


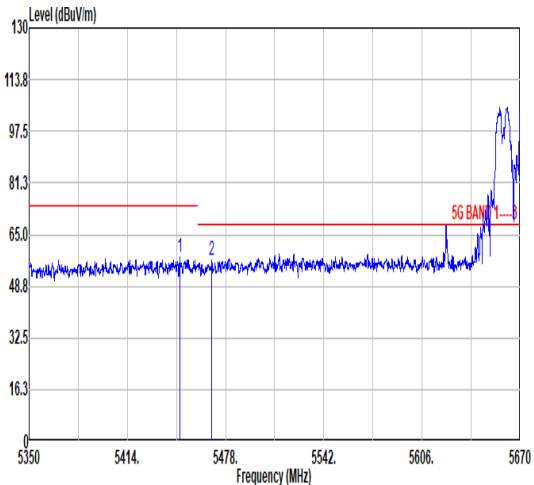


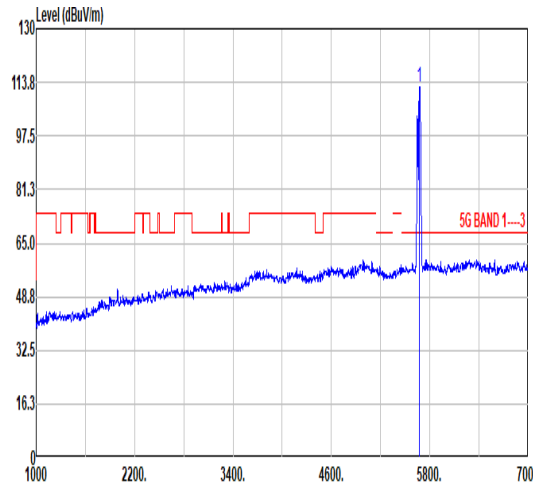

Mode	40																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_RU 242/62_5670MHz																																																																																																	
ANT	7+8																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.09</td> <td>57.90</td> <td>74.00</td> <td>-16.10</td> <td>39.84</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>206</td> <td>360 PEAK</td> </tr> <tr> <td>2</td> <td>5468.89</td> <td>56.82</td> <td>68.30</td> <td>-11.48</td> <td>38.72</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>206</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5448.09	57.90	74.00	-16.10	39.84	34.52	13.15	29.61	0.00	206	360 PEAK	2	5468.89	56.82	68.30	-11.48	38.72	34.53	13.20	29.63	0.00	206	360 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>112.22</td> <td>-----</td> <td>-----</td> <td>93.87</td> <td>34.74</td> <td>13.40</td> <td>29.79</td> <td>0.00</td> <td>206</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	112.22	-----	-----	93.87	34.74	13.40	29.79	0.00	206	360 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	5448.09	57.90	74.00	-16.10	39.84	34.52	13.15	29.61	0.00	206	360 PEAK																																																																																							
2	5468.89	56.82	68.30	-11.48	38.72	34.53	13.20	29.63	0.00	206	360 PEAK																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	5670.00	112.22	-----	-----	93.87	34.74	13.40	29.79	0.00	206	360 PEAK																																																																																							
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.61</td> <td>46.83</td> <td>54.00</td> <td>-7.17</td> <td>28.75</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>206</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5458.61	46.83	54.00	-7.17	28.75	34.53	13.17	29.62	0.00	206	360 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>102.02</td> <td>-----</td> <td>-----</td> <td>83.70</td> <td>34.73</td> <td>13.38</td> <td>29.79</td> <td>0.00</td> <td>206</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	102.02	-----	-----	83.70	34.73	13.38	29.79	0.00	206	360 AVERAGE												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	5458.61	46.83	54.00	-7.17	28.75	34.53	13.17	29.62	0.00	206	360 AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	5670.00	102.02	-----	-----	83.70	34.73	13.38	29.79	0.00	206	360 AVERAGE																																																																																							

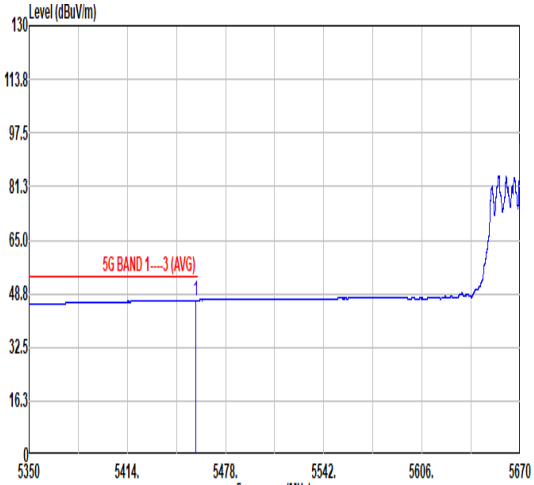

Mode	40																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_RU 242/62_5670MHz																																							
ANT	7+8																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5732.09</td> <td>60.48</td> <td>68.30</td> <td>-7.82</td> <td>41.65</td> <td>34.85</td> <td>13.77</td> <td>29.79</td> <td>0.00</td> <td>206 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5732.09	60.48	68.30	-7.82	41.65	34.85	13.77	29.79	0.00	206 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5732.09	60.48	68.30	-7.82	41.65	34.85	13.77	29.79	0.00	206 360 PEAK																															




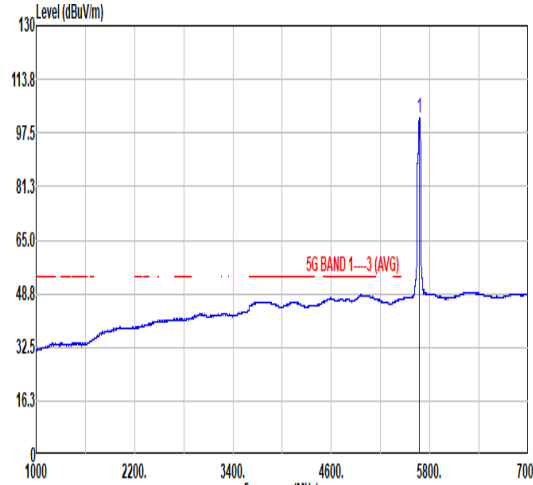


Mode	40																																																																									
	Band Edge - L																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_RU 242/62_5670MHz																																																																									
ANT	7+8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5401.05</td> <td>57.69</td> <td>74.00</td> <td>-16.31</td> <td>39.73</td> <td>34.50</td> <td>13.03</td> </tr> <tr> <td>2</td> <td>5460.25</td> <td>56.09</td> <td>68.30</td> <td>-12.21</td> <td>38.01</td> <td>34.53</td> <td>13.17</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5401.05	57.69	74.00	-16.31	39.73	34.50	13.03	2	5460.25	56.09	68.30	-12.21	38.01	34.53	13.17	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>110.50</td> <td>-----</td> <td>-----</td> <td>92.15</td> <td>34.74</td> <td>13.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5670.00	110.50	-----	-----	92.15	34.74	13.40
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5401.05	57.69	74.00	-16.31	39.73	34.50	13.03																																																																			
2	5460.25	56.09	68.30	-12.21	38.01	34.53	13.17																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5670.00	110.50	-----	-----	92.15	34.74	13.40																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>28.74</td> <td>34.53</td> <td>13.17</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.95	46.82	54.00	-7.18	28.74	34.53	13.17	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>101.96</td> <td>-----</td> <td>-----</td> <td>83.61</td> <td>34.74</td> <td>13.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5670.00	101.96	-----	-----	83.61	34.74	13.40								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5459.95	46.82	54.00	-7.18	28.74	34.53	13.17																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5670.00	101.96	-----	-----	83.61	34.74	13.40																																																																			



Mode	40																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_RU 242/62_5670MHz																																									
ANT	7+8																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.42</td> <td>63.20</td> <td>68.30</td> <td>-5.10</td> <td>44.38</td> <td>34.85</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>310</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.42	63.20	68.30	-5.10	44.38	34.85	13.76	29.79	0.00	310	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5731.42	63.20	68.30	-5.10	44.38	34.85	13.76	29.79	0.00	310	0	PEAK																															

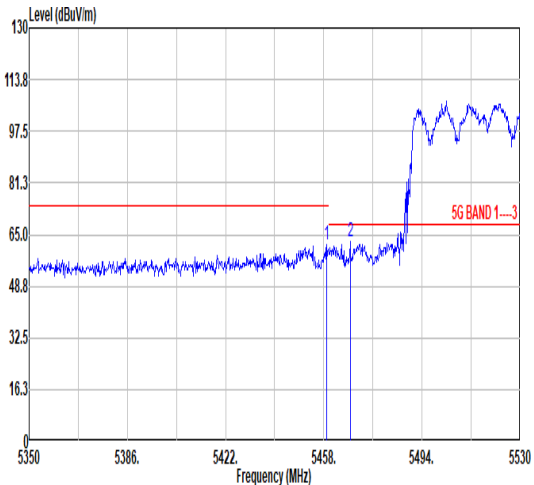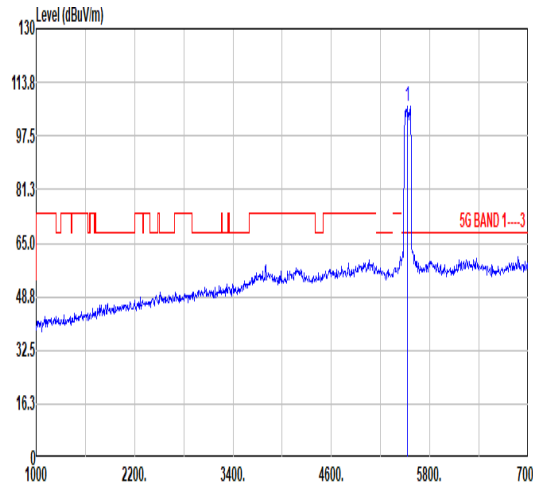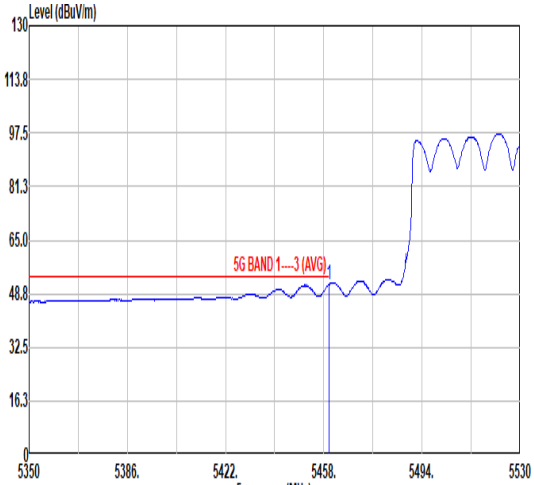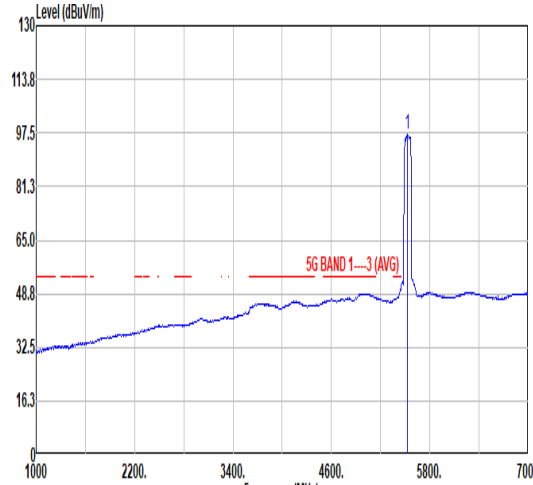

Mode	41																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																						
ANT	7+8																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.08</td> <td>61.99</td> <td>74.00</td> <td>-12.01</td> <td>43.12</td> <td>35.32</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>192</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.72</td> <td>63.01</td> <td>68.30</td> <td>-5.29</td> <td>44.12</td> <td>35.32</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>192</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.08	61.99	74.00	-12.01	43.12	35.32	13.17	29.62	0.00	192	360	PEAK	2	5467.72	63.01	68.30	-5.29	44.12	35.32	13.19	29.62	0.00	192	360	PEAK	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>106.47</td> <td>-----</td> <td>-----</td> <td>87.58</td> <td>35.42</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>192</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	106.47	-----	-----	87.58	35.42	13.19	29.72	0.00	192	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.08	61.99	74.00	-12.01	43.12	35.32	13.17	29.62	0.00	192	360	PEAK																																																																																											
2	5467.72	63.01	68.30	-5.29	44.12	35.32	13.19	29.62	0.00	192	360	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5530.00	106.47	-----	-----	87.58	35.42	13.19	29.72	0.00	192	360	PEAK																																																																																											
Avg	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.98</td> <td>51.64</td> <td>54.00</td> <td>-2.36</td> <td>32.77</td> <td>35.32</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>192</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.98	51.64	54.00	-2.36	32.77	35.32	13.17	29.62	0.00	192	360	AVERAGE	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>97.00</td> <td>-----</td> <td>-----</td> <td>78.07</td> <td>35.38</td> <td>13.23</td> <td>29.68</td> <td>0.00</td> <td>192</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	97.00	-----	-----	78.07	35.38	13.23	29.68	0.00	192	360	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.98	51.64	54.00	-2.36	32.77	35.32	13.17	29.62	0.00	192	360	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5530.00	97.00	-----	-----	78.07	35.38	13.23	29.68	0.00	192	360	AVERAGE																																																																																											



Mode	41																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																							
ANT	7+8																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5754.66</td> <td>59.33</td> <td>68.30</td> <td>-8.97</td> <td>39.48</td> <td>35.66</td> <td>13.97</td> <td>29.78</td> <td>0.00</td> <td>192 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5754.66	59.33	68.30	-8.97	39.48	35.66	13.97	29.78	0.00	192 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5754.66	59.33	68.30	-8.97	39.48	35.66	13.97	29.78	0.00	192 360 PEAK																															



		41																																																																								
Mode	Band Edge - L																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																									
ANT	7+8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.62</td> <td>61.78</td> <td>74.00</td> <td>-12.22</td> <td>42.91</td> <td>35.32</td> <td>13.17</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>63.36</td> <td>68.30</td> <td>-4.94</td> <td>44.46</td> <td>35.33</td> <td>13.20</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.62	61.78	74.00	-12.22	42.91	35.32	13.17	2	5469.52	63.36	68.30	-4.94	44.46	35.33	13.20	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>105.89</td> <td>-----</td> <td>-----</td> <td>86.96</td> <td>35.38</td> <td>13.23</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5530.00	105.89	-----	-----	86.96	35.38	13.23
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5459.62	61.78	74.00	-12.22	42.91	35.32	13.17																																																																			
2	5469.52	63.36	68.30	-4.94	44.46	35.33	13.20																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5530.00	105.89	-----	-----	86.96	35.38	13.23																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>52.37</td> <td>54.00</td> <td>-1.63</td> <td>33.50</td> <td>35.32</td> <td>13.17</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.00	52.37	54.00	-1.63	33.50	35.32	13.17	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>96.72</td> <td>-----</td> <td>-----</td> <td>77.79</td> <td>35.38</td> <td>13.23</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5530.00	96.72	-----	-----	77.79	35.38	13.23								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5458.00	52.37	54.00	-1.63	33.50	35.32	13.17																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5530.00	96.72	-----	-----	77.79	35.38	13.23																																																																			



Mode	41																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																								
ANT	7+8																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5759.13</td> <td>58.21</td> <td>68.30</td> <td>-10.09</td> <td>38.31</td> <td>35.67</td> <td>14.01</td> <td>29.78</td> <td>0.00</td> <td>253</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5759.13	58.21	68.30	-10.09	38.31	35.67	14.01	29.78	0.00	253	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5759.13	58.21	68.30	-10.09	38.31	35.67	14.01	29.78	0.00	253	0 PEAK																															



Mode	41																																																																																																																										
	Harmonic																																																																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7742.00</td> <td>52.33</td> <td>74.00</td> <td>-21.67</td> <td>66.85</td> <td>35.90</td> <td>15.38</td> <td>65.80</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7742.00</td> <td>41.35</td> <td>54.00</td> <td>-12.65</td> <td>55.87</td> <td>35.90</td> <td>15.38</td> <td>65.80</td> <td>0.00</td> <td>300</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>11060.00</td> <td>43.66</td> <td>74.00</td> <td>-30.34</td> <td>53.09</td> <td>38.14</td> <td>18.13</td> <td>65.70</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7742.00	52.33	74.00	-21.67	66.85	35.90	15.38	65.80	0.00	300	0	PEAK	2	7742.00	41.35	54.00	-12.65	55.87	35.90	15.38	65.80	0.00	300	0	AVERAGE	3	11060.00	43.66	74.00	-30.34	53.09	38.14	18.13	65.70	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7742.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>62.34</td> <td>35.90</td> <td>15.38</td> <td>65.80</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11060.00</td> <td>43.99</td> <td>74.00</td> <td>-30.01</td> <td>53.42</td> <td>38.14</td> <td>18.13</td> <td>65.70</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7742.00	47.82	74.00	-26.18	62.34	35.90	15.38	65.80	0.00	100	0	PEAK	2	11060.00	43.99	74.00	-30.01	53.42	38.14	18.13	65.70	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	7742.00	52.33	74.00	-21.67	66.85	35.90	15.38	65.80	0.00	300	0	PEAK																																																																																																															
2	7742.00	41.35	54.00	-12.65	55.87	35.90	15.38	65.80	0.00	300	0	AVERAGE																																																																																																															
3	11060.00	43.66	74.00	-30.34	53.09	38.14	18.13	65.70	0.00	300	0	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	7742.00	47.82	74.00	-26.18	62.34	35.90	15.38	65.80	0.00	100	0	PEAK																																																																																																															
2	11060.00	43.99	74.00	-30.01	53.42	38.14	18.13	65.70	0.00	100	0	PEAK																																																																																																															



Mode	42																																																																																												
	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_RU 484/65_5530MHz																																																																																												
ANT	7+8																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.30</td> <td>64.21</td> <td>74.00</td> <td>-9.79</td> <td>46.21</td> <td>34.51</td> <td>13.00</td> <td>29.59</td> <td>0.00</td> <td>300</td> <td>331</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.82</td> <td>64.37</td> <td>68.30</td> <td>-3.93</td> <td>46.27</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>300</td> <td>331</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5420.30	64.21	74.00	-9.79	46.21	34.51	13.00	29.59	0.00	300	331	PEAK	2	5467.82	64.37	68.30	-3.93	46.27	34.53	13.19	29.62	0.00	300	331	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>104.51</td> <td>-----</td> <td>-----</td> <td>86.35</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>300</td> <td>331</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	104.51	-----	-----	86.35	34.55	13.25	29.64	0.00	300	331	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5420.30	64.21	74.00	-9.79	46.21	34.51	13.00	29.59	0.00	300	331	PEAK																																																																																	
2	5467.82	64.37	68.30	-3.93	46.27	34.53	13.19	29.62	0.00	300	331	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5530.00	104.51	-----	-----	86.35	34.55	13.25	29.64	0.00	300	331	PEAK																																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.88</td> <td>47.27</td> <td>54.00</td> <td>-6.73</td> <td>29.19</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>300</td> <td>331</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.88	47.27	54.00	-6.73	29.19	34.53	13.17	29.62	0.00	300	331	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>94.70</td> <td>-----</td> <td>-----</td> <td>76.54</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>300</td> <td>331</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	94.70	-----	-----	76.54	34.55	13.25	29.64	0.00	300	331	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.88	47.27	54.00	-6.73	29.19	34.53	13.17	29.62	0.00	300	331	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5530.00	94.70	-----	-----	76.54	34.55	13.25	29.64	0.00	300	331	AVERAGE																																																																																	



Mode	42																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_RU 484/65_5530MHz																																							
ANT	7+8																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5750.32</td> <td>59.00</td> <td>68.30</td> <td>-9.30</td> <td>39.96</td> <td>34.89</td> <td>13.93</td> <td>29.78</td> <td>0.00</td> <td>300 331 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5750.32	59.00	68.30	-9.30	39.96	34.89	13.93	29.78	0.00	300 331 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5750.32	59.00	68.30	-9.30	39.96	34.89	13.93	29.78	0.00	300 331 PEAK																															



Mode	42																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_RU 484/65_5530MHz																																																																																		
ANT	7+8																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.60</td> <td>58.97</td> <td>74.00</td> <td>-15.03</td> <td>40.89</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>220</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.04</td> <td>62.72</td> <td>68.30</td> <td>-5.58</td> <td>44.63</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>220</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	1	5453.60	58.97	74.00	-15.03	40.89	34.53	13.16	29.61	0.00	220	0	PEAK	2	5464.04	62.72	68.30	-5.58	44.63	34.53	13.18	29.62	0.00	220	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>99.04</td> <td>-----</td> <td>-----</td> <td>80.88</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>220</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	1	5530.00	99.04	-----	-----	80.88	34.55	13.25	29.64	0.00	220	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																							
1	5453.60	58.97	74.00	-15.03	40.89	34.53	13.16	29.61	0.00	220	0	PEAK																																																																							
2	5464.04	62.72	68.30	-5.58	44.63	34.53	13.18	29.62	0.00	220	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																							
1	5530.00	99.04	-----	-----	80.88	34.55	13.25	29.64	0.00	220	0	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.78</td> <td>46.61</td> <td>54.00</td> <td>-7.39</td> <td>28.53</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>220</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	1	5458.78	46.61	54.00	-7.39	28.53	34.53	13.17	29.62	0.00	220	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>88.98</td> <td>-----</td> <td>-----</td> <td>70.82</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>220</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	1	5530.00	88.98	-----	-----	70.82	34.55	13.25	29.64	0.00	220	0	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																							
1	5458.78	46.61	54.00	-7.39	28.53	34.53	13.17	29.62	0.00	220	0	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																							
1	5530.00	88.98	-----	-----	70.82	34.55	13.25	29.64	0.00	220	0	AVERAGE																																																																							



Mode	42																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_RU 484/65_5530MHz																																								
ANT	7+8																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5749.15</td> <td>57.49</td> <td>68.30</td> <td>-10.81</td> <td>38.47</td> <td>34.89</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>220</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5749.15	57.49	68.30	-10.81	38.47	34.89	13.92	29.79	0.00	220	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5749.15	57.49	68.30	-10.81	38.47	34.89	13.92	29.79	0.00	220	0 PEAK																															







		43																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																							
ANT		7+8																																																																																							
Pol.	Horizontal	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.42</td> <td>60.86</td> <td>74.00</td> <td>-13.14</td> <td>42.00</td> <td>35.31</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>172</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.88</td> <td>60.92</td> <td>68.30</td> <td>-7.38</td> <td>42.04</td> <td>35.32</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>172</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.42	60.86	74.00	-13.14	42.00	35.31	13.16	29.61	0.00	172	0	PEAK	2	5460.88	60.92	68.30	-7.38	42.04	35.32	13.18	29.62	0.00	172	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>109.54</td> <td>-----</td> <td>-----</td> <td>90.64</td> <td>35.47</td> <td>13.20</td> <td>29.77</td> <td>0.00</td> <td>172</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	109.54	-----	-----	90.64	35.47	13.20	29.77	0.00	172	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5452.42	60.86	74.00	-13.14	42.00	35.31	13.16	29.61	0.00	172	0	PEAK																																																																													
2	5460.88	60.92	68.30	-7.38	42.04	35.32	13.18	29.62	0.00	172	0	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5610.00	109.54	-----	-----	90.64	35.47	13.20	29.77	0.00	172	0	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>48.26</td> <td>54.00</td> <td>-5.74</td> <td>29.39</td> <td>35.32</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>172</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.00	48.26	54.00	-5.74	29.39	35.32	13.17	29.62	0.00	172	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>99.82</td> <td>-----</td> <td>-----</td> <td>80.89</td> <td>35.48</td> <td>13.22</td> <td>29.77</td> <td>0.00</td> <td>172</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	99.82	-----	-----	80.89	35.48	13.22	29.77	0.00	172	0	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5459.00	48.26	54.00	-5.74	29.39	35.32	13.17	29.62	0.00	172	0	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5610.00	99.82	-----	-----	80.89	35.48	13.22	29.77	0.00	172	0	AVERAGE																																																																													



Mode	43																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																								
ANT	7+8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5756.07</td> <td>59.71</td> <td>68.30</td> <td>-8.59</td> <td>39.85</td> <td>35.66</td> <td>13.98</td> <td>29.78</td> <td>0.00</td> <td>172</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5756.07	59.71	68.30	-8.59	39.85	35.66	13.98	29.78	0.00	172	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5756.07	59.71	68.30	-8.59	39.85	35.66	13.98	29.78	0.00	172	0 PEAK																															

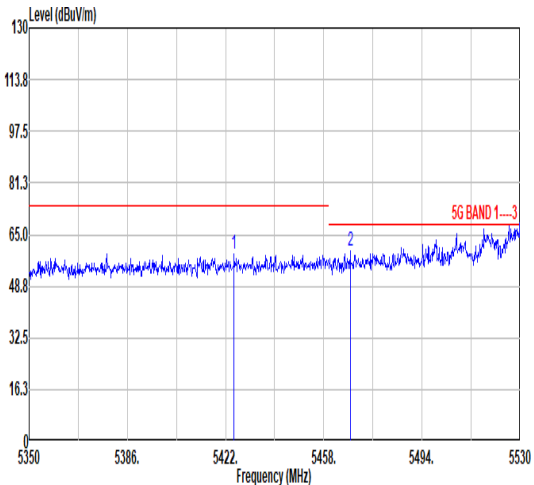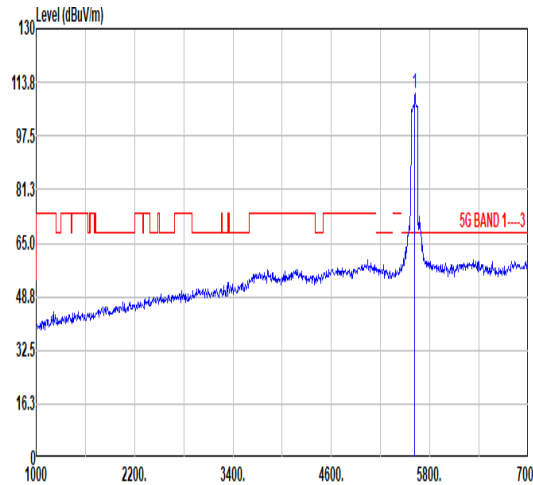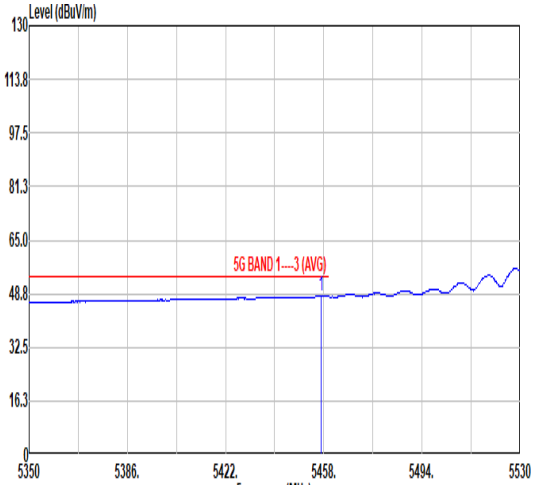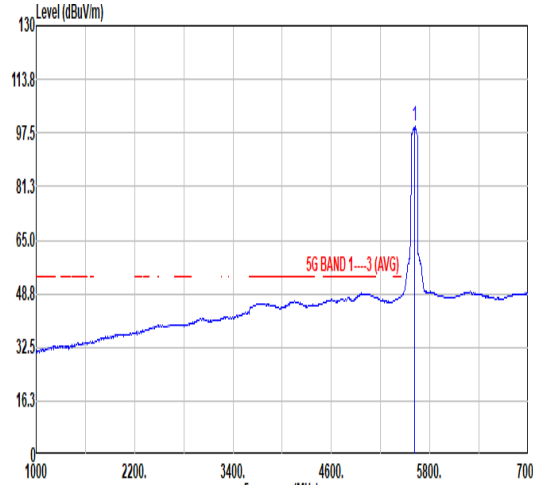

		43																																																																																																					
Mode	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																						
ANT	7+8																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.06</td> <td>58.94</td> <td>74.00</td> <td>-15.06</td> <td>40.15</td> <td>35.29</td> <td>13.09</td> <td>29.59</td> <td>0.00</td> <td>236</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.72</td> <td>59.96</td> <td>68.30</td> <td>-8.34</td> <td>41.07</td> <td>35.32</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>236</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5425.06	58.94	74.00	-15.06	40.15	35.29	13.09	29.59	0.00	236	360	PEAK	2	5467.72	59.96	68.30	-8.34	41.07	35.32	13.19	29.62	0.00	236	360	PEAK	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>110.23</td> <td>-----</td> <td>-----</td> <td>91.30</td> <td>35.48</td> <td>13.22</td> <td>29.77</td> <td>0.00</td> <td>236</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	110.23	-----	-----	91.30	35.48	13.22	29.77	0.00	236	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5425.06	58.94	74.00	-15.06	40.15	35.29	13.09	29.59	0.00	236	360	PEAK																																																																																											
2	5467.72	59.96	68.30	-8.34	41.07	35.32	13.19	29.62	0.00	236	360	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5610.00	110.23	-----	-----	91.30	35.48	13.22	29.77	0.00	236	360	PEAK																																																																																											
Avg	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.10</td> <td>48.09</td> <td>54.00</td> <td>-5.91</td> <td>29.22</td> <td>35.32</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>236</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.10	48.09	54.00	-5.91	29.22	35.32	13.17	29.62	0.00	236	360	AVERAGE	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>99.37</td> <td>-----</td> <td>-----</td> <td>80.44</td> <td>35.48</td> <td>13.22</td> <td>29.77</td> <td>0.00</td> <td>236</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	99.37	-----	-----	80.44	35.48	13.22	29.77	0.00	236	360	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5457.10	48.09	54.00	-5.91	29.22	35.32	13.17	29.62	0.00	236	360	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5610.00	99.37	-----	-----	80.44	35.48	13.22	29.77	0.00	236	360	AVERAGE																																																																																											







Mode	43																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																							
ANT	7+8																																							
Pol.	Vertical	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.40</td> <td>63.42</td> <td>68.30</td> <td>-4.88</td> <td>43.82</td> <td>35.63</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>236 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.40	63.42	68.30	-4.88	43.82	35.63	13.76	29.79	0.00	236 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5731.40	63.42	68.30	-4.88	43.82	35.63	13.76	29.79	0.00	236 360 PEAK																															



Mode	43																																																																																																												
	Harmonic																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																												
ANT	7+8																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7854.00</td> <td>52.20</td> <td>68.30</td> <td>-16.10</td> <td>66.81</td> <td>35.94</td> <td>15.45</td> <td>66.00</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>43.63</td> <td>74.00</td> <td>-30.37</td> <td>52.76</td> <td>38.23</td> <td>18.25</td> <td>65.61</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7854.00	52.20	68.30	-16.10	66.81	35.94	15.45	66.00	0.00	300	0	PEAK	2	11220.00	43.63	74.00	-30.37	52.76	38.23	18.25	65.61	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7854.00</td> <td>46.39</td> <td>68.30</td> <td>-21.91</td> <td>61.00</td> <td>35.94</td> <td>15.45</td> <td>66.00</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>44.15</td> <td>74.00</td> <td>-29.85</td> <td>53.28</td> <td>38.23</td> <td>18.25</td> <td>65.61</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7854.00	46.39	68.30	-21.91	61.00	35.94	15.45	66.00	0.00	100	0	PEAK	2	11220.00	44.15	74.00	-29.85	53.28	38.23	18.25	65.61	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7854.00	52.20	68.30	-16.10	66.81	35.94	15.45	66.00	0.00	300	0	PEAK																																																																																																	
2	11220.00	43.63	74.00	-30.37	52.76	38.23	18.25	65.61	0.00	300	0	PEAK																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7854.00	46.39	68.30	-21.91	61.00	35.94	15.45	66.00	0.00	100	0	PEAK																																																																																																	
2	11220.00	44.15	74.00	-29.85	53.28	38.23	18.25	65.61	0.00	100	0	PEAK																																																																																																	

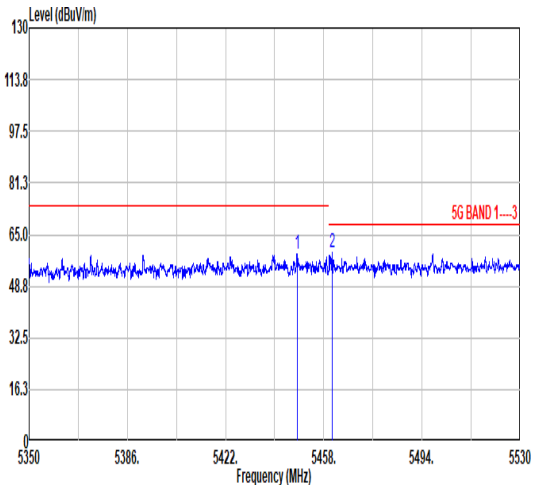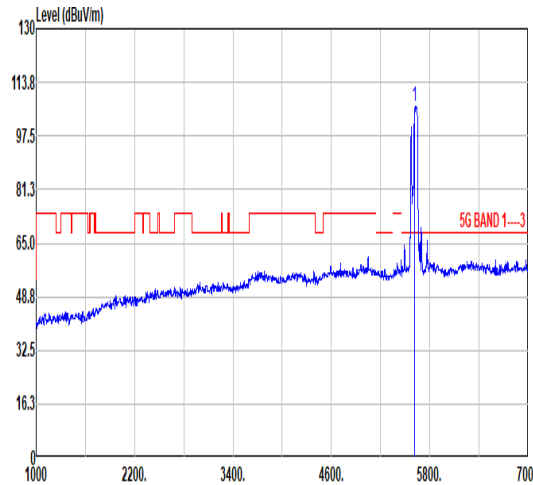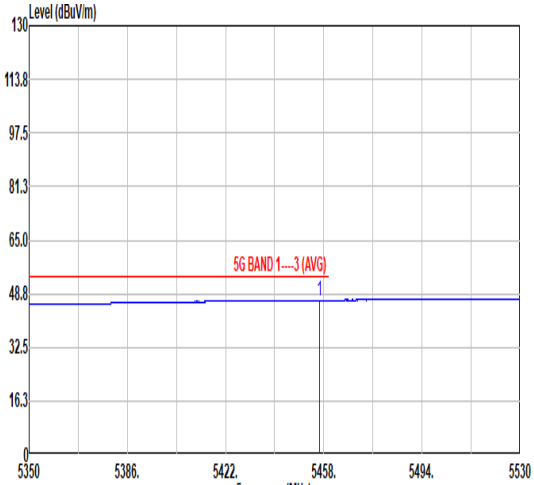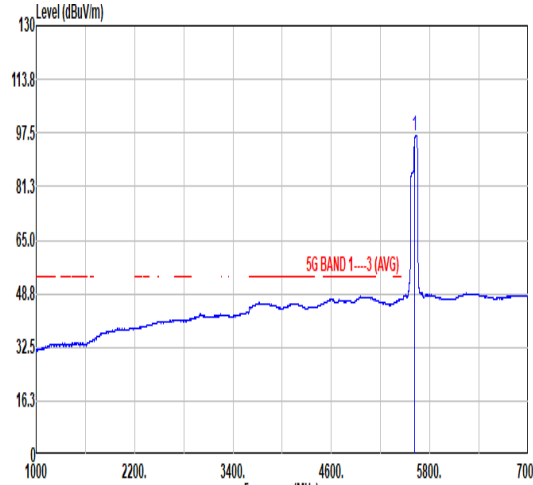

Mode	44																																																																												
	Band Edge - L																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_RU 484/66_5610MHz																																																																												
ANT	7+8																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.18</td> <td>58.83</td> <td>74.00</td> <td>-15.17</td> <td>40.77</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>129</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.16</td> <td>59.51</td> <td>68.30</td> <td>-8.79</td> <td>41.42</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>129</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5448.18	58.83	74.00	-15.17	40.77	34.52	13.15	29.61	0.00	129	319	PEAK	2	5461.16	59.51	68.30	-8.79	41.42	34.53	13.18	29.62	0.00	129	319	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>106.36</td> <td>-----</td> <td>-----</td> <td>88.23</td> <td>34.65</td> <td>13.25</td> <td>29.77</td> <td>0.00</td> <td>129</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5610.00	106.36	-----	-----	88.23	34.65	13.25	29.77	0.00	129	319	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5448.18	58.83	74.00	-15.17	40.77	34.52	13.15	29.61	0.00	129	319	PEAK																																																																	
2	5461.16	59.51	68.30	-8.79	41.42	34.53	13.18	29.62	0.00	129	319	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5610.00	106.36	-----	-----	88.23	34.65	13.25	29.77	0.00	129	319	PEAK																																																																	
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.38</td> <td>46.77</td> <td>54.00</td> <td>-7.23</td> <td>28.69</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>129</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5456.38	46.77	54.00	-7.23	28.69	34.53	13.17	29.62	0.00	129	319	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>96.69</td> <td>-----</td> <td>-----</td> <td>78.53</td> <td>34.66</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>129</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5610.00	96.69	-----	-----	78.53	34.66	13.27	29.77	0.00	129	319	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5456.38	46.77	54.00	-7.23	28.69	34.53	13.17	29.62	0.00	129	319	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5610.00	96.69	-----	-----	78.53	34.66	13.27	29.77	0.00	129	319	AVERAGE																																																																	



Mode	44																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_RU 484/66_5610MHz																																							
ANT	7+8																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5756.90</td> <td>63.21</td> <td>68.30</td> <td>-5.09</td> <td>44.09</td> <td>34.91</td> <td>13.99</td> <td>29.78</td> <td>0.00</td> <td>129 319 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5756.90	63.21	68.30	-5.09	44.09	34.91	13.99	29.78	0.00	129 319 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5756.90	63.21	68.30	-5.09	44.09	34.91	13.99	29.78	0.00	129 319 PEAK																															







	44																																																																																														
Mode	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_RU 484/66_5610MHz																																																																																														
ANT	7+8																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5391.32</td> <td>57.28</td> <td>74.00</td> <td>-16.72</td> <td>39.34</td> <td>34.50</td> <td>13.00</td> <td>29.56</td> <td>0.00</td> <td>164</td> <td>0 PEAK</td> </tr> <tr> <td>2 5464.22</td> <td>56.54</td> <td>68.30</td> <td>-11.76</td> <td>38.45</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>164</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5391.32	57.28	74.00	-16.72	39.34	34.50	13.00	29.56	0.00	164	0 PEAK	2 5464.22	56.54	68.30	-11.76	38.45	34.53	13.18	29.62	0.00	164	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5610.00</td> <td>98.89</td> <td>-----</td> <td>-----</td> <td>80.79</td> <td>34.64</td> <td>13.23</td> <td>29.77</td> <td>0.00</td> <td>164</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5610.00	98.89	-----	-----	80.79	34.64	13.23	29.77	0.00	164	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5391.32	57.28	74.00	-16.72	39.34	34.50	13.00	29.56	0.00	164	0 PEAK																																																																																					
2 5464.22	56.54	68.30	-11.76	38.45	34.53	13.18	29.62	0.00	164	0 PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5610.00	98.89	-----	-----	80.79	34.64	13.23	29.77	0.00	164	0 PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.86</td> <td>46.41</td> <td>54.00</td> <td>-7.59</td> <td>28.33</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>164</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5459.86	46.41	54.00	-7.59	28.33	34.53	13.17	29.62	0.00	164	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5610.00</td> <td>89.98</td> <td>-----</td> <td>-----</td> <td>71.85</td> <td>34.65</td> <td>13.25</td> <td>29.77</td> <td>0.00</td> <td>164</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5610.00	89.98	-----	-----	71.85	34.65	13.25	29.77	0.00	164	0 AVERAGE											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5459.86	46.41	54.00	-7.59	28.33	34.53	13.17	29.62	0.00	164	0 AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5610.00	89.98	-----	-----	71.85	34.65	13.25	29.77	0.00	164	0 AVERAGE																																																																																					



Mode	44																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_RU 484/66_5610MHz																																								
ANT	7+8																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5739.98</td> <td>57.78</td> <td>68.30</td> <td>-10.52</td> <td>38.86</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>164</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5739.98	57.78	68.30	-10.52	38.86	34.87	13.84	29.79	0.00	164	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5739.98	57.78	68.30	-10.52	38.86	34.87	13.84	29.79	0.00	164	0 PEAK																															

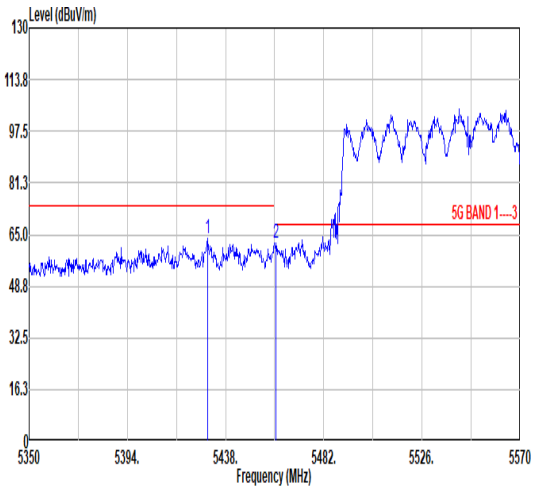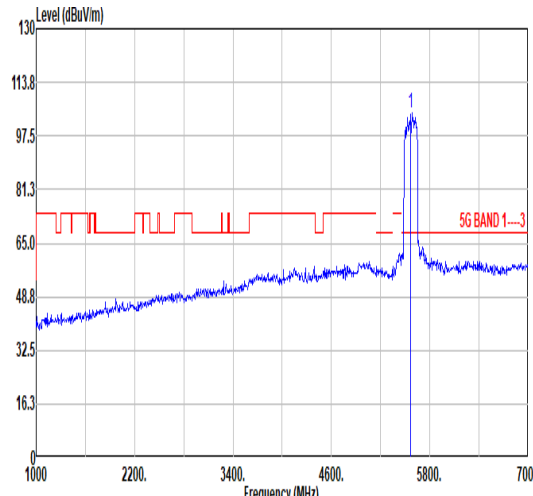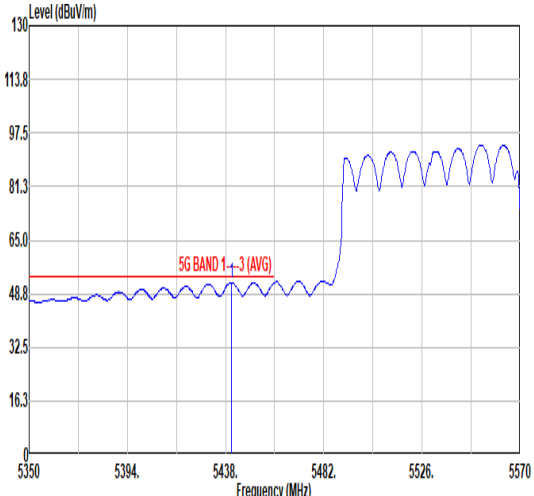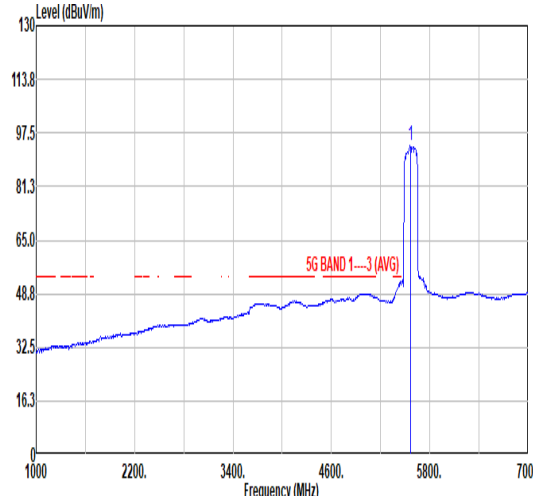

		45																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																			
ANT		7+8																																																																																																			
Pol.		Horizontal	Fundamental																																																																																																		
Peak		 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.86</td> <td>63.83</td> <td>74.00</td> <td>-10.17</td> <td>45.03</td> <td>35.29</td> <td>13.10</td> <td>29.59</td> <td>0.00</td> <td>175</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5460.66</td> <td>62.22</td> <td>68.30</td> <td>-6.08</td> <td>43.34</td> <td>35.32</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>175</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5429.86	63.83	74.00	-10.17	45.03	35.29	13.10	29.59	0.00	175	0 PEAK	2	5460.66	62.22	68.30	-6.08	43.34	35.32	13.18	29.62	0.00	175	0 PEAK	 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>104.36</td> <td>-----</td> <td>-----</td> <td>85.50</td> <td>35.43</td> <td>13.17</td> <td>29.74</td> <td>0.00</td> <td>175</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	104.36	-----	-----	85.50	35.43	13.17	29.74	0.00	175	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5429.86	63.83	74.00	-10.17	45.03	35.29	13.10	29.59	0.00	175	0 PEAK																																																																																										
2	5460.66	62.22	68.30	-6.08	43.34	35.32	13.18	29.62	0.00	175	0 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5570.00	104.36	-----	-----	85.50	35.43	13.17	29.74	0.00	175	0 PEAK																																																																																										
Avg		 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.64</td> <td>52.18</td> <td>54.00</td> <td>-1.82</td> <td>33.35</td> <td>35.30</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>175</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5440.64	52.18	54.00	-1.82	33.35	35.30	13.13	29.60	0.00	175	0 AVERAGE	 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>93.46</td> <td>-----</td> <td>-----</td> <td>74.56</td> <td>35.40</td> <td>13.21</td> <td>29.71</td> <td>0.00</td> <td>175</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	93.46	-----	-----	74.56	35.40	13.21	29.71	0.00	175	0 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5440.64	52.18	54.00	-1.82	33.35	35.30	13.13	29.60	0.00	175	0 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5570.00	93.46	-----	-----	74.56	35.40	13.21	29.71	0.00	175	0 AVERAGE																																																																																										



Mode	45																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	7+8																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.56</td> <td>63.43</td> <td>68.30</td> <td>-4.87</td> <td>43.87</td> <td>35.62</td> <td>13.73</td> <td>29.79</td> <td>0.00</td> <td>175</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.56	63.43	68.30	-4.87	43.87	35.62	13.73	29.79	0.00	175	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5727.56	63.43	68.30	-4.87	43.87	35.62	13.73	29.79	0.00	175	0	PEAK																															



Mode	45																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																						
ANT	7+8																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.62</td> <td>63.78</td> <td>74.00</td> <td>-10.22</td> <td>44.92</td> <td>35.31</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>246</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.48</td> <td>62.81</td> <td>68.30</td> <td>-5.49</td> <td>43.92</td> <td>35.32</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>246</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.62	63.78	74.00	-10.22	44.92	35.31	13.16	29.61	0.00	246	360	PEAK	2	5467.48	62.81	68.30	-5.49	43.92	35.32	13.19	29.62	0.00	246	360	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>104.90</td> <td>-----</td> <td>-----</td> <td>86.03</td> <td>35.43</td> <td>13.18</td> <td>29.74</td> <td>0.00</td> <td>246</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	104.90	-----	-----	86.03	35.43	13.18	29.74	0.00	246	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5453.62	63.78	74.00	-10.22	44.92	35.31	13.16	29.61	0.00	246	360	PEAK																																																																																											
2	5467.48	62.81	68.30	-5.49	43.92	35.32	13.19	29.62	0.00	246	360	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5570.00	104.90	-----	-----	86.03	35.43	13.18	29.74	0.00	246	360	PEAK																																																																																											
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.36</td> <td>52.88</td> <td>54.00</td> <td>-1.12</td> <td>34.01</td> <td>35.32</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>246</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.36	52.88	54.00	-1.12	34.01	35.32	13.17	29.62	0.00	246	360	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>93.77</td> <td>-----</td> <td>-----</td> <td>74.92</td> <td>35.44</td> <td>13.16</td> <td>29.75</td> <td>0.00</td> <td>246</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	93.77	-----	-----	74.92	35.44	13.16	29.75	0.00	246	360	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5457.36	52.88	54.00	-1.12	34.01	35.32	13.17	29.62	0.00	246	360	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5570.00	93.77	-----	-----	74.92	35.44	13.16	29.75	0.00	246	360	AVERAGE																																																																																											



Mode	45																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																								
ANT	7+8																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.66</td> <td>63.48</td> <td>68.30</td> <td>-4.82</td> <td>43.88</td> <td>35.63</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>246 360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.66	63.48	68.30	-4.82	43.88	35.63	13.76	29.79	0.00	246 360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5731.66	63.48	68.30	-4.82	43.88	35.63	13.76	29.79	0.00	246 360	PEAK																															



Mode	45																																																																																																												
	Harmonic																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																												
ANT	7+8																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>48.95</td> <td>68.30</td> <td>-19.35</td> <td>63.58</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11140.00</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>53.85</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7798.00	48.95	68.30	-19.35	63.58	35.92	15.35	65.90	0.00	300	0	PEAK	2	11140.00	43.77	74.00	-30.23	53.85	38.18	18.19	65.65	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>44.29</td> <td>68.30</td> <td>-24.01</td> <td>58.92</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11140.00</td> <td>43.58</td> <td>74.00</td> <td>-30.42</td> <td>52.86</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7798.00	44.29	68.30	-24.01	58.92	35.92	15.35	65.90	0.00	100	0	PEAK	2	11140.00	43.58	74.00	-30.42	52.86	38.18	18.19	65.65	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7798.00	48.95	68.30	-19.35	63.58	35.92	15.35	65.90	0.00	300	0	PEAK																																																																																																	
2	11140.00	43.77	74.00	-30.23	53.85	38.18	18.19	65.65	0.00	300	0	PEAK																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7798.00	44.29	68.30	-24.01	58.92	35.92	15.35	65.90	0.00	100	0	PEAK																																																																																																	
2	11140.00	43.58	74.00	-30.42	52.86	38.18	18.19	65.65	0.00	100	0	PEAK																																																																																																	



Mode	46																																																																																								
	Band Edge - L																																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_RU 996/67_5570MHz																																																																																								
ANT	7+8																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.36</td> <td>67.72</td> <td>74.00</td> <td>-6.28</td> <td>49.67</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>183</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.62</td> <td>58.85</td> <td>68.30</td> <td>-9.45</td> <td>40.75</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>183</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5447.36	67.72	74.00	-6.28	49.67	34.52	13.14	29.61	0.00	183	360	PEAK	2	5465.62	58.85	68.30	-9.45	40.75	34.53	13.19	29.62	0.00	183	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>103.06</td> <td>-----</td> <td>-----</td> <td>84.90</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>183</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	103.06	-----	-----	84.90	34.55	13.26	29.65	0.00	183	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5447.36	67.72	74.00	-6.28	49.67	34.52	13.14	29.61	0.00	183	360	PEAK																																																																													
2	5465.62	58.85	68.30	-9.45	40.75	34.53	13.19	29.62	0.00	183	360	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	103.06	-----	-----	84.90	34.55	13.26	29.65	0.00	183	360	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.37</td> <td>48.00</td> <td>54.00</td> <td>-6.00</td> <td>29.95</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>183</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5441.37	48.00	54.00	-6.00	29.95	34.52	13.13	29.60	0.00	183	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>93.38</td> <td>-----</td> <td>-----</td> <td>75.31</td> <td>34.58</td> <td>13.20</td> <td>29.71</td> <td>0.00</td> <td>183</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	93.38	-----	-----	75.31	34.58	13.20	29.71	0.00	183	360	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5441.37	48.00	54.00	-6.00	29.95	34.52	13.13	29.60	0.00	183	360	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	93.38	-----	-----	75.31	34.58	13.20	29.71	0.00	183	360	AVERAGE																																																																													



Mode	46																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_RU 996/67_5570MHz																																							
ANT	7+8																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>56 BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.37</td> <td>62.94</td> <td>68.30</td> <td>-5.36</td> <td>44.12</td> <td>34.85</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>183 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.37	62.94	68.30	-5.36	44.12	34.85	13.76	29.79	0.00	183 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5731.37	62.94	68.30	-5.36	44.12	34.85	13.76	29.79	0.00	183 360 PEAK																															



Mode	46																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_RU 996/67_5570MHz																																																																																																			
ANT	7+8																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.02</td> <td>65.84</td> <td>74.00</td> <td>-8.16</td> <td>47.78</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>252</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5461.00</td> <td>62.91</td> <td>68.30</td> <td>-5.39</td> <td>44.82</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>252</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.02	65.84	74.00	-8.16	47.78	34.52	13.15	29.61	0.00	252	0 PEAK	2	5461.00	62.91	68.30	-5.39	44.82	34.53	13.18	29.62	0.00	252	0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>102.09</td> <td>-----</td> <td>-----</td> <td>84.04</td> <td>34.58</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>252</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	102.09	-----	-----	84.04	34.58	13.19	29.72	0.00	252	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5448.02	65.84	74.00	-8.16	47.78	34.52	13.15	29.61	0.00	252	0 PEAK																																																																																									
2	5461.00	62.91	68.30	-5.39	44.82	34.53	13.18	29.62	0.00	252	0 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	102.09	-----	-----	84.04	34.58	13.19	29.72	0.00	252	0 PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.39</td> <td>47.77</td> <td>54.00</td> <td>-6.23</td> <td>29.72</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>252</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.39	47.77	54.00	-6.23	29.72	34.52	13.13	29.60	0.00	252	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>93.18</td> <td>-----</td> <td>-----</td> <td>75.11</td> <td>34.58</td> <td>13.20</td> <td>29.71</td> <td>0.00</td> <td>252</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	93.18	-----	-----	75.11	34.58	13.20	29.71	0.00	252	0 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5441.39	47.77	54.00	-6.23	29.72	34.52	13.13	29.60	0.00	252	0 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	93.18	-----	-----	75.11	34.58	13.20	29.71	0.00	252	0 AVERAGE																																																																																									



Mode	46																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_RU 996/67_5570MHz																																														
ANT	7+8																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5733.32</td> <td>63.85</td> <td>68.30</td> <td>-4.45</td> <td>45.01</td> <td>34.85</td> <td>13.78</td> <td>29.79</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>252 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5733.32	63.85	68.30	-4.45	45.01	34.85	13.78	29.79	0.00									252 0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5733.32	63.85	68.30	-4.45	45.01	34.85	13.78	29.79	0.00																																							
								252 0 PEAK																																							



Mode	47																																																																																																													
	Harmonic																																																																																																													
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz																																																																																																													
ANT	7+8																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8008.00</td> <td>49.77</td> <td>68.30</td> <td>-18.53</td> <td>64.30</td> <td>36.00</td> <td>15.72</td> <td>66.25</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>45.42</td> <td>74.00</td> <td>-28.58</td> <td>54.12</td> <td>38.36</td> <td>18.42</td> <td>65.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8008.00	49.77	68.30	-18.53	64.30	36.00	15.72	66.25	0.00	300	0	PEAK	2	11440.00	45.42	74.00	-28.58	54.12	38.36	18.42	65.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8008.00</td> <td>44.16</td> <td>68.30</td> <td>-24.14</td> <td>58.69</td> <td>36.00</td> <td>15.72</td> <td>66.25</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>45.40</td> <td>74.00</td> <td>-28.60</td> <td>54.10</td> <td>38.36</td> <td>18.42</td> <td>65.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8008.00	44.16	68.30	-24.14	58.69	36.00	15.72	66.25	0.00	100	0	PEAK	2	11440.00	45.40	74.00	-28.60	54.10	38.36	18.42	65.48	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8008.00	49.77	68.30	-18.53	64.30	36.00	15.72	66.25	0.00	300	0	PEAK																																																																																																		
2	11440.00	45.42	74.00	-28.58	54.12	38.36	18.42	65.48	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8008.00	44.16	68.30	-24.14	58.69	36.00	15.72	66.25	0.00	100	0	PEAK																																																																																																		
2	11440.00	45.40	74.00	-28.60	54.10	38.36	18.42	65.48	0.00	100	0	PEAK																																																																																																		



Mode	48																																																																																																													
	Harmonic																																																																																																													
	U-NII-2C_5.47-5.85_802.11ax HE20_CH144_Full RU_5720MHz																																																																																																													
ANT	7+8																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8008.00</td> <td>52.03</td> <td>68.30</td> <td>-16.27</td> <td>66.56</td> <td>36.00</td> <td>15.72</td> <td>66.25</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>45.85</td> <td>74.00</td> <td>-28.15</td> <td>54.55</td> <td>38.36</td> <td>18.42</td> <td>65.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8008.00	52.03	68.30	-16.27	66.56	36.00	15.72	66.25	0.00	300	0	PEAK	2	11440.00	45.85	74.00	-28.15	54.55	38.36	18.42	65.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8008.00</td> <td>45.99</td> <td>68.30</td> <td>-22.31</td> <td>60.52</td> <td>36.00</td> <td>15.72</td> <td>66.25</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>45.51</td> <td>74.00</td> <td>-28.49</td> <td>54.21</td> <td>38.36</td> <td>18.42</td> <td>65.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8008.00	45.99	68.30	-22.31	60.52	36.00	15.72	66.25	0.00	100	0	PEAK	2	11440.00	45.51	74.00	-28.49	54.21	38.36	18.42	65.48	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8008.00	52.03	68.30	-16.27	66.56	36.00	15.72	66.25	0.00	300	0	PEAK																																																																																																		
2	11440.00	45.85	74.00	-28.15	54.55	38.36	18.42	65.48	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8008.00	45.99	68.30	-22.31	60.52	36.00	15.72	66.25	0.00	100	0	PEAK																																																																																																		
2	11440.00	45.51	74.00	-28.49	54.21	38.36	18.42	65.48	0.00	100	0	PEAK																																																																																																		



Mode	49																																																																																					
	Harmonic																																																																																					
	U-NII-2C_5.47-5.85_802.11ax HE40_CH142_Full RU_5710MHz																																																																																					
ANT	7+8																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7994.00</td> <td>51.40</td> <td>68.30</td> <td>-16.90</td> <td>65.95</td> <td>36.00</td> <td>15.70</td> <td>66.25</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 11420.00</td> <td>45.28</td> <td>74.00</td> <td>-28.72</td> <td>54.02</td> <td>38.35</td> <td>18.40</td> <td>65.49</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1 7994.00	51.40	68.30	-16.90	65.95	36.00	15.70	66.25	0.00	300	0	PEAK	2 11420.00	45.28	74.00	-28.72	54.02	38.35	18.40	65.49	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7994.00</td> <td>44.57</td> <td>68.30</td> <td>-23.73</td> <td>59.12</td> <td>36.00</td> <td>15.70</td> <td>66.25</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 11420.00</td> <td>45.49</td> <td>74.00</td> <td>-28.51</td> <td>54.23</td> <td>38.35</td> <td>18.40</td> <td>65.49</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1 7994.00	44.57	68.30	-23.73	59.12	36.00	15.70	66.25	0.00	100	0	PEAK	2 11420.00	45.49	74.00	-28.51	54.23	38.35	18.40	65.49	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																														
1 7994.00	51.40	68.30	-16.90	65.95	36.00	15.70	66.25	0.00	300	0	PEAK																																																																											
2 11420.00	45.28	74.00	-28.72	54.02	38.35	18.40	65.49	0.00	300	0	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																														
1 7994.00	44.57	68.30	-23.73	59.12	36.00	15.70	66.25	0.00	100	0	PEAK																																																																											
2 11420.00	45.49	74.00	-28.51	54.23	38.35	18.40	65.49	0.00	100	0	PEAK																																																																											



Mode	50																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.85_802.11ax HE80_CH138_Full RU_5690MHz																																																																																									
ANT	7+8																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7966.00</td> <td>49.83</td> <td>68.30</td> <td>-18.47</td> <td>64.39</td> <td>35.99</td> <td>15.65</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>44.40</td> <td>74.00</td> <td>-29.60</td> <td>53.22</td> <td>38.33</td> <td>18.37</td> <td>65.52</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	7966.00	49.83	68.30	-18.47	64.39	35.99	15.65	66.20	0.00	300	0	PEAK	2	11380.00	44.40	74.00	-29.60	53.22	38.33	18.37	65.52	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7966.00</td> <td>44.14</td> <td>68.30</td> <td>-24.16</td> <td>58.70</td> <td>35.99</td> <td>15.65</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>43.74</td> <td>74.00</td> <td>-30.26</td> <td>52.56</td> <td>38.33</td> <td>18.37</td> <td>65.52</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	7966.00	44.14	68.30	-24.16	58.70	35.99	15.65	66.20	0.00	100	0	PEAK	2	11380.00	43.74	74.00	-30.26	52.56	38.33	18.37	65.52	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																		
1	7966.00	49.83	68.30	-18.47	64.39	35.99	15.65	66.20	0.00	300	0	PEAK																																																																														
2	11380.00	44.40	74.00	-29.60	53.22	38.33	18.37	65.52	0.00	300	0	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																		
1	7966.00	44.14	68.30	-24.16	58.70	35.99	15.65	66.20	0.00	100	0	PEAK																																																																														
2	11380.00	43.74	74.00	-30.26	52.56	38.33	18.37	65.52	0.00	100	0	PEAK																																																																														



Mode	68																																																																																								
	Band Edge - L																																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																								
ANT	7+8																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5444.94</td> <td>62.31</td> <td>74.00</td> <td>-11.69</td> <td>44.26</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.08</td> <td>62.02</td> <td>68.30</td> <td>-6.28</td> <td>43.93</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5444.94	62.31	74.00	-11.69	44.26	34.52	13.14	29.61	0.00	100	100	PEAK	2	5464.08	62.02	68.30	-6.28	43.93	34.53	13.18	29.62	0.00	100	100	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>103.76</td> <td>-----</td> <td>-----</td> <td>85.72</td> <td>34.59</td> <td>13.18</td> <td>29.73</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	103.76	-----	-----	85.72	34.59	13.18	29.73	0.00	100	100	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5444.94	62.31	74.00	-11.69	44.26	34.52	13.14	29.61	0.00	100	100	PEAK																																																																													
2	5464.08	62.02	68.30	-6.28	43.93	34.53	13.18	29.62	0.00	100	100	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	103.76	-----	-----	85.72	34.59	13.18	29.73	0.00	100	100	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.40</td> <td>52.18</td> <td>54.00</td> <td>-1.82</td> <td>34.10</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5454.40	52.18	54.00	-1.82	34.10	34.53	13.16	29.61	0.00	100	100	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>94.05</td> <td>-----</td> <td>-----</td> <td>76.00</td> <td>34.58</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	94.05	-----	-----	76.00	34.58	13.19	29.72	0.00	100	100	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5454.40	52.18	54.00	-1.82	34.10	34.53	13.16	29.61	0.00	100	100	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	94.05	-----	-----	76.00	34.58	13.19	29.72	0.00	100	100	AVERAGE																																																																													



Mode	68																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	7+8																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5738.19</td> <td>62.02</td> <td>68.30</td> <td>-6.28</td> <td>43.13</td> <td>34.86</td> <td>13.82</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5738.19	62.02	68.30	-6.28	43.13	34.86	13.82	29.79	0.00	100	108	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5738.19	62.02	68.30	-6.28	43.13	34.86	13.82	29.79	0.00	100	108	PEAK																															



Mode	68																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																			
ANT	7+8																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.24</td> <td>59.90</td> <td>74.00</td> <td>-14.10</td> <td>41.86</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>100</td> <td>112 PEAK</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>59.14</td> <td>68.30</td> <td>-9.16</td> <td>41.04</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>112 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5437.24	59.90	74.00	-14.10	41.86	34.52	13.12	29.60	0.00	100	112 PEAK	2	5467.60	59.14	68.30	-9.16	41.04	34.53	13.19	29.62	0.00	100	112 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>100.94</td> <td>-----</td> <td>-----</td> <td>82.90</td> <td>34.59</td> <td>13.18</td> <td>29.73</td> <td>0.00</td> <td>100</td> <td>112 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	100.94	-----	-----	82.90	34.59	13.18	29.73	0.00	100	112 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5437.24	59.90	74.00	-14.10	41.86	34.52	13.12	29.60	0.00	100	112 PEAK																																																																																									
2	5467.60	59.14	68.30	-9.16	41.04	34.53	13.19	29.62	0.00	100	112 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	100.94	-----	-----	82.90	34.59	13.18	29.73	0.00	100	112 PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.14</td> <td>49.52</td> <td>54.00</td> <td>-4.48</td> <td>31.44</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>112 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.14	49.52	54.00	-4.48	31.44	34.53	13.17	29.62	0.00	100	112 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>91.27</td> <td>-----</td> <td>-----</td> <td>73.23</td> <td>34.59</td> <td>13.18</td> <td>29.73</td> <td>0.00</td> <td>100</td> <td>112 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	91.27	-----	-----	73.23	34.59	13.18	29.73	0.00	100	112 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5458.14	49.52	54.00	-4.48	31.44	34.53	13.17	29.62	0.00	100	112 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	91.27	-----	-----	73.23	34.59	13.18	29.73	0.00	100	112 AVERAGE																																																																																									



Mode	68																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	7+8																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.17</td> <td>62.10</td> <td>68.30</td> <td>-6.20</td> <td>43.28</td> <td>34.85</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.17	62.10	68.30	-6.20	43.28	34.85	13.76	29.79	0.00	100	112	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5731.17	62.10	68.30	-6.20	43.28	34.85	13.76	29.79	0.00	100	112	PEAK																															



Mode	68																																																																																																							
	Harmonic																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																							
ANT	7+8																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>48.94</td> <td>68.30</td> <td>-19.36</td> <td>63.57</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>300</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>11139.67</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>53.29</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>100</td> <td>340</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7798.00	48.94	68.30	-19.36	63.57	35.92	15.35	65.90	0.00	300	0 Peak	2	11139.67	44.01	74.00	-29.99	53.29	38.18	18.19	65.65	0.00	100	340	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>49.12</td> <td>68.30</td> <td>-19.18</td> <td>63.75</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>11140.00</td> <td>46.17</td> <td>74.00</td> <td>-27.83</td> <td>55.45</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7798.00	49.12	68.30	-19.18	63.75	35.92	15.35	65.90	0.00	100	0 Peak	2	11140.00	46.17	74.00	-27.83	55.45	38.18	18.19	65.65	0.00	100	0 Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																
1	7798.00	48.94	68.30	-19.36	63.57	35.92	15.35	65.90	0.00	300	0 Peak																																																																																													
2	11139.67	44.01	74.00	-29.99	53.29	38.18	18.19	65.65	0.00	100	340																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																
1	7798.00	49.12	68.30	-19.18	63.75	35.92	15.35	65.90	0.00	100	0 Peak																																																																																													
2	11140.00	46.17	74.00	-27.83	55.45	38.18	18.19	65.65	0.00	100	0 Peak																																																																																													







Mode	69																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																			
ANT	7+8																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																		
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.42</td> <td>63.42</td> <td>74.00</td> <td>-10.58</td> <td>45.34</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>118 PEAK</td> </tr> <tr> <td>2</td> <td>5467.38</td> <td>63.69</td> <td>68.30</td> <td>-4.61</td> <td>45.59</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>118 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5452.42	63.42	74.00	-10.58	45.34	34.53	13.16	29.61	0.00	100	118 PEAK	2	5467.38	63.69	68.30	-4.61	45.59	34.53	13.19	29.62	0.00	100	118 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>103.75</td> <td>-----</td> <td>-----</td> <td>85.70</td> <td>34.58</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>100</td> <td>118 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	103.75	-----	-----	85.70	34.58	13.19	29.72	0.00	100	118 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5452.42	63.42	74.00	-10.58	45.34	34.53	13.16	29.61	0.00	100	118 PEAK																																																																																									
2	5467.38	63.69	68.30	-4.61	45.59	34.53	13.19	29.62	0.00	100	118 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	103.75	-----	-----	85.70	34.58	13.19	29.72	0.00	100	118 PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.52</td> <td>52.13</td> <td>54.00</td> <td>-1.87</td> <td>34.05</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>118 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.52	52.13	54.00	-1.87	34.05	34.53	13.16	29.61	0.00	100	118 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>94.12</td> <td>-----</td> <td>-----</td> <td>76.07</td> <td>34.58</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>100</td> <td>118 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	94.12	-----	-----	76.07	34.58	13.19	29.72	0.00	100	118 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5454.52	52.13	54.00	-1.87	34.05	34.53	13.16	29.61	0.00	100	118 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5570.00	94.12	-----	-----	76.07	34.58	13.19	29.72	0.00	100	118 AVERAGE																																																																																									



Mode	69																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																								
ANT	7+8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.05</td> <td>62.99</td> <td>68.30</td> <td>-5.31</td> <td>44.12</td> <td>34.86</td> <td>13.80</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>118 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5736.05	62.99	68.30	-5.31	44.12	34.86	13.80	29.79	0.00	100	118 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5736.05	62.99	68.30	-5.31	44.12	34.86	13.80	29.79	0.00	100	118 PEAK																															

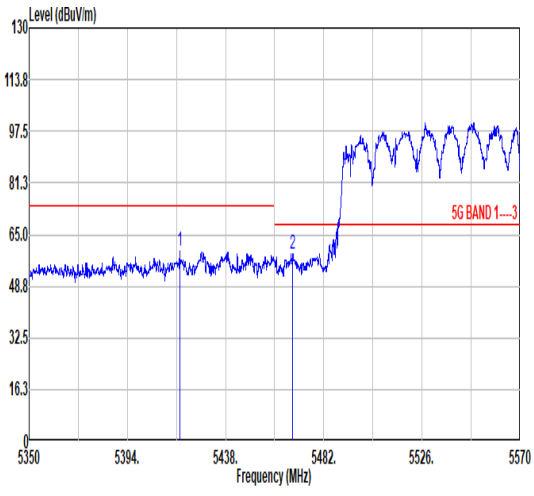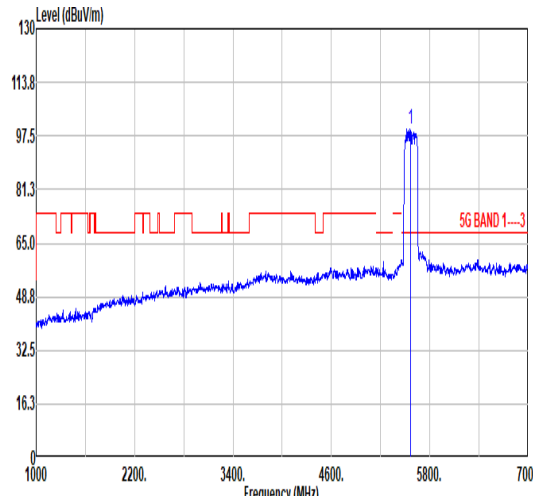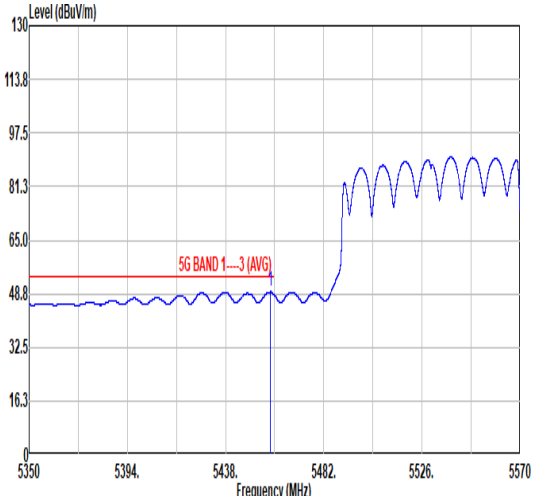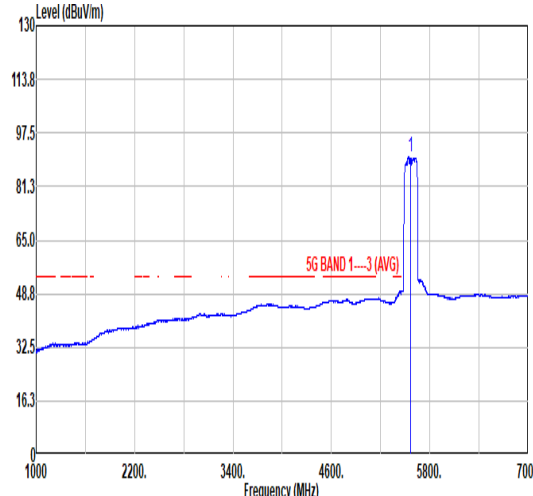

Mode	69																																																																																								
	Band Edge - L																																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																								
ANT	7+8																																																																																								
Pol.	Vertical	Fundamental																																																																																							
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5417.44</td> <td>59.61</td> <td>74.00</td> <td>-14.39</td> <td>41.61</td> <td>34.51</td> <td>13.07</td> <td>29.58</td> <td>0.00</td> <td>100</td> <td>109</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.04</td> <td>58.98</td> <td>68.30</td> <td>-9.32</td> <td>40.88</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5417.44	59.61	74.00	-14.39	41.61	34.51	13.07	29.58	0.00	100	109	PEAK	2	5468.04	58.98	68.30	-9.32	40.88	34.53	13.19	29.62	0.00	100	109	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>99.68</td> <td>-----</td> <td>-----</td> <td>81.54</td> <td>34.56</td> <td>13.25</td> <td>29.67</td> <td>0.00</td> <td>100</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	99.68	-----	-----	81.54	34.56	13.25	29.67	0.00	100	109	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5417.44	59.61	74.00	-14.39	41.61	34.51	13.07	29.58	0.00	100	109	PEAK																																																																													
2	5468.04	58.98	68.30	-9.32	40.88	34.53	13.19	29.62	0.00	100	109	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	99.68	-----	-----	81.54	34.56	13.25	29.67	0.00	100	109	PEAK																																																																													
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.12</td> <td>49.34</td> <td>54.00</td> <td>-4.66</td> <td>31.26</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>109</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.12	49.34	54.00	-4.66	31.26	34.53	13.17	29.62	0.00	100	109	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>90.26</td> <td>-----</td> <td>-----</td> <td>72.15</td> <td>34.57</td> <td>13.23</td> <td>29.69</td> <td>0.00</td> <td>100</td> <td>109</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5570.00	90.26	-----	-----	72.15	34.57	13.23	29.69	0.00	100	109	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5458.12	49.34	54.00	-4.66	31.26	34.53	13.17	29.62	0.00	100	109	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	5570.00	90.26	-----	-----	72.15	34.57	13.23	29.69	0.00	100	109	AVERAGE																																																																													



Mode	69																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	7+8																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5732.34</td> <td>62.23</td> <td>68.30</td> <td>-6.07</td> <td>43.40</td> <td>34.85</td> <td>13.77</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5732.34	62.23	68.30	-6.07	43.40	34.85	13.77	29.79	0.00	100	109	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5732.34	62.23	68.30	-6.07	43.40	34.85	13.77	29.79	0.00	100	109	PEAK																															



Mode	69																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																									
ANT	7+8																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>44.49</td> <td>68.30</td> <td>-23.81</td> <td>59.12</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11140.00</td> <td>45.92</td> <td>74.00</td> <td>-28.08</td> <td>55.20</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	7798.00	44.49	68.30	-23.81	59.12	35.92	15.35	65.90	0.00	100	0	PEAK	2	11140.00	45.92	74.00	-28.08	55.20	38.18	18.19	65.65	0.00	100	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7798.00</td> <td>44.94</td> <td>68.30</td> <td>-23.36</td> <td>59.57</td> <td>35.92</td> <td>15.35</td> <td>65.90</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11140.00</td> <td>45.80</td> <td>74.00</td> <td>-28.20</td> <td>55.08</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	7798.00	44.94	68.30	-23.36	59.57	35.92	15.35	65.90	0.00	300	0	PEAK	2	11140.00	45.80	74.00	-28.20	55.08	38.18	18.19	65.65	0.00	300	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																		
1	7798.00	44.49	68.30	-23.81	59.12	35.92	15.35	65.90	0.00	100	0	PEAK																																																																														
2	11140.00	45.92	74.00	-28.08	55.20	38.18	18.19	65.65	0.00	100	0	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																		
1	7798.00	44.94	68.30	-23.36	59.57	35.92	15.35	65.90	0.00	300	0	PEAK																																																																														
2	11140.00	45.80	74.00	-28.20	55.08	38.18	18.19	65.65	0.00	300	0	PEAK																																																																														



		70																																																																																													
Mode	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																														
ANT	4+5																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.64</td> <td>60.68</td> <td>74.00</td> <td>-13.32</td> <td>42.63</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>186</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.22</td> <td>60.26</td> <td>68.30</td> <td>-8.04</td> <td>42.17</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>186</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5441.64	60.68	74.00	-13.32	42.63	34.52	13.13	29.60	0.00	186	344	PEAK	2	5461.22	60.26	68.30	-8.04	42.17	34.53	13.18	29.62	0.00	186	344	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>102.66</td> <td>-----</td> <td>-----</td> <td>84.64</td> <td>34.59</td> <td>13.17</td> <td>29.74</td> <td>0.00</td> <td>186</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5570.00	102.66	-----	-----	84.64	34.59	13.17	29.74	0.00	186	344	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5441.64	60.68	74.00	-13.32	42.63	34.52	13.13	29.60	0.00	186	344	PEAK																																																																																			
2	5461.22	60.26	68.30	-8.04	42.17	34.53	13.18	29.62	0.00	186	344	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	5570.00	102.66	-----	-----	84.64	34.59	13.17	29.74	0.00	186	344	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.17</td> <td>50.57</td> <td>54.00</td> <td>-3.43</td> <td>32.52</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>186</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5441.17	50.57	54.00	-3.43	32.52	34.52	13.13	29.60	0.00	186	344	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>91.44</td> <td>-----</td> <td>-----</td> <td>73.39</td> <td>34.62</td> <td>13.19</td> <td>29.76</td> <td>0.00</td> <td>186</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5570.00	91.44	-----	-----	73.39	34.62	13.19	29.76	0.00	186	344	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	5441.17	50.57	54.00	-3.43	32.52	34.52	13.13	29.60	0.00	186	344	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	5570.00	91.44	-----	-----	73.39	34.62	13.19	29.76	0.00	186	344	AVERAGE																																																																																			



Mode	70																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																							
ANT	4+5																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.83</td> <td>62.26</td> <td>68.30</td> <td>-6.04</td> <td>43.38</td> <td>34.86</td> <td>13.81</td> <td>29.79</td> <td>0.00</td> <td>186 344 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5736.83	62.26	68.30	-6.04	43.38	34.86	13.81	29.79	0.00	186 344 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5736.83	62.26	68.30	-6.04	43.38	34.86	13.81	29.79	0.00	186 344 PEAK																															



Mode	70																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																													
ANT	4+5																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.20</td> <td>61.71</td> <td>74.00</td> <td>-12.29</td> <td>43.66</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>297</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5469.36</td> <td>61.43</td> <td>68.30</td> <td>-6.87</td> <td>43.33</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>297</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.20	61.71	74.00	-12.29	43.66	34.52	13.13	29.60	0.00	297	0 PEAK	2	5469.36	61.43	68.30	-6.87	43.33	34.53	13.20	29.63	0.00	297	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>103.30</td> <td>-----</td> <td>-----</td> <td>85.28</td> <td>34.59</td> <td>13.17</td> <td>29.74</td> <td>0.00</td> <td>297</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	103.30	-----	-----	85.28	34.59	13.17	29.74	0.00	297	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5441.20	61.71	74.00	-12.29	43.66	34.52	13.13	29.60	0.00	297	0 PEAK																																																																																			
2	5469.36	61.43	68.30	-6.87	43.33	34.53	13.20	29.63	0.00	297	0 PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5570.00	103.30	-----	-----	85.28	34.59	13.17	29.74	0.00	297	0 PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.59</td> <td>51.34</td> <td>54.00</td> <td>-2.66</td> <td>33.31</td> <td>34.52</td> <td>13.10</td> <td>29.59</td> <td>0.00</td> <td>297</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5430.59	51.34	54.00	-2.66	33.31	34.52	13.10	29.59	0.00	297	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>93.44</td> <td>-----</td> <td>-----</td> <td>75.37</td> <td>34.58</td> <td>13.20</td> <td>29.71</td> <td>0.00</td> <td>297</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	93.44	-----	-----	75.37	34.58	13.20	29.71	0.00	297	0 AVERAGE												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5430.59	51.34	54.00	-2.66	33.31	34.52	13.10	29.59	0.00	297	0 AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5570.00	93.44	-----	-----	75.37	34.58	13.20	29.71	0.00	297	0 AVERAGE																																																																																			



Mode	70																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																								
ANT	4+5																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5745.41</td> <td>63.40</td> <td>68.30</td> <td>-4.90</td> <td>44.43</td> <td>34.88</td> <td>13.88</td> <td>29.79</td> <td>0.00</td> <td>297</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.41	63.40	68.30	-4.90	44.43	34.88	13.88	29.79	0.00	297	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5745.41	63.40	68.30	-4.90	44.43	34.88	13.88	29.79	0.00	297	0 PEAK																															





Mode	70																																																																																		
	Harmonic																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																		
ANT	4+5																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>44.61</td> <td>74.00</td> <td>-29.39</td> <td>53.89</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11140.00	44.61	74.00	-29.39	53.89	38.18	18.19	65.65	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>44.68</td> <td>74.00</td> <td>-29.32</td> <td>53.96</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11140.00	44.68	74.00	-29.32	53.96	38.18	18.19	65.65	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 11140.00	44.61	74.00	-29.39	53.89	38.18	18.19	65.65	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 11140.00	44.68	74.00	-29.32	53.96	38.18	18.19	65.65	0.00	---	---	PEAK																																																																								



Mode	45	
	Emission above 18GHz	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	7+8	
Pol.	Horizontal	Vertical
Peak		
Avg		

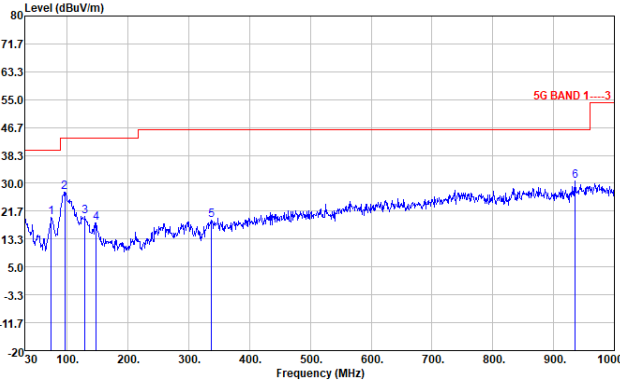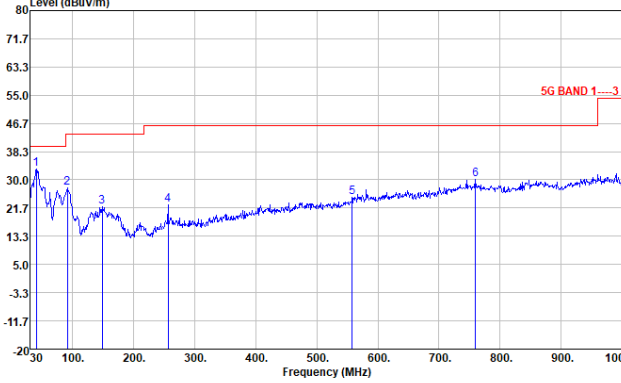

Mode	71																																																																																																																																																																																	
	Emission below 1GHz																																																																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																																																																																	
ANT	7+8																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak QP	 <p>Site : 03CH08-KS Condition : 5G BAND 1----3 3m CBL 6111D 59913 HORIZONTAL Project : 311602 Mode : IMEI :</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>73.65</td><td>19.71</td><td>-20.29</td><td>40.00</td><td>37.34</td><td>12.67</td><td>1.10</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>95.96</td><td>27.44</td><td>-16.06</td><td>43.50</td><td>42.04</td><td>15.39</td><td>1.41</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>128.94</td><td>19.98</td><td>-23.52</td><td>43.50</td><td>32.16</td><td>17.58</td><td>1.64</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>147.37</td><td>18.21</td><td>-25.29</td><td>43.50</td><td>30.74</td><td>17.12</td><td>1.75</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>337.49</td><td>18.89</td><td>-27.11</td><td>46.00</td><td>27.62</td><td>20.01</td><td>2.68</td><td>31.42</td><td>---</td><td>--- Peak</td></tr> <tr><td>6</td><td>935.98</td><td>30.61</td><td>-15.39</td><td>46.00</td><td>27.08</td><td>29.54</td><td>4.45</td><td>30.46</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	73.65	19.71	-20.29	40.00	37.34	12.67	1.10	31.40	---	--- Peak	2	95.96	27.44	-16.06	43.50	42.04	15.39	1.41	31.40	---	--- Peak	3	128.94	19.98	-23.52	43.50	32.16	17.58	1.64	31.40	---	--- Peak	4	147.37	18.21	-25.29	43.50	30.74	17.12	1.75	31.40	---	--- Peak	5	337.49	18.89	-27.11	46.00	27.62	20.01	2.68	31.42	---	--- Peak	6	935.98	30.61	-15.39	46.00	27.08	29.54	4.45	30.46	---	--- Peak	 <p>Site : 03CH08-KS Condition : 5G BAND 1----3 3m CBL 6111D 59913 VERTICAL Project : 311602 Mode : IMEI :</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>40.67</td><td>33.34</td><td>-6.66</td><td>40.00</td><td>44.99</td><td>19.11</td><td>0.64</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>91.11</td><td>27.50</td><td>-16.00</td><td>43.50</td><td>42.83</td><td>14.73</td><td>1.34</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>148.34</td><td>22.17</td><td>-21.33</td><td>43.50</td><td>34.72</td><td>17.09</td><td>1.76</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>256.01</td><td>22.55</td><td>-23.45</td><td>46.00</td><td>32.40</td><td>19.22</td><td>2.33</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>557.68</td><td>24.83</td><td>-21.17</td><td>46.00</td><td>27.44</td><td>25.41</td><td>3.43</td><td>31.45</td><td>---</td><td>--- Peak</td></tr> <tr><td>6</td><td>759.44</td><td>30.18</td><td>-15.82</td><td>46.00</td><td>29.38</td><td>28.12</td><td>4.01</td><td>31.33</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	40.67	33.34	-6.66	40.00	44.99	19.11	0.64	31.40	---	--- Peak	2	91.11	27.50	-16.00	43.50	42.83	14.73	1.34	31.40	---	--- Peak	3	148.34	22.17	-21.33	43.50	34.72	17.09	1.76	31.40	---	--- Peak	4	256.01	22.55	-23.45	46.00	32.40	19.22	2.33	31.40	---	--- Peak	5	557.68	24.83	-21.17	46.00	27.44	25.41	3.43	31.45	---	--- Peak	6	759.44	30.18	-15.82	46.00	29.38	28.12	4.01	31.33	---	--- Peak
	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																									
1	73.65	19.71	-20.29	40.00	37.34	12.67	1.10	31.40	---	--- Peak																																																																																																																																																																								
2	95.96	27.44	-16.06	43.50	42.04	15.39	1.41	31.40	---	--- Peak																																																																																																																																																																								
3	128.94	19.98	-23.52	43.50	32.16	17.58	1.64	31.40	---	--- Peak																																																																																																																																																																								
4	147.37	18.21	-25.29	43.50	30.74	17.12	1.75	31.40	---	--- Peak																																																																																																																																																																								
5	337.49	18.89	-27.11	46.00	27.62	20.01	2.68	31.42	---	--- Peak																																																																																																																																																																								
6	935.98	30.61	-15.39	46.00	27.08	29.54	4.45	30.46	---	--- Peak																																																																																																																																																																								
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																									
1	40.67	33.34	-6.66	40.00	44.99	19.11	0.64	31.40	---	--- Peak																																																																																																																																																																								
2	91.11	27.50	-16.00	43.50	42.83	14.73	1.34	31.40	---	--- Peak																																																																																																																																																																								
3	148.34	22.17	-21.33	43.50	34.72	17.09	1.76	31.40	---	--- Peak																																																																																																																																																																								
4	256.01	22.55	-23.45	46.00	32.40	19.22	2.33	31.40	---	--- Peak																																																																																																																																																																								
5	557.68	24.83	-21.17	46.00	27.44	25.41	3.43	31.45	---	--- Peak																																																																																																																																																																								
6	759.44	30.18	-15.82	46.00	29.38	28.12	4.01	31.33	---	--- Peak																																																																																																																																																																								



<U NII-3>

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 51	U-NII-3	5.725-5.85	7+8	802.11a	149	5745	6Mbps	-	-
Mode 52	U-NII-3	5.725-5.85	7+8	802.11a	157	5785	6Mbps	-	-
Mode 53	U-NII-3	5.725-5.85	7+8	802.11a	165	5825	6Mbps	-	-
Mode 54	U-NII-3	5.725-5.85	7+8	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 55	U-NII-3	5.725-5.85	7+8	802.11ax HE20	149	5745	MCS0	RU 106/53	-
Mode 56	U-NII-3	5.725-5.85	7+8	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 57	U-NII-3	5.725-5.85	7+8	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 58	U-NII-3	5.725-5.85	7+8	802.11ax HE20	165	5825	MCS0	RU 106/54	-
Mode 59	U-NII-3	5.725-5.85	7+8	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 60	U-NII-3	5.725-5.85	7+8	802.11ax HE40	151	5755	MCS0	RU 242/61	-
Mode 61	U-NII-3	5.725-5.85	7+8	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 62	U-NII-3	5.725-5.85	7+8	802.11ax HE40	159	5795	MCS0	RU 242/62	-
Mode 63	U-NII-3	5.725-5.85	7+8	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 64	U-NII-3	5.725-5.85	7+8	802.11ax HE80	155	5775	MCS0	RU 484/65	-
Mode 65	U-NII-3	5.725-5.85	7+8	802.11ax HE80	155	5775	MCS0	RU 484/66	-
Mode 71	U-NII-3	5.725-5.85	7+8	802.11ax HE80	155	5775	MCS0	RU 484/66	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
51	802.11a	149	5605.51	58.13	68.30	-10.17	H	PEAK	Pass	Band Edge
	802.11a	149	11490.00	44.56	74.00	-29.44	H	PEAK	Pass	Harmonic
52	802.11a	157	5932.84	58.96	68.30	-9.34	H	PEAK	Pass	Band Edge
	802.11a	157	11570.00	45.18	74.00	-28.82	H	PEAK	Pass	Harmonic
53	802.11a	165	5934.88	59.33	68.30	-8.97	V	PEAK	Pass	Band Edge
	802.11a	165	11650.00	44.95	74.00	-29.05	V	PEAK	Pass	Harmonic
54	802.11ax HE20	149	5604.50	58.12	68.30	-10.18	V	PEAK	Pass	Band Edge
	802.11ax HE20	149	11490.00	44.33	74.00	-29.67	H	PEAK	Pass	Harmonic
55	802.11ax HE20	149	5602.47	58.30	68.30	-10.00	H	PEAK	Pass	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	157	5929.71	59.70	68.30	-8.60	H	PEAK	Pass	Band Edge
56	802.11ax HE20	157	11570.00	44.42	74.00	-29.58	V	PEAK	Pass	Harmonic
57	802.11ax HE20	165	5941.13	58.37	68.30	-9.93	V	PEAK	Pass	Band Edge
	802.11ax HE20	165	11650.00	44.99	74.00	-29.01	H	PEAK	Pass	Harmonic
58	802.11ax HE20	165	5945.63	59.35	68.30	-8.95	H	PEAK	Pass	Band Edge
	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
59	802.11ax HE40	151	5934.40	58.91	68.30	-9.39	V	PEAK	Pass	Band Edge
	802.11ax HE40	151	11510.00	44.48	74.00	-29.52	V	PEAK	Pass	Harmonic
60	802.11ax HE40	151	5646.04	61.42	68.30	-6.88	V	PEAK	Pass	Band Edge
	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
61	802.11ax HE40	159	5646.80	59.06	68.30	-9.24	V	PEAK	Pass	Band Edge
	802.11ax HE40	159	11590.00	44.25	74.00	-29.75	H	PEAK	Pass	Harmonic






Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
62	802.11ax HE40	159	5946.75	59.26	68.30	-9.04	H	PEAK	Pass	Band Edge
	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
63	802.11ax HE80	155	5645.50	61.81	68.30	-6.49	V	PEAK	Pass	Band Edge
	802.11ax HE80	155	11550.00	43.66	74.00	-30.34	H	PEAK	Pass	Harmonic
64	802.11ax HE80	155	5630.28	61.80	68.30	-6.50	V	PEAK	Pass	Band Edge
	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE80	155	5637.28	62.45	68.30	-5.85	V	PEAK	Pass	Band Edge
	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
71	802.11ax HE80	155	40.67	33.34	40.00	-6.66	V	Peak	Pass	LF



Mode	51																																																																																																						
	Band Edge																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																						
ANT	7+8																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5605.51</td> <td>58.13</td> <td>68.30</td> <td>-10.17</td> <td>40.11</td> <td>34.61</td> <td>13.17</td> <td>29.76</td> <td>0.00</td> <td>149</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.91</td> <td>57.24</td> <td>69.72</td> <td>-12.48</td> <td>39.01</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>149</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.44</td> <td>73.00</td> <td>109.90</td> <td>-36.90</td> <td>54.35</td> <td>34.82</td> <td>13.63</td> <td>29.80</td> <td>0.00</td> <td>149</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.51</td> <td>77.67</td> <td>114.34</td> <td>-36.67</td> <td>58.96</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>149</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5605.51	58.13	68.30	-10.17	40.11	34.61	13.17	29.76	0.00	149	0	PEAK	2	5651.91	57.24	69.72	-12.48	39.01	34.69	13.32	29.78	0.00	149	0	PEAK	3	5716.44	73.00	109.90	-36.90	54.35	34.82	13.63	29.80	0.00	149	0	PEAK	4	5721.51	77.67	114.34	-36.67	58.96	34.83	13.67	29.79	0.00	149	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>115.45</td> <td>-----</td> <td>-----</td> <td>96.53</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>149</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	115.45	-----	-----	96.53	34.87	13.84	29.79	0.00	149	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5605.51	58.13	68.30	-10.17	40.11	34.61	13.17	29.76	0.00	149	0	PEAK																																																																																											
2	5651.91	57.24	69.72	-12.48	39.01	34.69	13.32	29.78	0.00	149	0	PEAK																																																																																											
3	5716.44	73.00	109.90	-36.90	54.35	34.82	13.63	29.80	0.00	149	0	PEAK																																																																																											
4	5721.51	77.67	114.34	-36.67	58.96	34.83	13.67	29.79	0.00	149	0	PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5745.00	115.45	-----	-----	96.53	34.87	13.84	29.79	0.00	149	0	PEAK																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.91</td> <td>-----</td> <td>-----</td> <td>87.93</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>149</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	106.91	-----	-----	87.93	34.88	13.89	29.79	0.00	149	0	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5745.00	106.91	-----	-----	87.93	34.88	13.89	29.79	0.00	149	0	AVERAGE																																																																																											

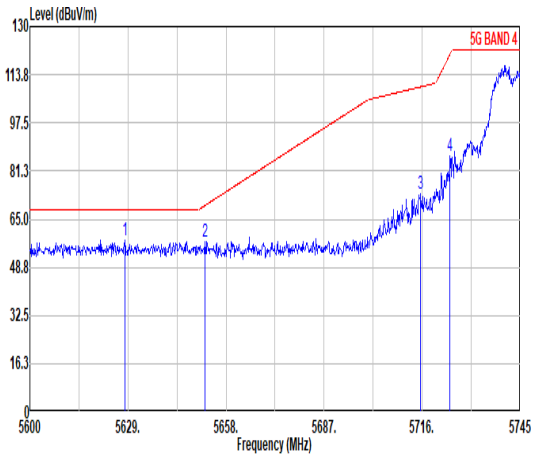
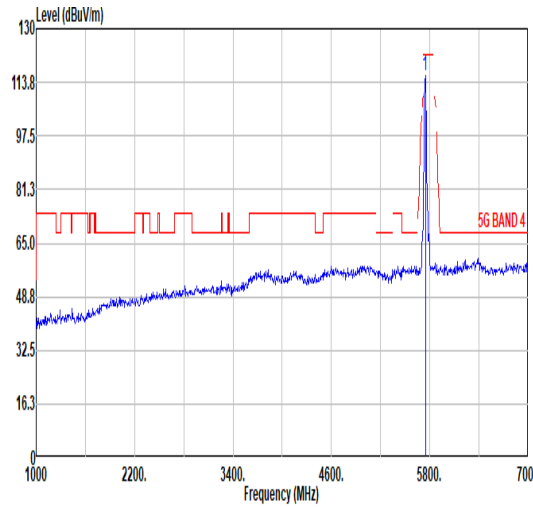
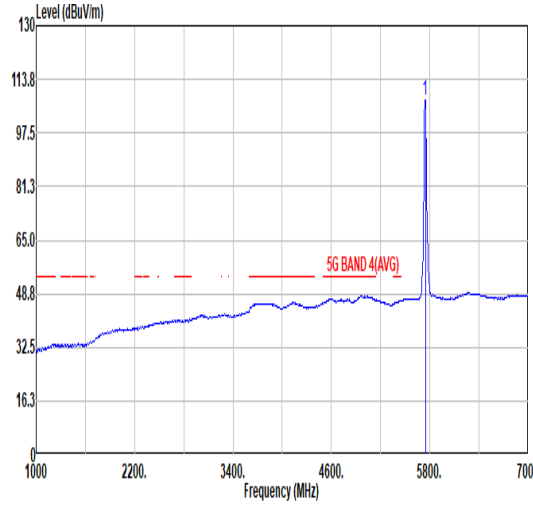


51																																																																																				
Mode	Band Edge																																																																																			
U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																				
ANT	7+8																																																																																			
Pol.	Vertical																																																																																			
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.13</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>39.74</td> <td>34.65</td> <td>13.24</td> <td>29.77</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.77</td> <td>57.48</td> <td>69.61</td> <td>-12.13</td> <td>39.25</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.57</td> <td>73.79</td> <td>109.66</td> <td>-35.87</td> <td>55.16</td> <td>34.81</td> <td>13.62</td> <td>29.80</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.27</td> <td>86.53</td> <td>120.63</td> <td>-34.10</td> <td>67.79</td> <td>34.83</td> <td>13.70</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5628.13	57.86	68.30	-10.44	39.74	34.65	13.24	29.77	0.00	231	360	PEAK	2	5651.77	57.48	69.61	-12.13	39.25	34.69	13.32	29.78	0.00	231	360	PEAK	3	5715.57	73.79	109.66	-35.87	55.16	34.81	13.62	29.80	0.00	231	360	PEAK	4	5724.27	86.53	120.63	-34.10	67.79	34.83	13.70	29.79	0.00	231	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5628.13	57.86	68.30	-10.44	39.74	34.65	13.24	29.77	0.00	231	360	PEAK																																																																								
2	5651.77	57.48	69.61	-12.13	39.25	34.69	13.32	29.78	0.00	231	360	PEAK																																																																								
3	5715.57	73.79	109.66	-35.87	55.16	34.81	13.62	29.80	0.00	231	360	PEAK																																																																								
4	5724.27	86.53	120.63	-34.10	67.79	34.83	13.70	29.79	0.00	231	360	PEAK																																																																								
Fundamental	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>115.85</td> <td>-----</td> <td>-----</td> <td>96.87</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	115.85	-----	-----	96.87	34.88	13.89	29.79	0.00	231	360	PEAK																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	115.85	-----	-----	96.87	34.88	13.89	29.79	0.00	231	360	PEAK																																																																								
Avg	Blank																																																																																			
	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.45</td> <td>-----</td> <td>-----</td> <td>88.40</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.45	-----	-----	88.40	34.89	13.94	29.78	0.00	231	360	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	107.45	-----	-----	88.40	34.89	13.94	29.78	0.00	231	360	AVERAGE																																																																								



Mode	51																																																																																																												
	Harmonic																																																																																																												
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																												
ANT	7+8																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>45.80</td> <td>74.00</td> <td>-28.20</td> <td>60.27</td> <td>35.97</td> <td>15.79</td> <td>66.23</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>53.17</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8043.00	45.80	74.00	-28.20	60.27	35.97	15.79	66.23	0.00	100	0	PEAK	2	11490.00	44.56	74.00	-29.44	53.17	38.39	18.46	65.46	0.00	100	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>45.64</td> <td>74.00</td> <td>-28.36</td> <td>60.11</td> <td>35.97</td> <td>15.79</td> <td>66.23</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>44.51</td> <td>74.00</td> <td>-29.49</td> <td>53.12</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8043.00	45.64	74.00	-28.36	60.11	35.97	15.79	66.23	0.00	300	0	PEAK	2	11490.00	44.51	74.00	-29.49	53.12	38.39	18.46	65.46	0.00	300	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	8043.00	45.80	74.00	-28.20	60.27	35.97	15.79	66.23	0.00	100	0	PEAK																																																																																																	
2	11490.00	44.56	74.00	-29.44	53.17	38.39	18.46	65.46	0.00	100	0	PEAK																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	8043.00	45.64	74.00	-28.36	60.11	35.97	15.79	66.23	0.00	300	0	PEAK																																																																																																	
2	11490.00	44.51	74.00	-29.49	53.12	38.39	18.46	65.46	0.00	300	0	PEAK																																																																																																	

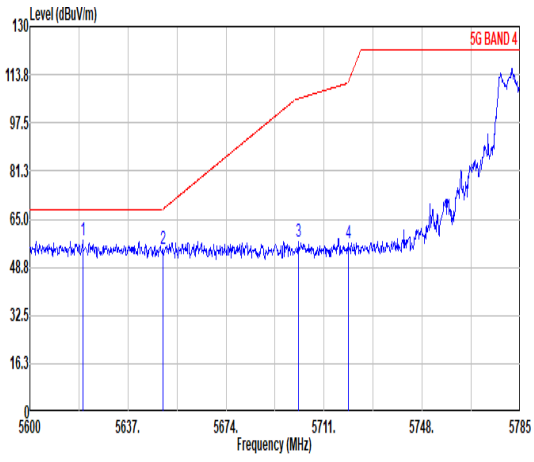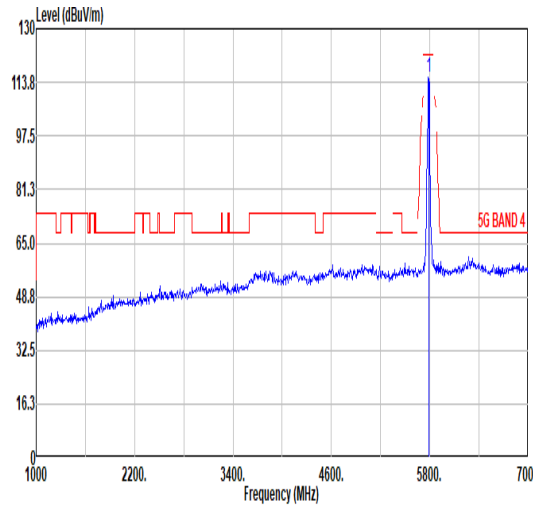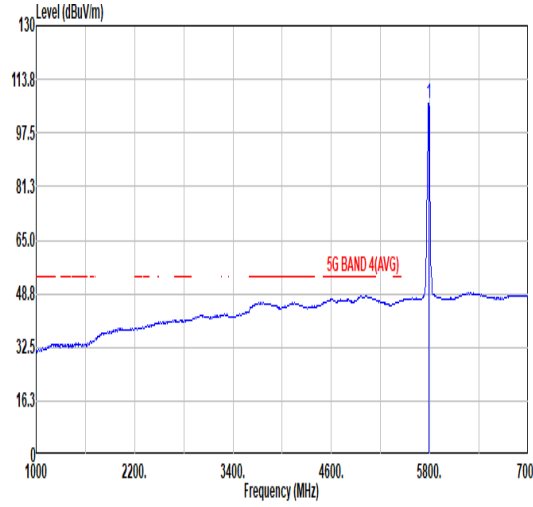

52																																																																																																																																
Mode	Band Edge - L																																																																																																																															
U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																
ANT	7+8																																																																																																																															
Pol.	Horizontal																																																																																																																															
Peak	Fundamental																																																																																																																															
 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5619.98</td> <td>57.74</td> <td>68.30</td> <td>-10.56</td> <td>39.65</td> <td>34.64</td> <td>13.22</td> <td>29.77</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.14</td> <td>55.04</td> <td>68.40</td> <td>-13.36</td> <td>36.81</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.38</td> <td>57.20</td> <td>105.69</td> <td>-48.49</td> <td>38.73</td> <td>34.78</td> <td>13.49</td> <td>29.00</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.25</td> <td>57.13</td> <td>111.47</td> <td>-54.34</td> <td>38.44</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5619.98	57.74	68.30	-10.56	39.65	34.64	13.22	29.77	0.00	128	342	PEAK	2	5650.14	55.04	68.40	-13.36	36.81	34.69	13.32	29.78	0.00	128	342	PEAK	3	5701.38	57.20	105.69	-48.49	38.73	34.78	13.49	29.00	0.00	128	342	PEAK	4	5720.25	57.13	111.47	-54.34	38.44	34.82	13.66	29.79	0.00	128	342	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>115.26</td> <td>-----</td> <td>-----</td> <td>95.87</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	115.26	-----	-----	95.87	34.96	14.21	29.78	0.00	128	342	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5619.98	57.74	68.30	-10.56	39.65	34.64	13.22	29.77	0.00	128	342	PEAK																																																																																																																				
2	5650.14	55.04	68.40	-13.36	36.81	34.69	13.32	29.78	0.00	128	342	PEAK																																																																																																																				
3	5701.38	57.20	105.69	-48.49	38.73	34.78	13.49	29.00	0.00	128	342	PEAK																																																																																																																				
4	5720.25	57.13	111.47	-54.34	38.44	34.82	13.66	29.79	0.00	128	342	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5785.00	115.26	-----	-----	95.87	34.96	14.21	29.78	0.00	128	342	PEAK																																																																																																																				
Avg	Blank																																																																																																																															
	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>106.37</td> <td>-----</td> <td>-----</td> <td>86.90</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>128</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	106.37	-----	-----	86.90	34.96	14.21	29.78	0.00	128	342	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5785.00	106.37	-----	-----	86.90	34.96	14.21	29.78	0.00	128	342	AVERAGE																																																																																																																				



Mode	52																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																									
ANT	7+8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.97</td> <td>59.46</td> <td>113.25</td> <td>-53.79</td> <td>40.14</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.76</td> <td>57.06</td> <td>105.37</td> <td>-48.31</td> <td>37.84</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.59</td> <td>56.78</td> <td>68.60</td> <td>-11.82</td> <td>37.72</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.84</td> <td>58.96</td> <td>68.30</td> <td>-9.34</td> <td>39.91</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>128</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5853.97	59.46	113.25	-53.79	40.14	35.08	14.03	29.79	0.00	128	342	PEAK	2	5874.76	57.06	105.37	-48.31	37.84	35.11	13.90	29.79	0.00	128	342	PEAK	3	5924.59	56.78	68.60	-11.82	37.72	35.19	13.69	29.82	0.00	128	342	PEAK	4	5932.84	58.96	68.30	-9.34	39.91	35.20	13.68	29.83	0.00	128	342	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5853.97	59.46	113.25	-53.79	40.14	35.08	14.03	29.79	0.00	128	342	PEAK																																																														
2	5874.76	57.06	105.37	-48.31	37.84	35.11	13.90	29.79	0.00	128	342	PEAK																																																														
3	5924.59	56.78	68.60	-11.82	37.72	35.19	13.69	29.82	0.00	128	342	PEAK																																																														
4	5932.84	58.96	68.30	-9.34	39.91	35.20	13.68	29.83	0.00	128	342	PEAK																																																														



	52																																																																																																																											
Mode	Band Edge - L																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	<table border="1" data-bbox="271 1064 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5635.71</td> <td>58.71</td> <td>68.30</td> <td>-9.59</td> <td>40.55</td> <td>34.66</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>232</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5651.06</td> <td>58.71</td> <td>69.09</td> <td>-10.38</td> <td>40.48</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>232</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5700.09</td> <td>56.64</td> <td>105.32</td> <td>-48.68</td> <td>38.18</td> <td>34.78</td> <td>13.48</td> <td>29.00</td> <td>0.00</td> <td>232</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.07</td> <td>55.29</td> <td>111.05</td> <td>-55.76</td> <td>36.60</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>232</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5635.71	58.71	68.30	-9.59	40.55	34.66	13.27	29.77	0.00	232	0 PEAK	2	5651.06	58.71	69.09	-10.38	40.48	34.69	13.32	29.78	0.00	232	0 PEAK	3	5700.09	56.64	105.32	-48.68	38.18	34.78	13.48	29.00	0.00	232	0 PEAK	4	5720.07	55.29	111.05	-55.76	36.60	34.82	13.66	29.79	0.00	232	0 PEAK	<table border="1" data-bbox="909 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>114.41</td> <td>-----</td> <td>-----</td> <td>95.02</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>232</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	114.41	-----	-----	95.02	34.96	14.21	29.78	0.00	232	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5635.71	58.71	68.30	-9.59	40.55	34.66	13.27	29.77	0.00	232	0 PEAK																																																																																																																	
2	5651.06	58.71	69.09	-10.38	40.48	34.69	13.32	29.78	0.00	232	0 PEAK																																																																																																																	
3	5700.09	56.64	105.32	-48.68	38.18	34.78	13.48	29.00	0.00	232	0 PEAK																																																																																																																	
4	5720.07	55.29	111.05	-55.76	36.60	34.82	13.66	29.79	0.00	232	0 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5785.00	114.41	-----	-----	95.02	34.96	14.21	29.78	0.00	232	0 PEAK																																																																																																																	
Avg	Blank	<table border="1" data-bbox="909 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>106.94</td> <td>-----</td> <td>-----</td> <td>87.55</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>232</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	106.94	-----	-----	87.55	34.96	14.21	29.78	0.00	232	0 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5785.00	106.94	-----	-----	87.55	34.96	14.21	29.78	0.00	232	0 AVERAGE																																																																																																																	



Mode	52																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																
ANT	7+8																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>57.26</td> <td>111.37</td> <td>-54.11</td> <td>37.95</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>232</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 5873.28</td> <td>60.16</td> <td>105.78</td> <td>-45.62</td> <td>40.93</td> <td>35.11</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>232</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3 5924.43</td> <td>57.35</td> <td>68.72</td> <td>-11.37</td> <td>38.29</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>232</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4 5941.75</td> <td>57.68</td> <td>68.30</td> <td>-10.62</td> <td>38.65</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>232</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.80	57.26	111.37	-54.11	37.95	35.08	14.02	29.79	0.00	232	0	PEAK	2 5873.28	60.16	105.78	-45.62	40.93	35.11	13.91	29.79	0.00	232	0	PEAK	3 5924.43	57.35	68.72	-11.37	38.29	35.19	13.69	29.82	0.00	232	0	PEAK	4 5941.75	57.68	68.30	-10.62	38.65	35.21	13.66	29.84	0.00	232	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 5854.80	57.26	111.37	-54.11	37.95	35.08	14.02	29.79	0.00	232	0	PEAK																																																																						
2 5873.28	60.16	105.78	-45.62	40.93	35.11	13.91	29.79	0.00	232	0	PEAK																																																																						
3 5924.43	57.35	68.72	-11.37	38.29	35.19	13.69	29.82	0.00	232	0	PEAK																																																																						
4 5941.75	57.68	68.30	-10.62	38.65	35.21	13.66	29.84	0.00	232	0	PEAK																																																																						






Mode	52																																																																																					
	Harmonic																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																					
ANT	7+8																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 8099.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>58.77</td> <td>35.94</td> <td>15.89</td> <td>66.18</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 11570.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>53.63</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1 8099.00	44.42	74.00	-29.58	58.77	35.94	15.89	66.18	0.00	100	0	PEAK	2 11570.00	45.18	74.00	-28.82	53.63	38.44	18.52	65.41	0.00	100	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 8099.00</td> <td>44.07</td> <td>74.00</td> <td>-29.93</td> <td>58.42</td> <td>35.94</td> <td>15.89</td> <td>66.18</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 11570.00</td> <td>44.59</td> <td>74.00</td> <td>-29.41</td> <td>53.04</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1 8099.00	44.07	74.00	-29.93	58.42	35.94	15.89	66.18	0.00	300	0	PEAK	2 11570.00	44.59	74.00	-29.41	53.04	38.44	18.52	65.41	0.00	300	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																														
1 8099.00	44.42	74.00	-29.58	58.77	35.94	15.89	66.18	0.00	100	0	PEAK																																																																											
2 11570.00	45.18	74.00	-28.82	53.63	38.44	18.52	65.41	0.00	100	0	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																														
1 8099.00	44.07	74.00	-29.93	58.42	35.94	15.89	66.18	0.00	300	0	PEAK																																																																											
2 11570.00	44.59	74.00	-29.41	53.04	38.44	18.52	65.41	0.00	300	0	PEAK																																																																											



	53																																																																																																																													
Mode	Band Edge																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																													
ANT	7+8																																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>63.45</td> <td>110.90</td> <td>-47.45</td> <td>44.14</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> <tr> <td>2</td> <td>5855.88</td> <td>70.72</td> <td>110.65</td> <td>-39.93</td> <td>51.41</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> <tr> <td>3</td> <td>5924.25</td> <td>58.26</td> <td>68.85</td> <td>-10.59</td> <td>39.20</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> <tr> <td>4</td> <td>5928.63</td> <td>58.60</td> <td>68.30</td> <td>-9.70</td> <td>39.55</td> <td>35.19</td> <td>13.69</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	63.45	110.90	-47.45	44.14	35.08	14.02	29.79	0.00	100	26 PEAK	2	5855.88	70.72	110.65	-39.93	51.41	35.08	14.02	29.79	0.00	100	26 PEAK	3	5924.25	58.26	68.85	-10.59	39.20	35.19	13.69	29.82	0.00	100	26 PEAK	4	5928.63	58.60	68.30	-9.70	39.55	35.19	13.69	29.83	0.00	100	26 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>113.06</td> <td>-----</td> <td>-----</td> <td>93.58</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	113.06	-----	-----	93.58	35.04	14.22	29.78	0.00	100	26 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5855.00	63.45	110.90	-47.45	44.14	35.08	14.02	29.79	0.00	100	26 PEAK																																																																																																																			
2	5855.88	70.72	110.65	-39.93	51.41	35.08	14.02	29.79	0.00	100	26 PEAK																																																																																																																			
3	5924.25	58.26	68.85	-10.59	39.20	35.19	13.69	29.82	0.00	100	26 PEAK																																																																																																																			
4	5928.63	58.60	68.30	-9.70	39.55	35.19	13.69	29.83	0.00	100	26 PEAK																																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5825.00	113.06	-----	-----	93.58	35.04	14.22	29.78	0.00	100	26 PEAK																																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.73</td> <td>-----</td> <td>-----</td> <td>84.29</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>26 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	103.73	-----	-----	84.29	35.04	14.18	29.78	0.00	100	26 AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5825.00	103.73	-----	-----	84.29	35.04	14.18	29.78	0.00	100	26 AVERAGE																																																																																																																			

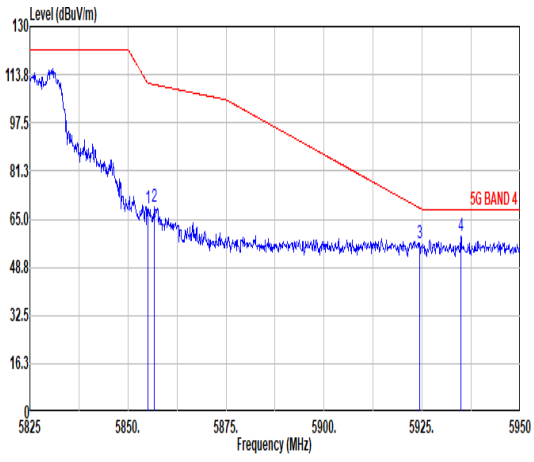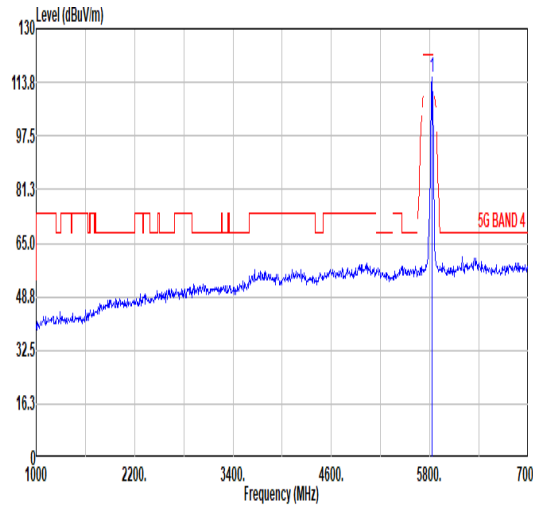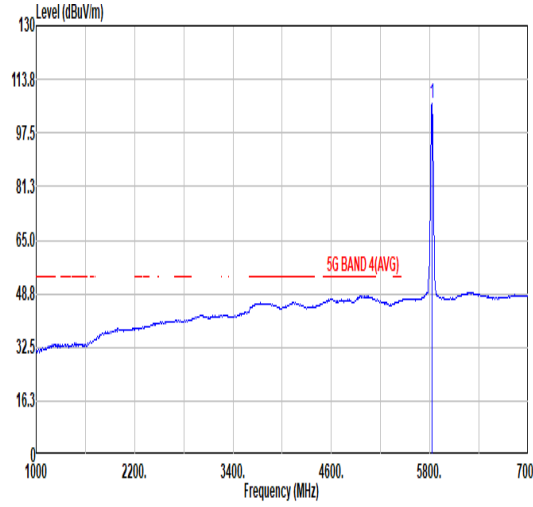

Mode	53																																																																																																																																
	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																
ANT	7+8																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>68.83</td> <td>110.90</td> <td>-42.07</td> <td>49.52</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>228</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.75</td> <td>68.94</td> <td>110.41</td> <td>-41.47</td> <td>49.63</td> <td>35.09</td> <td>14.01</td> <td>29.79</td> <td>0.00</td> <td>228</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.38</td> <td>57.02</td> <td>68.76</td> <td>-11.74</td> <td>37.96</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>228</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.88</td> <td>59.33</td> <td>68.30</td> <td>-8.97</td> <td>40.29</td> <td>35.20</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>228</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	68.83	110.90	-42.07	49.52	35.08	14.02	29.79	0.00	228	360	PEAK	2	5856.75	68.94	110.41	-41.47	49.63	35.09	14.01	29.79	0.00	228	360	PEAK	3	5924.38	57.02	68.76	-11.74	37.96	35.19	13.69	29.82	0.00	228	360	PEAK	4	5934.88	59.33	68.30	-8.97	40.29	35.20	13.67	29.83	0.00	228	360	PEAK	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>115.04</td> <td>-----</td> <td>-----</td> <td>95.56</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>228</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	115.04	-----	-----	95.56	35.04	14.22	29.78	0.00	228	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5855.00	68.83	110.90	-42.07	49.52	35.08	14.02	29.79	0.00	228	360	PEAK																																																																																																																					
2	5856.75	68.94	110.41	-41.47	49.63	35.09	14.01	29.79	0.00	228	360	PEAK																																																																																																																					
3	5924.38	57.02	68.76	-11.74	37.96	35.19	13.69	29.82	0.00	228	360	PEAK																																																																																																																					
4	5934.88	59.33	68.30	-8.97	40.29	35.20	13.67	29.83	0.00	228	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	115.04	-----	-----	95.56	35.04	14.22	29.78	0.00	228	360	PEAK																																																																																																																					
Avg	Blank	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.31</td> <td>-----</td> <td>-----</td> <td>86.87</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>228</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.31	-----	-----	86.87	35.04	14.18	29.78	0.00	228	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	106.31	-----	-----	86.87	35.04	14.18	29.78	0.00	228	360	AVERAGE																																																																																																																					



Mode	53																																																																														
	Harmonic																																																																														
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																														
ANT	7+8																																																																														
Pol.	Horizontal	Vertical																																																																													
Peak Avg																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>44.46</td> <td>74.00</td> <td>-29.54</td> <td>52.76</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	44.46	74.00	-29.54	52.76	38.49	18.58	65.37	0.00	100	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>44.95</td> <td>74.00</td> <td>-29.05</td> <td>53.25</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	44.95	74.00	-29.05	53.25	38.49	18.58	65.37	0.00	300
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	44.46	74.00	-29.54	52.76	38.49	18.58	65.37	0.00	100	0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	44.95	74.00	-29.05	53.25	38.49	18.58	65.37	0.00	300	0 PEAK																																																																					



54																																																																																		
Mode	Band Edge																																																																																	
U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																		
ANT	7+8																																																																																	
Pol.	Horizontal																																																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5621.75</td> <td>57.75</td> <td>68.30</td> <td>-10.55</td> <td>39.66</td> <td>34.64</td> <td>13.22</td> <td>29.77</td> <td>0.00</td> <td>152</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>55.78</td> <td>68.53</td> <td>-12.75</td> <td>37.55</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>152</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5719.05</td> <td>76.40</td> <td>110.63</td> <td>-34.23</td> <td>57.72</td> <td>34.82</td> <td>13.65</td> <td>29.79</td> <td>0.00</td> <td>152</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.50</td> <td>76.37</td> <td>112.03</td> <td>-35.66</td> <td>57.67</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>152</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5621.75	57.75	68.30	-10.55	39.66	34.64	13.22	29.77	0.00	152	0 PEAK	2	5650.32	55.78	68.53	-12.75	37.55	34.69	13.32	29.78	0.00	152	0 PEAK	3	5719.05	76.40	110.63	-34.23	57.72	34.82	13.65	29.79	0.00	152	0 PEAK	4	5720.50	76.37	112.03	-35.66	57.67	34.83	13.66	29.79	0.00	152	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																							
1	5621.75	57.75	68.30	-10.55	39.66	34.64	13.22	29.77	0.00	152	0 PEAK																																																																							
2	5650.32	55.78	68.53	-12.75	37.55	34.69	13.32	29.78	0.00	152	0 PEAK																																																																							
3	5719.05	76.40	110.63	-34.23	57.72	34.82	13.65	29.79	0.00	152	0 PEAK																																																																							
4	5720.50	76.37	112.03	-35.66	57.67	34.83	13.66	29.79	0.00	152	0 PEAK																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>116.47</td> <td>-----</td> <td>-----</td> <td>97.42</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>152</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5745.00	116.47	-----	-----	97.42	34.89	13.94	29.78	0.00	152	0 PEAK																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																							
1	5745.00	116.47	-----	-----	97.42	34.89	13.94	29.78	0.00	152	0 PEAK																																																																							
Avg	<p style="text-align: center;">Blank</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.11</td> <td>-----</td> <td>-----</td> <td>87.13</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>152</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5745.00	106.11	-----	-----	87.13	34.88	13.89	29.79	0.00	152	0 AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																							
1	5745.00	106.11	-----	-----	87.13	34.88	13.89	29.79	0.00	152	0 AVERAGE																																																																							



		54																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																																
ANT	7+8																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak																																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5604.50</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>40.11</td> <td>34.61</td> <td>13.16</td> <td>29.76</td> <td>0.00</td> <td>235</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.75</td> <td>56.01</td> <td>68.86</td> <td>-12.85</td> <td>37.78</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>235</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.26</td> <td>75.27</td> <td>109.29</td> <td>-34.02</td> <td>56.65</td> <td>34.81</td> <td>13.61</td> <td>29.00</td> <td>0.00</td> <td>235</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5723.83</td> <td>86.68</td> <td>119.63</td> <td>-32.95</td> <td>67.95</td> <td>34.83</td> <td>13.69</td> <td>29.79</td> <td>0.00</td> <td>235</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5604.50	58.12	68.30	-10.18	40.11	34.61	13.16	29.76	0.00	235	360	PEAK	2	5650.75	56.01	68.86	-12.85	37.78	34.69	13.32	29.78	0.00	235	360	PEAK	3	5714.26	75.27	109.29	-34.02	56.65	34.81	13.61	29.00	0.00	235	360	PEAK	4	5723.83	86.68	119.63	-32.95	67.95	34.83	13.69	29.79	0.00	235	360	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>118.42</td> <td>-----</td> <td>-----</td> <td>99.44</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>235</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	118.42	-----	-----	99.44	34.88	13.89	29.79	0.00	235	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5604.50	58.12	68.30	-10.18	40.11	34.61	13.16	29.76	0.00	235	360	PEAK																																																																																																																					
2	5650.75	56.01	68.86	-12.85	37.78	34.69	13.32	29.78	0.00	235	360	PEAK																																																																																																																					
3	5714.26	75.27	109.29	-34.02	56.65	34.81	13.61	29.00	0.00	235	360	PEAK																																																																																																																					
4	5723.83	86.68	119.63	-32.95	67.95	34.83	13.69	29.79	0.00	235	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	118.42	-----	-----	99.44	34.88	13.89	29.79	0.00	235	360	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.78</td> <td>-----</td> <td>-----</td> <td>87.00</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>235</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	106.78	-----	-----	87.00	34.88	13.89	29.79	0.00	235	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	106.78	-----	-----	87.00	34.88	13.89	29.79	0.00	235	360	AVERAGE																																																																																																																					






Mode	54																																																																																									
	Harmonic																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																									
ANT	7+8																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>46.77</td> <td>74.00</td> <td>-27.23</td> <td>61.24</td> <td>35.97</td> <td>15.79</td> <td>66.23</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>44.33</td> <td>74.00</td> <td>-29.67</td> <td>52.94</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	8043.00	46.77	74.00	-27.23	61.24	35.97	15.79	66.23	0.00	100	0	PEAK	2	11490.00	44.33	74.00	-29.67	52.94	38.39	18.46	65.46	0.00	100	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>46.57</td> <td>74.00</td> <td>-27.43</td> <td>61.04</td> <td>35.97</td> <td>15.79</td> <td>66.23</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>52.78</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	8043.00	46.57	74.00	-27.43	61.04	35.97	15.79	66.23	0.00	300	0	PEAK	2	11490.00	44.17	74.00	-29.83	52.78	38.39	18.46	65.46	0.00	300	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																		
1	8043.00	46.77	74.00	-27.23	61.24	35.97	15.79	66.23	0.00	100	0	PEAK																																																																														
2	11490.00	44.33	74.00	-29.67	52.94	38.39	18.46	65.46	0.00	100	0	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																		
1	8043.00	46.57	74.00	-27.43	61.04	35.97	15.79	66.23	0.00	300	0	PEAK																																																																														
2	11490.00	44.17	74.00	-29.83	52.78	38.39	18.46	65.46	0.00	300	0	PEAK																																																																														



	55																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU 106/53_5745MHz																																																																																																																																
ANT	7+8																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1" data-bbox="272 1064 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5602.47</td> <td>58.30</td> <td>68.30</td> <td>-10.00</td> <td>40.30</td> <td>34.60</td> <td>13.16</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>55.98</td> <td>68.53</td> <td>-12.55</td> <td>37.75</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.55</td> <td>68.24</td> <td>109.38</td> <td>-41.14</td> <td>49.62</td> <td>34.81</td> <td>13.61</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.50</td> <td>55.67</td> <td>112.03</td> <td>-56.36</td> <td>36.97</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5602.47	58.30	68.30	-10.00	40.30	34.60	13.16	29.76	0.00	100	330	PEAK	2	5650.32	55.98	68.53	-12.55	37.75	34.69	13.32	29.78	0.00	100	330	PEAK	3	5714.55	68.24	109.38	-41.14	49.62	34.81	13.61	29.80	0.00	100	330	PEAK	4	5720.50	55.67	112.03	-56.36	36.97	34.83	13.66	29.79	0.00	100	330	PEAK	<table border="1" data-bbox="917 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>114.66</td> <td>-----</td> <td>-----</td> <td>95.74</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	114.66	-----	-----	95.74	34.87	13.84	29.79	0.00	100	330	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5602.47	58.30	68.30	-10.00	40.30	34.60	13.16	29.76	0.00	100	330	PEAK																																																																																																																					
2	5650.32	55.98	68.53	-12.55	37.75	34.69	13.32	29.78	0.00	100	330	PEAK																																																																																																																					
3	5714.55	68.24	109.38	-41.14	49.62	34.81	13.61	29.80	0.00	100	330	PEAK																																																																																																																					
4	5720.50	55.67	112.03	-56.36	36.97	34.83	13.66	29.79	0.00	100	330	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	114.66	-----	-----	95.74	34.87	13.84	29.79	0.00	100	330	PEAK																																																																																																																					
Avg	Blank	<table border="1" data-bbox="917 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.49</td> <td>-----</td> <td>-----</td> <td>86.57</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	105.49	-----	-----	86.57	34.87	13.84	29.79	0.00	100	330	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	105.49	-----	-----	86.57	34.87	13.84	29.79	0.00	100	330	AVERAGE																																																																																																																					

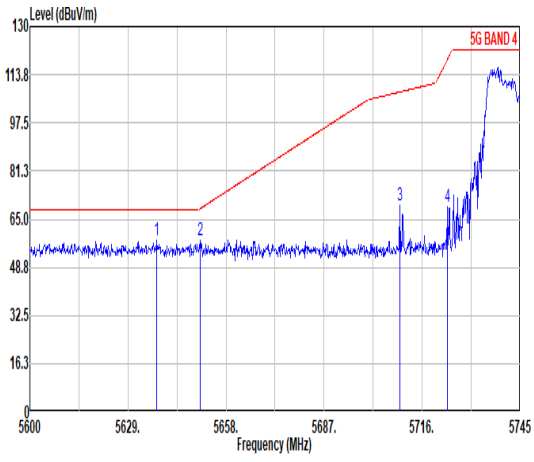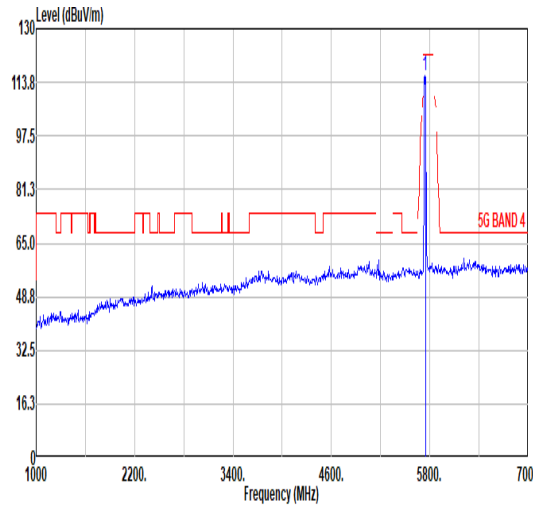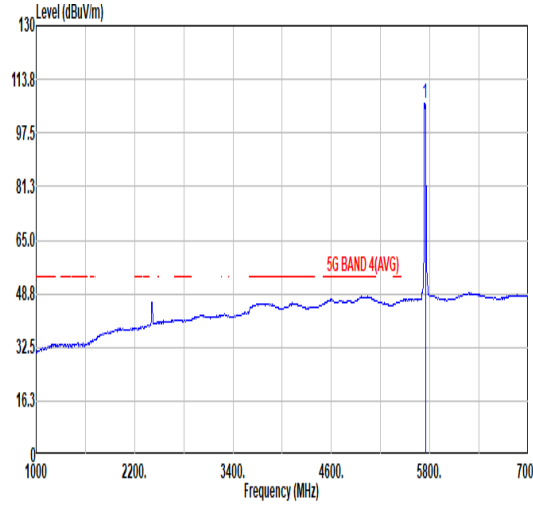

		55																																																																																																																												
Mode	Band Edge																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU 106/53_5745MHz																																																																																																																													
ANT	7+8																																																																																																																													
Pol.	Vertical	Fundamental																																																																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a rising signal level from approximately 65 dBuV/m at 5600 MHz to over 113 dBuV/m at 5745 MHz. A red line labeled '5G BAND 4' indicates the limit. Four peaks are marked with blue vertical lines and numbered 1, 2, 3, and 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.41</td> <td>57.71</td> <td>68.30</td> <td>-10.59</td> <td>39.54</td> <td>34.67</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>289</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.46</td> <td>57.68</td> <td>68.64</td> <td>-10.96</td> <td>39.45</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>289</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5709.33</td> <td>69.46</td> <td>107.91</td> <td>-38.45</td> <td>50.90</td> <td>34.00</td> <td>13.56</td> <td>29.00</td> <td>0.00</td> <td>289</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5723.54</td> <td>69.41</td> <td>118.97</td> <td>-49.56</td> <td>50.68</td> <td>34.83</td> <td>13.69</td> <td>29.79</td> <td>0.00</td> <td>289</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5637.41	57.71	68.30	-10.59	39.54	34.67	13.27	29.77	0.00	289	0 PEAK	2	5650.46	57.68	68.64	-10.96	39.45	34.69	13.32	29.78	0.00	289	0 PEAK	3	5709.33	69.46	107.91	-38.45	50.90	34.00	13.56	29.00	0.00	289	0 PEAK	4	5723.54	69.41	118.97	-49.56	50.68	34.83	13.69	29.79	0.00	289	0 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a flat noise floor around 48 dBuV/m until 5745 MHz, where a sharp peak reaches approximately 115 dBuV/m. A red line labeled '5G BAND 4' indicates the limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>115.76</td> <td>-----</td> <td>-----</td> <td>96.84</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>289</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	115.76	-----	-----	96.84	34.87	13.84	29.79	0.00	289	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5637.41	57.71	68.30	-10.59	39.54	34.67	13.27	29.77	0.00	289	0 PEAK																																																																																																																			
2	5650.46	57.68	68.64	-10.96	39.45	34.69	13.32	29.78	0.00	289	0 PEAK																																																																																																																			
3	5709.33	69.46	107.91	-38.45	50.90	34.00	13.56	29.00	0.00	289	0 PEAK																																																																																																																			
4	5723.54	69.41	118.97	-49.56	50.68	34.83	13.69	29.79	0.00	289	0 PEAK																																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5745.00	115.76	-----	-----	96.84	34.87	13.84	29.79	0.00	289	0 PEAK																																																																																																																			
Avg	Blank		 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization, Average. The plot shows a flat noise floor around 48 dBuV/m until 5745 MHz, where a sharp peak reaches approximately 106 dBuV/m. A red line labeled '5G BAND 4(AVG)' indicates the limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.38</td> <td>-----</td> <td>-----</td> <td>87.46</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>289</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	106.38	-----	-----	87.46	34.87	13.84	29.79	0.00	289	0 AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5745.00	106.38	-----	-----	87.46	34.87	13.84	29.79	0.00	289	0 AVERAGE																																																																																																																			






56																																																																																																																											
Mode	Band Edge - L																																																																																																																										
U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																																											
ANT	7+8																																																																																																																										
Pol.	Horizontal																																																																																																																										
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.93</td> <td>58.34</td> <td>68.30</td> <td>-9.96</td> <td>40.17</td> <td>34.67</td> <td>13.28</td> <td>29.78</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>56.54</td> <td>68.54</td> <td>-12.00</td> <td>38.31</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5702.86</td> <td>56.80</td> <td>106.10</td> <td>-49.30</td> <td>38.30</td> <td>34.79</td> <td>13.51</td> <td>29.80</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.25</td> <td>56.41</td> <td>111.47</td> <td>-55.06</td> <td>37.72</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>113.60</td> <td>-----</td> <td>-----</td> <td>94.14</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.93	58.34	68.30	-9.96	40.17	34.67	13.28	29.78	0.00	120	0 PEAK	2	5650.32	56.54	68.54	-12.00	38.31	34.69	13.32	29.78	0.00	120	0 PEAK	3	5702.86	56.80	106.10	-49.30	38.30	34.79	13.51	29.80	0.00	120	0 PEAK	4	5720.25	56.41	111.47	-55.06	37.72	34.82	13.66	29.79	0.00	120	0 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	113.60	-----	-----	94.14	34.97	14.26	29.77	0.00	120	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5637.93	58.34	68.30	-9.96	40.17	34.67	13.28	29.78	0.00	120	0 PEAK																																																																																																																
2	5650.32	56.54	68.54	-12.00	38.31	34.69	13.32	29.78	0.00	120	0 PEAK																																																																																																																
3	5702.86	56.80	106.10	-49.30	38.30	34.79	13.51	29.80	0.00	120	0 PEAK																																																																																																																
4	5720.25	56.41	111.47	-55.06	37.72	34.82	13.66	29.79	0.00	120	0 PEAK																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5785.00	113.60	-----	-----	94.14	34.97	14.26	29.77	0.00	120	0 PEAK																																																																																																																
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%; text-align: center;"> <p>Blank</p> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>104.86</td> <td>-----</td> <td>-----</td> <td>85.40</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>120</td> <td>0 AVERAGE</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	104.86	-----	-----	85.40	34.97	14.26	29.77	0.00	120	0 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5785.00	104.86	-----	-----	85.40	34.97	14.26	29.77	0.00	120	0 AVERAGE																																																																																																																



Mode	56																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																												
ANT	7+8																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>56.48</td> <td>111.37</td> <td>-54.89</td> <td>37.17</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5872.78</td> <td>58.79</td> <td>105.92</td> <td>-47.13</td> <td>39.56</td> <td>35.11</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5924.26</td> <td>57.61</td> <td>68.85</td> <td>-11.24</td> <td>38.55</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5929.71</td> <td>59.70</td> <td>68.30</td> <td>-8.60</td> <td>40.66</td> <td>35.19</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>120</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5854.80	56.48	111.37	-54.89	37.17	35.08	14.02	29.79	0.00	120	0 PEAK	2	5872.78	58.79	105.92	-47.13	39.56	35.11	13.91	29.79	0.00	120	0 PEAK	3	5924.26	57.61	68.85	-11.24	38.55	35.19	13.69	29.82	0.00	120	0 PEAK	4	5929.71	59.70	68.30	-8.60	40.66	35.19	13.68	29.83	0.00	120	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																					
1	5854.80	56.48	111.37	-54.89	37.17	35.08	14.02	29.79	0.00	120	0 PEAK																																																																		
2	5872.78	58.79	105.92	-47.13	39.56	35.11	13.91	29.79	0.00	120	0 PEAK																																																																		
3	5924.26	57.61	68.85	-11.24	38.55	35.19	13.69	29.82	0.00	120	0 PEAK																																																																		
4	5929.71	59.70	68.30	-8.60	40.66	35.19	13.68	29.83	0.00	120	0 PEAK																																																																		

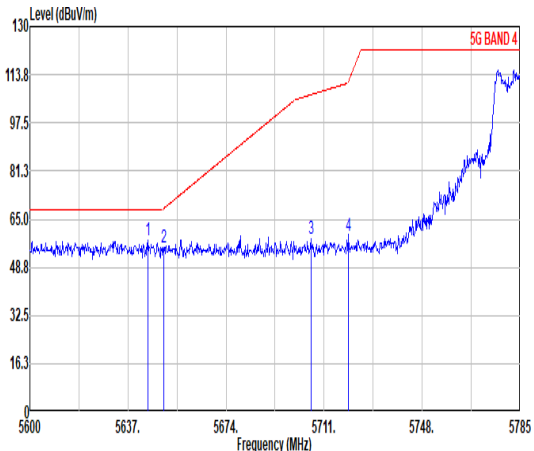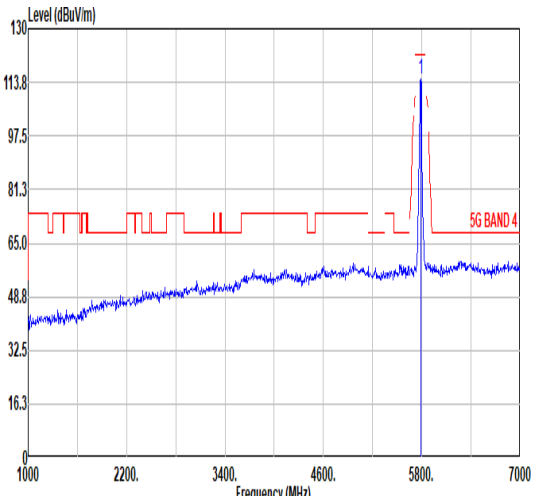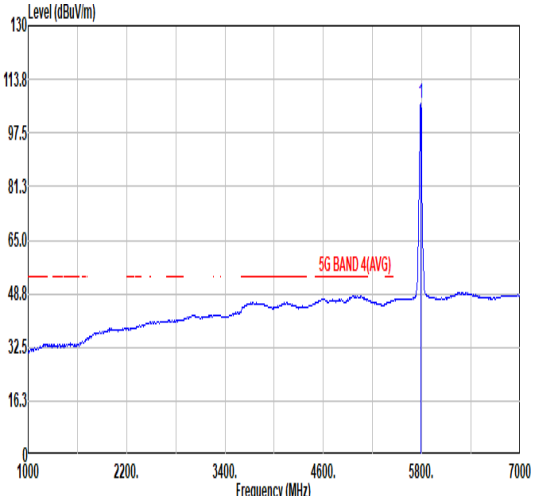

	56																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																																																
ANT	7+8																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a rising noise floor and a sharp peak at 5785 MHz. A red line indicates the 5G BAND 4 limit.</p> <table border="1" data-bbox="263 1052 766 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.40</td> <td>57.94</td> <td>68.30</td> <td>-10.36</td> <td>39.74</td> <td>34.68</td> <td>13.30</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>55.35</td> <td>68.68</td> <td>-13.33</td> <td>37.12</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.01</td> <td>58.21</td> <td>106.98</td> <td>-48.77</td> <td>39.69</td> <td>34.79</td> <td>13.53</td> <td>29.00</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.07</td> <td>59.56</td> <td>111.05</td> <td>-51.49</td> <td>40.87</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5644.40	57.94	68.30	-10.36	39.74	34.68	13.30	29.78	0.00	231	360	PEAK	2	5650.51	55.35	68.68	-13.33	37.12	34.69	13.32	29.78	0.00	231	360	PEAK	3	5706.01	58.21	106.98	-48.77	39.69	34.79	13.53	29.00	0.00	231	360	PEAK	4	5728.07	59.56	111.05	-51.49	40.87	34.82	13.66	29.79	0.00	231	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a flat noise floor with a sharp peak at 5785 MHz. A red line indicates the 5G BAND 4 limit.</p> <table border="1" data-bbox="909 1108 1420 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>114.57</td> <td>-----</td> <td>-----</td> <td>95.11</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	114.57	-----	-----	95.11	34.97	14.26	29.77	0.00	231	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5644.40	57.94	68.30	-10.36	39.74	34.68	13.30	29.78	0.00	231	360	PEAK																																																																																																																					
2	5650.51	55.35	68.68	-13.33	37.12	34.69	13.32	29.78	0.00	231	360	PEAK																																																																																																																					
3	5706.01	58.21	106.98	-48.77	39.69	34.79	13.53	29.00	0.00	231	360	PEAK																																																																																																																					
4	5728.07	59.56	111.05	-51.49	40.87	34.82	13.66	29.79	0.00	231	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5785.00	114.57	-----	-----	95.11	34.97	14.26	29.77	0.00	231	360	PEAK																																																																																																																					
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) for Average polarization. The plot shows a rising noise floor with a sharp peak at 5785 MHz. A red line indicates the 5G BAND 4(AVG) limit.</p> <table border="1" data-bbox="909 1780 1420 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>106.32</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>231</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	106.32	-----	-----	86.86	34.97	14.26	29.77	0.00	231	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5785.00	106.32	-----	-----	86.86	34.97	14.26	29.77	0.00	231	360	AVERAGE																																																																																																																					



Mode	56																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																
ANT	7+8																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.63</td> <td>58.15</td> <td>111.74</td> <td>-53.59</td> <td>38.83</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 5874.43</td> <td>56.51</td> <td>105.46</td> <td>-48.95</td> <td>37.29</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3 5923.11</td> <td>58.59</td> <td>69.70</td> <td>-11.11</td> <td>39.53</td> <td>35.18</td> <td>13.70</td> <td>29.82</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4 5934.99</td> <td>59.08</td> <td>68.30</td> <td>-9.22</td> <td>40.04</td> <td>35.20</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.63	58.15	111.74	-53.59	38.83	35.08	14.03	29.79	0.00	231	360	PEAK	2 5874.43	56.51	105.46	-48.95	37.29	35.11	13.90	29.79	0.00	231	360	PEAK	3 5923.11	58.59	69.70	-11.11	39.53	35.18	13.70	29.82	0.00	231	360	PEAK	4 5934.99	59.08	68.30	-9.22	40.04	35.20	13.67	29.83	0.00	231	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 5854.63	58.15	111.74	-53.59	38.83	35.08	14.03	29.79	0.00	231	360	PEAK																																																																						
2 5874.43	56.51	105.46	-48.95	37.29	35.11	13.90	29.79	0.00	231	360	PEAK																																																																						
3 5923.11	58.59	69.70	-11.11	39.53	35.18	13.70	29.82	0.00	231	360	PEAK																																																																						
4 5934.99	59.08	68.30	-9.22	40.04	35.20	13.67	29.83	0.00	231	360	PEAK																																																																						






Mode	56																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																													
ANT	7+8																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8099.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>62.75</td> <td>35.94</td> <td>15.89</td> <td>66.18</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>44.03</td> <td>74.00</td> <td>-29.97</td> <td>52.48</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8099.00	48.40	74.00	-25.60	62.75	35.94	15.89	66.18	0.00	300	0	PEAK	2	11570.00	44.03	74.00	-29.97	52.48	38.44	18.52	65.41	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8099.00</td> <td>44.59</td> <td>74.00</td> <td>-29.41</td> <td>58.94</td> <td>35.94</td> <td>15.89</td> <td>66.18</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>52.87</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8099.00	44.59	74.00	-29.41	58.94	35.94	15.89	66.18	0.00	100	0	PEAK	2	11570.00	44.42	74.00	-29.58	52.87	38.44	18.52	65.41	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8099.00	48.40	74.00	-25.60	62.75	35.94	15.89	66.18	0.00	300	0	PEAK																																																																																																		
2	11570.00	44.03	74.00	-29.97	52.48	38.44	18.52	65.41	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8099.00	44.59	74.00	-29.41	58.94	35.94	15.89	66.18	0.00	100	0	PEAK																																																																																																		
2	11570.00	44.42	74.00	-29.58	52.87	38.44	18.52	65.41	0.00	100	0	PEAK																																																																																																		



	57																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																
ANT	7+8																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>65.56</td> <td>111.18</td> <td>-45.62</td> <td>46.25</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>117</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.25</td> <td>67.97</td> <td>110.55</td> <td>-42.58</td> <td>48.66</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>117</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>56.77</td> <td>69.04</td> <td>-12.27</td> <td>37.71</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>117</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.00</td> <td>58.34</td> <td>68.30</td> <td>-9.96</td> <td>39.31</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>117</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.88	65.56	111.18	-45.62	46.25	35.08	14.02	29.79	0.00	117	30	PEAK	2	5856.25	67.97	110.55	-42.58	48.66	35.08	14.02	29.79	0.00	117	30	PEAK	3	5924.00	56.77	69.04	-12.27	37.71	35.19	13.69	29.82	0.00	117	30	PEAK	4	5942.00	58.34	68.30	-9.96	39.31	35.21	13.66	29.84	0.00	117	30	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>112.64</td> <td>-----</td> <td>-----</td> <td>93.13</td> <td>35.03</td> <td>14.26</td> <td>29.78</td> <td>0.00</td> <td>117</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	112.64	-----	-----	93.13	35.03	14.26	29.78	0.00	117	30	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5854.88	65.56	111.18	-45.62	46.25	35.08	14.02	29.79	0.00	117	30	PEAK																																																																																																																					
2	5856.25	67.97	110.55	-42.58	48.66	35.08	14.02	29.79	0.00	117	30	PEAK																																																																																																																					
3	5924.00	56.77	69.04	-12.27	37.71	35.19	13.69	29.82	0.00	117	30	PEAK																																																																																																																					
4	5942.00	58.34	68.30	-9.96	39.31	35.21	13.66	29.84	0.00	117	30	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	112.64	-----	-----	93.13	35.03	14.26	29.78	0.00	117	30	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.94</td> <td>-----</td> <td>-----</td> <td>84.50</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>117</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	103.94	-----	-----	84.50	35.04	14.18	29.78	0.00	117	30	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	103.94	-----	-----	84.50	35.04	14.18	29.78	0.00	117	30	AVERAGE																																																																																																																					

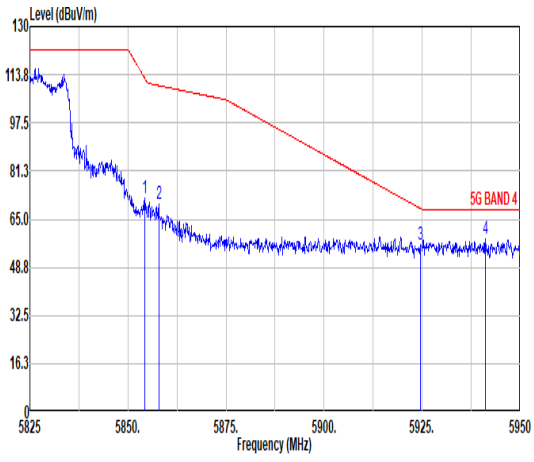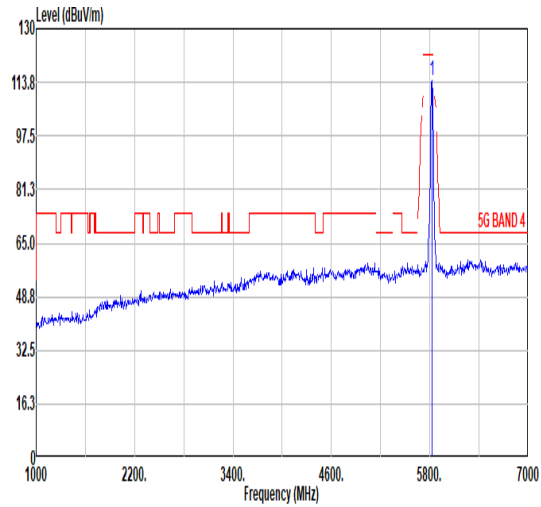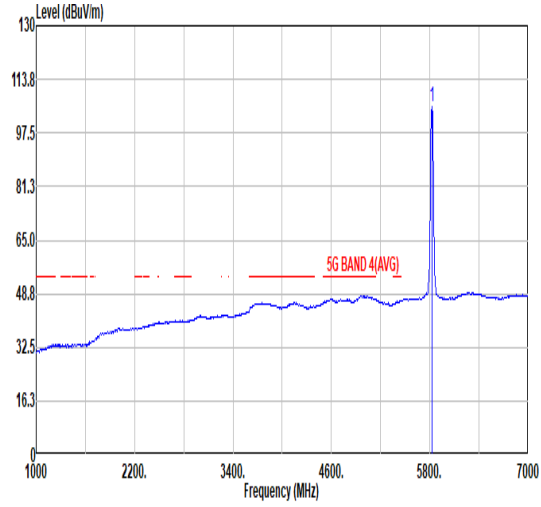

	57																																																																																																																		
Mode	Band Edge																																																																																																																		
	U-NII-3_ 5.725-5.85_ 802.11ax HE20_ CH165_ Full RU_ 5825MHz																																																																																																																		
ANT	7+8																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																	
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a red limit line and a blue signal line. Four peaks are marked with vertical lines and numbered 1, 2, 3, and 4. The signal level decreases as frequency increases.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>72.08</td> <td>112.32</td> <td>-40.24</td> <td>52.76</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>226</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5857.88</td> <td>69.95</td> <td>110.09</td> <td>-40.14</td> <td>50.64</td> <td>35.09</td> <td>14.01</td> <td>29.79</td> <td>0.00</td> <td>226</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.50</td> <td>56.54</td> <td>68.67</td> <td>-12.13</td> <td>37.48</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>226</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.13</td> <td>58.37</td> <td>68.30</td> <td>-9.93</td> <td>39.34</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>226</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.38	72.08	112.32	-40.24	52.76	35.08	14.03	29.79	0.00	226	360	PEAK	2	5857.88	69.95	110.09	-40.14	50.64	35.09	14.01	29.79	0.00	226	360	PEAK	3	5924.50	56.54	68.67	-12.13	37.48	35.19	13.69	29.82	0.00	226	360	PEAK	4	5941.13	58.37	68.30	-9.93	39.34	35.21	13.66	29.84	0.00	226	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a red limit line and a blue signal line. A single sharp peak is visible at approximately 5850 MHz. The signal level is relatively flat across the frequency range.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>114.00</td> <td>-----</td> <td>-----</td> <td>94.60</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>226</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	114.00	-----	-----	94.60	35.04	14.22	29.78	0.00	226	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5854.38	72.08	112.32	-40.24	52.76	35.08	14.03	29.79	0.00	226	360	PEAK																																																																																																							
2	5857.88	69.95	110.09	-40.14	50.64	35.09	14.01	29.79	0.00	226	360	PEAK																																																																																																							
3	5924.50	56.54	68.67	-12.13	37.48	35.19	13.69	29.82	0.00	226	360	PEAK																																																																																																							
4	5941.13	58.37	68.30	-9.93	39.34	35.21	13.66	29.84	0.00	226	360	PEAK																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5825.00	114.00	-----	-----	94.60	35.04	14.22	29.78	0.00	226	360	PEAK																																																																																																							
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average mode. The plot shows a red limit line and a blue signal line. A single sharp peak is visible at approximately 5850 MHz. The signal level is relatively flat across the frequency range.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>105.69</td> <td>-----</td> <td>-----</td> <td>86.21</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>226</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	105.69	-----	-----	86.21	35.04	14.22	29.78	0.00	226	360	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5825.00	105.69	-----	-----	86.21	35.04	14.22	29.78	0.00	226	360	AVERAGE																																																																																																							



Mode	57																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																											
ANT	7+8																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8155.00</td> <td>42.67</td> <td>74.00</td> <td>-31.33</td> <td>56.90</td> <td>35.91</td> <td>15.99</td> <td>66.13</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>44.99</td> <td>74.00</td> <td>-29.01</td> <td>53.29</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	8155.00	42.67	74.00	-31.33	56.90	35.91	15.99	66.13	0.00	300	0	PEAK	2	11650.00	44.99	74.00	-29.01	53.29	38.49	18.58	65.37	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8155.00</td> <td>42.79</td> <td>74.00</td> <td>-31.21</td> <td>57.02</td> <td>35.91</td> <td>15.99</td> <td>66.13</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>44.82</td> <td>74.00</td> <td>-29.18</td> <td>53.12</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	8155.00	42.79	74.00	-31.21	57.02	35.91	15.99	66.13	0.00	100	0	PEAK	2	11650.00	44.82	74.00	-29.18	53.12	38.49	18.58	65.37	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	8155.00	42.67	74.00	-31.33	56.90	35.91	15.99	66.13	0.00	300	0	PEAK																																																																																																
2	11650.00	44.99	74.00	-29.01	53.29	38.49	18.58	65.37	0.00	300	0	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	8155.00	42.79	74.00	-31.21	57.02	35.91	15.99	66.13	0.00	100	0	PEAK																																																																																																
2	11650.00	44.82	74.00	-29.18	53.12	38.49	18.58	65.37	0.00	100	0	PEAK																																																																																																






		58																																																																																																						
Mode		Band Edge																																																																																																						
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU 106/54_5825MHz																																																																																																						
ANT		7+8																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>57.58</td> <td>111.18</td> <td>-53.60</td> <td>38.27</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>2</td> <td>5874.63</td> <td>57.73</td> <td>105.40</td> <td>-47.67</td> <td>38.51</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>3</td> <td>5924.38</td> <td>56.60</td> <td>68.76</td> <td>-12.16</td> <td>37.54</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>4</td> <td>5945.63</td> <td>59.35</td> <td>68.30</td> <td>-8.95</td> <td>40.32</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	1	5854.88	57.58	111.18	-53.60	38.27	35.08	14.02	29.79	0.00	100	339 PEAK	2	5874.63	57.73	105.40	-47.67	38.51	35.11	13.90	29.79	0.00	100	339 PEAK	3	5924.38	56.60	68.76	-12.16	37.54	35.19	13.69	29.82	0.00	100	339 PEAK	4	5945.63	59.35	68.30	-8.95	40.32	35.22	13.65	29.84	0.00	100	339 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>113.00</td> <td>-----</td> <td>-----</td> <td>93.64</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	1	5825.00	113.00	-----	-----	93.64	35.04	14.18	29.78	0.00	100	339 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																																																																														
1	5854.88	57.58	111.18	-53.60	38.27	35.08	14.02	29.79	0.00	100	339 PEAK																																																																																													
2	5874.63	57.73	105.40	-47.67	38.51	35.11	13.90	29.79	0.00	100	339 PEAK																																																																																													
3	5924.38	56.60	68.76	-12.16	37.54	35.19	13.69	29.82	0.00	100	339 PEAK																																																																																													
4	5945.63	59.35	68.30	-8.95	40.32	35.22	13.65	29.84	0.00	100	339 PEAK																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																																																																														
1	5825.00	113.00	-----	-----	93.64	35.04	14.18	29.78	0.00	100	339 PEAK																																																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.76</td> <td>-----</td> <td>-----</td> <td>84.32</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>339 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	1	5825.00	103.76	-----	-----	84.32	35.04	14.18	29.78	0.00	100	339 AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																																																																														
1	5825.00	103.76	-----	-----	84.32	35.04	14.18	29.78	0.00	100	339 AVERAGE																																																																																													



Mode	58																																																																																																																															
	Band Edge																																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU 106/54_5825MHz																																																																																																																															
ANT	7+8																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>57.80</td> <td>111.18</td> <td>-53.38</td> <td>38.49</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>283</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5874.13</td> <td>58.48</td> <td>105.54</td> <td>-47.06</td> <td>39.26</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>283</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5922.63</td> <td>57.87</td> <td>70.05</td> <td>-12.18</td> <td>38.81</td> <td>35.18</td> <td>13.70</td> <td>29.82</td> <td>0.00</td> <td>283</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5948.13</td> <td>58.82</td> <td>68.30</td> <td>-9.48</td> <td>39.79</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>283</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5854.88	57.80	111.18	-53.38	38.49	35.08	14.02	29.79	0.00	283	0 PEAK	2	5874.13	58.48	105.54	-47.06	39.26	35.11	13.90	29.79	0.00	283	0 PEAK	3	5922.63	57.87	70.05	-12.18	38.81	35.18	13.70	29.82	0.00	283	0 PEAK	4	5948.13	58.82	68.30	-9.48	39.79	35.21	13.66	29.84	0.00	283	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>114.32</td> <td>-----</td> <td>-----</td> <td>94.88</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>283</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5825.00	114.32	-----	-----	94.88	35.04	14.18	29.78	0.00	283	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																																					
1	5854.88	57.80	111.18	-53.38	38.49	35.08	14.02	29.79	0.00	283	0 PEAK																																																																																																																					
2	5874.13	58.48	105.54	-47.06	39.26	35.11	13.90	29.79	0.00	283	0 PEAK																																																																																																																					
3	5922.63	57.87	70.05	-12.18	38.81	35.18	13.70	29.82	0.00	283	0 PEAK																																																																																																																					
4	5948.13	58.82	68.30	-9.48	39.79	35.21	13.66	29.84	0.00	283	0 PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																																					
1	5825.00	114.32	-----	-----	94.88	35.04	14.18	29.78	0.00	283	0 PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>104.58</td> <td>-----</td> <td>-----</td> <td>85.14</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>283</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5825.00	104.58	-----	-----	85.14	35.04	14.18	29.78	0.00	283	0 AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																																					
1	5825.00	104.58	-----	-----	85.14	35.04	14.18	29.78	0.00	283	0 AVERAGE																																																																																																																					

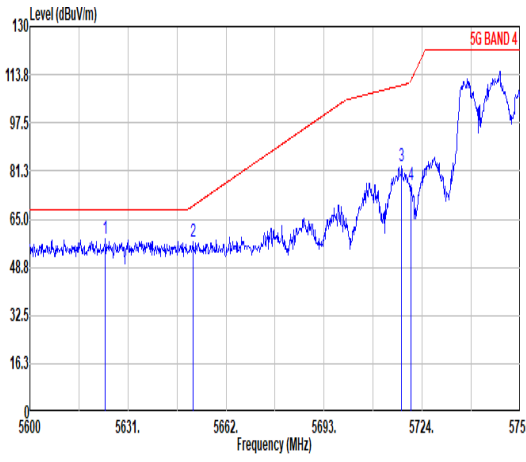
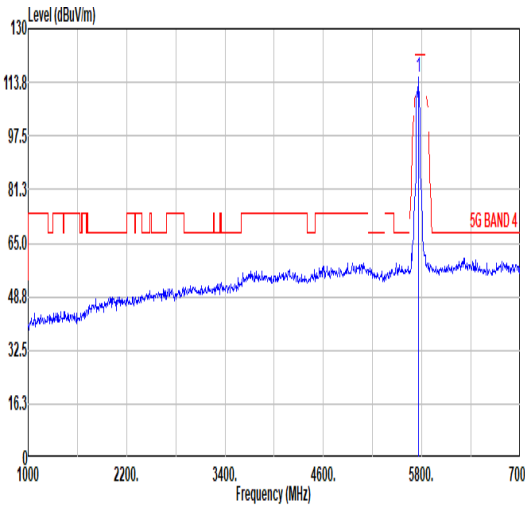
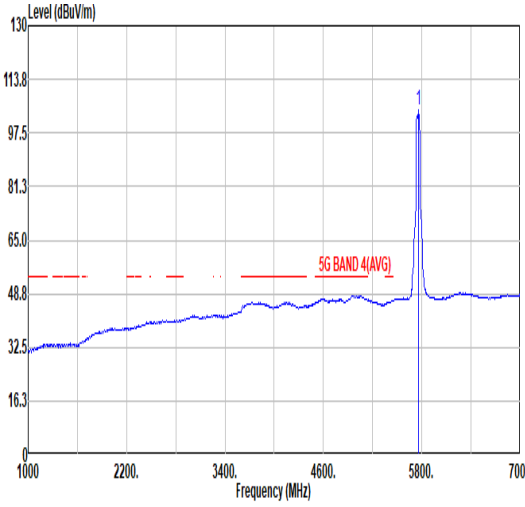


	59																																																																																				
Mode	Band Edge - L																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																				
ANT	7+8																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	 <table border="1" data-bbox="263 1064 790 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5623.87</th> <th>58.27</th> <th>68.30</th> <th>-10.03</th> <th>40.17</th> <th>34.64</th> <th>13.23</th> <th>29.77</th> <th>0.00</th> <th>116</th> <th>28</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>5651.62</td> <td>57.54</td> <td>69.50</td> <td>-11.96</td> <td>39.31</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>116</td> <td>28</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.49</td> <td>82.89</td> <td>110.20</td> <td>-27.31</td> <td>64.22</td> <td>34.82</td> <td>13.64</td> <td>29.79</td> <td>0.00</td> <td>116</td> <td>28</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>76.75</td> <td>111.89</td> <td>-35.14</td> <td>58.06</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>116</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5623.87	58.27	68.30	-10.03	40.17	34.64	13.23	29.77	0.00	116	28	PEAK	2	5651.62	57.54	69.50	-11.96	39.31	34.69	13.32	29.78	0.00	116	28	PEAK	3	5717.49	82.89	110.20	-27.31	64.22	34.82	13.64	29.79	0.00	116	28	PEAK	4	5720.44	76.75	111.89	-35.14	58.06	34.82	13.66	29.79	0.00	116	28	PEAK	 <table border="1" data-bbox="909 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5755.00</th> <th>115.16</th> <th>96.03</th> <th>34.91</th> <th>14.00</th> <th>29.78</th> <th>0.00</th> <th>116</th> <th>28</th> <th>PEAK</th> </tr> </thead> <tbody> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5755.00	115.16	96.03	34.91	14.00	29.78	0.00	116	28	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
1	5623.87	58.27	68.30	-10.03	40.17	34.64	13.23	29.77	0.00	116	28	PEAK																																																																									
2	5651.62	57.54	69.50	-11.96	39.31	34.69	13.32	29.78	0.00	116	28	PEAK																																																																									
3	5717.49	82.89	110.20	-27.31	64.22	34.82	13.64	29.79	0.00	116	28	PEAK																																																																									
4	5720.44	76.75	111.89	-35.14	58.06	34.82	13.66	29.79	0.00	116	28	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
1	5755.00	115.16	96.03	34.91	14.00	29.78	0.00	116	28	PEAK																																																																											
Avg	Blank	 <table border="1" data-bbox="909 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5755.00</th> <th>104.28</th> <th>85.15</th> <th>34.91</th> <th>14.00</th> <th>29.78</th> <th>0.00</th> <th>116</th> <th>28</th> <th>AVERAGE</th> </tr> </thead> <tbody> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5755.00	104.28	85.15	34.91	14.00	29.78	0.00	116	28	AVERAGE																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
1	5755.00	104.28	85.15	34.91	14.00	29.78	0.00	116	28	AVERAGE																																																																											



Mode	59																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																							
ANT	7+8																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.65</td> <td>57.89</td> <td>111.71</td> <td>-53.82</td> <td>38.57</td> <td>35.08</td> <td>14.83</td> <td>29.79</td> <td>0.00</td> <td>116 28 PEAK</td> </tr> <tr> <td>2 5871.22</td> <td>59.38</td> <td>106.36</td> <td>-46.98</td> <td>40.14</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>116 28 PEAK</td> </tr> <tr> <td>3 5924.46</td> <td>56.87</td> <td>68.70</td> <td>-11.83</td> <td>37.81</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>116 28 PEAK</td> </tr> <tr> <td>4 5932.26</td> <td>58.24</td> <td>68.30</td> <td>-10.06</td> <td>39.19</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>116 28 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5854.65	57.89	111.71	-53.82	38.57	35.08	14.83	29.79	0.00	116 28 PEAK	2 5871.22	59.38	106.36	-46.98	40.14	35.11	13.92	29.79	0.00	116 28 PEAK	3 5924.46	56.87	68.70	-11.83	37.81	35.19	13.69	29.82	0.00	116 28 PEAK	4 5932.26	58.24	68.30	-10.06	39.19	35.20	13.68	29.83	0.00	116 28 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																															
1 5854.65	57.89	111.71	-53.82	38.57	35.08	14.83	29.79	0.00	116 28 PEAK																																																															
2 5871.22	59.38	106.36	-46.98	40.14	35.11	13.92	29.79	0.00	116 28 PEAK																																																															
3 5924.46	56.87	68.70	-11.83	37.81	35.19	13.69	29.82	0.00	116 28 PEAK																																																															
4 5932.26	58.24	68.30	-10.06	39.19	35.20	13.68	29.83	0.00	116 28 PEAK																																																															

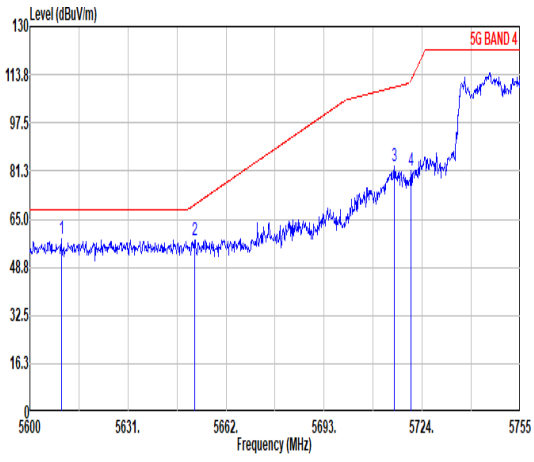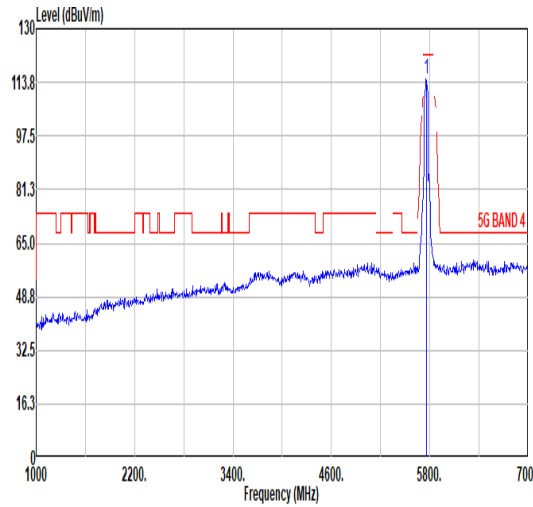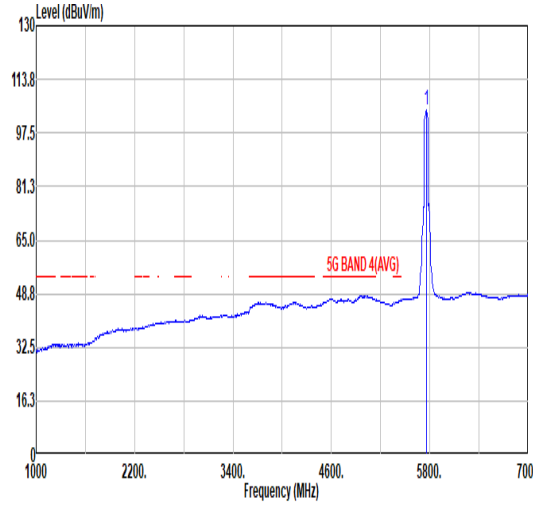

Mode	59																																																																																																																										
	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5609.92</td> <td>58.54</td> <td>68.30</td> <td>-9.76</td> <td>40.50</td> <td>34.62</td> <td>13.18</td> <td>29.76</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.08</td> <td>57.98</td> <td>69.85</td> <td>-11.87</td> <td>39.75</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.17</td> <td>82.92</td> <td>109.55</td> <td>-26.63</td> <td>64.30</td> <td>34.81</td> <td>13.61</td> <td>29.80</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.44</td> <td>81.52</td> <td>111.89</td> <td>-30.37</td> <td>62.83</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5609.92	58.54	68.30	-9.76	40.50	34.62	13.18	29.76	0.00	231	360	PEAK	2	5652.08	57.98	69.85	-11.87	39.75	34.69	13.32	29.78	0.00	231	360	PEAK	3	5715.17	82.92	109.55	-26.63	64.30	34.81	13.61	29.80	0.00	231	360	PEAK	4	5728.44	81.52	111.89	-30.37	62.83	34.82	13.66	29.79	0.00	231	360	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>114.61</td> <td>-----</td> <td>-----</td> <td>95.56</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	114.61	-----	-----	95.56	34.89	13.94	29.78	0.00	231	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5609.92	58.54	68.30	-9.76	40.50	34.62	13.18	29.76	0.00	231	360	PEAK																																																																																																															
2	5652.08	57.98	69.85	-11.87	39.75	34.69	13.32	29.78	0.00	231	360	PEAK																																																																																																															
3	5715.17	82.92	109.55	-26.63	64.30	34.81	13.61	29.80	0.00	231	360	PEAK																																																																																																															
4	5728.44	81.52	111.89	-30.37	62.83	34.82	13.66	29.79	0.00	231	360	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5755.00	114.61	-----	-----	95.56	34.89	13.94	29.78	0.00	231	360	PEAK																																																																																																															
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>104.27</td> <td>-----</td> <td>-----</td> <td>85.14</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>231</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	104.27	-----	-----	85.14	34.91	14.00	29.78	0.00	231	360	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5755.00	104.27	-----	-----	85.14	34.91	14.00	29.78	0.00	231	360	AVERAGE																																																																																																															



Mode	59																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																				
ANT	7+8																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>57.73</td> <td>111.26</td> <td>-53.53</td> <td>38.42</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.69</td> <td>59.03</td> <td>107.07</td> <td>-48.04</td> <td>39.78</td> <td>35.10</td> <td>13.94</td> <td>29.79</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.26</td> <td>56.95</td> <td>68.85</td> <td>-11.90</td> <td>37.89</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.40</td> <td>58.91</td> <td>68.30</td> <td>-9.39</td> <td>39.87</td> <td>35.20</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>231</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	57.73	111.26	-53.53	38.42	35.08	14.02	29.79	0.00	231	360	PEAK	2	5868.69	59.03	107.07	-48.04	39.78	35.10	13.94	29.79	0.00	231	360	PEAK	3	5924.26	56.95	68.85	-11.90	37.89	35.19	13.69	29.82	0.00	231	360	PEAK	4	5934.40	58.91	68.30	-9.39	39.87	35.20	13.67	29.83	0.00	231	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.84	57.73	111.26	-53.53	38.42	35.08	14.02	29.79	0.00	231	360	PEAK																																																																									
2	5868.69	59.03	107.07	-48.04	39.78	35.10	13.94	29.79	0.00	231	360	PEAK																																																																									
3	5924.26	56.95	68.85	-11.90	37.89	35.19	13.69	29.82	0.00	231	360	PEAK																																																																									
4	5934.40	58.91	68.30	-9.39	39.87	35.20	13.67	29.83	0.00	231	360	PEAK																																																																									



Mode	59																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																													
ANT	7+8																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>62.14</td> <td>35.97</td> <td>15.81</td> <td>66.21</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>44.34</td> <td>74.00</td> <td>-29.66</td> <td>52.90</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8057.00	47.71	74.00	-26.29	62.14	35.97	15.81	66.21	0.00	300	0	PEAK	2	11510.00	44.34	74.00	-29.66	52.90	38.41	18.47	65.44	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>43.25</td> <td>74.00</td> <td>-30.75</td> <td>57.68</td> <td>35.97</td> <td>15.81</td> <td>66.21</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>44.48</td> <td>74.00</td> <td>-29.52</td> <td>53.04</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8057.00	43.25	74.00	-30.75	57.68	35.97	15.81	66.21	0.00	100	0	PEAK	2	11510.00	44.48	74.00	-29.52	53.04	38.41	18.47	65.44	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8057.00	47.71	74.00	-26.29	62.14	35.97	15.81	66.21	0.00	300	0	PEAK																																																																																																		
2	11510.00	44.34	74.00	-29.66	52.90	38.41	18.47	65.44	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8057.00	43.25	74.00	-30.75	57.68	35.97	15.81	66.21	0.00	100	0	PEAK																																																																																																		
2	11510.00	44.48	74.00	-29.52	53.04	38.41	18.47	65.44	0.00	100	0	PEAK																																																																																																		



Mode	60																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_RU 242/61_5755MHz																																																																																																										
ANT	7+8																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.51</td> <td>58.03</td> <td>68.30</td> <td>-10.27</td> <td>39.86</td> <td>34.67</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.38</td> <td>56.52</td> <td>68.58</td> <td>-12.06</td> <td>38.29</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.96</td> <td>78.61</td> <td>110.33</td> <td>-31.72</td> <td>59.94</td> <td>34.82</td> <td>13.64</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.21</td> <td>77.18</td> <td>113.66</td> <td>-36.48</td> <td>58.47</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5637.51	58.03	68.30	-10.27	39.86	34.67	13.27	29.77	0.00	100	338	PEAK	2	5650.38	56.52	68.58	-12.06	38.29	34.69	13.32	29.78	0.00	100	338	PEAK	3	5717.96	78.61	110.33	-31.72	59.94	34.82	13.64	29.79	0.00	100	338	PEAK	4	5721.21	77.18	113.66	-36.48	58.47	34.83	13.67	29.79	0.00	100	338	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>113.88</td> <td>-----</td> <td>-----</td> <td>94.96</td> <td>34.87</td> <td>13.84</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5755.00	113.88	-----	-----	94.96	34.87	13.84	29.79	0.00	100	338	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5637.51	58.03	68.30	-10.27	39.86	34.67	13.27	29.77	0.00	100	338	PEAK																																																																																															
2	5650.38	56.52	68.58	-12.06	38.29	34.69	13.32	29.78	0.00	100	338	PEAK																																																																																															
3	5717.96	78.61	110.33	-31.72	59.94	34.82	13.64	29.79	0.00	100	338	PEAK																																																																																															
4	5721.21	77.18	113.66	-36.48	58.47	34.83	13.67	29.79	0.00	100	338	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5755.00	113.88	-----	-----	94.96	34.87	13.84	29.79	0.00	100	338	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>103.26</td> <td>-----</td> <td>-----</td> <td>84.28</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5755.00	103.26	-----	-----	84.28	34.88	13.89	29.79	0.00	100	338	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5755.00	103.26	-----	-----	84.28	34.88	13.89	29.79	0.00	100	338	AVERAGE																																																																																															



Mode	60																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_RU 242/61_5755MHz																																																																																			
ANT	7+8																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>56.48</td> <td>111.26</td> <td>-54.78</td> <td>37.17</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>57.95</td> <td>105.32</td> <td>-47.37</td> <td>38.73</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.87</td> <td>56.82</td> <td>69.13</td> <td>-12.31</td> <td>37.76</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5944.35</td> <td>59.10</td> <td>68.30</td> <td>-9.20</td> <td>40.06</td> <td>35.22</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5854.84	56.48	111.26	-54.78	37.17	35.08	14.02	29.79	0.00	100	338	PEAK	2	5874.93	57.95	105.32	-47.37	38.73	35.11	13.90	29.79	0.00	100	338	PEAK	3	5923.87	56.82	69.13	-12.31	37.76	35.19	13.69	29.82	0.00	100	338	PEAK	4	5944.35	59.10	68.30	-9.20	40.06	35.22	13.66	29.84	0.00	100	338	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																											
1	5854.84	56.48	111.26	-54.78	37.17	35.08	14.02	29.79	0.00	100	338	PEAK																																																																								
2	5874.93	57.95	105.32	-47.37	38.73	35.11	13.90	29.79	0.00	100	338	PEAK																																																																								
3	5923.87	56.82	69.13	-12.31	37.76	35.19	13.69	29.82	0.00	100	338	PEAK																																																																								
4	5944.35	59.10	68.30	-9.20	40.06	35.22	13.66	29.84	0.00	100	338	PEAK																																																																								






Mode	60																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_RU 242/61_5755MHz																																																																																																						
ANT	7+8																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.04</td> <td>61.42</td> <td>68.30</td> <td>-6.88</td> <td>43.22</td> <td>34.68</td> <td>13.30</td> <td>29.78</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.53</td> <td>56.71</td> <td>68.69</td> <td>-11.98</td> <td>38.48</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.34</td> <td>81.78</td> <td>110.15</td> <td>-28.37</td> <td>63.12</td> <td>34.82</td> <td>13.63</td> <td>29.79</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.45</td> <td>82.32</td> <td>116.49</td> <td>-34.17</td> <td>63.60</td> <td>34.83</td> <td>13.68</td> <td>29.79</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5646.04	61.42	68.30	-6.88	43.22	34.68	13.30	29.78	0.00	274	14	PEAK	2	5650.53	56.71	68.69	-11.98	38.48	34.69	13.32	29.78	0.00	274	14	PEAK	3	5717.34	81.78	110.15	-28.37	63.12	34.82	13.63	29.79	0.00	274	14	PEAK	4	5722.45	82.32	116.49	-34.17	63.60	34.83	13.68	29.79	0.00	274	14	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>112.72</td> <td>-----</td> <td>-----</td> <td>93.67</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5755.00	112.72	-----	-----	93.67	34.89	13.94	29.78	0.00	274	14	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5646.04	61.42	68.30	-6.88	43.22	34.68	13.30	29.78	0.00	274	14	PEAK																																																																																											
2	5650.53	56.71	68.69	-11.98	38.48	34.69	13.32	29.78	0.00	274	14	PEAK																																																																																											
3	5717.34	81.78	110.15	-28.37	63.12	34.82	13.63	29.79	0.00	274	14	PEAK																																																																																											
4	5722.45	82.32	116.49	-34.17	63.60	34.83	13.68	29.79	0.00	274	14	PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5755.00	112.72	-----	-----	93.67	34.89	13.94	29.78	0.00	274	14	PEAK																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>104.15</td> <td>-----</td> <td>-----</td> <td>85.17</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>274</td> <td>14</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5755.00	104.15	-----	-----	85.17	34.88	13.89	29.79	0.00	274	14	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																															
1	5755.00	104.15	-----	-----	85.17	34.88	13.89	29.79	0.00	274	14	AVERAGE																																																																																											



Mode	60																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_RU 242/61_5755MHz																																																																																			
ANT	7+8																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.48</td> <td>59.37</td> <td>114.38</td> <td>-55.01</td> <td>40.05</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.54</td> <td>58.96</td> <td>105.43</td> <td>-46.47</td> <td>39.74</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.26</td> <td>56.92</td> <td>68.85</td> <td>-11.93</td> <td>37.86</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.30</td> <td>58.45</td> <td>68.30</td> <td>-9.85</td> <td>39.40</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>274</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.48	59.37	114.38	-55.01	40.05	35.08	14.03	29.79	0.00	274	14	PEAK	2	5874.54	58.96	105.43	-46.47	39.74	35.11	13.90	29.79	0.00	274	14	PEAK	3	5924.26	56.92	68.85	-11.93	37.86	35.19	13.69	29.82	0.00	274	14	PEAK	4	5938.30	58.45	68.30	-9.85	39.40	35.21	13.67	29.83	0.00	274	14	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5853.48	59.37	114.38	-55.01	40.05	35.08	14.03	29.79	0.00	274	14	PEAK																																																																								
2	5874.54	58.96	105.43	-46.47	39.74	35.11	13.90	29.79	0.00	274	14	PEAK																																																																								
3	5924.26	56.92	68.85	-11.93	37.86	35.19	13.69	29.82	0.00	274	14	PEAK																																																																								
4	5938.30	58.45	68.30	-9.85	39.40	35.21	13.67	29.83	0.00	274	14	PEAK																																																																								

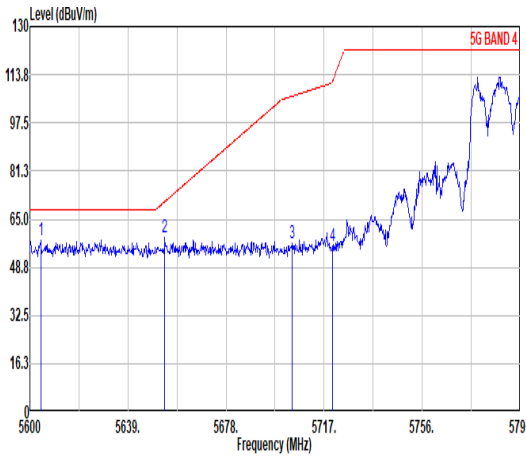
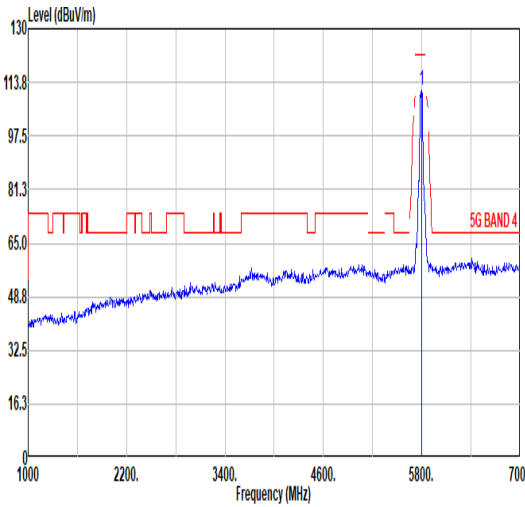
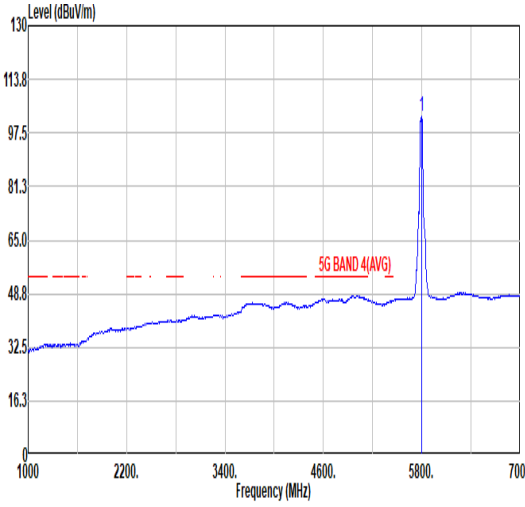


	61																																																																																																																											
Mode	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1064 790 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5604.29</td> <td>58.08</td> <td>68.30</td> <td>-10.22</td> <td>40.07</td> <td>34.61</td> <td>13.16</td> <td>29.76</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>2</td> <td>5653.63</td> <td>58.89</td> <td>70.99</td> <td>-12.10</td> <td>40.64</td> <td>34.70</td> <td>13.33</td> <td>29.78</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>3</td> <td>5704.33</td> <td>56.86</td> <td>106.51</td> <td>-49.65</td> <td>38.35</td> <td>34.79</td> <td>13.52</td> <td>29.80</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>4</td> <td>5728.32</td> <td>55.96</td> <td>111.62</td> <td>-55.66</td> <td>37.27</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5604.29	58.08	68.30	-10.22	40.07	34.61	13.16	29.76	0.00	104	28 PEAK	2	5653.63	58.89	70.99	-12.10	40.64	34.70	13.33	29.78	0.00	104	28 PEAK	3	5704.33	56.86	106.51	-49.65	38.35	34.79	13.52	29.80	0.00	104	28 PEAK	4	5728.32	55.96	111.62	-55.66	37.27	34.82	13.66	29.79	0.00	104	28 PEAK	 <table border="1" data-bbox="909 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>111.46</td> <td>-----</td> <td>-----</td> <td>91.86</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	111.46	-----	-----	91.86	35.00	14.37	29.77	0.00	104	28 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5604.29	58.08	68.30	-10.22	40.07	34.61	13.16	29.76	0.00	104	28 PEAK																																																																																																																	
2	5653.63	58.89	70.99	-12.10	40.64	34.70	13.33	29.78	0.00	104	28 PEAK																																																																																																																	
3	5704.33	56.86	106.51	-49.65	38.35	34.79	13.52	29.80	0.00	104	28 PEAK																																																																																																																	
4	5728.32	55.96	111.62	-55.66	37.27	34.82	13.66	29.79	0.00	104	28 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	111.46	-----	-----	91.86	35.00	14.37	29.77	0.00	104	28 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="909 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>102.54</td> <td>-----</td> <td>-----</td> <td>82.94</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>104</td> <td>28 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	102.54	-----	-----	82.94	35.00	14.37	29.77	0.00	104	28 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	102.54	-----	-----	82.94	35.00	14.37	29.77	0.00	104	28 AVERAGE																																																																																																																	



Mode	61																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																
ANT	7+8																																																																																
Pol.	Horizontal	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>60.97</td> <td>110.93</td> <td>-49.96</td> <td>41.66</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>2</td> <td>5858.71</td> <td>64.11</td> <td>109.86</td> <td>-45.75</td> <td>44.81</td> <td>35.09</td> <td>14.00</td> <td>29.79</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>3</td> <td>5924.58</td> <td>57.64</td> <td>68.61</td> <td>-10.97</td> <td>38.58</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> <tr> <td>4</td> <td>5938.01</td> <td>57.98</td> <td>68.30</td> <td>-10.32</td> <td>38.93</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>104</td> <td>28 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	60.97	110.93	-49.96	41.66	35.08	14.02	29.79	0.00	104	28 PEAK	2	5858.71	64.11	109.86	-45.75	44.81	35.09	14.00	29.79	0.00	104	28 PEAK	3	5924.58	57.64	68.61	-10.97	38.58	35.19	13.69	29.82	0.00	104	28 PEAK	4	5938.01	57.98	68.30	-10.32	38.93	35.20	13.68	29.83	0.00	104	28 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.99	60.97	110.93	-49.96	41.66	35.08	14.02	29.79	0.00	104	28 PEAK																																																																						
2	5858.71	64.11	109.86	-45.75	44.81	35.09	14.00	29.79	0.00	104	28 PEAK																																																																						
3	5924.58	57.64	68.61	-10.97	38.58	35.19	13.69	29.82	0.00	104	28 PEAK																																																																						
4	5938.01	57.98	68.30	-10.32	38.93	35.20	13.68	29.83	0.00	104	28 PEAK																																																																						

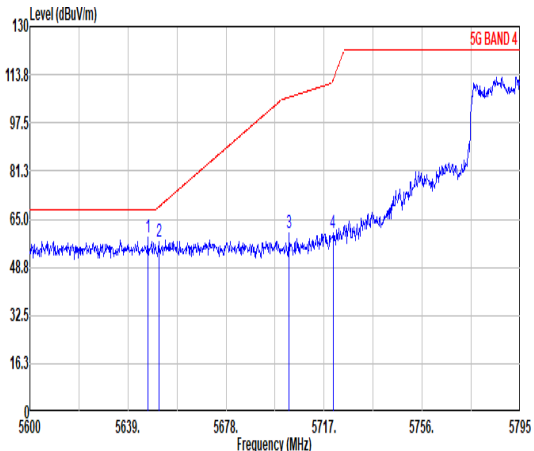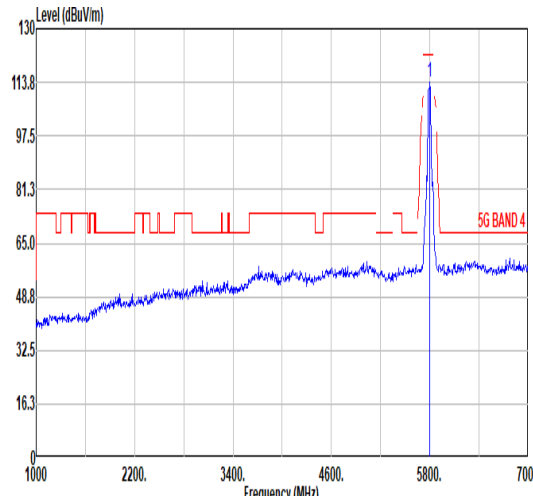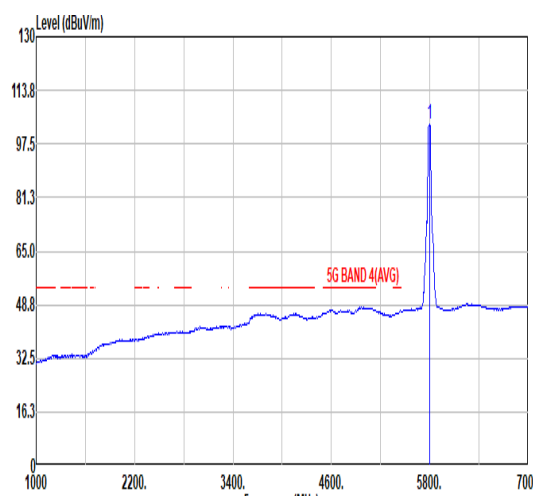

Mode	61																																																																																																																										
	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.80</td> <td>59.06</td> <td>68.30</td> <td>-9.24</td> <td>40.86</td> <td>34.68</td> <td>13.30</td> <td>29.78</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.29</td> <td>57.36</td> <td>69.26</td> <td>-11.90</td> <td>39.13</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5783.16</td> <td>60.31</td> <td>106.18</td> <td>-45.87</td> <td>41.81</td> <td>34.79</td> <td>13.51</td> <td>29.80</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.51</td> <td>60.52</td> <td>112.06</td> <td>-51.54</td> <td>41.82</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.80	59.06	68.30	-9.24	40.86	34.68	13.30	29.78	0.00	240	360	PEAK	2	5651.29	57.36	69.26	-11.90	39.13	34.69	13.32	29.78	0.00	240	360	PEAK	3	5783.16	60.31	106.18	-45.87	41.81	34.79	13.51	29.80	0.00	240	360	PEAK	4	5728.51	60.52	112.06	-51.54	41.82	34.83	13.66	29.79	0.00	240	360	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>113.97</td> <td>-----</td> <td>-----</td> <td>94.37</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	113.97	-----	-----	94.37	35.00	14.37	29.77	0.00	240	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5646.80	59.06	68.30	-9.24	40.86	34.68	13.30	29.78	0.00	240	360	PEAK																																																																																																															
2	5651.29	57.36	69.26	-11.90	39.13	34.69	13.32	29.78	0.00	240	360	PEAK																																																																																																															
3	5783.16	60.31	106.18	-45.87	41.81	34.79	13.51	29.80	0.00	240	360	PEAK																																																																																																															
4	5728.51	60.52	112.06	-51.54	41.82	34.83	13.66	29.79	0.00	240	360	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	113.97	-----	-----	94.37	35.00	14.37	29.77	0.00	240	360	PEAK																																																																																																															
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>103.53</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>34.99</td> <td>14.32</td> <td>29.77</td> <td>0.00</td> <td>240</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	103.53	-----	-----	83.99	34.99	14.32	29.77	0.00	240	360	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	103.53	-----	-----	83.99	34.99	14.32	29.77	0.00	240	360	AVERAGE																																																																																																															



Mode	61																																																																																	
	Band Edge - R																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																	
ANT	7+8																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.21</td> <td>66.12</td> <td>112.70</td> <td>-46.58</td> <td>46.80</td> <td>35.08</td> <td>14.83</td> <td>29.79</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.23</td> <td>66.26</td> <td>110.56</td> <td>-44.30</td> <td>46.95</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.43</td> <td>56.92</td> <td>68.72</td> <td>-11.80</td> <td>37.86</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.08</td> <td>58.02</td> <td>68.30</td> <td>-10.28</td> <td>38.98</td> <td>35.19</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>240</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.21	66.12	112.70	-46.58	46.80	35.08	14.83	29.79	0.00	240	360	PEAK	2	5856.23	66.26	110.56	-44.30	46.95	35.08	14.02	29.79	0.00	240	360	PEAK	3	5924.43	56.92	68.72	-11.80	37.86	35.19	13.69	29.82	0.00	240	360	PEAK	4	5929.08	58.02	68.30	-10.28	38.98	35.19	13.68	29.83	0.00	240	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5854.21	66.12	112.70	-46.58	46.80	35.08	14.83	29.79	0.00	240	360	PEAK																																																																						
2	5856.23	66.26	110.56	-44.30	46.95	35.08	14.02	29.79	0.00	240	360	PEAK																																																																						
3	5924.43	56.92	68.72	-11.80	37.86	35.19	13.69	29.82	0.00	240	360	PEAK																																																																						
4	5929.08	58.02	68.30	-10.28	38.98	35.19	13.68	29.83	0.00	240	360	PEAK																																																																						



Mode	61																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																													
ANT	7+8																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>44.65</td> <td>74.00</td> <td>-29.35</td> <td>58.98</td> <td>35.93</td> <td>15.91</td> <td>66.17</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>44.25</td> <td>74.00</td> <td>-29.75</td> <td>52.67</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8113.00	44.65	74.00	-29.35	58.98	35.93	15.91	66.17	0.00	300	0	PEAK	2	11590.00	44.25	74.00	-29.75	52.67	38.45	18.53	65.40	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>42.91</td> <td>74.00</td> <td>-31.09</td> <td>57.24</td> <td>35.93</td> <td>15.91</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>43.68</td> <td>74.00</td> <td>-30.32</td> <td>52.10</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8113.00	42.91	74.00	-31.09	57.24	35.93	15.91	66.17	0.00	100	0	PEAK	2	11590.00	43.68	74.00	-30.32	52.10	38.45	18.53	65.40	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8113.00	44.65	74.00	-29.35	58.98	35.93	15.91	66.17	0.00	300	0	PEAK																																																																																																		
2	11590.00	44.25	74.00	-29.75	52.67	38.45	18.53	65.40	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	8113.00	42.91	74.00	-31.09	57.24	35.93	15.91	66.17	0.00	100	0	PEAK																																																																																																		
2	11590.00	43.68	74.00	-30.32	52.10	38.45	18.53	65.40	0.00	100	0	PEAK																																																																																																		






	62																																																																																																																										
Mode	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_RU 242/62_5795MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5638.42</td> <td>57.89</td> <td>68.30</td> <td>-10.41</td> <td>39.72</td> <td>34.67</td> <td>13.28</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.48</td> <td>55.17</td> <td>69.40</td> <td>-14.23</td> <td>36.94</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.82</td> <td>58.33</td> <td>105.53</td> <td>-47.20</td> <td>39.86</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>55.47</td> <td>111.17</td> <td>-55.70</td> <td>36.78</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5638.42	57.89	68.30	-10.41	39.72	34.67	13.28	29.78	0.00	100	337	PEAK	2	5651.48	55.17	69.40	-14.23	36.94	34.69	13.32	29.78	0.00	100	337	PEAK	3	5700.82	58.33	105.53	-47.20	39.86	34.78	13.49	29.80	0.00	100	337	PEAK	4	5720.12	55.47	111.17	-55.70	36.78	34.82	13.66	29.79	0.00	100	337	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>110.65</td> <td>-----</td> <td>-----</td> <td>91.05</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	110.65	-----	-----	91.05	35.00	14.37	29.77	0.00	100	337	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5638.42	57.89	68.30	-10.41	39.72	34.67	13.28	29.78	0.00	100	337	PEAK																																																																																																															
2	5651.48	55.17	69.40	-14.23	36.94	34.69	13.32	29.78	0.00	100	337	PEAK																																																																																																															
3	5700.82	58.33	105.53	-47.20	39.86	34.78	13.49	29.80	0.00	100	337	PEAK																																																																																																															
4	5720.12	55.47	111.17	-55.70	36.78	34.82	13.66	29.79	0.00	100	337	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	110.65	-----	-----	91.05	35.00	14.37	29.77	0.00	100	337	PEAK																																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>101.30</td> <td>-----</td> <td>-----</td> <td>81.73</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>337</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	101.30	-----	-----	81.73	35.01	14.33	29.77	0.00	100	337	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	101.30	-----	-----	81.73	35.01	14.33	29.77	0.00	100	337	AVERAGE																																																																																																															



Mode	62																																																																																	
	Band Edge - R																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_RU 242/62_5795MHz																																																																																	
ANT	7+8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>56.26</td> <td>110.93</td> <td>-54.67</td> <td>36.95</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.61</td> <td>66.08</td> <td>107.65</td> <td>-41.57</td> <td>46.82</td> <td>35.10</td> <td>13.95</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>57.82</td> <td>68.30</td> <td>-10.56</td> <td>38.76</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5946.75</td> <td>59.26</td> <td>68.30</td> <td>-9.04</td> <td>40.23</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	56.26	110.93	-54.67	36.95	35.08	14.02	29.79	0.00	100	337	PEAK	2	5866.61	66.08	107.65	-41.57	46.82	35.10	13.95	29.79	0.00	100	337	PEAK	3	5924.89	57.82	68.30	-10.56	38.76	35.19	13.69	29.82	0.00	100	337	PEAK	4	5946.75	59.26	68.30	-9.04	40.23	35.22	13.65	29.84	0.00	100	337	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5854.99	56.26	110.93	-54.67	36.95	35.08	14.02	29.79	0.00	100	337	PEAK																																																																						
2	5866.61	66.08	107.65	-41.57	46.82	35.10	13.95	29.79	0.00	100	337	PEAK																																																																						
3	5924.89	57.82	68.30	-10.56	38.76	35.19	13.69	29.82	0.00	100	337	PEAK																																																																						
4	5946.75	59.26	68.30	-9.04	40.23	35.22	13.65	29.84	0.00	100	337	PEAK																																																																						

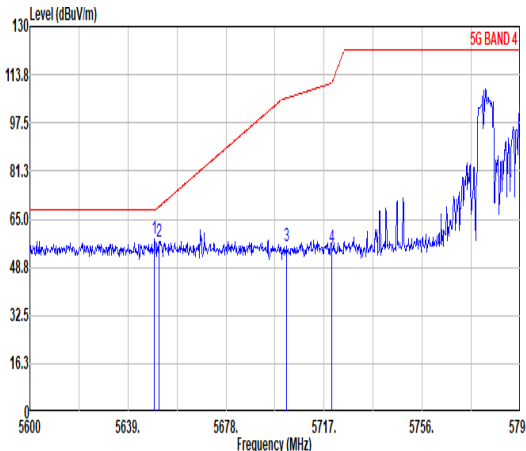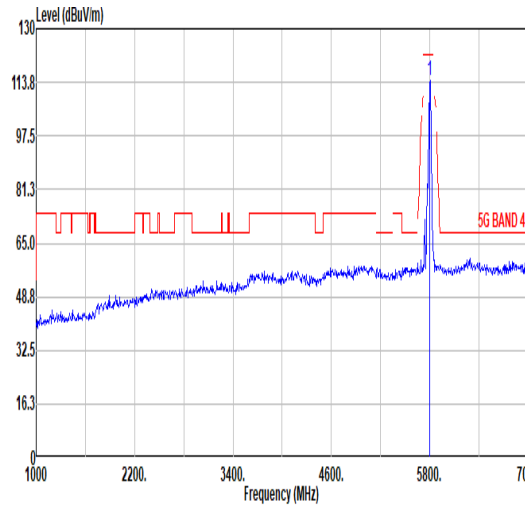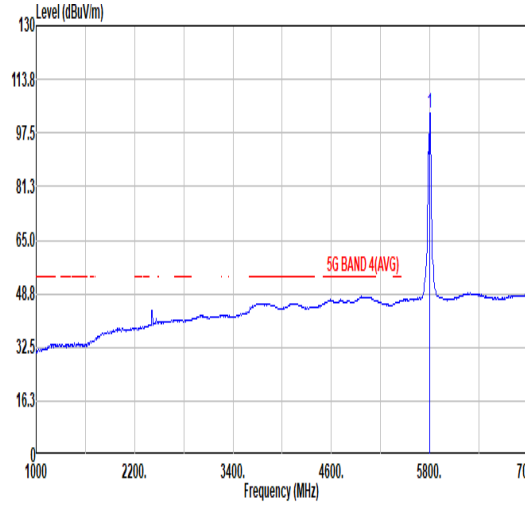

Mode	62																																																																																																																										
	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_RU 242/62_5795MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.53</td> <td>58.23</td> <td>68.30</td> <td>-10.07</td> <td>40.01</td> <td>34.69</td> <td>13.31</td> <td>29.78</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.29</td> <td>57.57</td> <td>69.26</td> <td>-11.69</td> <td>39.34</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.99</td> <td>55.92</td> <td>105.86</td> <td>-49.94</td> <td>37.44</td> <td>34.78</td> <td>13.50</td> <td>29.80</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>55.54</td> <td>111.17</td> <td>-55.63</td> <td>36.85</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.53	58.23	68.30	-10.07	40.01	34.69	13.31	29.78	0.00	260	26	PEAK	2	5651.29	57.57	69.26	-11.69	39.34	34.69	13.32	29.78	0.00	260	26	PEAK	3	5701.99	55.92	105.86	-49.94	37.44	34.78	13.50	29.80	0.00	260	26	PEAK	4	5720.12	55.54	111.17	-55.63	36.85	34.82	13.66	29.79	0.00	260	26	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>114.12</td> <td>-----</td> <td>-----</td> <td>94.55</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	114.12	-----	-----	94.55	35.01	14.33	29.77	0.00	260	26	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5649.53	58.23	68.30	-10.07	40.01	34.69	13.31	29.78	0.00	260	26	PEAK																																																																																																															
2	5651.29	57.57	69.26	-11.69	39.34	34.69	13.32	29.78	0.00	260	26	PEAK																																																																																																															
3	5701.99	55.92	105.86	-49.94	37.44	34.78	13.50	29.80	0.00	260	26	PEAK																																																																																																															
4	5720.12	55.54	111.17	-55.63	36.85	34.82	13.66	29.79	0.00	260	26	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	114.12	-----	-----	94.55	35.01	14.33	29.77	0.00	260	26	PEAK																																																																																																															
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>103.69</td> <td>-----</td> <td>-----</td> <td>84.12</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>260</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	103.69	-----	-----	84.12	35.01	14.33	29.77	0.00	260	26	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5795.00	103.69	-----	-----	84.12	35.01	14.33	29.77	0.00	260	26	AVERAGE																																																																																																															



Mode	62																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_RU 242/62_5795MHz																																																																									
ANT	7+8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.89</td> <td>73.29</td> <td>118.00</td> <td>-44.71</td> <td>53.96</td> <td>35.08</td> <td>14.04</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.77</td> <td>66.14</td> <td>107.60</td> <td>-41.46</td> <td>46.88</td> <td>35.10</td> <td>13.95</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>56.78</td> <td>68.30</td> <td>-11.60</td> <td>37.72</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5948.86</td> <td>58.01</td> <td>68.30</td> <td>-10.29</td> <td>38.98</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5851.89	73.29	118.00	-44.71	53.96	35.08	14.04	29.79	0.00	260	26	PEAK	2	5866.77	66.14	107.60	-41.46	46.88	35.10	13.95	29.79	0.00	260	26	PEAK	3	5924.89	56.78	68.30	-11.60	37.72	35.19	13.69	29.82	0.00	260	26	PEAK	4	5948.86	58.01	68.30	-10.29	38.98	35.21	13.66	29.84	0.00	260	26	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5851.89	73.29	118.00	-44.71	53.96	35.08	14.04	29.79	0.00	260	26	PEAK																																																														
2	5866.77	66.14	107.60	-41.46	46.88	35.10	13.95	29.79	0.00	260	26	PEAK																																																														
3	5924.89	56.78	68.30	-11.60	37.72	35.19	13.69	29.82	0.00	260	26	PEAK																																																														
4	5948.86	58.01	68.30	-10.29	38.98	35.21	13.66	29.84	0.00	260	26	PEAK																																																														



		63																																																																																																																										
Mode		Band Edge - L																																																																																																																										
		U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																										
ANT		7+8																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																										
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.50</td> <td>61.38</td> <td>68.30</td> <td>-6.92</td> <td>43.18</td> <td>34.68</td> <td>13.30</td> <td>29.78</td> <td>0.00</td> <td>129</td> <td>30 PEAK</td> </tr> <tr> <td>2</td> <td>5655.83</td> <td>62.56</td> <td>72.63</td> <td>-10.07</td> <td>44.31</td> <td>34.70</td> <td>13.33</td> <td>29.78</td> <td>0.00</td> <td>129</td> <td>30 PEAK</td> </tr> <tr> <td>3</td> <td>5706.75</td> <td>76.76</td> <td>107.19</td> <td>-30.43</td> <td>58.23</td> <td>34.79</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>129</td> <td>30 PEAK</td> </tr> <tr> <td>4</td> <td>5728.58</td> <td>75.52</td> <td>112.21</td> <td>-36.69</td> <td>56.82</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>129</td> <td>30 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.50	61.38	68.30	-6.92	43.18	34.68	13.30	29.78	0.00	129	30 PEAK	2	5655.83	62.56	72.63	-10.07	44.31	34.70	13.33	29.78	0.00	129	30 PEAK	3	5706.75	76.76	107.19	-30.43	58.23	34.79	13.54	29.80	0.00	129	30 PEAK	4	5728.58	75.52	112.21	-36.69	56.82	34.83	13.66	29.79	0.00	129	30 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>109.95</td> <td>-----</td> <td>-----</td> <td>90.70</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>129</td> <td>30 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	109.95	-----	-----	90.70	34.93	14.10	29.78	0.00	129	30 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5645.50	61.38	68.30	-6.92	43.18	34.68	13.30	29.78	0.00	129	30 PEAK																																																																																																																	
2	5655.83	62.56	72.63	-10.07	44.31	34.70	13.33	29.78	0.00	129	30 PEAK																																																																																																																	
3	5706.75	76.76	107.19	-30.43	58.23	34.79	13.54	29.80	0.00	129	30 PEAK																																																																																																																	
4	5728.58	75.52	112.21	-36.69	56.82	34.83	13.66	29.79	0.00	129	30 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	109.95	-----	-----	90.70	34.93	14.10	29.78	0.00	129	30 PEAK																																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>99.67</td> <td>-----</td> <td>-----</td> <td>80.42</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>129</td> <td>30 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	99.67	-----	-----	80.42	34.93	14.10	29.78	0.00	129	30 AVERAGE																																																																														
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	99.67	-----	-----	80.42	34.93	14.10	29.78	0.00	129	30 AVERAGE																																																																																																																	



Mode	63																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
ANT	7+8																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>69.43</td> <td>110.96</td> <td>-41.53</td> <td>50.12</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5858.13</td> <td>73.53</td> <td>110.02</td> <td>-36.49</td> <td>54.23</td> <td>35.09</td> <td>14.00</td> <td>29.79</td> <td>0.00</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>57.46</td> <td>68.58</td> <td>-11.12</td> <td>38.40</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> </tr> <tr> <td>4</td> <td>5946.15</td> <td>58.89</td> <td>68.30</td> <td>-9.41</td> <td>39.86</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5854.98	69.43	110.96	-41.53	50.12	35.08	14.02	29.79	0.00	2	5858.13	73.53	110.02	-36.49	54.23	35.09	14.00	29.79	0.00	3	5924.63	57.46	68.58	-11.12	38.40	35.19	13.69	29.82	0.00	4	5946.15	58.89	68.30	-9.41	39.86	35.22	13.65	29.84	0.00	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
	Freq	Level	Line	Level	Margin	Level	Factor	Loss	Factor																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																															
1	5854.98	69.43	110.96	-41.53	50.12	35.08	14.02	29.79	0.00																																																															
2	5858.13	73.53	110.02	-36.49	54.23	35.09	14.00	29.79	0.00																																																															
3	5924.63	57.46	68.58	-11.12	38.40	35.19	13.69	29.82	0.00																																																															
4	5946.15	58.89	68.30	-9.41	39.86	35.22	13.65	29.84	0.00																																																															



Mode	63																																																																																																																										
	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																										
ANT	7+8																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.50</td> <td>61.81</td> <td>68.30</td> <td>-6.49</td> <td>43.61</td> <td>34.68</td> <td>13.30</td> <td>29.78</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.50</td> <td>62.68</td> <td>70.16</td> <td>-7.48</td> <td>44.45</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.30</td> <td>79.60</td> <td>106.51</td> <td>-26.91</td> <td>61.09</td> <td>34.79</td> <td>13.52</td> <td>29.80</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.28</td> <td>78.29</td> <td>113.81</td> <td>-35.52</td> <td>59.58</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.50	61.81	68.30	-6.49	43.61	34.68	13.30	29.78	0.00	234	360	PEAK	2	5652.50	62.68	70.16	-7.48	44.45	34.69	13.32	29.78	0.00	234	360	PEAK	3	5704.30	79.60	106.51	-26.91	61.09	34.79	13.52	29.80	0.00	234	360	PEAK	4	5721.28	78.29	113.81	-35.52	59.58	34.83	13.67	29.79	0.00	234	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>109.98</td> <td>-----</td> <td>-----</td> <td>90.93</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	109.98	-----	-----	90.93	34.89	13.94	29.78	0.00	234	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5645.50	61.81	68.30	-6.49	43.61	34.68	13.30	29.78	0.00	234	360	PEAK																																																																																																															
2	5652.50	62.68	70.16	-7.48	44.45	34.69	13.32	29.78	0.00	234	360	PEAK																																																																																																															
3	5704.30	79.60	106.51	-26.91	61.09	34.79	13.52	29.80	0.00	234	360	PEAK																																																																																																															
4	5721.28	78.29	113.81	-35.52	59.58	34.83	13.67	29.79	0.00	234	360	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	109.98	-----	-----	90.93	34.89	13.94	29.78	0.00	234	360	PEAK																																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>100.45</td> <td>-----</td> <td>-----</td> <td>81.26</td> <td>34.92</td> <td>14.05</td> <td>29.78</td> <td>0.00</td> <td>234</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.45	-----	-----	81.26	34.92	14.05	29.78	0.00	234	360	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	100.45	-----	-----	81.26	34.92	14.05	29.78	0.00	234	360	AVERAGE																																																																																																															






Mode	63																																																																																	
	Band Edge - R																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																	
ANT	7+8																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>74.12</td> <td>110.96</td> <td>-36.84</td> <td>54.81</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.90</td> <td>76.95</td> <td>110.37</td> <td>-33.42</td> <td>57.64</td> <td>35.09</td> <td>14.01</td> <td>29.79</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.45</td> <td>57.24</td> <td>68.71</td> <td>-11.47</td> <td>38.18</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.18</td> <td>58.34</td> <td>68.30</td> <td>-9.96</td> <td>39.30</td> <td>35.19</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>234</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	74.12	110.96	-36.84	54.81	35.08	14.02	29.79	0.00	234	360	PEAK	2	5856.90	76.95	110.37	-33.42	57.64	35.09	14.01	29.79	0.00	234	360	PEAK	3	5924.45	57.24	68.71	-11.47	38.18	35.19	13.69	29.82	0.00	234	360	PEAK	4	5929.18	58.34	68.30	-9.96	39.30	35.19	13.68	29.83	0.00	234	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5854.98	74.12	110.96	-36.84	54.81	35.08	14.02	29.79	0.00	234	360	PEAK																																																																						
2	5856.90	76.95	110.37	-33.42	57.64	35.09	14.01	29.79	0.00	234	360	PEAK																																																																						
3	5924.45	57.24	68.71	-11.47	38.18	35.19	13.69	29.82	0.00	234	360	PEAK																																																																						
4	5929.18	58.34	68.30	-9.96	39.30	35.19	13.68	29.83	0.00	234	360	PEAK																																																																						



Mode	63																																																																																																												
	Harmonic																																																																																																												
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																												
ANT	7+8																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8085.00</td> <td>44.33</td> <td>74.00</td> <td>-29.67</td> <td>58.71</td> <td>35.95</td> <td>15.86</td> <td>66.19</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>43.66</td> <td>74.00</td> <td>-30.34</td> <td>52.15</td> <td>38.43</td> <td>18.50</td> <td>65.42</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8085.00	44.33	74.00	-29.67	58.71	35.95	15.86	66.19	0.00	300	0	PEAK	2	11550.00	43.66	74.00	-30.34	52.15	38.43	18.50	65.42	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8085.00</td> <td>42.72</td> <td>74.00</td> <td>-31.28</td> <td>57.10</td> <td>35.95</td> <td>15.86</td> <td>66.19</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>43.51</td> <td>74.00</td> <td>-30.49</td> <td>52.00</td> <td>38.43</td> <td>18.50</td> <td>65.42</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	8085.00	42.72	74.00	-31.28	57.10	35.95	15.86	66.19	0.00	100	0	PEAK	2	11550.00	43.51	74.00	-30.49	52.00	38.43	18.50	65.42	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	8085.00	44.33	74.00	-29.67	58.71	35.95	15.86	66.19	0.00	300	0	PEAK																																																																																																	
2	11550.00	43.66	74.00	-30.34	52.15	38.43	18.50	65.42	0.00	300	0	PEAK																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	8085.00	42.72	74.00	-31.28	57.10	35.95	15.86	66.19	0.00	100	0	PEAK																																																																																																	
2	11550.00	43.51	74.00	-30.49	52.00	38.43	18.50	65.42	0.00	100	0	PEAK																																																																																																	

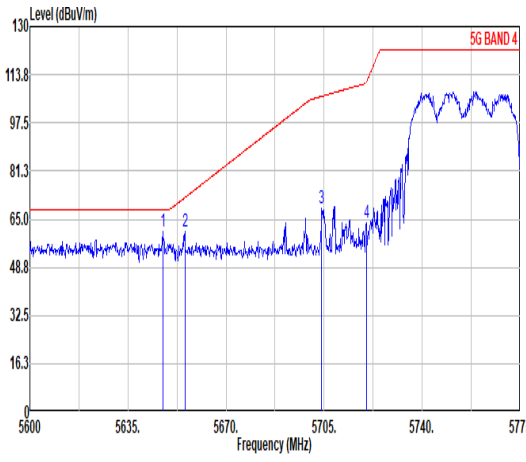
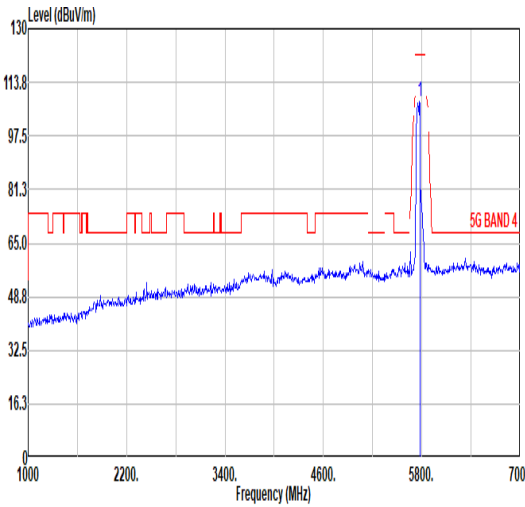
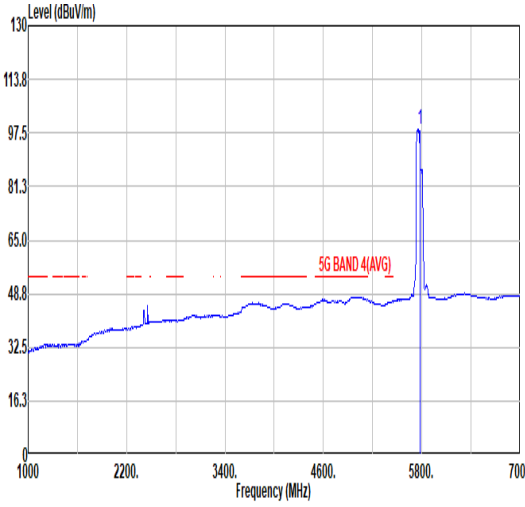


	64																																																																																																																											
Mode	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/65_5775MHz																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1064 790 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.43</td> <td>60.79</td> <td>68.30</td> <td>-7.51</td> <td>42.57</td> <td>34.69</td> <td>13.31</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337 PEAK</td> </tr> <tr> <td>2</td> <td>5655.30</td> <td>60.87</td> <td>72.24</td> <td>-11.37</td> <td>42.62</td> <td>34.70</td> <td>13.33</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337 PEAK</td> </tr> <tr> <td>3</td> <td>5704.13</td> <td>68.78</td> <td>106.46</td> <td>-37.68</td> <td>50.27</td> <td>34.79</td> <td>13.52</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>337 PEAK</td> </tr> <tr> <td>4</td> <td>5728.05</td> <td>64.01</td> <td>111.01</td> <td>-47.00</td> <td>45.32</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.43	60.79	68.30	-7.51	42.57	34.69	13.31	29.78	0.00	100	337 PEAK	2	5655.30	60.87	72.24	-11.37	42.62	34.70	13.33	29.78	0.00	100	337 PEAK	3	5704.13	68.78	106.46	-37.68	50.27	34.79	13.52	29.80	0.00	100	337 PEAK	4	5728.05	64.01	111.01	-47.00	45.32	34.82	13.66	29.79	0.00	100	337 PEAK	 <table border="1" data-bbox="909 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>107.72</td> <td>-----</td> <td>-----</td> <td>88.47</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	107.72	-----	-----	88.47	34.93	14.10	29.78	0.00	100	337 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5647.43	60.79	68.30	-7.51	42.57	34.69	13.31	29.78	0.00	100	337 PEAK																																																																																																																	
2	5655.30	60.87	72.24	-11.37	42.62	34.70	13.33	29.78	0.00	100	337 PEAK																																																																																																																	
3	5704.13	68.78	106.46	-37.68	50.27	34.79	13.52	29.80	0.00	100	337 PEAK																																																																																																																	
4	5728.05	64.01	111.01	-47.00	45.32	34.82	13.66	29.79	0.00	100	337 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	107.72	-----	-----	88.47	34.93	14.10	29.78	0.00	100	337 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="909 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>98.71</td> <td>-----</td> <td>-----</td> <td>79.58</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>337 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	98.71	-----	-----	79.58	34.91	14.00	29.78	0.00	100	337 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	98.71	-----	-----	79.58	34.91	14.00	29.78	0.00	100	337 AVERAGE																																																																																																																	



Mode	64																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/65_5775MHz																																																																									
ANT	7+8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.28</td> <td>59.13</td> <td>112.55</td> <td>-53.42</td> <td>39.81</td> <td>35.08</td> <td>14.83</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.95</td> <td>58.20</td> <td>106.15</td> <td>-47.95</td> <td>38.96</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.28</td> <td>56.86</td> <td>68.83</td> <td>-11.97</td> <td>37.80</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5945.98</td> <td>58.30</td> <td>68.30</td> <td>-10.00</td> <td>39.27</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5854.28	59.13	112.55	-53.42	39.81	35.08	14.83	29.79	0.00	100	337	PEAK	2	5871.95	58.20	106.15	-47.95	38.96	35.11	13.92	29.79	0.00	100	337	PEAK	3	5924.28	56.86	68.83	-11.97	37.80	35.19	13.69	29.82	0.00	100	337	PEAK	4	5945.98	58.30	68.30	-10.00	39.27	35.22	13.65	29.84	0.00	100	337	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																	
1	5854.28	59.13	112.55	-53.42	39.81	35.08	14.83	29.79	0.00	100	337	PEAK																																																														
2	5871.95	58.20	106.15	-47.95	38.96	35.11	13.92	29.79	0.00	100	337	PEAK																																																														
3	5924.28	56.86	68.83	-11.97	37.80	35.19	13.69	29.82	0.00	100	337	PEAK																																																														
4	5945.98	58.30	68.30	-10.00	39.27	35.22	13.65	29.84	0.00	100	337	PEAK																																																														

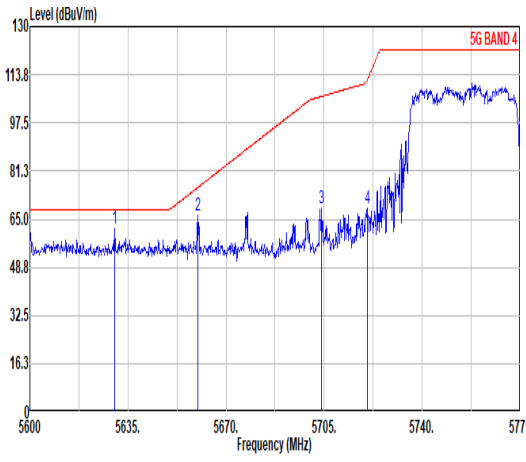
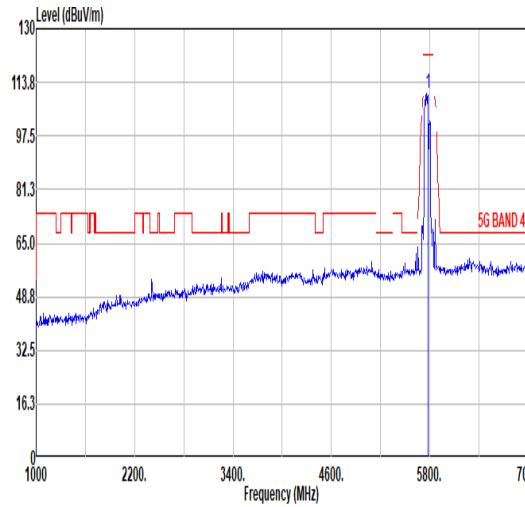
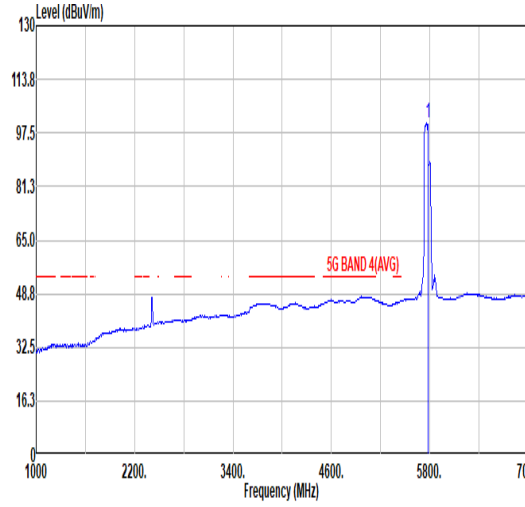


	64																																																																																																																											
Mode	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/65_5775MHz																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1064 790 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.28</td> <td>61.00</td> <td>68.30</td> <td>-6.50</td> <td>43.67</td> <td>34.65</td> <td>13.25</td> <td>29.77</td> <td>0.00</td> <td>287</td> <td>23 PEAK</td> </tr> <tr> <td>2</td> <td>5659.85</td> <td>66.12</td> <td>75.61</td> <td>-9.49</td> <td>47.84</td> <td>34.71</td> <td>13.35</td> <td>29.78</td> <td>0.00</td> <td>287</td> <td>23 PEAK</td> </tr> <tr> <td>3</td> <td>5704.13</td> <td>68.80</td> <td>106.46</td> <td>-37.66</td> <td>50.29</td> <td>34.79</td> <td>13.52</td> <td>29.80</td> <td>0.00</td> <td>287</td> <td>23 PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>68.59</td> <td>111.81</td> <td>-43.22</td> <td>49.90</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>287</td> <td>23 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5630.28	61.00	68.30	-6.50	43.67	34.65	13.25	29.77	0.00	287	23 PEAK	2	5659.85	66.12	75.61	-9.49	47.84	34.71	13.35	29.78	0.00	287	23 PEAK	3	5704.13	68.80	106.46	-37.66	50.29	34.79	13.52	29.80	0.00	287	23 PEAK	4	5720.40	68.59	111.81	-43.22	49.90	34.82	13.66	29.79	0.00	287	23 PEAK	 <table border="1" data-bbox="901 1108 1428 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>110.47</td> <td>-----</td> <td>-----</td> <td>91.34</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>287</td> <td>23 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	110.47	-----	-----	91.34	34.91	14.00	29.78	0.00	287	23 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5630.28	61.00	68.30	-6.50	43.67	34.65	13.25	29.77	0.00	287	23 PEAK																																																																																																																	
2	5659.85	66.12	75.61	-9.49	47.84	34.71	13.35	29.78	0.00	287	23 PEAK																																																																																																																	
3	5704.13	68.80	106.46	-37.66	50.29	34.79	13.52	29.80	0.00	287	23 PEAK																																																																																																																	
4	5720.40	68.59	111.81	-43.22	49.90	34.82	13.66	29.79	0.00	287	23 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	110.47	-----	-----	91.34	34.91	14.00	29.78	0.00	287	23 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="901 1792 1428 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>100.49</td> <td>-----</td> <td>-----</td> <td>81.36</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>287</td> <td>23 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.49	-----	-----	81.36	34.91	14.00	29.78	0.00	287	23 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	100.49	-----	-----	81.36	34.91	14.00	29.78	0.00	287	23 AVERAGE																																																																																																																	



Mode	64																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/65_5775MHz																																																																																
ANT	7+8																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.28</td> <td>71.73</td> <td>112.55</td> <td>-40.82</td> <td>52.41</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>287</td> <td>23</td> <td>PEAK</td> </tr> <tr> <td>2 5870.73</td> <td>70.71</td> <td>106.50</td> <td>-35.79</td> <td>51.47</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>287</td> <td>23</td> <td>PEAK</td> </tr> <tr> <td>3 5924.98</td> <td>55.72</td> <td>68.32</td> <td>-12.60</td> <td>36.66</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>287</td> <td>23</td> <td>PEAK</td> </tr> <tr> <td>4 5932.33</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>38.48</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>287</td> <td>23</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.28	71.73	112.55	-40.82	52.41	35.08	14.03	29.79	0.00	287	23	PEAK	2 5870.73	70.71	106.50	-35.79	51.47	35.11	13.92	29.79	0.00	287	23	PEAK	3 5924.98	55.72	68.32	-12.60	36.66	35.19	13.69	29.82	0.00	287	23	PEAK	4 5932.33	57.53	68.30	-10.77	38.48	35.20	13.68	29.83	0.00	287	23	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 5854.28	71.73	112.55	-40.82	52.41	35.08	14.03	29.79	0.00	287	23	PEAK																																																																						
2 5870.73	70.71	106.50	-35.79	51.47	35.11	13.92	29.79	0.00	287	23	PEAK																																																																						
3 5924.98	55.72	68.32	-12.60	36.66	35.19	13.69	29.82	0.00	287	23	PEAK																																																																						
4 5932.33	57.53	68.30	-10.77	38.48	35.20	13.68	29.83	0.00	287	23	PEAK																																																																						

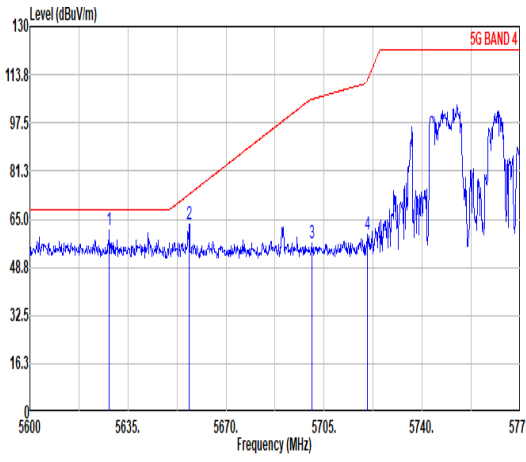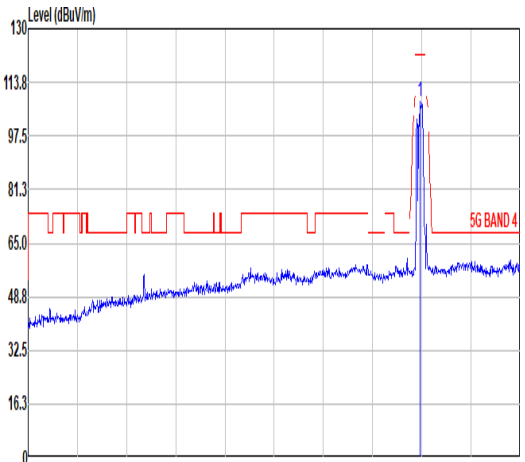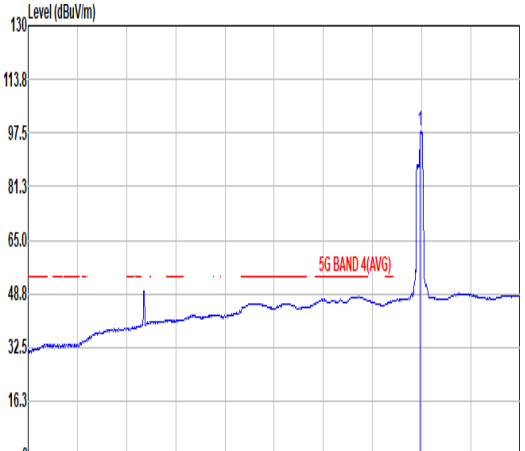

	65																																																																																																																											
Mode	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1064 790 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.35</td> <td>61.56</td> <td>68.30</td> <td>-6.74</td> <td>43.44</td> <td>34.65</td> <td>13.24</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>336 PEAK</td> </tr> <tr> <td>2</td> <td>5656.88</td> <td>63.52</td> <td>73.41</td> <td>-9.89</td> <td>45.26</td> <td>34.70</td> <td>13.34</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>336 PEAK</td> </tr> <tr> <td>3</td> <td>5700.63</td> <td>56.83</td> <td>105.48</td> <td>-48.65</td> <td>38.36</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>336 PEAK</td> </tr> <tr> <td>4</td> <td>5728.58</td> <td>59.94</td> <td>112.21</td> <td>-52.27</td> <td>41.24</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>336 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5628.35	61.56	68.30	-6.74	43.44	34.65	13.24	29.77	0.00	100	336 PEAK	2	5656.88	63.52	73.41	-9.89	45.26	34.70	13.34	29.78	0.00	100	336 PEAK	3	5700.63	56.83	105.48	-48.65	38.36	34.78	13.49	29.80	0.00	100	336 PEAK	4	5728.58	59.94	112.21	-52.27	41.24	34.83	13.66	29.79	0.00	100	336 PEAK	 <table border="1" data-bbox="909 1064 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>108.11</td> <td>-----</td> <td>-----</td> <td>88.78</td> <td>34.95</td> <td>14.16</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>336 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	108.11	-----	-----	88.78	34.95	14.16	29.78	0.00	100	336 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5628.35	61.56	68.30	-6.74	43.44	34.65	13.24	29.77	0.00	100	336 PEAK																																																																																																																	
2	5656.88	63.52	73.41	-9.89	45.26	34.70	13.34	29.78	0.00	100	336 PEAK																																																																																																																	
3	5700.63	56.83	105.48	-48.65	38.36	34.78	13.49	29.80	0.00	100	336 PEAK																																																																																																																	
4	5728.58	59.94	112.21	-52.27	41.24	34.83	13.66	29.79	0.00	100	336 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	108.11	-----	-----	88.78	34.95	14.16	29.78	0.00	100	336 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="909 1736 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.88</td> <td>-----</td> <td>-----</td> <td>78.42</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>336 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	97.88	-----	-----	78.42	34.97	14.26	29.77	0.00	100	336 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	97.88	-----	-----	78.42	34.97	14.26	29.77	0.00	100	336 AVERAGE																																																																																																																	



Mode	65																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz																																																																																			
ANT	7+8																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>57.26</td> <td>111.36</td> <td>-54.10</td> <td>37.95</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5860.05</td> <td>66.25</td> <td>109.48</td> <td>-43.23</td> <td>46.96</td> <td>35.09</td> <td>13.99</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>55.52</td> <td>68.58</td> <td>-13.06</td> <td>36.46</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.05</td> <td>58.71</td> <td>68.30</td> <td>-9.59</td> <td>39.66</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>336</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	57.26	111.36	-54.10	37.95	35.08	14.02	29.79	0.00	100	336	PEAK	2	5860.05	66.25	109.48	-43.23	46.96	35.09	13.99	29.79	0.00	100	336	PEAK	3	5924.63	55.52	68.58	-13.06	36.46	35.19	13.69	29.82	0.00	100	336	PEAK	4	5930.05	58.71	68.30	-9.59	39.66	35.20	13.68	29.83	0.00	100	336	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.80	57.26	111.36	-54.10	37.95	35.08	14.02	29.79	0.00	100	336	PEAK																																																																								
2	5860.05	66.25	109.48	-43.23	46.96	35.09	13.99	29.79	0.00	100	336	PEAK																																																																								
3	5924.63	55.52	68.58	-13.06	36.46	35.19	13.69	29.82	0.00	100	336	PEAK																																																																								
4	5930.05	58.71	68.30	-9.59	39.66	35.20	13.68	29.83	0.00	100	336	PEAK																																																																								







Mode	65																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz																																																																																																										
ANT	7+8																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.28</td> <td>62.45</td> <td>68.30</td> <td>-5.85</td> <td>44.28</td> <td>34.67</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>57.66</td> <td>68.34</td> <td>-10.68</td> <td>39.43</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.88</td> <td>73.95</td> <td>108.91</td> <td>-34.96</td> <td>55.35</td> <td>34.81</td> <td>13.59</td> <td>29.80</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.40</td> <td>61.33</td> <td>111.81</td> <td>-50.48</td> <td>42.64</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5637.28	62.45	68.30	-5.85	44.28	34.67	13.27	29.77	0.00	260	26	PEAK	2	5650.05	57.66	68.34	-10.68	39.43	34.69	13.32	29.78	0.00	260	26	PEAK	3	5712.88	73.95	108.91	-34.96	55.35	34.81	13.59	29.80	0.00	260	26	PEAK	4	5728.40	61.33	111.81	-50.48	42.64	34.82	13.66	29.79	0.00	260	26	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>110.19</td> <td>-----</td> <td>-----</td> <td>90.62</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>260</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5775.00	110.19	-----	-----	90.62	35.01	14.33	29.77	0.00	260	26	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5637.28	62.45	68.30	-5.85	44.28	34.67	13.27	29.77	0.00	260	26	PEAK																																																																																															
2	5650.05	57.66	68.34	-10.68	39.43	34.69	13.32	29.78	0.00	260	26	PEAK																																																																																															
3	5712.88	73.95	108.91	-34.96	55.35	34.81	13.59	29.80	0.00	260	26	PEAK																																																																																															
4	5728.40	61.33	111.81	-50.48	42.64	34.82	13.66	29.79	0.00	260	26	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5775.00	110.19	-----	-----	90.62	35.01	14.33	29.77	0.00	260	26	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>99.83</td> <td>-----</td> <td>-----</td> <td>80.26</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>260</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5775.00	99.83	-----	-----	80.26	35.01	14.33	29.77	0.00	260	26	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5775.00	99.83	-----	-----	80.26	35.01	14.33	29.77	0.00	260	26	AVERAGE																																																																																															



Mode	65																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz																																																																											
ANT	7+8																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>58.67</td> <td>111.36</td> <td>-52.69</td> <td>39.36</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26 PEAK</td> </tr> <tr> <td>2 5861.10</td> <td>75.28</td> <td>109.19</td> <td>-33.91</td> <td>55.99</td> <td>35.09</td> <td>13.99</td> <td>29.79</td> <td>0.00</td> <td>260</td> <td>26 PEAK</td> </tr> <tr> <td>3 5924.10</td> <td>57.51</td> <td>68.96</td> <td>-11.45</td> <td>38.45</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>260</td> <td>26 PEAK</td> </tr> <tr> <td>4 5942.83</td> <td>58.02</td> <td>68.30</td> <td>-10.28</td> <td>38.99</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>260</td> <td>26 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.80	58.67	111.36	-52.69	39.36	35.08	14.02	29.79	0.00	260	26 PEAK	2 5861.10	75.28	109.19	-33.91	55.99	35.09	13.99	29.79	0.00	260	26 PEAK	3 5924.10	57.51	68.96	-11.45	38.45	35.19	13.69	29.82	0.00	260	26 PEAK	4 5942.83	58.02	68.30	-10.28	38.99	35.21	13.66	29.84	0.00	260	26 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5854.80	58.67	111.36	-52.69	39.36	35.08	14.02	29.79	0.00	260	26 PEAK																																																																		
2 5861.10	75.28	109.19	-33.91	55.99	35.09	13.99	29.79	0.00	260	26 PEAK																																																																		
3 5924.10	57.51	68.96	-11.45	38.45	35.19	13.69	29.82	0.00	260	26 PEAK																																																																		
4 5942.83	58.02	68.30	-10.28	38.99	35.21	13.66	29.84	0.00	260	26 PEAK																																																																		

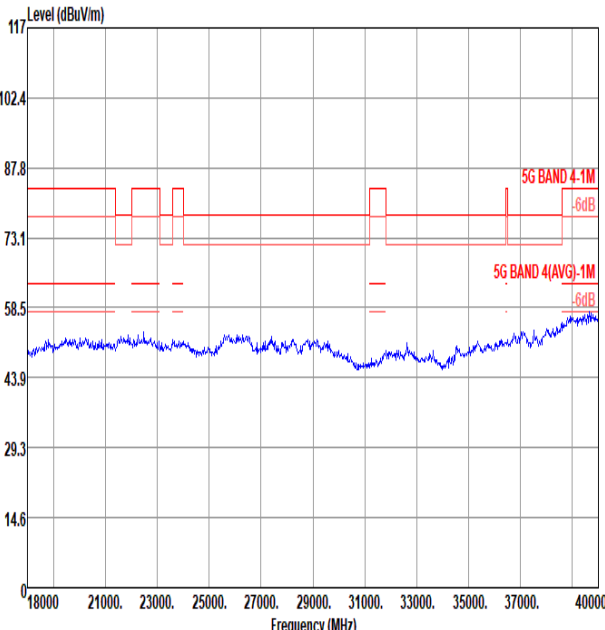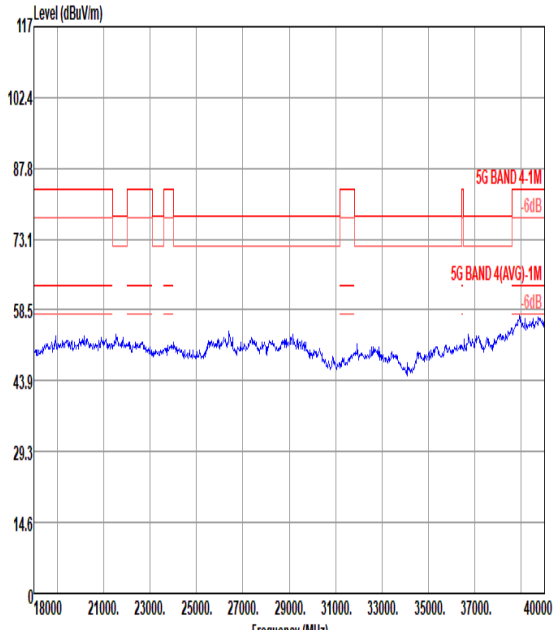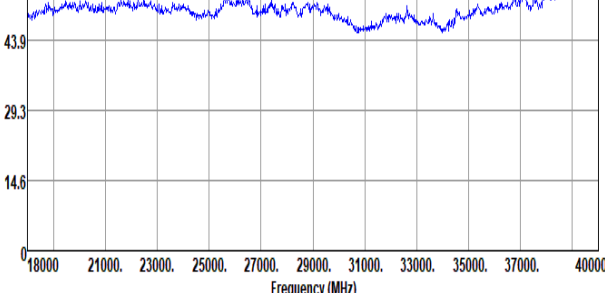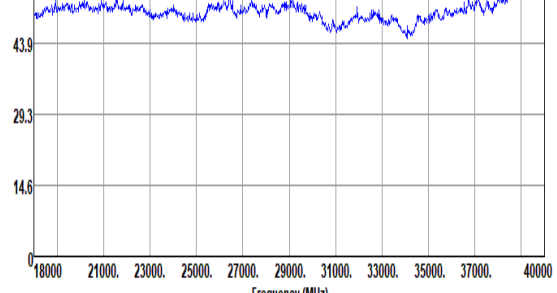

Mode	65	
	Emission above 18GHz	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz	
ANT	7+8	
Pol.	Horizontal	Vertical
Peak		
Avg		



Mode	71																																																																																																																																																																																	
	Emission below 1GHz																																																																																																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_RU 484/66_5775MHz																																																																																																																																																																																	
ANT	7+8																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	<p>Site : 03CH08-KS Condition : 5G BAND 4 3m CBL 6111D 59913 HORIZONTAL Project : 311602 Mode : 71 IMEI :</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>97.90</td><td>22.71</td><td>-20.79</td><td>43.50</td><td>37.01</td><td>15.66</td><td>1.44</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>127.97</td><td>18.14</td><td>-25.36</td><td>43.50</td><td>30.35</td><td>17.56</td><td>1.63</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>218.18</td><td>19.33</td><td>-26.67</td><td>46.00</td><td>33.44</td><td>15.14</td><td>2.15</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>253.10</td><td>21.61</td><td>-24.39</td><td>46.00</td><td>31.90</td><td>18.80</td><td>2.31</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>378.23</td><td>21.48</td><td>-24.52</td><td>46.00</td><td>28.98</td><td>21.10</td><td>2.84</td><td>31.44</td><td>---</td><td>--- Peak</td></tr> <tr><td>6</td><td>629.46</td><td>26.13</td><td>-19.87</td><td>46.00</td><td>27.70</td><td>26.18</td><td>3.66</td><td>31.41</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	97.90	22.71	-20.79	43.50	37.01	15.66	1.44	31.40	---	--- Peak	2	127.97	18.14	-25.36	43.50	30.35	17.56	1.63	31.40	---	--- Peak	3	218.18	19.33	-26.67	46.00	33.44	15.14	2.15	31.40	---	--- Peak	4	253.10	21.61	-24.39	46.00	31.90	18.80	2.31	31.40	---	--- Peak	5	378.23	21.48	-24.52	46.00	28.98	21.10	2.84	31.44	---	--- Peak	6	629.46	26.13	-19.87	46.00	27.70	26.18	3.66	31.41	---	--- Peak	<p>Site : 03CH08-KS Condition : 5G BAND 4 3m CBL 6111D 59913 VERTICAL Project : 311602 Mode : 71 IMEI :</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>40.67</td><td>33.34</td><td>-6.66</td><td>40.00</td><td>44.99</td><td>19.11</td><td>0.64</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>92.08</td><td>27.28</td><td>-16.22</td><td>43.50</td><td>42.47</td><td>14.86</td><td>1.35</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>147.37</td><td>22.55</td><td>-20.95</td><td>43.50</td><td>35.08</td><td>17.12</td><td>1.75</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>256.01</td><td>22.55</td><td>-23.45</td><td>46.00</td><td>32.40</td><td>19.22</td><td>2.33</td><td>31.40</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>453.89</td><td>23.26</td><td>-22.74</td><td>46.00</td><td>28.81</td><td>22.84</td><td>3.10</td><td>31.49</td><td>---</td><td>--- Peak</td></tr> <tr><td>6</td><td>960.23</td><td>31.40</td><td>-22.60</td><td>54.00</td><td>27.42</td><td>29.83</td><td>4.51</td><td>30.36</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	40.67	33.34	-6.66	40.00	44.99	19.11	0.64	31.40	---	--- Peak	2	92.08	27.28	-16.22	43.50	42.47	14.86	1.35	31.40	---	--- Peak	3	147.37	22.55	-20.95	43.50	35.08	17.12	1.75	31.40	---	--- Peak	4	256.01	22.55	-23.45	46.00	32.40	19.22	2.33	31.40	---	--- Peak	5	453.89	23.26	-22.74	46.00	28.81	22.84	3.10	31.49	---	--- Peak	6	960.23	31.40	-22.60	54.00	27.42	29.83	4.51	30.36	---	--- Peak
	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																									
1	97.90	22.71	-20.79	43.50	37.01	15.66	1.44	31.40	---	--- Peak																																																																																																																																																																								
2	127.97	18.14	-25.36	43.50	30.35	17.56	1.63	31.40	---	--- Peak																																																																																																																																																																								
3	218.18	19.33	-26.67	46.00	33.44	15.14	2.15	31.40	---	--- Peak																																																																																																																																																																								
4	253.10	21.61	-24.39	46.00	31.90	18.80	2.31	31.40	---	--- Peak																																																																																																																																																																								
5	378.23	21.48	-24.52	46.00	28.98	21.10	2.84	31.44	---	--- Peak																																																																																																																																																																								
6	629.46	26.13	-19.87	46.00	27.70	26.18	3.66	31.41	---	--- Peak																																																																																																																																																																								
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																									
1	40.67	33.34	-6.66	40.00	44.99	19.11	0.64	31.40	---	--- Peak																																																																																																																																																																								
2	92.08	27.28	-16.22	43.50	42.47	14.86	1.35	31.40	---	--- Peak																																																																																																																																																																								
3	147.37	22.55	-20.95	43.50	35.08	17.12	1.75	31.40	---	--- Peak																																																																																																																																																																								
4	256.01	22.55	-23.45	46.00	32.40	19.22	2.33	31.40	---	--- Peak																																																																																																																																																																								
5	453.89	23.26	-22.74	46.00	28.81	22.84	3.10	31.49	---	--- Peak																																																																																																																																																																								
6	960.23	31.40	-22.60	54.00	27.42	29.83	4.51	30.36	---	--- Peak																																																																																																																																																																								



<WLAN+WWAN Co-location mode>

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 66	2400-2483.5	2400-2483.5	7+8	802.11ax HE40	06	2437	MCS0	-	-
	U-NII-2C	5.47-5.725	7+8	802.11ax HE160	114	5570	MCS0	Full RU	-
	RSS192 LTE B48 BW=20M								
Mode 67	2400-2483.5	2400-2483.5	8	802.11ax HE40	06	2437	MCS0	-	-
	2400-2483.5	2400-2483.5	7	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
	U-NII-2C	5.47-5.725	7+8	802.11ax HE160	114	5570	MCS0	Full RU	-
	RSS192 LTE B48 BW=20M								





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
66	802.11ax HE40	06	2484.06	50.61	54.00	-3.39	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	06	4874.00	45.91	74.00	-28.09	V	Peak	Pass	Harmonic
66	802.11ax HE160	114	5445.14	52.77	54.00	-1.23	V	Average	Pass	Band Edge
	802.11ax HE160	114	11140.00	44.56	74.00	-29.44	V	PEAK	Pass	Harmonic
67	802.11ax HE40	06	2483.56	51.87	54.00	-2.13	V	Average	Pass	Band Edge
	802.11ax HE40	06	4874.00	46.21	74.00	-27.79	V	Peak	Pass	Harmonic
67	Bluetooth-LE_GSKF	00	2389.95	48.08	54.00	-5.92	H	Average	Pass	Band Edge
	Bluetooth-LE_GSKF	00	4804.00	40.73	74.00	-33.27	V	Peak	Pass	Harmonic
67	802.11ax HE160	114	5453.93	52.56	54.00	-1.44	V	Average	Pass	Band Edge
	802.11ax HE160	114	11140.00	44.44	74.00	-29.56	H	PEAK	Pass	Harmonic







		66																																																																																		
Mode	Band Edge - L																																																																																			
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																			
ANT	7+8																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>59.50</td> <td>74.00</td> <td>-14.50</td> <td>43.64</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	59.50	74.00	-14.50	43.64	31.98	8.77	30.89	6.00	100	134	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>110.29</td> <td>-----</td> <td>-----</td> <td>94.17</td> <td>32.04</td> <td>8.88</td> <td>30.80</td> <td>6.00</td> <td>100</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	110.29	-----	-----	94.17	32.04	8.88	30.80	6.00	100	134
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.88	59.50	74.00	-14.50	43.64	31.98	8.77	30.89	6.00	100	134	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	110.29	-----	-----	94.17	32.04	8.88	30.80	6.00	100	134	PEAK																																																																								
Avg																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>30.67</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	46.53	54.00	-7.47	30.67	31.98	8.77	30.89	6.00	100	134	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>98.89</td> <td>-----</td> <td>-----</td> <td>82.77</td> <td>32.04</td> <td>8.88</td> <td>30.80</td> <td>6.00</td> <td>100</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	98.89	-----	-----	82.77	32.04	8.88	30.80	6.00	100	134
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.88	46.53	54.00	-7.47	30.67	31.98	8.77	30.89	6.00	100	134	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	98.89	-----	-----	82.77	32.04	8.88	30.80	6.00	100	134	AVERAGE																																																																								

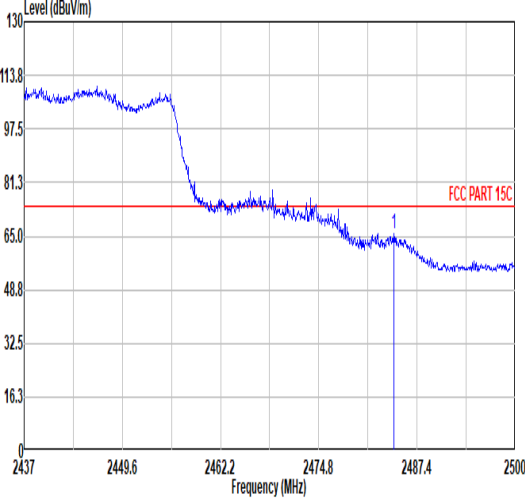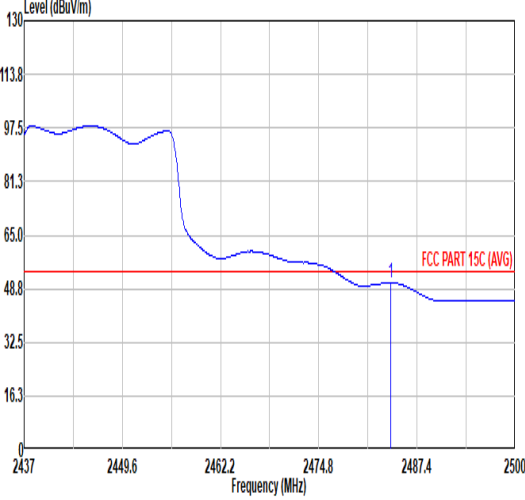

	66																																																		
Mode	Band Edge - R																																																		
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																		
ANT	7+8																																																		
Pol.	Horizontal	Fundamental																																																	
Peak	 <table border="1" data-bbox="268 1115 794 1238"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.44</td> <td>65.74</td> <td>74.00</td> <td>-8.26</td> <td>49.20</td> <td>32.13</td> <td>9.05</td> <td>30.64</td> <td>6.00</td> <td>100</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	2484.44	65.74	74.00	-8.26	49.20	32.13	9.05	30.64	6.00	100	134	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	2484.44	65.74	74.00	-8.26	49.20	32.13	9.05	30.64	6.00	100	134	PEAK																																							
Avg	 <table border="1" data-bbox="268 1796 794 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>50.61</td> <td>54.00</td> <td>-3.39</td> <td>34.07</td> <td>32.13</td> <td>9.05</td> <td>30.64</td> <td>6.00</td> <td>100</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	2484.06	50.61	54.00	-3.39	34.07	32.13	9.05	30.64	6.00	100	134	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	2484.06	50.61	54.00	-3.39	34.07	32.13	9.05	30.64	6.00	100	134	AVERAGE																																							

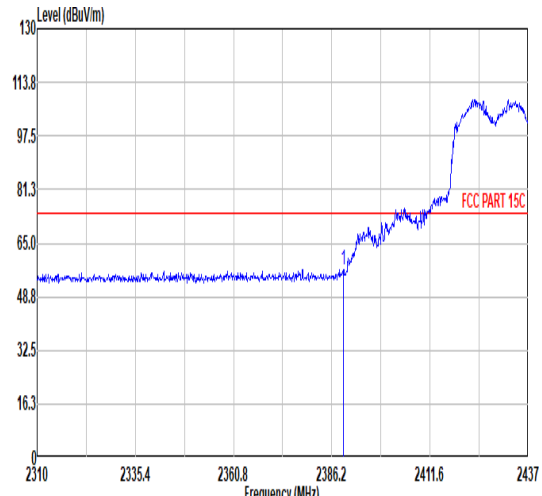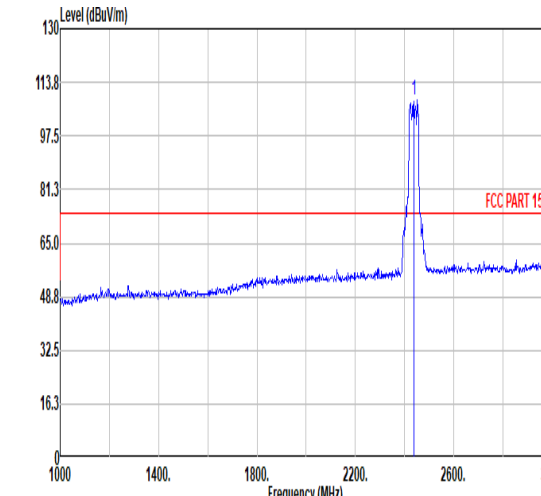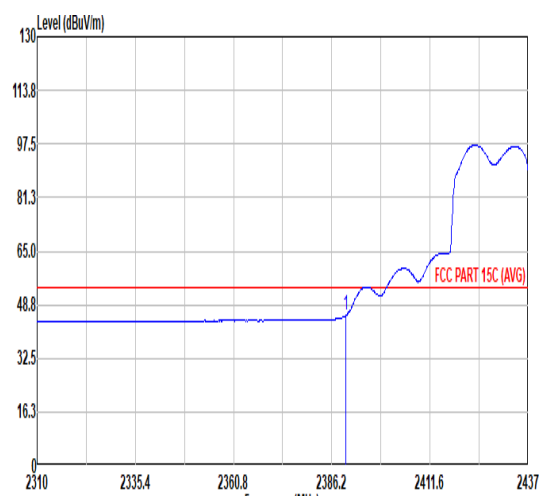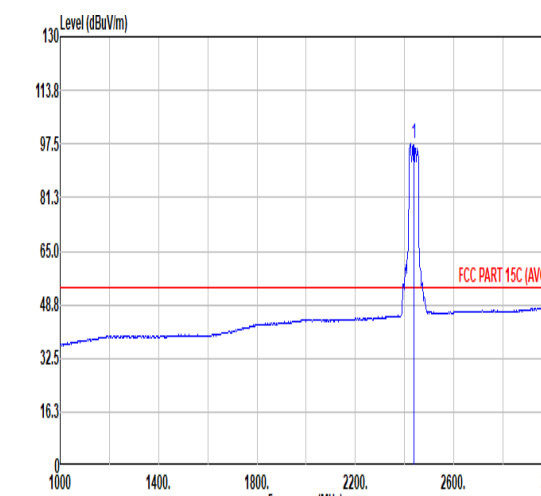

		66																																																																																
Mode		Band Edge - L																																																																																
		2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																
ANT		7+8																																																																																
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>0</p> <p>2310</p> <p>2335.4</p> <p>2360.8</p> <p>2386.2</p> <p>2411.6</p> <p>2437</p> <p>Frequency (MHz)</p> <p style="color: red;">FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.12</td> <td>57.11</td> <td>74.00</td> <td>-16.89</td> <td>41.25</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>8 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.12	57.11	74.00	-16.89	41.25	31.98	8.77	30.89	6.00	100	8 PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>0</p> <p>1000</p> <p>1400.</p> <p>1800.</p> <p>2200.</p> <p>2600.</p> <p>3000</p> <p>Frequency (MHz)</p> <p style="color: red;">FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>108.33</td> <td>-----</td> <td>-----</td> <td>92.02</td> <td>32.08</td> <td>8.96</td> <td>30.73</td> <td>6.00</td> <td>100</td> <td>8 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	108.33	-----	-----	92.02	32.08	8.96	30.73	6.00	100	8 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.12	57.11	74.00	-16.89	41.25	31.98	8.77	30.89	6.00	100	8 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	108.33	-----	-----	92.02	32.08	8.96	30.73	6.00	100	8 PEAK																																																																							
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>2310</p> <p>2335.4</p> <p>2360.8</p> <p>2386.2</p> <p>2411.6</p> <p>2437</p> <p>Frequency (MHz)</p> <p style="color: red;">FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>45.52</td> <td>54.00</td> <td>-8.48</td> <td>29.66</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>8 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	45.52	54.00	-8.48	29.66	31.98	8.77	30.89	6.00	100	8 AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000</p> <p>1400.</p> <p>1800.</p> <p>2200.</p> <p>2600.</p> <p>3000</p> <p>Frequency (MHz)</p> <p style="color: red;">FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.46</td> <td>-----</td> <td>-----</td> <td>81.36</td> <td>32.04</td> <td>8.87</td> <td>30.81</td> <td>6.00</td> <td>100</td> <td>8 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.46	-----	-----	81.36	32.04	8.87	30.81	6.00	100	8 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.88	45.52	54.00	-8.48	29.66	31.98	8.77	30.89	6.00	100	8 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	97.46	-----	-----	81.36	32.04	8.87	30.81	6.00	100	8 AVERAGE																																																																							



	66																																													
Mode	Band Edge - R																																													
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																													
ANT	7+8																																													
Pol.	Vertical	Fundamental																																												
Peak	<table border="1" data-bbox="268 1115 778 1238"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.87</td> <td>62.01</td> <td>74.00</td> <td>-11.99</td> <td>45.48</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>8 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.87	62.01	74.00	-11.99	45.48	32.13	9.05	30.65	6.00	100	8 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.87	62.01	74.00	-11.99	45.48	32.13	9.05	30.65	6.00	100	8 PEAK																																			
Avg	<table border="1" data-bbox="268 1792 778 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>48.40</td> <td>54.00</td> <td>-5.60</td> <td>31.87</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>8 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.56	48.40	54.00	-5.60	31.87	32.13	9.05	30.65	6.00	100	8 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.56	48.40	54.00	-5.60	31.87	32.13	9.05	30.65	6.00	100	8 AVERAGE																																			



Mode	66																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																																																																																																	
ANT	7+8																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>61.24</td> <td>74.00</td> <td>-12.76</td> <td>82.48</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>41.40</td> <td>74.00</td> <td>-32.60</td> <td>60.45</td> <td>34.10</td> <td>12.29</td> <td>65.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>60.11</td> <td>74.00</td> <td>-13.89</td> <td>78.00</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>43.28</td> <td>74.00</td> <td>-30.72</td> <td>58.00</td> <td>35.80</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3640.00	61.24	74.00	-12.76	82.48	33.18	10.72	65.14	0.00	---	---	Peak	2	4874.00	41.40	74.00	-32.60	60.45	34.10	12.29	65.44	0.00	---	---	Peak	3	5570.00	60.11	74.00	-13.89	78.00	34.58	13.19	65.66	0.00	---	---	Peak	4	7311.00	43.28	74.00	-30.72	58.00	35.80	14.73	65.25	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>61.02</td> <td>74.00</td> <td>-12.98</td> <td>82.26</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>45.91</td> <td>74.00</td> <td>-28.09</td> <td>64.96</td> <td>34.10</td> <td>12.29</td> <td>65.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>61.77</td> <td>74.00</td> <td>-12.23</td> <td>79.66</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>44.94</td> <td>74.00</td> <td>-29.06</td> <td>59.66</td> <td>35.80</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3640.00	61.02	74.00	-12.98	82.26	33.18	10.72	65.14	0.00	---	---	Peak	2	4874.00	45.91	74.00	-28.09	64.96	34.10	12.29	65.44	0.00	---	---	Peak	3	5570.00	61.77	74.00	-12.23	79.66	34.58	13.19	65.66	0.00	---	---	Peak	4	7311.00	44.94	74.00	-29.06	59.66	35.80	14.73	65.25	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	3640.00	61.24	74.00	-12.76	82.48	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																																																						
2	4874.00	41.40	74.00	-32.60	60.45	34.10	12.29	65.44	0.00	---	---	Peak																																																																																																																																																						
3	5570.00	60.11	74.00	-13.89	78.00	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																																																						
4	7311.00	43.28	74.00	-30.72	58.00	35.80	14.73	65.25	0.00	---	---	Peak																																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	3640.00	61.02	74.00	-12.98	82.26	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																																																						
2	4874.00	45.91	74.00	-28.09	64.96	34.10	12.29	65.44	0.00	---	---	Peak																																																																																																																																																						
3	5570.00	61.77	74.00	-12.23	79.66	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																																																						
4	7311.00	44.94	74.00	-29.06	59.66	35.80	14.73	65.25	0.00	---	---	Peak																																																																																																																																																						



		66																																																																																																																										
Mode	Band Edge - L																																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																											
ANT	7+8																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.52</td> <td>61.39</td> <td>74.00</td> <td>-12.61</td> <td>43.36</td> <td>34.52</td> <td>13.11</td> <td>29.60</td> <td>0.00</td> <td>100</td> <td>61 PEAK</td> </tr> <tr> <td>2</td> <td>5464.30</td> <td>58.50</td> <td>68.30</td> <td>-9.80</td> <td>40.41</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5431.52	61.39	74.00	-12.61	43.36	34.52	13.11	29.60	0.00	100	61 PEAK	2	5464.30	58.50	68.30	-9.80	40.41	34.53	13.18	29.62	0.00	100	61 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.57</td> <td>74.00</td> <td>29.57</td> <td>93.38</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>0.00</td> <td>100</td> <td>61 Peak</td> </tr> <tr> <td>2</td> <td>3640.00</td> <td>119.07</td> <td>74.00</td> <td>45.07</td> <td>104.75</td> <td>33.18</td> <td>10.72</td> <td>29.58</td> <td>0.00</td> <td>100</td> <td>61 Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>99.61</td> <td>74.00</td> <td>25.61</td> <td>81.57</td> <td>34.58</td> <td>13.19</td> <td>29.73</td> <td>0.00</td> <td>100</td> <td>61 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	103.57	74.00	29.57	93.38	32.06	8.91	30.78	0.00	100	61 Peak	2	3640.00	119.07	74.00	45.07	104.75	33.18	10.72	29.58	0.00	100	61 Peak	3	5570.00	99.61	74.00	25.61	81.57	34.58	13.19	29.73	0.00	100	61 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5431.52	61.39	74.00	-12.61	43.36	34.52	13.11	29.60	0.00	100	61 PEAK																																																																																																																	
2	5464.30	58.50	68.30	-9.80	40.41	34.53	13.18	29.62	0.00	100	61 PEAK																																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	2437.00	103.57	74.00	29.57	93.38	32.06	8.91	30.78	0.00	100	61 Peak																																																																																																																	
2	3640.00	119.07	74.00	45.07	104.75	33.18	10.72	29.58	0.00	100	61 Peak																																																																																																																	
3	5570.00	99.61	74.00	25.61	81.57	34.58	13.19	29.73	0.00	100	61 Peak																																																																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.12</td> <td>48.93</td> <td>54.00</td> <td>-5.07</td> <td>30.87</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5449.12	48.93	54.00	-5.07	30.87	34.52	13.15	29.61	0.00	100	61 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>94.64</td> <td>54.00</td> <td>40.64</td> <td>84.49</td> <td>32.05</td> <td>8.89</td> <td>30.79</td> <td>0.00</td> <td>100</td> <td>61 Average</td> </tr> <tr> <td>2</td> <td>3640.00</td> <td>114.54</td> <td>54.00</td> <td>60.54</td> <td>100.22</td> <td>33.18</td> <td>10.72</td> <td>29.58</td> <td>0.00</td> <td>100</td> <td>61 Average</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>88.66</td> <td>54.00</td> <td>34.66</td> <td>70.61</td> <td>34.62</td> <td>13.19</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>61 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	94.64	54.00	40.64	84.49	32.05	8.89	30.79	0.00	100	61 Average	2	3640.00	114.54	54.00	60.54	100.22	33.18	10.72	29.58	0.00	100	61 Average	3	5570.00	88.66	54.00	34.66	70.61	34.62	13.19	29.76	0.00	100	61 Average												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5449.12	48.93	54.00	-5.07	30.87	34.52	13.15	29.61	0.00	100	61 AVERAGE																																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	2437.00	94.64	54.00	40.64	84.49	32.05	8.89	30.79	0.00	100	61 Average																																																																																																																	
2	3640.00	114.54	54.00	60.54	100.22	33.18	10.72	29.58	0.00	100	61 Average																																																																																																																	
3	5570.00	88.66	54.00	34.66	70.61	34.62	13.19	29.76	0.00	100	61 Average																																																																																																																	



Mode	66																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																								
ANT	7+8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.27</td> <td>61.17</td> <td>68.30</td> <td>-7.13</td> <td>42.40</td> <td>34.84</td> <td>13.72</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.27	61.17	68.30	-7.13	42.40	34.84	13.72	29.79	0.00	100	61 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5727.27	61.17	68.30	-7.13	42.40	34.84	13.72	29.79	0.00	100	61 PEAK																															



Mode	66																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																									
ANT	7+8																																																																																																																									
Pol.	Vertical	Fundamental																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.38</td> <td>65.11</td> <td>74.00</td> <td>-8.89</td> <td>47.06</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>75 PEAK</td> </tr> <tr> <td>2</td> <td>5465.84</td> <td>64.33</td> <td>68.30</td> <td>-3.97</td> <td>46.23</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>75 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5445.38	65.11	74.00	-8.89	47.06	34.52	13.14	29.61	0.00	100	75 PEAK	2	5465.84	64.33	68.30	-3.97	46.23	34.53	13.19	29.62	0.00	100	75 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>99.37</td> <td>74.00</td> <td>25.37</td> <td>89.22</td> <td>32.05</td> <td>8.89</td> <td>30.79</td> <td>0.00</td> <td>100</td> <td>75 Peak</td> </tr> <tr> <td>2</td> <td>3640.00</td> <td>115.20</td> <td>74.00</td> <td>41.20</td> <td>100.92</td> <td>33.16</td> <td>10.68</td> <td>29.56</td> <td>0.00</td> <td>100</td> <td>75 Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>102.19</td> <td>74.00</td> <td>28.19</td> <td>84.06</td> <td>34.56</td> <td>13.24</td> <td>29.67</td> <td>0.00</td> <td>100</td> <td>75 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.37	74.00	25.37	89.22	32.05	8.89	30.79	0.00	100	75 Peak	2	3640.00	115.20	74.00	41.20	100.92	33.16	10.68	29.56	0.00	100	75 Peak	3	5570.00	102.19	74.00	28.19	84.06	34.56	13.24	29.67	0.00	100	75 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5445.38	65.11	74.00	-8.89	47.06	34.52	13.14	29.61	0.00	100	75 PEAK																																																																																																															
2	5465.84	64.33	68.30	-3.97	46.23	34.53	13.19	29.62	0.00	100	75 PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	2437.00	99.37	74.00	25.37	89.22	32.05	8.89	30.79	0.00	100	75 Peak																																																																																																															
2	3640.00	115.20	74.00	41.20	100.92	33.16	10.68	29.56	0.00	100	75 Peak																																																																																																															
3	5570.00	102.19	74.00	28.19	84.06	34.56	13.24	29.67	0.00	100	75 Peak																																																																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.14</td> <td>52.77</td> <td>54.00</td> <td>-1.23</td> <td>34.72</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5445.14	52.77	54.00	-1.23	34.72	34.52	13.14	29.61	0.00	100	75 Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>90.61</td> <td>54.00</td> <td>36.61</td> <td>80.38</td> <td>32.06</td> <td>8.93</td> <td>30.76</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> <tr> <td>2</td> <td>3640.00</td> <td>102.20</td> <td>54.00</td> <td>48.20</td> <td>87.88</td> <td>33.18</td> <td>10.72</td> <td>29.58</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>91.99</td> <td>54.00</td> <td>37.99</td> <td>73.91</td> <td>34.58</td> <td>13.21</td> <td>29.71</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	90.61	54.00	36.61	80.38	32.06	8.93	30.76	0.00	100	75 Average	2	3640.00	102.20	54.00	48.20	87.88	33.18	10.72	29.58	0.00	100	75 Average	3	5570.00	91.99	54.00	37.99	73.91	34.58	13.21	29.71	0.00	100	75 Average												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5445.14	52.77	54.00	-1.23	34.72	34.52	13.14	29.61	0.00	100	75 Average																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	2437.00	90.61	54.00	36.61	80.38	32.06	8.93	30.76	0.00	100	75 Average																																																																																																															
2	3640.00	102.20	54.00	48.20	87.88	33.18	10.72	29.58	0.00	100	75 Average																																																																																																															
3	5570.00	91.99	54.00	37.99	73.91	34.58	13.21	29.71	0.00	100	75 Average																																																																																																															



Mode	66																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																														
ANT	7+8																																														
Pol.	Vertical	Fundamental																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5728.83</td> <td>62.22</td> <td>68.30</td> <td>-6.08</td> <td>43.43</td> <td>34.84</td> <td>13.74</td> <td>29.79</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 75 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5728.83	62.22	68.30	-6.08	43.43	34.84	13.74	29.79	0.00									100 75 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5728.83	62.22	68.30	-6.08	43.43	34.84	13.74	29.79	0.00																																							
								100 75 PEAK																																							



Mode	66																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																
ANT	7+8																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>44.29</td> <td>74.00</td> <td>-29.71</td> <td>53.57</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	44.29	74.00	-29.71	53.57	38.18	18.19	65.65	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>53.84</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	44.56	74.00	-29.44	53.84	38.18	18.19	65.65	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11140.00	44.29	74.00	-29.71	53.57	38.18	18.19	65.65	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11140.00	44.56	74.00	-29.44	53.84	38.18	18.19	65.65	0.00	---	---	PEAK																																																																						



Mode	67																																																																																														
	Band Edge - L																																																																																														
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>58.44</td> <td>74.00</td> <td>-15.56</td> <td>42.58</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.76	58.44	74.00	-15.56	42.58	31.98	8.77	30.89	6.00	100	118	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.39</td> <td>74.00</td> <td>16.39</td> <td>74.45</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>118</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>106.78</td> <td>74.00</td> <td>32.78</td> <td>90.59</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>100</td> <td>118</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	90.39	74.00	16.39	74.45	32.00	8.81	30.87	6.00	100	118	Peak	2	2437.00	106.78	74.00	32.78	90.59	32.06	8.91	30.78	6.00	100	118	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2389.76	58.44	74.00	-15.56	42.58	31.98	8.77	30.89	6.00	100	118	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	90.39	74.00	16.39	74.45	32.00	8.81	30.87	6.00	100	118	Peak																																																																																			
2	2437.00	106.78	74.00	32.78	90.59	32.06	8.91	30.78	6.00	100	118	Peak																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>46.78</td> <td>54.00</td> <td>-7.22</td> <td>30.92</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.88	46.78	54.00	-7.22	30.92	31.98	8.77	30.89	6.00	100	118	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>88.45</td> <td>54.00</td> <td>34.45</td> <td>72.51</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>118</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>96.10</td> <td>54.00</td> <td>42.10</td> <td>79.91</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>100</td> <td>118</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	88.45	54.00	34.45	72.51	32.00	8.81	30.87	6.00	100	118	Average	2	2437.00	96.10	54.00	42.10	79.91	32.06	8.91	30.78	6.00	100	118	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2389.88	46.78	54.00	-7.22	30.92	31.98	8.77	30.89	6.00	100	118	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	88.45	54.00	34.45	72.51	32.00	8.81	30.87	6.00	100	118	Average																																																																																			
2	2437.00	96.10	54.00	42.10	79.91	32.06	8.91	30.78	6.00	100	118	Average																																																																																			



Mode	67																																																		
	Band Edge - R																																																		
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																		
ANT	8																																																		
Pol.	Horizontal	Fundamental																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.75</td> <td>61.09</td> <td>74.00</td> <td>-12.91</td> <td>44.56</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	2483.75	61.09	74.00	-12.91	44.56	32.13	9.05	30.65	6.00	100	118	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	2483.75	61.09	74.00	-12.91	44.56	32.13	9.05	30.65	6.00	100	118	PEAK																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>47.62</td> <td>54.00</td> <td>-6.38</td> <td>31.09</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	2483.56	47.62	54.00	-6.38	31.09	32.13	9.05	30.65	6.00	100	118	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	2483.56	47.62	54.00	-6.38	31.09	32.13	9.05	30.65	6.00	100	118	AVERAGE																																							



Mode	67																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																																
ANT	8																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>57.70</td> <td>74.00</td> <td>-16.30</td> <td>41.84</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	57.70	74.00	-16.30	41.84	31.98	8.77	30.89	6.00	100	110	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>88.17</td> <td>74.00</td> <td>14.17</td> <td>72.23</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>110</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>104.09</td> <td>74.00</td> <td>30.09</td> <td>87.90</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>100</td> <td>110</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.17	74.00	14.17	72.23	32.00	8.81	30.87	6.00	100	110	Peak	2	2437.00	104.09	74.00	30.09	87.90	32.06	8.91	30.78	6.00	100	110	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2388.74	57.70	74.00	-16.30	41.84	31.98	8.77	30.89	6.00	100	110	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	88.17	74.00	14.17	72.23	32.00	8.81	30.87	6.00	100	110	Peak																																																																																					
2	2437.00	104.09	74.00	30.09	87.90	32.06	8.91	30.78	6.00	100	110	Peak																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>45.70</td> <td>54.00</td> <td>-8.30</td> <td>29.84</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	45.70	54.00	-8.30	29.84	31.98	8.77	30.89	6.00	100	110	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>86.45</td> <td>54.00</td> <td>32.45</td> <td>70.51</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>110</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>93.86</td> <td>54.00</td> <td>39.86</td> <td>77.67</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>100</td> <td>110</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	86.45	54.00	32.45	70.51	32.00	8.81	30.87	6.00	100	110	Average	2	2437.00	93.86	54.00	39.86	77.67	32.06	8.91	30.78	6.00	100	110	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.88	45.70	54.00	-8.30	29.84	31.98	8.77	30.89	6.00	100	110	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	86.45	54.00	32.45	70.51	32.00	8.81	30.87	6.00	100	110	Average																																																																																					
2	2437.00	93.86	54.00	39.86	77.67	32.06	8.91	30.78	6.00	100	110	Average																																																																																					







	67																																																		
Mode	Band Edge - R																																																		
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																		
ANT	8																																																		
Pol.	Vertical	Fundamental																																																	
Peak	<table border="1" data-bbox="255 1108 774 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.25</td> <td>68.47</td> <td>74.00</td> <td>-5.53</td> <td>51.93</td> <td>32.13</td> <td>9.05</td> <td>30.64</td> <td>6.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB							cm	deg		1	2484.25	68.47	74.00	-5.53	51.93	32.13	9.05	30.64	6.00	100	110	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
						cm	deg																																												
1	2484.25	68.47	74.00	-5.53	51.93	32.13	9.05	30.64	6.00	100	110	PEAK																																							
Avg	<table border="1" data-bbox="255 1780 774 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>51.87</td> <td>54.00</td> <td>-2.13</td> <td>35.34</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB							cm	deg		1	2483.56	51.87	54.00	-2.13	35.34	32.13	9.05	30.65	6.00	100	110	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
						cm	deg																																												
1	2483.56	51.87	54.00	-2.13	35.34	32.13	9.05	30.65	6.00	100	110	AVERAGE																																							



Mode	67																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_2400-2483.5_802.11ax HE40_CH06_2437MHz																																																																																																																																																																	
ANT	8																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>61.80</td> <td>74.00</td> <td>-12.20</td> <td>83.04</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>41.53</td> <td>74.00</td> <td>-32.47</td> <td>60.58</td> <td>34.10</td> <td>12.29</td> <td>65.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>59.92</td> <td>74.00</td> <td>-14.08</td> <td>77.81</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>59.14</td> <td>35.80</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3640.00	61.80	74.00	-12.20	83.04	33.18	10.72	65.14	0.00	---	---	Peak	2	4874.00	41.53	74.00	-32.47	60.58	34.10	12.29	65.44	0.00	---	---	Peak	3	5570.00	59.92	74.00	-14.08	77.81	34.58	13.19	65.66	0.00	---	---	Peak	4	7311.00	44.42	74.00	-29.58	59.14	35.80	14.73	65.25	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>60.88</td> <td>74.00</td> <td>-13.12</td> <td>82.12</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>46.21</td> <td>74.00</td> <td>-27.79</td> <td>65.26</td> <td>34.10</td> <td>12.29</td> <td>65.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>62.95</td> <td>74.00</td> <td>-11.05</td> <td>80.84</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>44.22</td> <td>74.00</td> <td>-29.78</td> <td>58.94</td> <td>35.80</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3640.00	60.88	74.00	-13.12	82.12	33.18	10.72	65.14	0.00	---	---	Peak	2	4874.00	46.21	74.00	-27.79	65.26	34.10	12.29	65.44	0.00	---	---	Peak	3	5570.00	62.95	74.00	-11.05	80.84	34.58	13.19	65.66	0.00	---	---	Peak	4	7311.00	44.22	74.00	-29.78	58.94	35.80	14.73	65.25	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	3640.00	61.80	74.00	-12.20	83.04	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																																																						
2	4874.00	41.53	74.00	-32.47	60.58	34.10	12.29	65.44	0.00	---	---	Peak																																																																																																																																																						
3	5570.00	59.92	74.00	-14.08	77.81	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																																																						
4	7311.00	44.42	74.00	-29.58	59.14	35.80	14.73	65.25	0.00	---	---	Peak																																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	3640.00	60.88	74.00	-13.12	82.12	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																																																						
2	4874.00	46.21	74.00	-27.79	65.26	34.10	12.29	65.44	0.00	---	---	Peak																																																																																																																																																						
3	5570.00	62.95	74.00	-11.05	80.84	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																																																						
4	7311.00	44.22	74.00	-29.78	58.94	35.80	14.73	65.25	0.00	---	---	Peak																																																																																																																																																						

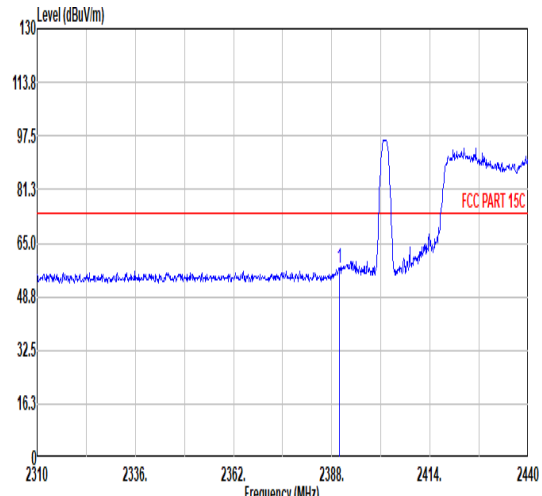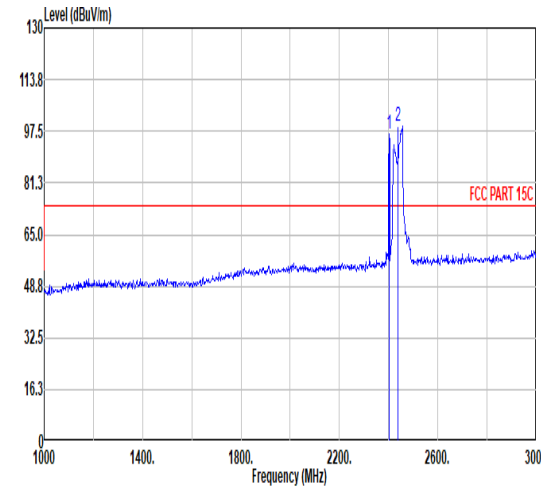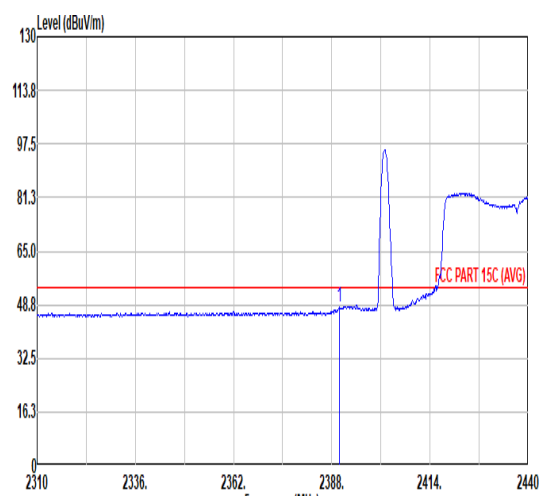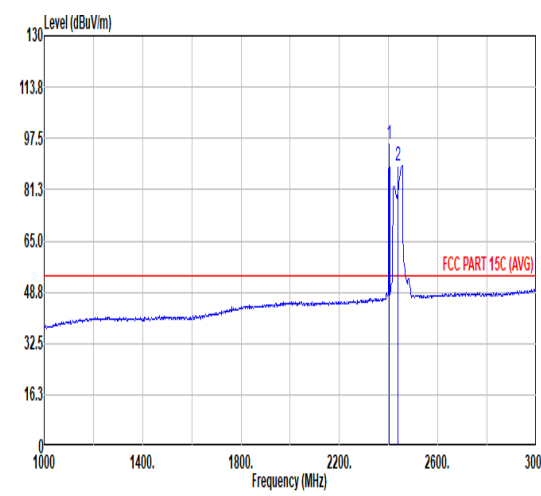

Mode	67																																																																																														
	Band Edge - L																																																																																														
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																														
ANT	7																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>57.49</td> <td>74.00</td> <td>-16.51</td> <td>41.63</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>113</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	57.49	74.00	-16.51	41.63	31.98	8.77	30.89	6.00	113	308	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.58</td> <td>74.00</td> <td>22.58</td> <td>80.64</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>113</td> <td>308</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>99.07</td> <td>74.00</td> <td>25.07</td> <td>82.88</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>113</td> <td>308</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	96.58	74.00	22.58	80.64	32.00	8.81	30.87	6.00	113	308	Peak	2	2437.00	99.07	74.00	25.07	82.88	32.06	8.91	30.78	6.00	113	308	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2389.95	57.49	74.00	-16.51	41.63	31.98	8.77	30.89	6.00	113	308	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	96.58	74.00	22.58	80.64	32.00	8.81	30.87	6.00	113	308	Peak																																																																																			
2	2437.00	99.07	74.00	25.07	82.88	32.06	8.91	30.78	6.00	113	308	Peak																																																																																			
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>48.00</td> <td>54.00</td> <td>-5.92</td> <td>32.22</td> <td>31.98</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>113</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	48.00	54.00	-5.92	32.22	31.98	8.77	30.89	6.00	113	308	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.60</td> <td>54.00</td> <td>41.60</td> <td>79.66</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>113</td> <td>308</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>88.72</td> <td>54.00</td> <td>34.72</td> <td>72.53</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>113</td> <td>308</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	95.60	54.00	41.60	79.66	32.00	8.81	30.87	6.00	113	308	Average	2	2437.00	88.72	54.00	34.72	72.53	32.06	8.91	30.78	6.00	113	308	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2389.95	48.00	54.00	-5.92	32.22	31.98	8.77	30.89	6.00	113	308	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	95.60	54.00	41.60	79.66	32.00	8.81	30.87	6.00	113	308	Average																																																																																			
2	2437.00	88.72	54.00	34.72	72.53	32.06	8.91	30.78	6.00	113	308	Average																																																																																			







	67																																																																																														
Mode	Band Edge - L																																																																																														
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																														
ANT	7																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2335.09</td> <td>56.41</td> <td>74.00</td> <td>-17.59</td> <td>40.87</td> <td>31.06</td> <td>8.61</td> <td>30.93</td> <td>6.00</td> <td>379</td> <td>15</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2335.09	56.41	74.00	-17.59	40.87	31.06	8.61	30.93	6.00	379	15	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.51</td> <td>74.00</td> <td>19.51</td> <td>77.57</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>379</td> <td>15</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>87.95</td> <td>74.00</td> <td>13.95</td> <td>71.76</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>379</td> <td>15</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	93.51	74.00	19.51	77.57	32.00	8.81	30.87	6.00	379	15	Peak	2	2437.00	87.95	74.00	13.95	71.76	32.06	8.91	30.78	6.00	379	15	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2335.09	56.41	74.00	-17.59	40.87	31.06	8.61	30.93	6.00	379	15	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	93.51	74.00	19.51	77.57	32.00	8.81	30.87	6.00	379	15	Peak																																																																																			
2	2437.00	87.95	74.00	13.95	71.76	32.06	8.91	30.78	6.00	379	15	Peak																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.00</td> <td>54.00</td> <td>-6.92</td> <td>31.22</td> <td>31.90</td> <td>8.77</td> <td>30.89</td> <td>6.00</td> <td>379</td> <td>15</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	47.00	54.00	-6.92	31.22	31.90	8.77	30.89	6.00	379	15	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>92.64</td> <td>54.00</td> <td>38.64</td> <td>76.70</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>379</td> <td>15</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>78.14</td> <td>54.00</td> <td>24.14</td> <td>61.95</td> <td>32.06</td> <td>8.91</td> <td>30.78</td> <td>6.00</td> <td>379</td> <td>15</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	92.64	54.00	38.64	76.70	32.00	8.81	30.87	6.00	379	15	Average	2	2437.00	78.14	54.00	24.14	61.95	32.06	8.91	30.78	6.00	379	15	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2389.95	47.00	54.00	-6.92	31.22	31.90	8.77	30.89	6.00	379	15	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	2402.00	92.64	54.00	38.64	76.70	32.00	8.81	30.87	6.00	379	15	Average																																																																																			
2	2437.00	78.14	54.00	24.14	61.95	32.06	8.91	30.78	6.00	379	15	Average																																																																																			



Mode	67																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																					
ANT	7																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>62.75</td> <td>74.00</td> <td>-11.25</td> <td>83.99</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>40.69</td> <td>74.00</td> <td>-33.31</td> <td>59.47</td> <td>34.10</td> <td>12.55</td> <td>65.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>61.40</td> <td>74.00</td> <td>-12.60</td> <td>79.29</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3640.00	62.75	74.00	-11.25	83.99	33.18	10.72	65.14	0.00	---	---	Peak	2	4804.00	40.69	74.00	-33.31	59.47	34.10	12.55	65.43	0.00	---	---	Peak	3	5570.00	61.40	74.00	-12.60	79.29	34.58	13.19	65.66	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3640.00</td> <td>59.13</td> <td>74.00</td> <td>-14.87</td> <td>80.37</td> <td>33.18</td> <td>10.72</td> <td>65.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>40.73</td> <td>74.00</td> <td>-33.27</td> <td>59.51</td> <td>34.10</td> <td>12.55</td> <td>65.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5570.00</td> <td>61.00</td> <td>74.00</td> <td>-13.00</td> <td>78.89</td> <td>34.58</td> <td>13.19</td> <td>65.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3640.00	59.13	74.00	-14.87	80.37	33.18	10.72	65.14	0.00	---	---	Peak	2	4804.00	40.73	74.00	-33.27	59.51	34.10	12.55	65.43	0.00	---	---	Peak	3	5570.00	61.00	74.00	-13.00	78.89	34.58	13.19	65.66	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	3640.00	62.75	74.00	-11.25	83.99	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																										
2	4804.00	40.69	74.00	-33.31	59.47	34.10	12.55	65.43	0.00	---	---	Peak																																																																																																																										
3	5570.00	61.40	74.00	-12.60	79.29	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	3640.00	59.13	74.00	-14.87	80.37	33.18	10.72	65.14	0.00	---	---	Peak																																																																																																																										
2	4804.00	40.73	74.00	-33.27	59.51	34.10	12.55	65.43	0.00	---	---	Peak																																																																																																																										
3	5570.00	61.00	74.00	-13.00	78.89	34.58	13.19	65.66	0.00	---	---	Peak																																																																																																																										

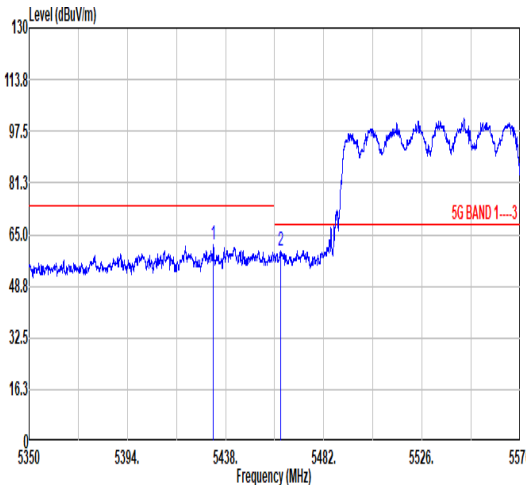
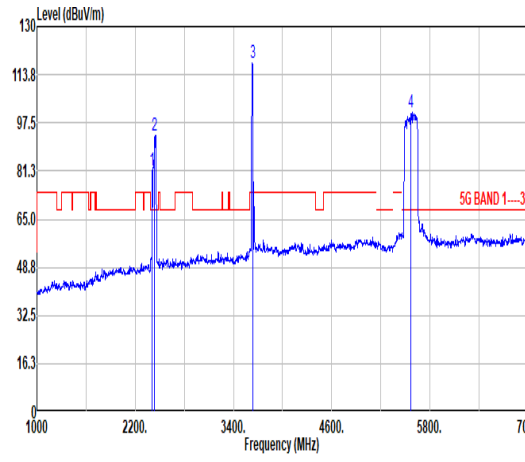
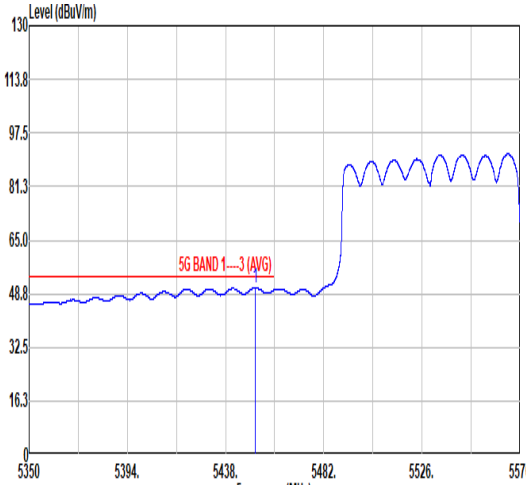
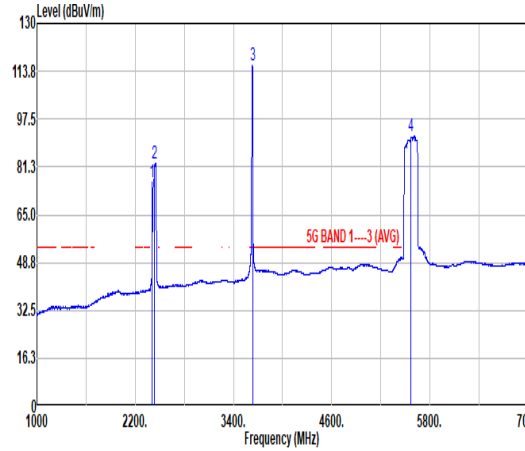


Mode	67																																																																																																																																							
	Band Edge - L																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																																							
ANT	7+8																																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																																						
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.40</td> <td>61.58</td> <td>74.00</td> <td>-12.42</td> <td>43.55</td> <td>34.52</td> <td>13.11</td> <td>29.60</td> <td>0.00</td> <td>100</td> <td>233 PEAK</td> </tr> <tr> <td>2</td> <td>5462.54</td> <td>59.86</td> <td>68.30</td> <td>-8.44</td> <td>41.77</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>233 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5432.40	61.58	74.00	-12.42	43.55	34.52	13.11	29.60	0.00	100	233 PEAK	2	5462.54	59.86	68.30	-8.44	41.77	34.53	13.18	29.62	0.00	100	233 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>81.55</td> <td>74.00</td> <td>7.55</td> <td>71.61</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>0.00</td> <td>100</td> <td>233 Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>93.24</td> <td>74.00</td> <td>19.24</td> <td>82.96</td> <td>32.07</td> <td>8.95</td> <td>30.74</td> <td>0.00</td> <td>100</td> <td>233 Peak</td> </tr> <tr> <td>3</td> <td>3640.00</td> <td>117.98</td> <td>74.00</td> <td>43.98</td> <td>103.70</td> <td>33.16</td> <td>10.68</td> <td>29.56</td> <td>0.00</td> <td>100</td> <td>233 Peak</td> </tr> <tr> <td>4</td> <td>5570.00</td> <td>100.82</td> <td>74.00</td> <td>26.82</td> <td>82.80</td> <td>34.59</td> <td>13.17</td> <td>29.74</td> <td>0.00</td> <td>100</td> <td>233 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	81.55	74.00	7.55	71.61	32.00	8.81	30.87	0.00	100	233 Peak	2	2437.00	93.24	74.00	19.24	82.96	32.07	8.95	30.74	0.00	100	233 Peak	3	3640.00	117.98	74.00	43.98	103.70	33.16	10.68	29.56	0.00	100	233 Peak	4	5570.00	100.82	74.00	26.82	82.80	34.59	13.17	29.74	0.00	100	233 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5432.40	61.58	74.00	-12.42	43.55	34.52	13.11	29.60	0.00	100	233 PEAK																																																																																																																													
2	5462.54	59.86	68.30	-8.44	41.77	34.53	13.18	29.62	0.00	100	233 PEAK																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	2402.00	81.55	74.00	7.55	71.61	32.00	8.81	30.87	0.00	100	233 Peak																																																																																																																													
2	2437.00	93.24	74.00	19.24	82.96	32.07	8.95	30.74	0.00	100	233 Peak																																																																																																																													
3	3640.00	117.98	74.00	43.98	103.70	33.16	10.68	29.56	0.00	100	233 Peak																																																																																																																													
4	5570.00	100.82	74.00	26.82	82.80	34.59	13.17	29.74	0.00	100	233 Peak																																																																																																																													
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.46</td> <td>50.57</td> <td>54.00</td> <td>-3.43</td> <td>32.50</td> <td>34.53</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>233 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5451.46	50.57	54.00	-3.43	32.50	34.53	13.15	29.61	0.00	100	233 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>76.25</td> <td>54.00</td> <td>22.25</td> <td>66.31</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>0.00</td> <td>100</td> <td>233 Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>82.31</td> <td>54.00</td> <td>28.31</td> <td>71.99</td> <td>32.00</td> <td>8.97</td> <td>30.73</td> <td>0.00</td> <td>100</td> <td>233 Average</td> </tr> <tr> <td>3</td> <td>3640.00</td> <td>115.67</td> <td>54.00</td> <td>61.67</td> <td>101.39</td> <td>33.16</td> <td>10.68</td> <td>29.56</td> <td>0.00</td> <td>100</td> <td>233 Average</td> </tr> <tr> <td>4</td> <td>5570.00</td> <td>91.79</td> <td>54.00</td> <td>37.79</td> <td>73.74</td> <td>34.62</td> <td>13.19</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>233 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	76.25	54.00	22.25	66.31	32.00	8.81	30.87	0.00	100	233 Average	2	2437.00	82.31	54.00	28.31	71.99	32.00	8.97	30.73	0.00	100	233 Average	3	3640.00	115.67	54.00	61.67	101.39	33.16	10.68	29.56	0.00	100	233 Average	4	5570.00	91.79	54.00	37.79	73.74	34.62	13.19	29.76	0.00	100	233 Average												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5451.46	50.57	54.00	-3.43	32.50	34.53	13.15	29.61	0.00	100	233 AVERAGE																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	2402.00	76.25	54.00	22.25	66.31	32.00	8.81	30.87	0.00	100	233 Average																																																																																																																													
2	2437.00	82.31	54.00	28.31	71.99	32.00	8.97	30.73	0.00	100	233 Average																																																																																																																													
3	3640.00	115.67	54.00	61.67	101.39	33.16	10.68	29.56	0.00	100	233 Average																																																																																																																													
4	5570.00	91.79	54.00	37.79	73.74	34.62	13.19	29.76	0.00	100	233 Average																																																																																																																													



Mode	67																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	7+8																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.44</td> <td>63.33</td> <td>68.30</td> <td>-4.97</td> <td>44.46</td> <td>34.86</td> <td>13.80</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>233</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5736.44	63.33	68.30	-4.97	44.46	34.86	13.80	29.79	0.00	100	233	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5736.44	63.33	68.30	-4.97	44.46	34.86	13.80	29.79	0.00	100	233	PEAK																															

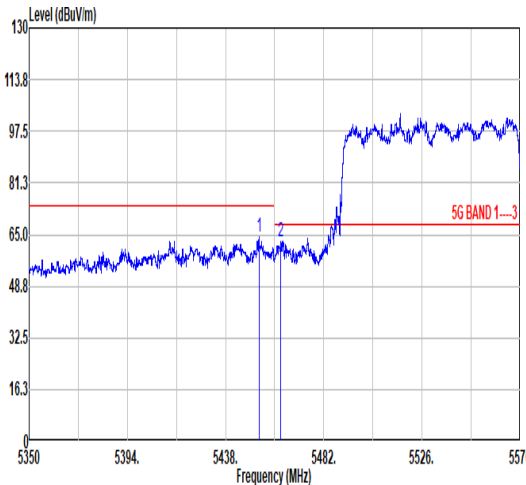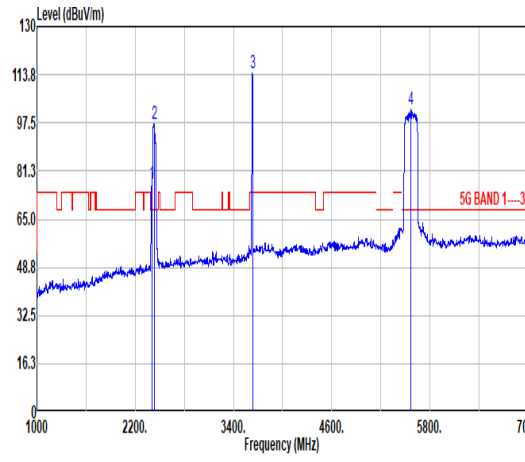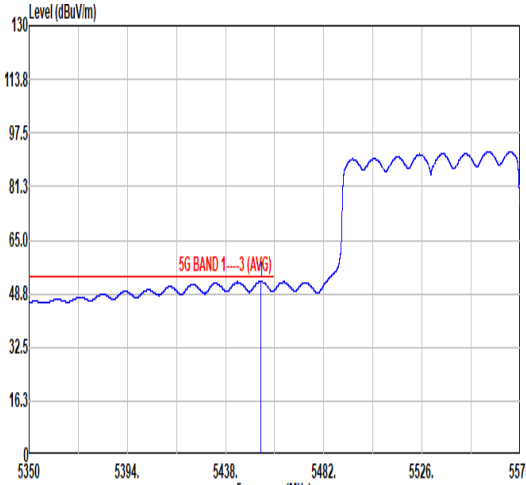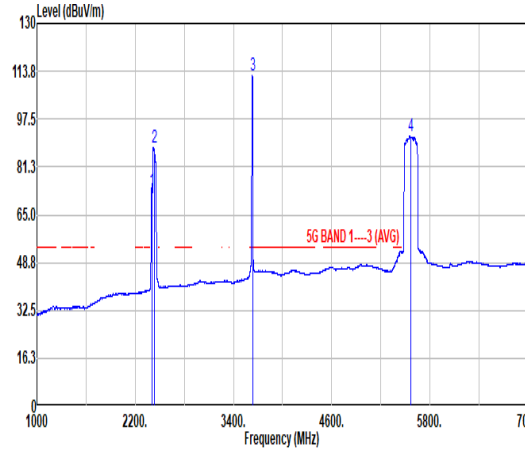

Mode	67																																																																																																																																							
	Band Edge - L																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																																							
ANT	7+8																																																																																																																																							
Pol.	Vertical	Fundamental																																																																																																																																						
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.08</td> <td>64.20</td> <td>74.00</td> <td>-9.80</td> <td>46.12</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>243 PEAK</td> </tr> <tr> <td>2</td> <td>5462.76</td> <td>62.76</td> <td>68.30</td> <td>-5.54</td> <td>44.67</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>243 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5453.08	64.20	74.00	-9.80	46.12	34.53	13.16	29.61	0.00	100	243 PEAK	2	5462.76	62.76	68.30	-5.54	44.67	34.53	13.18	29.62	0.00	100	243 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>76.96</td> <td>74.00</td> <td>2.96</td> <td>67.02</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>0.00</td> <td>100</td> <td>243 Peak</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>97.00</td> <td>74.00</td> <td>23.00</td> <td>86.85</td> <td>32.05</td> <td>8.89</td> <td>30.79</td> <td>0.00</td> <td>100</td> <td>243 Peak</td> </tr> <tr> <td>3</td> <td>3640.00</td> <td>114.19</td> <td>74.00</td> <td>40.19</td> <td>99.91</td> <td>33.16</td> <td>10.68</td> <td>29.56</td> <td>0.00</td> <td>100</td> <td>243 Peak</td> </tr> <tr> <td>4</td> <td>5570.00</td> <td>101.87</td> <td>74.00</td> <td>27.87</td> <td>83.82</td> <td>34.58</td> <td>13.19</td> <td>29.72</td> <td>0.00</td> <td>100</td> <td>243 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	76.96	74.00	2.96	67.02	32.00	8.81	30.87	0.00	100	243 Peak	2	2437.00	97.00	74.00	23.00	86.85	32.05	8.89	30.79	0.00	100	243 Peak	3	3640.00	114.19	74.00	40.19	99.91	33.16	10.68	29.56	0.00	100	243 Peak	4	5570.00	101.87	74.00	27.87	83.82	34.58	13.19	29.72	0.00	100	243 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5453.08	64.20	74.00	-9.80	46.12	34.53	13.16	29.61	0.00	100	243 PEAK																																																																																																																													
2	5462.76	62.76	68.30	-5.54	44.67	34.53	13.18	29.62	0.00	100	243 PEAK																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	2402.00	76.96	74.00	2.96	67.02	32.00	8.81	30.87	0.00	100	243 Peak																																																																																																																													
2	2437.00	97.00	74.00	23.00	86.85	32.05	8.89	30.79	0.00	100	243 Peak																																																																																																																													
3	3640.00	114.19	74.00	40.19	99.91	33.16	10.68	29.56	0.00	100	243 Peak																																																																																																																													
4	5570.00	101.87	74.00	27.87	83.82	34.58	13.19	29.72	0.00	100	243 Peak																																																																																																																													
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.93</td> <td>52.56</td> <td>54.00</td> <td>-1.44</td> <td>34.48</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>100</td> <td>243 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5453.93	52.56	54.00	-1.44	34.48	34.53	13.16	29.61	0.00	100	243 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>73.08</td> <td>54.00</td> <td>19.08</td> <td>63.14</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>0.00</td> <td>100</td> <td>243 Average</td> </tr> <tr> <td>2</td> <td>2437.00</td> <td>87.00</td> <td>54.00</td> <td>33.00</td> <td>77.74</td> <td>32.03</td> <td>8.86</td> <td>30.83</td> <td>0.00</td> <td>100</td> <td>243 Average</td> </tr> <tr> <td>3</td> <td>3640.00</td> <td>112.24</td> <td>54.00</td> <td>58.24</td> <td>97.96</td> <td>33.16</td> <td>10.68</td> <td>29.56</td> <td>0.00</td> <td>100</td> <td>243 Average</td> </tr> <tr> <td>4</td> <td>5570.00</td> <td>91.71</td> <td>54.00</td> <td>37.71</td> <td>73.63</td> <td>34.58</td> <td>13.21</td> <td>29.71</td> <td>0.00</td> <td>100</td> <td>243 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	73.08	54.00	19.08	63.14	32.00	8.81	30.87	0.00	100	243 Average	2	2437.00	87.00	54.00	33.00	77.74	32.03	8.86	30.83	0.00	100	243 Average	3	3640.00	112.24	54.00	58.24	97.96	33.16	10.68	29.56	0.00	100	243 Average	4	5570.00	91.71	54.00	37.71	73.63	34.58	13.21	29.71	0.00	100	243 Average												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5453.93	52.56	54.00	-1.44	34.48	34.53	13.16	29.61	0.00	100	243 AVERAGE																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	2402.00	73.08	54.00	19.08	63.14	32.00	8.81	30.87	0.00	100	243 Average																																																																																																																													
2	2437.00	87.00	54.00	33.00	77.74	32.03	8.86	30.83	0.00	100	243 Average																																																																																																																													
3	3640.00	112.24	54.00	58.24	97.96	33.16	10.68	29.56	0.00	100	243 Average																																																																																																																													
4	5570.00	91.71	54.00	37.71	73.63	34.58	13.21	29.71	0.00	100	243 Average																																																																																																																													



Mode	67																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																								
ANT	7+8																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5750.28</td> <td>63.68</td> <td>68.30</td> <td>-4.62</td> <td>44.64</td> <td>34.89</td> <td>13.93</td> <td>29.78</td> <td>0.00</td> <td>100 243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5750.28	63.68	68.30	-4.62	44.64	34.89	13.93	29.78	0.00	100 243	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5750.28	63.68	68.30	-4.62	44.64	34.89	13.93	29.78	0.00	100 243	PEAK																															




Mode	67																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																
ANT	7+8																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>44.44</td> <td>74.00</td> <td>-29.56</td> <td>53.72</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	44.44	74.00	-29.56	53.72	38.18	18.19	65.65	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>43.79</td> <td>74.00</td> <td>-30.21</td> <td>53.07</td> <td>38.18</td> <td>18.19</td> <td>65.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	43.79	74.00	-30.21	53.07	38.18	18.19	65.65	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11140.00	44.44	74.00	-29.56	53.72	38.18	18.19	65.65	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11140.00	43.79	74.00	-30.21	53.07	38.18	18.19	65.65	0.00	---	---	PEAK																																																																						



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
7+8	802.11a	98.63	-	-	10Hz
7+8	802.11ax HE20 Full RU	100	-	-	10Hz
7+8	802.11ax HE20 RU106	100	-	-	10Hz
7+8	802.11ax HE40 Full RU	100	-	-	10Hz
7+8	802.11ax HE40 RU242	100	-	-	10Hz
7+8	802.11ax HE80 Full RU	98.69	-	-	10Hz
7+8	802.11ax HE80 RU484	98.98	-	-	10Hz
7+8	802.11ax HE160 Full RU	98.13	-	-	10Hz
7+8	802.11ax HE160 RU996	98.95	-	-	10Hz

802.11a

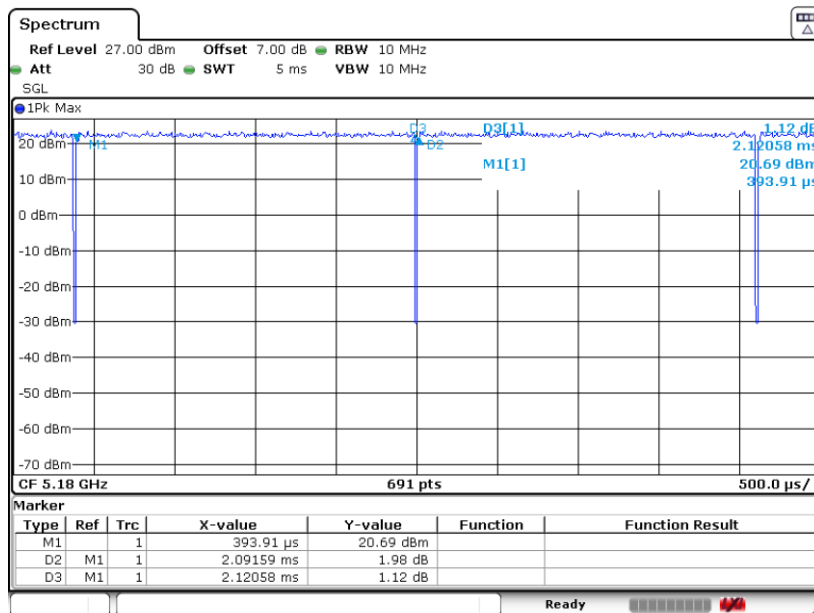




802.11ax HE20 Full RU

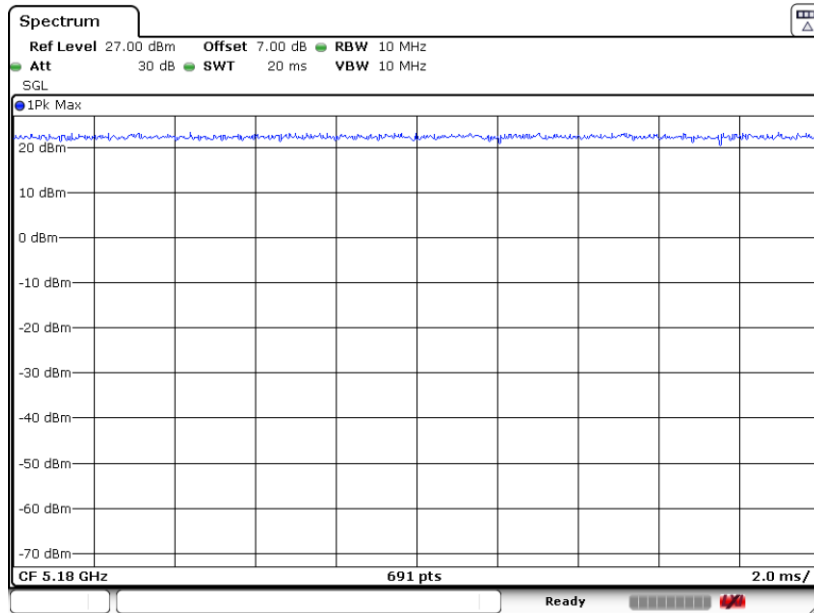


802.11ax HE20 RU106

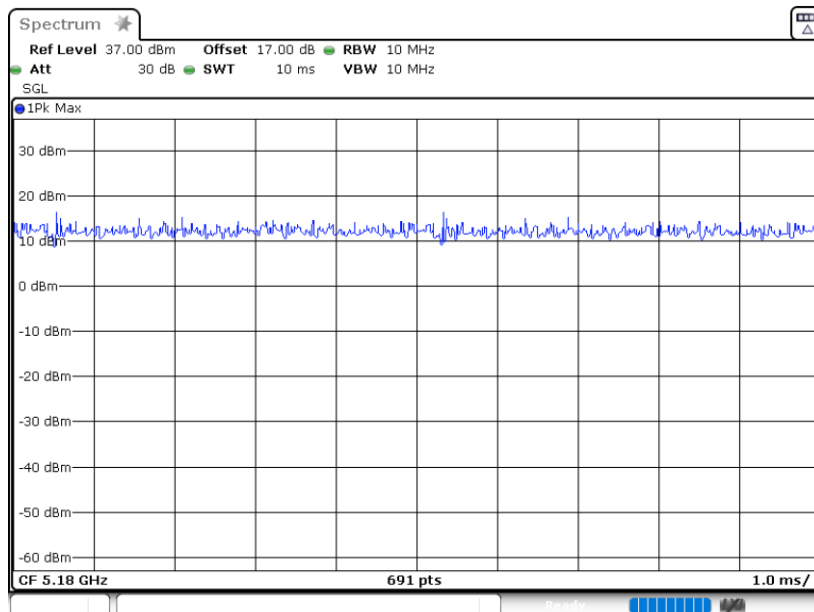




802.11ax HE40 Full RU

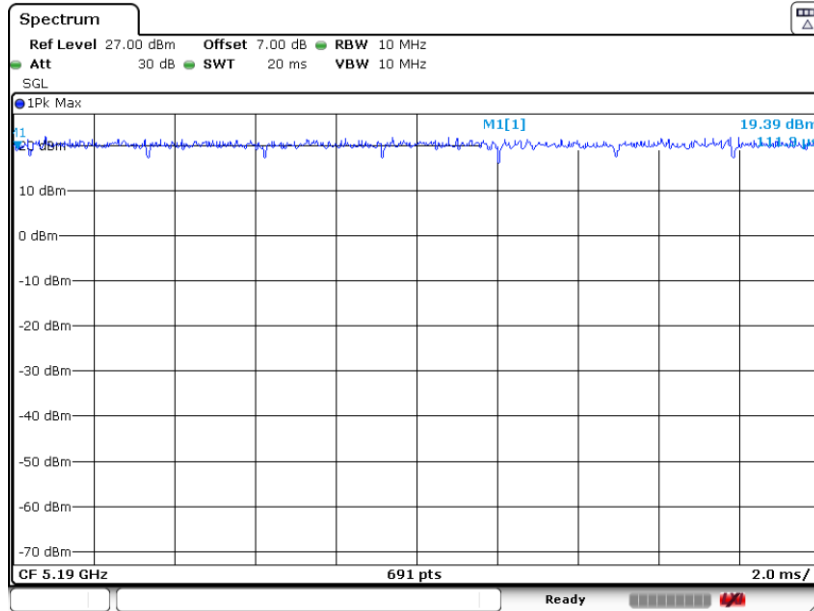


802.11ax HE40 RU242

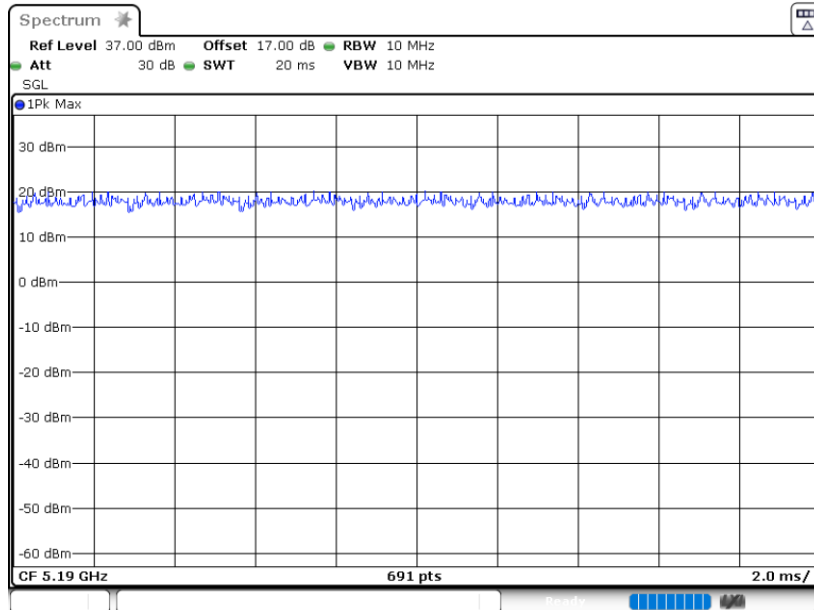




802.11ax HE80 Full RU

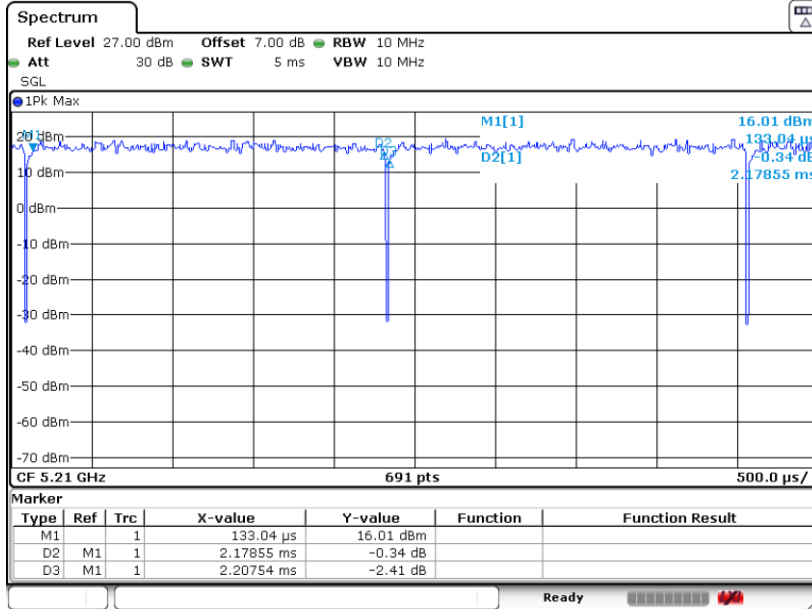


802.11ax HE80 RU484

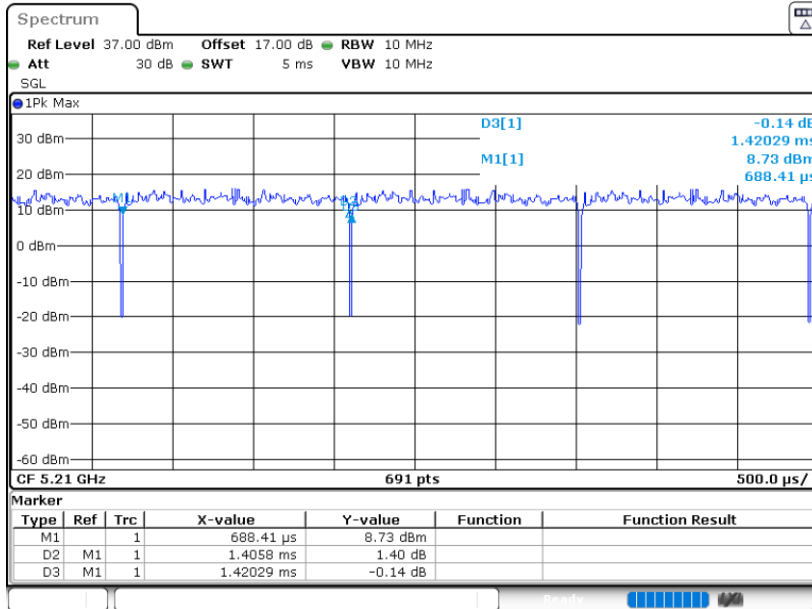



802.11ax HE160 Full RU

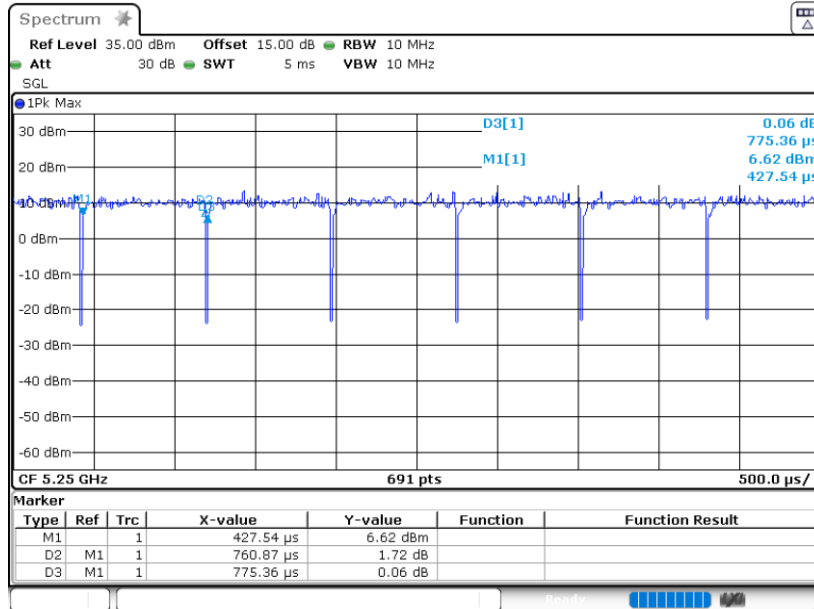

802.11ax HE160 RU996

