

# FCC RF Test Report

FCC ID : UZ7WCMTA  
EQUIPMENT : Touch Computer  
BRAND NAME : Zebra  
MODEL NAME : WCMTA  
APPLICANT : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
MANUFACTURER : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
STANDARD : 47 CFR Part 2, Part 27 Subpart Q  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Feb. 20, 2023 ~ Mar. 30, 2023

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Product Feature of Equipment Under Test... 5
1.2 Product Specification of Equipment Under Test... 6
1.3 Modification of EUT ... 6
1.4 Maximum EIRP Power and Emission Designator ... 7
1.5 Testing Site ... 8
1.6 Test Software... 8
1.7 Applied Standards ... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 9
2.1 Test Mode ... 9
2.2 Connection Diagram of Test System ... 10
2.3 Support Unit used in test configuration and system ... 10
2.4 Measurement Results Explanation Example ... 10
2.5 Frequency List of Low/Middle/High Channels ... 11
3 CONDUCTED TEST ITEMS ... 12
3.1 Measuring Instruments ... 12
3.2 Test Setup ... 12
3.3 Test Result of Conducted Test ... 12
3.4 Conducted Output Power Measurement ... 13
3.5 Peak-to-Average Ratio ... 14
3.6 EIRP ... 15
3.7 Occupied Bandwidth ... 16
3.8 Conducted Band Edge Measurement ... 17
3.9 Conducted Spurious Emission Measurement ... 18
3.10 Frequency Stability Measurement ... 19
4 RADIATED TEST ITEMS ... 20
4.1 Measuring Instruments ... 20
4.2 Test Setup ... 20
4.3 Test Result of Radiated Test ... 21
4.4 Radiated Spurious Emission Measurement ... 22
5 LIST OF MEASURING EQUIPMENT ... 23
6 UNCERTAINTY OF EVALUATION ... 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3116020	Rev. 01	Initial issue of report	Apr. 27, 2023

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 33.55 dB at 6900.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	WCMTA
FCC ID	UZ7WCMTA
Sample 1	Scanner(SE4710)
Sample 2	Scanner(SE5500)
HW Version	DV
SW Version	13-09-09.00-TG-U00-PRD-ATH-04
MFD	09MAR23
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT: the main differences between them are the scanner and memory. According to the difference, we choose the Sample 1 to perform full test, and verify the worst RSE mode for Sample 2.

Specification of Accessory				
Battery 1	Brand Name	Zebra	Model Number	BT-000473

Supported Unit used in test configuration and system				
Battery 2	Brand Name	Zebra	Model Number	BT-000473B
Battery 3	Brand Name	Zebra	Model Number	BT-000473E
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-TC2L-SNP1-01
Hand Strap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01

## 1.2 Product Specification of Equipment Under Test

Product Feature	
<b>Tx/Rx Frequency</b>	5G NR n77: 3450 MHz ~ 3550 MHz
<b>SCS</b>	30kHz
<b>Bandwidth</b>	20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
<b>Antenna Gain</b>	<p>&lt;Ant. 0&gt; 5G NR n77: 0.10 dBi</p> <p>&lt;Ant. 1&gt; 5G NR n77: -1.30 dBi</p> <p>&lt;Ant. 5&gt; 5G NR n77: -1.07 dBi</p> <p>&lt;Ant. 6&gt; 5G NR n77: 0.40 dBi</p>
<b>Type of Modulation</b>	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

**Remark:**

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77 for Antenna 5.
2. The device supports n77(1T4R) SRS resources on Antenna 0/1/5/6, only the test data of worst Antenna 5 is showed in the report according to the maximum power.
3. 5G NR n77 support UL MIMO mode for Antenna 5+1.
4. 5G NR n77 UL\_MIMO mode only supports CP-OFDM Modulation, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
5. For UL MIMO mode, the conducted test data is the final combined data according to KDB 662911 D01.
6. 5G NR n77 support SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
7. The device supports HPUE mode for 5G NR n77.
8. For NSA mode of RSE testing, we only choose the combination of the maximum power among all NSA combinations to test.
9. The EN-DC mode combination could be referred to the product spec.

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.4 Maximum EIRP Power and Emission Designator

5G NR n77 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.3192	18M2G7D	0.2483	18M2W7D
30	3465.00 ~ 3534.99	0.3199	27M8G7D	0.2460	27M9W7D
40	3470.01 ~ 3529.98	0.3206	37M8G7D	0.2495	37M8W7D
50	3475.02 ~ 3525.00	0.3055	47M5G7D	0.2393	47M5W7D
60	3480.00 ~ 3519.99	0.3041	57M8G7D	0.2410	57M9W7D
70	3485.01 ~ 3514.98	0.2972	67M4G7D	0.2323	67M6W7D
80	3490.02 ~ 3510.00	0.2972	77M6G7D	0.2371	77M7W7D
90	3495.00 ~ 3504.99	0.2965	87M3G7D	0.2344	87M6W7D
100	3500.01	0.3221	97M3G7D	0.2455	97M7W7D

5G NR n77 UL MIMO		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.2317	18M2G7D	0.2148	18M2W7D
30	3465.00 ~ 3534.99	0.2388	27M8G7D	0.2158	27M9W7D
40	3470.01 ~ 3529.98	0.2371	37M8G7D	0.2133	37M9W7D
50	3475.02 ~ 3525.00	0.2275	47M4G7D	0.2037	47M5W7D
60	3480.00 ~ 3519.99	0.2291	57M8G7D	0.2046	57M9W7D
70	3485.01 ~ 3514.98	0.2228	67M4G7D	0.2000	67M6W7D
80	3490.02 ~ 3510.00	0.2188	77M5G7D	0.1977	77M5W7D
90	3495.00 ~ 3504.99	0.2183	87M3G7D	0.1991	87M6W7D
100	3500.01	0.2404	97M5G7D	0.1968	97M8W7D

**Note:** All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

## 1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS TH01-KS	CN1257	314309

## 1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X-Plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n77	100M	PI/2 BPSK, QPSK	1RB, Full RB	M
E.I.R.P	5G n77	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n77	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	5G n77	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n77	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n77	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n77	Worst case from maximum power			M

**Note:**

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Frequency Stability: Normal Voltage: 3.85Vdc, Extreme Voltage: 3.45Vdc ~4.41Vdc.

## 2.2 Connection Diagram of Test System

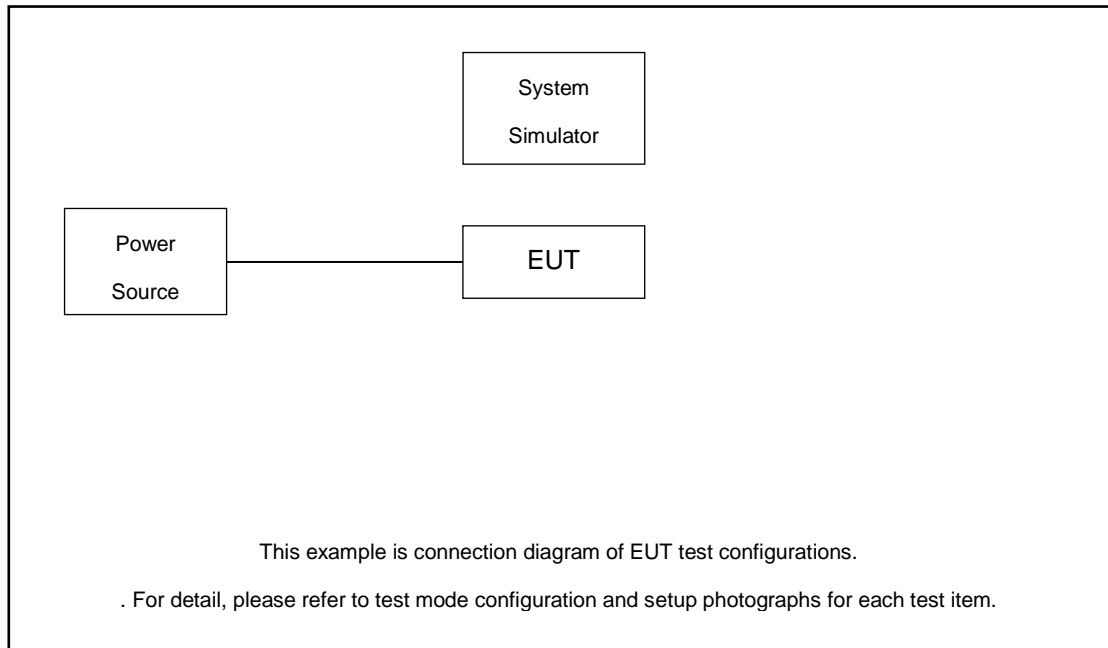

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 3.48 dB and 30dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 3.47 + 30 = 33.47 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

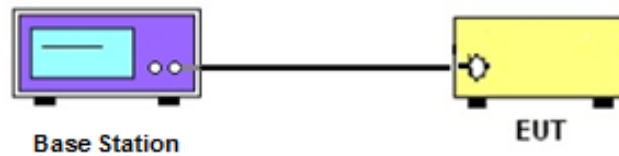

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

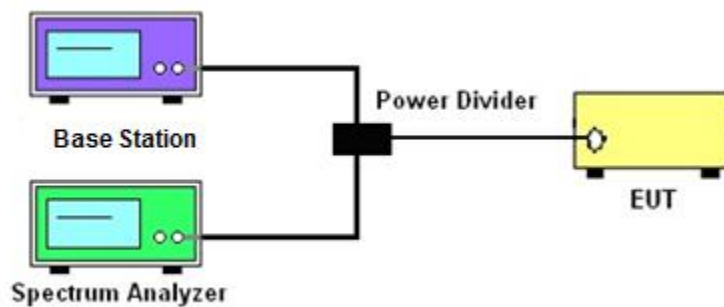

##### 3.2.3 Frequency Stability

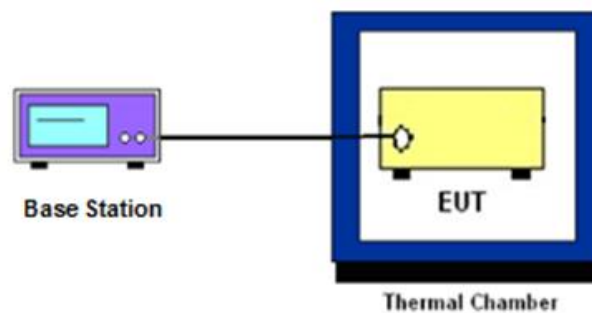

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power Measurement**

### **3.4.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 EIRP

### 3.6.1 Description of EIRP Limit

#### § 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where  
 $P_T$  = transmitter output power in dBm  
 $G_T$  = gain of the transmitting antenna in dBi  
 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

#### § 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW  $\geq 500$ KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test below 30MHz

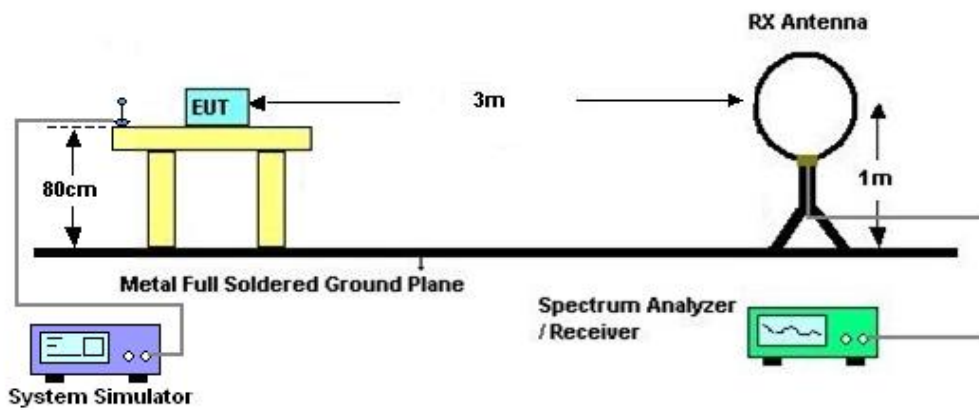

#### 4.2.2 For radiated test from 30MHz to 1GHz

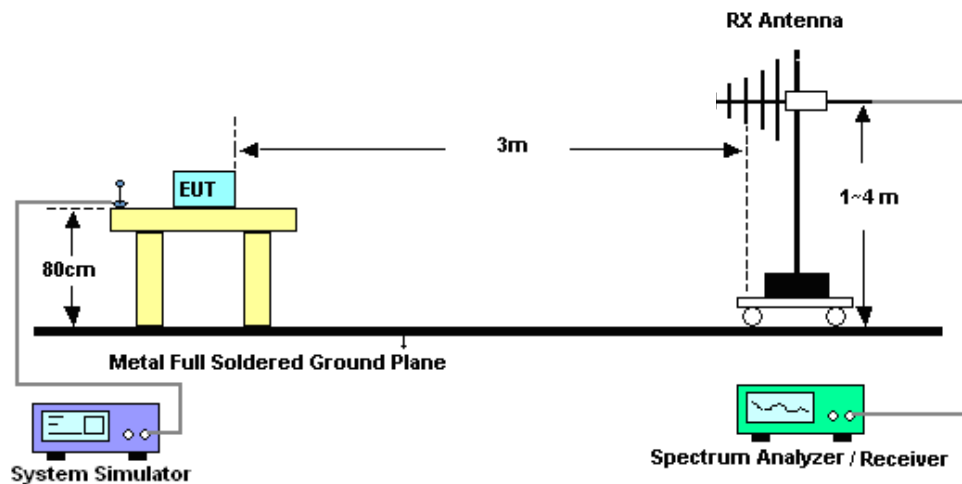

### 4.2.3 For radiated test above 1GHz



### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 20, 2023~ Mar. 01, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Feb. 20, 2023~ Mar. 01, 2023	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Feb. 20, 2023~ Mar. 01, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Mar. 01, 2023~ Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 01, 2023~ Mar. 30, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Mar. 01, 2023~ Mar. 30, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Mar. 01, 2023~ Mar. 30, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Mar. 01, 2023~ Mar. 30, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	Mar. 01, 2023~ Mar. 30, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	Mar. 01, 2023~ Mar. 30, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060839	1Ghz-18Ghz	Oct. 12, 2022	Mar. 01, 2023~ Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 12, 2022	Mar. 01, 2023~ Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 01, 2023~ Mar. 30, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 01, 2023~ Mar. 30, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 01, 2023~ Mar. 30, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----





## Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

# FR1 N77 (ANT5)

## Transmitter Conducted Output Power and EIRP, ( $G_T - L_C$ )=-1.07dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP(W)
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.79	24.72	0.2965
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.15	25.08	0.3221
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	25.36	24.29	0.2685
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.51	24.44	0.2780
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.88	24.81	0.3027
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	25.43	24.36	0.2729
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.45	23.38	0.2178
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.97	23.9	0.2455
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	24.47	23.4	0.2188
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	22.98	21.91	0.1552
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.39	22.32	0.1706
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	22.84	21.77	0.1503
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.98	19.91	0.0979
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.1	20.03	0.1007
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	20.76	19.69	0.0931
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.33	23.26	0.2118
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	26.11	25.04	0.3192
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	26.04	24.97	0.3141
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	25.02	23.95	0.2483
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.69	24.62	0.2897
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.55	24.48	0.2805
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.58	23.51	0.2244
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	25.65	24.58	0.2871
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.54	24.47	0.2799
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	24.49	23.42	0.2198
77	30	30	631000	3465	DFT-s-OFDM PI/2 BPSK	1@1	26.12	25.05	0.3199
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	26.01	24.94	0.3119
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.98	23.91	0.2460

77	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.81	24.74	0.2979
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.77	24.7	0.2951
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.89	23.82	0.2410
77	30	30	635666	3534.99	DFT-s-OFDM PI/2 BPSK	1@1	25.62	24.55	0.2851
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	25.44	24.37	0.2735
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24.57	23.5	0.2239
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	26.13	25.06	0.3206
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	26.05	24.98	0.3148
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	25.04	23.97	0.2495
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.86	24.79	0.3013
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.75	24.68	0.2938
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.98	23.91	0.2460
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	25.68	24.61	0.2891
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	25.58	24.51	0.2825
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.55	23.48	0.2228
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	25.92	24.85	0.3055
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	25.88	24.81	0.3027
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.86	23.79	0.2393
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.73	24.66	0.2924
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.67	24.6	0.2884
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.65	23.58	0.2280
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	25.53	24.46	0.2793
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	25.48	24.41	0.2761
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	24.45	23.38	0.2178
77	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	25.9	24.83	0.3041
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.78	24.71	0.2958
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.89	23.82	0.2410
77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.69	24.62	0.2897
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.67	24.6	0.2884
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.67	23.6	0.2291
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	25.64	24.57	0.2864
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.58	24.51	0.2825
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.75	23.68	0.2333
77	30	70	632334	3485.01	DFT-s-OFDM PI/2 BPSK	1@1	25.8	24.73	0.2972

77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	25.74	24.67	0.2931
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	24.73	23.66	0.2323
77	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.66	24.59	0.2877
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.64	24.57	0.2864
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.58	23.51	0.2244
77	30	70	634332	3514.98	DFT-s-OFDM PI/2 BPSK	1@1	25.53	24.46	0.2793
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	25.47	24.4	0.2754
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	24.52	23.45	0.2213
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	25.8	24.73	0.2972
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.75	24.68	0.2938
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.82	23.75	0.2371
77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.66	24.59	0.2877
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.53	24.46	0.2793
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.58	23.51	0.2244
77	30	80	634000	3510	DFT-s-OFDM PI/2 BPSK	1@1	24.65	23.58	0.2280
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	25.44	24.37	0.2735
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.52	23.45	0.2213
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	25.79	24.72	0.2965
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	25.75	24.68	0.2938
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.56	23.49	0.2234
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.68	24.61	0.2891
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.43	24.36	0.2729
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.47	23.4	0.2188
77	30	90	633666	3504.99	DFT-s-OFDM PI/2 BPSK	1@1	25.68	24.61	0.2891
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	25.48	24.41	0.2761
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	24.77	23.7	0.2344

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPS	50@0	-0.0018	<b>PASS</b>	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0035	<b>PASS</b>	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0012	<b>PASS</b>	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0022	<b>PASS</b>	-30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0005	<b>PASS</b>	-20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0011	<b>PASS</b>	-10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0032	<b>PASS</b>	0°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0046	<b>PASS</b>	10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0024	<b>PASS</b>	20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0019	<b>PASS</b>	30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0025	<b>PASS</b>	40°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0021	<b>PASS</b>	50°C


## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	270@0	10.1	13	PASS
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	7.02	13	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	10.42	13	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	7.6	13	PASS


N77(100M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




N77(100M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

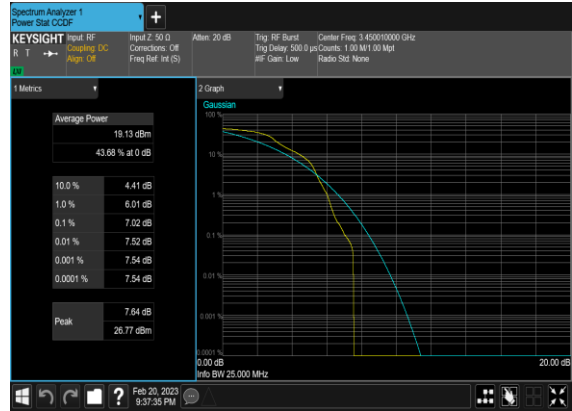

N77(100M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

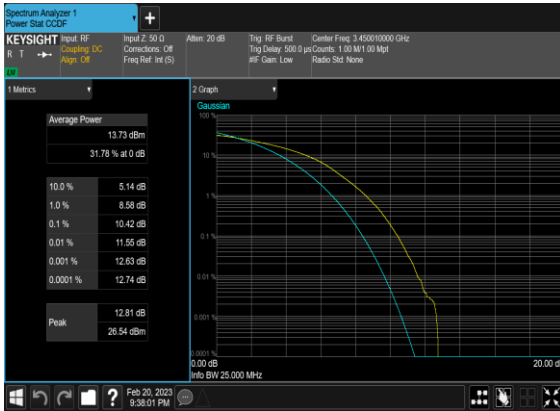

N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

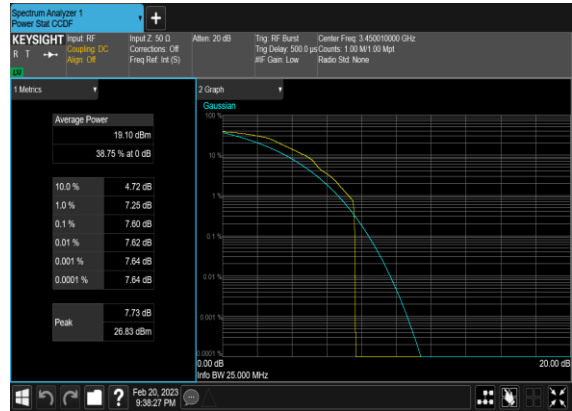


## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.208	19.06
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.21	19.39
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.161	19.15
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.147	19.13
77	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.835	29.03
77	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.822	29.28
77	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.818	29.17
77	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.866	28.99
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.79	39.39
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.837	39.25
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.67	39.14
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.83	39.29
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.5	49.17
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.434	49.15
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.45	49.23
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.426	49.02
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.819	59.68
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.793	59.79
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.735	59.74
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.911	59.78
77	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.413	69.55
77	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.476	69.61
77	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.55	69.61
77	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.517	69.58
77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.593	79.83
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.716	79.91



77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.407	80.01
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.548	79.85
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.292	90.25
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.495	90.23
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.226	90.31
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.624	90.33
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.319	100.5
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.656	100.6
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.407	100.5
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.302	100.6


### N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

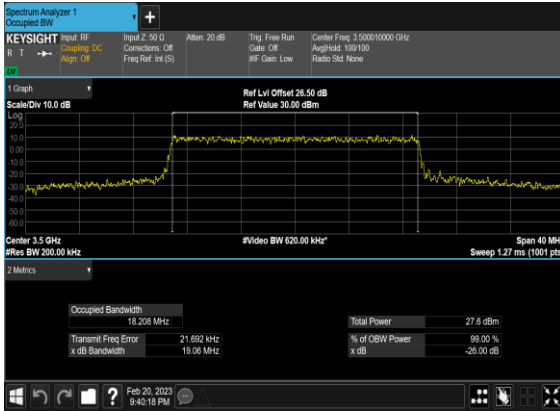


### N77(20M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH




### N77(20M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

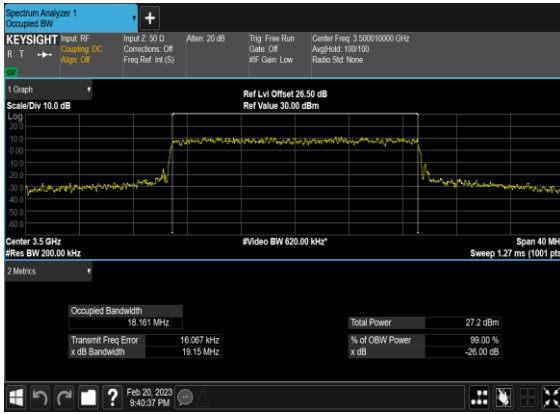


### N77(20M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

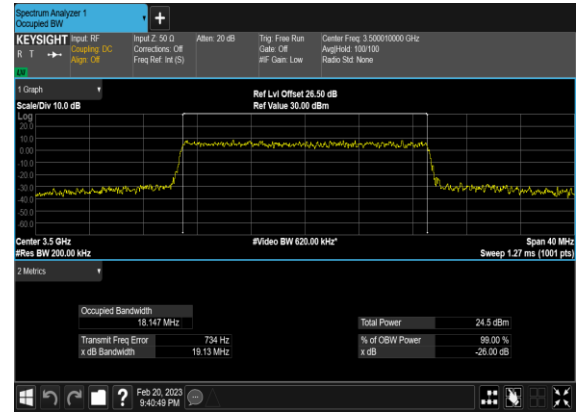


### N77(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

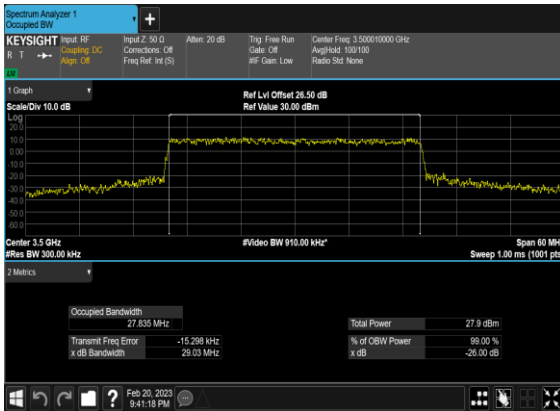


### N77(30M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

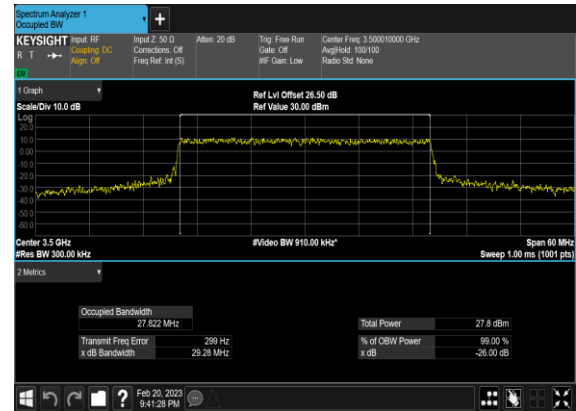


### N77(30M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

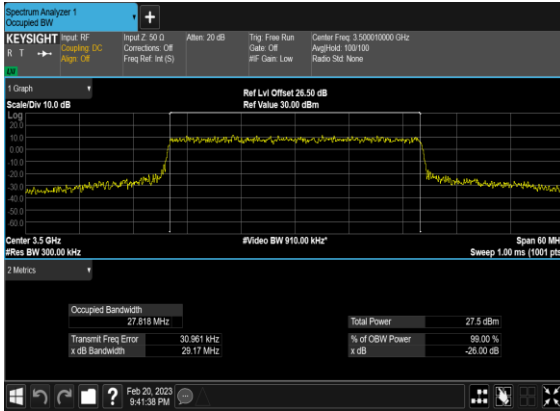


### N77(30M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

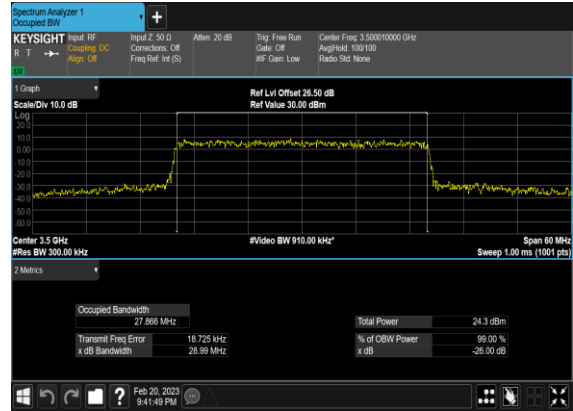


### N77(40M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

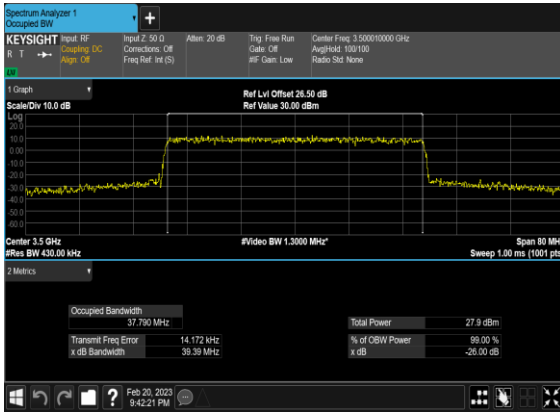


### N77(40M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

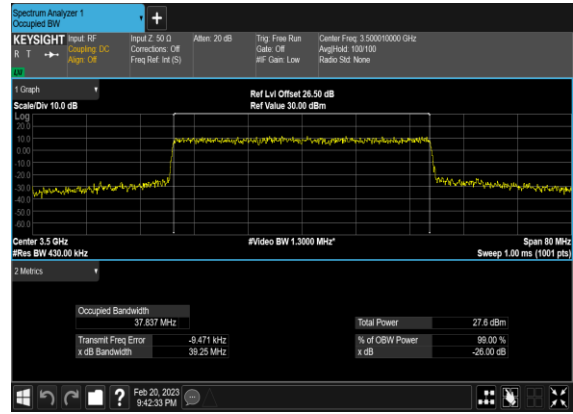


### N77(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

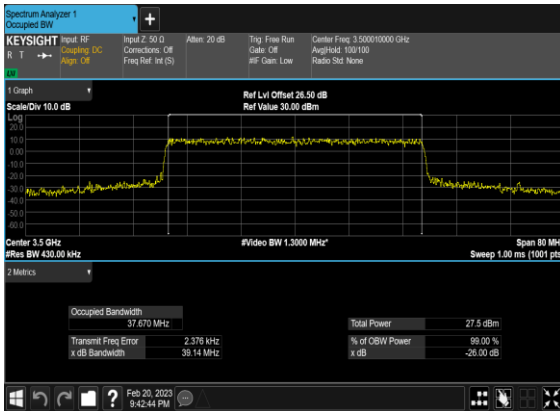


### N77(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

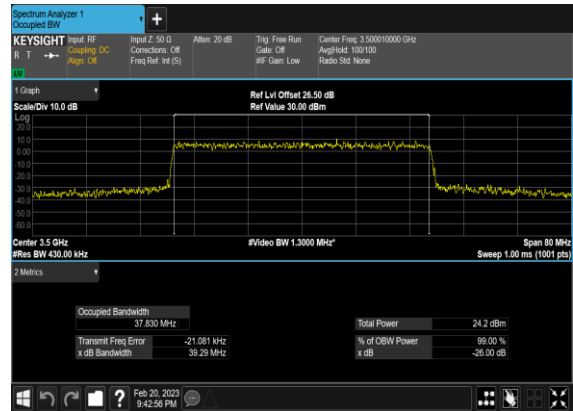

### N77(50M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

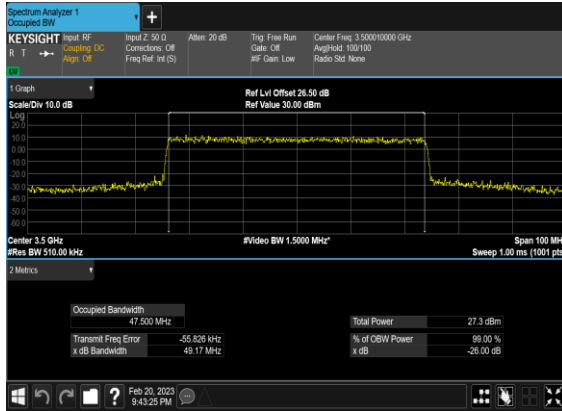


### N77(50M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

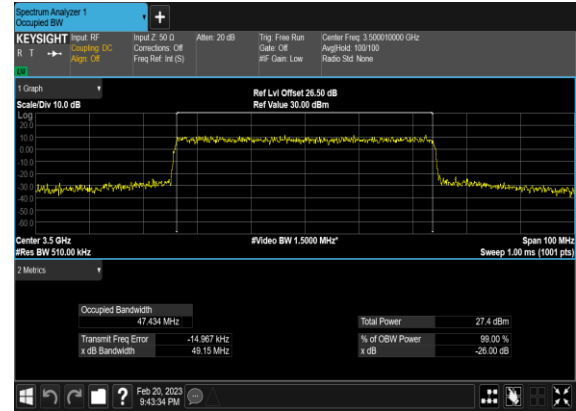


### N77(50M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N77(50M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

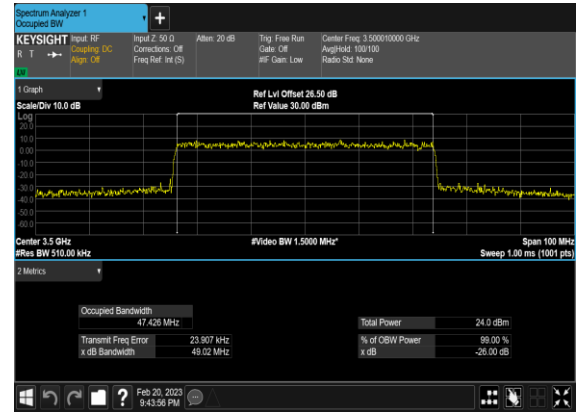


### N77(60M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

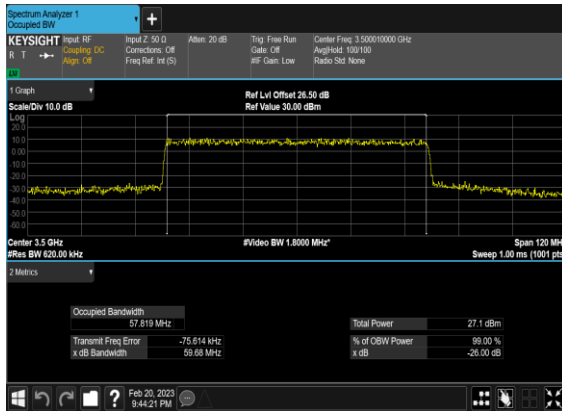


### N77(60M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

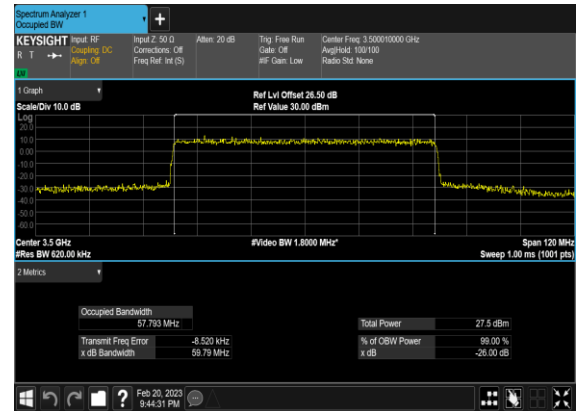


### N77(60M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

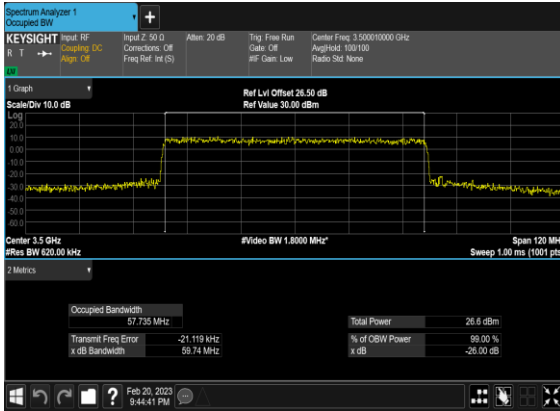


### N77(60M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

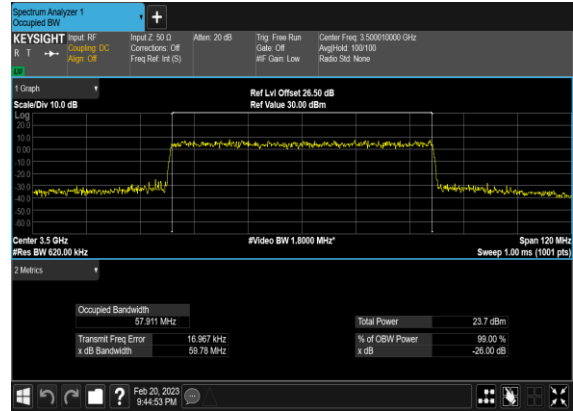


### N77(70M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

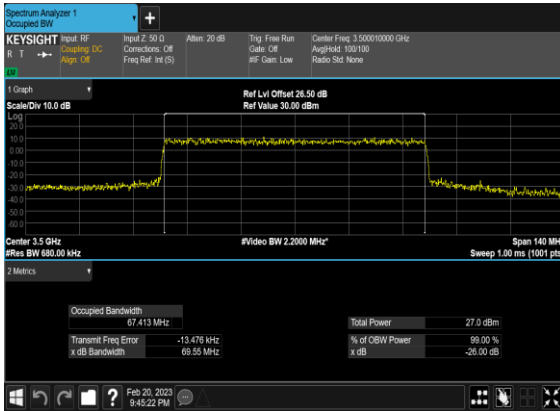


### N77(70M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

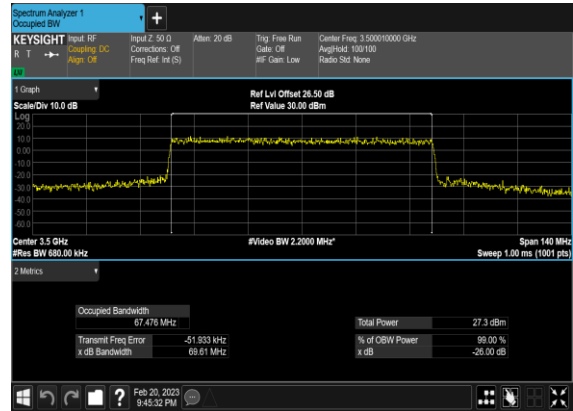


### N77(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

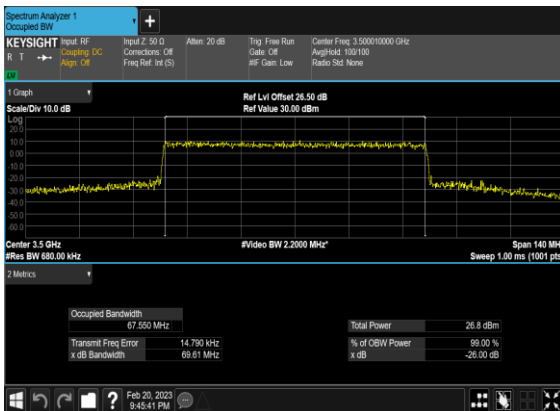


### N77(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

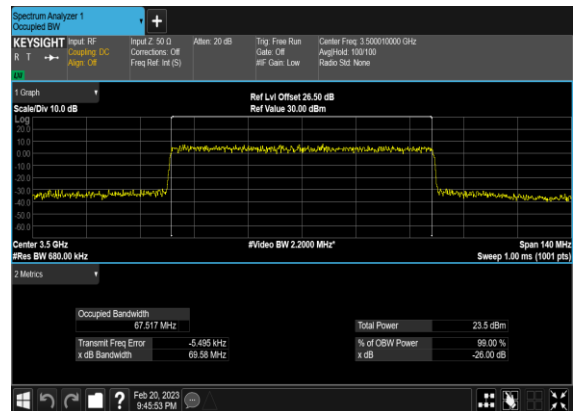


### N77(80M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

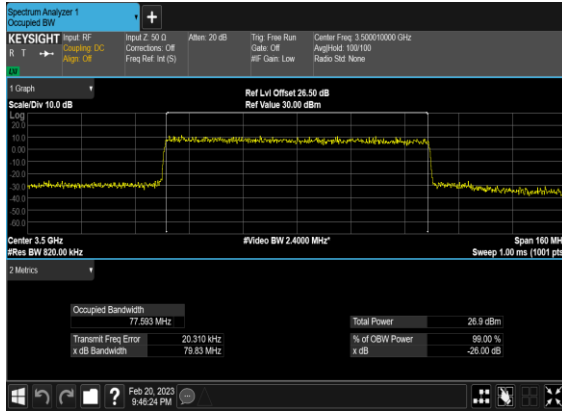


### N77(80M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

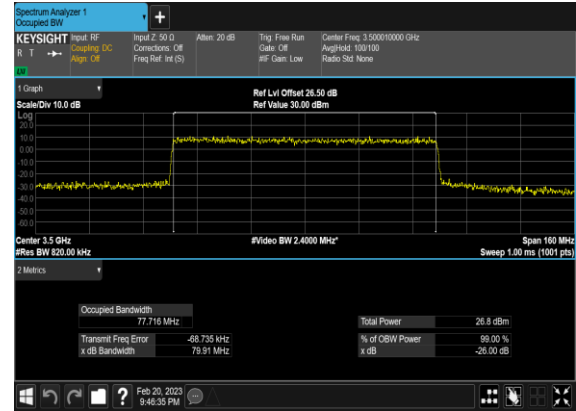


### N77(80M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

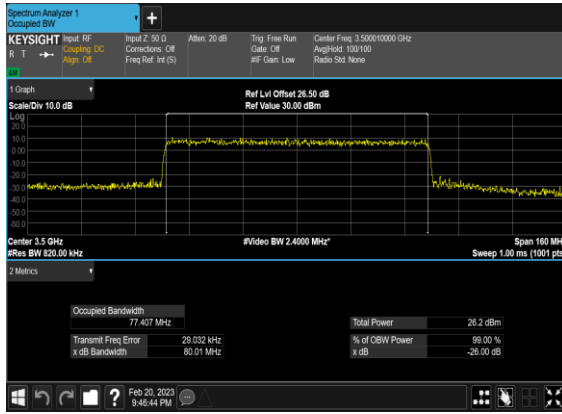


### N77(80M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

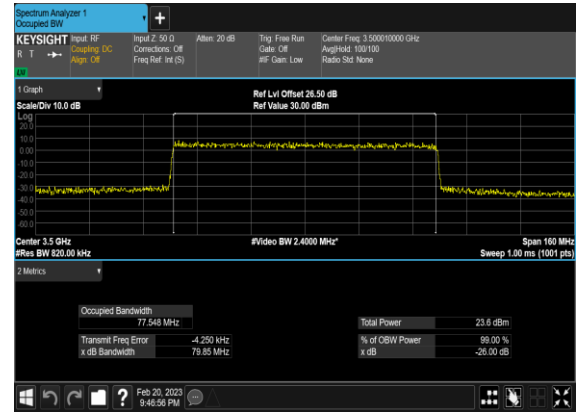


### N77(90M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

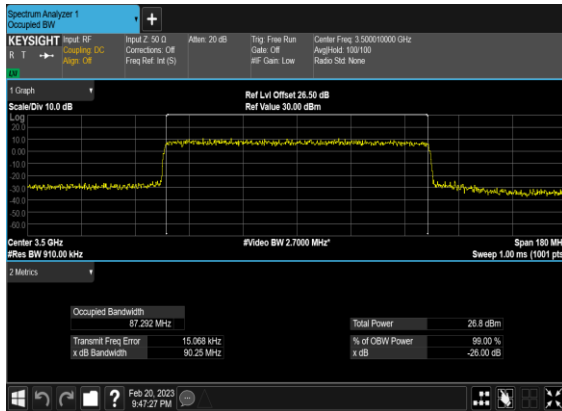


### N77(90M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

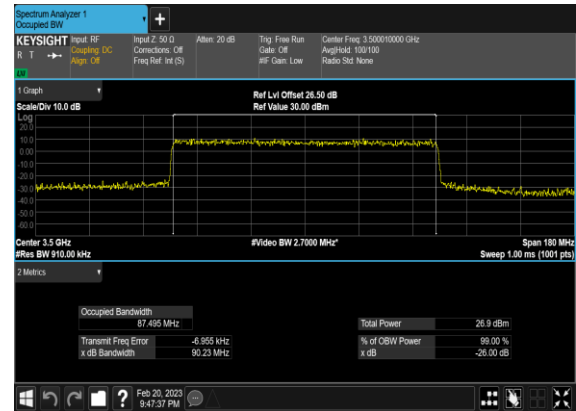


### N77(90M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

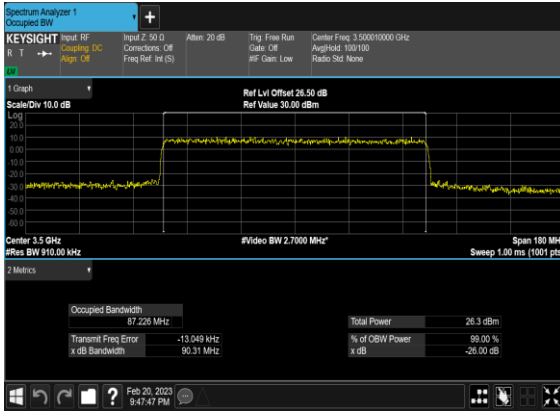


### N77(90M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

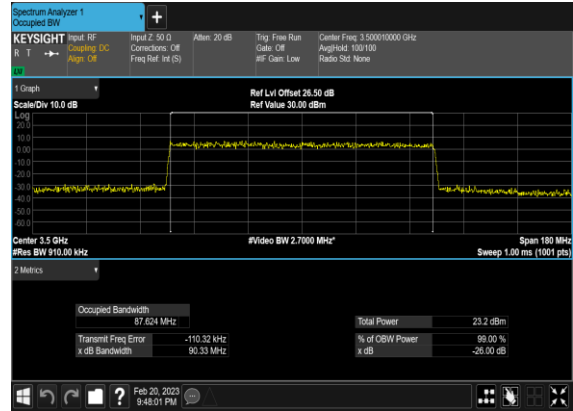

### N77(100M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

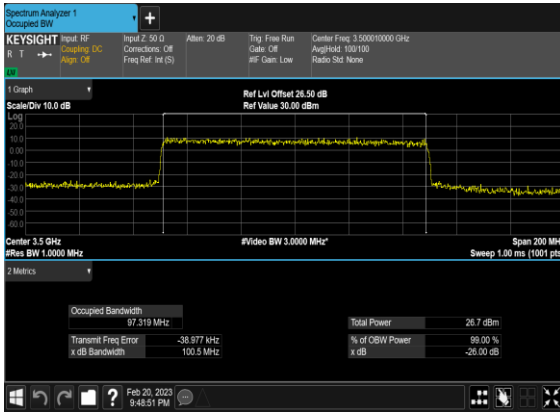


### N77(100M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

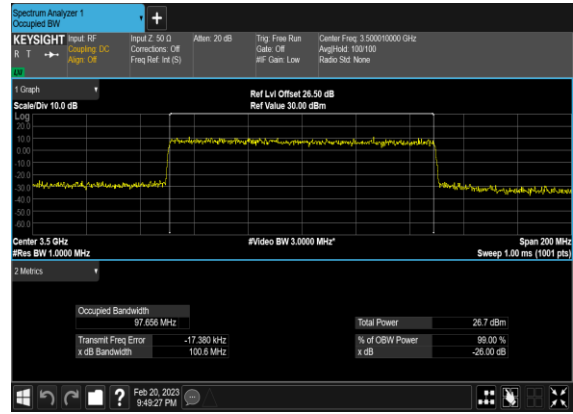

### N77(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH



### N77(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

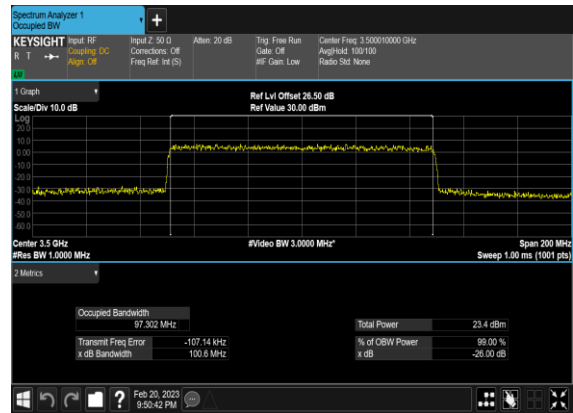


## Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

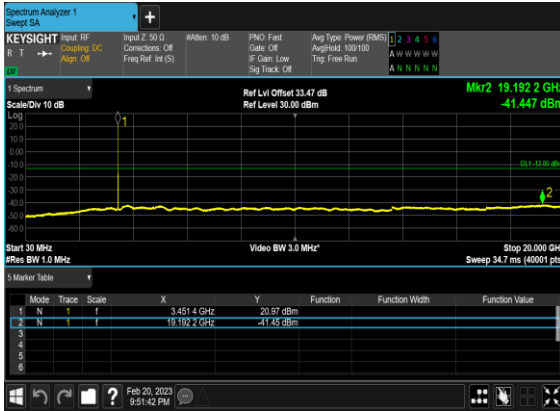


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

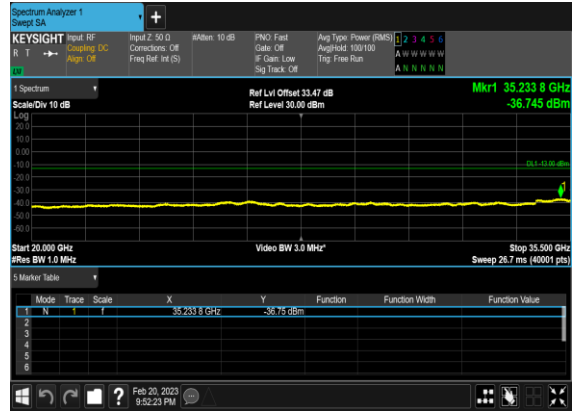


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

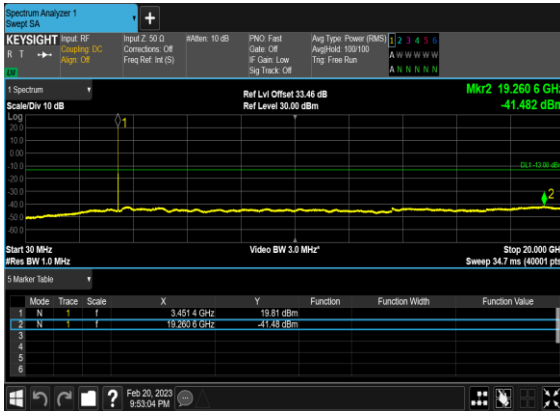


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

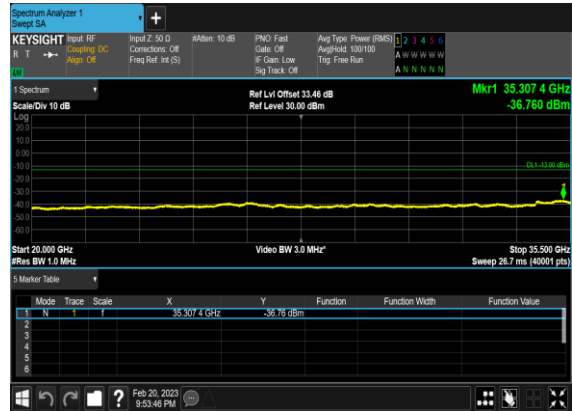


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

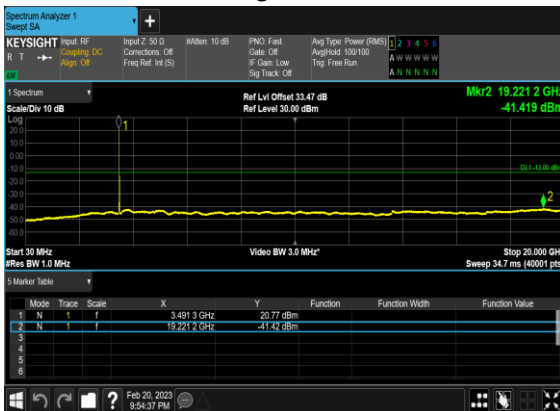


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

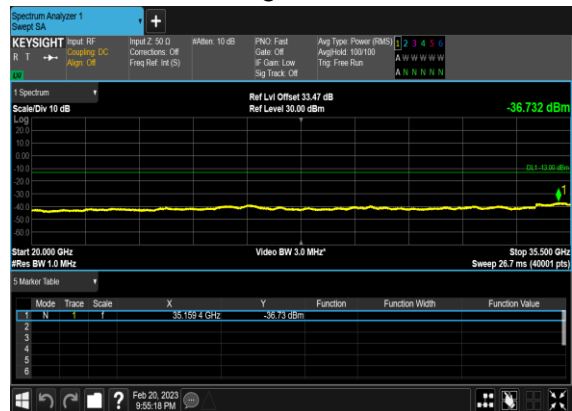


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

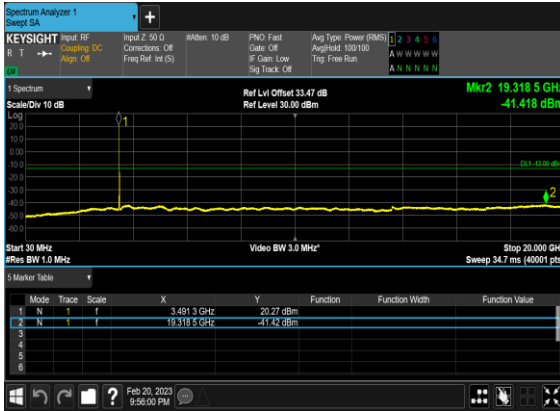


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

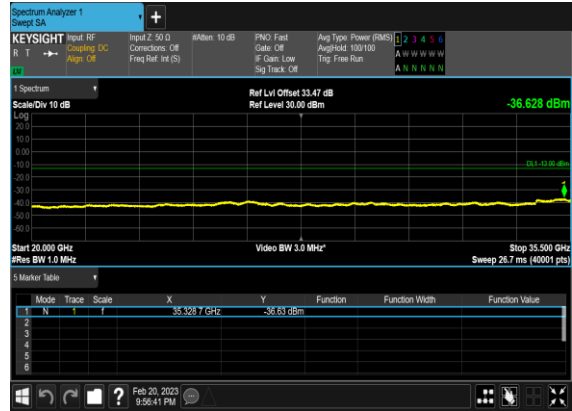


N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

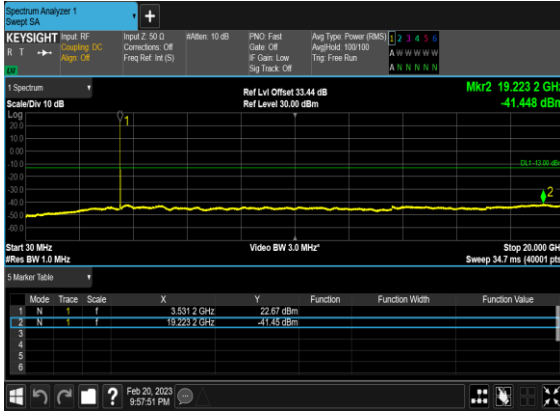


N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

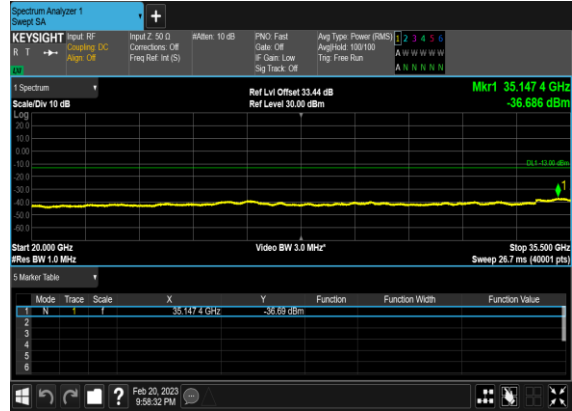


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

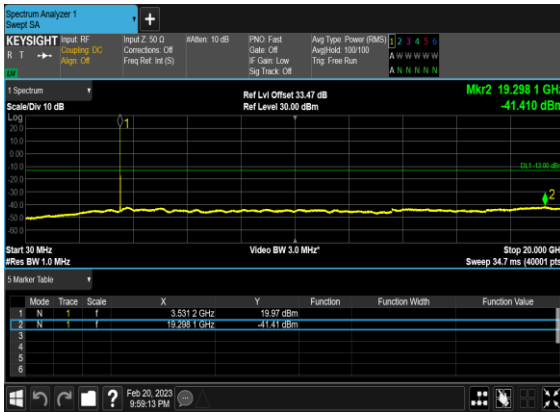


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

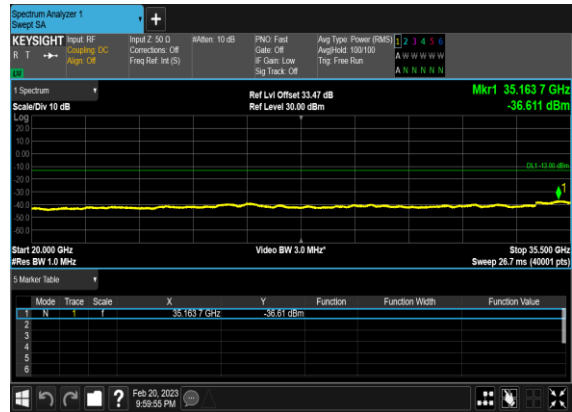


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

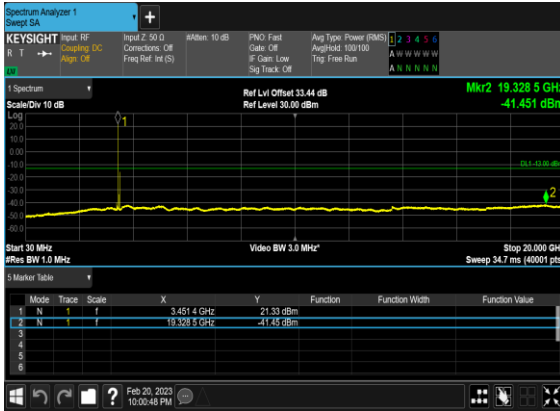


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

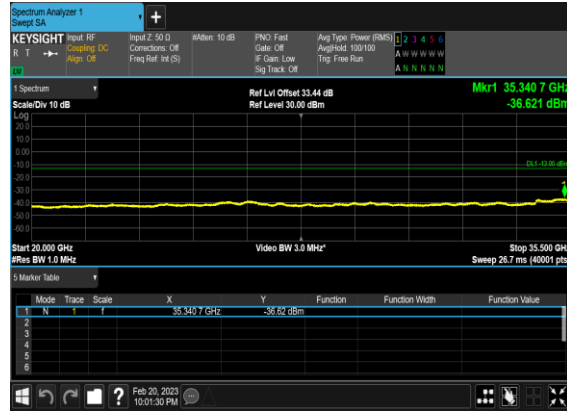


N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

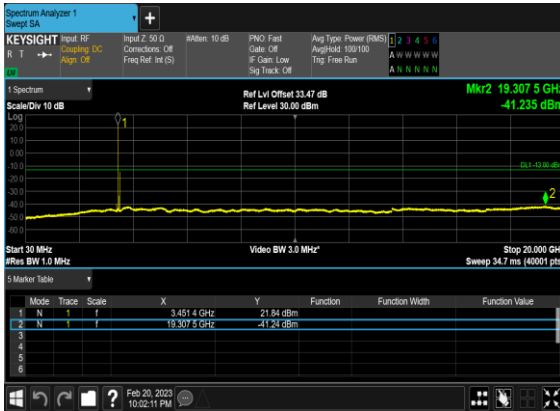


N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

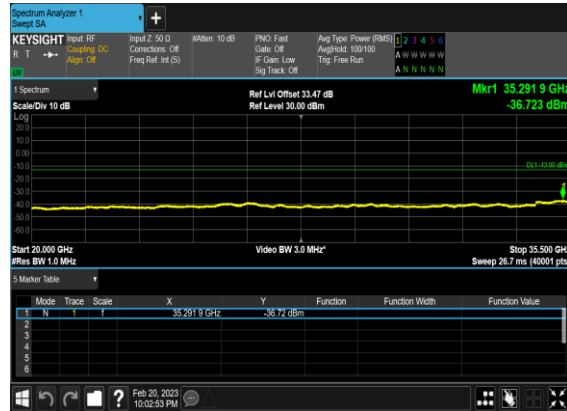


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

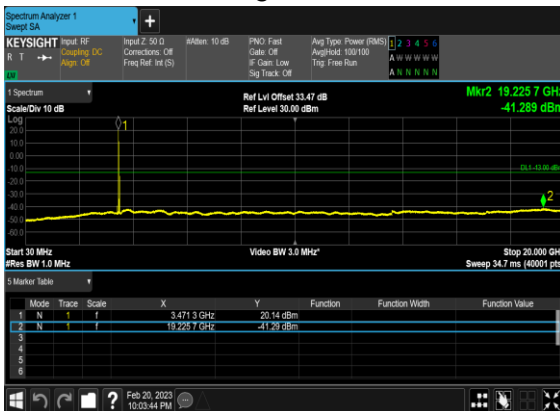


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

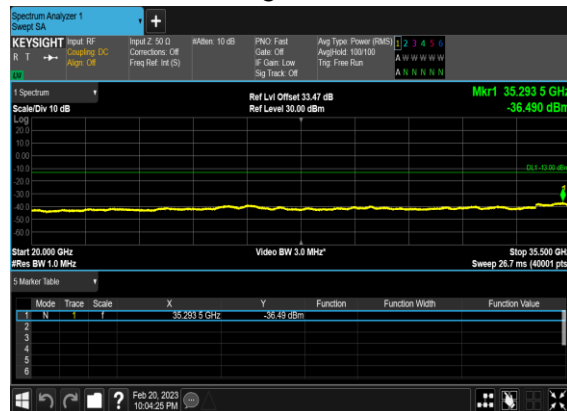


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

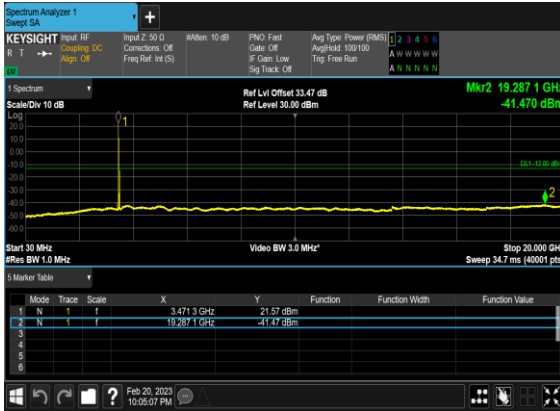


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

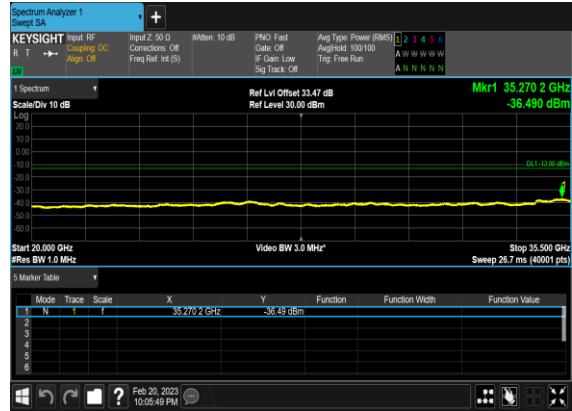


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

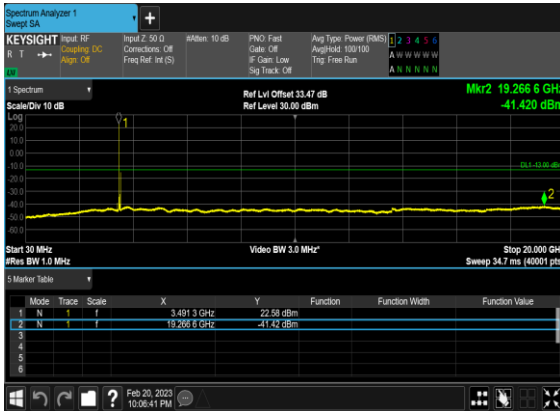


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

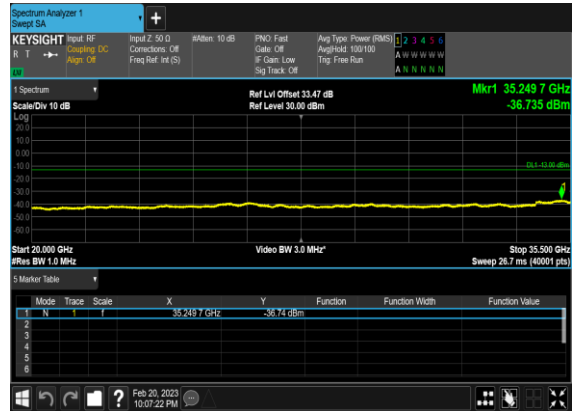


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

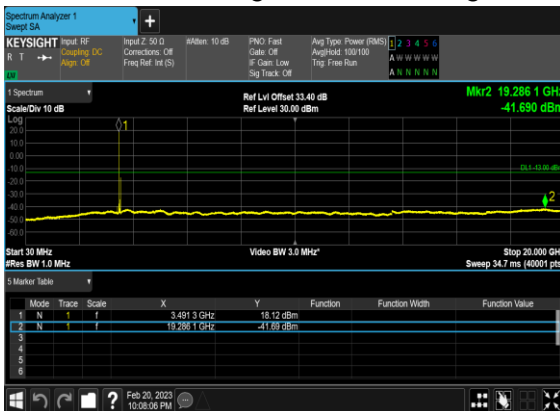


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

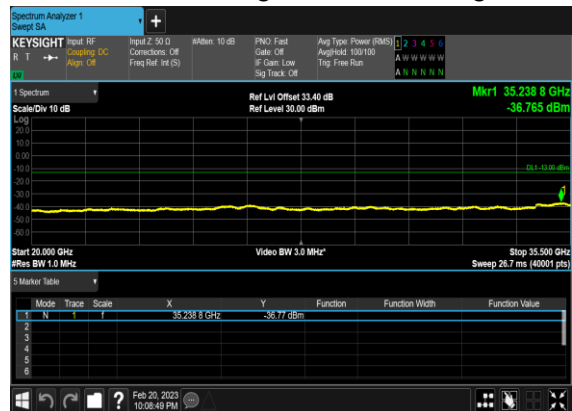


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

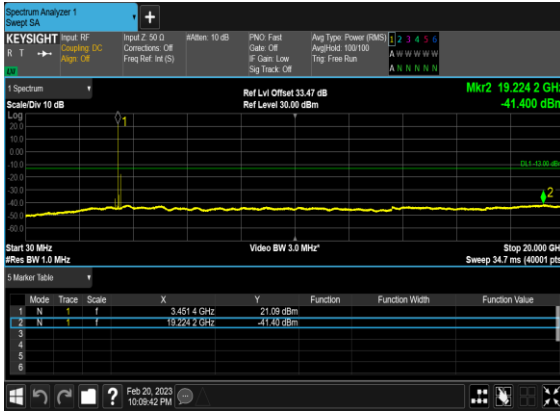


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

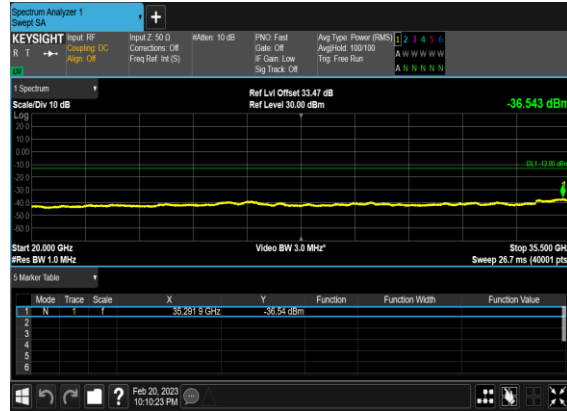

### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

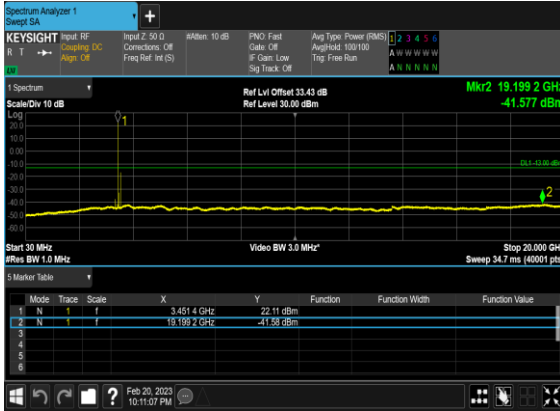


### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

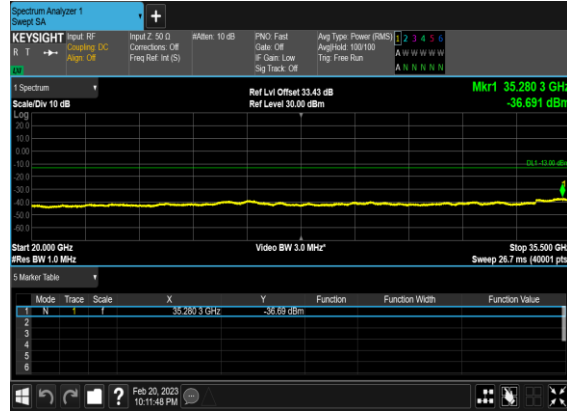


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

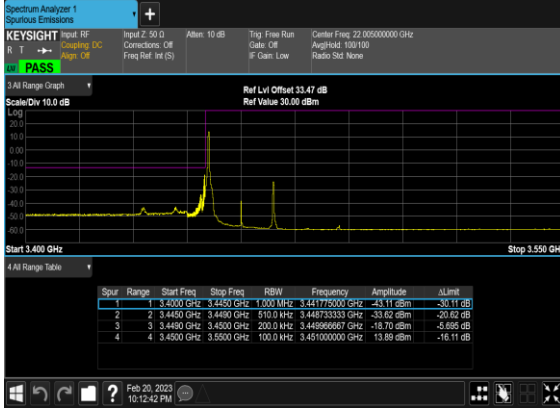


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

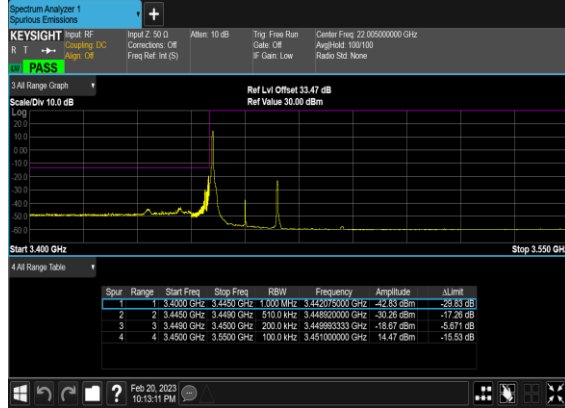


### N77(20M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

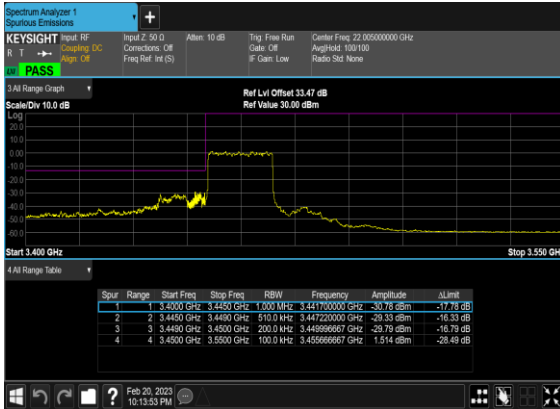


### N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

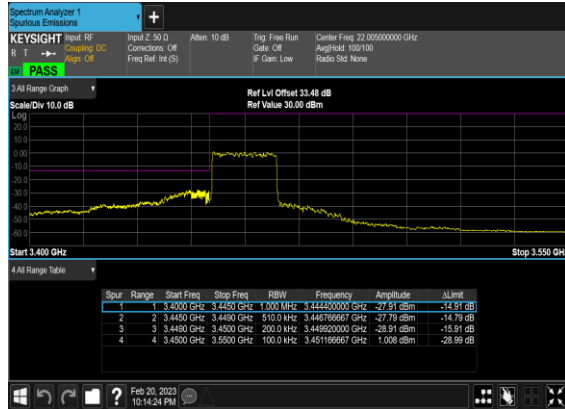

### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

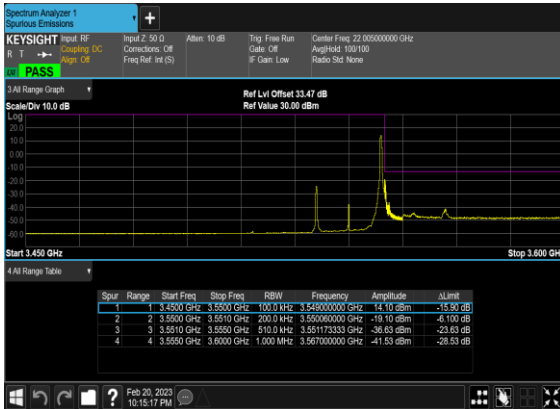


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

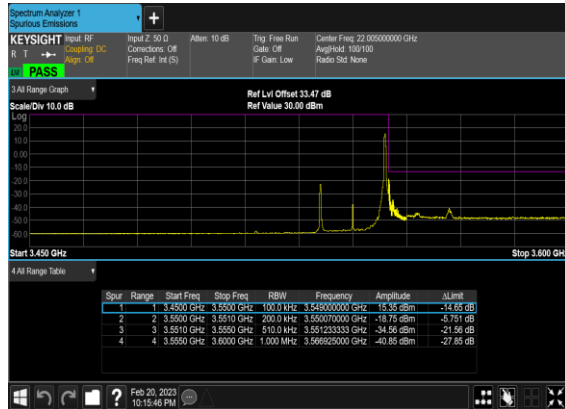





### N77(20M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

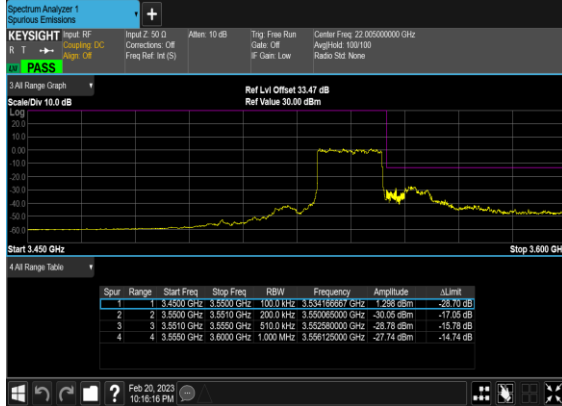


### N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

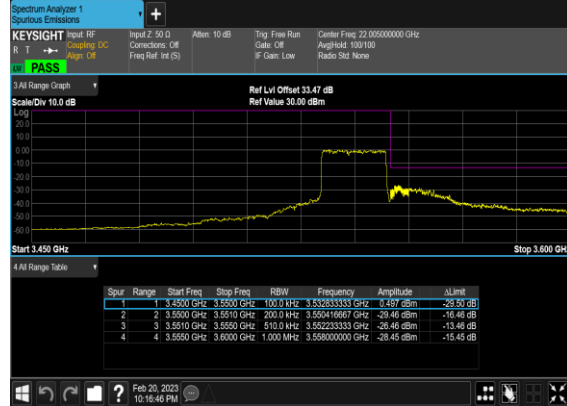


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

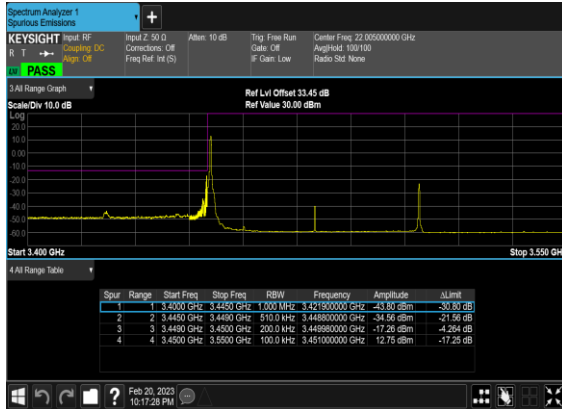


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

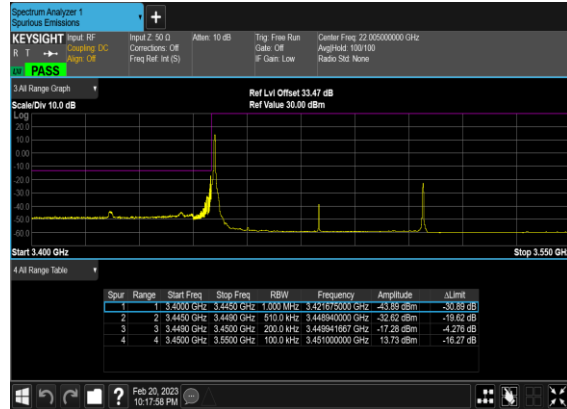


### N77(60M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

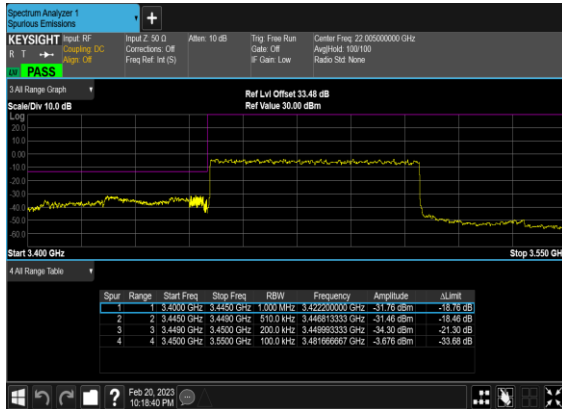


### N77(60M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

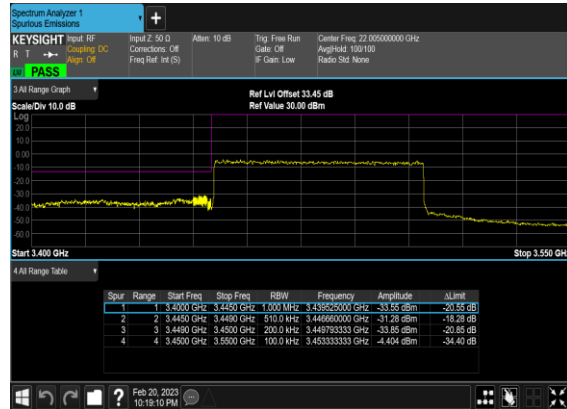


N77(60M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

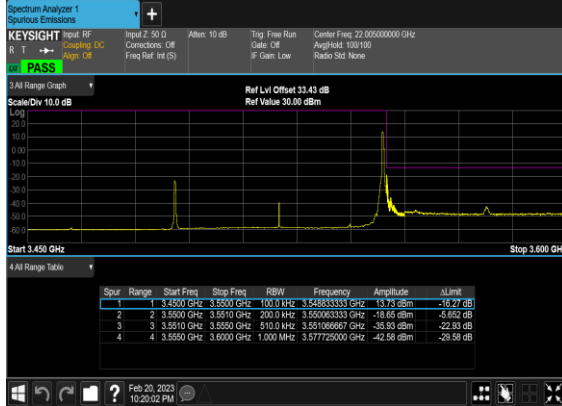


N77(60M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

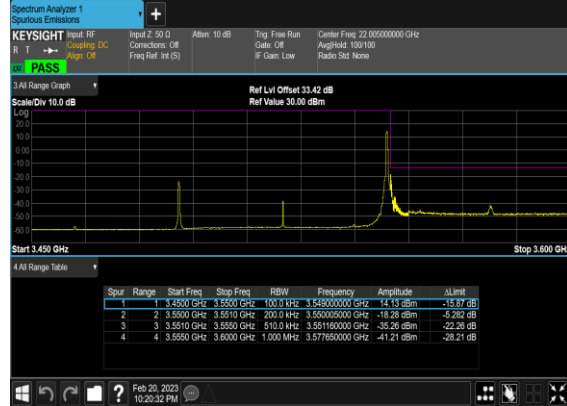


N77(60M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_High\_CH

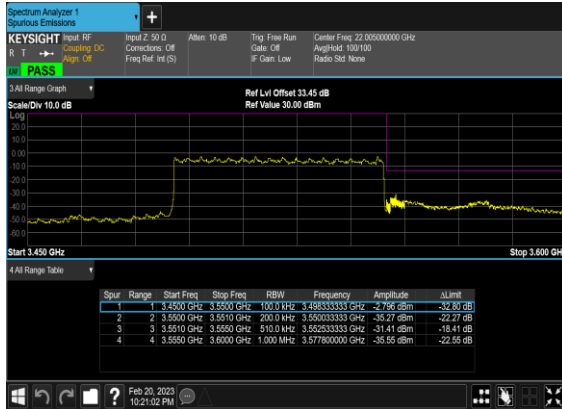


N77(60M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_High\_CH

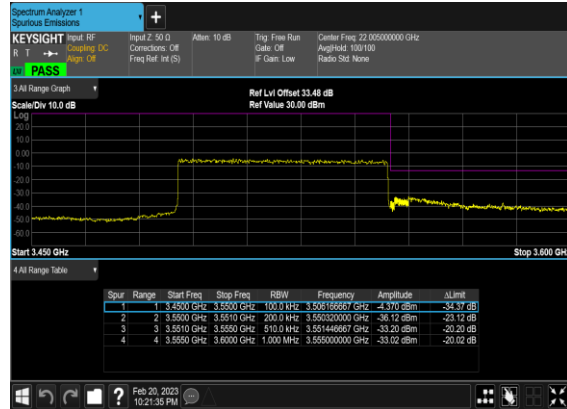


N77(100M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

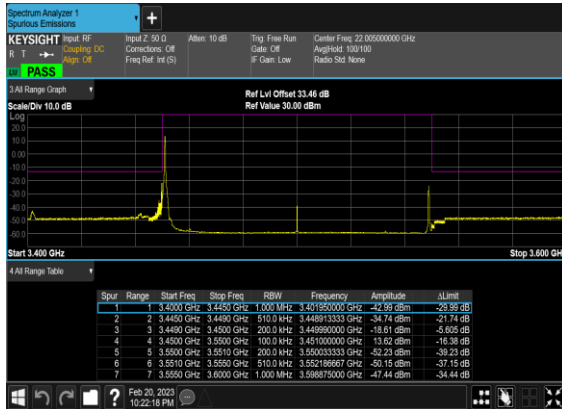


N77(100M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

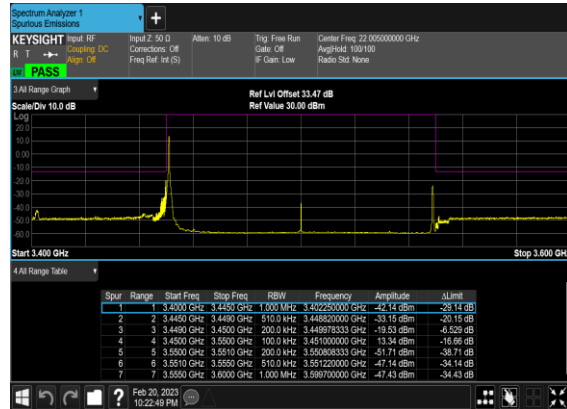


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

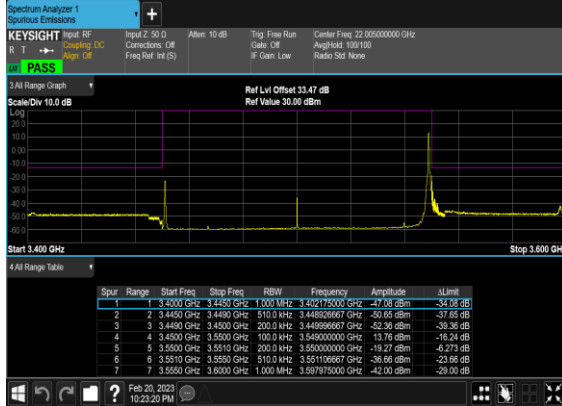


### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

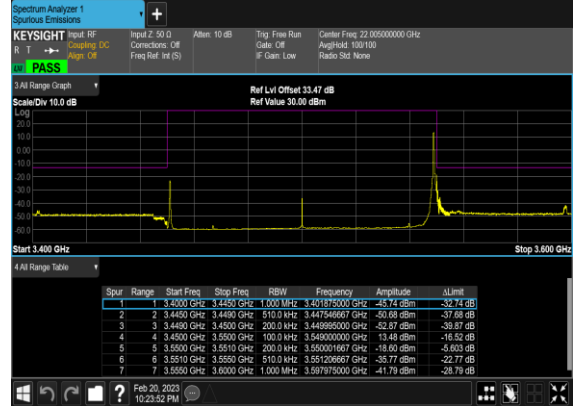

### N77(100M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Mid\_CH

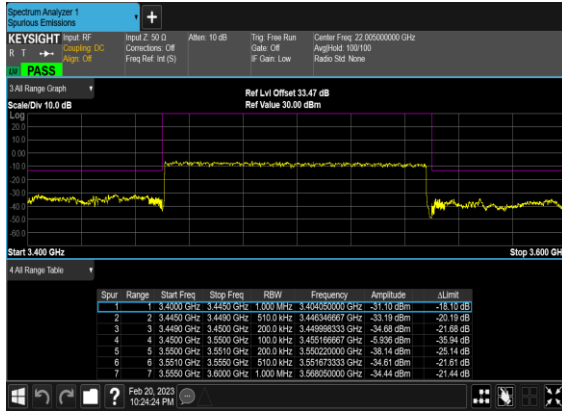

### N77(100M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

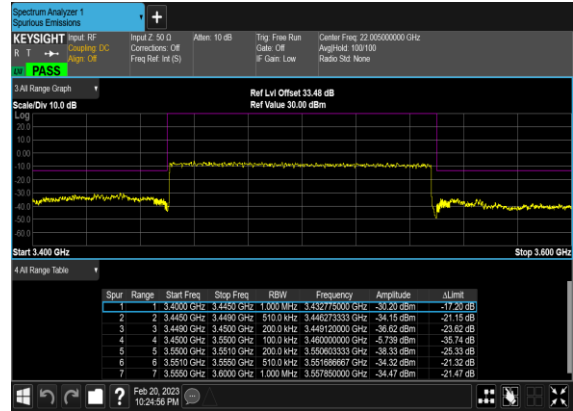

# FR1 N77 MIMO-ANT5+ANT1

## Transmitter Conducted Output Power and EIRP, ( $G_T - L_C$ )=-1.07dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	ANT5 Power(dBm)	ANT1 Power(dBm)	Conducted Power(dBm)	EIRP (dBm)	EIRP(W)
77	30	20	630668	3460.02	CP-OFDM QPSK	1@1	21.56	21.35	24.44	23.37	0.2173
77	30	20	630668	3460.02	CP-OFDM 16 QAM	1@1	21.64	21.07	24.39	23.32	0.2148
77	30	20	630668	3460.02	CP-OFDM 64 QAM	1@1	19.79	19.59	22.74	21.67	0.1469
77	30	20	633334	3500.01	CP-OFDM QPSK	1@1	21.58	21.61	24.67	23.6	0.2291
77	30	20	633334	3500.01	CP-OFDM 16 QAM	1@1	21.32	20.78	24.13	23.06	0.2023
77	30	20	633334	3500.01	CP-OFDM 64 QAM	1@1	19.49	19.37	22.41	21.34	0.1361
77	30	20	636000	3540	CP-OFDM QPSK	1@1	21.9	21.47	24.72	23.65	0.2317
77	30	20	636000	3540	CP-OFDM 16 QAM	1@1	21.63	20.98	24.32	23.25	0.2113
77	30	20	636000	3540	CP-OFDM 64 QAM	1@1	19.63	19.45	22.55	21.48	0.1406
77	30	30	631000	3465	CP-OFDM QPSK	1@1	21.86	21.73	24.85	23.78	0.2388
77	30	30	631000	3465	CP-OFDM 16 QAM	1@1	21.57	21.07	24.33	23.26	0.2118
77	30	30	631000	3465	CP-OFDM 64 QAM	1@1	19.77	19.62	22.68	21.61	0.1449
77	30	30	633334	3500.01	CP-OFDM QPSK	1@1	21.65	21.68	24.69	23.62	0.2301
77	30	30	633334	3500.01	CP-OFDM 16 QAM	1@1	21.3	21.07	24.2	23.13	0.2056
77	30	30	633334	3500.01	CP-OFDM 64 QAM	1@1	19.49	19.57	22.53	21.46	0.1400
77	30	30	635666	3534.99	CP-OFDM QPSK	1@1	22.05	21.6	24.81	23.74	0.2366
77	30	30	635666	3534.99	CP-OFDM 16 QAM	1@1	21.75	21.03	24.41	23.34	0.2158
77	30	30	635666	3534.99	CP-OFDM 64 QAM	1@1	19.93	19.68	22.79	21.72	0.1486
77	30	40	631334	3470.01	CP-OFDM QPSK	1@1	21.99	21.69	24.82	23.75	0.2371
77	30	40	631334	3470.01	CP-OFDM 16 QAM	1@1	21.61	21.11	24.36	23.29	0.2133
77	30	40	631334	3470.01	CP-OFDM 64 QAM	1@1	19.88	19.74	22.82	21.75	0.1496
77	30	40	633334	3500.01	CP-OFDM QPSK	1@1	21.79	21.67	24.65	23.58	0.2280
77	30	40	633334	3500.01	CP-OFDM 16 QAM	1@1	21.35	21.06	24.16	23.09	0.2037
77	30	40	633334	3500.01	CP-OFDM 64 QAM	1@1	19.58	19.7	22.65	21.58	0.1439
77	30	40	635332	3529.98	CP-OFDM QPSK	1@1	21.89	21.57	24.82	23.75	0.2371
77	30	40	635332	3529.98	CP-OFDM 16 QAM	1@1	21.65	21.06	24.36	23.29	0.2133
77	30	40	635332	3529.98	CP-OFDM 64 QAM	1@1	19.85	19.57	22.74	21.67	0.1469
77	30	50	631668	3475.02	CP-OFDM QPSK	1@1	21.69	21.47	24.64	23.57	0.2275

77	30	50	631668	3475.02	CP-OFDM 16 QAM	1@1	21.41	20.87	24.14	23.07	0.2028
77	30	50	631668	3475.02	CP-OFDM 64 QAM	1@1	19.55	19.46	22.47	21.4	0.1380
77	30	50	633334	3500.01	CP-OFDM QPSK	1@1	21.4	21.39	24.52	23.45	0.2213
77	30	50	633334	3500.01	CP-OFDM 16 QAM	1@1	21.1	20.81	23.98	22.91	0.1954
77	30	50	633334	3500.01	CP-OFDM 64 QAM	1@1	19.26	19.24	22.27	21.2	0.1318
77	30	50	635000	3525	CP-OFDM QPSK	1@1	21.63	21.41	24.59	23.52	0.2249
77	30	50	635000	3525	CP-OFDM 16 QAM	1@1	21.2	20.88	24.16	23.09	0.2037
77	30	50	635000	3525	CP-OFDM 64 QAM	1@1	19.46	19.3	22.43	21.36	0.1368
77	30	60	632000	3480	CP-OFDM QPSK	1@1	21.72	21.42	24.67	23.6	0.2291
77	30	60	632000	3480	CP-OFDM 16 QAM	1@1	21.41	20.91	24.18	23.11	0.2046
77	30	60	632000	3480	CP-OFDM 64 QAM	1@1	19.57	19.41	22.5	21.43	0.1390
77	30	60	633334	3500.01	CP-OFDM QPSK	1@1	21.46	21.32	24.37	23.3	0.2138
77	30	60	633334	3500.01	CP-OFDM 16 QAM	1@1	21.08	20.67	23.9	22.83	0.1919
77	30	60	633334	3500.01	CP-OFDM 64 QAM	1@1	19.38	19.26	22.33	21.26	0.1337
77	30	60	634666	3519.99	CP-OFDM QPSK	1@1	21.6	21.54	24.51	23.44	0.2208
77	30	60	634666	3519.99	CP-OFDM 16 QAM	1@1	21.22	20.87	24.02	22.95	0.1972
77	30	60	634666	3519.99	CP-OFDM 64 QAM	1@1	19.46	19.51	22.49	21.42	0.1387
77	30	70	632334	3485.01	CP-OFDM QPSK	1@1	21.66	21.32	24.55	23.48	0.2228
77	30	70	632334	3485.01	CP-OFDM 16 QAM	1@1	21.3	20.72	24.08	23.01	0.2000
77	30	70	632334	3485.01	CP-OFDM 64 QAM	1@1	19.4	19.18	22.33	21.26	0.1337
77	30	70	633334	3500.01	CP-OFDM QPSK	1@1	21.38	21.14	24.24	23.17	0.2075
77	30	70	633334	3500.01	CP-OFDM 16 QAM	1@1	21.01	20.58	23.81	22.74	0.1879
77	30	70	633334	3500.01	CP-OFDM 64 QAM	1@1	19.26	19.22	22.23	21.16	0.1306
77	30	70	634332	3514.98	CP-OFDM QPSK	1@1	21.29	21.29	24.31	23.24	0.2109
77	30	70	634332	3514.98	CP-OFDM 16 QAM	1@1	21.04	20.73	23.88	22.81	0.1910
77	30	70	634332	3514.98	CP-OFDM 64 QAM	1@1	19.16	19.24	22.2	21.13	0.1297
77	30	80	632668	3490.02	CP-OFDM QPSK	1@1	21.54	21.23	24.47	23.4	0.2188
77	30	80	632668	3490.02	CP-OFDM 16 QAM	1@1	21.31	20.72	24.03	22.96	0.1977
77	30	80	632668	3490.02	CP-OFDM 64 QAM	1@1	19.42	19.18	22.3	21.23	0.1327
77	30	80	633334	3500.01	CP-OFDM QPSK	1@1	21.36	21.26	24.34	23.27	0.2123
77	30	80	633334	3500.01	CP-OFDM 16 QAM	1@1	21.08	20.72	23.88	22.81	0.1910
77	30	80	633334	3500.01	CP-OFDM 64 QAM	1@1	19.28	19.17	22.24	21.17	0.1309
77	30	80	634000	3510	CP-OFDM QPSK	1@1	21.22	21.31	24.23	23.16	0.2070
77	30	80	634000	3510	CP-OFDM 16 QAM	1@1	21.02	20.71	23.85	22.78	0.1897

77	30	80	634000	3510	CP-OFDM 64 QAM	1@1	19.11	19.17	22.16	21.09	0.1285
77	30	90	633000	3495	CP-OFDM QPSK	1@1	21.5	21.3	24.46	23.39	0.2183
77	30	90	633000	3495	CP-OFDM 16 QAM	1@1	21.29	20.82	24.06	22.99	0.1991
77	30	90	633000	3495	CP-OFDM 64 QAM	1@1	19.41	19.29	22.33	21.26	0.1337
77	30	90	633334	3500.01	CP-OFDM QPSK	1@1	21.42	21.23	24.37	23.3	0.2138
77	30	90	633334	3500.01	CP-OFDM 16 QAM	1@1	21.23	20.71	23.94	22.87	0.1936
77	30	90	633334	3500.01	CP-OFDM 64 QAM	1@1	19.31	19.15	22.28	21.21	0.1321
77	30	90	633666	3504.99	CP-OFDM QPSK	1@1	21.37	21.26	24.33	23.26	0.2118
77	30	90	633666	3504.99	CP-OFDM 16 QAM	1@1	21.15	20.74	23.94	22.87	0.1936
77	30	90	633666	3504.99	CP-OFDM 64 QAM	1@1	19.24	19.17	22.2	21.13	0.1297
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	21.22	21.04	24.12	23.05	0.2018
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	21.92	21.78	24.88	23.81	0.2404
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	21.06	20.55	23.83	22.76	0.1888
77	30	100	633334	3500.01	CP-OFDM 16 QAM	137@68	20.79	20.52	23.65	22.58	0.1811
77	30	100	633334	3500.01	CP-OFDM 16 QAM	1@1	21.26	20.82	24.01	22.94	0.1968
77	30	100	633334	3500.01	CP-OFDM 16 QAM	1@271	20.8	20.07	23.46	22.39	0.1734
77	30	100	633334	3500.01	CP-OFDM 64 QAM	137@68	19.28	19.04	22.17	21.1	0.1288
77	30	100	633334	3500.01	CP-OFDM 64 QAM	1@1	19.4	19.34	22.37	21.3	0.1349
77	30	100	633334	3500.01	CP-OFDM 64 QAM	1@271	18.88	18.59	21.73	20.66	0.1164
77	30	100	633334	3500.01	CP-OFDM 256 QAM	137@68	16.22	16.07	19.21	18.14	0.0652
77	30	100	633334	3500.01	CP-OFDM 256 QAM	1@1	16.25	16.42	19.35	18.28	0.0673
77	30	100	633334	3500.01	CP-OFDM 256 QAM	1@271	15.98	15.63	18.83	17.76	0.0597

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0021	PASS	NV
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0025	PASS	LV
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0032	PASS	HV
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0011	PASS	-30°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0016	PASS	-20°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0024	PASS	-10°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0032	PASS	0°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0024	PASS	10°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0036	PASS	20°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0014	PASS	30°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	-0.0009	PASS	40°C
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	0.0026	PASS	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	10.94	13	PASS
77	30	100	633334	3500.01	CP-OFDM QPSK	1@0	10.71	13	PASS
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	10.82	13	PASS
77	30	100	633334	3500.01	CP-OFDM 16 QAM	1@0	10.0	13	PASS