

FCC SAR Test Report

APPLICANT : Zebra Technologies Corporation
EQUIPMENT : Touch Computer
BRAND NAME : Zebra
MODEL NAME : WCMTA
FCC ID : UZ7WCMTA
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 6
3. Guidance Applied 6
4. Equipment Under Test (EUT) Information 7
4.1 General Information 7
4.2 General LTE SAR Test and Reporting Considerations 10
4.3 General 5G NR SAR Test and Reporting Considerations 14
5. Smart Transmit feature for RF Exposure compliance 18
6. RF Exposure Limits 20
6.1 Uncontrolled Environment 20
6.2 Controlled Environment 20
7. Specific Absorption Rate (SAR) 21
7.1 Introduction 21
7.2 SAR Definition 21
8. System Description and Setup 22
8.1 E-Field Probe 23
8.2 Data Acquisition Electronics (DAE) 23
8.3 Phantom 24
8.4 Device Holder 25
9. Measurement Procedures 26
9.1 Spatial Peak SAR Evaluation 26
9.2 Power Reference Measurement 27
9.3 Area Scan 27
9.4 Zoom Scan 28
9.5 Volume Scan Procedures 28
9.6 Power Drift Monitoring 28
10. Test Equipment List 29
11. System Verification 30
11.1 Tissue Simulating Liquids 30
11.2 Tissue Verification 31
11.3 System Performance Check Results 32
12. RF Exposure Positions 34
12.1 Ear and handset reference point 34
12.2 Definition of the cheek position 35
12.3 Definition of the tilt position 36
12.4 Body Worn Accessory 37
12.5 Product Specific 10g SAR Exposure 38
12.6 Wireless Router 38
13. Conducted RF Output Power (Unit: dBm) 39
14. Antenna Location 456
15. SAR Test Results 457
15.1 Head SAR 461
15.2 Hotspot SAR 473
15.3 Body Worn Accessory SAR 485
15.4 Product specific 10g SAR 494
15.5 Repeated SAR Measurement 499
15.1 TDD LTE Linearity Data Analysis 501
16. Simultaneous Transmission Analysis 502
16.1 5G NR + LTE + WLAN + BT Sim-Tx analysis 504
16.2 Head Exposure Conditions 505
16.3 Hotspot Exposure Conditions 512
16.4 Body-Worn Accessory Exposure Conditions 517
16.5 Product specific 10g SAR Exposure Conditions 521
16.6 SPLSR Evaluation and Analysis 523
17. Uncertainty Assessment 525
18. References 526
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA311602	Rev. 01	Initial issue of report.	Apr. 26, 2023



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Touch Computer, WCMTA**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	WCDMA	WCDMA II	0.90	0.82	0.53	1.59
		WCDMA IV	0.77	0.65	0.43	
		WCDMA V	1.08	0.47	0.25	
	LTE	LTE Band 7	0.51	1.12	1.00	
		LTE Band 12/17	1.08	0.40	0.32	
		LTE Band 13	1.22	0.39	0.31	
		LTE Band 14	0.91	0.36	0.33	
		LTE Band 25/2	0.80	1.24	0.79	
		LTE Band 26/5	1.07	0.41	0.27	
		LTE Band 66/4	0.78	1.25	0.80	
		LTE Band 71	1.11	0.48	0.37	
		LTE Band 41/38	0.29	0.71	0.38	
		LTE Band 48	1.14	1.13	0.97	
		5G NR	FR1 n7	0.51	1.12	
	FR1 n12		0.83	0.31	0.29	
	FR1 n13		1.04	0.37	0.30	
	FR1 n14		0.95	0.36	0.29	
	FR1 n25/n2		0.86	1.23	0.85	
	FR1 n26/n5		1.12	0.69	0.25	
	FR1 n66		0.65	1.25	0.76	
FR1 n71	0.98		0.32	0.34		
FR1 n41/n38	1.03		1.12	1.06		
DTS	WLAN	2.4GHz WLAN	1.33	0.42	0.27	1.59
NII		5GHz WLAN	1.37	0.44	1.35	1.59
DSS	Bluetooth	2.4GHz Bluetooth	<0.10	<0.10	<0.10	1.59



Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	LTE	LTE Band 7	2.53	3.90
		LTE Band 25/2	3.29	
		LTE Band 66/4	3.48	
		LTE Band 48	3.17	
	5G NR	FR1 n7	1.98	
		FR1 n25/n2	3.26	
		FR1 n66	3.29	
		FR1 n41/n38	3.32	
		FR1 n48	3.09	
		FR1 n77	3.08	
NII	WLAN	5GHz WLAN	3.49	3.90
Date of Testing:			2023/3/8~2023/4/12	
Remark:				
1. This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41. 2. This device supports 5G NR n38/n5/n2 and n41/n26/n25. Since the supported frequency span for 5G NR n38/n5/n2 falls completely within the supports frequency span for n41/n26/n25, both 5G NR bands have the same target power, and both 5G NR bands share the same transmission path; therefore, SAR was only assessed for n41/n26/n25.				

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR02-KS	CN1257	314309

Applicant	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

Manufacturer	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Touch Computer
Brand Name	Zebra
Model Name	WCMTA
FCC ID	UZ7WCMTA
Sample 1	Scanner(SE4710)
Sample 2	Scanner(SE5500)
IMEI Code	Sample 1: IMEI 1:359667560020409 IMEI 2:352407450020384 Sample 2: IMEI 1:356466670001406 IMEI 2:350859340001408
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13 : 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz



Mode	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11 ac/ax VHT20/VHT40/HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
HW Version	DV
SW Version	13-09-09.00-TG-U00-PRD-ATH-04
MFD	09MAR23
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). WLAN 6GHz has no hotspot function.
4. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO and MIMO mode.
5. The device implements receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, hotspot, body-worn, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. This device uses the receiver to indicate whether the user is making a call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. It can determine proximity to head or body and set the relevant power level for WLAN/BT antennas accordingly.
6. For WLAN when transmit simultaneous with WWAN, power reduction will be activated to head, hotspot, body-worn and Handheld.
7. This device supports HPUE for LTE Band 41 with class 2 level, HPUE power has been measured separately. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
8. 5G NR N41/77 supports HPUE, HPUE power and SAR testing performed separately.
9. 5G NR N41/N77 HPUE with higher power, so 5G NR N41/77 HPUE SAR can represent power class 3 level SAR.
10. 5G NR n77 supports UL MIMO.
11. For 5G NR test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
12. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
13. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
14. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
15. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
16. The device supports 1S2T (CDD & Tx Beamforming) mode.
17. The device support DBS (Dual Band Simultaneous) function, when the device WLAN 2.4GHz and WLAN 5GHz or WLAN 6GHz transmit at the same time the module will limit different output power for simultaneous transmission compliance.
18. This device has three batteries, for battery1 and battery2 is same capacity, but battery 2 has BLE Beacon function, and for battery1/2 and battery 3 capacity is different and When they matched holster with device, the thickness is different. According to the difference, we only chose battery 1 to perform full SAR testing, and battery 2/3 spot check worse of battery 1.
19. Bluetooth LE is meant to ensure beacons are sent when the battery 2 is out of power and cannot be transmitted simultaneously with other wireless modes.
20. This device has two headsets, only audio interface is different. According to the difference, we chose headset 1/2 to



- perform full SAR testing.
21. There are two samples, the main differences between them are the scanner and memory. According to the difference, we only chose sample 1 to perform full SAR testing, and sample 2 spot check worse of sample 1.
 22. This device has one soft holster and one Hand Strap, the Hand Strap has no effect on RF exposure, and so soft holster spot check worst case to ensure the RF exposure is compliance at different exposure conditions.
 23. SAR Power density test report for WLAN6GHz U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WLAN/Bluetooth, always chose higher SAR of WLAN5GHz U-NII-1/2A/2C/3 and WLAN6GHz U-NII-5/6/7/8.
 24. This device has NFC function and the NFC SAR report will be separately submitted.
 25. This device supports 5GNR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n12	FDD	15	5, 10, 15
	n25	FDD	15	5, 10, 15, 20, 25, 30, 40
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n71	FDD	15	5, 10, 15, 20
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n48	TDD	30	10, 20, 40
SA	n77	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n12	FDD	15	5, 10, 15
	n13	FDD	15	5, 10
	n14	FDD	15	5, 10
	n25	FDD	15	5, 10, 15, 20, 25, 30, 40
	n26	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n71	FDD	15	5, 10, 15, 20
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
n48	TDD	30	10, 20, 40	
n77	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100	

Specification of Accessory

Battery1 Standard Battery (3800mAh)	Brand Name	Zebra	Model Number	BT-000473
---	-------------------	-------	---------------------	-----------

Supported Unit Used in Test Configuration and System

Battery2 Standard BLE Beacon Battery (3800mAh)	Brand Name	Zebra	Model Number	BT-000473B
Battery3 Extended Battery (5200mAh)	Brand Name	Zebra	Model Number	BT-000473E
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-TC2L-SNP1-01
Hand Strap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	UZ7WCMTA																																																														
Equipment Name	Touch Computer																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R15, Cat18																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in receiver detection/hotspot detect mechanism; head / body-worn / hotspot / extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.																																																														
LTE Carrier Aggregation Combinations	Intra-Band and Inter-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 4 carriers in the downlink Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz						
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)					
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz						
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)					
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz						
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)					
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
Bandwidth 5 MHz				Bandwidth 10 MHz								
Channel #		Freq.(MHz)		Channel #		Freq.(MHz)						
L	23205	779.5		23230		782						
M	23230	782										
H	23255	784.5										
LTE Band 14												
Bandwidth 5 MHz				Bandwidth 10 MHz								
Channel #		Channel #		Channel #		Freq.(MHz)						
L	23305	790.5		23330		793						
M	23330	793										
H	23355	795.5										
LTE Band 17												
Bandwidth 5 MHz				Bandwidth 10 MHz								
Channel #		Freq.(MHz)		Channel #		Freq. (MHz)						
L	23755	706.5		23780		709						
M	23790	710		23790		710						
H	23825	713.5		23800		711						
LTE Band 25												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz				
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			



										(MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

LTE Band 38									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Freq. (MHz)
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Ch. #	
L	37775	2572.5	37800	2575	37825	2577.5	37850	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	38150	2610

LTE Band 41									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Freq. (MHz)
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Ch. #	
L	39675	2498.5	39700	2501	39725	2503.5	39750	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	41490	2680

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

LTE Band 71									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Freq. (MHz)
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Ch. #	
L	133147	665.5	133172	668	133197	670.5	133222	133222	673
M	133247	675.5	133272	678	133297	680.5	133322	133322	683
H	133447	695.5	133422	693	133397	690.5	133372	133372	688

LTE Band 48									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Freq. (MHz)
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Ch. #	
L	55265	3552.5	55290	3555	55315	3557.5	55340	55340	3560
LM	55810	3607	55815	3607.5	55820	3608	55830	55830	3609
MH	56170	3643	56165	3642.5	56160	3642	56150	56150	3641
H	56715	3697.5	56690	3695	56665	3692.5	56640	56640	3690



<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 25	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
LTE Band 5	Ant 0	25.00	25.00	25.00	25.00	25.00
LTE Band 26	Ant 0	25.00	25.00	25.00	25.00	25.00
LTE Band 12	Ant 0	25.00	25.00	25.00	25.00	25.00
LTE Band 17	Ant 0	25.00	25.00	25.00	25.00	25.00

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
LTE Band 2	Ant 1	25.00	25.00	23.30	25.00	25.00
LTE Band 25	Ant 1	25.00	25.00	23.30	25.00	25.00
LTE Band 4	Ant 1	24.50	24.50	23.10	24.50	25.00
LTE Band 66	Ant 1	24.50	24.50	23.10	24.50	25.00

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
LTE Band 2	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 25	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 4	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 66	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 38	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 41 PC3	Ant 2	25.00	25.00	25.00	25.00	25.00
LTE Band 41 PC2	Ant 2	27.00	27.00	27.00	27.00	27.00



4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13 : 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n2	LTE B5/12/13/14/66/71
LTE Anchor Bands for n5	LTE B2/7/66/48
LTE Anchor Bands for n7	LTE B2/5/12/13/66
LTE Anchor Bands for n12	LTE B2/66
LTE Anchor Bands for n25	LTE B12/48/66
LTE Anchor Bands for n38	LTE B2/4/5/12/66/71
LTE Anchor Bands for n41	LTE B2/4/12/25/26/66
LTE Anchor Bands for n48	LTE B2/5/13/66
LTE Anchor Bands for n66	LTE B2/5/7/12/13/14/48/71
LTE Anchor Bands for n71	LTE B2/7/66
LTE Anchor Bands for n77	LTE B2/5/7/12/13/14/66

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550

NR Band 12						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	140300	701.5	140800	704	141300	706.5
M	141500	707.5	141500	707.5	141500	707.5
H	142700	713.5	142200	711	141700	708.5



NR Band 13				
	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	155900	779.5	156400	782
M	156400	782		
H	156900	784.5		

NR Band 14				
	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	158100	790.5	158600	793
M	158600	793		
H	159100	795.5		

NR Band 25														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	374000	1870
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379000	1895

NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 66												
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760

NR Band 71								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133100	665.5	133600	668	134100	670.5	134600	673
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5
H	139100	695.5	138600	693	138100	690.5	137600	688

NR Band 38						
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	516000	2580	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595
H	522000	2610	520998	2604.99	519996	2599.98

NR Band 41																		
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640

NR Band 48						
	Bandwidth 10MHz		Bandwidth 20MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	637000	3555	637334	3560.01	638000	3570
M	641666	3624.99	641666	3624.99	641666	3624.99
H	646332	3694.98	646000	3690	645332	3679.98



NR Band 77																		
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	664666	3970.02	664332	3965.01	664000	3960	663668	3955.02	663332	3950.01	663000	3945	662666	3940.02	662332	3935.01	662000	3930

For <3450 MHz ~ 3550 MHz >

NR Band 77																		
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

<For NR Overlap Bands Description>

1) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20
	n25	FDD	15	5, 10, 15, 20, 25, 30, 40
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60,70, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20
	n25	FDD	15	5, 10, 15, 20, 25, 30, 40
	n5	FDD	15	5, 10, 15, 20
	n26	FDD	15	5, 10, 15, 20
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60,70, 80, 90, 100



2) NR Bands Tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
5G NR n5	Ant 0	25.00	25.00	25.00	25.00	25.00
5G NR n26	Ant 0	25.00	25.00	25.00	25.00	25.00

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
5G NR n2	Ant 1	25.00	25.00	24.40	25.00	25.00
5G NR n25	Ant 1	25.00	25.00	24.40	25.00	25.00

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 0 Tune-up Limit	Hotspot DSI 1 Tune-up Limit	Extremely DSI 0 Tune-up Limit	Default Tune-up Limit
5G NR n2	Ant 2	25.00	25.00	25.00	25.00	25.00
5G NR n25	Ant 2	25.00	25.00	25.00	25.00	25.00
5G NR n38	Ant 2	25.00	25.00	23.20	25.00	25.00
5G NR n41 PC3	Ant 2	24.00	24.00	23.20	24.00	24.00
5G NR n41 PC2	Ant 2	27.00	26.30	23.20	26.30	27.00

5. Smart Transmit feature for RF Exposure compliance

The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

Note that WLAN/BT operations are not enabled with Smart Transmit.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for f < 6 GHz.

<SAR design target and uncertainty>

Item	Uncertainty dB (k=2)
Total uncertainty	1.0

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$



The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Head DSI 2	Body Worn& Extremity DSI 0	Hotspot DSI 1	Pmax*
WCDMA II	Ant 2	25.1	24.0	26.0	24.0
WCDMA IV	Ant 2	26.0	24.0	26.3	24.0
WCDMA V	Ant 0	24.5	24.0	27.7	24.0
LTE Band 25(2)	Ant 1	30.2	24.3	22.3	24.0
LTE Band 25(2)	Ant 2	26.0	24.0	25.7	24.0
LTE Band 66(4)	Ant 1	23.5	23.5	22.1	24.0
LTE Band 66(4)	Ant 2	26.2	24.0	26.4	24.0
LTE Band 26(5)	Ant 0	24.2	24.0	30.6	24.0
LTE Band 7	Ant 2	28.3	24.0	21.6	24.0
LTE Band 12(17)	Ant 0	24.7	24.0	28.5	24.0
LTE Band 13	Ant 0	24.1	24.0	28.6	24.0
LTE Band 14	Ant 0	25.2	24.0	28.9	24.0
LTE Band 71	Ant 0	24.7	24.0	27.7	24.0
LTE Band 41 PC3(38 PC3)	Ant 2	28.0	22.4	24.0	22.0
LTE Band 41 PC2	Ant 2	28.0	22.4	24.0	22.4
LTE Band 48	Ant 5	19.8	19.4	18.9	21.0
5G NR n25(2)	Ant 1	30.2	24.2	23.4	24.0
5G NR n25(2)	Ant 2	25.3	24.0	26.5	24.0
5G NR n26(5)	Ant 0	24.2	24.0	26.1	24.0
5G NR n7	Ant 2	28.3	26.0	21.9	24.0
5G NR n12	Ant 0	25.3	24.0	29.6	24.0
5G NR n13	Ant 0	24.3	24.0	28.8	24.0
5G NR n14	Ant 0	24.7	24.0	28.9	24.0
5G NR n66	Ant 1	32.0	24.1	23.6	24.0
5G NR n66	Ant 2	26.8	24.0	26.7	24.0
5G NR n71	Ant 0	24.7	24.0	29.5	24.0
5G NR n41 PC3(38 PC3)	Ant 0	22.5	22.0	21.6	22.0
5G NR n38 PC3	Ant 2	27.2	25.3	22.2	24.0
5G NR n41 PC3	Ant 2	27.2	25.3	22.2	23.0
5G NR n41 PC2	Ant 2	27.2	25.3	22.2	26.0
5G NR n41 PC3(38 PC3)	Ant 3	26.3	22.0	28.5	22.0
5G NR n41 PC3(38 PC3)	Ant 4	31.3	22.0	27.8	22.0
5G NR n48	Ant 5	20.7	19.2	19.2	23.0
5G NR n77 PC3	Ant 0	20.0	20.5	24.1	20.5
5G NR n77 PC3	Ant 1	34.2	22.7	22.4	22.0
5G NR n77 PC3	Ant 5	21.0	19.4	19.4	23.0
5G NR n77 PC2	Ant 5	21.0	19.4	19.4	26.0
5G NR n77 PC3	Ant 6	22.7	22.0	22.7	22.0

Note:

- 1) *P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + 1.0 dB device uncertainty.
- 2) All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., LTE TDD & NR TDD).
- 3) The following table is duty cycle and factor used for calculating time average power.

FDD/TDD	Duty Cycle	Time average calculation factor(dB)
FDD LTE	100%	0.0
TDD LTE	63.30%	-2.0
TDD HPUE	43.30%	-3.6
NR FDD/TDD	100%	0.0

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

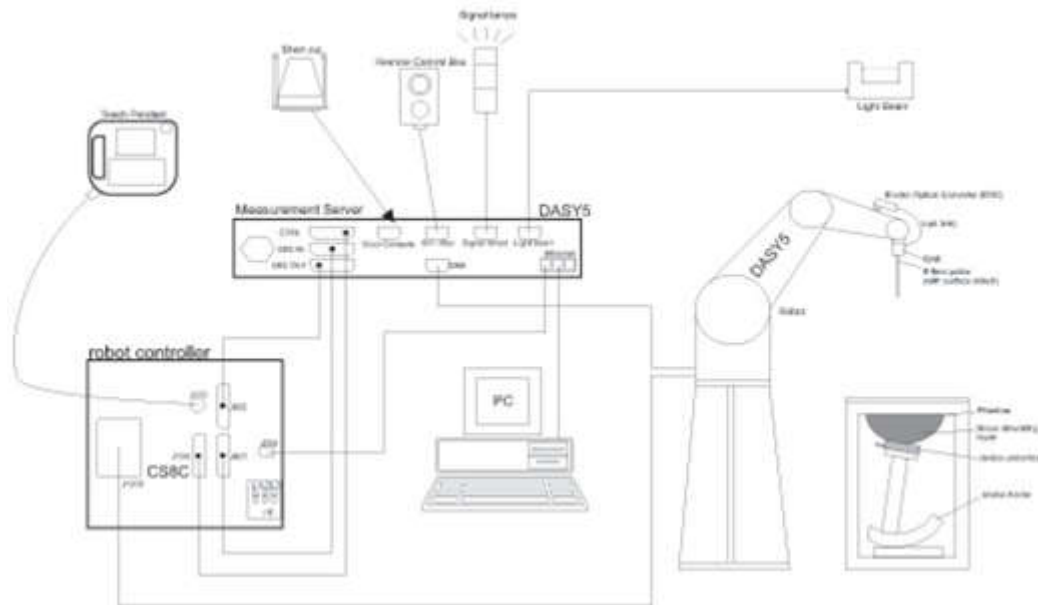


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2025/2/23
SPEAG	835MHz System Validation Kit	D835V2	4d091	2022/8/19	2023/8/18
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2025/2/23
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	2021/12/20	2024/12/19
SPEAG	2450MHz System Validation Kit	D2450V2	1040	2020/5/6	2023/5/4
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/24
SPEAG	3500MHz System Validation Kit	D3500V2	1037	2020/11/25	2023/11/23
SPEAG	3700MHz System Validation Kit	D3700V2	1008	2020/11/25	2023/11/23
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2020/5/14	2023/5/12
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2022/9/23	2023/9/22
SPEAG	Data Acquisition Electronics	DAE4	1303	2022/11/24	2023/11/23
SPEAG	Dosimetric E-Field Probe	EX3DV4	7706	2023/1/26	2024/1/25
SPEAG	SAM Twin Phantom	SAM Twin	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-1754	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2022/7/14	2023/7/13
Agilent	ENA Series Network Analyzer	E5071C	MY46104587	2022/5/24	2023/5/23
SPEAG	Dielectric Probe Kit	DAK-3.5	1144	2022/8/15	2023/8/14
Anritsu	Vector Signal Generator	MG3710A	6201682672	2023/1/5	2024/1/4
Rohde & Schwarz	Power Meter	NRVD	102081	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2022/7/14	2023/7/13
R&S	BLUETOOTH TESTER	CBT	101246	2022/5/24	2023/5/23
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2022/10/12	2023/10/11
TES	DIGITAC THERMOMETER	1310	220305411	2023/1/8	2024/1/7
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/7/20	2023/7/19
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

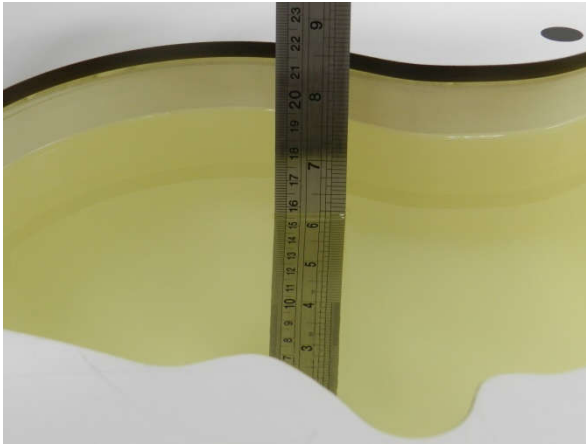


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.8	0.889	42.269	0.89	41.90	-0.11	0.88	±5	2023/3/8
835	Head	22.7	0.911	42.719	0.90	41.50	1.22	2.94	±5	2023/3/9
1750	Head	22.6	1.316	40.214	1.37	40.10	-3.94	0.28	±5	2023/3/10
1900	Head	22.7	1.406	40.2	1.4	40	0.43	0.50	±5	2023/3/11
2600	Head	22.8	2.03	40.337	1.96	39	3.57	3.43	±5	2023/3/12
3500	Head	22.8	2.810	38.714	2.91	37.90	-3.44	2.15	±5	2023/3/13
3700	Head	22.9	2.988	38.363	3.12	37.70	-4.23	1.76	±5	2023/3/14
3900	Head	22.6	3.171	38.039	3.32	37.50	-4.49	1.44	±5	2023/3/15
750	Head	22.7	0.900	41.192	0.89	41.90	1.12	-1.69	±5	2023/3/16
835	Head	22.6	0.902	41.240	0.90	41.50	0.22	-0.63	±5	2023/3/17
1750	Head	22.8	1.409	40.669	1.37	40.10	2.85	1.42	±5	2023/3/18
1900	Head	22.7	1.397	39.035	1.40	40.00	-0.21	-2.41	±5	2023/3/19
2600	Head	22.7	1.926	38.230	1.96	39.00	-1.73	-1.97	±5	2023/3/20
3500	Head	22.7	2.784	38.912	2.91	37.90	-4.33	2.67	±5	2023/3/21
3700	Head	22.8	2.994	38.681	3.12	37.70	-4.04	2.60	±5	2023/3/22
3900	Head	22.8	3.194	38.385	3.32	37.50	-3.80	2.36	±5	2023/3/23
750	Head	22.6	0.887	42.279	0.89	41.90	-0.34	0.90	±5	2023/3/24
835	Head	22.5	0.912	41.950	0.90	41.50	1.33	1.08	±5	2023/3/26
1750	Head	22.9	1.317	40.222	1.37	40.10	-3.87	0.30	±5	2023/3/28
1900	Head	22.8	1.407	40.212	1.40	40.00	0.50	0.53	±5	2023/3/30
2600	Head	22.7	1.872	39.214	1.96	39.00	-4.49	0.55	±5	2023/4/1
3500	Head	22.6	2.813	38.733	2.91	37.90	-3.33	2.20	±5	2023/4/3
3700	Head	22.5	2.991	38.380	3.12	37.70	-4.13	1.80	±5	2023/4/5
3900	Head	22.6	3.175	38.056	3.32	37.50	-4.37	1.48	±5	2023/4/7
2450	Head	22.6	1.806	38.608	1.80	39.20	0.33	-1.51	±5	2023/4/8
5250	Head	22.7	4.601	35.852	4.71	35.90	-2.31	-0.13	±5	2023/4/9
5600	Head	22.7	5.004	35.285	5.07	35.50	-1.30	-0.61	±5	2023/4/10
5750	Head	22.8	5.171	35.094	5.22	35.40	-0.94	-0.86	±5	2023/4/12

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2023/3/8	750	Head	50	1087	7706	1303	0.408	8.58	8.16	-4.90
2023/3/9	835	Head	50	4d091	7706	1303	0.487	9.45	9.74	3.07
2023/3/10	1750	Head	50	1090	7706	1303	1.720	37.00	34.4	-7.03
2023/3/11	1900	Head	50	5d182	7706	1303	1.870	39.60	37.4	-5.56
2023/3/12	2600	Head	50	1061	7706	1303	2.620	56.60	52.4	-7.42
2023/3/13	3500	Head	50	1037	7706	1303	3.130	68.00	62.6	-7.94
2023/3/14	3700	Head	50	1008	7706	1303	3.190	67.60	63.8	-5.62
2023/3/15	3900	Head	50	1048	7706	1303	3.310	70.20	66.2	-5.70
2023/3/16	750	Head	50	1087	7706	1303	0.431	8.58	8.62	0.47
2023/3/17	835	Head	50	4d091	7706	1303	0.501	9.45	10.02	6.03
2023/3/18	1750	Head	50	1090	7706	1303	1.980	37.00	39.6	7.03
2023/3/19	1900	Head	50	5d182	7706	1303	2.100	39.60	42	6.06
2023/3/20	2600	Head	50	1061	7706	1303	2.940	56.60	58.8	3.89
2023/3/21	3500	Head	50	1037	7706	1303	3.350	68.00	67	-1.47
2023/3/22	3700	Head	50	1008	7706	1303	3.550	67.60	71	5.03
2023/3/23	3900	Head	50	1048	7706	1303	3.290	70.20	65.8	-6.27
2023/3/24	750	Head	50	1087	7706	1303	0.411	8.58	8.22	-4.20
2023/3/26	835	Head	50	4d091	7706	1303	0.467	9.45	9.34	-1.16
2023/3/28	1750	Head	50	1090	7706	1303	1.710	37.00	34.2	-7.57
2023/3/30	1900	Head	50	5d182	7706	1303	1.880	39.60	37.6	-5.05
2023/4/1	2600	Head	50	1061	7706	1303	2.620	56.60	52.4	-7.42
2023/4/3	3500	Head	50	1037	7706	1303	3.160	68.00	63.2	-7.06
2023/4/5	3700	Head	50	1008	7706	1303	3.470	67.60	69.4	2.66
2023/4/7	3900	Head	50	1048	7706	1303	3.280	70.20	65.6	-6.55
2023/4/8	2450	Head	50	1040	7706	1303	2.660	51.80	53.2	2.70
2023/4/9	5250	Head	50	1113	7706	1303	4.150	81.50	83	1.84
2023/4/10	5600	Head	50	1113	7706	1303	4.370	82.60	87.4	5.81
2023/4/12	5750	Head	50	1113	7706	1303	4.000	80.80	80	-0.99

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2023/3/8	750	Head	50	1087	7706	1303	0.267	5.65	5.34	-5.49
2023/3/9	835	Head	50	4d091	7706	1303	0.317	6.22	6.34	1.93
2023/3/10	1750	Head	50	1090	7706	1303	0.905	19.50	18.1	-7.18
2023/3/11	1900	Head	50	5d182	7706	1303	0.973	20.20	19.46	-3.66
2023/3/12	2600	Head	50	1061	7706	1303	1.180	25.10	23.6	-5.98
2023/3/13	3500	Head	50	1037	7706	1303	1.180	25.40	23.6	-7.09
2023/3/14	3700	Head	50	1008	7706	1303	1.180	24.40	23.6	-3.28
2023/3/15	3900	Head	50	1048	7706	1303	1.190	24.40	23.8	-2.46
2023/3/16	750	Head	50	1087	7706	1303	0.293	5.65	5.86	3.72
2023/3/17	835	Head	50	4d091	7706	1303	0.335	6.22	6.7	7.72
2023/3/18	1750	Head	50	1090	7706	1303	1.030	19.50	20.6	5.64
2023/3/19	1900	Head	50	5d182	7706	1303	1.090	20.20	21.8	7.92
2023/3/20	2600	Head	50	1061	7706	1303	1.350	25.10	27	7.57
2023/3/21	3500	Head	50	1037	7706	1303	1.340	25.40	26.8	5.51
2023/3/22	3700	Head	50	1008	7706	1303	1.310	24.40	26.2	7.38
2023/3/23	3900	Head	50	1048	7706	1303	1.310	24.40	26.2	7.38
2023/3/24	750	Head	50	1087	7706	1303	0.269	5.65	5.38	-4.78
2023/3/26	835	Head	50	4d091	7706	1303	0.304	6.22	6.08	-2.25
2023/3/28	1750	Head	50	1090	7706	1303	0.898	19.50	17.96	-7.90
2023/3/30	1900	Head	50	5d182	7706	1303	0.974	20.20	19.48	-3.56
2023/4/1	2600	Head	50	1061	7706	1303	1.180	25.10	23.6	-5.98
2023/4/3	3500	Head	50	1037	7706	1303	1.210	25.40	24.2	-4.72
2023/4/5	3700	Head	50	1008	7706	1303	1.280	24.40	25.6	4.92
2023/4/7	3900	Head	50	1048	7706	1303	1.160	24.40	23.2	-4.92
2023/4/8	2450	Head	50	1040	7706	1303	1.280	24.00	25.6	6.67
2023/4/9	5250	Head	50	1113	7706	1303	1.250	23.30	25	7.30
2023/4/10	5600	Head	50	1113	7706	1303	1.260	23.70	25.2	6.33
2023/4/12	5750	Head	50	1113	7706	1303	1.150	23.00	23	0.00

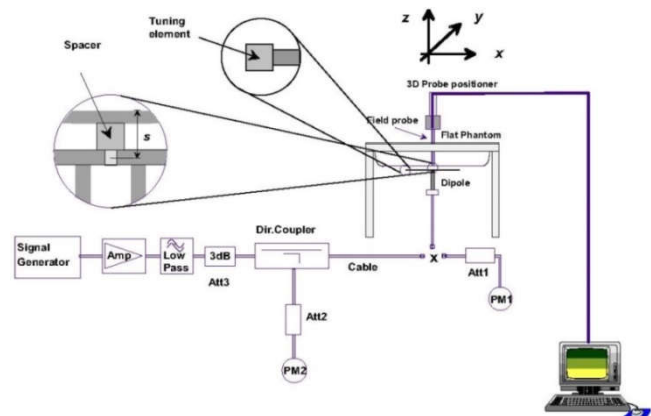


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

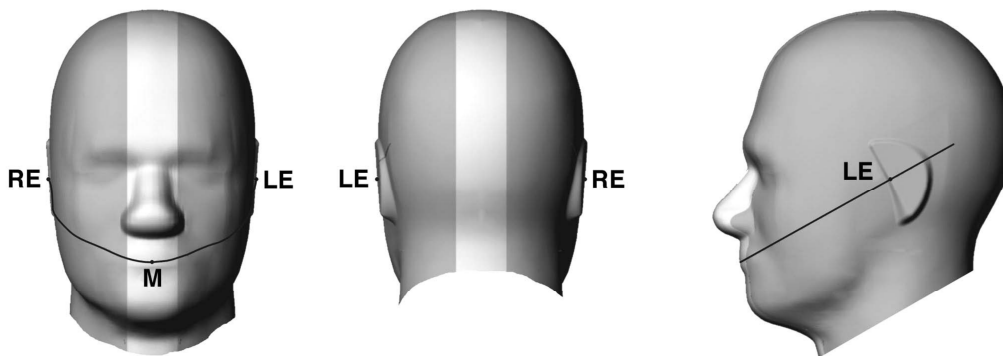


Fig 12.1.1 Front, back, and side views of SAM twin phantom

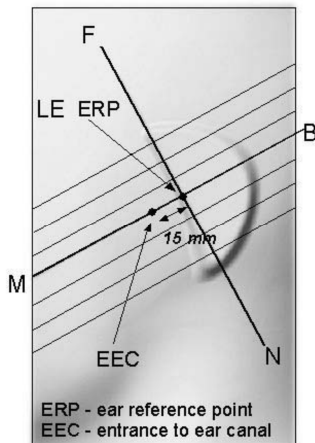


Fig 12.1.2 Close-up side view of phantom showing the ear region.

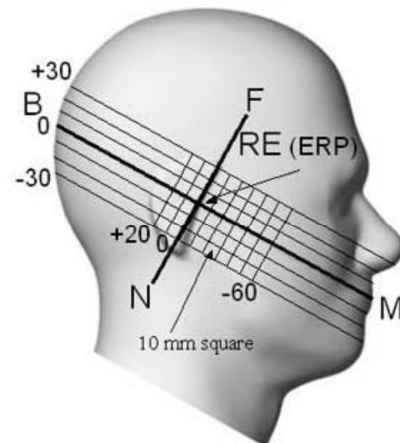


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

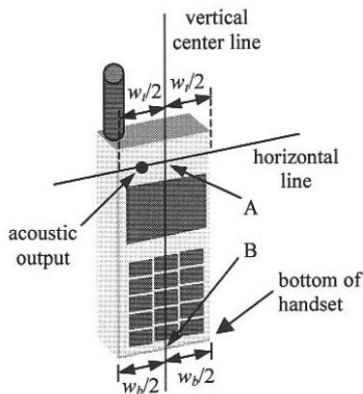


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

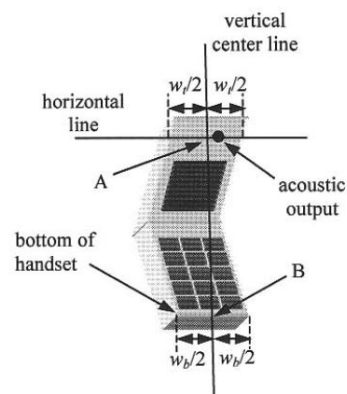


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

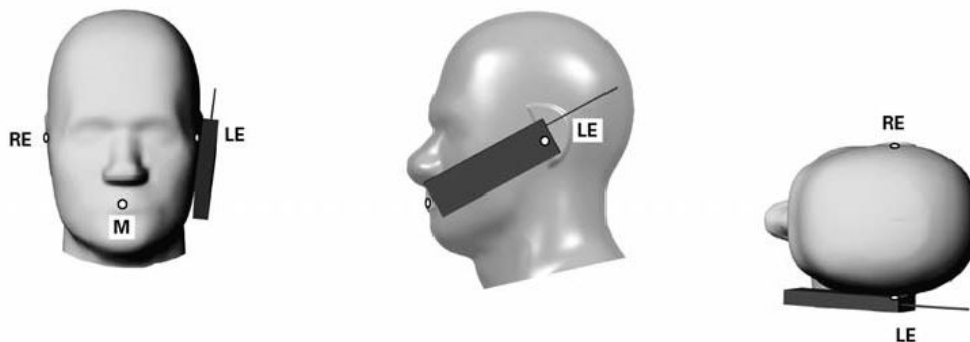


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

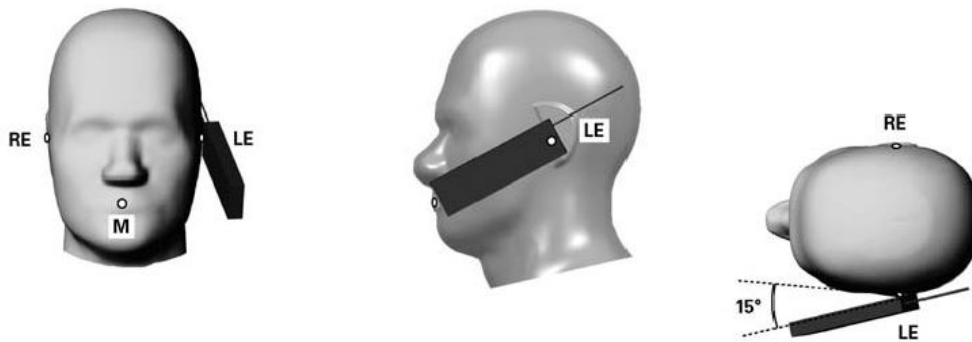


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

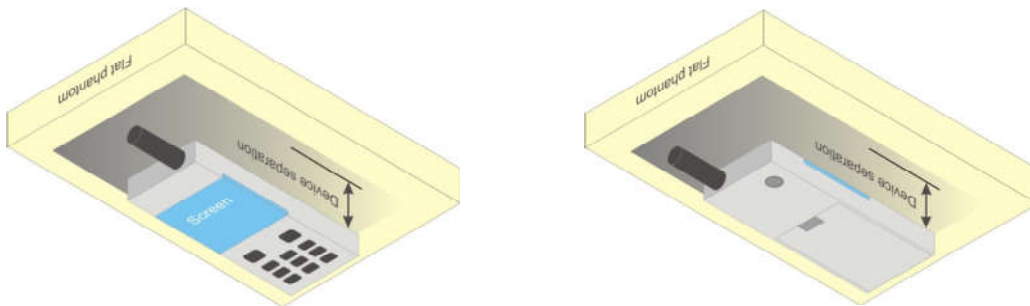


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

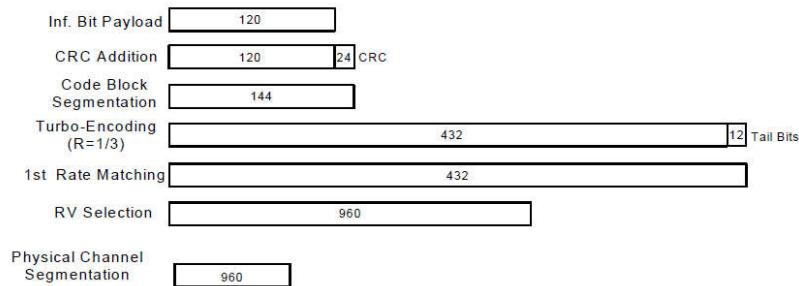


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK) Setup Configuration



<WCDMA Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Default Power Mode

Band		WCDMA V Ant0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.80	24.00	23.89	25.00
3GPP Rel 99	RMC 12.2Kbps	23.93	24.06	24.01	25.00
3GPP Rel 6	HSDPA Subtest-1	23.09	23.27	23.05	24.00
3GPP Rel 6	HSDPA Subtest-2	22.97	23.02	23.17	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.67	22.84	23.50
3GPP Rel 6	HSDPA Subtest-4	22.61	22.82	22.65	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.33	23.33	23.07	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.32	23.09	23.34	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.70	22.77	22.80	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.65	22.73	22.70	23.50
3GPP Rel 6	HSUPA Subtest-1	23.29	23.07	23.10	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	20.89	20.94	22.00
3GPP Rel 6	HSUPA Subtest-3	22.07	22.28	21.98	23.00
3GPP Rel 6	HSUPA Subtest-4	20.89	21.23	21.30	22.00
3GPP Rel 6	HSUPA Subtest-5	23.20	23.36	23.23	24.00

Band		WCDMA II Ant2			Tune-up Limit (dBm)	WCDMA IV Ant2			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	24.08	24.24	24.13	25.00	23.84	23.98	23.93	25.00
3GPP Rel 99	RMC 12.2Kbps	24.19	24.32	24.30	25.00	23.91	24.05	24.02	25.00
3GPP Rel 6	HSDPA Subtest-1	23.05	23.30	23.23	24.00	22.89	23.06	22.97	24.00
3GPP Rel 6	HSDPA Subtest-2	23.10	23.31	23.26	24.00	22.99	23.08	23.00	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.84	22.73	23.50	22.55	22.61	22.53	23.50
3GPP Rel 6	HSDPA Subtest-4	22.53	22.77	22.74	23.50	22.41	22.56	22.46	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.17	23.40	23.28	24.00	22.90	23.06	22.87	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.18	23.39	23.25	24.00	22.94	23.02	22.97	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.53	22.78	22.64	23.50	22.41	22.60	22.58	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.49	22.84	22.75	23.50	22.55	22.57	22.55	23.50
3GPP Rel 6	HSUPA Subtest-1	23.04	23.32	23.23	24.00	22.87	23.04	22.91	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	21.37	21.28	22.00	20.83	21.03	20.86	22.00
3GPP Rel 6	HSUPA Subtest-3	22.12	22.33	22.21	23.00	22.06	22.09	21.93	23.00
3GPP Rel 6	HSUPA Subtest-4	21.02	21.39	21.26	22.00	21.02	21.13	21.04	22.00
3GPP Rel 6	HSUPA Subtest-5	23.09	23.38	23.21	24.00	23.09	23.13	23.13	24.00



Reduced Power Mode for DSI 0

Band		WCDMA V Ant0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.80	24.00	23.89	25.00
3GPP Rel 99	RMC 12.2Kbps	23.93	24.06	24.01	25.00
3GPP Rel 6	HSDPA Subtest-1	23.09	23.27	23.05	24.00
3GPP Rel 6	HSDPA Subtest-2	22.97	23.02	23.17	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.67	22.84	23.50
3GPP Rel 6	HSDPA Subtest-4	22.61	22.82	22.65	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.33	23.33	23.07	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.32	23.09	23.34	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.70	22.77	22.80	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.65	22.73	22.70	23.50
3GPP Rel 6	HSUPA Subtest-1	23.29	23.07	23.10	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	20.89	20.94	22.00
3GPP Rel 6	HSUPA Subtest-3	22.07	22.28	21.98	23.00
3GPP Rel 6	HSUPA Subtest-4	20.89	21.23	21.30	22.00
3GPP Rel 6	HSUPA Subtest-5	23.20	23.36	23.23	24.00

Band		WCDMA II Ant2			Tune-up Limit (dBm)	WCDMA IV Ant2			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	24.08	24.24	24.13	25.00	23.84	23.98	23.93	25.00
3GPP Rel 99	RMC 12.2Kbps	24.19	24.32	24.30	25.00	23.91	24.05	24.02	25.00
3GPP Rel 6	HSDPA Subtest-1	23.05	23.30	23.23	24.00	22.89	23.06	22.97	24.00
3GPP Rel 6	HSDPA Subtest-2	23.10	23.31	23.26	24.00	22.99	23.08	23.00	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.84	22.73	23.50	22.55	22.61	22.53	23.50
3GPP Rel 6	HSDPA Subtest-4	22.53	22.77	22.74	23.50	22.41	22.56	22.46	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.17	23.40	23.28	24.00	22.90	23.06	22.87	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.18	23.39	23.25	24.00	22.94	23.02	22.97	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.53	22.78	22.64	23.50	22.41	22.60	22.58	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.49	22.84	22.75	23.50	22.55	22.57	22.55	23.50
3GPP Rel 6	HSUPA Subtest-1	23.04	23.32	23.23	24.00	22.87	23.04	22.91	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	21.37	21.28	22.00	20.83	21.03	20.86	22.00
3GPP Rel 6	HSUPA Subtest-3	22.12	22.33	22.21	23.00	22.06	22.09	21.93	23.00
3GPP Rel 6	HSUPA Subtest-4	21.02	21.39	21.26	22.00	21.02	21.13	21.04	22.00
3GPP Rel 6	HSUPA Subtest-5	23.09	23.38	23.21	24.00	23.09	23.13	23.13	24.00



Reduced Power Mode for DSI 1

Band		WCDMA V Ant0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.80	24.00	23.89	25.00
3GPP Rel 99	RMC 12.2Kbps	23.93	24.06	24.01	25.00
3GPP Rel 6	HSDPA Subtest-1	23.09	23.27	23.05	24.00
3GPP Rel 6	HSDPA Subtest-2	22.97	23.02	23.17	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.67	22.84	23.50
3GPP Rel 6	HSDPA Subtest-4	22.61	22.82	22.65	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.33	23.33	23.07	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.32	23.09	23.34	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.70	22.77	22.80	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.65	22.73	22.70	23.50
3GPP Rel 6	HSUPA Subtest-1	23.29	23.07	23.10	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	20.89	20.94	22.00
3GPP Rel 6	HSUPA Subtest-3	22.07	22.28	21.98	23.00
3GPP Rel 6	HSUPA Subtest-4	20.89	21.23	21.30	22.00
3GPP Rel 6	HSUPA Subtest-5	23.20	23.36	23.23	24.00

Band		WCDMA II Ant2			Tune-up Limit (dBm)	WCDMA IV Ant2			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	24.08	24.24	24.13	25.00	23.84	23.98	23.93	25.00
3GPP Rel 99	RMC 12.2Kbps	24.19	24.32	24.30	25.00	23.91	24.05	24.02	25.00
3GPP Rel 6	HSDPA Subtest-1	23.05	23.30	23.23	24.00	22.89	23.06	22.97	24.00
3GPP Rel 6	HSDPA Subtest-2	23.10	23.31	23.26	24.00	22.99	23.08	23.00	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.84	22.73	23.50	22.55	22.61	22.53	23.50
3GPP Rel 6	HSDPA Subtest-4	22.53	22.77	22.74	23.50	22.41	22.56	22.46	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.17	23.40	23.28	24.00	22.90	23.06	22.87	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.18	23.39	23.25	24.00	22.94	23.02	22.97	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.53	22.78	22.64	23.50	22.41	22.60	22.58	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.49	22.84	22.75	23.50	22.55	22.57	22.55	23.50
3GPP Rel 6	HSUPA Subtest-1	23.04	23.32	23.23	24.00	22.87	23.04	22.91	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	21.37	21.28	22.00	20.83	21.03	20.86	22.00
3GPP Rel 6	HSUPA Subtest-3	22.12	22.33	22.21	23.00	22.06	22.09	21.93	23.00
3GPP Rel 6	HSUPA Subtest-4	21.02	21.39	21.26	22.00	21.02	21.13	21.04	22.00
3GPP Rel 6	HSUPA Subtest-5	23.09	23.38	23.21	24.00	23.09	23.13	23.13	24.00



Reduced Power Mode for DSI 2


Band		WCDMA V Ant0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.80	24.00	23.89	25.00
3GPP Rel 99	RMC 12.2Kbps	23.93	24.06	24.01	25.00
3GPP Rel 6	HSDPA Subtest-1	23.09	23.27	23.05	24.00
3GPP Rel 6	HSDPA Subtest-2	22.97	23.02	23.17	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.67	22.84	23.50
3GPP Rel 6	HSDPA Subtest-4	22.61	22.82	22.65	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.33	23.33	23.07	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.32	23.09	23.34	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.70	22.77	22.80	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.65	22.73	22.70	23.50
3GPP Rel 6	HSUPA Subtest-1	23.29	23.07	23.10	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	20.89	20.94	22.00
3GPP Rel 6	HSUPA Subtest-3	22.07	22.28	21.98	23.00
3GPP Rel 6	HSUPA Subtest-4	20.89	21.23	21.30	22.00
3GPP Rel 6	HSUPA Subtest-5	23.20	23.36	23.23	24.00

Band		WCDMA II Ant2			Tune-up Limit (dBm)	WCDMA IV Ant2			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	24.08	24.24	24.13	25.00	23.84	23.98	23.93	25.00
3GPP Rel 99	RMC 12.2Kbps	24.19	24.32	24.30	25.00	23.91	24.05	24.02	25.00
3GPP Rel 6	HSDPA Subtest-1	23.05	23.30	23.23	24.00	22.89	23.06	22.97	24.00
3GPP Rel 6	HSDPA Subtest-2	23.10	23.31	23.26	24.00	22.99	23.08	23.00	24.00
3GPP Rel 6	HSDPA Subtest-3	22.51	22.84	22.73	23.50	22.55	22.61	22.53	23.50
3GPP Rel 6	HSDPA Subtest-4	22.53	22.77	22.74	23.50	22.41	22.56	22.46	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.17	23.40	23.28	24.00	22.90	23.06	22.87	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.18	23.39	23.25	24.00	22.94	23.02	22.97	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.53	22.78	22.64	23.50	22.41	22.60	22.58	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.49	22.84	22.75	23.50	22.55	22.57	22.55	23.50
3GPP Rel 6	HSUPA Subtest-1	23.04	23.32	23.23	24.00	22.87	23.04	22.91	24.00
3GPP Rel 6	HSUPA Subtest-2	21.14	21.37	21.28	22.00	20.83	21.03	20.86	22.00
3GPP Rel 6	HSUPA Subtest-3	22.12	22.33	22.21	23.00	22.06	22.09	21.93	23.00
3GPP Rel 6	HSUPA Subtest-4	21.02	21.39	21.26	22.00	21.02	21.13	21.04	22.00
3GPP Rel 6	HSUPA Subtest-5	23.09	23.38	23.21	24.00	23.09	23.13	23.13	24.00

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

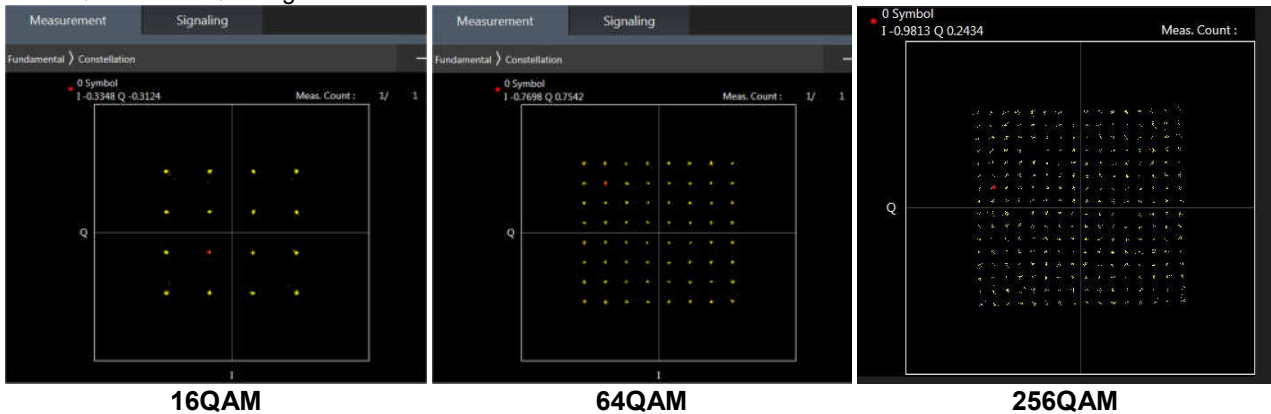



Default Power Mode

Band 5 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.68	23.76	23.60	25	0
10	QPSK	1	25	23.47	23.60	23.56		
10	QPSK	1	49	23.61	23.63	23.52		
10	QPSK	25	0	22.49	22.71	22.60	24	1
10	QPSK	25	12	22.58	22.62	22.57		
10	QPSK	25	25	22.61	22.68	22.56		
10	QPSK	50	0	22.50	22.57	22.52	24	1
10	16QAM	1	0	22.67	22.83	22.75		
10	16QAM	1	25	22.74	22.80	22.64		
10	16QAM	1	49	22.66	22.77	22.65	23	2
10	16QAM	25	0	21.64	21.71	21.62		
10	16QAM	25	12	21.54	21.61	21.46		
10	16QAM	25	25	21.52	21.57	21.44	23	2
10	16QAM	50	0	21.51	21.54	21.41		
10	64QAM	1	0	21.75	21.78	21.72		
10	64QAM	1	25	21.58	21.75	21.64	22	3
10	64QAM	1	49	21.52	21.66	21.61		
10	64QAM	25	0	20.61	20.69	20.61		
10	64QAM	25	12	20.53	20.60	20.54	20	5
10	64QAM	25	25	20.48	20.56	20.47		
10	64QAM	50	0	20.48	20.65	20.56		
10	256QAM	1	0	18.57	18.74	18.73	20	5
10	256QAM	1	25	18.64	18.72	18.65		
10	256QAM	1	49	18.62	18.70	18.64		
10	256QAM	25	0	18.77	18.84	18.72	20	5
10	256QAM	25	12	18.69	18.78	18.69		
10	256QAM	25	25	18.75	18.80	18.63		
10	256QAM	50	0	18.66	18.73	18.67		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.56	23.66	23.54	25	0
5	QPSK	1	12	23.40	23.54	23.51		
5	QPSK	1	24	23.55	23.48	23.39		
5	QPSK	12	0	22.35	22.51	22.57	24	1
5	QPSK	12	7	22.48	22.64	22.50		
5	QPSK	12	13	22.57	22.53	22.51		
5	QPSK	25	0	22.41	22.49	22.39	24	1
5	16QAM	1	0	22.57	22.68	22.65		
5	16QAM	1	12	22.67	22.65	22.57		



5	16QAM	1	24	22.58	22.65	22.57		
5	16QAM	12	0	21.55	21.63	21.56	23	2
5	16QAM	12	7	21.47	21.49	21.38		
5	16QAM	12	13	21.39	21.43	21.32		
5	16QAM	25	0	21.47	21.44	21.38		
5	64QAM	1	0	21.72	21.62	21.65	23	2
5	64QAM	1	12	21.50	21.72	21.62		
5	64QAM	1	24	21.45	21.53	21.48		
5	64QAM	12	0	20.51	20.63	20.49	22	3
5	64QAM	12	7	20.49	20.51	20.46		
5	64QAM	12	13	20.37	20.47	20.44		
5	64QAM	25	0	20.37	20.56	20.47		
5	256QAM	1	0	18.55	18.82	18.72	20	5
5	256QAM	1	12	18.59	18.66	18.66		
5	256QAM	1	24	18.67	18.70	18.51		
5	256QAM	12	0	18.79	18.83	18.77	20	5
5	256QAM	12	7	18.79	18.69	18.69		
5	256QAM	12	13	18.79	18.86	18.63		
5	256QAM	25	0	18.74	18.85	18.77		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.62	23.61	23.55	25	0
3	QPSK	1	8	23.40	23.45	23.52		
3	QPSK	1	14	23.48	23.58	23.45		
3	QPSK	8	0	22.34	22.47	22.46	24	1
3	QPSK	8	4	22.55	22.54	22.44		
3	QPSK	8	7	22.44	22.51	22.53		
3	QPSK	15	0	22.46	22.54	22.46		
3	16QAM	1	0	22.59	22.78	22.64	24	1
3	16QAM	1	8	22.60	22.75	22.59		
3	16QAM	1	14	22.59	22.71	22.61		
3	16QAM	8	0	21.54	21.58	21.53	23	2
3	16QAM	8	4	21.42	21.44	21.39		
3	16QAM	8	7	21.37	21.49	21.28		
3	16QAM	15	0	21.47	21.45	21.27		
3	64QAM	1	0	21.61	21.74	21.66	23	2
3	64QAM	1	8	21.43	21.59	21.53		
3	64QAM	1	14	21.46	21.63	21.58		
3	64QAM	8	0	20.47	20.57	20.52	22	3
3	64QAM	8	4	20.46	20.53	20.52		
3	64QAM	8	7	20.34	20.43	20.35		
3	64QAM	15	0	20.45	20.50	20.48		
3	256QAM	1	0	18.59	18.76	18.65	20	5
3	256QAM	1	8	18.67	18.71	18.70		
3	256QAM	1	14	18.59	18.64	18.50		
3	256QAM	8	0	18.78	18.80	18.70	20	5
3	256QAM	8	4	18.70	18.71	18.66		



3	256QAM	8	7	18.77	18.82	18.67		
3	256QAM	15	0	18.65	18.84	18.72		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.59	23.62	23.54	25	0
1.4	QPSK	1	3	23.32	23.52	23.46		
1.4	QPSK	1	5	23.55	23.48	23.46		
1.4	QPSK	3	0	23.46	23.60	23.57		
1.4	QPSK	3	1	23.54	23.59	23.46		
1.4	QPSK	3	3	23.59	23.63	23.47		
1.4	QPSK	6	0	22.37	22.48	22.39	24	1
1.4	16QAM	1	0	22.54	22.79	22.70	24	1
1.4	16QAM	1	3	22.62	22.75	22.50		
1.4	16QAM	1	5	22.61	22.72	22.48		
1.4	16QAM	3	0	22.47	22.63	22.54		
1.4	16QAM	3	1	22.37	22.47	22.43		
1.4	16QAM	3	3	22.40	22.42	22.36		
1.4	16QAM	6	0	21.40	21.43	21.26	23	2
1.4	64QAM	1	0	21.66	21.61	21.66	23	2
1.4	64QAM	1	3	21.53	21.59	21.53		
1.4	64QAM	1	5	21.49	21.59	21.52		
1.4	64QAM	3	0	21.52	21.59	21.54		
1.4	64QAM	3	1	21.46	21.46	21.37		
1.4	64QAM	3	3	21.32	21.40	21.31		
1.4	64QAM	6	0	20.46	20.51	20.49	22	3
1.4	256QAM	1	0	18.62	18.69	18.61	20	5
1.4	256QAM	1	3	18.68	18.63	18.66		
1.4	256QAM	1	5	18.65	18.73	18.63		
1.4	256QAM	3	0	18.69	18.88	18.72		
1.4	256QAM	3	1	18.71	18.72	18.79		
1.4	256QAM	3	3	18.66	18.86	18.60		
1.4	256QAM	6	0	18.63	18.71	18.69	20	5



Band 12 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.78	23.86	23.72	25	0
10	QPSK	1	25	23.55	23.71	23.64		
10	QPSK	1	49	23.57	23.67	23.56		
10	QPSK	25	0	22.62	22.79	22.73	24	1
10	QPSK	25	12	22.66	22.73	22.62		
10	QPSK	25	25	22.76	22.78	22.75		
10	QPSK	50	0	22.61	22.75	22.69	24	1
10	16QAM	1	0	22.89	23.00	22.90		
10	16QAM	1	25	22.81	22.93	22.87		
10	16QAM	1	49	22.84	22.92	22.82	23	2
10	16QAM	25	0	21.83	21.89	21.77		
10	16QAM	25	12	21.63	21.78	21.70		
10	16QAM	25	25	21.72	21.86	21.75	23	2
10	16QAM	50	0	21.59	21.74	21.65		
10	64QAM	1	0	21.94	22.06	22.02		
10	64QAM	1	25	21.85	22.02	21.90	22	3
10	64QAM	1	49	21.90	21.97	21.82		
10	64QAM	25	0	20.82	20.85	20.79		
10	64QAM	25	12	20.68	20.78	20.70	20	5
10	64QAM	25	25	20.65	20.70	20.65		
10	64QAM	50	0	20.66	20.83	20.75		
10	256QAM	1	0	18.60	18.78	18.69	20	5
10	256QAM	1	25	18.65	18.60	18.63		
10	256QAM	1	49	18.65	18.72	18.53		
10	256QAM	25	0	18.69	18.81	18.81	20	5
10	256QAM	25	12	18.72	18.75	18.73		
10	256QAM	25	25	18.77	18.82	18.70		
10	256QAM	50	0	18.69	18.80	18.76		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.67	23.83	23.56		
5	QPSK	1	12	23.41	23.63	23.60		
5	QPSK	1	24	23.55	23.54	23.41		
5	QPSK	12	0	22.50	22.67	22.65	24	1
5	QPSK	12	7	22.58	22.63	22.53		
5	QPSK	12	13	22.67	22.74	22.63		
5	QPSK	25	0	22.58	22.73	22.56	24	1
5	16QAM	1	0	22.82	22.87	22.86		
5	16QAM	1	12	22.69	22.78	22.70		



5	16QAM	1	24	22.73	22.87	22.66		
5	16QAM	12	0	21.76	21.86	21.69	23	2
5	16QAM	12	7	21.51	21.72	21.60		
5	16QAM	12	13	21.62	21.76	21.61		
5	16QAM	25	0	21.51	21.63	21.49	23	2
5	64QAM	1	0	21.86	21.90	21.99		
5	64QAM	1	12	21.72	21.93	21.83		
5	64QAM	1	24	21.76	21.88	21.75	22	3
5	64QAM	12	0	20.69	20.76	20.71		
5	64QAM	12	7	20.56	20.69	20.59		
5	64QAM	12	13	20.57	20.55	20.48		
5	64QAM	25	0	20.55	20.74	20.70	20	5
5	256QAM	1	0	18.61	18.73	18.70		
5	256QAM	1	12	18.67	18.66	18.68		
5	256QAM	1	24	18.71	18.71	18.56		
5	256QAM	12	0	18.77	18.84	18.74		
5	256QAM	12	7	18.64	18.69	18.69	20	5
5	256QAM	12	13	18.66	18.85	18.61		
5	256QAM	25	0	18.77	18.83	18.74		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.72	23.70	23.63	25	0
3	QPSK	1	8	23.52	23.66	23.55		
3	QPSK	1	14	23.52	23.60	23.44		
3	QPSK	8	0	22.51	22.73	22.65	24	1
3	QPSK	8	4	22.49	22.67	22.49		
3	QPSK	8	7	22.69	22.63	22.71		
3	QPSK	15	0	22.54	22.73	22.64	24	1
3	16QAM	1	0	22.87	22.94	22.85		
3	16QAM	1	8	22.64	22.86	22.83		
3	16QAM	1	14	22.77	22.79	22.76	23	2
3	16QAM	8	0	21.71	21.87	21.70		
3	16QAM	8	4	21.57	21.67	21.63		
3	16QAM	8	7	21.62	21.75	21.61	23	2
3	16QAM	15	0	21.53	21.65	21.53		
3	64QAM	1	0	21.86	22.00	22.00		
3	64QAM	1	8	21.71	21.98	21.76	23	2
3	64QAM	1	14	21.78	21.95	21.71		
3	64QAM	8	0	20.76	20.81	20.69		
3	64QAM	8	4	20.63	20.64	20.66	22	3
3	64QAM	8	7	20.54	20.58	20.55		
3	64QAM	15	0	20.53	20.72	20.72		
3	256QAM	1	0	18.61	18.79	18.69	20	5
3	256QAM	1	8	18.65	18.73	18.62		
3	256QAM	1	14	18.73	18.64	18.63		
3	256QAM	8	0	18.71	18.86	18.73	20	5
3	256QAM	8	4	18.67	18.81	18.68		



FCC SAR Test Report

Report No. : FA311602

3	256QAM	8	7	18.80	18.78	18.71		
3	256QAM	15	0	18.71	18.78	18.74		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.72	23.71	23.69	25	0
1.4	QPSK	1	3	23.42	23.65	23.62		
1.4	QPSK	1	5	23.50	23.62	23.46		
1.4	QPSK	3	0	23.54	23.65	23.68		
1.4	QPSK	3	1	23.60	23.66	23.51		
1.4	QPSK	3	3	23.73	23.76	23.72		
1.4	QPSK	6	0	22.56	22.72	22.63	24	1
1.4	16QAM	1	0	22.72	22.92	22.84	24	1
1.4	16QAM	1	3	22.76	22.84	22.79		
1.4	16QAM	1	5	22.81	22.80	22.70		
1.4	16QAM	3	0	22.78	22.76	22.71		
1.4	16QAM	3	1	22.61	22.66	22.56		
1.4	16QAM	3	3	22.65	22.74	22.65		
1.4	16QAM	6	0	21.45	21.68	21.61	23	2
1.4	64QAM	1	0	21.80	21.93	21.98	23	2
1.4	64QAM	1	3	21.80	21.94	21.79		
1.4	64QAM	1	5	21.80	21.90	21.77		
1.4	64QAM	3	0	21.71	21.68	21.63		
1.4	64QAM	3	1	21.59	21.73	21.54		
1.4	64QAM	3	3	21.49	21.66	21.62		
1.4	64QAM	6	0	20.64	20.75	20.68	22	3
1.4	256QAM	1	0	18.65	18.77	18.62	20	5
1.4	256QAM	1	3	18.56	18.60	18.69		
1.4	256QAM	1	5	18.60	18.74	18.57		
1.4	256QAM	3	0	18.83	18.90	18.76		
1.4	256QAM	3	1	18.68	18.74	18.69		
1.4	256QAM	3	3	18.69	18.76	18.64		
1.4	256QAM	6	0	18.71	18.81	18.71	20	5



Band 13 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.61		25	0
10	QPSK	1	25		23.52			
10	QPSK	1	49		23.56			
10	QPSK	25	0		22.71		24	1
10	QPSK	25	12		22.60			
10	QPSK	25	25		22.67			
10	QPSK	50	0		22.64		24	1
10	16QAM	1	0		22.81			
10	16QAM	1	25		22.71			
10	16QAM	1	49		22.71		23	2
10	16QAM	25	0		21.76			
10	16QAM	25	12		21.69			
10	16QAM	25	25		21.65		23	2
10	16QAM	50	0		21.72			
10	64QAM	1	0		21.76			
10	64QAM	1	25		21.61		23	2
10	64QAM	1	49		21.63			
10	64QAM	25	0		20.65			
10	64QAM	25	12		20.51		22	3
10	64QAM	25	25		20.58			
10	64QAM	50	0		20.67			
10	256QAM	1	0		18.71		20	5
10	256QAM	1	25		18.68			
10	256QAM	1	49		18.64			
10	256QAM	25	0		18.82		20	5
10	256QAM	25	12		18.71			
10	256QAM	25	25		18.75			
10	256QAM	50	0		18.76			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.48	23.49	23.58	25	0
5	QPSK	1	12	23.45	23.43	23.38		
5	QPSK	1	24	23.46	23.50	23.54		
5	QPSK	12	0	22.64	22.67	22.60	24	1
5	QPSK	12	7	22.50	22.51	22.50		
5	QPSK	12	13	22.65	22.54	22.57		
5	QPSK	25	0	22.56	22.50	22.60	24	1
5	16QAM	1	0	22.78	22.79	22.68		
5	16QAM	1	12	22.58	22.58	22.62		



FCC SAR Test Report

Report No. : FA311602

5	16QAM	1	24	22.64	22.68	22.62		
5	16QAM	12	0	21.70	21.65	21.71	23	2
5	16QAM	12	7	21.55	21.62	21.54		
5	16QAM	12	13	21.63	21.58	21.56		
5	16QAM	25	0	21.59	21.63	21.61		
5	64QAM	1	0	21.65	21.67	21.69	23	2
5	64QAM	1	12	21.58	21.56	21.50		
5	64QAM	1	24	21.47	21.58	21.58		
5	64QAM	12	0	20.59	20.53	20.51	22	3
5	64QAM	12	7	20.49	20.35	20.46		
5	64QAM	12	13	20.47	20.56	20.42		
5	64QAM	25	0	20.51	20.59	20.55		
5	256QAM	1	0	18.52	18.72	18.69	20	5
5	256QAM	1	12	18.52	18.68	18.56		
5	256QAM	1	24	18.65	18.59	18.53		
5	256QAM	12	0	18.72	18.79	18.65	20	5
5	256QAM	12	7	18.64	18.65	18.63		
5	256QAM	12	13	18.66	18.83	18.55		
5	256QAM	25	0	18.65	18.67	18.69		



Band 14 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		23.66		25	0
10	QPSK	1	25		23.61			
10	QPSK	1	49		23.59			
10	QPSK	25	0		22.68		24	1
10	QPSK	25	12		22.62			
10	QPSK	25	25		22.67			
10	QPSK	50	0		22.60		24	1
10	16QAM	1	0		22.84			
10	16QAM	1	25		22.71			
10	16QAM	1	49		22.74		23	2
10	16QAM	25	0		21.62			
10	16QAM	25	12		21.49			
10	16QAM	25	25		21.55		23	2
10	16QAM	50	0		21.65			
10	64QAM	1	0		21.79			
10	64QAM	1	25		21.69		22	3
10	64QAM	1	49		21.63			
10	64QAM	25	0		20.67			
10	64QAM	25	12		20.65		20	5
10	64QAM	25	25		20.59			
10	64QAM	50	0		20.60			
10	256QAM	1	0		18.64		20	5
10	256QAM	1	25		18.60			
10	256QAM	1	49		18.60			
10	256QAM	25	0		18.76		20	5
10	256QAM	25	12		18.77			
10	256QAM	25	25		18.72			
10	256QAM	50	0		18.77		24	1
5	QPSK	1	0	23.56	23.61	23.59		
5	QPSK	1	12	23.49	23.46	23.57		
5	QPSK	1	24	23.44	23.47	23.48	24	1
5	QPSK	12	0	22.55	22.51	22.62		
5	QPSK	12	7	22.59	22.58	22.46		
5	QPSK	12	13	22.57	22.62	22.58	24	1
5	QPSK	25	0	22.47	22.48	22.52		
5	16QAM	1	0	22.75	22.72	22.76		
5	16QAM	1	12	22.56	22.59	22.55		



5	16QAM	1	24	22.59	22.57	22.60		
5	16QAM	12	0	21.55	21.50	21.55	23	2
5	16QAM	12	7	21.40	21.36	21.46		
5	16QAM	12	13	21.43	21.38	21.38		
5	16QAM	25	0	21.49	21.49	21.49		
5	64QAM	1	0	21.62	21.77	21.73	23	2
5	64QAM	1	12	21.64	21.61	21.62		
5	64QAM	1	24	21.51	21.59	21.58		
5	64QAM	12	0	20.61	20.61	20.55	22	3
5	64QAM	12	7	20.61	20.53	20.51		
5	64QAM	12	13	20.54	20.44	20.50		
5	64QAM	25	0	20.49	20.48	20.43		
5	256QAM	1	0	18.61	18.78	18.64	20	5
5	256QAM	1	12	18.53	18.64	18.53		
5	256QAM	1	24	18.62	18.68	18.57		
5	256QAM	12	0	18.74	18.81	18.77	20	5
5	256QAM	12	7	18.61	18.78	18.70		
5	256QAM	12	13	18.76	18.81	18.58		
5	256QAM	25	0	18.65	18.74	18.71		



Band 17 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.69	23.71	23.65	25	0
10	QPSK	1	25	23.48	23.63	23.55		
10	QPSK	1	49	23.54	23.67	23.56		
10	QPSK	25	0	22.72	22.81	22.65	24	1
10	QPSK	25	12	22.64	22.78	22.66		
10	QPSK	25	25	22.66	22.74	22.59		
10	QPSK	50	0	22.68	22.71	22.68	24	1
10	16QAM	1	0	22.76	22.90	22.78		
10	16QAM	1	25	22.74	22.87	22.75		
10	16QAM	1	49	22.79	22.84	22.81	23	2
10	16QAM	25	0	21.70	21.83	21.78		
10	16QAM	25	12	21.61	21.73	21.57		
10	16QAM	25	25	21.58	21.73	21.61	23	2
10	16QAM	50	0	21.59	21.72	21.65		
10	64QAM	1	0	21.82	21.91	21.75		
10	64QAM	1	25	21.67	21.76	21.60	22	3
10	64QAM	1	49	21.79	21.86	21.80		
10	64QAM	25	0	20.79	20.86	20.71		
10	64QAM	25	12	20.64	20.78	20.75	20	5
10	64QAM	25	25	20.59	20.76	20.61		
10	64QAM	50	0	20.64	20.78	20.66		
10	256QAM	1	0	18.57	18.68	18.70	20	5
10	256QAM	1	25	18.62	18.65	18.62		
10	256QAM	1	49	18.57	18.70	18.45		
10	256QAM	25	0	18.75	18.88	18.65	20	5
10	256QAM	25	12	18.72	18.64	18.74		
10	256QAM	25	25	18.74	18.79	18.63		
10	256QAM	50	0	18.69	18.68	18.70		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5	Tune-up limit (dBm)	MPR (dB)
5	QPSK	1	0	23.55	23.66	23.57	25	0
5	QPSK	1	12	23.40	23.54	23.39		
5	QPSK	1	24	23.51	23.65	23.50		
5	QPSK	12	0	22.68	22.69	22.58	24	1
5	QPSK	12	7	22.60	22.65	22.52		
5	QPSK	12	13	22.59	22.66	22.43		
5	QPSK	25	0	22.54	22.55	22.65	24	1
5	16QAM	1	0	22.71	22.86	22.66		
5	16QAM	1	12	22.69	22.73	22.68		



FCC SAR Test Report

Report No. : FA311602

5	16QAM	1	24	22.68	22.70	22.66		
5	16QAM	12	0	21.60	21.76	21.70	23	2
5	16QAM	12	7	21.45	21.70	21.54		
5	16QAM	12	13	21.51	21.64	21.53		
5	16QAM	25	0	21.51	21.59	21.55		
5	64QAM	1	0	21.66	21.80	21.69	23	2
5	64QAM	1	12	21.51	21.65	21.57		
5	64QAM	1	24	21.75	21.81	21.76		
5	64QAM	12	0	20.68	20.70	20.68	22	3
5	64QAM	12	7	20.53	20.68	20.64		
5	64QAM	12	13	20.49	20.66	20.56		
5	64QAM	25	0	20.60	20.63	20.58		
5	256QAM	1	0	18.62	18.71	18.63	20	5
5	256QAM	1	12	18.60	18.55	18.60		
5	256QAM	1	24	18.67	18.66	18.57		
5	256QAM	12	0	18.69	18.85	18.66	20	5
5	256QAM	12	7	18.69	18.78	18.67		
5	256QAM	12	13	18.64	18.78	18.67		
5	256QAM	25	0	18.72	18.71	18.63		



Band 26 for FCC Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.77	23.79	23.71	25	0
15	QPSK	1	37	23.70	23.75	23.72		
15	QPSK	1	74	23.55	23.64	23.52		
15	QPSK	36	0	22.66	22.77	22.69	24	1
15	QPSK	36	20	22.54	22.71	22.64		
15	QPSK	36	39	22.58	22.73	22.63		
15	QPSK	75	0	22.66	22.72	22.64		
15	16QAM	1	0	22.94	22.97	22.90	24	1
15	16QAM	1	37	22.85	22.93	22.83		
15	16QAM	1	74	22.83	22.90	22.85		
15	16QAM	36	0	21.58	21.73	21.57	23	2
15	16QAM	36	20	21.50	21.60	21.58		
15	16QAM	36	39	21.61	21.64	21.58		
15	16QAM	75	0	21.62	21.73	21.61		
15	64QAM	1	0	21.79	21.85	21.83	23	2
15	64QAM	1	37	21.71	21.74	21.61		
15	64QAM	1	74	21.56	21.69	21.60		
15	64QAM	36	0	20.62	20.74	20.59	22	3
15	64QAM	36	20	20.52	20.69	20.66		
15	64QAM	36	39	20.53	20.65	20.54		
15	64QAM	75	0	20.67	20.77	20.61		
15	256QAM	1	0	18.63	18.68	18.60	20	5
15	256QAM	1	37	18.63	18.63	18.63		
15	256QAM	1	74	18.68	18.61	18.59		
15	256QAM	36	0	18.70	18.75	18.72	20	5
15	256QAM	36	20	18.67	18.73	18.65		
15	256QAM	36	39	18.70	18.74	18.58		
15	256QAM	75	0	18.73	18.77	18.68		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.70	23.76	23.54	25	0
10	QPSK	1	25	23.59	23.67	23.58		
10	QPSK	1	49	23.43	23.48	23.45		
10	QPSK	25	0	22.60	22.74	22.60	24	1
10	QPSK	25	12	22.40	22.66	22.59		
10	QPSK	25	25	22.44	22.71	22.60		
10	QPSK	50	0	22.56	22.67	22.58		
10	16QAM	1	0	22.81	22.84	22.77	24	1
10	16QAM	1	25	22.76	22.89	22.72		



10	16QAM	1	49	22.79	22.84	22.78		
10	16QAM	25	0	21.55	21.57	21.52	23	2
10	16QAM	25	12	21.41	21.51	21.52		
10	16QAM	25	25	21.50	21.51	21.52		
10	16QAM	50	0	21.59	21.65	21.58		
10	64QAM	1	0	21.73	21.79	21.72	23	2
10	64QAM	1	25	21.65	21.70	21.55		
10	64QAM	1	49	21.53	21.62	21.51		
10	64QAM	25	0	20.50	20.70	20.43	22	3
10	64QAM	25	12	20.48	20.67	20.60		
10	64QAM	25	25	20.39	20.57	20.41		
10	64QAM	50	0	20.58	20.71	20.48		
10	256QAM	1	0	18.57	18.69	18.69	20	5
10	256QAM	1	25	18.50	18.67	18.64		
10	256QAM	1	49	18.65	18.64	18.49		
10	256QAM	25	0	18.67	18.85	18.69	20	5
10	256QAM	25	12	18.71	18.63	18.61		
10	256QAM	25	25	18.71	18.74	18.65		
10	256QAM	50	0	18.74	18.76	18.70		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.71	23.64	23.55	25	0
5	QPSK	1	12	23.64	23.59	23.64		
5	QPSK	1	24	23.51	23.61	23.46		
5	QPSK	12	0	22.63	22.62	22.59	24	1
5	QPSK	12	7	22.49	22.67	22.49		
5	QPSK	12	13	22.55	22.56	22.50		
5	QPSK	25	0	22.52	22.64	22.54		
5	16QAM	1	0	22.83	22.86	22.79	24	1
5	16QAM	1	12	22.80	22.83	22.72		
5	16QAM	1	24	22.76	22.88	22.77		
5	16QAM	12	0	21.53	21.59	21.45	23	2
5	16QAM	12	7	21.43	21.54	21.54		
5	16QAM	12	13	21.44	21.55	21.42		
5	16QAM	25	0	21.46	21.68	21.46		
5	64QAM	1	0	21.73	21.78	21.66	23	2
5	64QAM	1	12	21.57	21.59	21.53		
5	64QAM	1	24	21.44	21.65	21.52		
5	64QAM	12	0	20.54	20.58	20.42	22	3
5	64QAM	12	7	20.39	20.62	20.63		
5	64QAM	12	13	20.50	20.52	20.44		
5	64QAM	25	0	20.53	20.65	20.44		
5	256QAM	1	0	18.50	18.68	18.58	20	5
5	256QAM	1	12	18.50	18.61	18.52		
5	256QAM	1	24	18.56	18.61	18.48		
5	256QAM	12	0	18.73	18.86	18.65	20	5
5	256QAM	12	7	18.70	18.78	18.61		



5	256QAM	12	13	18.72	18.74	18.58				
5	256QAM	25	0	18.68	18.72	18.73				
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)		
Frequency (MHz)				815.5	831.5	847.5				
3	QPSK	1	0	23.63	23.62	23.62	25	0		
3	QPSK	1	8	23.55	23.67	23.60				
3	QPSK	1	14	23.43	23.55	23.37				
3	QPSK	8	0	22.52	22.73	22.53	24	1		
3	QPSK	8	4	22.44	22.68	22.56				
3	QPSK	8	7	22.45	22.57	22.58				
3	QPSK	15	0	22.62	22.67	22.56	24	1		
3	16QAM	1	0	22.86	22.85	22.84				
3	16QAM	1	8	22.70	22.88	22.66				
3	16QAM	1	14	22.78	22.83	22.76	23	2		
3	16QAM	8	0	21.48	21.65	21.50				
3	16QAM	8	4	21.46	21.47	21.47				
3	16QAM	8	7	21.47	21.55	21.41	23	2		
3	16QAM	15	0	21.55	21.70	21.55				
3	64QAM	1	0	21.66	21.71	21.69				
3	64QAM	1	8	21.61	21.63	21.54	23	2		
3	64QAM	1	14	21.45	21.53	21.52				
3	64QAM	8	0	20.51	20.65	20.56				
3	64QAM	8	4	20.45	20.53	20.57	22	3		
3	64QAM	8	7	20.44	20.59	20.50				
3	64QAM	15	0	20.51	20.70	20.51				
3	256QAM	1	0	18.54	18.78	18.67	20	5		
3	256QAM	1	8	18.55	18.64	18.55				
3	256QAM	1	14	18.59	18.68	18.49				
3	256QAM	8	0	18.75	18.85	18.74	20	5		
3	256QAM	8	4	18.71	18.78	18.60				
3	256QAM	8	7	18.63	18.82	18.61				
3	256QAM	15	0	18.61	18.78	18.68	20	5		
Channel				26697	26865	27033			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3				
1.4	QPSK	1	0	23.62	23.76	23.57	25	0		
1.4	QPSK	1	3	23.59	23.65	23.59				
1.4	QPSK	1	5	23.47	23.54	23.45				
1.4	QPSK	3	0	23.55	23.68	23.57	25	0		
1.4	QPSK	3	1	23.45	23.61	23.61				
1.4	QPSK	3	3	23.55	23.71	23.51				
1.4	QPSK	6	0	22.59	22.70	22.61	24	1		
1.4	16QAM	1	0	22.87	22.81	22.88	24	1		
1.4	16QAM	1	3	22.81	22.83	22.71				
1.4	16QAM	1	5	22.66	22.84	22.77				
1.4	16QAM	3	0	22.56	22.60	22.54	24	1		
1.4	16QAM	3	1	22.43	22.49	22.51				
1.4	16QAM	3	3	22.51	22.60	22.49				



FCC SAR Test Report

Report No. : FA311602

1.4	16QAM	6	0	21.50	21.70	21.50	23	2
1.4	64QAM	1	0	21.67	21.75	21.68	23	2
1.4	64QAM	1	3	21.56	21.57	21.49		
1.4	64QAM	1	5	21.49	21.60	21.57		
1.4	64QAM	3	0	21.60	21.60	21.54		
1.4	64QAM	3	1	21.37	21.62	21.60		
1.4	64QAM	3	3	21.38	21.62	21.44		
1.4	64QAM	6	0	20.54	20.70	20.57	22	3
1.4	256QAM	1	0	18.58	18.75	18.60	20	5
1.4	256QAM	1	3	18.62	18.69	18.61		
1.4	256QAM	1	5	18.69	18.65	18.46		
1.4	256QAM	3	0	18.72	18.84	18.71		
1.4	256QAM	3	1	18.61	18.72	18.62		
1.4	256QAM	3	3	18.75	18.72	18.56		
1.4	256QAM	6	0	18.65	18.77	18.72	20	5



Band 71 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372		
Frequency (MHz)				673	683	688		
20	QPSK	1	0	23.80	23.84	23.71	25	0
20	QPSK	1	49	23.62	23.68	23.62		
20	QPSK	1	99	23.60	23.64	23.53		
20	QPSK	50	0	22.81	22.85	22.82	24	1
20	QPSK	50	24	22.68	22.73	22.59		
20	QPSK	50	50	22.63	22.78	22.64		
20	QPSK	100	0	22.61	22.72	22.66	24	1
20	16QAM	1	0	22.86	22.94	22.85		
20	16QAM	1	49	22.72	22.86	22.69		
20	16QAM	1	99	22.65	22.79	22.68	23	2
20	16QAM	50	0	21.78	21.83	21.77		
20	16QAM	50	24	21.66	21.68	21.54		
20	16QAM	50	50	21.60	21.66	21.52	23	2
20	16QAM	100	0	21.60	21.70	21.55		
20	64QAM	1	0	21.78	21.89	21.84		
20	64QAM	1	49	21.71	21.86	21.73	22	3
20	64QAM	1	99	21.66	21.74	21.62		
20	64QAM	50	0	20.75	20.81	20.70		
20	64QAM	50	24	20.63	20.66	20.51	20	5
20	64QAM	50	50	20.58	20.64	20.57		
20	64QAM	100	0	20.73	20.77	20.75		
20	256QAM	1	0	18.56	18.79	18.63	20	5
20	256QAM	1	49	18.67	18.62	18.68		
20	256QAM	1	99	18.72	18.74	18.56		
20	256QAM	50	0	18.69	18.80	18.78	20	5
20	256QAM	50	24	18.77	18.69	18.76		
20	256QAM	50	50	18.74	18.78	18.68		
20	256QAM	100	0	18.75	18.73	18.65		
Channel				133197	133297	133397		
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	23.73	23.76	23.57		
15	QPSK	1	37	23.49	23.62	23.58	25	0
15	QPSK	1	74	23.45	23.49	23.39		
15	QPSK	36	0	22.68	22.75	22.68		
15	QPSK	36	20	22.59	22.64	22.56	24	1
15	QPSK	36	39	22.60	22.66	22.60		
15	QPSK	75	0	22.44	22.61	22.53		
15	16QAM	1	0	22.82	22.87	22.81	24	1
15	16QAM	1	37	22.64	22.76	22.53		



15	16QAM	1	74	22.51	22.64	22.65		
15	16QAM	36	0	21.64	21.68	21.65	23	2
15	16QAM	36	20	21.61	21.55	21.38		
15	16QAM	36	39	21.55	21.61	21.35		
15	16QAM	75	0	21.55	21.68	21.38	23	2
15	64QAM	1	0	21.74	21.75	21.81		
15	64QAM	1	37	21.62	21.82	21.68		
15	64QAM	1	74	21.64	21.65	21.49	22	3
15	64QAM	36	0	20.60	20.68	20.57		
15	64QAM	36	20	20.55	20.64	20.36		
15	64QAM	36	39	20.52	20.57	20.53	20	5
15	64QAM	75	0	20.65	20.64	20.58		
15	256QAM	1	0	18.63	18.80	18.70		
15	256QAM	1	37	18.61	18.70	18.61	20	5
15	256QAM	1	74	18.72	18.73	18.61		
15	256QAM	36	0	18.68	18.90	18.73		
15	256QAM	36	20	18.71	18.75	18.76	20	5
15	256QAM	36	39	18.73	18.79	18.73		
15	256QAM	75	0	18.77	18.82	18.67		
Channel				133172	133272	133422	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	678	693		
10	QPSK	1	0	23.77	23.79	23.63	25	0
10	QPSK	1	25	23.49	23.54	23.58		
10	QPSK	1	49	23.51	23.61	23.48		
10	QPSK	25	0	22.73	22.76	22.67	24	1
10	QPSK	25	12	22.60	22.67	22.42		
10	QPSK	25	25	22.55	22.69	22.62		
10	QPSK	50	0	22.50	22.64	22.60	24	1
10	16QAM	1	0	22.78	22.91	22.77		
10	16QAM	1	25	22.61	22.75	22.54		
10	16QAM	1	49	22.53	22.70	22.59	23	2
10	16QAM	25	0	21.66	21.76	21.64		
10	16QAM	25	12	21.58	21.55	21.42		
10	16QAM	25	25	21.50	21.62	21.42	23	2
10	16QAM	50	0	21.55	21.55	21.48		
10	64QAM	1	0	21.61	21.75	21.72		
10	64QAM	1	25	21.64	21.74	21.56	23	2
10	64QAM	1	49	21.61	21.62	21.52		
10	64QAM	25	0	20.69	20.74	20.61		
10	64QAM	25	12	20.58	20.51	20.39	22	3
10	64QAM	25	25	20.56	20.47	20.45		
10	64QAM	50	0	20.68	20.73	20.61		
10	256QAM	1	0	18.66	18.72	18.72	20	5
10	256QAM	1	25	18.59	18.60	18.60		
10	256QAM	1	49	18.70	18.77	18.59		
10	256QAM	25	0	18.73	18.91	18.77	20	5
10	256QAM	25	12	18.71	18.75	18.66		



10	256QAM	25	25	18.80	18.76	18.64		
10	256QAM	50	0	18.64	18.85	18.74		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	23.67	23.73	23.65	25	0
5	QPSK	1	12	23.53	23.59	23.58		
5	QPSK	1	24	23.49	23.50	23.43		
5	QPSK	12	0	22.72	22.77	22.77	24	1
5	QPSK	12	7	22.60	22.67	22.46		
5	QPSK	12	13	22.49	22.69	22.59		
5	QPSK	25	0	22.52	22.69	22.58		
5	16QAM	1	0	22.72	22.84	22.77	24	1
5	16QAM	1	12	22.66	22.82	22.66		
5	16QAM	1	24	22.48	22.64	22.59		
5	16QAM	12	0	21.64	21.73	21.64	23	2
5	16QAM	12	7	21.51	21.65	21.39		
5	16QAM	12	13	21.55	21.57	21.44		
5	16QAM	25	0	21.51	21.58	21.40		
5	64QAM	1	0	21.75	21.73	21.75	23	2
5	64QAM	1	12	21.57	21.82	21.58		
5	64QAM	1	24	21.51	21.65	21.56		
5	64QAM	12	0	20.73	20.71	20.64	22	3
5	64QAM	12	7	20.54	20.56	20.35		
5	64QAM	12	13	20.48	20.56	20.49		
5	64QAM	25	0	20.62	20.66	20.65		
5	256QAM	1	0	18.57	18.69	18.69	20	5
5	256QAM	1	12	18.61	18.72	18.70		
5	256QAM	1	24	18.74	18.73	18.51		
5	256QAM	12	0	18.70	18.83	18.76	20	5
5	256QAM	12	7	18.75	18.78	18.69		
5	256QAM	12	13	18.70	18.80	18.61		
5	256QAM	25	0	18.76	18.86	18.78		



Band 2 Ant1 Default ENDC								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.79	23.81	23.79	25	0
20	QPSK	1	49	23.76	23.80	23.72		
20	QPSK	1	99	23.73	23.79	23.66		
20	QPSK	50	0	22.97	22.98	22.79	24	1
20	QPSK	50	24	22.91	22.97	22.84		
20	QPSK	50	50	22.91	22.91	22.74		
20	QPSK	100	0	22.72	22.89	22.72	24	1
20	16QAM	1	0	22.62	22.67	22.51		
20	16QAM	1	49	22.62	22.62	22.54		
20	16QAM	1	99	22.50	22.60	22.58	23	2
20	16QAM	50	0	21.78	21.92	21.72		
20	16QAM	50	24	21.76	21.92	21.89		
20	16QAM	50	50	21.71	21.87	21.73	23	2
20	16QAM	100	0	21.88	21.97	21.87		
20	64QAM	1	0	22.29	22.43	22.33		
20	64QAM	1	49	22.33	22.35	22.30	22	3
20	64QAM	1	99	22.26	22.37	22.15		
20	64QAM	50	0	20.92	20.98	20.77		
20	64QAM	50	24	20.97	20.97	20.77	20	5
20	64QAM	50	50	20.74	20.93	20.74		
20	64QAM	100	0	20.87	20.92	20.86		
20	256QAM	1	0	18.89	18.92	18.81	20	5
20	256QAM	1	49	18.68	18.89	18.90		
20	256QAM	1	99	18.65	18.85	18.74		
20	256QAM	50	0	18.73	18.94	18.88	20	5
20	256QAM	50	24	18.78	18.98	18.77		
20	256QAM	50	50	18.88	18.92	18.80		
20	256QAM	100	0	18.75	18.95	18.94	24	1
15	QPSK	1	0	23.63	23.72	23.58		
15	QPSK	1	37	23.57	23.71	23.72		
15	QPSK	1	74	23.67	23.67	23.51	24	1
15	QPSK	36	0	22.77	22.95	22.68		
15	QPSK	36	20	22.83	22.85	22.68		
15	QPSK	36	39	22.86	22.71	22.58	24	1
15	QPSK	75	0	22.69	22.88	22.65		
15	16QAM	1	0	22.55	22.57	22.45		
15	16QAM	1	37	22.52	22.53	22.44	24	1
15	16QAM	1	74	22.43	22.49	22.49		



15	16QAM	36	0	21.71	21.93	21.57	23	2
15	16QAM	36	20	21.62	21.74	21.72		
15	16QAM	36	39	21.50	21.66	21.75		
15	16QAM	75	0	21.83	21.89	21.65	23	2
15	64QAM	1	0	22.23	22.40	22.20		
15	64QAM	1	37	22.24	22.32	22.28		
15	64QAM	1	74	22.25	22.34	22.08	22	3
15	64QAM	36	0	20.83	20.97	20.61		
15	64QAM	36	20	20.93	20.97	20.63		
15	64QAM	36	39	20.68	20.91	20.54	20	5
15	64QAM	75	0	20.88	20.75	20.83		
15	256QAM	1	0	18.69	18.82	18.79		
15	256QAM	1	37	18.58	18.82	18.89	20	5
15	256QAM	1	74	18.52	18.72	18.69		
15	256QAM	36	0	18.68	18.73	18.67		
15	256QAM	36	20	18.70	18.82	18.62	20	5
15	256QAM	36	39	18.90	18.82	18.64		
15	256QAM	75	0	18.61	18.94	18.90		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.69	23.77	23.63	25	0
10	QPSK	1	25	23.66	23.70	23.70		
10	QPSK	1	49	23.51	23.60	23.44		
10	QPSK	25	0	22.89	22.87	22.59	24	1
10	QPSK	25	12	22.77	22.91	22.63		
10	QPSK	25	25	22.83	22.78	22.58		
10	QPSK	50	0	22.74	22.83	22.70	24	1
10	16QAM	1	0	22.43	22.66	22.51		
10	16QAM	1	25	22.49	22.63	22.52		
10	16QAM	1	49	22.50	22.62	22.57	23	2
10	16QAM	25	0	21.75	21.87	21.61		
10	16QAM	25	12	21.59	21.84	21.79		
10	16QAM	25	25	21.60	21.72	21.60	23	2
10	16QAM	50	0	21.76	21.76	21.80		
10	64QAM	1	0	22.28	22.41	22.29		
10	64QAM	1	25	22.29	22.15	22.09	23	2
10	64QAM	1	49	22.10	22.31	22.09		
10	64QAM	25	0	20.83	20.77	20.73		
10	64QAM	25	12	20.93	20.76	20.64	22	3
10	64QAM	25	25	20.56	20.93	20.69		
10	64QAM	50	0	20.71	20.91	20.72		
10	256QAM	1	0	18.83	18.90	18.75	20	5
10	256QAM	1	25	18.51	18.88	18.89		
10	256QAM	1	49	18.54	18.69	18.73		
10	256QAM	25	0	18.53	18.81	18.78	20	5
10	256QAM	25	12	18.68	18.87	18.63		
10	256QAM	25	25	18.89	18.88	18.64		



10	256QAM	50	0	18.77	18.88	18.94		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.74	23.73	23.68	25	0
5	QPSK	1	12	23.71	23.68	23.62		
5	QPSK	1	24	23.74	23.57	23.68		
5	QPSK	12	0	22.89	22.91	22.58	24	1
5	QPSK	12	7	22.80	22.81	22.63		
5	QPSK	12	13	22.91	22.78	22.54		
5	QPSK	25	0	22.65	22.69	22.73	24	1
5	16QAM	1	0	22.61	22.68	22.36		
5	16QAM	1	12	22.50	22.41	22.40		
5	16QAM	1	24	22.41	22.58	22.57	23	2
5	16QAM	12	0	21.62	21.74	21.55		
5	16QAM	12	7	21.74	21.86	21.77		
5	16QAM	12	13	21.68	21.77	21.71	22	3
5	16QAM	25	0	21.72	21.78	21.73		
5	64QAM	1	0	22.21	22.28	22.30		
5	64QAM	1	12	22.30	22.21	22.14	23	2
5	64QAM	1	24	22.17	22.29	22.01		
5	64QAM	12	0	20.92	20.83	20.65		
5	64QAM	12	7	20.89	20.78	20.58	22	3
5	64QAM	12	13	20.55	20.83	20.63		
5	64QAM	25	0	20.70	20.91	20.67		
5	256QAM	1	0	18.85	18.84	18.68	20	5
5	256QAM	1	12	18.67	18.81	18.87		
5	256QAM	1	24	18.56	18.71	18.56		
5	256QAM	12	0	18.67	18.84	18.68	20	5
5	256QAM	12	7	18.79	18.93	18.56		
5	256QAM	12	13	18.87	18.80	18.66		
5	256QAM	25	0	18.64	18.74	18.85		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.60	23.77	23.68	25	0
3	QPSK	1	8	23.70	23.66	23.51		
3	QPSK	1	14	23.55	23.77	23.48		
3	QPSK	8	0	22.75	22.92	22.65	24	1
3	QPSK	8	4	22.80	22.77	22.66		
3	QPSK	8	7	22.84	22.76	22.65		
3	QPSK	15	0	22.54	22.78	22.70	24	1
3	16QAM	1	0	22.42	22.59	22.47		
3	16QAM	1	8	22.54	22.59	22.50		
3	16QAM	1	14	22.35	22.38	22.47	23	2
3	16QAM	8	0	21.68	21.85	21.56		
3	16QAM	8	4	21.62	21.79	21.88		
3	16QAM	8	7	21.53	21.88	21.51	23	2
3	16QAM	15	0	21.83	21.88	21.71		



3	64QAM	1	0	22.08	22.32	22.16	23	2
3	64QAM	1	8	22.27	22.14	22.21		
3	64QAM	1	14	22.28	22.17	22.10		
3	64QAM	8	0	20.93	20.82	20.70	22	3
3	64QAM	8	4	20.86	20.84	20.65		
3	64QAM	8	7	20.72	20.95	20.75		
3	64QAM	15	0	20.71	20.72	20.68	20	5
3	256QAM	1	0	18.90	18.88	18.74		
3	256QAM	1	8	18.59	18.89	18.85		
3	256QAM	1	14	18.48	18.74	18.63	20	5
3	256QAM	8	0	18.55	18.82	18.74		
3	256QAM	8	4	18.78	18.82	18.78		
3	256QAM	8	7	18.71	18.90	18.69	20	5
3	256QAM	15	0	18.76	18.82	18.87		
Channel				18607	18900	19193		
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.65	23.80	23.65	25	0
1.4	QPSK	1	3	23.78	23.68	23.57		
1.4	QPSK	1	5	23.70	23.62	23.63		
1.4	QPSK	3	0	23.74	23.70	23.58		
1.4	QPSK	3	1	23.62	23.67	23.65		
1.4	QPSK	3	3	23.60	23.64	23.63	24	1
1.4	QPSK	6	0	22.86	22.95	22.74		
1.4	16QAM	1	0	22.72	22.86	22.76	24	1
1.4	16QAM	1	3	22.83	22.69	22.68		
1.4	16QAM	1	5	22.55	22.72	22.74		
1.4	16QAM	3	0	22.46	22.64	22.49		
1.4	16QAM	3	1	22.53	22.47	22.48		
1.4	16QAM	3	3	22.39	22.39	22.40	23	2
1.4	16QAM	6	0	21.73	21.89	21.74		
1.4	64QAM	1	0	21.70	21.93	21.88	23	2
1.4	64QAM	1	3	21.71	21.67	21.70		
1.4	64QAM	1	5	21.88	21.93	21.88		
1.4	64QAM	3	0	22.23	22.36	22.18		
1.4	64QAM	3	1	22.12	22.26	22.21		
1.4	64QAM	3	3	22.11	22.19	22.09	22	3
1.4	64QAM	6	0	20.84	20.87	20.59		
1.4	256QAM	1	0	18.70	18.90	18.81	20	5
1.4	256QAM	1	3	18.47	18.83	18.86		
1.4	256QAM	1	5	18.62	18.64	18.61		
1.4	256QAM	3	0	18.62	18.87	18.77		
1.4	256QAM	3	1	18.56	18.83	18.64		
1.4	256QAM	3	3	18.84	18.81	18.80	20	5
1.4	256QAM	6	0	18.72	18.81	18.96		



Band 4 Ant1 Default ENDC								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.30	23.43	23.40	25	0
20	QPSK	1	49	23.25	23.39	23.30		
20	QPSK	1	99	23.42	23.38	23.25		
20	QPSK	50	0	22.82	22.89	22.84	24	1
20	QPSK	50	24	22.82	22.81	22.81		
20	QPSK	50	50	22.80	22.83	22.65		
20	QPSK	100	0	22.84	22.86	22.80	24	1
20	16QAM	1	0	22.57	22.65	22.61		
20	16QAM	1	49	22.65	22.72	22.53		
20	16QAM	1	99	22.58	22.77	22.63	23	2
20	16QAM	50	0	21.64	21.85	21.74		
20	16QAM	50	24	21.72	21.91	21.90		
20	16QAM	50	50	21.77	21.92	21.92	23	2
20	16QAM	100	0	21.95	21.93	21.92		
20	64QAM	1	0	22.10	22.32	22.14		
20	64QAM	1	49	22.37	22.38	22.39	23	2
20	64QAM	1	99	22.25	22.32	22.30		
20	64QAM	50	0	20.85	20.99	20.94		
20	64QAM	50	24	20.86	20.91	20.69	22	3
20	64QAM	50	50	20.99	21.00	21.00		
20	64QAM	100	0	20.73	20.88	20.77		
20	256QAM	1	0	18.64	18.85	18.64	20	5
20	256QAM	1	49	18.78	18.91	18.83		
20	256QAM	1	99	18.70	18.86	18.79		
20	256QAM	50	0	18.89	18.93	18.77	20	5
20	256QAM	50	24	18.65	18.85	18.71		
20	256QAM	50	50	18.78	18.88	18.78		
20	256QAM	100	0	18.75	18.87	18.84	24	1
15	QPSK	1	0	23.24	23.35	23.34		
15	QPSK	1	37	23.20	23.32	23.26		
15	QPSK	1	74	23.34	23.32	23.20	24	1
15	QPSK	36	0	22.73	22.84	22.79		
15	QPSK	36	20	22.81	22.77	22.72		
15	QPSK	36	39	22.66	22.82	22.49	24	1
15	QPSK	75	0	22.74	22.84	22.80		
15	16QAM	1	0	22.55	22.55	22.41		
15	16QAM	1	37	22.50	22.66	22.46	24	1
15	16QAM	1	74	22.47	22.63	22.42		



15	16QAM	36	0	21.53	21.75	21.72	23	2
15	16QAM	36	20	21.54	21.90	21.88		
15	16QAM	36	39	21.63	21.91	21.91		
15	16QAM	75	0	21.91	21.87	21.71	23	2
15	64QAM	1	0	21.93	22.18	21.98		
15	64QAM	1	37	22.32	22.36	22.35		
15	64QAM	1	74	22.27	22.19	22.31	22	3
15	64QAM	36	0	20.84	20.78	20.85		
15	64QAM	36	20	20.65	20.83	20.57		
15	64QAM	36	39	20.89	20.95	20.94	20	5
15	64QAM	75	0	20.52	20.76	20.66		
15	256QAM	1	0	18.65	18.73	18.54		
15	256QAM	1	37	18.61	18.82	18.63	20	5
15	256QAM	1	74	18.60	18.75	18.62		
15	256QAM	36	0	18.68	18.94	18.78		
15	256QAM	36	20	18.57	18.75	18.67	20	5
15	256QAM	36	39	18.61	18.76	18.63		
15	256QAM	75	0	18.69	18.69	18.80		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.24	23.41	23.30	25	0
10	QPSK	1	25	23.18	23.30	23.27		
10	QPSK	1	49	23.32	23.34	23.19		
10	QPSK	25	0	22.70	22.90	22.74	24	1
10	QPSK	25	12	22.76	22.80	22.82		
10	QPSK	25	25	22.79	22.83	22.44		
10	QPSK	50	0	22.63	22.65	22.81	24	1
10	16QAM	1	0	22.42	22.49	22.51		
10	16QAM	1	25	22.64	22.59	22.54		
10	16QAM	1	49	22.41	22.60	22.49	23	2
10	16QAM	25	0	21.61	21.69	21.70		
10	16QAM	25	12	21.53	21.71	21.86		
10	16QAM	25	25	21.56	21.88	21.87	23	2
10	16QAM	50	0	21.78	21.80	21.94		
10	64QAM	1	0	22.11	22.25	21.94		
10	64QAM	1	25	22.26	22.20	22.28	23	2
10	64QAM	1	49	22.24	22.20	22.21		
10	64QAM	25	0	20.74	20.77	20.82		
10	64QAM	25	12	20.87	20.84	20.48	22	3
10	64QAM	25	25	20.98	20.83	20.96		
10	64QAM	50	0	20.72	20.78	20.69		
10	256QAM	1	0	18.53	18.75	18.51	20	5
10	256QAM	1	25	18.75	18.74	18.79		
10	256QAM	1	49	18.65	18.71	18.59		
10	256QAM	25	0	18.80	18.79	18.55	20	5
10	256QAM	25	12	18.44	18.71	18.51		
10	256QAM	25	25	18.69	18.89	18.65		



10	256QAM	50	0	18.65	18.66	18.63		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.27	23.35	23.37	25	0
5	QPSK	1	12	23.18	23.37	23.24		
5	QPSK	1	24	23.36	23.34	23.16		
5	QPSK	12	0	22.72	22.82	22.76	24	1
5	QPSK	12	7	22.83	22.78	22.60		
5	QPSK	12	13	22.78	22.83	22.46		
5	QPSK	25	0	22.81	22.83	22.77	24	1
5	16QAM	1	0	22.46	22.65	22.49		
5	16QAM	1	12	22.60	22.69	22.48		
5	16QAM	1	24	22.59	22.69	22.64	23	2
5	16QAM	12	0	21.56	21.74	21.61		
5	16QAM	12	7	21.52	21.79	21.92		
5	16QAM	12	13	21.57	21.77	21.92	23	2
5	16QAM	25	0	21.76	21.83	21.76		
5	64QAM	1	0	21.94	22.23	22.01		
5	64QAM	1	12	22.24	22.19	22.39	23	2
5	64QAM	1	24	22.04	22.18	22.21		
5	64QAM	12	0	20.74	20.91	20.87		
5	64QAM	12	7	20.87	20.70	20.67	22	3
5	64QAM	12	13	20.85	20.93	20.84		
5	64QAM	25	0	20.57	20.81	20.71		
5	256QAM	1	0	18.42	18.85	18.57	20	5
5	256QAM	1	12	18.70	18.77	18.78		
5	256QAM	1	24	18.59	18.78	18.77		
5	256QAM	12	0	18.84	18.75	18.66	20	5
5	256QAM	12	7	18.54	18.70	18.70		
5	256QAM	12	13	18.58	18.89	18.70		
5	256QAM	25	0	18.64	18.65	18.64		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.21	23.37	23.36	25	0
3	QPSK	1	8	23.16	23.30	23.26		
3	QPSK	1	14	23.32	23.32	23.17		
3	QPSK	8	0	22.69	22.76	22.64	24	1
3	QPSK	8	4	22.71	22.64	22.82		
3	QPSK	8	7	22.70	22.69	22.62		
3	QPSK	15	0	22.68	22.65	22.64	24	1
3	16QAM	1	0	22.35	22.49	22.52		
3	16QAM	1	8	22.54	22.62	22.53		
3	16QAM	1	14	22.52	22.66	22.63	23	2
3	16QAM	8	0	21.55	21.85	21.56		
3	16QAM	8	4	21.53	21.78	21.70		
3	16QAM	8	7	21.63	21.74	21.77	23	2
3	16QAM	15	0	21.86	21.73	21.88		



FCC SAR Test Report

Report No. : FA311602

3	64QAM	1	0	21.89	22.14	22.05	23	2
3	64QAM	1	8	22.24	22.17	22.39		
3	64QAM	1	14	22.17	22.24	22.12		
3	64QAM	8	0	20.66	20.95	20.86	22	3
3	64QAM	8	4	20.77	20.89	20.71		
3	64QAM	8	7	20.85	21.01	20.79		
3	64QAM	15	0	20.74	20.87	20.76	20	5
3	256QAM	1	0	18.44	18.81	18.58		
3	256QAM	1	8	18.71	18.87	18.62		
3	256QAM	1	14	18.69	18.86	18.78	20	5
3	256QAM	8	0	18.68	18.77	18.75		
3	256QAM	8	4	18.55	18.82	18.63		
3	256QAM	8	7	18.73	18.89	18.76	20	5
3	256QAM	15	0	18.55	18.70	18.68		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.25	23.34	23.37	25	0
1.4	QPSK	1	3	23.22	23.34	23.23		
1.4	QPSK	1	5	23.38	23.36	23.20		
1.4	QPSK	3	0	23.20	23.37	23.30		
1.4	QPSK	3	1	23.22	23.30	23.26		
1.4	QPSK	3	3	23.38	23.29	23.18	24	1
1.4	QPSK	6	0	22.71	22.84	22.83	24	1
1.4	16QAM	1	0	22.67	22.80	22.74		
1.4	16QAM	1	3	22.80	22.75	22.46		
1.4	16QAM	1	5	22.67	22.70	22.60		
1.4	16QAM	3	0	22.57	22.55	22.62		
1.4	16QAM	3	1	22.49	22.57	22.41	23	2
1.4	16QAM	3	3	22.58	22.68	22.64		
1.4	16QAM	6	0	21.56	21.70	21.52		
1.4	64QAM	1	0	21.52	21.73	21.84		
1.4	64QAM	1	3	21.58	21.85	21.80		
1.4	64QAM	1	5	21.94	21.80	21.86	22	3
1.4	64QAM	3	0	22.02	22.32	22.03		
1.4	64QAM	3	1	22.25	22.32	22.29		
1.4	64QAM	3	3	22.16	22.14	22.10	20	5
1.4	64QAM	6	0	20.85	20.81	20.86		
1.4	256QAM	1	0	18.46	18.68	18.60		
1.4	256QAM	1	3	18.66	18.86	18.80		
1.4	256QAM	1	5	18.65	18.87	18.69		
1.4	256QAM	3	0	18.91	18.93	18.55	20	5
1.4	256QAM	3	1	18.49	18.75	18.50		
1.4	256QAM	3	3	18.60	18.87	18.76		
1.4	256QAM	6	0	18.56	18.87	18.86	20	5



Band 25 Ant1 Default ENDC								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.76	23.83	23.70	25	0
20	QPSK	1	49	23.73	23.75	23.69		
20	QPSK	1	99	23.61	23.80	23.66		
20	QPSK	50	0	22.62	22.81	22.77	24	1
20	QPSK	50	24	22.64	22.79	22.80		
20	QPSK	50	50	22.60	22.80	22.69		
20	QPSK	100	0	22.64	22.78	22.58	24	1
20	16QAM	1	0	22.60	22.70	22.62		
20	16QAM	1	49	22.49	22.58	22.42		
20	16QAM	1	99	22.60	22.63	22.56	23	2
20	16QAM	50	0	21.70	21.72	21.59		
20	16QAM	50	24	21.65	21.80	21.66		
20	16QAM	50	50	21.57	21.75	21.72	23	2
20	16QAM	100	0	21.74	21.84	21.66		
20	64QAM	1	0	22.09	22.30	22.15		
20	64QAM	1	49	22.25	22.34	22.27	22	3
20	64QAM	1	99	22.18	22.24	22.05		
20	64QAM	50	0	20.64	20.85	20.81		
20	64QAM	50	24	20.88	20.87	20.73	20	5
20	64QAM	50	50	20.74	20.79	20.65		
20	64QAM	100	0	20.73	20.80	20.77		
20	256QAM	1	0	18.66	18.80	18.65	20	5
20	256QAM	1	49	18.69	18.85	18.67		
20	256QAM	1	99	18.63	18.77	18.69		
20	256QAM	50	0	18.64	18.81	18.67	20	5
20	256QAM	50	24	18.63	18.83	18.70		
20	256QAM	50	50	18.73	18.77	18.74		
20	256QAM	100	0	18.71	18.82	18.65	24	1
15	QPSK	1	0	23.62	23.71	23.52		
15	QPSK	1	37	23.53	23.62	23.47		
15	QPSK	1	74	23.42	23.81	23.59	24	1
15	QPSK	36	0	22.63	22.69	22.57		
15	QPSK	36	20	22.59	22.67	22.59		
15	QPSK	36	39	22.53	22.76	22.55	24	1
15	QPSK	75	0	22.62	22.60	22.50		
15	16QAM	1	0	22.60	22.69	22.45		
15	16QAM	1	37	22.48	22.59	22.38	24	1
15	16QAM	1	74	22.54	22.56	22.42		



15	16QAM	36	0	21.69	21.69	21.49	23	2
15	16QAM	36	20	21.53	21.72	21.50		
15	16QAM	36	39	21.55	21.64	21.72		
15	16QAM	75	0	21.62	21.62	21.57	23	2
15	64QAM	1	0	22.02	22.23	22.00		
15	64QAM	1	37	22.22	22.33	22.10		
15	64QAM	1	74	21.97	22.26	21.92	22	3
15	64QAM	36	0	20.46	20.87	20.74		
15	64QAM	36	20	20.84	20.69	20.57		
15	64QAM	36	39	20.56	20.78	20.63	20	5
15	64QAM	75	0	20.59	20.61	20.76		
15	256QAM	1	0	18.55	18.72	18.66		
15	256QAM	1	37	18.50	18.67	18.46	20	5
15	256QAM	1	74	18.53	18.69	18.68		
15	256QAM	36	0	18.51	18.71	18.46		
15	256QAM	36	20	18.61	18.65	18.56	20	5
15	256QAM	36	39	18.71	18.62	18.57		
15	256QAM	75	0	18.52	18.70	18.64		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.73	23.78	23.60	25	0
10	QPSK	1	25	23.53	23.75	23.67		
10	QPSK	1	49	23.52	23.79	23.56		
10	QPSK	25	0	22.51	22.68	22.63	24	1
10	QPSK	25	12	22.47	22.73	22.70		
10	QPSK	25	25	22.51	22.79	22.53		
10	QPSK	50	0	22.54	22.65	22.42	24	1
10	16QAM	1	0	22.44	22.60	22.54		
10	16QAM	1	25	22.27	22.50	22.32		
10	16QAM	1	49	22.58	22.51	22.47	23	2
10	16QAM	25	0	21.68	21.51	21.51		
10	16QAM	25	12	21.45	21.67	21.62		
10	16QAM	25	25	21.58	21.68	21.70	23	2
10	16QAM	50	0	21.53	21.71	21.56		
10	64QAM	1	0	22.01	22.21	22.01		
10	64QAM	1	25	22.09	22.13	22.14	23	2
10	64QAM	1	49	22.09	22.22	21.92		
10	64QAM	25	0	20.57	20.77	20.81		
10	64QAM	25	12	20.77	20.87	20.53	22	3
10	64QAM	25	25	20.71	20.65	20.45		
10	64QAM	50	0	20.58	20.61	20.78		
10	256QAM	1	0	18.61	18.59	18.45	20	5
10	256QAM	1	25	18.54	18.84	18.55		
10	256QAM	1	49	18.54	18.57	18.49		
10	256QAM	25	0	18.57	18.82	18.53	20	5
10	256QAM	25	12	18.44	18.73	18.71		
10	256QAM	25	25	18.59	18.61	18.62		



10	256QAM	50	0	18.53	18.66	18.51		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.58	23.68	23.70	25	0
5	QPSK	1	12	23.61	23.73	23.62		
5	QPSK	1	24	23.60	23.81	23.44		
5	QPSK	12	0	22.64	22.72	22.71	24	1
5	QPSK	12	7	22.52	22.80	22.80		
5	QPSK	12	13	22.45	22.76	22.65		
5	QPSK	25	0	22.56	22.57	22.54	24	1
5	16QAM	1	0	22.50	22.67	22.48		
5	16QAM	1	12	22.48	22.46	22.30		
5	16QAM	1	24	22.53	22.46	22.37	23	2
5	16QAM	12	0	21.62	21.66	21.42		
5	16QAM	12	7	21.66	21.82	21.60		
5	16QAM	12	13	21.57	21.62	21.68	22	3
5	16QAM	25	0	21.75	21.85	21.54		
5	64QAM	1	0	22.05	22.12	22.16		
5	64QAM	1	12	22.07	22.29	22.08	23	2
5	64QAM	1	24	22.04	22.08	21.86		
5	64QAM	12	0	20.55	20.76	20.75		
5	64QAM	12	7	20.75	20.68	20.54	22	3
5	64QAM	12	13	20.75	20.64	20.52		
5	64QAM	25	0	20.57	20.69	20.71		
5	256QAM	1	0	18.55	18.62	18.53	20	5
5	256QAM	1	12	18.59	18.85	18.51		
5	256QAM	1	24	18.62	18.57	18.55		
5	256QAM	12	0	18.48	18.67	18.57	20	5
5	256QAM	12	7	18.49	18.74	18.65		
5	256QAM	12	13	18.63	18.66	18.68		
5	256QAM	25	0	18.73	18.78	18.61		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.73	23.80	23.64	25	0
3	QPSK	1	8	23.57	23.56	23.68		
3	QPSK	1	14	23.54	23.78	23.63		
3	QPSK	8	0	22.41	22.82	22.72	24	1
3	QPSK	8	4	22.45	22.76	22.82		
3	QPSK	8	7	22.40	22.59	22.63		
3	QPSK	15	0	22.61	22.67	22.53	24	1
3	16QAM	1	0	22.60	22.61	22.62		
3	16QAM	1	8	22.39	22.56	22.28		
3	16QAM	1	14	22.42	22.43	22.44	23	2
3	16QAM	8	0	21.69	21.54	21.38		
3	16QAM	8	4	21.56	21.72	21.48		
3	16QAM	8	7	21.43	21.69	21.64	23	2
3	16QAM	15	0	21.63	21.80	21.55		



FCC SAR Test Report

Report No. : FA311602

3	64QAM	1	0	22.09	22.25	22.02	23	2
3	64QAM	1	8	22.09	22.19	22.26		
3	64QAM	1	14	22.01	22.05	21.94		
3	64QAM	8	0	20.51	20.86	20.82	22	3
3	64QAM	8	4	20.76	20.82	20.54		
3	64QAM	8	7	20.67	20.59	20.59		
3	64QAM	15	0	20.67	20.80	20.59		
3	256QAM	1	0	18.60	18.62	18.51	20	5
3	256QAM	1	8	18.56	18.63	18.60		
3	256QAM	1	14	18.56	18.57	18.55		
3	256QAM	8	0	18.56	18.75	18.59	20	5
3	256QAM	8	4	18.53	18.77	18.71		
3	256QAM	8	7	18.73	18.63	18.57		
3	256QAM	15	0	18.63	18.72	18.63		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.71	23.81	23.66	25	0
1.4	QPSK	1	3	23.55	23.58	23.47		
1.4	QPSK	1	5	23.60	23.76	23.50		
1.4	QPSK	3	0	23.61	23.73	23.54		
1.4	QPSK	3	1	23.61	23.61	23.57		
1.4	QPSK	3	3	23.41	23.70	23.57	24	1
1.4	QPSK	6	0	22.61	22.69	22.60		
1.4	16QAM	1	0	22.59	22.61	22.79	24	1
1.4	16QAM	1	3	22.51	22.63	22.65		
1.4	16QAM	1	5	22.64	22.67	22.49		
1.4	16QAM	3	0	22.62	22.51	22.56		
1.4	16QAM	3	1	22.48	22.51	22.36		
1.4	16QAM	3	3	22.54	22.64	22.50	23	2
1.4	16QAM	6	0	21.50	21.67	21.43		
1.4	64QAM	1	0	21.57	21.80	21.59	23	2
1.4	64QAM	1	3	21.51	21.70	21.51		
1.4	64QAM	1	5	21.59	21.63	21.50		
1.4	64QAM	3	0	22.00	22.29	22.16		
1.4	64QAM	3	1	22.11	22.29	22.23		
1.4	64QAM	3	3	22.14	22.09	21.91	22	3
1.4	64QAM	6	0	20.53	20.63	20.74		
1.4	256QAM	1	0	18.54	18.62	18.50	20	5
1.4	256QAM	1	3	18.49	18.77	18.55		
1.4	256QAM	1	5	18.56	18.65	18.58		
1.4	256QAM	3	0	18.57	18.75	18.68		
1.4	256QAM	3	1	18.42	18.81	18.59		
1.4	256QAM	3	3	18.66	18.68	18.60		
1.4	256QAM	6	0	18.60	18.78	18.47	20	5



Band 66 Ant1 Default ENDC								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.40	23.48	23.37	25	0
20	QPSK	1	49	23.44	23.40	23.21		
20	QPSK	1	99	23.26	23.33	23.15		
20	QPSK	50	0	22.34	22.52	22.46	24	1
20	QPSK	50	24	22.33	22.34	22.31		
20	QPSK	50	50	22.30	22.35	22.32		
20	QPSK	100	0	22.17	22.30	22.29	24	1
20	16QAM	1	0	22.14	22.34	22.22		
20	16QAM	1	49	22.04	22.07	22.00		
20	16QAM	1	99	22.13	22.25	22.13	24	1
20	16QAM	50	0	21.19	21.24	21.13		
20	16QAM	50	24	21.21	21.37	21.26		
20	16QAM	50	50	21.20	21.23	21.40	23	2
20	16QAM	100	0	21.24	21.52	21.15		
20	16QAM	100	0	21.24	21.52	21.15		
20	64QAM	1	0	21.69	21.99	21.74	23	2
20	64QAM	1	49	21.86	21.88	21.96		
20	64QAM	1	99	21.83	21.95	21.66		
20	64QAM	50	0	20.22	20.52	20.34	22	3
20	64QAM	50	24	20.57	20.56	20.38		
20	64QAM	50	50	20.31	20.34	20.26		
20	64QAM	100	0	20.24	20.38	20.42	20	5
20	256QAM	1	0	18.23	18.36	18.21		
20	256QAM	1	49	18.23	18.56	18.26		
20	256QAM	1	99	18.20	18.39	18.36	20	5
20	256QAM	50	0	18.35	18.51	18.21		
20	256QAM	50	24	18.13	18.41	18.28		
20	256QAM	50	50	18.42	18.31	18.23	20	5
20	256QAM	100	0	18.26	18.32	18.16		
20	256QAM	100	0	18.26	18.32	18.16		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.20	23.39	23.18	25	0
15	QPSK	1	37	23.29	23.37	23.04		
15	QPSK	1	74	23.13	23.34	23.11		
15	QPSK	36	0	22.17	22.53	22.36	24	1
15	QPSK	36	20	22.26	22.15	22.23		
15	QPSK	36	39	22.09	22.30	22.26		
15	QPSK	75	0	22.17	22.17	22.26	24	1
15	16QAM	1	0	22.05	22.16	22.18		
15	16QAM	1	37	22.01	22.09	22.22		
15	16QAM	1	74	22.06	22.08	22.14	24	1
15	16QAM	1	0	22.05	22.16	22.18		
15	16QAM	1	37	22.01	22.09	22.22		



15	16QAM	36	0	21.07	21.18	21.04	23	2
15	16QAM	36	20	21.05	21.24	21.09		
15	16QAM	36	39	21.19	21.07	21.23		
15	16QAM	75	0	21.25	21.31	21.05	23	2
15	64QAM	1	0	21.51	21.96	21.55		
15	64QAM	1	37	21.66	21.66	21.90		
15	64QAM	1	74	21.75	21.92	21.50	22	3
15	64QAM	36	0	20.06	20.47	20.26		
15	64QAM	36	20	20.50	20.53	20.32		
15	64QAM	36	39	20.17	20.14	20.08	20	5
15	64QAM	75	0	20.07	20.26	20.36		
15	256QAM	1	0	18.13	18.22	18.22		
15	256QAM	1	37	18.14	18.39	18.13	20	5
15	256QAM	1	74	18.01	18.22	18.24		
15	256QAM	36	0	18.17	18.49	18.11		
15	256QAM	36	20	18.01	18.24	18.20	20	5
15	256QAM	36	39	18.23	18.22	18.17		
15	256QAM	75	0	18.19	18.32	18.21		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.36	23.26	23.29	25	0
10	QPSK	1	25	23.40	23.35	23.15		
10	QPSK	1	49	23.21	23.32	23.11		
10	QPSK	25	0	22.29	22.52	22.42	24	1
10	QPSK	25	12	22.20	22.32	22.15		
10	QPSK	25	25	22.17	22.24	22.31		
10	QPSK	50	0	22.00	22.17	22.19	24	1
10	16QAM	1	0	22.02	22.36	22.01		
10	16QAM	1	25	22.11	22.15	22.13		
10	16QAM	1	49	22.11	22.24	22.14	23	2
10	16QAM	25	0	21.21	21.03	21.08		
10	16QAM	25	12	21.04	21.37	21.19		
10	16QAM	25	25	21.14	21.12	21.29	23	2
10	16QAM	50	0	21.18	21.52	21.10		
10	64QAM	1	0	21.50	21.82	21.55		
10	64QAM	1	25	21.77	21.77	21.90	23	2
10	64QAM	1	49	21.66	21.77	21.56		
10	64QAM	25	0	20.08	20.33	20.28		
10	64QAM	25	12	20.48	20.52	20.33	22	3
10	64QAM	25	25	20.28	20.34	20.20		
10	64QAM	50	0	20.22	20.37	20.30		
10	256QAM	1	0	18.21	18.20	18.04	20	5
10	256QAM	1	25	18.23	18.43	18.11		
10	256QAM	1	49	18.13	18.34	18.34		
10	256QAM	25	0	18.17	18.42	18.02	20	5
10	256QAM	25	12	18.09	18.31	18.07		
10	256QAM	25	25	18.28	18.25	18.14		



10	256QAM	50	0	18.09	18.11	18.05		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.38	23.45	23.34	25	0
5	QPSK	1	12	23.29	23.25	23.06		
5	QPSK	1	24	23.25	23.17	23.04		
5	QPSK	12	0	22.31	22.32	22.40	24	1
5	QPSK	12	7	22.23	22.20	22.28		
5	QPSK	12	13	22.15	22.15	22.11		
5	QPSK	25	0	22.06	22.25	22.12	24	1
5	16QAM	1	0	22.13	22.32	22.19		
5	16QAM	1	12	22.00	22.00	22.14		
5	16QAM	1	24	22.02	22.07	22.02	23	2
5	16QAM	12	0	21.21	21.23	21.06		
5	16QAM	12	7	21.22	21.26	21.22		
5	16QAM	12	13	21.13	21.23	21.20	23	2
5	16QAM	25	0	21.20	21.41	21.15		
5	64QAM	1	0	21.63	21.96	21.66		
5	64QAM	1	12	21.73	21.72	21.82	23	2
5	64QAM	1	24	21.66	21.77	21.58		
5	64QAM	12	0	20.15	20.43	20.21		
5	64QAM	12	7	20.56	20.56	20.35	22	3
5	64QAM	12	13	20.27	20.33	20.08		
5	64QAM	25	0	20.17	20.23	20.22		
5	256QAM	1	0	18.19	18.24	18.06	20	5
5	256QAM	1	12	18.06	18.51	18.11		
5	256QAM	1	24	18.02	18.24	18.24		
5	256QAM	12	0	18.21	18.40	18.17	20	5
5	256QAM	12	7	18.03	18.31	18.11		
5	256QAM	12	13	18.28	18.28	18.07		
5	256QAM	25	0	18.24	18.34	18.10		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.31	23.31	23.37	25	0
3	QPSK	1	8	23.41	23.40	23.03		
3	QPSK	1	14	23.26	23.27	23.07		
3	QPSK	8	0	22.21	22.51	22.42	24	1
3	QPSK	8	4	22.12	22.34	22.20		
3	QPSK	8	7	22.24	22.19	22.11		
3	QPSK	15	0	22.18	22.15	22.14	24	1
3	16QAM	1	0	22.11	22.23	22.05		
3	16QAM	1	8	22.01	22.04	22.01		
3	16QAM	1	14	22.08	22.11	22.04	23	2
3	16QAM	8	0	21.15	21.04	21.10		
3	16QAM	8	4	21.13	21.27	21.10		
3	16QAM	8	7	21.12	21.13	21.42	23	2
3	16QAM	15	0	21.05	21.35	21.08		



3	64QAM	1	0	21.64	21.89	21.72	23	2
3	64QAM	1	8	21.84	21.80	21.91		
3	64QAM	1	14	21.68	21.75	21.61		
3	64QAM	8	0	20.16	20.33	20.14	22	3
3	64QAM	8	4	20.53	20.38	20.21		
3	64QAM	8	7	20.23	20.18	20.22		
3	64QAM	15	0	20.10	20.23	20.43		
3	256QAM	1	0	18.11	18.21	18.03	20	5
3	256QAM	1	8	18.02	18.44	18.09		
3	256QAM	1	14	18.09	18.25	18.23		
3	256QAM	8	0	18.15	18.37	18.02	20	5
3	256QAM	8	4	18.13	18.42	18.26		
3	256QAM	8	7	18.24	18.14	18.05		
3	256QAM	15	0	18.21	18.32	18.05		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.26	23.35	23.25	25	0
1.4	QPSK	1	3	23.25	23.27	23.20		
1.4	QPSK	1	5	23.07	23.35	23.11		
1.4	QPSK	3	0	23.34	23.32	23.28		
1.4	QPSK	3	1	23.34	23.32	23.03		
1.4	QPSK	3	3	23.26	23.17	23.14	24	1
1.4	QPSK	6	0	22.22	22.33	22.43		
1.4	16QAM	1	0	22.22	22.20	22.14	24	1
1.4	16QAM	1	3	22.28	22.30	22.27		
1.4	16QAM	1	5	22.03	22.12	22.15		
1.4	16QAM	3	0	22.01	22.28	22.05		
1.4	16QAM	3	1	22.06	22.24	22.09		
1.4	16QAM	3	3	22.01	22.05	22.09	23	2
1.4	16QAM	6	0	21.11	21.04	21.06		
1.4	64QAM	1	0	21.17	21.23	21.05	23	2
1.4	64QAM	1	3	21.01	21.20	21.37		
1.4	64QAM	1	5	21.16	21.35	21.09		
1.4	64QAM	3	0	21.71	21.95	21.75		
1.4	64QAM	3	1	21.78	21.86	21.92		
1.4	64QAM	3	3	21.79	21.79	21.62	22	3
1.4	64QAM	6	0	20.47	20.46	20.40		
1.4	256QAM	1	0	18.10	18.36	18.00	20	5
1.4	256QAM	1	3	18.03	18.41	18.26		
1.4	256QAM	1	5	18.02	18.18	18.24		
1.4	256QAM	3	0	18.32	18.36	18.16		
1.4	256QAM	3	1	18.15	18.26	18.10		
1.4	256QAM	3	3	18.30	18.26	18.17		
1.4	256QAM	6	0	18.21	18.29	18.16	20	5



Band 2 Ant2 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.41	23.46	23.44	25	0
20	QPSK	1	49	23.26	23.41	23.34		
20	QPSK	1	99	23.24	23.38	23.35		
20	QPSK	50	0	22.34	22.49	22.40	24	1
20	QPSK	50	24	22.38	22.42	22.33		
20	QPSK	50	50	22.38	22.45	22.33		
20	QPSK	100	0	22.33	22.43	22.40	24	1
20	16QAM	1	0	22.51	22.59	22.50		
20	16QAM	1	49	22.41	22.49	22.37		
20	16QAM	1	99	22.43	22.56	22.41	23	2
20	16QAM	50	0	21.41	21.54	21.41		
20	16QAM	50	24	21.43	21.45	21.28		
20	16QAM	50	50	21.40	21.52	21.47	23	2
20	16QAM	100	0	21.47	21.53	21.40		
20	64QAM	1	0	21.35	21.49	21.36		
20	64QAM	1	49	21.26	21.34	21.24	23	2
20	64QAM	1	99	21.26	21.36	21.33		
20	64QAM	50	0	20.44	20.50	20.41		
20	64QAM	50	24	20.31	20.35	20.23	22	3
20	64QAM	50	50	20.27	20.42	20.26		
20	64QAM	100	0	20.33	20.47	20.30		
20	256QAM	1	0	18.27	18.45	18.42	20	5
20	256QAM	1	49	18.35	18.41	18.38		
20	256QAM	1	99	18.27	18.33	18.17		
20	256QAM	50	0	18.37	18.59	18.44	20	5
20	256QAM	50	24	18.42	18.45	18.40		
20	256QAM	50	50	18.49	18.49	18.35		
20	256QAM	100	0	18.37	18.43	18.38		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.34	23.35	23.29	25	0
15	QPSK	1	37	23.15	23.35	23.27		
15	QPSK	1	74	23.20	23.26	23.24		
15	QPSK	36	0	22.30	22.42	22.28	24	1
15	QPSK	36	20	22.32	22.26	22.30		
15	QPSK	36	39	22.24	22.40	22.28		
15	QPSK	75	0	22.29	22.40	22.23	24	1
15	16QAM	1	0	22.35	22.54	22.42		
15	16QAM	1	37	22.25	22.43	22.22		
15	16QAM	1	74	22.35	22.40	22.32		



15	16QAM	36	0	21.29	21.40	21.32	23	2
15	16QAM	36	20	21.28	21.29	21.20		
15	16QAM	36	39	21.36	21.44	21.41		
15	16QAM	75	0	21.39	21.42	21.34	23	2
15	64QAM	1	0	21.24	21.36	21.33		
15	64QAM	1	37	21.23	21.24	21.22		
15	64QAM	1	74	21.15	21.23	21.19	22	3
15	64QAM	36	0	20.30	20.33	20.33		
15	64QAM	36	20	20.28	20.23	20.11		
15	64QAM	36	39	20.17	20.28	20.16	20	5
15	64QAM	75	0	20.29	20.41	20.20		
15	256QAM	1	0	18.33	18.40	18.36		
15	256QAM	1	37	18.23	18.28	18.29	20	5
15	256QAM	1	74	18.35	18.31	18.18		
15	256QAM	36	0	18.48	18.56	18.43		
15	256QAM	36	20	18.32	18.39	18.43	20	5
15	256QAM	36	39	18.42	18.56	18.41		
15	256QAM	75	0	18.45	18.40	18.37		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.31	23.33	23.33	25	0
10	QPSK	1	25	23.14	23.37	23.29		
10	QPSK	1	49	23.08	23.35	23.28		
10	QPSK	25	0	22.26	22.45	22.37	24	1
10	QPSK	25	12	22.22	22.39	22.21		
10	QPSK	25	25	22.24	22.37	22.18		
10	QPSK	50	0	22.22	22.34	22.24	24	1
10	16QAM	1	0	22.37	22.53	22.44		
10	16QAM	1	25	22.25	22.42	22.30		
10	16QAM	1	49	22.38	22.42	22.36	23	2
10	16QAM	25	0	21.28	21.39	21.30		
10	16QAM	25	12	21.26	21.36	21.25		
10	16QAM	25	25	21.31	21.43	21.37	23	2
10	16QAM	50	0	21.36	21.49	21.28		
10	64QAM	1	0	21.32	21.43	21.26		
10	64QAM	1	25	21.23	21.32	21.22	23	2
10	64QAM	1	49	21.17	21.23	21.22		
10	64QAM	25	0	20.39	20.41	20.34		
10	64QAM	25	12	20.21	20.20	20.11	22	3
10	64QAM	25	25	20.11	20.30	20.17		
10	64QAM	50	0	20.30	20.39	20.15		
10	256QAM	1	0	18.22	18.43	18.43	20	5
10	256QAM	1	25	18.29	18.31	18.30		
10	256QAM	1	49	18.28	18.42	18.29		
10	256QAM	25	0	18.38	18.53	18.49	20	5
10	256QAM	25	12	18.45	18.36	18.43		
10	256QAM	25	25	18.43	18.52	18.29		



10	256QAM	50	0	18.40	18.40	18.33		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.33	23.37	23.30	25	0
5	QPSK	1	12	23.23	23.34	23.24		
5	QPSK	1	24	23.09	23.33	23.32		
5	QPSK	12	0	22.29	22.43	22.23	24	1
5	QPSK	12	7	22.28	22.34	22.29		
5	QPSK	12	13	22.36	22.33	22.28		
5	QPSK	25	0	22.31	22.28	22.32	24	1
5	16QAM	1	0	22.49	22.56	22.37		
5	16QAM	1	12	22.36	22.40	22.32		
5	16QAM	1	24	22.34	22.46	22.27	23	2
5	16QAM	12	0	21.35	21.52	21.26		
5	16QAM	12	7	21.33	21.29	21.13		
5	16QAM	12	13	21.26	21.39	21.35	23	2
5	16QAM	25	0	21.38	21.41	21.35		
5	64QAM	1	0	21.24	21.43	21.32		
5	64QAM	1	12	21.16	21.29	21.17	23	2
5	64QAM	1	24	21.09	21.28	21.25		
5	64QAM	12	0	20.41	20.33	20.37		
5	64QAM	12	7	20.25	20.26	20.16	22	3
5	64QAM	12	13	20.21	20.36	20.21		
5	64QAM	25	0	20.18	20.38	20.27		
5	256QAM	1	0	18.22	18.39	18.38	20	5
5	256QAM	1	12	18.32	18.34	18.24		
5	256QAM	1	24	18.35	18.37	18.21		
5	256QAM	12	0	18.43	18.50	18.46	20	5
5	256QAM	12	7	18.32	18.37	18.36		
5	256QAM	12	13	18.36	18.49	18.32		
5	256QAM	25	0	18.37	18.48	18.40		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.34	23.42	23.36	25	0
3	QPSK	1	8	23.24	23.37	23.28		
3	QPSK	1	14	23.13	23.32	23.26		
3	QPSK	8	0	22.30	22.42	22.30	24	1
3	QPSK	8	4	22.27	22.40	22.20		
3	QPSK	8	7	22.33	22.41	22.28		
3	QPSK	15	0	22.24	22.26	22.25	24	1
3	16QAM	1	0	22.41	22.56	22.45		
3	16QAM	1	8	22.24	22.47	22.29		
3	16QAM	1	14	22.31	22.48	22.27	23	2
3	16QAM	8	0	21.28	21.46	21.36		
3	16QAM	8	4	21.32	21.40	21.11		
3	16QAM	8	7	21.33	21.39	21.38	23	2
3	16QAM	15	0	21.36	21.48	21.35		



3	64QAM	1	0	21.22	21.46	21.22	23	2
3	64QAM	1	8	21.19	21.24	21.09		
3	64QAM	1	14	21.18	21.33	21.29		
3	64QAM	8	0	20.36	20.43	20.31	22	3
3	64QAM	8	4	20.28	20.26	20.15		
3	64QAM	8	7	20.11	20.37	20.11		
3	64QAM	15	0	20.24	20.43	20.22		
3	256QAM	1	0	18.32	18.43	18.33	20	5
3	256QAM	1	8	18.29	18.33	18.25		
3	256QAM	1	14	18.28	18.34	18.28		
3	256QAM	8	0	18.36	18.56	18.37	20	5
3	256QAM	8	4	18.42	18.49	18.40		
3	256QAM	8	7	18.37	18.43	18.40		
3	256QAM	15	0	18.36	18.40	18.37		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.24	23.30	23.28	25	0
1.4	QPSK	1	3	23.22	23.29	23.22		
1.4	QPSK	1	5	23.09	23.31	23.20		
1.4	QPSK	3	0	23.28	23.40	23.33		
1.4	QPSK	3	1	23.24	23.31	23.17		
1.4	QPSK	3	3	23.25	23.43	23.17		
1.4	QPSK	6	0	22.30	22.38	22.36	24	1
1.4	16QAM	1	0	22.45	22.50	22.40	24	1
1.4	16QAM	1	3	22.37	22.42	22.25		
1.4	16QAM	1	5	22.28	22.42	22.29		
1.4	16QAM	3	0	22.33	22.44	22.32		
1.4	16QAM	3	1	22.37	22.34	22.13		
1.4	16QAM	3	3	22.24	22.48	22.34		
1.4	16QAM	6	0	21.41	21.51	21.26	23	2
1.4	64QAM	1	0	21.21	21.44	21.24	23	2
1.4	64QAM	1	3	21.19	21.27	21.19		
1.4	64QAM	1	5	21.19	21.29	21.20		
1.4	64QAM	3	0	21.40	21.38	21.37		
1.4	64QAM	3	1	21.20	21.30	21.14		
1.4	64QAM	3	3	21.15	21.28	21.23		
1.4	64QAM	6	0	20.18	20.44	20.26	22	3
1.4	256QAM	1	0	18.29	18.46	18.39	20	5
1.4	256QAM	1	3	18.29	18.32	18.36		
1.4	256QAM	1	5	18.42	18.40	18.32		
1.4	256QAM	3	0	18.38	18.49	18.40		
1.4	256QAM	3	1	18.39	18.48	18.44		
1.4	256QAM	3	3	18.37	18.57	18.33		
1.4	256QAM	6	0	18.38	18.40	18.38	20	5



Band 4 Ant2 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.34	23.52	23.36	25	0
20	QPSK	1	49	23.26	23.37	23.33		
20	QPSK	1	99	23.41	23.48	23.36		
20	QPSK	50	0	22.43	22.49	22.36	24	1
20	QPSK	50	24	22.33	22.43	22.32		
20	QPSK	50	50	22.37	22.46	22.32		
20	QPSK	100	0	22.37	22.40	22.32		
20	16QAM	1	0	22.64	22.67	22.61	24	1
20	16QAM	1	49	22.43	22.57	22.41		
20	16QAM	1	99	22.54	22.64	22.57		
20	16QAM	50	0	21.41	21.47	21.41	23	2
20	16QAM	50	24	21.30	21.44	21.30		
20	16QAM	50	50	21.32	21.44	21.30		
20	16QAM	100	0	21.29	21.46	21.33		
20	64QAM	1	0	21.49	21.63	21.53	23	2
20	64QAM	1	49	21.51	21.60	21.47		
20	64QAM	1	99	21.44	21.60	21.56		
20	64QAM	50	0	20.23	20.39	20.24	22	3
20	64QAM	50	24	20.31	20.36	20.23		
20	64QAM	50	50	20.18	20.32	20.21		
20	64QAM	100	0	20.32	20.42	20.31		
20	256QAM	1	0	18.32	18.50	18.39	20	5
20	256QAM	1	49	18.33	18.38	18.38		
20	256QAM	1	99	18.37	18.36	18.28		
20	256QAM	50	0	18.45	18.59	18.39	20	5
20	256QAM	50	24	18.38	18.40	18.43		
20	256QAM	50	50	18.36	18.54	18.27		
20	256QAM	100	0	18.42	18.48	18.41		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.20	23.48	23.33	25	0
15	QPSK	1	37	23.14	23.25	23.26		
15	QPSK	1	74	23.33	23.44	23.32		
15	QPSK	36	0	22.34	22.34	22.26	24	1
15	QPSK	36	20	22.21	22.29	22.24		
15	QPSK	36	39	22.33	22.36	22.24		
15	QPSK	75	0	22.29	22.29	22.16		
15	16QAM	1	0	22.57	22.63	22.54	24	1
15	16QAM	1	37	22.39	22.48	22.31		
15	16QAM	1	74	22.47	22.50	22.53		



15	16QAM	36	0	21.34	21.43	21.27	23	2
15	16QAM	36	20	21.25	21.29	21.13		
15	16QAM	36	39	21.17	21.36	21.17		
15	16QAM	75	0	21.17	21.41	21.22	23	2
15	64QAM	1	0	21.43	21.53	21.50		
15	64QAM	1	37	21.48	21.53	21.45		
15	64QAM	1	74	21.37	21.53	21.46	22	3
15	64QAM	36	0	20.13	20.24	20.11		
15	64QAM	36	20	20.27	20.20	20.11		
15	64QAM	36	39	20.12	20.22	20.18	20	5
15	64QAM	75	0	20.26	20.31	20.25		
15	256QAM	1	0	18.31	18.41	18.30		
15	256QAM	1	37	18.31	18.28	18.32	20	5
15	256QAM	1	74	18.32	18.41	18.20		
15	256QAM	36	0	18.49	18.53	18.46		
15	256QAM	36	20	18.33	18.49	18.45	20	5
15	256QAM	36	39	18.44	18.43	18.30		
15	256QAM	75	0	18.43	18.53	18.43		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.21	23.42	23.30	25	0
10	QPSK	1	25	23.20	23.23	23.24		
10	QPSK	1	49	23.27	23.45	23.28		
10	QPSK	25	0	22.33	22.37	22.27	24	1
10	QPSK	25	12	22.22	22.28	22.29		
10	QPSK	25	25	22.29	22.42	22.24		
10	QPSK	50	0	22.24	22.28	22.27	24	1
10	16QAM	1	0	22.51	22.59	22.45		
10	16QAM	1	25	22.38	22.43	22.35		
10	16QAM	1	49	22.48	22.61	22.51	23	2
10	16QAM	25	0	21.32	21.37	21.37		
10	16QAM	25	12	21.13	21.34	21.15		
10	16QAM	25	25	21.25	21.39	21.27	23	2
10	16QAM	50	0	21.26	21.37	21.28		
10	64QAM	1	0	21.34	21.54	21.48		
10	64QAM	1	25	21.48	21.43	21.36	23	2
10	64QAM	1	49	21.41	21.49	21.41		
10	64QAM	25	0	20.15	20.34	20.14		
10	64QAM	25	12	20.18	20.29	20.09	22	3
10	64QAM	25	25	20.07	20.17	20.12		
10	64QAM	50	0	20.26	20.36	20.25		
10	256QAM	1	0	18.25	18.49	18.31	20	5
10	256QAM	1	25	18.27	18.37	18.31		
10	256QAM	1	49	18.42	18.43	18.25		
10	256QAM	25	0	18.44	18.49	18.46	20	5
10	256QAM	25	12	18.45	18.42	18.40		
10	256QAM	25	25	18.49	18.51	18.36		



10	256QAM	50	0	18.33	18.40	18.36				
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)		
Frequency (MHz)				1712.5	1732.5	1752.5				
5	QPSK	1	0	23.20	23.41	23.28	25	0		
5	QPSK	1	12	23.14	23.33	23.18				
5	QPSK	1	24	23.26	23.38	23.32				
5	QPSK	12	0	22.41	22.39	22.29	24	1		
5	QPSK	12	7	22.17	22.36	22.18				
5	QPSK	12	13	22.34	22.30	22.28				
5	QPSK	25	0	22.22	22.37	22.21	24	1		
5	16QAM	1	0	22.58	22.50	22.47				
5	16QAM	1	12	22.31	22.44	22.27				
5	16QAM	1	24	22.39	22.55	22.55	23	2		
5	16QAM	12	0	21.27	21.31	21.27				
5	16QAM	12	7	21.15	21.37	21.18				
5	16QAM	12	13	21.26	21.38	21.25	23	2		
5	16QAM	25	0	21.19	21.38	21.19				
5	64QAM	1	0	21.47	21.52	21.38				
5	64QAM	1	12	21.40	21.47	21.43	23	2		
5	64QAM	1	24	21.41	21.45	21.49				
5	64QAM	12	0	20.16	20.31	20.16				
5	64QAM	12	7	20.18	20.23	20.08	22	3		
5	64QAM	12	13	20.13	20.18	20.06				
5	64QAM	25	0	20.29	20.39	20.16				
5	256QAM	1	0	18.24	18.36	18.36	20	5		
5	256QAM	1	12	18.28	18.34	18.30				
5	256QAM	1	24	18.40	18.46	18.20				
5	256QAM	12	0	18.37	18.46	18.38	20	5		
5	256QAM	12	7	18.44	18.36	18.39				
5	256QAM	12	13	18.45	18.50	18.38				
5	256QAM	25	0	18.43	18.52	18.35	20	5		
Channel				19965	20175	20385			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5				
3	QPSK	1	0	23.23	23.42	23.21	25	0		
3	QPSK	1	8	23.13	23.31	23.28				
3	QPSK	1	14	23.26	23.46	23.28				
3	QPSK	8	0	22.30	22.34	22.23	24	1		
3	QPSK	8	4	22.20	22.35	22.30				
3	QPSK	8	7	22.23	22.36	22.27				
3	QPSK	15	0	22.22	22.38	22.20	24	1		
3	16QAM	1	0	22.55	22.58	22.48				
3	16QAM	1	8	22.39	22.47	22.27				
3	16QAM	1	14	22.44	22.51	22.44	24	1		
3	16QAM	8	0	21.31	21.42	21.37				
3	16QAM	8	4	21.13	21.31	21.17				
3	16QAM	8	7	21.25	21.29	21.14	23	2		
3	16QAM	15	0	21.14	21.40	21.24				