



# FCC TEST REPORT

## (PART 27)

**REPORT NO.:** RF140225C37-1

**MODEL NO.:** E580P

**FCC ID:** UZI-580P

**RECEIVED:** Feb. 25, 2014

**TESTED:** Mar. 11 ~ Mar. 18, 2014

**ISSUED:** Mar. 24, 2014

**APPLICANT:** BandRich Inc.

**ADDRESS:** 6F., No. 71, Zhouzi St., Neihu Dist., Taipei City  
11493, Taiwan (R.O.C.)

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



# TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	3
1 CERTIFICATION .....	4
2 SUMMARY OF TEST RESULTS .....	5
2.1 MEASUREMENT UNCERTAINTY .....	5
2.2 TEST SITE AND INSTRUMENTS .....	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.3 DESCRIPTION OF SUPPORT UNITS.....	8
3.4 DESCRIPTION OF TEST MODES.....	9
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	10
4 TEST TYPES AND RESULTS .....	11
4.1 OUTPUT POWER MEASUREMENT .....	11
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT.....	11
4.1.2 TEST PROCEDURES .....	11
4.1.3 TEST SETUP .....	12
4.1.4 TEST RESULTS.....	13
4.2 FREQUENCY STABILITY MEASUREMENT .....	19
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	19
4.2.2 TEST PROCEDURE .....	19
4.2.3 TEST SETUP .....	19
4.2.4 TEST RESULTS .....	20
4.3 EMISSION BANDWIDTH MEASUREMENT .....	21
4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT.....	21
4.3.2 TEST SETUP .....	21
4.3.3 TEST PROCEDURES .....	21
4.3.4 TEST RESULTS.....	22
4.4 CHANNEL EDGE MEASUREMENT .....	25
4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT.....	25
4.4.2 TEST SETUP .....	25
4.4.3 TEST PROCEDURES .....	25
4.4.4 TEST RESULTS .....	26
4.5 CONDUCTED SPURIOUS EMISSIONS.....	32
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	32
4.5.2 TEST PROCEDURE .....	32
4.5.3 TEST SETUP .....	32
4.5.4 TEST RESULTS.....	33
4.6 RADIATED EMISSION MEASUREMENT .....	42
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	42
4.6.2 TEST PROCEDURES .....	42
4.6.3 DEVIATION FROM TEST STANDARD .....	42
4.6.4 TEST SETUP .....	43
4.6.5 TEST RESULTS.....	44
5 INFORMATION ON THE TESTING LABORATORIES .....	56
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	57



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140225C37-1	Original release	Mar. 24, 2014




# 1 CERTIFICATION

**PRODUCT:** LTE Outdoor CPE  
**MODEL NO.:** E580P  
**BRAND:** BandLuxe  
**APPLICANT:** BandRich Inc.  
**TESTED:** Mar. 11 ~ Mar. 18, 2014  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**TEST STANDARDS:** **FCC Part 27, Subpart C, M**  
**FCC Part 2**

The above equipment (model: E580P) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Mar. 24, 2014  
Pettie Chen / Senior Specialist

**APPROVED BY** :  , **DATE:** Mar. 24, 2014  
Ivan Tsai / Project Engineer

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(h)(2)	Equivalent Isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Emission Bandwidth	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -12.10dB at 5002.00MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Sep. 09, 2013	Sep. 08, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Dec. 18, 2013	Dec. 17, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8449B	3008A01961	Oct. 28, 2013	Oct. 27, 2014
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 26, 2013	Aug. 25, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Sep. 09, 2013	Sep. 08, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	LTE Outdoor CPE	
<b>MODEL NO.</b>	E580P	
<b>POWER SUPPLY</b>	48Vdc (PoE)	
<b>MODULATION TECHNOLOGY</b>	QPSK, 16QAM	
<b>FREQUENCY RANGE</b>	<b>Channel Bandwidth 10MHz</b>	2501MHz ~ 2685MHz
	<b>Channel Bandwidth 15MHz</b>	2503.5MHz ~ 2682.5MHz
	<b>Channel Bandwidth 20MHz</b>	2506MHz ~ 2680MHz
<b>MAX. EIRP POWER (W)</b>	<b>Channel Bandwidth 10MHz</b>	1.629W (32.12dBm)
	<b>Channel Bandwidth 15MHz</b>	1.581W (31.99dBm)
	<b>Channel Bandwidth 20MHz</b>	1.574W (31.97dBm)
<b>EMISSION DESIGNATOR</b>	<b>Channel Bandwidth 10MHz</b>	9M00G7D (QPSK)
		8M97W7D (16QAM)
	<b>Channel Bandwidth 15MHz</b>	13M4G7D (QPSK)
		13M4W7D (16QAM)
	<b>Channel Bandwidth 20MHz</b>	17M9G7D (QPSK)
		17M9W7D (16QAM)
<b>ANTENNA TYPE</b>	Embedded high gain directional antenna with 11dBi gain	
<b>ANTENNA CONNECTOR</b>	IPEX	
<b>I/O PORTS</b>	Refer to users' manual	
<b>DATA CABLE</b>	NA	
<b>ACCESSORY DEVICES</b>	NA	

**NOTE:**

- The EUT uses following PoE.


<b>Brand</b>	ALFA
<b>Model</b>	APOE01(F)
<b>Input Power</b>	48Vdc

Adapter of PoE

<b>Brand</b>	DVE
<b>Model</b>	DSA-42D-48 1 480100 1
<b>Input Power</b>	100-240V~ 50/60Hz 1.2A
<b>Output Power</b>	+48V / 1A
<b>Power Line</b>	AC: 0.6m non-shielded power cord without core
	DC: 1.5m cable with one core attached on adapter

- The above EUT information is declared by manufacturer and for more detailed feature description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

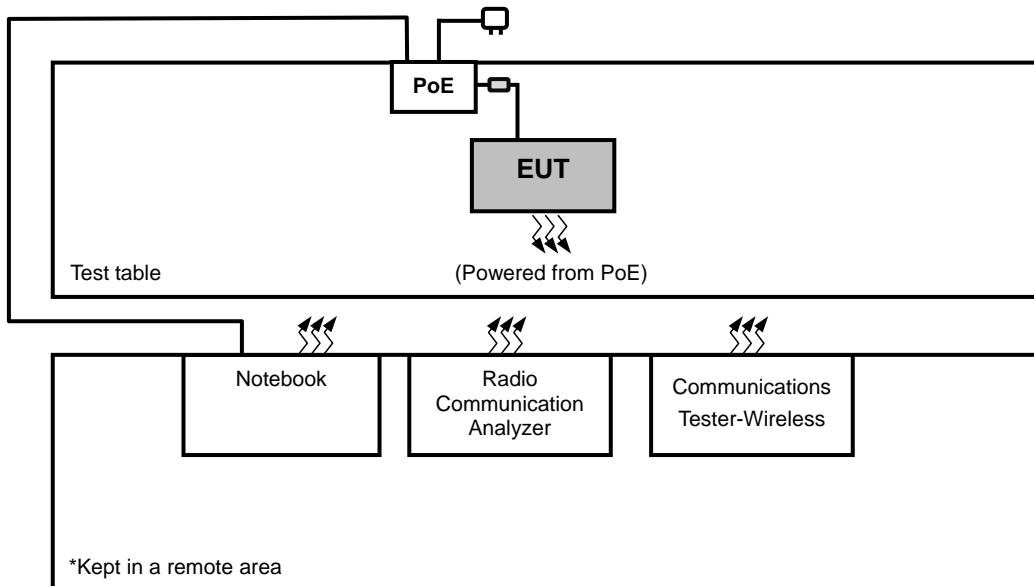

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5430	FKKCYW1	FCC DoC Approved
2	Communications Tester-Wireless	Agilent	8960 Series 10	MY50260642	NA
3	Radio Communication Analyzer	Anritsu	MT8820C	6201010284	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8m).
2. Items 2, 3 act as communication partners to transfer data.



### 3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane. Following channel(s) was (were) selected for the final test as listed below:

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
OUTPUT POWER	39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0 RB Offset
	39725 to 41515	39725, 40620, 41515	15MHz	QPSK	1 RB / 0 RB Offset
	39750 to 41490	39750, 40620, 41490	20MHz	QPSK	1 RB / 0 RB Offset
FREQUENCY STABILITY	39700 to 41540	40620	10MHz	QPSK	1 RB / 0 RB Offset
	39725 to 41515	40620	15MHz	QPSK	1 RB / 0 RB Offset
	39750 to 41490	40620	20MHz	QPSK	1 RB / 0 RB Offset
EMISSION BANDWIDTH	39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0 RB Offset
	39725 to 41515	39725, 40620, 41515	15MHz	QPSK	1 RB / 0 RB Offset
	39750 to 41490	39750, 40620, 41490	20MHz	QPSK	1 RB / 0 RB Offset
CHANNEL EDGE	39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
CONDUCTED EMISSION	39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
RADIATED EMISSION Below 1GHz	39700 to 41540	39700	10MHz	QPSK	1 RB / 0 RB Offset
	39725 to 41515	39725	15MHz	QPSK	1 RB / 0 RB Offset
	39750 to 41490	39750	20MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION Above 1GHz	39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0 RB Offset
	39725 to 41515	39725, 40620, 41515	15MHz	QPSK	1 RB / 0 RB Offset
	39750 to 41490	39750, 40620, 41490	20MHz	QPSK	1 RB / 0 RB Offset

**NOTE:**

- For radiated emission below 1 GHz, the low, mid and high channels were pre-tested in chamber. The low channel was the worst case and chosen for final test.
- The conducted output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, the EIRP power, Frequency Stability and Radiated Emission were performed under QPSK mode only.

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OUTPUT POWER	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
FREQUENCY STABILITY	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
EMISSION BANDWIDTH	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
CHANNEL EDGE	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
CONDUCTED EMISSION	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Brad Tung



### **3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**ANSI/TIA/EIA-603-C 2004**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

#### 4.1.2 TEST PROCEDURES

##### **EIRP / ERP MEASUREMENT:**

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- e.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10MHz/10MHz.

##### **CONDUCTED POWER MEASUREMENT:**

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.


### 4.1.3 TEST SETUP

#### EIRP / ERP MEASUREMENT:

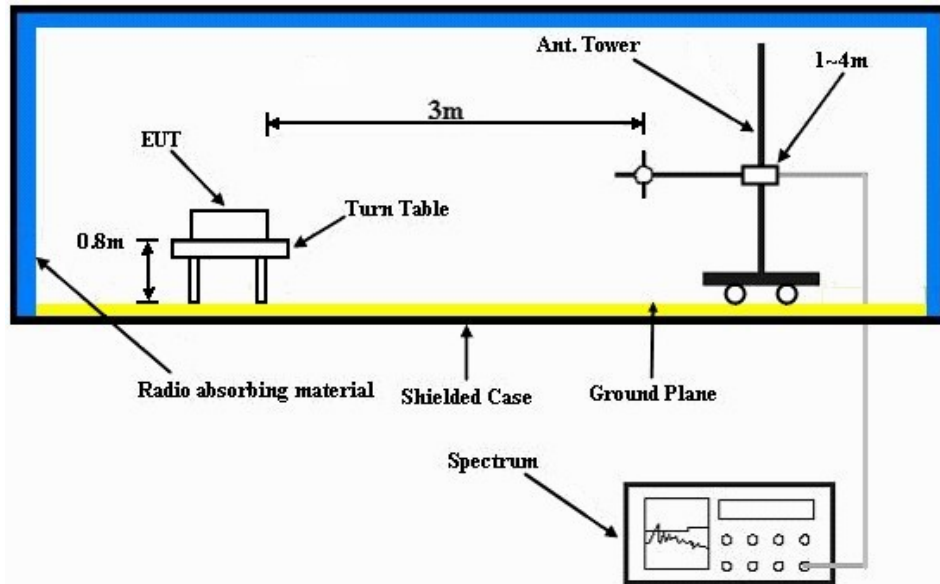

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

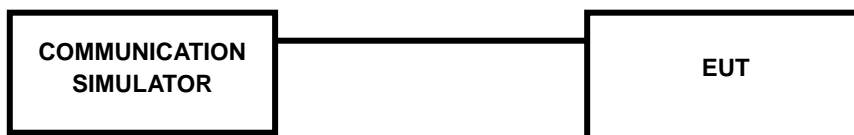

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 TEST RESULTS

##### CONDUCTED OUTPUT POWER (dBm)

BW	Modulation	CH	Frequency (MHz)	RB	RB Offset	MPR	Target Power	Measured Power
10MHz	QPSK	39700	2501	1	0	0	22.60	21.18
		40620	2593	1	0	0	22.60	22.52
		41540	2685	1	0	0	22.60	22.79
		39700	2501	1	24	0	22.60	20.08
		40620	2593	1	24	0	22.60	22.38
		41540	2685	1	24	0	22.60	22.53
		39700	2501	1	49	0	22.60	20.99
		40620	2593	1	49	0	22.60	22.31
		41540	2685	1	49	0	22.60	22.45
		39700	2501	25	0	1	22.60	20.18
		40620	2593	25	0	1	22.60	21.51
		41540	2685	25	0	1	22.60	21.75
		39700	2501	25	12	1	22.60	20.15
		40620	2593	25	12	1	22.60	21.44
		41540	2685	25	12	1	22.60	21.63
		39700	2501	25	25	1	22.60	20.14
		40620	2593	25	25	1	22.60	21.49
		41540	2685	25	25	1	22.60	21.74
	39700	2501	50	0	1	22.60	20.01	
	40620	2593	50	0	1	22.60	21.20	
	41540	2685	50	0	1	22.60	21.47	
	39700	2501	1	0	1	22.60	20.19	
	40620	2593	1	0	1	22.60	21.65	
	41540	2685	1	0	1	22.60	21.98	
	39700	2501	1	24	1	22.60	20.24	
	40620	2593	1	24	1	22.60	21.74	
	41540	2685	1	24	1	22.60	22.24	
	39700	2501	1	49	1	22.60	20.11	
	40620	2593	1	49	1	22.60	21.73	
	41540	2685	1	49	1	22.60	22.11	
	39700	2501	25	0	2	22.60	19.16	
	40620	2593	25	0	2	22.60	20.70	
	41540	2685	25	0	2	22.60	21.11	
	39700	2501	25	12	2	22.60	19.11	
	40620	2593	25	12	2	22.60	20.61	
	41540	2685	25	12	2	22.60	21.25	
39700	2501	25	25	2	22.60	19.15		
40620	2593	25	25	2	22.60	20.65		
41540	2685	25	25	2	22.60	21.02		
39700	2501	50	0	2	22.60	19.04		
40620	2593	50	0	2	22.60	20.45		
41540	2685	50	0	2	22.60	20.85		
	16QAM							



A D T

BW	Modulation	CH	Frequency (MHz)	RB	RB Offset	MPR	Target Power	Measured Power
15MHz	QPSK	39725	2503.5	1	0	0	22.60	21.13
		40620	2593.0	1	0	0	22.60	22.44
		41515	2682.5	1	0	0	22.60	23.29
		39725	2503.5	1	37	0	22.60	21.04
		40620	2593.0	1	37	0	22.60	22.29
		41515	2682.5	1	37	0	22.60	23.10
		39725	2503.5	1	74	0	22.60	21.04
		40620	2593.0	1	74	0	22.60	22.29
		41515	2682.5	1	74	0	22.60	22.98
		39725	2503.5	36	0	1	22.60	20.05
		40620	2593.0	36	0	1	22.60	21.31
		41515	2682.5	36	0	1	22.60	22.09
		39725	2503.5	36	19	1	22.60	19.98
		40620	2593.0	36	19	1	22.60	21.24
		41515	2682.5	36	19	1	22.60	22.98
		39725	2503.5	36	39	1	22.60	19.98
		40620	2593.0	36	39	1	22.60	21.09
		41515	2682.5	36	39	1	22.60	22.01
	39725	2503.5	75	0	1	22.60	19.97	
	40620	2593.0	75	0	1	22.60	21.19	
	41515	2682.5	75	0	1	22.60	22.04	
	39725	2503.5	1	0	1	22.60	21.08	
	40620	2593.0	1	0	1	22.60	21.73	
	41515	2682.5	1	0	1	22.60	22.58	
	39725	2503.5	1	37	1	22.60	20.68	
	40620	2593.0	1	37	1	22.60	21.36	
	41515	2682.5	1	37	1	22.60	22.14	
	39725	2503.5	1	74	1	22.60	20.74	
	40620	2593.0	1	74	1	22.60	21.24	
	41515	2682.5	1	74	1	22.60	22.04	
	39725	2503.5	36	0	2	22.60	19.58	
	40620	2593.0	36	0	2	22.60	20.24	
	41515	2682.5	36	0	2	22.60	20.95	
	39725	2503.5	36	19	2	22.60	19.42	
	40620	2593.0	36	19	2	22.60	20.11	
	41515	2682.5	36	19	2	22.60	20.95	
39725	2503.5	36	39	2	22.60	19.39		
40620	2593.0	36	39	2	22.60	20.10		
41515	2682.5	36	39	2	22.60	20.86		
39725	2503.5	75	0	2	22.60	19.42		
40620	2593.0	75	0	2	22.60	20.11		
41515	2682.5	75	0	2	22.60	20.78		



A D T

BW	Modulation	CH	Frequency (MHz)	RB	RB Offset	MPR	Target Power	Measured Power
20MHz	QPSK	39750	2506.0	1	0	0	22.60	21.17
		40620	2593.0	1	0	0	22.60	22.57
		41490	2680.0	1	0	0	22.60	23.17
		39750	2506.0	1	50	0	22.60	21.01
		40620	2593.0	1	50	0	22.60	22.31
		41490	2680.0	1	50	0	22.60	23.11
		39750	2506.0	1	99	0	22.60	20.85
		40620	2593.0	1	99	0	22.60	22.21
		41490	2680.0	1	99	0	22.60	22.96
		39750	2506.0	50	0	1	22.60	19.93
		40620	2593.0	50	0	1	22.60	21.41
		41490	2680.0	50	0	1	22.60	22.19
		39750	2506.0	50	25	1	22.60	20.08
		40620	2593.0	50	25	1	22.60	21.25
		41490	2680.0	50	25	1	22.60	21.98
		39750	2506.0	50	50	1	22.60	19.94
		40620	2593.0	50	50	1	22.60	21.24
		41490	2680.0	50	50	1	22.60	21.99
	39750	2506.0	100	0	1	22.60	20.00	
	40620	2593.0	100	0	1	22.60	21.34	
	41490	2680.0	100	0	1	22.60	22.03	
	39750	2506.0	1	0	1	22.60	20.28	
	40620	2593.0	1	0	1	22.60	21.62	
	41490	2680.0	1	0	1	22.60	22.44	
	39750	2506.0	1	50	1	22.60	20.24	
	40620	2593.0	1	50	1	22.60	21.56	
	41490	2680.0	1	50	1	22.60	22.16	
	39750	2506.0	1	99	1	22.60	20.04	
	40620	2593.0	1	99	1	22.60	21.39	
	41490	2680.0	1	99	1	22.60	22.06	
	39750	2506.0	50	0	2	22.60	18.99	
	40620	2593.0	50	0	2	22.60	20.27	
	41490	2680.0	50	0	2	22.60	20.96	
	39750	2506.0	50	25	2	22.60	18.96	
	40620	2593.0	50	25	2	22.60	20.17	
	41490	2680.0	50	25	2	22.60	20.68	
39750	2506.0	50	50	2	22.60	18.92		
40620	2593.0	50	50	2	22.60	20.17		
41490	2680.0	50	50	2	22.60	20.88		
39750	2506.0	100	0	2	22.60	18.96		
40620	2593.0	100	0	2	22.60	20.28		
41490	2680.0	100	0	2	22.60	20.89		



A D T

**EIRP (dBm)**

**CHANNEL BANDWIDTH: 10MHz QPSK**

MODE		TX channel 39700					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2501.00	-11.11	27.46	0.68	28.14	33.00	-4.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2501.00	-9.75	31.44	0.68	<b>32.12</b>	33.00	-0.88

MODE		TX channel 40620					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-12.09	27.72	0.85	28.57	33.00	-4.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-10.86	30.00	0.85	30.85	33.00	-2.15

MODE		TX channel 41540					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2685.00	-12.63	28.22	0.84	29.06	33.00	-3.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2685.00	-11.25	30.11	0.84	30.95	33.00	-2.05

**NOTE:** EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



**CHANNEL BANDWIDTH: 15MHz QPSK**

<b>MODE</b>		TX channel 39725					
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2503.50	-11.42	27.19	0.68	27.87	33.00	-5.13
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2503.50	-9.87	31.31	0.68	<b>31.99</b>	33.00	-1.01

<b>MODE</b>		TX channel 40620					
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-12.32	27.49	0.85	28.34	33.00	-4.66
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-10.88	29.98	0.85	30.83	33.00	-2.17

<b>MODE</b>		TX channel 41515					
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2682.50	-12.03	28.79	0.84	29.63	33.00	-3.37
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2682.50	-10.57	30.77	0.84	31.61	33.00	-1.39

**NOTE:** EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

### CHANNEL BANDWIDTH: 20MHz QPSK

MODE		TX channel 39750					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2506.00	-11.58	27.06	0.69	27.75	33.00	-5.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2506.00	-9.89	31.28	0.69	31.97	33.00	-1.03

MODE		TX channel 40620					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-12.24	27.57	0.85	28.42	33.00	-4.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2593.00	-10.92	29.94	0.85	30.79	33.00	-2.21

MODE		TX channel 41490					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2680.00	-12.88	27.92	0.84	28.76	33.00	-4.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2680.00	-10.96	30.37	0.84	31.21	33.00	-1.79

**NOTE:** EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

## 4.2 FREQUENCY STABILITY MEASUREMENT


### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT  $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$ .

### 4.2.2 TEST PROCEDURE

- Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 108Volts to 132Volts. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing.
- The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

### 4.2.3 TEST SETUP

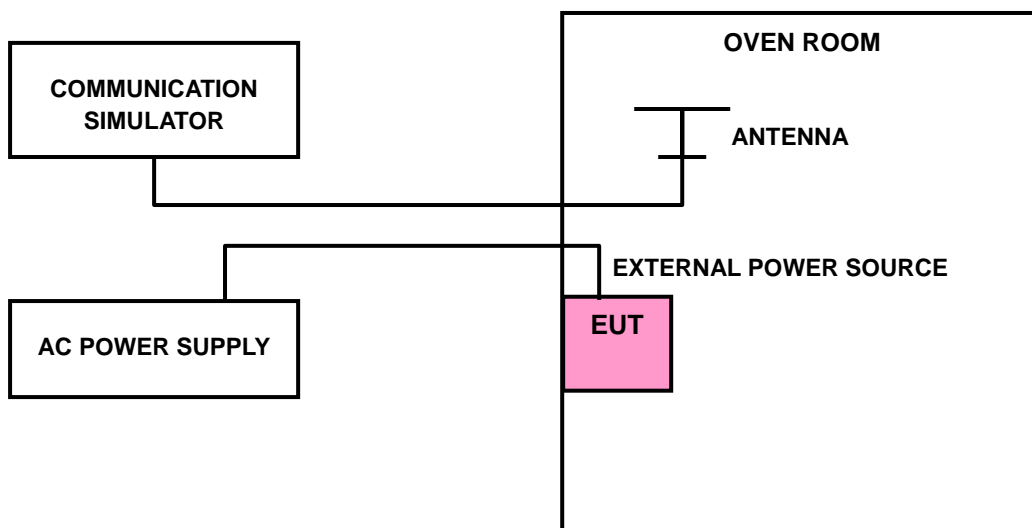

#### 4.2.4 TEST RESULTS

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	10MHz	15MHz	20MHz	
132	-0.005	-0.006	-0.006	2.5
120	-0.005	-0.006	-0.005	2.5
108	-0.006	-0.006	-0.005	2.5

**NOTE:** The applicant defined the normal working voltage of the adapter is from 108Vac to 132Vac.


TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	10MHz	15MHz	20MHz	
60	-0.010	-0.010	-0.011	2.5
50	-0.011	-0.010	-0.010	2.5
40	-0.011	-0.009	-0.009	2.5
30	-0.007	-0.007	-0.007	2.5
20	-0.005	-0.006	-0.005	2.5
10	-0.008	-0.007	-0.007	2.5
0	-0.012	-0.008	-0.010	2.5
-10	-0.015	-0.010	-0.015	2.5
-20	-0.019	-0.012	-0.017	2.5
-30	-0.017	-0.014	-0.015	2.5
-40	-0.018	-0.013	-0.016	2.5

## 4.3 EMISSION BANDWIDTH MEASUREMENT

### 4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

### 4.3.2 TEST SETUP

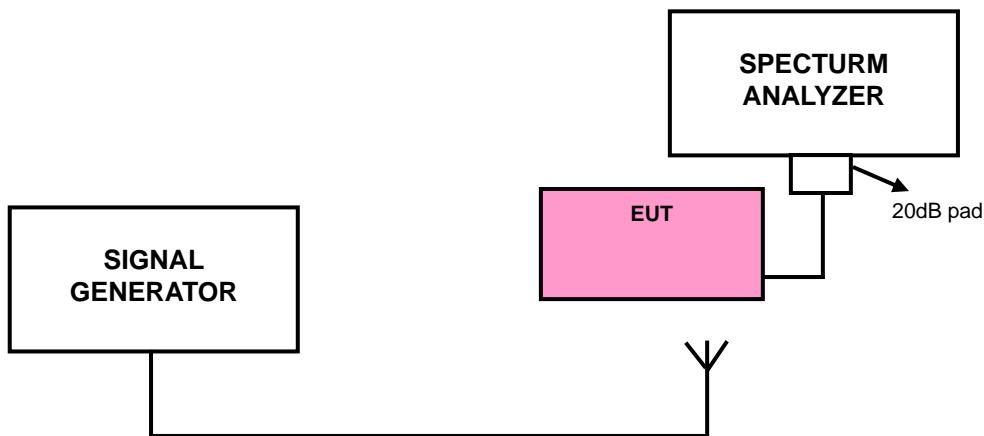

### 4.3.3 TEST PROCEDURES


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 200kHz and VBW = 620kHz (Channel Bandwidth: 10MHz and 15MHz), RBW = 430kHz and VBW = 1.2MHz (Channel Bandwidth: 20MHz). The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.



A D T

### 4.3.4 TEST RESULTS


CHANNEL BANDWIDTH: 10MHz					
CHANNEL	FREQUENCY (MHz)	-26dBc BANDWIDTH (MHz)		OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM	QPSK	16QAM
39700	2501.0	9.80	9.79	8.93	8.93
40620	2593.0	9.79	9.71	9.00	8.83
41540	2685.0	9.80	9.73	9.00	8.97

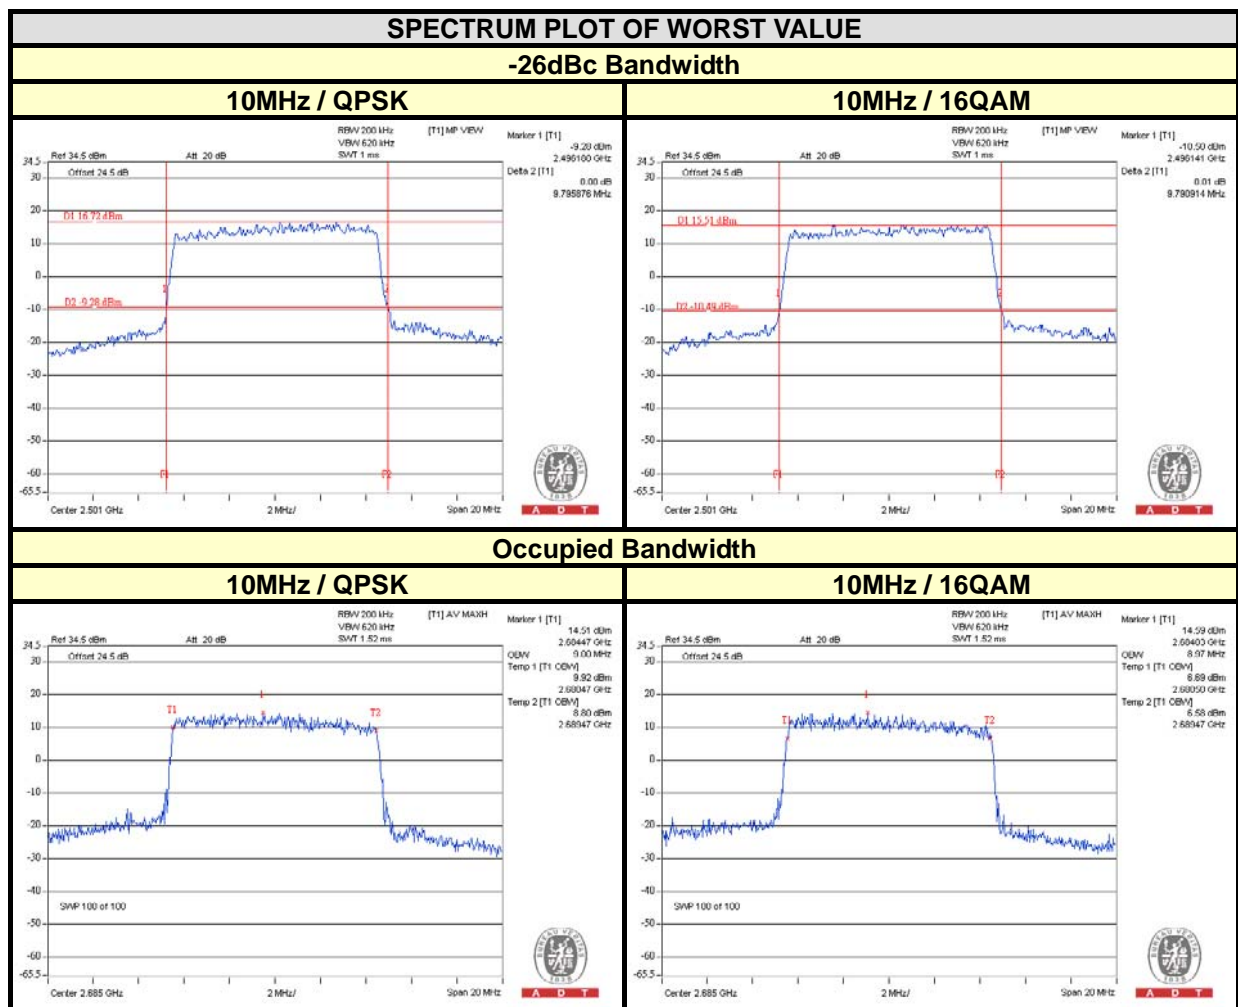



A D T



CHANNEL BANDWIDTH: 15MHz					
CHANNEL	FREQUENCY (MHz)	-26dBc BANDWIDTH (MHz)		OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM	QPSK	16QAM
39725	2503.5	14.33	14.60	13.33	13.37
40620	2593.0	14.53	14.56	13.37	13.40
41515	2682.5	14.49	14.71	13.37	13.40

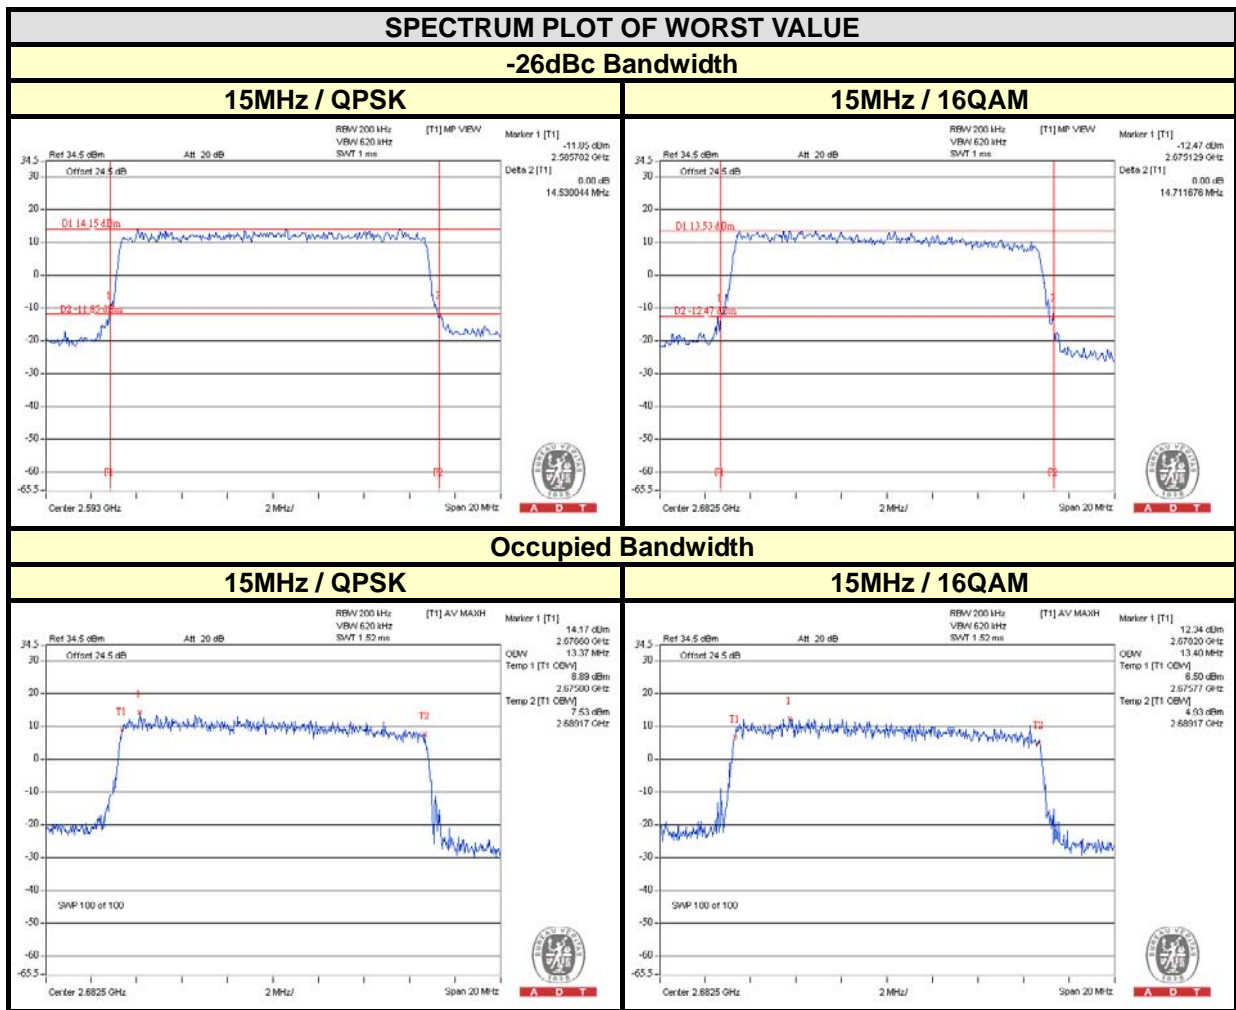



A D T

CHANNEL BANDWIDTH: 20MHz					
CHANNEL	FREQUENCY (MHz)	-26dBc BANDWIDTH (MHz)		OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM	QPSK	16QAM
39750	2506.0	19.49	19.63	17.80	17.87
40620	2593.0	19.46	19.45	17.93	17.93
41490	2680.0	19.37	19.27	17.87	17.87

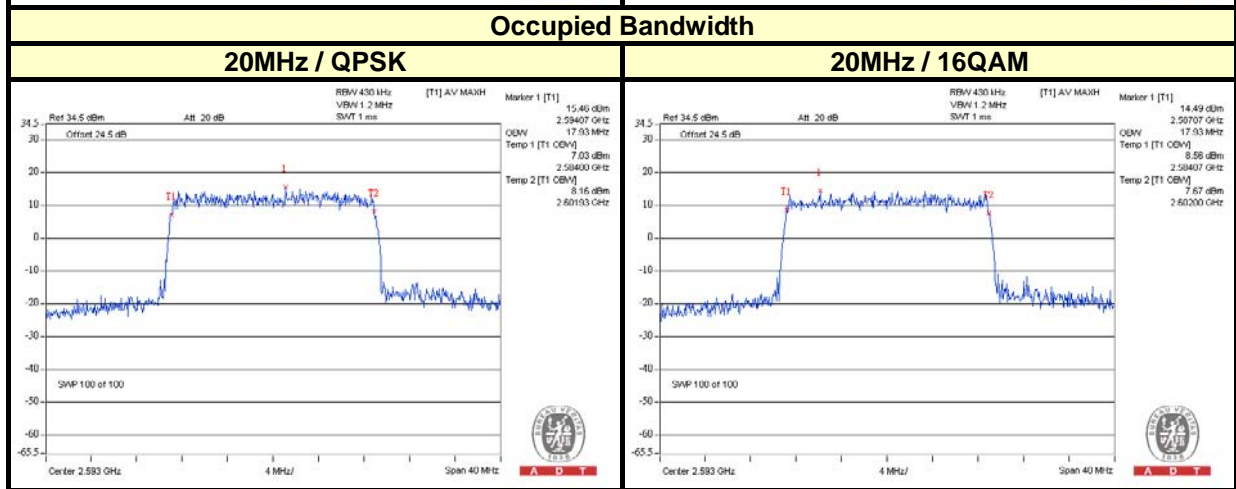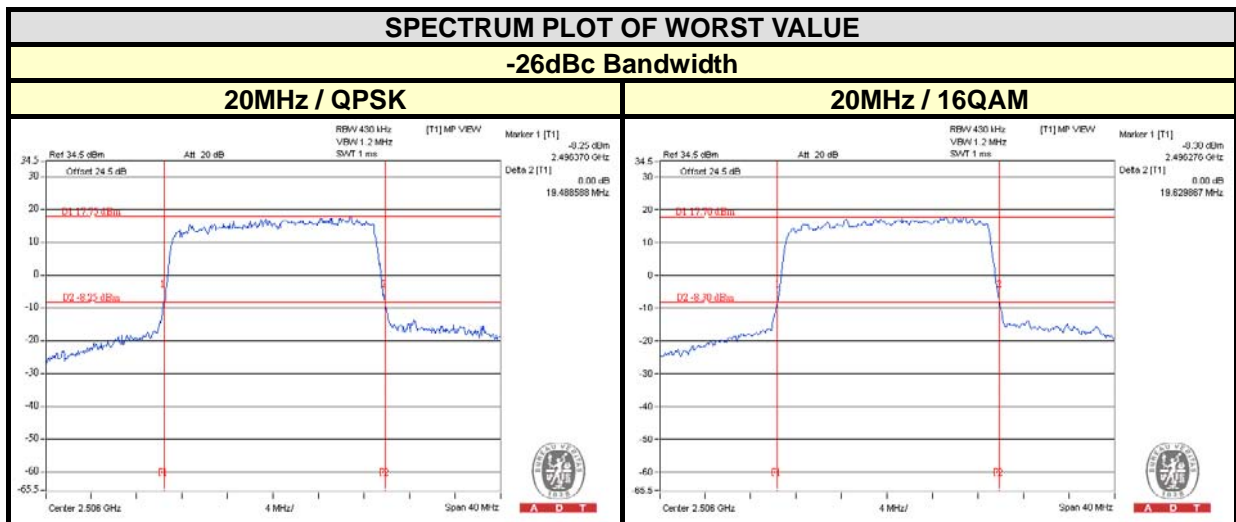




## 4.4 CHANNEL EDGE MEASUREMENT

### 4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT

According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than  $43 + 10 \log (P)$  dB at the channel edge, the limit of emission equal to  $-13\text{dBm}$ . And  $55 + 10 \log (P)$  dB at 5.5 MHz from the channel edges, the limit of emission equal to  $-25\text{dBm}$ . In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.4.2 TEST SETUP

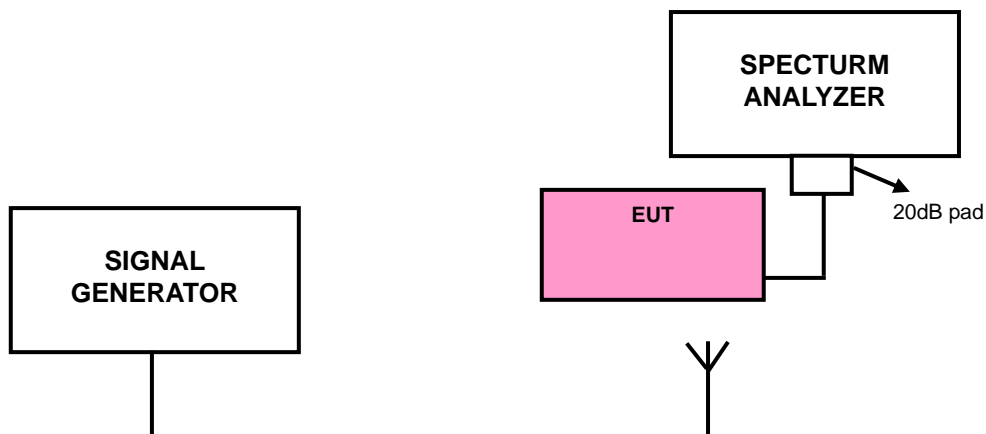

### 4.4.3 TEST PROCEDURES

- The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 30MHz (Channel Bandwidth: 10MHz) / 40MHz (Channel Bandwidth: 15MHz) / 50MHz (Channel Bandwidth: 25MHz). RBW of the spectrum is 100kHz (Channel Bandwidth: 10MHz) / 100kHz (Channel Bandwidth: 10MHz) / 150kHz (Channel Bandwidth: 15MHz) / 200kHz (Channel Bandwidth: 20MHz).
- Record the max trace plot into the test report.



A D T


### 4.4.4 TEST RESULTS






A D T

**Channel Bandwidth: 10MHz**

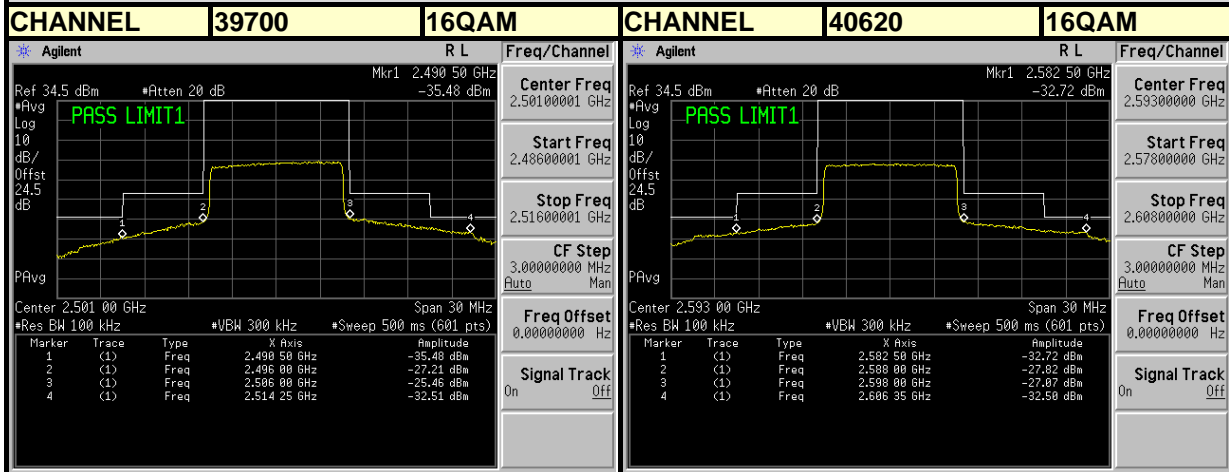

Copyright 2000-2012 Agilent Technologies

Copyright 2000-2012 Agilent Technologies

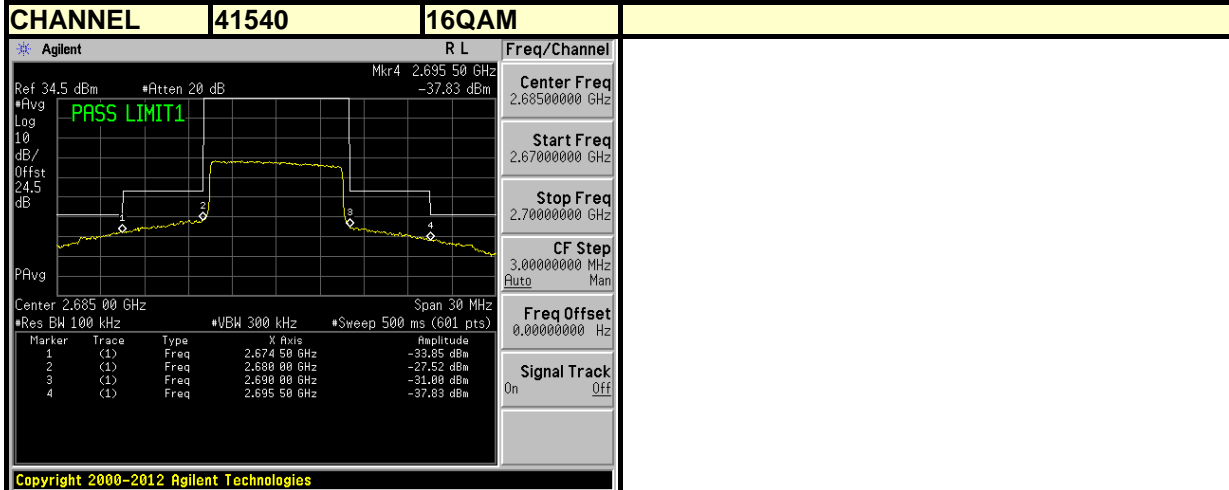

Copyright 2000-2012 Agilent Technologies



A D T

**Channel Bandwidth: 15MHz**

CHANNEL	39725	QPSK	CHANNEL	40620	QPSK																																																		
* Agilent R L Freq/Channel Ref 34.5 dBm #Atten 20 dB #Avg Log 10 dB/ Offst 24.5 dB PAvg Center 2.503 50 GHz Span 35 MHz #Res BW 150 kHz #VBW 470 kHz #Sweep 500 ms (601 pts)			* Agilent R L Freq/Channel Ref 34.5 dBm #Atten 20 dB #Avg Log 10 dB/ Offst 24.5 dB PAvg Center 2.593 00 GHz Span 35 MHz #Res BW 150 kHz #VBW 470 kHz #Sweep 500 ms (601 pts)																																																				
<table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.490 50 GHz</td> <td>-36.84 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>2.496 00 GHz</td> <td>-30.50 dBm</td> </tr> <tr> <td>3</td> <td>(1)</td> <td>Freq</td> <td>2.511 00 GHz</td> <td>-27.90 dBm</td> </tr> <tr> <td>4</td> <td>(1)</td> <td>Freq</td> <td>2.516 60 GHz</td> <td>-30.82 dBm</td> </tr> </tbody> </table>			Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.490 50 GHz	-36.84 dBm	2	(1)	Freq	2.496 00 GHz	-30.50 dBm	3	(1)	Freq	2.511 00 GHz	-27.90 dBm	4	(1)	Freq	2.516 60 GHz	-30.82 dBm	<table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.580 00 GHz</td> <td>-33.77 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>2.585 50 GHz</td> <td>-29.81 dBm</td> </tr> <tr> <td>3</td> <td>(1)</td> <td>Freq</td> <td>2.600 50 GHz</td> <td>-28.30 dBm</td> </tr> <tr> <td>4</td> <td>(1)</td> <td>Freq</td> <td>2.606 82 GHz</td> <td>-30.67 dBm</td> </tr> </tbody> </table>			Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.580 00 GHz	-33.77 dBm	2	(1)	Freq	2.585 50 GHz	-29.81 dBm	3	(1)	Freq	2.600 50 GHz	-28.30 dBm	4	(1)	Freq	2.606 82 GHz	-30.67 dBm
Marker	Trace	Type	X Axis	Amplitude																																																			
1	(1)	Freq	2.490 50 GHz	-36.84 dBm																																																			
2	(1)	Freq	2.496 00 GHz	-30.50 dBm																																																			
3	(1)	Freq	2.511 00 GHz	-27.90 dBm																																																			
4	(1)	Freq	2.516 60 GHz	-30.82 dBm																																																			
Marker	Trace	Type	X Axis	Amplitude																																																			
1	(1)	Freq	2.580 00 GHz	-33.77 dBm																																																			
2	(1)	Freq	2.585 50 GHz	-29.81 dBm																																																			
3	(1)	Freq	2.600 50 GHz	-28.30 dBm																																																			
4	(1)	Freq	2.606 82 GHz	-30.67 dBm																																																			
Center Freq 2.50350000 GHz Start Freq 2.48600000 GHz Stop Freq 2.52100000 GHz CF Step 3.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off			Center Freq 2.59300000 GHz Start Freq 2.57550000 GHz Stop Freq 2.61050000 GHz CF Step 3.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off																																																				

Copyright 2000-2012 Agilent Technologies

Copyright 2000-2012 Agilent Technologies



CHANNEL	41515	QPSK																												
* Agilent R L Freq/Channel Ref 34.5 dBm #Atten 20 dB #Avg Log 10 dB/ Offst 24.5 dB PAvg Center 2.682 50 GHz Span 35 MHz #Res BW 150 kHz #VBW 470 kHz #Sweep 500 ms (601 pts)																														
<table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.689 50 GHz</td> <td>-33.95 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>2.675 00 GHz</td> <td>-29.80 dBm</td> </tr> <tr> <td>3</td> <td>(1)</td> <td>Freq</td> <td>2.690 00 GHz</td> <td>-35.09 dBm</td> </tr> <tr> <td>4</td> <td>(1)</td> <td>Freq</td> <td>2.695 50 GHz</td> <td>-39.73 dBm</td> </tr> </tbody> </table>			Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.689 50 GHz	-33.95 dBm	2	(1)	Freq	2.675 00 GHz	-29.80 dBm	3	(1)	Freq	2.690 00 GHz	-35.09 dBm	4	(1)	Freq	2.695 50 GHz	-39.73 dBm			
Marker	Trace	Type	X Axis	Amplitude																										
1	(1)	Freq	2.689 50 GHz	-33.95 dBm																										
2	(1)	Freq	2.675 00 GHz	-29.80 dBm																										
3	(1)	Freq	2.690 00 GHz	-35.09 dBm																										
4	(1)	Freq	2.695 50 GHz	-39.73 dBm																										
Center Freq 2.68250000 GHz Start Freq 2.66500000 GHz Stop Freq 2.70000000 GHz CF Step 3.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off																														

Copyright 2000-2012 Agilent Technologies



A D T


**Channel Bandwidth: 15MHz**

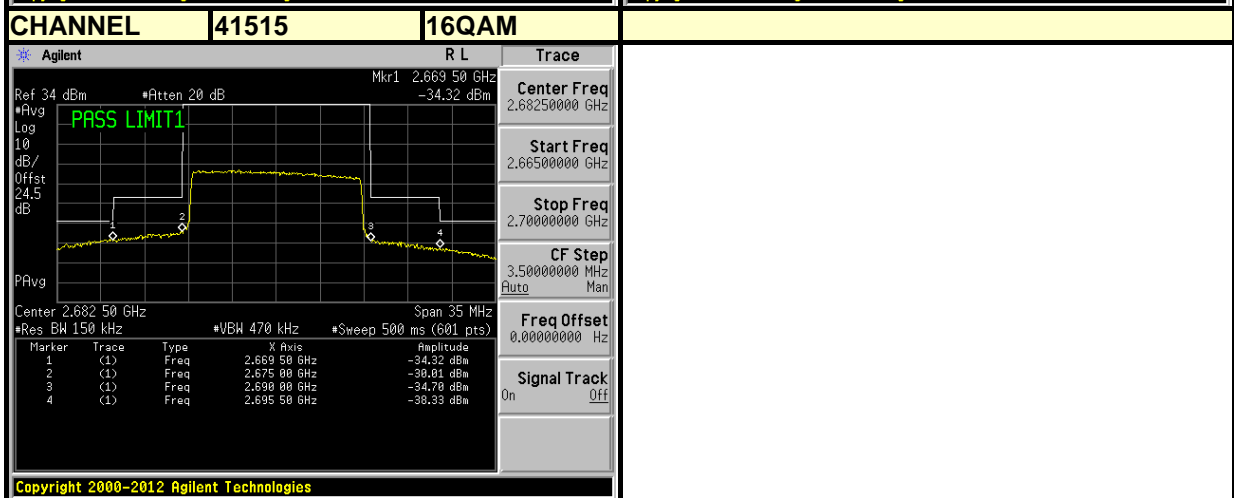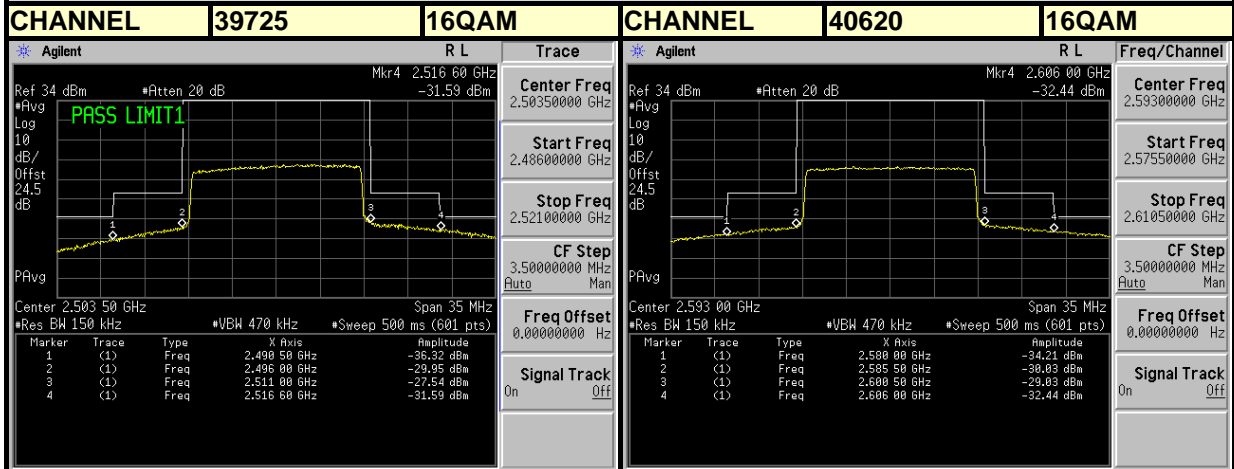




A D T

**Channel Bandwidth: 20MHz**

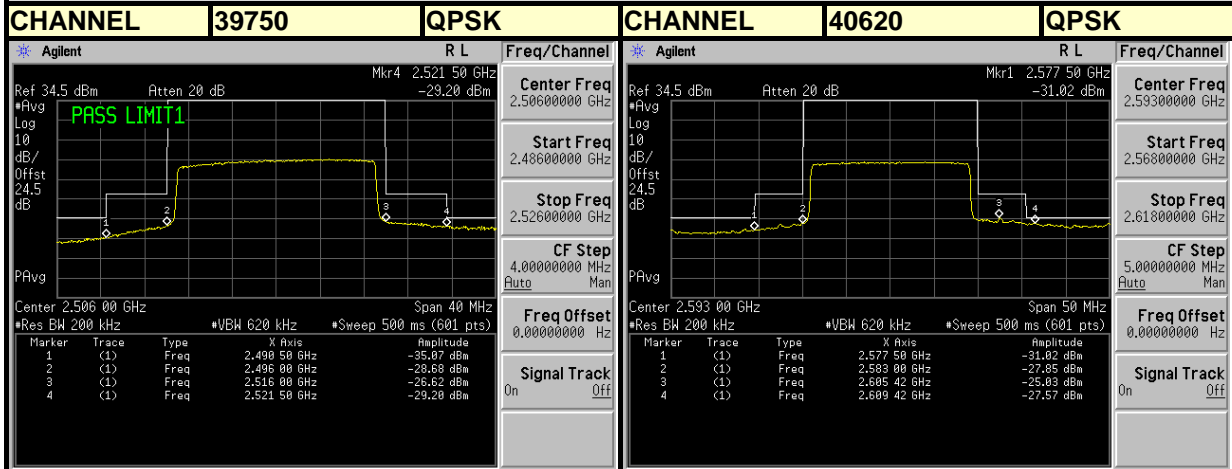

Copyright 2000-2012 Agilent Technologies

Copyright 2000-2012 Agilent Technologies

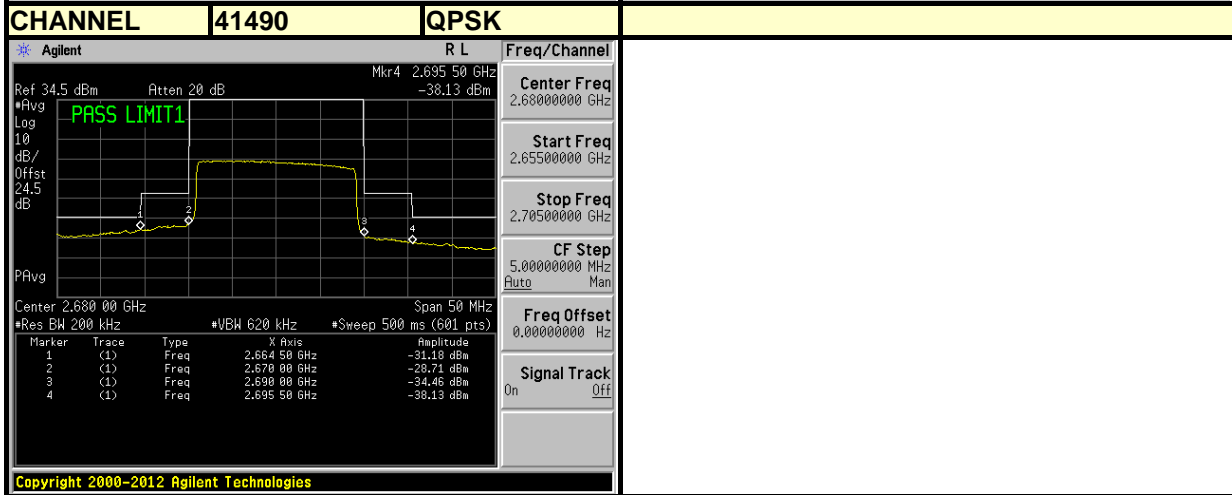


Copyright 2000-2012 Agilent Technologies




A D T

**Channel Bandwidth: 20MHz**

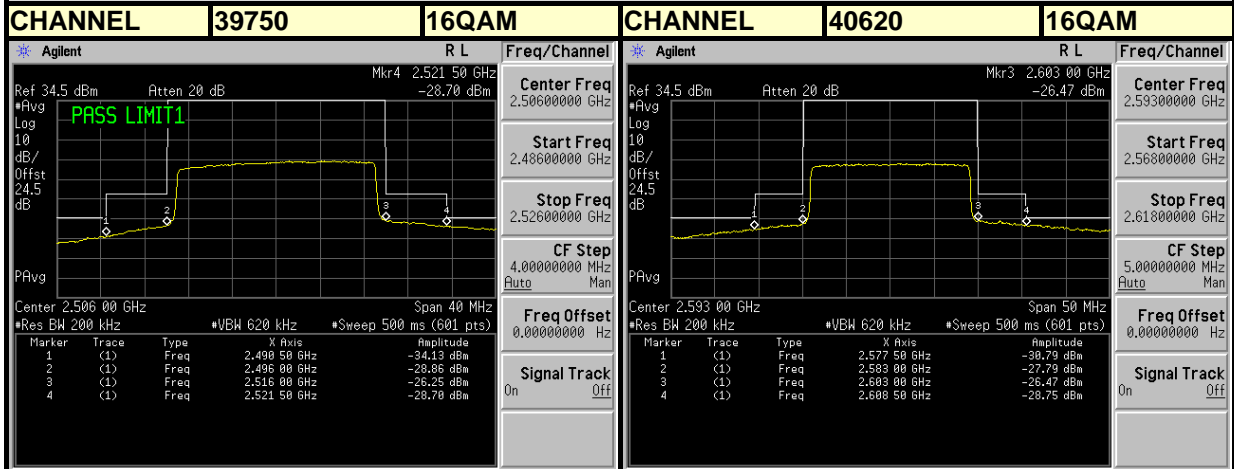

Copyright 2000-2012 Agilent Technologies

Copyright 2000-2012 Agilent Technologies

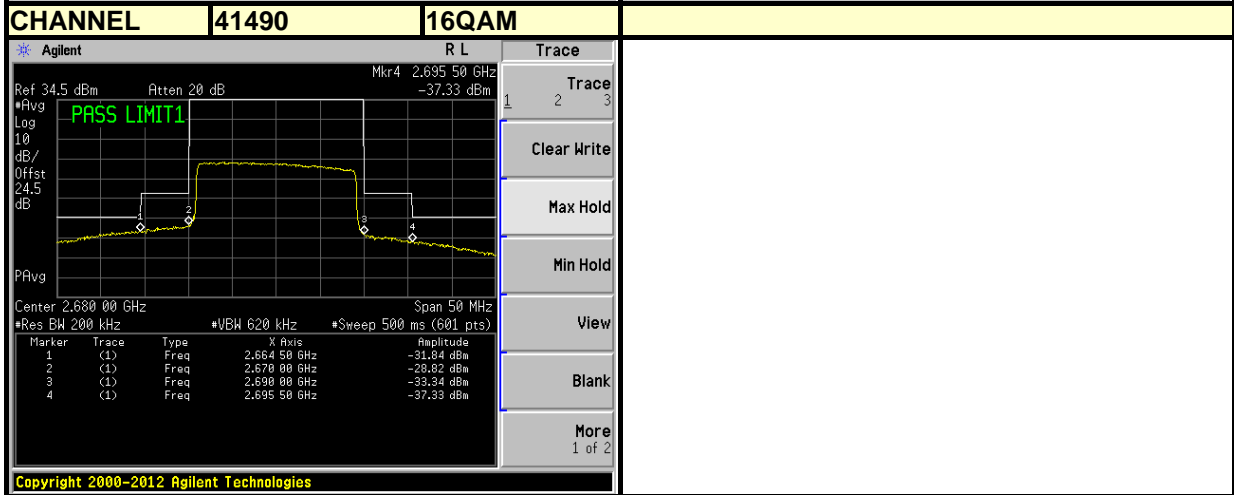

Copyright 2000-2012 Agilent Technologies

## 4.5 CONDUCTED SPURIOUS EMISSIONS


### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, the emission limit equal to  $-13\text{dBm}$ , and  $55 + 10 \log (P)$  dB at 5.5 megahertz from the channel edges, the emission limit equal to  $-25\text{dBm}$ .

### 4.5.2 TEST PROCEDURE

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 9kHz to 20GHz, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set  $RB = 1\text{MHz}$ ,  $VB = 3\text{MHz}$ .

### 4.5.3 TEST SETUP

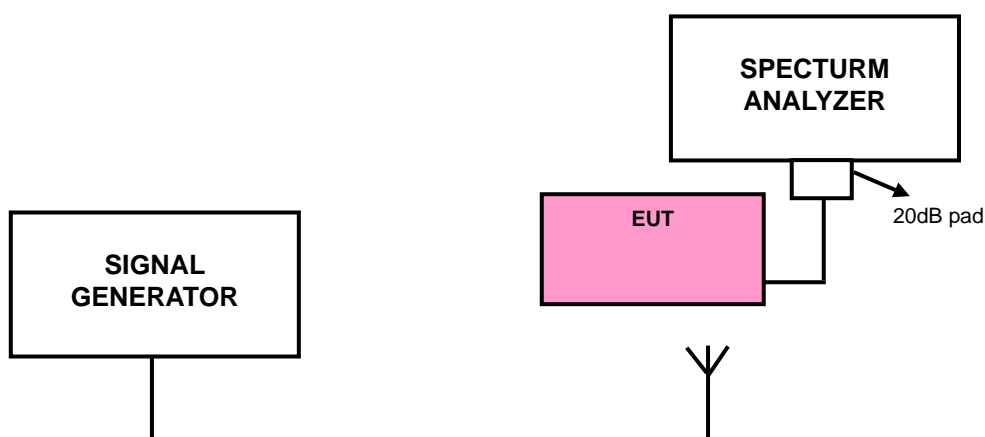






A D T

### 4.5.4 TEST RESULTS


**Channel Bandwidth: 10MHz**

**CHANNEL 39700**



**FREQUENCY RANGE : 9kHz~3GHz**

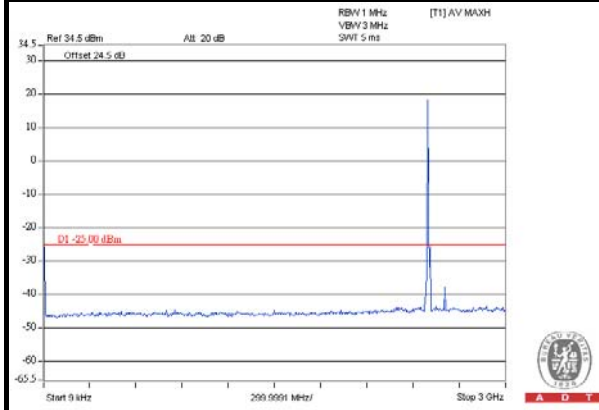

**FREQUENCY RANGE : 3GHz~10GHz**

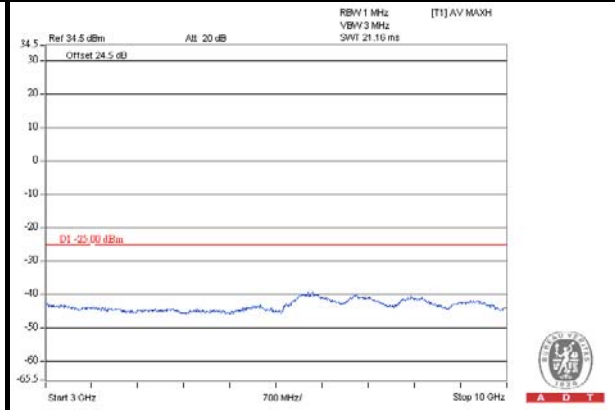

**FREQUENCY RANGE : 10GHz~20GHz**

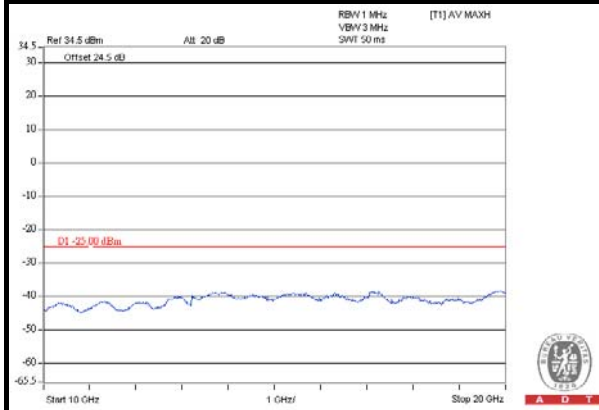




A D T


**Channel Bandwidth: 10MHz**

**CHANNEL 40620**



**FREQUENCY RANGE : 9kHz~3GHz**

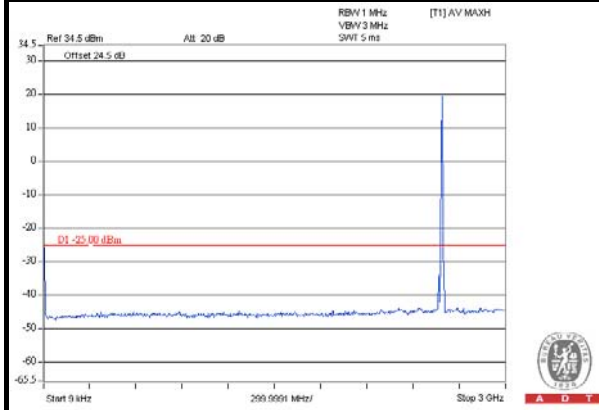

**FREQUENCY RANGE : 3GHz~10GHz**

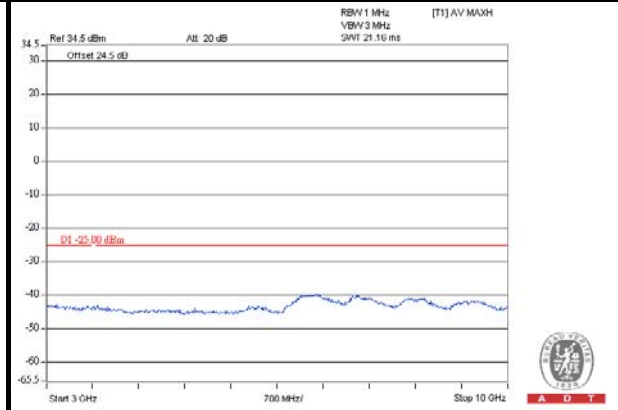

**FREQUENCY RANGE : 10GHz~20GHz**

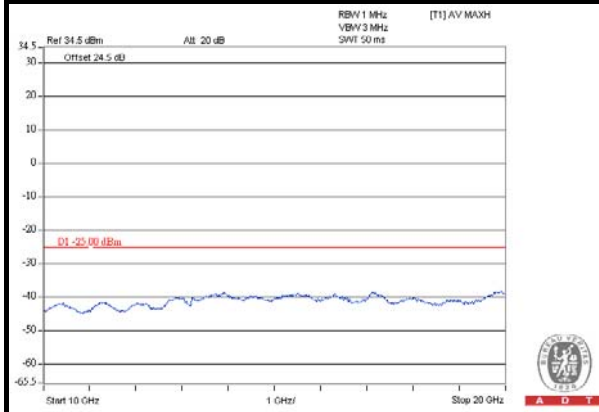




A D T


**Channel Bandwidth: 10MHz**

**CHANNEL 41540**



**FREQUENCY RANGE : 9kHz~3GHz**

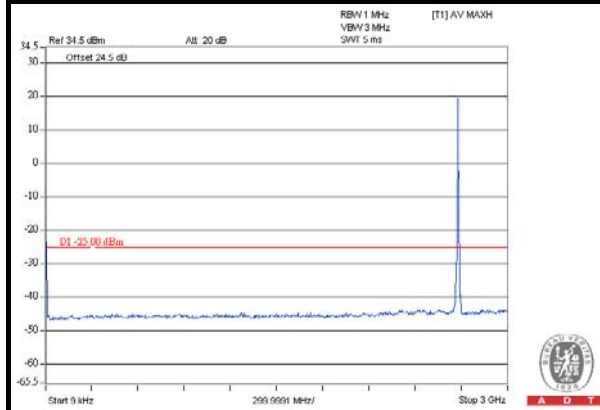

**FREQUENCY RANGE : 3GHz~10GHz**

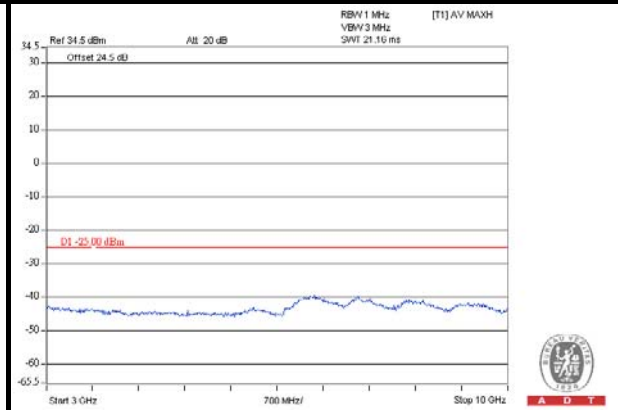

**FREQUENCY RANGE : 10GHz~20GHz**

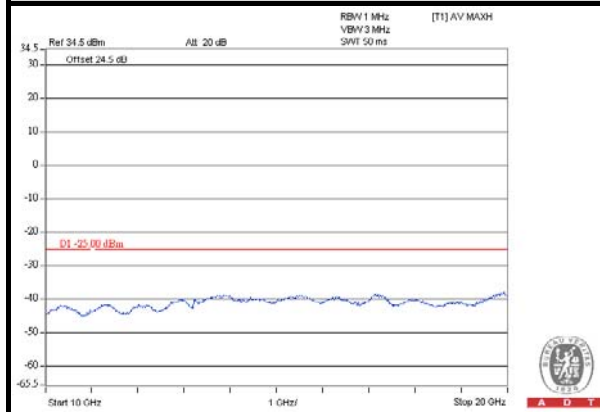





A D T

**Channel Bandwidth: 15MHz**



**CHANNEL 39725**

**FREQUENCY RANGE : 9kHz~3GHz**

**FREQUENCY RANGE : 3GHz~10GHz**

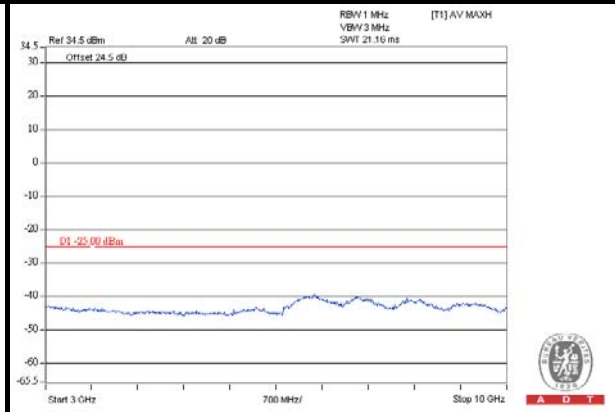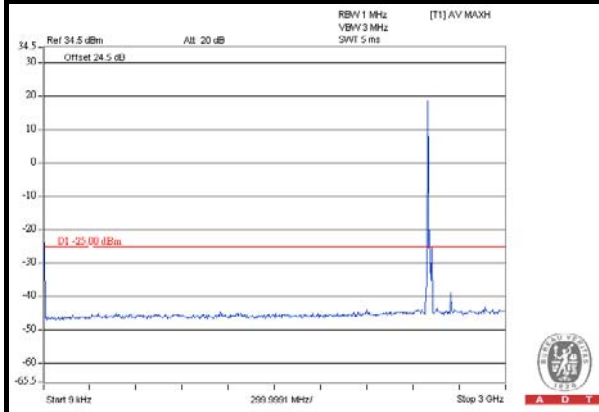

**FREQUENCY RANGE : 10GHz~20GHz**

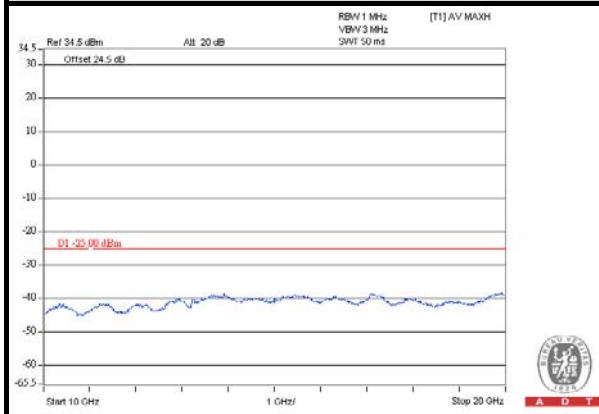




A D T


Channel Bandwidth: 15MHz

CHANNEL 40620



FREQUENCY RANGE : 9kHz~3GHz

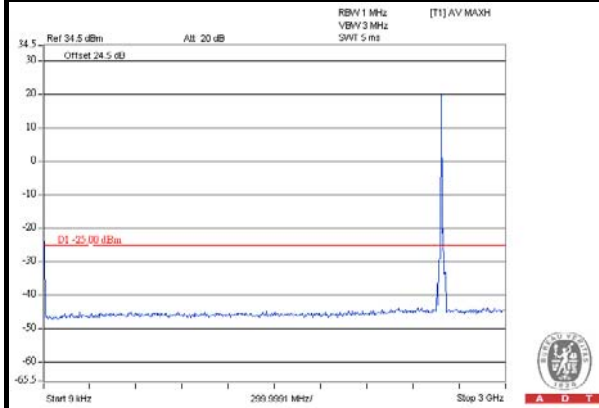

FREQUENCY RANGE : 3GHz~10GHz

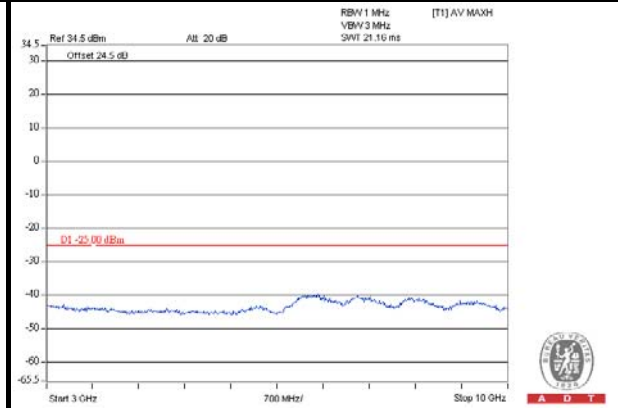

FREQUENCY RANGE : 10GHz~20GHz

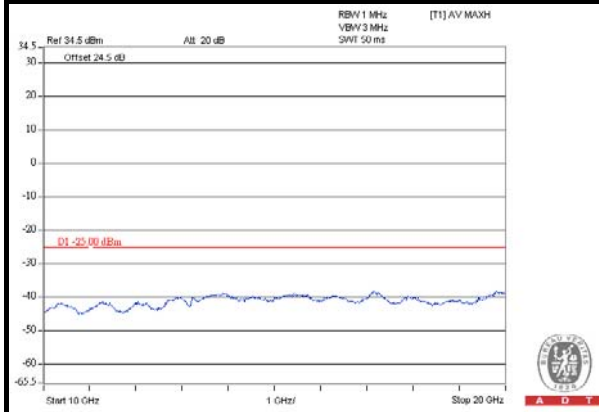




A D T


**Channel Bandwidth: 15MHz**

**CHANNEL 41515**



**FREQUENCY RANGE : 9kHz~3GHz**

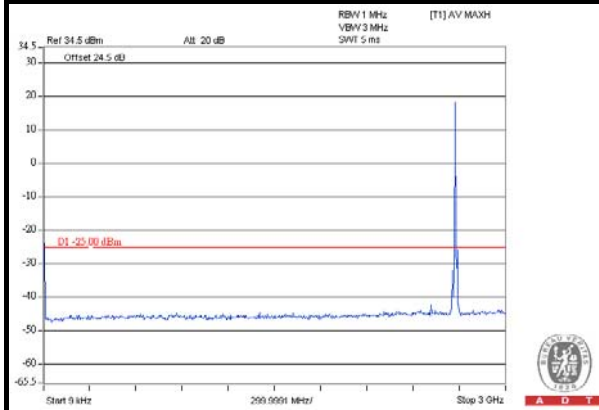

**FREQUENCY RANGE : 3GHz~10GHz**

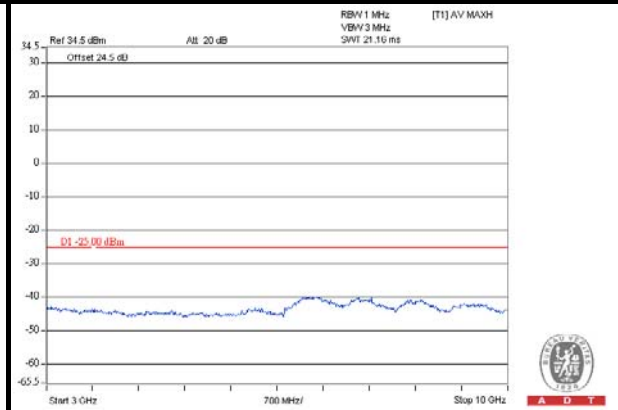

**FREQUENCY RANGE : 10GHz~20GHz**

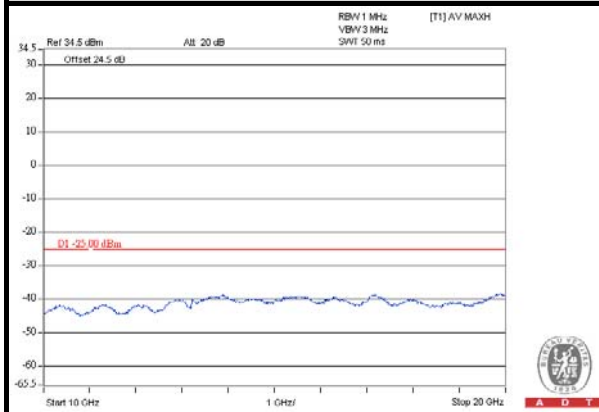





A D T

**Channel Bandwidth: 20MHz**



**CHANNEL 39750**

**FREQUENCY RANGE : 9kHz~3GHz**

**FREQUENCY RANGE : 3GHz~10GHz**

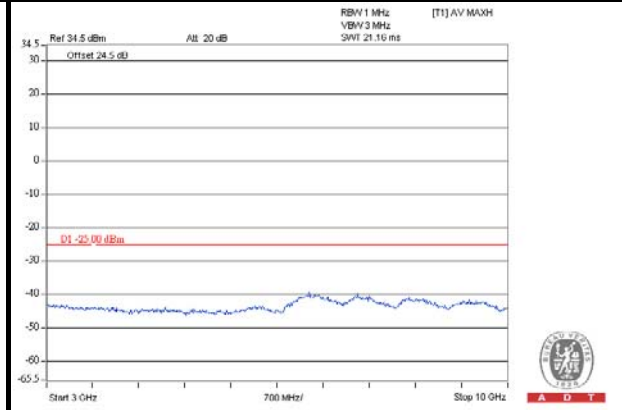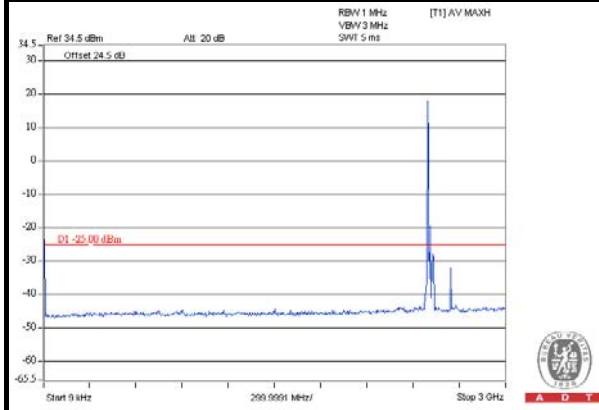

**FREQUENCY RANGE : 10GHz~20GHz**

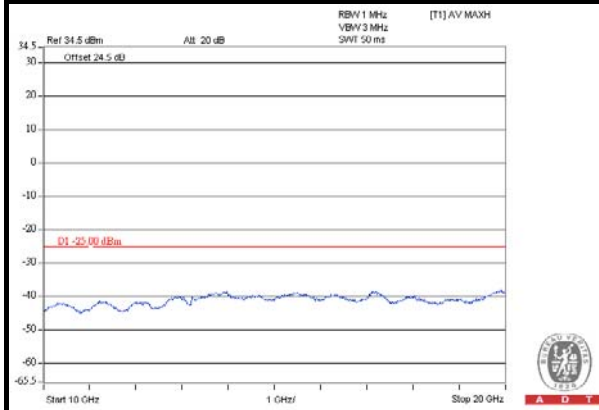





A D T

Channel Bandwidth: 20MHz



CHANNEL 40620

FREQUENCY RANGE : 9kHz~3GHz

FREQUENCY RANGE : 3GHz~10GHz

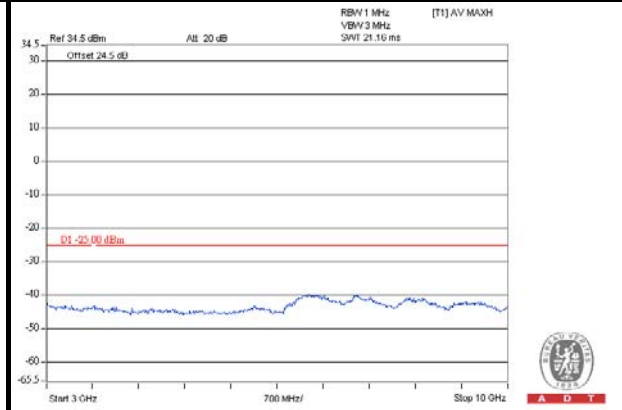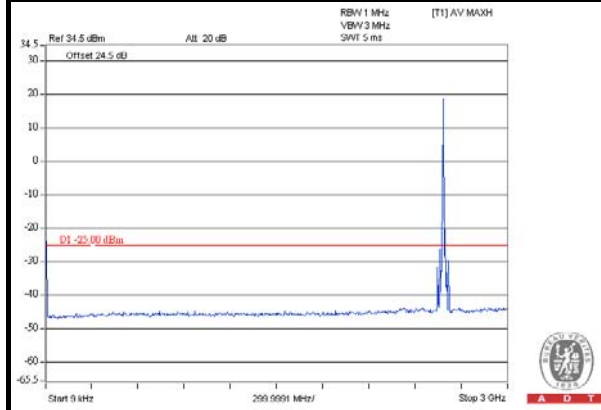

FREQUENCY RANGE : 10GHz~20GHz

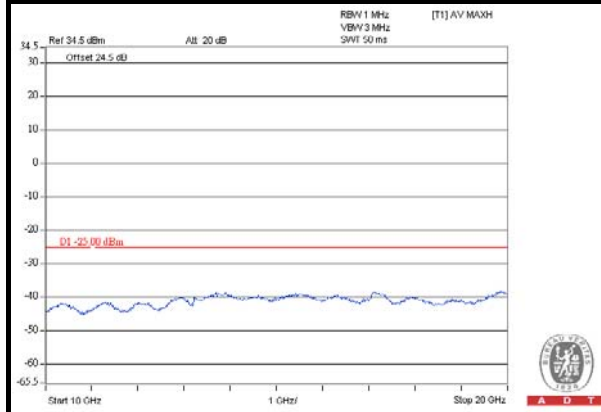






A D T


Channel Bandwidth: 20MHz

CHANNEL 41490


FREQUENCY RANGE : 9kHz~3GHz

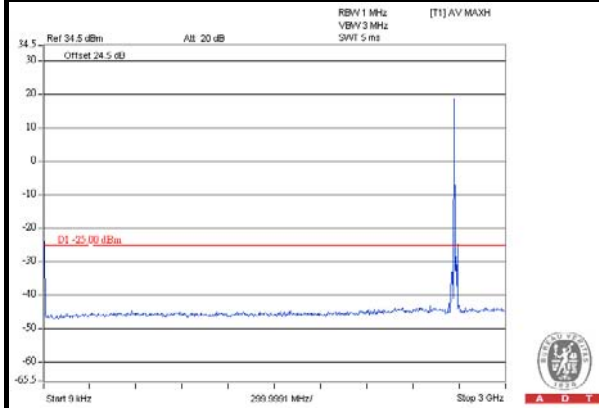

FREQUENCY RANGE : 3GHz~10GHz

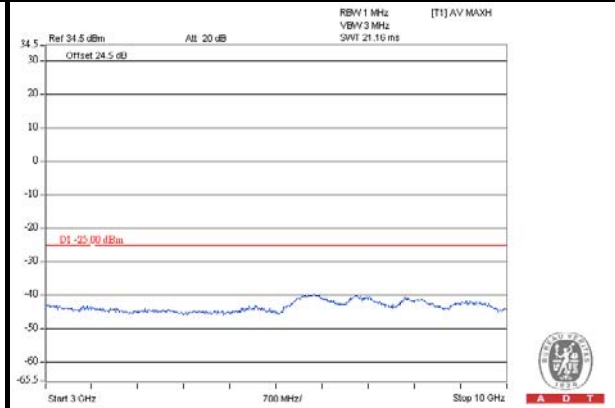

FREQUENCY RANGE : 10GHz~20GHz

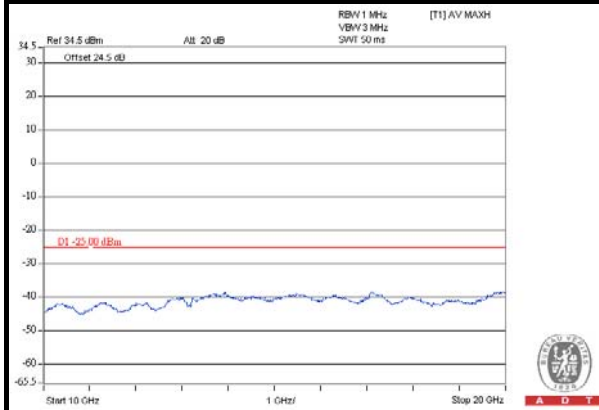

## 4.6 RADIATED EMISSION MEASUREMENT

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, the emission limit equal to  $-13\text{dBm}$ , and  $55 + 10 \log (P)$  dB at 5.5 megahertz from the channel edges, the emission limit equal to  $-25\text{dBm}$ .

### 4.6.2 TEST PROCEDURES


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz

### 4.6.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.4 TEST SETUP

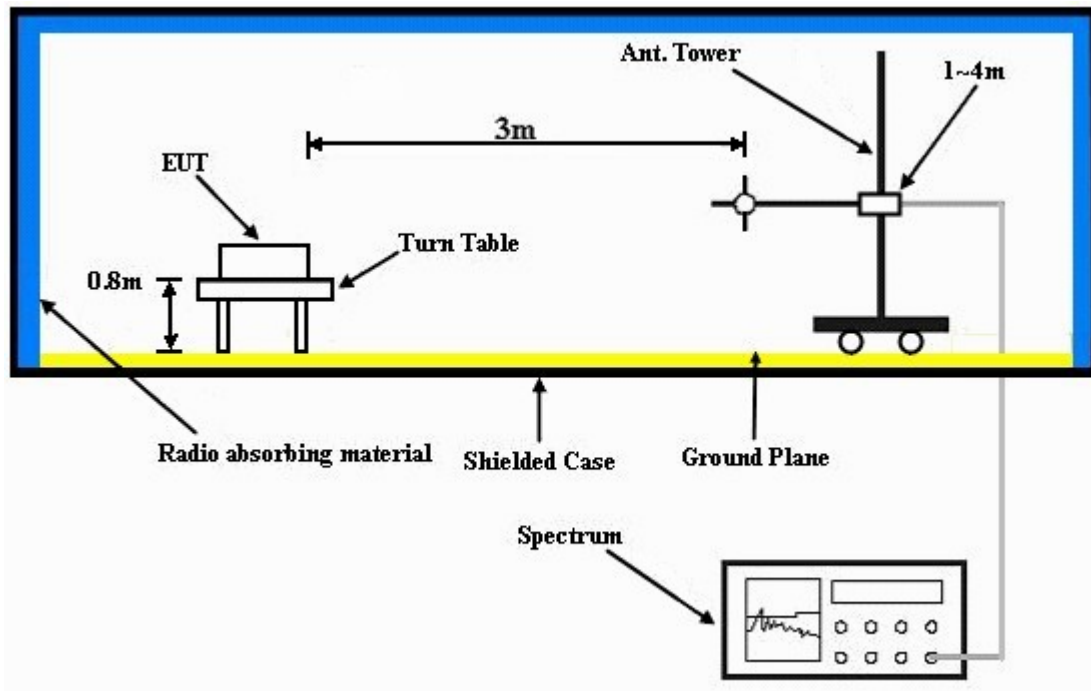

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.6.5 TEST RESULTS

##### BELOW 1GHz

##### CHANNEL BANDWIDTH: 10MHz

<b>MODE</b>	TX channel 39700	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-53.75	-40.35	-10.3	-50.65	-25.00	-25.65
2	214.30	-38.76	-50.44	5.45	-44.99	-25.00	-19.99
3	247.28	-41.26	-51.39	5.41	-45.98	-25.00	-20.98
4	266.68	-42.39	-52.35	5.31	-47.04	-25.00	-22.04
5	371.44	-54.04	-60.17	5.22	-54.95	-25.00	-29.95
6	600.36	-53.96	-56.75	4.44	-52.31	-25.00	-27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	47.46	-36.39	-31.17	-10.16	-41.33	-25.00	-16.33
2	59.10	-38.78	-36.86	-7.79	-44.65	-25.00	-19.65
3	216.24	-39.49	-47.4	5.46	-41.94	-25.00	-16.94
4	365.62	-54.48	-59.31	5.22	-54.09	-25.00	-29.09
5	429.64	-57.14	-59.9	5.15	-54.75	-25.00	-29.75
6	604.24	-54.92	-54.12	4.46	-49.66	-25.00	-24.66

##### REMARKS:

1. EIRP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

**CHANNEL BANDWIDTH: 15MHz**

<b>MODE</b>	TX channel 39725	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-55.75	-41.55	-10.62	-52.17	-25.00	-27.17
2	212.36	-38.97	-50.67	5.46	-45.21	-25.00	-20.21
3	243.40	-45.89	-56.27	5.40	-50.87	-25.00	-25.87
4	307.42	-48.66	-57.35	5.15	-52.20	-25.00	-27.20
5	577.08	-57.81	-61.16	4.54	-56.62	-25.00	-31.62
6	604.24	-55.38	-58.07	4.46	-53.61	-25.00	-28.61
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-38.88	-33.03	-11.18	-44.21	-25.00	-19.21
2	90.14	-46.34	-51.95	1.13	-50.82	-25.00	-25.82
3	212.36	-39.78	-47.71	5.46	-42.25	-25.00	-17.25
4	379.20	-50.61	-54.74	5.25	-49.49	-25.00	-24.49
5	588.72	-57.35	-57.04	4.48	-52.56	-25.00	-27.56
6	604.24	-54.90	-54.10	4.46	-49.64	-25.00	-24.64

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

**CHANNEL BANDWIDTH: 20MHz**

<b>MODE</b>	TX channel 39750	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	47.46	-54.76	-42.46	-10.16	-52.62	-25.00	-27.62
2	103.72	-51.76	-58.12	0.73	-57.39	-25.00	-32.39
3	212.36	-38.81	-50.51	5.46	-45.05	-25.00	-20.05
4	260.86	-47.74	-57.90	5.35	-52.55	-25.00	-27.55
5	577.08	-58.59	-61.94	4.54	-57.40	-25.00	-32.40
6	604.24	-53.86	-56.55	4.46	-52.09	-25.00	-27.09

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-41.31	-35.32	-10.62	-45.94	-25.00	-20.94
2	107.60	-48.92	-53.47	0.58	-52.89	-25.00	-27.89
3	212.36	-39.81	-47.74	5.46	-42.28	-25.00	-17.28
4	359.80	-48.81	-53.98	5.22	-48.76	-25.00	-23.76
5	532.46	-58.85	-60.26	4.73	-55.53	-25.00	-30.53
6	600.36	-53.27	-52.57	4.44	-48.13	-25.00	-23.13

**REMARKS:**

- 1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
- 2. Correction Factor = gain of substitution antenna + cable loss



A D T

**ABOVE 1GHz**

**CHANNEL BANDWIDTH: 10MHz**

<b>MODE</b>	Channel 39700	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5002.00	-60.02	-48.99	6.59	-42.40	-25.00	-17.40

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5002.00	-54.21	-43.69	6.59	-37.10	-25.00	-12.10

**REMARKS:**

1.  $EIRP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$ .
2.  $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

<b>MODE</b>	Channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-61.22	-49.90	6.67	-43.23	-25.00	-18.23

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-55.88	-45.28	6.67	-38.61	-25.00	-13.61

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss





A D T

<b>MODE</b>	Channel 41540	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5370.00	-61.86	-50.29	6.78	-43.51	-25.00	-18.51

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5370.00	-55.87	-45.23	6.78	-38.45	-25.00	-13.45

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

**CHANNEL BANDWIDTH: 15MHz**

<b>MODE</b>	Channel 39725	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5007.00	-60.74	-49.70	6.59	-43.11	-25.00	-18.11

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5007.00	-54.75	-44.22	6.59	-37.63	-25.00	-12.63

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

<b>MODE</b>	Channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-61.53	-50.21	6.67	-43.54	-25.00	-18.54

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-55.54	-44.94	6.67	-38.27	-25.00	-13.27

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

<b>MODE</b>	Channel 41515	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5365.00	-62.09	-50.53	6.78	-43.75	-25.00	-18.75

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5365.00	-56.32	-45.68	6.78	-38.90	-25.00	-13.90

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

**CHANNEL BANDWIDTH: 20MHz**

<b>MODE</b>	Channel 39750	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5012.00	-61.05	-50.00	6.59	-43.41	-25.00	-18.41
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5012.00	-55.24	-44.71	6.59	-38.12	-25.00	-13.12

**REMARKS:**

1.  $EIRP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

<b>MODE</b>	Channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-62.33	-51.01	6.67	-44.34	-25.00	-19.34

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-56.03	-45.43	6.67	-38.76	-25.00	-13.76

**REMARKS:**

1.  $EIRP(dBm) = S.G\ Power\ Value\ (dBm) + Correction\ Factor\ (dB)$ .
2. Correction Factor = gain of substitution antenna + cable loss



A D T

<b>MODE</b>	Channel 41490	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Brad Tung		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5360.00	-62.96	-51.40	6.77	-44.63	-25.00	-19.63

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5360.00	-56.75	-46.11	6.77	-39.34	-25.00	-14.34

**REMARKS:**

1.  $EIRP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$ .
2. Correction Factor = gain of substitution antenna + cable loss



## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.





A D T

## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**---END---**