

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2304-0059

2. Customer

- Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD
- Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Mobile Computer / PM560

FCC ID : V2X-PM560

IC : 10664A-PM560

5. FCC Regulation(s): Part 15.407

IC Standard(s): RSS-247 Issue 2, RSS-Gen Issue 5

Test Method used: ANSI C63.10-2013, KDB789033 D02v02r01, KDB662911 D01v02r01

6. Date of Test : 2023.03.08 ~ 2023.03.31



7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : SeungMin Gil  (Signature)	Name : JaeJin Lee  (Signature)

2023 . 04 . 14 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2304-0059	Apr. 14, 2023	Initial issue	SeungMin Gil	JaeJin Lee

CONTENTS

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the applicant / manufacturer	4
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Test Equipment List	6
2. Test Methodology	7
2.1. EUT Configuration	7
2.2. EUT Exercise	7
2.3. General Test Procedures	7
2.4. Instrument Calibration	7
2.5. Description of Test Modes	8
3. Antenna Requirements	14
4. Summary of Test Result	15
5. TEST RESULT	16
5.1 Emission Bandwidth (26 dB Bandwidth) & Occupied BW (99 %)	16
5.2 Minimum Emission Bandwidth (6 dB Bandwidth) & Occupied BW (99 %)	43
5.3 Maximum Conducted Output Power	62
5.4 Maximum Power Spectral Density	86
5.5 Unwanted Emissions	126
5.6 AC Power-Line Conducted Emissions	136
APPENDIX I	145
APPENDIX II	146
APPENDIX III	151

1. General Information

1.1. Description of EUT

Equipment Class	Unlicensed National Information Infrastructure TX(NII)
Product Name	Mobile Computer
Model Name	PM560
Add Model Name	-
Firmware Version Identification Number	56.00xx
EUT Serial Number	Conducted : 2223710235, Radiated: 2303310292
Power Supply	DC 3.63 V
Modulation Technique	OFDM, OFDMA
Antenna Specification	Antenna type: LDS Antenna Antenna gain: Refer to the clause 3 in test report.

Band	Mode	Tx. frequency(MHz)	Max. conducted power(dBm)	Antenna gain(dBi)	Max. e.i.r.p (dBm)
U-NII 1	802.11ax(HE20)_OFDMA	5 180 ~ 5 240	13.96	4.60	18.56
	802.11ax(HE20)_OFDM	5 180 ~ 5 240	12.84	4.60	17.44
	802.11ax(HE40)_OFDMA	5 190 ~ 5 230	14.94	4.60	19.54
	802.11ax(HE40)_OFDM	5 190 ~ 5 230	15.01	4.60	19.61
	802.11ax(HE80)_OFDMA	5 210	14.06	4.60	18.66
	802.11ax(HE80)_OFDM	5 210	12.36	4.60	16.96
U-NII 2A	802.11ax(HE20)_OFDMA	5 260 ~ 5 320	14.44	4.94	19.38
	802.11ax(HE20)_OFDM	5 260 ~ 5 320	14.23	4.94	19.17
	802.11ax(HE40)_OFDMA	5 270 ~ 5 310	15.75	4.94	20.69
	802.11ax(HE40)_OFDM	5 270 ~ 5 310	14.48	4.94	19.42
	802.11ax(HE80)_OFDMA	5 290	13.81	4.94	18.75
	802.11ax(HE80)_OFDM	5 290	11.76	4.94	16.70
U-NII 2C	802.11ax(HE20)_OFDMA	5 500 ~ 5 720	15.41	5.03	20.44
	802.11ax(HE20)_OFDM	5 500 ~ 5 720	15.01	5.03	20.04
	802.11ax(HE40)_OFDMA	5 510 ~ 5 710	16.24	5.03	21.27
	802.11ax(HE40)_OFDM	5 510 ~ 5 710	15.56	5.03	20.59
	802.11ax(HE80)_OFDMA	5 530 ~ 5 690	14.43	5.03	19.46
	802.11ax(HE80)_OFDM	5 530 ~ 5 690	13.65	5.03	18.68
U-NII 3	802.11ax(HE20)_OFDMA	5 745 ~ 5 825	14.83	5.13	19.96
	802.11ax(HE20)_OFDM	5 745 ~ 5 825	14.45	5.13	19.58
	802.11ax(HE40)_OFDMA	5 755 ~ 5 795	15.06	5.13	20.19
	802.11ax(HE40)_OFDM	5 755 ~ 5 795	14.85	5.13	19.98
	802.11ax(HE80)_OFDMA	5 775	13.98	5.13	19.11
	802.11ax(HE80)_OFDM	5 775	13.70	5.13	18.83

1.2. Declaration by the applicant / manufacturer

N/A

1.3. Testing Laboratory

Dt&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.		
- FCC & IC MRA Designation No. : KR0034		
- ISED#: 5740A		
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.4. Testing Environment

Ambient Condition	
▪ Temperature	+21 °C ~ +24 °C
▪ Relative Humidity	+36 % ~ +41 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.2 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/06/24	23/06/24	MY46471622
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY48010133
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	22/06/24	23/06/24	US47360812
Spectrum Analyzer	KEYSIGHT	N9030B	22/12/16	23/12/16	MY55480168
DC Power Supply	Agilent Technologies	66332A	22/06/24	23/06/24	US37473627
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	22/06/24	23/06/24	N/A
Loop Antenna	ETS-Lindgren	6502	22/12/16	24/12/16	00226186
Hybrid Antenna	Schwarzbeck	VULB 9160	22/12/16	23/12/16	3362
Horn Antenna	ETS-Lindgren	3117	22/06/24	23/06/24	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	22/06/24	23/06/24	155
PreAmplifier	tsj	MLA-0118-B01-40	22/12/16	23/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	22/06/24	23/06/24	16966-10728
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	22/06/24	23/06/24	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	22/06/24	23/06/24	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	22/06/24	23/06/24	3
Attenuator	Hefei Shunze	SS5T.92-10-40	22/06/24	23/06/24	16012202
Attenuator	Aeroflex/Weinschel	56-3	22/06/24	23/06/24	Y2370
Attenuator	SMAJK	SMAJK-2-3	22/06/24	23/06/24	3
Attenuator	SMAJK	SMAJK-2-3	22/06/24	23/06/24	2
Attenuator	Aeroflex/Weinschel	86-10-11	22/06/24	23/06/24	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2411B	22/12/16	23/12/16	1338004 1911481
EMI Test Receiver	ROHDE&SCHWARZ	ESCI7	23/01/31	24/01/31	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	22/08/22	23/08/22	101333
LISN	SCHWARZBECK	NSLK 8128 RC	22/10/26	23/10/26	8128 RC-387
Thermo Hygro Meter	TESTO	608-H1	23/01/13	24/01/13	45084791
Cable	Dt&C	Cable	23/01/04	24/01/04	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	23/01/04	24/01/04	G-3
Cable	Dt&C	Cable	23/01/04	24/01/04	G-4
Cable	OMT	YSS21S	23/01/04	24/01/04	G-5
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-1
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-02
Cable	JUNKOSHA	MWX241/B	23/01/04	24/01/04	M-03
Cable	JUNKOSHA	J12J101757-00	23/01/04	24/01/04	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-09
Cable	RADIALL	TESTPRO 3	23/01/04	24/01/04	RFC-44
Cable	RADIALL	TESTPRO 3	23/01/04	24/01/04	RFC-03
Cable	Dt&C	Cable	23/01/04	24/01/04	RFC-69
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0147
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0185

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB789033 D02v02r01 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB789033 D02v02r01. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02v02r01.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02v02r01. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on KDB789033 D02v02r01.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 m or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	SISO		MIMO (CDD)	MIMO (SDM)
	Ant 1	Ant 2	Ant 1 & 2	Ant 1 & 2
	Data rate			
802.11ax(HE20) 26T ~ 106T	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(2SS)
802.11ax(HE20) 242T , SU	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(2SS)
802.11ax(HE40) 26T ~ 106T	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(2SS)
802.11ax(HE40) 242T ~ 484T , SU	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(2SS)
802.11ax(HE80) 26T ~ 106T	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(1SS)	MCS 0 ~ 9(2SS)
802.11ax(HE80) 242T ~ 996T , SU	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(1SS)	MCS 0 ~ 11(2SS)

Note1: SDM = Spatial Diversity Multiplexing, CDD = Cycle Delay Diversity, SS = Spatial Streams

EUT Operation test setup

- **Test Software:** Using the adb command
- **Power setting:** Refer to the table next page.

Tested frequency and power setting

Tones(RU Index)	Band	802.11ax(HE20)		
		Channel	Frequency (MHz)	Power Setting
				MCS 0 ~ MCS 9
26(0, 4, 8)	U-NII 1	36	5 180	4
		40	5 200	4
		48	5 240	4
	U-NII 2A	52	5 260	8
		60	5 300	8
		64	5 320	8
	U-NII 2C	100	5 500	8
		116	5 580	8
		140	5 700	8
	U-NII 3	144	5 720	8
		149	5 745	12
		157	5 785	12
52(37, 38, 40)	U-NII 1	165	5 825	12
		36	5 180	6
		40	5 200	6
	U-NII 2A	48	5 240	6
		52	5 260	9
		60	5 300	9
	U-NII 2C	64	5 320	9
		100	5 500	9
		116	5 580	9
	U-NII 3	140	5 700	9
		144	5 720	9
		149	5 745	12
106(53, 54)	U-NII 1	157	5 785	12
		165	5 825	12
		36	5 180	8
	U-NII 2A	40	5 200	8
		48	5 240	8
		52	5 260	12
	U-NII 2C	60	5 300	12
		64	5 320	12
		100	5 500	12
	U-NII 3	116	5 580	12
		140	5 700	10
		144	5 720	12
U-NII 3	149	5 745	12	
	157	5 785	12	
	165	5 825	12	

Tones(RU Index)	Band	802.11ax(HE20)			
		Channel	Frequency (MHz)	Power Setting	
				MCS 0 ~ MCS 11	
242(61)	U-NII 1	36	5 180	11	
		40	5 200	11	
		48	5 240	11	
	U-NII 2A	52	5 260	12	
		60	5 300	12	
		64	5 320	10	
	U-NII 2C	100	5 500	10	
		116	5 580	12	
		140	5 700	8	
		144	5 720	12	
	U-NII 3	149	5 745	12	
		157	5 785	12	
		165	5 825	12	
	SU	U-NII 1	36	5 180	10
			40	5 200	10
48			5 240	10	
U-NII 2A		52	5 260	12	
		60	5 300	12	
		64	5 320	12	
U-NII 2C		100	5 500	11	
		116	5 580	12	
		140	5 700	10	
		144	5 720	12	
U-NII 3		149	5 745	12	
		157	5 785	12	
		165	5 825	12	

Tones(RU Index)	Band	802.11ax(HE40)		
		Channel	Frequency (MHz)	Power Setting
				MCS 0 ~ MCS 9
26(0, 8, 17)	U-NII 1	38	5 190	4
		46	5 230	4
	U-NII 2A	54	5 270	8
		62	5 310	8
	U-NII 2C	102	5 510	8
		110	5 550	8
		134	5 670	8
		142	5 710	8
	U-NII 3	151	5 755	12
		159	5 795	12
52(37, 40, 44)	U-NII 1	38	5 190	6
		46	5 230	6
	U-NII 2A	54	5 270	9
		62	5 310	9
	U-NII 2C	102	5 510	9
		110	5 550	9
		134	5 670	9
		142	5 710	9
	U-NII 3	151	5 755	12
		159	5 795	12
106(53, 54, 56)	U-NII 1	38	5 190	8
		46	5 230	8
	U-NII 2A	54	5 270	12
		62	5 310	12
	U-NII 2C	102	5 510	11
		110	5 550	12
		134	5 670	12
		142	5 710	12
	U-NII 3	151	5 755	12
		159	5 795	12

Tones(RU Index)	Band	802.11ax(HE40)		
		Channel	Frequency (MHz)	Power Setting
				MCS 0 ~ MCS 11
242(61, 62)	U-NII 1	38	5 190	11
		46	5 230	11
	U-NII 2A	54	5 270	12
		62	5 310	12
	U-NII 2C	102	5 510	10
		110	5 550	12
		134	5 670	12
		142	5 710	12
	U-NII 3	151	5 755	12
		159	5 795	12
484(65)	U-NII 1	38	5 190	8
		46	5 230	12
	U-NII 2A	54	5 270	12
		62	5 310	8
	U-NII 2C	102	5 510	7
		110	5 550	12
		134	5 670	10
		142	5 710	12
	U-NII 3	151	5 755	12
		159	5 795	12
SU	U-NII 1	38	5 190	8
		46	5 230	12
	U-NII 2A	54	5 270	12
		62	5 310	8
	U-NII 2C	102	5 510	7
		110	5 550	12
		134	5 670	9
		142	5 710	12
	U-NII 3	151	5 755	12
		159	5 795	12

Tones(RU Index)	Band	802.11ax(HE80)		
		Channel	Frequency (MHz)	Power Setting
				MCS 0 ~ MCS 9
26(0, 18, 36)	U-NII 1	42	5 210	4
	U-NII 2A	58	5 290	8
	U-NII 2C	106	5 530	8
		138	5 690	8
	U-NII 3	155	5 775	11
52(37, 44, 52)	U-NII 1	42	5 210	6
	U-NII 2A	58	5 290	9
	U-NII 2C	106	5 530	9
		138	5 690	9
	U-NII 3	155	5 775	11
106(53, 56, 60)	U-NII 1	42	5 210	8
	U-NII 2A	58	5 290	11
	U-NII 2C	106	5 530	11
		138	5 690	11
	U-NII 3	155	5 775	11

Tones(RU Index)	Band	802.11ax(HE80)		
		Channel	Frequency (MHz)	Power Setting
				MCS 0 ~ MCS 11
242(61, 62, 64)	U-NII 1	42	5 210	11
	U-NII 2A	58	5 290	11
	U-NII 2C	106	5 530	11
		138	5 690	11
	U-NII 3	155	5 775	11
484(65, 66)	U-NII 1	42	5 210	10
	U-NII 2A	58	5 290	10
	U-NII 2C	106	5 530	9
		138	5 690	11
	U-NII 3	155	5 775	11
996(67)	U-NII 1	42	5 210	9
	U-NII 2A	58	5 290	9
	U-NII 2C	106	5 530	9
		138	5 690	11
	U-NII 3	155	5 775	11
SU	U-NII 1	42	5 210	9
	U-NII 2A	58	5 290	9
	U-NII 2C	106	5 530	9
		138	5 690	11
	U-NII 3	155	5 775	11

3. Antenna Requirements

■ According to Part 15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna is attached on the device by means of unique coupling method.
Therefore this E.U.T complies with the requirement of Part 15.203**

Directional antenna gain:

Bands	SISO		MIMO (CDD) ^{Note 1.}	MIMO (SDM) ^{Note 2}
	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain[dBi]	Directional Gain[dBi]
U-NII 1	1.516	1.669	4.60	1.59
U-NII 2A	1.761	2.102	4.94	1.93
U-NII 2C	1.769	2.237	5.03	2.02
U-NII 3	2.182	2.050	5.13	2.12

Note 1. Directional gain(correlated signal with unequal antenna gain and equal transmit power)

$$10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N^{ANT}] \text{ dBi}$$

Note 2. Directional gain(completely uncorrelated signal with unequal antenna gain and equal transmit power)

$$10 \log [(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N^{ANT}] \text{ dBi}$$

4. Summary of Test Result

FCC Part Section(s)	RSS Section(s)	Test Description	Limit	Test Condition	Status Note 1
15.407(a)	RSS-247[6.2]	Emission Bandwidth (26 dB Bandwidth)	N/A	Conducted	C
15.407(e)	RSS-247[6.2]	Minimum Emission Bandwidth (6 dB Bandwidth)	> 500 kHz in 5 725 ~ 5 850 MHz		C
15.407(a)	RSS-247[6.2]	Maximum Conducted Output Power	Part 15.407(a) (Refer to section 5.3)		C
15.407(a)	RSS-247[6.2]	Peak Power Spectral Density	Part 15.407(a) (Refer to section 5.4)		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	N/A		C
15.407(h)	RSS-247[6.3]	Dynamic Frequency Selection	Part 15.407(h) (Refer to the DFS test report)		C Note 4
15.205 15.209 15.407(b)	RSS-Gen[8.9] RSS-Gen[8.10] RSS-247[6.2]	Unwanted Emissions	Part 15.209, 15.407(b) (Refer to section 5.5)	Radiated	C Note 3
15.207	RSS-Gen[8.8]	AC Conducted Emissions	Part 15.207 (Refer to section 5.6)	AC Line Conducted	C
15.203	-	Antenna Requirements	Part 15.203 (Refer to section 3)	-	C

Note 1: **C** = Comply **NC** = Not Comply **NT** = Not Tested **NA** = Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

Note 4: Refer to the DFS test report.

5. TEST RESULT

5.1 Emission Bandwidth (26 dB Bandwidth) & Occupied BW (99 %)

■ Test Requirements

- Emission Bandwidth (26 dB Bandwidth)

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The 26 dB bandwidth is used to determine the conducted output power limit.

- Occupied BW (99 %)

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

- Emission Bandwidth (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the EBW.
2. Set the video bandwidth (**VBW**) > **RBW**.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

- Occupied BW (99 %): RSS-Gen[6.7]

1. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
2. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
3. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Test Results: Comply

Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]			
					26 dB BW		99 % BW	
					CDD			
					ANT 1	ANT 2	ANT 1	ANT 2
802.11ax (HE20)	U-NII 1	5 180	26	0	19.85	19.82	18.36	18.35
				4	19.05	18.20	17.06	16.50
				8	20.48	19.78	18.58	18.40
		5 200	26	0	19.97	19.37	18.44	18.03
				4	19.06	18.20	17.09	16.98
				8	20.55	19.56	18.56	18.25
		5 240	26	0	20.04	19.87	18.41	17.92
				4	19.00	18.15	16.96	17.01
				8	20.30	19.63	18.69	18.36
	U-NII 2A	5 260	26	0	19.99	19.76	17.75	18.25
				4	19.24	18.20	17.20	17.03
				8	20.35	19.71	18.62	18.40
		5 300	26	0	20.16	19.74	18.45	18.36
				4	18.59	18.24	17.13	17.01
				8	20.11	19.85	18.59	18.46
		5 320	26	0	19.97	19.80	18.40	18.38
				4	19.17	18.17	17.17	17.02
				8	20.80	19.82	18.45	18.35
	U-NII 2C	5 500	26	0	19.99	19.68	18.38	18.10
				4	19.11	18.26	17.01	16.34
				8	20.30	19.75	18.49	18.30
		5 580	26	0	19.99	19.70	18.47	18.37
				4	18.56	18.18	17.04	17.05
				8	20.28	19.75	18.55	17.80
5 720		26	0	20.04	19.67	18.11	18.32	
			4	18.99	18.19	17.32	16.89	
			8	20.46	19.68	18.54	18.25	

Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]			
					26 dB BW		99 % BW	
					CDD			
					ANT 1	ANT 2	ANT 1	ANT 2
802.11ax (HE20)	U-NII 1	5 180	242	61	22.01	21.49	19.07	19.08
		5 200	242	61	21.83	21.55	19.11	19.05
		5 240	242	61	21.97	21.58	19.12	19.09
	U-NII 2A	5 260	242	61	22.12	21.32	19.13	19.09
		5 300	242	61	22.00	21.41	19.11	19.07
		5 320	242	61	21.76	21.50	19.07	19.09
	U-NII 2C	5 500	242	61	21.65	21.44	19.03	19.07
		5 580	242	61	21.92	21.43	19.11	19.04
		5 720	242	61	21.98	21.47	19.11	19.03
802.11ax (HE20)	U-NII 1	5 180	SU	NA	21.44	21.03	18.97	18.92
		5 200	SU	NA	21.24	21.07	18.94	18.94
		5 240	SU	NA	21.16	21.19	18.94	18.89
	U-NII 2A	5 260	SU	NA	21.49	21.28	19.00	18.94
		5 300	SU	NA	21.13	21.08	18.97	18.92
		5 320	SU	NA	20.98	21.09	18.90	18.96
	U-NII 2C	5 500	SU	NA	21.21	20.98	18.95	18.92
		5 580	SU	NA	21.41	21.01	18.97	18.91
		5 720	SU	NA	21.10	21.14	18.92	18.95


Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]				
					26 dB BW		99 % BW		
					CDD				
					ANT 1	ANT 2	ANT 1	ANT 2	
802.11ax (HE40)	U-NII 1	5 190	26	0	20.12	19.17	18.00	18.05	
				8	23.28	22.70	21.76	21.28	
				17	19.82	19.03	18.41	17.96	
		5 230	26	0	20.14	19.35	18.16	18.10	
				8	23.66	22.56	21.29	20.89	
				17	20.33	19.03	18.38	17.95	
	U-NII 2A	5 270	26	0	20.07	19.36	18.11	17.91	
				8	23.21	22.62	21.25	20.71	
				17	20.45	19.22	18.36	17.99	
		5 310	26	0	19.82	19.36	17.93	17.97	
				8	23.12	22.84	20.83	20.76	
				17	20.54	19.27	18.28	18.09	
	U-NII 2C	5 510	26	0	19.67	19.36	18.19	18.02	
				8	23.48	22.33	21.28	20.70	
				17	20.32	19.09	18.13	17.94	
		5 550	26	0	20.19	19.57	18.01	18.12	
				8	23.27	22.55	20.65	21.33	
				17	20.00	19.37	17.98	17.96	
5 710		26	0	20.19	19.42	18.23	18.04		
			8	22.52	23.51	21.00	21.18		
			17	20.16	19.26	18.19	17.98		
802.11ax (HE40)	U-NII 1	5 190	484	65	40.08	39.81	37.60	37.59	
		5 230	484	65	40.53	39.90	37.65	37.58	
	U-NII 2A	5 270	484	65	40.29	40.12	37.64	37.56	
		5 310	484	65	40.07	39.74	37.55	37.54	
	U-NII 2C	5 510	484	65	39.93	39.86	37.59	37.56	
		5 550	484	65	40.33	39.78	37.63	37.55	
		5 710	484	65	40.13	39.87	37.68	37.58	
	802.11ax (HE40)	U-NII 1	5 190	SU	NA	40.11	39.93	37.61	37.63
			5 230	SU	NA	40.28	39.99	37.70	37.62
U-NII 2A		5 270	SU	NA	40.05	39.97	37.68	37.58	
		5 310	SU	NA	40.14	39.89	37.58	37.61	
U-NII 2C		5 510	SU	NA	40.01	39.96	37.61	37.58	
		5 550	SU	NA	51.55	42.62	37.74	37.62	
		5 710	SU	NA	40.37	42.33	37.74	37.56	

Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]			
					26 dB BW(MHz)		99 % BW(MHz)	
					CDD			
					ANT 1	ANT 2	ANT 1	ANT 2
802.11ax (HE80)	U-NII 1	5 210	26	0	20.22	20.37	19.05	18.96
				18	39.58	39.45	36.95	36.80
				36	22.22	21.13	20.07	18.80
	U-NII 2A	5 290	26	0	19.70	20.54	18.67	18.89
				18	41.81	38.52	37.33	36.73
				36	21.88	20.31	18.78	18.20
	U-NII 2C	5 530	26	0	20.20	20.70	18.67	18.87
				18	41.33	38.70	36.79	36.53
				36	22.26	20.14	20.63	18.58
		5 690	26	0	20.24	20.06	18.31	18.84
				18	38.67	39.44	36.63	36.62
				36	21.29	20.25	19.68	18.63
802.11ax (HE80)	U-NII 1	5 210	996	67	81.68	81.43	77.05	77.12
	U-NII 2A	5 290	996	67	81.64	81.63	76.94	77.09
	U-NII 2C	5 530	996	67	81.77	81.57	77.00	77.08
		5 690	996	67	81.59	81.36	77.17	77.19
802.11ax (HE80)	U-NII 1	5 210	SU	NA	81.55	81.42	77.16	77.26
	U-NII 2A	5 290	SU	NA	81.53	81.53	77.17	77.30
	U-NII 2C	5 530	SU	NA	81.53	81.05	77.12	77.05
		5 690	SU	NA	82.25	81.56	77.27	77.14

Note: The worst-case plots are reported.


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.36

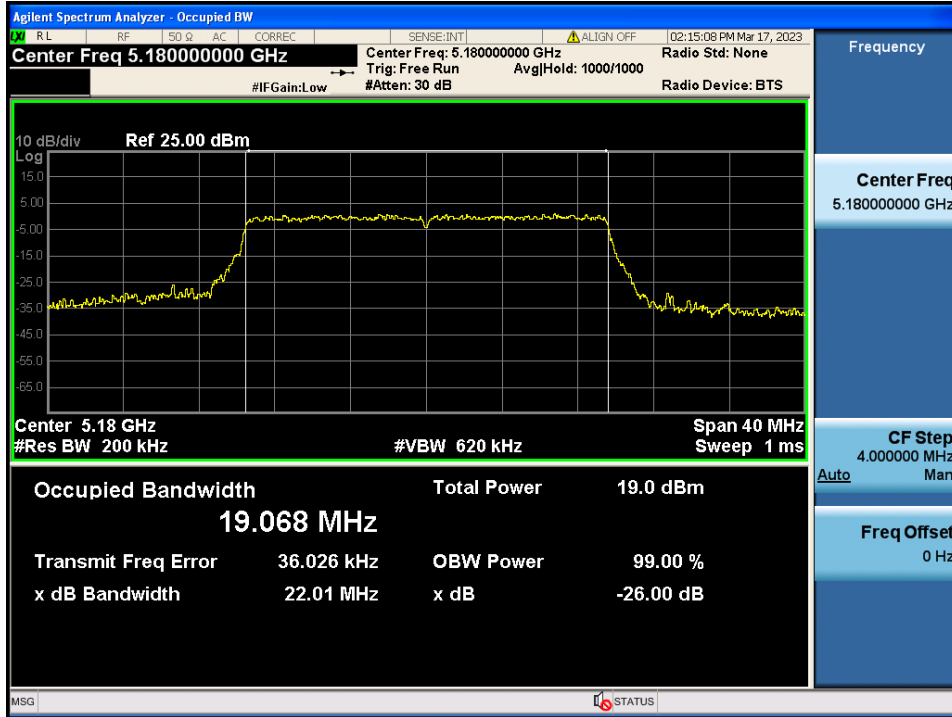


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.40

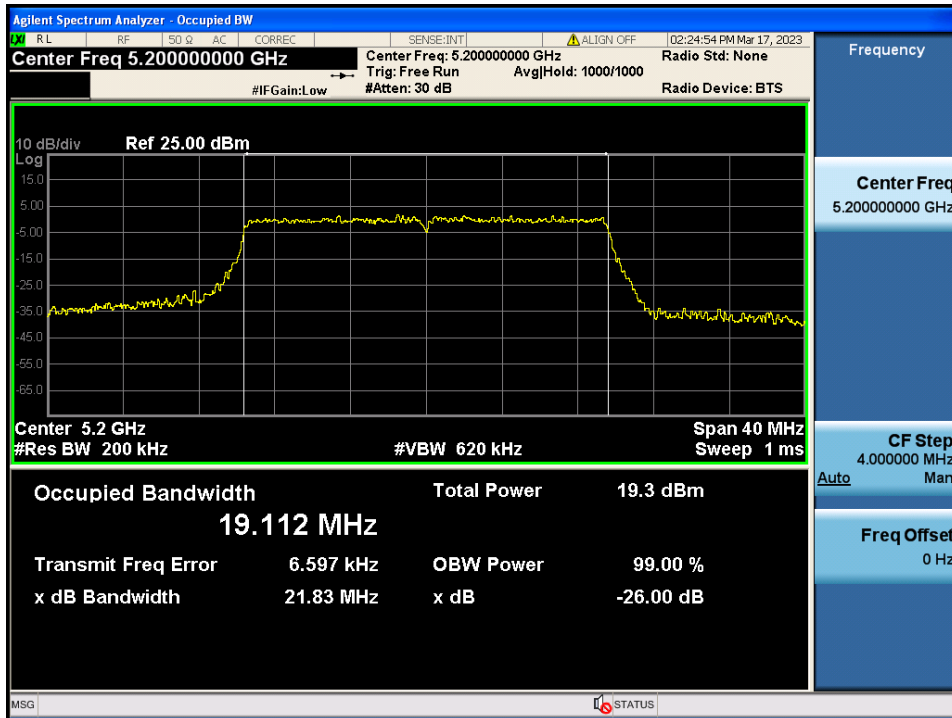


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.48

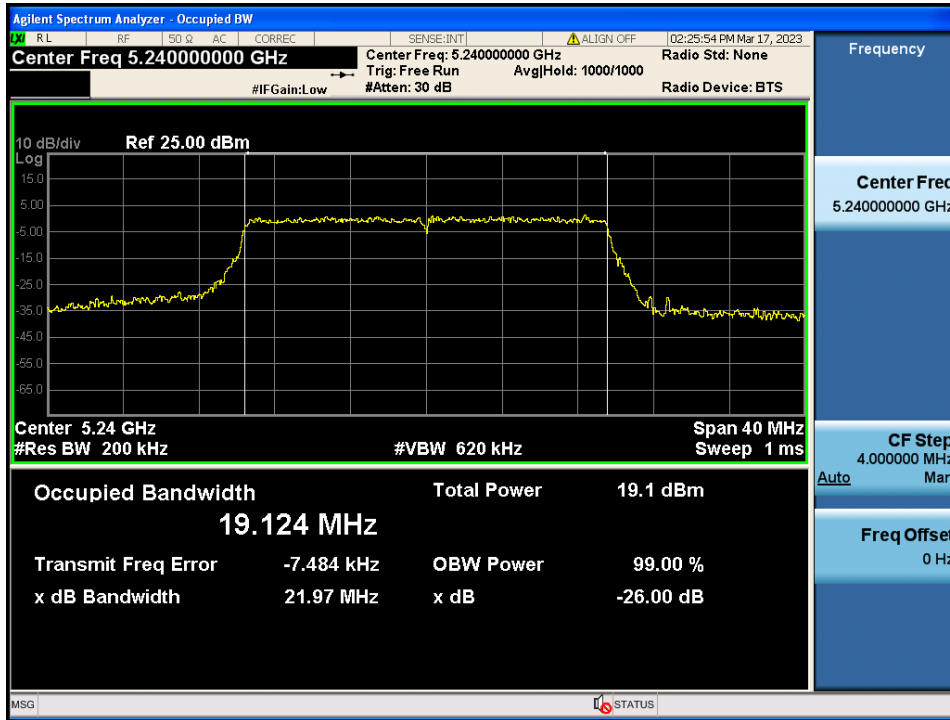


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.52

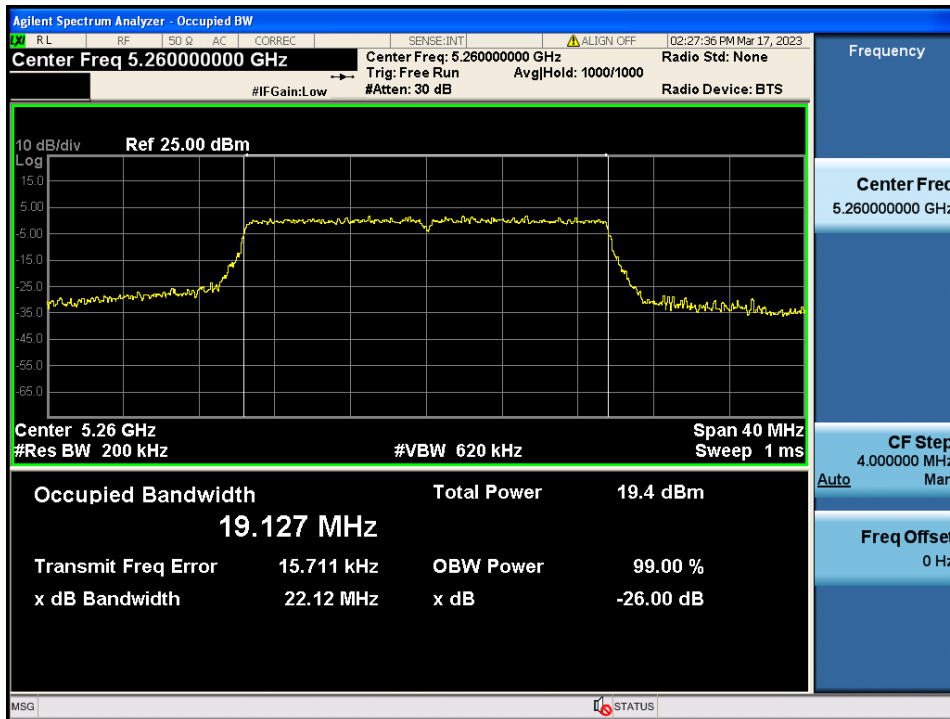


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.60

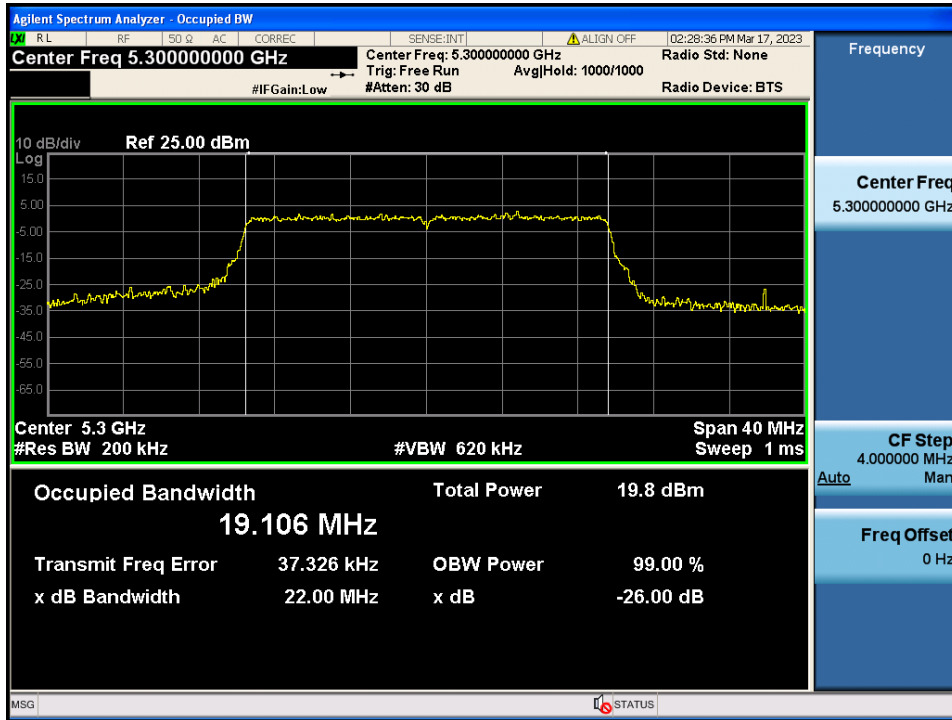


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.64

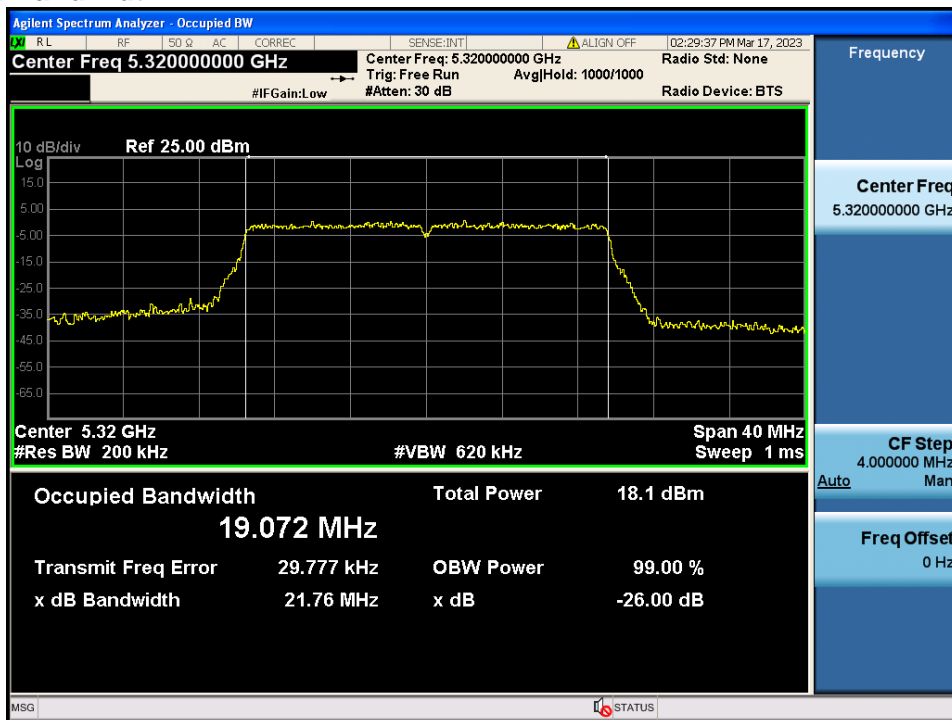


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.100

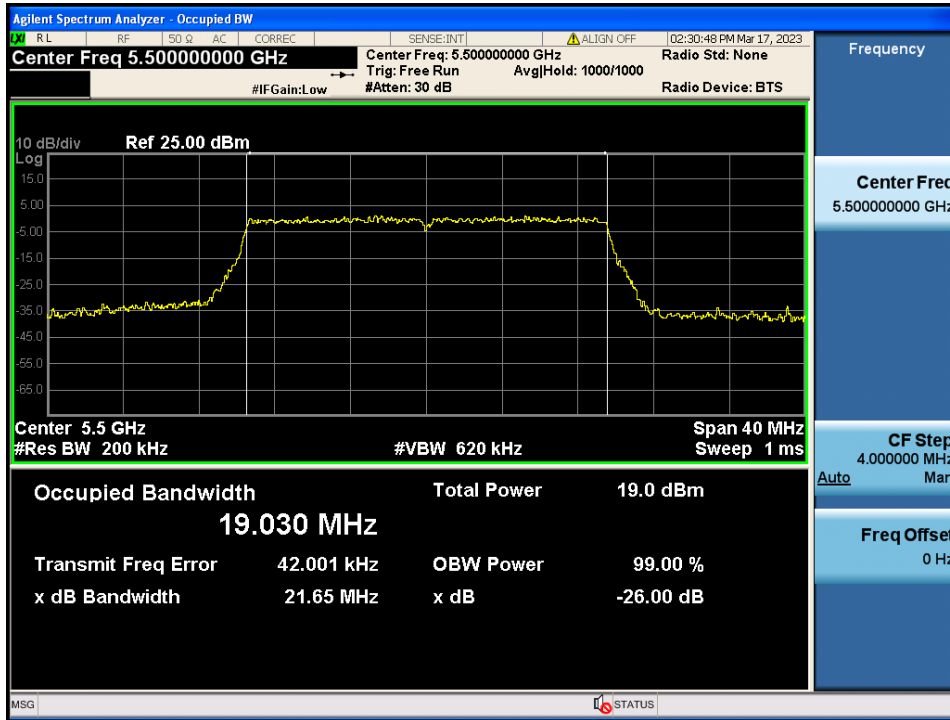


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.116

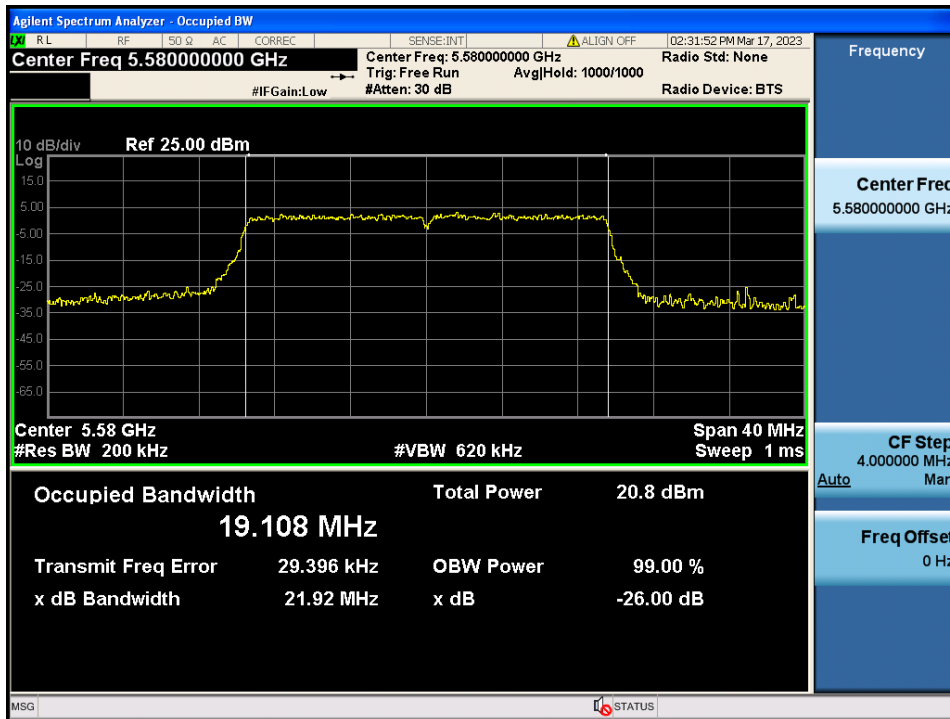


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.144

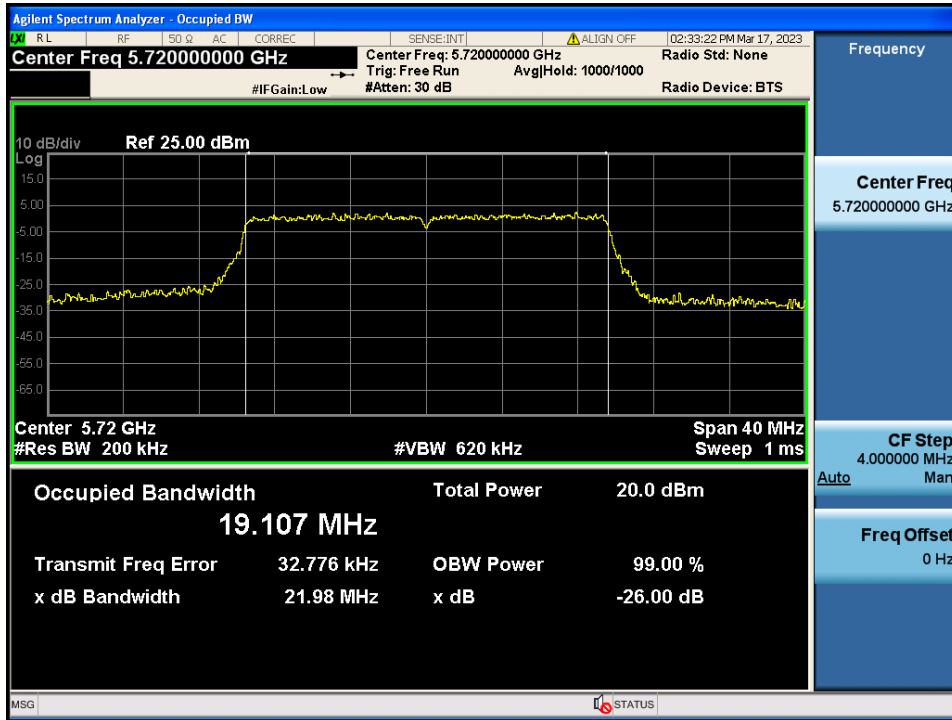


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.38

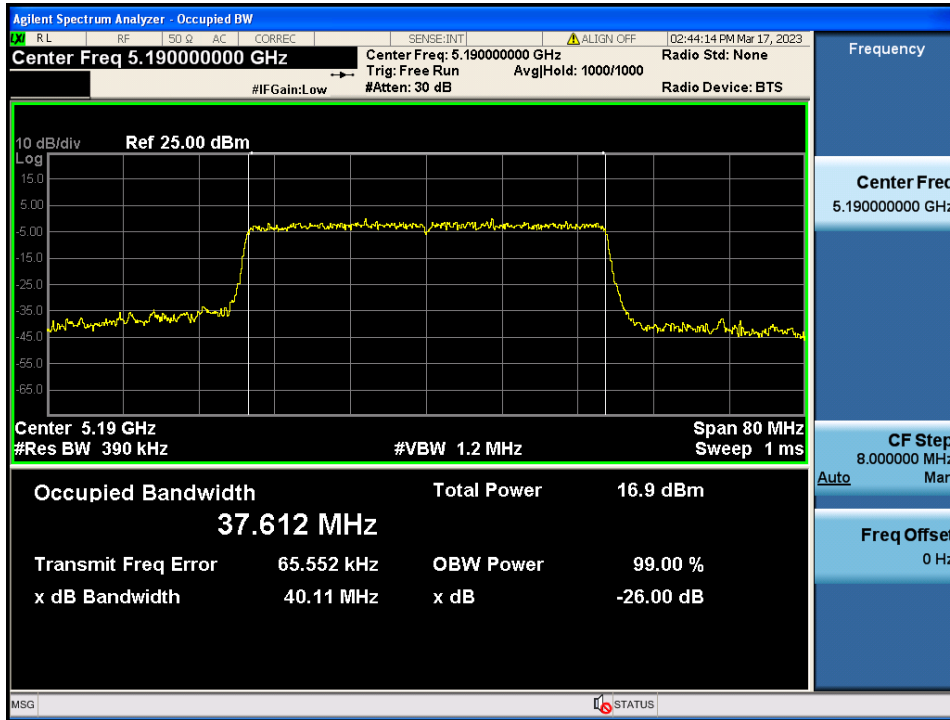


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & 484 Tone & 65 RU & Ch.46

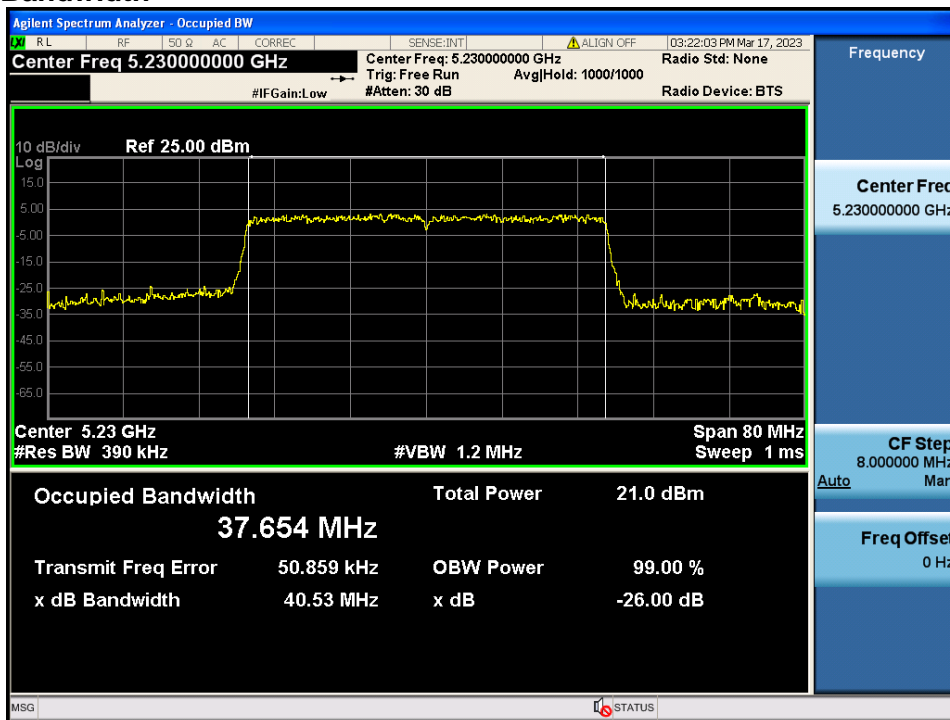


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & 484 Tone & 65 RU & Ch.54

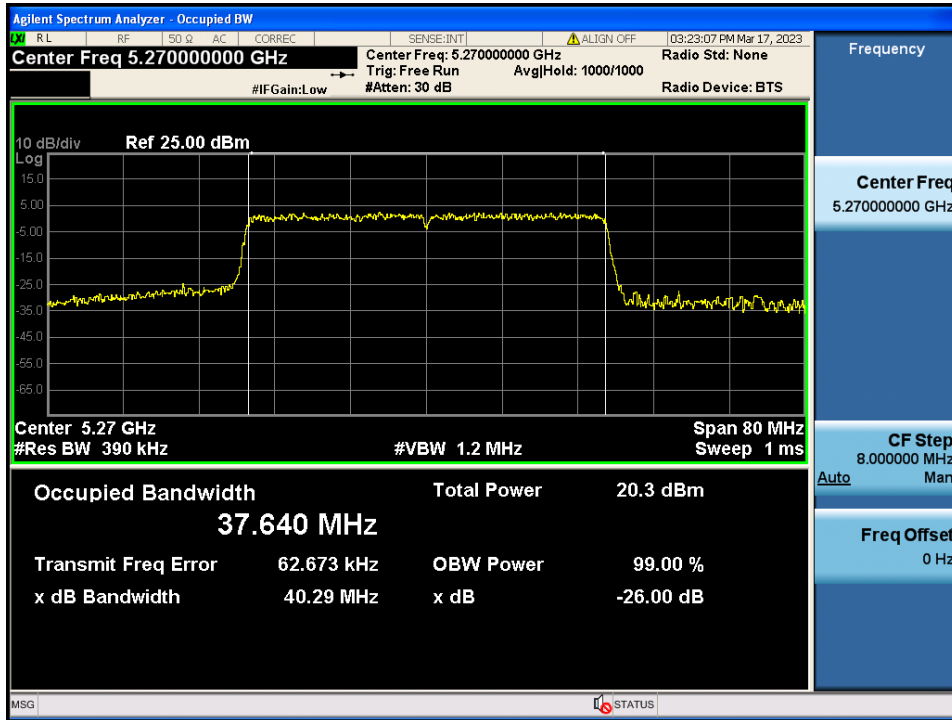


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.62

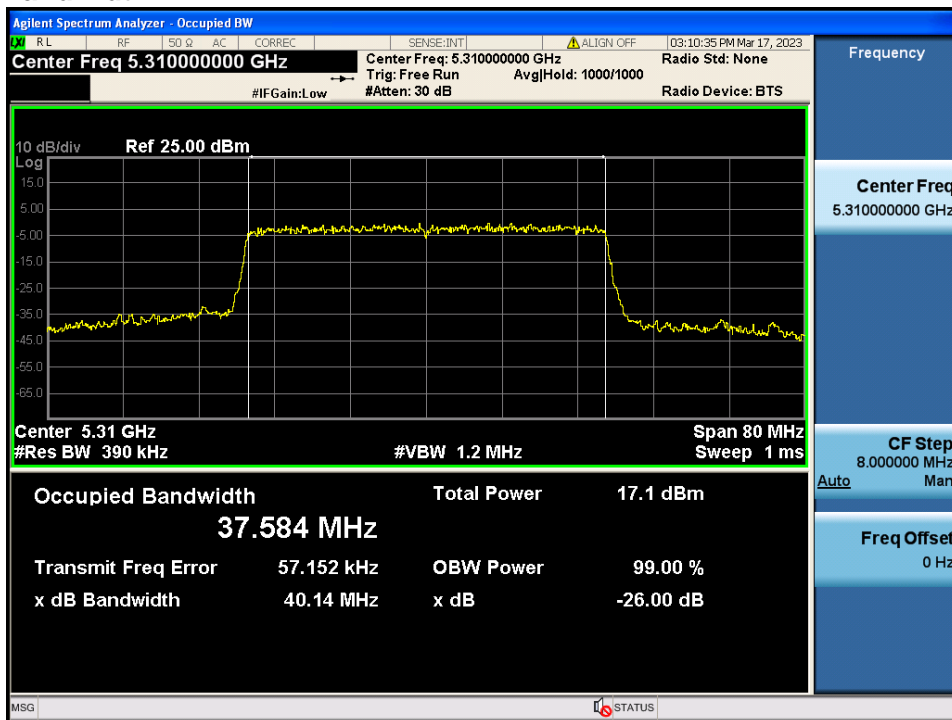


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.102

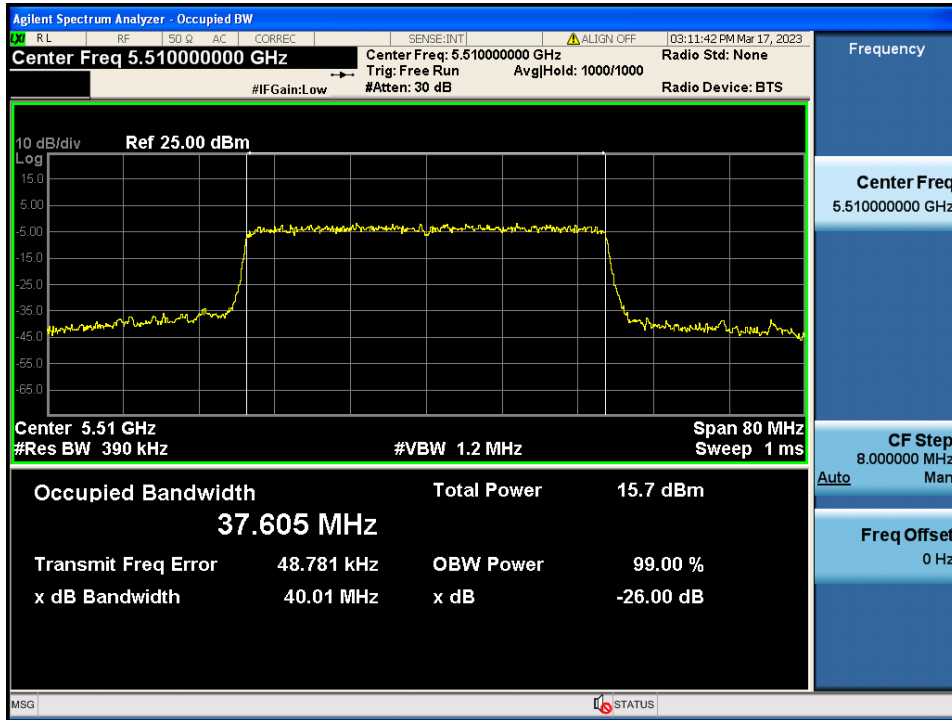


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.110

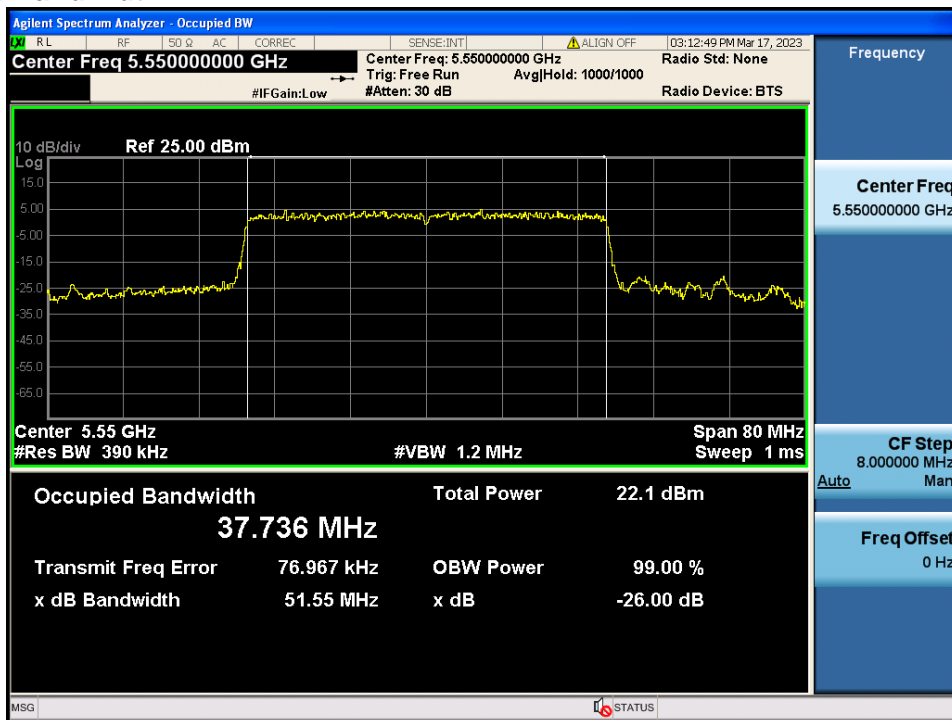


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.142

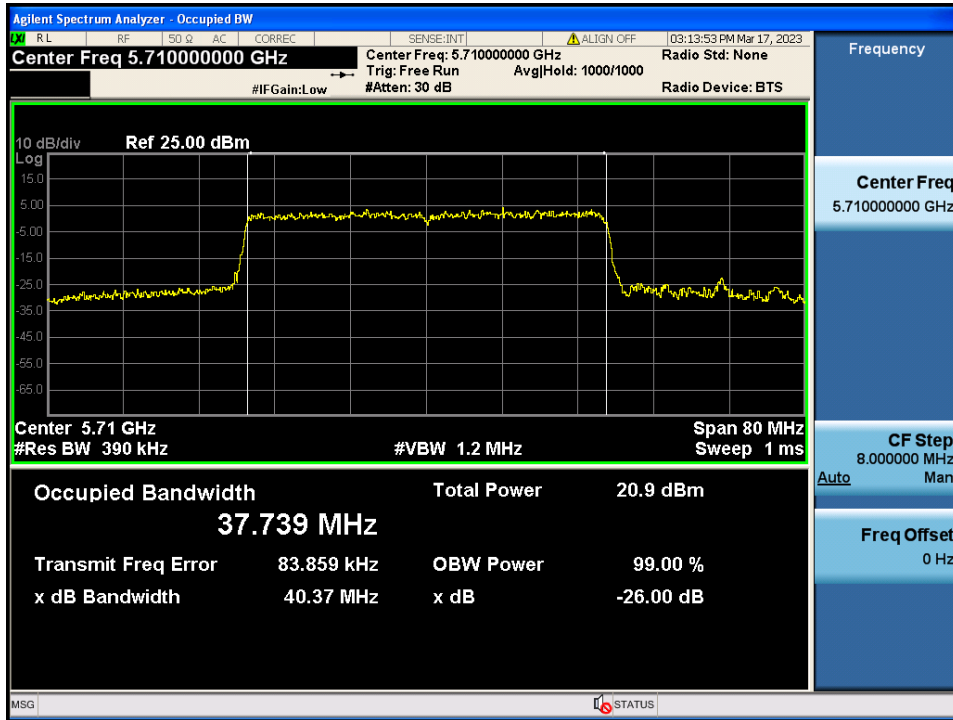


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & 996 Tone & 67 RU & Ch.42

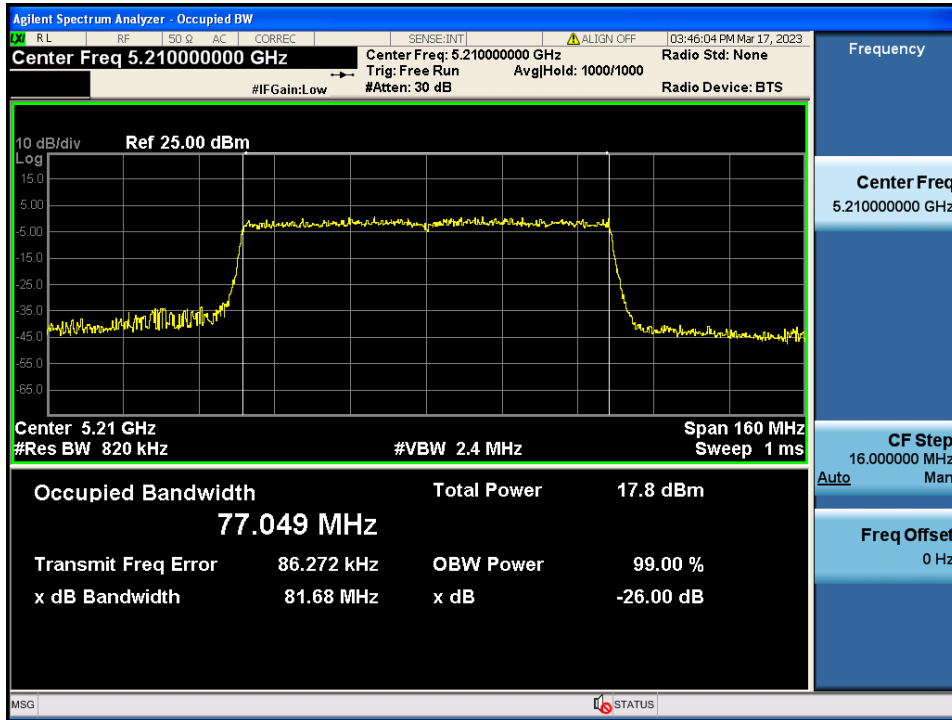


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & 996 Tone & 67 RU & Ch.58

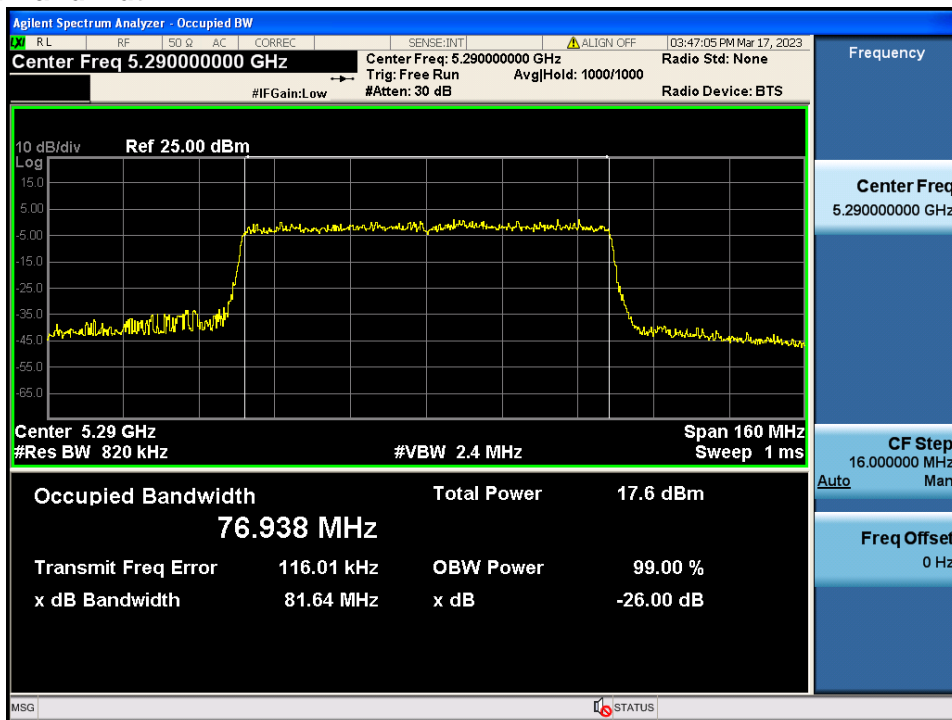


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & 996 Tone & 67 RU & Ch.106

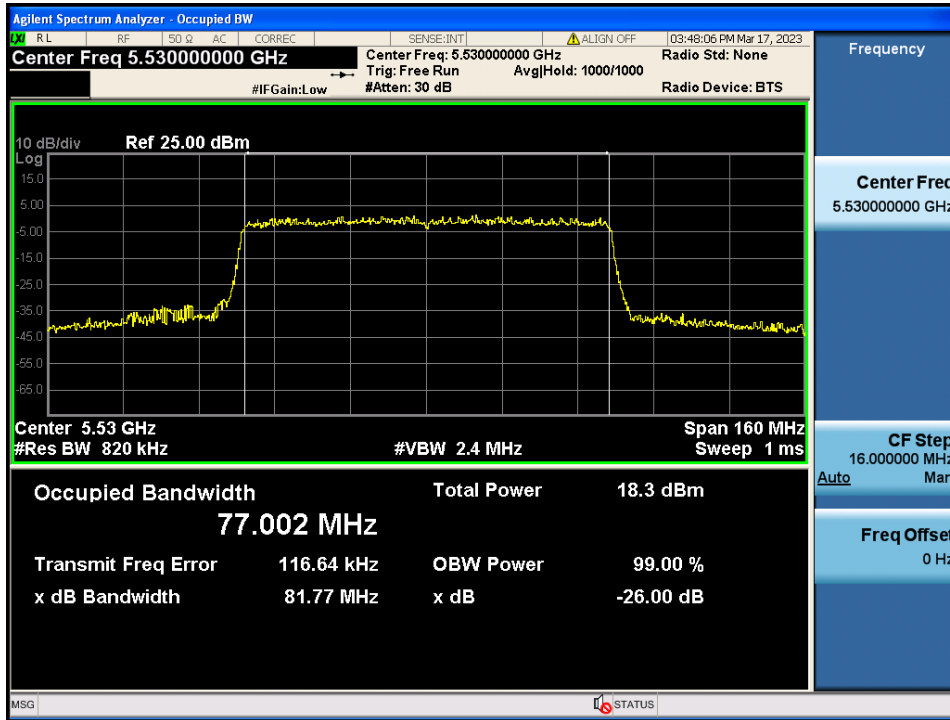


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & SU & Ch.138

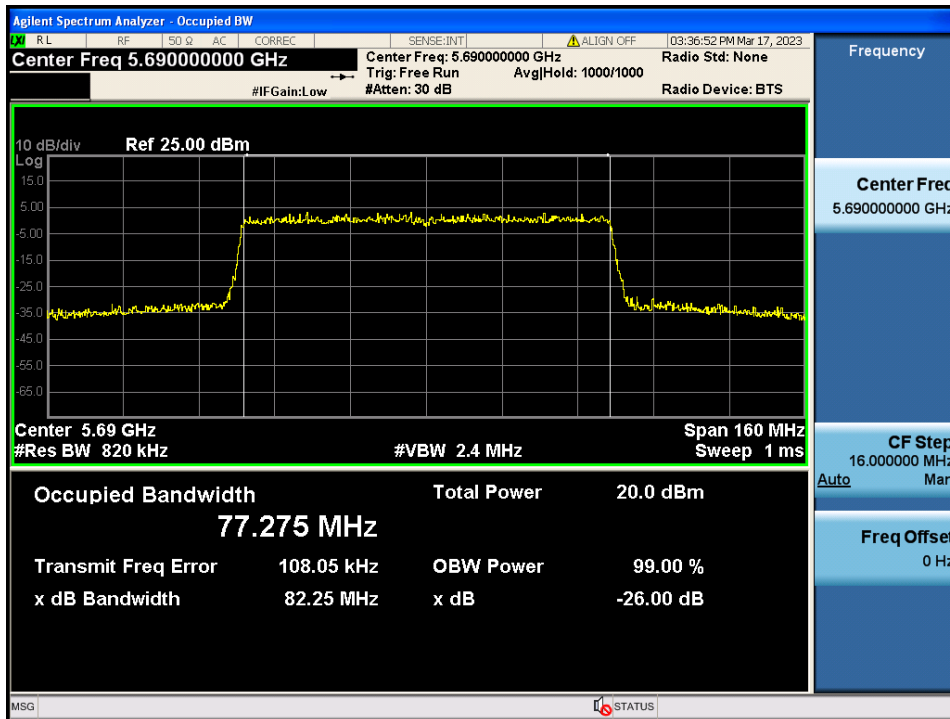


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.36

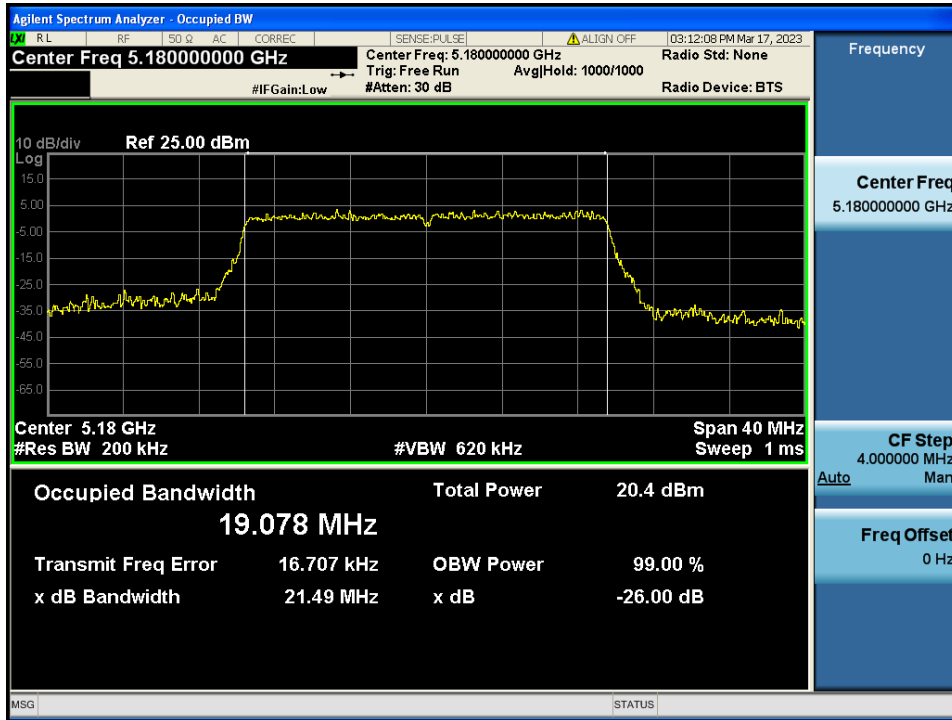


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.40

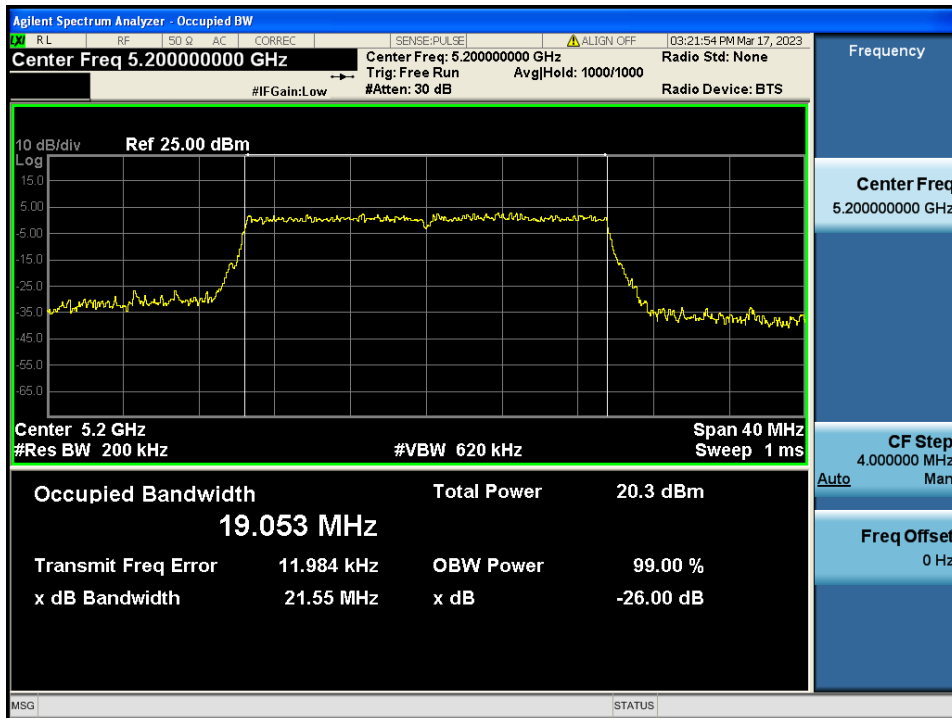


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.48

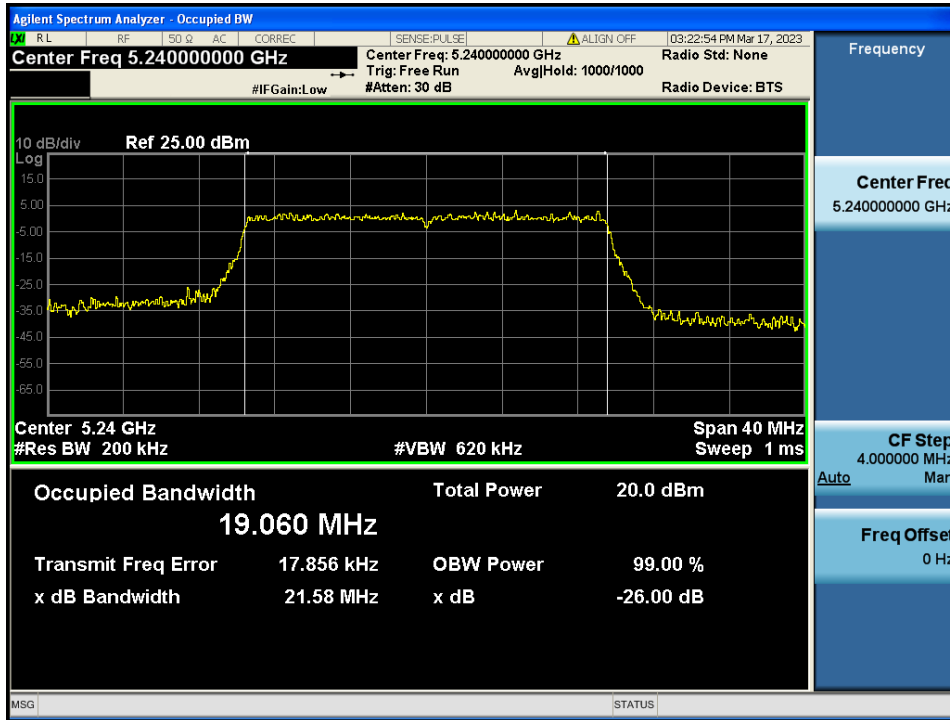


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.52

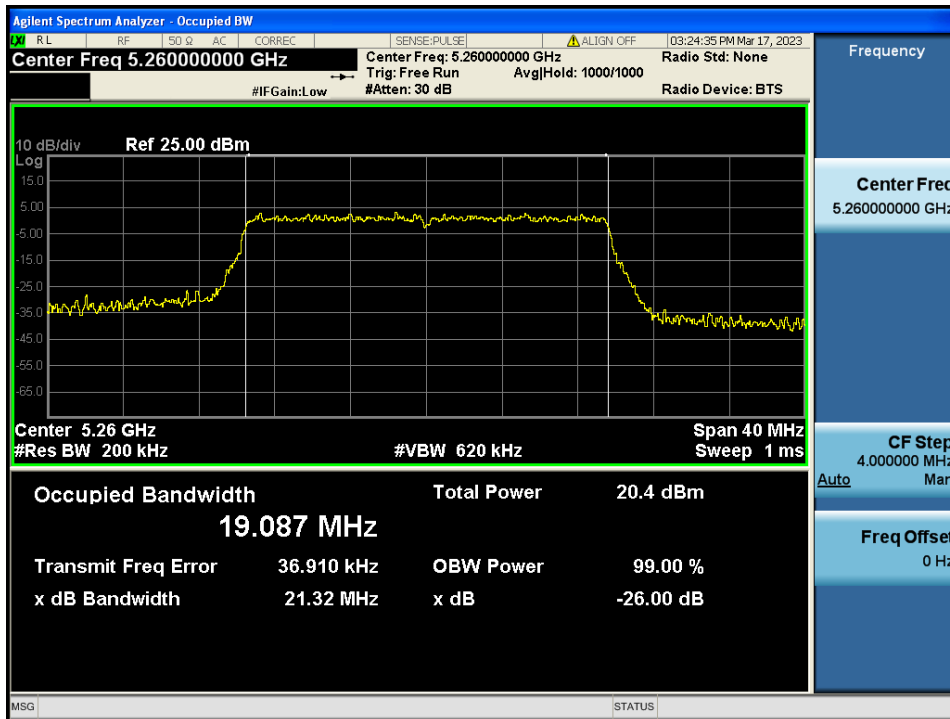


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.60

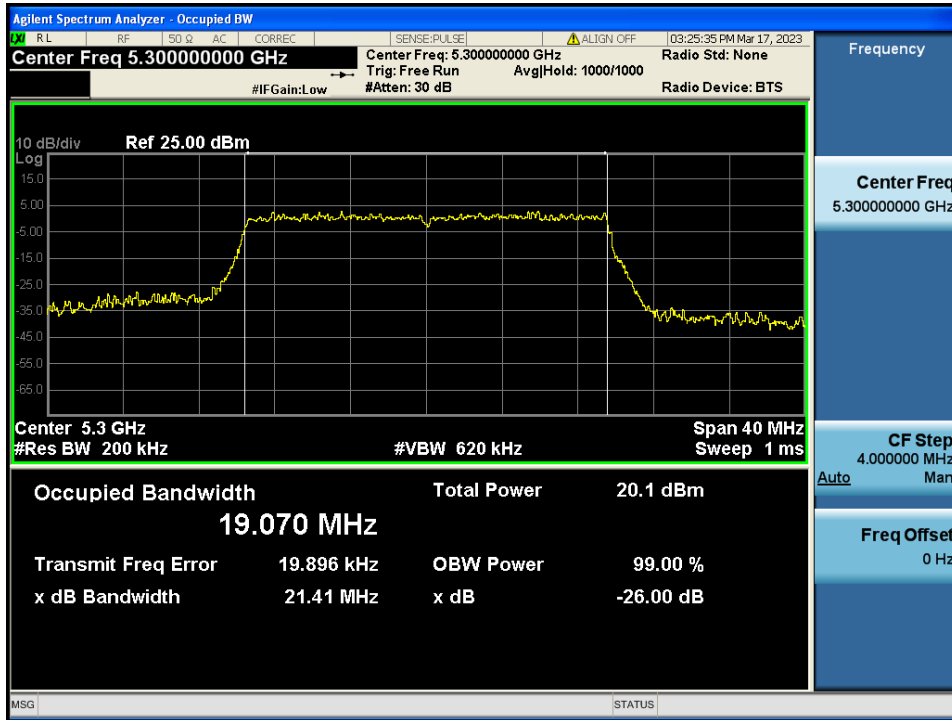


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.64

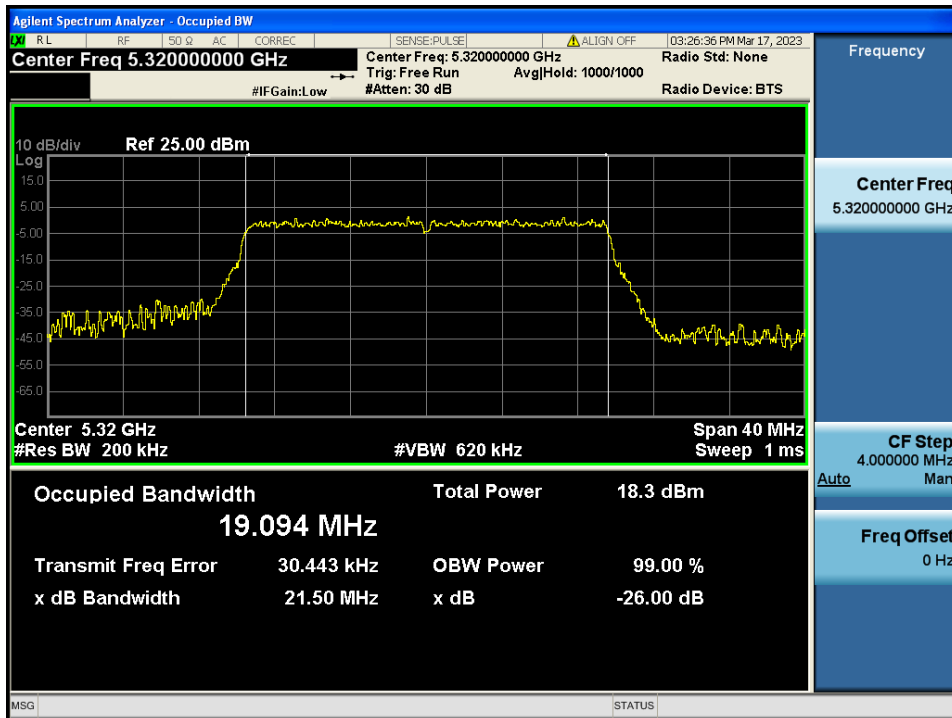


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.100

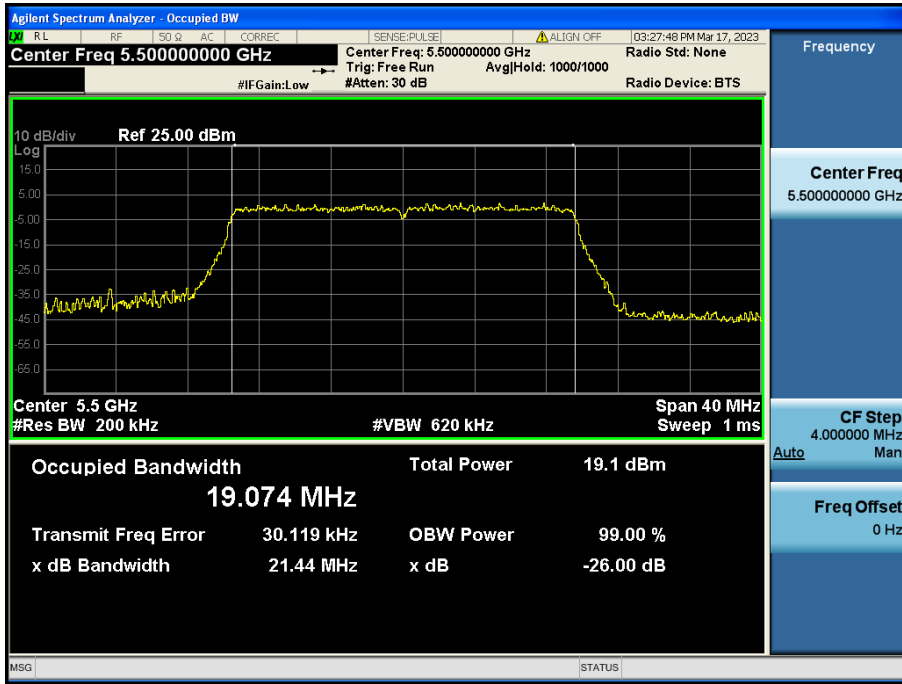


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.116

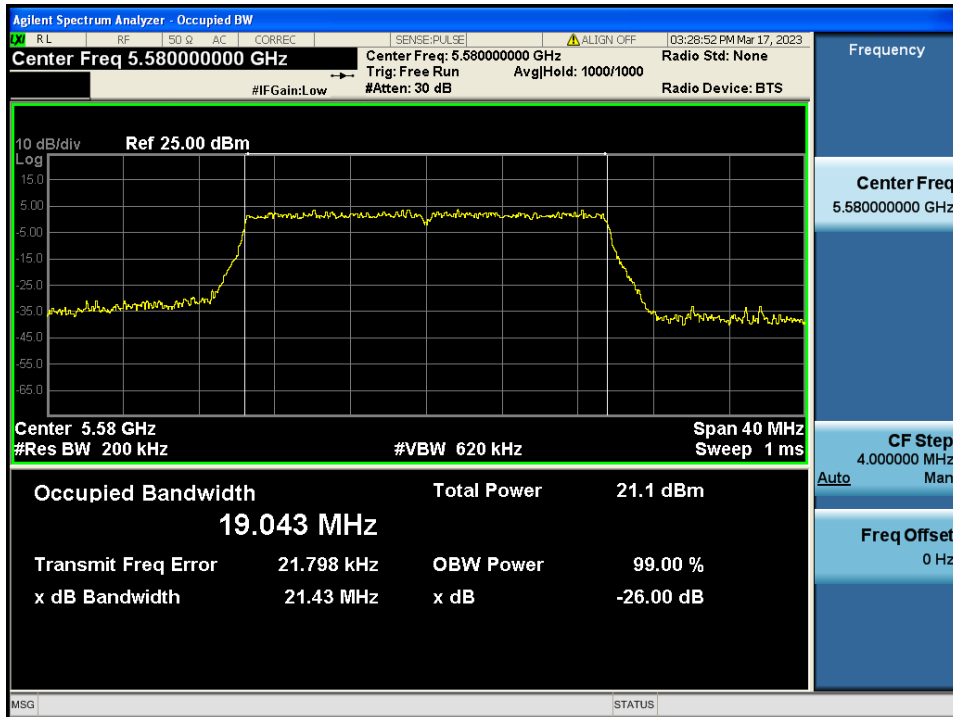


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 26 Tone & 4 RU & Ch.144

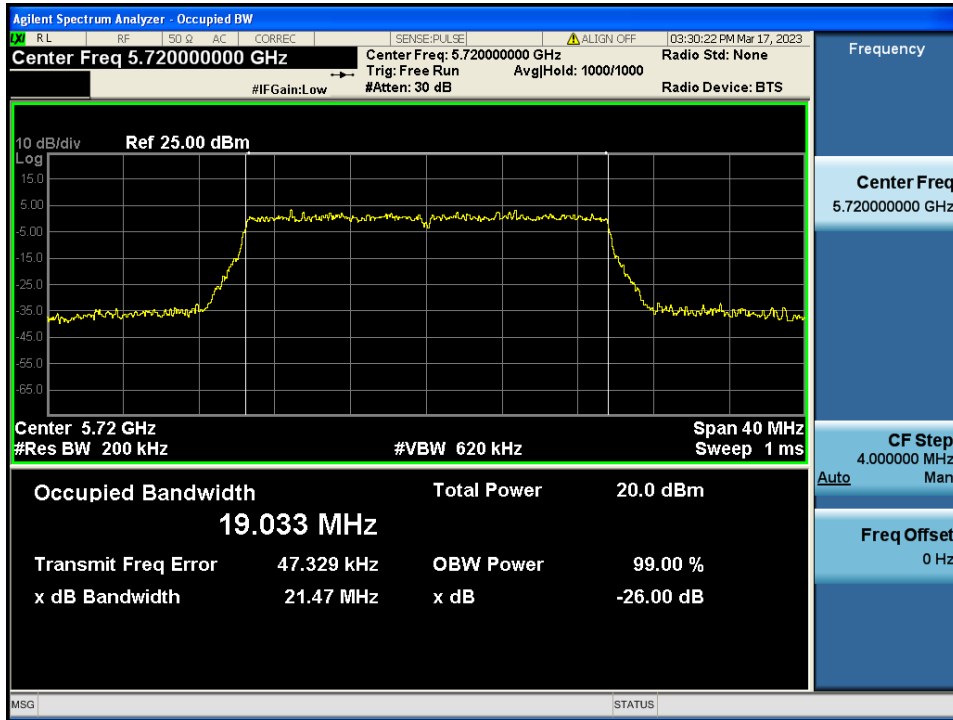


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & SU & Ch.38

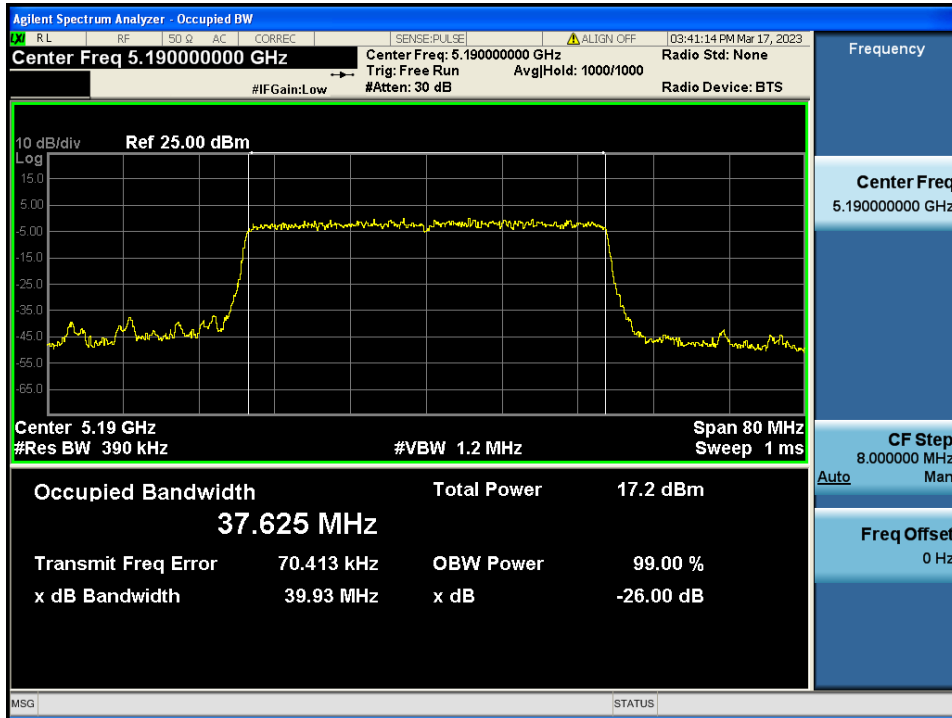


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & SU & Ch.46

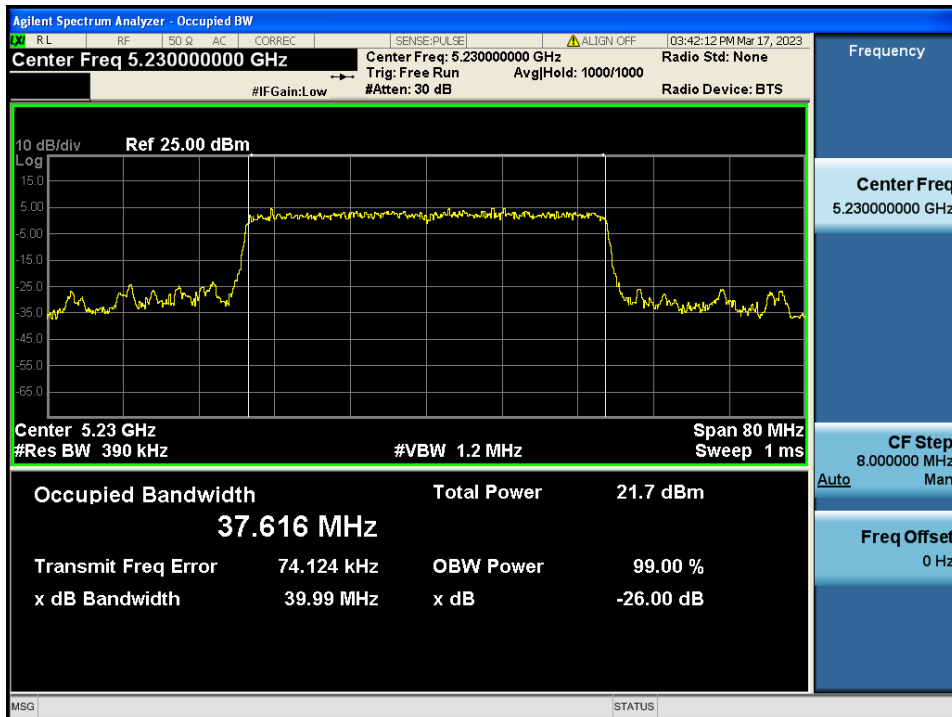


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 484 Tone & 65 RU & Ch.54

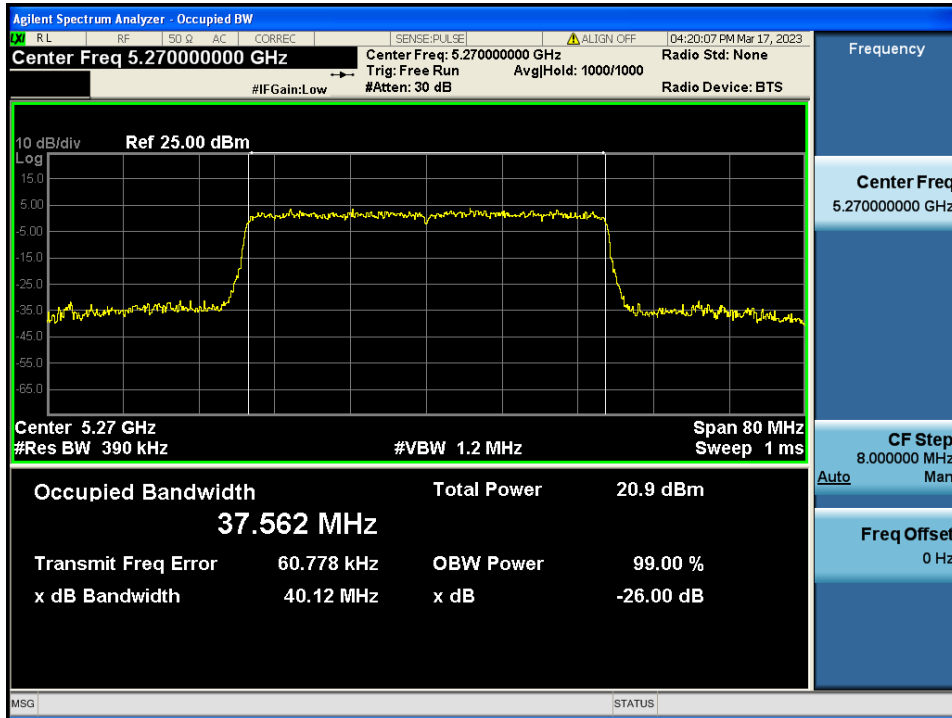


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & SU & Ch.62

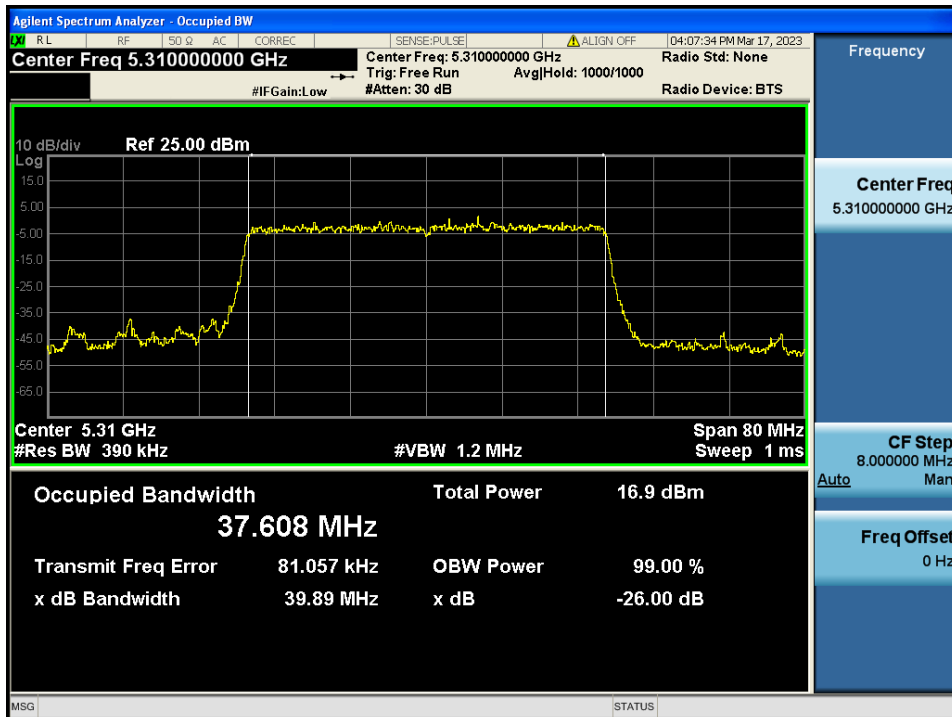


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & SU & Ch.102

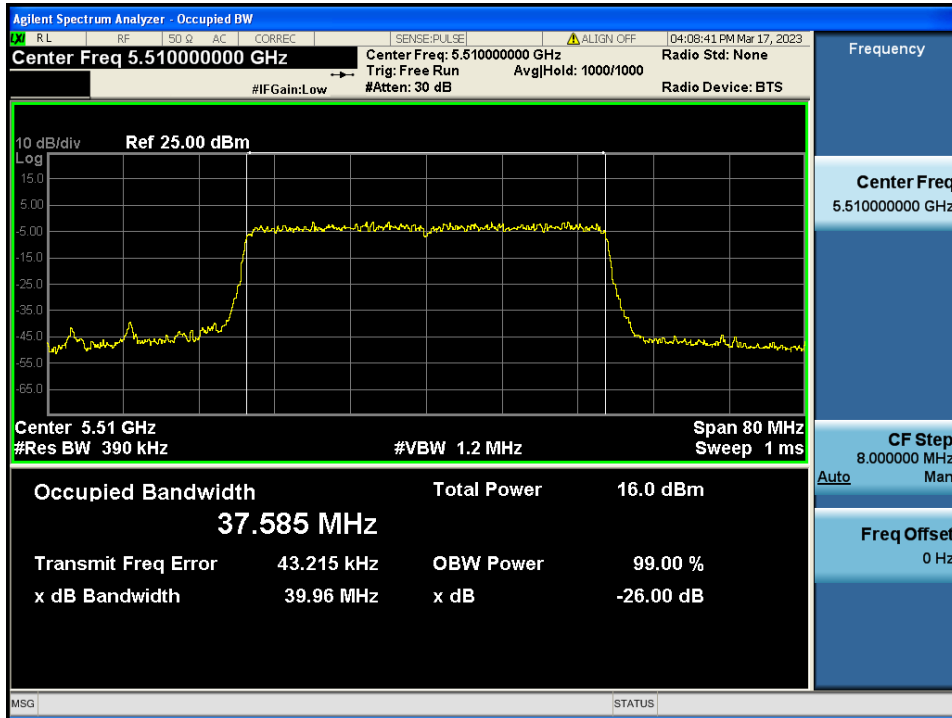


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & SU & Ch.110

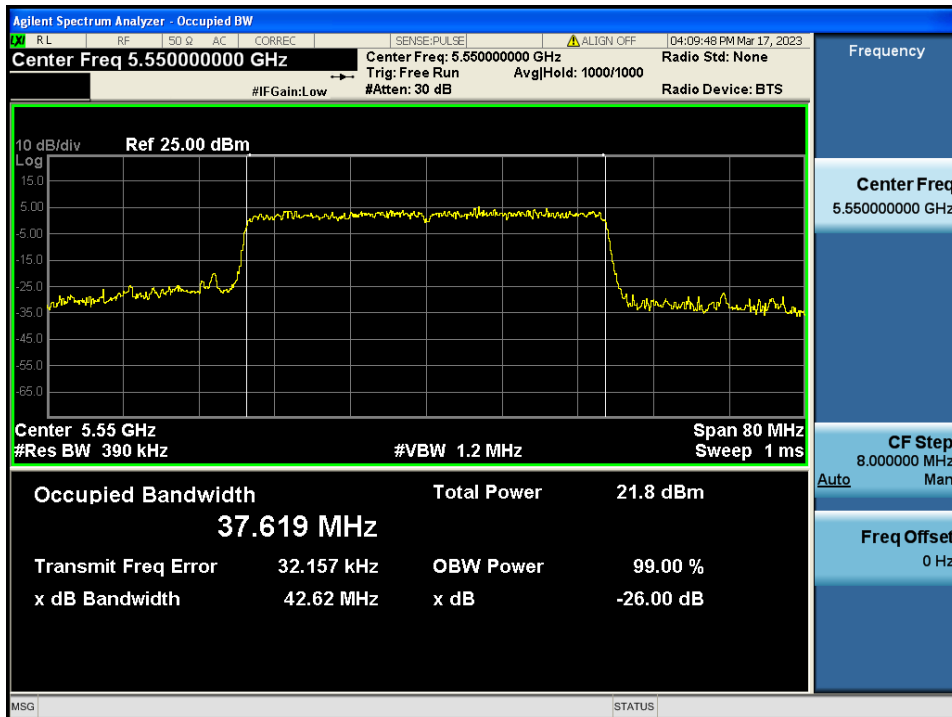


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 484 Tone & 65 RU & Ch.142

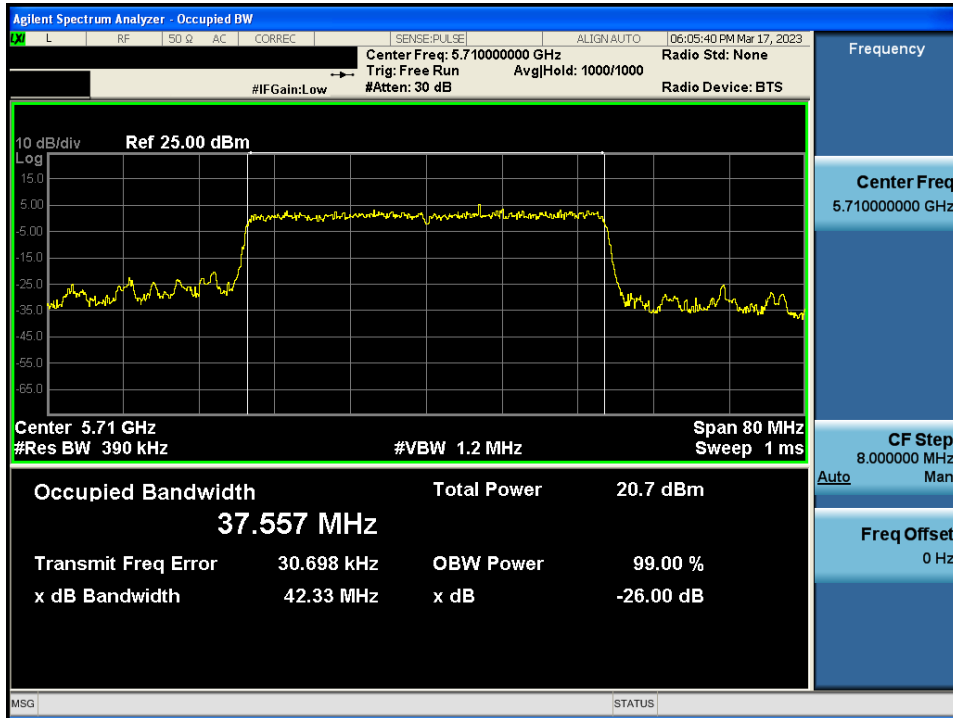


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & 996 Tone & 67 RU & Ch.42

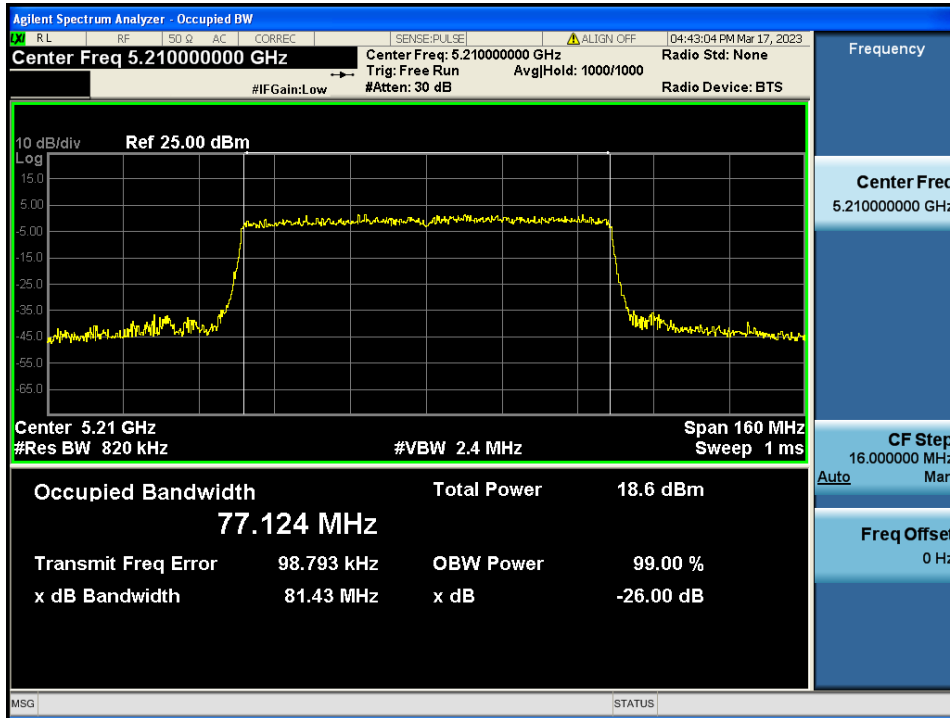


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & 996 Tone & 67 RU & Ch.58

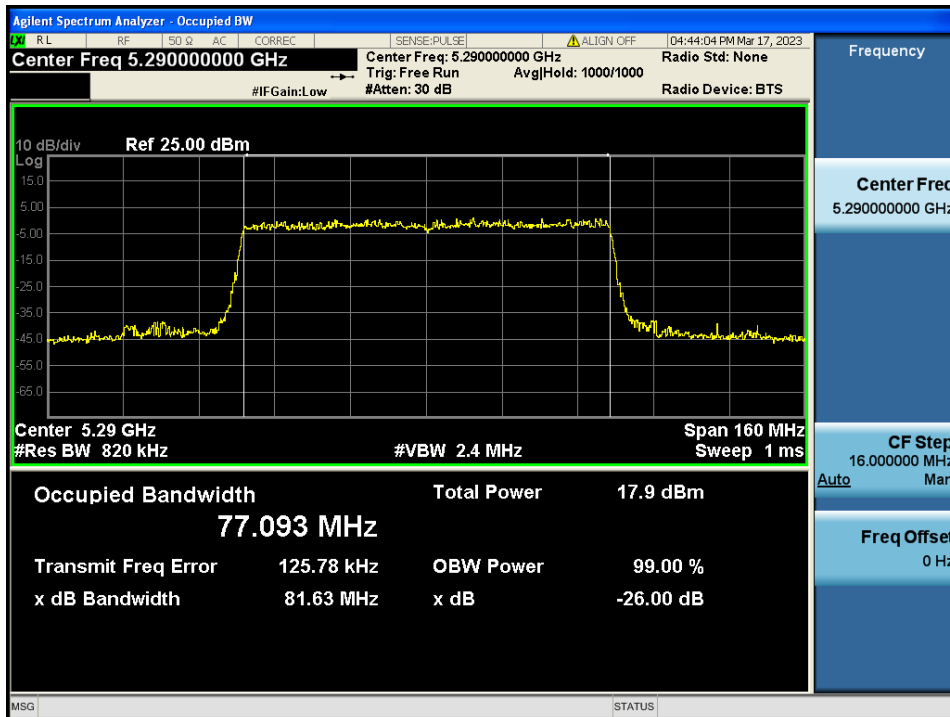


26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & 996 Tone & 67 RU & Ch.106

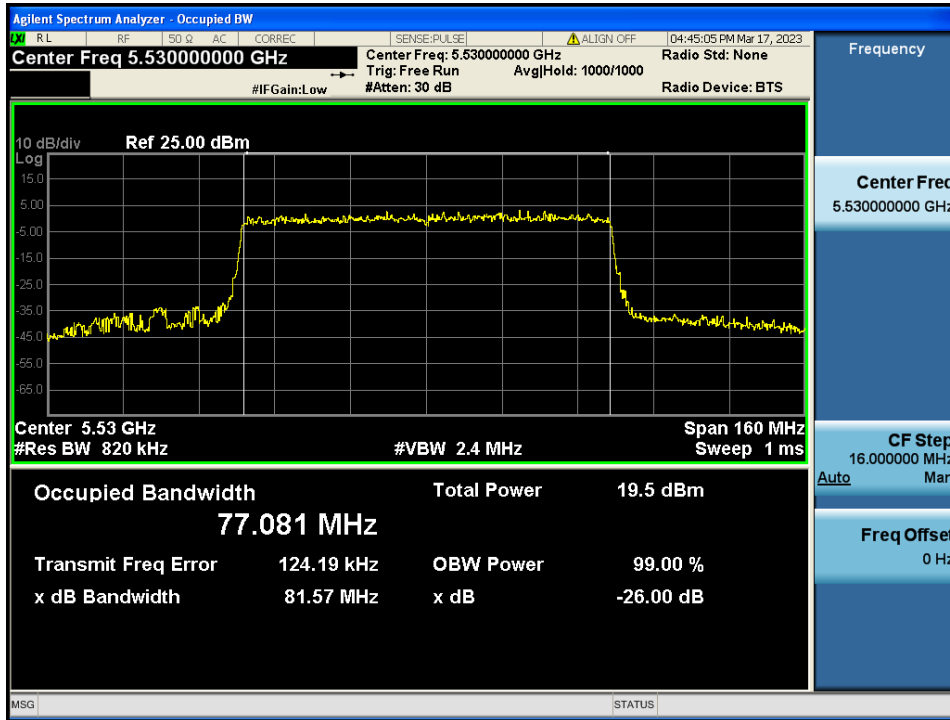

26 dB Bandwidth & Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & SU & Ch.138

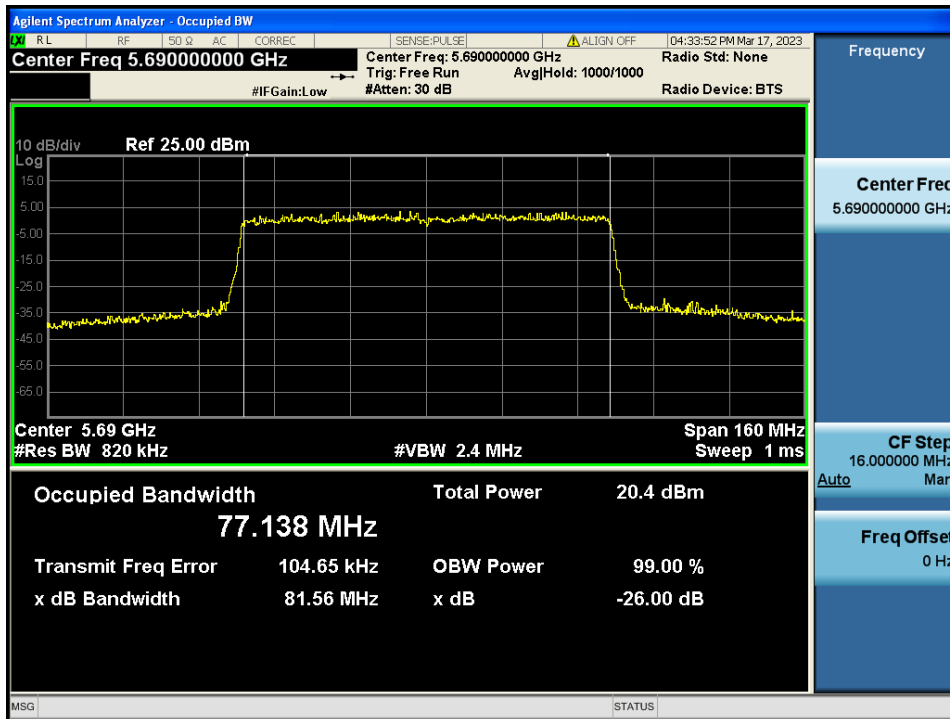

5.2 Minimum Emission Bandwidth (6 dB Bandwidth) & Occupied BW (99 %)

■ Test Requirements

- Emission Bandwidth (6 dB Bandwidth)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

- Occupied BW (99 %)

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

- Emission Bandwidth (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth $\geq 3 \times \text{RBW}$.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

- Occupied BW (99 %) : RSS-Gen[6.7]

1. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
2. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
3. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.

Test Results: Comply


Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]			
					6 dB BW		99 % BW	
					CDD			
					ANT 1	ANT 2	ANT 1	ANT 2
802.11ax(HE20)	U-NII 3	5 745	26	0	2.14	2.13	18.52	18.31
				4	2.69	2.69	17.16	17.00
				8	2.09	2.12	18.59	18.17
		5 785	26	0	2.09	2.07	18.46	18.41
				4	2.65	2.66	16.61	17.03
				8	2.10	2.13	18.51	18.34
		5 825	26	0	2.08	2.12	18.49	18.46
				4	2.69	2.69	17.23	17.01
				8	2.13	2.12	17.80	17.89
802.11ax(HE20)	U-NII 3	5 745	242	61	19.11	19.05	19.08	19.03
		5 785	242	61	19.08	19.13	19.09	19.03
		5 825	242	61	19.05	19.01	19.09	19.07
802.11ax(HE20)	U-NII 3	5 745	SU	NA	18.67	18.20	18.93	18.95
		5 785	SU	NA	18.76	18.76	18.96	18.93
		5 825	SU	NA	18.54	18.00	18.93	18.92

Mode	Band	Frequency [MHz]	Tone	RU Index	Test Result [MHz]			
					6 dB BW(MHz)		99 % BW(MHz)	
					CDD			
					ANT 1	ANT 2	ANT 1	ANT 2
802.11ax(HE40)	U-NII 3	5 755	26	0	2.10	2.16	18.15	18.01
				8	2.13	2.19	21.34	20.52
				17	2.09	2.11	18.20	18.04
		5 795	26	0	2.06	2.11	17.65	18.16
				8	2.16	2.18	21.21	20.71
				17	2.10	2.12	18.17	18.08
802.11ax(HE40)	U-NII 3	5 755	484	65	37.93	37.72	37.65	37.62
		5 795	484	65	37.85	37.69	37.63	37.57
		5 755	SU	NA	37.69	37.62	37.67	37.55
		5 795	SU	NA	37.66	37.34	37.67	37.57
802.11ax(HE80)	U-NII 3	5 775	26	0	2.20	2.22	18.63	18.83
				18	2.81	2.80	35.88	35.97
				36	2.20	2.22	19.21	18.81
802.11ax(HE80)	U-NII 3	5 775	996	67	77.88	77.73	77.33	77.02
			SU	NA	77.60	77.55	77.12	77.13

Note: The worst-case plots(Minimum 6 dB Bandwidth) are reported.


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.149

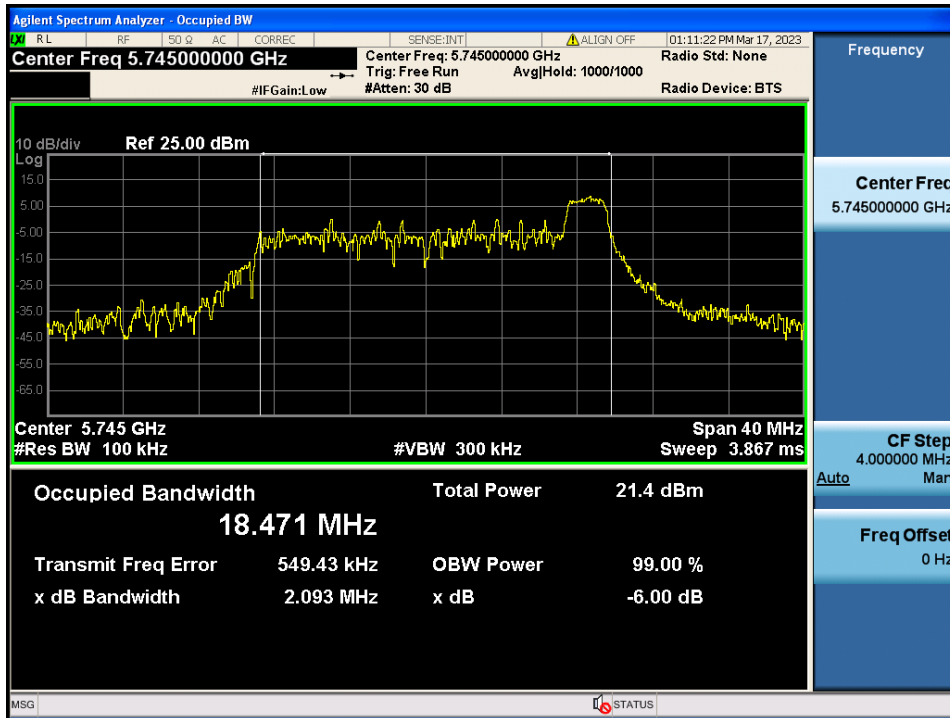


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 0 RU & Ch.157

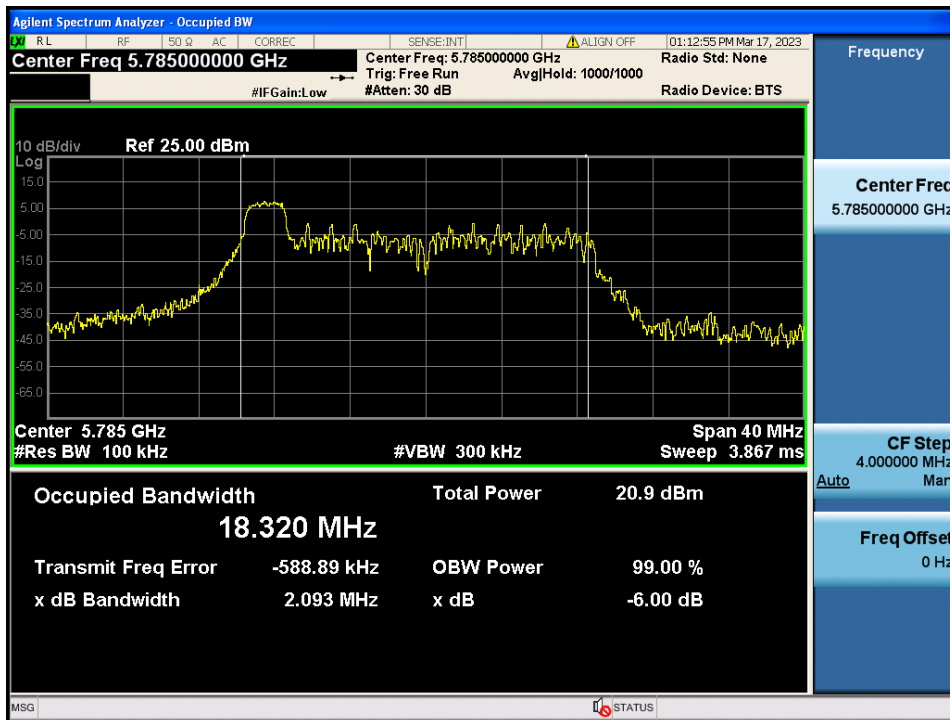


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 0 RU & Ch.165

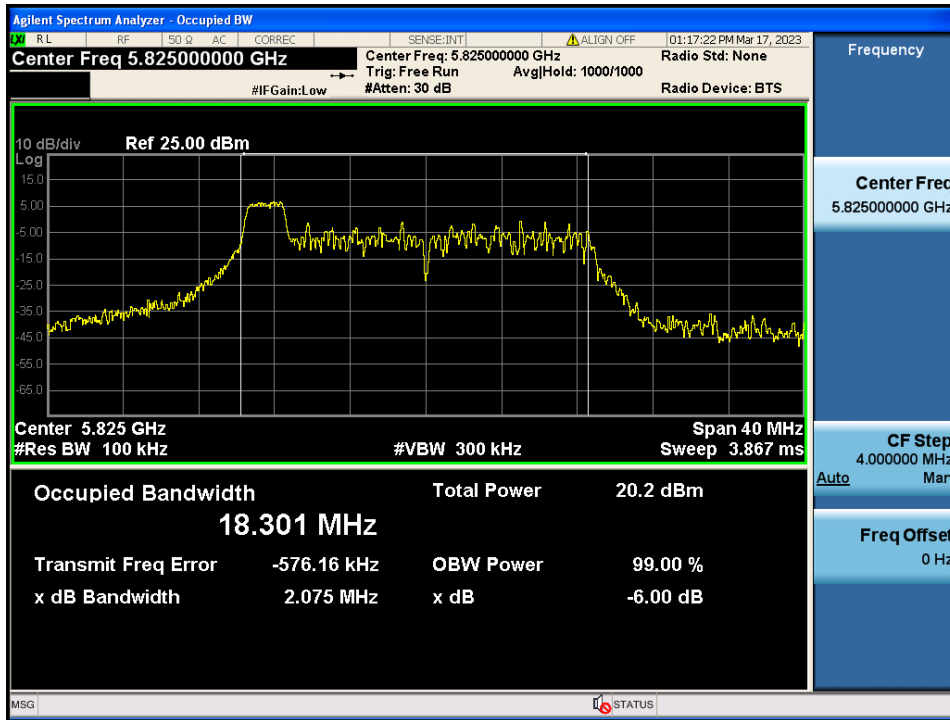


6 dB Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 17 RU & Ch.151

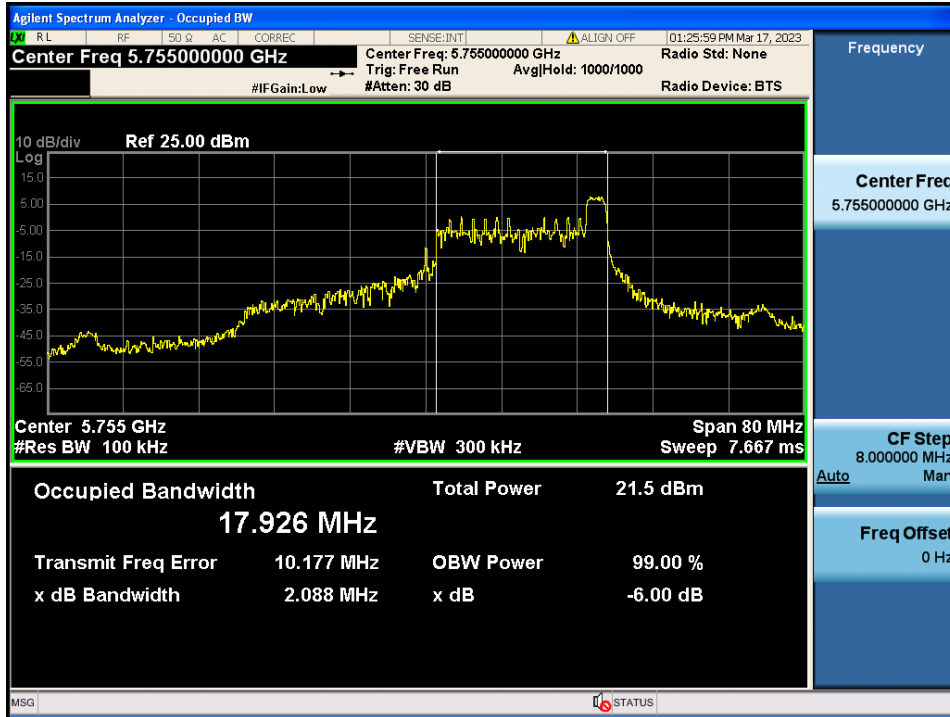


6 dB Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 0 RU & Ch.159

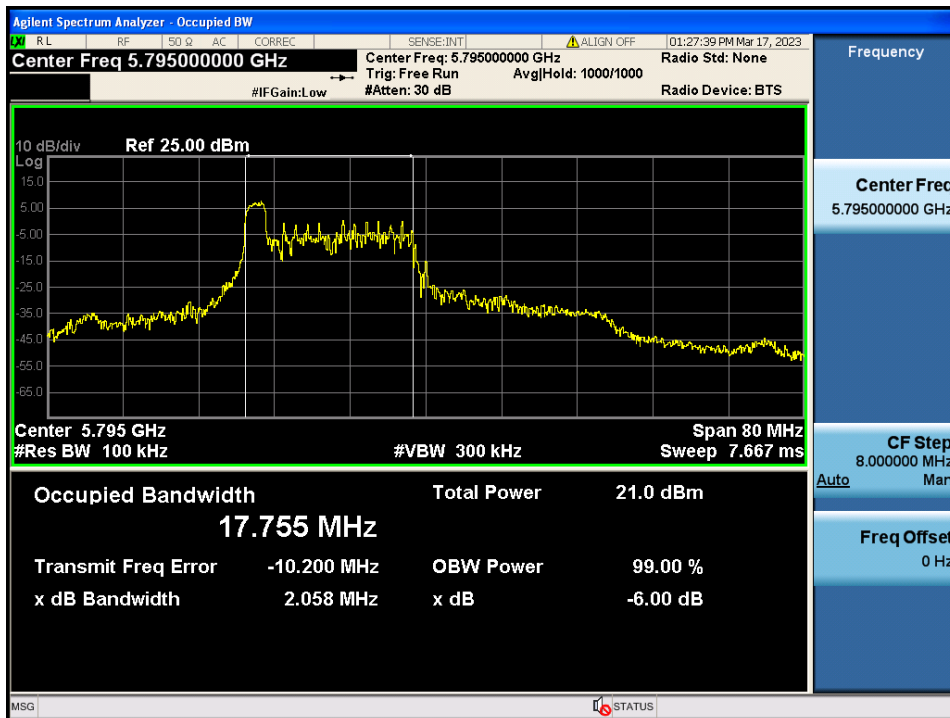


6 dB Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & 26 Tone & 0 RU & Ch.155

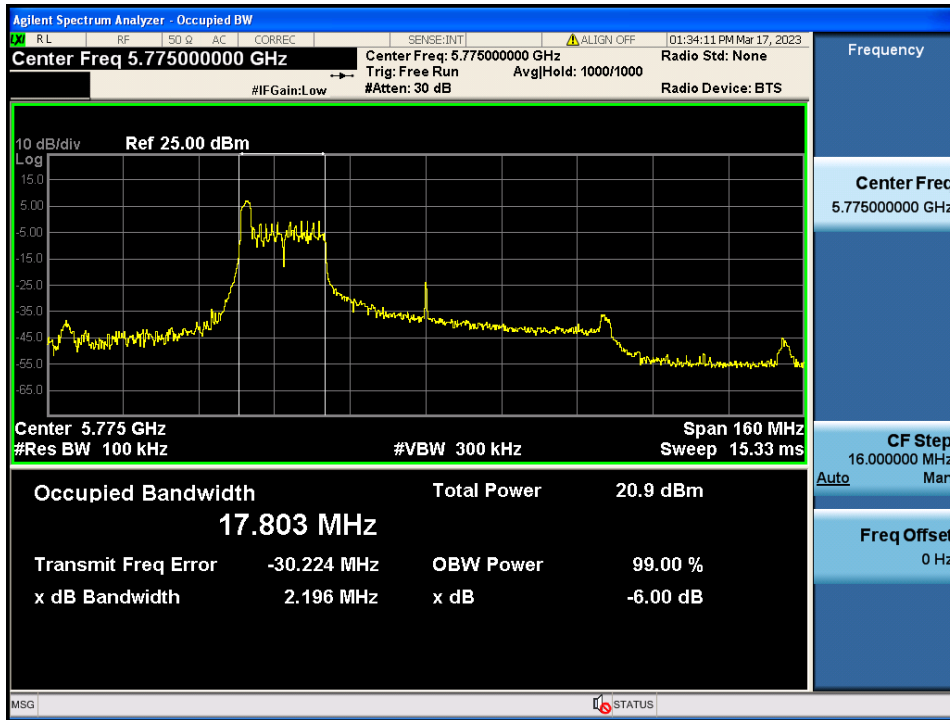


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 26 Tone & 8 RU & Ch.149

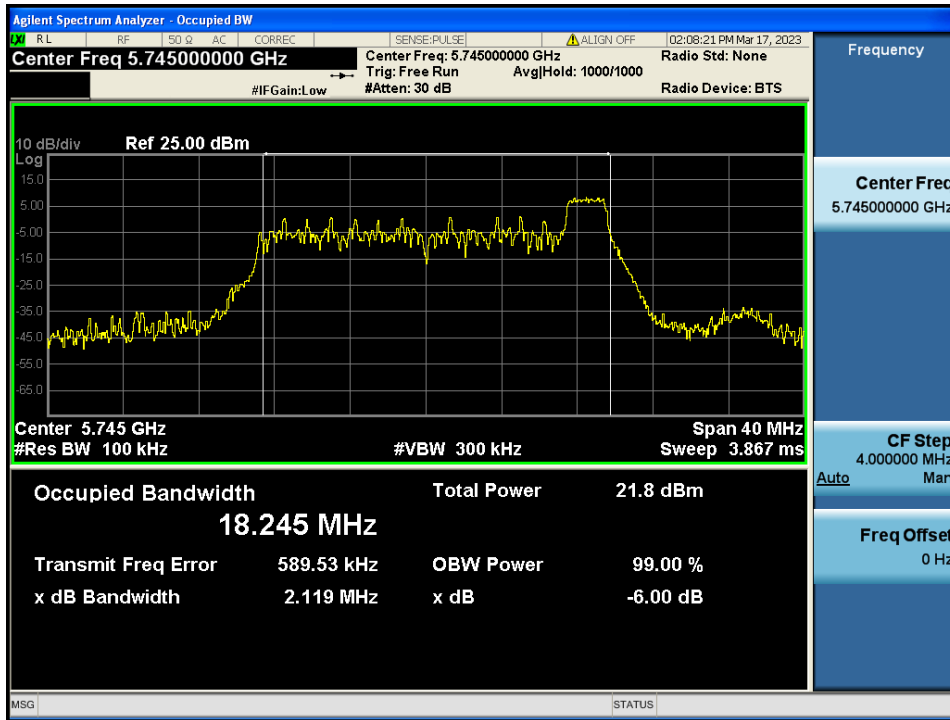


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 26 Tone & 0 RU & Ch.157

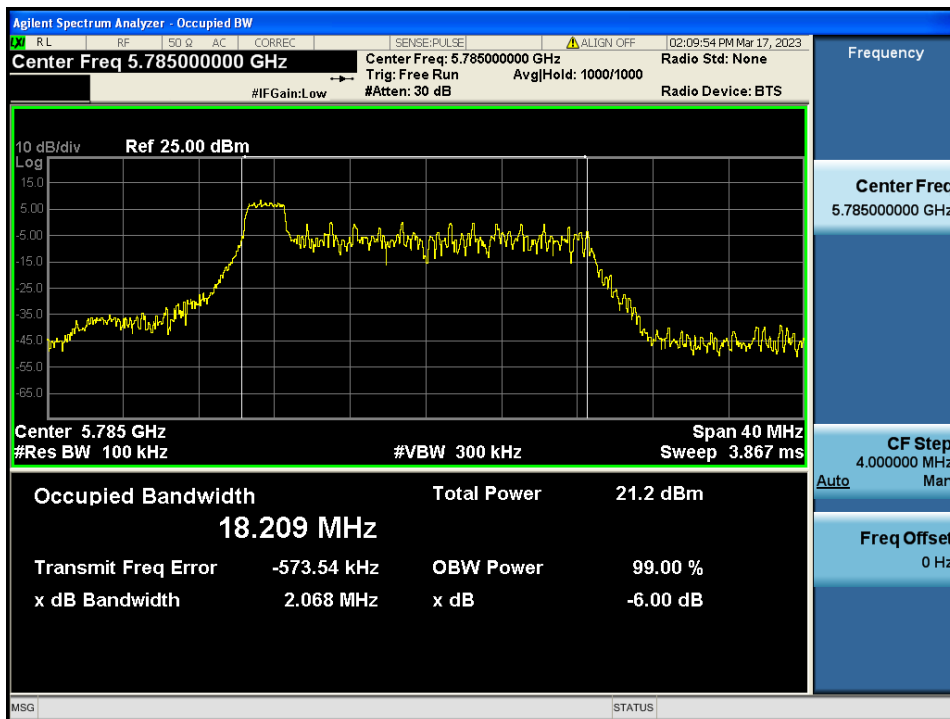


6 dB Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 26 Tone & 0 RU & Ch.165

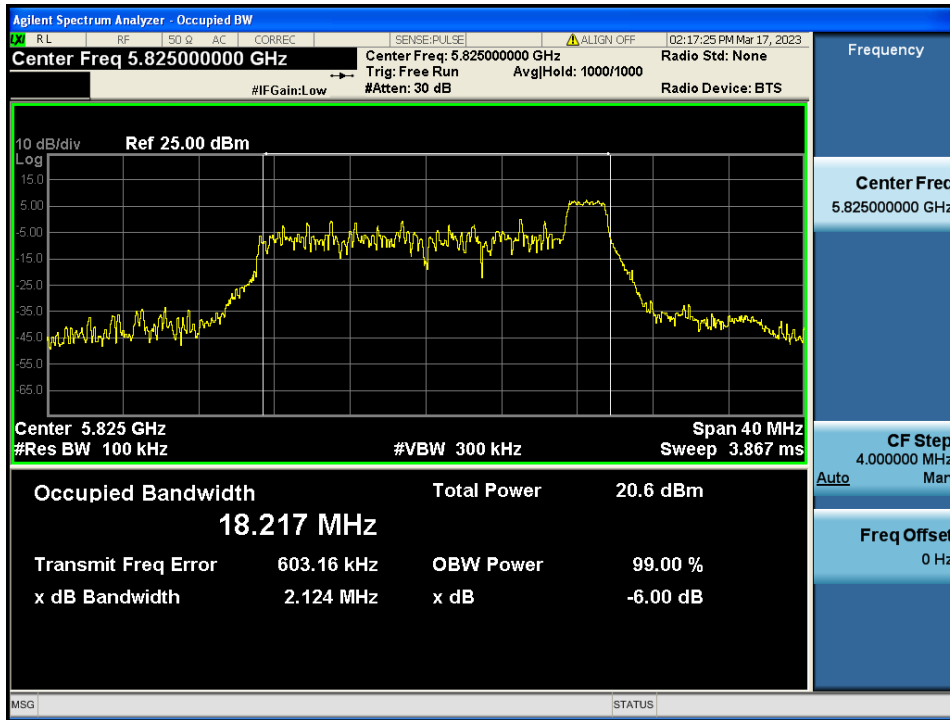


6 dB Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 26 Tone & 17 RU & Ch.151

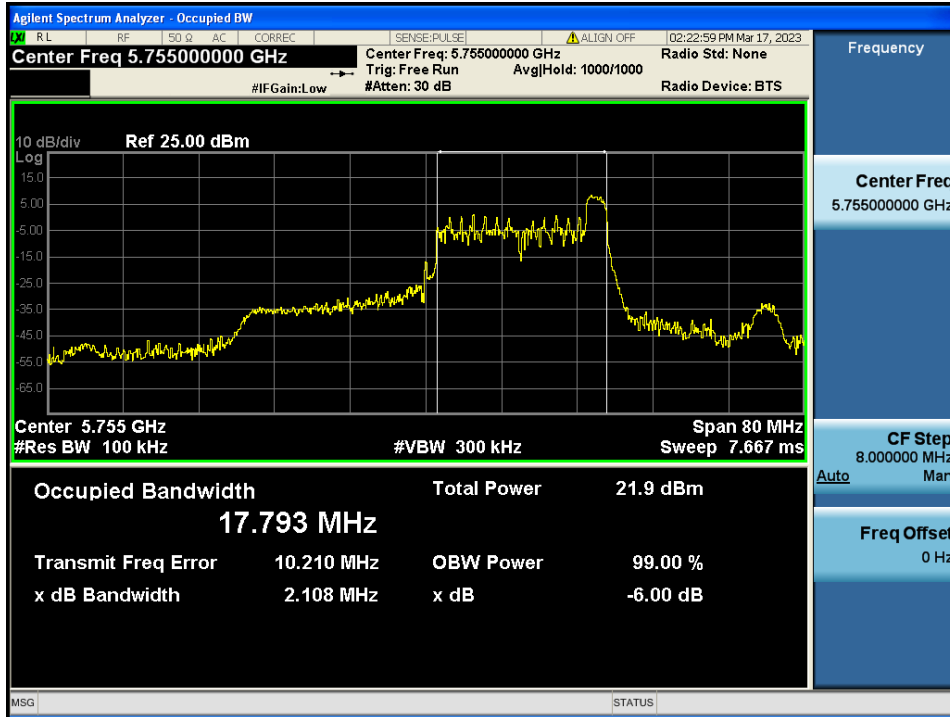


6 dB Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 26 Tone & 0 RU & Ch.159

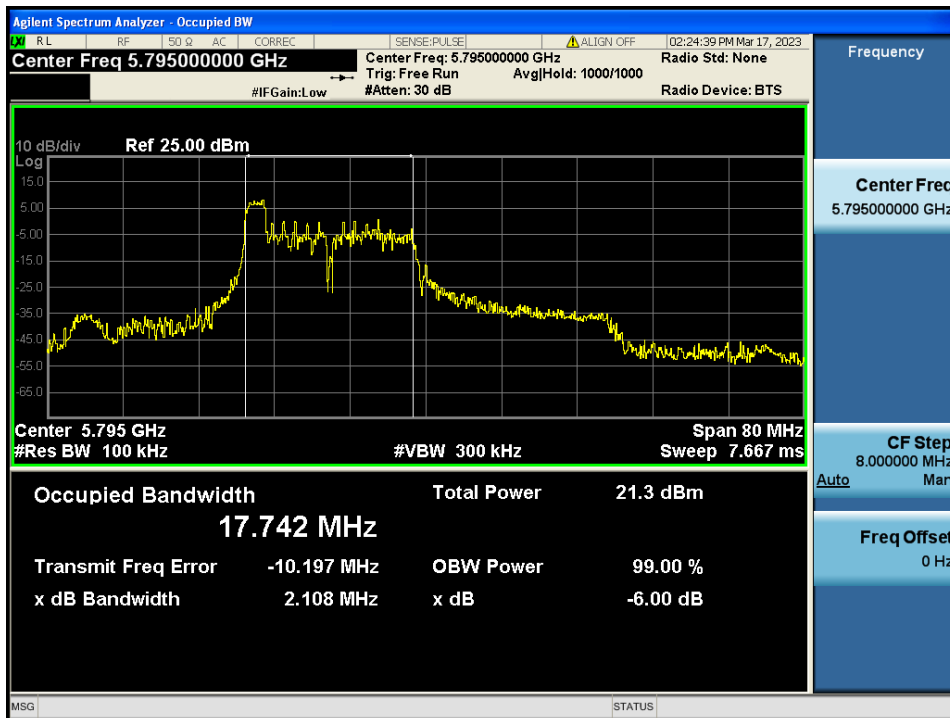


6 dB Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & 26 Tone & 0 RU & Ch.155

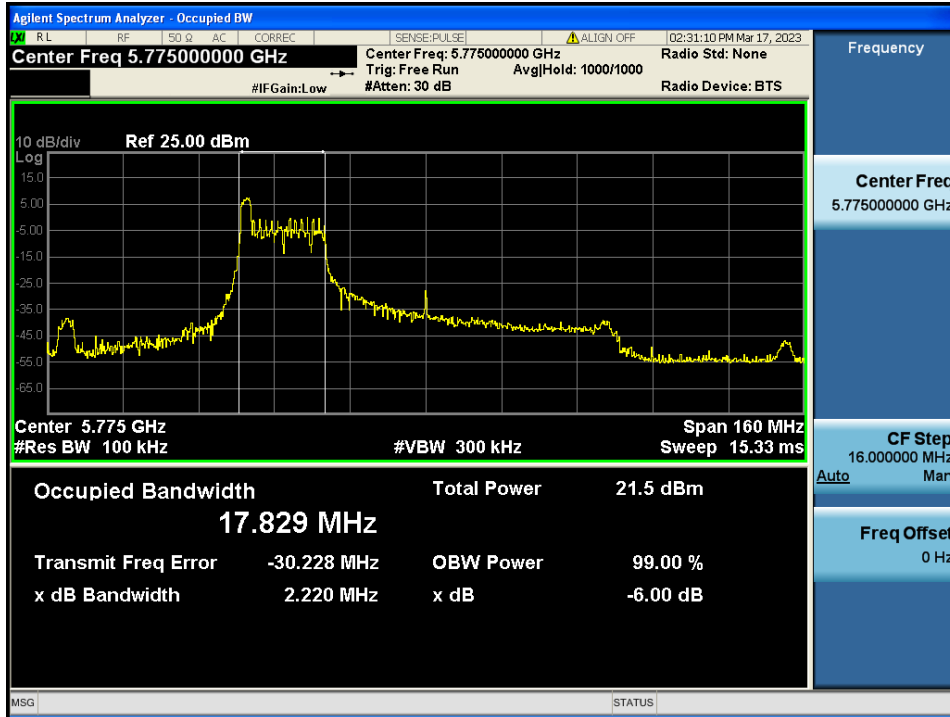


Note: The worst-case plots(Maximum Occupied Bandwidth) are reported.

Occupied Bandwidth Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.149

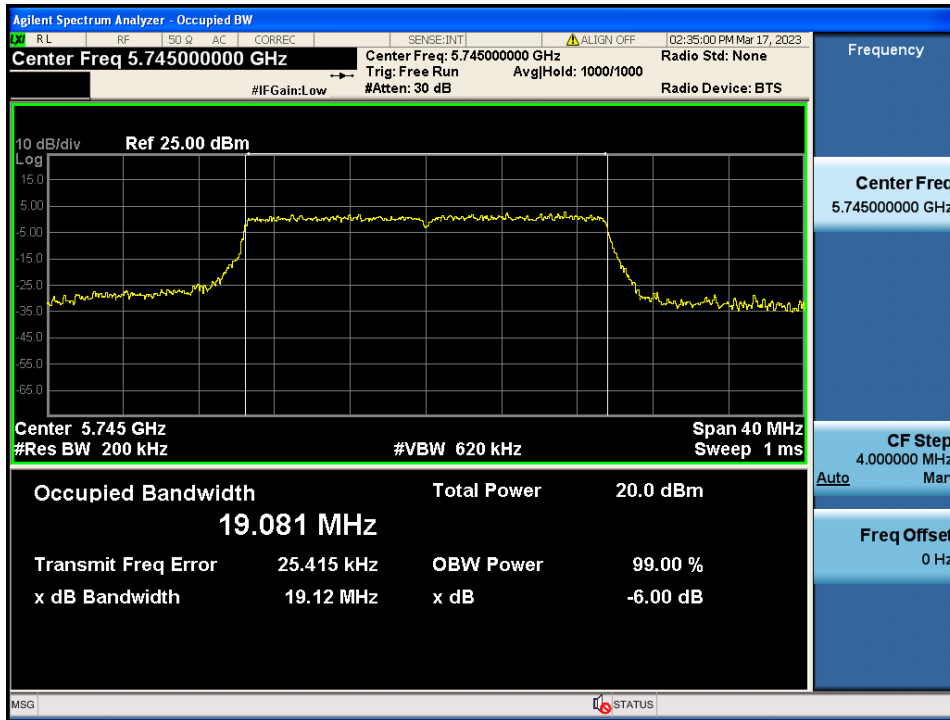


Occupied Bandwidth Test Mode: 802.11ax HE20 & ANT 1 & 242 Tone & 61 RU & Ch.157

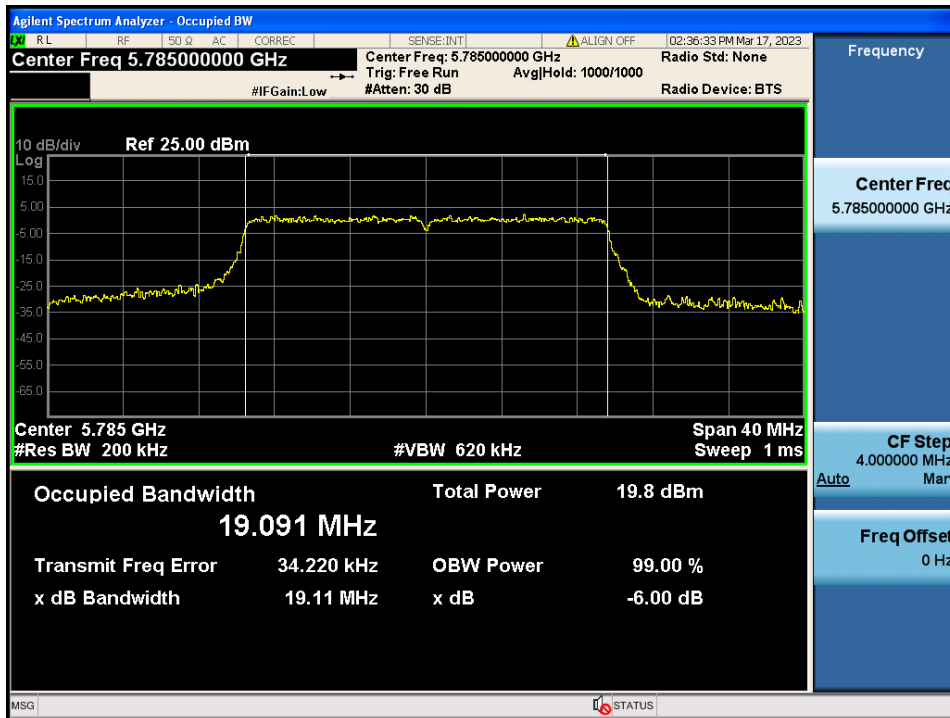


Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 61 RU & Ch.165

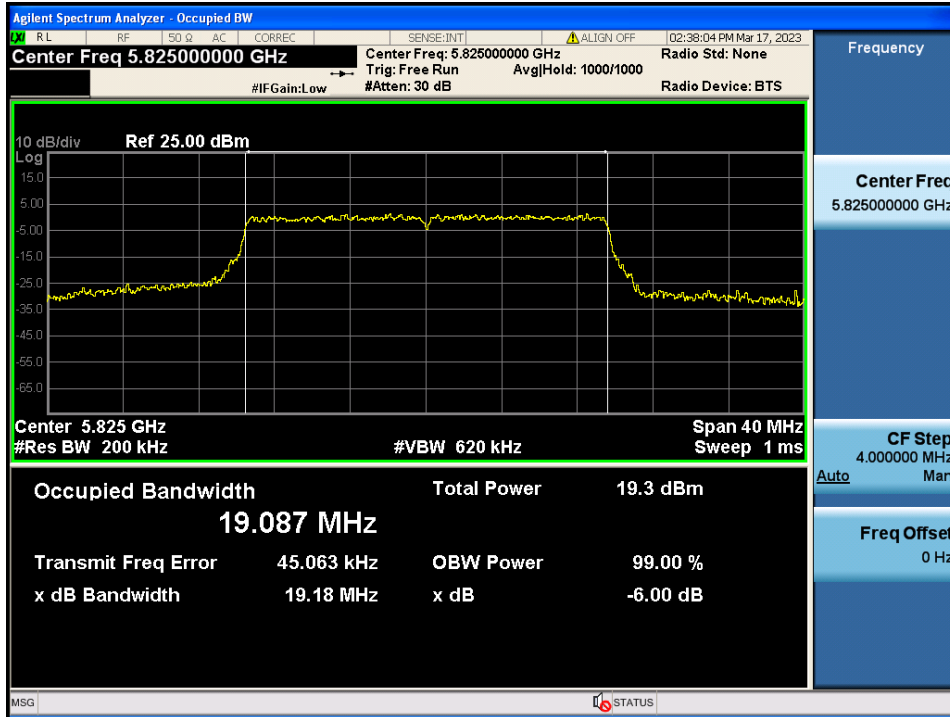


Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.151

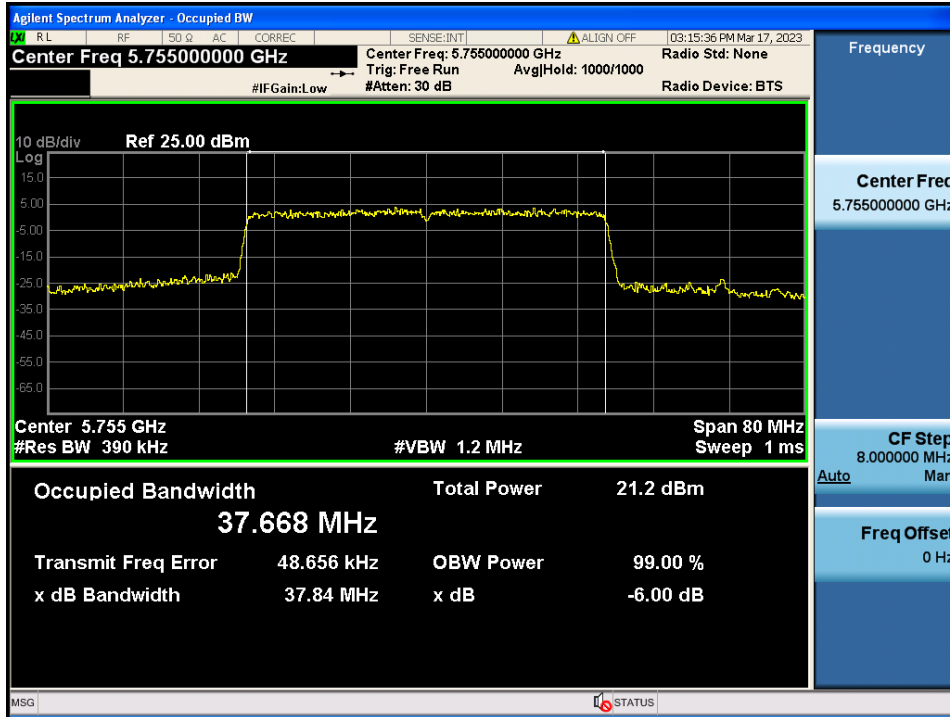


Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 1 & SU & Ch.159

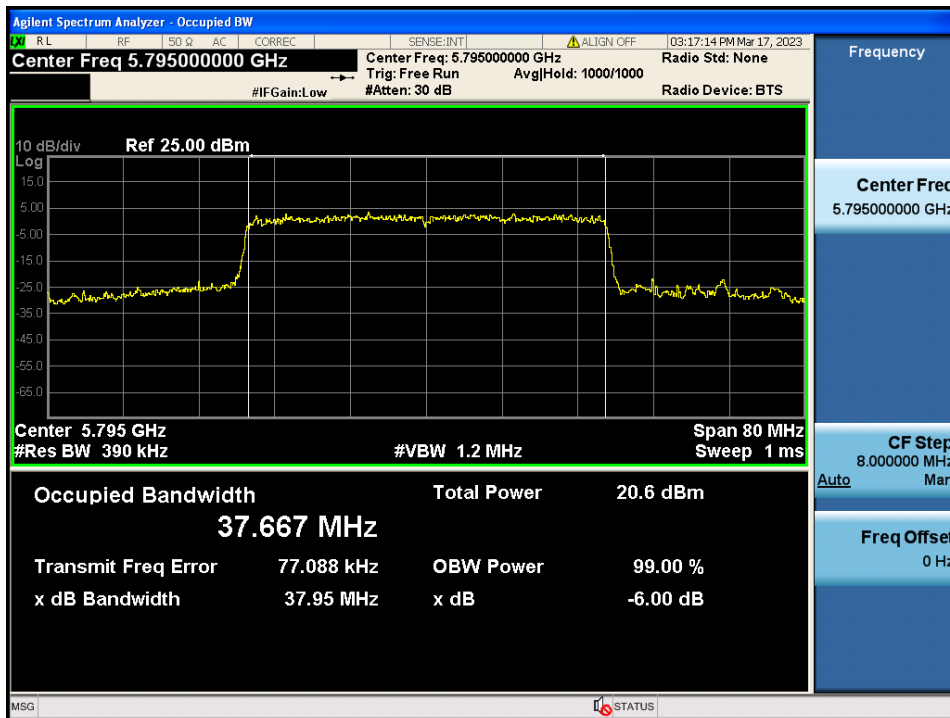


Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 1 & 996 Tone & 67 RU & Ch.155

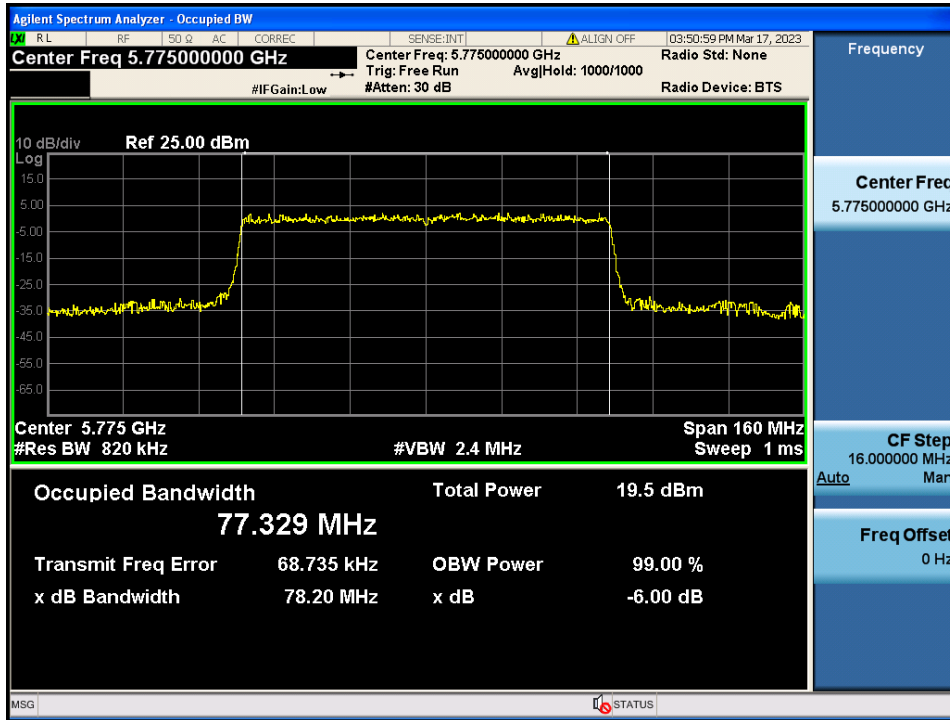


Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.149

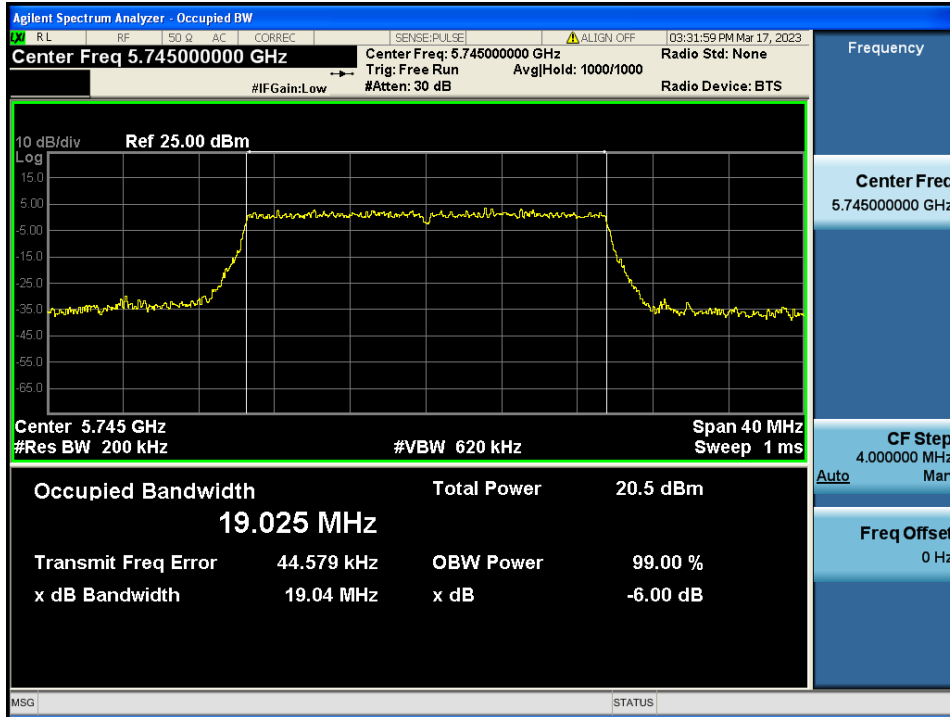


Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.157

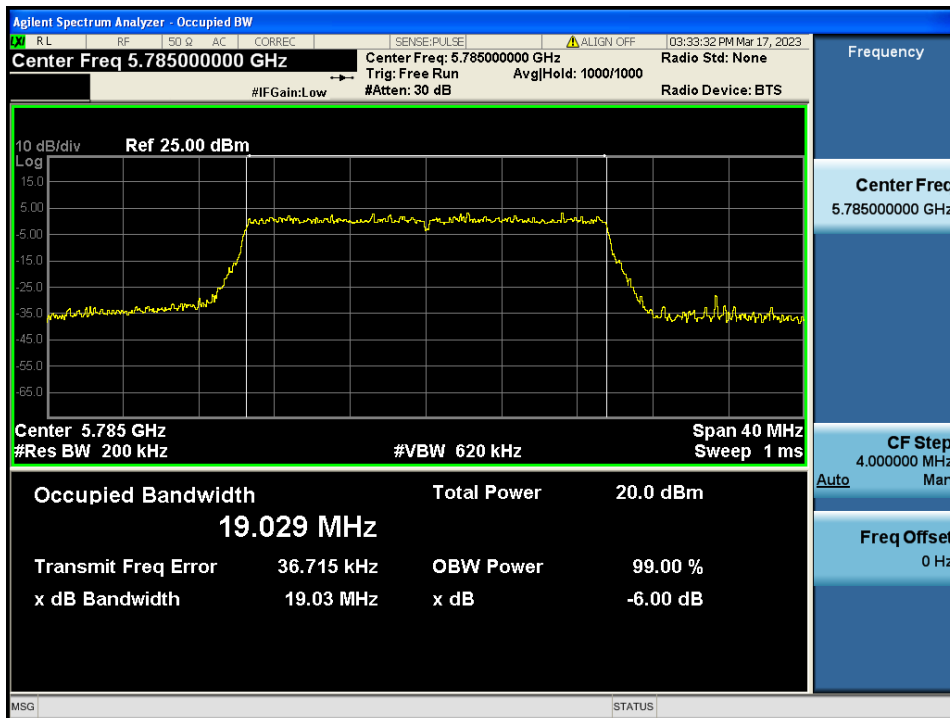


Occupied Bandwidth

Test Mode: 802.11ax HE20 & ANT 2 & 242 Tone & 61 RU & Ch.165

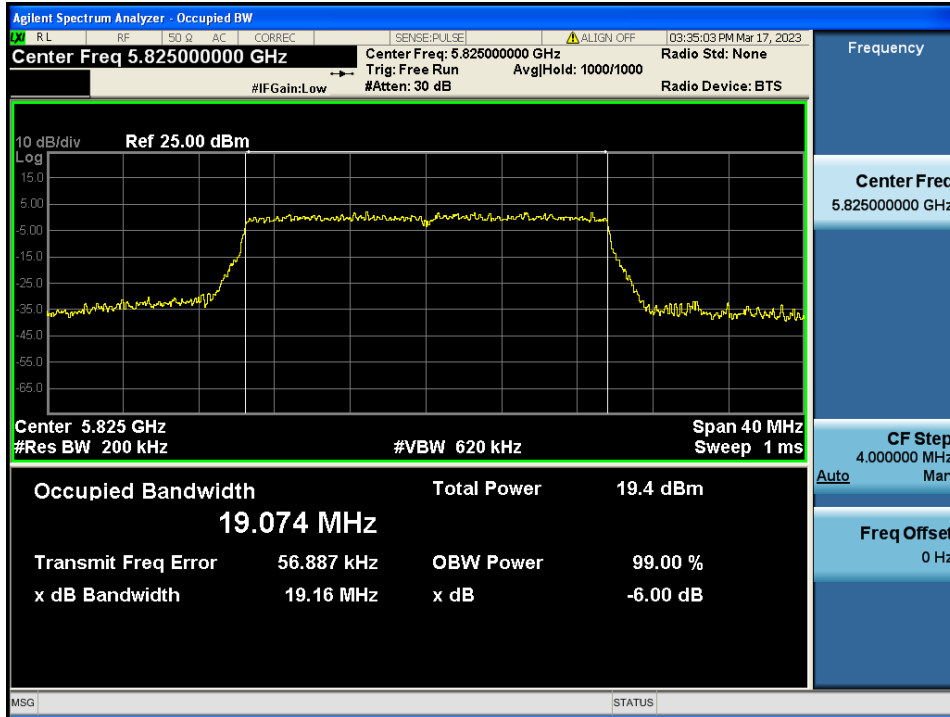


Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 484 Tone & 65 RU & Ch.151

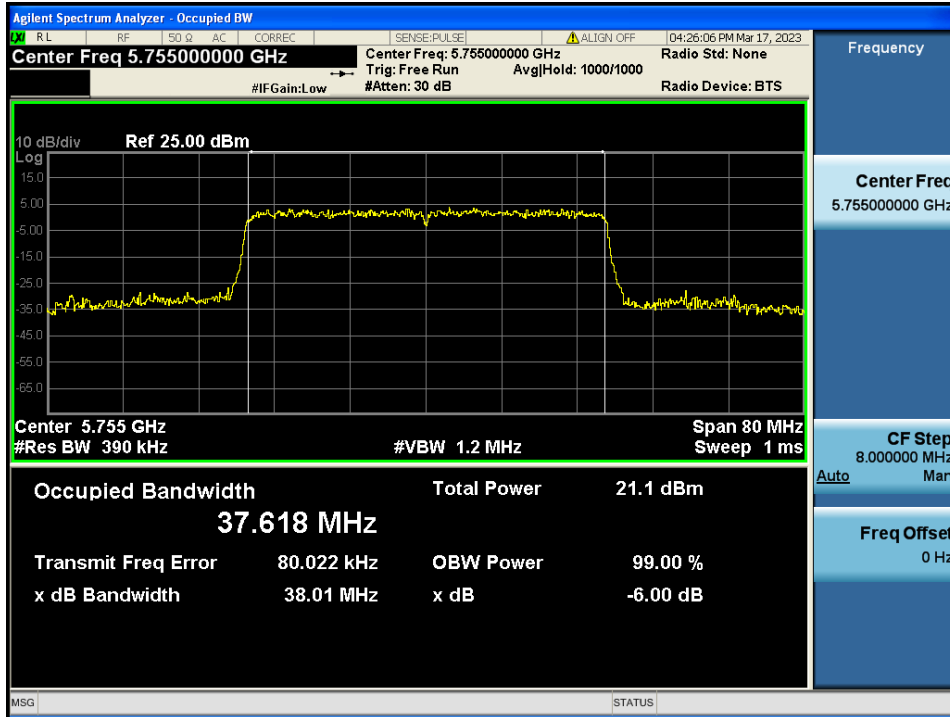


Occupied Bandwidth

Test Mode: 802.11ax HE40 & ANT 2 & 484 Tone & 65 RU & Ch.159

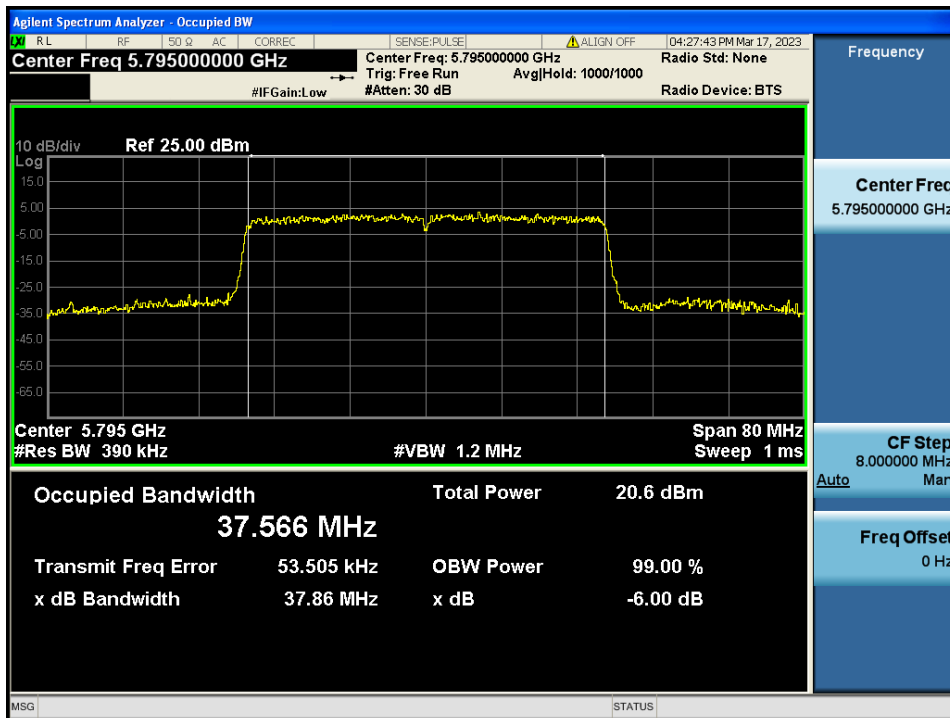

Occupied Bandwidth

Test Mode: 802.11ax HE80 & ANT 2 & 996 Tone & SU & Ch.155

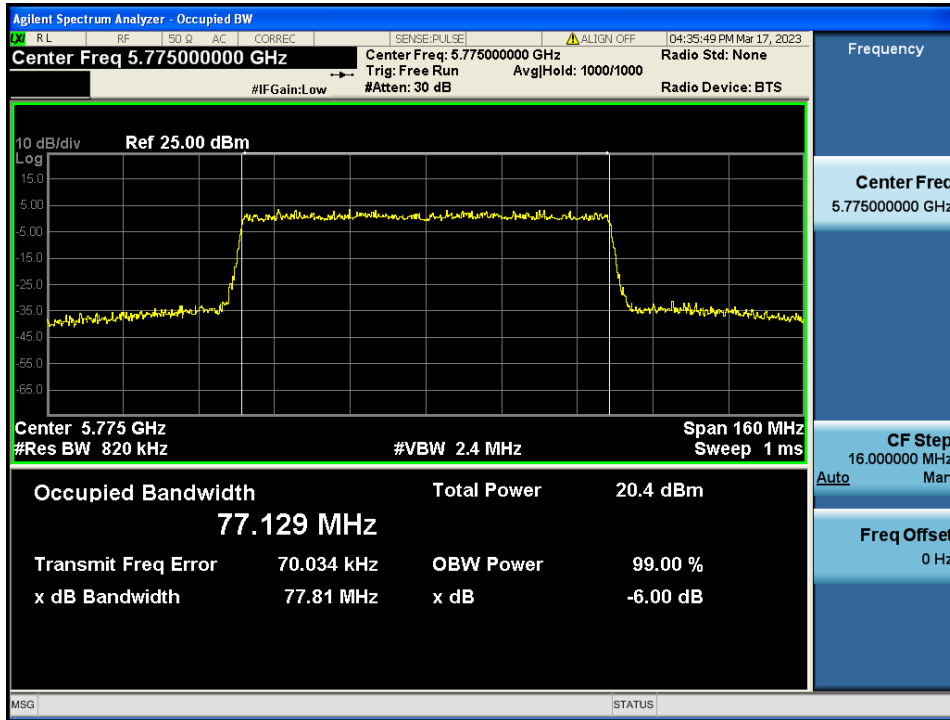

5.3 Maximum Conducted Output Power

■ Test Requirements

Part. 15.407(a)

(1) For the band 5.15 GHz - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15 GHz - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) **For the 5.25 GHz - 5.35 GHz and 5.47 GHz - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.** If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) **For the band 5.725 GHz - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.** If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247[6.2]
(1) For band 5 150 MHz – 5 250 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For band 5 250 MHz – 5 350 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less.

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


(3) For band 5 470 MHz – 5 600 MHz and 5 650 MHz – 5 725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(4) For band 5 725 MHz – 5 850 MHz

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

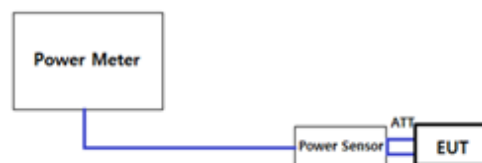■ Test Configuration


Method PM-G

■ Test Procedure
Method PM-G of KDB789033 D02v02r01

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

■ Test Results: **Comply**

- Output Power: CDD

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE20	5 180	26	0	2.83	3.19	6.02	4.60	10.62
			4	3.09	3.68	6.41	4.60	11.01
			8	2.61	3.59	6.14	4.60	10.74
	5 200	26	0	2.60	3.24	5.94	4.60	10.54
			4	2.95	3.59	6.29	4.60	10.89
			8	2.72	3.42	6.09	4.60	10.69
	5 240	26	0	2.91	3.36	6.15	4.60	10.75
			4	3.40	3.56	6.49	4.60	11.09
			8	3.10	3.46	6.29	4.60	10.89
	5 260	26	0	7.46	7.98	10.74	4.94	15.68
			4	7.65	8.05	10.86	4.94	15.80
			8	7.71	8.12	10.93	4.94	15.87
	5 300	26	0	7.58	7.89	10.75	4.94	15.69
			4	7.81	8.12	10.98	4.94	15.92
			8	7.94	8.03	11.00	4.94	15.94
	5 320	26	0	7.77	7.83	10.81	4.94	15.75
			4	8.04	8.13	11.10	4.94	16.04
			8	7.95	8.07	11.02	4.94	15.96
	5 500	26	0	8.61	8.66	11.65	5.03	16.68
			4	8.69	8.98	11.85	5.03	16.88
			8	8.82	8.71	11.78	5.03	16.81
	5 580	26	0	8.42	8.40	11.42	5.03	16.45
			4	8.73	8.59	11.67	5.03	16.70
			8	8.63	8.56	11.61	5.03	16.64
	5 720	26	0	7.98	7.42	10.72	5.03	15.75
			4	8.35	7.84	11.11	5.03	16.14
			8	8.22	7.80	11.03	5.03	16.06
	5 745	26	0	11.53	11.54	14.55	5.13	19.68
			4	11.78	11.80	14.80	5.13	19.93
			8	11.84	11.63	14.75	5.13	19.88
	5 785	26	0	11.39	11.12	14.27	5.13	19.40
			4	11.73	11.46	14.61	5.13	19.74
			8	11.54	11.28	14.42	5.13	19.55
	5 825	26	0	11.15	11.08	14.13	5.13	19.26
			4	11.25	11.55	14.41	5.13	19.54
			8	11.46	11.37	14.43	5.13	19.56

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE20	5 180	52	37	4.25	5.17	7.74	4.60	12.34
			38	4.23	5.36	7.84	4.60	12.44
			40	4.32	5.38	7.89	4.60	12.49
	5 200	52	37	4.34	5.30	7.86	4.60	12.46
			38	4.52	5.58	8.09	4.60	12.69
			40	4.46	5.42	7.98	4.60	12.58
	5 240	52	37	4.52	5.23	7.90	4.60	12.50
			38	4.67	5.46	8.09	4.60	12.69
			40	4.68	5.43	8.08	4.60	12.68
	5 260	52	37	8.76	9.06	11.92	4.94	16.86
			38	8.77	9.31	12.06	4.94	17.00
			40	8.80	9.20	12.01	4.94	16.95
	5 300	52	37	8.49	8.82	11.67	4.94	16.61
			38	8.75	9.01	11.89	4.94	16.83
			40	8.68	8.98	11.84	4.94	16.78
	5 320	52	37	8.87	8.86	11.88	4.94	16.82
			38	9.13	9.08	12.12	4.94	17.06
			40	8.89	9.05	11.98	4.94	16.92
	5 500	52	37	9.29	9.47	12.39	5.03	17.42
			38	9.43	9.44	12.45	5.03	17.48
			40	9.49	9.39	12.45	5.03	17.48
	5 580	52	37	9.17	9.14	12.17	5.03	17.20
			38	9.49	9.36	12.44	5.03	17.47
			40	9.41	9.34	12.39	5.03	17.42
	5 720	52	37	9.00	8.38	11.71	5.03	16.74
			38	9.16	8.66	11.93	5.03	16.96
			40	9.20	8.65	11.94	5.03	16.97
	5 745	52	37	11.66	11.57	14.63	5.13	19.76
			38	11.79	11.85	14.83	5.13	19.96
			40	11.68	11.81	14.76	5.13	19.89
5 785	52	37	11.25	11.12	14.20	5.13	19.33	
		38	11.63	11.34	14.50	5.13	19.63	
		40	11.51	11.30	14.42	5.13	19.55	
5 825	52	37	11.65	11.16	14.42	5.13	19.55	
		38	11.32	11.37	14.36	5.13	19.49	
		40	11.41	11.43	14.43	5.13	19.56	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE20	5 180	106	53	7.46	8.21	10.86	4.60	15.46
			54	7.57	8.34	10.98	4.60	15.58
	5 200	106	53	7.74	8.05	10.91	4.60	15.51
			54	7.71	8.23	10.99	4.60	15.59
	5 240	106	53	7.76	8.26	11.03	4.60	15.63
			54	7.72	8.20	10.98	4.60	15.58
	5 260	106	53	11.02	11.45	14.25	4.94	19.19
			54	11.09	11.64	14.38	4.94	19.32
	5 300	106	53	11.23	11.49	14.37	4.94	19.31
			54	11.21	11.56	14.40	4.94	19.34
	5 320	106	53	11.17	11.43	14.31	4.94	19.25
			54	11.35	11.50	14.44	4.94	19.38
	5 500	106	53	12.37	12.05	15.22	5.03	20.25
			54	12.68	12.10	15.41	5.03	20.44
	5 580	106	53	12.28	11.57	14.95	5.03	19.98
			54	12.45	12.00	15.24	5.03	20.27
	5 720	106	53	11.72	10.94	14.36	5.03	19.39
			54	11.84	11.23	14.56	5.03	19.59
	5 745	106	53	11.69	11.34	14.53	5.13	19.66
			54	11.67	11.68	14.69	5.13	19.82
	5 785	106	53	11.37	11.22	14.31	5.13	19.44
			54	11.54	11.23	14.40	5.13	19.53
	5 825	106	53	11.52	10.93	14.25	5.13	19.38
			54	11.76	11.27	14.53	5.13	19.66

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE20	5 180	242	61	10.22	11.17	13.73	4.60	18.33
	5 200	242	61	10.23	11.22	13.76	4.60	18.36
	5 240	242	61	10.51	11.34	13.96	4.60	18.56
	5 260	242	61	10.94	11.43	14.20	4.94	19.14
	5 300	242	61	11.17	11.37	14.28	4.94	19.22
	5 320	242	61	9.61	9.79	12.71	4.94	17.65
	5 500	242	61	10.56	10.28	13.43	5.03	18.46
	5 580	242	61	12.31	11.80	15.07	5.03	20.10
	5 720	242	61	11.64	11.08	14.38	5.03	19.41
	5 745	242	61	11.46	11.44	14.46	5.13	19.59
	5 785	242	61	11.53	11.32	14.44	5.13	19.57
802.11ax HE20	5 825	242	61	11.06	10.89	13.99	5.13	19.12
	5 180	SU	NA	9.23	10.07	12.68	4.60	17.28
	5 200	SU	NA	9.13	10.31	12.77	4.60	17.37
	5 240	SU	NA	9.51	10.12	12.84	4.60	17.44
	5 260	SU	NA	10.89	11.38	14.15	4.94	19.09
	5 300	SU	NA	11.05	11.25	14.16	4.94	19.10
	5 320	SU	NA	11.11	11.32	14.23	4.94	19.17
	5 500	SU	NA	11.23	11.15	14.20	5.03	19.23
	5 580	SU	NA	12.36	11.60	15.01	5.03	20.04
	5 720	SU	NA	11.52	11.04	14.30	5.03	19.33
	5 745	SU	NA	11.35	11.52	14.45	5.13	19.58
5 785	SU	NA	11.25	11.12	14.20	5.13	19.33	
5 825	SU	NA	11.01	10.80	13.92	5.13	19.05	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE40	5 190	26	0	2.23	2.80	5.53	4.60	10.13
			8	3.11	3.41	6.27	4.60	10.87
			17	2.59	2.67	5.64	4.60	10.24
	5 230	26	0	2.07	2.89	5.51	4.60	10.11
			8	2.95	3.51	6.25	4.60	10.85
			17	2.66	3.16	5.93	4.60	10.53
	5 270	26	0	7.05	7.61	10.35	4.94	15.29
			8	7.78	8.39	11.11	4.94	16.05
			17	7.32	7.70	10.52	4.94	15.46
	5 310	26	0	7.25	7.59	10.43	4.94	15.37
			8	8.11	8.41	11.27	4.94	16.21
			17	7.62	7.63	10.64	4.94	15.58
	5 510	26	0	8.05	8.36	11.22	5.03	16.25
			8	8.97	9.21	12.10	5.03	17.13
			17	8.54	8.37	11.47	5.03	16.50
	5 550	26	0	8.32	8.32	11.33	5.03	16.36
			8	9.16	9.13	12.16	5.03	17.19
			17	8.25	8.41	11.34	5.03	16.37
	5 710	26	0	7.43	7.47	10.46	5.03	15.49
			8	8.41	8.19	11.31	5.03	16.34
			17	7.64	7.45	10.56	5.03	15.59
	5 755	26	0	11.39	11.36	14.39	5.13	19.52
			8	12.19	11.91	15.06	5.13	20.19
			17	11.42	11.23	14.34	5.13	19.47
	5 795	26	0	10.53	10.62	13.59	5.13	18.72
			8	12.04	11.84	14.95	5.13	20.08
			17	10.67	10.94	13.82	5.13	18.95

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE40	5 190	52	37	3.69	4.90	7.35	4.60	11.95
			40	4.55	5.51	8.07	4.60	12.67
			44	4.25	4.91	7.60	4.60	12.20
	5 230	52	37	4.46	4.98	7.74	4.60	12.34
			40	5.16	5.68	8.44	4.60	13.04
			44	4.58	5.23	7.93	4.60	12.53
	5 270	52	37	8.46	8.63	11.56	4.94	16.50
			40	8.89	9.26	12.09	4.94	17.03
			44	8.46	8.87	11.68	4.94	16.62
	5 310	52	37	8.13	8.78	11.48	4.94	16.42
			40	8.97	9.43	12.22	4.94	17.16
			44	8.64	8.74	11.70	4.94	16.64
	5 510	52	37	9.10	9.10	12.11	5.03	17.14
			40	9.41	9.46	12.45	5.03	17.48
			44	9.32	9.43	12.39	5.03	17.42
	5 550	52	37	9.12	9.10	12.12	5.03	17.15
			40	9.46	9.49	12.49	5.03	17.52
			44	9.32	9.35	12.35	5.03	17.38
	5 710	52	37	8.68	8.43	11.57	5.03	16.60
			40	9.38	9.25	12.33	5.03	17.36
			44	9.05	8.63	11.86	5.03	16.89
	5 755	52	37	11.22	11.44	14.34	5.13	19.47
			40	11.87	12.04	14.97	5.13	20.10
			44	11.56	11.22	14.40	5.13	19.53
	5 795	52	37	11.02	11.06	14.05	5.13	19.18
			40	12.04	11.91	14.99	5.13	20.12
			44	11.04	11.03	14.05	5.13	19.18

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE40	5 190	106	53	7.25	8.06	10.68	4.60	15.28
			54	7.74	8.43	11.11	4.60	15.71
			56	7.64	8.13	10.90	4.60	15.50
	5 230	106	53	7.60	8.14	10.89	4.60	15.49
			54	8.03	8.40	11.23	4.60	15.83
			56	7.89	8.36	11.14	4.60	15.74
	5 270	106	53	12.14	12.86	15.53	4.94	20.47
			54	12.36	12.90	15.65	4.94	20.59
			56	12.35	13.09	15.75	4.94	20.69
	5 310	106	53	11.89	12.32	15.12	4.94	20.06
			54	12.75	12.71	15.74	4.94	20.68
			56	12.14	12.48	15.32	4.94	20.26
	5 510	106	53	11.03	11.05	14.05	5.03	19.08
			54	11.53	11.53	14.54	5.03	19.57
			56	11.13	11.35	14.25	5.03	19.28
	5 550	106	53	12.91	12.81	15.87	5.03	20.90
			54	13.43	13.02	16.24	5.03	21.27
			56	13.30	12.93	16.13	5.03	21.16
	5 710	106	53	12.59	12.13	15.38	5.03	20.41
			54	12.57	12.63	15.61	5.03	20.64
			56	12.39	12.03	15.22	5.03	20.25
	5 755	106	53	11.48	11.56	14.53	5.13	19.66
			54	12.03	11.79	14.92	5.13	20.05
			56	11.56	11.46	14.52	5.13	19.65
	5 795	106	53	11.09	11.08	14.10	5.13	19.23
			54	12.08	11.78	14.94	5.13	20.07
			56	11.09	11.24	14.18	5.13	19.31

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE40	5 190	242	61	10.40	11.27	13.87	4.60	18.47
			62	10.26	11.19	13.76	4.60	18.36
	5 230	242	61	10.55	11.14	13.87	4.60	18.47
			62	10.59	11.27	13.95	4.60	18.55
	5 270	242	61	10.83	11.43	14.15	4.94	19.09
			62	11.11	11.33	14.23	4.94	19.17
	5 310	242	61	11.09	11.38	14.25	4.94	19.19
			62	11.23	11.57	14.41	4.94	19.35
	5 510	242	61	10.57	10.41	13.50	5.03	18.53
			62	10.41	10.32	13.38	5.03	18.41
	5 550	242	61	12.15	12.08	15.13	5.03	20.16
			62	12.30	12.07	15.20	5.03	20.23
	5 710	242	61	11.83	11.44	14.65	5.03	19.68
			62	11.62	11.10	14.38	5.03	19.41
	5 755	242	61	11.64	11.70	14.68	5.13	19.81
			62	11.42	11.26	14.35	5.13	19.48
	5 795	242	61	11.46	11.19	14.34	5.13	19.47
			62	11.30	11.23	14.28	5.13	19.41
802.11ax HE40	5 190	484	65	7.41	7.62	10.53	4.60	15.13
	5 230	484	65	11.75	12.10	14.94	4.60	19.54
	5 270	484	65	11.37	11.44	14.42	4.94	19.36
	5 310	484	65	7.55	7.56	10.57	4.94	15.51
	5 510	484	65	6.78	7.04	9.92	5.03	14.95
	5 550	484	65	12.65	12.22	15.45	5.03	20.48
	5 710	484	65	11.95	11.24	14.62	5.03	19.65
	5 755	484	65	11.88	11.55	14.73	5.13	19.86
	5 795	484	65	11.62	11.32	14.48	5.13	19.61
802.11ax HE40	5 190	SU	NA	7.56	7.81	10.70	4.60	15.30
	5 230	SU	NA	11.82	12.17	15.01	4.60	19.61
	5 270	SU	NA	11.36	11.58	14.48	4.94	19.42
	5 310	SU	NA	7.83	7.78	10.82	4.94	15.76
	5 510	SU	NA	6.73	6.67	9.71	5.03	14.74
	5 550	SU	NA	12.82	12.27	15.56	5.03	20.59
	5 710	SU	NA	12.04	11.32	14.71	5.03	19.74
	5 755	SU	NA	11.96	11.71	14.85	5.13	19.98
	5 795	SU	NA	11.75	11.47	14.62	5.13	19.75

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE80	5 210	26	0	2.04	2.51	5.29	4.60	9.89
			18	2.88	3.07	5.99	4.60	10.59
			36	2.61	2.82	5.73	4.60	10.33
	5 290	26	0	7.23	7.78	10.52	4.94	15.46
			18	7.64	7.83	10.75	4.94	15.69
			36	7.46	7.88	10.69	4.94	15.63
	5 530	26	0	7.81	8.23	11.04	5.03	16.07
			18	8.41	8.49	11.46	5.03	16.49
			36	7.91	8.20	11.07	5.03	16.10
	5 690	26	0	7.82	7.92	10.88	5.03	15.91
			18	8.15	7.57	10.88	5.03	15.91
			36	7.58	7.41	10.51	5.03	15.54
	5 775	26	0	10.32	10.31	13.33	5.13	18.46
			18	10.83	10.23	13.55	5.13	18.68
			36	10.13	9.88	13.02	5.13	18.15
802.11ax HE80	5 210	52	37	3.92	4.81	7.40	4.60	12.00
			44	4.13	5.41	7.83	4.60	12.43
			52	4.41	5.01	7.73	4.60	12.33
	5 290	52	37	8.19	8.73	11.48	4.94	16.42
			44	8.87	9.05	11.97	4.94	16.91
			52	8.55	8.69	11.63	4.94	16.57
	5 530	52	37	8.92	8.96	11.95	5.03	16.98
			44	9.41	9.27	12.35	5.03	17.38
			52	9.05	8.97	12.02	5.03	17.05
	5 690	52	37	8.94	8.73	11.85	5.03	16.88
			44	9.04	8.78	11.92	5.03	16.95
			52	8.93	8.53	11.74	5.03	16.77
	5 775	52	37	10.35	10.52	13.45	5.13	18.58
			44	10.56	10.47	13.53	5.13	18.66
			52	10.23	10.02	13.14	5.13	18.27

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (CDD)		
802.11ax HE80	5 210	106	53	7.40	7.72	10.57	4.60	15.17
			56	7.66	8.23	10.96	4.60	15.56
			60	7.78	8.01	10.91	4.60	15.51
	5 290	106	53	9.87	10.35	13.13	4.94	18.07
			56	10.10	10.64	13.39	4.94	18.33
			60	10.14	10.44	13.30	4.94	18.24
	5 530	106	53	10.85	10.83	13.85	5.03	18.88
			56	11.10	11.22	14.17	5.03	19.20
			60	10.80	10.98	13.90	5.03	18.93
	5 690	106	53	10.74	10.32	13.55	5.03	18.58
			56	10.69	10.54	13.63	5.03	18.66
			60	10.52	10.12	13.33	5.03	18.36
5 775	106	53	10.53	10.61	13.58	5.13	18.71	
		56	10.72	10.57	13.66	5.13	18.79	
		60	10.32	10.07	13.21	5.13	18.34	
802.11ax HE80	5 210	242	61	10.07	11.08	13.61	4.60	18.21
			62	10.71	11.37	14.06	4.60	18.66
			64	10.34	11.01	13.70	4.60	18.30
	5 290	242	61	10.18	10.58	13.39	4.94	18.33
			62	10.57	11.01	13.81	4.94	18.75
			64	10.26	10.51	13.40	4.94	18.34
	5 530	242	61	10.88	11.26	14.08	5.03	19.11
			62	11.46	11.38	14.43	5.03	19.46
			64	10.96	11.02	14.00	5.03	19.03
	5 690	242	61	10.78	10.72	13.76	5.03	18.79
			62	11.20	10.85	14.04	5.03	19.07
			64	10.52	10.33	13.44	5.03	18.47
5 775	242	61	10.65	10.86	13.77	5.13	18.90	
		62	11.12	10.82	13.98	5.13	19.11	
		64	10.65	10.07	13.38	5.13	18.51	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)	
				ANT 1	ANT 2	ANT1+ANT2 (CDD)			
802.11ax HE80	5 210	484	65	9.35	10.21	12.81	4.60	17.41	
			66	9.63	10.12	12.89	4.60	17.49	
	5 290	484	65	9.33	9.82	12.59	4.94	17.53	
			66	9.56	9.56	12.57	4.94	17.51	
	5 530	484	65	9.81	9.30	12.57	5.03	17.60	
			66	9.64	9.27	12.47	5.03	17.50	
	5 690	484	65	10.92	10.49	13.72	5.03	18.75	
			66	10.96	10.37	13.69	5.03	18.72	
	5 775	484	65	10.81	10.52	13.68	5.13	18.81	
			66	10.92	10.12	13.55	5.13	18.68	
	802.11ax HE80	5 210	996	67	8.59	9.17	11.90	4.60	16.50
		5 290	996	67	8.33	8.48	11.42	4.94	16.36
5 530		996	67	9.29	9.39	12.35	5.03	17.38	
5 690		996	67	10.56	10.53	13.56	5.03	18.59	
5 775		996	67	10.94	10.49	13.73	5.13	18.86	
802.11ax HE80	5 210	SU	NA	9.04	9.63	12.36	4.60	16.96	
	5 290	SU	NA	8.78	8.71	11.76	4.94	16.70	
	5 530	SU	NA	9.35	9.64	12.51	5.03	17.54	
	5 690	SU	NA	10.63	10.65	13.65	5.03	18.68	
	5 775	SU	NA	10.77	10.61	13.70	5.13	18.83	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

- Summed Output Power: SDM

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE20	5 180	26	0	2.68	3.12	5.92	1.59	7.51
			4	3.03	3.63	6.35	1.59	7.94
			8	2.54	3.53	6.07	1.59	7.66
	5 200	26	0	2.41	3.07	5.76	1.59	7.35
			4	2.87	3.49	6.20	1.59	7.79
			8	2.55	3.34	5.97	1.59	7.56
	5 240	26	0	2.72	3.16	5.96	1.59	7.55
			4	3.31	3.49	6.41	1.59	8.00
			8	2.94	3.32	6.14	1.59	7.73
	5 260	26	0	7.32	7.80	10.58	1.93	12.51
			4	7.48	7.85	10.68	1.93	12.61
			8	7.66	8.04	10.86	1.93	12.79
	5 300	26	0	7.43	7.83	10.64	1.93	12.57
			4	7.73	8.03	10.89	1.93	12.82
			8	7.76	7.93	10.86	1.93	12.79
	5 320	26	0	7.64	7.69	10.68	1.93	12.61
			4	7.96	7.98	10.98	1.93	12.91
			8	7.83	7.92	10.89	1.93	12.82
	5 500	26	0	8.49	8.57	11.54	2.02	13.56
			4	8.53	8.90	11.73	2.02	13.75
			8	8.64	8.60	11.63	2.02	13.65
	5 580	26	0	8.28	8.25	11.28	2.02	13.30
			4	8.67	8.48	11.59	2.02	13.61
			8	8.47	8.38	11.44	2.02	13.46
	5 720	26	0	7.81	7.22	10.54	2.02	12.56
			4	8.17	7.69	10.95	2.02	12.97
			8	8.09	7.60	10.86	2.02	12.88
5 745	26	0	11.46	11.42	14.45	2.12	16.57	
		4	11.60	11.71	14.67	2.12	16.79	
		8	11.69	11.54	14.63	2.12	16.75	
5 785	26	0	11.25	10.94	14.11	2.12	16.23	
		4	11.56	11.36	14.47	2.12	16.59	
		8	11.43	11.23	14.34	2.12	16.46	
5 825	26	0	11.09	10.89	14.00	2.12	16.12	
		4	11.07	11.47	14.28	2.12	16.40	
		8	11.26	11.22	14.25	2.12	16.37	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE20	5 180	52	37	4.20	5.04	7.65	1.59	9.24
			38	4.05	5.20	7.67	1.59	9.26
			40	4.21	5.22	7.75	1.59	9.34
	5 200	52	37	4.15	5.17	7.70	1.59	9.29
			38	4.44	5.42	7.97	1.59	9.56
			40	4.30	5.33	7.86	1.59	9.45
	5 240	52	37	4.42	5.18	7.83	1.59	9.42
			38	4.58	5.27	7.95	1.59	9.54
			40	4.57	5.29	7.96	1.59	9.55
	5 260	52	37	8.71	9.01	11.87	1.93	13.80
			38	8.58	9.12	11.87	1.93	13.80
			40	8.74	9.00	11.88	1.93	13.81
	5 300	52	37	8.35	8.64	11.51	1.93	13.44
			38	8.68	8.94	11.82	1.93	13.75
			40	8.54	8.88	11.72	1.93	13.65
	5 320	52	37	8.73	8.78	11.77	1.93	13.70
			38	8.99	9.00	12.01	1.93	13.94
			40	8.70	8.96	11.84	1.93	13.77
	5 500	52	37	9.23	9.27	12.26	2.02	14.28
			38	9.38	9.37	12.39	2.02	14.41
			40	9.37	9.28	12.34	2.02	14.36
	5 580	52	37	9.08	9.05	12.08	2.02	14.10
			38	9.41	9.31	12.37	2.02	14.39
			40	9.36	9.22	12.30	2.02	14.32
	5 720	52	37	8.82	8.26	11.56	2.02	13.58
			38	9.05	8.50	11.79	2.02	13.81
			40	9.10	8.46	11.80	2.02	13.82
	5 745	52	37	11.46	11.38	14.43	2.12	16.55
			38	11.62	11.68	14.66	2.12	16.78
			40	11.51	11.69	14.61	2.12	16.73
5 785	52	37	11.19	10.92	14.07	2.12	16.19	
		38	11.57	11.23	14.41	2.12	16.53	
		40	11.40	11.19	14.31	2.12	16.43	
5 825	52	37	11.53	11.09	14.33	2.12	16.45	
		38	11.17	11.20	14.20	2.12	16.32	
		40	11.36	11.30	14.34	2.12	16.46	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE20	5 180	106	53	7.33	8.02	10.70	1.59	12.29
			54	7.38	8.24	10.84	1.59	12.43
	5 200	106	53	7.57	7.91	10.75	1.59	12.34
			54	7.59	8.06	10.84	1.59	12.43
	5 240	106	53	7.71	8.09	10.91	1.59	12.50
			54	7.57	8.09	10.85	1.59	12.44
	5 260	106	53	10.94	11.36	14.17	1.93	16.10
			54	10.96	11.46	14.23	1.93	16.16
	5 300	106	53	11.16	11.34	14.26	1.93	16.19
			54	11.10	11.51	14.32	1.93	16.25
	5 320	106	53	10.97	11.34	14.17	1.93	16.10
			54	11.23	11.39	14.32	1.93	16.25
	5 500	106	53	12.26	11.85	15.07	2.02	17.09
			54	12.49	12.00	15.26	2.02	17.28
	5 580	106	53	12.21	11.45	14.86	2.02	16.88
			54	12.26	11.80	15.05	2.02	17.07
	5 720	106	53	11.59	10.79	14.22	2.02	16.24
			54	11.76	11.10	14.45	2.02	16.47
	5 745	106	53	11.58	11.14	14.38	2.12	16.50
			54	11.48	11.62	14.56	2.12	16.68
5 785	106	53	11.32	11.14	14.24	2.12	16.36	
		54	11.44	11.12	14.29	2.12	16.41	
5 825	106	53	11.39	10.77	14.10	2.12	16.22	
		54	11.60	11.19	14.41	2.12	16.53	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE20	5 180	242	61	10.16	11.09	13.66	1.59	15.25
	5 200	242	61	10.13	11.14	13.67	1.59	15.26
	5 240	242	61	10.31	11.18	13.78	1.59	15.37
	5 260	242	61	10.88	11.27	14.09	1.93	16.02
	5 300	242	61	10.97	11.24	14.12	1.93	16.05
	5 320	242	61	9.43	9.74	12.60	1.93	14.53
	5 500	242	61	10.36	10.09	13.24	2.02	15.26
	5 580	242	61	12.14	11.60	14.89	2.02	16.91
	5 720	242	61	11.55	10.92	14.26	2.02	16.28
	5 745	242	61	11.36	11.38	14.38	2.12	16.50
	5 785	242	61	11.48	11.23	14.37	2.12	16.49
802.11ax HE20	5 825	242	61	10.96	10.72	13.85	2.12	15.97
	5 180	SU	NA	9.08	9.91	12.53	1.59	14.12
	5 200	SU	NA	9.04	10.24	12.69	1.59	14.28
	5 240	SU	NA	9.39	9.95	12.69	1.59	14.28
	5 260	SU	NA	10.80	11.24	14.04	1.93	15.97
	5 300	SU	NA	10.87	11.05	13.97	1.93	15.90
	5 320	SU	NA	10.99	11.12	14.07	1.93	16.00
	5 500	SU	NA	11.16	11.02	14.10	2.02	16.12
	5 580	SU	NA	12.30	11.53	14.94	2.02	16.96
	5 720	SU	NA	11.33	10.98	14.17	2.02	16.19
	5 745	SU	NA	11.28	11.38	14.34	2.12	16.46
5 785	SU	NA	11.06	10.95	14.02	2.12	16.14	
5 825	SU	NA	10.85	10.73	13.80	2.12	15.92	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE40	5 190	26	0	2.15	2.67	5.43	1.59	7.02
			8	2.99	3.34	6.18	1.59	7.77
			17	2.49	2.59	5.55	1.59	7.14
	5 230	26	0	1.88	2.84	5.40	1.59	6.99
			8	2.79	3.39	6.11	1.59	7.70
			17	2.59	3.10	5.86	1.59	7.45
	5 270	26	0	6.90	7.53	10.24	1.93	12.17
			8	7.60	8.29	10.97	1.93	12.90
			17	7.14	7.54	10.35	1.93	12.28
	5 310	26	0	7.12	7.45	10.30	1.93	12.23
			8	7.97	8.32	11.16	1.93	13.09
			17	7.54	7.49	10.53	1.93	12.46
	5 510	26	0	7.98	8.24	11.12	2.02	13.14
			8	8.82	9.04	11.94	2.02	13.96
			17	8.48	8.20	11.35	2.02	13.37
	5 550	26	0	8.26	8.21	11.25	2.02	13.27
			8	8.97	9.06	12.03	2.02	14.05
			17	8.17	8.31	11.25	2.02	13.27
	5 710	26	0	7.35	7.34	10.36	2.02	12.38
			8	8.21	7.99	11.11	2.02	13.13
			17	7.47	7.34	10.42	2.02	12.44
	5 755	26	0	11.20	11.21	14.22	2.12	16.34
			8	12.01	11.78	14.91	2.12	17.03
			17	11.37	11.16	14.28	2.12	16.40
5 795	26	0	10.48	10.57	13.54	2.12	15.66	
		8	11.99	11.71	14.86	2.12	16.98	
		17	10.56	10.74	13.66	2.12	15.78	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE40	5 190	52	37	3.63	4.73	7.23	1.59	8.82
			40	4.35	5.32	7.87	1.59	9.46
			44	4.12	4.79	7.48	1.59	9.07
	5 230	52	37	4.36	4.92	7.66	1.59	9.25
			40	5.08	5.61	8.36	1.59	9.95
			44	4.48	5.07	7.80	1.59	9.39
	5 270	52	37	8.32	8.51	11.43	1.93	13.36
			40	8.73	9.15	11.96	1.93	13.89
			44	8.29	8.68	11.50	1.93	13.43
	5 310	52	37	7.96	8.70	11.36	1.93	13.29
			40	8.78	9.25	12.03	1.93	13.96
			44	8.58	8.56	11.58	1.93	13.51
	5 510	52	37	8.90	8.90	11.91	2.02	13.93
			40	9.25	9.27	12.27	2.02	14.29
			44	9.24	9.26	12.26	2.02	14.28
	5 550	52	37	9.04	8.98	12.02	2.02	14.04
			40	9.31	9.34	12.34	2.02	14.36
			44	9.16	9.19	12.19	2.02	14.21
	5 710	52	37	8.54	8.38	11.47	2.02	13.49
			40	9.30	9.13	12.23	2.02	14.25
			44	8.85	8.43	11.66	2.02	13.68
	5 755	52	37	11.02	11.37	14.21	2.12	16.33
			40	11.71	11.89	14.81	2.12	16.93
			44	11.42	11.13	14.29	2.12	16.41
5 795	52	37	10.97	11.01	14.00	2.12	16.12	
		40	11.84	11.84	14.85	2.12	16.97	
		44	10.86	10.91	13.90	2.12	16.02	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE40	5 190	106	53	7.16	7.89	10.55	1.59	12.14
			54	7.56	8.33	10.97	1.59	12.56
			56	7.57	8.08	10.84	1.59	12.43
	5 230	106	53	7.49	8.06	10.79	1.59	12.38
			54	7.98	8.34	11.17	1.59	12.76
			56	7.80	8.29	11.06	1.59	12.65
	5 270	106	53	12.04	12.81	15.45	1.93	17.38
			54	12.16	12.72	15.46	1.93	17.39
			56	12.22	12.99	15.63	1.93	17.56
	5 310	106	53	11.71	12.13	14.94	1.93	16.87
			54	12.64	12.66	15.66	1.93	17.59
			56	12.07	12.35	15.22	1.93	17.15
	5 510	106	53	10.86	10.85	13.87	2.02	15.89
			54	11.44	11.48	14.47	2.02	16.49
			56	10.96	11.19	14.09	2.02	16.11
	5 550	106	53	12.74	12.73	15.75	2.02	17.77
			54	13.36	12.91	16.15	2.02	18.17
			56	13.20	12.84	16.03	2.02	18.05
	5 710	106	53	12.43	11.97	15.22	2.02	17.24
			54	12.42	12.46	15.45	2.02	17.47
			56	12.21	11.89	15.06	2.02	17.08
	5 755	106	53	11.40	11.48	14.45	2.12	16.57
			54	11.87	11.62	14.76	2.12	16.88
			56	11.45	11.31	14.39	2.12	16.51
5 795	106	53	10.97	10.92	13.96	2.12	16.08	
		54	11.89	11.59	14.75	2.12	16.87	
		56	10.95	11.15	14.06	2.12	16.18	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE40	5 190	242	61	10.34	11.09	13.74	1.59	15.33
			62	10.08	11.11	13.64	1.59	15.23
	5 230	242	61	10.37	11.03	13.72	1.59	15.31
			62	10.48	11.22	13.88	1.59	15.47
	5 270	242	61	10.78	11.37	14.10	1.93	16.03
			62	11.04	11.19	14.13	1.93	16.06
	5 310	242	61	11.00	11.27	14.15	1.93	16.08
			62	11.07	11.44	14.27	1.93	16.20
	5 510	242	61	10.49	10.30	13.41	2.02	15.43
			62	10.25	10.22	13.25	2.02	15.27
	5 550	242	61	12.00	12.00	15.01	2.02	17.03
			62	12.16	11.90	15.04	2.02	17.06
	5 710	242	61	11.71	11.36	14.55	2.02	16.57
			62	11.46	11.03	14.26	2.02	16.28
	5 755	242	61	11.59	11.61	14.61	2.12	16.73
			62	11.30	11.07	14.20	2.12	16.32
	5 795	242	61	11.28	11.03	14.17	2.12	16.29
			62	11.10	11.17	14.15	2.12	16.27
802.11ax HE40	5 190	484	65	7.34	7.44	10.40	1.59	11.99
	5 230	484	65	11.63	11.98	14.82	1.59	16.41
	5 270	484	65	11.18	11.33	14.27	1.93	16.20
	5 310	484	65	7.35	7.40	10.39	1.93	12.32
	5 510	484	65	6.64	6.92	9.79	2.02	11.81
	5 550	484	65	12.46	12.10	15.29	2.02	17.31
	5 710	484	65	11.88	11.04	14.49	2.02	16.51
	5 755	484	65	11.82	11.40	14.63	2.12	16.75
	5 795	484	65	11.45	11.25	14.36	2.12	16.48
802.11ax HE40	5 190	SU	NA	7.50	7.63	10.58	1.59	12.17
	5 230	SU	NA	11.66	12.12	14.91	1.59	16.50
	5 270	SU	NA	11.22	11.45	14.35	1.93	16.28
	5 310	SU	NA	7.73	7.63	10.69	1.93	12.62
	5 510	SU	NA	6.63	6.60	9.63	2.02	11.65
	5 550	SU	NA	12.73	12.11	15.44	2.02	17.46
	5 710	SU	NA	11.87	11.25	14.58	2.02	16.60
	5 755	SU	NA	11.83	11.63	14.74	2.12	16.86
	5 795	SU	NA	11.58	11.28	14.44	2.12	16.56

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE80	5 210	26	0	1.84	2.43	5.16	1.59	6.75
			18	2.81	2.88	5.86	1.59	7.45
			36	2.41	2.73	5.58	1.59	7.17
	5 290	26	0	7.07	7.68	10.40	1.93	12.33
			18	7.56	7.77	10.68	1.93	12.61
			36	7.26	7.80	10.55	1.93	12.48
	5 530	26	0	7.76	8.14	10.96	2.02	12.98
			18	8.34	8.39	11.38	2.02	13.40
			36	7.78	8.04	10.92	2.02	12.94
	5 690	26	0	7.62	7.78	10.71	2.02	12.73
			18	8.03	7.37	10.72	2.02	12.74
			36	7.40	7.35	10.39	2.02	12.41
5 775	26	0	10.16	10.15	13.17	2.12	15.29	
		18	10.77	10.09	13.45	2.12	15.57	
		36	10.02	9.73	12.89	2.12	15.01	
802.11ax HE80	5 210	52	37	3.76	4.63	7.23	1.59	8.82
			44	3.99	5.23	7.66	1.59	9.25
			52	4.31	4.86	7.60	1.59	9.19
	5 290	52	37	8.10	8.62	11.38	1.93	13.31
			44	8.68	8.90	11.80	1.93	13.73
			52	8.50	8.53	11.53	1.93	13.46
	5 530	52	37	8.84	8.81	11.84	2.02	13.86
			44	9.34	9.17	12.27	2.02	14.29
			52	8.88	8.82	11.86	2.02	13.88
	5 690	52	37	8.85	8.60	11.74	2.02	13.76
			44	8.93	8.66	11.81	2.02	13.83
			52	8.86	8.40	11.65	2.02	13.67
5 775	52	37	10.22	10.36	13.30	2.12	15.42	
		44	10.41	10.39	13.41	2.12	15.53	
		52	10.17	9.97	13.08	2.12	15.20	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)
				ANT 1	ANT 2	ANT1+ANT2 (SDM)		
802.11ax HE80	5 210	106	53	7.22	7.54	10.39	1.59	11.98
			56	7.57	8.16	10.89	1.59	12.48
			60	7.68	7.95	10.83	1.59	12.42
	5 290	106	53	9.80	10.30	13.07	1.93	15.00
			56	10.01	10.49	13.27	1.93	15.20
			60	10.01	10.38	13.21	1.93	15.14
	5 530	106	53	10.77	10.73	13.76	2.02	15.78
			56	10.95	11.07	14.02	2.02	16.04
			60	10.61	10.83	13.73	2.02	15.75
	5 690	106	53	10.65	10.17	13.43	2.02	15.45
			56	10.63	10.35	13.50	2.02	15.52
			60	10.35	10.04	13.21	2.02	15.23
	5 775	106	53	10.45	10.53	13.50	2.12	15.62
			56	10.53	10.47	13.51	2.12	15.63
			60	10.12	9.93	13.04	2.12	15.16
802.11ax HE80	5 210	242	61	9.95	10.95	13.49	1.59	15.08
			62	10.53	11.21	13.89	1.59	15.48
			64	10.19	10.84	13.54	1.59	15.13
	5 290	242	61	10.05	10.49	13.29	1.93	15.22
			62	10.50	10.94	13.74	1.93	15.67
			64	10.16	10.46	13.32	1.93	15.25
	5 530	242	61	10.74	11.14	13.95	2.02	15.97
			62	11.37	11.29	14.34	2.02	16.36
			64	10.87	10.89	13.89	2.02	15.91
	5 690	242	61	10.63	10.55	13.60	2.02	15.62
			62	11.14	10.70	13.94	2.02	15.96
			64	10.46	10.24	13.36	2.02	15.38
	5 775	242	61	10.58	10.67	13.64	2.12	15.76
			62	11.06	10.67	13.88	2.12	16.00
			64	10.58	10.01	13.31	2.12	15.43

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

Mode	Freq.[MHz]	Tone	RU Index	Test Result [dBm]			Antenna Gain(dBi)	e.i.r.p ^{Note1} (dBm)	
				ANT 1	ANT 2	ANT1+ANT2 (SDM)			
802.11ax HE80	5 210	484	65	9.27	10.09	12.71	1.59	14.30	
			66	9.53	10.01	12.79	1.59	14.38	
	5 290	484	65	9.25	9.67	12.48	1.93	14.41	
			66	9.45	9.41	12.44	1.93	14.37	
	5 530	484	65	9.64	9.22	12.45	2.02	14.47	
			66	9.51	9.09	12.32	2.02	14.34	
	5 690	484	65	10.78	10.33	13.57	2.02	15.59	
			66	10.77	10.25	13.53	2.02	15.55	
	5 775	484	65	10.75	10.40	13.59	2.12	15.71	
			66	10.78	10.05	13.44	2.12	15.56	
	802.11ax HE80	5 210	996	67	8.53	9.09	11.83	1.59	13.42
		5 290	996	67	8.20	8.42	11.32	1.93	13.25
5 530		996	67	9.18	9.26	12.23	2.02	14.25	
5 690		996	67	10.50	10.35	13.44	2.02	15.46	
5 775		996	67	10.76	10.41	13.60	2.12	15.72	
802.11ax HE80	5 210	SU	NA	8.85	9.46	12.18	1.59	13.77	
	5 290	SU	NA	8.61	8.66	11.65	1.93	13.58	
	5 530	SU	NA	9.19	9.49	12.35	2.02	14.37	
	5 690	SU	NA	10.54	10.52	13.54	2.02	15.56	
	5 775	SU	NA	10.67	10.45	13.57	2.12	15.69	

Note 1: e.i.r.p= Conducted Output Power + Antenna Gain

5.4 Maximum Power Spectral Density

■ Test requirements

Part. 15.407(a)

(1) For the band 5.15 GHz - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}

(ii) For an indoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 GHz - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 GHz - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(2) For the 5.25 GHz - 5.35 GHz and 5.47 GHz - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(3) For the band 5.725 GHz - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. ^{note1,note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

RSS-247[6.2]

(1) For band 5 150 MHz – 5 250 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For band 5 250 MHz – 5 350 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less.

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(3) For band 5 470 MHz – 5 600 MHz and 5 650 MHz – 5 725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(4) For band 5 725 MHz – 5 850 MHz

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

Maximum Power Spectral Density is measured using Measurement Procedure of **KDB789033 D02v02r01**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA - 2 or SA - 2 Alternative was used, add $10 \log(1 / x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.**
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW = 1 MHz.
 - b) Set VBW $\geq 1 / T$, where T is defined in item a1) in 12.2.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / \text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / \text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - g) Detector = peak.
 - h) Video filtering shall be applied to a voltage-squared or power signal (i.e., rms mode), if possible. Otherwise, it shall be set to operate on a linear voltage signal (which can require use of linear display mode). Log mode shall not be used:
 - 1) The preferred voltage-squared (i.e., power or rms) mode is selected on some instruments by setting the "average-VBW type" to power or rms.
 - 2) If RMS mode is not available, then linear voltage mode is selected on some analyzers by setting the display mode to linear. Other instruments have a setting for "average-VBW type" that can be set to "voltage" regardless of the display mode.**
 - i) Trace mode = max hold.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW = 100 kHz is available on nearly all spectrum analyzers.

Test Results: Comply

Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm)		Power Spectral Density(dBm) ANT1+ANT2 (CDD)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm)
				ANT 1	ANT 2			
802.11ax (HE20)	5 180	26	0	-0.62	0.36	2.91	4.60	7.51
			4	-0.21	0.48	3.16	4.60	7.76
			8	0.75	1.50	4.15	4.60	8.75
	5 200	26	0	0.40	1.04	3.74	4.60	8.34
			4	-0.41	0.32	2.98	4.60	7.58
			8	0.65	1.34	4.02	4.60	8.62
	5 240	26	0	0.86	1.28	4.09	4.60	8.69
			4	-0.07	0.35	3.16	4.60	7.76
			8	0.81	1.15	3.99	4.60	8.59
	5 260	26	0	5.55	6.19	8.89	4.94	13.83
			4	4.68	5.29	8.01	4.94	12.95
			8	5.52	6.13	8.85	4.94	13.79
	5 300	26	0	5.65	5.88	8.78	4.94	13.72
			4	4.94	5.09	8.03	4.94	12.97
			8	6.03	6.23	9.14	4.94	14.08
	5 320	26	0	5.88	5.83	8.87	4.94	13.81
			4	4.96	5.27	8.13	4.94	13.07
			8	5.88	6.10	9.00	4.94	13.94
	5 500	26	0	6.78	6.89	9.85	5.03	14.88
			4	5.73	6.04	8.90	5.03	13.93
			8	6.84	7.01	9.93	5.03	14.96
	5 580	26	0	6.45	6.97	9.73	5.03	14.76
			4	5.55	6.25	8.92	5.03	13.95
			8	6.62	7.05	9.85	5.03	14.88
5 720	26	0	5.28	5.44	8.37	5.03	13.40	
		4	4.53	4.77	7.66	5.03	12.69	
		8	5.81	5.81	8.82	5.03	13.85	

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)

Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm)		TF (dB)	Power Spectral Density(dBm) ANT1+ANT2 (CDD)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm)
				ANT 1	ANT 2				
802.11ax (HE20)	5 180	242	61	-0.83	0.46	N/A	2.87	4.60	7.47
	5 200	242	61	-0.73	0.47	N/A	2.92	4.60	7.52
	5 240	242	61	-0.69	0.39	N/A	2.89	4.60	7.49
	5 260	242	61	-0.24	0.44	N/A	3.12	4.94	8.06
	5 300	242	61	0.17	0.29	N/A	3.24	4.94	8.18
	5 320	242	61	-1.65	-1.43	N/A	1.47	4.94	6.41
	5 500	242	61	-0.67	-0.54	N/A	2.41	5.03	7.44
	5 580	242	61	1.31	1.41	N/A	4.37	5.03	9.40
802.11ax (HE20)	5 720	242	61	0.18	0.05	N/A	3.13	5.03	8.16
	5 180	SU	NA	-0.45	0.85	N/A	3.26	4.60	7.86
	5 200	SU	NA	-0.37	0.68	N/A	3.20	4.60	7.80
	5 240	SU	NA	-0.33	0.59	N/A	3.16	4.60	7.76
	5 260	SU	NA	1.10	2.08	N/A	4.63	4.94	9.57
	5 300	SU	NA	1.50	1.96	N/A	4.75	4.94	9.69
	5 320	SU	NA	1.56	2.14	N/A	4.87	4.94	9.81
	5 500	SU	NA	1.49	1.90	N/A	4.71	5.03	9.74
5 580	SU	NA	2.77	2.76	N/A	5.78	5.03	10.81	
5 720	SU	NA	1.56	1.60	N/A	4.59	5.03	9.62	

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)

Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm)		TF (dB)	Power Spectral Density(dBm) ANT1+ANT2 (CDD)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm)
				ANT 1	ANT 2				
802.11ax (HE40)	5 190	26	0	0.15	0.94	N/A	3.57	4.60	8.17
			8	0.70	1.55	N/A	4.16	4.60	8.76
			17	0.47	1.27	N/A	3.90	4.60	8.50
	5 230	26	0	0.36	0.73	N/A	3.56	4.60	8.16
			8	0.83	1.49	N/A	4.18	4.60	8.78
			17	0.47	1.19	N/A	3.86	4.60	8.46
	5 270	26	0	5.13	6.11	N/A	8.66	4.94	13.60
			8	5.87	6.31	N/A	9.11	4.94	14.05
			17	5.77	6.10	N/A	8.95	4.94	13.89
	5 310	26	0	5.54	5.67	N/A	8.62	4.94	13.56
			8	6.39	6.33	N/A	9.37	4.94	14.31
			17	5.73	6.04	N/A	8.90	4.94	13.84
	5 510	26	0	6.28	6.74	N/A	9.53	5.03	14.56
			8	6.82	7.01	N/A	9.93	5.03	14.96
			17	6.38	7.02	N/A	9.72	5.03	14.75
	5 550	26	0	6.83	6.70	N/A	9.78	5.03	14.81
			8	6.67	7.23	N/A	9.97	5.03	15.00
			17	6.89	6.87	N/A	9.89	5.03	14.92
	5 710	26	0	5.28	5.79	N/A	8.55	5.03	13.58
			8	5.90	6.21	N/A	9.07	5.03	14.10
			17	5.54	5.88	N/A	8.72	5.03	13.75

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)

Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm)		TF (dB)	Power Spectral Density(dBm) ANT1+ANT2 (CDD)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm)
				ANT 1	ANT 2				
802.11ax (HE40)	5 190	484	65	-6.29	-5.98	N/A	3.12	4.60	7.72
	5 230	484	65	-2.05	-1.58	N/A	1.20	4.60	5.80
	5 270	484	65	-2.74	-2.21	N/A	0.54	4.94	5.48
	5 310	484	65	-6.10	-6.25	N/A	-3.16	4.94	1.78
	5 510	484	65	-6.86	-6.85	N/A	-3.84	5.03	1.19
	5 550	484	65	-0.99	-1.19	N/A	1.92	5.03	6.95
	5 710	484	65	-2.09	-2.57	N/A	0.69	5.03	5.72
802.11ax (HE40)	5 190	SU	NA	-6.04	-5.59	N/A	-2.80	4.60	1.80
	5 230	SU	NA	-1.83	-0.94	N/A	1.65	4.60	6.25
	5 270	SU	NA	-2.51	-1.92	N/A	0.81	4.94	5.75
	5 310	SU	NA	-5.82	-6.00	N/A	-2.90	4.94	2.04
	5 510	SU	NA	-7.01	-6.94	N/A	-3.96	5.03	1.07
	5 550	SU	NA	-0.75	-1.07	N/A	2.10	5.03	7.13
	5 710	SU	NA	-1.72	-2.11	N/A	1.10	5.03	6.13

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)

Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm)		TF (dB)	Power Spectral Density(dBm) ANT1+ANT2 (CDD)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm)
				ANT 1	ANT 2				
802.11ax (HE80)	5 210	26	0	0.19	0.95	N/A	3.60	4.60	8.20
			18	-0.22	-0.15	N/A	2.83	4.60	7.43
			36	0.45	0.99	N/A	3.74	4.60	8.34
	5 290	26	0	5.72	6.21	N/A	8.98	4.94	13.92
			18	4.57	4.84	N/A	7.72	4.94	12.66
			36	5.96	6.11	N/A	9.05	4.94	13.99
	5 530	26	0	6.54	6.79	N/A	9.68	5.03	14.71
			18	5.72	5.55	N/A	8.65	5.03	13.68
			36	6.73	6.98	N/A	9.87	5.03	14.90
	5 690	26	0	6.02	6.19	N/A	9.12	5.03	14.15
			18	4.58	4.61	N/A	7.61	5.03	12.64
			36	5.65	5.84	N/A	8.76	5.03	13.79
802.11ax (HE80)	5 210	996	67	-8.16	-7.46	N/A	-4.79	4.60	-0.19
	5 290	996	67	-8.44	-8.19	N/A	-5.30	4.94	-0.36
	5 530	996	67	-7.80	-7.02	N/A	-4.38	5.03	0.65
	5 690	996	67	-6.74	-6.19	N/A	-3.45	5.03	1.58
802.11ax (HE80)	5 210	SU	NA	-7.36	-6.86	N/A	-4.09	4.60	0.51
	5 290	SU	NA	-7.68	-7.77	N/A	-4.71	4.94	0.23
	5 530	SU	NA	-6.92	-6.55	N/A	-3.72	5.03	1.31
	5 690	SU	NA	-6.30	-5.36	N/A	-2.79	5.03	2.24

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)


Mode	Frequency [MHz]	Tone	RU Index	Reading (dBm/100kHz)		TF ^{Note 2} (dB)	Power Spectral Density (dBm/500kHz)	Antenna Gain(dBi)	e.i.r.p Spectral Density (dBm/500kHz)
				ANT 1	ANT 2		ANT1+ANT2 (CDD)		
802.11ax (HE20)	5 745	26	0	0.68	1.37	6.99	11.04	5.13	16.17
			4	1.02	1.21	6.99	11.12	5.13	16.25
			8	1.20	1.39	6.99	11.30	5.13	16.43
	5 785	26	0	0.43	0.78	6.99	10.61	5.13	15.74
			4	0.54	1.15	6.99	10.86	5.13	15.99
			8	0.41	0.97	6.99	10.70	5.13	15.83
	5 825	26	0	-0.68	0.10	6.99	9.73	5.13	14.86
			4	0.02	0.39	6.99	10.21	5.13	15.34
			8	-0.15	0.62	6.99	10.25	5.13	15.38
	5 745	242	61	-8.94	-8.29	6.99	1.40	5.13	6.53
	5 785	242	61	-9.15	-8.59	6.99	1.14	5.13	6.27
	5 825	242	61	-9.55	-9.17	6.99	0.64	5.13	5.77
5 745	SU	NA	-7.21	-6.31	6.99	3.26	5.13	8.39	
5 785	SU	NA	-7.58	-6.63	6.99	2.92	5.13	8.05	
5 825	SU	NA	-8.19	-7.34	6.99	2.26	5.13	7.39	
802.11ax (HE40)	5 755	26	0	0.86	1.20	6.99	11.03	5.13	16.16
			8	0.95	1.65	6.99	11.31	5.13	16.44
			17	0.52	1.11	6.99	10.83	5.13	15.96
	5 795	26	0	-0.24	0.75	6.99	10.28	5.13	15.41
			8	0.89	1.59	6.99	11.25	5.13	16.38
	17	-0.35	0.55	6.99	10.12	5.13	15.25		
	5 755	484	65	-11.15	-11.01	6.99	-1.08	5.13	4.05
	5 795	484	65	-11.46	-11.20	6.99	-1.33	5.13	3.80
5 755	SU	NA	-9.91	-9.32	6.99	0.40	5.13	5.53	
5 795	SU	NA	-10.30	-9.62	6.99	0.05	5.13	5.18	
802.11ax (HE80)	5 775	26	0	-0.42	0.45	6.99	10.04	5.13	15.17
			18	-0.10	0.39	6.99	10.15	5.13	15.28
			36	-0.91	-0.46	6.99	9.32	5.13	14.45
		996	67	-15.74	-15.43	6.99	-5.58	5.13	-0.45
		SU	NA	-12.44	-12.19	6.99	-2.31	5.13	2.82

Note 1: e.i.r.p Spectral Density= Power spectral density + EUT Antenna Gain

Note 2: "U-NII 3 [TF] = 10*LOG(500 kHz/100 kHz)


Maximum Power Spectral Density

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.36

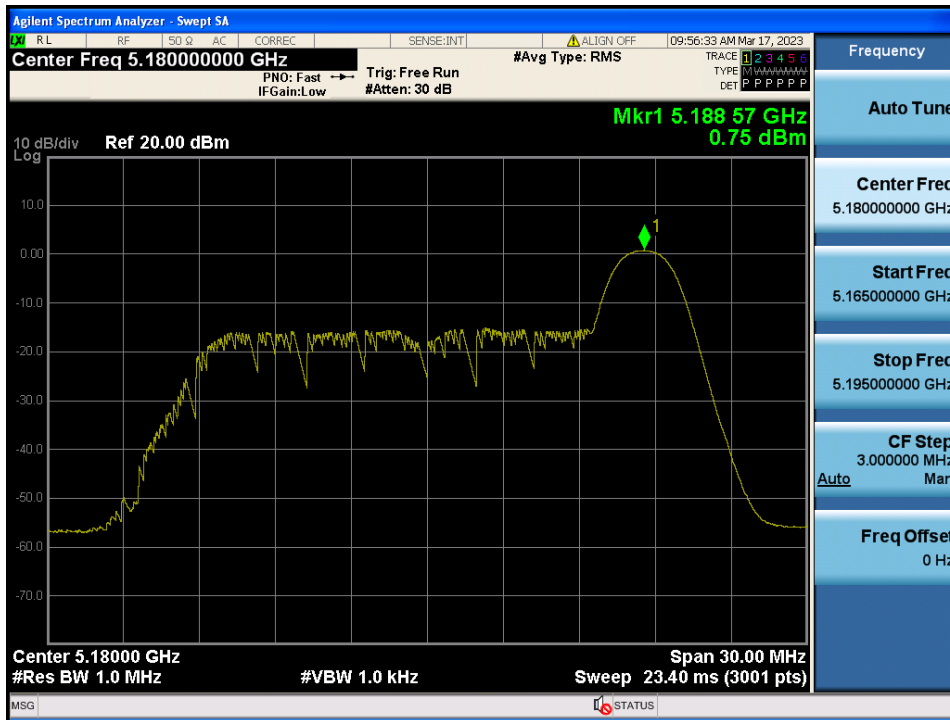


Maximum Power Spectral Density

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.40

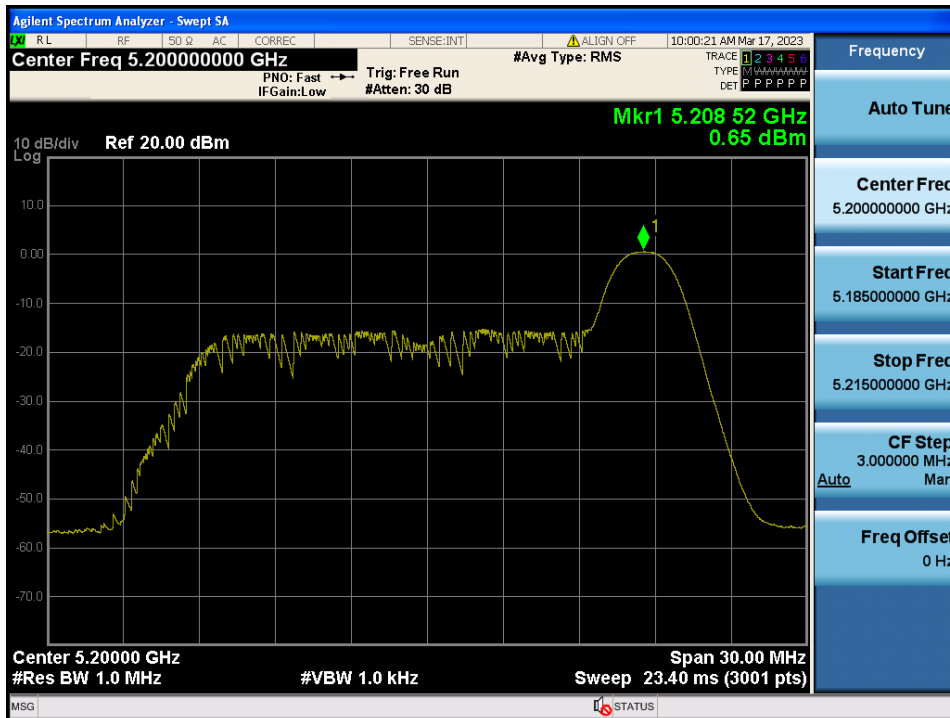

Maximum Power Spectral Density


Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 0 RU & Ch.48

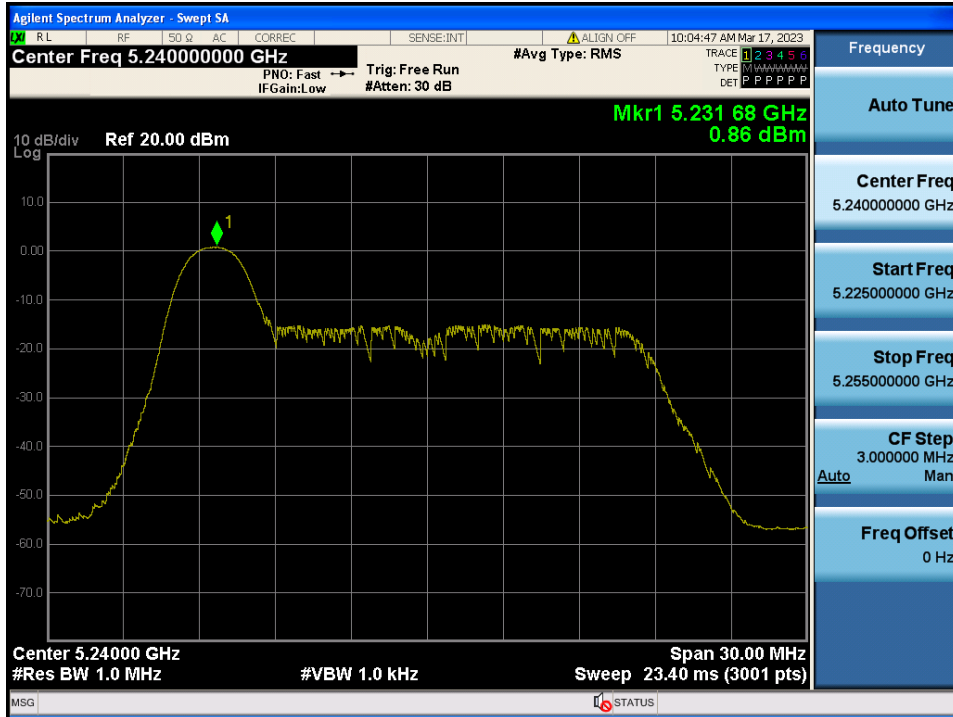


Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 0 RU & Ch.52



Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.60

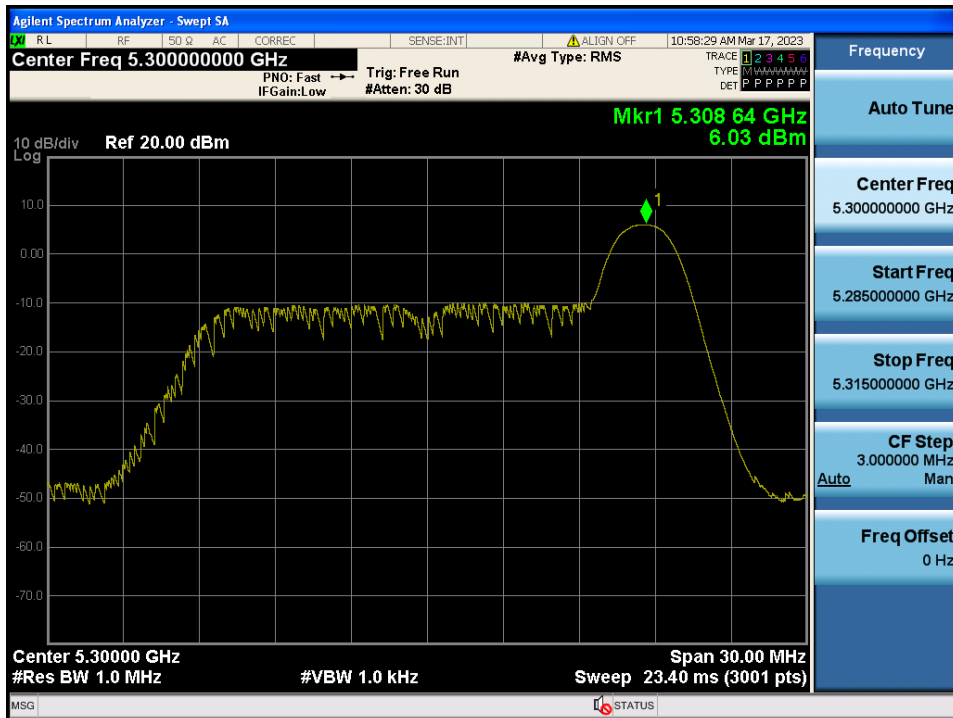


Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.64

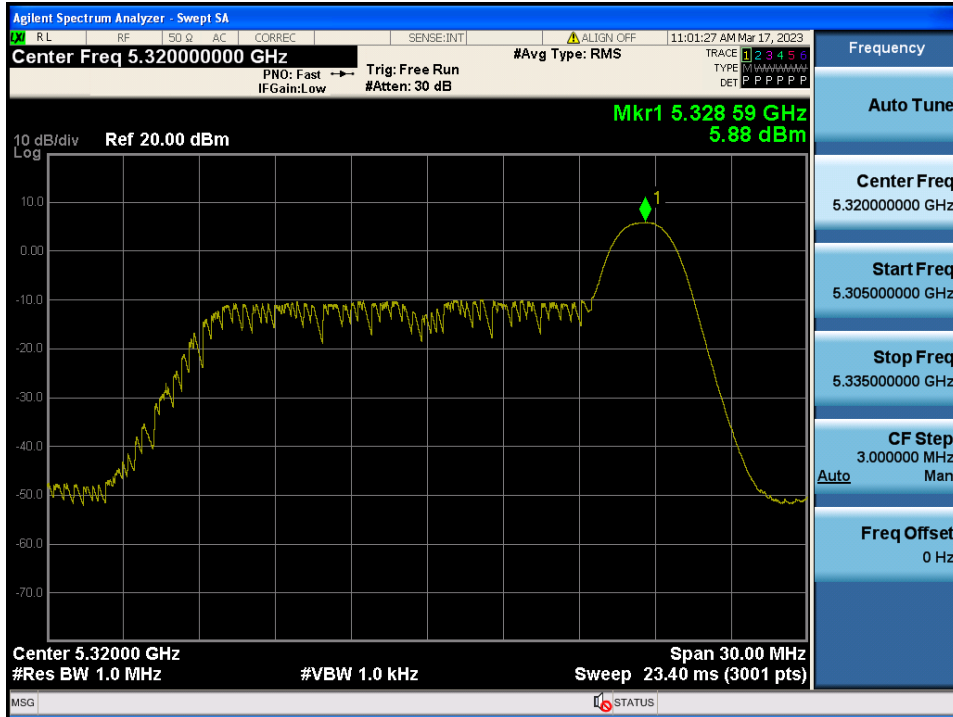


Maximum Power Spectral Density

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.100

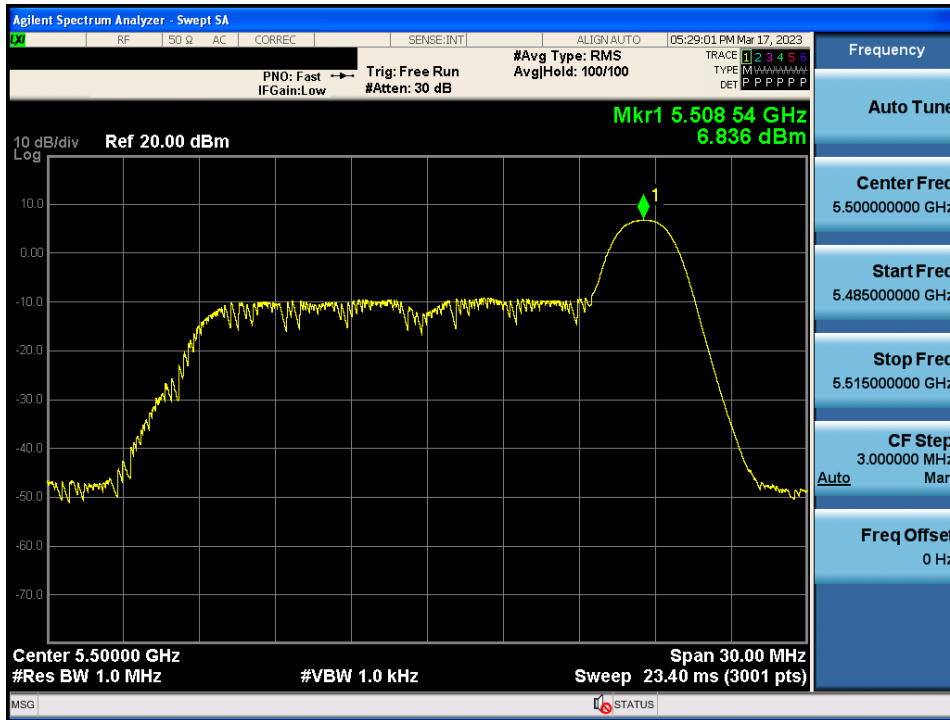


Maximum Power Spectral Density

Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.116

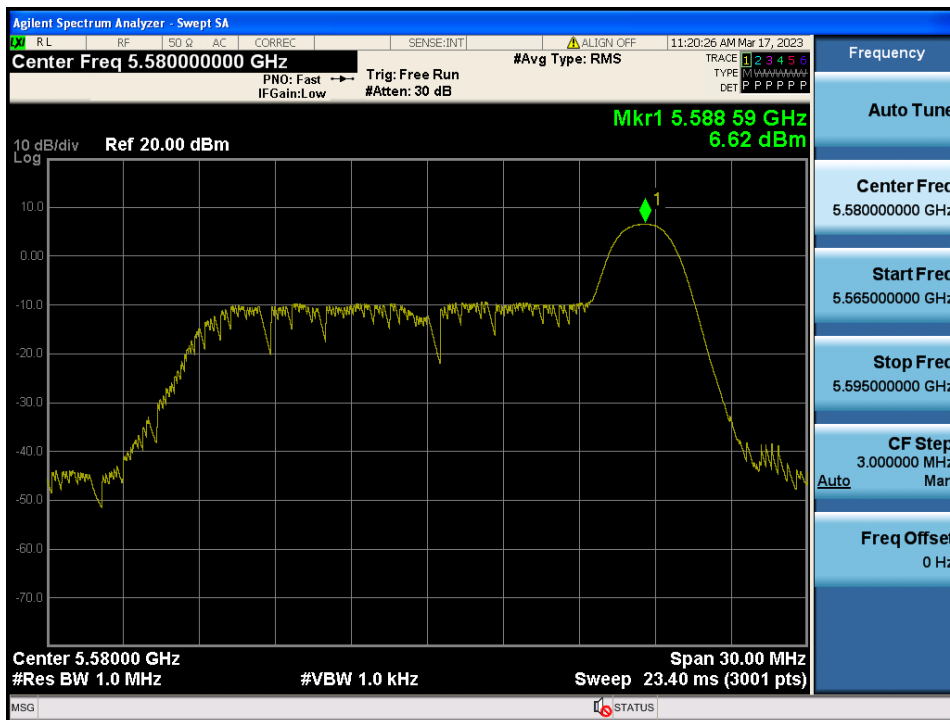


Maximum Power Spectral Density


Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.144

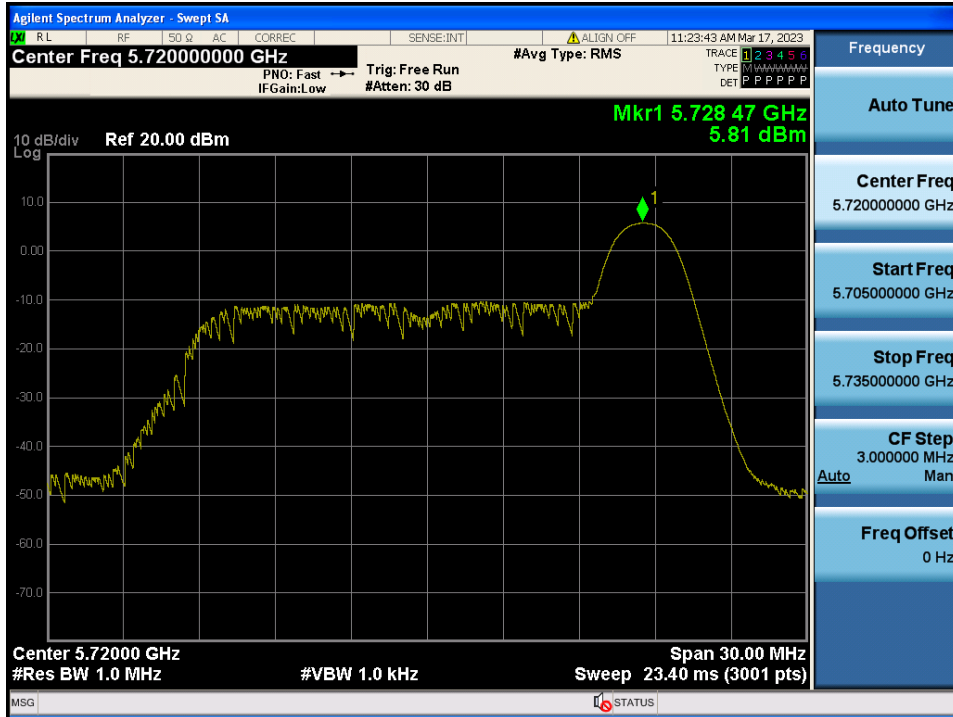


Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.149

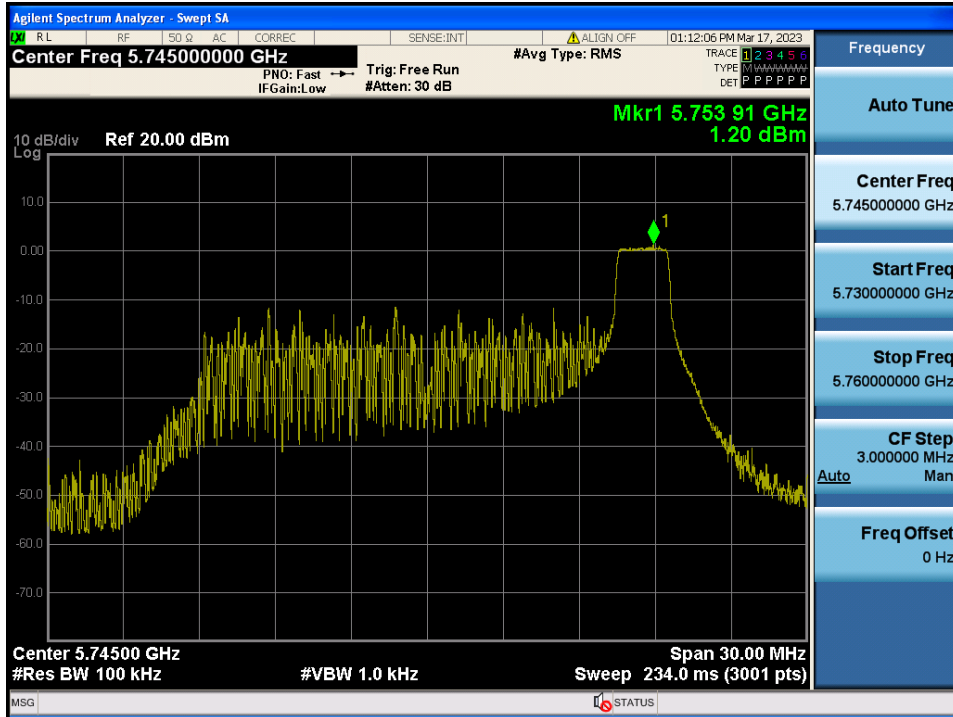

Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 4 RU & Ch.157

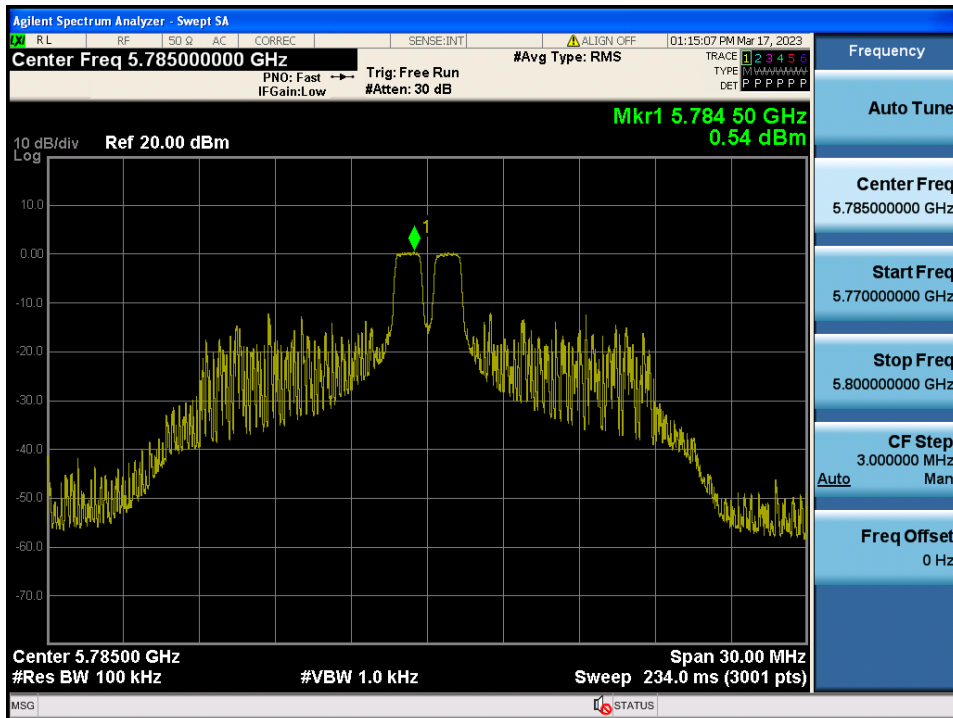


Maximum Power Spectral Density Test Mode: 802.11ax HE20 & ANT 1 & 26 Tone & 8 RU & Ch.165

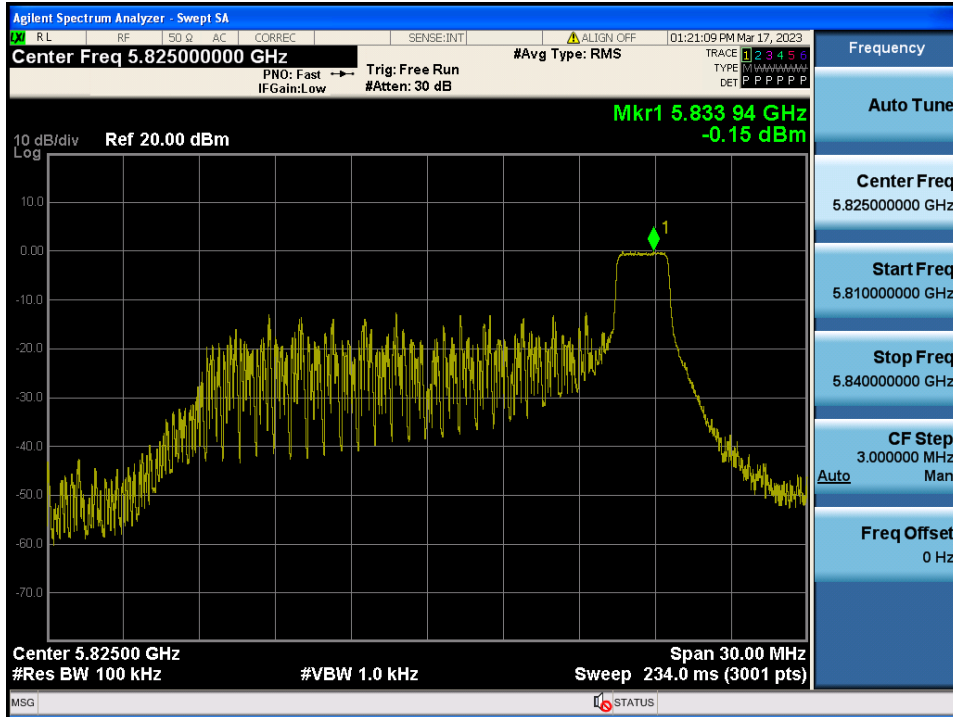


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.38

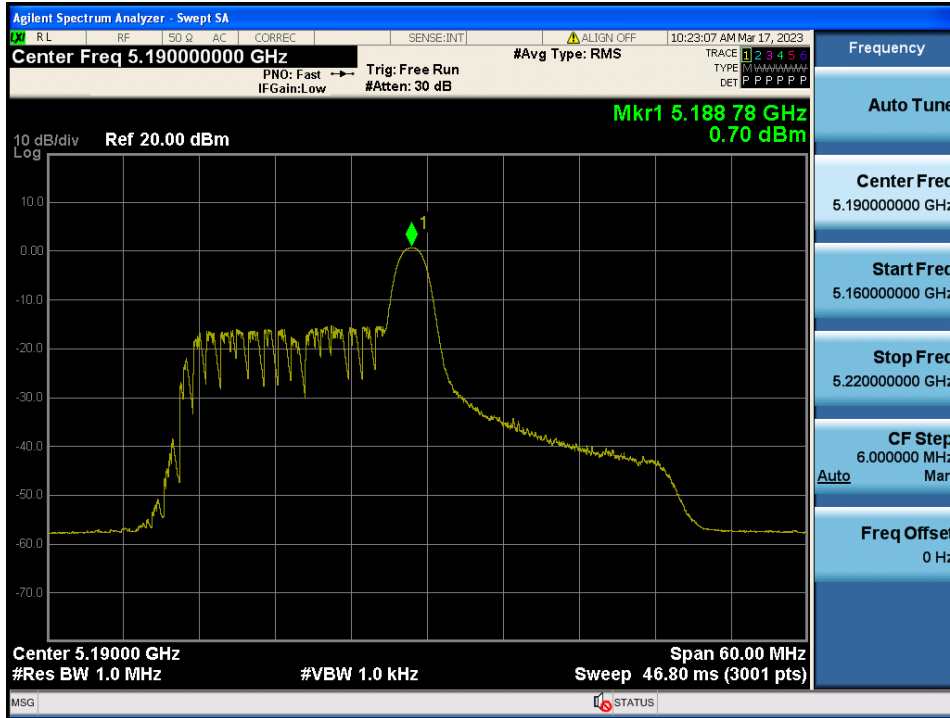


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.46

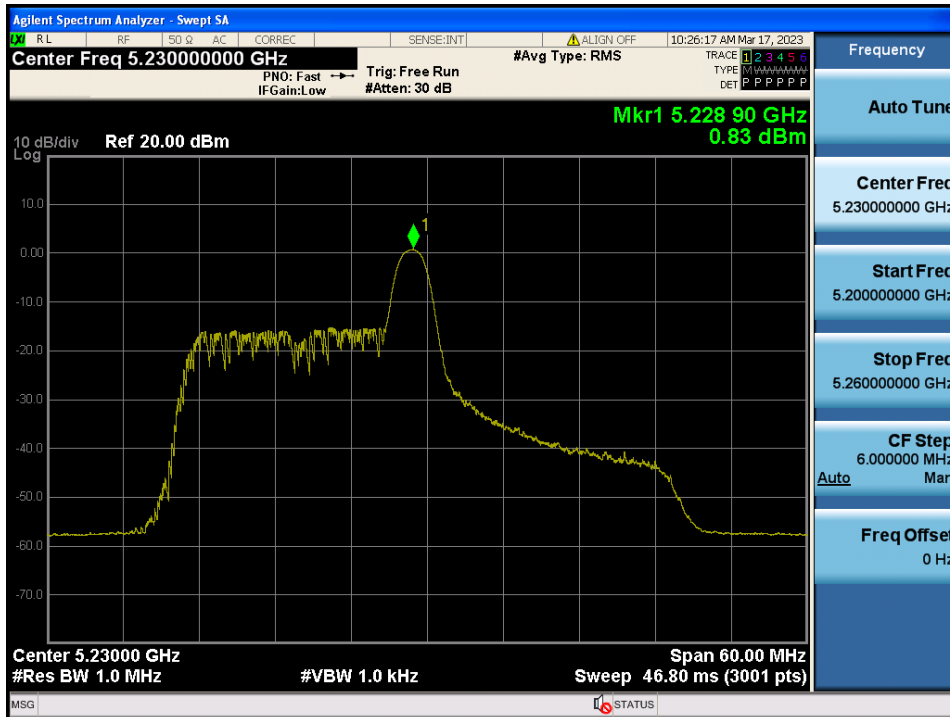


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.54

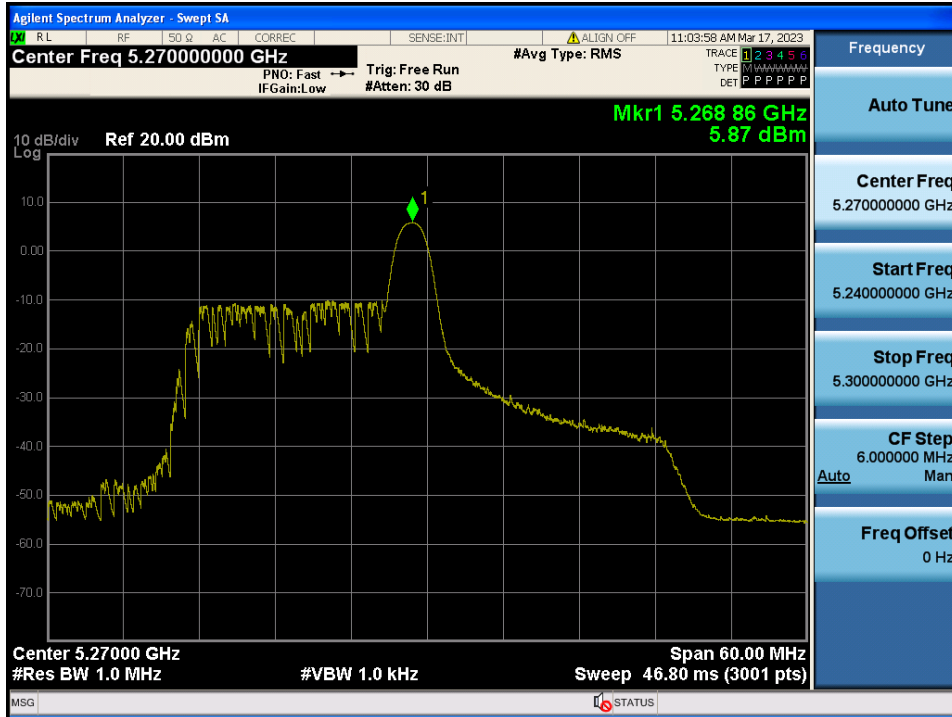


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.62

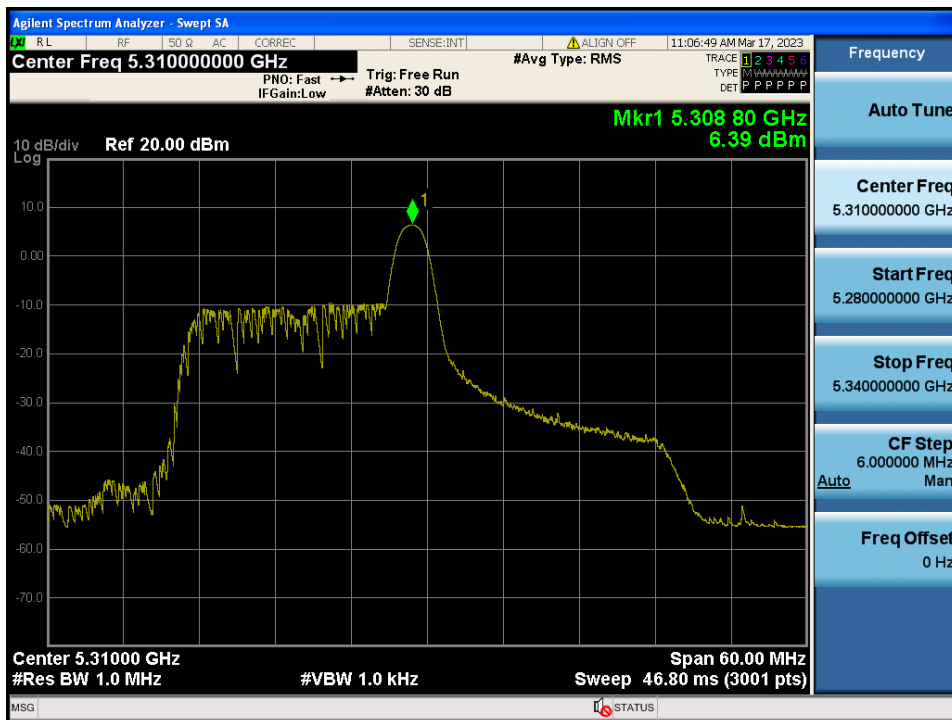


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.102

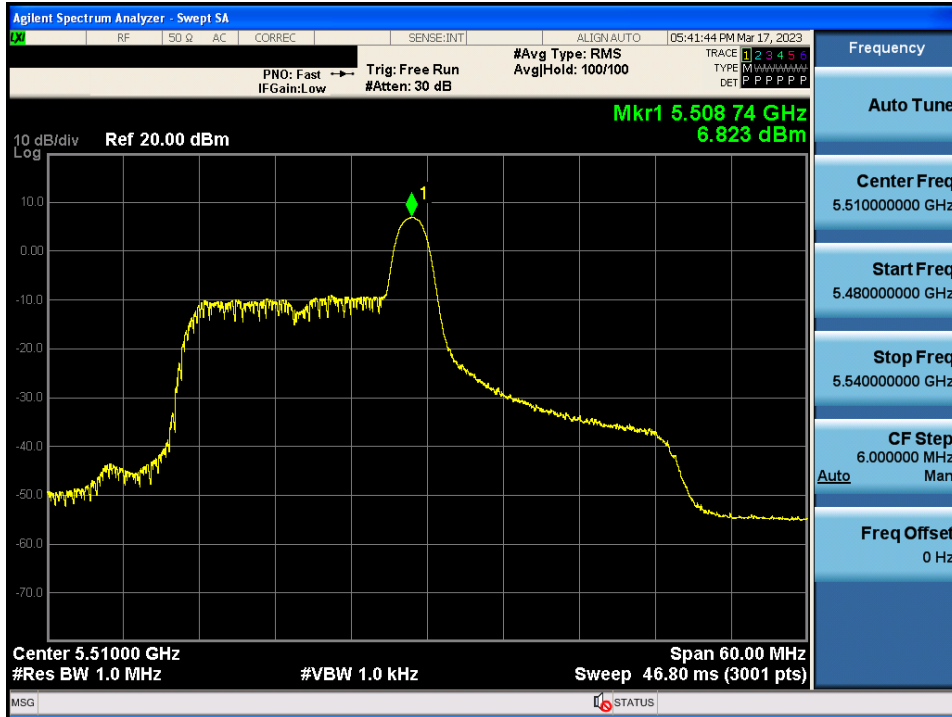


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.110

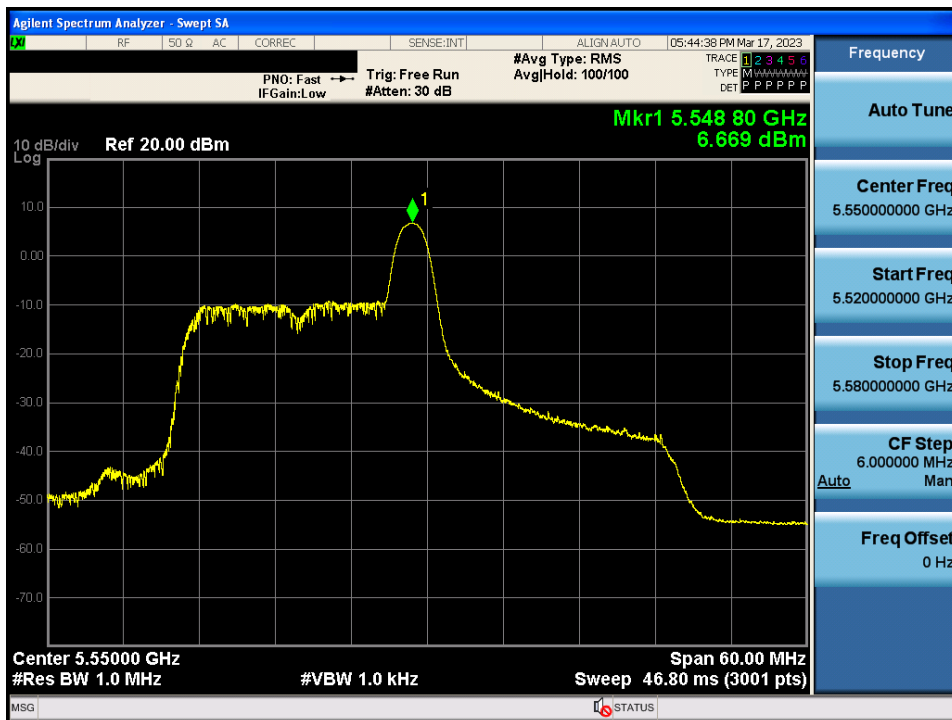


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.142

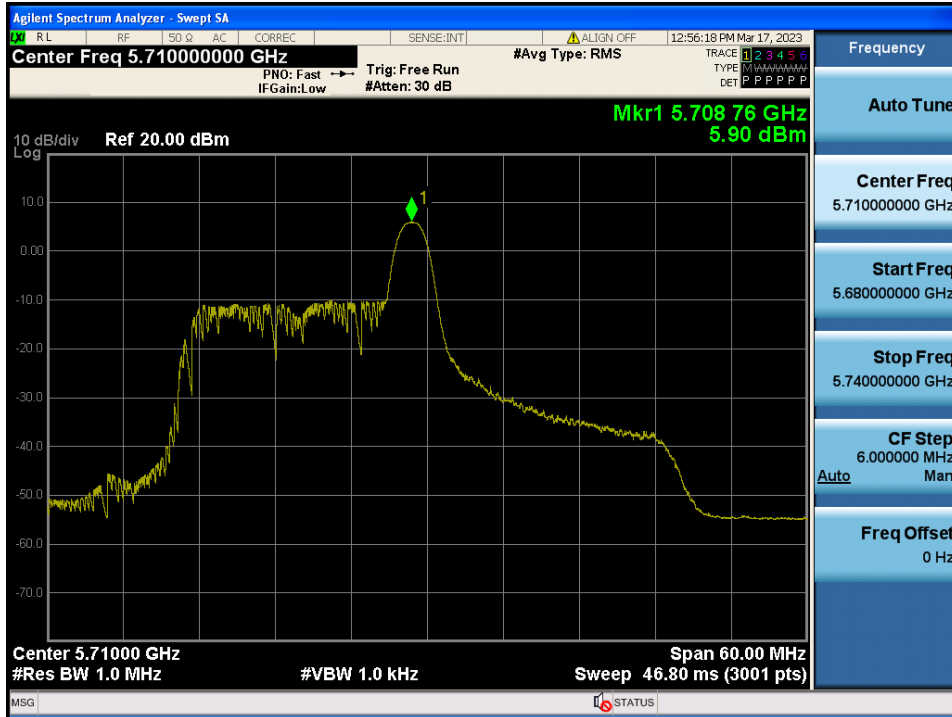


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.151

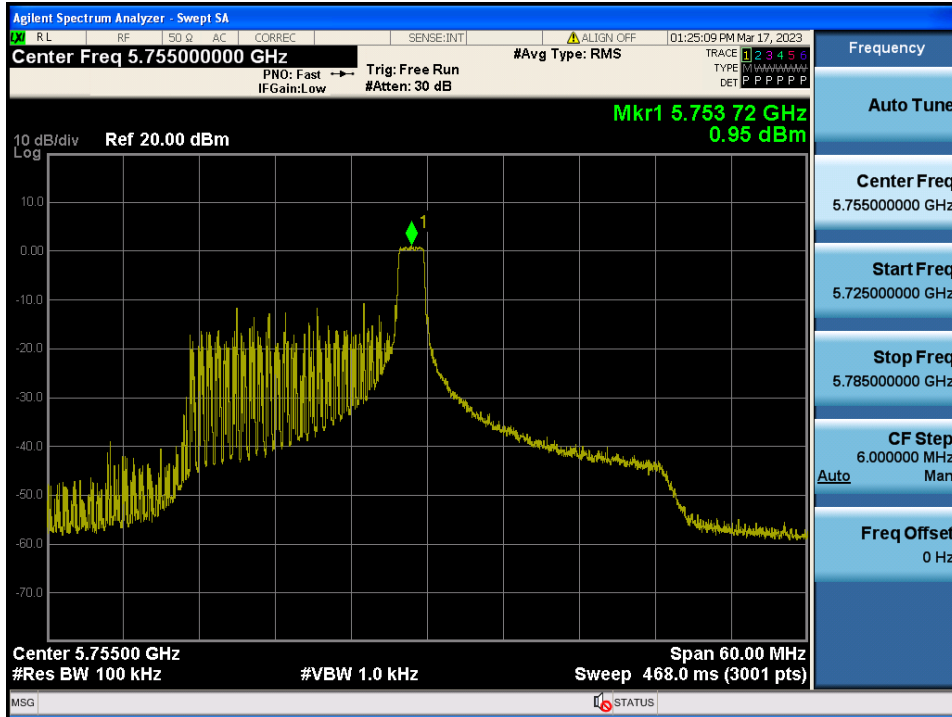


Maximum Power Spectral Density

Test Mode: 802.11ax HE40 & ANT 1 & 26 Tone & 8 RU & Ch.159

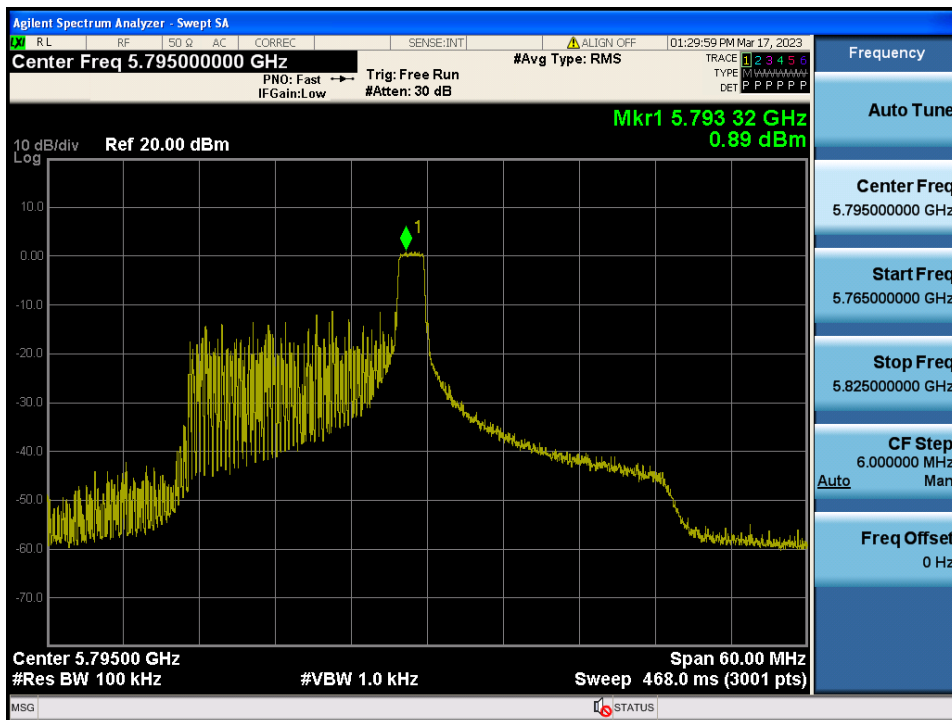

Maximum Power Spectral Density

Test Mode: 802.11ax HE80 & ANT 1 & 26 Tone & 36 RU & Ch.42

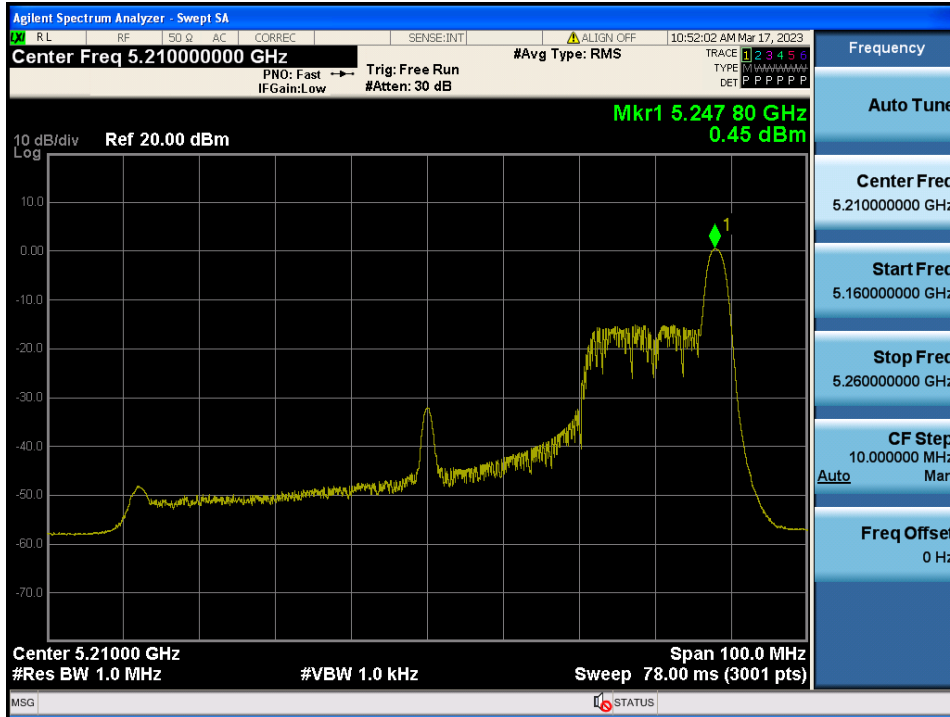

Maximum Power Spectral Density

Test Mode: 802.11ax HE80 & ANT 1 & 26 Tone & 36 RU & Ch.58

