



Test Report No.: RF200327S003-1



# FCC TEST REPORT

## (PART 22)



Applicant:	PAX Technology Limited
Address:	Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Hong Kong, China

Manufacturer or Supplier:	PAX Computer Technology (Shenzhen) Co., Ltd.
Address:	4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.
Product:	Smart Mobile Payment Terminal
Brand Name:	PAX
Model Name:	A920Pro
FCC ID:	V5PA920PRO
Date of tests:	Apr. 01, 2020~ May 15, 2020

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H
- ANSI/TIA/EIA-603-D
- ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

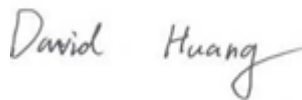Issued by Evans He Engineer / Mobile Department	Approved by David Huang Manager / Mobile Department
 Date: May 18, 2020	 Date: May 18, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

\* REFER TO KDB 971168 D01 POWER MEAS LICENSE DIGITAL SYSTEMS V02R02..... 5

1.1 MEASUREMENT UNCERTAINTY ..... 5

1.2 TEST SITE AND INSTRUMENTS ..... 6

**2 GENERAL INFORMATION ..... 7**

2.1 GENERAL DESCRIPTION OF EUT ..... 7

2.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 9

2.3 DESCRIPTION OF SUPPORT UNITS ..... 10

2.4 TEST ITEM AND TEST CONFIGURATION..... 10

2.5 EUT OPERATING CONDITIONS..... 13

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 13

**3 TEST TYPES AND RESULTS..... 14**

3.1 OUTPUT POWER MEASUREMENT ..... 14

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 14

3.1.2 TEST PROCEDURES ..... 14

3.1.3 TEST SETUP ..... 15

3.1.4 TEST RESULTS ..... 16

3.2 FREQUENCY STABILITY MEASUREMENT ..... 20

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 20

3.2.2 TEST PROCEDURE ..... 20

3.2.3 TEST SETUP ..... 20

3.2.4 TEST RESULTS ..... 21

3.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 25

3.3.1 TEST PROCEDURES ..... 25

3.3.2 TEST SETUP ..... 25

3.3.3 TEST RESULTS ..... 26

3.4 BAND EDGE MEASUREMENT ..... 30

3.4.1 LIMITS OF BAND EDGE MEASUREMENT ..... 30

3.4.2 TEST SETUP ..... 30

3.4.3 TEST PROCEDURES ..... 31

3.4.4 TEST RESULTS ..... 32

3.5 CONDUCTED SPURIOUS EMISSIONS..... 36

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 36

3.5.2 TEST PROCEDURE ..... 36

3.5.3 TEST SETUP ..... 36

3.5.4 TEST RESULTS ..... 37

3.6 RADIATED EMISSION MEASUREMENT..... 41

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 41



**BUREAU  
VERITAS**

**Test Report No.: RF200327S003-1**

3.6.2	TEST PROCEDURES .....	41
3.6.3	DEVIATION FROM TEST STANDARD .....	41
3.6.4	TEST SETUP .....	42
3.6.5	TEST RESULTS .....	44
3.7	PEAK TO AVERAGE RATIO .....	54
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....	54
3.7.2	TEST SETUP .....	54
3.7.3	TEST PROCEDURES .....	54
3.7.4	TEST RESULTS .....	55
<b>4</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>57</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF200327S003-1

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200327S003-1	Original release	May 18, 2020

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective Radiated Power	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 22.917b	Occupied Bandwidth	PASS	Meet the requirement of limit.
--	Peak to average ratio*	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -12.82dB at 1697.6MHz.

\* Refer to KDB 971168 D01 Power Meas License Digital Systems v02r02.

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GHz	3.74dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06-10 0262-eQ	Mar. 24,20	Mar. 24,21
Bilog Antenna	Sunol Sciences	JB6	A110712	Apr. 08, 20	Apr. 07, 21
Active Antenna	CMO-POWER	AL-130	121031	Mar. 27, 20	Mar. 26, 21
Signal Amplifier	HP	8447E	443008	Mar. 24, 20	Mar. 24, 21
Spectrum	Agilent	E4446A	MY46180622	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 22, 20	Mar. 21, 21
Horn Antenna	COM-POWER	HAH-118	71259	Mar. 20, 20	Mar. 19, 21
Horn Antenna	COM-POWER	HAH-118	71283	Jun. 30, 19	Jun. 29, 20
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	Jun. 30, 19	Jun. 29, 20
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	Mar. 24, 20	Mar. 24, 21
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Jan. 04, 20	Jan. 03,21
AMPLIFIER	Emc Instruments Corporation	Emc012645	980077	Oct. 18,18	Oct. 17,21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Mar. 24, 20	Mar. 24, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 18, 19	Dec. 17, 20
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24,20	Mar. 24,21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24,20	Mar. 24,21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24,20	Mar. 24,21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 28,20	Mar. 27,21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225D H	DG-180746	Mar. 24,20	Mar. 24,21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 20,20	Mar. 19,21
Universal Radio Communication	ROHDE&SCHWARZ	CMU200	112012	Mar. 24,20	Mar. 24,21
Universal Radio Communication	ROHDE&SCHWARZ	CMU200	121393	Mar. 28,20	Mar. 27,21
Wireless Communication Test Set	ROHDE&SCHWARZ	CMW500	1201.0002K500-1 55842-Gd	Nov. 1, 19	Oct. 31, 20

- NOTE:** 1. The calibration interval of the above test instruments is 12 months (except 3m Semi-anechoic Chamber). And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 535293.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Smart Mobile Payment Terminal	
<b>MODEL NAME</b>	A920Pro	
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.7Vdc (Li-ion, ion battery )	
<b>MODULATION TYPE</b>	LTE	QPSK, 16QAM
<b>FREQUENCY RANGE</b>	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
<b>MAX. ERP POWER</b>	LTE Band 5 (Channel Bandwidth: 1.4MHz)	173.78mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	181.13mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	168.27mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	168.66mW
<b>EMISSION DESIGNATOR</b>	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M70G7D
		16QAM: 2M69W7D
	LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M47G7D
		16QAM: 4M48W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 8M95G7D
		16QAM: 8M95W7D
<b>ANTENNA TYPE</b>	FPC Antenna with 1dBi gain	
<b>HW VERSION</b>	N/A	
<b>SW VERSION</b>	N/A	
<b>I/O PORTS</b>	Refer to user's manual	
<b>DATA CABLE</b>	USB cable: non-shielded, detachable, 1.0m	
<b>EUT STAGE</b>	Production Unit	

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	N/A
<b>MODEL:</b>	GLH50D2000HW
<b>INPUT:</b>	100-240V~50/60Hz 0.40A
<b>OUTPUT:</b>	5.0V --- 2000mA

3. The EUT matched the following USB cable:

<b>USB CABLE</b>	
<b>BRAND:</b>	N/A
<b>MODEL:</b>	N/A
<b>SIGNAL LINE:</b>	1.0 METER

4. The EUT was powered by the following Battery:

<b>ADAPTER</b>	
<b>BRAND:</b>	VEKEN
<b>MODEL:</b>	YW-008
<b>POWER RATING:</b>	3.7V --- 5150mAh 19.05Wh


5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.






## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION

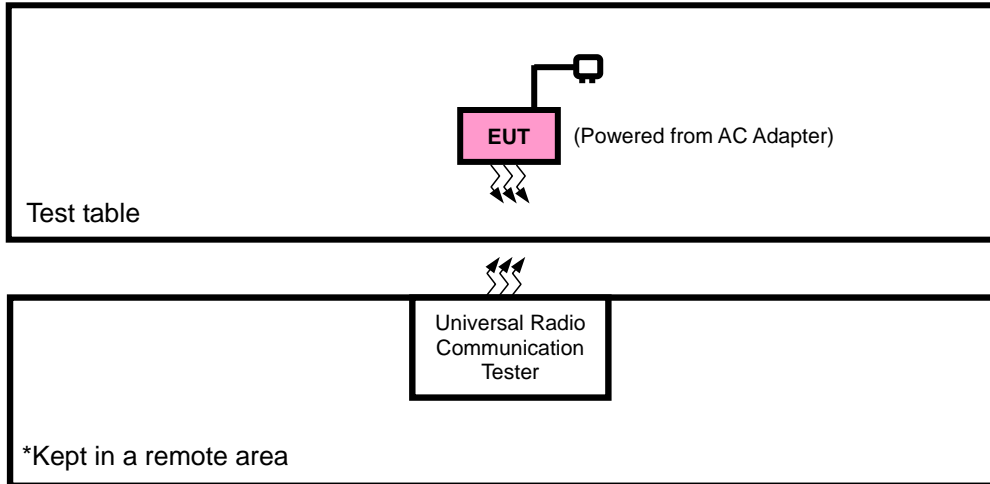

### FOR CONDUCTED & E.R.P. TEST

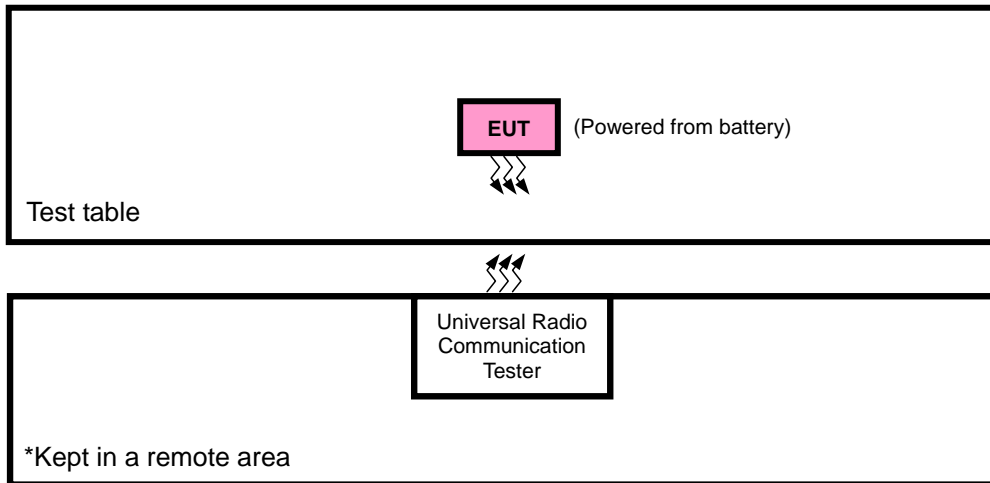



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM/EDGE/WCDMA/LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + Battery with LTE link



**LTE BAND 5 MODE**

TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	20407 to 20643	20407, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	6 RB / 0 RB Offset
				16QAM	6 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	15 RB / 0 RB Offset
				16QAM	15 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	25 RB / 0 RB Offset
				16QAM	25 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	50 RB / 0 RB Offset
				16QAM	50 RB / 0 RB Offset



**BUREAU  
VERITAS**

**Test Report No.: RF200327S003-1**

BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK	1 RB / 0 RB Offset
					6 RB / 0 RB Offset
	20407 to 20643	20643	1.4 MHz	QPSK	1 RB / 5 RB Offset
					6 RB / 0 RB Offset
	20415 to 20635	20415	3 MHz	QPSK	1 RB / 0 RB Offset
					15 RB / 0 RB Offset
	20415 to 20635	20635	3 MHz	QPSK	1 RB / 14 RB Offset
					15 RB / 0 RB Offset
20425 to 20625	20425	5MHz	QPSK	1 RB / 0 RB Offset	
				25 RB / 0 RB Offset	
20425 to 20625	20625	5MHz	QPSK	1 RB / 24 RB Offset	
				25 RB / 0 RB Offset	
20450 to 20600	20450	10MHz	QPSK	1 RB / 0 RB Offset	
				50 RB / 0 RB Offset	
20450 to 20600	20600	10MHz	QPSK	1 RB / 49 RB Offset	
				50 RB / 0 RB Offset	
CONDCUDED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	24deg. C, 60%RH	3.7Vdc from Battery	Aaron Liang
PEAK TO AVERAGE RATIO	24deg. C, 60%RH	3.85Vdc from Battery	Aaron Liang
FREQUENCY STABILITY	24deg. C, 60%RH	DC 3.4V/3.7V/4.2V	Aaron Liang
OCCUPIED BANDWIDTH	24deg. C, 60%RH	3.7Vdc from Battery	Aaron Liang
BAND EDGE	24deg. C, 60%RH	3.7Vdc from Battery	Aaron Liang
CONDCUDED EMISSION	24deg. C, 60%RH	3.7Vdc from Battery	Aaron Liang
RADIATED EMISSION	25deg. C, 59%RH	5Vdc from adapter	Aaron Liang



Test Report No.: RF200327S003-1

## 2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

## 2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 22**

**KDB 971168 D01 Power Meas License Digital Systems v03**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

##### 3.1.2 TEST PROCEDURES

###### **EIRP / ERP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


###### **CONDUCTED POWER MEASUREMENT:**

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

#### CONDUCTED POWER MEASUREMENT:

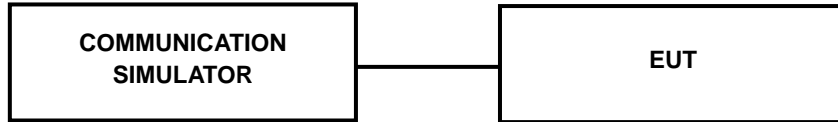

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	3GPP MPR (dB)
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/1.4	QPSK	1	0	23.18	23.24	23.52	0
		1	2	23.18	23.22	23.52	0
		1	5	23.16	23.29	23.55	0
		3	0	23.23	23.41	23.44	0
		3	1	23.13	23.48	23.44	0
		3	3	23.21	23.42	23.36	0
	16QAM	6	0	22.22	22.23	22.38	1
		1	0	22.29	23.03	22.27	1
		1	2	22.21	22.91	22.38	1
		1	5	22.21	22.83	22.46	1
		3	0	22.42	22.39	22.45	1
		3	1	22.43	22.4	22.44	1
		3	3	22.39	22.4	22.57	1
		6	0	21.43	21.58	21.58	2
Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	3GPP MPR (dB)
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/3	QPSK	1	0	23.16	23.41	23.72	0
		1	7	23.03	23.29	23.73	0
		1	14	23.21	23.3	23.54	0
		8	0	22.3	22.45	22.38	1
		8	3	22.35	22.34	22.27	1
		8	7	22.44	22.33	22.34	1
		15	0	22.16	22.3	22.28	1
	16QAM	1	0	21.81	23.08	22.69	1
		1	7	21.72	22.87	22.74	1
		1	14	21.84	22.88	22.77	1
		8	0	21.27	21.55	21.53	2
		8	3	21.32	21.12	21.25	2
		8	7	21.41	21.14	21.52	2
		15	0	21.13	21.16	21.27	2





Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	3GPP MPR (dB)
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5/5	QPSK	1	0	23.16	23.41	23.37	0
		1	12	23.26	23.4	23.37	0
		1	24	23.23	23.37	23.31	0
		12	0	22.23	22.4	22.42	1
		12	6	22.31	22.16	22.29	1
		12	13	22.28	22.33	22.21	1
		25	0	22.21	22.31	22.33	1
	16QAM	1	0	22.16	22.34	22.02	1
		1	12	22.31	22.15	21.85	1
		1	24	22.39	22.28	21.85	1
		12	0	21.32	21.43	21.2	2
		12	6	21.32	21.34	21.09	2
		12	13	21.33	21.35	21.07	2
		25	0	21.33	21.38	21.29	2
Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	3GPP MPR (dB)
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/10	QPSK	1	0	23.13	23.29	23.27	0
		1	24	23.19	23.39	23.42	0
		1	49	23.34	23.35	23.35	0
		25	0	22.28	22.34	22.5	1
		25	12	22.39	22.15	22.66	1
		25	25	22.33	22.48	22.3	1
		50	0	22.43	22.09	22.6	1
	16QAM	1	0	22.38	22.53	22.62	1
		1	24	22.58	22.6	22.83	1
		1	49	22.43	22.7	22.7	1
		25	0	21.35	21.5	21.64	2
		25	12	21.37	21.43	21.56	2
		25	25	21.38	21.59	21.44	2
		50	0	21.13	21.38	21.39	2



ERP POWER (dBm)

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	23.23	1	22.08	161.44	7
20525	836.5	23.48	1	22.33	171	7
20643	848.3	23.55	1	22.4	173.78	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.43	1	21.28	134.28	7
20525	836.5	23.03	1	21.88	154.17	7
20643	848.3	22.57	1	21.42	138.68	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	23.21	1	22.06	160.69	7
20525	836.5	23.41	1	22.26	168.27	7
20635	847.5	23.73	1	22.58	181.13	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	21.84	1	20.69	117.22	7
20525	836.5	23.08	1	21.93	155.96	7
20635	847.5	22.77	1	21.62	145.21	7



**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	23.26	1	22.11	162.55	7
20525	836.5	23.41	1	22.26	168.27	7
20625	846.5	23.37	1	22.22	166.72	7

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.39	1	21.24	133.05	7
20525	836.5	22.34	1	21.19	131.52	7
20625	846.5	22.02	1	20.87	122.18	7

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	23.34	1	22.19	165.58	7
20525	836.5	23.39	1	22.24	167.49	7
20600	844.0	23.42	1	22.27	168.66	7

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	22.58	1	21.43	139	7
20525	836.5	22.7	1	21.55	142.89	7
20600	844.0	22.83	1	21.68	147.23	7

**REMARKS:** 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).  
: 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 3.2.3 TEST SETUP

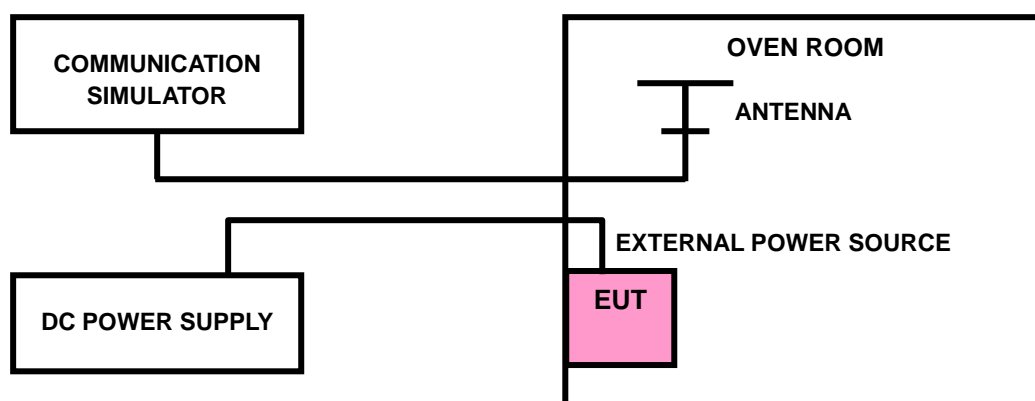



### 3.2.4 TEST RESULTS

#### LTE Band 5

#### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.8	0.1013	0.1081	2.5
3.55(BEP)	0.1074	0.1135	2.5
4.35	0.1195	0.105	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.35Vdc.

#### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	0.1044	0.1192	2.5
-20	0.0995	0.1248	2.5
-10	0.0949	0.122	2.5
0	0.1057	0.1277	2.5
10	0.1179	0.1153	2.5
20	0.115	0.1198	2.5
30	0.1272	0.1107	2.5
40	0.1284	0.1065	2.5
50	0.1197	0.1164	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.8	0.1039	0.0982	2.5
3.55(BEP)	0.1079	0.0924	2.5
4.35	0.0934	0.0839	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	0.1188	0.0858	2.5
-20	0.1124	0.0949	2.5
-10	0.1256	0.1048	2.5
0	0.1162	0.095	2.5
10	0.1245	0.0999	2.5
20	0.1318	0.1055	2.5
30	0.1354	0.0916	2.5
40	0.1374	0.1046	2.5
50	0.1317	0.1101	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.8	0.1094	0.1057	2.5
3.55(BEP)	0.0967	0.0924	2.5
4.35	0.0893	0.1022	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	0.0827	0.1043	2.5
-20	0.0893	0.119	2.5
-10	0.0973	0.1132	2.5
0	0.0975	0.1276	2.5
10	0.0852	0.114	2.5
20	0.0801	0.1234	2.5
30	0.0806	0.1311	2.5
40	0.0814	0.1409	2.5
50	0.0745	0.1351	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.8	0.0957	0.1057	2.5
3.55(BEP)	0.0938	0.1104	2.5
4.35	0.0813	0.1066	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	0.0905	0.1165	2.5
-20	0.0787	0.113	2.5
-10	0.0815	0.1189	2.5
0	0.0872	0.1156	2.5
10	0.0807	0.1025	2.5
20	0.0756	0.0882	2.5
30	0.0781	0.0864	2.5
40	0.0752	0.0751	2.5
50	0.0739	0.0734	2.5




### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 3.3.2 TEST SETUP

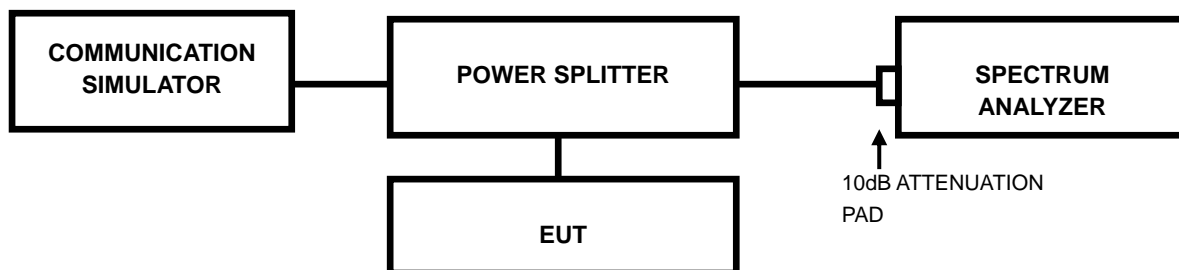




### 3.3.3 TEST RESULTS


#### LTE BAND 5

LTE band 5							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.085	1.088	20407	824.7	1.262	1.256
20525	836.5	1.084	1.085	20525	836.5	1.259	1.261
20643	848.3	1.083	1.085	20643	848.3	1.262	1.265

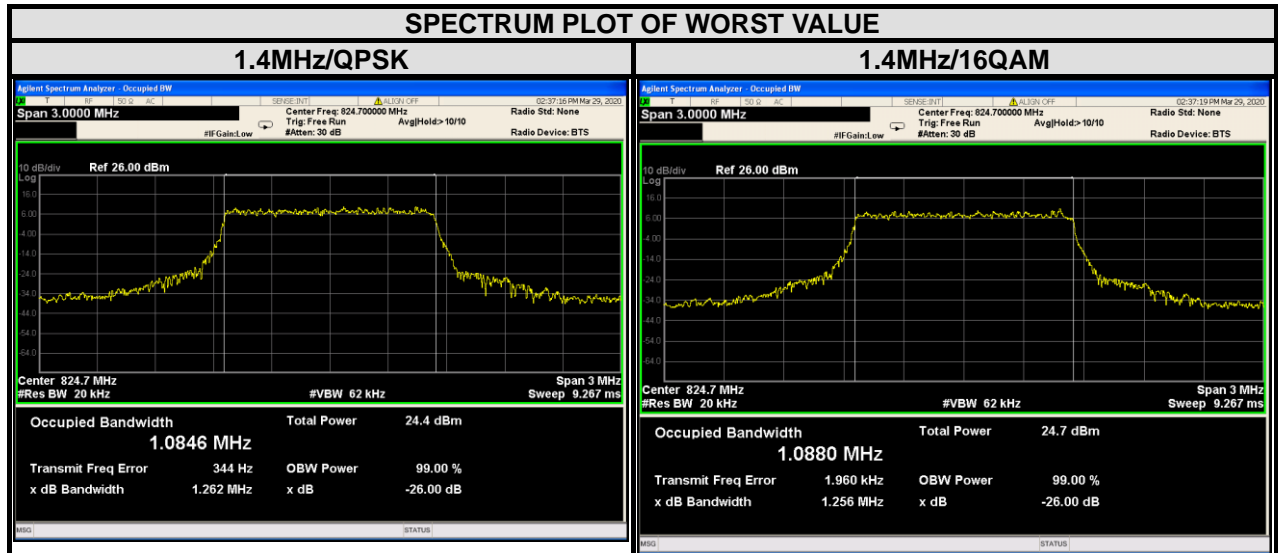




LTE band 5							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20415	825.5	2.6865	2.6860	20415	825.5	2.957	2.957
20525	836.5	2.6952	2.6868	20525	836.5	2.995	2.966
20635	847.5	2.6856	2.6848	20635	847.5	2.976	2.984

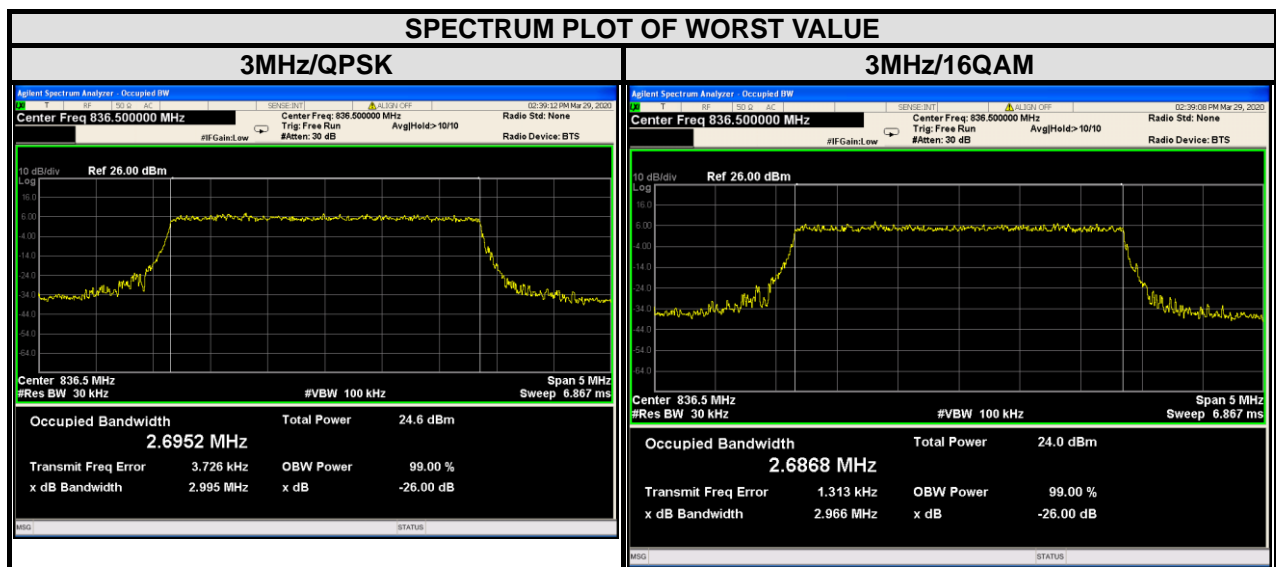




LTE band 5							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.4648	4.4742	20425	826.5	5.009	5.007
20525	836.5	4.4667	4.4813	20525	836.5	4.865	4.958
20625	846.5	4.4491	4.4619	20625	846.5	4.999	5.137

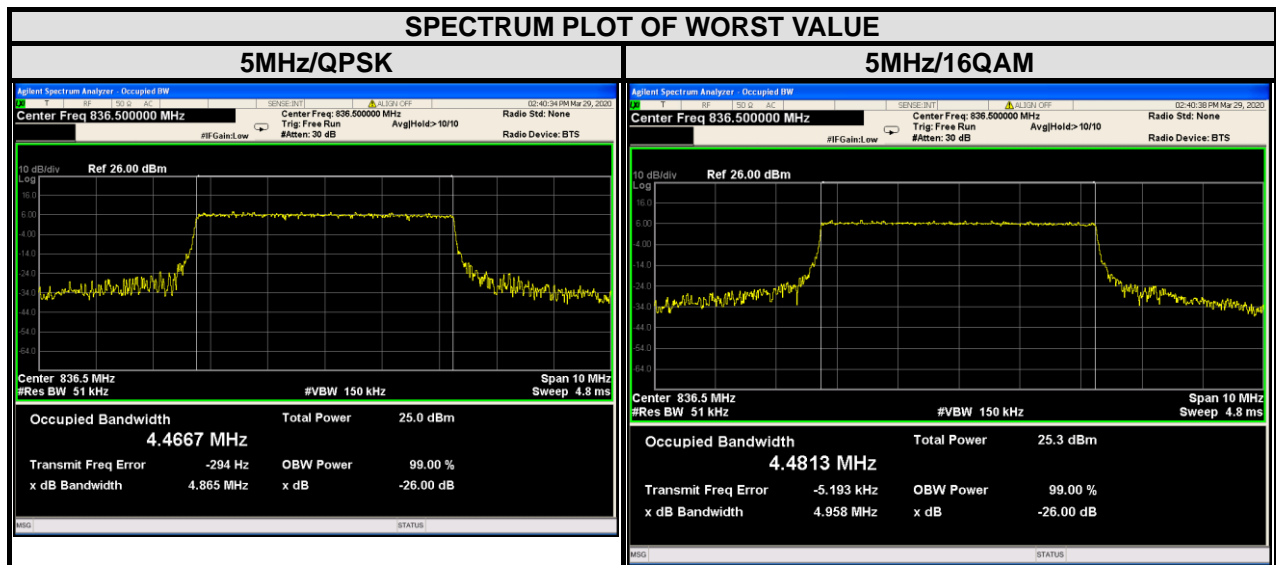



LTE band 5							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20450	829	8.9259	8.9255	20450	829	9.656	9.681
20525	836.5	8.9425	8.9418	20525	836.5	9.628	9.780
20600	844	8.9527	8.9522	20600	844	9.651	9.778

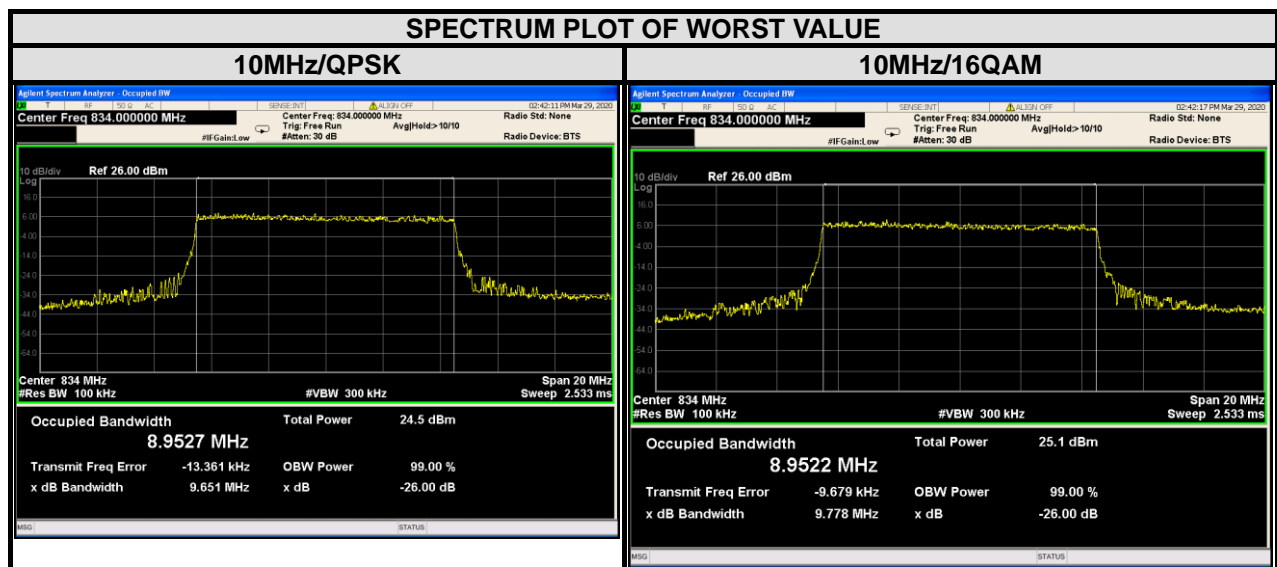


### 3.4 BAND EDGE MEASUREMENT

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

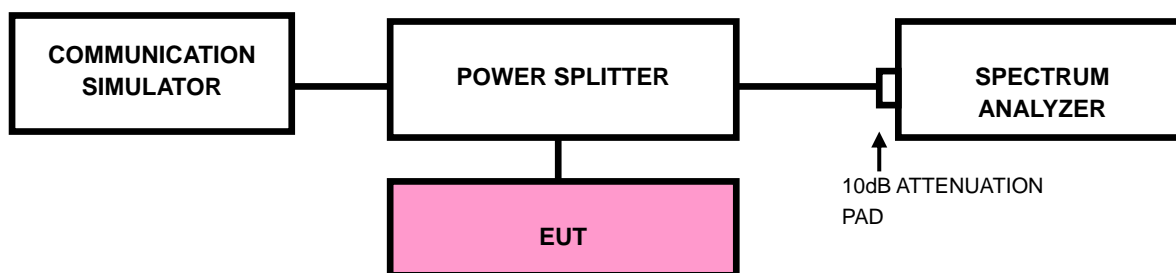




### 3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. Record the max trace plot into the test report.



### 3.4.4 TEST RESULTS

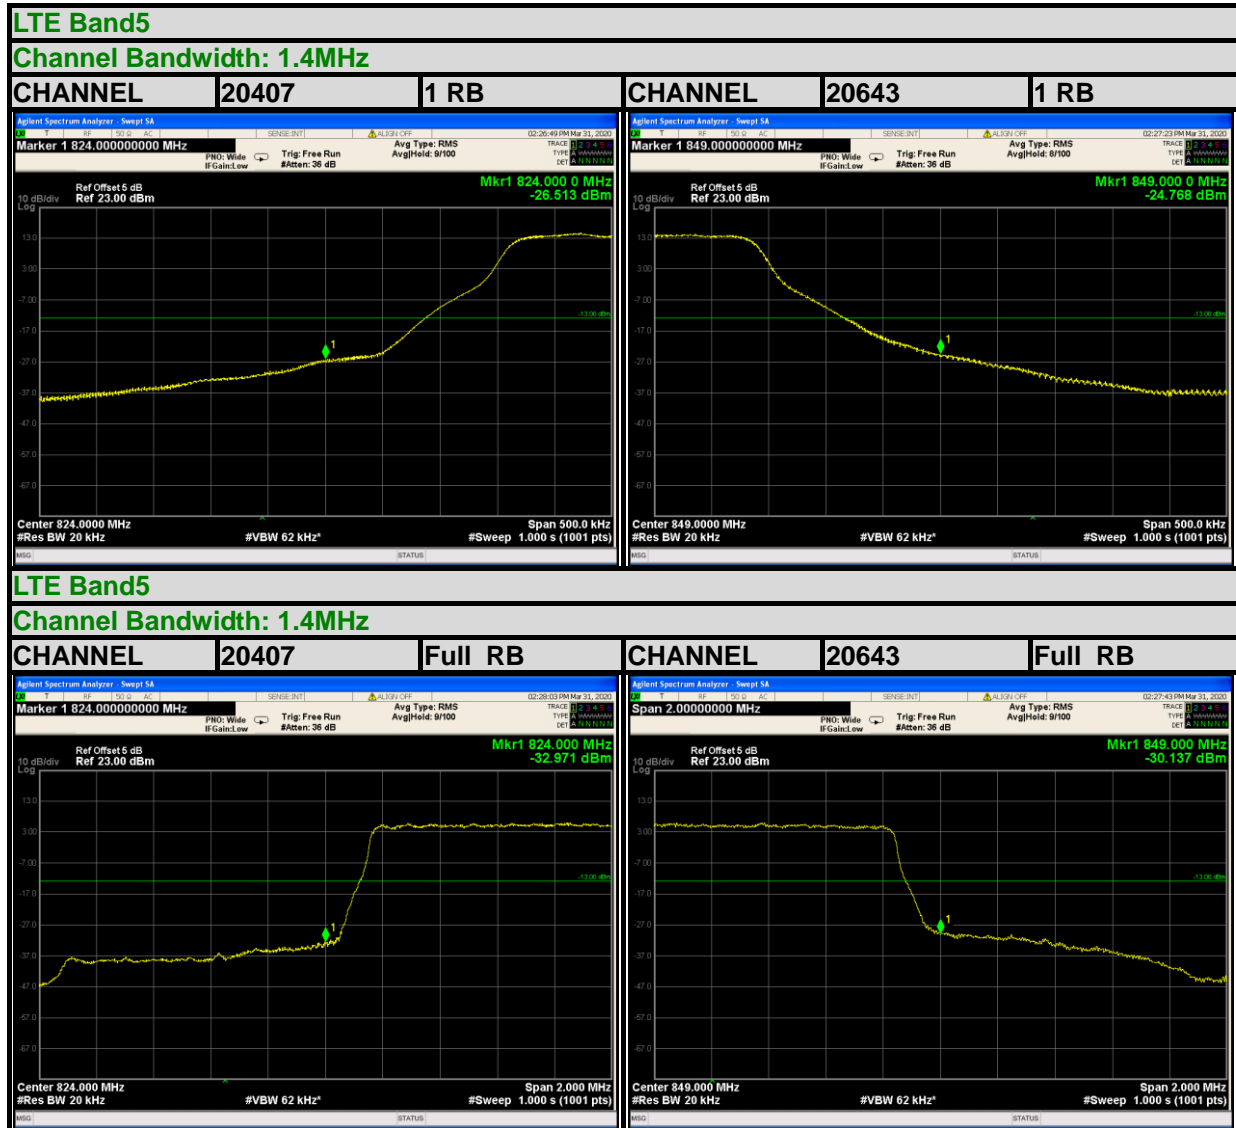






BUREAU VERITAS

Test Report No.: RF200327S003-1

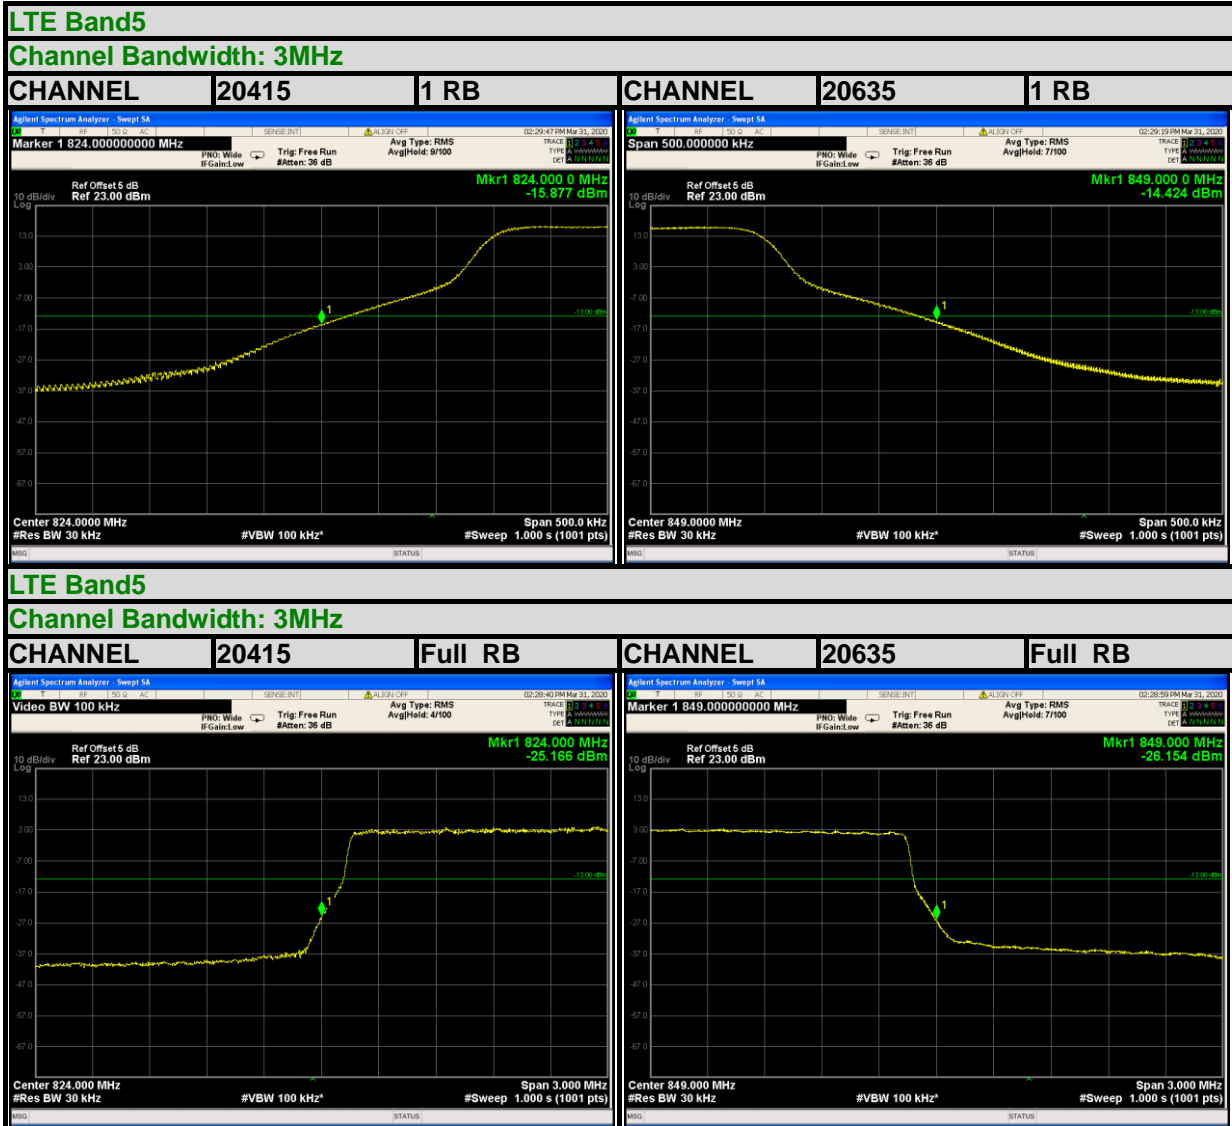

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200327S003-1

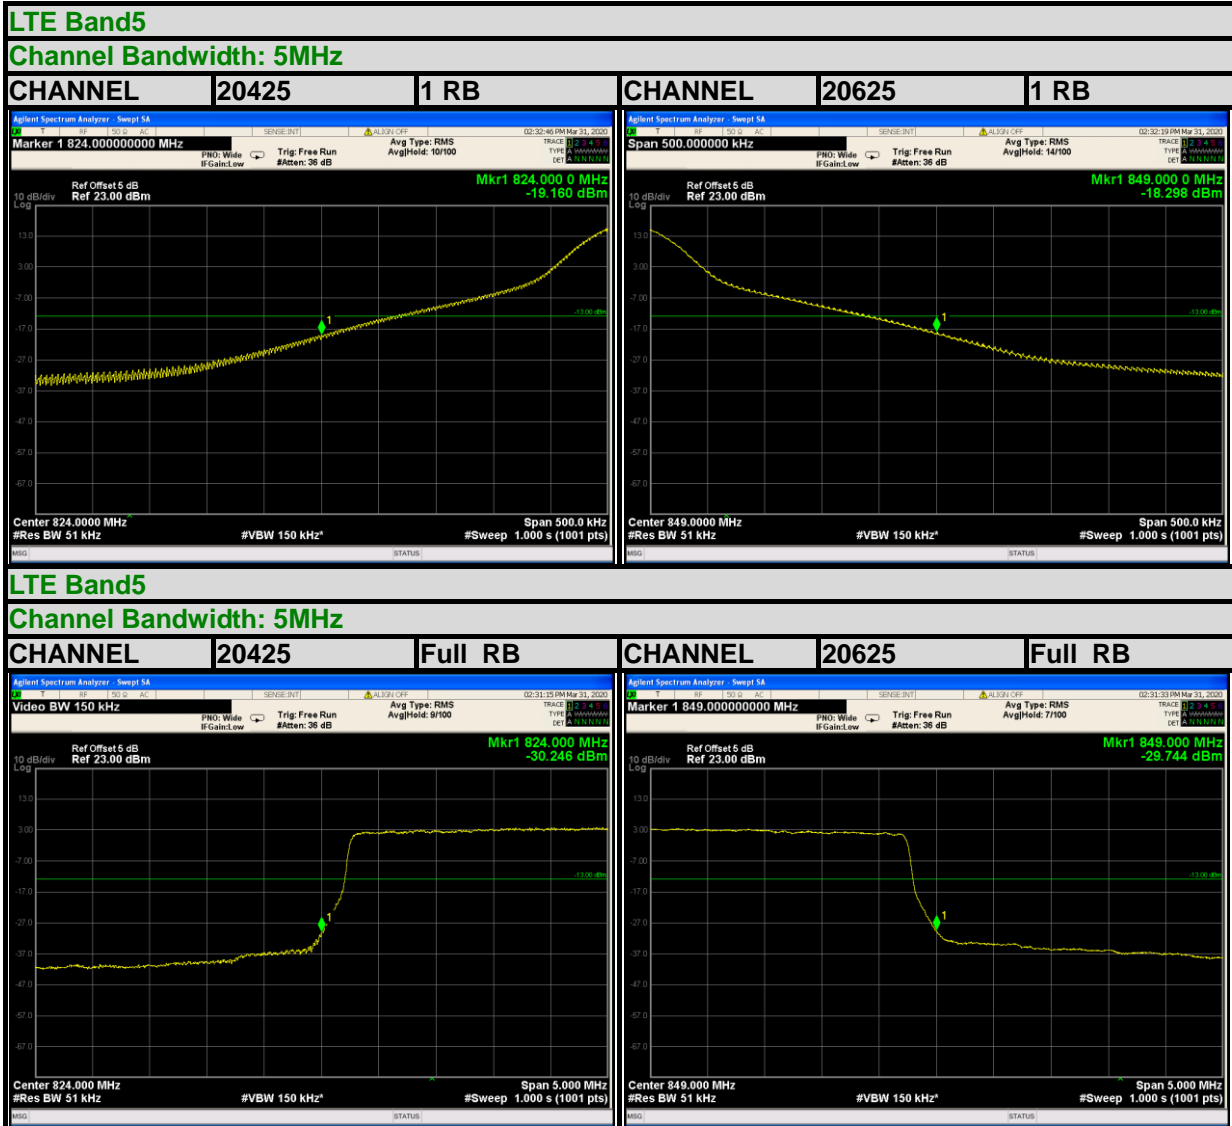

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200327S003-1

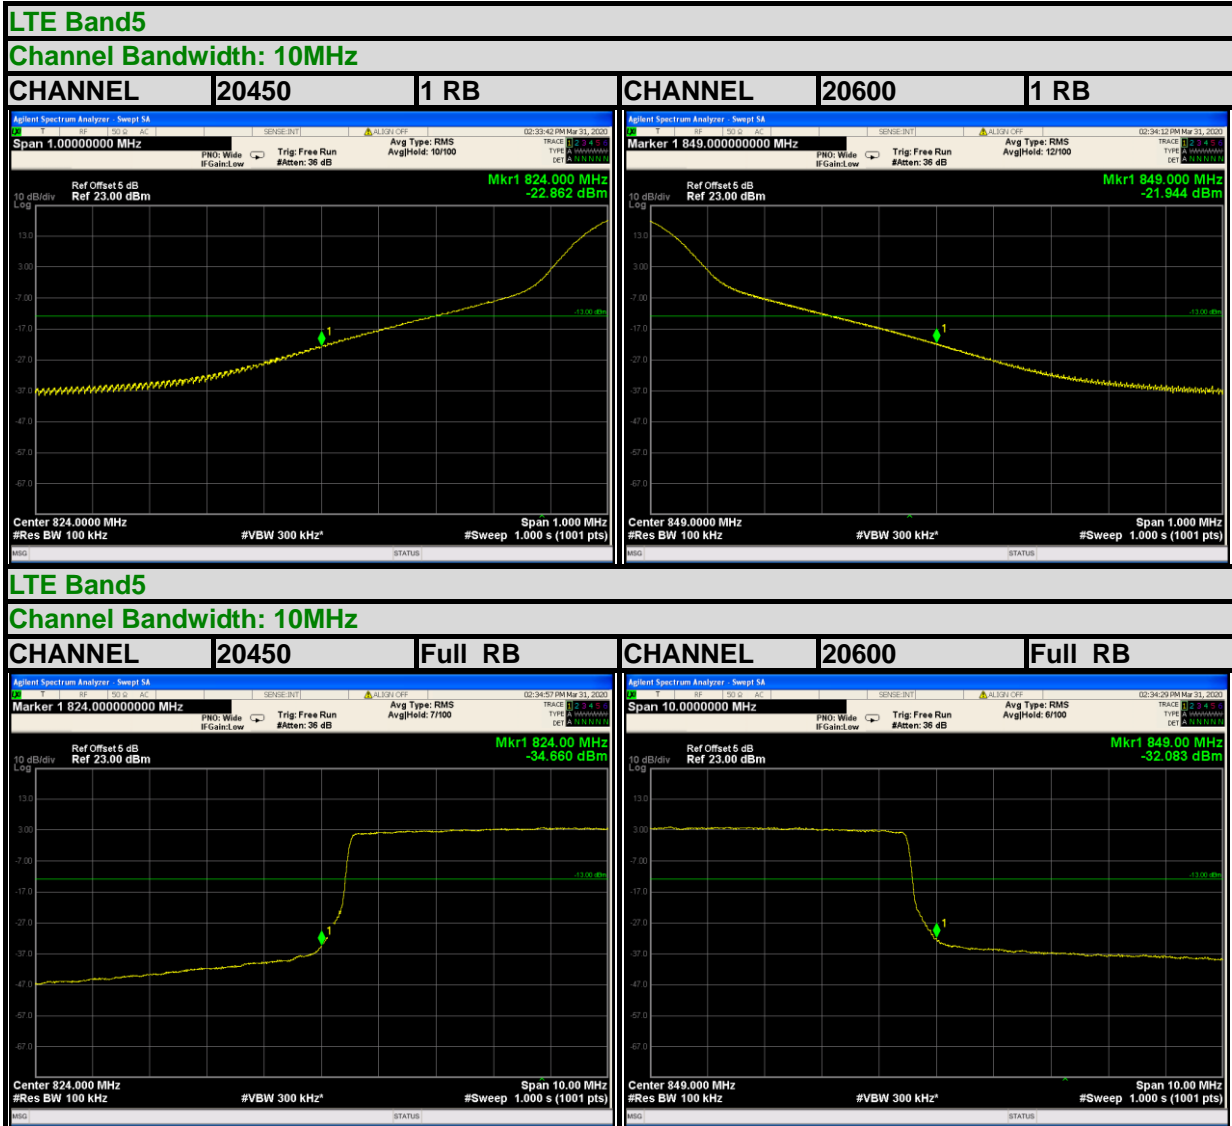

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE


- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

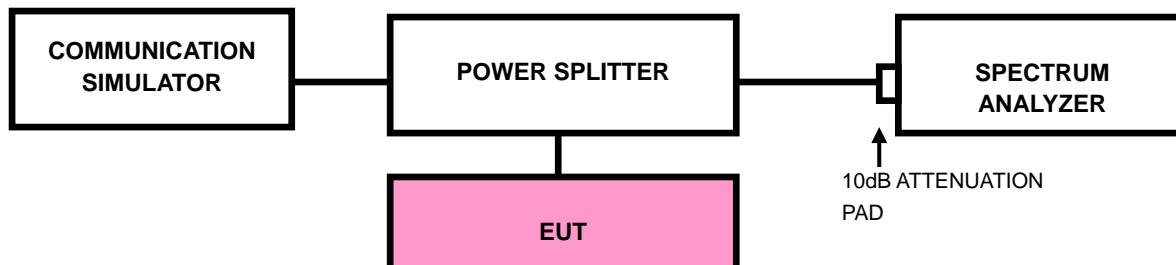




### 3.5.4 TEST RESULTS

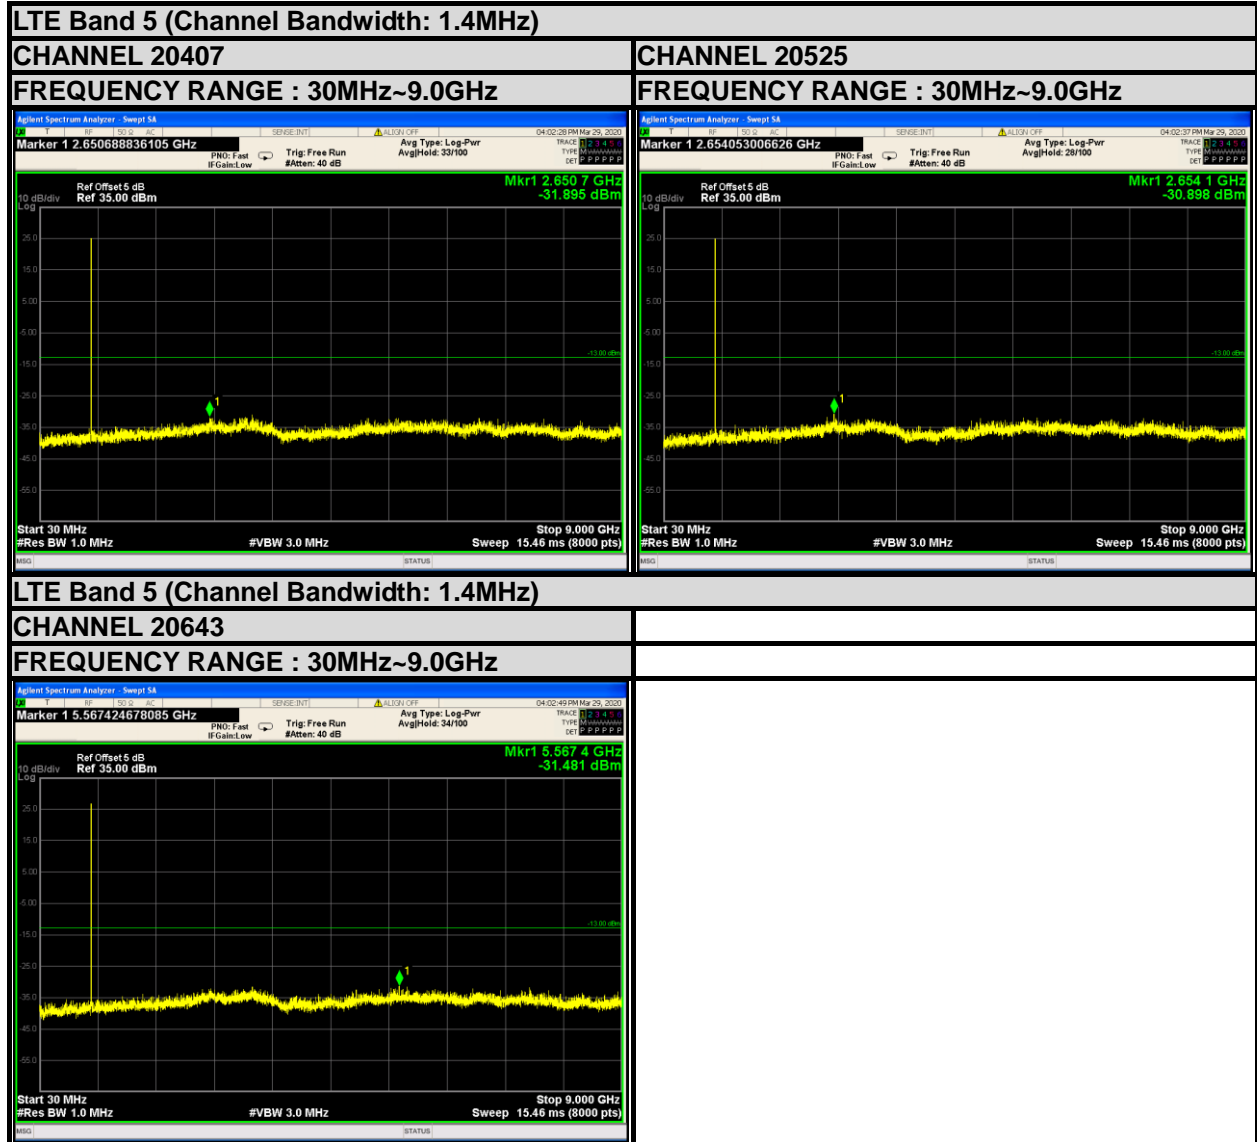



BUREAU VERITAS


Test Report No.: RF200327S003-1

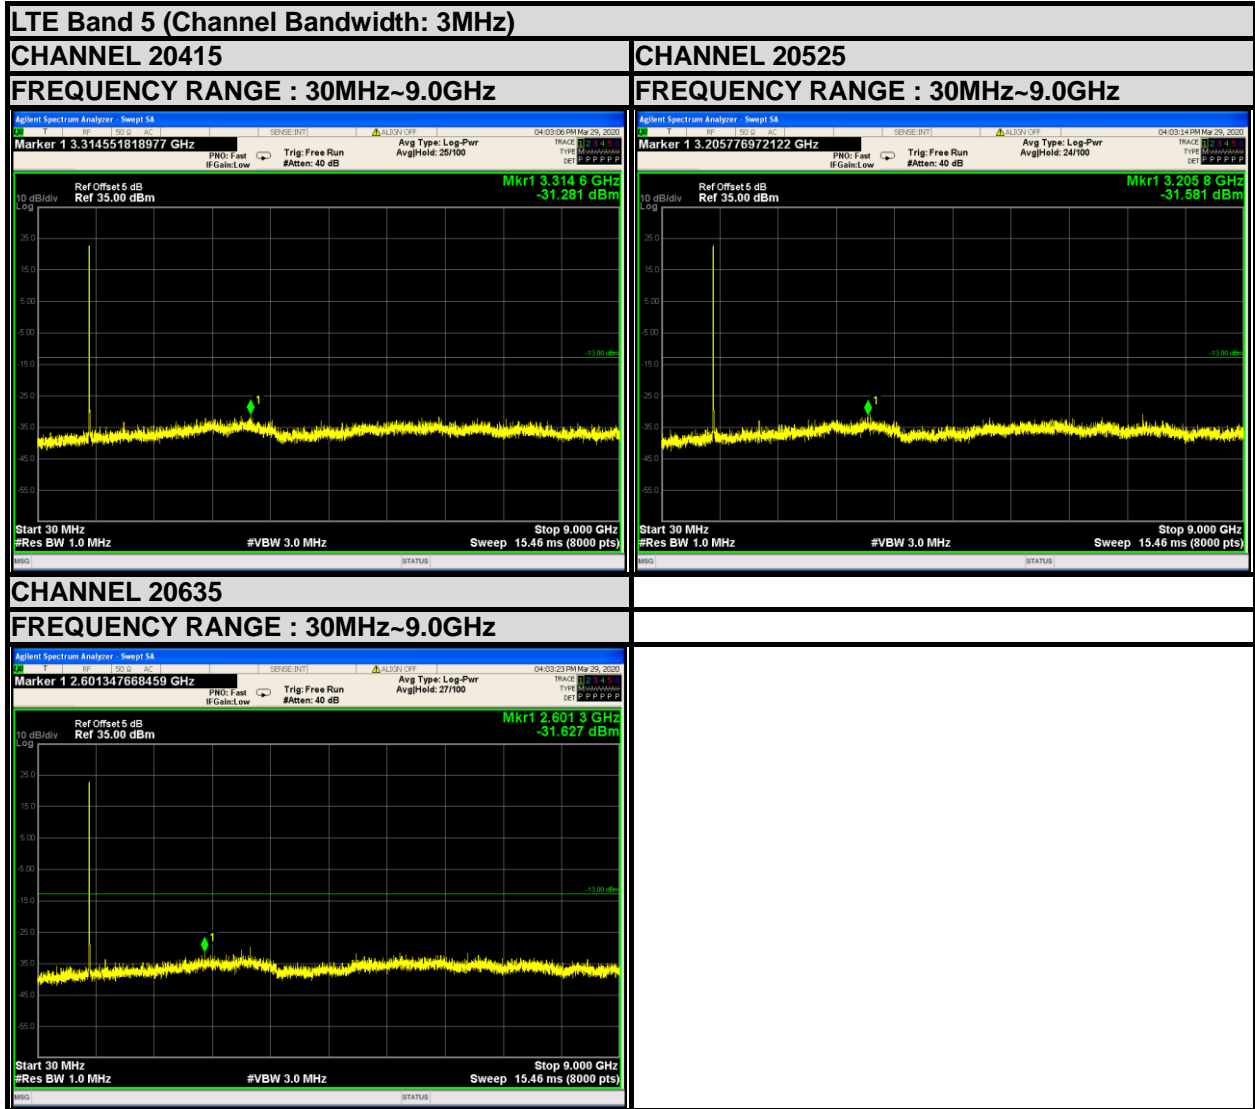



BUREAU VERITAS

Test Report No.: RF200327S003-1

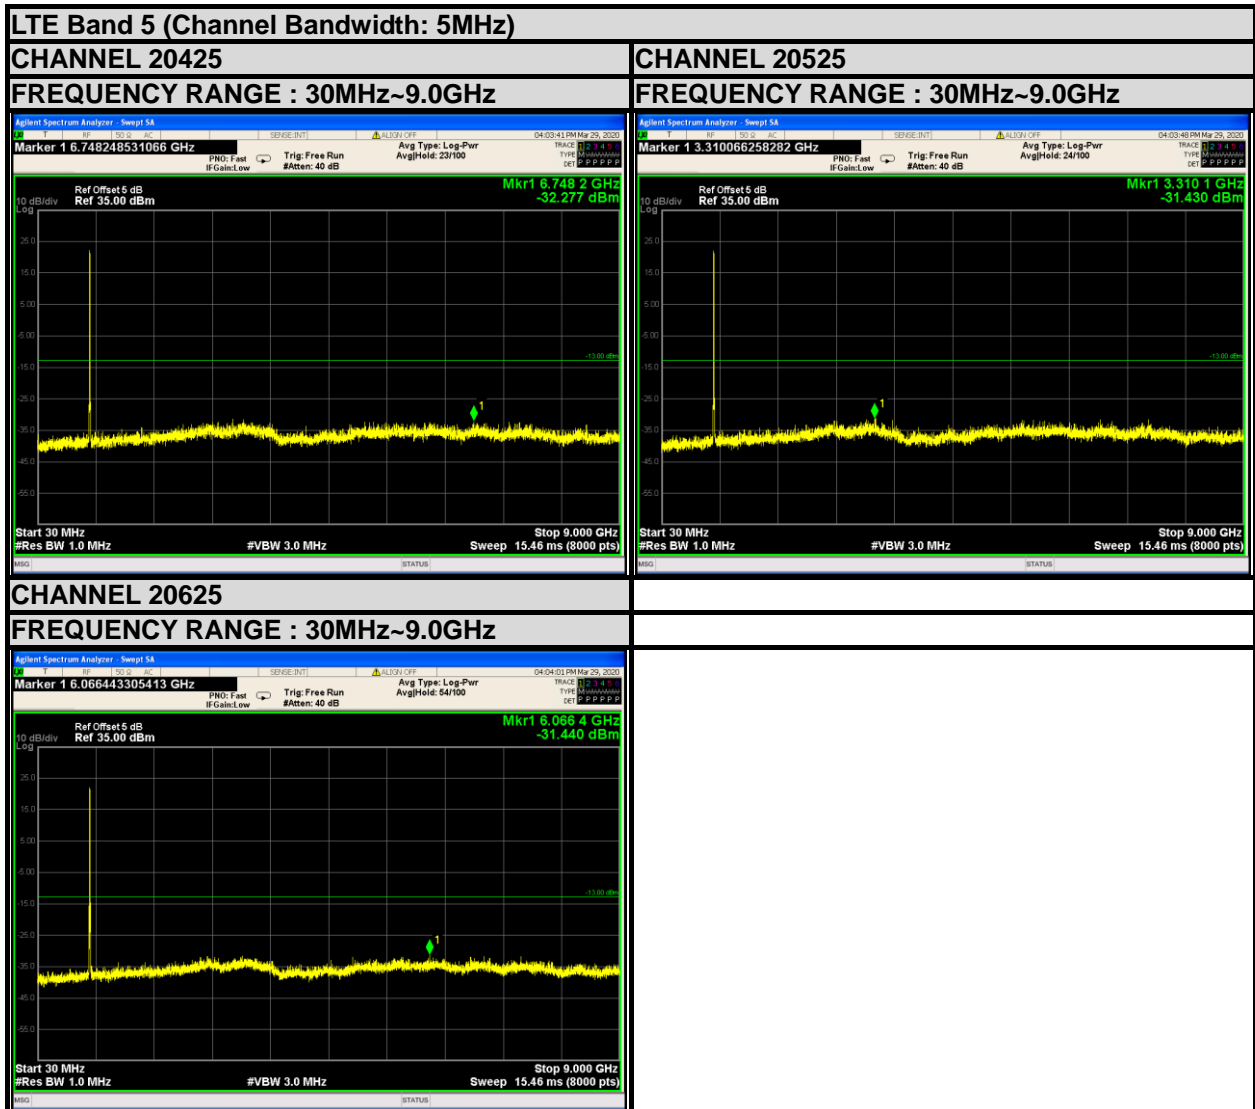

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200327S003-1

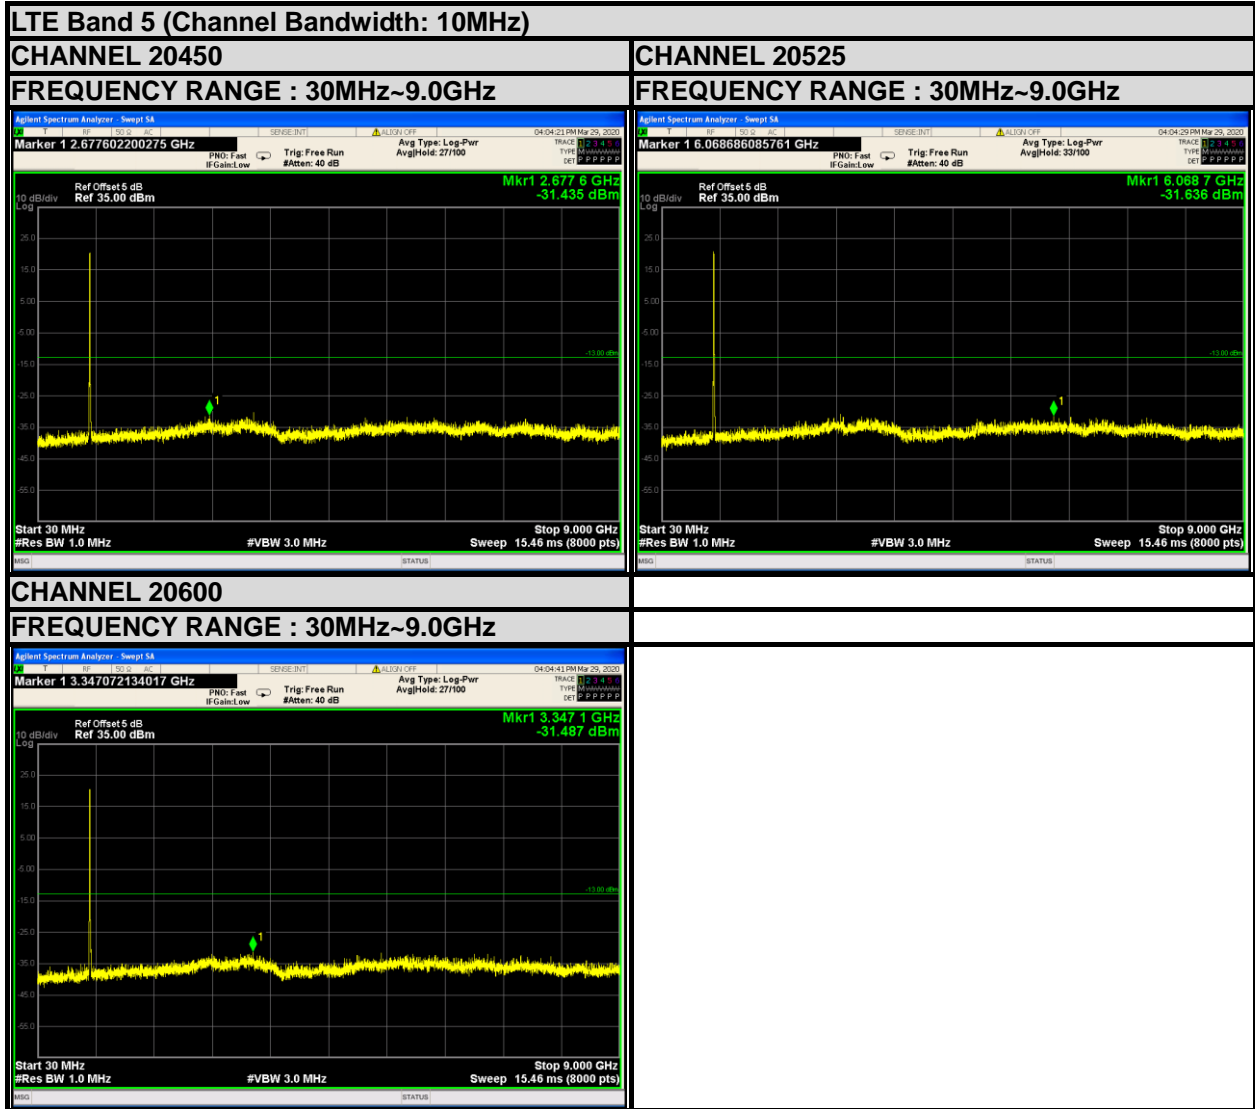





### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


#### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.6.4 TEST SETUP


<Below 30MHz>

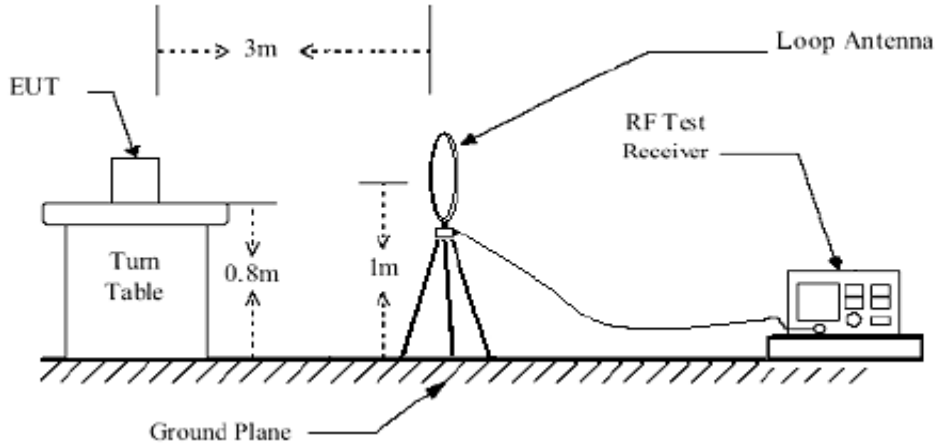

< Frequency Range 30MHz~1GHz >

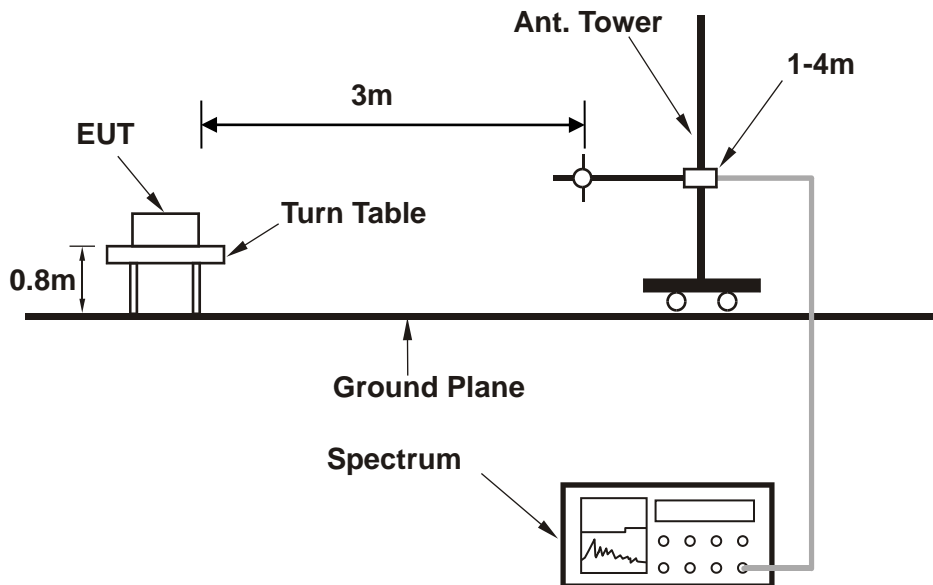

< Frequency Range above 1GHz >

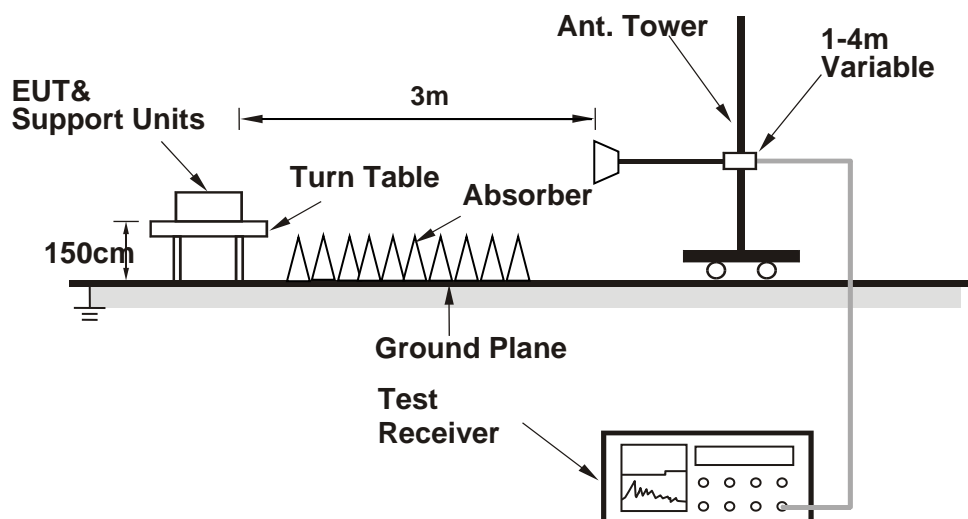

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.6.5 TEST RESULTS


#### BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE Band 5

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 60%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	30.9619	H	-55.67	peak	-13	-42.67	-68.91	-13.24
2	70.0903	H	-73.82	peak	-13	-60.82	-71.42	2.4
3	191.745	H	-64.28	peak	-13	-51.28	-64.55	-0.27
4	240.8304	H	-67.8	peak	-13	-54.8	-68.6	-0.8
5	494.1984	H	-67.16	peak	-13	-54.16	-73.21	-6.05
6	842.1296	H	-60.38	peak	-13	-47.38	-71.08	-10.7

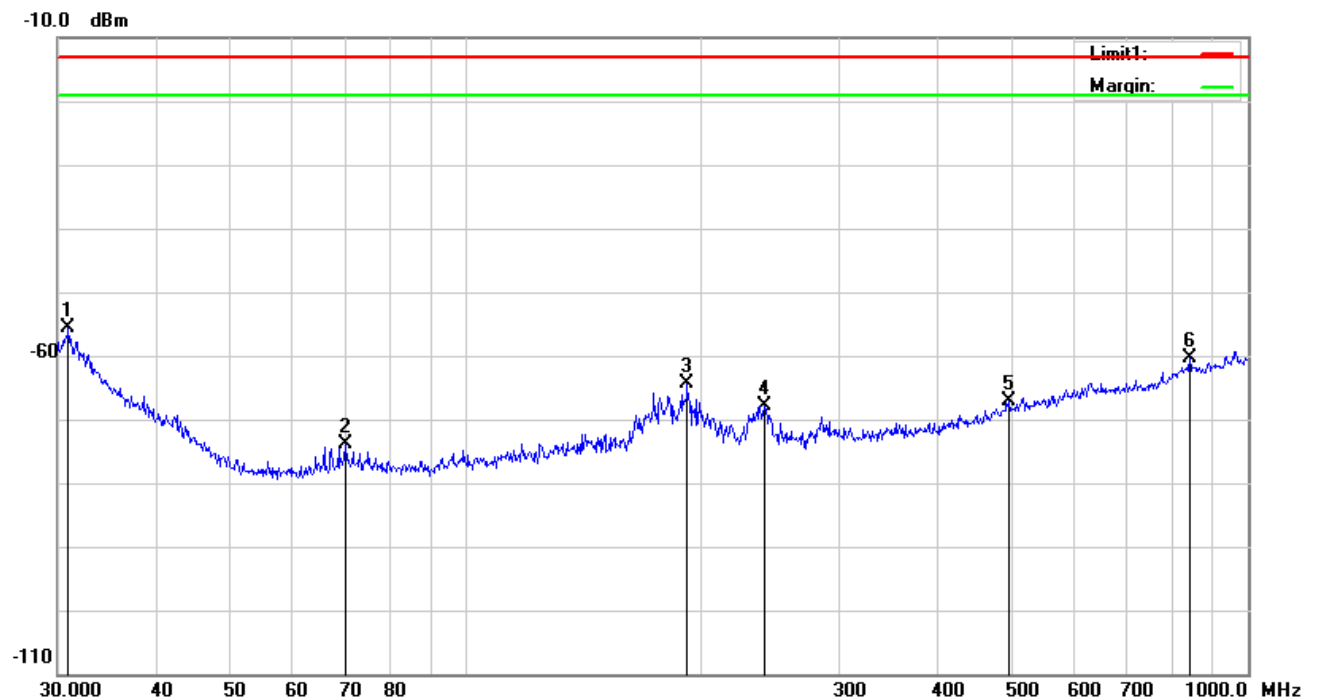




**BUREAU  
VERITAS**

**Test Report No.: RF200327S003-1**

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 60%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	32.4059	V	-60.83	peak	-13	-47.83	-65.89	-5.06
2	43.0505	V	-63.52	peak	-13	-50.52	-61.71	1.81
3	67.2022	V	-67.36	peak	-13	-54.36	-65.48	1.88
4	229.2931	V	-67.78	peak	-13	-54.78	-70.2	-2.42
5	517.248	V	-62.93	peak	-13	-49.93	-72.48	-9.55
6	955.4381	V	-55.09	peak	-13	-42.09	-69.8	-14.71

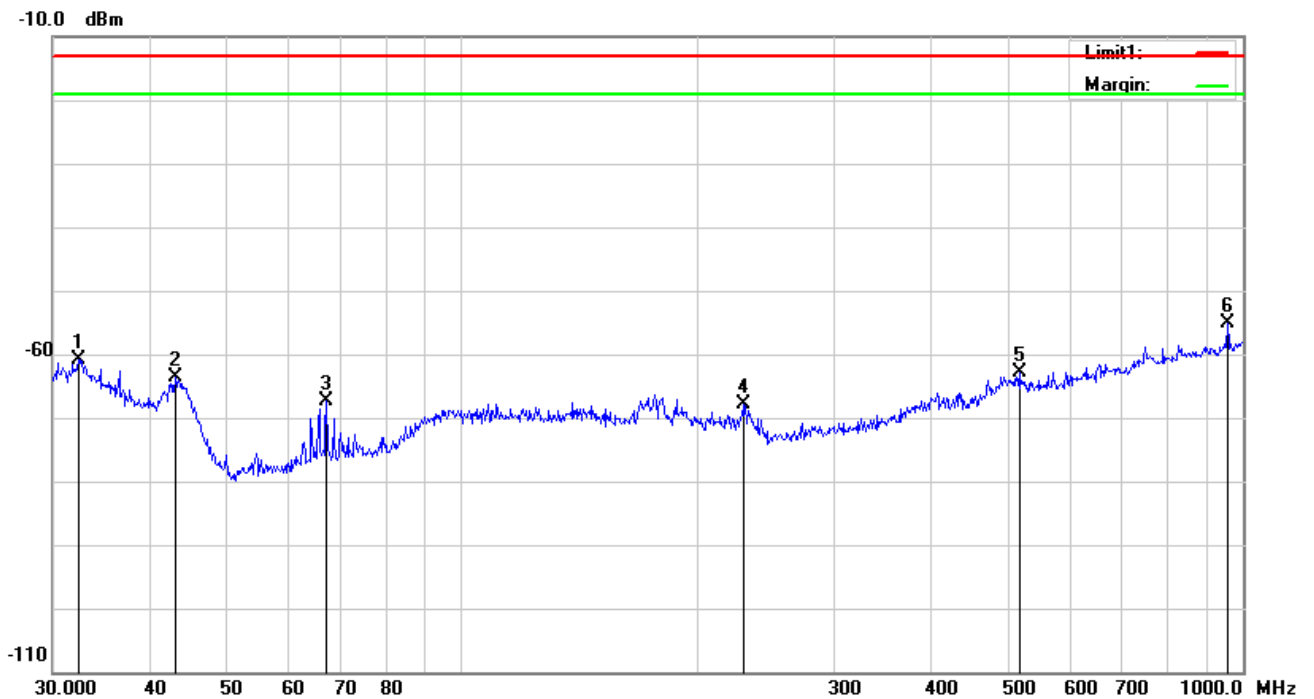



ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1649.4	V	-36.87	PK	-13	-23.87	-47.84	10.97
2	1649.4	H	-42.42	PK	-13	-29.42	-53.39	10.97
3	2474.1	V	-44.32	PK	-13	-31.32	-60.03	15.71
4	2474.1	H	-41.46	PK	-13	-28.46	-57.17	15.71

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1673	V	-36.16	PK	-13	-23.16	-47.13	10.97
2	1673	H	-41.23	PK	-13	-28.23	-52.2	10.97
3	2509.5	V	-40.61	PK	-13	-27.61	-56.32	15.71
4	2509.5	H	-39.33	PK	-13	-26.33	-55.04	15.71



High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1696.6	V	-36.25	PK	-13	-23.25	-47.22	10.97
2	1696.6	H	-38.87	PK	-13	-25.87	-49.84	10.97
3	3393.2	V	-37.51	PK	-13	-24.51	-55.47	17.96
4	3393.2	H	-29.39	PK	-13	-16.39	-47.35	17.96

**Note:**

- 1, The testing has been conformed to  $10 \times 848.3\text{MHz} = 8,483\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



LTE Band 5:

CHANNEL BANDWIDTH: 3MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1651	V	-37.32	PK	-13	-24.32	-48.29	10.97
2	1651	H	-41.16	PK	-13	-28.16	-52.13	10.97
3	3302	V	-47.19	PK	-13	-34.19	-64.95	17.76
4	3302	H	-38.46	PK	-13	-25.46	-56.22	17.76

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1673	V	-35.9	PK	-13	-22.9	-46.87	10.97
2	1673	H	-39.01	PK	-13	-26.01	-49.98	10.97
3	3346	V	-42.5	PK	-13	-29.5	-60.26	17.76
4	3346	H	-34.09	PK	-13	-21.09	-51.85	17.76





High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1695	V	-36.46	PK	-13	-23.46	-47.43	10.97
2	1695	H	-39.85	PK	-13	-26.85	-50.82	10.97
3	3390	V	-39.52	PK	-13	-26.52	-57.48	17.96
4	3390	H	-32.15	PK	-13	-19.15	-50.11	17.96

**Note:**

- 1, The testing has been conformed to  $10 \times 847.5\text{MHz} = 8,475\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



**LTE Band 5:**

**CHANNEL BANDWIDTH: 5MHz / QPSK**

**Low channel**

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1653	V	-35.83	PK	-13	-22.83	-46.8	10.97
2	1653	H	-36.15	PK	-13	-23.15	-47.12	10.97
3	3306	V	-47.57	PK	-13	-34.57	-65.33	17.76
4	3306	H	-42.27	PK	-13	-29.27	-60.03	17.76

**Middle channel**

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1673	V	-36.97	PK	-13	-23.97	-47.94	10.97
2	1673	H	-38.97	PK	-13	-25.97	-49.94	10.97
3	3346	V	-41.55	PK	-13	-28.55	-59.31	17.76
4	3346	H	-35.17	PK	-13	-22.17	-52.93	17.76



High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1693	V	-37.85	PK	-13	-24.85	-48.82	10.97
2	1693	H	-39.43	PK	-13	-26.43	-50.4	10.97
3	3386	V	-42.06	PK	-13	-29.06	-60.02	17.96
4	3386	H	-35.68	PK	-13	-22.68	-53.64	17.96

**Note:**

- 1, The testing has been conformed to  $10 \times 846.5\text{MHz} = 8,465\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



**LTE Band 5:**

**CHANNEL BANDWIDTH: 10MHz / QPSK**

**Low channel**

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1658	V	-36.5	PK	-13	-23.5	-47.47	10.97
2	1658	H	-35.33	PK	-13	-22.33	-46.3	10.97
3	3316	V	-44.39	PK	-13	-31.39	-62.15	17.76
4	3316	H	-38.88	PK	-13	-25.88	-56.64	17.76

**Middle channel**

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1873	V	-37.17	PK	-13	-24.17	-48.14	10.97
2	1873	H	-36.79	PK	-13	-23.79	-47.76	10.97
3	3746	V	-42.8	PK	-13	-29.8	-61.24	18.44
4	3746	H	-36.36	PK	-13	-23.36	-54.8	18.44



High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1688	V	-35.57	PK	-13	-22.57	-46.54	10.97
2	1688	H	-41.47	PK	-13	-28.47	-52.44	10.97
3	3376	V	-42.71	PK	-13	-29.71	-60.67	17.96
4	3376	H	-34.33	PK	-13	-21.33	-52.29	17.96

**Note:**


- 1, The testing has been conformed to  $10 \times 844\text{MHz} = 8,440\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

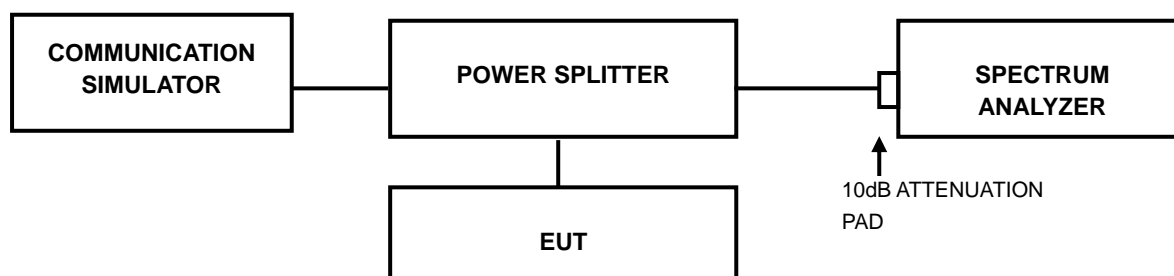

#### 3.7.3 TEST PROCEDURES


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



### 3.7.4 TEST RESULTS

#### LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	5.65	6.35	20415	825.5	5.67	6.30
20525	836.5	5.66	6.55	20525	836.5	5.82	6.53
20643	848.3	5.01	5.68	20635	847.5	5.21	5.91

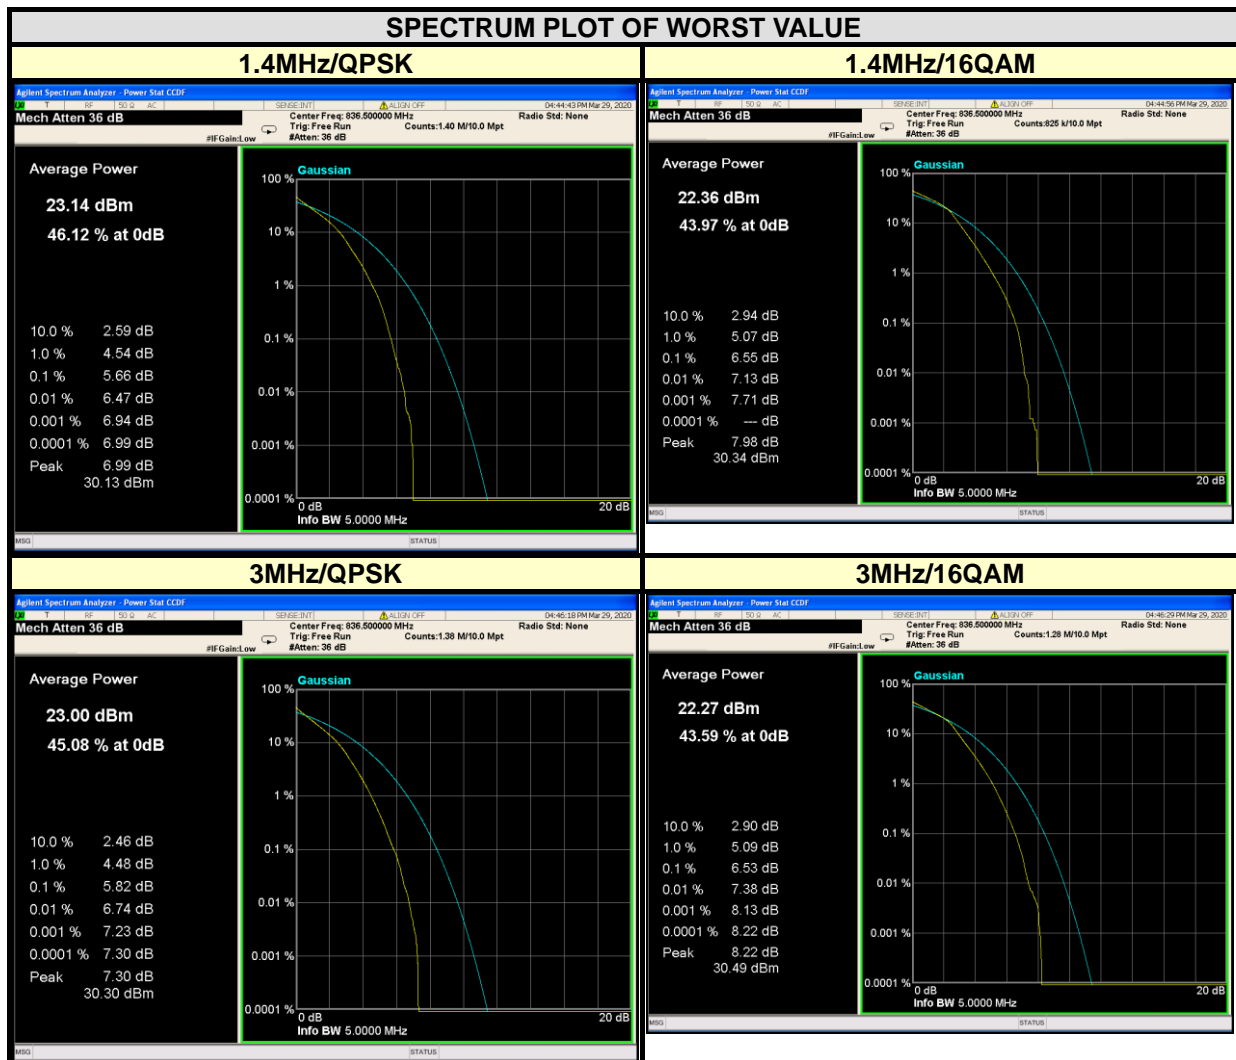



CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	5.61	6.16	20450	829	5.56	6.12
20525	836.5	5.74	6.39	20525	836.5	5.67	6.32
20625	846.5	5.12	5.78	20600	844	5.04	5.67







**BUREAU  
VERITAS**

Test Report No.: RF200327S003-1

#### **4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**