

Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

## RF Emissions Test Report

FCC Part 15.247

For

Kyocera Corporation  
c/o Kyocera Communication Inc.

Product:	Single-Band CDMA Phone
Model:	SA001

## TABLE OF CONTENTS

1	SUMMARY OF TESTING .....	4
2	EQUIPMENT UNDER TEST INFORMATION.....	4
3	TEST FACILITIES.....	5
4	TEST SETUP .....	5
5	PEAK OUTPUT POWER .....	6
5.1	Test Configuration .....	6
5.2	Results and Limits: .....	6
6	20 DB BANDWIDTH .....	10
6.1	Test Configuration .....	10
6.2	20dB Bandwidth Plots and Results .....	10
7	CARRIER FREQUENCY SEPARATION .....	14
7.1	Test Configuration .....	14
7.2	Results: Carrier Frequency.....	14
8	NUMBER OF HOPPING FREQUENCIES .....	15
8.1	Test Configuration .....	15
8.2	Results: Number of Hopping Frequencies.....	15
9	TIME OF OCCUPANCY (DWELL TIME) .....	17
9.1	Test Configuration .....	17
9.2	Results: Dwell Time.....	17
10	BANDEDGE .....	19
10.1	Test Configuration .....	19
10.2	Results: Bandedge .....	19
11	SPURIOUS RF CONDUCTED EMISSIONS.....	26
11.1	Test Configuration .....	26
11.2	Results: Conducted Spurious Emissions.....	26
12	AC POWER LINE CONDUCTED EMISSIONS.....	30
12.1	Test Configuration & Results.....	30
13	RADIATED EMISSIONS .....	30
13.1	Test Configuration & Results.....	30
14	TEST EQUIPMENT.....	30

Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

## ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

<b>Product:</b>	Single-Band CDMA Cellular Phone with Bluetooth+EDR
<b>Model #:</b>	SA001
<b>FCC ID:</b>	V65SA001
<b>Tested in accordance with:</b>	FCC Part 15.247
<b>Test performed by:</b>	Comptest Services LLC
<b>Test Requested by:</b>	KYOCERA Corporation C/o KYOCERA Communication Inc 10300 Campus Point Drive San Diego, CA92121
<b>Date of Test:</b>	July 28, 2009 – July 29, 2009

**Responsible Engineer**

***Benjamin Nguyen***

---

Benjamin Nguyen  
Test Engineer

**Reviewed and approved by:**




---

Tammy To  
Quality Manager

## 1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
4	FCC § 15.247 b1, IC RSS-210 §A8.4 (2)	Peak Output Power	Pass
5	FCC § 15.247 a1, IC RSS-210 §6.2.2(o) a1	20 dB Bandwidth	Pass
6	FCC § 15.247 a1, IC RSS-210 §A8.1(2)	Carrier Frequency Separation	Pass
7	FCC § 15.247 a1 iii, IC RSS-210 §A8.1 (4)	Number of Hopping Frequencies	Pass
8	FCC § 15.247 a1 iii, § 15.247 f, IC RSS-210 §A8.1 (4)	Time of Occupancy	Pass
9	FCC § 15.247 d, IC RSS-210 §A8.5	Band-edge Compliance of Conducted Emissions	Pass
10	FCC § 15.247 d, IC RSS-210 §A8.5	Spurious RF Conducted Emissions	Pass
11	FCC § 15.107 § 15.207, IC RSS-210 §6.6	AC Power Line Conducted Emissions	Pass
12	FCC § 15.109, § 15.209, IC RSS-210 §A2.9(2)	Spurious Radiated Emissions	Pass

## 2 EQUIPMENT UNDER TEST INFORMATION


<b>EUT Serial Number:</b>	SSAEG000160
<b>Type:</b>	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production
<b>Equipment Category:</b>	Portable
<b>TX Frequency (MHz):</b>	2402 to 2480
<b>Channel Numbers:</b>	79
<b>Channel Spacing (MHz):</b>	1
<b>Bluetooth version:</b>	<input type="checkbox"/> 1.1 <input type="checkbox"/> 1.2 <input type="checkbox"/> 2.0 <input checked="" type="checkbox"/> 2.0 + EDR
<b>Modulation:</b>	Frequency Hopping Spread Spectrum (FHSS), Class 2
<b>Max. Output Power (dBm)</b>	0.29 dBm
<b>Antenna:</b>	Internal
<b>Antenna Gain (dBi):</b>	-8.6 (Peak)

### 3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 10300 Campus Point Drive San Diego, CA 92121, USA

### 4 TEST SETUP

The Bluetooth RF output of the equipment under test (EUT) was connected to the input of the spectrum analyzer through a RF cable with a specialized RF connector. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as power supply voltage.

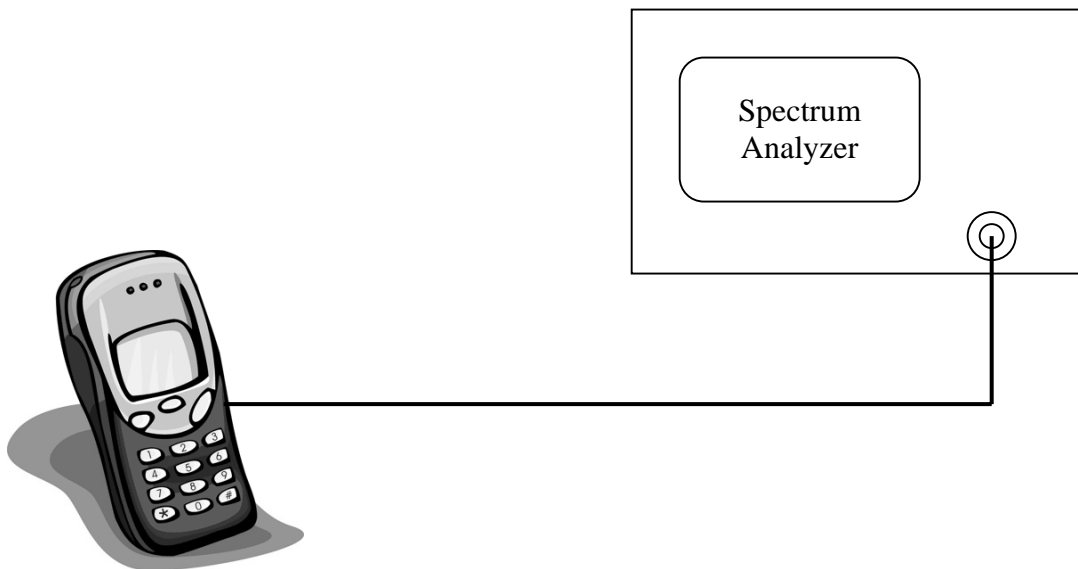

## 5 PEAK OUTPUT POWER

### 5.1 Test Configuration

**FCC:** § 15.247 b1

**IC:** RSS-210 §A8.4 (2)

The Bluetooth transmitter was enabled at low, mid and high channels of separately to investigate the peak output power for each channel.

**Frequencies of Interest:** Spectrum was investigated from 2400 MHz – 2483.5 MHz.

**Limits:** < 1 watt (for systems with at least 75 hopping channels)

### 5.2 Results and Limits:

Figure	Channel	Modulation	Results
5-1	0	Basic Rate	0.29 dBm
5-1a		EDR DQPSK	-6.28 dBm
5-1b		EDR D8PSK	-6.02 dBm
5-2	39	Basic Rate	-0.51 dBm
5-2a		EDR DQPSK	-6.77 dBm
5-2b		EDR D8PSK	-6.68 dBm
5-3	78	Basic Rate	-0.94 dBm
5-3a		EDR DQPSK	-7.43 dBm
5-3b		EDR D8PSK	-7.12 dBm

**Comments:** Within Bluetooth Power Class 2 limit



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

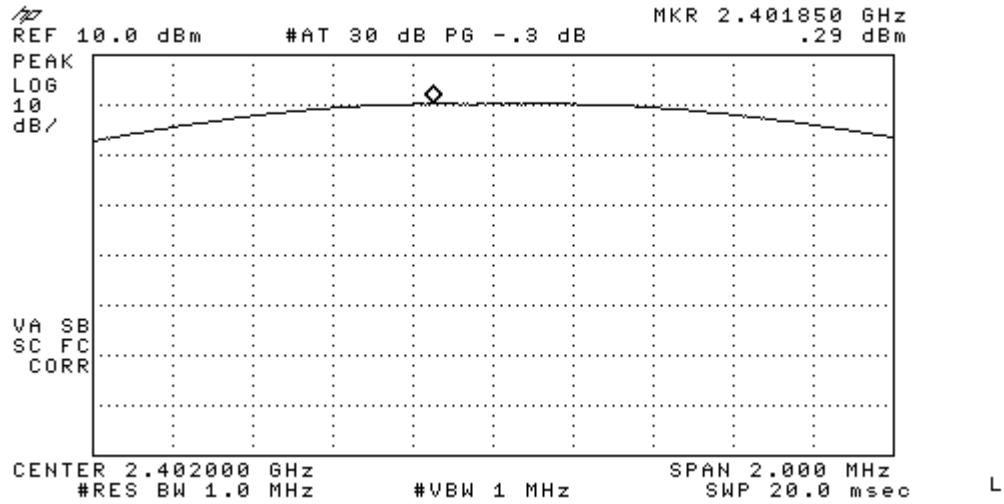


Figure 5-1: Peak Output Power, Basic Rate Channel 0.

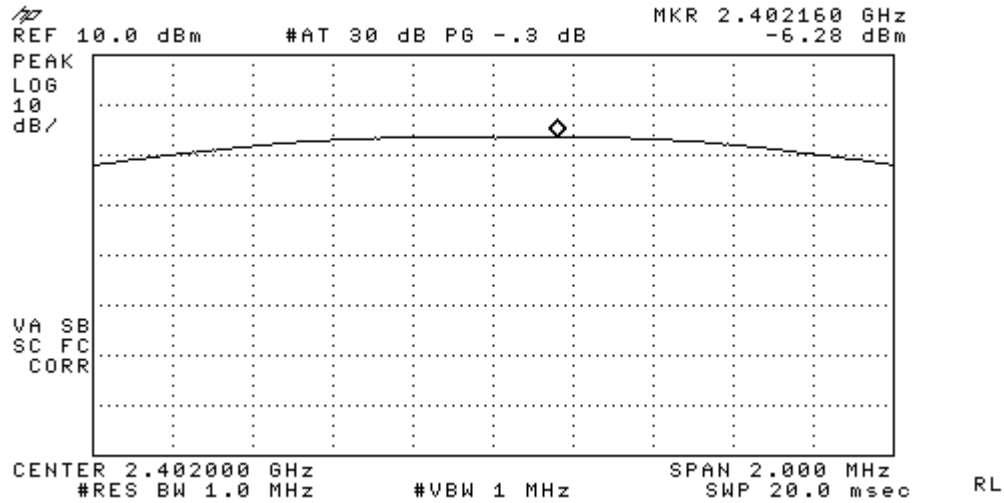


Figure 5-1a: Peak Output Power, EDR DQPSK Channel 0.

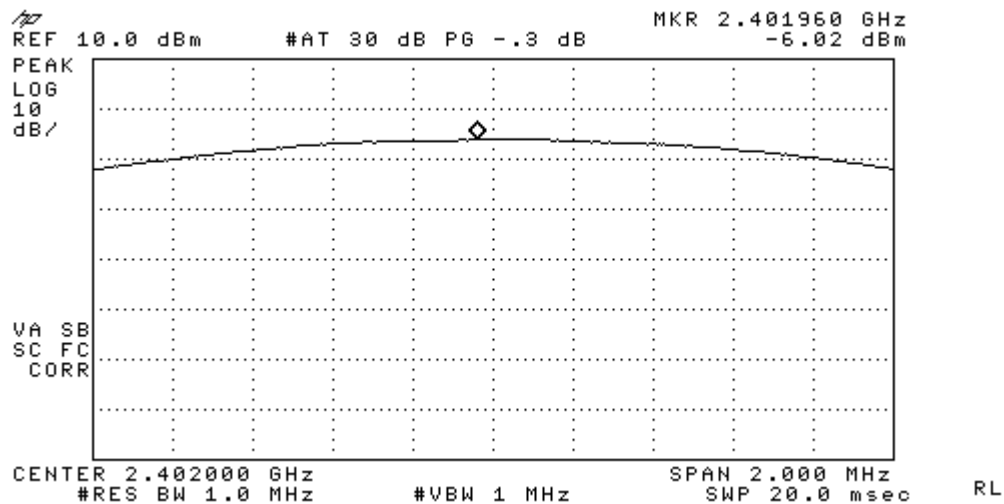


Figure 5-1b: Peak Output Power, EDR D8PSK Channel 0.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

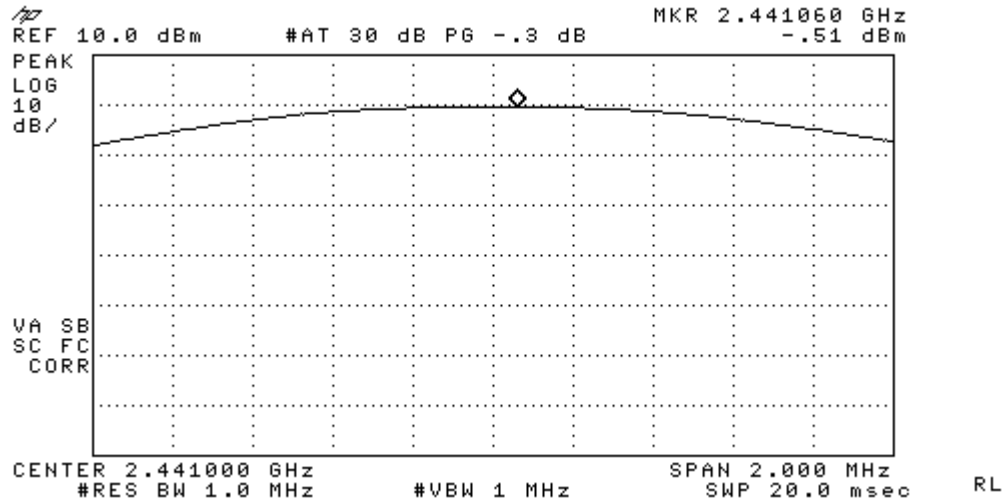


Figure 5-2: Peak Output Power, Channel 39.

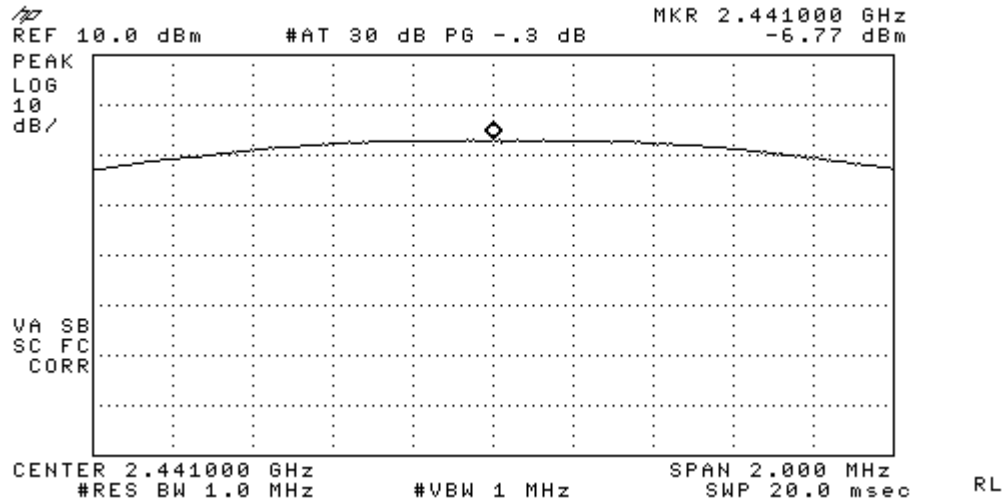


Figure 5-2a: Peak Output Power, EDR DQPSK Channel 39.

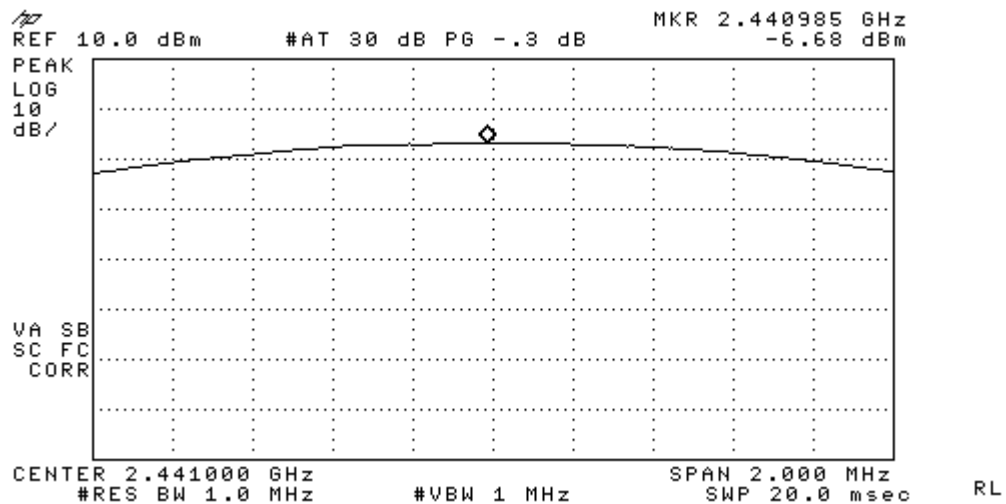


Figure 5-2b: Peak Output Power, EDR D8PSK Channel 39.





Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

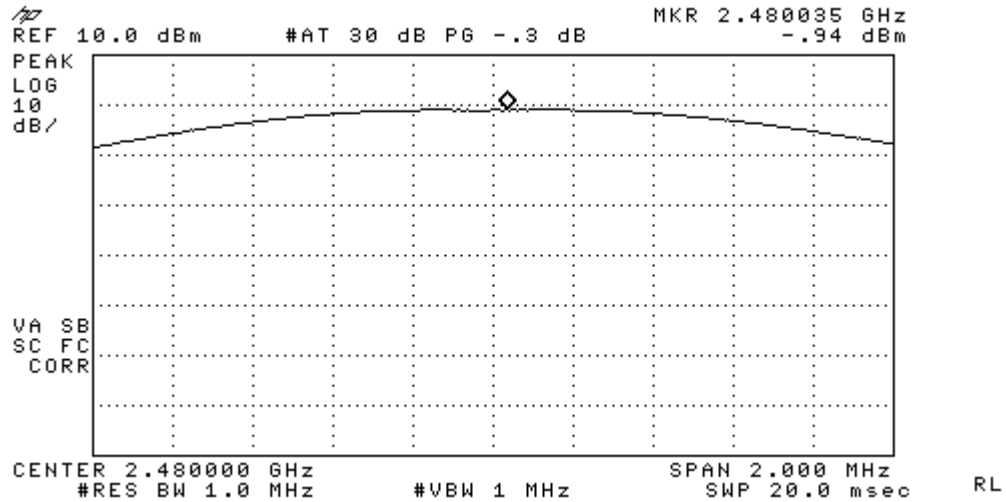


Figure 5-3: Peak Output Power, Channel 78.

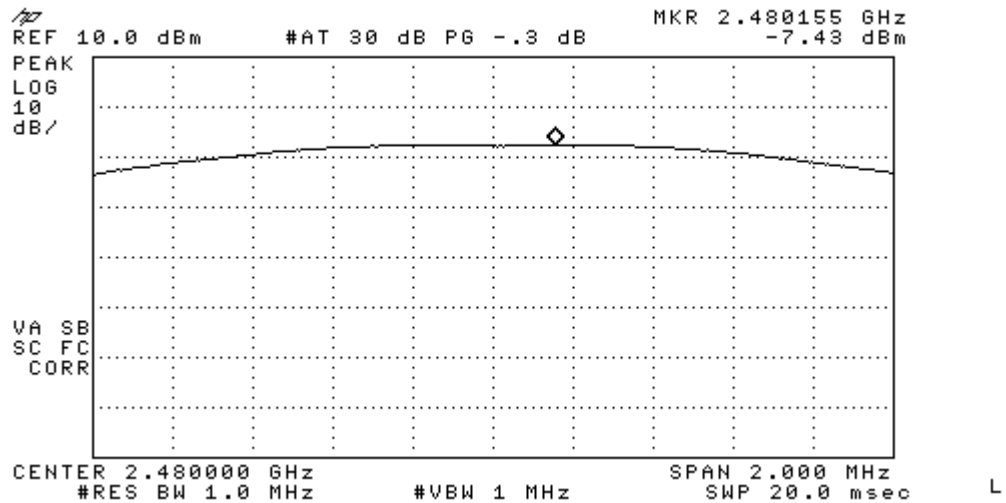


Figure 5-3a: Peak Output Power, EDR DQPSK Channel 78.

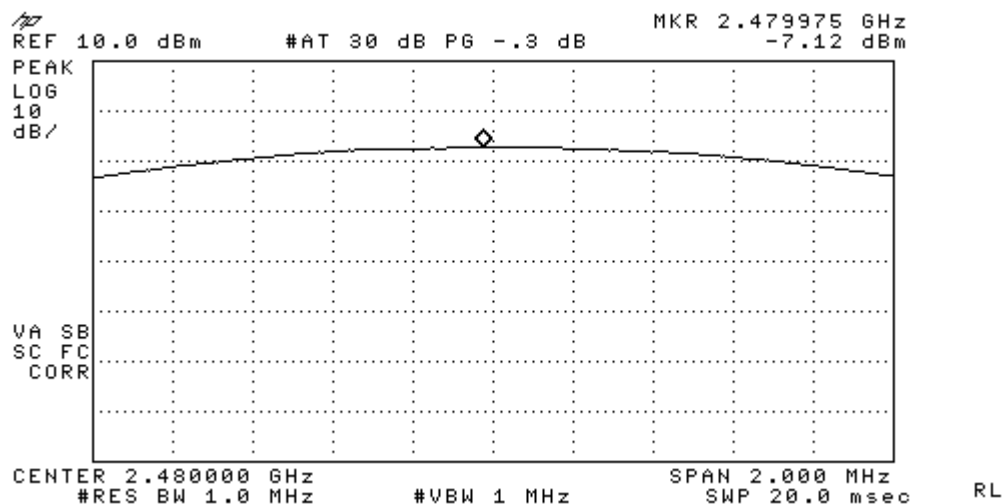


Figure 5-3b: Peak Output Power, EDR D8PSK Channel 78.

## 6 20 DB BANDWIDTH

### 6.1 Test Configuration

**FCC:** § 15.247 a1

**IC:** RSS-210 §6.2.2(o) a1

The Bluetooth transmitter was enabled at low, mid, high channels and at each supporting modulation scheme separately to investigate the 20dB-bandwidth for each channel. Delta marker on the spectrum analyzer was moved from the center frequency until -20dBc to measure the 20dB-bandwidth.

**Frequencies of Interest:** Spectrum was investigated from 2402 MHz – 2480 MHz.

### 6.2 20dB Bandwidth Plots and Results

Figure	Channel	Modulation	Results
6-1a	0	Basic Rate	920 kHz
6-1b		EDR DQPSK	1.295 MHz
6-2c		EDR D8PSK	1.265 MHz
6-2a	39	Basic Rate	875 kHz
6-2b		EDR DQPSK	1.290 MHz
6-2c		EDR D8PSK	1.240 MHz
6-3a	78	Basic Rate	865 kHz
6-3b		EDR DQPSK	1.290 MHz
6-3c		EDR D8PSK	1.240 MHz



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

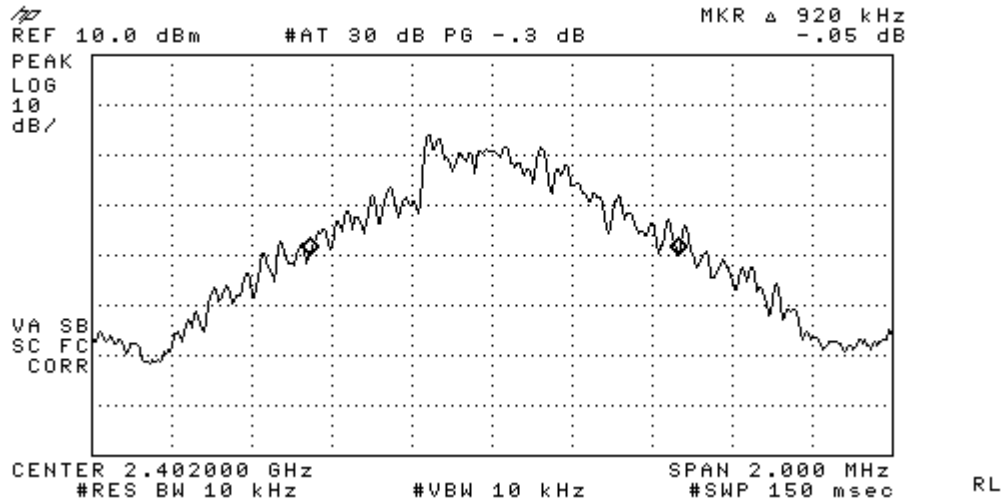


Figure 6-1a: 20dB Bandwidth Basic rate, Channel 0.

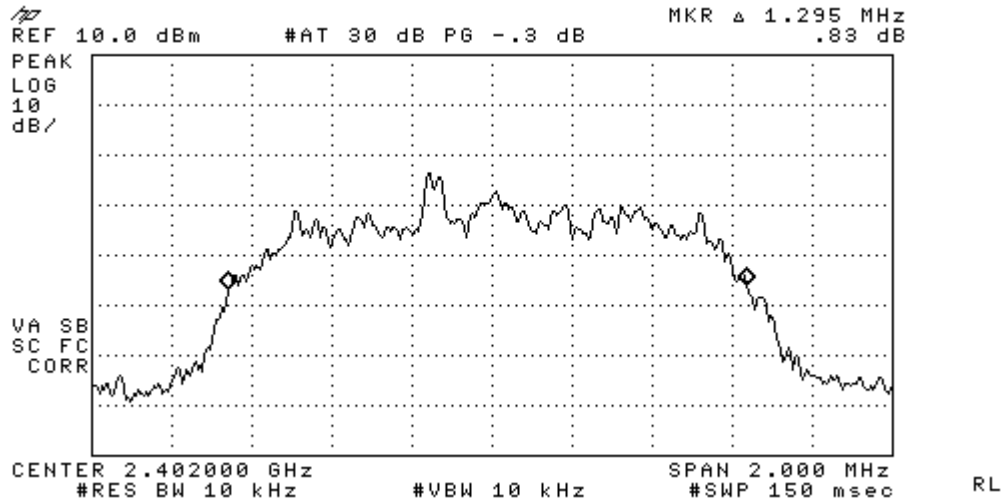


Figure 6-1b: 20dB Bandwidth EDR DQPSK, Channel 0.

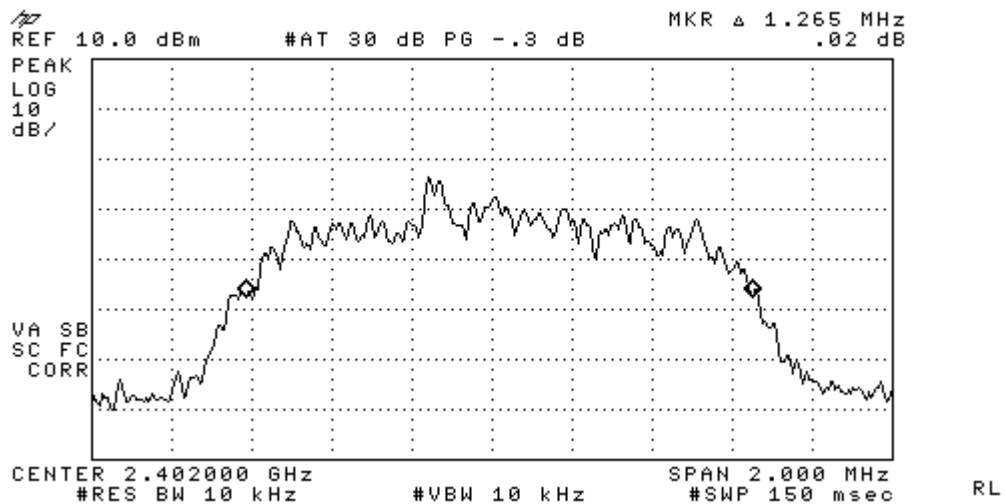


Figure 6-1c: 20dB Bandwidth EDR D8PSK, Channel 0.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

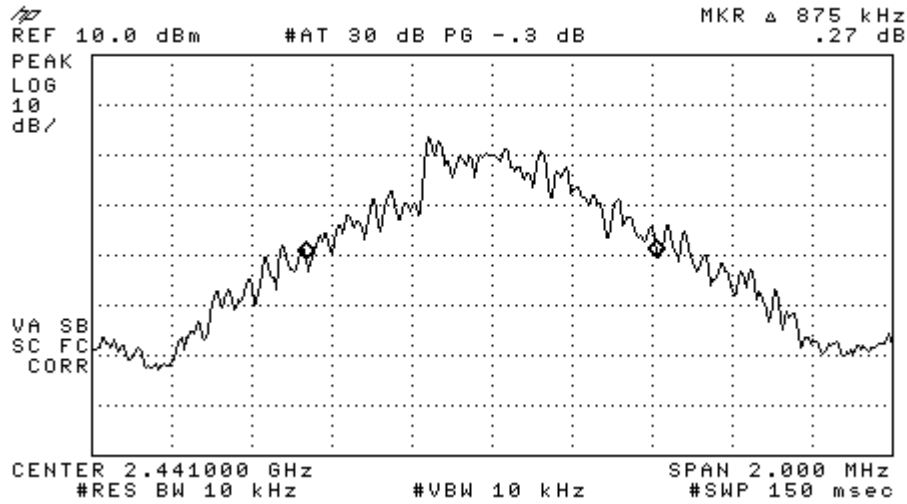


Figure 6-2a: 20dB Bandwidth Basic rate, Channel 39.

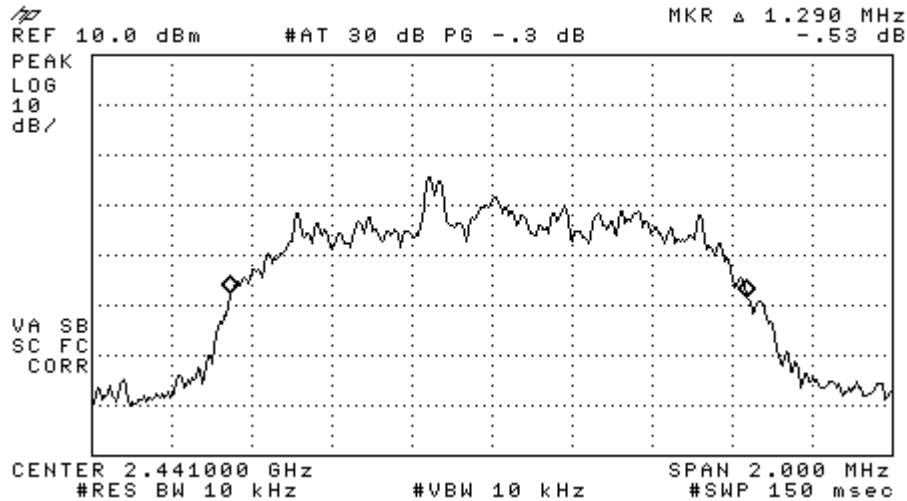


Figure 6-2b: 20dB Bandwidth EDR DQPSK, Channel 39.

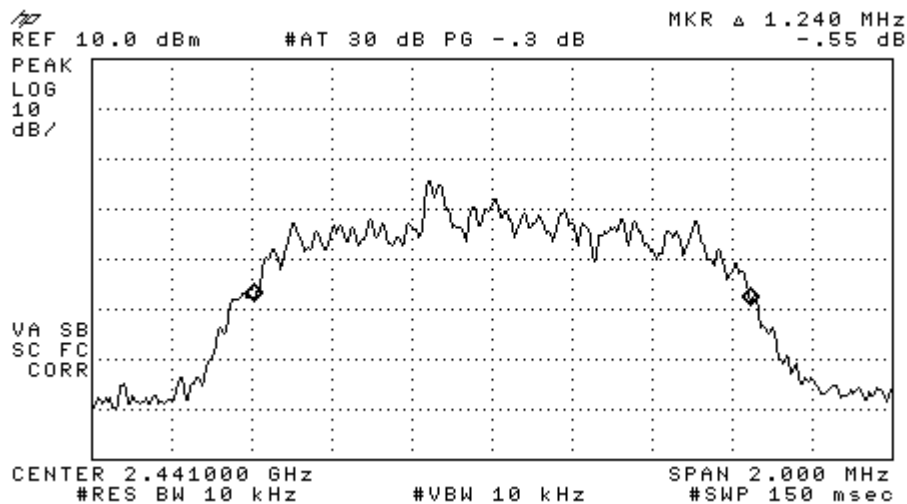


Figure 6-2c: 20dB Bandwidth EDR D8PSK, Channel 39.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

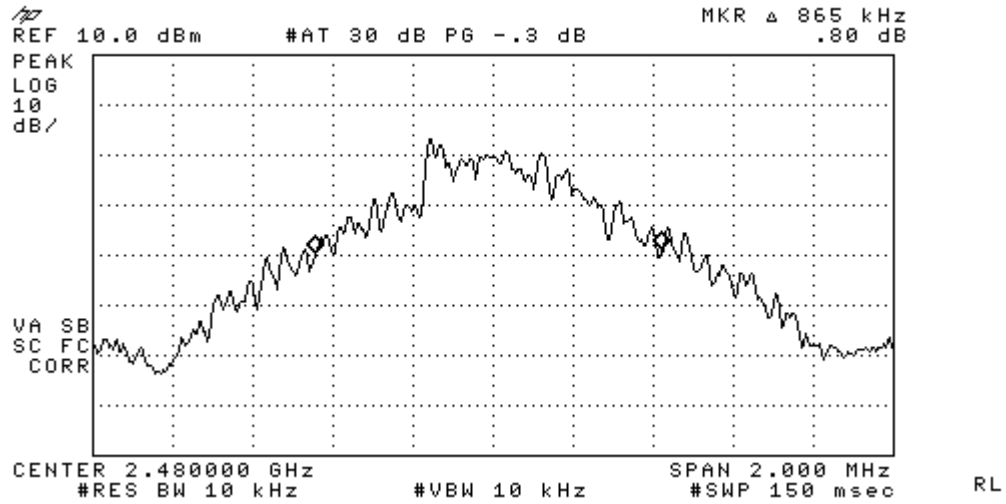


Figure 6-3a: 20dB Bandwidth Basic rate, Channel 78.

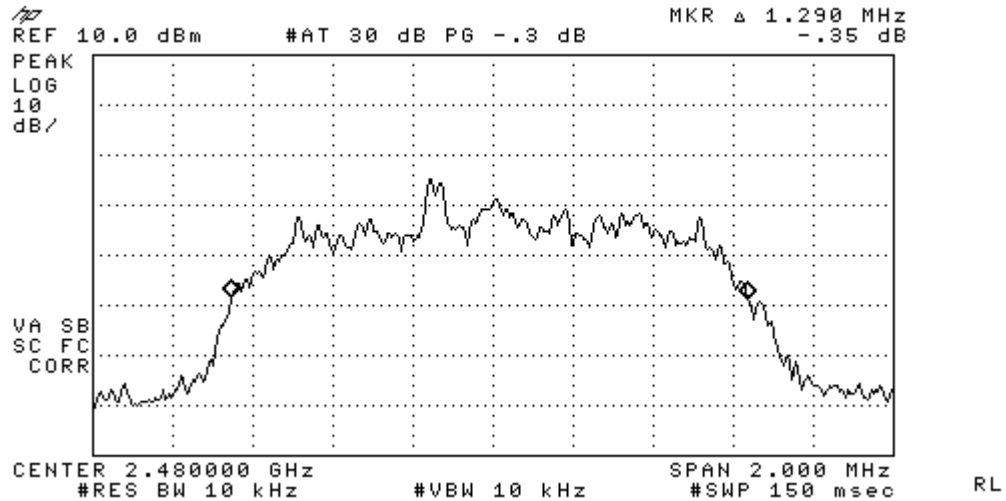


Figure 6-3b: 20dB Bandwidth EDR DQPSK, Channel 78.

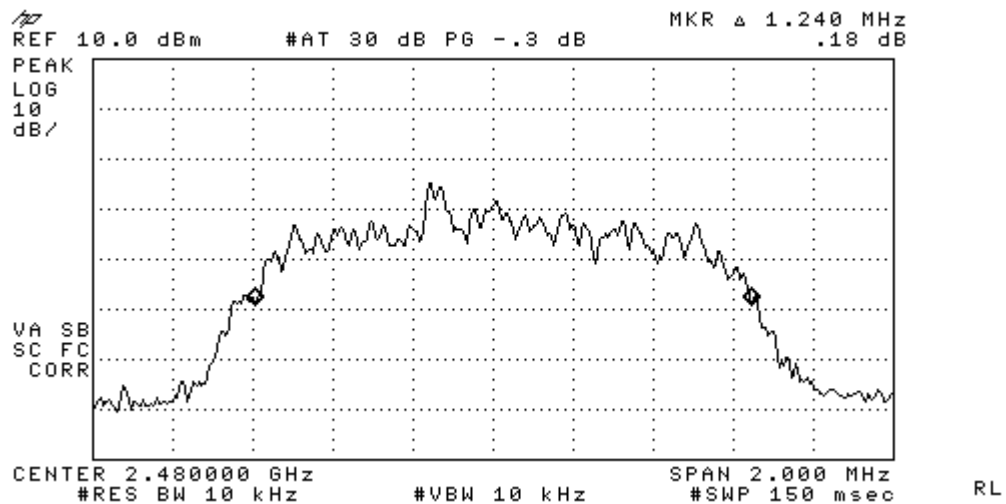


Figure 6-3c: 20dB Bandwidth EDR D8PSK, Channel 78.

## 7 CARRIER FREQUENCY SEPARATION

### 7.1 Test Configuration

FCC: § 15.247 a1

IC: RSS-210 §A8.1(2)

The Bluetooth transmitter was set in hopping mode to investigate the carrier frequency separation between mid-channel and its adjacent channels. The carrier frequency separation is independent of modulation and packet length (DH1, DH3, etc.).

#### Limits:

- a)  $\geq 25$  kHz or 20 dB Bandwidth, whichever is greater
- b) For FH systems operating in 2400-2483.5MHz and with output power less than 125mW the carrier frequency separation should be greater than 25kHz or 2/3 of 20dB Bandwidth.

### 7.2 Results: Carrier Frequency

Figure	Limits Frequency Separation	> 2/3 of 20 dB Bandwidth	Result
7	990 kHz	1020 kHz $(2/3) * 1.29 \text{ MHz} = 860 \text{ kHz}$	Pass

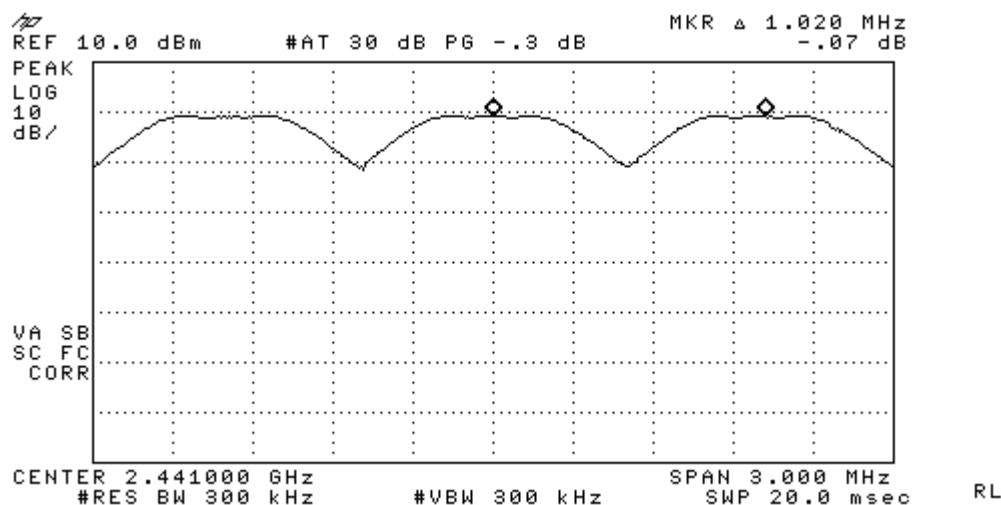


Figure 7: Carrier Frequency Separation between channels 38, 39 (mid-channel) & 40.

## 8 NUMBER OF HOPPING FREQUENCIES

### 8.1 Test Configuration

**FCC:** § 15.247 a1 iii

**IC:** RSS-210 §A8.1 (4)


The Bluetooth transmitter was set in hopping mode to investigate the number of hopping frequencies. The number of frequency hopping is independent of modulation and packet length (DH1, DH3, etc.).

**Limits:**

At least 15 non-overlapping channels

### 8.2 Results: Number of Hopping Frequencies


Figure	Channel	Plot Description	Results
8a	Hopping	Number of Hopping Frequencies (Channels 0-39)	79
8b		Number of Hopping Frequencies (Channels 39-78)	(Channels 0-78)
Comments: Pass			

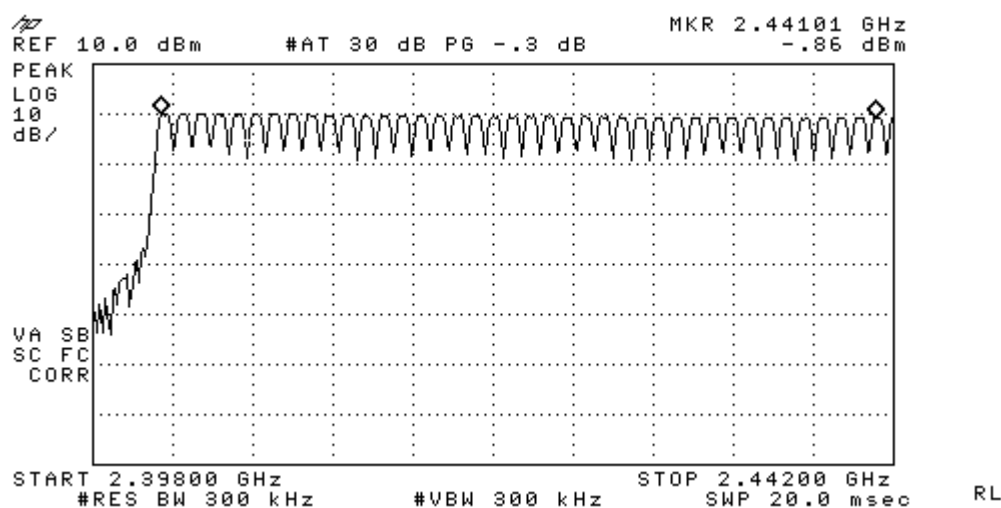

**Figure 8a: Number of Hopping Frequencies (Channels 0-39).**



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

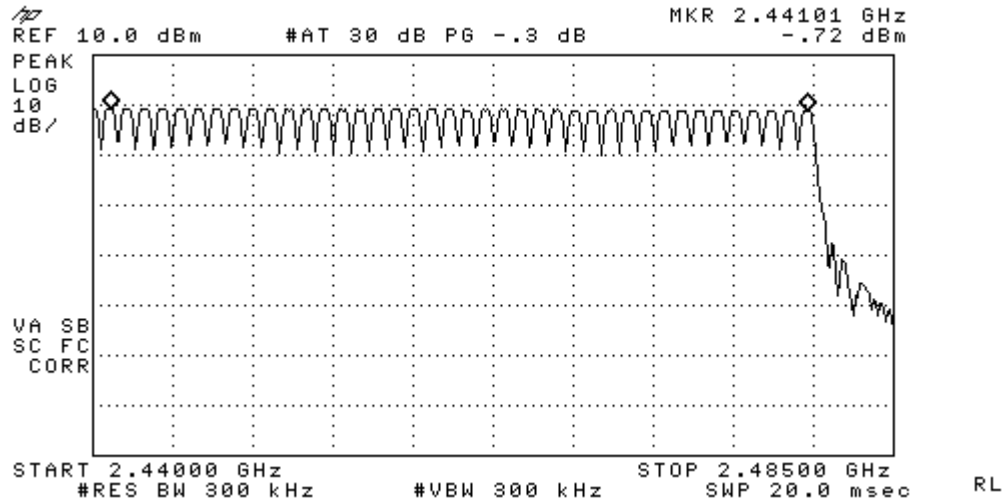

**Figure 8b: Number of Hopping Frequencies (Channels 39-78).**





Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

## 9 TIME OF OCCUPANCY (DWELL TIME)

### 9.1 Test Configuration

**FCC:** § 15.247 a1 iii, § 15.247 f

**IC:** RSS-210 §A8.1 (4)

The Bluetooth transmitter was set in hopping mode to capture one of the transmissions of mid-channel. Mid-channel (CH 39) was measured here.

**Comments:**

The dwell time is independent of modulation and packet length (DH1, DH3, etc.).

According to the Bluetooth Core Specification v1.1, we have 1600 hops in a second for a one slot packet type. One frequency hop lasts 625  $\mu$ s; this increment is called a time slot. In a period of 31.6 seconds, the time of occupancy for any given channel is calculated as follows:

Duration of one transmission\*(1600 hops/sec)/(No. of time-slots)/(79 channels)\*31.6 sec

For a DH1 (1 time-slot) packet type, ideally the duration of one transmission is 625  $\mu$ s. Therefore, the dwell time is given by:

$625 \mu\text{s} * 1600/\text{s} / (1 \text{ time-slot}) / 79 * 31.6 \text{ s} = 0.4 \text{ s}.$

**Spectrum Analyzer Parameters:**

The measurement is conducted with zero span centered at mid-channel (2441 MHz) with sweep time sufficient enough to capture one transmission (in this case,  $\geq 625 \mu\text{s}$ ).

**Limits:**

$\leq 0.4 \text{ s}$

(in a period of 31.6 s)


### 9.2 Results: Dwell Time

Figure	Channel	Results
9	Hopping	0.2400 s

**Comments: Pass**



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

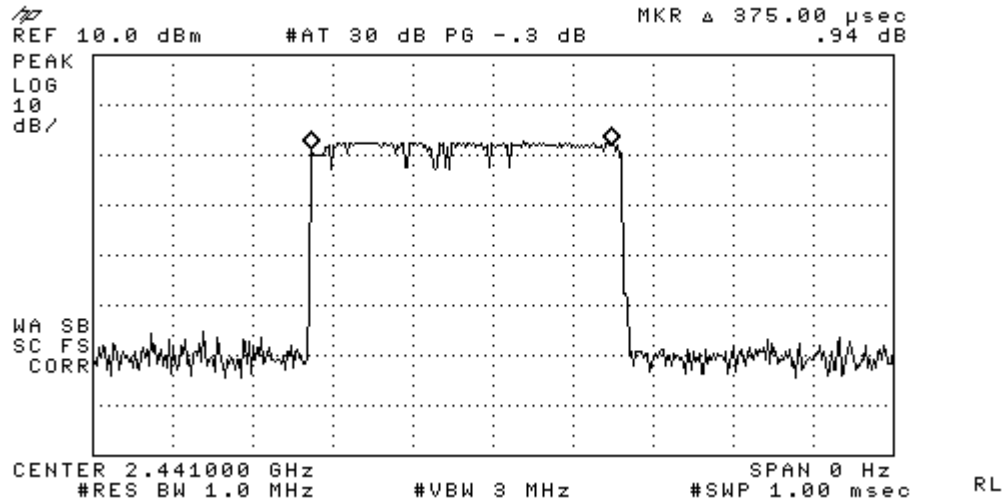

**Figure 9: Duration of one transmission (Channel 39).**

## 10 BANEDGE

### 10.1 Test Configuration

**FCC:** § 15.247 d

**IC:** RSS-210 §A8.5

The Bluetooth RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low and high channels of Bluetooth transmitter were enabled separately to investigate the band-edge compliance of conducted emissions. To ensure the band-edge compliance when the channels are hopping, measurements were also conducted at low and high channels in this mode. A fully charged battery was used as supply voltage

Frequencies of Interest: Spectrum was investigated from 2400 MHz – 2483.5 MHz.

Limits:  $\leq -20$  dBc

In any 100kHz band, the highest radio frequency power outside the band (2400-2483.5 MHz) is measured to be at least 20 dB below the desired power of intentional radiator within the band.

### 10.2 Results: Bandedge

Figure	Channel/Edge	Modulation	Plot Description	Results
10-1a	0 -- Low Band Edge	Basic Rate	Hopping disabled	-40.74 dBc
10-1b			Hopping enabled	-42.02 dBc
10-2a		EDR DQPSK	Hopping disabled	-40.14 dBc
10-2b			Hopping enabled	-39.48 dBc
10-3a		EDR D8PSK	Hopping disabled	-39.44 dBc
10-3b			Hopping enabled	-39.76 dBc
10-4a	78 -- High Band Edge	Basic Rate	Hopping disabled	-44.78 dBc
10-4b			Hopping enabled	-45.03 dBc
10-5a		EDR DQPSK	Hopping disabled	-42.77 dBc
10-5b			Hopping enabled	-43.16 dBc
10-6a		EDR D8PSK	Hopping disabled	-42.97 dBc
10-6b			Hopping enabled	-43.63 dBc



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

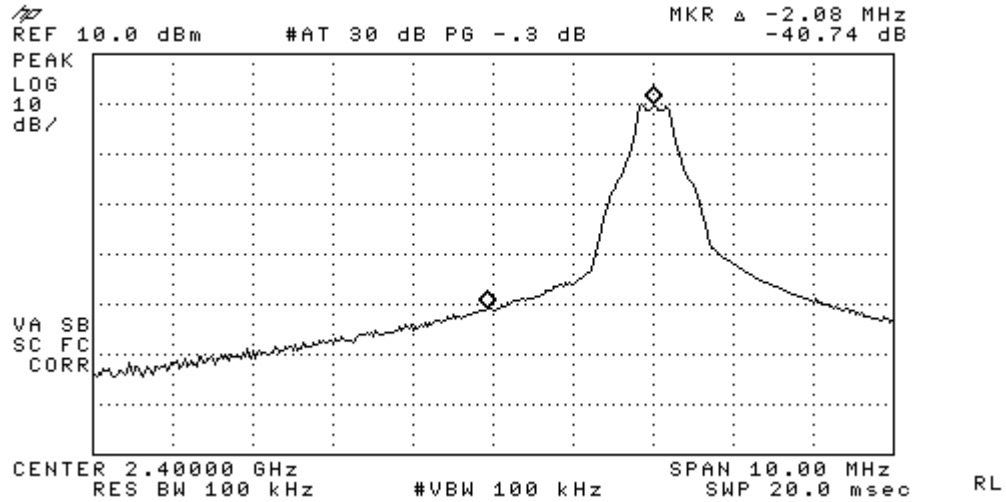


Figure 10-1a: Basic Rate Low band edge with hopping disabled.

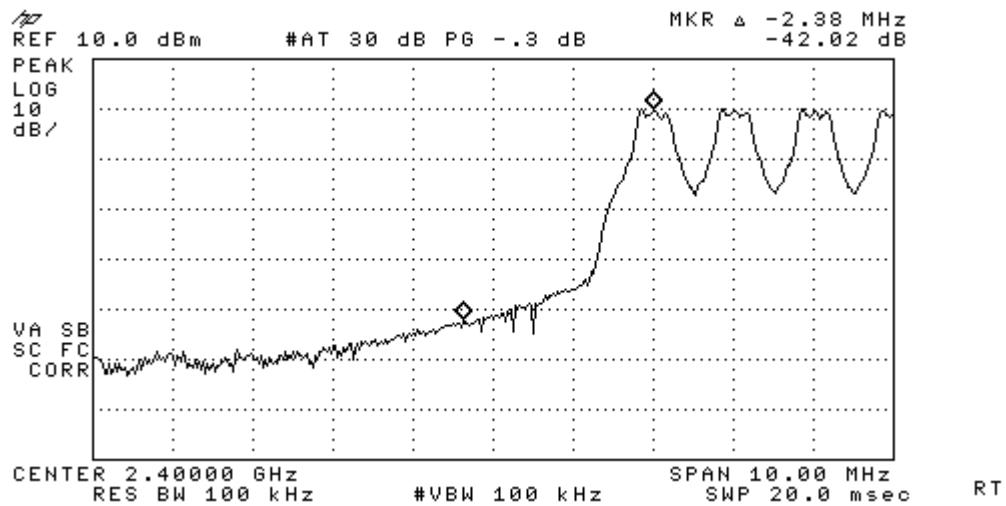


Figure 10-1b: Basic Rate Low band edge with hopping enabled.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

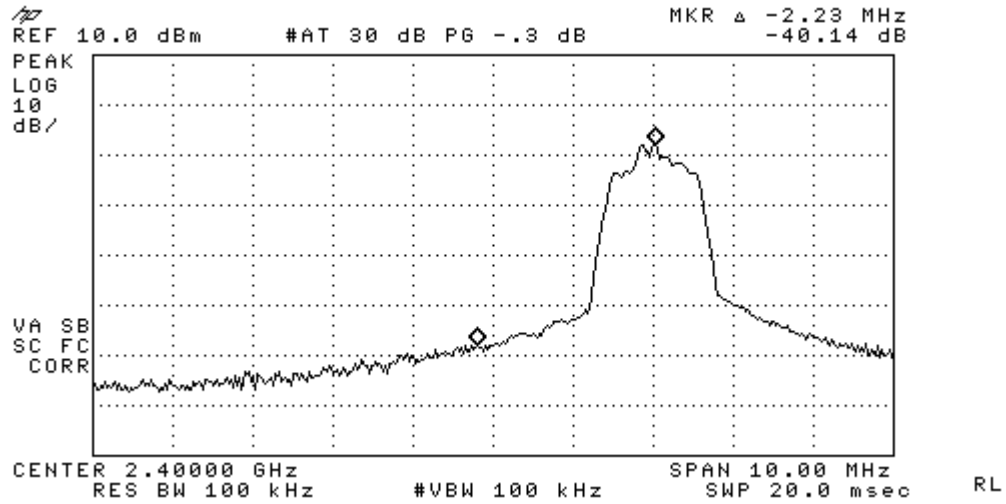


Figure 10-2a: EDR DQPSK Low band edge with hopping disabled.

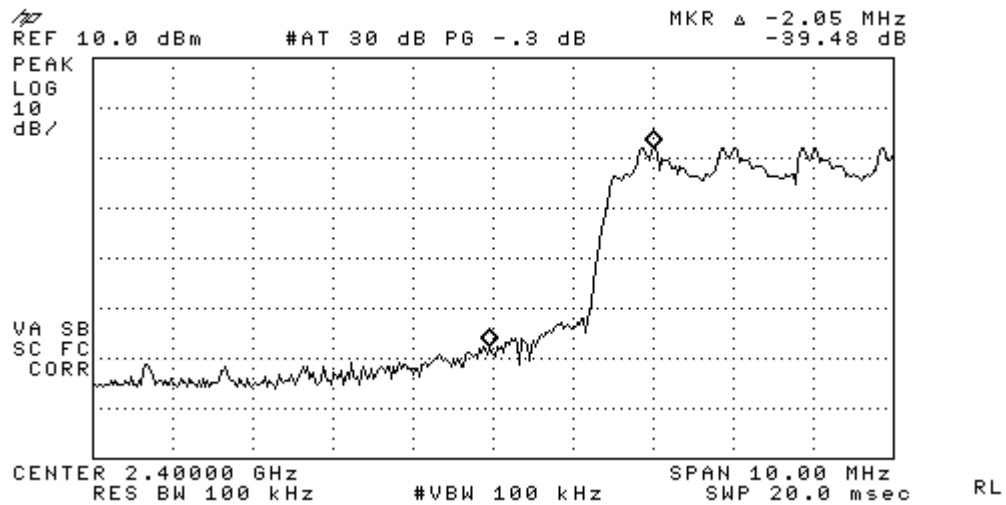


Figure 10-2b: EDR DQPSK Low band edge with hopping enabled.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

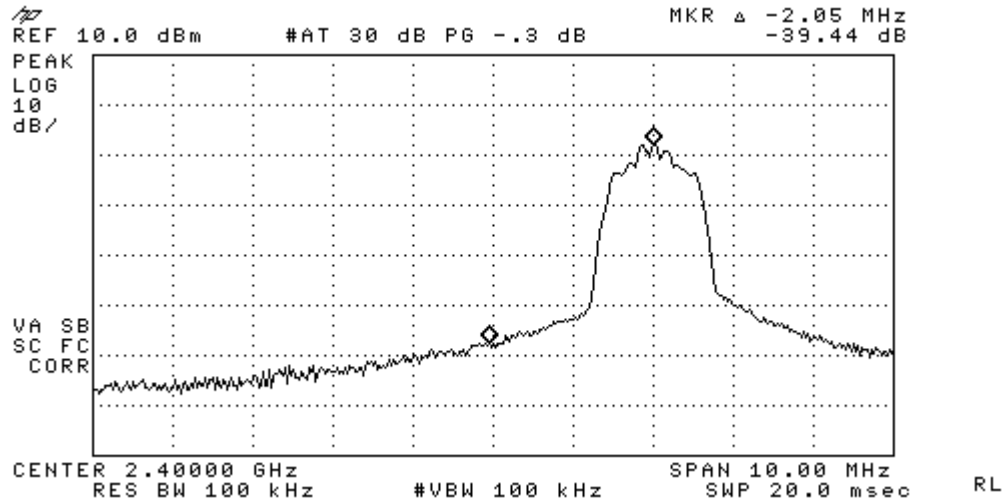


Figure 10-3a: EDR D8PSK Low band edge with hopping disabled.

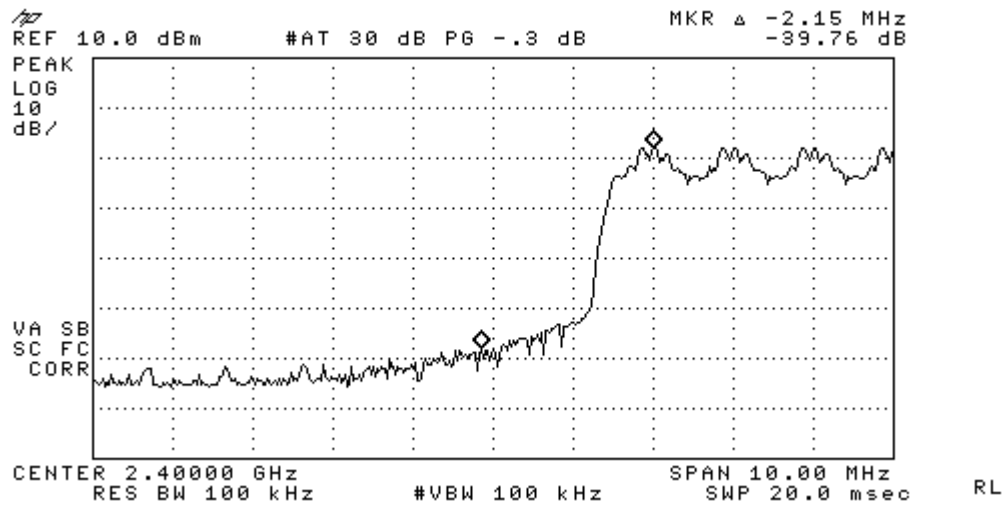


Figure 10-3b: EDR D8PSK Low band edge with hopping enabled.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

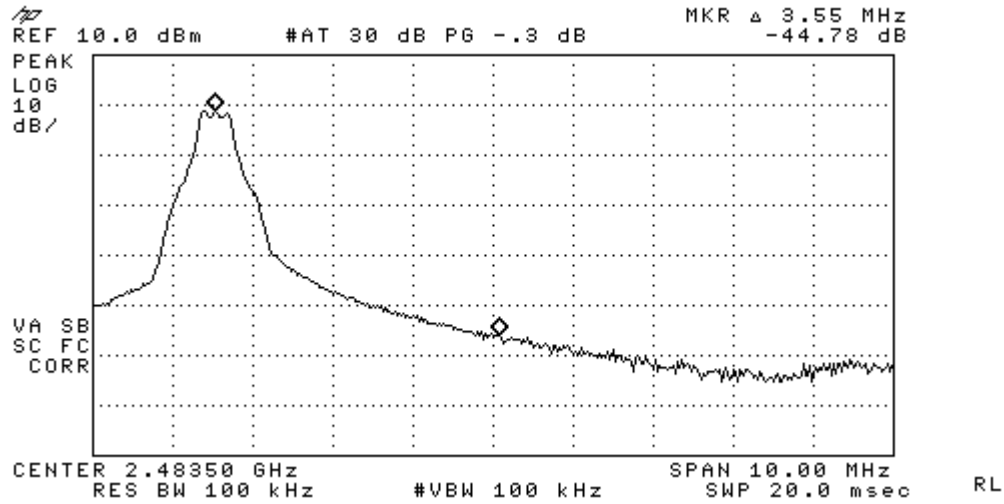


Figure 10-4a: Basic Rate High band edge with hopping disabled.

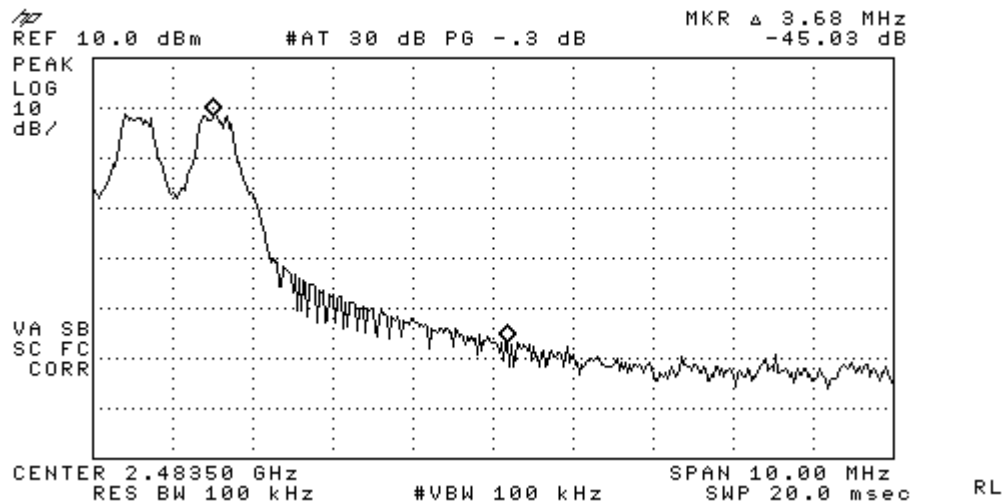


Figure 10-4b: Basic Rate High band edge with hopping enabled.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

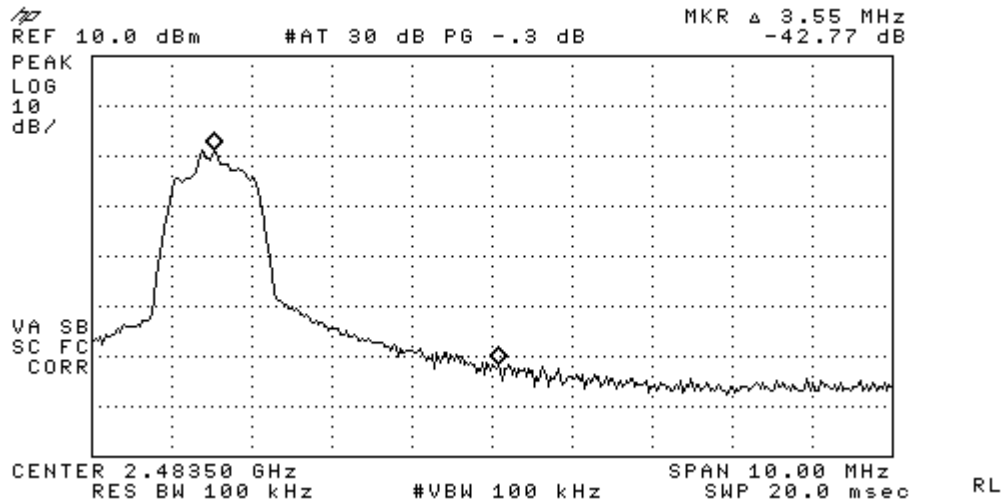


Figure 10-5a: EDR DQPSK High band edge with hopping disabled.

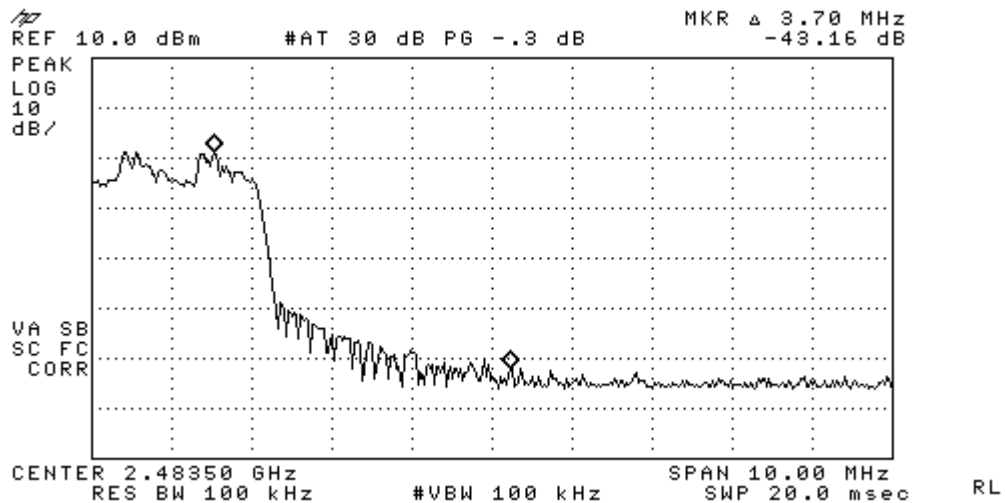


Figure 10-5b: EDR DQPSK High band edge with hopping enabled.





Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

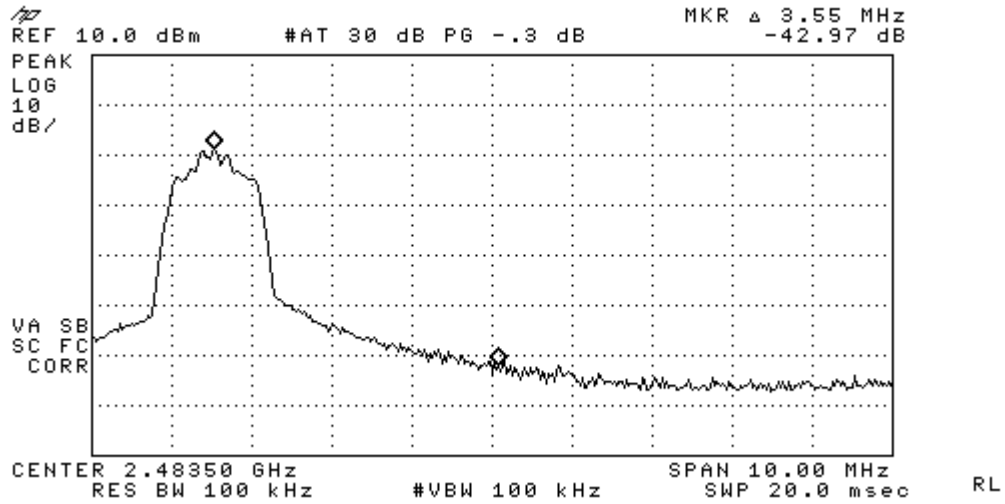


Figure 10-6a: EDR D8PSK High band edge with hopping disabled.

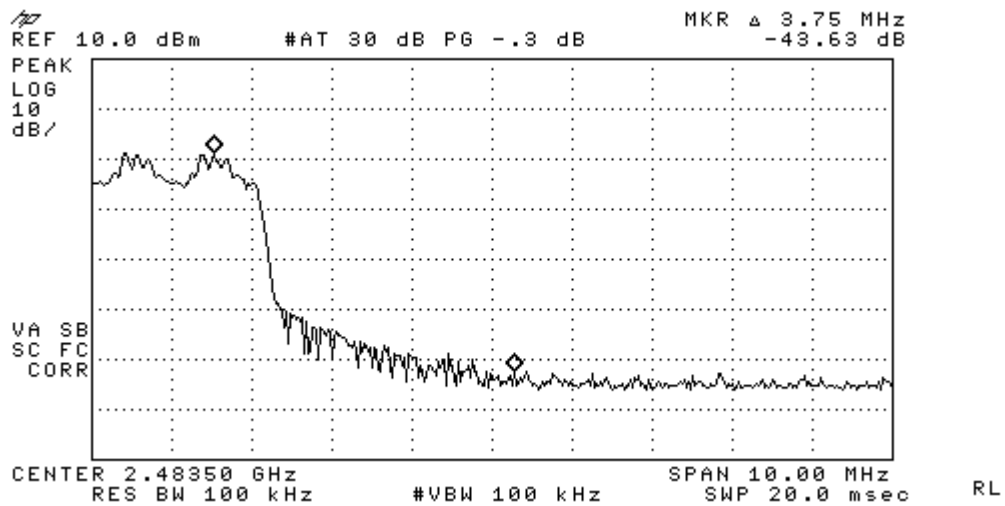


Figure 10-6b: EDR D8PSK High band edge with hopping enabled.

## 11 SPURIOUS RF CONDUCTED EMISSIONS

### 11.1 Test Configuration

**FCC:** § 15.247 d

**IC:** RSS-210 §A8.5

The Bluetooth RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of Bluetooth transmitter were enabled separately and the frequency spectrum was investigated for any spurious emissions. A fully charged battery was used as supply voltage.

Frequencies of Interest: Spectrum was investigated from 9kHz – 25 GHz.

Limits: <-20 dBc

### 11.2 Results: Conducted Spurious Emissions

Figure	Channel	Plot Description	Results
11-1a	0	Conducted spurious emissions, 9kHz to 2.7GHz	-46.10 dBm
11-1b		Conducted spurious emissions, 2.7GHz to 25GHz	
11-2a	39	Conducted spurious emissions, 9kHz to 2.7GHz	-46.03 dBm
11-2b		Conducted spurious emissions, 2.7GHz to 25GHz	
11-3a	78	Conducted spurious emissions, 9kHz to 2.7GHz	-45.84 dBm
11-3b		Conducted spurious emissions, 2.7GHz to 25GHz	

Comments:

Spurious RF Conducted Emission testing was performed only with Basic Rate since the conducted power was highest in comparison with the other modulation.



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

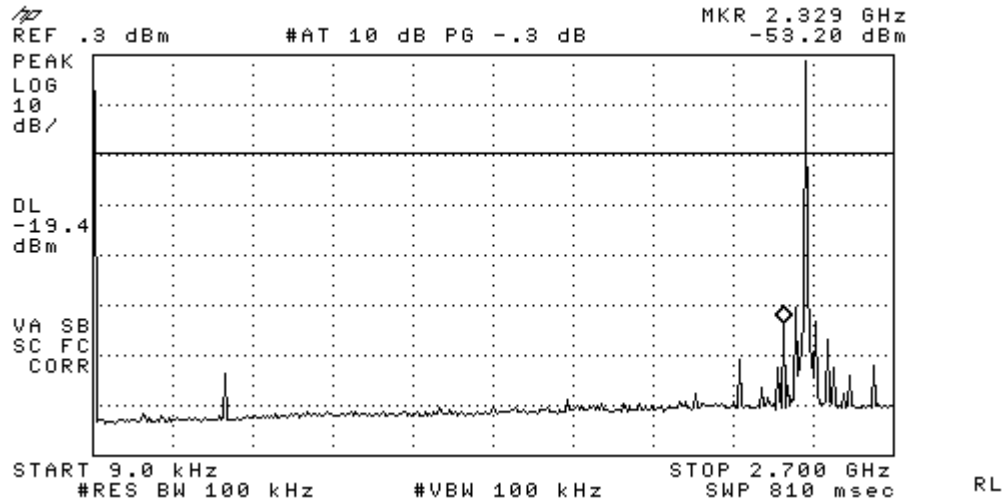


Figure 11-1a: Basic Rate Conducted Spurious Emissions (CH 0).

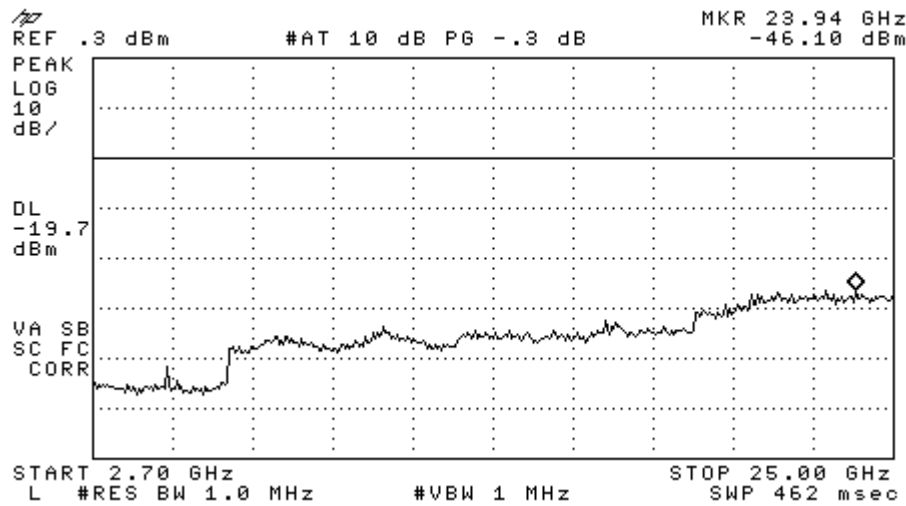


Figure 11-1b: Basic Rate Conducted Spurious Emissions (CH 0).



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

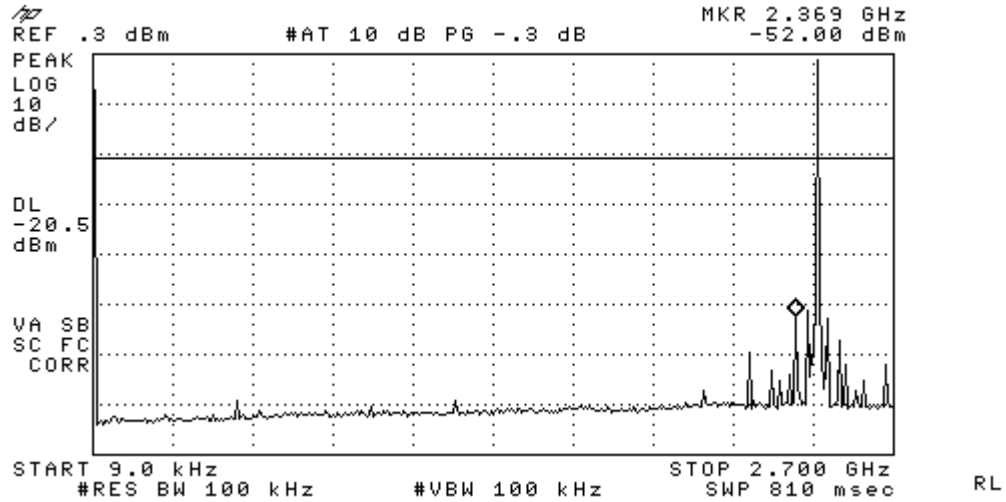


Figure 11-2a: Conducted Spurious Emissions (CH 39).

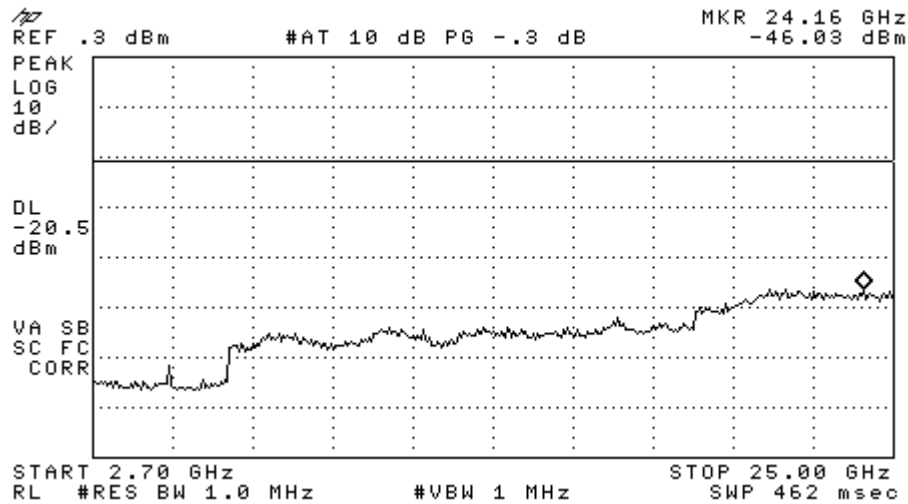


Figure 11-2b: Conducted Spurious Emissions (CH 39).



Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

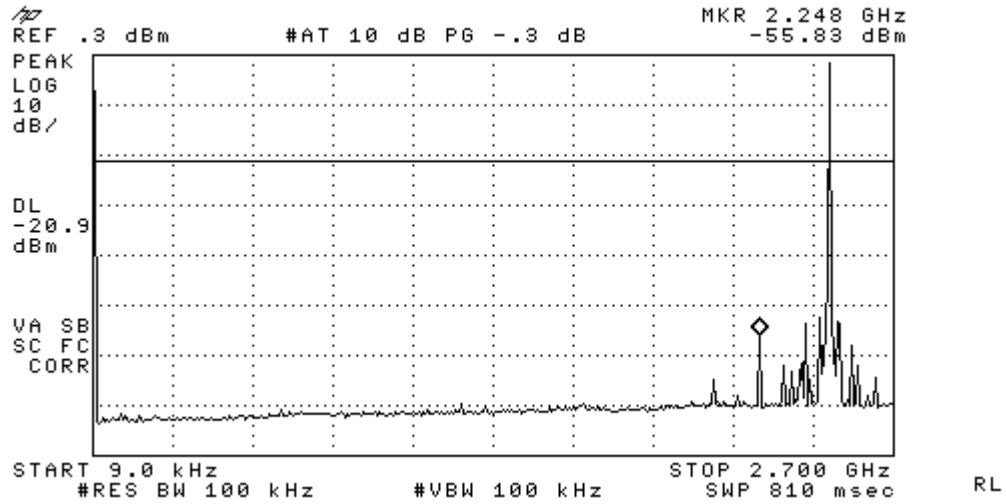


Figure 11-3a: Conducted Spurious Emissions (CH 78).

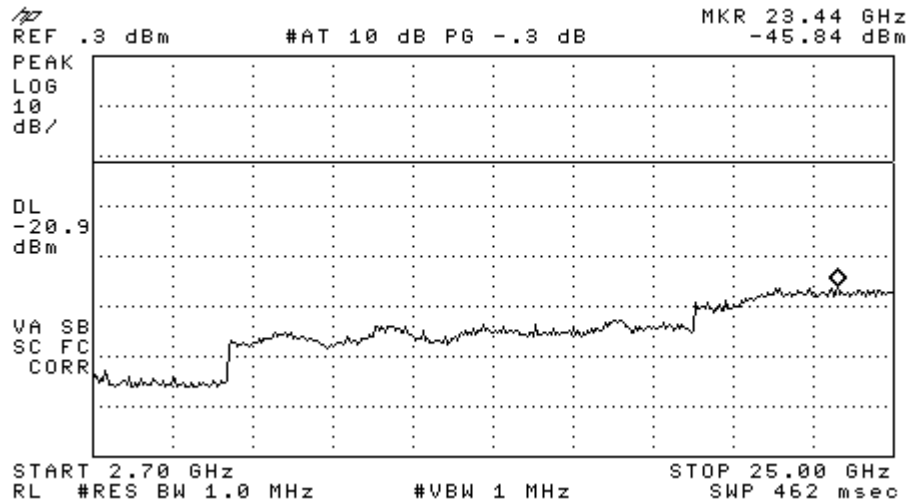


Figure 11-3b: Conducted Spurious Emissions (CH 78).

Applicant:	Kyocera
FCC ID:	V65SA001
Report #:	CT-V65-15C-0709-R0

## 12 AC POWER LINE CONDUCTED EMISSIONS

### 12.1 Test Configuration & Results

**FCC:** § 15.107 § 15.207

**IC:** RSS-210 §6.6

See separate report

## 13 RADIATED EMISSIONS

### 13.1 Test Configuration & Results

**FCC:** § 15.109 § 15.209

**IC:** RSS-210 §A2.9 (2)

See separate report

## 14 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/04/10
Spectrum Analyzer	Hewlett Packard	8594E	3810A04238	04/03/10