



specifications: 2.4GHz, L=34mm

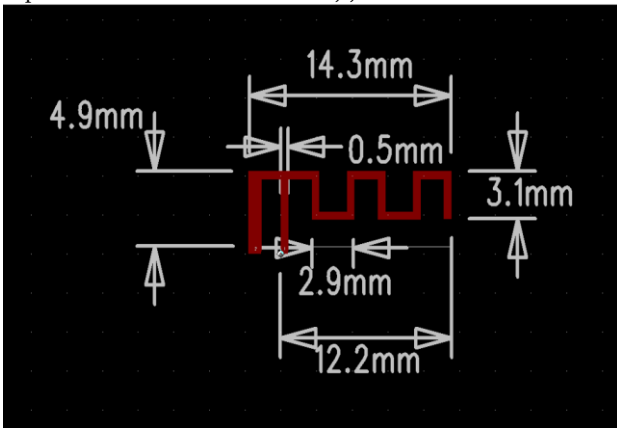


Passive Test For BT2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)
2400	62.98	-2.01	0.8	-1.35	0	0	0.8	-14.52
2410	55.92	-2.52	0.33	-1.82	0	0	0.33	-14.9
2420	53.5	-2.72	0.23	-1.92	0	0	0.23	-14.9
2430	57.48	-2.4	0.53	-1.62	0	0	0.53	-14.84
2440	51.99	-2.84	0.03	-2.12	0	0	0.03	-15.35
2450	56.82	-2.45	0.38	-1.77	0	0	0.38	-15.12
2460	57.83	-2.38	0.59	-1.56	0	0	0.59	-15.19
2470	46.13	-3.36	-0.25	-2.4	0	0	-0.25	-15.56
2480	51.54	-2.88	0.57	-1.58	0	0	0.57	-14.09
2490	43.76	-3.59	0.14	-2.01	0	0	0.14	-13.96
2500	43.84	-3.58	0.2	-1.95	0	0	0.2	-14.29

2400.00MHz - 2500.00MHz Gain

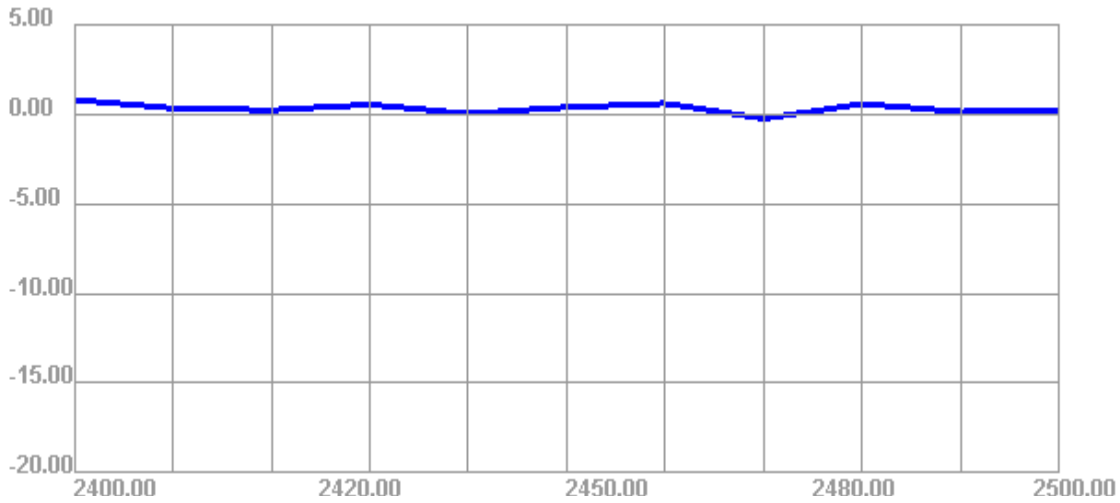


2400.00MHz - 2500.00MHz Efficiency

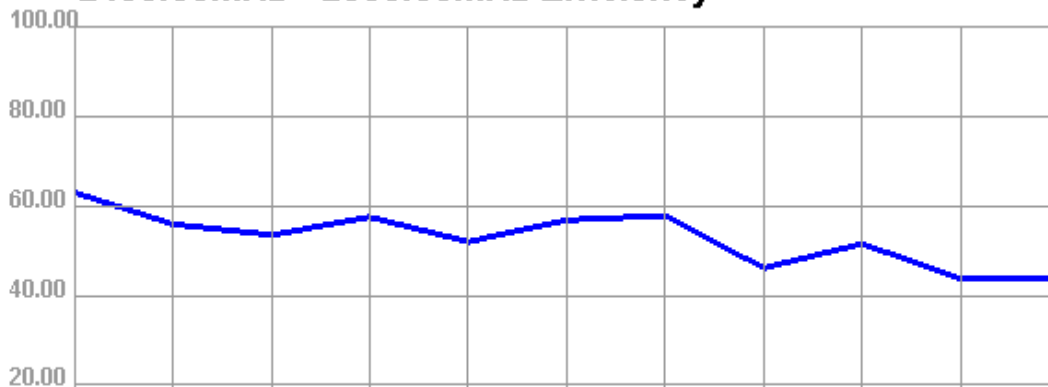





2400.000MHz

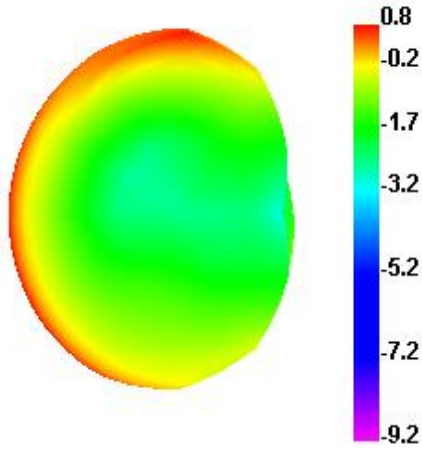


2400.000MHz H

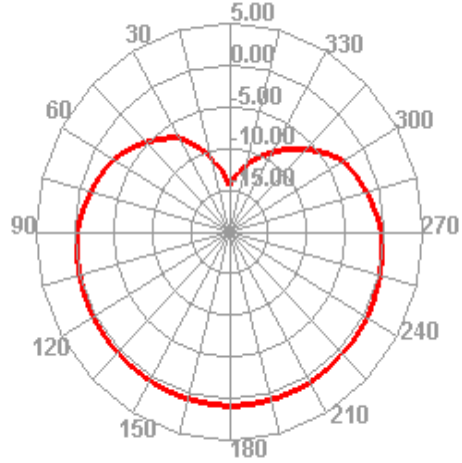


2400.000MHz E1

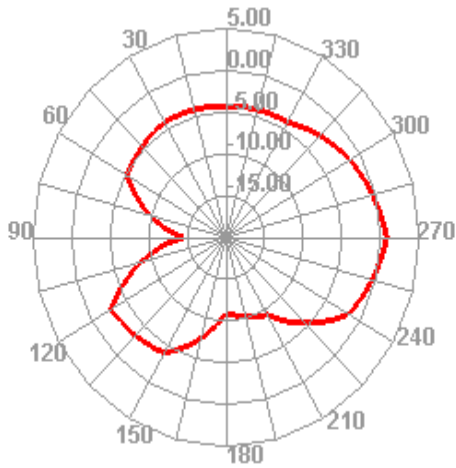


2400.000MHz E2

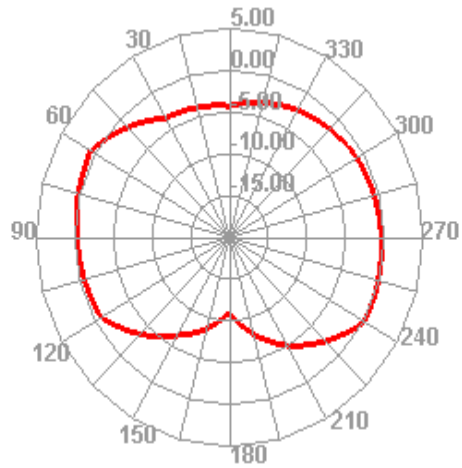

2450.000MHz

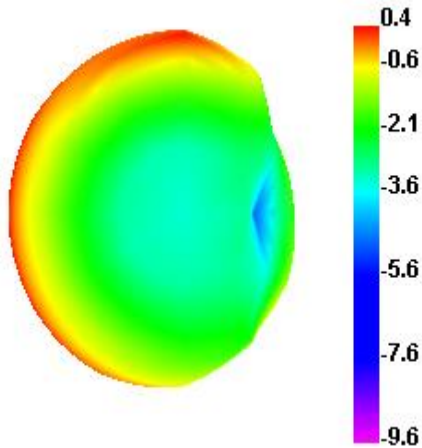


2450.000MHz H

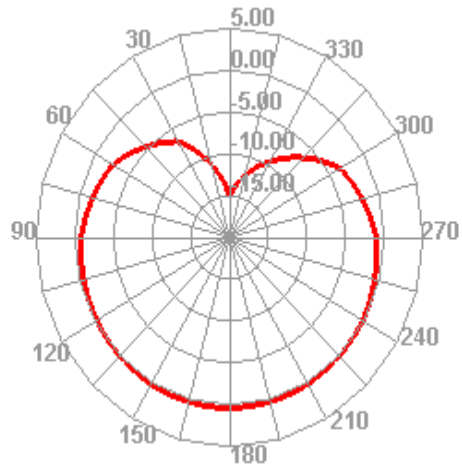


2450.000MHz E1



2450.000MHz E2

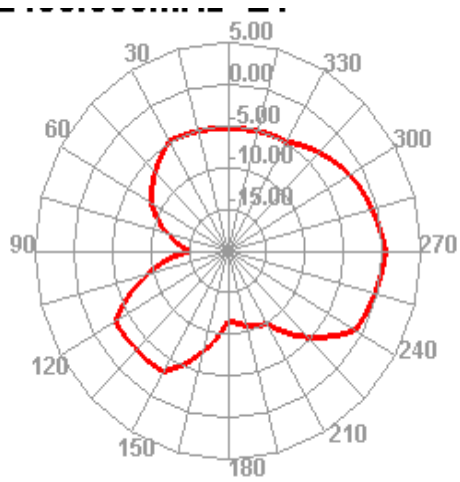

2500.000MHz


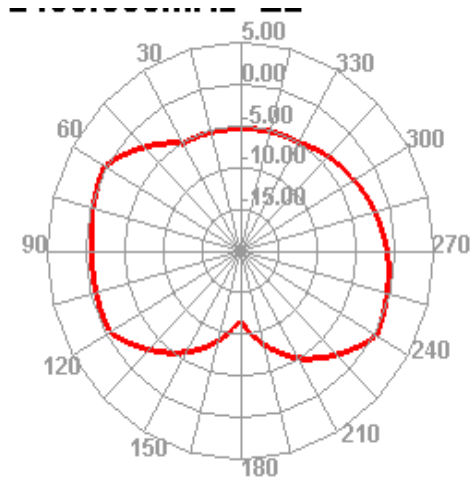


2500.000MHz H

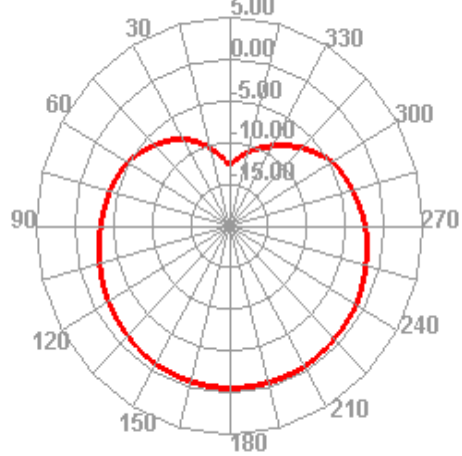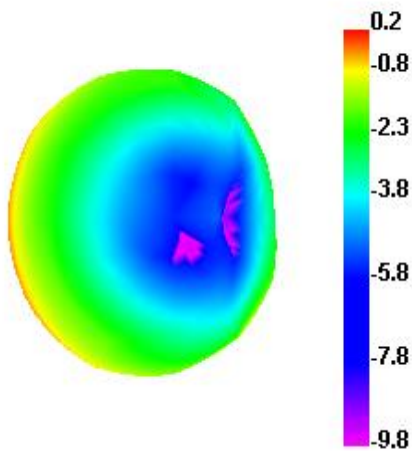

2500.000MHz E1

2500.000MHz E2

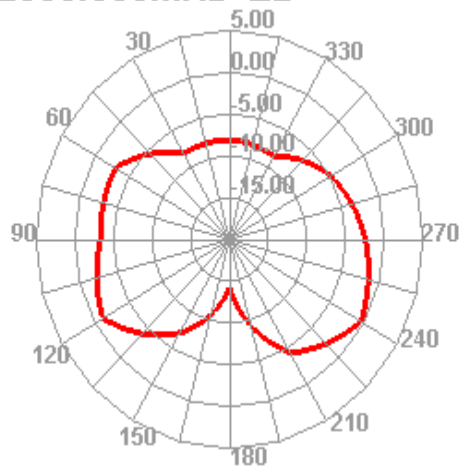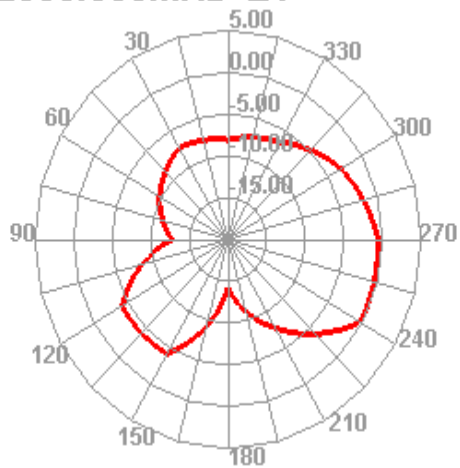

Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2.01	60	47.36	46.86
2.52	60	47.4	46.9
2.72	60	47.28	46.76
2.4	60	47.35	46.78
2.84	60	47.15	46.65
2.45	60	47.33	46.85
2.38	60	47.72	47.22
3.36	60	47.36	46.93
2.88	60	47.56	47.1
3.59	60	47.05	46.67
3.58	60	47.01	46.63

Application Information	
04Version	5.245.351
TotalTime	4m 18s 251ms
AdditionalInfor	NULL