

FCC Radio Test Report

FCC ID: V7TMESH3FV31

This report concerns: Original Grant

Project No. : 2105C079
Equipment : AC1200 Whole Home Mesh WiFi System
Brand Name : Tenda
Test Model : Mesh3f
Series Model : MW3
Applicant : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Manufacturer : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Date of Receipt : May 14, 2021
Date of Test : May 17, 2021~Jun. 19, 2021
Issued Date : Jul. 08, 2021
Report Version : R01
Test Sample : Engineering Sample No.: DG2021051721 for conducted, DG2021051722 for radiated.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Antony Liang



Approved by : Ethan Ma

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com



TESTING CERT #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	9
2 . GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	14
2.4 DUTY CYCLE	16
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.6 SUPPORT UNITS	18
3 . AC POWER LINE CONDUCTED EMISSIONS	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
4 . RADIATED EMISSIONS	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	23
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	24
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	24
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	24
4.8 TEST RESULTS - ABOVE 1000 MHZ	24
5 . BANDWIDTH	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM STANDARD	25
5.4 TEST SETUP	25

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	25
6 . MAXIMUM OUTPUT POWER	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . FREQUENCY STABILITY	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . MEASUREMENT INSTRUMENTS LIST	30
10 . EUT TEST PHOTOS	32
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	37
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	42
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	47
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	50
APPENDIX E - BANDWIDTH	125
APPENDIX F - MAXIMUM OUTPUT POWER	134
APPENDIX G - POWER SPECTRAL DENSITY	155

Table of Contents**Page****APPENDIX H - FREQUENCY STABILITY****164**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 05, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	-	3.02
		30MHz ~ 200MHz	V	4.26
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	3.98
		200MHz ~ 1,000MHz	H	3.94
		1GHz ~ 6GHz	-	3.96
		6GHz ~ 18GHz	-	5.24
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Power Spectral Density	±0.86 dB
Frequency Stability	±0.16 dB
Temperature	±0.08 °C
Humidity	±1.5%


Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 240V/50Hz AC 120V/60Hz	Gerry Zhao
Radiated Emissions-9kHz to 30MHz	25°C	60%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-30MHz to 1000MHz	22°C	54%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-Above 1000 MHz	22°C	54%	AC 120V/60Hz	Hayden Chen
Bandwidth	25°C	50%	DC 12V	Jesse Wang
Maximum Output Power	25°C	50%	DC 12V	Hand Huang
Power Spectral Density	25°C	50%	DC 12V	Jesse Wang
Frequency Stability	Normal & Extreme	50%	Normal & Extreme	Jesse Wang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Whole Home Mesh WiFi System
Brand Name	Tenda
Test Model	Mesh3f
Series Model	MW3
Model Difference(s)	Only the model name is different.
Power Source	DC Voltage supplied from AC adapter. Model: BN073-A12012U
Power Rating	I/P: 100-240V ~ 50/60Hz, 0.4A O/P: 12V  1A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps
Maximum Output Power UNII-1 Non Beamforming	IEEE 802.11ac(VHT40): 26.58 dBm (0.4550 W)
Maximum Output Power UNII-3 Non Beamforming	IEEE 802.11ac(VHT20): 29.30 dBm (0.8511 W)
Maximum Output Power UNII-1 Beamforming	IEEE 802.11ac(VHT40): 26.36 dBm (0.4325 W)
Maximum Output Power UNII-3 Beamforming	IEEE 802.11ac(VHT20): 29.10 dBm (0.8128 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	3
2	N/A	N/A	Internal	N/A	3

Note:

- 1) This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
 For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.
 For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
 So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3 + 10\log(2/1)\text{dBi} = 6.01$.
 Then, the UNII-1 power spectral density limit is $17 - (6.01 - 6) = 16.99$, the UNII-3 power spectral density limit is $30 - (6.01 - 6) = 29.99$.
- 2) Beamforming gain: 3dB. Directional gain=3+3=6dB.
- 3) The antenna gain and beamforming gain are provided by the manufacturer.

4. Table for Antenna Configuration:

For Non Beamforming:

Operating Mode	TX Mode	1TX	2TX
IEEE 802.11a		V (Ant. 1)	-
IEEE 802.11n(HT20)		-	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		-	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		-	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		-	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		-	V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 13	TX AC(VHT20) Mode Channel 157 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 13	TX AC(VHT20) Mode Channel 157 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 13	TX AC(VHT20) Mode Channel 157 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Power Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 32	TX A Mode Channel 149/157/165 (UNII-3)
Mode 33	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 34	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 35	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 36	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 37	TX AC(VHT80) Mode Channel 155 (UNII-3)

Other Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT20) Mode Channel 157 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11ac(VHT20) mode, IEEE 802.11ac(VHT40) mode and IEEE 802.11ac(VHT80) mode, only the worst cases are documented for other test items.
- (5) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (6) For AC power line conducted emissions and radiated emissions below 1 GHz test, all adapters had been pre-tested and in this report only recorded the worst case.
- (7) For radiated emissions, the TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5745MHz was found the worst case of simultaneous transmission and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	MP_TEST		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	71	91	88
IEEE 802.11n(HT20)	65/75	76/94	74/89
IEEE 802.11ac(VHT20)	65/75	75/94	74/89
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	55/65	78/98	
IEEE 802.11ac(VHT40)	55/65	78/98	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	53/63		

UNII-3			
Test Software Version	MP_TEST		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	100	100	100
IEEE 802.11n(HT20)	100/110	100/110	100/110
IEEE 802.11ac(VHT20)	100/110	100/110	100/110
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	105/115	105/115	
IEEE 802.11ac(VHT40)	105/115	105/115	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	80/90		

Beamforming

UNII-1			
Test Software Version	MP_TEST		
Frequency (MHz)	5180	5200	5240
IEEE 802.11n(HT20)	64/74	75/93	73/88
IEEE 802.11ac(VHT20)	64/74	74/93	73/88
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	54/64	77/97	
IEEE 802.11ac(VHT40)	54/64	77/97	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	52/62		

UNII-3			
Test Software Version	MP_TEST		
Frequency (MHz)	5745	5785	5825
IEEE 802.11n(HT20)	99/109	99/109	99/109
IEEE 802.11ac(VHT20)	99/109	99/109	99/109
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	104/114	104/114	
IEEE 802.11ac(VHT40)	104/114	104/114	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	79/89		

2.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

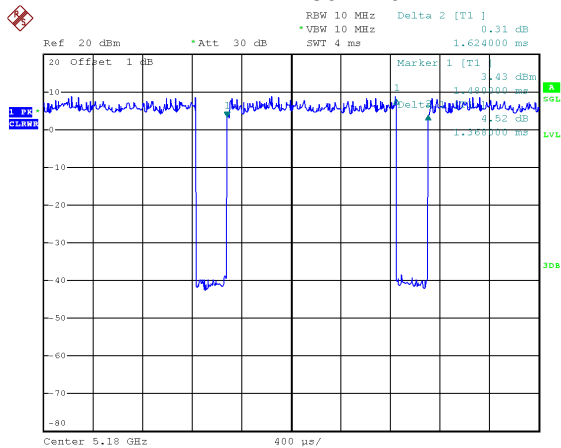

Date: 18.MAY.2021 10:25:01

Duty cycle = $1.368 \text{ ms} / 1.624 \text{ ms} = 84.24\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.74$


IEEE 802.11n(HT20)

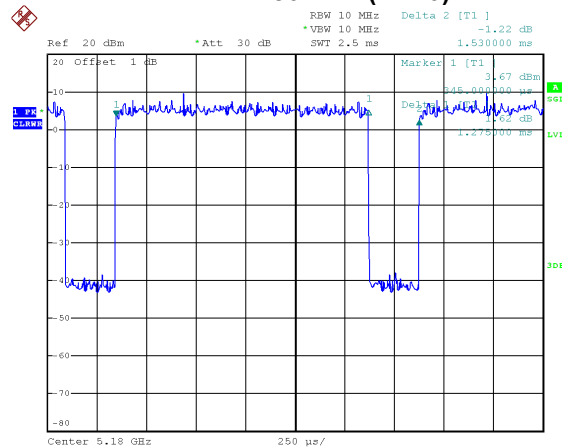

Date: 18.MAY.2021 10:25:22

Duty cycle = $1.275 \text{ ms} / 1.530 \text{ ms} = 83.33\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.79$


IEEE 802.11n(HT40)

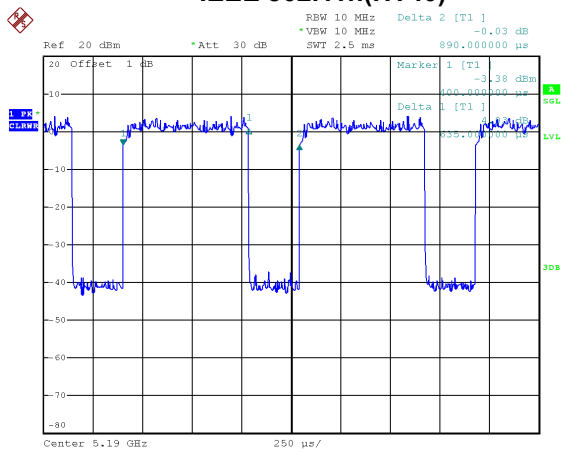

Date: 18.MAY.2021 10:26:10

Duty cycle = $0.635 \text{ ms} / 0.890 \text{ ms} = 71.35\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 1.47$


IEEE 802.11ac(VHT20)

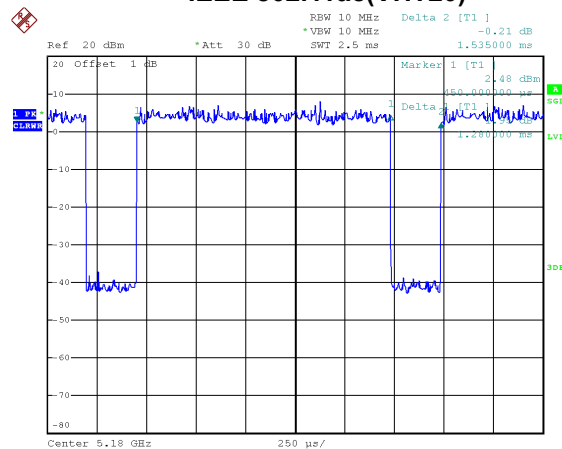

Date: 18.MAY.2021 10:26:50

Duty cycle = $1.280 \text{ ms} / 1.535 \text{ ms} = 83.39\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.79$


IEEE 802.11ac(VHT40)

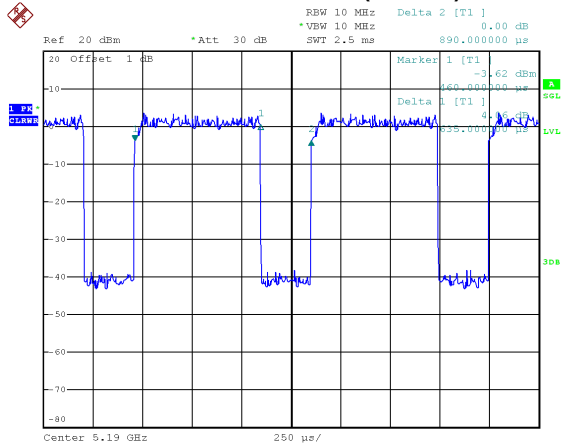

Date: 18.MAY.2021 10:27:22

Duty cycle = 0.635 ms / 0.890 ms = 71.35%
 Duty Factor = 10 log(1 / Duty cycle) = 1.47

IEEE 802.11ac(VHT80)

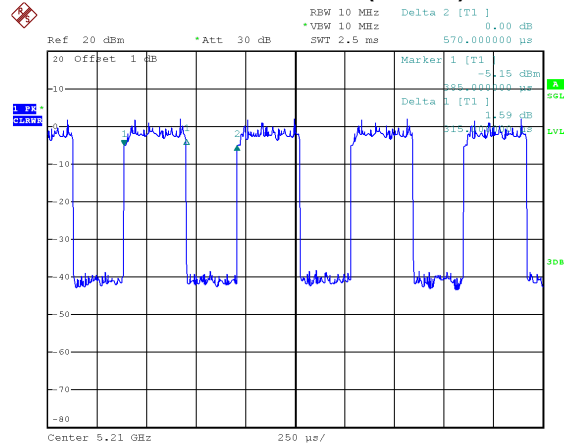

Date: 18.MAY.2021 10:27:38

Duty cycle = 0.315 ms / 0.570 ms = 55.26%
 Duty Factor = 10 log(1 / Duty cycle) = 2.58

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 731 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 784 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1575 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 781 Hz (Duty cycle < 98%).


For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1575 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3175 Hz (Duty cycle < 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

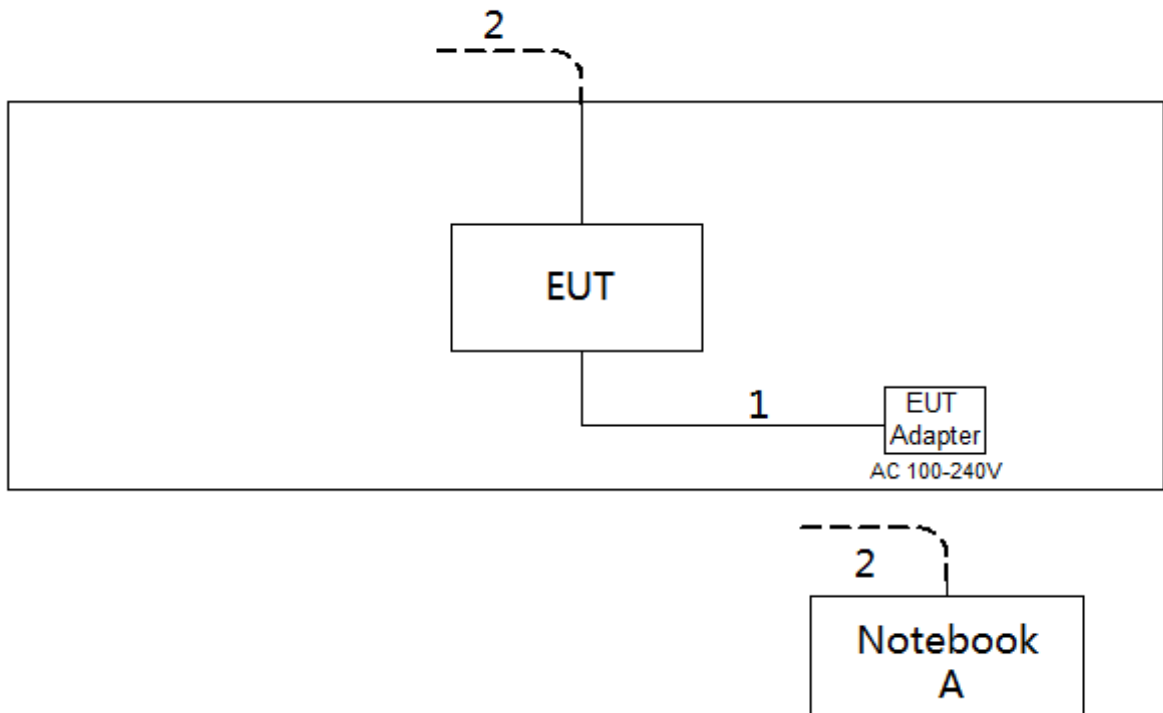

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

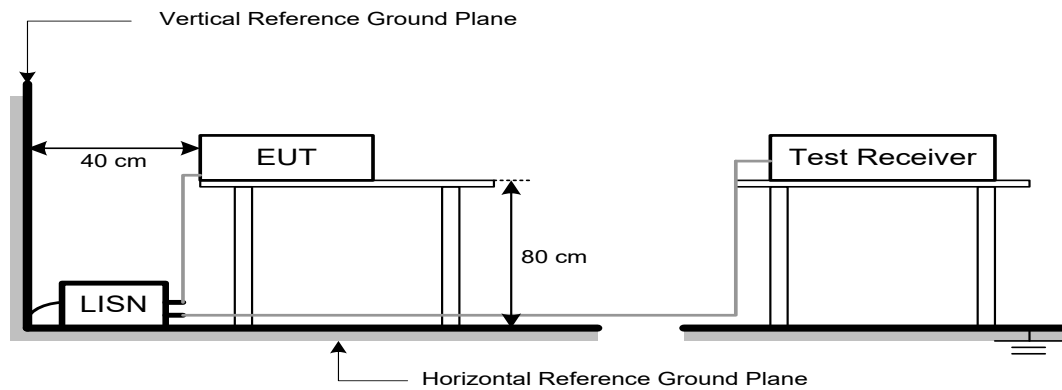

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5725-5850 NOTE (2)	-27	68.2
	10	105.2
	15.6	110.8
	27	122.2

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

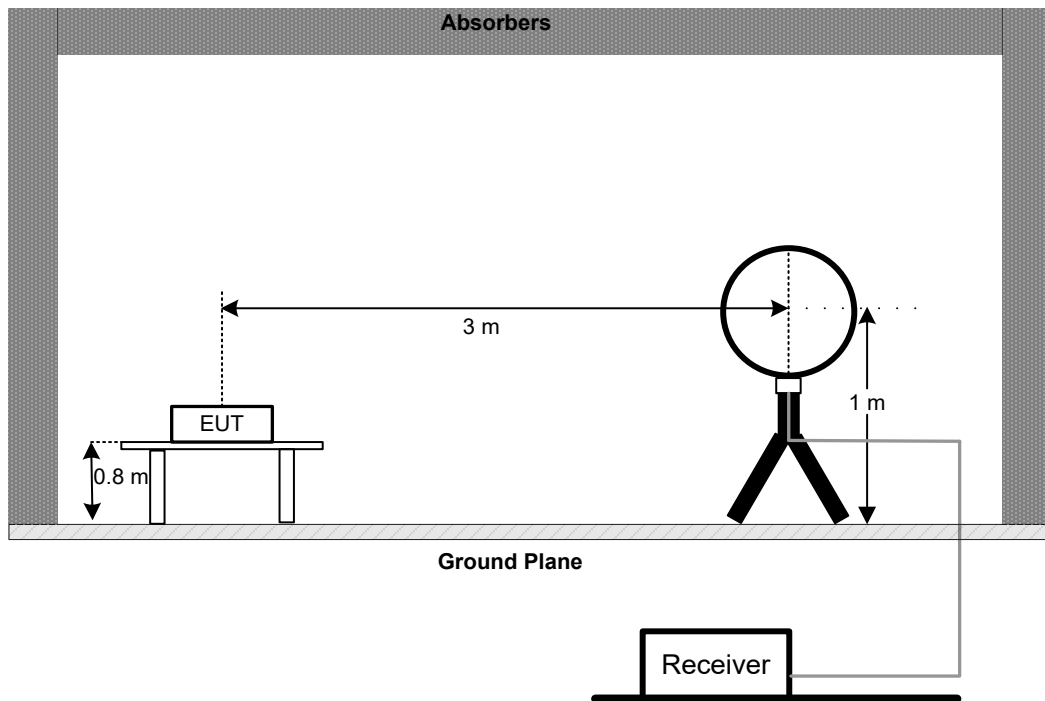

30 MHz to 1 GHz

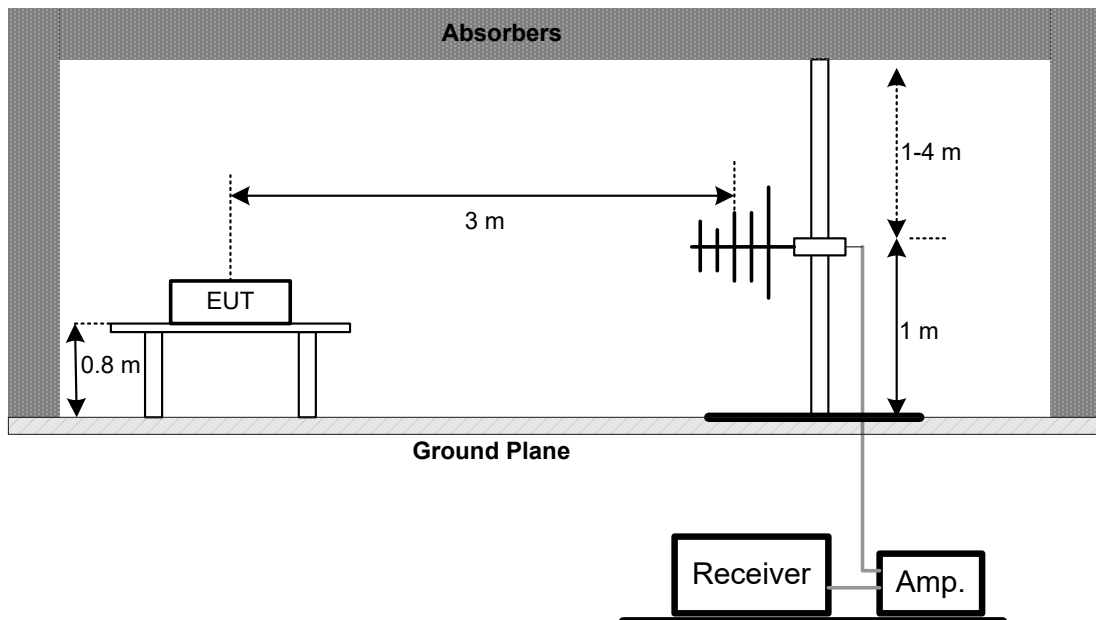

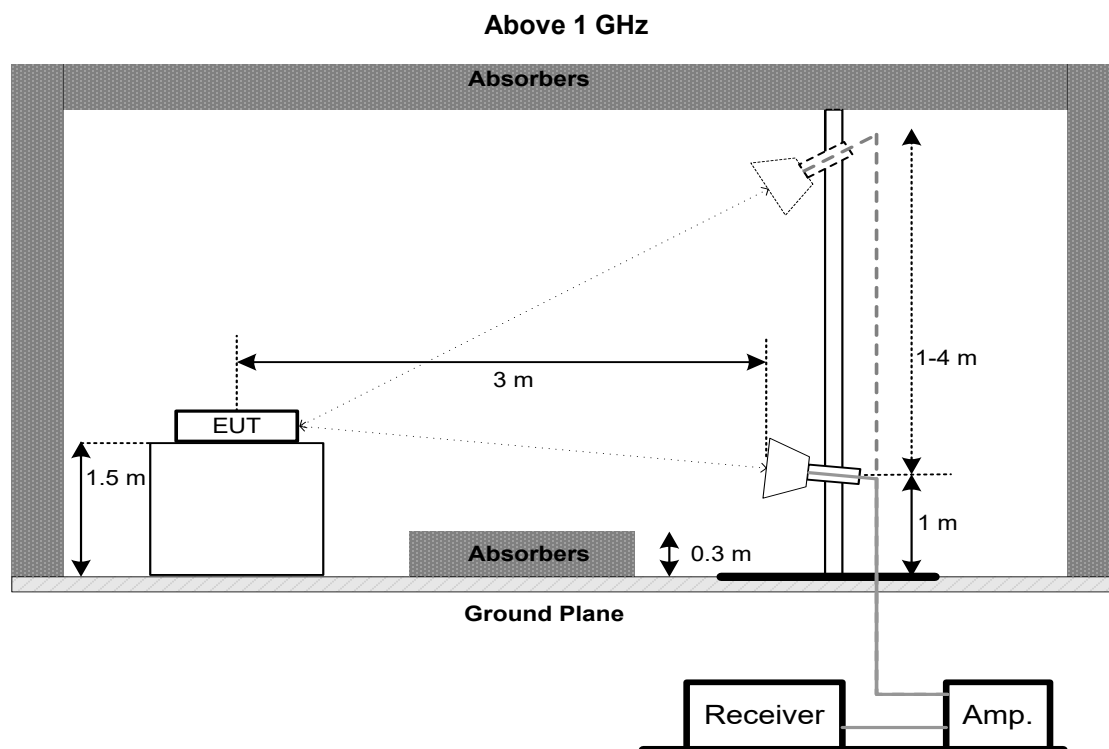

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	-	5150-5250
FCC 15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- a. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto


Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 13 dB, and the final offset is $13 + 7 = 20$ dB when RBW=100kHz is used.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. FREQUENCY STABILITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~40°C.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

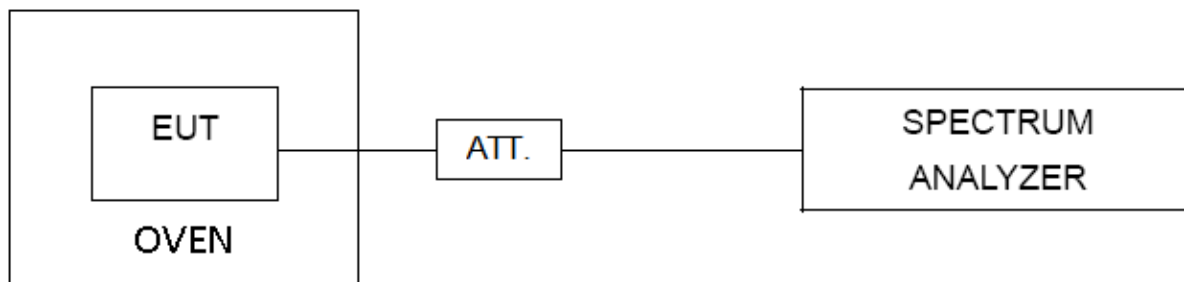

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Apr. 28, 2022
2	Cable	N/A	RG 213/U	N/A	May 27, 2022
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 27, 2022
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 15, 2022
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 20, 2022
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Band Reject Filter	Micro-Tronics	BRC50705-01	10	Feb. 27, 2022
12	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 27, 2022
13	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
3	RF Cable	Tongkaichuan	N/A	N/A	N/A
4	DC Block	Mini	N/A	N/A	N/A


Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A


Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	Precision Oven Tester	CEPREI	CEEC-M64T-40	15-008	Feb. 27, 2022
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A
5	DC Block	Mini	N/A	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


10. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

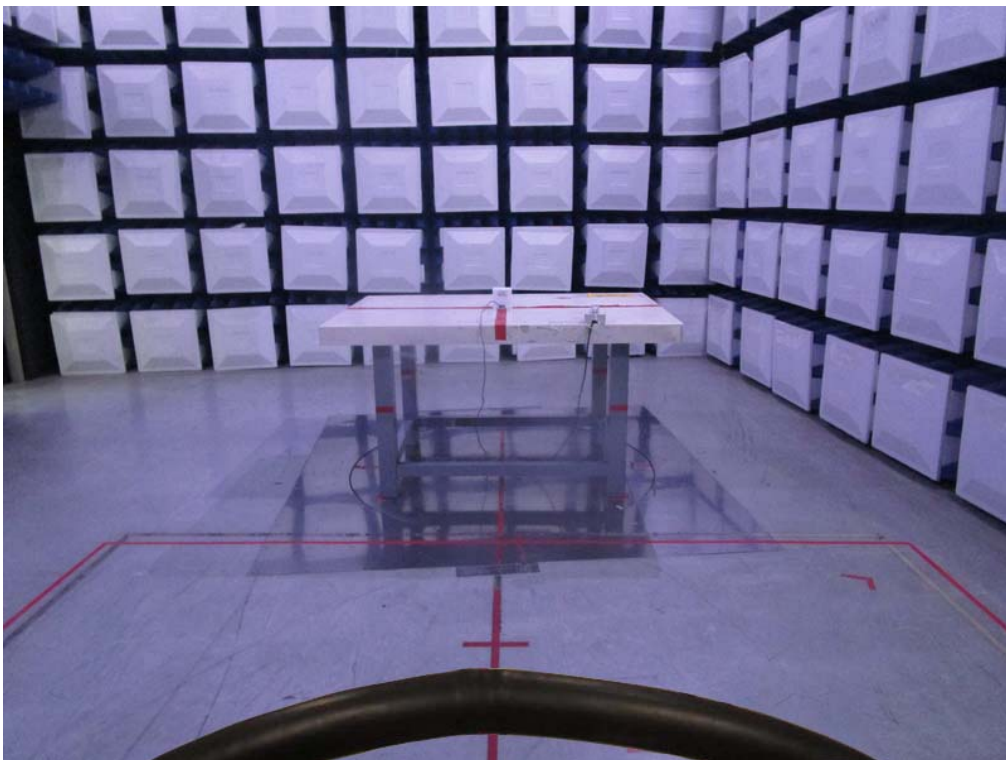Radiated Emissions Test Photos**9 kHz to 30 MHz**

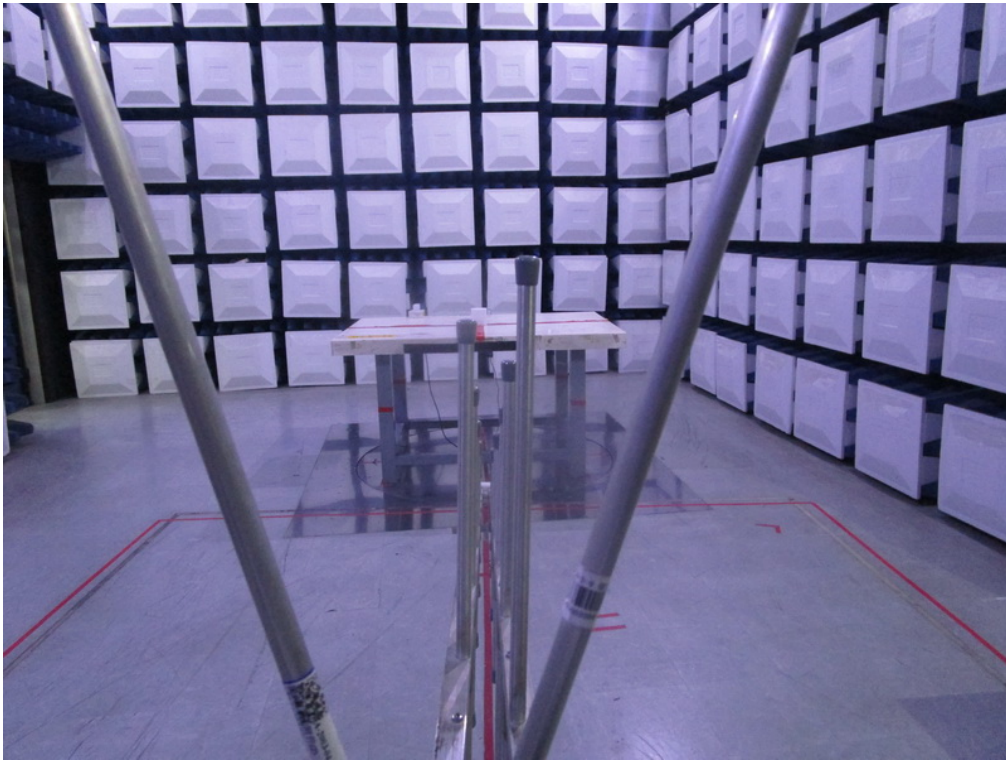Radiated Emissions Test Photos**30 MHz to 1 GHz**

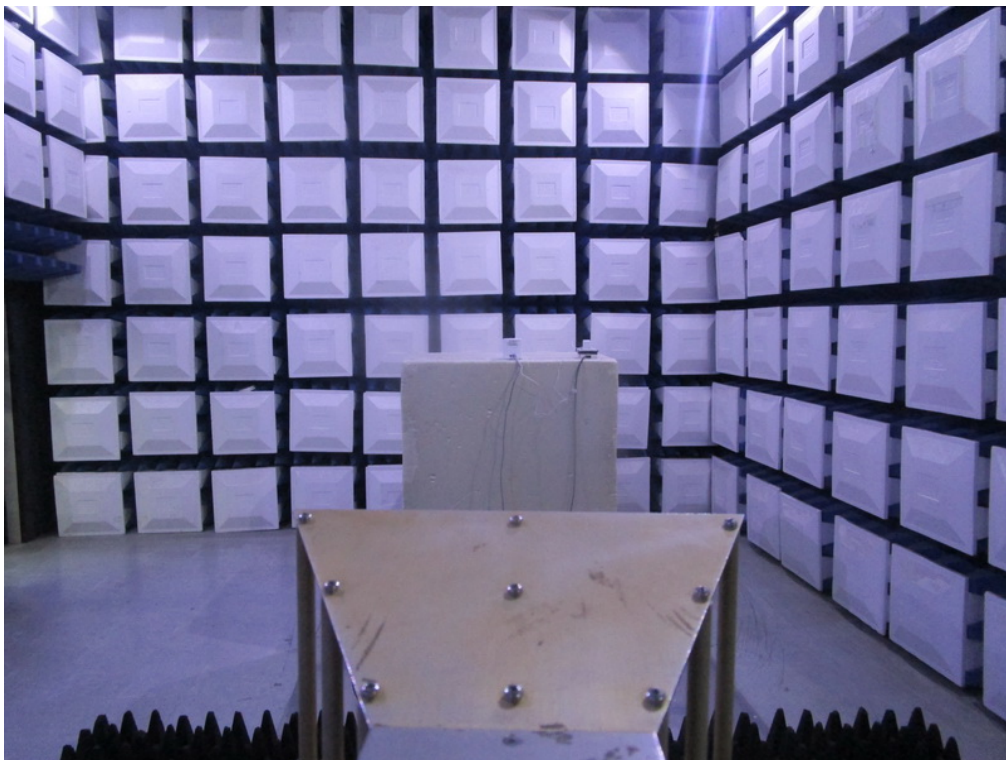
Radiated Emissions Test Photos**Above 1 GHz**

Conducted Test Photos

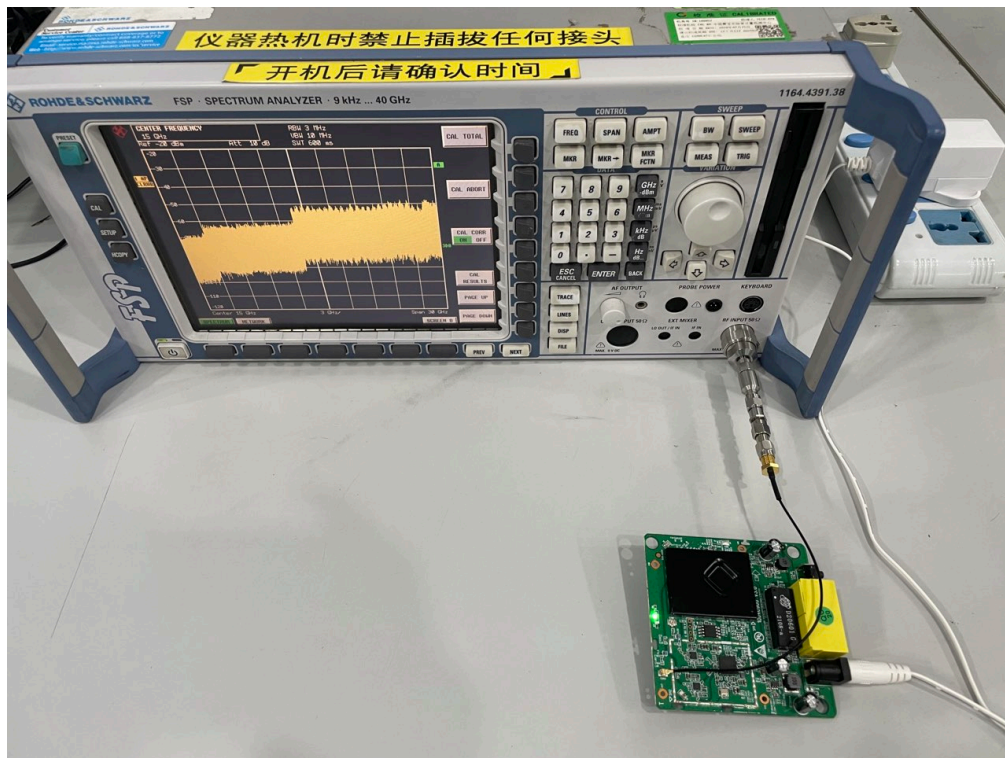

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Voltage	AC 120V/60Hz		
Test Mode	TX AC(VHT20) Mode Channel 157	Phase	Line

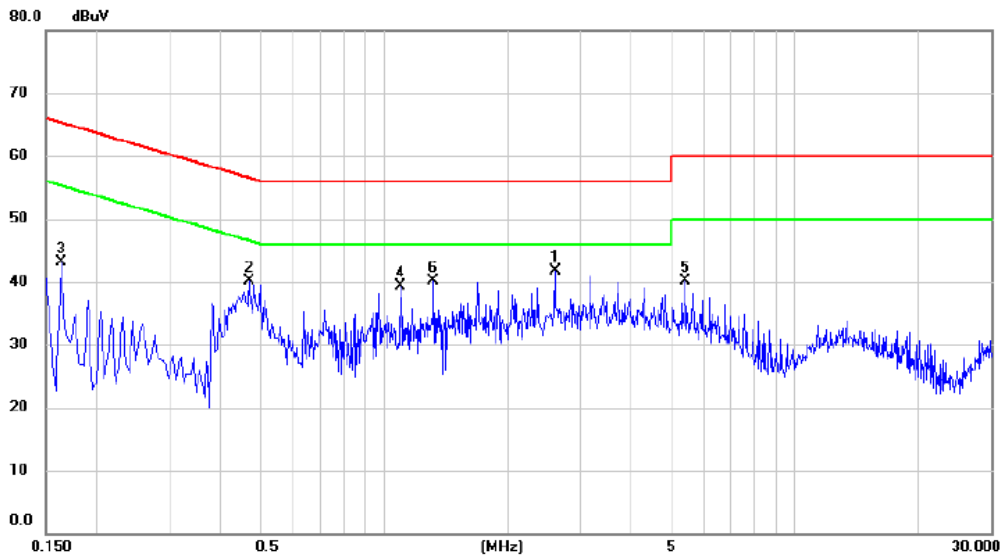


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	2.6070	31.67	10.10	41.77	56.00	-14.23	peak	
2		0.4695	30.18	9.92	40.10	56.52	-16.42	peak	
3		0.1635	33.27	9.77	43.04	65.28	-22.24	peak	
4		1.0994	29.28	9.99	39.27	56.00	-16.73	peak	
5		5.3925	29.88	10.31	40.19	60.00	-19.81	peak	
6		1.3200	30.03	10.00	40.03	56.00	-15.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 120V/60Hz		
Test Mode	TX AC(VHT20) Mode Channel 157	Phase	Neutral

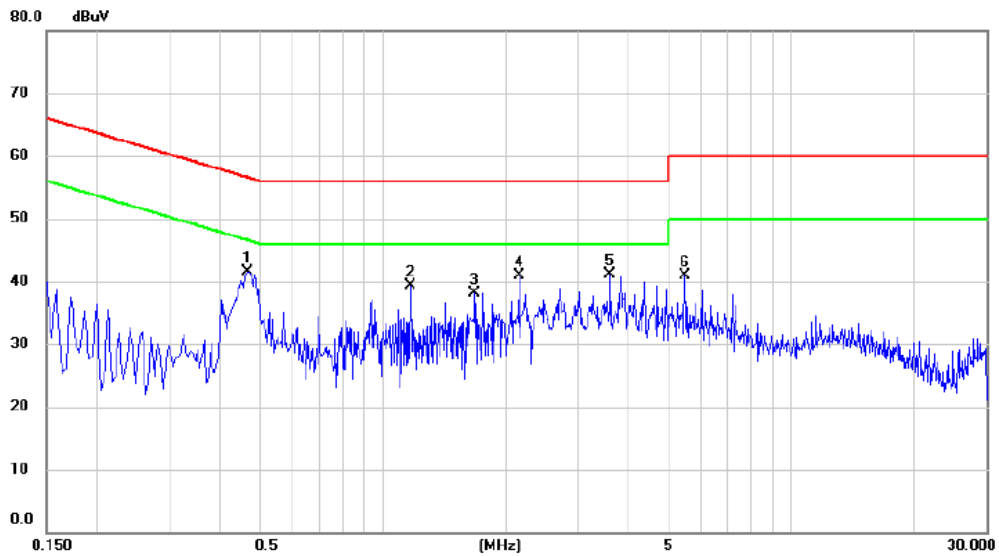


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4650	31.49	10.11	41.60	56.60	-15.00	peak	
2	1.1670	29.03	10.29	39.32	56.00	-16.68	peak	
3	1.6754	27.84	10.35	38.19	56.00	-17.81	peak	
4	2.1524	30.57	10.39	40.96	56.00	-15.04	peak	
5 *	3.5925	30.58	10.52	41.10	56.00	-14.90	peak	
6	5.4960	30.27	10.65	40.92	60.00	-19.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 240V/50Hz		
Test Mode	TX AC(VHT20) Mode Channel 157	Phase	Line

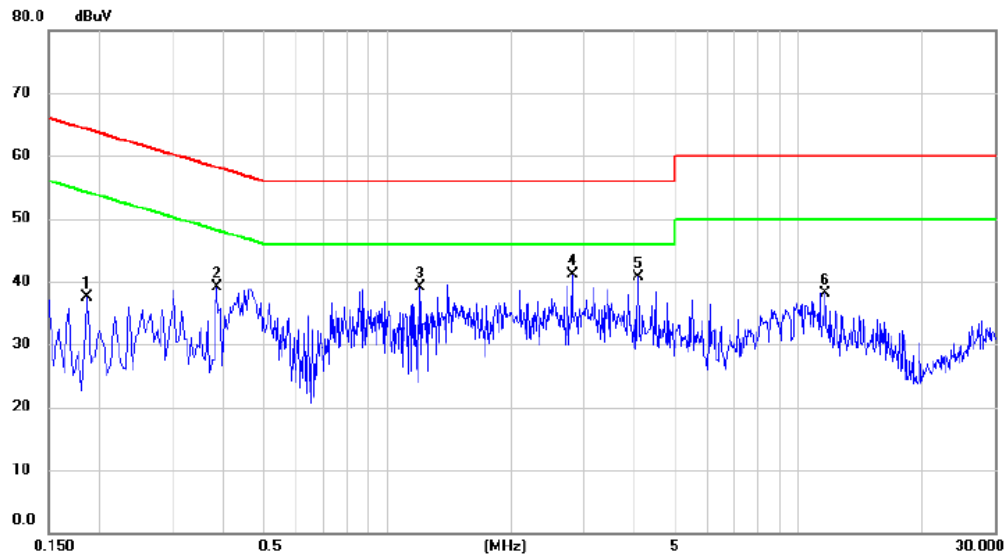


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1860	27.59	9.86	37.45	64.21	-26.76	peak	
2	0.3840	29.21	9.90	39.11	58.19	-19.08	peak	
3	1.1984	29.14	9.99	39.13	56.00	-16.87	peak	
4 *	2.8184	31.02	10.13	41.15	56.00	-14.85	peak	
5	4.0875	30.44	10.20	40.64	56.00	-15.36	peak	
6	11.5890	27.41	10.72	38.13	60.00	-21.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 240V/50Hz		
Test Mode	TX AC(VHT20) Mode Channel 157	Phase	Neutral

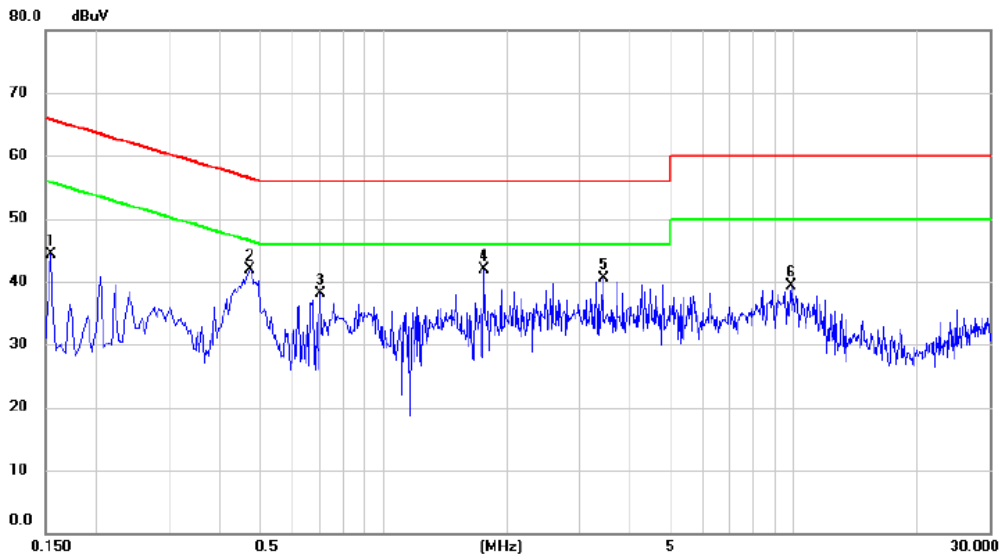


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1544	34.56	9.77	44.33	65.76	-21.43	peak	
2		0.4740	31.77	10.11	41.88	56.44	-14.56	peak	
3		0.7034	27.92	10.09	38.01	56.00	-17.99	peak	
4	*	1.7564	31.49	10.36	41.85	56.00	-14.15	peak	
5		3.4350	29.98	10.50	40.48	56.00	-15.52	peak	
6		9.8745	28.37	11.01	39.38	60.00	-20.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

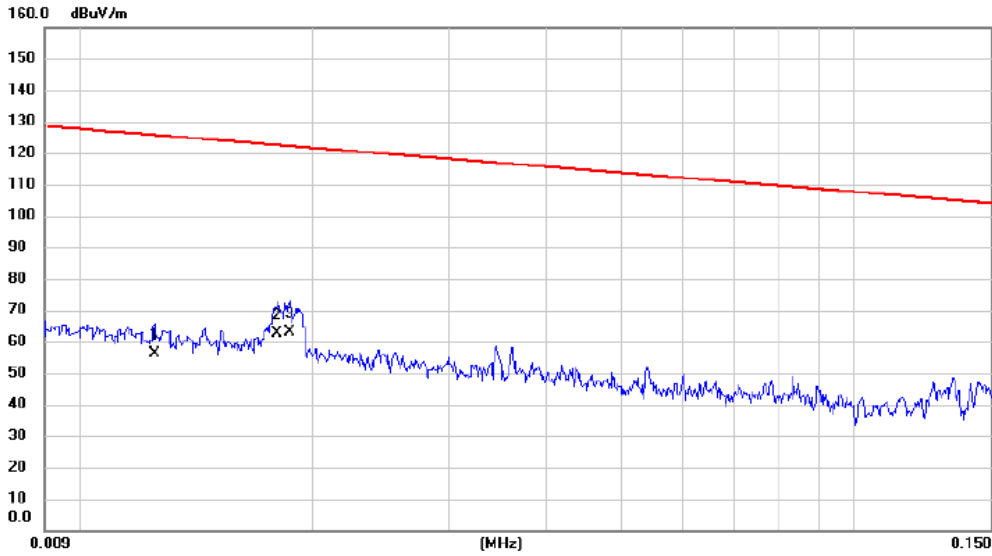


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0125	39.60	16.77	56.37	125.67	-69.30	AVG		
2		0.0180	47.40	15.04	62.44	122.50	-60.06	AVG		
3	*	0.0187	48.20	14.82	63.02	122.17	-59.15	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

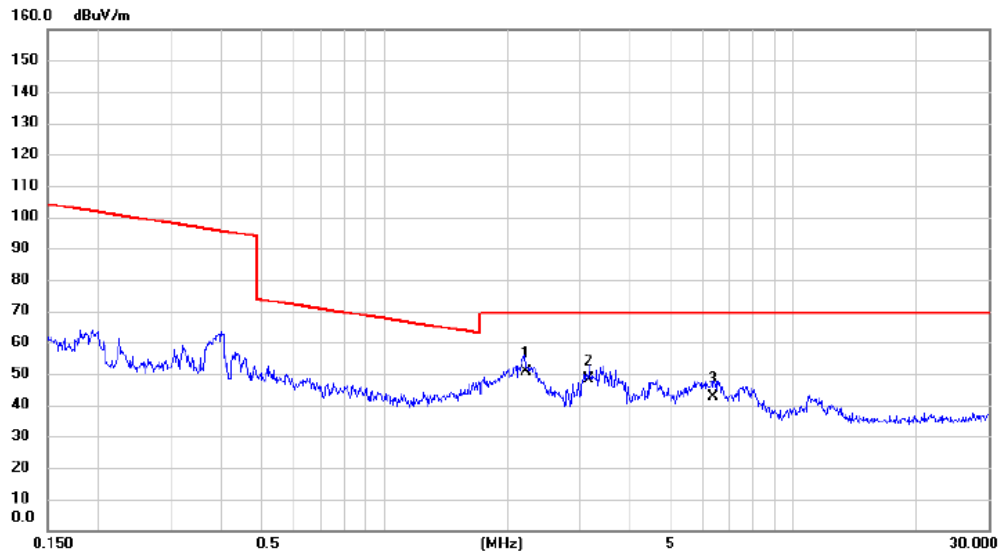


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	2.2132	38.50	12.18	50.68	69.54	-18.86	QP			
2	3.1731	36.40	11.97	48.37	69.54	-21.17	QP			
3	6.3520	30.50	12.13	42.63	69.54	-26.91	QP			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

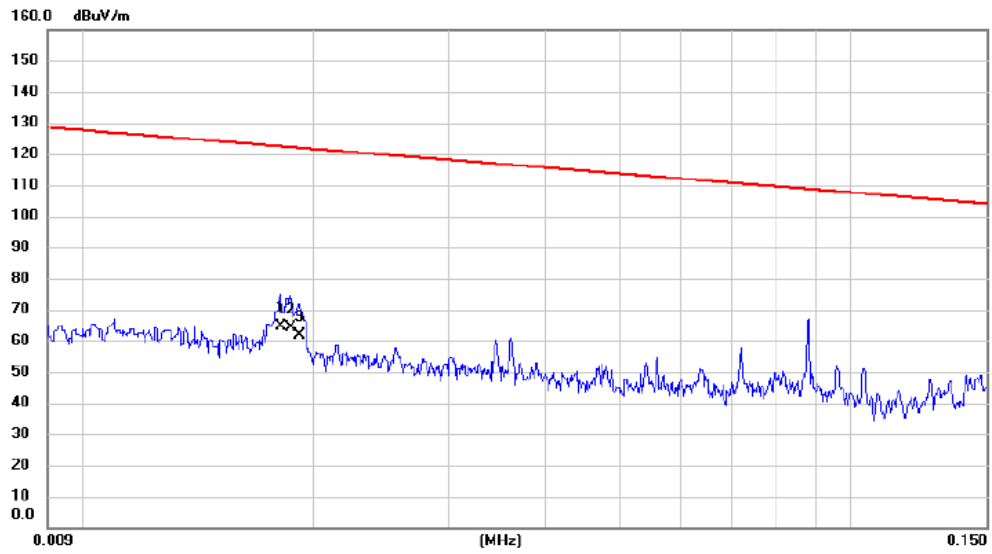


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	0.0181	49.50	15.01	64.51	122.45	-57.94	AVG			
2	0.0187	49.30	14.82	64.12	122.17	-58.05	AVG			
3	0.0192	47.30	14.66	61.96	121.94	-59.98	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

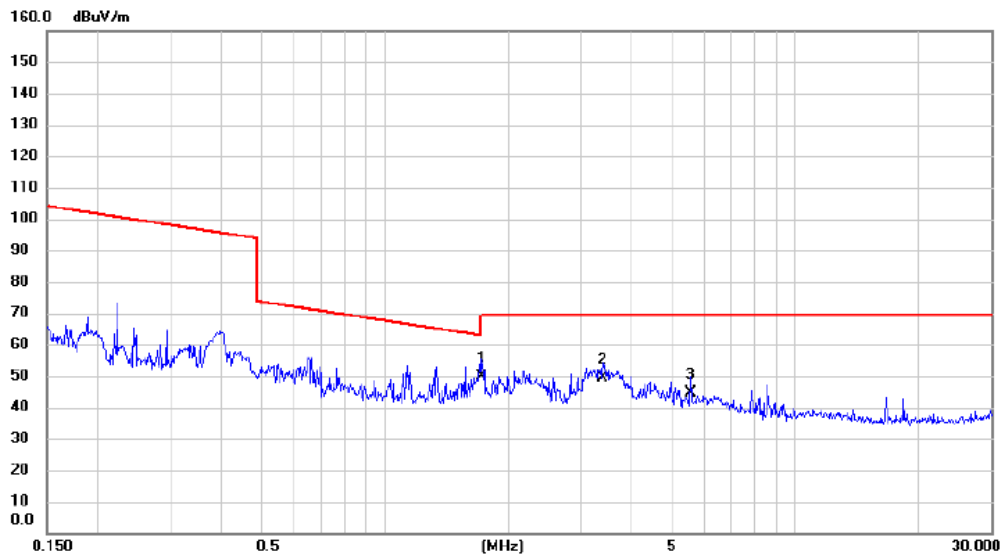


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	1.7162	37.40	12.45	49.85	69.54	-19.69	QP			
2	3.3994	37.50	11.99	49.49	69.54	-20.05	QP			
3	5.5641	32.40	12.12	44.52	69.54	-25.02	QP			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Vertical
-----------	-------------------------------	--------------	----------

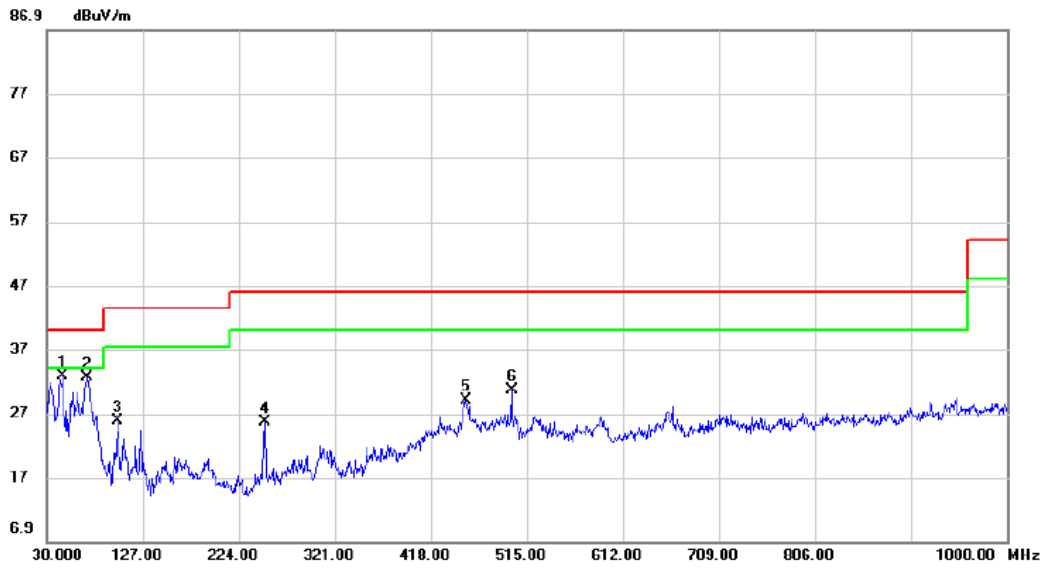


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	46.490	46.85	-13.97	32.88	40.00	-7.12	peak	
2	70.740	48.69	-16.04	32.65	40.00	-7.35	peak	
3	101.780	40.58	-14.79	25.79	43.50	-17.71	peak	
4	250.190	38.90	-13.28	25.62	46.00	-20.38	peak	
5	453.405	36.65	-7.61	29.04	46.00	-16.96	peak	
6	499.965	37.84	-7.26	30.58	46.00	-15.42	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 157	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

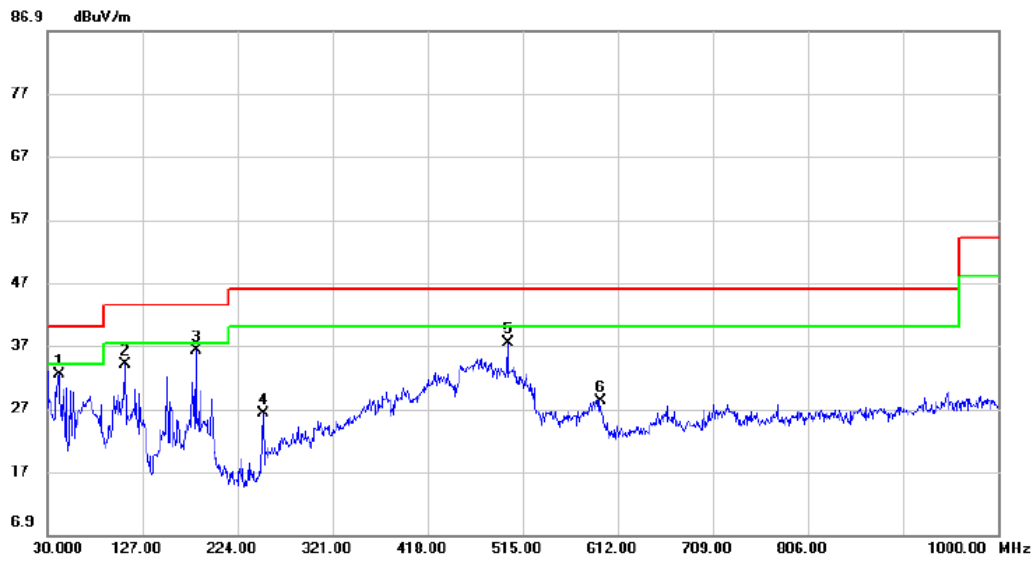

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.640	46.38	-14.00	32.38	40.00	-7.62	peak	
2		109.540	48.21	-14.26	33.95	43.50	-9.55	peak	
3	*	181.320	49.12	-12.95	36.17	43.50	-7.33	peak	
4		250.190	39.46	-13.28	26.18	46.00	-19.82	peak	
5		499.965	44.75	-7.26	37.49	46.00	-8.51	peak	
6		594.055	33.78	-5.52	28.26	46.00	-17.74	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

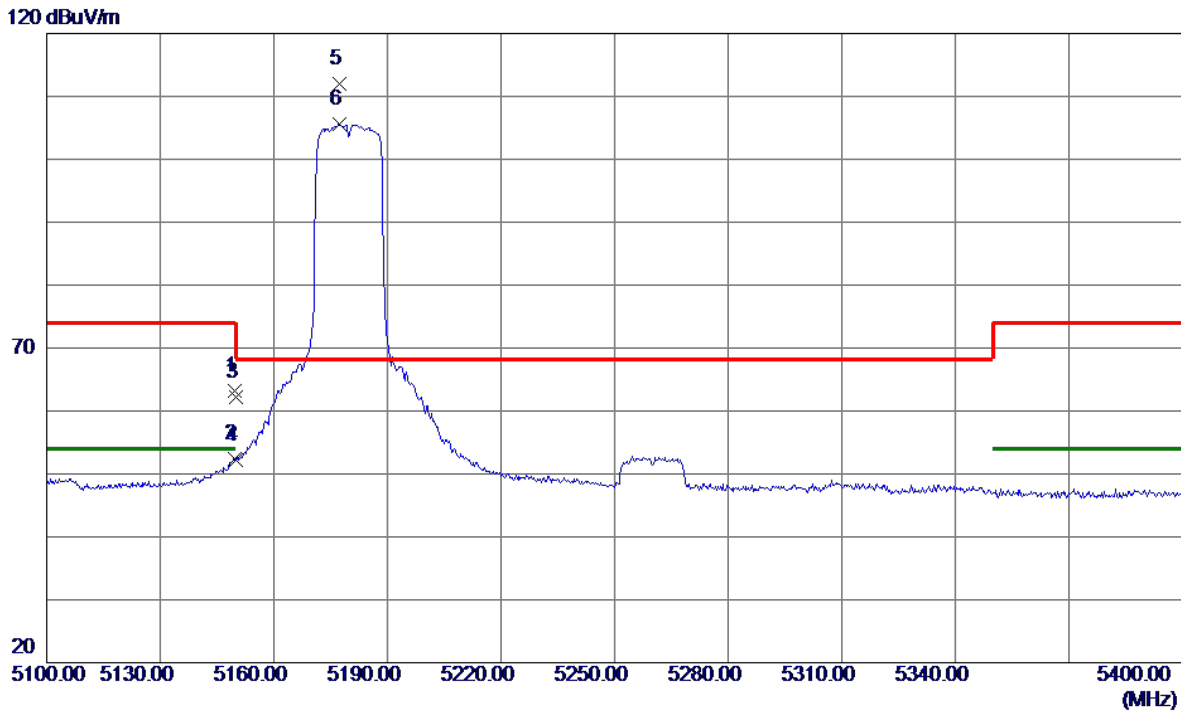


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6500	47.02	16.15	63.17	74.00	-10.83	Peak	
2	5149.6500	36.16	16.15	52.31	54.00	-1.69	AVG	
3	5150.0000	46.13	16.16	62.29	74.00	-11.71	Peak	
4	5150.0000	36.11	16.16	52.27	54.00	-1.73	AVG	
5 *	5177.2500	95.85	16.22	112.07	68.20	43.87	Peak	No limit
6	5177.2500	89.31	16.22	105.53	999.00	-893.47	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

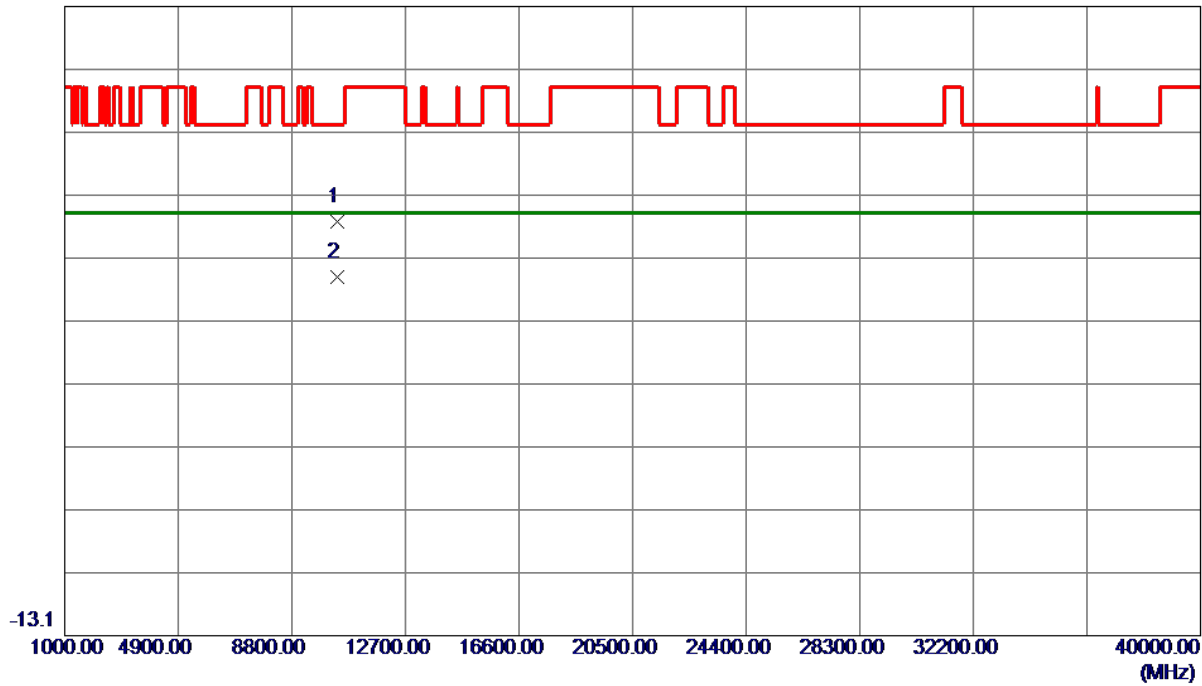


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	39.20	13.51	52.71	68.20	-15.49	Peak	
2 *	10360.0000	30.33	13.51	43.84	54.00	-10.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

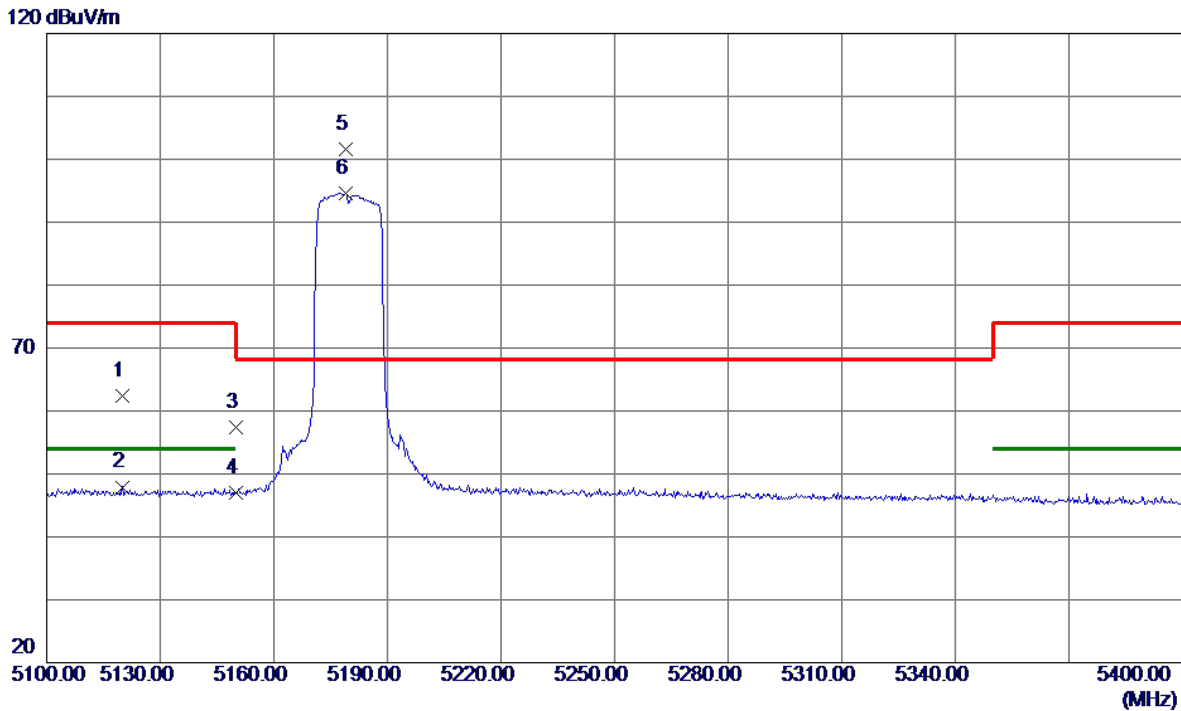


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.1000	46.38	16.08	62.46	74.00	-11.54	Peak	
2	5120.1000	31.82	16.08	47.90	54.00	-6.10	AVG	
3	5150.0000	41.31	16.16	57.47	74.00	-16.53	Peak	
4	5150.0000	30.80	16.16	46.96	54.00	-7.04	AVG	
5 *	5178.9000	85.43	16.22	101.65	68.20	33.45	Peak	No limit
6	5178.9000	78.44	16.22	94.66	999.00	-904.34	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

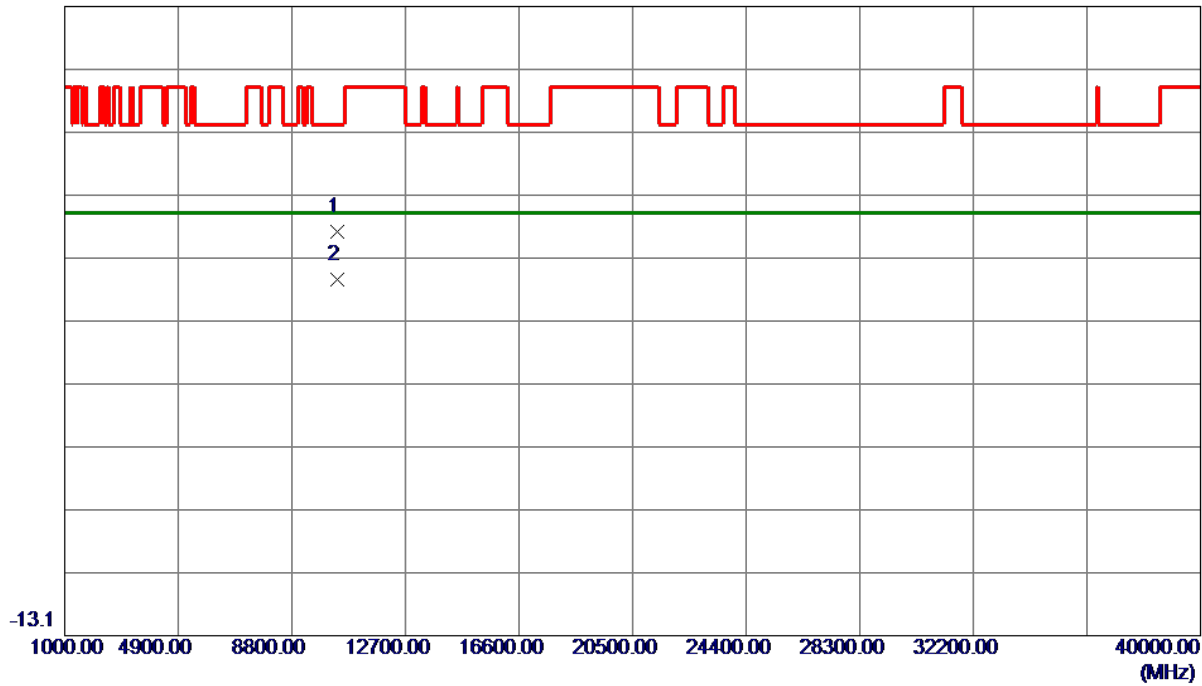


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	37.68	13.51	51.19	68.20	-17.01	Peak	
2 *	10360.0000	30.04	13.51	43.55	54.00	-10.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

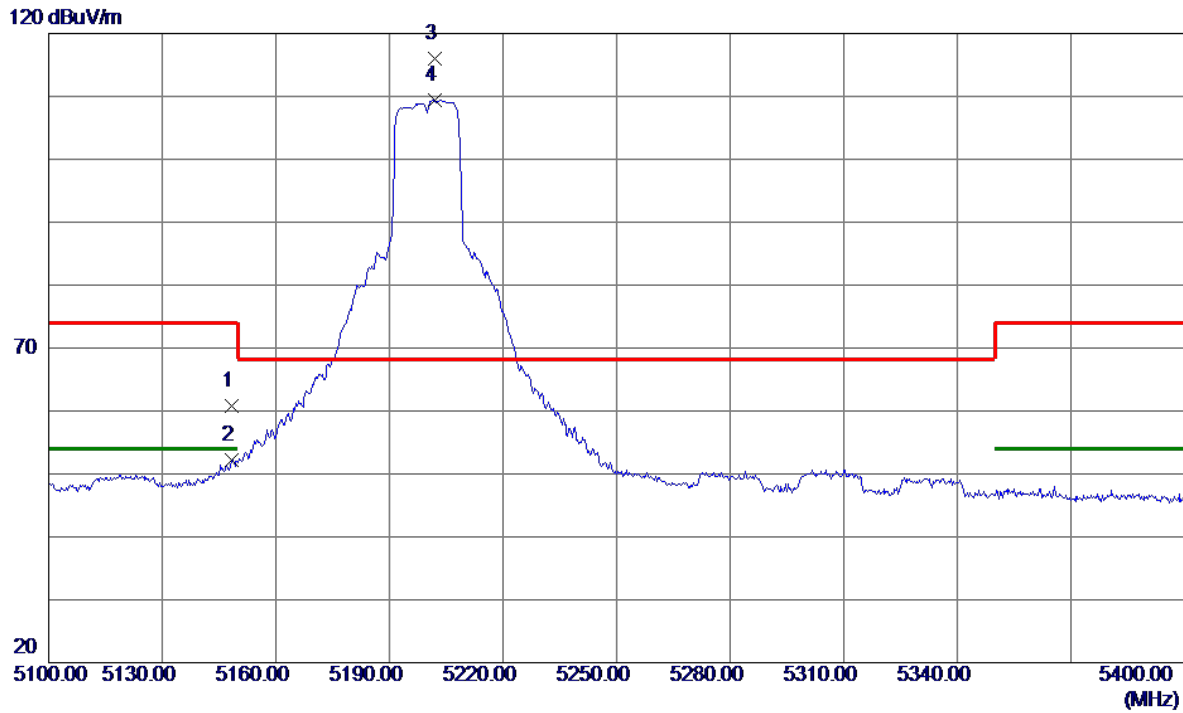


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4500	44.67	16.15	60.82	74.00	-13.18	Peak	
2	5148.4500	36.08	16.15	52.23	54.00	-1.77	AVG	
3 *	5201.8500	99.63	16.28	115.91	68.20	47.71	Peak	No limit
4	5201.8500	93.13	16.28	109.41	999.00	-889.59	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

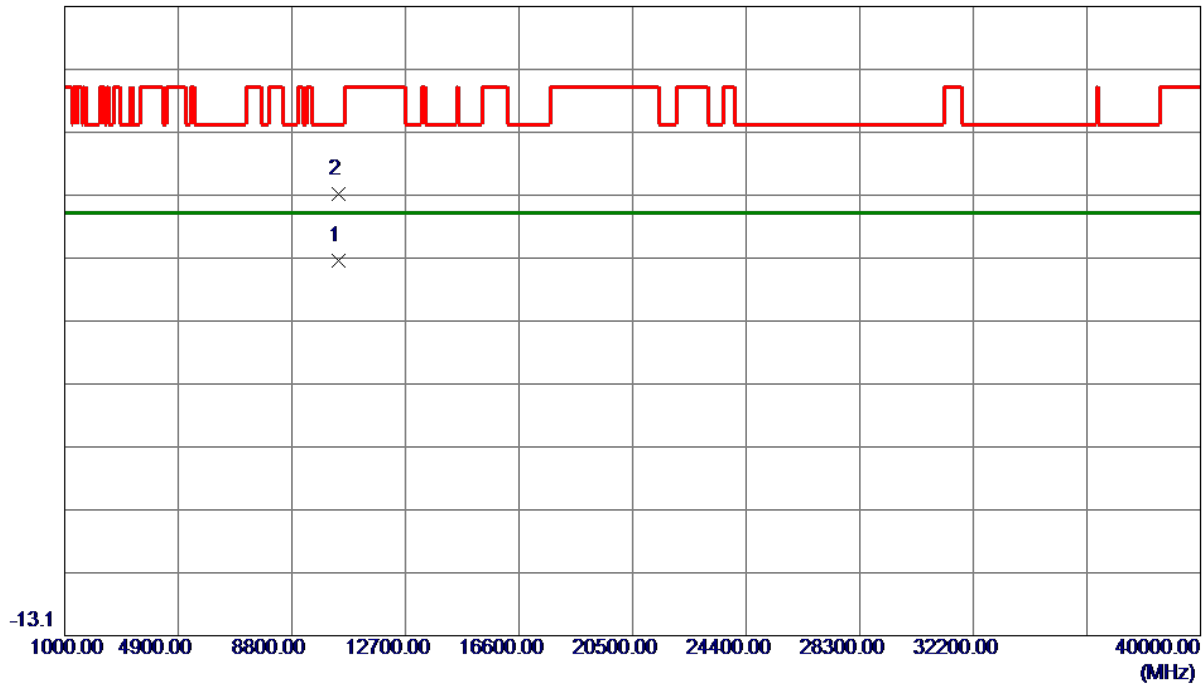


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.0000	33.02	13.55	46.57	54.00	-7.43	AVG	
2	10400.9500	43.51	13.55	57.06	68.20	-11.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

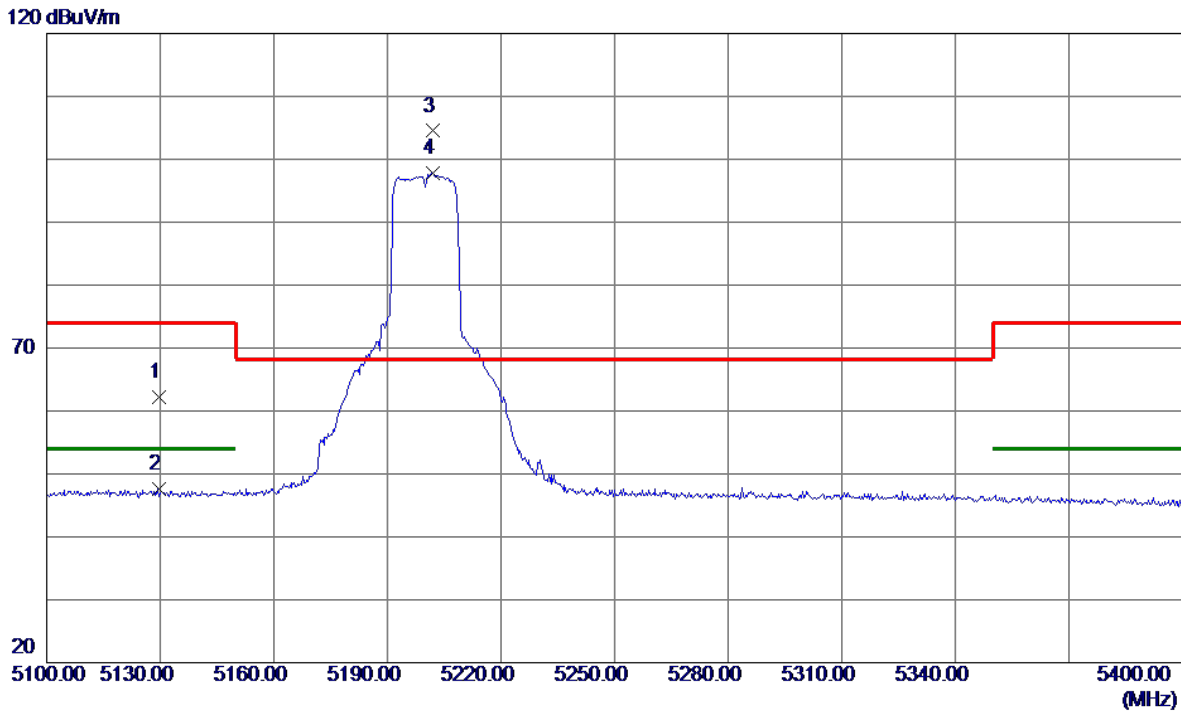


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5129.5500	46.06	16.11	62.17	74.00	-11.83	Peak	
2	5129.5500	31.42	16.11	47.53	54.00	-6.47	AVG	
3 *	5202.0000	88.22	16.28	104.50	68.20	36.30	Peak	No limit
4	5202.0000	81.49	16.28	97.77	999.00	-901.23	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

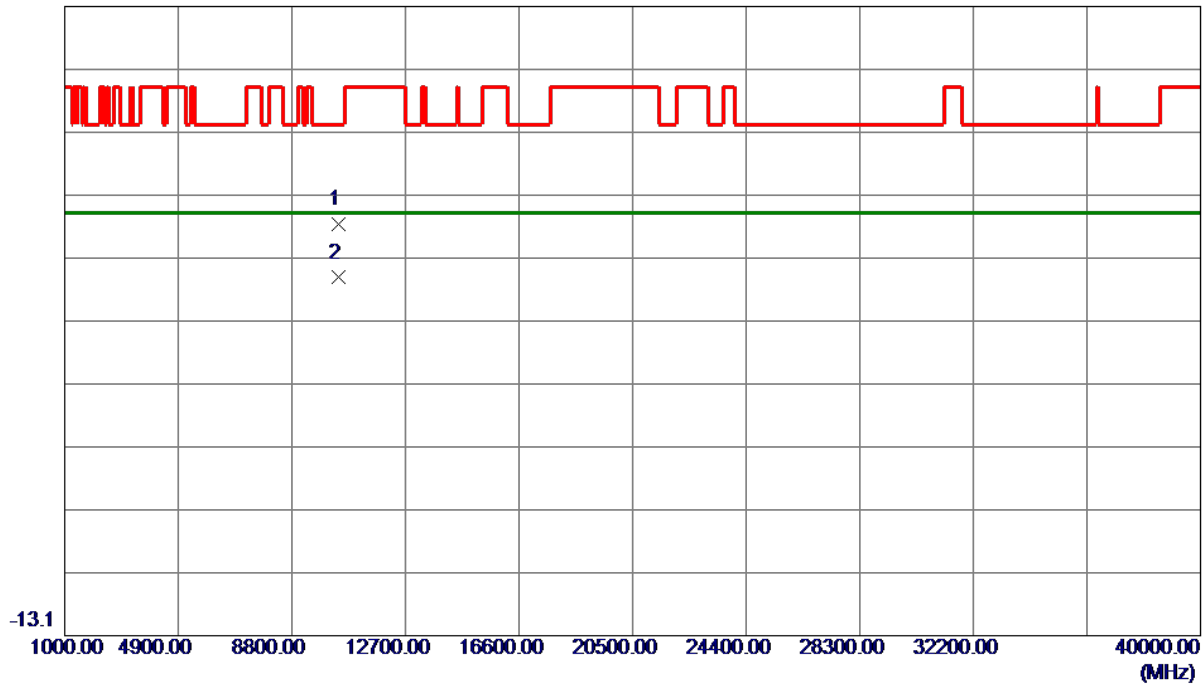


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.0000	38.80	13.55	52.35	68.20	-15.85	Peak	
2 *	10400.0000	30.25	13.55	43.80	54.00	-10.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

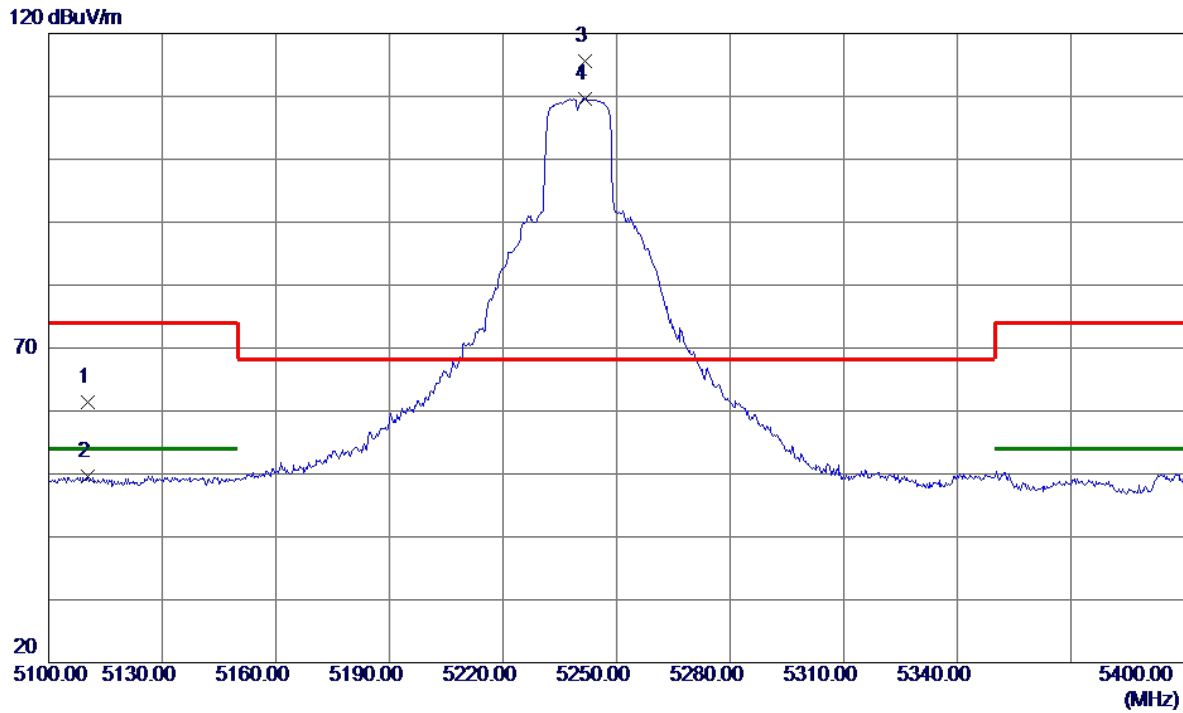


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5110.3500	45.27	16.06	61.33	74.00	-12.67	Peak	
2	5110.3500	33.50	16.06	49.56	54.00	-4.44	AVG	
3 *	5241.6000	99.26	16.37	115.63	68.20	47.43	Peak	No limit
4	5241.6000	93.30	16.37	109.67	999.00	-889.33	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

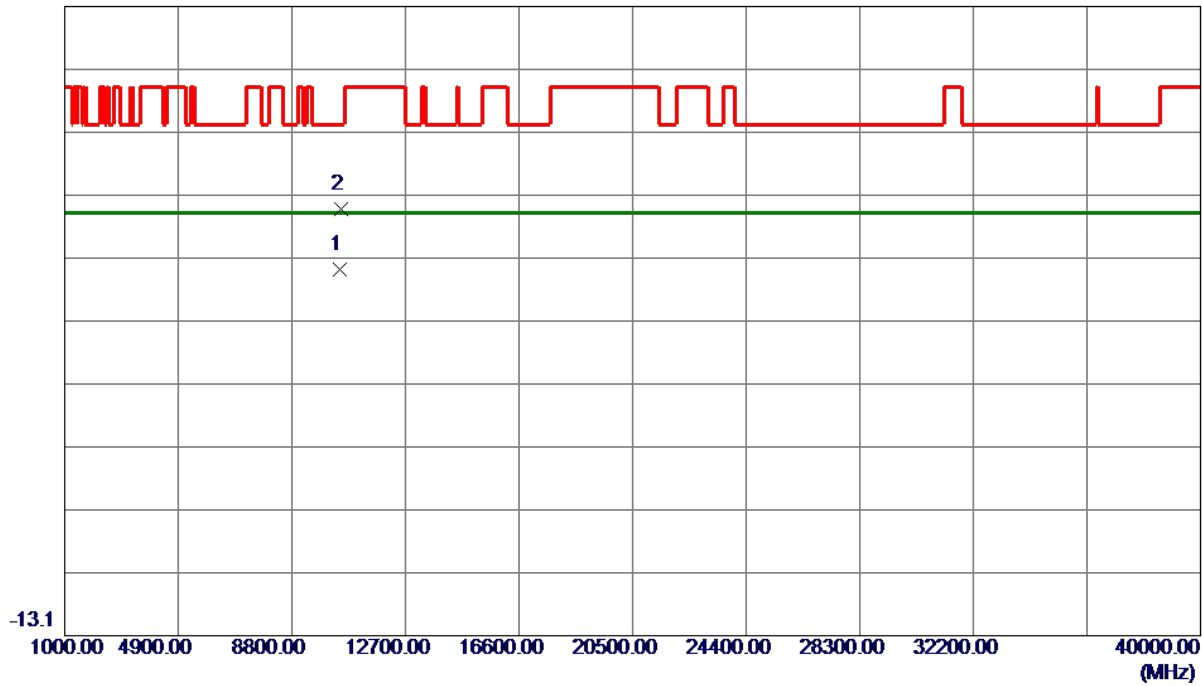


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10438.0000	31.54	13.59	45.13	54.00	-8.87	AVG	
2	10473.1000	41.01	13.62	54.63	68.20	-13.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

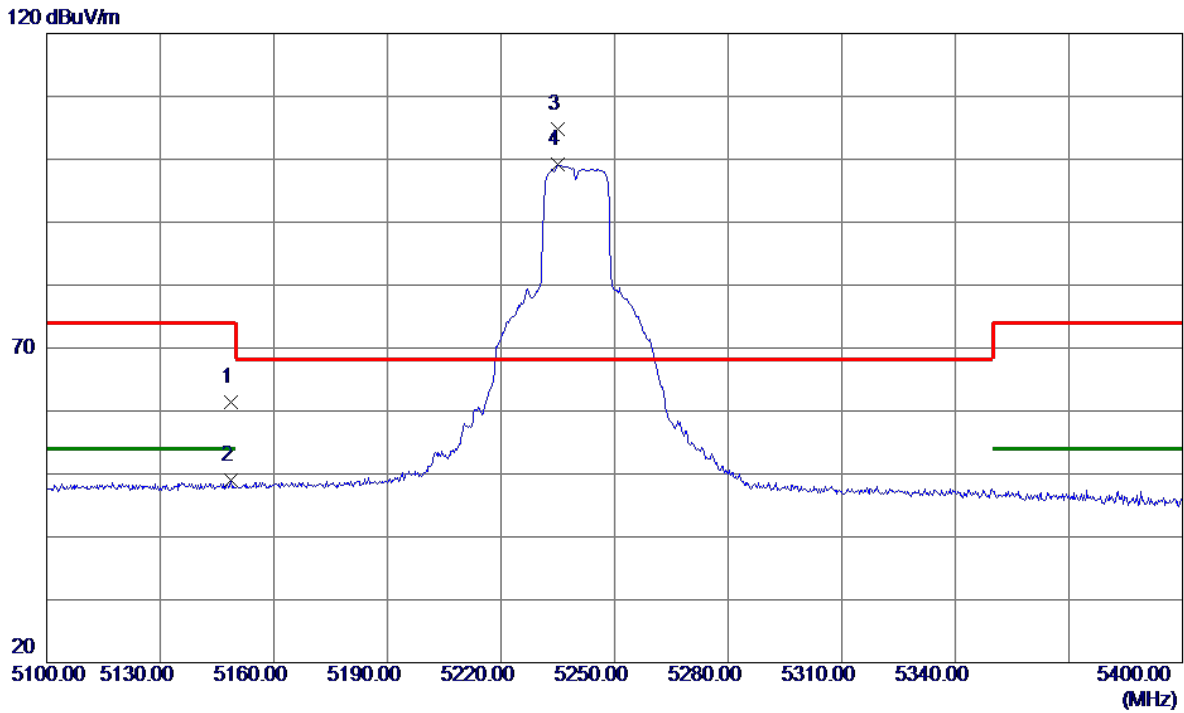


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.6000	45.18	16.15	61.33	74.00	-12.67	Peak	
2	5148.6000	32.82	16.15	48.97	54.00	-5.03	AVG	
3 *	5235.1500	88.46	16.36	104.82	68.20	36.62	Peak	No limit
4	5235.1500	82.75	16.36	99.11	999.00	-899.89	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

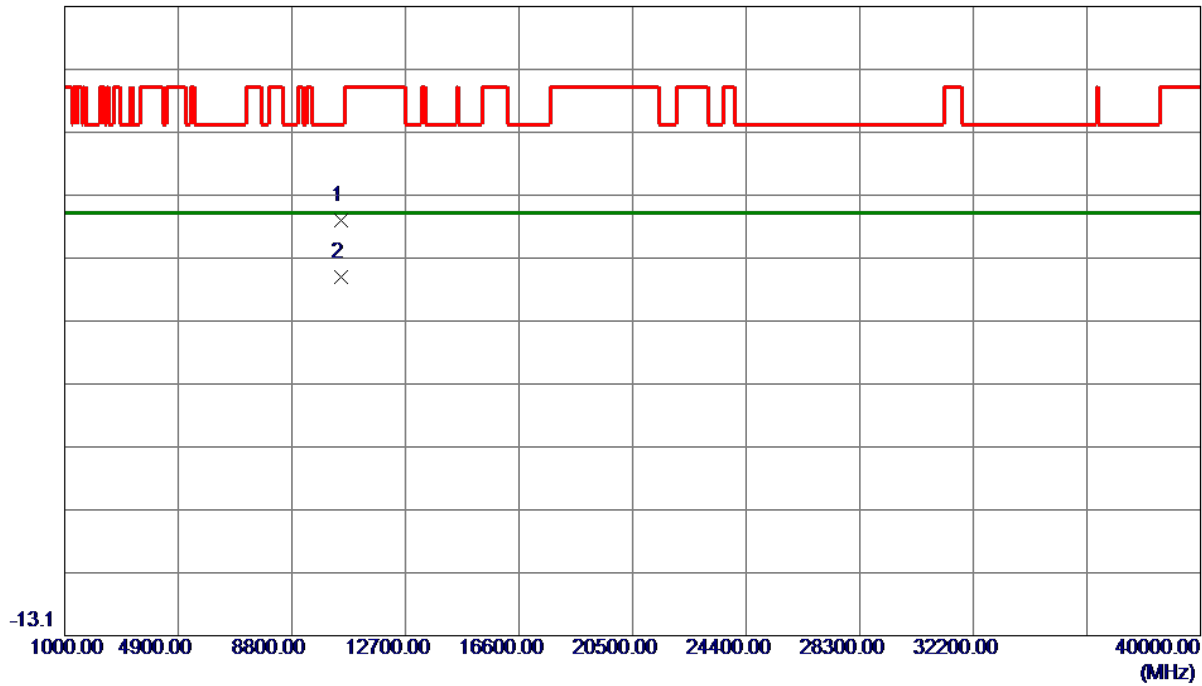


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	39.36	13.63	52.99	68.20	-15.21	Peak	
2 *	10480.0000	30.25	13.63	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

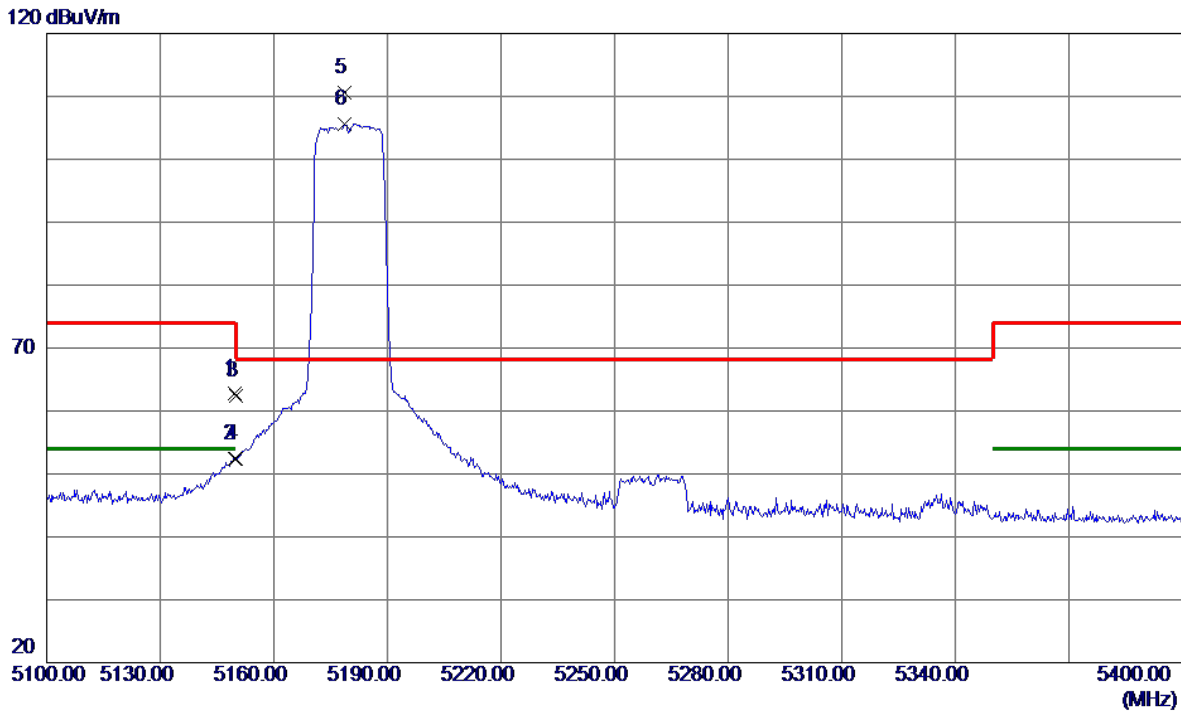


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.5000	46.73	16.15	62.88	74.00	-11.12	Peak	
2	5149.5000	36.18	16.15	52.33	54.00	-1.67	AVG	
3	5150.0000	46.31	16.16	62.47	74.00	-11.53	Peak	
4	5150.0000	36.30	16.16	52.46	54.00	-1.54	AVG	
5 *	5178.6000	94.31	16.22	110.53	68.20	42.33	Peak	No limit
6	5178.6000	89.39	16.22	105.61	999.00	-893.39	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

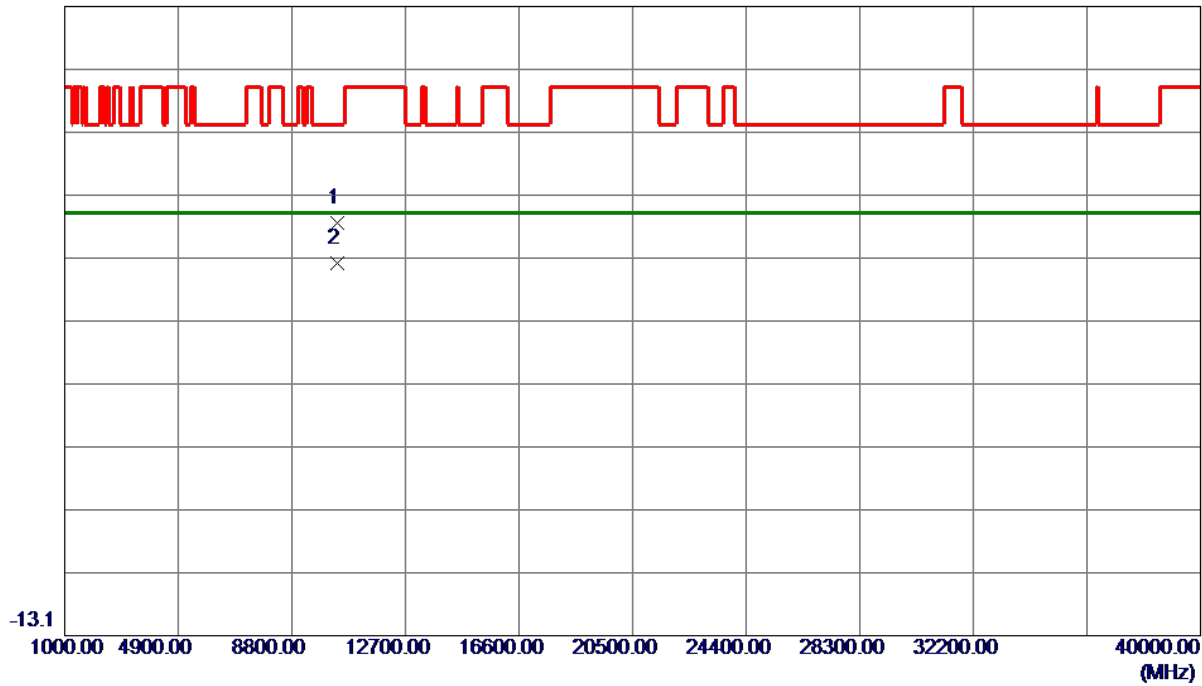


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	39.07	13.51	52.58	68.20	-15.62	Peak	
2 *	10360.0000	32.65	13.51	46.16	54.00	-7.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

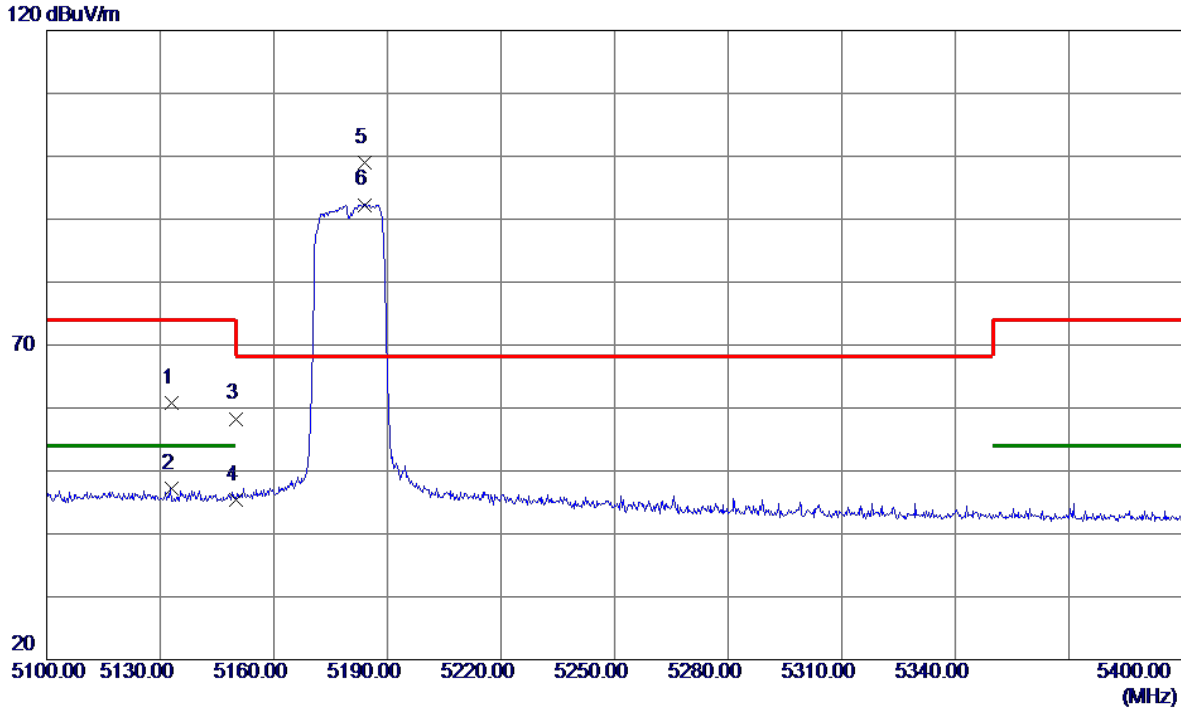


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5132.8500	44.65	16.11	60.76	74.00	-13.24	Peak	
2	5132.8500	31.07	16.11	47.18	54.00	-6.82	AVG	
3	5150.0000	42.14	16.16	58.30	74.00	-15.70	Peak	
4	5150.0000	29.28	16.16	45.44	54.00	-8.56	AVG	
5 *	5184.1500	82.77	16.24	99.01	68.20	30.81	Peak	No limit
6	5184.1500	76.06	16.24	92.30	999.00	-906.70	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

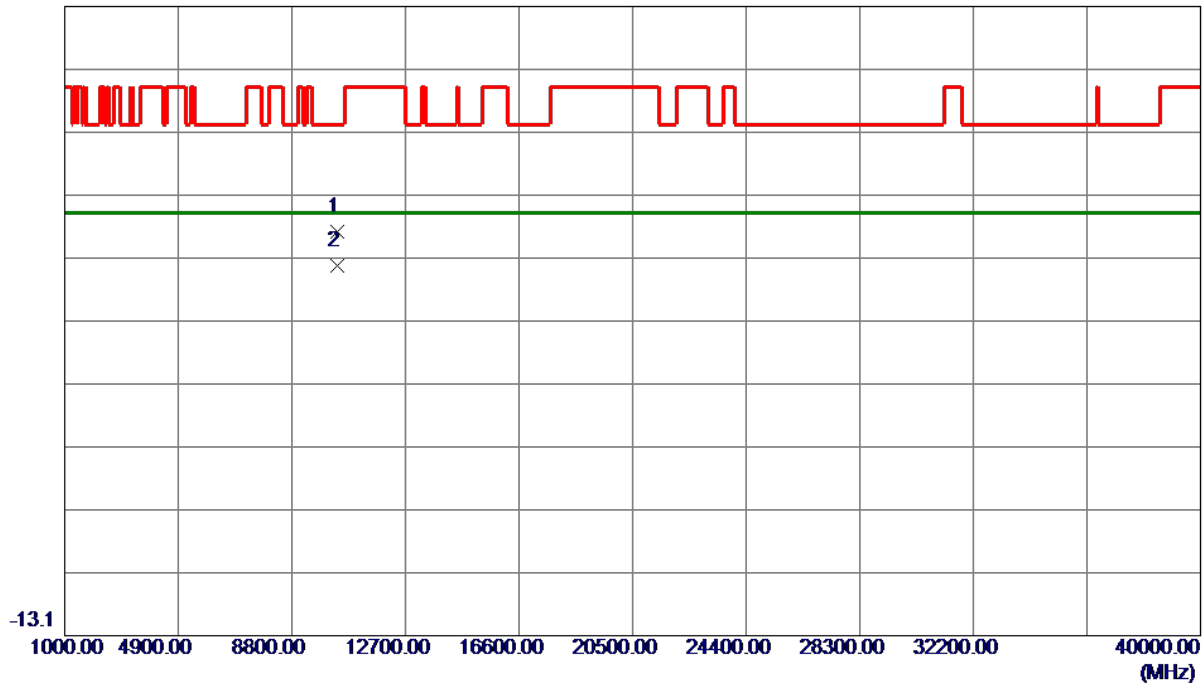


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	37.51	13.51	51.02	68.20	-17.18	Peak	
2 *	10360.0000	32.14	13.51	45.65	54.00	-8.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

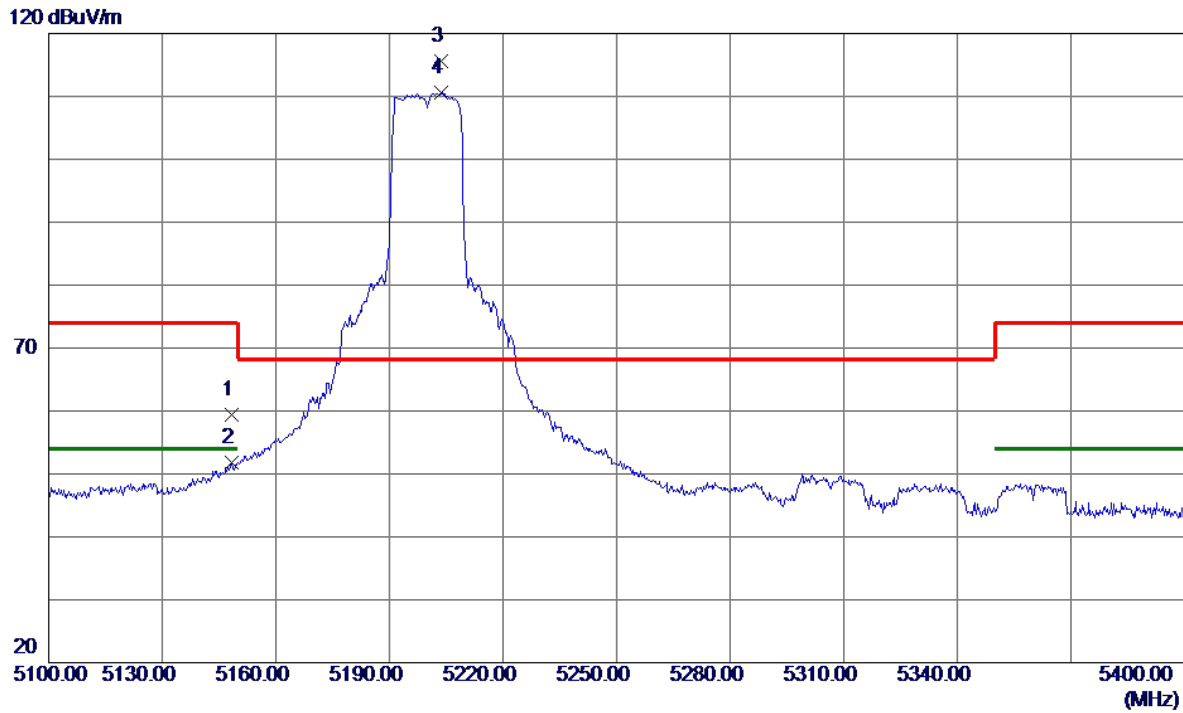


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4500	43.24	16.15	59.39	74.00	-14.61	Peak	
2	5148.4500	35.59	16.15	51.74	54.00	-2.26	AVG	
3 *	5203.8000	99.27	16.28	115.55	68.20	47.35	Peak	No limit
4	5203.8000	94.34	16.28	110.62	999.00	-888.38	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

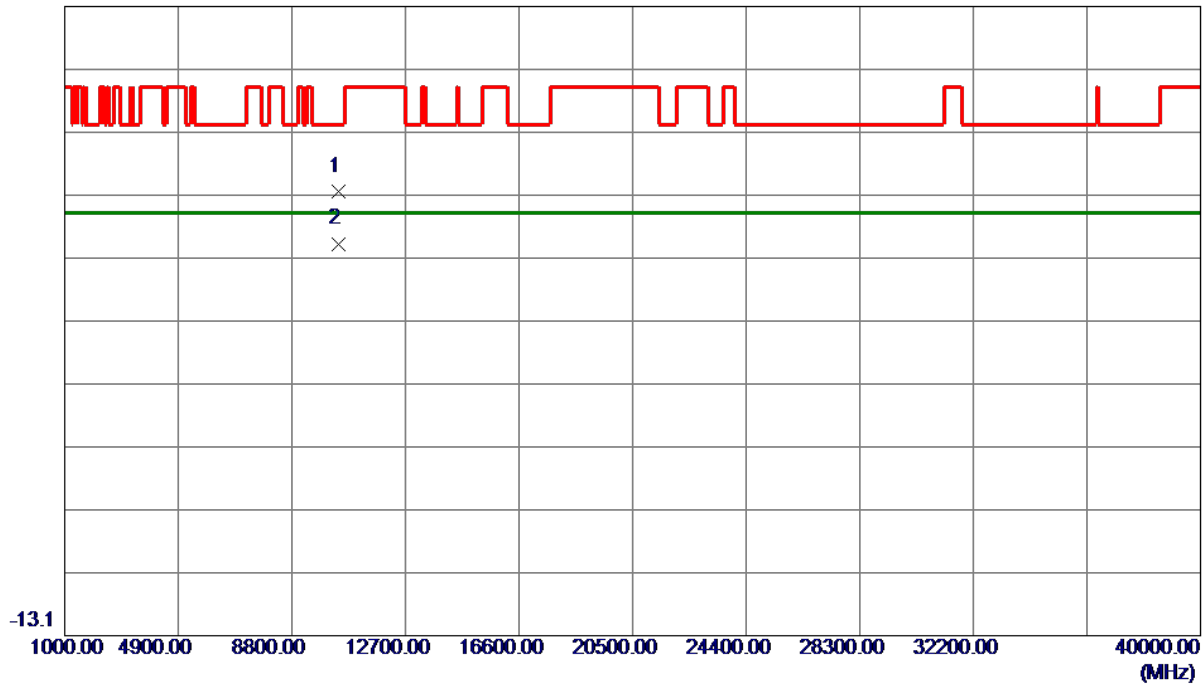


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10399.0000	43.94	13.55	57.49	68.20	-10.71	Peak	
2 *	10399.0000	35.65	13.55	49.20	54.00	-4.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

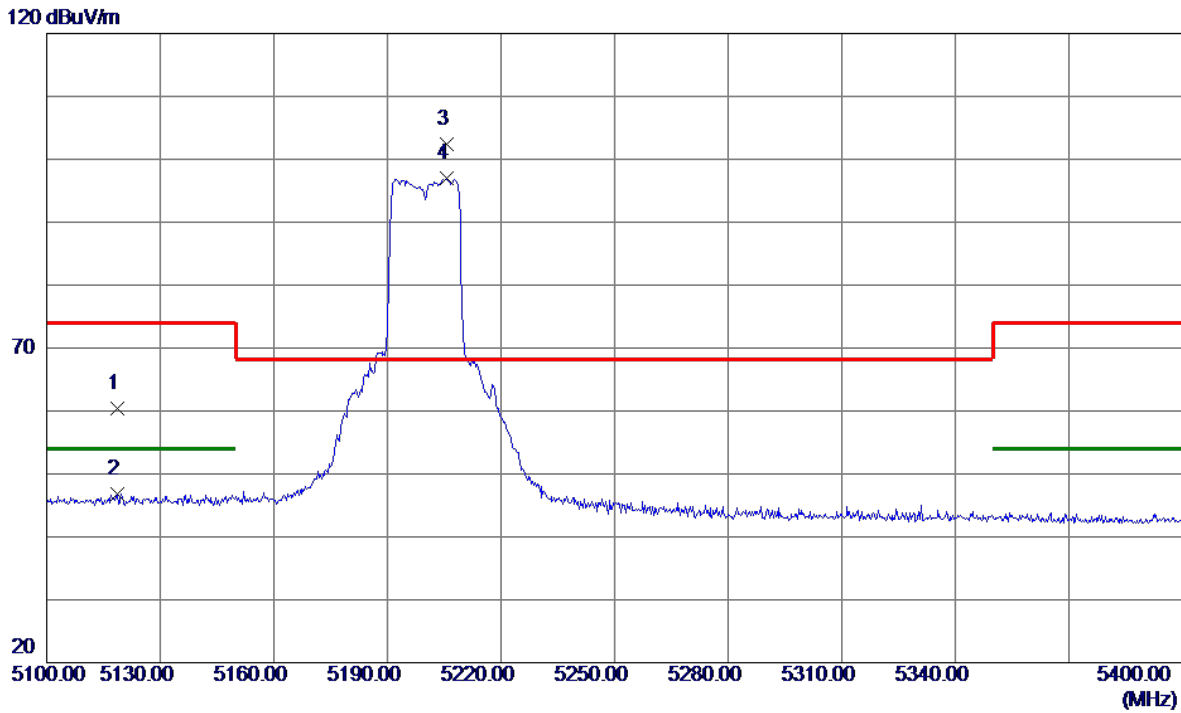


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5118.6000	44.36	16.08	60.44	74.00	-13.56	Peak	
2	5118.6000	30.78	16.08	46.86	54.00	-7.14	AVG	
3 *	5205.6000	86.17	16.29	102.46	68.20	34.26	Peak	No limit
4	5205.6000	80.65	16.29	96.94	999.00	-902.06	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

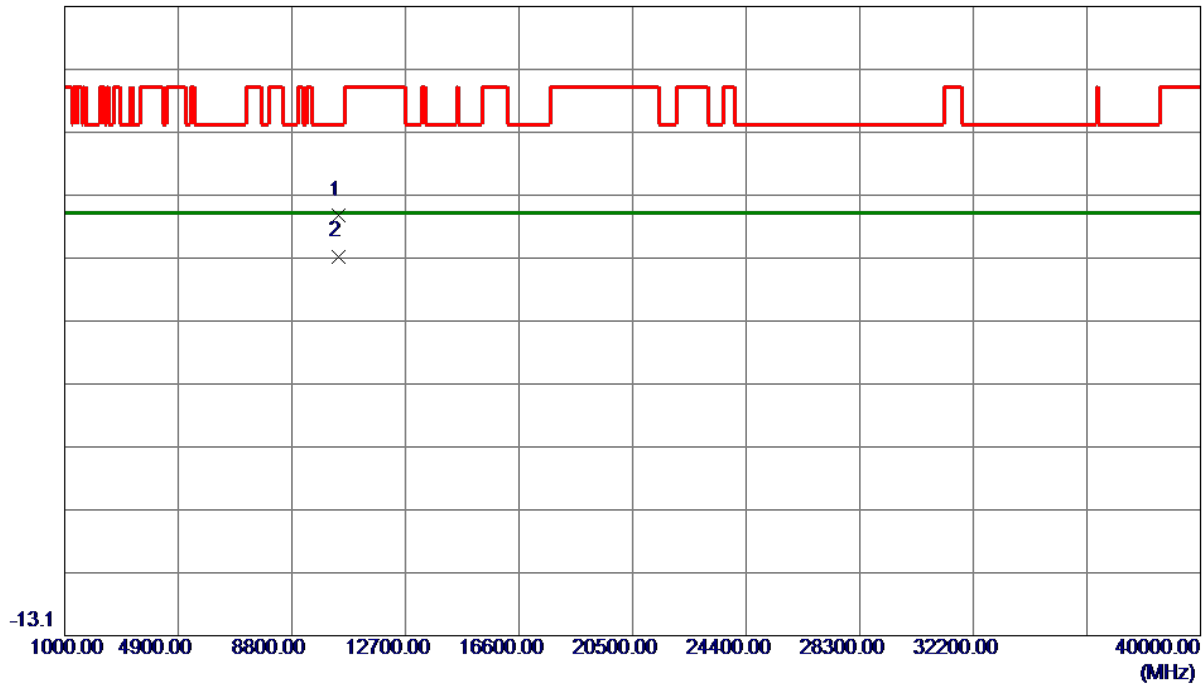


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.0000	40.12	13.55	53.67	68.20	-14.53	Peak	
2 *	10400.0000	33.65	13.55	47.20	54.00	-6.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

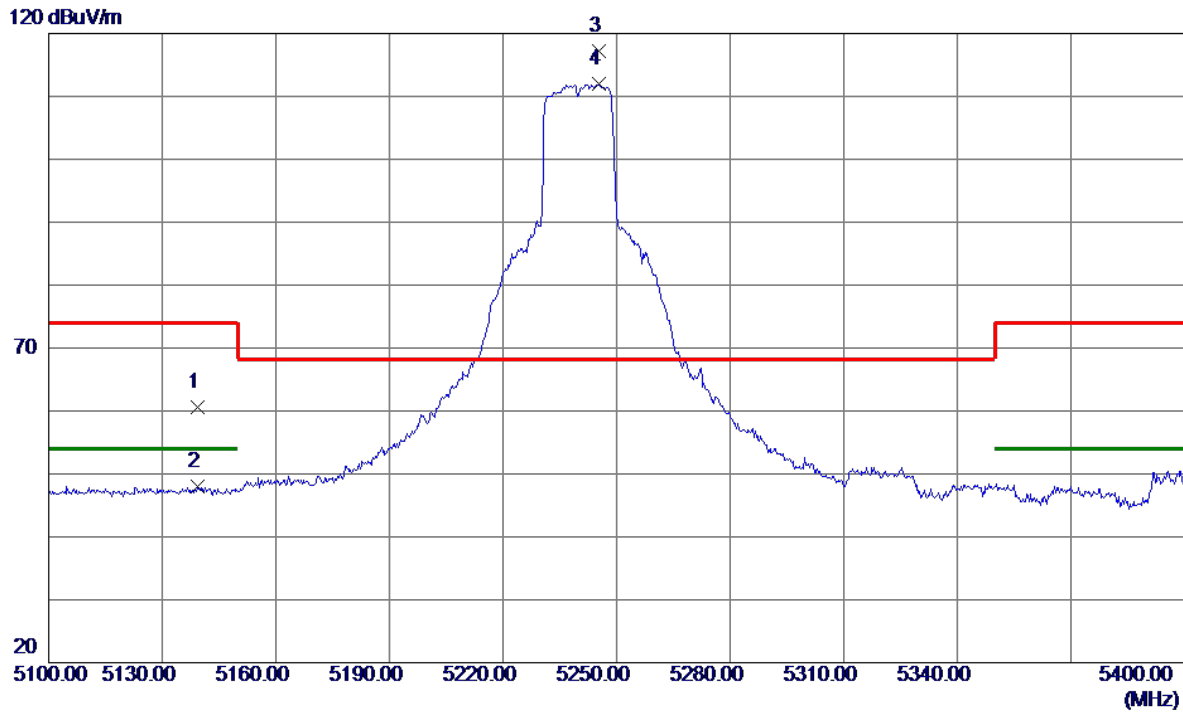


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5139.4500	44.51	16.13	60.64	74.00	-13.36	Peak	
2	5139.4500	31.84	16.13	47.97	54.00	-6.03	AVG	
3 *	5245.3500	100.83	16.38	117.21	68.20	49.01	Peak	No limit
4	5245.3500	95.54	16.38	111.92	999.00	-887.08	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

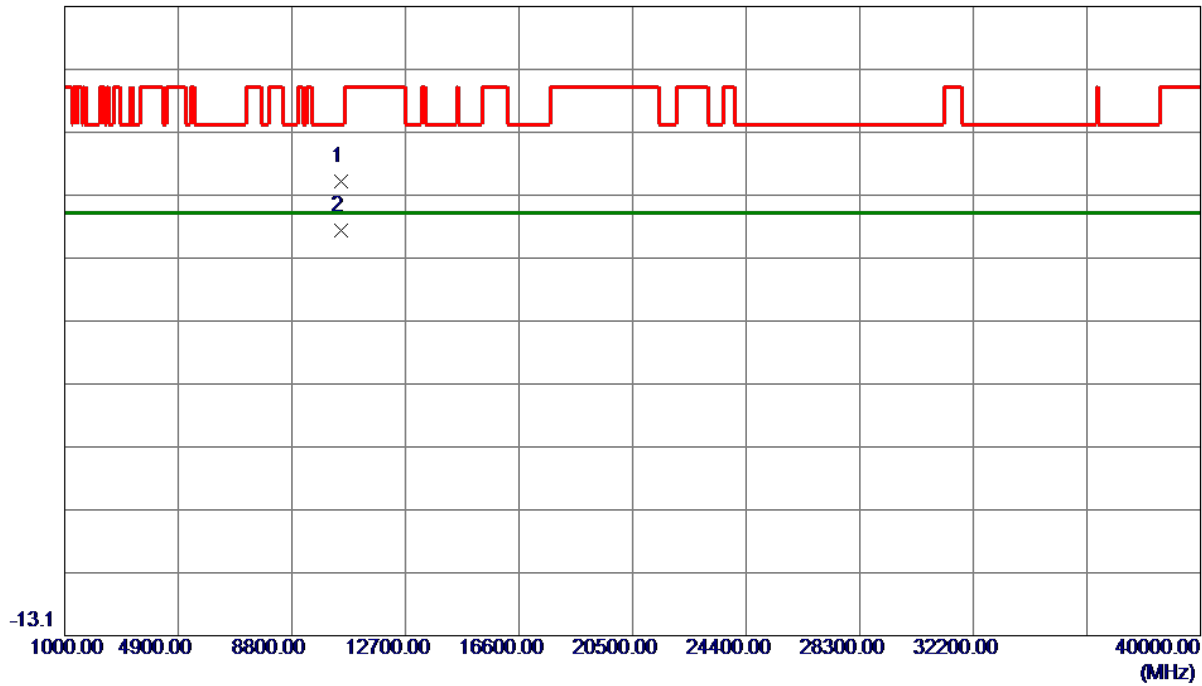


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10473.1000	45.41	13.62	59.03	68.20	-9.17	Peak	
2 *	10473.1000	37.66	13.62	51.28	54.00	-2.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

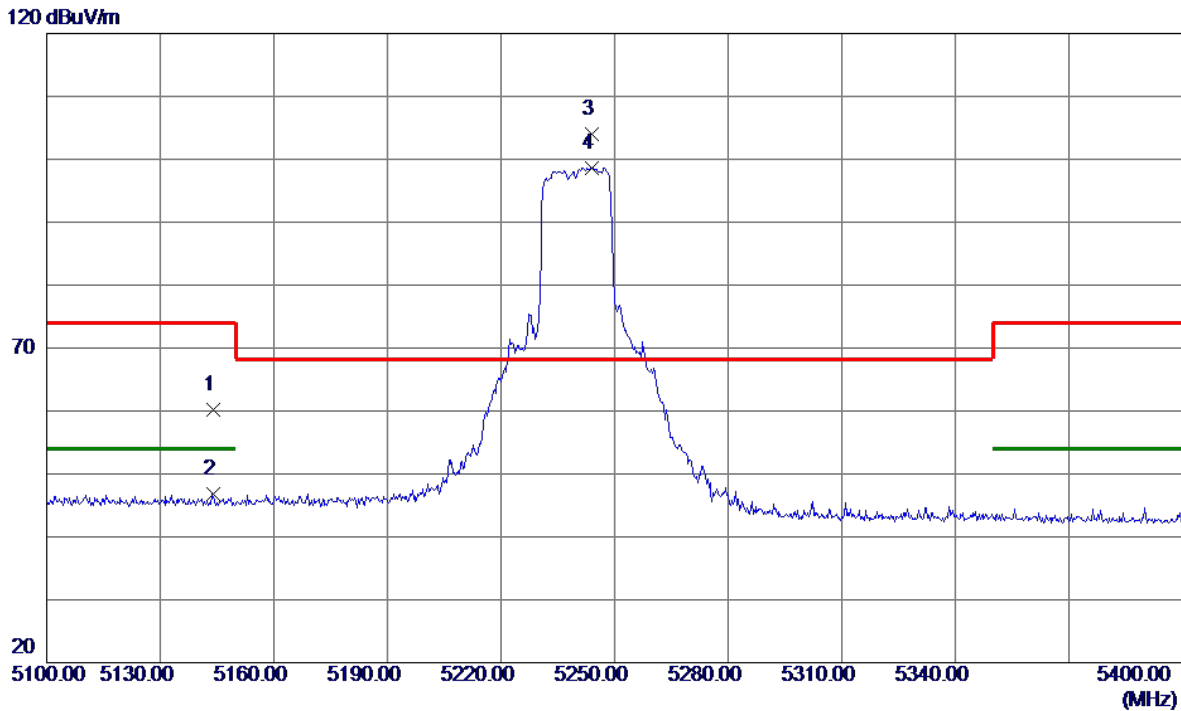


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5143.9500	43.98	16.14	60.12	74.00	-13.88	Peak	
2	5143.9500	30.58	16.14	46.72	54.00	-7.28	AVG	
3 *	5243.8500	87.67	16.38	104.05	68.20	35.85	Peak	No limit
4	5243.8500	82.28	16.38	98.66	999.00	-900.34	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

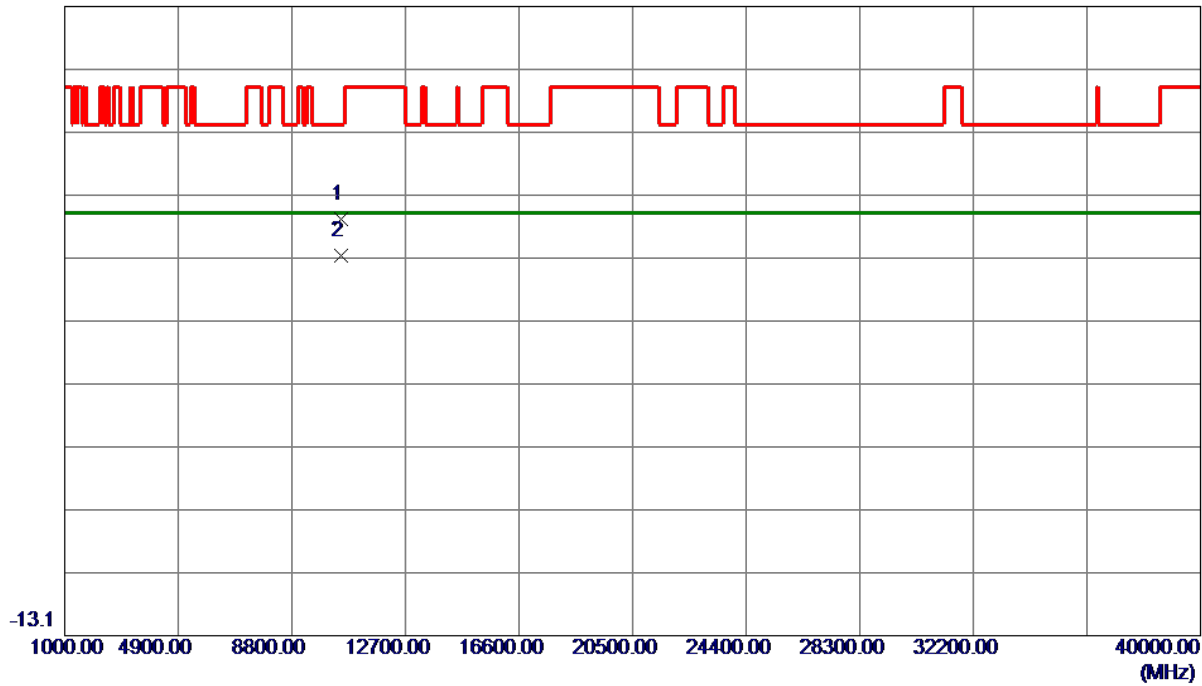


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	39.56	13.63	53.19	68.20	-15.01	Peak	
2 *	10480.0000	33.58	13.63	47.21	54.00	-6.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

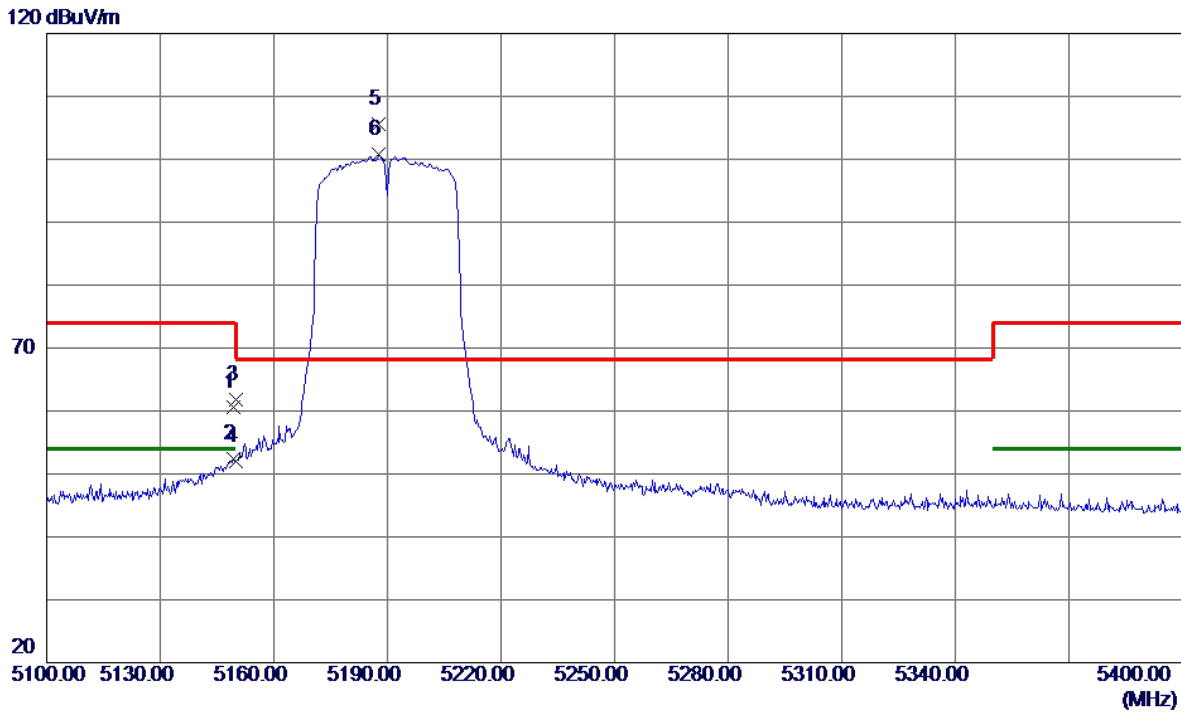


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.3500	44.38	16.15	60.53	74.00	-13.47	Peak	
2	5149.3500	36.31	16.15	52.46	54.00	-1.54	AVG	
3	5150.0000	45.68	16.16	61.84	74.00	-12.16	Peak	
4	5150.0000	35.91	16.16	52.07	54.00	-1.93	AVG	
5 *	5187.7500	89.39	16.25	105.64	68.20	37.44	Peak	No limit
6	5187.7500	84.54	16.25	100.79	999.00	-898.21	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

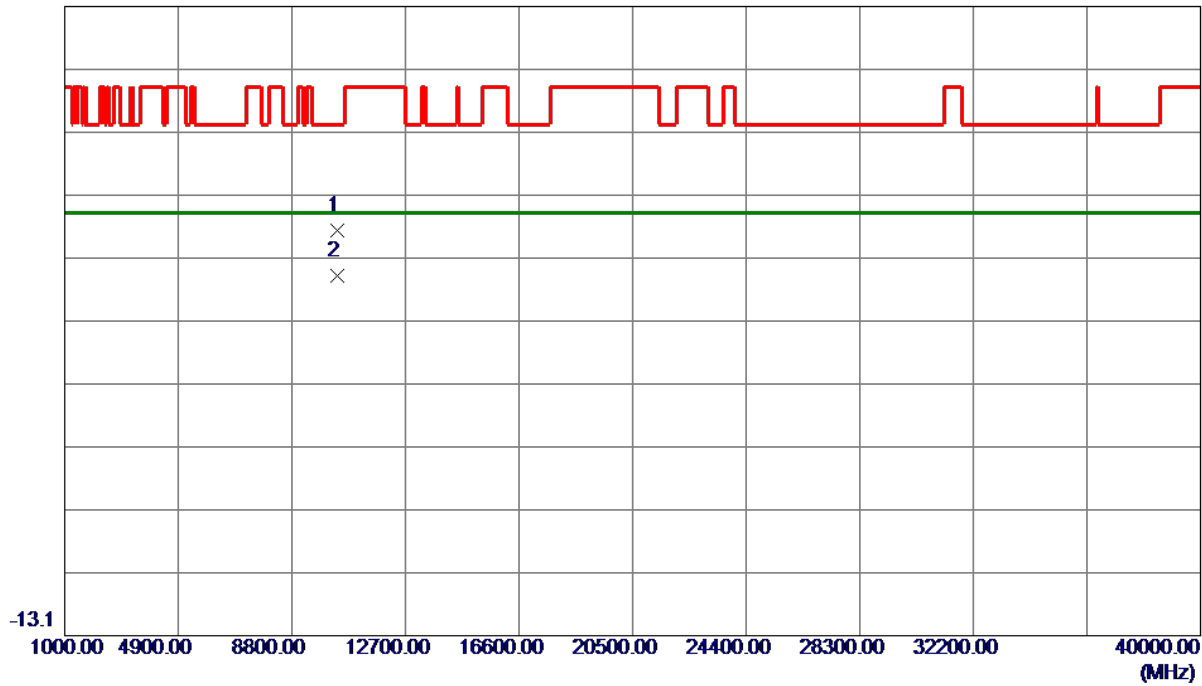


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	37.86	13.53	51.39	68.20	-16.81	Peak	
2 *	10380.0000	30.59	13.53	44.12	54.00	-9.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

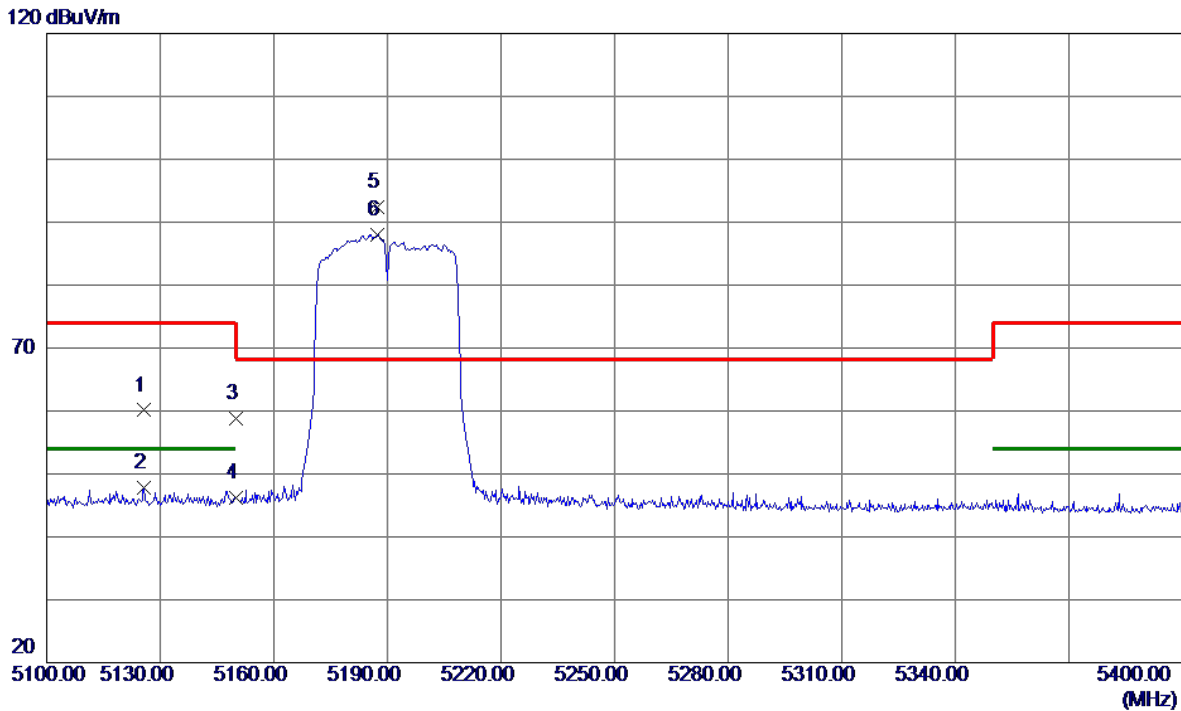


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5125.8000	44.00	16.10	60.10	74.00	-13.90	Peak	
2	5125.8000	31.66	16.10	47.76	54.00	-6.24	AVG	
3	5150.0000	42.67	16.16	58.83	74.00	-15.17	Peak	
4	5150.0000	29.98	16.16	46.14	54.00	-7.86	AVG	
5 *	5187.4500	76.24	16.24	92.48	68.20	24.28	Peak	No limit
6	5187.4500	71.77	16.24	88.01	999.00	-910.99	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

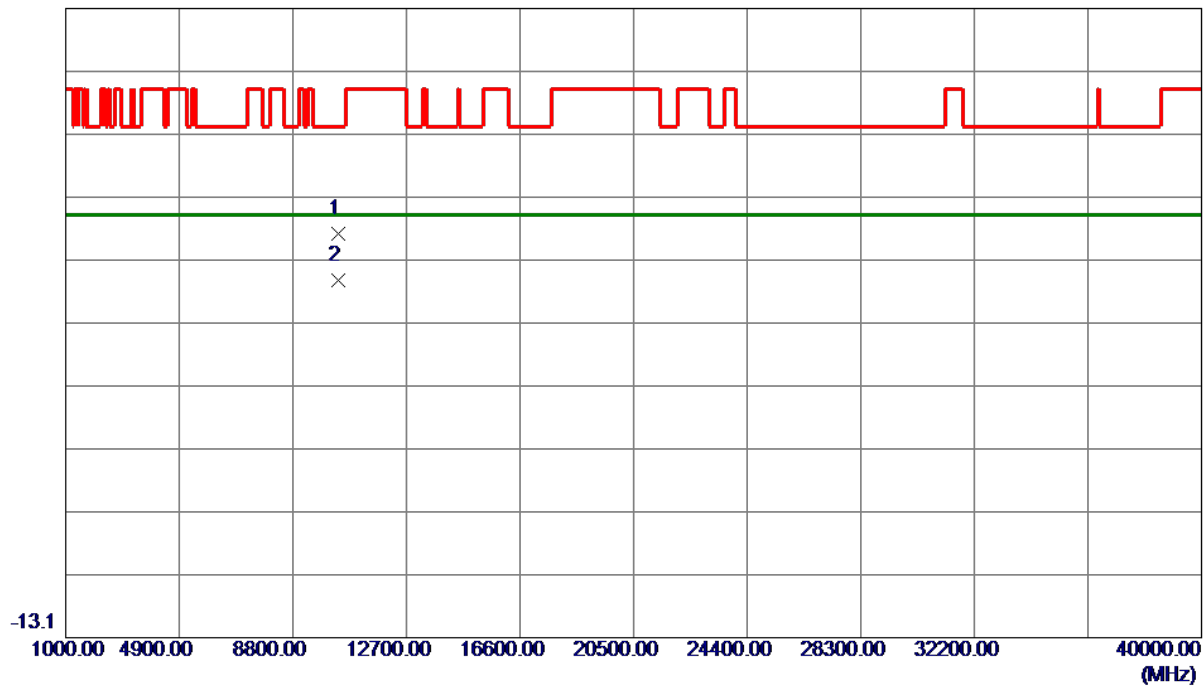


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	37.66	13.53	51.19	68.20	-17.01	Peak	
2 *	10380.0000	30.12	13.53	43.65	54.00	-10.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

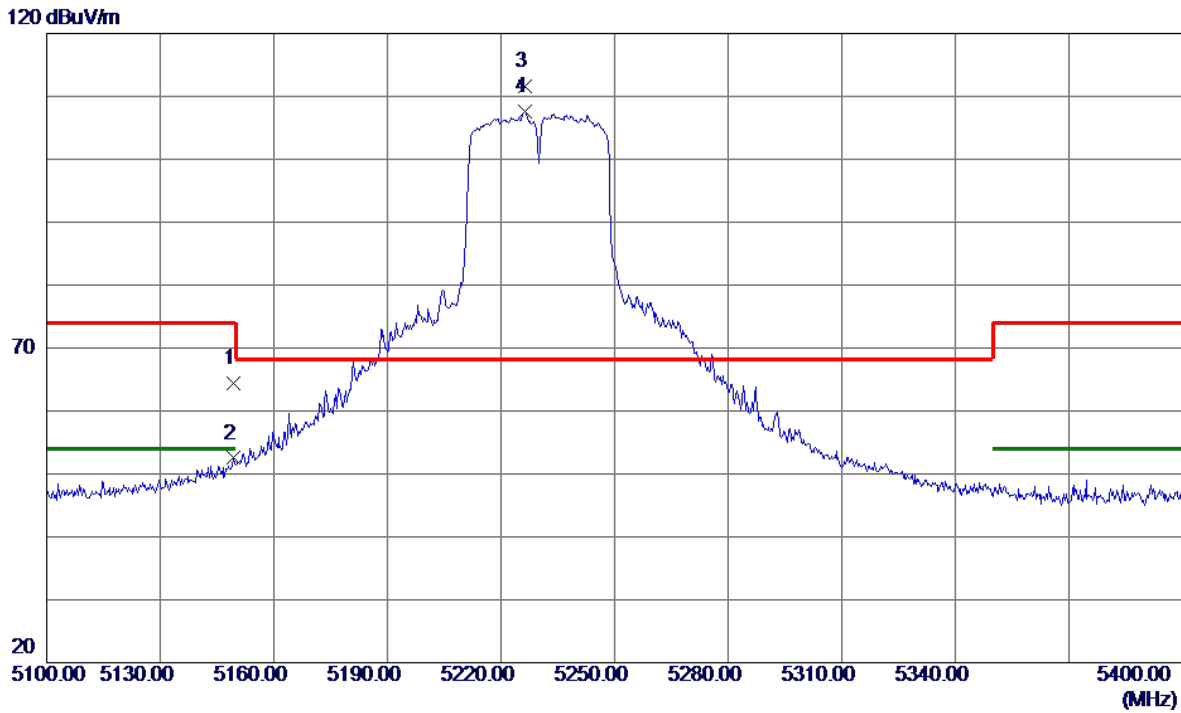


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.2000	48.26	16.15	64.41	74.00	-9.59	Peak	
2	5149.2000	36.35	16.15	52.50	54.00	-1.50	AVG	
3 *	5226.4500	95.31	16.34	111.65	68.20	43.45	Peak	No limit
4	5226.4500	91.17	16.34	107.51	999.00	-891.49	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

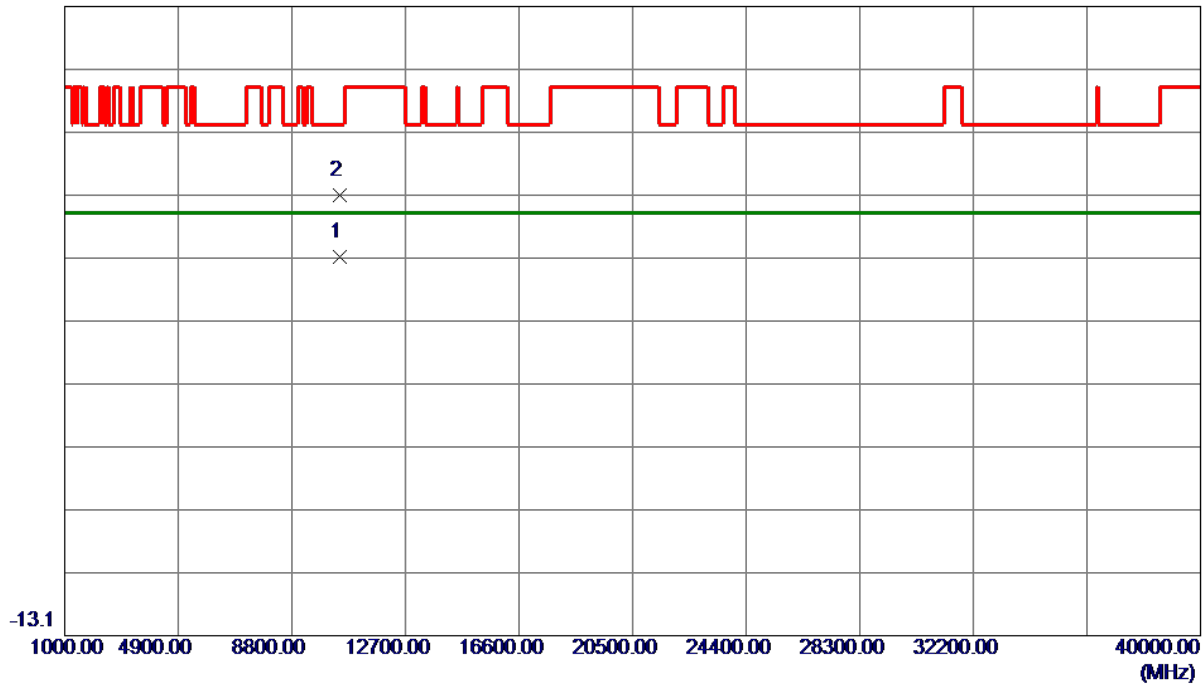


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10438.0000	33.49	13.59	47.08	54.00	-6.92	AVG	
2	10463.3500	43.35	13.61	56.96	68.20	-11.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

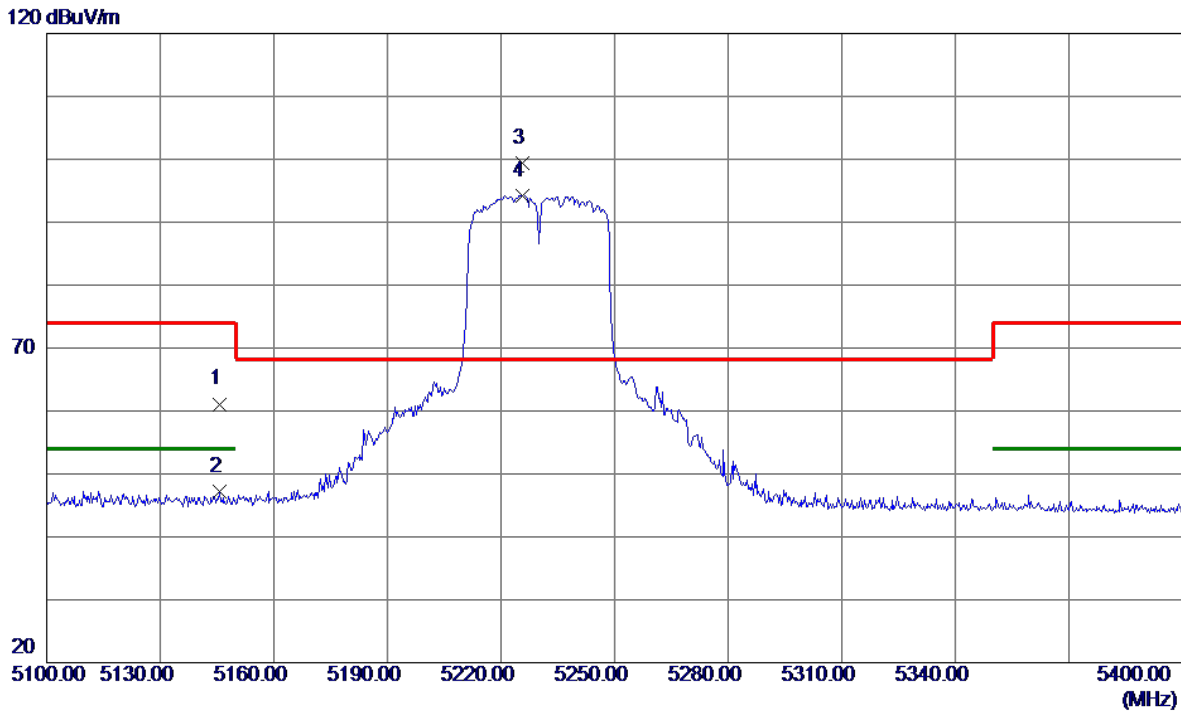


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.7500	44.95	16.15	61.10	74.00	-12.90	Peak	
2	5145.7500	31.03	16.15	47.18	54.00	-6.82	AVG	
3 *	5225.5500	83.13	16.33	99.46	68.20	31.26	Peak	No limit
4	5225.5500	77.89	16.33	94.22	999.00	-904.78	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

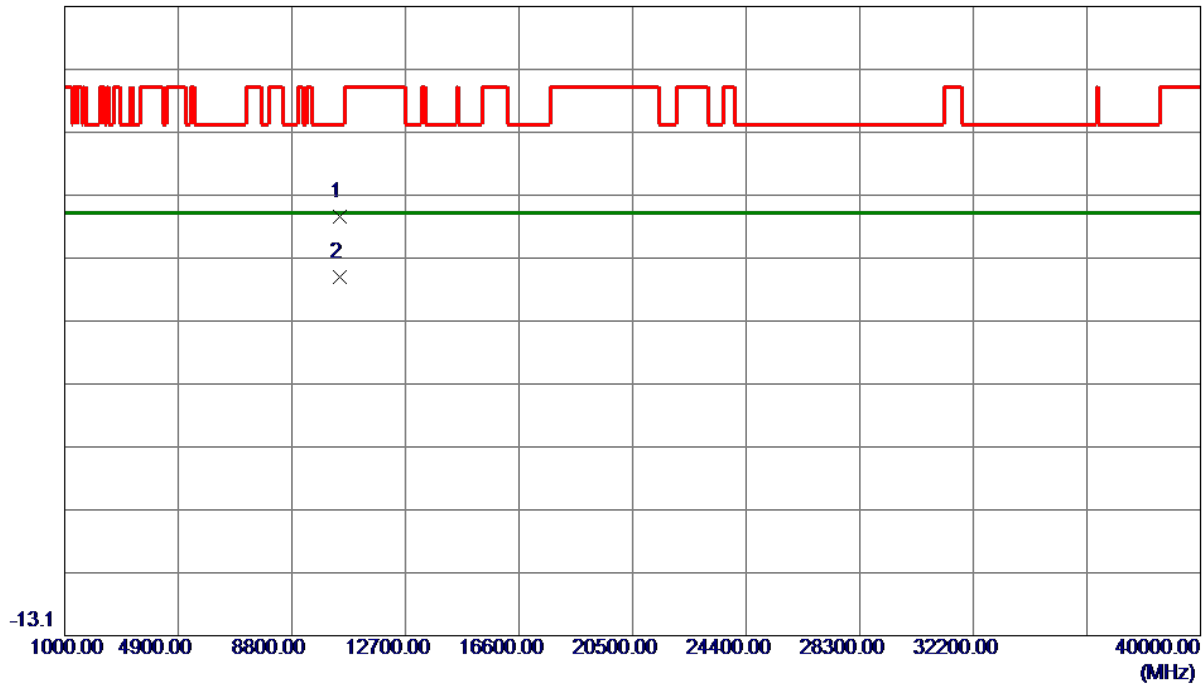


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	39.89	13.61	53.50	68.20	-14.70	Peak	
2 *	10460.0000	30.24	13.61	43.85	54.00	-10.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

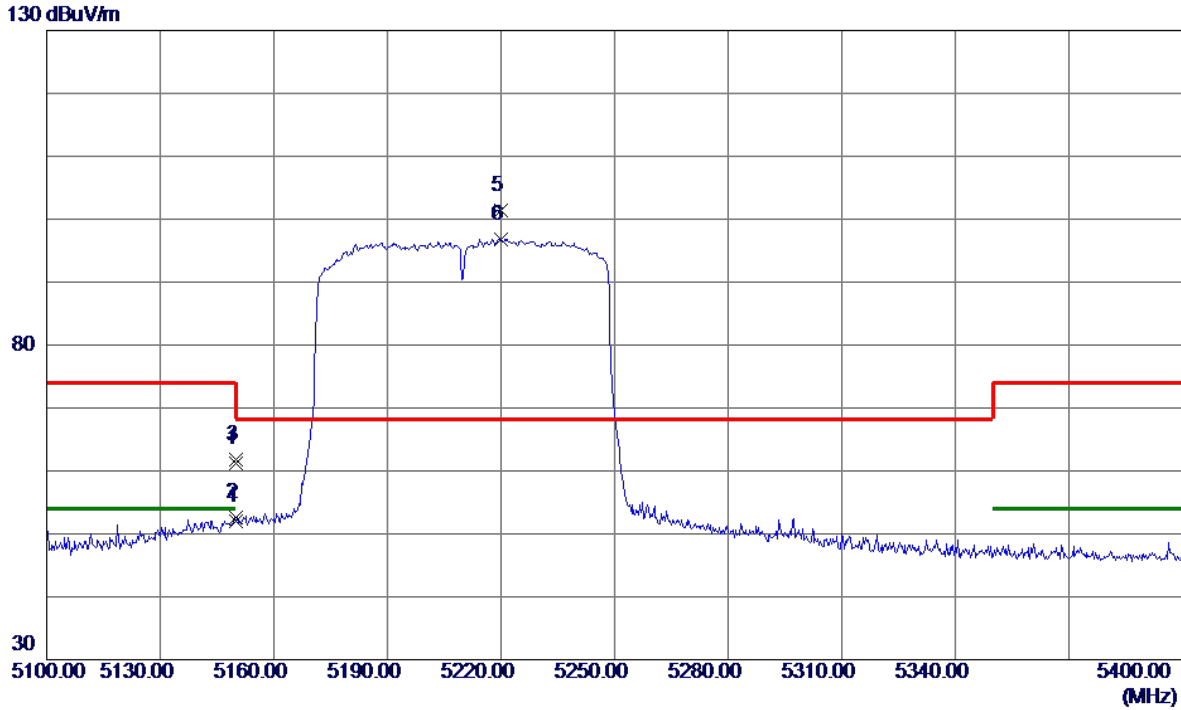


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.9500	45.00	16.16	61.16	74.00	-12.84	Peak	
2	5149.9500	36.51	16.16	52.67	54.00	-1.33	AVG	
3	5150.0000	45.67	16.16	61.83	74.00	-12.17	Peak	
4	5150.0000	35.83	16.16	51.99	54.00	-2.01	AVG	
5 *	5219.8500	85.09	16.32	101.41	68.20	33.21	Peak	No limit
6	5219.8500	80.54	16.32	96.86	999.00	-902.14	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

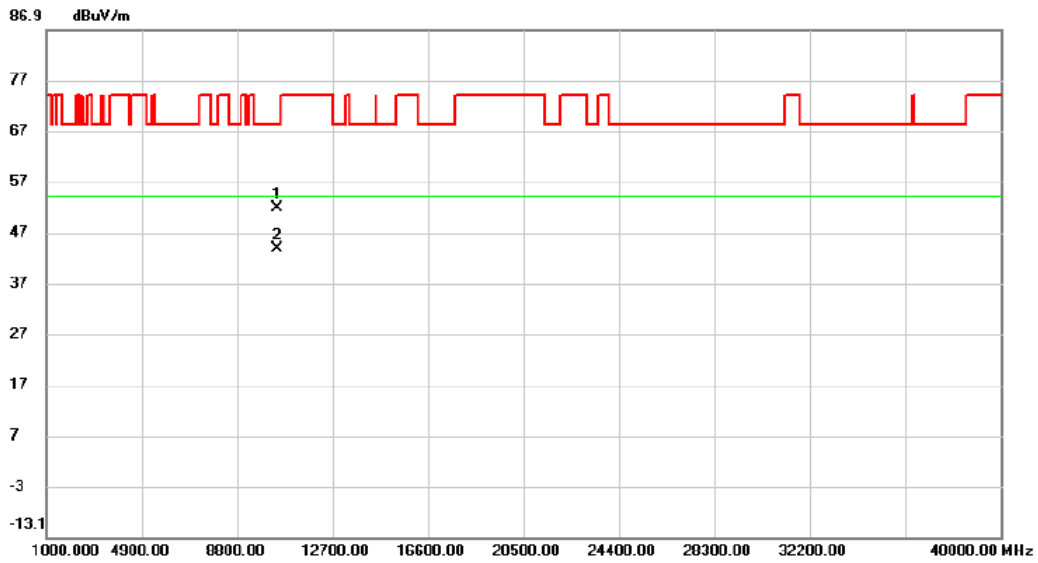


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.000	38.26	13.57	51.83	68.20	-16.37	peak	
2		10420.000	30.21	13.57	43.78	68.20	-24.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

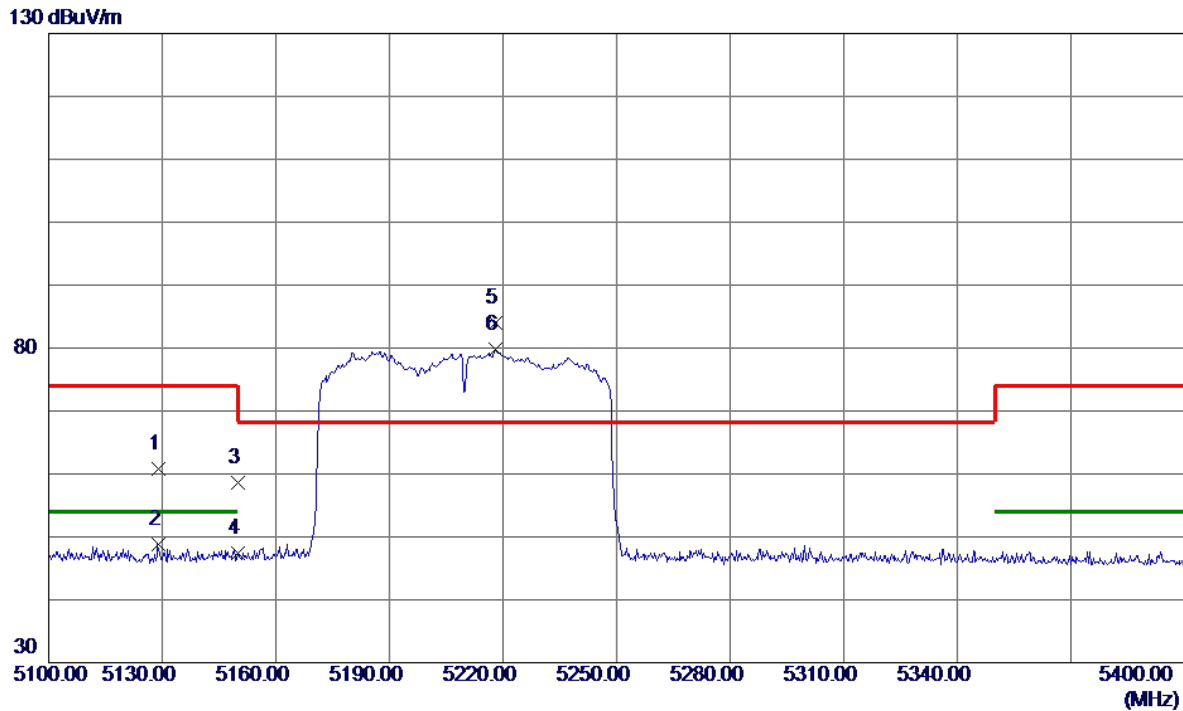


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5128.9500	44.63	16.11	60.74	74.00	-13.26	Peak	
2	5128.9500	32.61	16.11	48.72	54.00	-5.28	AVG	
3	5150.0000	42.35	16.16	58.51	74.00	-15.49	Peak	
4	5150.0000	31.27	16.16	47.43	54.00	-6.57	AVG	
5 *	5217.9000	67.70	16.32	84.02	68.20	15.82	Peak	No limit
6	5217.9000	63.45	16.32	79.77	999.00	-919.23	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

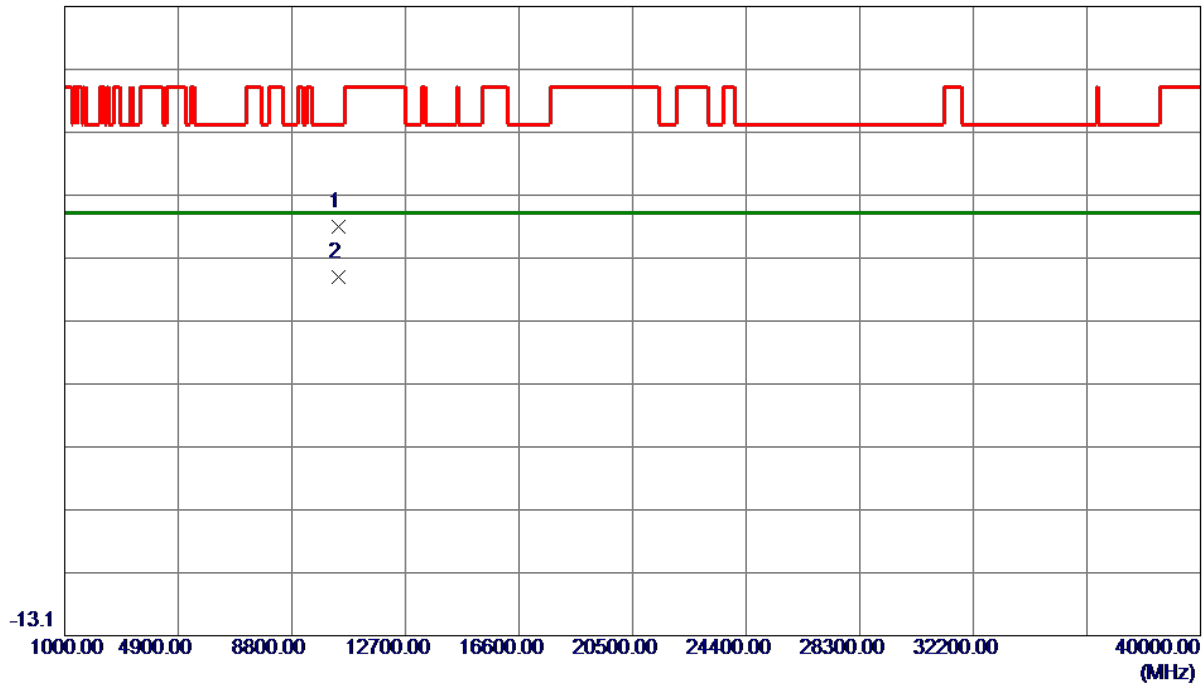


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10420.0000	38.35	13.57	51.92	68.20	-16.28	Peak	
2 *	10420.0000	30.25	13.57	43.82	54.00	-10.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

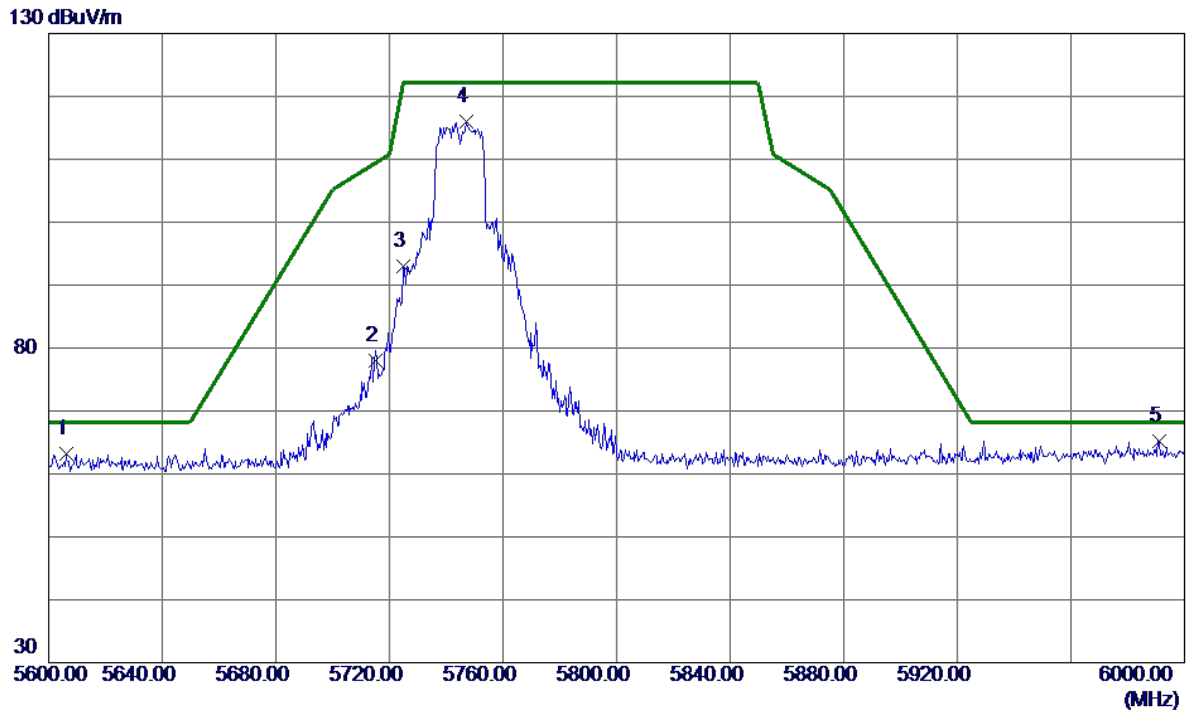


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5606.2000	45.81	17.30	63.11	68.20	-5.09	Peak	
2	5715.0000	60.40	17.62	78.02	109.40	-31.38	Peak	
3	5725.0000	75.26	17.65	92.91	122.20	-29.29	Peak	
4	5747.2000	98.19	17.72	115.91	122.20	-6.29	Peak	No Limit
5 *	5991.0000	46.83	18.44	65.27	68.20	-2.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

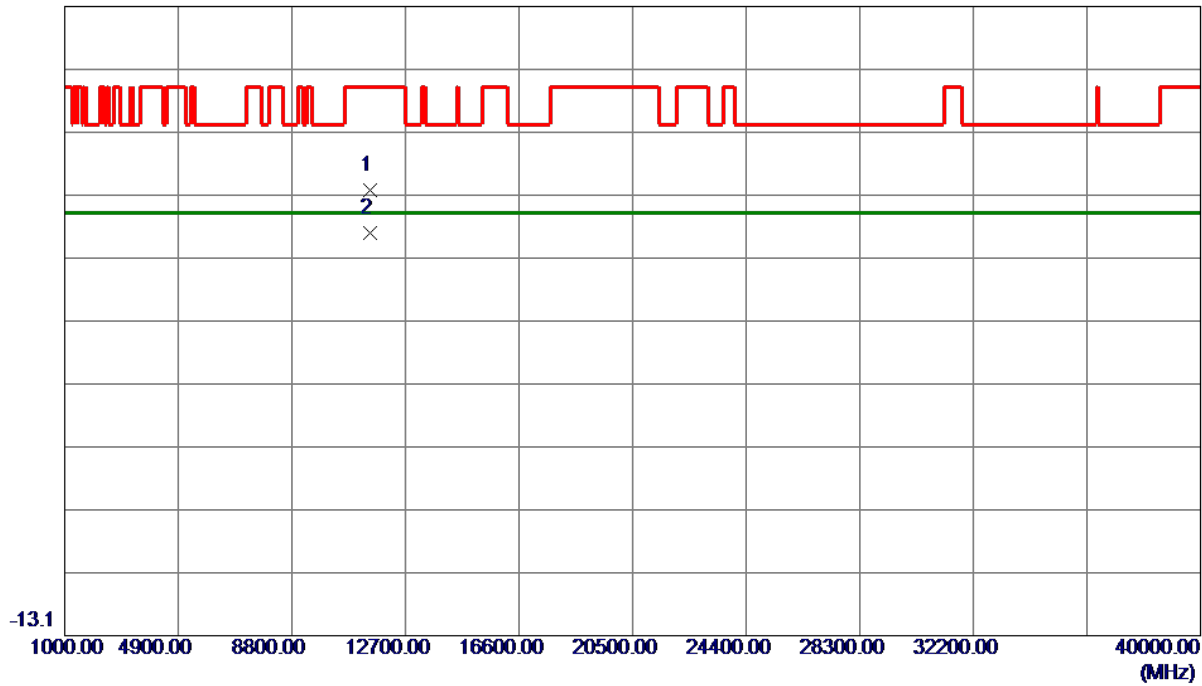


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.0500	43.09	14.55	57.64	74.00	-16.36	Peak	
2 *	11489.8380	36.37	14.55	50.92	54.00	-3.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

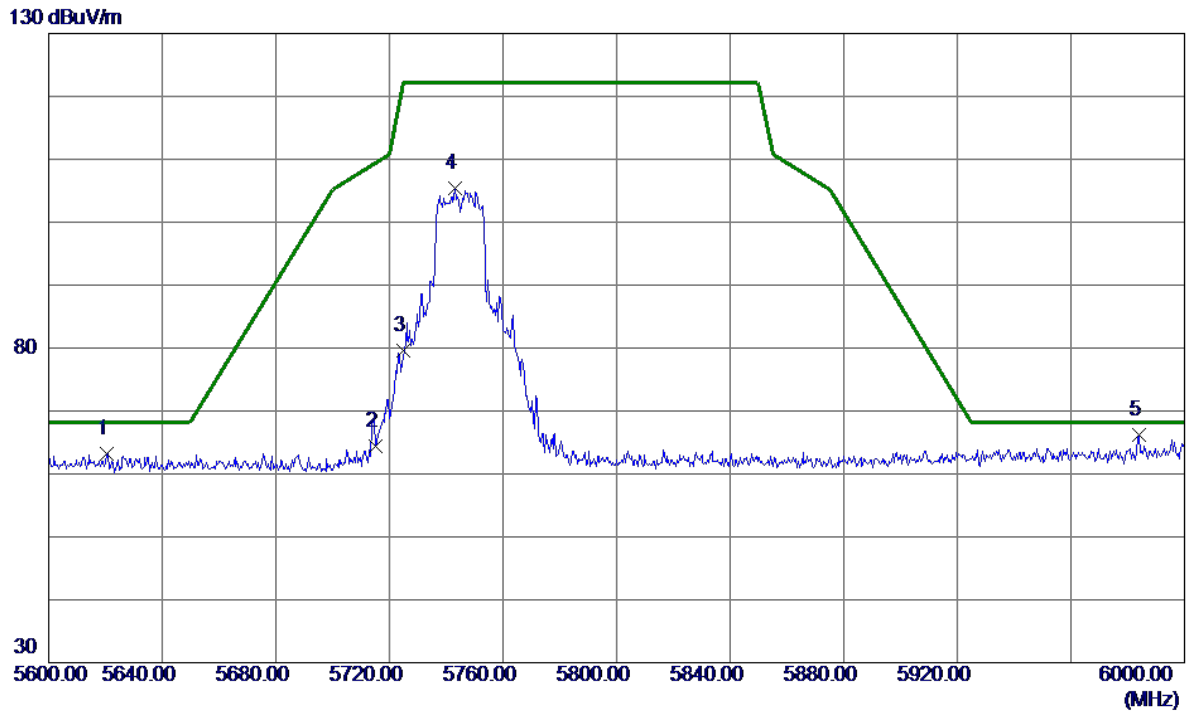


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5620.6000	45.85	17.34	63.19	68.20	-5.01	Peak	
2	5715.0000	46.87	17.62	64.49	109.40	-44.91	Peak	
3	5725.0000	61.92	17.65	79.57	122.20	-42.63	Peak	
4	5743.2000	87.71	17.71	105.42	122.20	-16.78	Peak	No Limit
5 *	5984.0000	47.70	18.42	66.12	68.20	-2.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

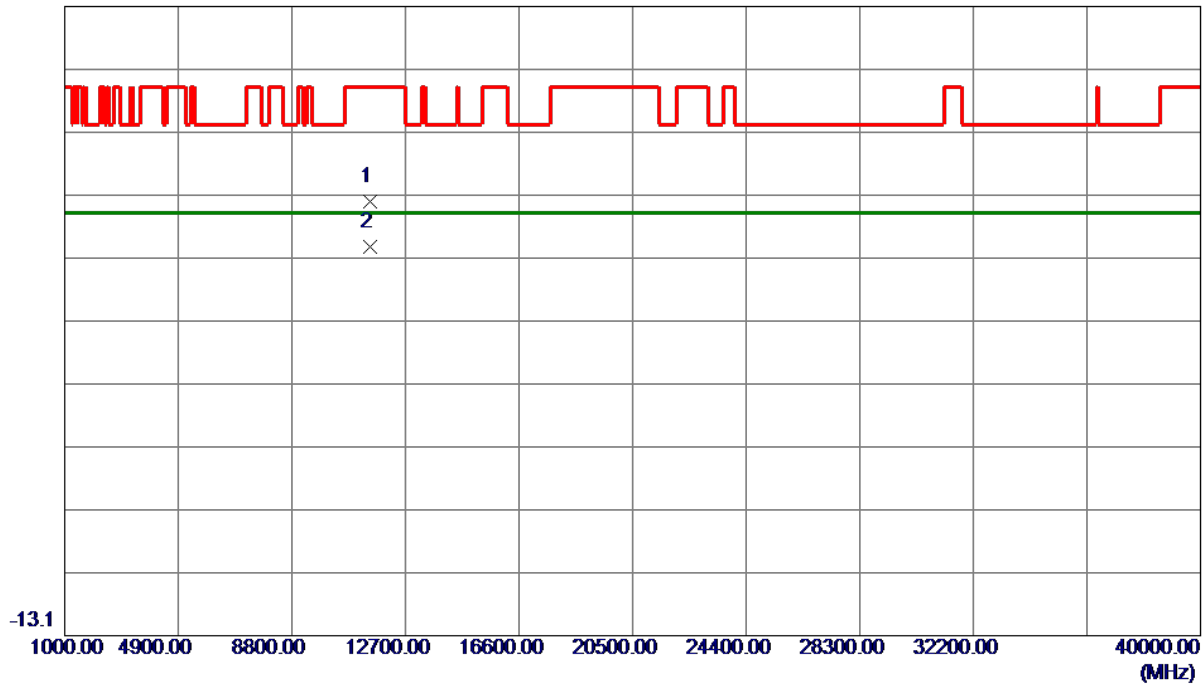


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11483.2000	41.33	14.54	55.87	74.00	-18.13	Peak	
2 *	11489.9260	34.20	14.55	48.75	54.00	-5.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

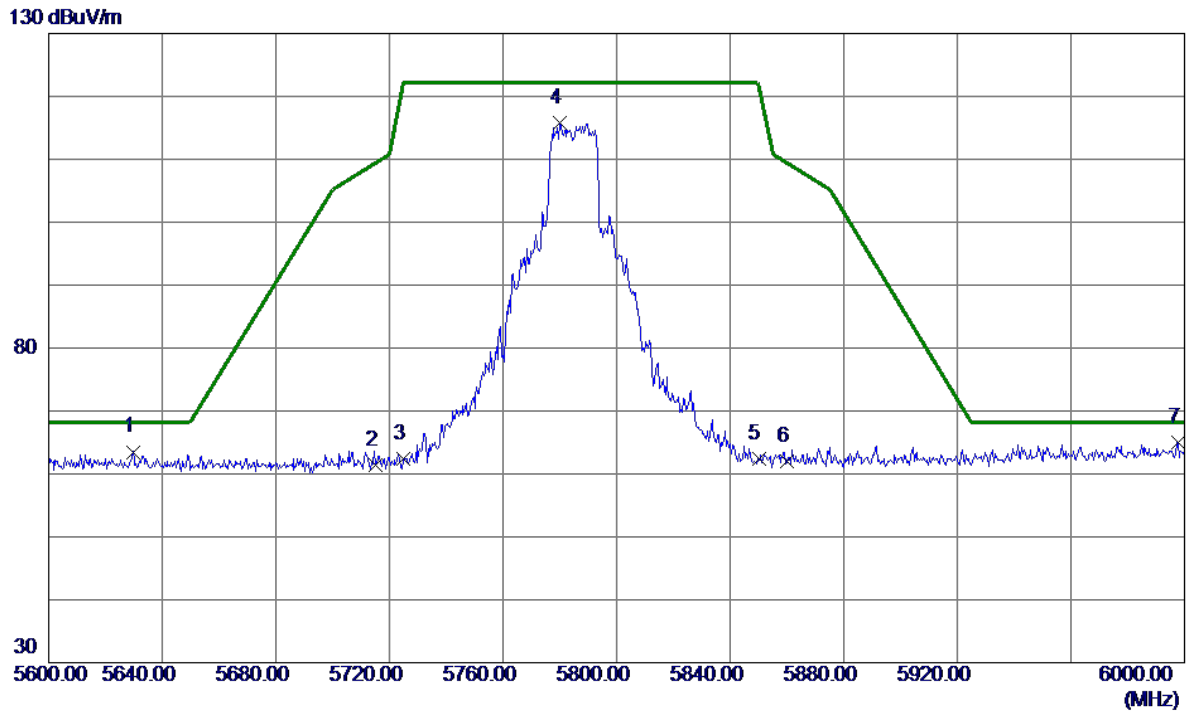


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5629.8000	46.13	17.37	63.50	68.20	-4.70	Peak	
2	5715.0000	43.75	17.62	61.37	109.40	-48.03	Peak	
3	5725.0000	44.67	17.65	62.32	122.20	-59.88	Peak	
4	5780.2000	97.89	17.82	115.71	122.20	-6.49	Peak	No Limit
5	5850.0000	44.30	18.02	62.32	122.20	-59.88	Peak	
6	5860.0000	43.96	18.05	62.01	109.40	-47.39	Peak	
7 *	5997.6000	46.61	18.46	65.07	68.20	-3.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

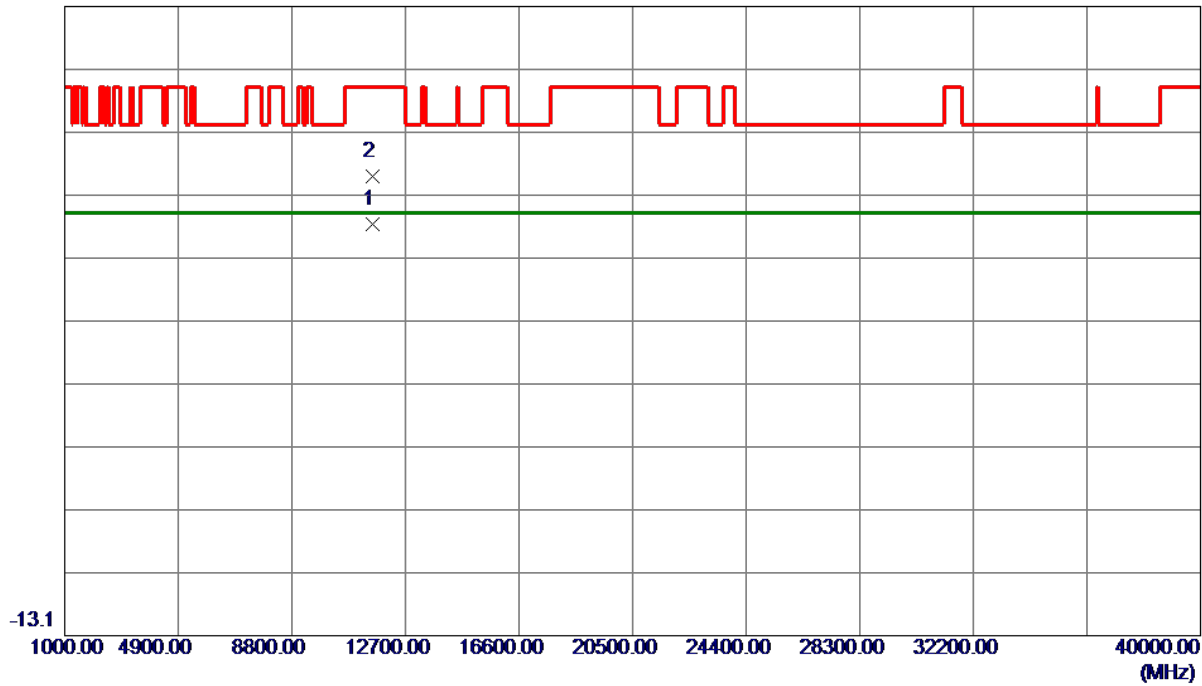


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11572.8339	37.76	14.57	52.33	54.00	-1.67	AVG	
2	11576.8000	45.38	14.57	59.95	74.00	-14.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

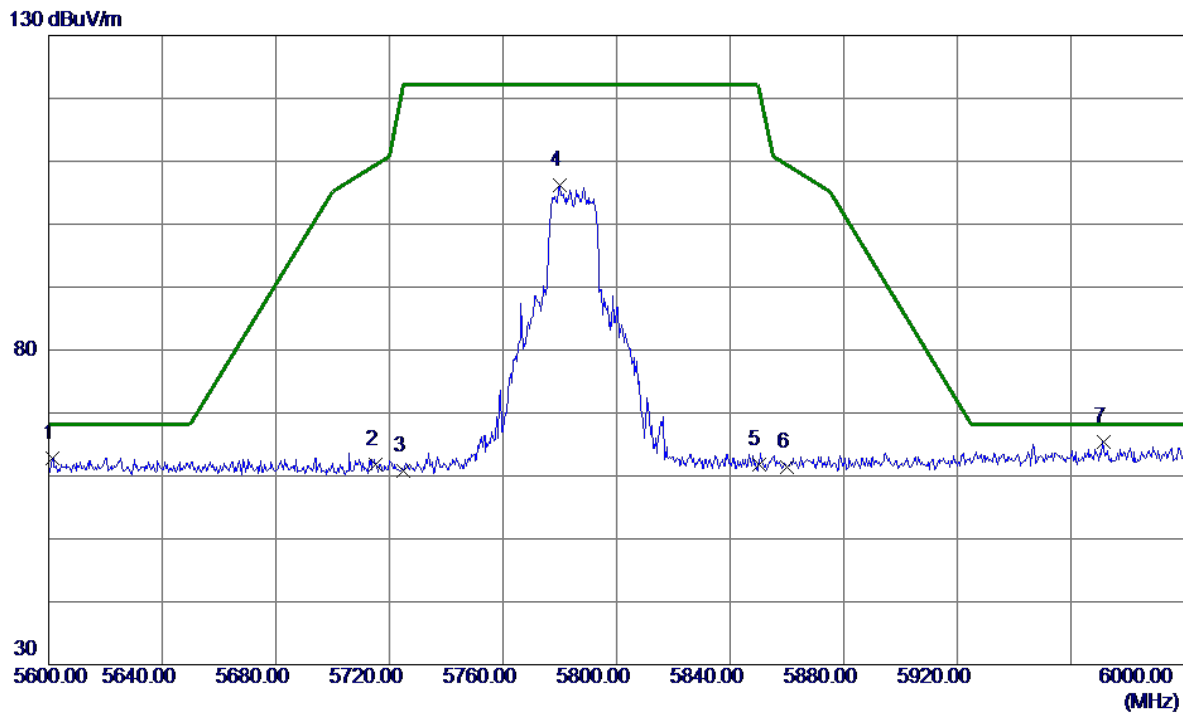


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5601.4000	45.60	17.29	62.89	68.20	-5.31	Peak	
2	5715.0000	44.15	17.62	61.77	109.40	-47.63	Peak	
3	5725.0000	43.22	17.65	60.87	122.20	-61.33	Peak	
4	5780.0000	88.34	17.82	106.16	122.20	-16.04	Peak	No Limit
5	5850.0000	43.87	18.02	61.89	122.20	-60.31	Peak	
6	5860.0000	43.27	18.05	61.32	109.40	-48.08	Peak	
7 *	5971.4000	46.95	18.38	65.33	68.20	-2.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

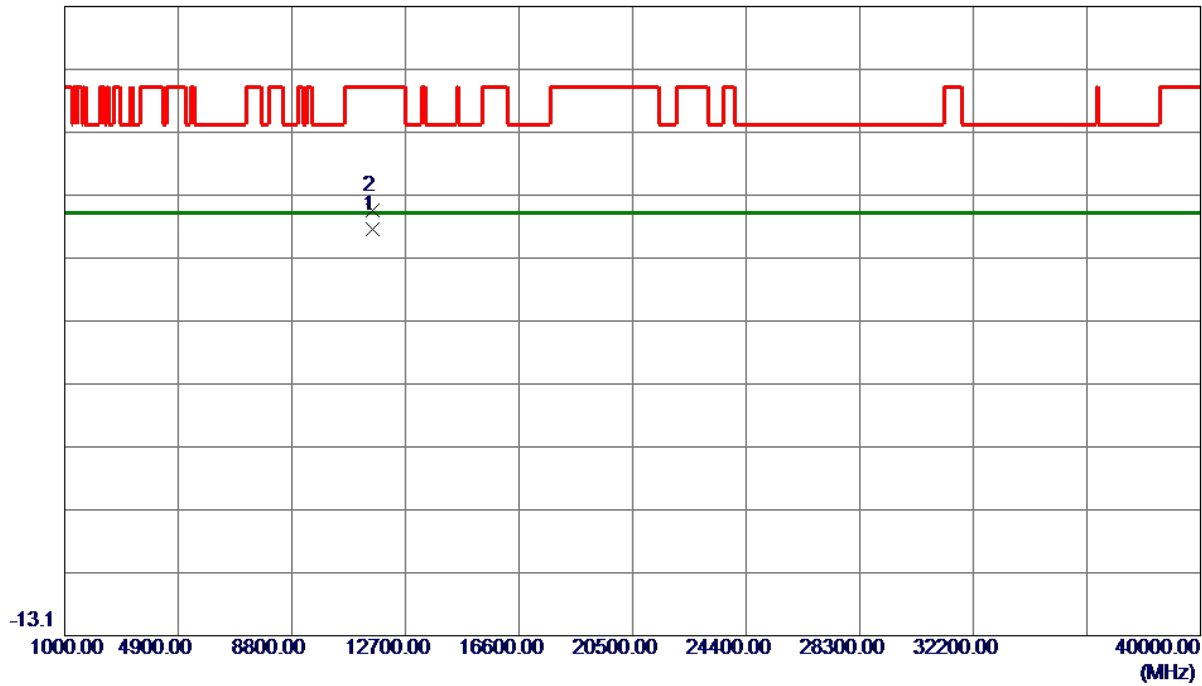


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11559.2500	36.91	14.57	51.48	54.00	-2.52	AVG	
2	11570.0000	39.85	14.57	54.42	74.00	-19.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

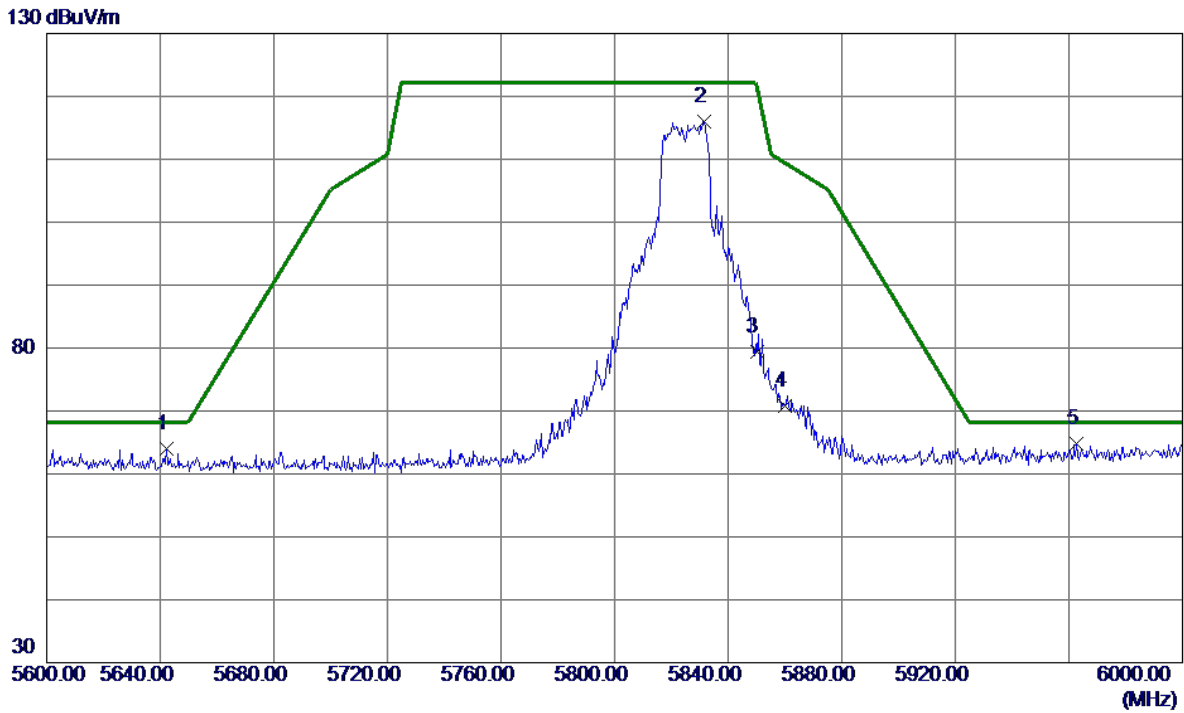


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5642.4000	46.50	17.41	63.91	68.20	-4.29	Peak	
2	5831.4000	98.12	17.97	116.09	122.20	-6.11	Peak	No Limit
3	5850.0000	61.44	18.02	79.46	122.20	-42.74	Peak	
4	5860.0000	52.68	18.05	70.73	109.40	-38.67	Peak	
5 *	5962.8000	46.41	18.36	64.77	68.20	-3.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

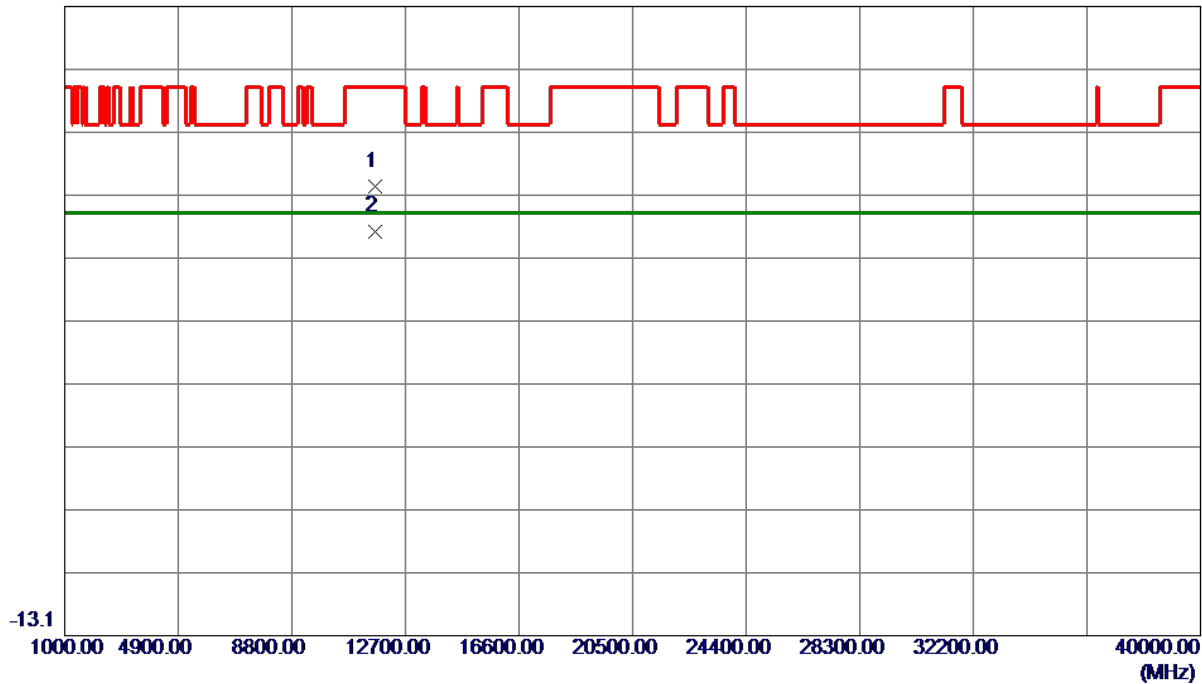


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11645.0500	43.70	14.57	58.27	74.00	-15.73	Peak	
2 *	11650.1760	36.63	14.57	51.20	54.00	-2.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

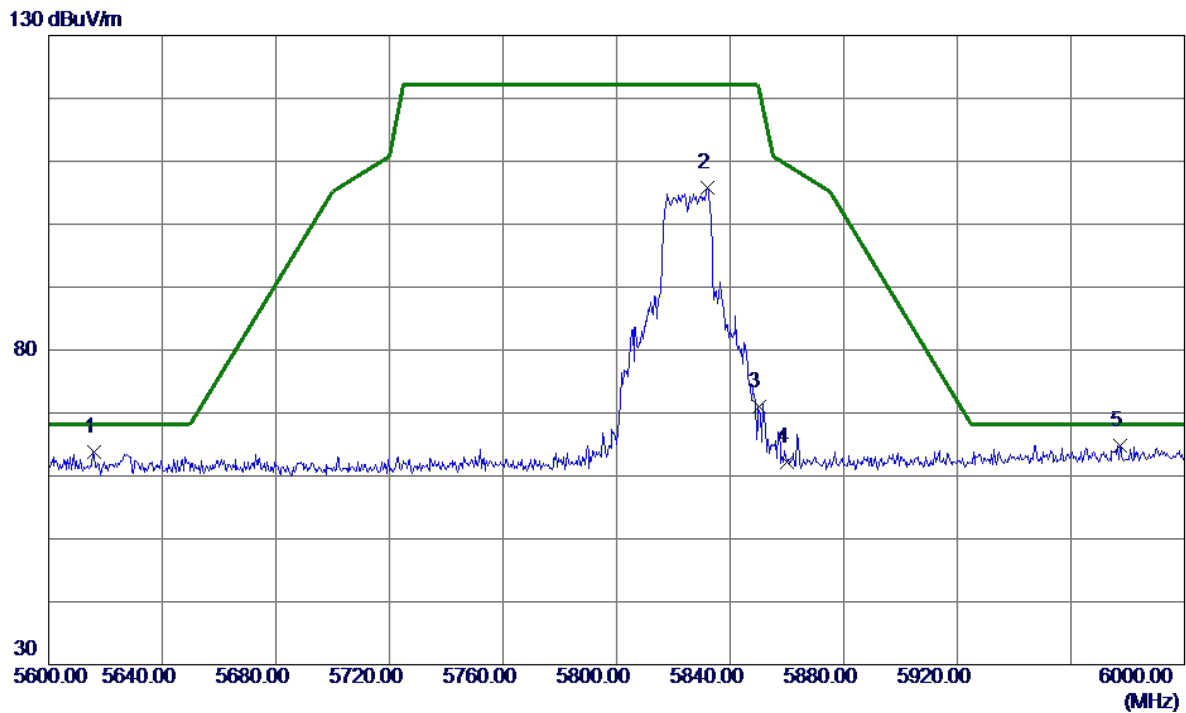


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5615.8000	46.41	17.33	63.74	68.20	-4.46	Peak	
2	5832.2000	87.74	17.97	105.71	122.20	-16.49	Peak	No Limit
3	5850.0000	53.07	18.02	71.09	122.20	-51.11	Peak	
4	5860.0000	44.14	18.05	62.19	109.40	-47.21	Peak	
5 *	5977.4000	46.41	18.40	64.81	68.20	-3.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

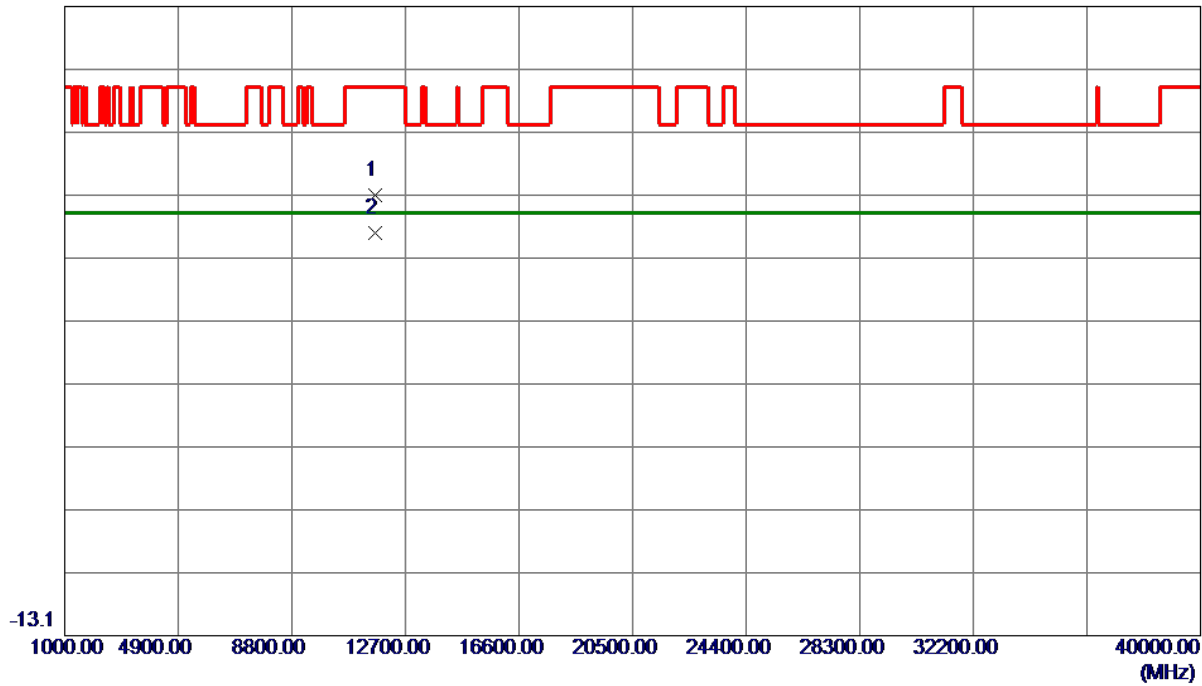


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11645.0500	42.24	14.57	56.81	74.00	-17.19	Peak	
2 *	11645.0500	36.24	14.57	50.81	54.00	-3.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

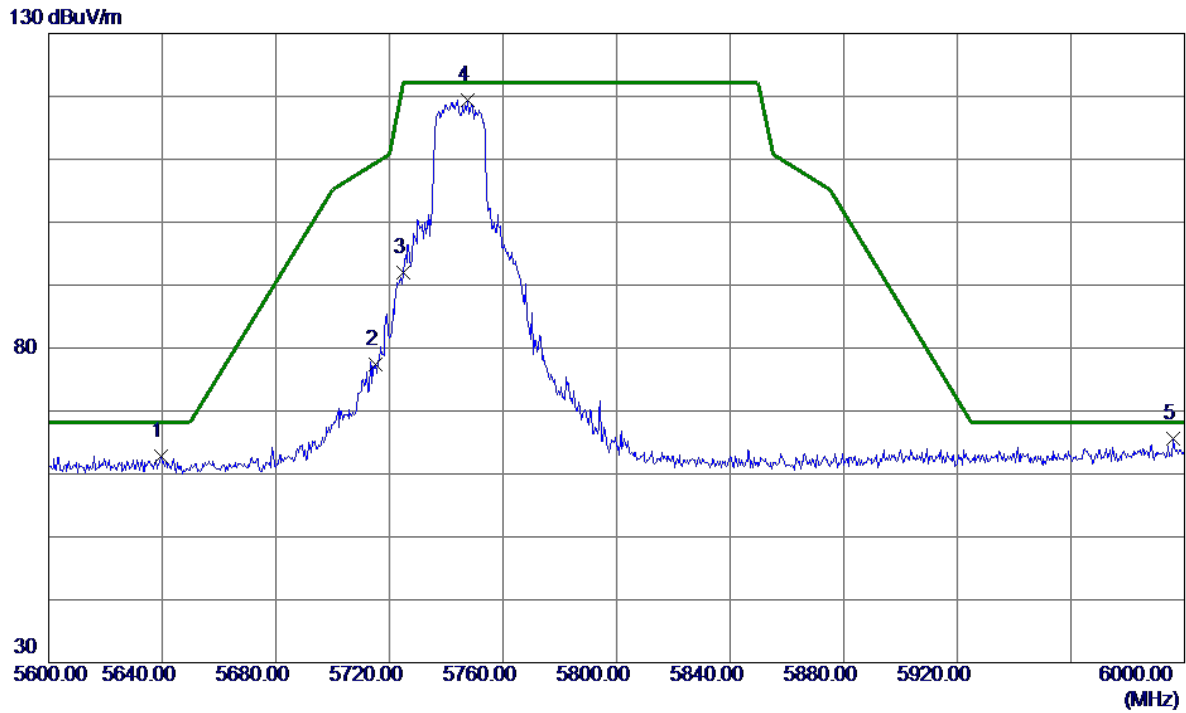


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5639.6000	45.34	17.40	62.74	68.20	-5.46	Peak	
2	5715.0000	59.76	17.62	77.38	109.40	-32.02	Peak	
3	5725.0000	74.28	17.65	91.93	122.20	-30.27	Peak	
4	5747.6000	101.62	17.72	119.34	122.20	-2.86	Peak	No Limit
5 *	5996.2000	47.23	18.46	65.69	68.20	-2.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

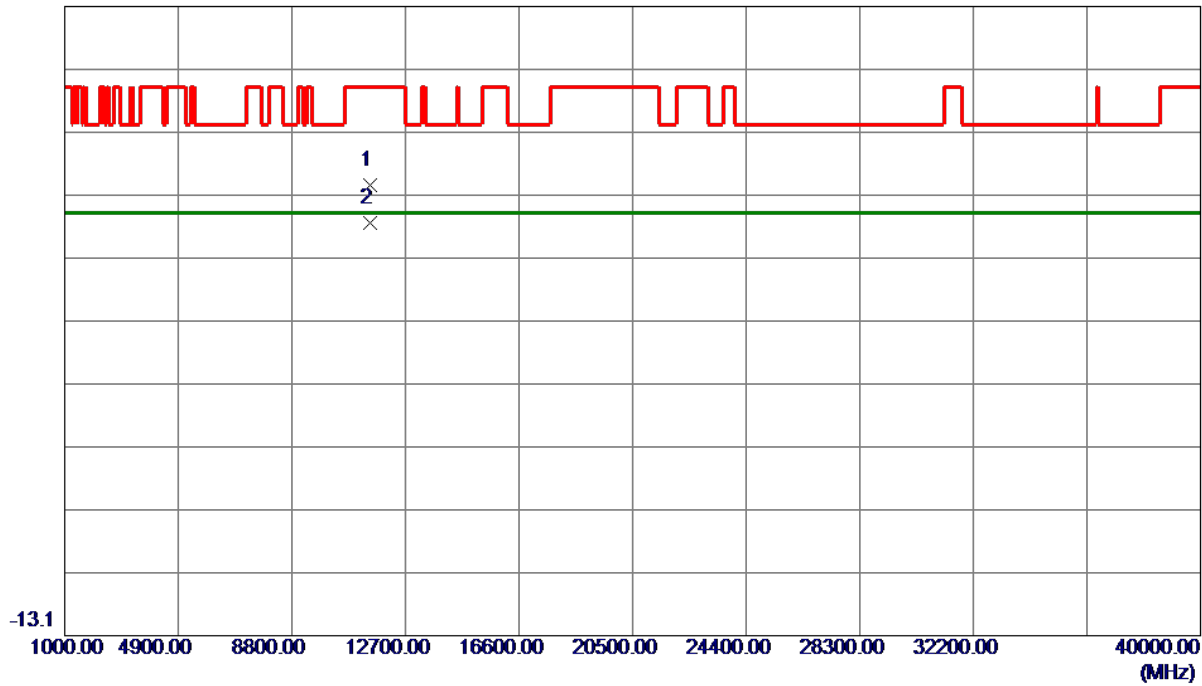


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11479.3000	44.01	14.54	58.55	74.00	-15.45	Peak	
2 *	11488.5039	37.97	14.55	52.52	54.00	-1.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

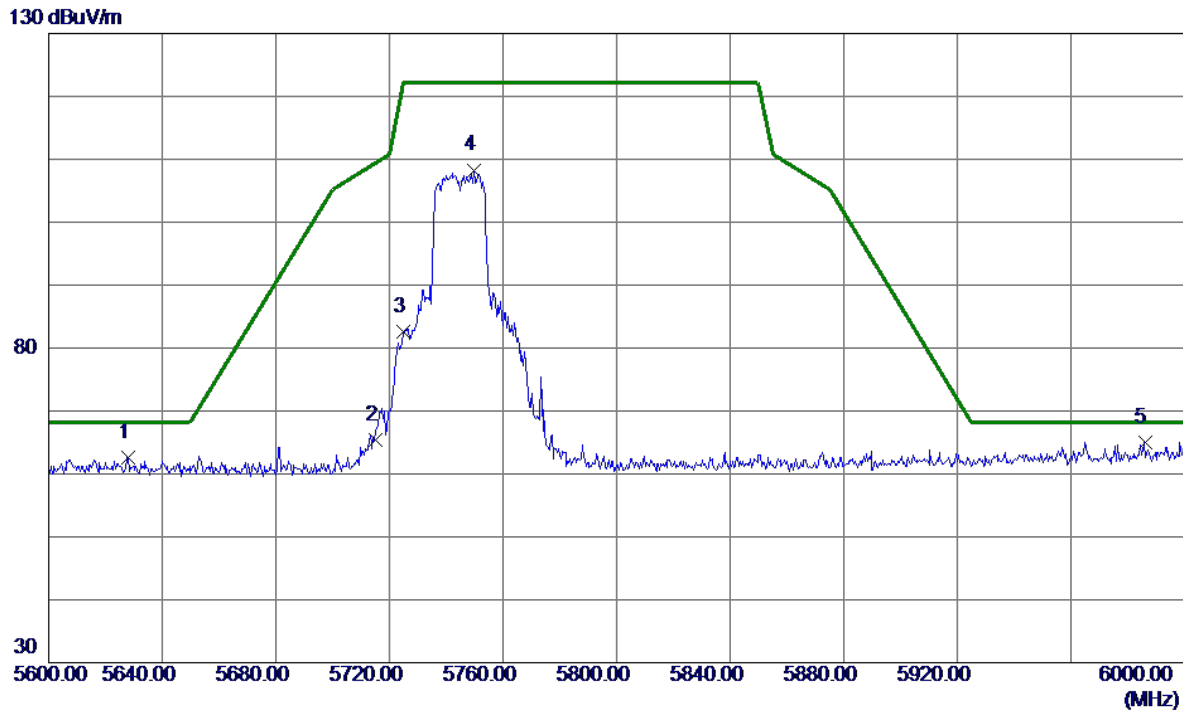


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5627.8000	45.22	17.36	62.58	68.20	-5.62	Peak	
2	5715.0000	47.72	17.62	65.34	109.40	-44.06	Peak	
3	5725.0000	64.93	17.65	82.58	122.20	-39.62	Peak	
4	5749.8000	90.57	17.73	108.30	122.20	-13.90	Peak	No Limit
5 *	5986.0000	46.66	18.43	65.09	68.20	-3.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

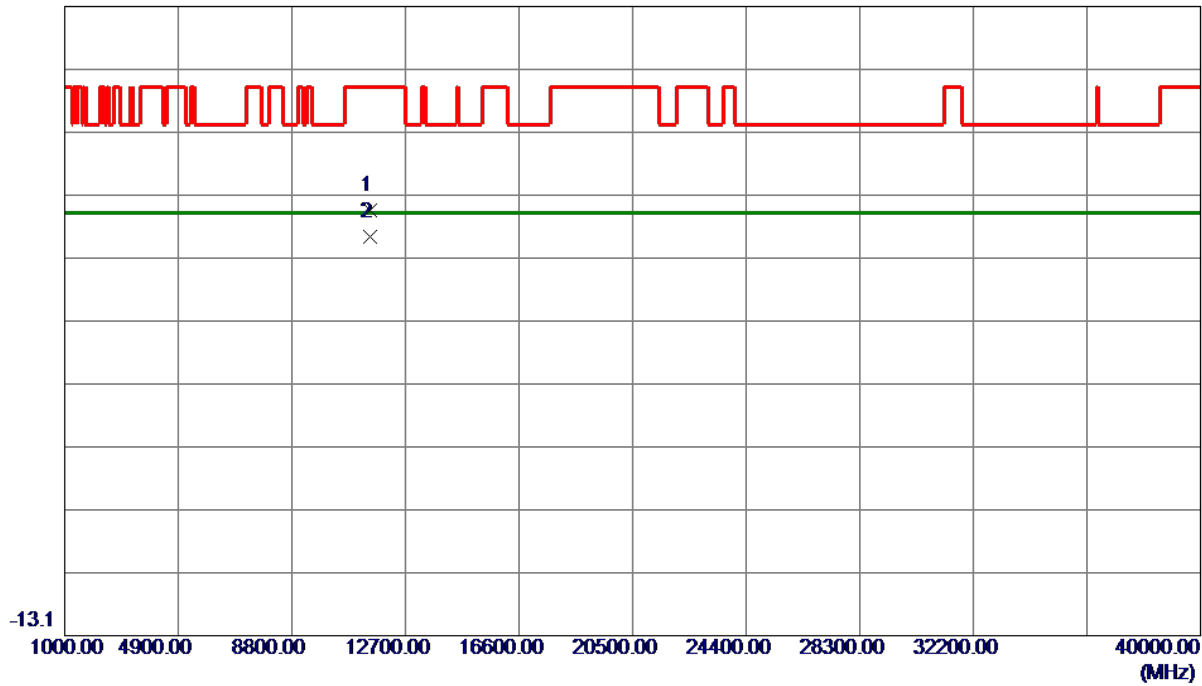


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	39.98	14.55	54.53	74.00	-19.47	Peak	
2 *	11490.5640	35.72	14.55	50.27	54.00	-3.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

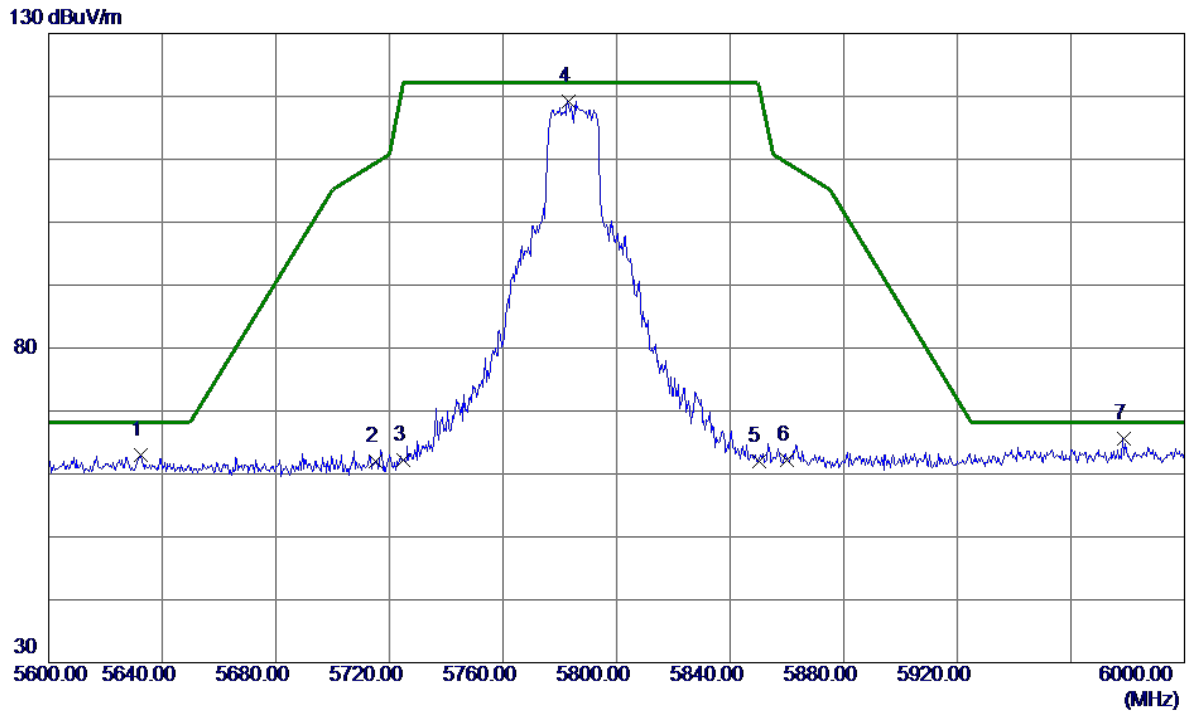


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5632.6000	45.55	17.38	62.93	68.20	-5.27	Peak	
2	5715.0000	44.32	17.62	61.94	109.40	-47.46	Peak	
3	5725.0000	44.49	17.65	62.14	122.20	-60.06	Peak	
4	5783.0000	101.38	17.83	119.21	122.20	-2.99	Peak	No Limit
5	5850.0000	43.91	18.02	61.93	122.20	-60.27	Peak	
6	5860.0000	44.06	18.05	62.11	109.40	-47.29	Peak	
7 *	5978.6000	47.17	18.41	65.58	68.20	-2.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

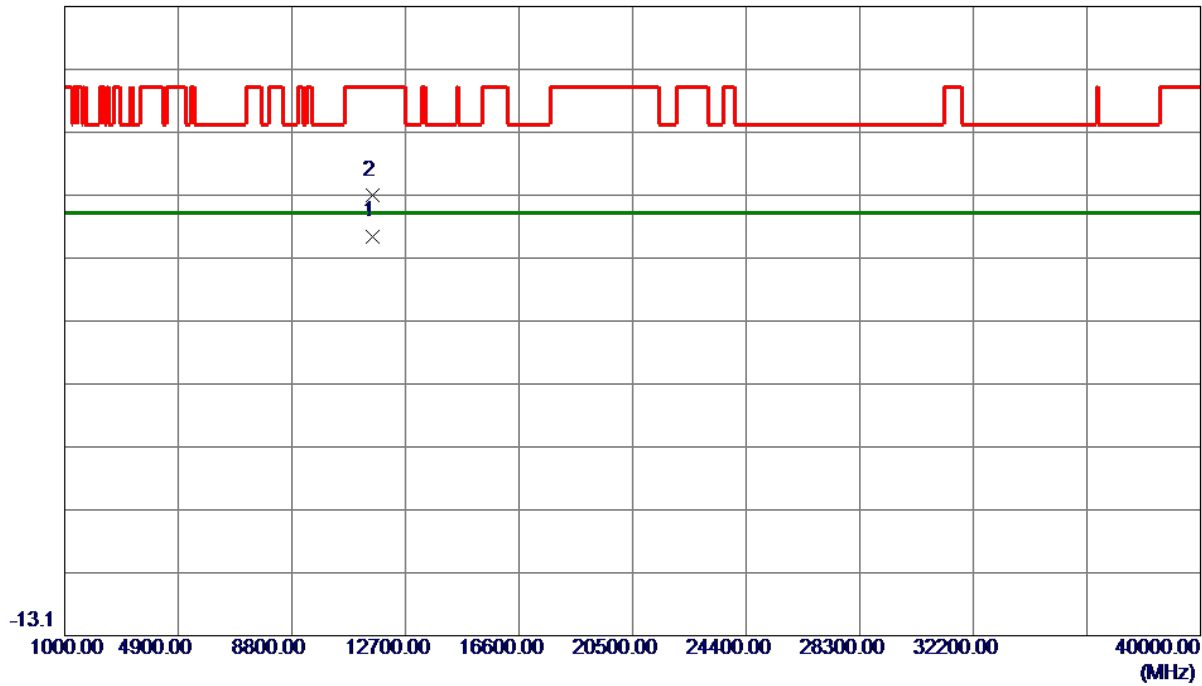


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11571.0740	35.83	14.57	50.40	54.00	-3.60	AVG	
2	11576.8000	42.35	14.57	56.92	74.00	-17.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

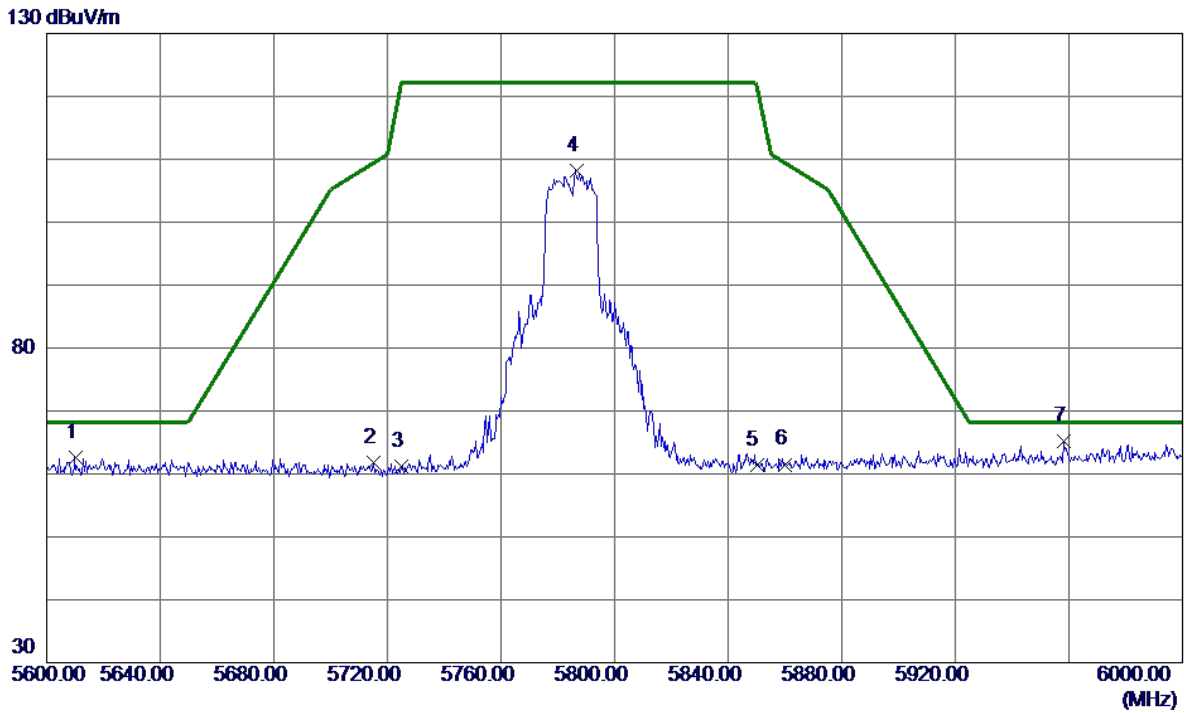


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5610.2000	45.27	17.31	62.58	68.20	-5.62	Peak	
2	5715.0000	44.15	17.62	61.77	109.40	-47.63	Peak	
3	5725.0000	43.62	17.65	61.27	122.20	-60.93	Peak	
4	5786.6000	90.43	17.84	108.27	122.20	-13.93	Peak	No Limit
5	5850.0000	43.43	18.02	61.45	122.20	-60.75	Peak	
6	5860.0000	43.45	18.05	61.50	109.40	-47.90	Peak	
7 *	5958.2000	46.82	18.35	65.17	68.20	-3.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

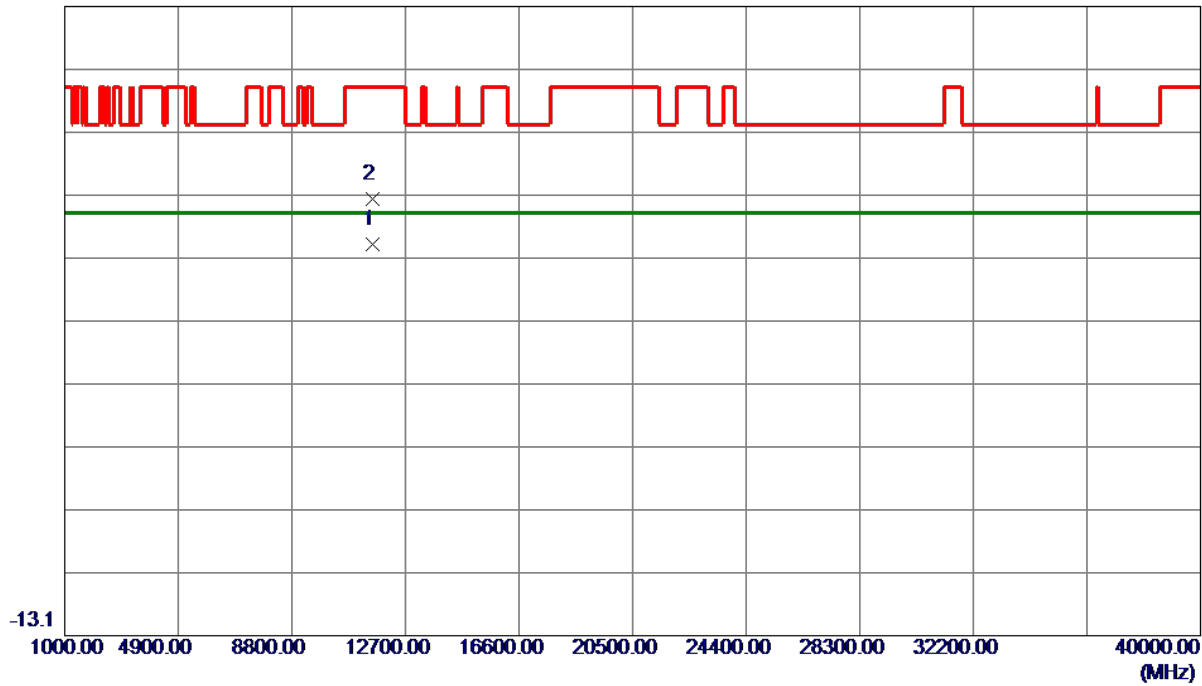


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.8560	34.45	14.57	49.02	54.00	-4.98	AVG	
2	11578.7500	41.75	14.57	56.32	74.00	-17.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

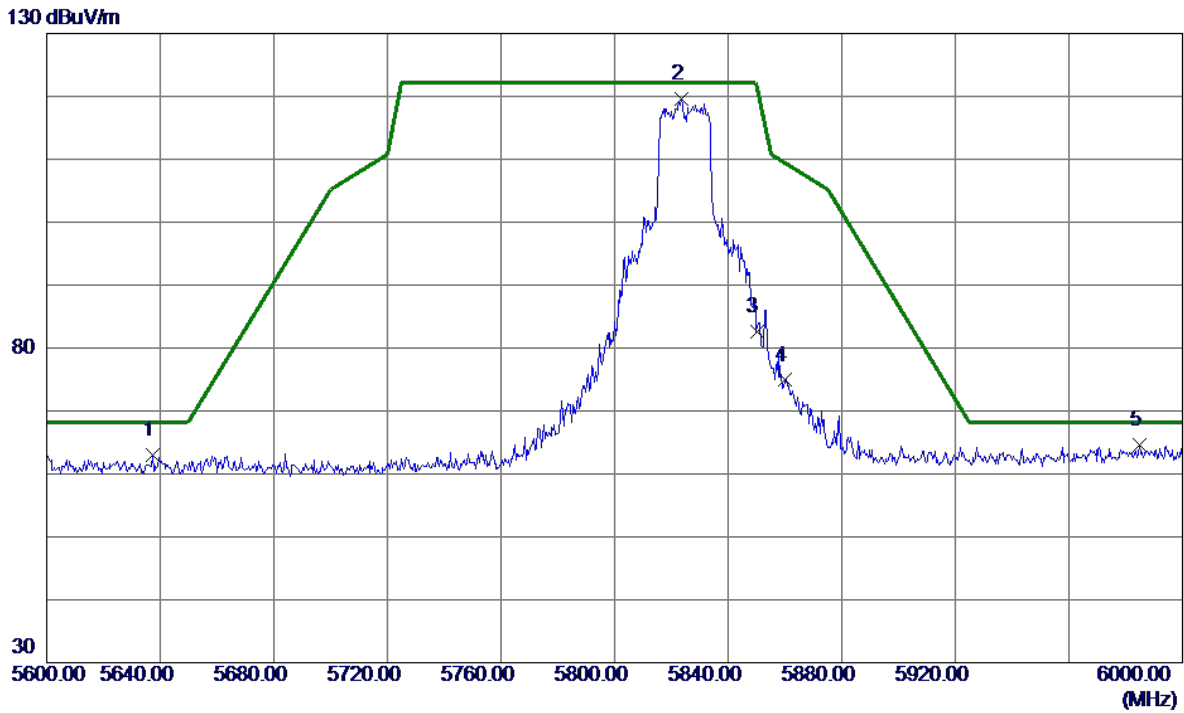


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5637.2000	45.60	17.39	62.99	68.20	-5.21	Peak	
2 *	5823.6000	101.73	17.95	119.68	122.20	-2.52	Peak	No Limit
3	5850.0000	64.51	18.02	82.53	122.20	-39.67	Peak	
4	5860.0000	56.85	18.05	74.90	109.40	-34.50	Peak	
5	5985.0000	46.11	18.43	64.54	68.20	-3.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

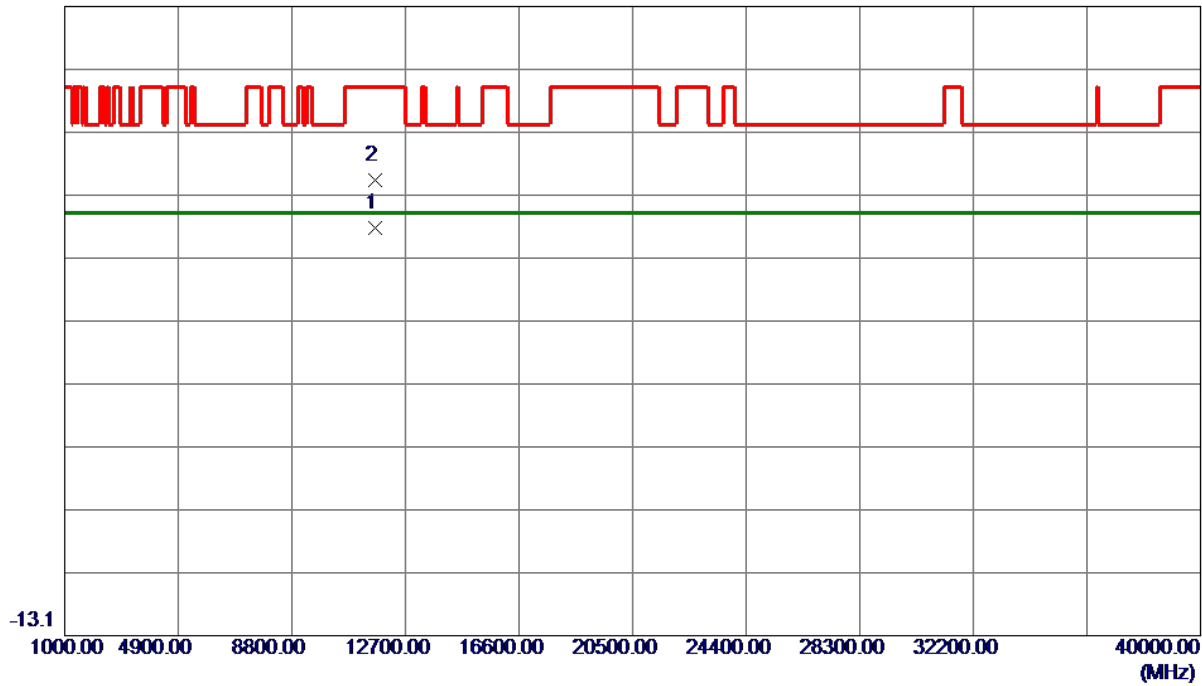


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11653.4780	37.08	14.57	51.65	54.00	-2.35	AVG	
2	11656.7500	44.72	14.57	59.29	74.00	-14.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

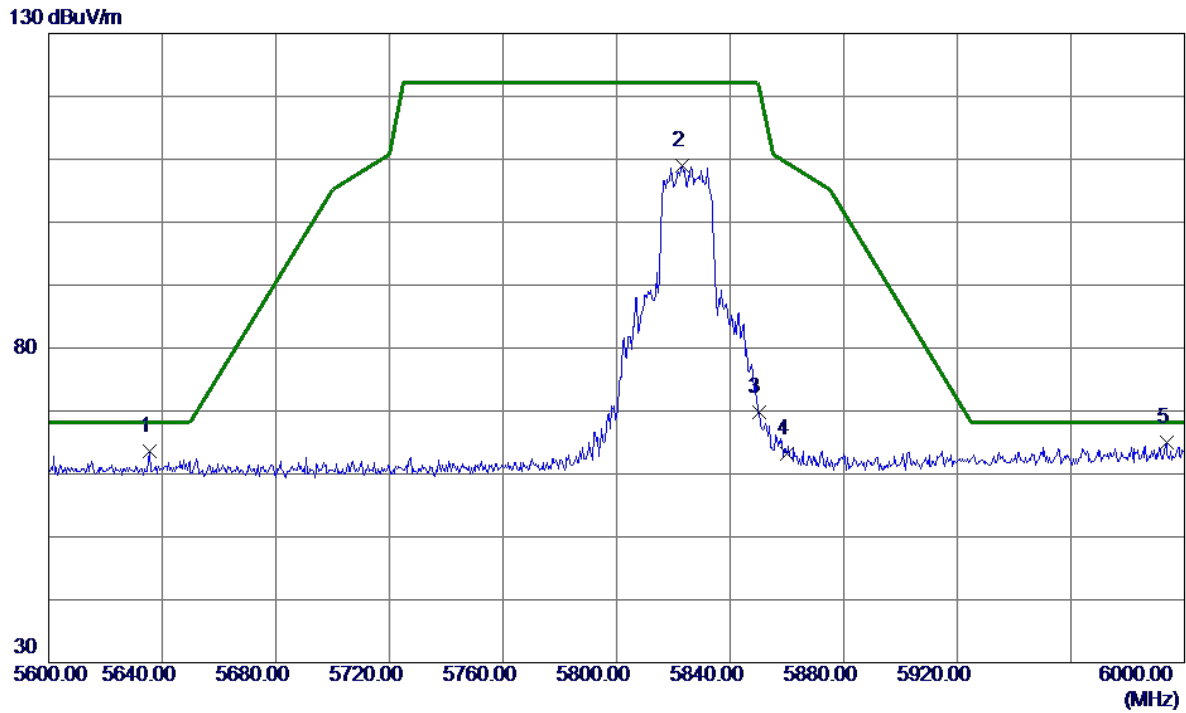


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.6000	46.26	17.39	63.65	68.20	-4.55	Peak	
2	5823.2000	90.98	17.94	108.92	122.20	-13.28	Peak	No Limit
3	5850.0000	51.70	18.02	69.72	122.20	-52.48	Peak	
4	5860.0000	45.08	18.05	63.13	109.40	-46.27	Peak	
5 *	5993.6000	46.62	18.45	65.07	68.20	-3.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

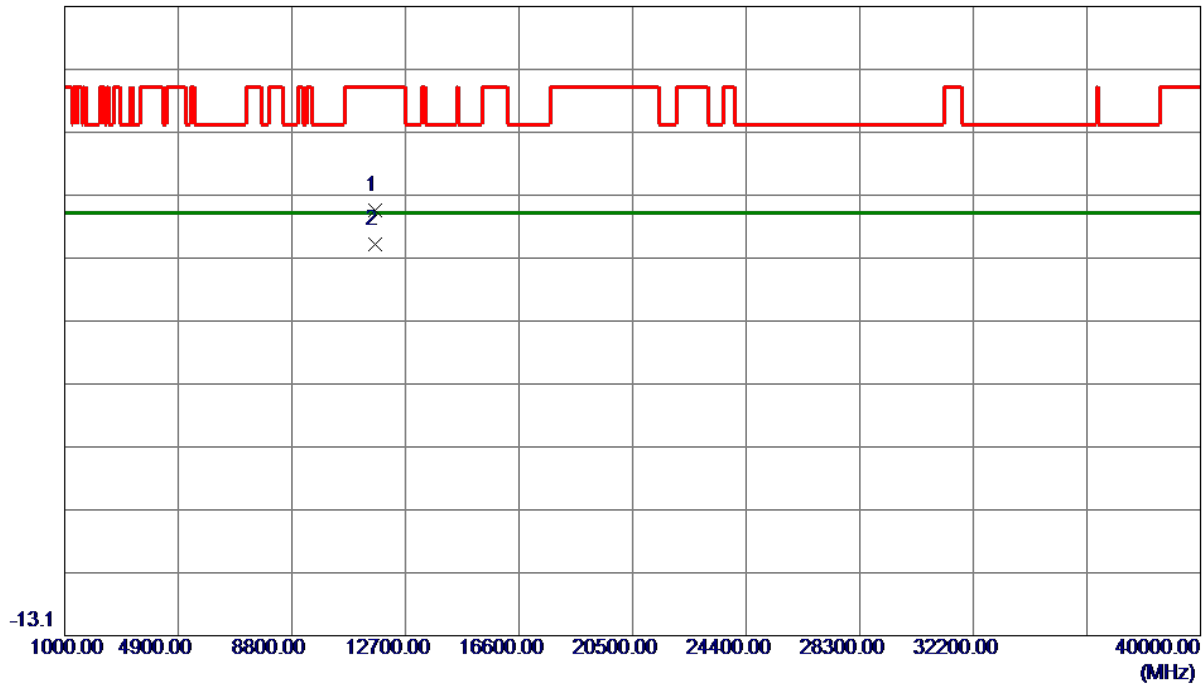


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	39.93	14.57	54.50	74.00	-19.50	Peak	
2 *	11652.9520	34.62	14.57	49.19	54.00	-4.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

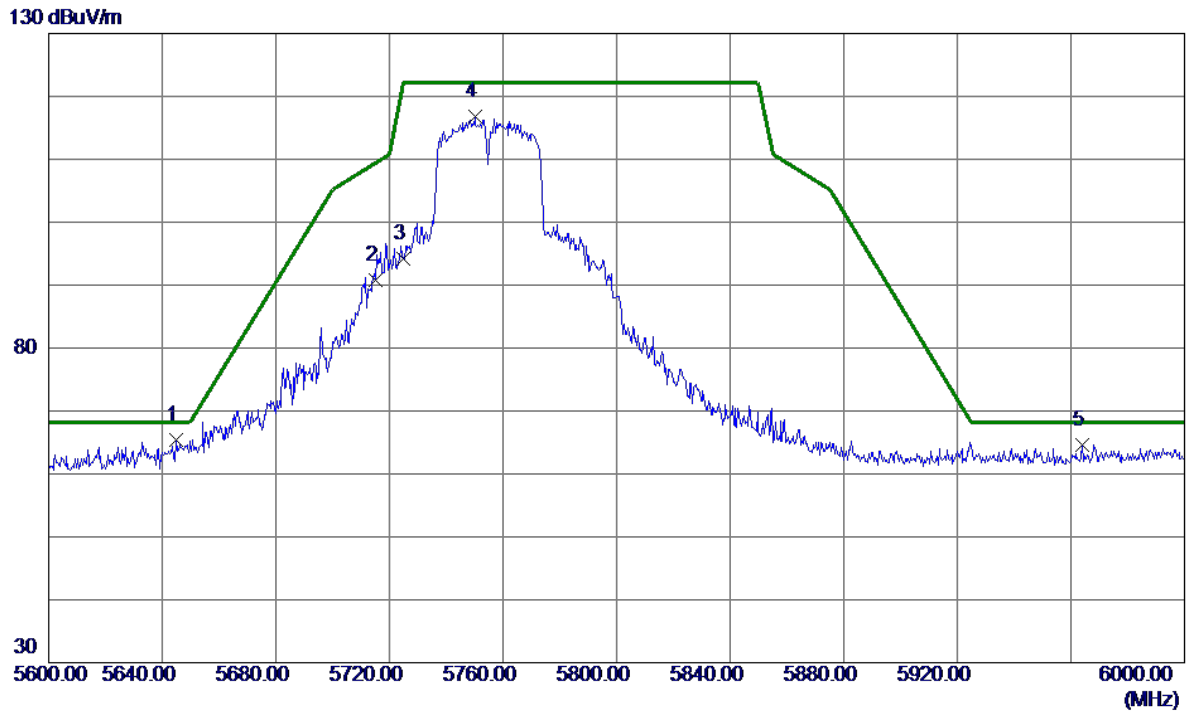


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5645.0000	47.99	17.42	65.41	68.20	-2.79	Peak	
2	5715.0000	73.21	17.62	90.83	109.40	-18.57	Peak	
3	5725.0000	76.50	17.65	94.15	122.20	-28.05	Peak	
4	5750.2000	99.07	17.73	116.80	122.20	-5.40	Peak	No Limit
5	5964.0000	46.27	18.36	64.63	68.20	-3.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

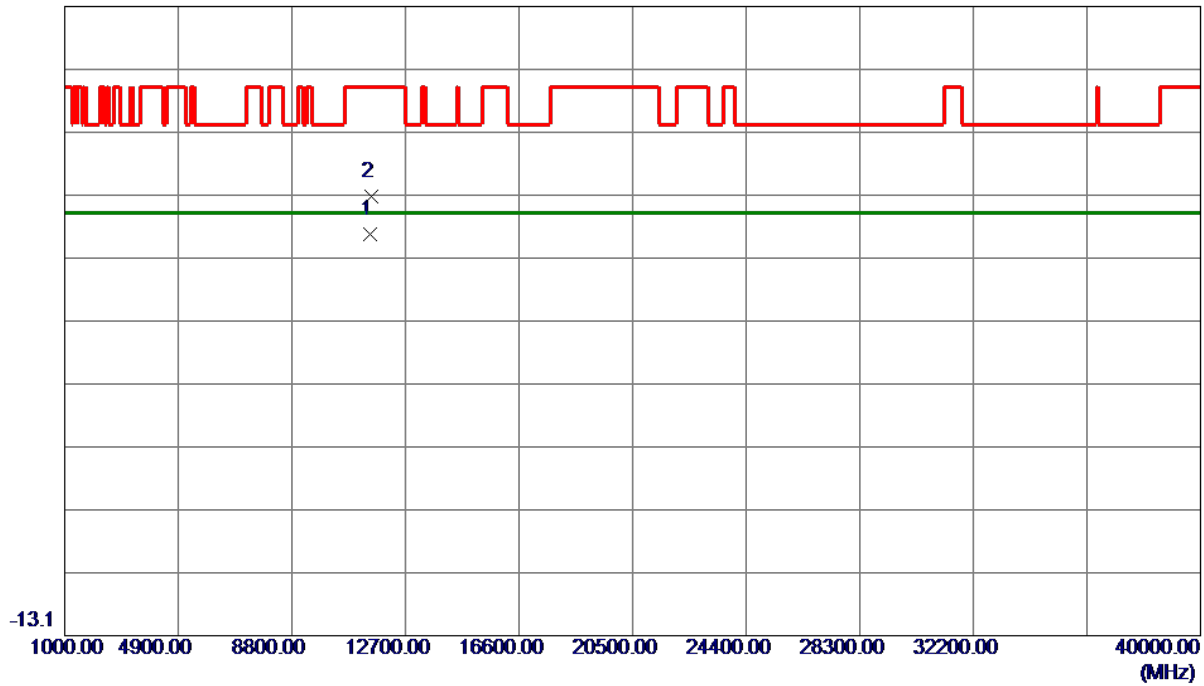


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11503.5759	36.21	14.57	50.78	54.00	-3.22	AVG	
2	11510.5000	42.21	14.57	56.78	74.00	-17.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

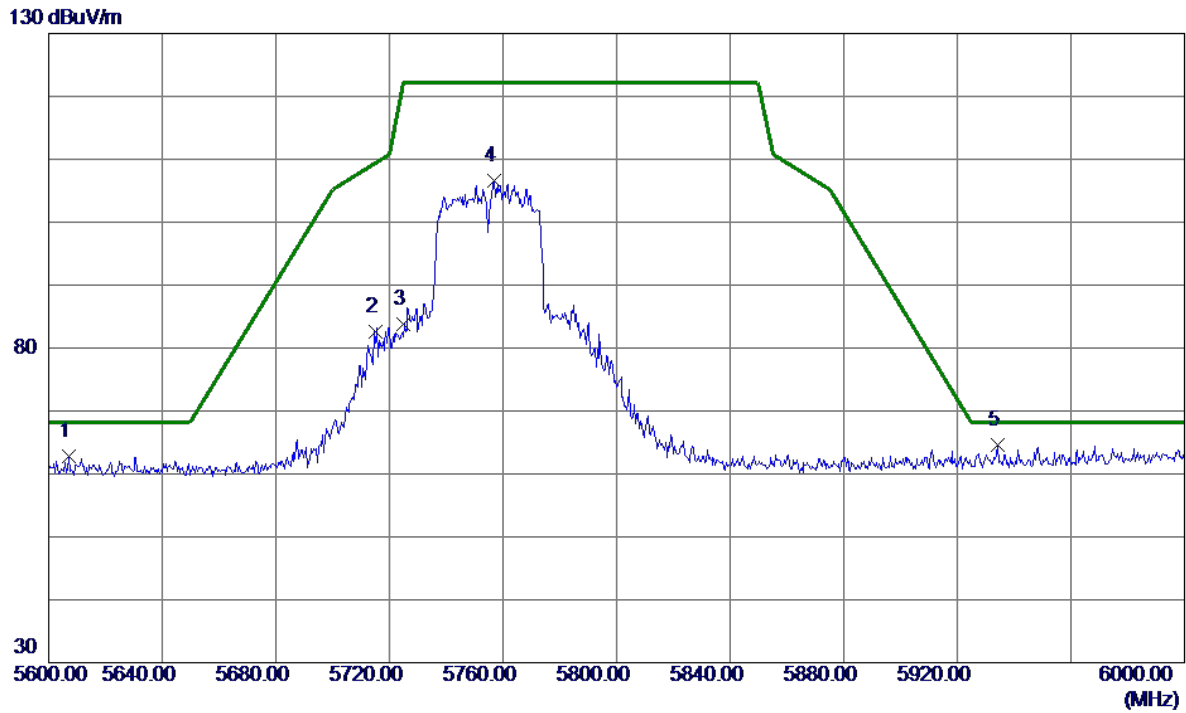


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5607.2000	45.46	17.30	62.76	68.20	-5.44	Peak	
2	5715.0000	64.95	17.62	82.57	109.40	-26.83	Peak	
3	5725.0000	66.12	17.65	83.77	122.20	-38.43	Peak	
4	5756.8000	88.94	17.75	106.69	122.20	-15.51	Peak	No Limit
5 *	5934.2000	46.29	18.27	64.56	68.20	-3.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

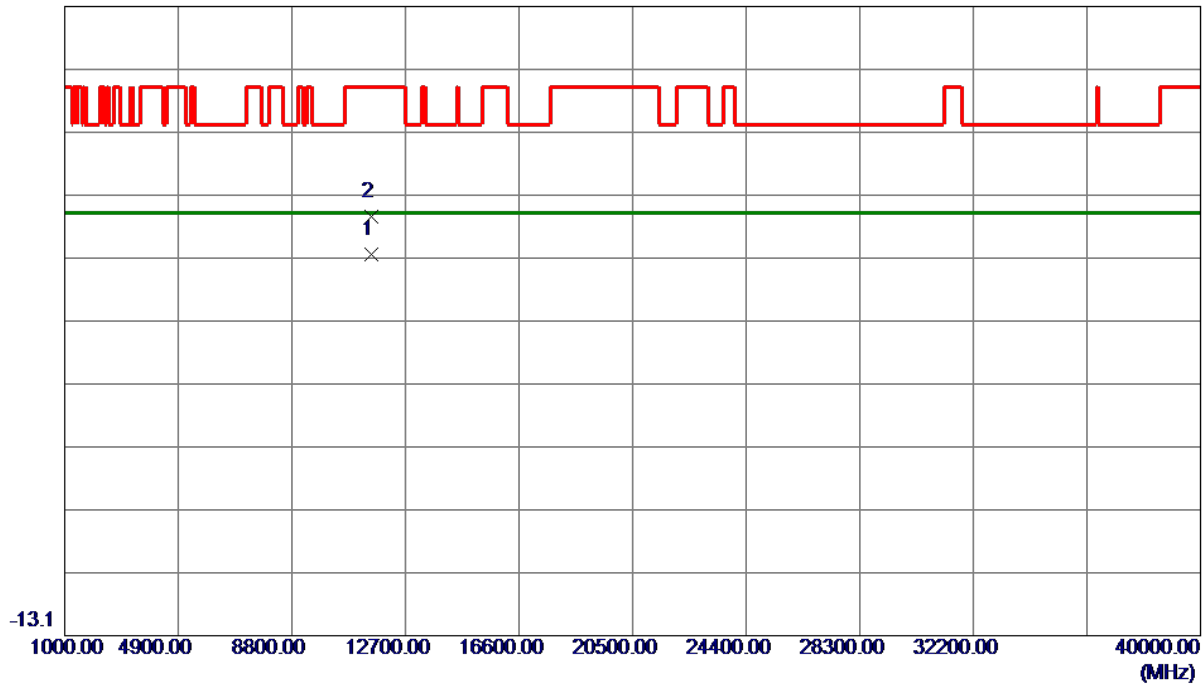


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.7760	32.94	14.57	47.51	54.00	-6.49	AVG	
2	11510.0000	39.01	14.57	53.58	74.00	-20.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

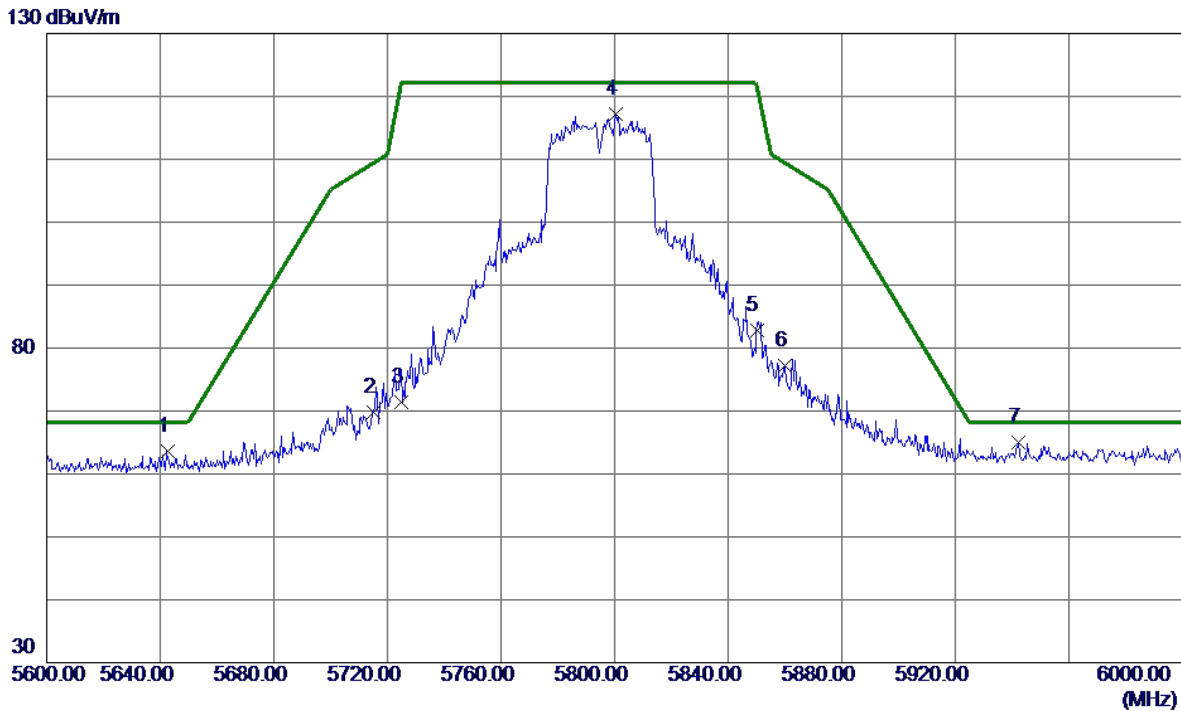


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5642.6000	46.14	17.41	63.55	68.20	-4.65	Peak	
2	5715.0000	52.18	17.62	69.80	109.40	-39.60	Peak	
3	5725.0000	53.84	17.65	71.49	122.20	-50.71	Peak	
4	5800.4000	99.30	17.88	117.18	122.20	-5.02	Peak	No Limit
5	5850.0000	64.72	18.02	82.74	122.20	-39.46	Peak	
6	5860.0000	59.08	18.05	77.13	109.40	-32.27	Peak	
7 *	5942.4000	46.76	18.30	65.06	68.20	-3.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

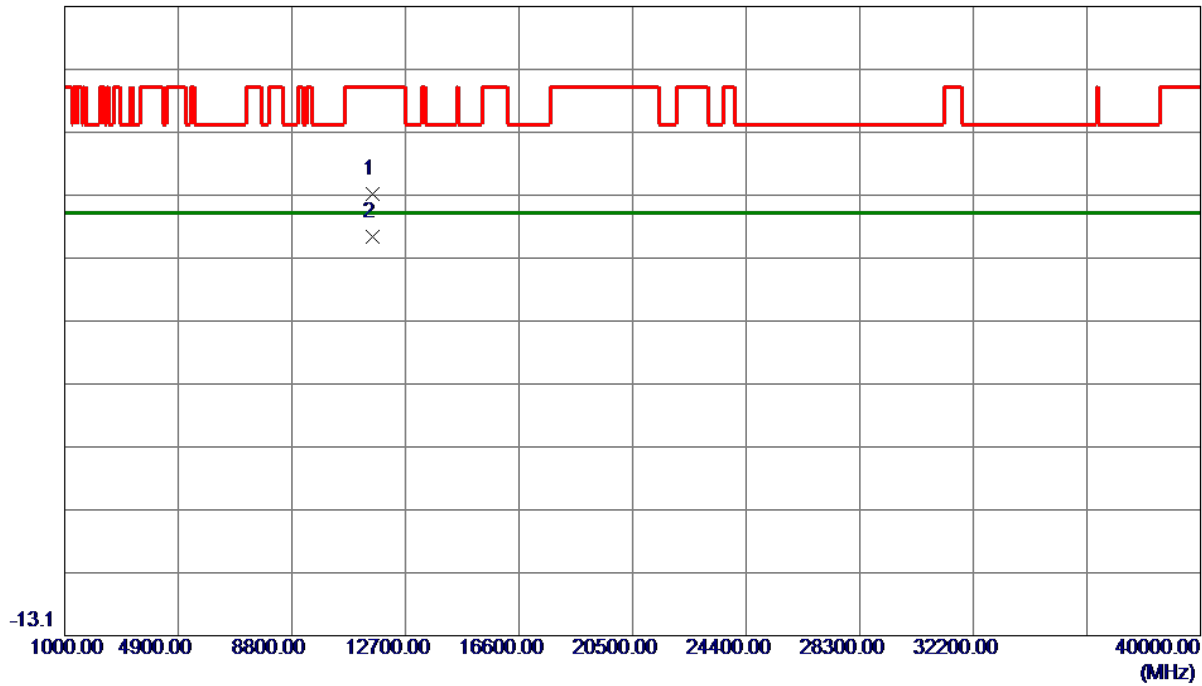


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11592.4000	42.46	14.57	57.03	74.00	-16.97	Peak	
2 *	11592.9000	35.73	14.57	50.30	54.00	-3.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

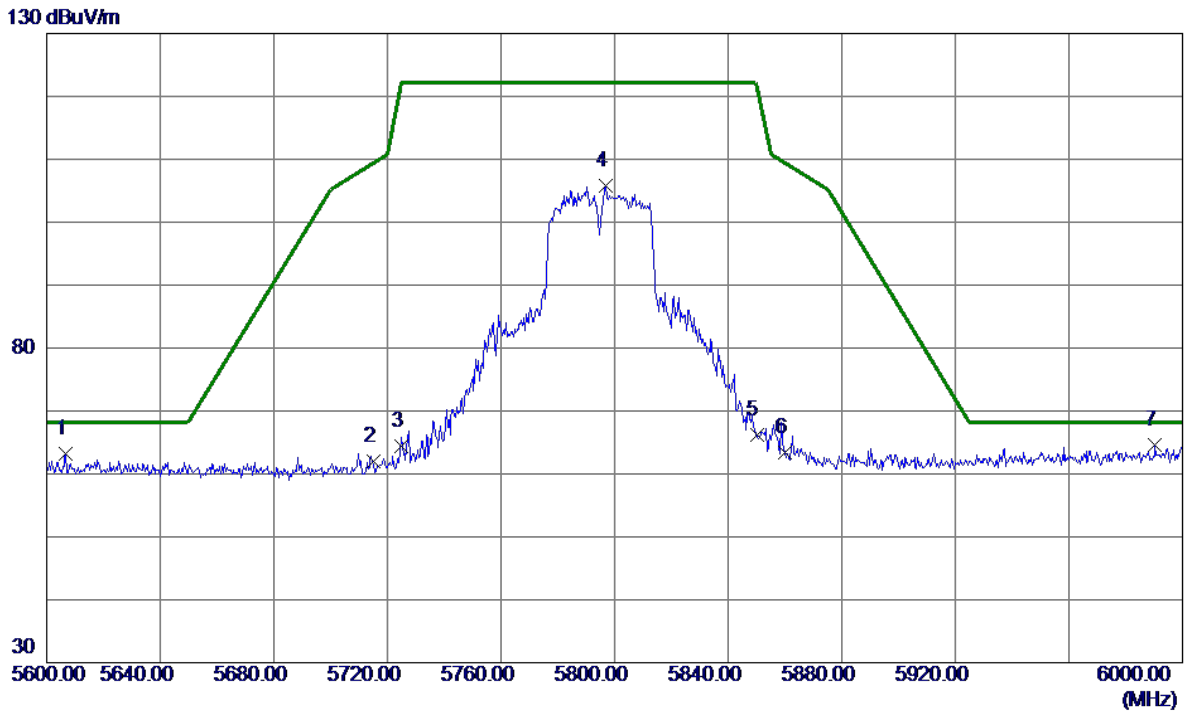


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5606.8000	45.95	17.30	63.25	68.20	-4.95	Peak	
2	5715.0000	44.29	17.62	61.91	109.40	-47.49	Peak	
3	5725.0000	46.71	17.65	64.36	122.20	-57.84	Peak	
4	5796.8000	87.88	17.87	105.75	122.20	-16.45	Peak	No Limit
5	5850.0000	48.27	18.02	66.29	122.20	-55.91	Peak	
6	5860.0000	45.28	18.05	63.33	109.40	-46.07	Peak	
7 *	5990.4000	46.23	18.44	64.67	68.20	-3.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

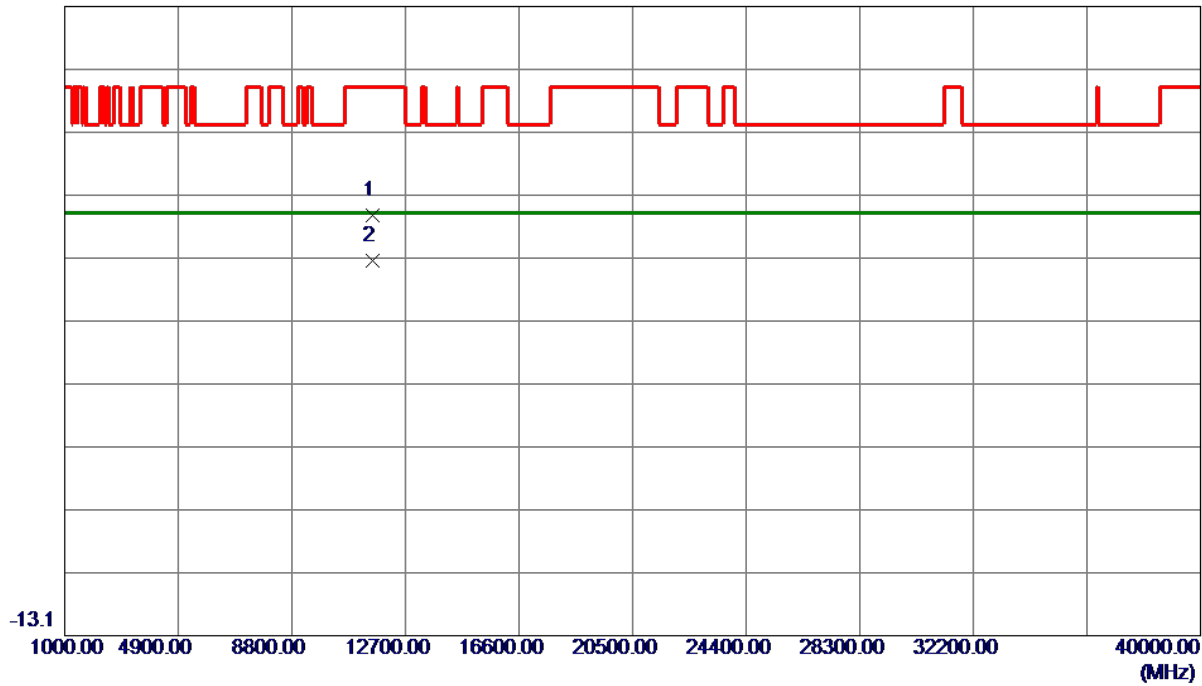


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	39.10	14.57	53.67	74.00	-20.33	Peak	
2 *	11592.4720	31.92	14.57	46.49	54.00	-7.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

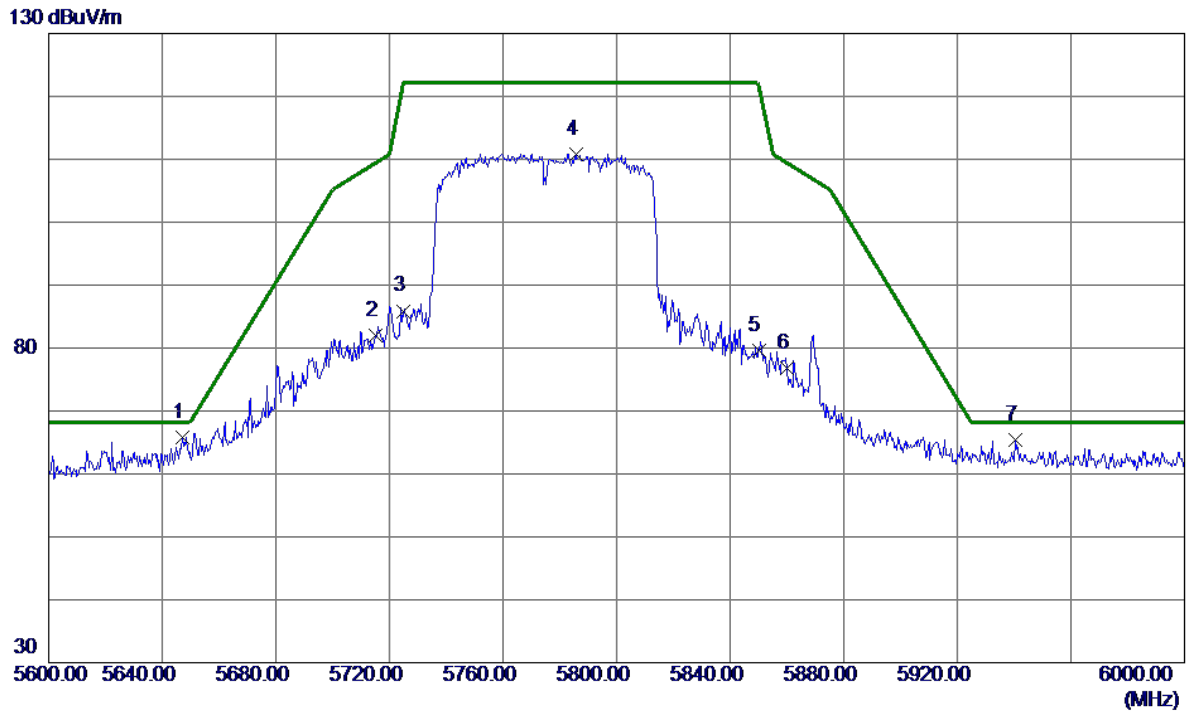


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.2000	48.47	17.42	65.89	68.20	-2.31	Peak	
2	5715.0000	64.39	17.62	82.01	109.40	-27.39	Peak	
3	5725.0000	68.25	17.65	85.90	122.20	-36.30	Peak	
4	5785.6000	93.04	17.83	110.87	122.20	-11.33	Peak	No Limit
5	5850.0000	61.51	18.02	79.53	122.20	-42.67	Peak	
6	5860.0000	58.81	18.05	76.86	109.40	-32.54	Peak	
7	5940.6000	47.03	18.29	65.32	68.20	-2.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

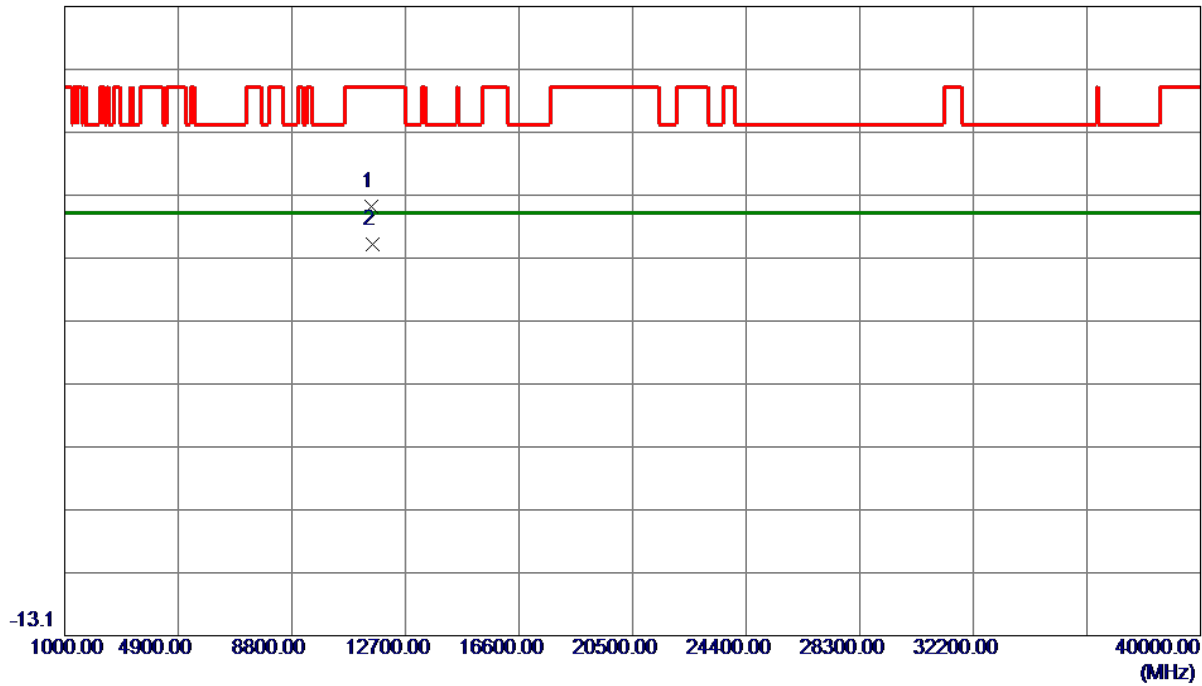


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	40.48	14.57	55.05	74.00	-18.95	Peak	
2 *	11563.6320	34.46	14.57	49.03	54.00	-4.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

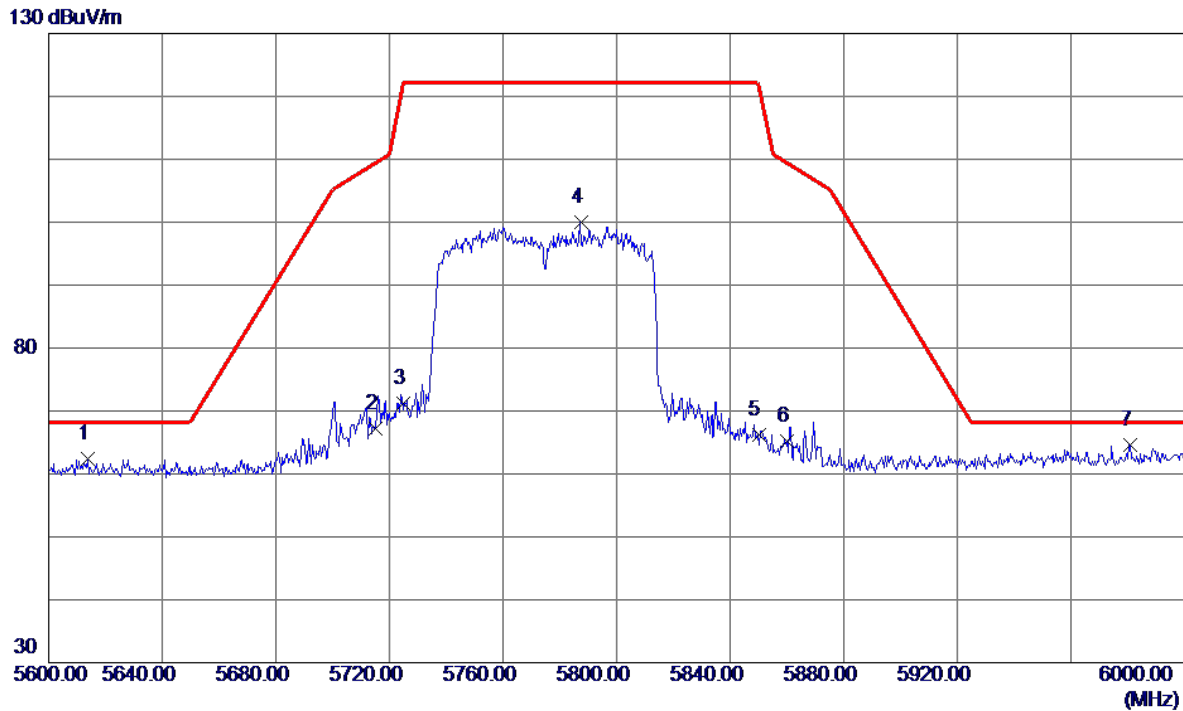


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5613.6000	45.04	17.32	62.36	68.20	-5.84	Peak	
2	5715.0000	49.62	17.62	67.24	109.40	-42.16	Peak	
3	5725.0000	53.58	17.65	71.23	122.20	-50.97	Peak	
4	5787.4000	82.11	17.84	99.95	122.20	-22.25	Peak	No Limit
5	5850.0000	48.21	18.02	66.23	122.20	-55.97	Peak	
6	5860.0000	47.06	18.05	65.11	109.40	-44.29	Peak	
7 *	5980.8000	46.23	18.41	64.64	68.20	-3.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

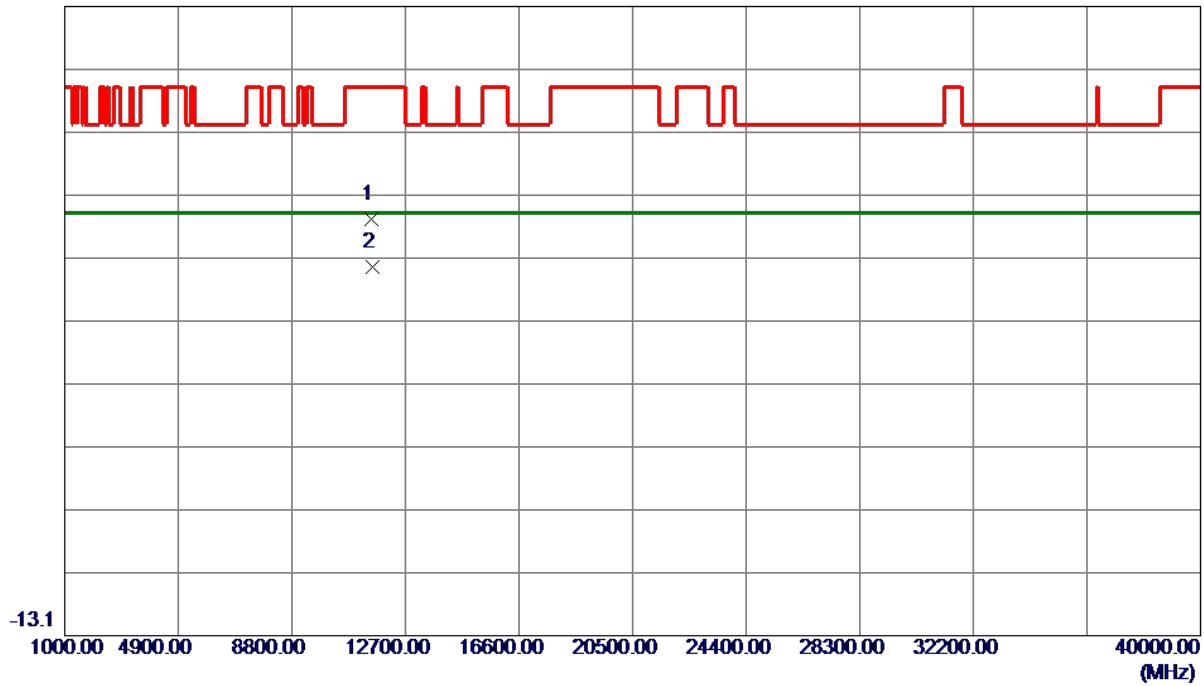


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	38.53	14.57	53.10	74.00	-20.90	Peak	
2 *	11570.9040	30.91	14.57	45.48	54.00	-8.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

The worst case of simultaneous transmission:

Test Mode	TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5745MHz	Polarization	Vertical
-----------	---	--------------	----------

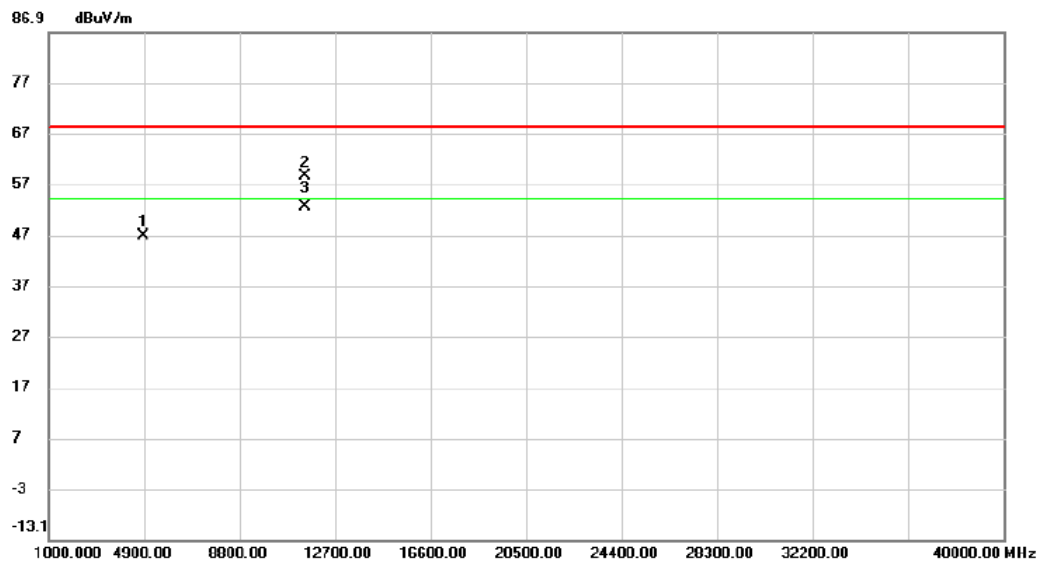


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.625	41.24	5.46	46.70	68.30	-21.60	peak	
2		11489.010	43.95	14.54	58.49	68.30	-9.81	peak	
3	*	11489.925	37.95	14.54	52.49	54.00	-1.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5745MHz	Polarization	Horizontal
-----------	---	--------------	------------

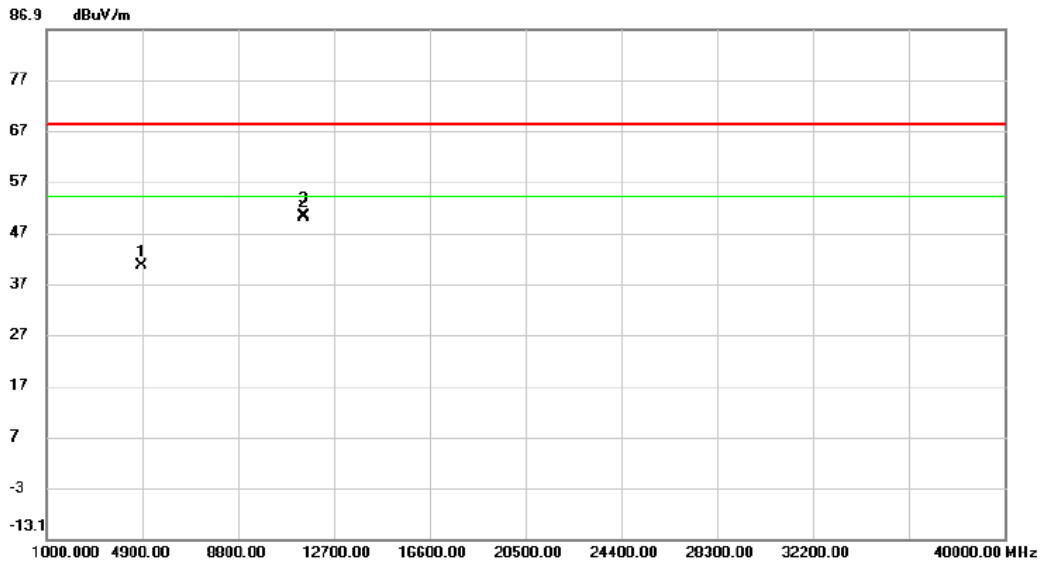

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.441	35.01	5.46	40.47	68.30	-27.83	peak	
2		11480.100	35.82	14.54	50.36	68.30	-17.94	peak	
3	*	11489.926	35.58	14.54	50.12	54.00	-3.88	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	41.399	25.400
40	5200	41.799	26.700
48	5240	36.398	19.900

CH36

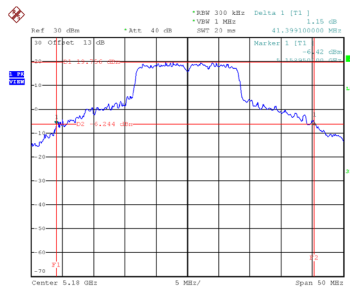


Date: 20_MAY_2021 15:18:28

CH40 26 dB Bandwidth

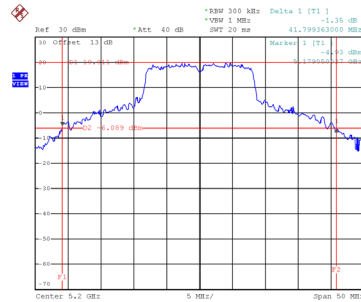


Date: 20_MAY_2021 15:19:45

CH48

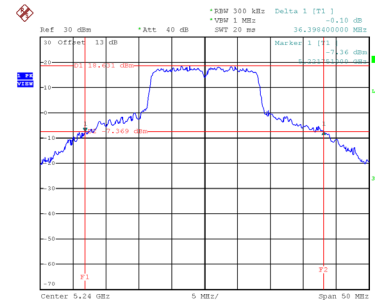


Date: 20_MAY_2021 15:23:02


99 % Occupied Bandwidth

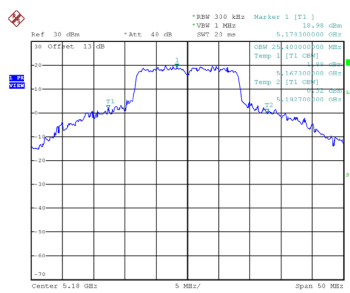

Date: 20_MAY_2021 15:18:17

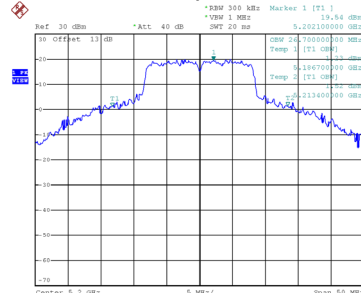

Date: 20_MAY_2021 15:19:34

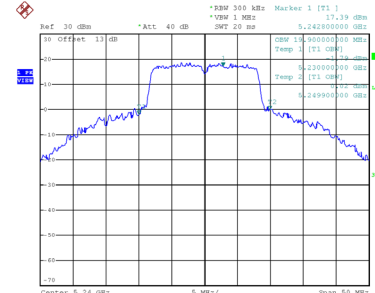


Date: 20_MAY_2021 15:22:48

Test Mode UNII-1_TX AC(VHT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	40.850	22.300
40	5200	40.950	23.200
48	5240	38.349	18.100

CH36

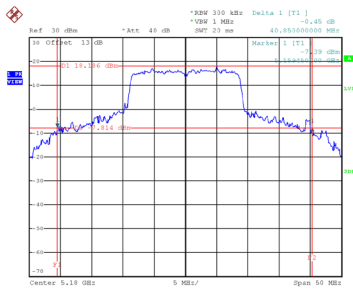


Date: 20_MAY.2021 20:36:50

CH40
26 dB Bandwidth

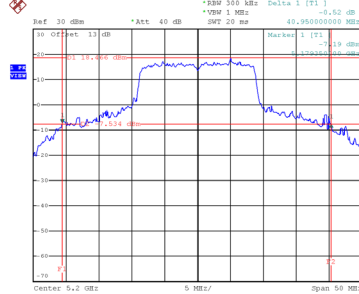


Date: 20_MAY.2021 20:37:20

CH48

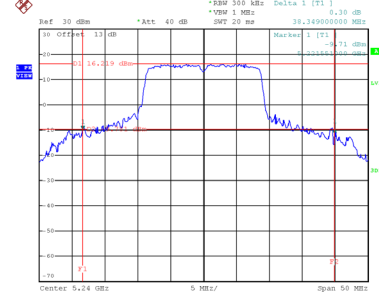


Date: 20_MAY.2021 20:38:25


99 % Occupied Bandwidth

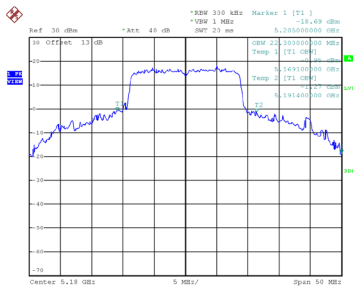

Date: 20_MAY.2021 20:36:38

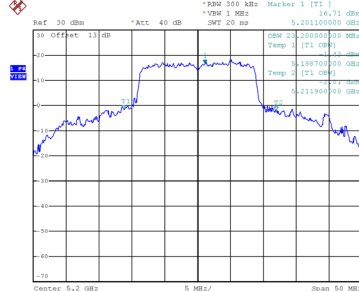

Date: 20_MAY.2021 20:37:08

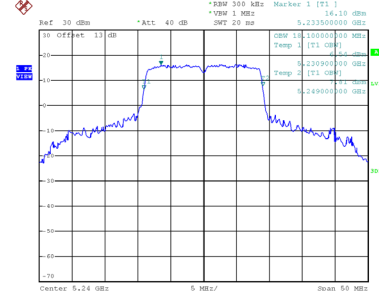


Date: 20_MAY.2021 20:38:08

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	87.586	53.400
46	5230	88.196	39.000

CH38

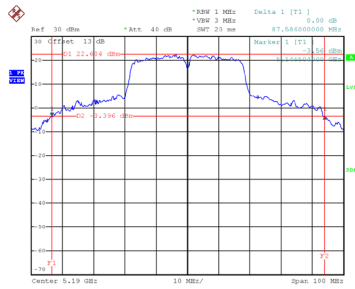


Date: 10.JUN.2021 10:18:17

CH46 26 dB Bandwidth

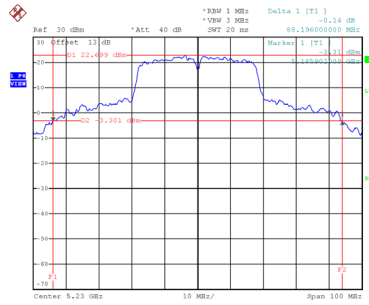


Date: 10.JUN.2021 10:18:54

99 % Occupied Bandwidth

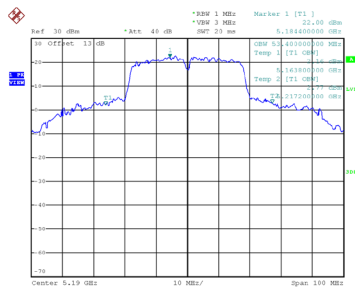

Date: 20.MAY.2021 20:41:31

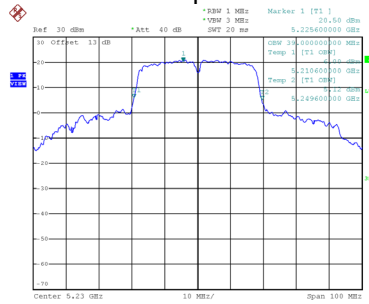

Date: 20.MAY.2021 20:42:29