



# RF MEASUREMENT REPORT

---

**FCC ID:** VBNAHIB-01  
**Application:** Nokia Solutions and Networks  
**Product:** AirScale Base Station RRH 2100MHz  
**Model No.:** AHIB  
**Brand Name:** Nokia  
**FCC Rule Part(s):** Part 2, 27 (L)  
**Result:** Complies  
**Test Date:** 2022-08-21 ~ 2022-08-23

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2208RSU051-U1	Rev. 01	Initial Report	2022-08-29	Valid

Note: This report is prepared for FCC Class II permissive supplement to FCC ID: VBNAHIB-01, added 5G NR bandwidth and related data.

## CONTENTS

Description	Page
<b>1. General Information.....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility .....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test .....	6
1.6. Emission Designator .....	6
1.7. Description of Available Antennas.....	7
1.8. EMI Suppression Device(s)/Modifications .....	7
1.9. Test Methodology .....	7
<b>2. Test Configuration .....</b>	<b>8</b>
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Environment Condition .....	8
<b>3. Measuring Instrument .....</b>	<b>9</b>
<b>4. Decision Rules and Measurement Uncertainty.....</b>	<b>10</b>
4.1. Decision Rules .....	10
4.2. Measurement Uncertainty.....	10
<b>5. Test Result .....</b>	<b>11</b>
5.1. Summary.....	11
5.2. Occupied Bandwidth Measurement .....	12
5.2.1. Test Limit .....	12
5.2.2. Test Procedure .....	12
5.2.3. Test Setting .....	12
5.2.4. Test Setup .....	12
5.2.5. Test Result .....	12
5.3. Equivalent Isotropically Radiated Power Measurement .....	13
5.3.1. Test Limit .....	13
5.3.2. Test Procedure .....	13
5.3.3. Test Setting .....	13
5.3.4. Test Setup .....	14
5.3.5. Test Result .....	14
5.4. Band Edge Measurement .....	15
5.4.1. Test Limit .....	15

---

5.4.2.	Test Procedure .....	15
5.4.3.	Test Setting .....	15
5.4.4.	Test Setup .....	15
5.4.5.	Test Result .....	16
5.5.	Out-of-frequency Band unwanted Emissions Measurement .....	17
5.5.1.	Test Limit .....	17
5.5.2.	Test Procedure .....	17
5.5.3.	Test Setting .....	17
5.5.4.	Test Setup .....	17
5.5.5.	Test Result .....	17
<b>Appendix A - Test Result .....</b>		<b>18</b>
A.1	Occupied Bandwidth Test Result .....	18
A.2	Equivalent Isotropically Radiated Power Test Result.....	21
A.3	Band Edge Test Result .....	24
A.4	Conducted Spurious Emissions Test Result .....	26
<b>Appendix B - Test Setup Photograph .....</b>		<b>27</b>
<b>Appendix C - EUT Photograph .....</b>		<b>28</b>



#### 1.4. Product Information

Product Name	AirScale Base Station RRH 2100MHz
Model No.	AHIB
Brand Name	Nokia
Test Device Serial No.	AH193900754
Software Version	SBTS22R4_ENB_9999_220608_000015
Operating Band (s)	LTE Band 66, 5G NR n66
Voltage Range	DC: 40.5V to 57VDC AC:100-240VAC
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

#### 1.5. Radio Specification under Test

5G NR n66	
Frequency Range	DL: 2110 ~ 2200 MHz; UL: 1710 ~ 1780MHz
Bandwidth	NR 20 + 20MHz
Modulation Type	QPSK, 16QAM, 64QAM, 256QAM
Max EIRP	55.81dBm
Emission Designator:	Refer to Section 1.6
Antenna Specification:	Refer to Section 1.7
Remark: For other features of this EUT, test report will be issued separately.	

#### 1.6. Emission Designator

Bandwidth (MHz)	Modulation	Emission Designator
20 + GAP50 + 20	QPSK	37M8G7D
	16QAM	37M9W7D
	64QAM	37M8W7D
	256QAM	37M8W7D

### 1.7. Description of Available Antennas

Band Support	Antenna Type	Model	Antenna Gain
n66	Directional Antenna	AAFA	12.5dBi
Remark: 1. The transmit signals are completely uncorrelated with each other, directional gain = $G_{ANT}$ dBi, $G_{ANT}$ is the antenna gain in dBi; 2. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.			

### 1.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

### 1.9. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:


- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- FCC KDB 662911 D01 v02r01: Multiple Transmitter Output

## 2. Test Configuration

### 2.1. Test Mode

Test Item	Channel Bandwidth	Modulation
Transmitter output power	20 + GAP50 + 20MHz	QPSK, 16QAM, 64QAM, 256QAM
Occupied bandwidth		QPSK, 16QAM, 64QAM, 256QAM
Unwanted emissions		QPSK
Out-of-frequency band unwanted emissions		QPSK
Remark: This report has assessed the typical multi-carrier mode.		

### 2.2. Test System Connection Diagram

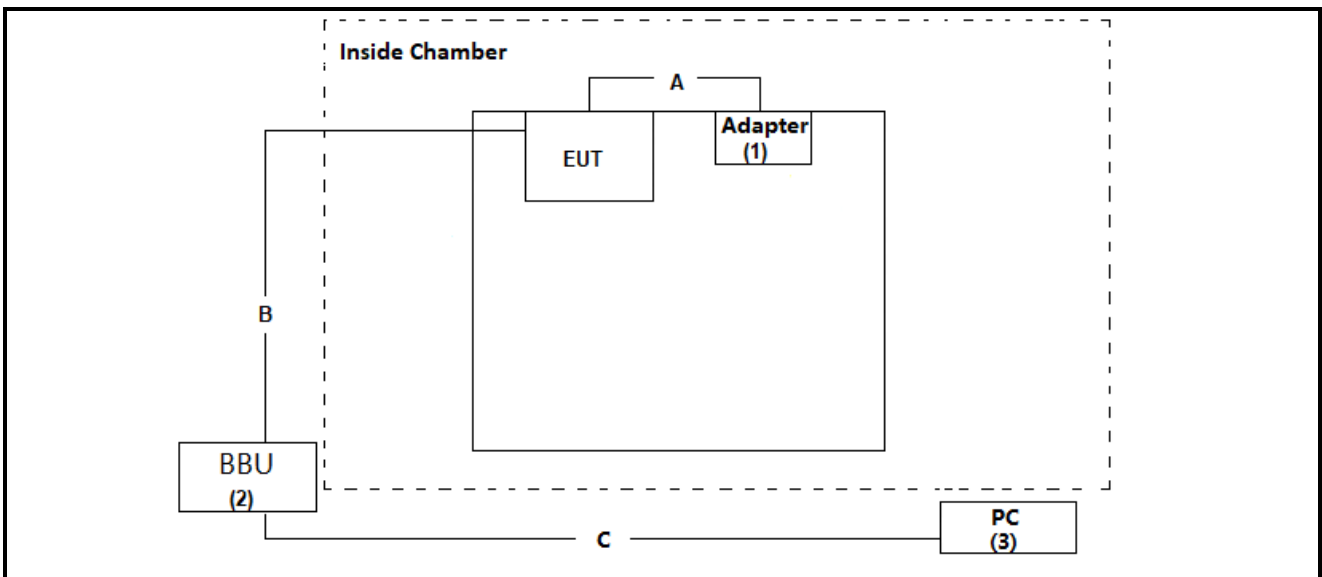

No.	Cable Type	Cable Spec.	Length
A	Power cable	Non-Shielding, 1.0m	Power cable
B	Optical fiber cable	Non-Shielding, >10.0m	Optical fiber cable
C	LAN cable	Non-Shielding, 2.0m	LAN cable
No.	Product	Manufacturer	Model No.
1	AC/DC Power supply	SUPLET	S818A210-220S54W
2	BBU	Nokia	AMIA
3	Personal Computer	HP	TPN-C141

### 2.3. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH



### 3. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2022-12-05	WZ-TR3
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2023-03-29	WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022-10-10	WZ-TR3
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2023-07-07	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2023-06-06	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023-02-15	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022-10-10	WZ-SR6
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2022-11-29	WZ-SR6
Attenuator	SHX	SMA10-20dB-18G	MRTSUE06697	1 year	2023-03-02	WZ-SR6

## 4. Decision Rules and Measurement Uncertainty

### 4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 5. Test Result

### 5.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1046; 27.50(d)(2)	Equivalent Isotropically Radiated Power		Pass
27.53(h)	Band Edge		Pass
27.53(h)	Out-of-frequency Band unwanted Emissions		Pass

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The Occupied Bandwidth and Conducted Spurious Emission were presented the worst test data of modulation & antenna port in the test report.

## 5.2. Occupied Bandwidth Measurement

### 5.2.1. Test Limit

The occupied bandwidth shall not exceed the equipment's channel bandwidth, which is declared by the manufacturer.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 5.2.4. Test Setup

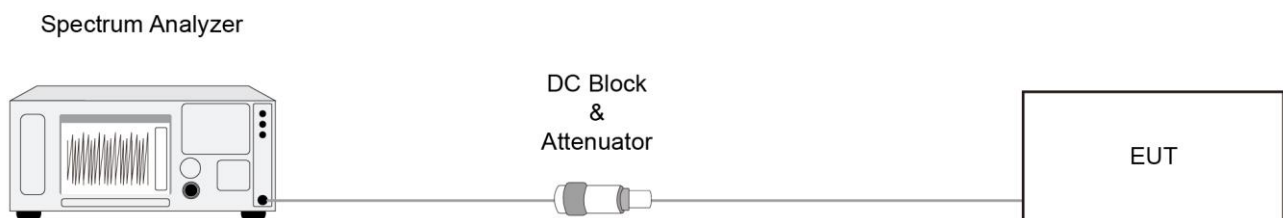

### 5.2.5. Test Result

Refer to Appendix A.1.

### **5.3. Equivalent Isotropically Radiated Power Measurement**

#### **5.3.1. Test Limit**

The equivalent isotropically radiated power (e.i.r.p.) of base stations shall not exceed 1640 W when transmitting with an emission bandwidth of 1 MHz or less, and 1640 W/MHz when transmitting with an emission bandwidth greater than 1MHz.

#### **5.3.2. Test Procedure**

ANSI C63.26-2015 - Section 5.2.4.2 & 5.2.5.5

#### **5.3.3. Test Setting**

##### **Average Power Measurement**


Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

##### **Average Power Spectral Density Measurement**

1. Span to  $2 \times$  to  $3 \times$  the OBW
2. RBW  $\geq 1\%$  to  $5\%$  of the OBW
3. VBW  $\geq 3 \times$  RBW
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run"
7. If the EUT can be configured to transmit continuously, then set the trigger to free run
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.
9. The trace was allowed to stabilize
10. Compute the power by integrating the spectrum across the OBW of the signal using the Instrument's band power measurement function, with the band/channel limits set equal to the OBW band edges.
11. EIRP = Output Power Level of S.G - Tx Cable Loss + Antenna Gain of Substitution Antenna.

### 5.3.4. Test Setup

Spectrum Analyzer



DC Block  
&  
Attenuator



### 5.3.5. Test Result

Refer to Appendix A.3.

## 5.4. Band Edge Measurement

### 5.4.1. Test Limit

The first 1.0 MHz band immediately outside and adjacent to each of the sub-bands, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} P$  (watts)

Note: This device can be implement MIMO function, so the limit os spurious emissions needs to be reduced  $10 * \log(\text{Numbers}_{\text{Ant}})$  according to FCC KDB 662911 D01 guidance.

The limit is adjusted to  $-13\text{dBm} - 10 * \log(4) = -19.02\text{dBm}$


### 5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.7.1

### 5.4.3. Test Setting

1. Set the analyzer frequency to Bottom or Top channel.
2. RBW = The nominal RBW shall be in the range of 1% of the anticipated OBW;
3. VBW  $\geq 3 * \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run"
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
9. Used power integration when using a measurement bandwidth smaller than the specified bandwidth.

### 5.4.4. Test Setup

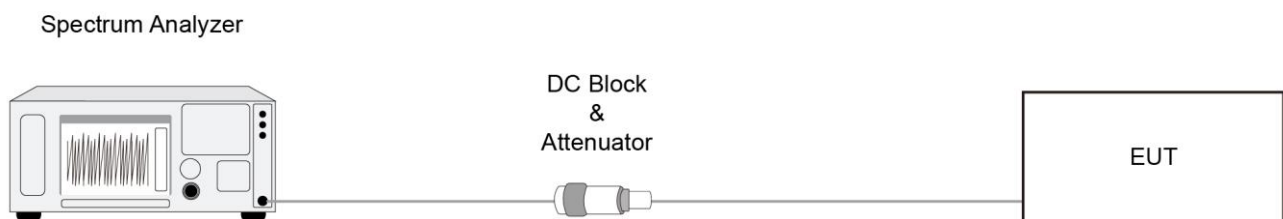

#### **5.4.5. Test Result**

Refer to Appendix A.4.



## 5.5. Out-of-frequency Band unwanted Emissions Measurement

### 5.5.1. Test Limit

The first 1.0 MHz band immediately outside and adjacent to each of the sub-bands, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} P$  (watts)

Note: This device can be implement MIMO function, so the limit os spurious emissions needs to be reduced  $10 * \log(\text{Numbers}_{\text{Ant}})$  according to FCC KDB 662911 D01 guidance.

The limit is adjusted to  $-13\text{dBm} - 10 * \log(4) = -19.02\text{dBm}$


### 5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7.1

### 5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 * \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.5.4. Test Setup

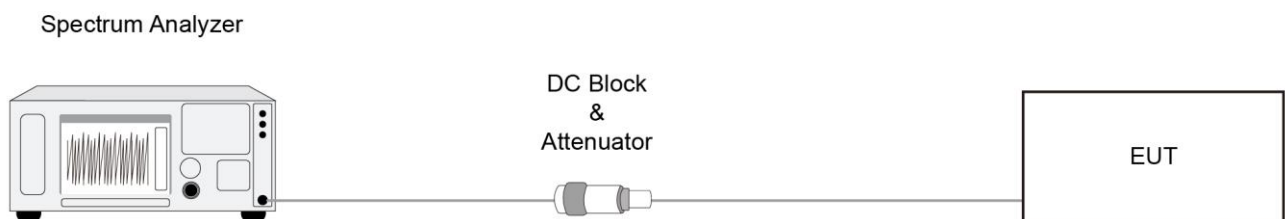

### 5.5.5. Test Result

Refer to Appendix A.5.

## Appendix A - Test Result


### A.1 Occupied Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2022/08/21 ~ 2022/08/23	Test Configuration	n66


Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
2120 + 2190	20 + GAP50 + 20	37.794
16QAM		
2120 + 2190	20 + GAP50 + 20	37.875
64QAM		
2120 + 2190	20 + GAP50 + 20	37.796
256QAM		
2120 + 2190	20 + GAP50 + 20	37.773

## 20 + GAP50 + 20MHz Channel Bandwidth - QPSK

## Low Channel - 2120MHz

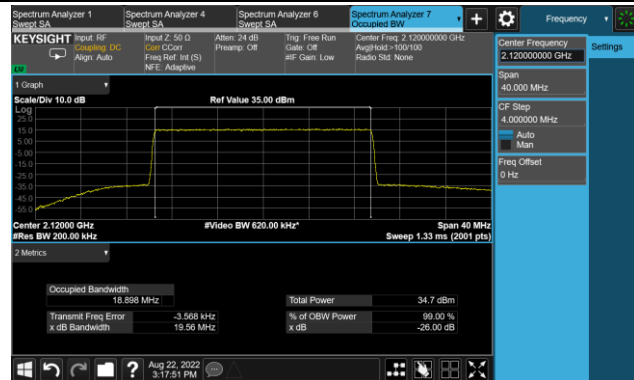


## High Channel - 2190MHz

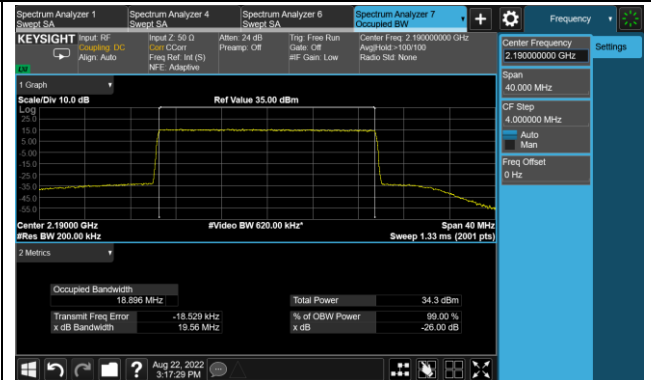


## 20 + GAP50 + 20MHz Channel Bandwidth - 16QAM

## Low Channel - 2120MHz

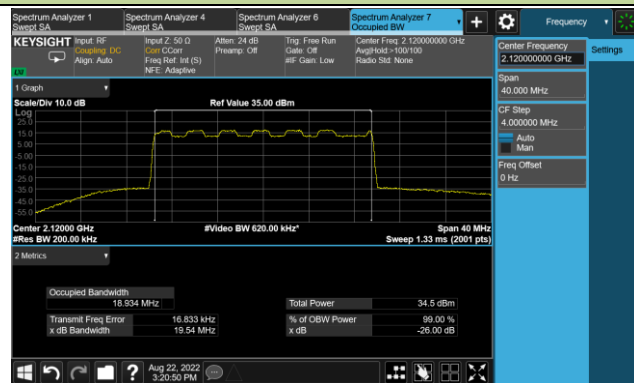


## High Channel - 2190MHz

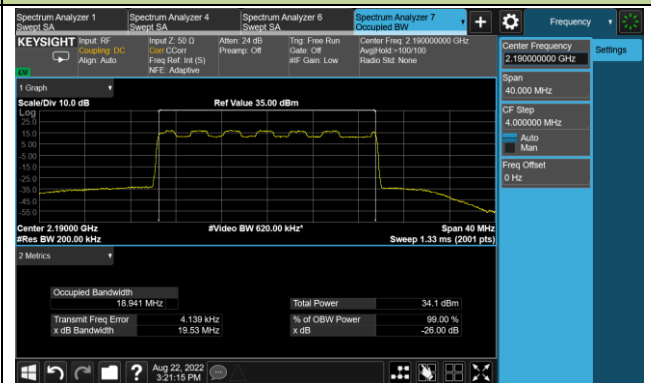


## 20 + GAP50 + 20MHz Channel Bandwidth - 64QAM

## Low Channel - 2120MHz

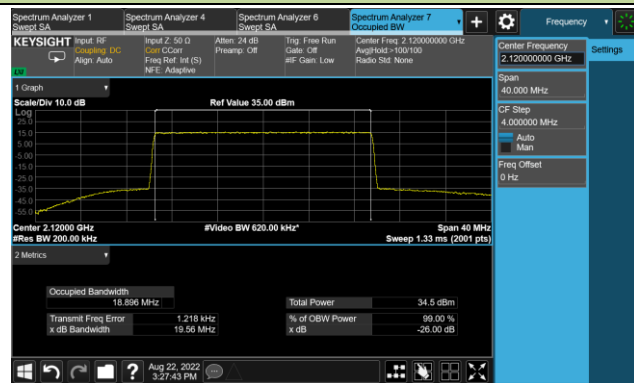


## High Channel - 2190MHz

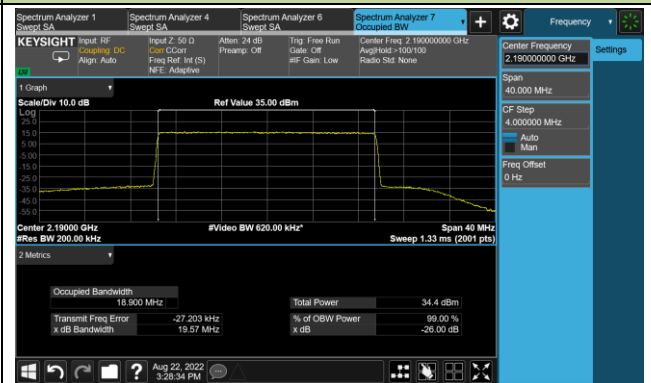

20 + GAP50 + 20MHz Channel Bandwidth - 256QAM

Low Channel - 2120MHz

High Channel - 2190MHz

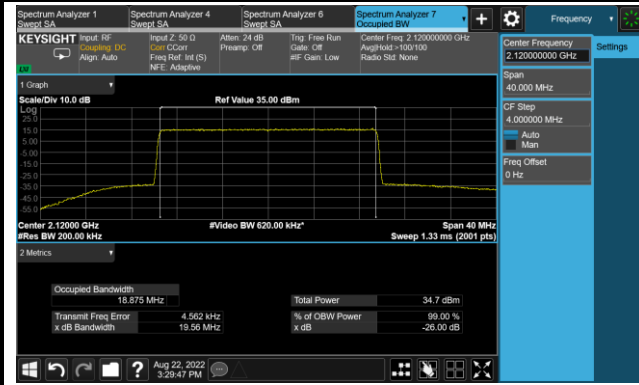

**A.2 Equivalent Isotropically Radiated Power Test Result**

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2022/08/021 ~ 2022/08/23	Test Configuration	n66, 20 + GAP50 + 20

Frequency (MHz)	Output Power Density (dBm/MHz)				Total Power Density (dBm/MHz)	EIRP Density (dBm/MHz)	Limit (dBm /MHz)	Result
	Ant 0	Ant 1	Ant 2	Ant 3				
<b>QPSK</b>								
2120 + 2190	21.721	21.897	21.895	22.324	27.986	40.486	< 62.15	Pass
<b>16QAM</b>								
2120 + 2190	23.729	23.704	23.604	23.990	29.780	42.280	< 62.15	Pass
<b>64QAM</b>								
2120 + 2190	21.772	21.877	21.874	22.224	27.961	40.461	< 62.15	Pass
<b>256QAM</b>								
2120 + 2190	21.904	21.869	22.049	22.291	28.052	40.552	< 62.15	Pass


Note 1: Note: Total Power (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{ANT 1 Power (dBm/MHz) / 10}} + 10^{\text{ANT 2 Power (dBm/MHz) / 10}} + 10^{\text{ANT 3 Power (dBm/MHz) / 10}} + 10^{\text{ANT 4 Power (dBm/MHz) / 10}} \}$  (dBm/MHz).

Note 2: EIRP (dBm) = Total Power (dBm) + Directional Gain (dBi).


**Worst case output power**

20 + GAP50 + 20MHz Channel Bandwidth - 2120 + 2190MHz - 16QAM


Ant 1

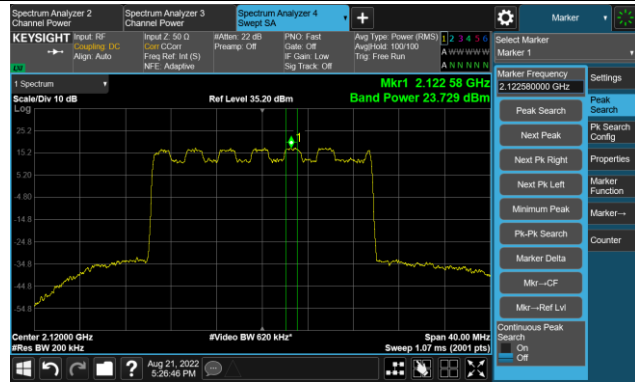


Ant 2

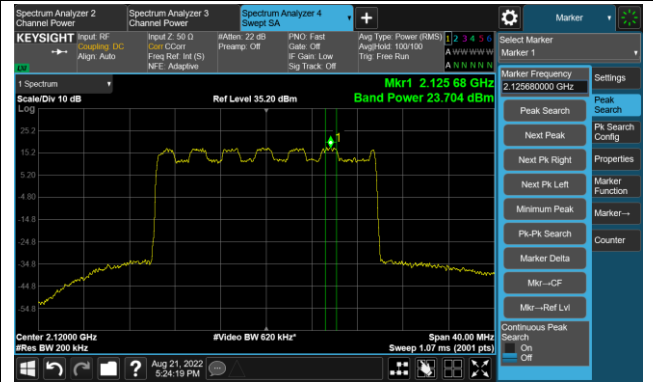

Ant 3

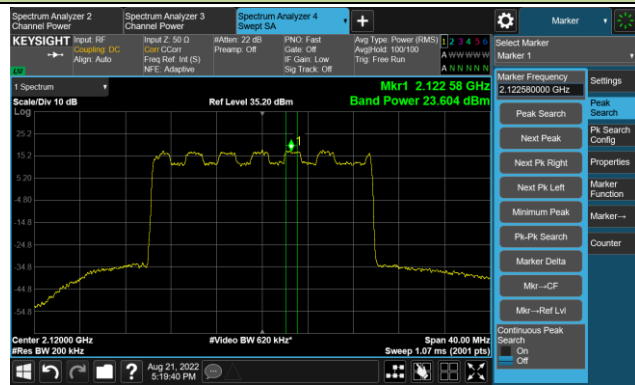

Ant 4

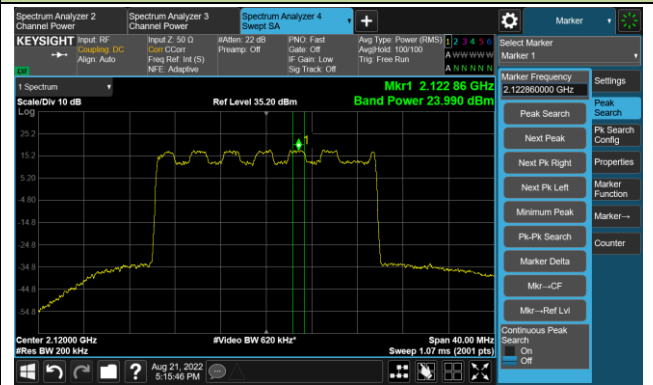

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2022/08/21 ~ 2022/08/23	Test Configuration	n66, 20 + GAP50 + 20 Report Only

Frequency (MHz)	Output Power (dBm)				Total Power (dBm)	EIRP (dBm)	Limit (dBm)
	Ant 0	Ant 1	Ant 2	Ant 3			
QPSK							
2120 + 2190	37.17	37.17	37.14	37.56	43.29	55.79	NA
16QAM							
2120 + 2190	37.08	37.05	37.03	37.43	43.17	55.67	NA
64QAM							
2120 + 2190	37.16	37.20	37.12	37.64	43.31	55.81	NA
256QAM							
2120 + 2190	37.14	37.14	37.19	37.59	43.29	55.79	NA

Note 1: Note: Total Power (dBm) =  $10 \cdot \log \left\{ 10^{\text{ANT 1 Power (dBm) / 10}} + 10^{\text{ANT 2 Power (dBm) / 10}} + 10^{\text{ANT 3 Power (dBm) / 10}} + 10^{\text{ANT 4 Power (dBm) / 10}} \right\}$  (dBm).


Note 2: EIRP (dBm) = Total Power (dBm) + Directional Gain (dBi)

### A.3 Band Edge Test Result


Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2022/08/21 ~ 2022/08/23	Test Configuration	n66, 20 + GAP50 + 20

Frequency (MHz)	Max Band Edge (dBm)				Limit (dBm)	Result
	Ant 1	Ant 2	Ant 3	Ant 4		
2120 + 2190	-27.947	-27.259	-28.355	-27.386	≤ -19.02	Pass


#### 20 + GAP50 + 20MHz Channel Bandwidth - Ant 1

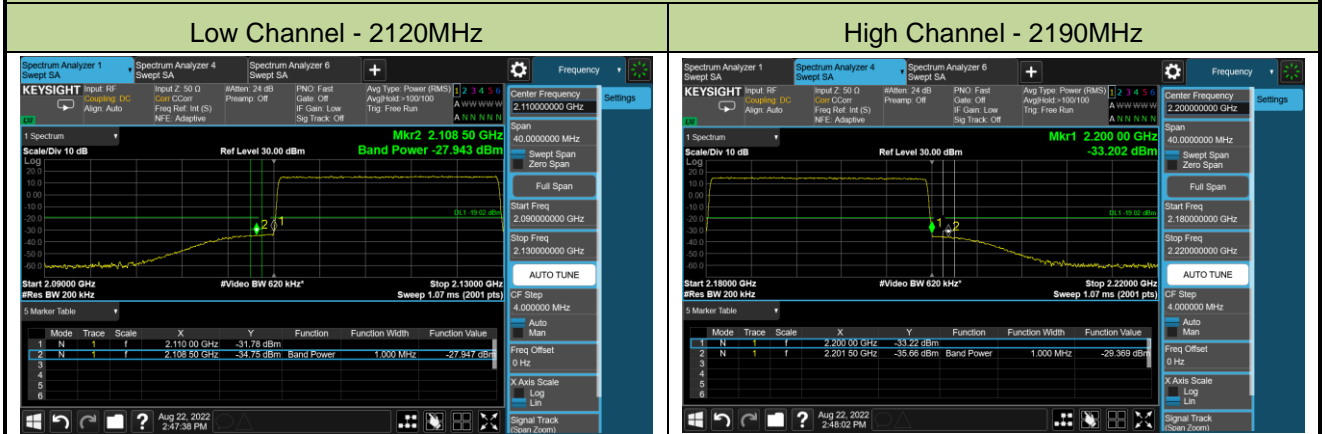

#### 20 + GAP50 + 20MHz Channel Bandwidth - Ant 2

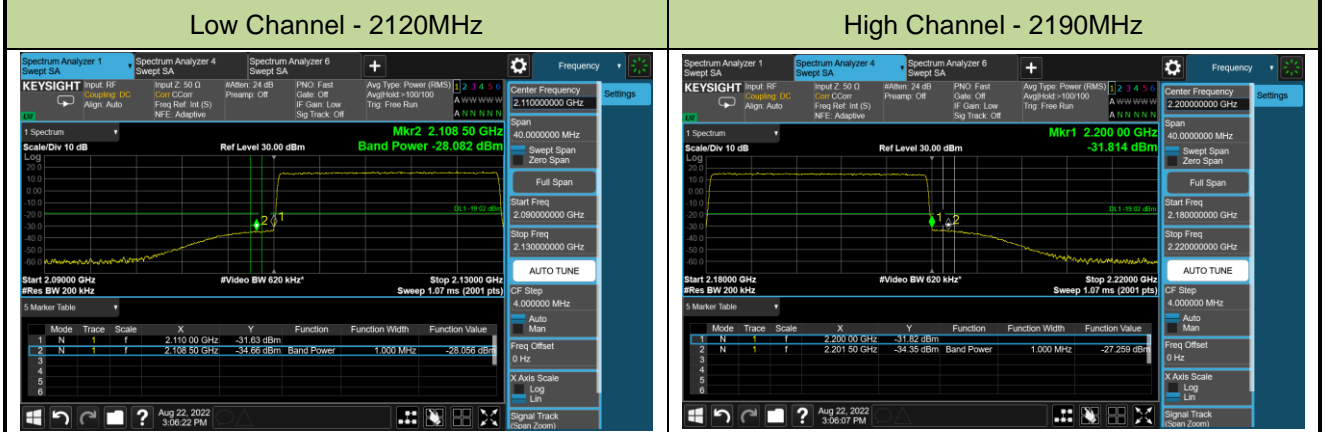

#### 20 + GAP50 + 20MHz Channel Bandwidth - Ant 3


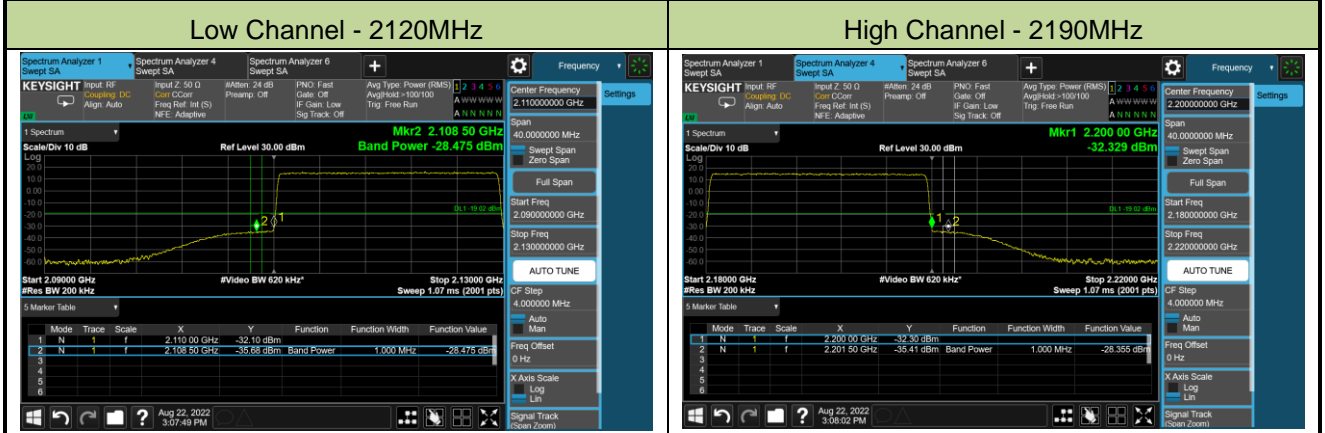




20 + GAP50 + 20MHz Channel Bandwidth - Ant 4

Low Channel - 2120MHz


High Channel - 2190MHz

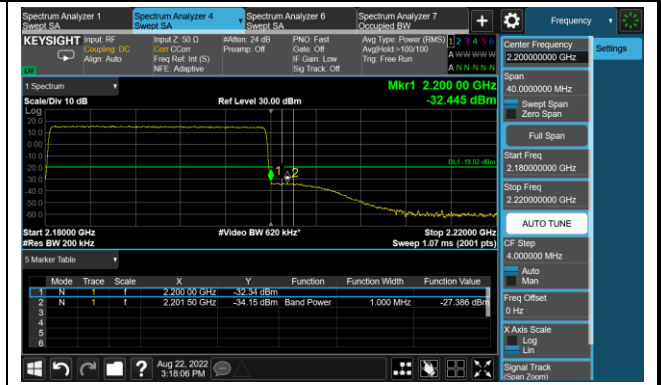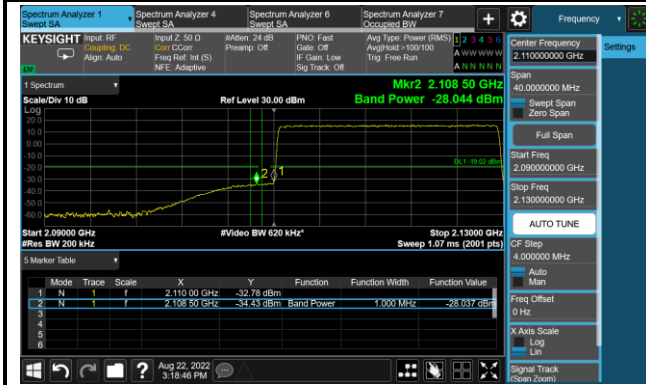

#### A.4 Conducted Spurious Emissions Test Result

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2022/08/21 ~ 2022/08/23	Test Configuration	n66, 20 + GAP50 + 20

Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
2120 + 2190	30 ~ 1000	-62.996	≤ -19.02	Pass
	1000 ~ 22000	-44.636	≤ -19.02	Pass

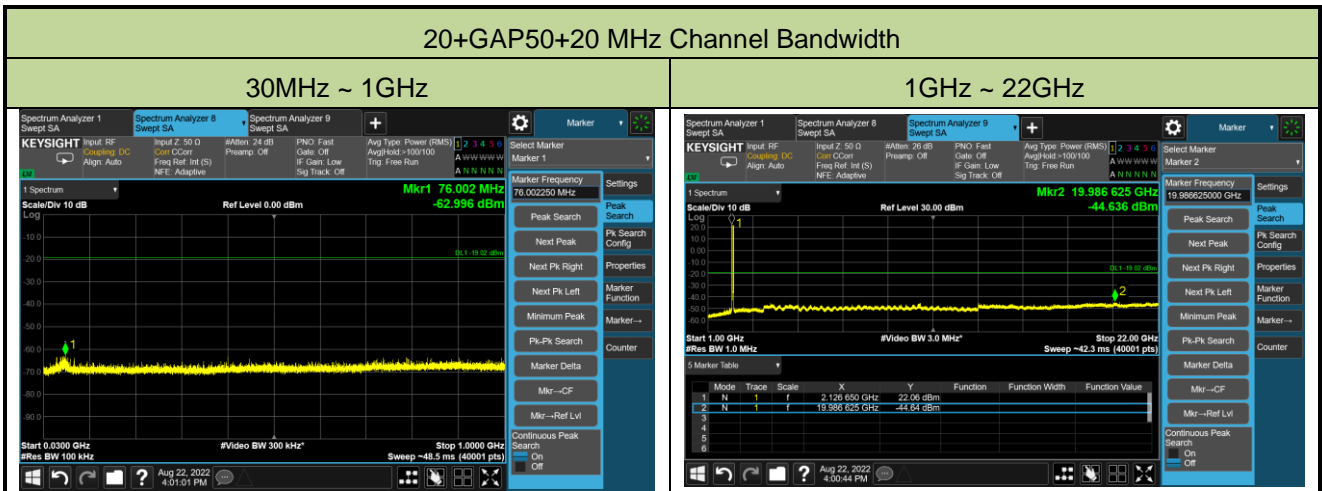

Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

## **Appendix B - Test Setup Photograph**

Refer to "2208RSU051-UT" file.

## Appendix C - EUT Photograph

Refer to "2208RSU051-UE" file.