



Appendix A. Test Result of AC Power Line Conducted Emission

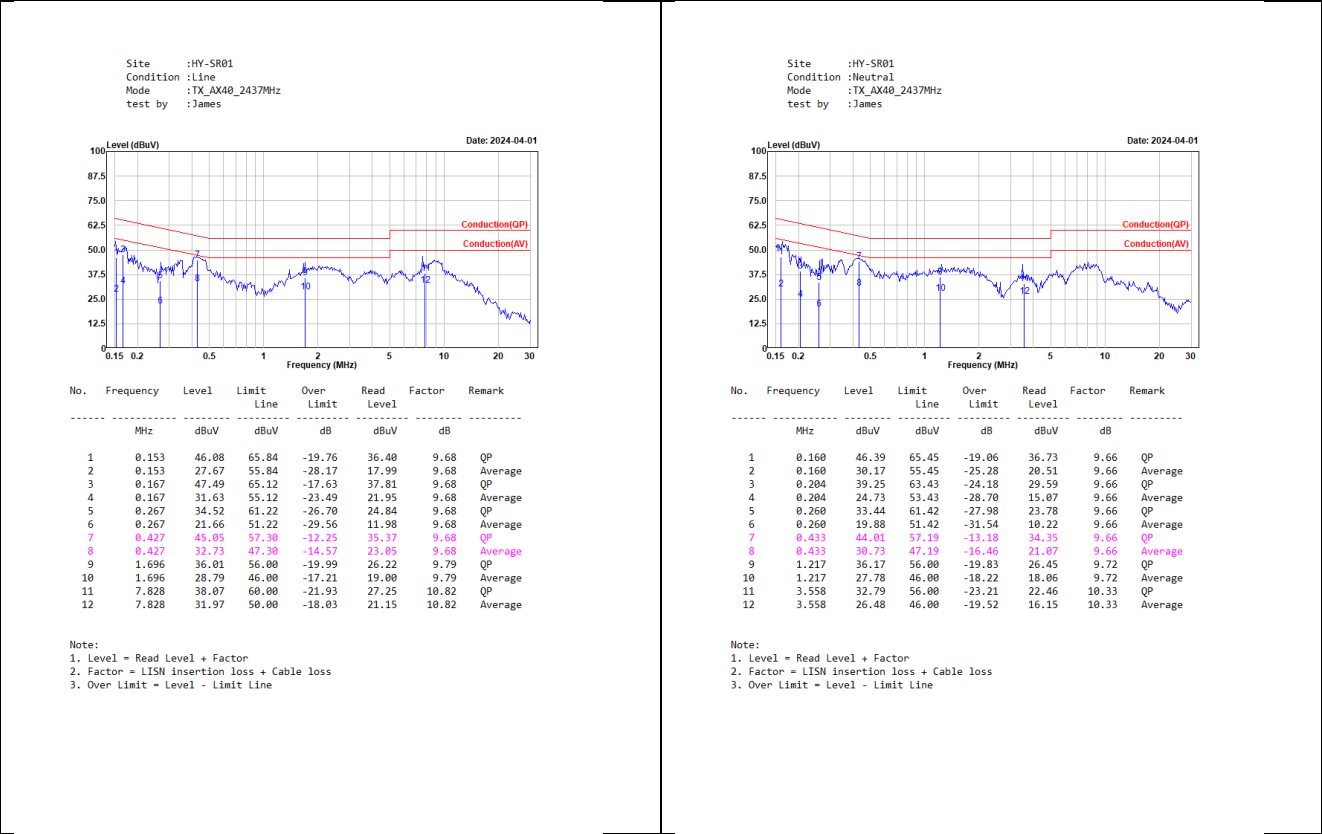


Appendix B. 6 dB Bandwidth

Modulation	Chain	Frequency (MHz)	Measured Value (kHz)	Required Limit (kHz)	Result
802.11b	A	2412	8032	>500	Pass
		2437	8551	>500	Pass
		2462	8072	>500	Pass
	B	2412	8072	>500	Pass
		2437	8072	>500	Pass
		2462	7552	>500	Pass
802.11g	A	2412	16304	>500	Pass
		2437	16304	>500	Pass
		2462	16304	>500	Pass
	B	2412	16264	>500	Pass
		2437	15704	>500	Pass
		2462	16304	>500	Pass
802.11ax (20 MHz)	A	2412	18781	>500	Pass
		2437	18262	>500	Pass
		2462	18062	>500	Pass
	B	2412	19061	>500	Pass
		2437	18342	>500	Pass
		2462	15185	>500	Pass
802.11ax (40 MHz)	A	2422	35085	>500	Pass
		2437	35085	>500	Pass
		2452	35005	>500	Pass
	B	2422	37403	>500	Pass
		2437	35085	>500	Pass
		2452	35564	>500	Pass


802.11b / 2462MHz / Chain B

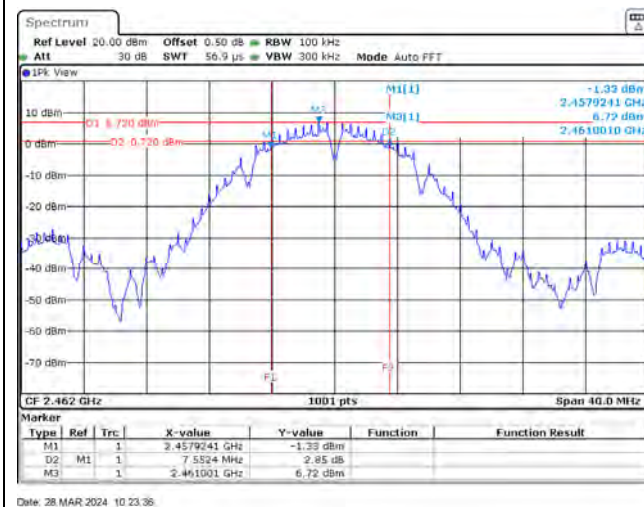


802.11g / 2437MHz / Chain B

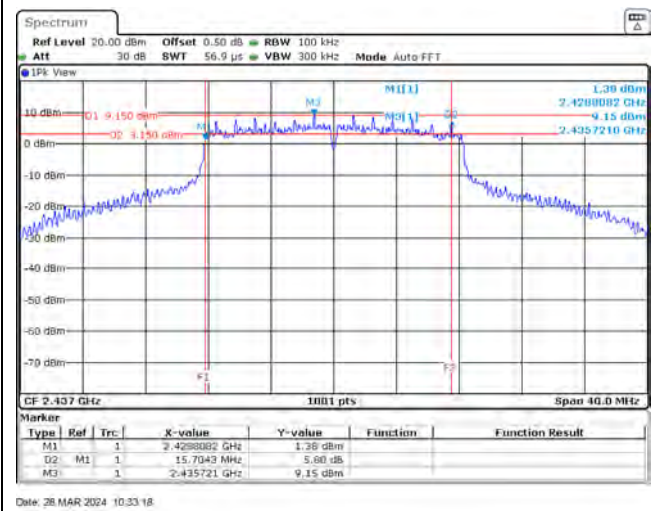

802.11ax (20 MHz) / 2462MHz / Chain B

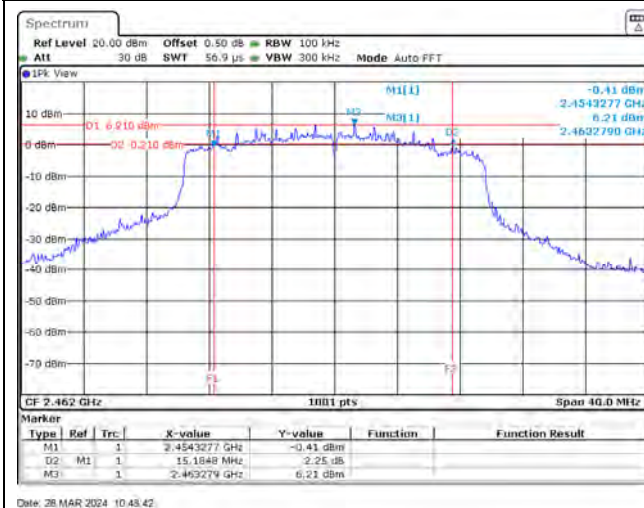

802.11ax (40 MHz) / 2452MHz / Chain A

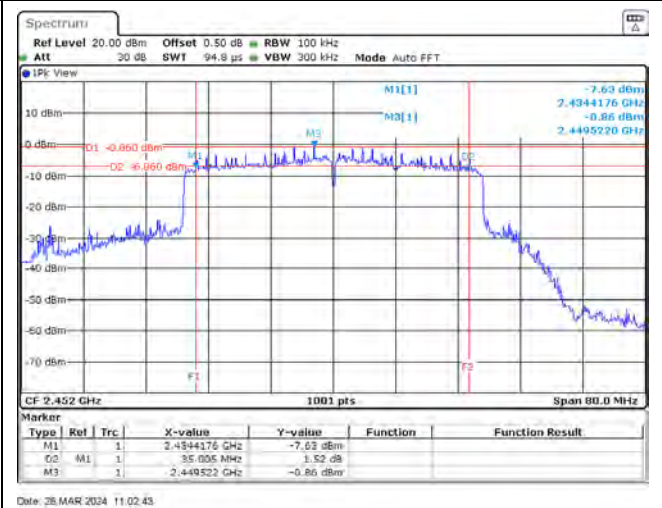

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	2412	15.72	15.95	18.85	<30	Pass
	2437	16.35	16.03	19.20	<30	Pass
	2462	15.34	15.86	18.62	<30	Pass
802.11g	2412	16.66	16.96	19.82	<30	Pass
	2437	20.96	20.64	23.81	<30	Pass
	2462	18.07	18.43	21.26	<30	Pass
802.11ax (20 MHz)	2412	15.98	16.22	19.11	<30	Pass
	2437	20.66	20.34	23.51	<30	Pass
	2462	17.13	17.51	20.33	<30	Pass
802.11ax (40 MHz)	2422	14.85	15.26	18.07	<30	Pass
	2437	17.39	17.22	20.32	<30	Pass
	2452	13.67	13.55	16.62	<30	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Beamforming

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	12.97	13.21	16.10	<30	Pass
	2437	17.65	17.33	20.50	<30	Pass
	2462	14.12	14.50	17.32	<30	Pass
802.11ax (40 MHz)	2422	11.84	12.25	15.06	<30	Pass
	2437	14.38	14.21	17.31	<30	Pass
	2452	10.66	10.54	13.61	<30	Pass


Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Chain	Measured Value (dBm)	Duty factor (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11b	2412	A	-11.810	0.000	-8.446	≤ 8	Pass
		B	-11.130				
	2437	A	-11.070	0.000	-8.030	≤ 8	Pass
		B	-11.010				
	2462	A	-11.700	0.000	-8.422	≤ 8	Pass
		B	-11.180				
802.11g	2412	A	-13.110	0.201	-9.673	≤ 8	Pass
		B	-12.670				
	2437	A	-8.520	0.201	-5.427	≤ 8	Pass
		B	-8.760				
	2462	A	-10.360	0.201	-7.507	≤ 8	Pass
		B	-11.110				
802.11ax (20 MHz)	2412	A	-15.110	0.248	-11.17	≤ 8	Pass
		B	-13.840				
	2437	A	-10.260	0.248	-6.95	≤ 8	Pass
		B	-10.160				
	2462	A	-13.510	0.248	-9.89	≤ 8	Pass
		B	-12.820				
802.11ax (40 MHz)	2422	A	-18.290	0.455	-14.26	≤ 8	Pass
		B	-17.230				
	2437	A	-14.600	0.455	-11.45	≤ 8	Pass
		B	-15.260				
	2452	A	-18.360	0.455	-15.37	≤ 8	Pass
		B	-19.360				

Note: Total PSD = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.


802.11b / 2437MHz / Chain B

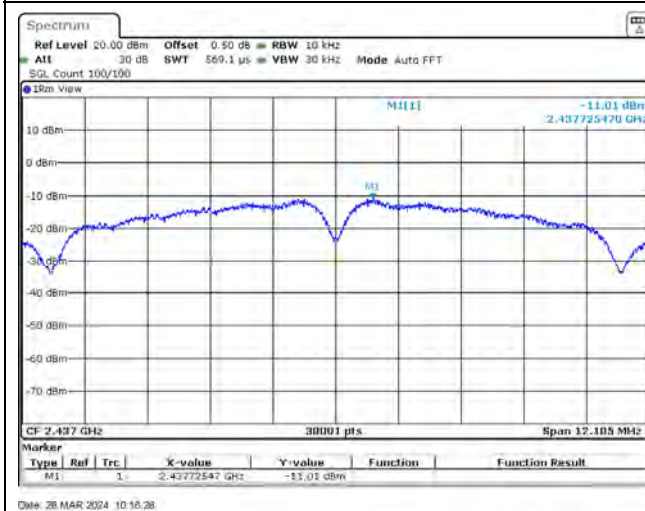


802.11g / 2437MHz / Chain A

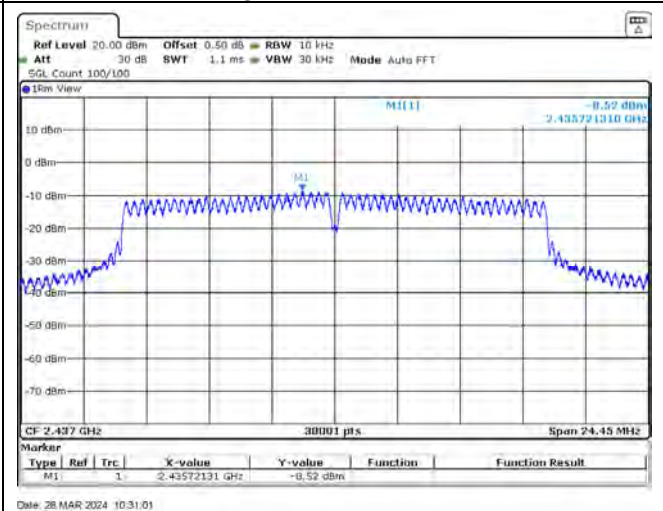


802.11ax (20 MHz) / 2437MHz / Chain B

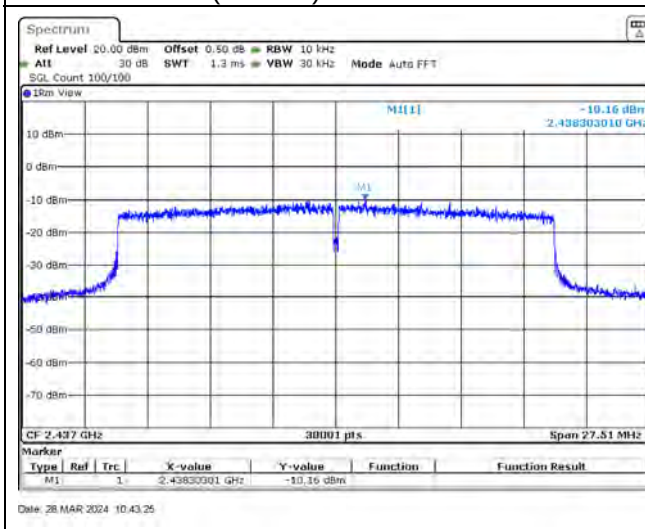


802.11ax (40 MHz) / 2437MHz / Chain A

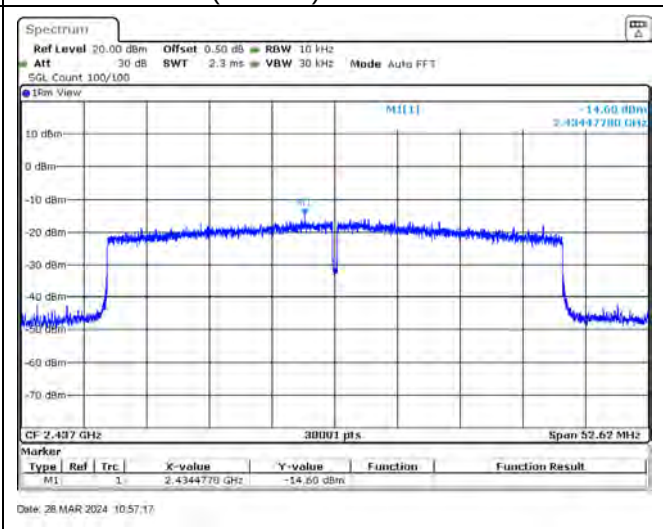

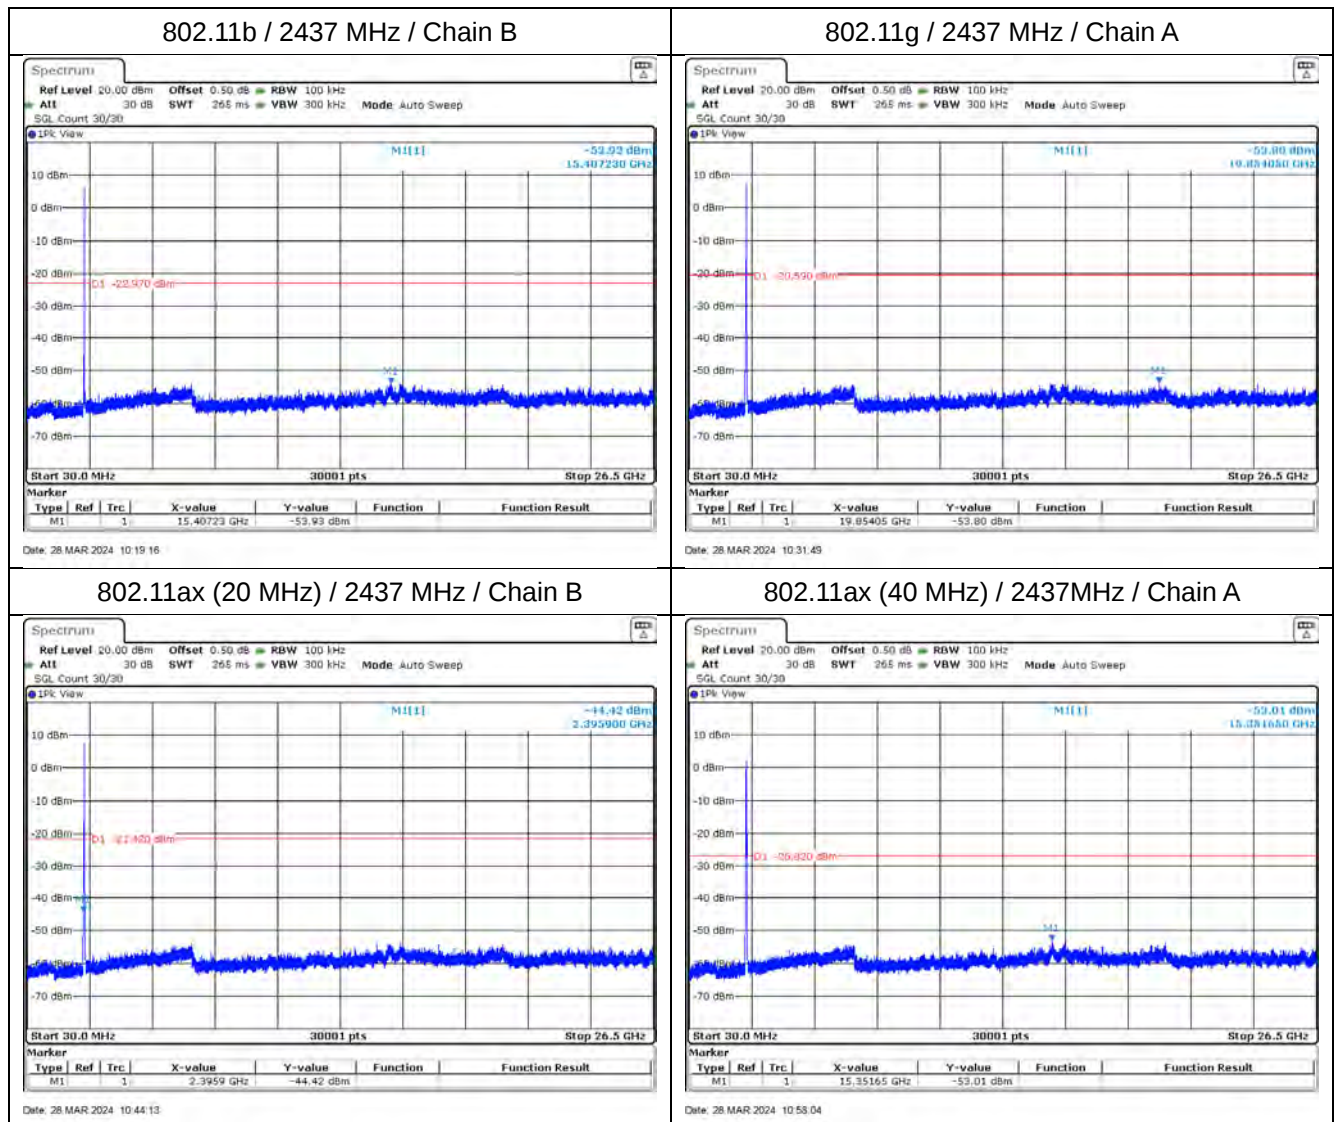
Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
802.11b	> 20	PASS
802.11g	> 20	PASS
802.11ax (20MHz)	> 20	PASS
802.11ax (40MHz)	> 20	PASS


802.11b / 2412 MHz / Chain A

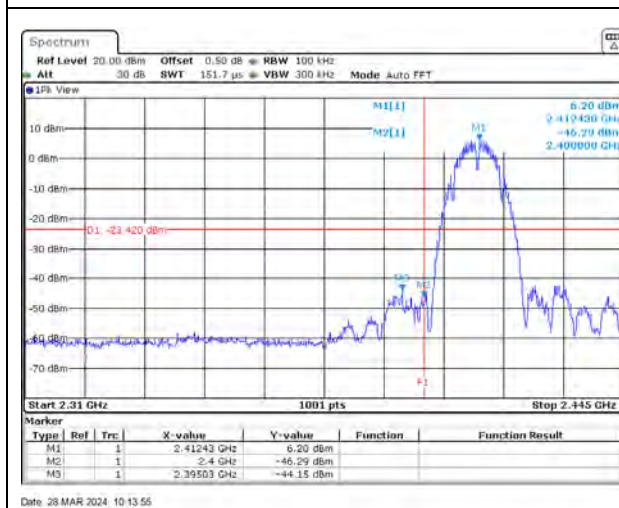


802.11b / 2412 MHz / Chain B

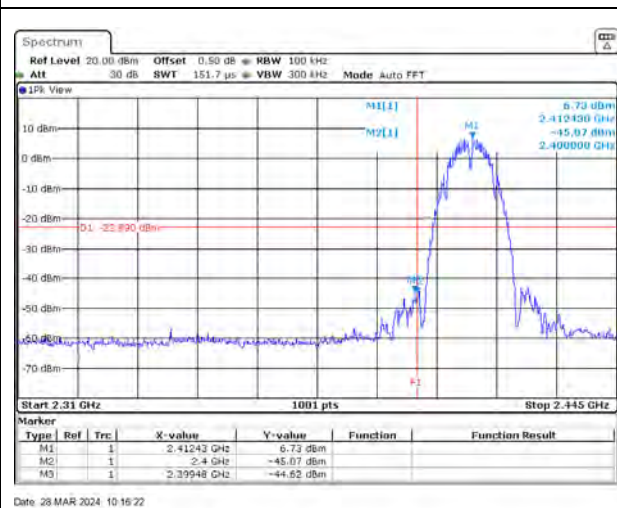


802.11b / 2462 MHz / Chain A

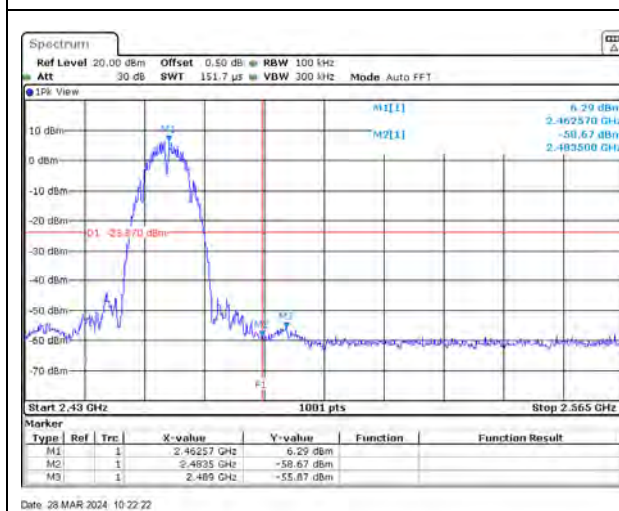

802.11b / 2462 MHz / Chain B

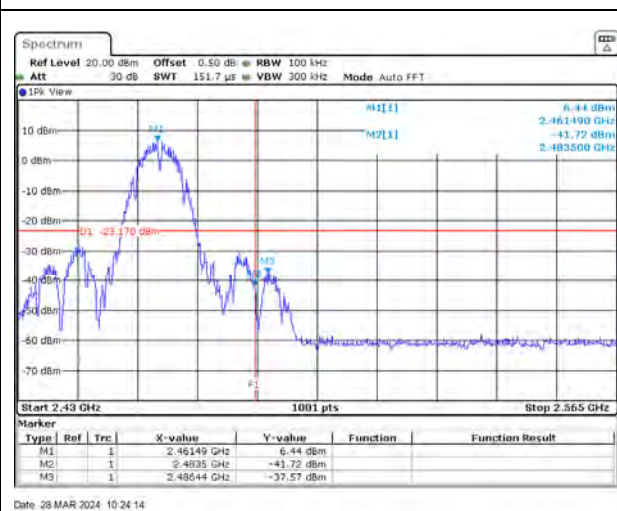


802.11g / 2412 MHz / Chain A

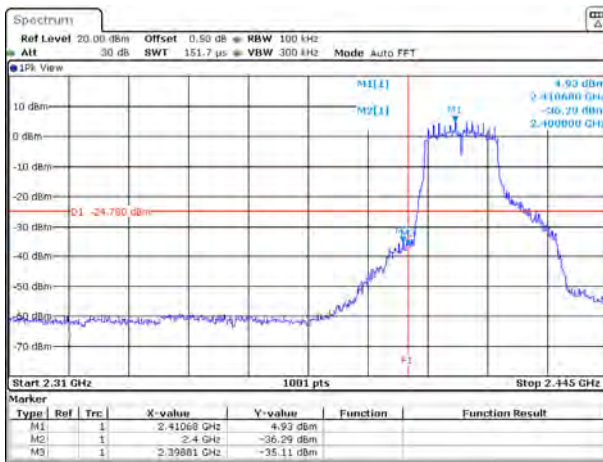


Date: 28 MAR 2024 10:26:57

802.11g / 2412 MHz / Chain B

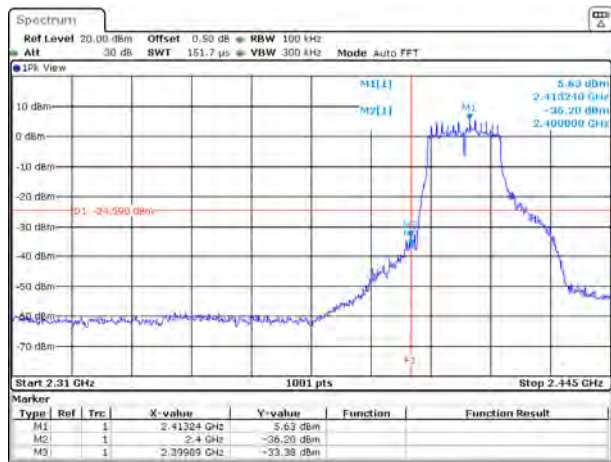


Date: 28 MAR 2024 10:27:05

802.11g / 2462 MHz / Chain A

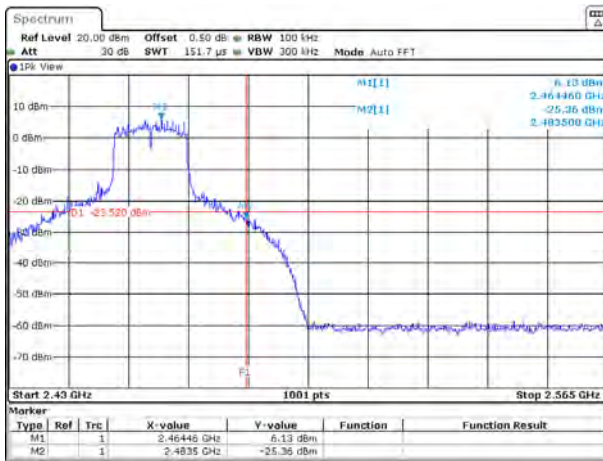


Date: 28 MAR 2024 10:37:47

802.11g / 2462 MHz / Chain B

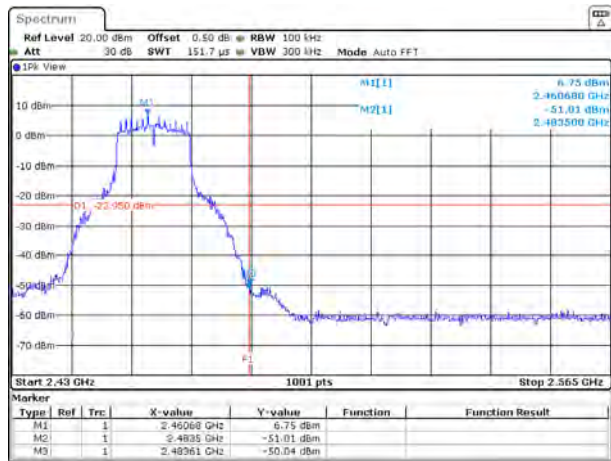


Date: 28 MAR 2024 10:35:56

802.11ax (20 MHz) / 2412 MHz / Chain A

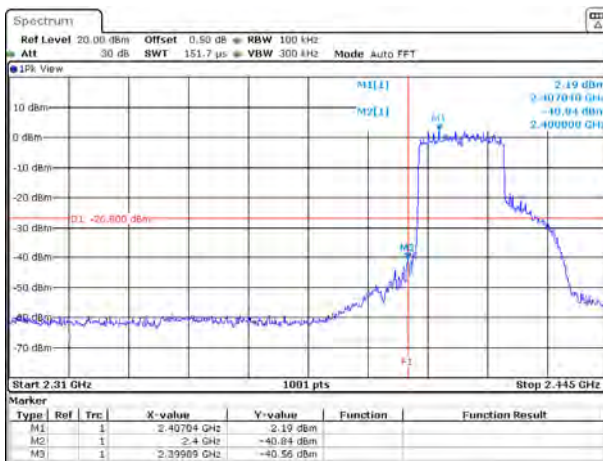


Date: 28 MAR 2024 10:40:00

802.11ax (20 MHz) / 2412 MHz / Chain B

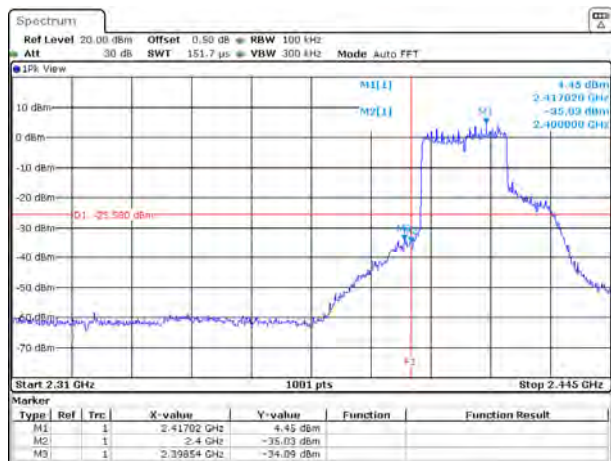


Date: 28 MAR 2024 10:41:47

802.11ax (20 MHz) / 2462 MHz / Chain A

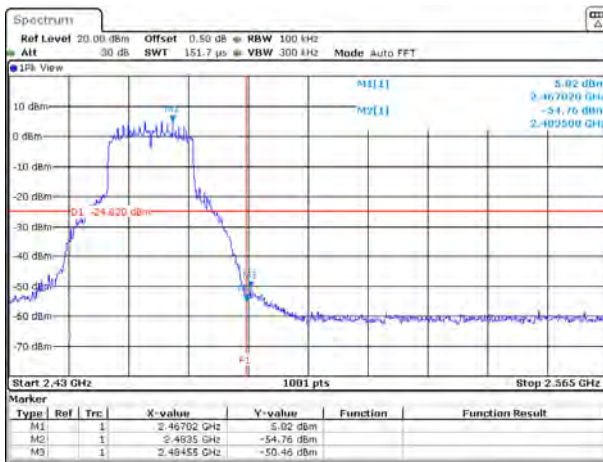


Date: 28 MAR 2024 10:47:27

802.11ax (20 MHz) / 2462 MHz / Chain B

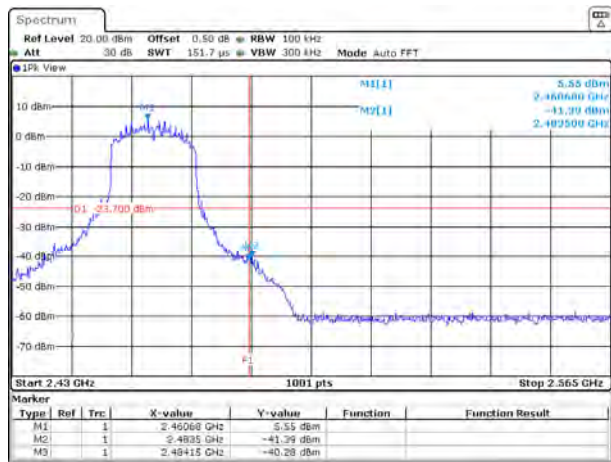


Date: 28 MAR 2024 10:49:19

802.11ax (40 MHz) / 2422 MHz / Chain A

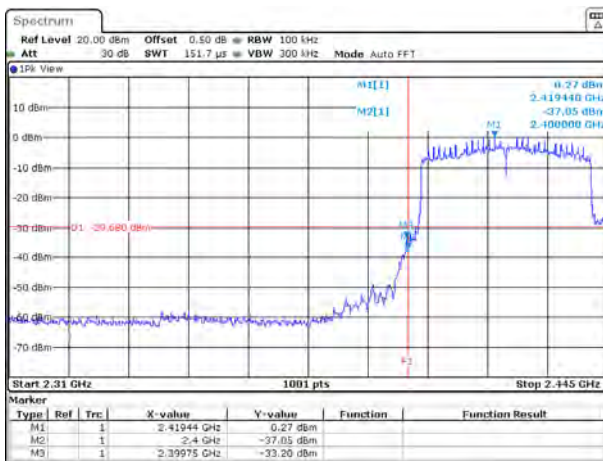


Date: 28 MAR 2024 10:55:49

802.11ax (40 MHz) / 2422 MHz / Chain B

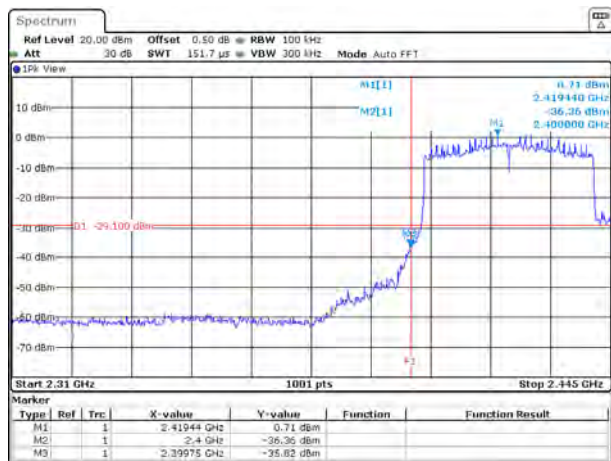


Date: 28 MAR 2024 10:53:25

802.11ax (40 MHz) / 2452 MHz / Chain A

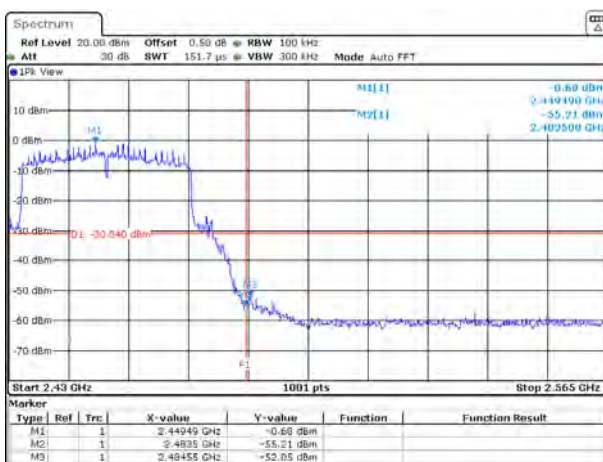

Date: 28 MAR 2024 11:03:21


802.11ax (40 MHz) / 2452 MHz / Chain B

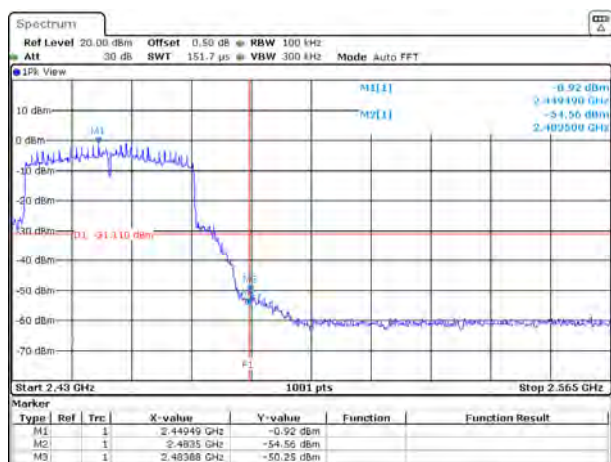

Date: 28 MAR 2024 11:01:18

Appendix F. Test Result of Radiated Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Peter

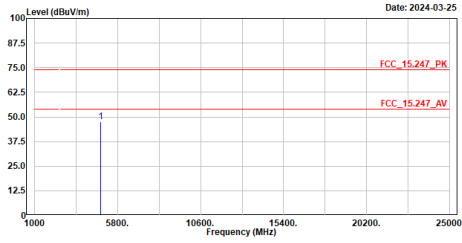


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	47.56	74.00	-26.44	61.28	-13.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2412MHz
TEST BY :Peter

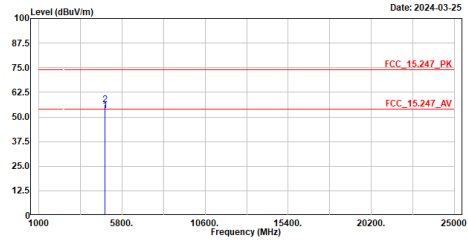


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	53.39	54.00	-0.61	67.11	-13.72	Average
2	4824.000	56.33	74.00	-17.67	70.05	-13.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Peter

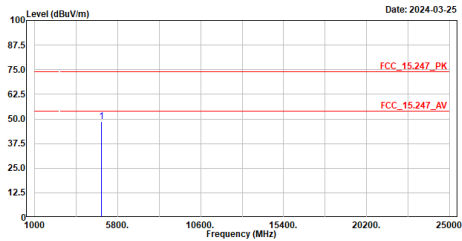


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	48.82	74.00	-25.18	62.40	-13.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Peter

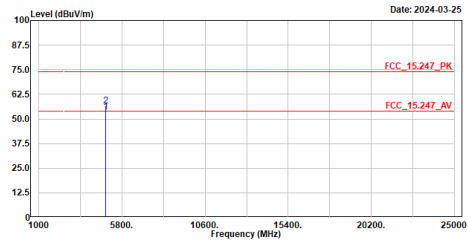


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	53.43	54.00	-0.57	67.01	-13.58	Average
2	4874.000	56.49	74.00	-17.51	70.07	-13.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Peter

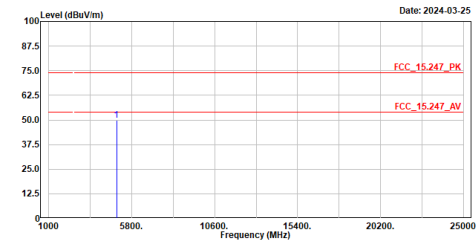

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	49.82	74.00	-24.18	63.17	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Peter

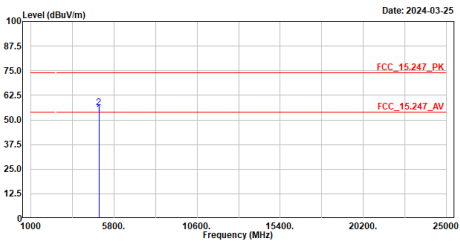

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	53.35	74.00	-20.65	66.70	-13.35	Average
2	4924.000	56.41	74.00	-17.59	69.76	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

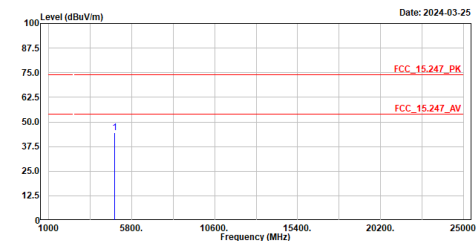

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	44.60	74.00	-29.40	58.32	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
TEST BY :Caster

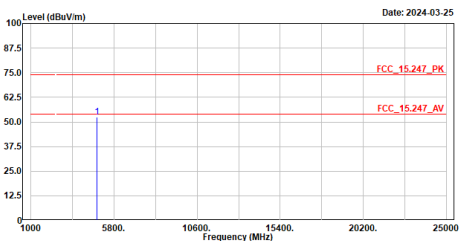

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	52.28	74.00	-21.72	66.00	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

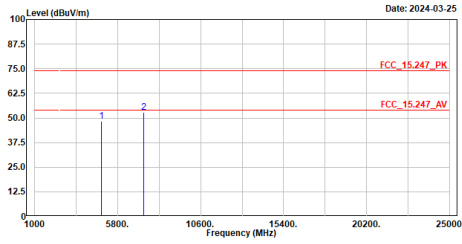


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	48.21	74.00	-25.79	61.79	-13.58	Peak
2	7311.000	52.78	74.00	-21.22	62.20	-9.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

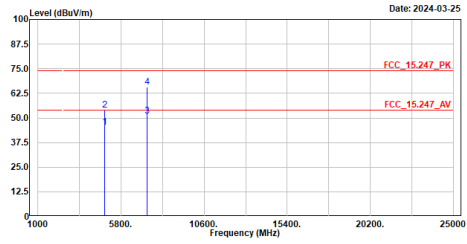


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	45.44	54.00	-8.56	59.02	-13.58	Average
2	4874.000	54.04	74.00	-19.96	67.62	-13.58	Peak
3	7311.000	50.89	54.00	-3.11	60.31	-9.42	Average
4	7311.000	65.62	74.00	-8.38	75.04	-9.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

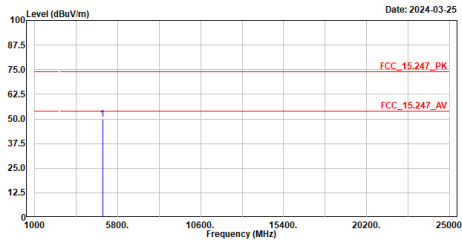


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	49.68	74.00	-24.32	63.03	-13.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster

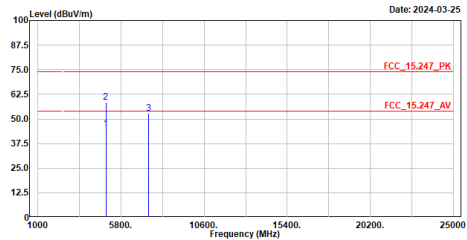


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	45.09	54.00	-8.91	58.44	-13.35	Average
2	4924.000	58.41	74.00	-15.59	71.76	-13.35	Peak
3	7386.000	52.76	74.00	-21.24	62.28	-9.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

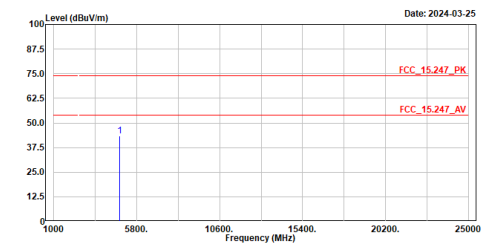

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	43.55	74.00	-30.45	57.27	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

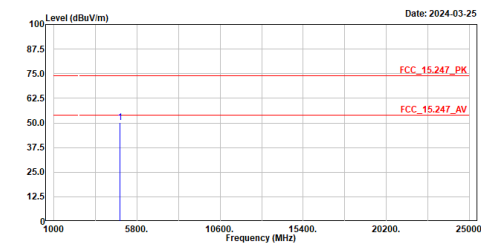

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	50.21	74.00	-23.79	63.93	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

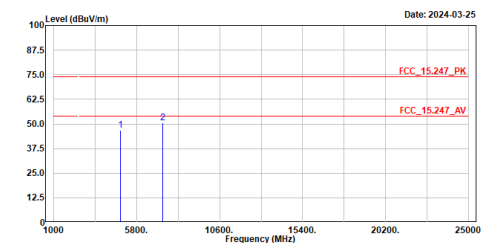

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	46.73	74.00	-27.27	60.31	-13.58	Peak
2	7311.000	50.43	74.00	-23.57	59.85	-9.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

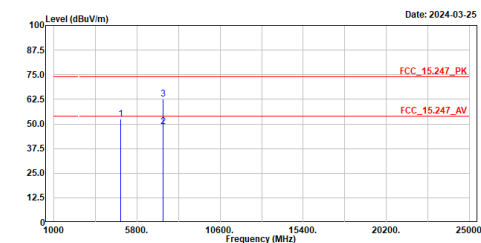

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	52.37	74.00	-21.63	65.95	-13.58	Peak
2	7311.000	48.54	54.00	-5.46	57.96	-9.42	Average
3	7311.000	62.69	74.00	-11.31	72.11	-9.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

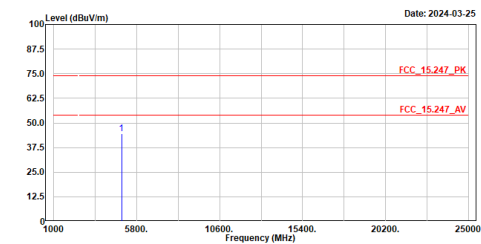

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	44.42	74.00	-29.58	57.77	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

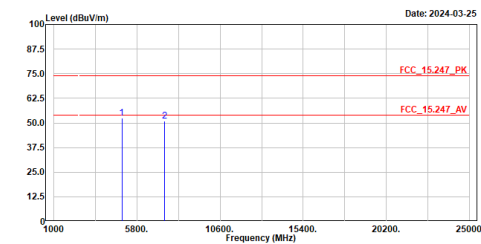

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	52.64	74.00	-21.36	65.99	-13.35	Peak
2	7386.000	51.02	74.00	-22.98	60.54	-9.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

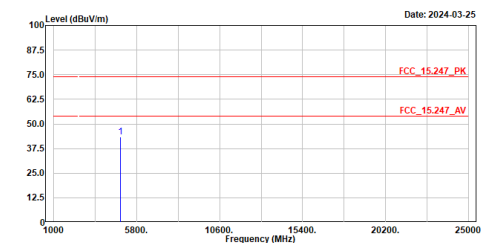

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	43.24	74.00	-30.76	56.90	-13.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

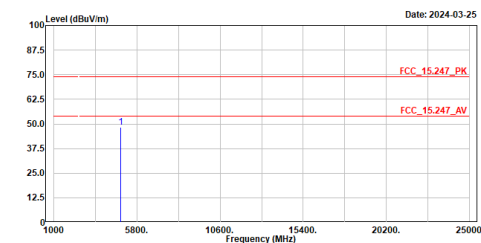

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	48.16	74.00	-25.84	61.82	-13.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

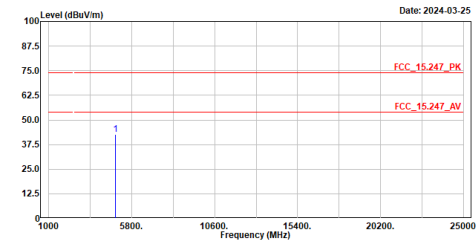

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	42.50	74.00	-31.50	56.08	-13.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

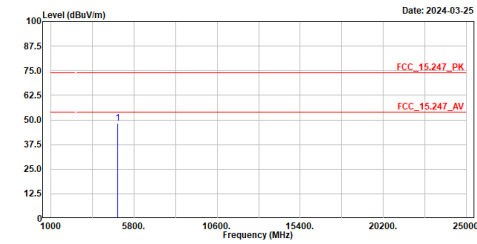

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	48.21	74.00	-25.79	61.79	-13.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

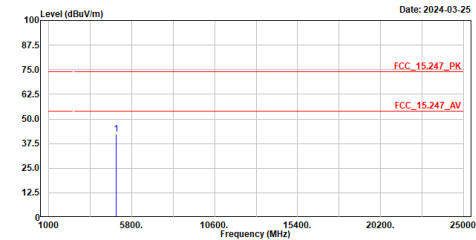

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	42.27	74.00	-31.73	55.75	-13.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

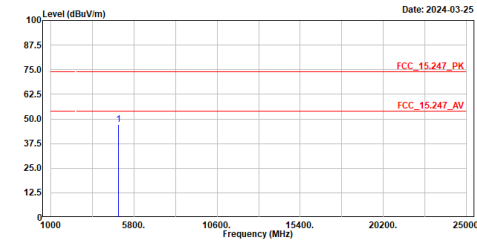

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	47.03	74.00	-26.97	60.51	-13.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

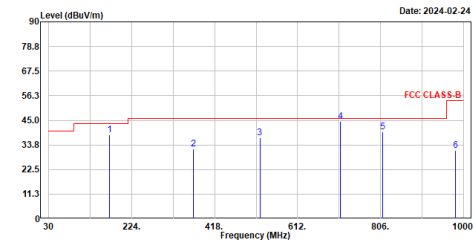

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	171.620	38.31	43.50	-5.19	62.75	-24.44	QP
2	368.530	31.94	46.00	-14.06	53.20	-21.26	QP
3	523.730	36.85	46.00	-9.15	54.38	-17.53	QP
4	712.880	44.54	46.00	-1.46	58.31	-13.77	QP
5	811.820	39.80	46.00	-6.20	52.24	-12.44	QP
6	981.570	31.33	54.00	-22.67	42.06	-10.73	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

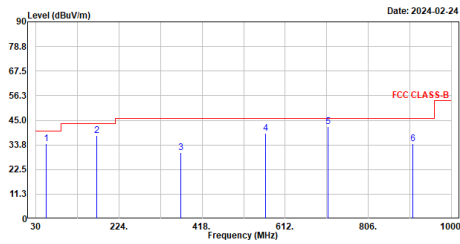

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	53.280	34.46	40.00	-5.54	57.88	-23.42	QP
2	171.620	38.17	43.50	-5.33	62.61	-24.44	QP
3	368.530	30.19	46.00	-15.81	51.45	-21.26	QP
4	565.440	39.04	46.00	-6.96	55.48	-16.44	QP
5	712.880	42.17	46.00	-3.83	55.94	-13.77	QP
6	909.790	34.18	46.00	-11.82	45.51	-11.33	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Peter

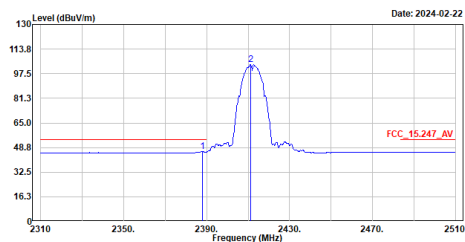

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	46.01	54.00	-7.99	15.52	30.49	Average
2	2411.200	103.54	-----	-----	73.20	30.34	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Peter

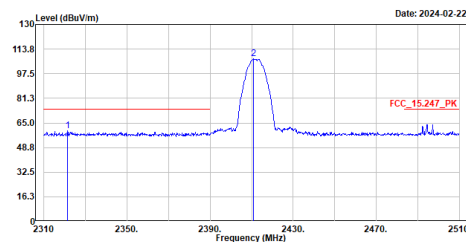

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.400	59.61	74.00	-14.39	29.20	30.41	Peak
2	2411.000	107.20	-----	-----	76.86	30.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Peter

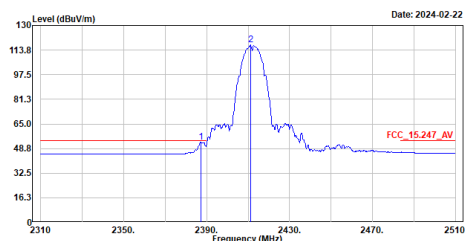

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.200	52.86	54.00	-1.14	22.38	30.48	Average
2	2411.200	117.03	-----	-----	86.69	30.34	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Peter

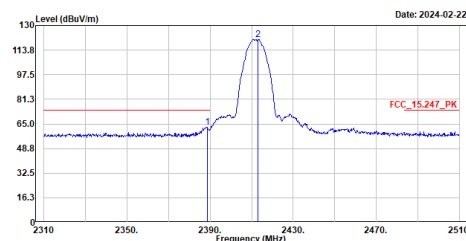

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	62.88	74.00	-11.12	32.38	30.50	Peak
2	2413.200	120.75	-----	-----	90.41	30.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
TEST BY :Caster

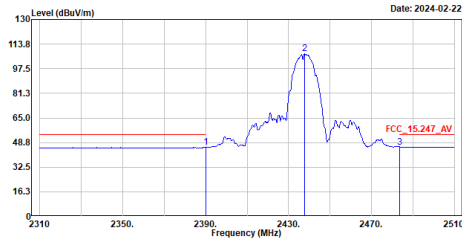

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
TEST BY :Caster

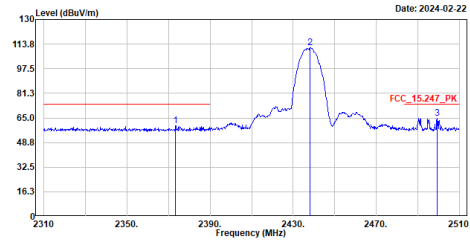

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2437MHz
TEST BY :Caster

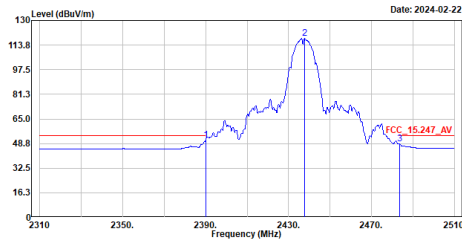

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2437MHz
TEST BY :Caster

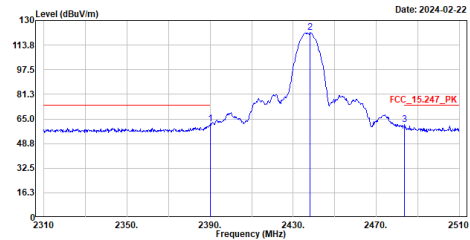

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Peter

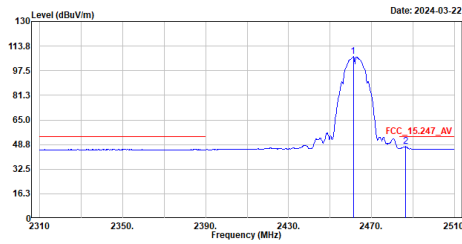


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	106.77	-----	-----	76.46	30.31	Average
2	2486.400	47.36	54.00	-6.64	16.95	30.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Peter

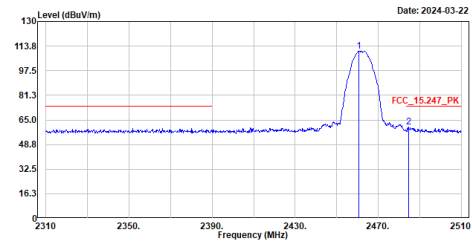


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	110.56	-----	-----	80.25	30.31	Peak
2	2484.600	60.16	74.00	-13.84	29.76	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Peter

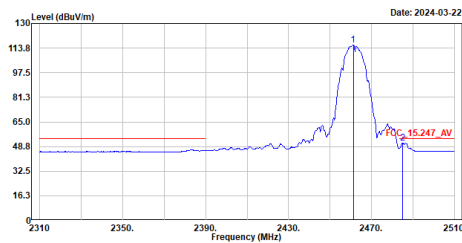


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	115.83	-----	-----	85.52	30.31	Average
2	2485.000	50.84	54.00	-3.16	20.44	30.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Peter

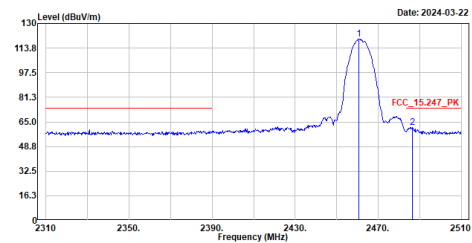


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	119.86	-----	-----	89.55	30.31	Peak
2	2486.400	61.46	74.00	-12.54	31.05	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Peter

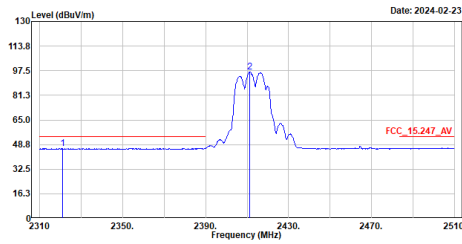


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.000	46.34	54.00	-7.66	15.93	30.41	Average
2	2411.200	96.69	-----	-----	66.35	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Peter

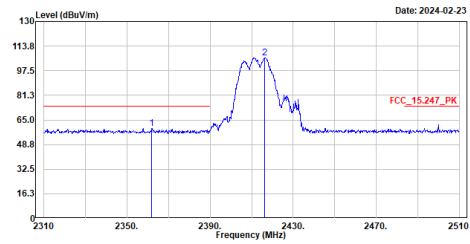


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.000	59.54	74.00	-14.46	29.09	30.45	Peak
2	2416.200	105.91	-----	-----	75.57	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Peter

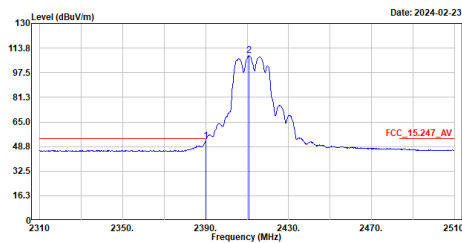


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.37	54.00	-1.63	21.86	30.51	Average
2	2410.000	108.88	-----	-----	78.54	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Peter

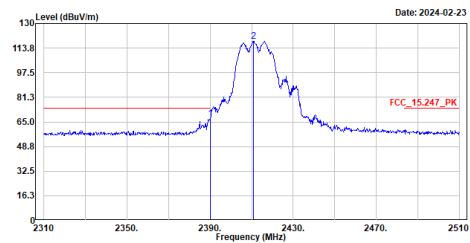


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	67.36	74.00	-6.64	36.85	30.51	Peak
2	2411.000	118.40	-----	-----	88.06	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
TEST BY :Peter

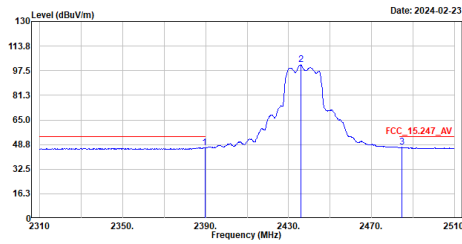

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	46.61	54.00	-7.39	16.10	30.51	Average
2	2436.000	101.45	54.00	-7.05	16.55	30.40	Average
3	2484.600	46.95	54.00	-7.05	16.55	30.40	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
TEST BY :Peter

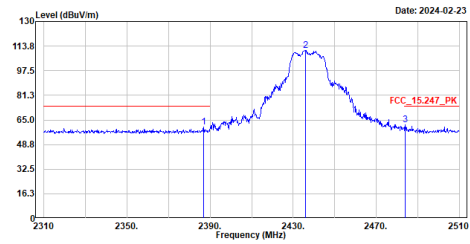

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.000	60.34	74.00	-13.66	29.87	30.47	Peak
2	2436.000	110.83	74.00	-12.20	31.42	30.38	Peak
3	2484.000	61.80	74.00	-12.20	31.42	30.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2437MHz
TEST BY :Peter

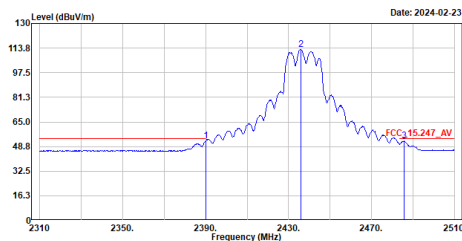

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.27	54.00	-1.73	21.76	30.51	Average
2	2436.000	112.78	54.00	-1.75	21.84	30.41	Average
3	2485.600	52.25	54.00	-1.75	21.84	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2437MHz
TEST BY :Peter

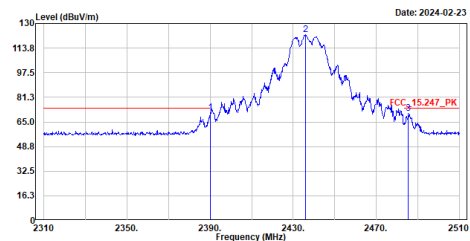

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	70.90	74.00	-3.10	40.39	30.51	Peak
2	2436.000	122.49	74.00	-3.46	40.14	30.40	Peak
3	2485.400	70.54	74.00	-3.46	40.14	30.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Peter

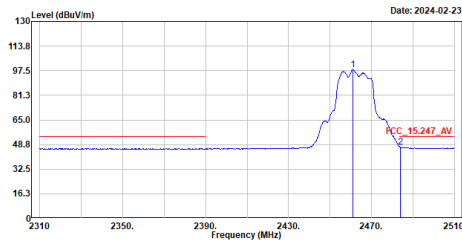


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	98.10	-----	-----	67.79	30.31	Average
2	2483.800	47.25	54.00	-6.75	16.87	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Peter

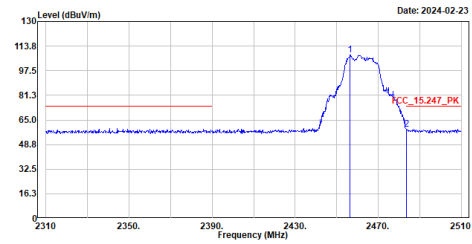


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2456.400	108.12	-----	-----	77.86	30.26	Peak
2	2483.600	58.96	74.00	-15.04	28.58	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Peter

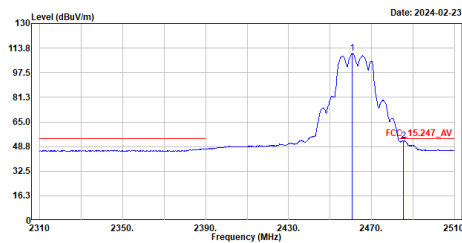


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	110.16	-----	-----	79.85	30.31	Average
2	2485.200	52.71	54.00	-1.29	22.31	30.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Peter

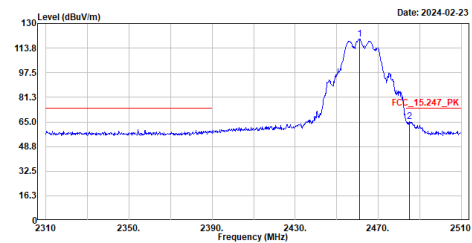


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	119.88	-----	-----	89.57	30.31	Peak
2	2485.000	65.21	74.00	-8.79	34.81	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

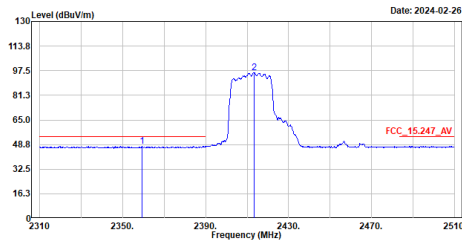


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2359.200	47.55	54.00	-6.45	17.07	30.48	Average
2	2413.400	96.34	-----	-----	66.00	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

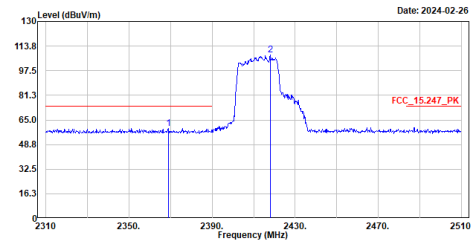


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2369.000	59.32	74.00	-14.68	28.93	30.39	Peak
2	2418.000	107.86	-----	-----	77.51	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

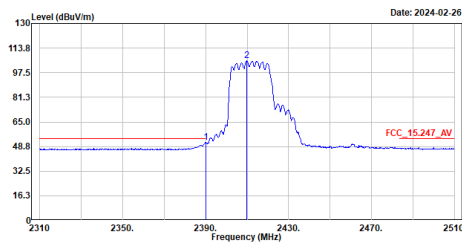


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	51.68	54.00	-2.32	21.17	30.51	Average
2	2409.800	105.27	-----	-----	74.94	30.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

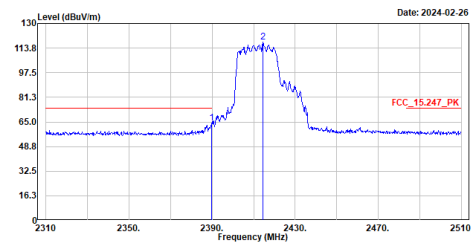


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	64.12	74.00	-9.88	33.61	30.51	Peak
2	2414.600	117.64	-----	-----	87.30	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

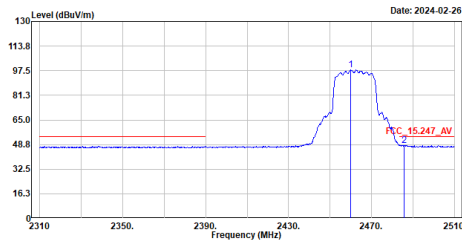


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.000	98.16	-----	-----	67.86	30.30	Average
2	2485.000	48.20	54.00	-5.80	17.79	30.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

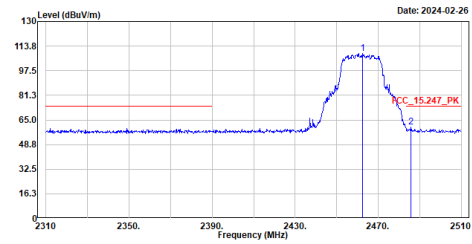


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2462.000	109.14	-----	-----	78.83	30.31	Peak
2	2485.000	60.28	74.00	-13.72	29.87	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

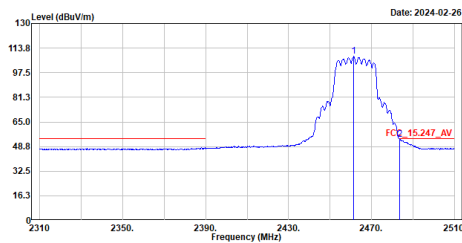


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.400	108.21	-----	-----	77.99	30.31	Average
2	2483.600	53.40	54.00	-0.60	23.02	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

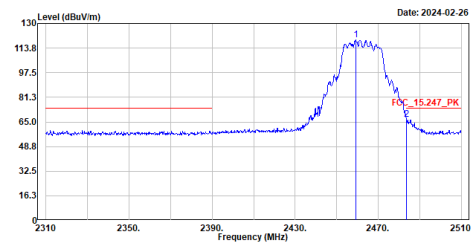


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.200	119.08	-----	-----	88.79	30.29	Peak
2	2483.600	66.78	74.00	-7.22	36.40	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

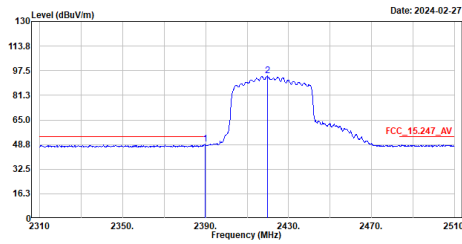


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	48.91	54.00	-5.09	18.40	30.51	Average
2	2419.800	94.05	-----	-----	63.70	30.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

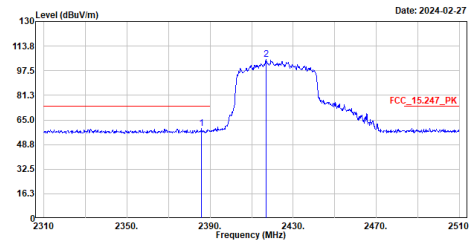


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.000	59.27	74.00	-14.73	28.81	30.46	Peak
2	2417.000	105.19	-----	-----	74.85	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

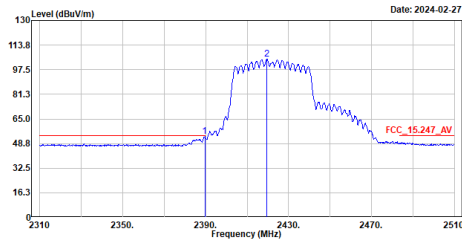


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.600	53.33	54.00	-0.67	22.82	30.51	Average
2	2419.400	104.66	-----	-----	74.31	30.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

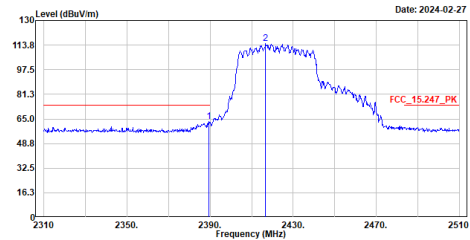


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.400	63.16	74.00	-10.84	32.66	30.50	Peak
2	2416.800	114.63	-----	-----	84.29	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

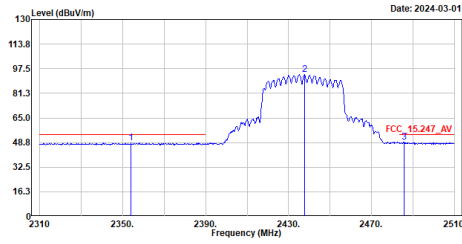

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2354.000	48.44	54.00	-5.56	17.92	30.52	Average
2	2437.000	93.50	54.00	39.50	63.21	30.29	Average
3	2485.600	49.07	54.00	-4.93	18.66	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

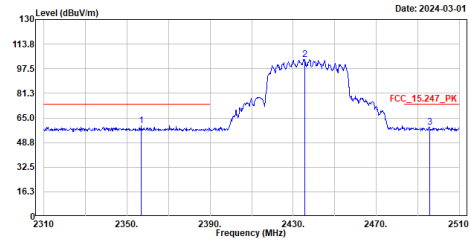

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2357.000	59.89	74.00	-14.11	29.39	30.50	Peak
2	2435.600	103.63	74.00	29.63	73.32	30.31	Peak
3	2495.600	58.79	74.00	-15.21	28.27	30.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
TEST BY :Caster

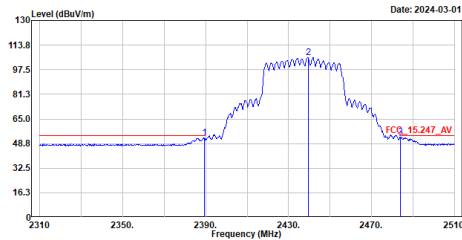

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.400	52.58	54.00	-1.42	22.08	30.50	Average
2	2439.400	105.48	54.00	51.48	75.20	30.28	Average
3	2484.000	53.05	54.00	-0.95	22.67	30.38	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
TEST BY :Caster

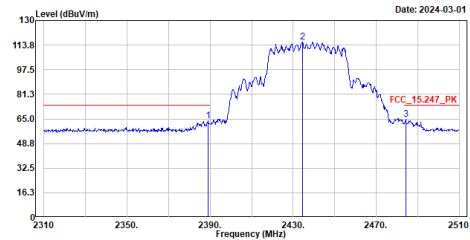

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.200	63.63	74.00	-10.37	33.13	30.50	Peak
2	2434.600	115.65	74.00	41.65	85.33	30.32	Peak
3	2484.200	64.91	74.00	-9.09	34.53	30.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

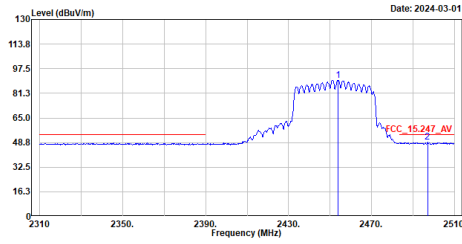


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.000	89.97	-----	-----	59.74	30.23	Average
2	2497.000	48.93	54.00	-5.07	18.39	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

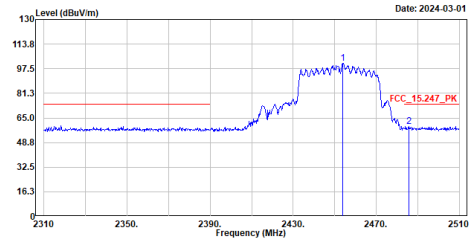


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.000	101.23	-----	-----	71.00	30.23	Peak
2	2485.600	59.48	74.00	-14.52	29.07	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

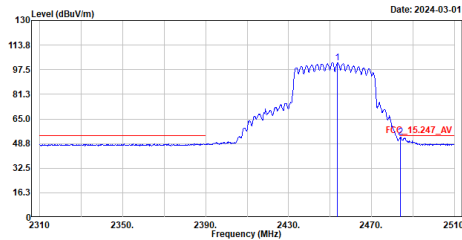


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	102.23	-----	-----	72.00	30.23	Average
2	2404.000	53.01	54.00	-0.99	22.63	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

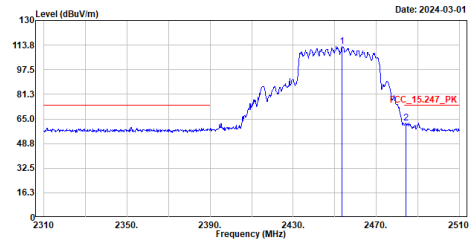

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	112.93	-----	-----	82.70	30.23	Peak
2	2404.200	62.34	74.00	-11.66	31.96	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.