

Test Report
Electromagnetic Compatibility

Test Report - Nr.: 07KFE007857-Q-FCC-02

Date: 2008-01-15

Type:	JA-80E
Description:	Hard wired keypad
Serial number:	0701664-005

Manufacturer:	Jablotron s.r.o.
Customer:	Jablotron s.r.o.
Address (Customer):	Pod Skalkou 33 CZ 646601 Jablonec nad Nisou Czech Republic

Test Laboratory:	Intertek Deutschland GmbH, Innovapark 20, D- 87600 Kaufbeuren
FCC registration number:	90714
Compiled by:	Marek Svoboda Technical Leader
Approved by:	R. Dressler Project Engineer

This test report consists of 18 pages. All measurement results exclusively refer to the equipment, which was tested.
Reproduction of this report except in its entirety is not permitted without written approval of Intertek Deutschland GmbH.

Table of Contents

1. General description.....	4
1.1. Product description	4
1.2. Related submittal(s) Grants.....	4
1.3. Test Methodology.....	4
1.4. Test Facility.....	4
1.5. List of exhibits	5
2. Measurements And Test Specifications.....	6
3. Description Of EUT	7
3.1. Configuration / Operating Conditions	7
3.2. Major Subassemblies Or Internal Peripherals.....	7
3.3. Peripheral Devices Used For Testing.....	7
3.4. Supply- And Interconnecting Cables	7
4. Test Results - Overview.....	8
5. Measurement results detailed.....	9
5.1. Duty cycle and Averaging factor.....	9
5.2. Radiated Emission 9 kHz – 1 GHz	9
5.3.1. <i>Field strength calculation.....</i>	9
5.3.2. <i>Normative references</i>	10
5.3.3. <i>Emission Test results</i>	11
6. Test setup Photo documentation.....	16
7. EUT Photo documentation	18
8. Technical specification.....	18
8.1. Block Diagram Of The EUT.....	18

8.2. Circuit Diagram Of The Layout.....	18
8.3. Instruction manual.....	18
8.4. Product Labelling	18

1. General description

1.1. Product description

The JA-80E is a component of Jablotron's Oasis 80 alarm system and is designed to control and program the system. It has a built-in proximity access card reader and allows the wiring up of a separate door detector. The keypad should be wired to the control panel.

The operating frequency of the card reader is $f = 125$ kHz. The card / tag is passive. The device is wire connected by means of OASIS bus to the control unit.

Antenna type : Internal, Integral

Duty cycle : no duty cycle, no periodic transmission.

1.2. Related submittal(s) Grants

This is application for certification of the transmitter.

No related devices are present.

1.3. Test Methodology

- The test setup and test was done according to: **ANSI C63.4: 2003**
American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- The test setup and test was done according to: **CISPR 22: 1998 + Corrigendum: 2003 + A1: 2000 + A2: 2003 and ANSI C63.4: 2003**
Compliance with CISPR 22 is being used to demonstrate conformity with FCC DoC requirements. This conforms with FCC Part 15.109(g).

The test results detailed in this report apply only to the JA-80E with the test setup described. Any modification such as a change, addition to or inclusion of another device into this product will require an additional evaluation.

The support equipment listed as part of the emission tests is required to properly exercise and test the device under test.

1.4. Test Facility

The test site was semi-anechoic chamber Intertek Germany (PM KF 1150). Measurement distance EUT – Antenna was $d = 3$ m.

1.5. List of exhibits

Following exhibits are delivered as separate pdf files. The name of file corresponds with description of exhibit with extension **.pdf**

EXHIBIT 1	Test setup photo documentation
EXHIBIT 2	External Photos
EXHIBIT 3	Internal Photos
EXHIBIT 4	Operational description
EXHIBIT 5	Block diagram
EXHIBIT 6	Circuit diagram
EXHIBIT 7	Instruction manual
EXHIBIT 8	Product label
EXHIBIT 9	Confidentiality request

2. **Measurements And Test Specifications**

Emission - Requirements according to

- FCC, Part 15, Class A, verification
- FCC, Part 15, Class B, DoC
- FCC, Part 15, Class B, certification
- FCC, Part 15, intentional radiator, certification

3. Description Of EUT

3.1. Configuration / Operating Conditions

table-top EUT

floor-standing EUT

The device is powered from the control unit 12 V accumulator located in the control unit. For the test purposes was the keypad powered from 12 V stand alone fully charged laboratory accumulator battery.

The radiated measurements were performed in configuration :

JA-80E ---- 12 V DC accumulator battery

The equipment under test (EUT) is placed on wooden table 0,8 m above ground plane.

For $f < 30$ MHz the measurement was performed at distance $d = 10$ m by means of shielded loop antenna RA30.1. Measured values were below the noise level. Therefore measurement was performed at closer distances and measured values of field strength were calculated to $d = 300$ m (40 dB/dec) and compared to the limit value.

Measurements in frequency range 30 MHz – 1 GHz were performed with bilog antenna HL 562. At all interference frequencies the height of the antenna is scanned in the range 1 m to 4 m with horizontal and vertical polarization and the turntable is rotated in the range 0° to 360° to obtain the highest field strength.

3.2. Major Subassemblies Or Internal Peripherals

Device	Manufacturer	Type	SN	FCC ID
none				

3.3. Peripheral Devices Used For Testing

Device	Manufacturer	Type	SN	FCC ID
none				

3.4. Supply- And Interconnecting Cables

Line	Length	shielded	non shielded	Shield on GND / PE
Supply cable	1 m	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

4. Test Results - Overview

	required	passed	passed with modification	not passed
Emission		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9 kHz – 30 MHz	FCC 15.209	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30 MHz - 1000 MHz	FCC 15.209	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

5. Measurement results detailed

5.1. Duty cycle and Averaging factor

The device does not transmit in Duty cycle.

5.2. Radiated Emission 9 kHz – 1 GHz

Data was measured for worst case configuration which resulted in highest emission levels. A sample calculation, configuration photographs and data tables of emissions are included.

The detector used was average (f<30 MHz) and quasipeak (f>30 MHz).

5.3.1. Field strength calculation

The field strength is calculated by adding the reading on the measuring receiver to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when the specified limit is related to average detector and measurements are made with peak detector).

A sample of calculation is included below :

$$E = RR + AF + CF - AG + PD + AV$$

Where

E	field strength in dB μ V/m
RR	receiver reading including preamplifier in dB μ V
CF	cable attenuation factor in dB
AF	antenna factor in dB/m
AG	amplifier gain in dB
PD	pulse desensitization in dB
AV	average factor in dB

Example :

Asssume that measured values and factors are as follows :

RR	= 60 dB μ V
CF	= 1.2 dB
AF	= 12.6 dB/m
AG	= 20 dB
PD	= 0 dB
AV	= -10 dB

Then

$$E = 60 + 1.2 + 12.6 - 20 + 0 - 10 = 43.8 \text{ dB}\mu\text{V/m}$$

The radiated emission tables which follow the graphical presentation of results were created by the EMC 32 software by Rohde-Schwarz. The data of field strength include the components given above with the exception of PD and AV.

5.3.2. Normative references

Limits equivalent:	FCC, Part 15.209
Methods of Measurement equivalent:	ANSI C63.4

Test requirement

Distance Antenna – EUT	3 m (f>30MHz), for f < 30 MHz see detailed results
Frequency range	9 kHz - 1000 MHz

Place of measurement

- Semi anechoic chamber Intertek Germany PM KF 1150.
- Open Area Test Site

Measurement devices

Measurement device	Type	Manufacturer	SN	Asset No.	Last Calibr.ation	Inter-val
<input checked="" type="checkbox"/> Test receiver, 20Hz-26GHz	ESIB26	Rohde & Schwarz	100150	PM KF 0948	07-03	1
<input checked="" type="checkbox"/> Antenna, 9 kHz -30 MHz	RA 30.1	MessTec	960101	PM KF 0875	07-10	2
<input checked="" type="checkbox"/> Antenna, 30-3000 MHz	HL562	Rohde & Schwarz	100354	PM KF 1123	07-03	2

5.3.3. Emission Test results

Test requirements

passed

**passed with
modification**

not passed


Comment:

The radiated emissions between 9 kHz and 1000 MHz are under the limit
specified in FCC 15.209

5.3.3.1 Radiated Emission 9 kHz – 30 MHz

The displayed graphical representation was measured in the distance $d = 1$ m. Emissions bellow $f = 125$ kHz were proved to be ambient disturbances.

The blue curve represents peak detector prescan measurement, red/green crosses are final measurement with QP/AV detector.

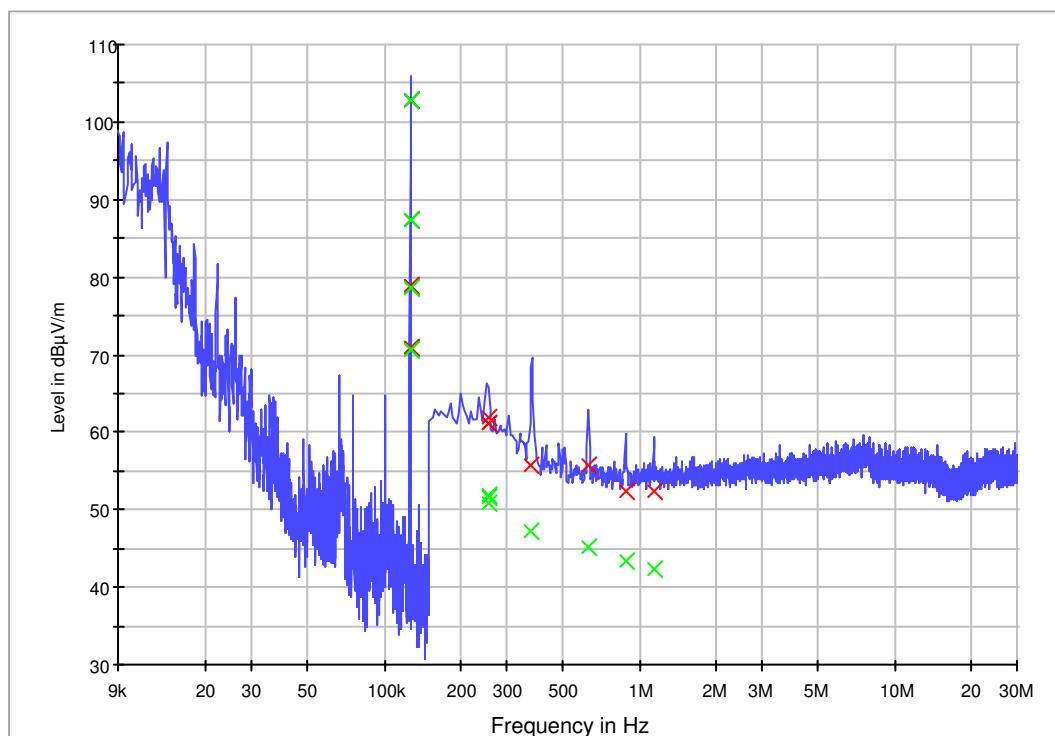

The detailed measurement at operation frequency was performed at measurement distances $d = 1$ m, 2 m, 3 m, 4 m with results as follows :

d (m)	1	2	3	4
E (dB μ V/m)	102,8	87,4	78,9	70,8

Detector : Average

To compare measured values at operating frequency $f = 125$ kHz with the limits the 40 dB/decade conversion was used as given in the table below :


measuring distance d (m)	E measured at d AV (dB μ V/m)	Normalizing factor to d = 300 m (dB)	Normalized E to d = 300 m (dB μ V/m)	Limit 300 m (dB μ V/m)	Margin (dB)
1	102,80	99,08	3,72	25,62	-21,91
2	87,40	87,04	0,36		-25,27
3	78,90	80,00	-1,10		-26,72
4	70,80	75,00	-4,20		-29,82

For comparison with limit the highest value was taken, $E = 3,72$ dB μ V/m with resulting margin -21,91 dB.

Operational frequency $f = 125,69$ kHz.

5.3.3.2 Radiated Emission 30 MHz – 1 GHz

The radiated emission measurement in the frequency range 30 MHz - 1 GHz was performed in the anechoic hall at measuring distance d = 3 m.

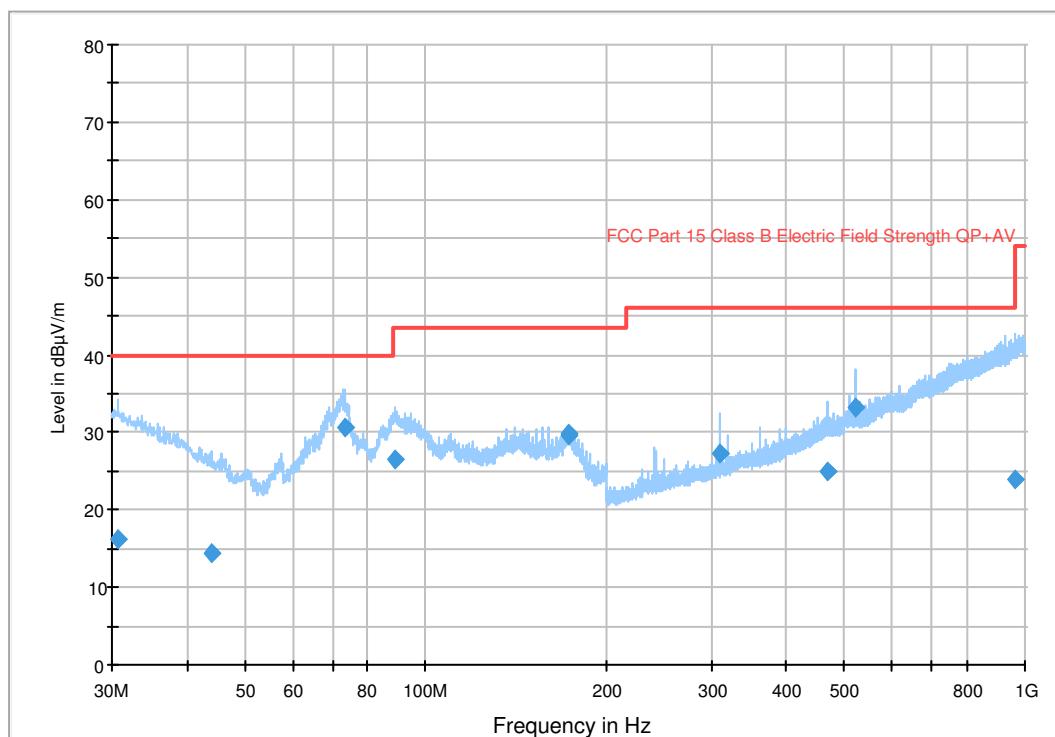

5.3.3.3 Radiated Emission : table 30 MHz – 1 GHz

The measurements based on a measurement time of 1000 ms unless otherwise noted. Correction factor in table is for indication only – it was taken into account by measurement software.

Limits are valid for measuring distance d = 3m.

Frequency (MHz)	QuasiPeak (dB μ V/m)	limit QP / AV (dB μ V/m)	Margin (dB)
30,6	16,2	40	-23,8
44,16	14,3	40	-25,7
73,26	30,6	40	-9,4
88,92	26,6	43,5	-16,9
173,02	29,9	43,5	-13,6
173,5	29,5	43,5	-14
310,06	27,2	46	-18,8
470,08	24,9	46	-21,1
520,06	33,2	46	-12,8
962,68	24	54	-30

6. Test setup Photo documentation

EXHIBIT 1

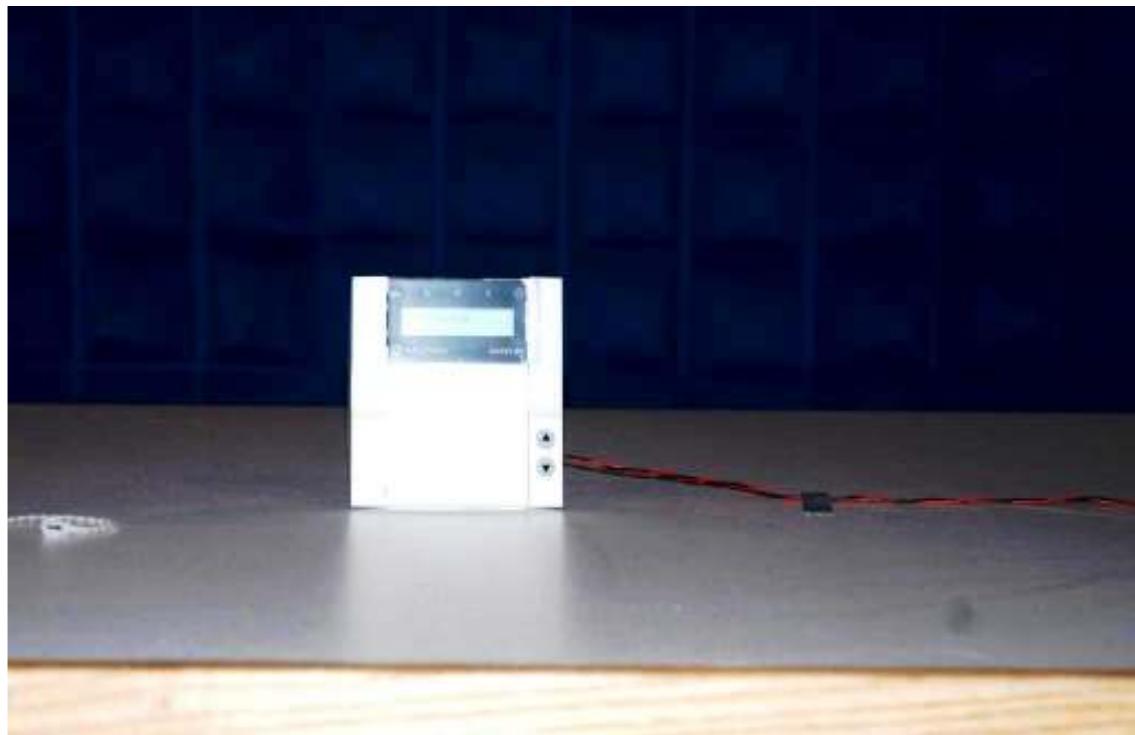


Fig. 1 Front view – anechoic hall

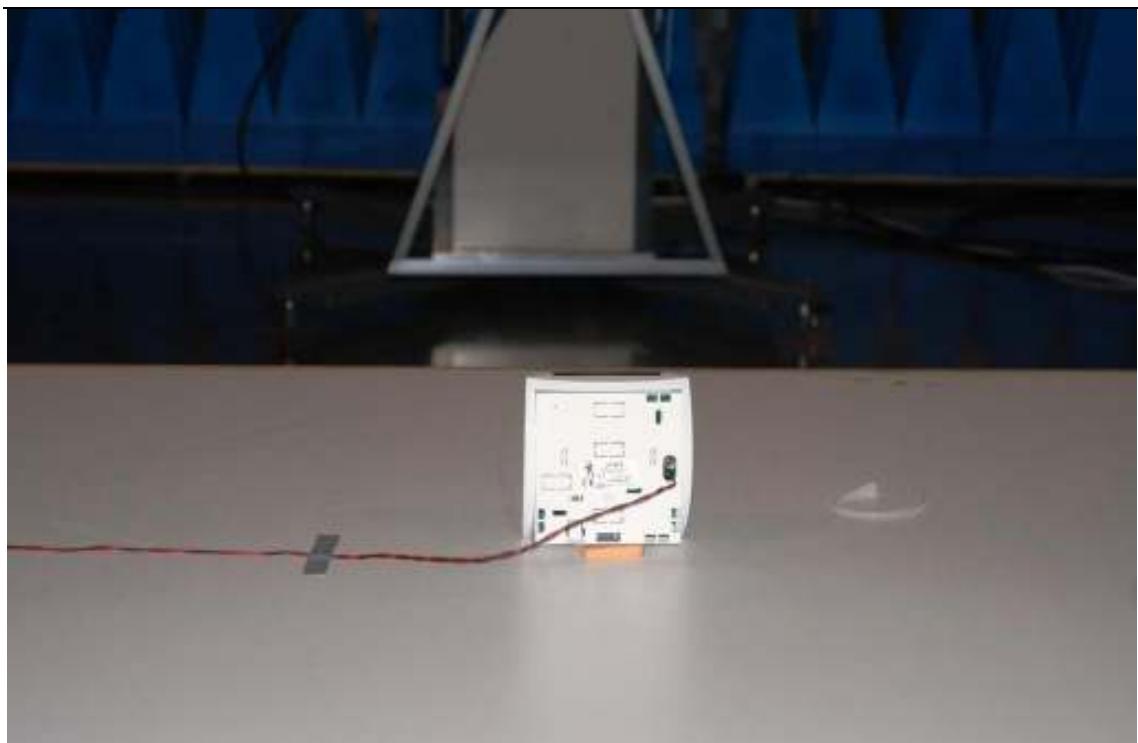


Fig. 2 Rear view – anechoic hall

7. EUT Photo documentation

External Photos : EXHIBIT 2
Internal Photos : EXHIBIT 3

8. Technical specification

Operational description : EXHIBIT 4

8.1. Block Diagram Of The EUT

EXHIBIT 5

8.2. Circuit Diagram Of The Layout

EXHIBIT 6

8.3. Instruction manual

EXHIBIT 7

8.4. Product Labelling

EXHIBIT 8