

# FCC Part 90& Part 22 Rules **Test Report**

Report No.: AGC02415190405FE10

**FCC ID** V06DR-350

PRODUCT DESIGNATION DMR TWO WAY RADIO

**BRAND NAME** Kydera

**MODEL NAME** DR-350, DR-360, DR-320, DR-330

CLIENT FUJIAN NEW CENTURY COMMUNICATIONS CO., LTD.

**DATE OF ISSUE** May. 15, 2019

FCC Part 90 Rules STANDARD(S) FCC Part 22 Rules

REPORT VERSION

# Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Page 2 of 84

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	40	May 15, 2019	Valid	Initial Release

The results spouroid this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com. IGC 8

Attestation of Global Compliance



# **TABLE OF CONTENTS**

	1. VERIFICATION OF COMPLIANCE	
2	2. GENERAL INFORMATION	
	2.1PRODUCT DESCRIPTION	
	2.2RELATED SUBMITTAL(S) / GRANT (S)	g
	2.3 TEST METHODOLOGY	
	2.4 TEST FACILITY	ę
	2.5 SPECIAL ACCESSORIES	
	2.6 EQUIPMENT MODIFICATIONS	<u>e</u>
3	B. SYSTEM TEST CONFIGURATION	10
	3.1EUT CONFIGURATION	10
	3.2 EUT EXERCISE	10
	3.3 GENERAL TECHNICAL REQUIREMENTS	10
	3.4CONFIGURATION OF TESTED SYSTEM	11
4	8. SUMMARY OF TEST RESULTS	12
	5. DESCRIPTION OF TEST MODES	
6	S. FREQUENCY TOLERANCE	
	6.1 PROVISIONS APPLICABLE	
	6.2 MEASUREMENT PROCEDURE	
	6.3 TEST SETUP BLOCK DIAGRAM	16
	6.4 TEST RESULTS	
7	7. EMISSION BANDWIDTH	
	7.1 PROVISIONS APPLICABLE	
	7.2 MEASUREMENT PROCEDURE	21
	7.3 TEST SETUP BLOCK DIAGRAM	21
	7.4 MEASUREMENT RESULT	23
8	3. UNWANTED RADIATION	35
	8.1 PROVISIONS APPLICABLE	35
	8.2 MEASUREMENT PROCEDURE	35
	8.3 TEST SETUP BLOCK DIAGRAM	36
	8.4 MEASUREMENT RESULTS:	37
	8.5 EMISSION MASK PLOT	46
9	D. MODULATION CHARACTERISTICS	55
	9.1 PROVISIONS APPLICABLE	55
	9.2 MEASUREMENT METHOD	55
	O O MEACHDEMENT DECLUT	R. C.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at the confirm



10. MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PEAK POWER	62
10.1 PROVISIONS APPLICABLE	62
10.2 TEST PROCEDURE	62
10.3 TEST CONFIGURATION	62
10.4 TEST RESULT	64
10.5 CONDUCT SPURIOUS PLOT	
11. RANSMITTER FREQUENCY BEHAVIOR	70
11.1PROVISIONS APPLICABLE	70
11.2 TEST METHOD	70
11.3 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR	71
11.4 MEASURE RESULT	72
12. AUDIO LOW PASS FILTER RESPONSE	73
12.1.TEST LIMITS	73
12.2. METHOD OF MEASUREMENTS	73
APPENDIX I: PHOTOGRAPHS OF SETUP	75
APPENDIX II PHOTOGRAPHS OF EUT	76



# 1. VERIFICATION OF COMPLIANCE

<b>Date of Test:</b> Apr. 26, 2019~May. 15, 2019			
Difference Description	The main test DR-350, the series is the same motherboard & hardware & software & specifications, different models; 320/330 uses LED screen, 350/360 uses LCD screen; 320 no enabled entity button, 330 uses 3 entities to press, 350/360 uses 6 entities to press; The upper part of the front shell of the fuselage has different injection molding lines;		
Serial Model	DR-360, DR-320, DR-330		
Test Model	DR-350		
Brand Name:	Kydera		
Product Designation:	DMR TWO WAY RADIO		
Address	NO.1 FENGSHOU RD., ZHAOFENG IND. ZONE, FENGZE DISTRICT, QUANZHOU, FUJIAN, CHINA.		
Factory	FUJIAN NEW CENTURY COMMUNICATIONS CO., LTD.		
Address	NO.1 FENGSHOU RD., ZHAOFENG IND. ZONE, FENGZE DISTRICT, QUANZHOU, FUJIAN, CHINA.		
Manufacturer:	FUJIAN NEW CENTURY COMMUNICATIONS CO., LTD.		
Address	NO.1 FENGSHOU RD., ZHAOFENG IND. ZONE, FENGZE DISTRICT, QUANZHOU, FUJIAN, CHINA.		
Applicant:	FUJIAN NEW CENTURY COMMUNICATIONS CO., LTD.		

# WE HEREBY CERTIFY THAT:

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E (2016). The sample tested as described in this report is in compliance with the FCC Rules Part 90 and FCC Rules Part 22 requirements

The test results of this report relate only to the tested sample identified in this report.

Tested By

Calvin Liu(Liu Junchen) Apr. 26, 2019

Reviewed By

Max Zhang

Max Zhang(Zhang Yi) May 15, 2019

Approved By

Forrest Lei(Lei Yonggang)
Authorized Officer

May 15, 2019

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance



Page 6 of 84

# 2. GENERAL INFORMATION

# 2.1PRODUCT DESCRIPTION

The EUT is a **DMR TWO WAY RADIO** designed for voice/data communication. It is designed by way of utilizing the FM/4FSK modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Data			
Hardware Version	C70M320-2.0			
Software Version	7.8.72			
Modulation	FM/4FSK			
Emission Type	7K60FXD/7K60FXE/11K0F3E			
Emission Bandwidth	Analog:10.142KHz(2W-12.5 KHz), 10.140KHz(0.5W-12.5 KHz) Digital: 9.755KHz(2W-12.5KHz), 9.187KHz(0.5W-12.5KHz)			
Peak Frequency Deviation	1.95KHz			
Audio Frequency Response	10.88dB			
Maximum Transmitter Power	Analog:32.55 dBm(2W-12.5 KHz), 26.84dBm (0.5W-12.5 KHz) Digital: 32.38 dBm(2W-12.5KHz), 26.58dBm (0.5W-12.5KHz)			
Output power Modification	2W/0.5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)			
Data Rate	9600bps/12.5KHz(Channel Spacing)			
Antenna Designation	Inseparable			
Antenna Gain	1.7dBi			
Power Supply	DC 3.7V, 2200mAh (by battery) charging for DC 5V			
Limiting Voltage	DC 3V-4.26V			
S S S S S S S S S S S S S S S S S S S	Frequency Range:400 MHz to 480 MHz (UHF) Channel Separation: 12.5KHz(Digital/ Analog)			
Operation Frequency Range and Channel  Middle Channel: 453.225MHz Middle Channel: 454.025MHz  (Top)High Channel: 479.975MHz				
Frequency Tolerance	1.121ppm			



Page 7 of 84

	Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator
1	400-480	0.5W/2W	11K0F3E(Analog Vioce;NB)
n of	400-480	0.5W/2W	7K60FXD/7K60FXW(9600Data/Digital Voice NB)

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)	
1 2	1-2	400.025	
3 4 8 8	3-4	440.025	
5 6	5-6	479.975	



Page 8 of 84

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

Voice –FM Analog (12.5KHz)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation(D) in kHz:2.5

Constant factor (K): 1(assumed)

Bn= 2XM +2XDK=11.0 KHz

Emission designator: 11K0F3E

9600 Digital Vioce/date (12.5KHz)

Calculation:

Data rate in bps(R)=9600

Deviation Peak deviation of carrier(D)=2359.585

Constant factor (K): 1 (default)

Bn= 3.86D+1.27RK= 3.86(2359.585)+0.27(9600)(1)=11.7KHz

Emission designator: 11K0FXD



Page 9 of 84

### 2.2RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **VO6DR-350**, filing to comply with Part 2, Part 22, and Part 90 of the Federal Communication Commission rules.

#### 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E (2016).

#### 2.4 TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

# 2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

#### 2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 10 of 84

#### 3. SYSTEM TEST CONFIGURATION

#### 3.1EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 GENERAL TECHNICAL REQUIREMENTS

For FCC Part 90& Part 22 requirements:

(1). Section 90.205 &22.565: RF Output Power

(2). Section 90.207: Modulation Characteristic

(3). Section 90.209 &22.359: Occupied Bandwidth

(4). Section 90.210&22.359: Emission Mask

(5). Section 90.213&22.355: Frequency Tolerance

(6). Section 90.214: Transient Frequency Behavior



Page 11 of 84

#### 3.4CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	DMR Digital Radio	DR-350	FCC ID: VO6DR-350	EUT
2	USB cable	- 10	0.8M	Accessory

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Page 12 of 84

# 4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§90.205 & 22.565	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209& 22.359	Occupied Bandwidth	Compliant
§90.210& 22.359	Emission Mask	Compliant
§90.213& 22.355	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant



Page 13 of 84

# LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2018	Jun. 11, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.18, 2018	Sep.17, 2019
preamplifier	ChengYi	EMC184045SE	980508	Oct.31, 2018	Oct 30, 2019
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2018	Jun. 11, 2019
HORN ANTENNA	EM	EM-AH-10180	0 / 6	Mar.01, 2018	Feb.29, 2020
SIGNAL GENERATOR	AGILENT	E4421B	122501288	May. 15, 2018	May. 14, 2019
SIGNAL GENERATOR	AGILENT	E4421B	122501288	May. 13, 2019	May. 12, 2020
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 12, 2018	Jun. 11, 2019
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 09, 2019	Jan. 08, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.26, 2018	Sep.25, 2019
Modulation Domain Analyzer	HP T	53310A	3121A02467	Nov. 01, 2018	Oct. 31, 2019
Small environmental tester	ESPEC	SH-242	So See after decorate	Feb. 25, 2019	Feb. 24, 2020
RF Communication Test Set	HP	8920B	,O	Jun. 12, 2018	Jun. 11, 2019
Loop Antenna	LAPLACE	RF300	The sound are	Feb. 19, 2019	Feb. 18, 2020
Attenuator	JFW	50FHC-006-50	ion of Gio	June 12, 2018	June 11, 2019
Vector Analyzer	Agilent	E4440A		Feb. 27, 2019	Feb. 26, 2020
RF Cable	R&S	1#	K 700000	Each time	N/A
RF Cable	R&S	2#	© A Cloon Collin	Each time	N/A

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a



Page 14 of 84

# 5. DESCRIPTION OF TEST MODES

#### **RF TEST MODES**

The EUT (**DMR RADIO**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

#### Analog:

No.	TEST MODES	CHANNEL SEPARATION
Milestation of 1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

#### Digital:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Note: Only the result of the worst case was recorded in the report.



Page 15 of 84

#### 6. FREQUENCY TOLERANCE

#### **6.1 PROVISIONS APPLICABLE**

- a). According to FCC §2.1055, § 22.355 and §90.213, the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}$ C to  $+50^{\circ}$ C centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.

#### **6.2 MEASUREMENT PROCEDURE**

#### 6.2.1 Frequency stability versus environmental temperature

- Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth
  to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this
  frequency as reference frequency.
- 3. Set the temperature of chamber to 50 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.


#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
   Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 3.7V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.



Page 16 of 84

#### **6.3 TEST SETUP BLOCK DIAGRAM**

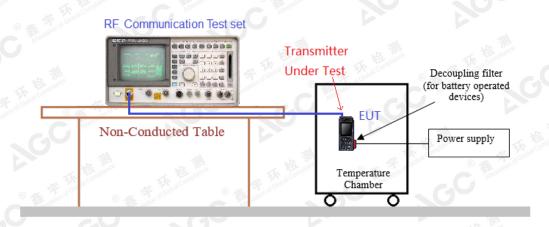

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 17 of 84

# **6.4 TEST RESULTS**

UHF:

Analog:

(1) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-2W-12.5KHz

Environment	Power		Reference Frequer	ncy	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.70 V	0.779	0.823	1.008	of Gobal
40	DC 3.70 V	0.639	1.121	1.027	
30	DC 3.70 V	0.657	0.832	0.996	
20	DC 3.70 V	0.829	1.054	0.894	
10 Augustin	DC 3.70 V	0.762	0.513	0.964	2.5
0	DC 3.70 V	0.794	0.587	0.748	@ Maria station of G
-10	DC 3.70 V	0.611	0.975	0.501	All
-20	DC 3.70 V	1.020	0.918	0.977	
-30	DC 3.70 V	1.019	0.652	0.720	all
Result	1 . 6		Pass	下 测	Minuce Min

(2) Frequency stability versus input voltage (Battery endpoint is 3V) -2W-12.5KHz

Environment	Power Supply	Comp.	Reference Frequen	су	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.00 V	1.023	0.947	0.533	The Kill plance
40	DC 3.00 V	1.003	0.645	0.773	Global Co
30	DC 3.00 V	0.867	0.903	0.801	
20	DC 3.00 V	0.968	0.851	0.832	
10	DC 3.00 V	0.748	0.537	0.631	2.5
Allestation O Allestation	DC 3.00 V	0.686	1.060	0.906	500
-10	DC 3.00 V	0.808	0.593	0.766	8 # F
-20	DC 3.00 V	0.909	0.879	0.922	Allestan
-30	DC 3.00 V	1.085	0.615	0.838	
Result	® ## station of G		Pass		litte



Page 18 of 84

(3) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-0.5W-12.5KHz

Environment	Power		Reference Frequence	Sy Good Co	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.70 V	0.663	0.823	0.785	7
40	DC 3.70 V	0.813	0.841	0.636	WE THIS
30	DC 3.70 V	0.547	0.975	0.652	Par Compliano
20	DC 3.70 V	0.918	0.958	0.685	ofGo
10	DC 3.70 V	1.062	1.034	0.537	2.5
The O	DC 3.70 V	0.560	0.770	0.662	
8 Martin -10 8 Martin of Co	DC 3.70 V	1.022	0.898	0.949	
-20	DC 3.70 V	1.009	1.130	0.558	G F F of GI
-30	DC 3.70 V	0.597	1.016	0.786	Attestation Attestation
Result	T KEL polience	EX Compliance	Pass	Attes lation of	

(4) Frequency stability versus input voltage (Battery endpoint is 3V) -0.5W-12.5KHz

Environment	Power		Reference Frequer	ncy	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.00 V	0.843	0.570	0.787	
40	DC 3.00 V	0.948	0.948	0.849	
ad County	DC 3.00 V	0.995	0.510	1.041	THE SAL
20	DC 3.00 V	0.992	0.594	0.645	The Mist Compliant
10	DC 3.00 V	0.741	0.690	0.657	2.5
0	DC 3.00 V	0.841	0.948	0.526	1
-10	DC 3.00 V	1.086	0.575	0.735	
-20 ®	DC 3.00 V	0.799	0.932	1.004	
-30	DC 3.00 V	0.598	0.993	0.546	12
Result	- 11	人校	Pass (n	(8) The stand Clops	® Alatio



Page 19 of 84

# Digital:

(1) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-2W-12.5KHz

Environment	Power	The Compiler	Reference Frequen	су	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.70 V	0.926	0.728	0.533	LINE -
40	DC 3.70 V	1.039	0.986	1.060	Compliance
30	DC 3.70 V	0.528	1.033	1.068	G Open
20	DC 3.70 V	1.034	0.870	0.791	G
10	DC 3.70 V	1.125	0.763	0.827	2.5
Management O & Management of Color	DC 3.70 V	0.551	0.536	0.773	
-10	DC 3.70 V	0.649	0.505	0.628	学玩
-20	DC 3.70 V	0.623	0.663	1.061	Affestation
-30	DC 3.70 V	0.796	1.048	0.909	
Result	* Clopal Court	(B) The same of Global	Pass		•

(2) Frequency stability versus input voltage(Battery endpoint is 3V) -2W-12.5KHz

Environment	Power	-mil	Reference Frequen	cy	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.00 V	0.708	0.858	1.095	
40	DC 3.00 V	1.063	0.794	1.089	THE THE
30	DC 3.00 V	0.637	0.668	0.601	Fr Kil Compliance
20	DC 3.00 V	1.094	0.532	1.117	of of Glove
10	DC 3.00 V	0.912	0.561	0.968	2.5
<b>60</b>	DC 3.00 V	0.930	0.674	0.674	
-10	DC 3.00 V	0.629	0.941	0.837	
-20	DC 3.00 V	1.035	0.993	0.649	o
-30	DC 3.00 V	0.806	0.905	0.691	® A tallo
Result	15 mm	a Global C	Pass	Attesta	



Page 20 of 84

(3) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-0.5W-12.5KHz

Environment	Power	15 m	Reference Frequence	cy	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.70 V	0.511	0.915	1.081	7
40	DC 3.70 V	0.982	0.922	0.551	ALL THE
30	DC 3.70 V	0.731	0.649	0.786	The Son Compilario
20	DC 3.70 V	0.910	0.725	0.749	ofe
10	DC 3.70 V	0.939	0.544	1.057	2.5
7 O T	DC 3.70 V	0.908	1.028	0.815	
-10 Samuel and the same of the	DC 3.70 V	1.003	1.018	1.065	7.
-20	DC 3.70 V	0.884	0.933	0.501	G F F of Glo
-30	DC 3.70 V	1.071	0.707	1.086	Attestation
Result	T Williams	The Compliance	Pass	Alfestation .	

(4) Frequency stability versus input voltage (Battery endpoint is 3V) -0.5W-12.5KHz

Environment	Power		Reference Frequen	су	Limit:
Temperature(°C)	(V)	400.025MHz	454.025MHz	479.975MHz	ppm
50	DC 3.00 V	0.954	0.547	0.883	
40	DC 3.00 V	0.696	0.994	0.682	
30 F. J. Com	DC 3.00 V	0.643	0.643	0.979	
20	DC 3.00 V	0.555	0.871	0.539	The Risk Compliant
10	DC 3.00 V	1.002	0.589	0.988	2.5
0	DC 3.00 V	0.944	0.601	0.502	
-10	DC 3.00 V	0.966	0.904	0.925	
-20	DC 3.00 V	0.785	0.843	0.654	
-30	DC 3.00 V	0.618	1.055	0.952	12
Result		T. T	Pass (No. of the last)	® # Globs	® Statio



Page 21 of 84

#### 7. EMISSION BANDWIDTH

#### 7.1 PROVISIONS APPLICABLE

FCC Part 90 & FCC Part 22:

The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.


#### 7.2 MEASUREMENT PROCEDURE


- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
  - 3). Set SPA Center Frequency = fundamental frequency, RBW=100Hz.VBW= 300 Hz, Span =50 KHz.
  - 4). Set SPA Max hold. Mark peak, -26 dB.

# 7.3 TEST SETUP BLOCK DIAGRAM

#### Radiation method:

#### Radiated Below1GHz

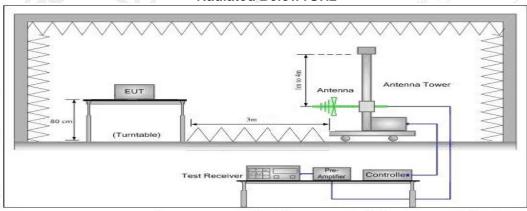


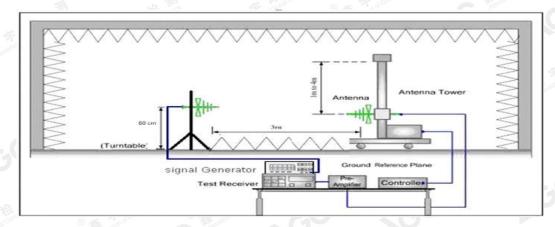






# **Radiated Above 1 GHz**

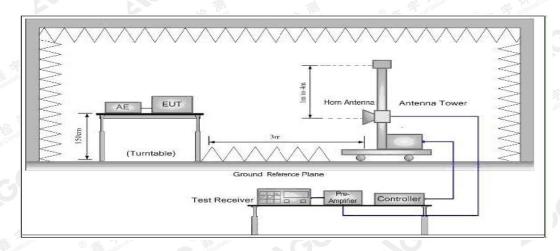

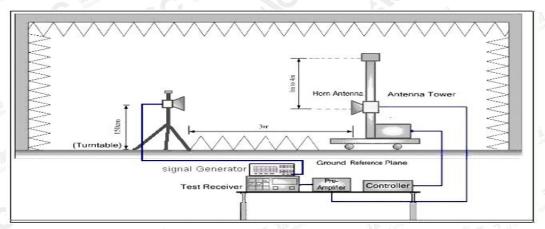

#### **Conduction method:**





Page 23 of 84


#### 7.4 MEASUREMENT RESULT

UHF:

Analog:12.5KHz

naiog. iz.ortiiz	GIO	2/0/00				
26 DB BANDWIDTH MEASUREMENT RESULT						
Operating Frequency	1	2.5 KHz Channel Separation				
Operating Frequency	Test Data	Limits	Result			
400.025MHz	10.138KHz	11.25 KHz	Pass			
453.225MHz	10.137KHz	11.25 KHz	Pass			
454.025MHz	10.139KHz	11.25 KHz	Pass			
479.975MHz	10.140KHz	11.25 KHz	Pass			

# Occupied bandwidth of Bottom Channel (400.025MHz)-0.5W

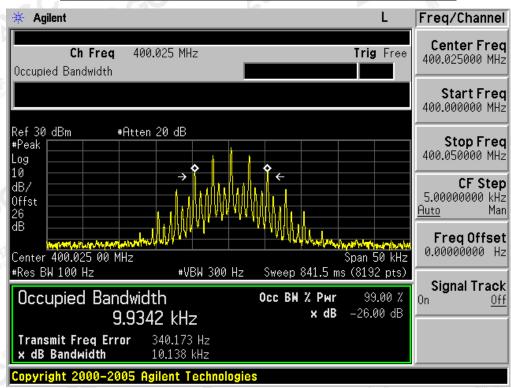


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (\$\frac{\partial}{\partial}\text{\$\



Freq Offset 0.00000000 Hz

Signal Track

Page 24 of 84

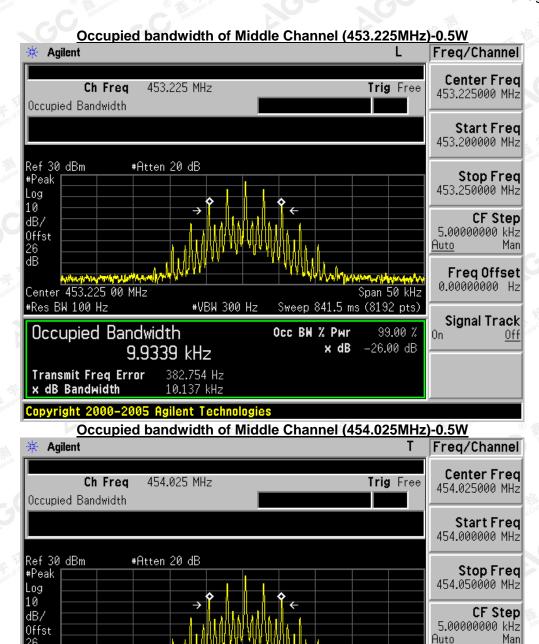

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.

#VBW 300 Hz

Center 454.025 00 MHz #Res BW 100 Hz

Transmit Freq Error

x dB Bandwidth

Occupied Bandwidth

9.9331 kHz

382.597 Hz

Span 50 kHz

-26.00 dB

Sweep 841.5 ms (8192 pts)


x dB

Occ BW % Pwr



Page 25 of 84

### Occupied bandwidth of Top Channel (479.975MHz)-0.5W

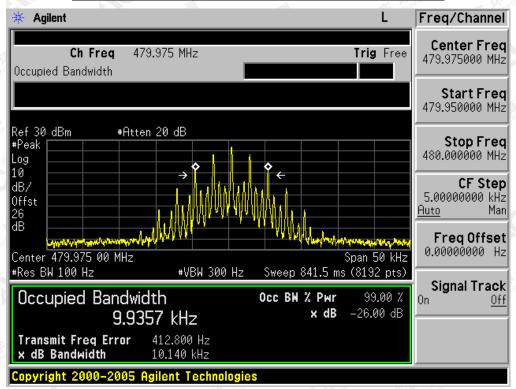

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance


IGC 8



Page 26 of 84


26 DB BANDWIDTH MEASUREMENT RESULT					
On and the self-resource	12.	5 KHz Channel Separation			
Operating Frequency	Test Data	Limits	Result		
400.025MHz	10.142KHz	11.25 KHz	Pass		
453.225MHz	10.137KHz	11.25 KHz	Pass		
454.025MHz	10.140KHz	11.25 KHz	Pass		
479.975MHz	10.141MHz	11.25 KHz	Pass		


# Occupied bandwidth of Bottom Channel (400.025MHz)-2W

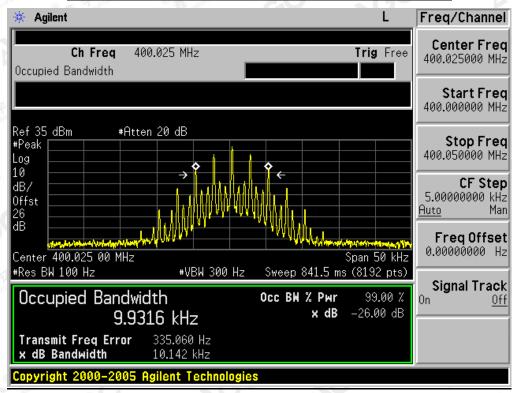



Page 27 of 84

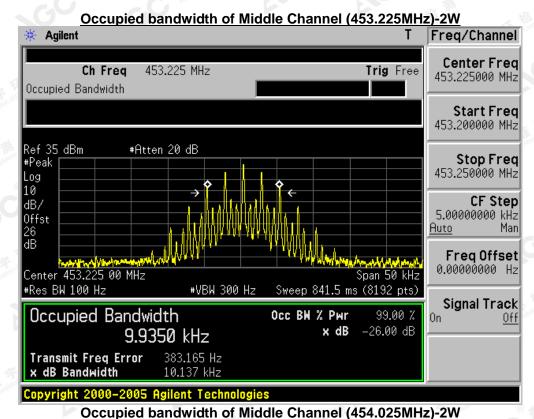

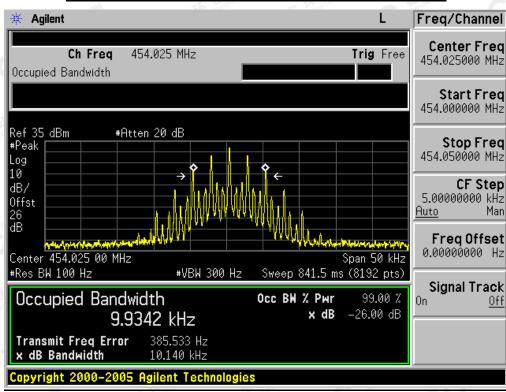


The results spown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KEE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.

C Co S



Page 28 of 84

# Occupied bandwidth of Top Channel (479.975MHz)-2W

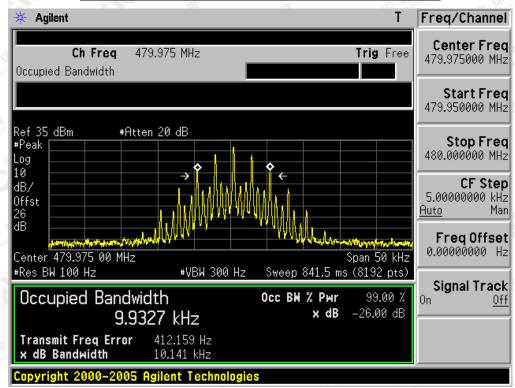

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.

Attestation of Global Compliance




Page 29 of 84


# Digital:

# **TEST RESULTS**


	MZ 578	(2) (2) (3) (4)	2 3 10
2	6 DB BANDWIDTH ME	ASUREMENT RESULT	
Operating Frequency	1	2.5 KHz Channel Separation	
Operating Frequency	Test Data	Limits	Result
400.025MHz	8.904KHz	11.25 KHz	Pass
453.225MHz	8.986KHz	11.25 KHz	Pass
454.025MHz	9.004KHz	11.25 KHz	Pass
479.975MHz	9.187KHz	11.25 KHz	Pass

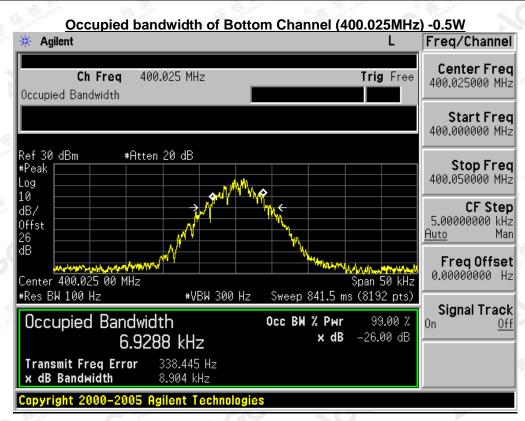

Page 30 of 84

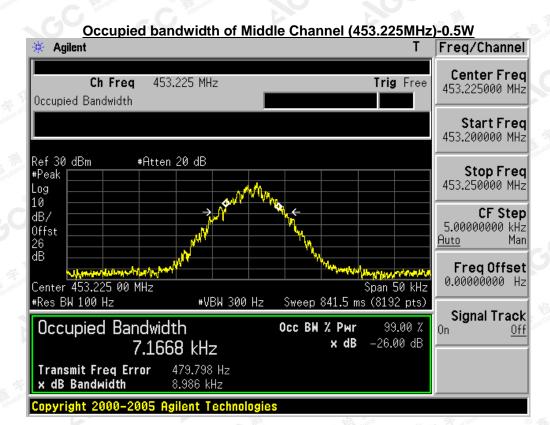


#### Occupied bandwidth of Middle Channel (454.025MHz)-0.5W

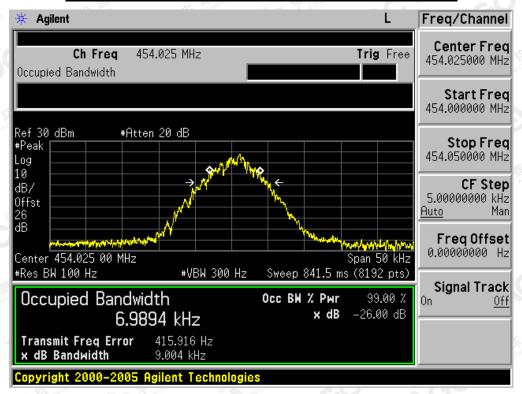



Page 31 of 84

#### Occupied bandwidth of Top Channel (479.975MHz )-0.5W

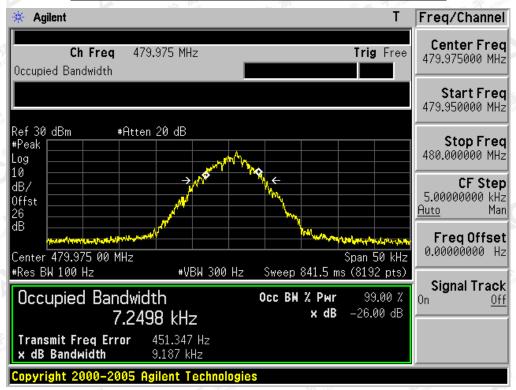

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance

**IGC** 8




Page 32 of 84

#### **TEST RESULTS**


<u> </u>			
	26 DB BANDWIDTH MEA	SUREMENT RESULT	
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	9.082KHz	11.25 KHz	Pass
453.225MHz	9.227KHz	11.25 KHz	Pass
454.025MHz	9.037KHz	11.25 KHz	Pass
479.975MHz	9.755KHz	11.25 KHz	Pass


# Occupied bandwidth of Bottom Channel (400.025MHz)-2W

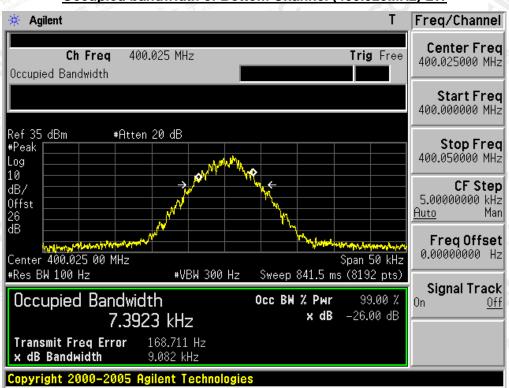



Page 33 of 84

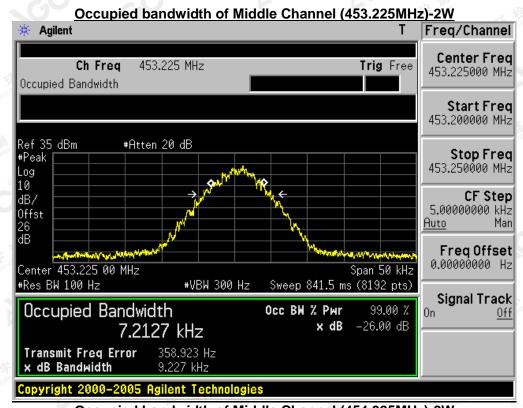


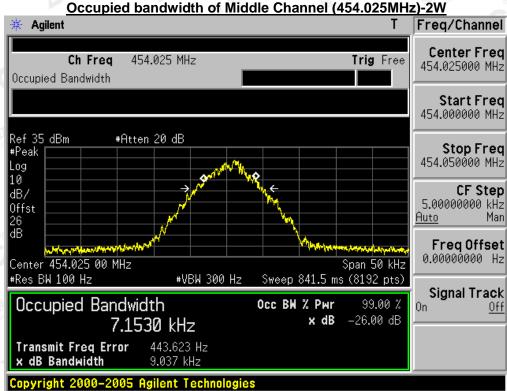



Page 34 of 84

#### Occupied bandwidth of Top Channel (479.975MHz)-2W

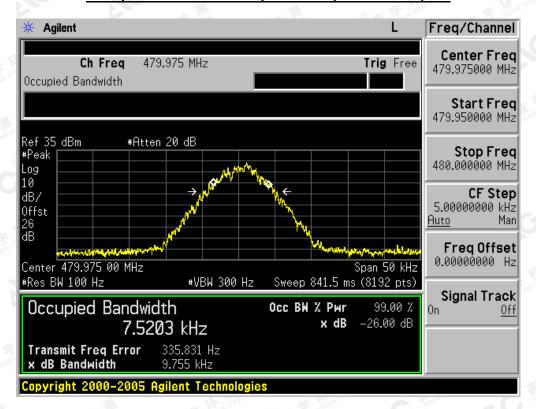

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance

**IGC** 8

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 35 of 84

#### 8. UNWANTED RADIATION

#### 8.1 PROVISIONS APPLICABLE

8.1.1 According to FCC §2.1049, §22.359 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

Emission Mask D -for 12.5 KHz Channel Separation:

- (1).On any frequency removed from the center of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB.
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz) fo of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### 8.2 MEASUREMENT PROCEDURE

- (1)On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4)The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.

AIGC 8





Page 36 of 84

# **8.3 TEST SETUP BLOCK DIAGRAM**


# SUBSTITUTION METHOD: (Radiated Emissions) Radiation method:

#### Radiated Below1GHz

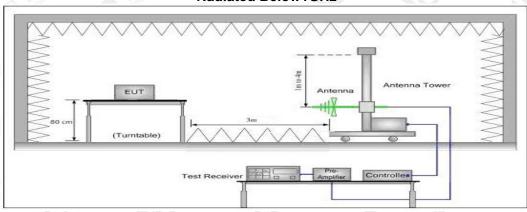

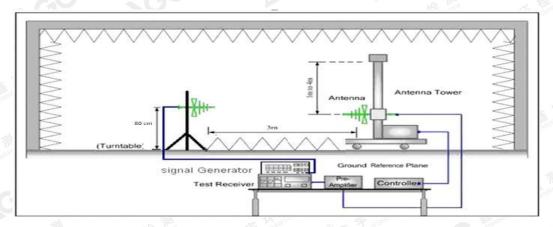


#### Radiated Above 1 GHz

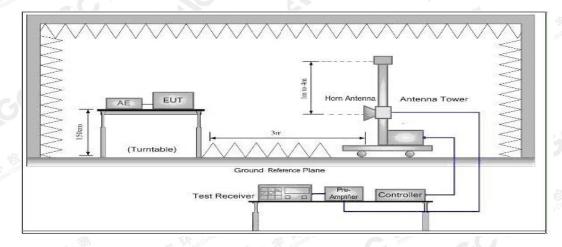



Page 37 of 84

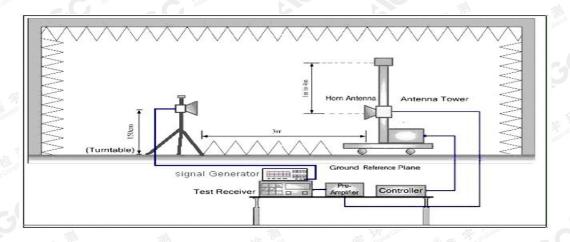

#### **8.4 MEASUREMENT RESULTS:**

#### **Applicable Standard**

FCC §2.1053, §22.359 and §90.210

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (fd in KHz)for of more than 12.5 KHz: at least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### **Test Procedure**

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz<sup>th</sup> and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.

Limit: At least 50+10 log (P) =50+10log (2) =53.01 (dB)—2W 33.01-53.01=-20 dBm At least 50+10 log (P) =50+10log (0.5) =47 (dB)—0.5W 26.99-47 $\approx$ -20dBm

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

GCS



Page 38 of 84

UHF: Analog:

# TEST RESULTS--2W Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	H #	Global Com	(8) Francisco Global	pass
800.050	H Allestanon	-33.5	-20	pass
1200.075	CH .	-34.6	-20	pass
1600.100	Н	-36.9	-20	pass
2000.125	Н	-39.2	-20	pass
2400.150	H	-39.6	-20	pass
2800.175	The Complete H	-41.5	-20	pass
3200.200	north Hamiltonia	-52.7	-20	pass
3600.225		-52.6	-20	pass
4000.250	Н	-53.3	-20	pass

	The state of the s	2 0/11		- 110°
Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	V	- 0	- FILL)	pass
800.050	V	-35.4	-20	pass
1200.075	The V	-37.2	-20	pass
1600.100	V Altostatio	-37.6	-20	pass
2000.125	V	-40.5	-20	pass
2400.150	V	-41.4	-20	pass
2800.175	V	-48.5	-20	pass
3200.200	T V°	-49.9	-20	pass
3600.225	To a Calabai V	-50.8	-20	pass
4000.250	V	-52.7	-20	pass

#### Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	V	0	-1111	pass
908.050	V	-36.8	-20	pass
1362.075	V	-37.7	-20	pass
1816.100	z That come V	-38.5	-20	pass
2270.125	ion of V	-44.4	-20	pass
2724.150	V	-46.9	-20	pass
3178.175	V	-50.0	-20	pass
3632.200	V Registro	-50.6	9 -20	pass
4086.225	V <sub>1</sub> Clobal Co.	-51.7	-20	pass
4540.250	V	-53.5	-20	pass

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Page 39 of 84

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	® \$H	(dBiii)		pass
908.050	O H C	-36.1	-20	pass
1362.075	Н	-36.2	-20	pass
1816.100	Н	-37.9	-20	pass
2270.125	H %	-39.4	-20	pass
2724.150	H Allestation	-41.5	-20	pass
3178.175	CH .	-42.2	-20	pass
3632.200	Н	-47.4	-20	pass
4086.225	Н	-50.6	-20	pass
4540.250	H W	-51.6	-20	pass

## Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	⊕ #H <sub>3lobal</sub>	© Age and O	0 . 0	pass
959.950	Allestan H	-38.3	-20	pass
1439.925	H	-38.5	-20	pass
1919.900	Н	-39.7	-20	pass
2399.875	: H	-41.2	-20	pass
2879.850	Ha and the state of the state o	-42.4	-20	pass
3359.825	(H)	-45.1	-20	pass
3839.800	OH	-49.8	-20	pass
4319.775	Н	-52.6	-20	pass
4799.750	HA.	-53.4	-20	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	V	0 1	blian. We Coun	pass
959.950	V Managara	-36.3	-20	pass
1439.925	O Service V	-34.7	-20	pass
1919.900	V	-39.4	-20	pass
2399.875	V	-40.5	-20	pass
2879.850	V	-39.7	-20	pass
3359.825	T BUY	-42.5	-20	pass
3839.800	V 8	-49.8	-20	pass
4319.775	V	-50.1	-20	pass
4799.750	V	-51.7	-20	pass

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 40 of 84

#### **TEST RESULTS—0.5W**

## Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	Н	0	测	pass
800.050	H &	-39.2	-20	pass
1200.075	oe H®	-38.8	-20	pass
1600.100	C.H.	-39.7	-20	pass
2000.125	Н	-43.6	-20	pass
2400.150	Н	-43.2	-20	pass
2800.175	:MH	-45.8	-20	pass
3200.200	The Manual H	-49.9	-20	pass
3600.225	not Global H ® Martin	-51.8	-20	pass
4000.250	-HC	-52.5	-20	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	V V	0		pass
800.050	V	-38.7	-20	pass
1200.075	V	-39.2	-20	pass
1600.100	* V 5	-39.5	-20	pass
2000.125	As a string of	-39.9	-20	pass
2400.150	V	-42.5	-20	pass
2800.175	V	-44.7	-20	pass
3200.200	V	-48.6	-20	pass
3600.225	V	-52.5	-20	pass
4000.250	Z ZNood Con V	-53.9	-20	pass

## Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	#H	0		pass
908.050	Н	-37.7	-20	pass
1362.075	Н	-39.3	-20	pass
1816.100	. ∌H	-39.9	-20	pass
2270.125	The sound H	-42.5	-20	pass
2724.150	The follow H (S) The state of t	-43.1	-20	pass
3178.175	H	-48.8	-20	pass
3632.200	Н	-49.4	-20	pass
4086.225	H A	-51.5	-20	pass
4540.250	H EA Compile	-53.3	-20	pass

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Page 41 of 84

	17			
Result(P/F)	Limit (dBm)	Measurement Result (dBm)	Ant. Polarity(H/V)	Emission Frequency (MHz)
pass		Management of Co.	O TO V	454.025
pass	-20	-37.1	V	908.050
pass	-20	-37.6	V	1362.075
pass	-20	-39.4	V	1816.100
pass	-20	-42.5	V	2270.125
pass	-20	-46.6	V Allestano	2724.150
pass	-20	-48.8	V	3178.175
pass	-20	-50.2	V	3632.200
pass	-20	-50.7	V	4086.225
pass	-20	-51.1	V. F. W.	4540.250

## Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
HA Company	0	Allesto	pass
® 🌉 salio 🖁	-35.2	-20	pass
H	-35.7	-20	pass
Н	-37.8	-20	pass
Н	-40.2	-20	pass
H	-42.4	-20	pass
H Allestalion	-46.7	-20	pass
H	-48.7	-20	pass
Н	-51.7	-20	pass
Н	-52.8	-20	pass
	Polarity(H/V)  H H H H H H H	Ant. Polarity(H/V)  Result (dBm)  H  0  H -35.2  H -35.7  H -37.8  H -40.2  H -42.4  H -46.7  H -48.7  H -51.7	Ant. Polarity(H/V)  Result (dBm)  H  0  H  -35.2 -20 H  -35.7 -20 H  -37.8 -20 H  -40.2 -20 H  -42.4 -20 H  -46.7 -20 H  -48.7 -20 H  -51.7 -20

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	V	0 6	allance TK Com	pass
959.950	V IK Manufacture	-35.6	·20	pass
1439.925	(S) V of Globa	-34.9	-20	pass
1919.900	V	-39.9	-20	pass
2399.875	V	-40.0	-20	pass
2879.850	V	-41.0	-20	pass
3359.825	V	-46.4	-20	pass
3839.800	E Thod comb V	-47.9	-20	pass
4319.775	lono V	-50.5	-20	pass
4799.750	V	-50.9	-20	pass

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 42 of 84

#### Digital:

# TEST RESULTS-2W Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	H	K 恒 0 恒	ance TX Complier	pass
800.050	H H	-37.2	⊚ <b>∠-20</b> √ □	pass
1200.075	Allestan	-37.5	-20	pass
1600.100	H	-38.1	-20	pass
2000.125	Н	-39.6	-20	pass
2400.150	Н	-42.4	-20	pass
2800.175	H THE	-42.9	-20	pass
3200.200	· Thurston H 。 写	-47.2	-20	pass
3600.225	aum of Harristan	-50.9	-20	pass
4000.250	- CH	-51.3	-20	pass 🦠

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	V	0		pass
800.050	V	-36.6	-20	pass
1200.075	V	-37.2	-20	pass
1600.100	office Vo To To To	-38.2	-20	pass
2000.125	V Attestall	-39.9	-20	pass
2400.150	V	-44.5	-20	pass
2800.175	V	-46.1	-20	pass
3200.200	V	-49.9	-20	pass
3600.225	I KIV	-50.6	-20	pass
4000.250	The Cions V	-50.8	-20	pass

## Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	C H	0	9	pass
908.050	Н	-37.7	-20	pass
1362.075	Н	-37.8	-20	pass
1816.100	极用	-36.6	-20	pass
2270.125	E That com H ® #	-39.4	-20	pass
2724.150	Jon H Artest	-42.2	-20	pass
3178.175	Н	-45.3	-20	pass
3632.200	H sall	-49.4	-20	pass
4086.225	H Kingliance	-50.1	-20	pass
4540.250	H. Clobal	9 -51.1	-20	pass

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Page 43 of 84

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	V	Marketinon of Co., O		pass
908.050	V	-35.5	-20	pass
1362.075	V	-37.1	-20	pass
1816.100	V	-38.9	-20	pass
2270.125	V 4	-40.1	·20	pass
2724.150	V Alles alto	-40.7	-20	pass
3178.175	V	-44.6	-20	pass
3632.200	V	-45.9	-20	pass
4086.225	V	-49.7	-20	pass
4540.250	V	-51.7	-20 @	pass

## Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	R FHOODER	® 4 1000 0	0 .0	pass
959.950	AND STATE H	-38.8	-20	pass
1439.925	н	-39.2	-20	pass
1919.900	Н	-41.5	-20	pass
2399.875	- H	-41.7	-20	pass
2879.850	pliance Hs & John of	-45.5	-20	pass
3359.825	H Auto-	-47.8	-20	pass
3839.800	O H	-50.2	-20	pass
4319.775	Н	-51.6	-20	pass
4799.750	H	-52.2	-20	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	V V	0 1	blian E Stopal Count	pass
959.950	V Managara	-37.2	-20	pass
1439.925	O DO O	-38.9	-20	pass
1919.900	V	-38.4	-20	pass
2399.875	V	-40.6	-20	pass
2879.850	V	-45.5	-20	pass
3359.825	T BUY	-46.7	-20	pass
3839.800	V 8	-48.9	-20	pass
4319.775	V	-50.2	-20	pass
4799.750	V	-53.3	-20	pass

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 44 of 84

## TEST RESULTS-0.5W Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	Н	- <u>- (1)</u>	in line	pass
800.050	Н	-37.3	-20	pass
1200.075	H <sub>® Max</sub> S <sub>S</sub>	-38.6	· -20	pass
1600.100	H Altestan	-39.9	-20	pass
2000.125	CH .	-45.2	-20	pass
2400.150	Н	-46.1	-20	pass
2800.175	Н	-48.4	-20	pass
3200.200	AT THE	-49.9	-20	pass
3600.225	H R	-51.9	-20	pass
4000.250	H Allestan	-52.7	-20	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
400.025	Allestanov	0		pass
800.050	V	-37.1	-20	pass
1200.075	V	-38.3	-20	pass
1600.100	- V	-39.6	-20	pass
2000.125	plance V <sub>®</sub> 4 and	-42.4	-20	pass
2400.150	V Attests	-43.3	-20	pass
2800.175	V	-46.7	-20	pass
3200.200	V	-50.7	-20	pass
3600.225	V	-51.2	-20	pass
4000.250	The V	-53.5	-20	pass

## Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	® A Hard Course	0		pass
908.050	G MH	-36.6	-20	pass
1362.075	Н	-37.1	-20	pass
1816.100	Н	-39.4	-20	pass
2270.125	极用	-40.5	-20	pass
2724.150	H ®	-45.6	-20	pass
3178.175	H Allesto	-47.4	-20	pass
3632.200	Н	-49.2	-20	pass
4086.225	H and	-50.7	-20	pass
4540.250	H.K. Kilmplance	-51.7	-20	pass

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Page 45 of 84

			4	4/1//-
Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
454.025	V	a station of 0		pass
908.050	V	-38.5	-20	pass
1362.075	V	-39.5	-20	pass
1816.100	V	-42.6	-20	pass
2270.125	V 3	-43.3	-20 disconsistent	pass
2724.150	V Muse state	-45.1	-20	pass
3178.175	V	-46.1	-20	pass
3632.200	V	-49.9	-20	pass
4086.225	V	-51.2	-20	pass
4540.250	V	-51.8	-20	pass

## Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
HA Company	0	Allesto	pass
® ## gate H	-36.9	-20	pass
H C	-38.9	-20	pass
Н	-40.9	-20	pass
Н	-42.1	-20	pass
H #	-46.3	-20	pass
H Allestation	-48.5	-20	pass
H	-49.7	-20	pass
Н	-51.6	-20	pass
Н	-53.8	-20	pass
	Polarity(H/V)  H H H H H H H	Ant. Polarity(H/V)  Result (dBm)  H  0  H -36.9  H -38.9  H -40.9  H -42.1  H -46.3  H -48.5  H -49.7  H -51.6	Ant. Polarity(H/V)  Result (dBm)  H  0  H  -36.9  -20  H  -38.9  -20  H  -40.9  -42.1  -20  H  -46.3  -20  H  -48.5  -20  H  -49.7  -20  H  -51.6  -20

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result (dBm)	Limit (dBm)	Result(P/F)
479.975	V	0 6	allence IV Com	pass
959.950	V X	-38.2	·20 and Color	pass
1439.925	® Wand Global	-39.7	-20	pass
1919.900	Ne V	-40.0	-20	pass
2399.875	V	-44.0	-20	pass
2879.850	V	-47.6	-20	pass
3359.825	V	-49.6	-20	pass
3839.800	E That come V	-50.1	-20	pass
4319.775	on of Niest	-52.4	-20	pass
4799.750	V	-53.5	-20	pass

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 46 of 84

#### **8.5 EMISSION MASK PLOT**


The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.

#### UHF:

#### Analog:


## The Worst Emission Mask D for (400.025 MHz) of 12.5 KHz channel Separation (0.5W

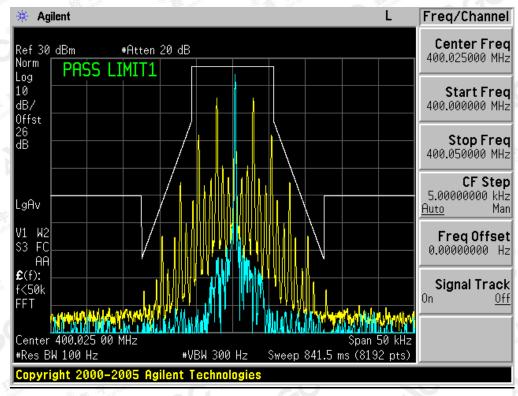


The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Page 47 of 84

## The Worst Emission Mask D for (400.025 MHz) of 12.5 KHz channel Separation (2W)

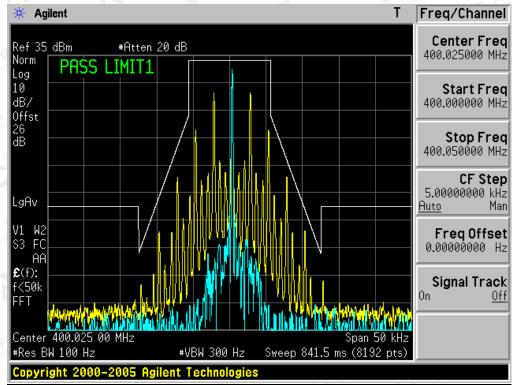

## The Worst Emission Mask D for (453.225 MHz) of 12.5 KHz channel Separation (0.5W)

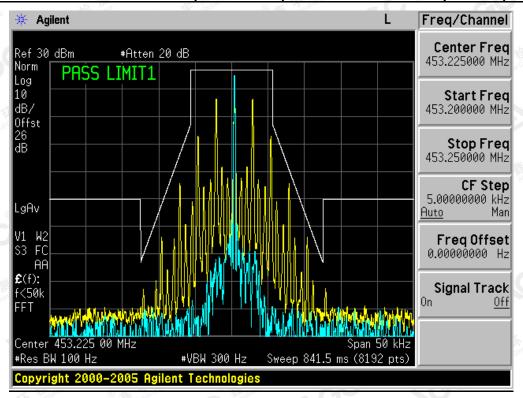


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a training and the sample (s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a training and the sample (s) are retained for 30 days only. The document is issued by XOC, this document is a sample (s) are retained for 30 days only. The document is issued by XOC, this document is a sample (s) are retained for 30 days only. The document is issued by XOC, this document is a sample (s) are retained for 30 days only. The document is issued by XOC, this document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only. The document is a sample (s) are retained for 30 days only are retained fo


(GC) S



## The Worst Emission Mask D for (453.225 MHz) of 12.5 KHz channel Separation (2W)

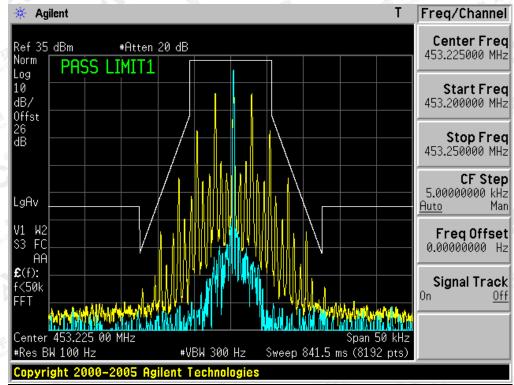

## The Worst Emission Mask D for (454.025 MHz) of 12.5 KHz channel Separation (0.5W)

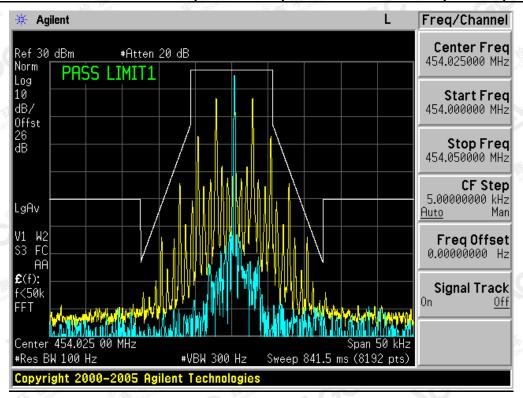


The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


(GC) S

Page 49 of 84

## The Worst Emission Mask D for (454.025 MHz) of 12.5 KHz channel Separation (2W)

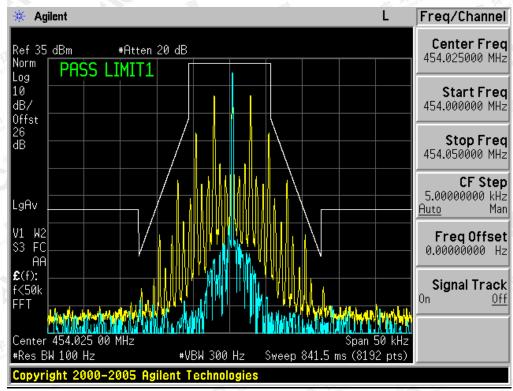

#### The Worst Emission Mask D for (479.975 MHz) of 12.5 KHz channel Separation (0.5W)

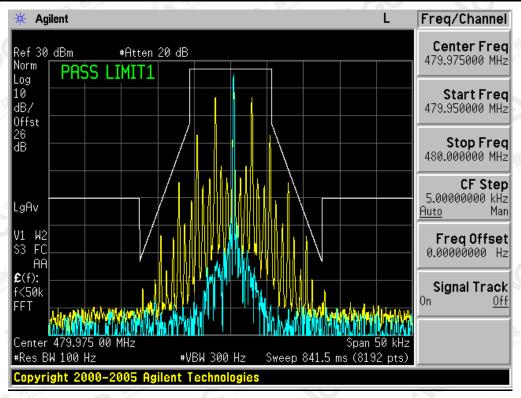


The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 50 of 84

#### The Worst Emission Mask D for (479.975 MHz) of 12.5 KHz channel Separation (2W)

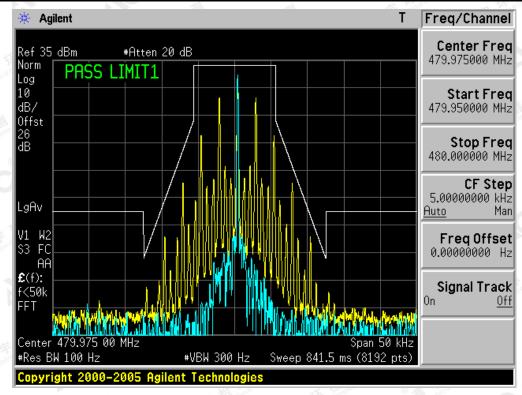

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China


Page 51 of 84

## Digital:

#### The Worst Emission Mask D for (400.025 MHz) of 12.5 KHz channel Separation (0.5W)

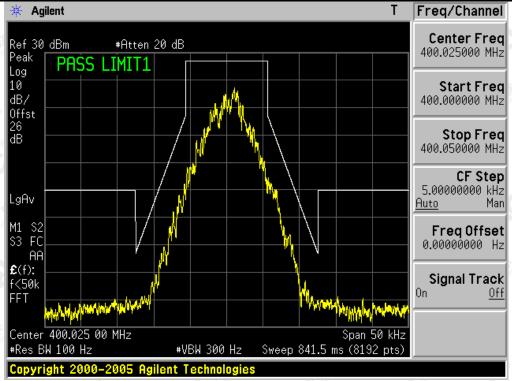

#### The Worst Emission Mask D for (400.025 MHz) of 12.5 KHz channel Separation (2W)

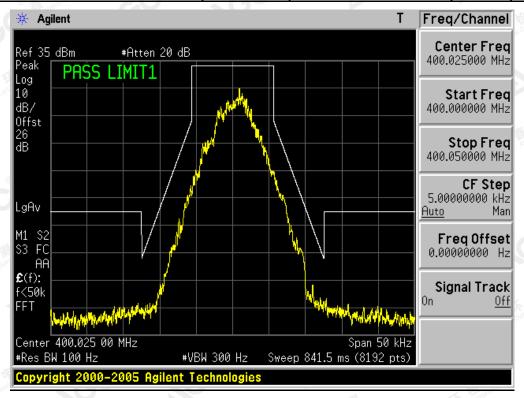


The results shown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document to cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.


**IGC** 8

Page 52 of 84

## The Worst Emission Mask D for (453.225 MHz) of 12.5 KHz channel Separation (0.5W)

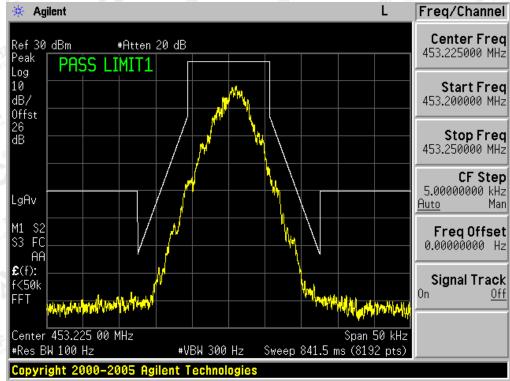

#### The Worst Emission Mask D for (453.225 MHz) of 12.5 KHz channel Separation (2W)

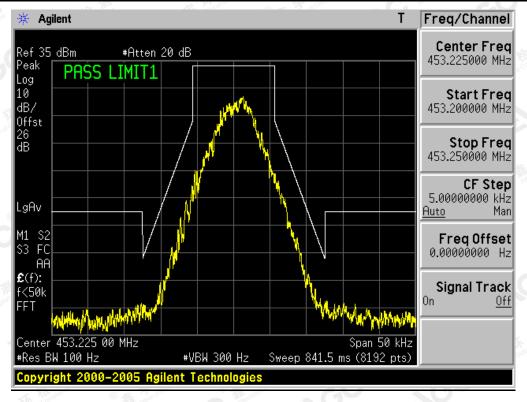


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gott.com.


C C S

Page 53 of 84

#### The Worst Emission Mask D for (454.025 MHz) of 12.5 KHz channel Separation (0.5W)

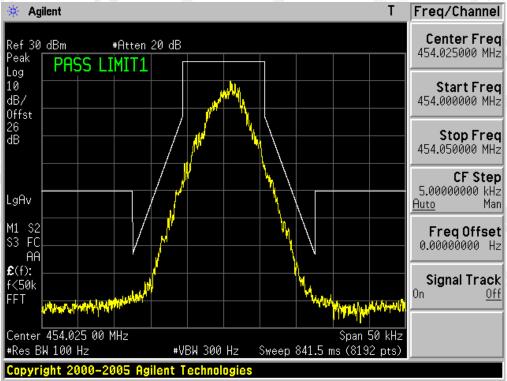

#### The Worst Emission Mask D for (454.025 MHz) of 12.5 KHz channel Separation (2W)

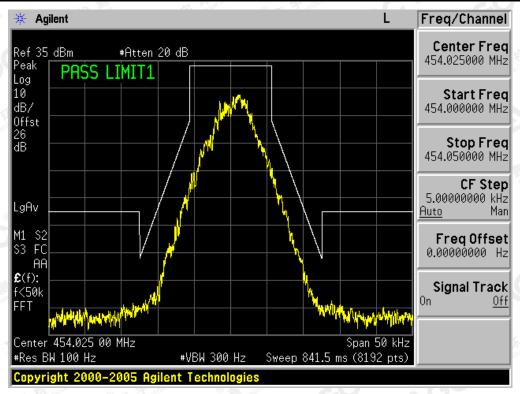


The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


C C S

Page 54 of 84

#### The Worst Emission Mask D for (479.975 MHz) of 12.5 KHz channel Separation (0.5W)

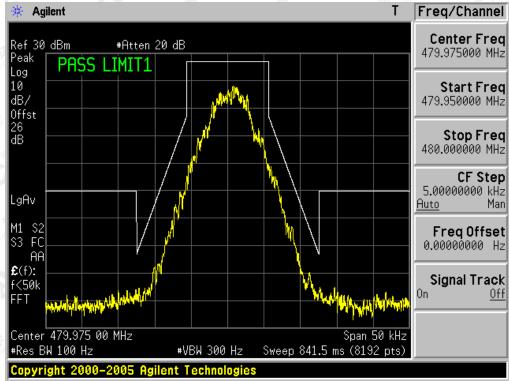

#### The Worst Emission Mask D for (479.975 MHz) of 12.5 KHz channel Separation (2W)

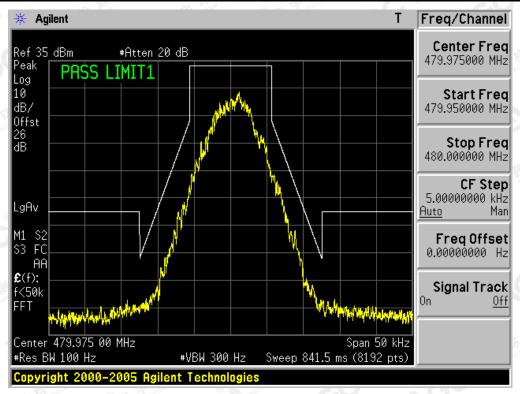

The results shown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document to cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.

(GC) S



Page 55 of 84

#### 9. MODULATION CHARACTERISTICS

#### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §90.207, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

## 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 KHz reference).



The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.



Page 56 of 84

#### 9.3 MEASUREMENT RESULT


UHF: Analog:

## TEST RESULT TS FOR H POWER H LEVEL

## (A). MODULATION LIMIT:

High Channel @ 12.5 KHz Channel Separations

		<u> </u>	400	7dV (0)
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.17	0.61	0.75	0.82
-15	0.31	0.67	0.88	1.05
-10	0.35	1.03	1.12	1.12
-5	0.43	1.15	1.22	1.34
0	0.52	1.34	1.51	1.59
+5	0.72	1.62	1.64	1.73
+10	0.83	1.73	1.76	1.88
+15	0.85	1.68	1.72	1.89
+20	0.90	1.60	1.69	1.91

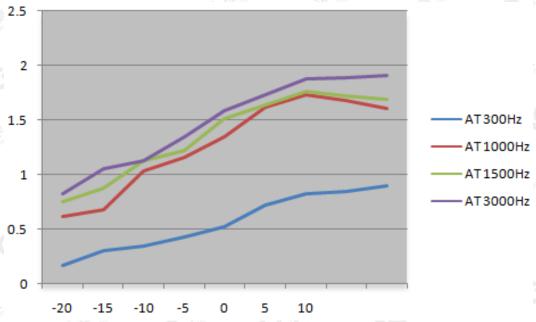

Note: All the modes had been tested, but only the worst data recorded in the report.

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




Page 57 of 84

## (B). AUDIO FREQUENCY RESPONSE:

High Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100		
200	<u></u>	B. 1870
300	0.13	-11.70
400	0.16	-9.90
500	0.21	-7.54
600	0.24	-6.38
700	0.25	-6.02
800	0.35	-3.10
900	0.43	-1.31 Same
1000	0.51	0.17
1200	0.54	0.67
1400	0.66	2.41
1600	0.77	3.75
1800	0.85	4.61
2000	0.96	5.67
2400	1.21	7.68
2500	1.45	9.25
2800	1.65	10.37
3000	1.76	10.77
3200	1.72	10.73
3600	1.54	9.77
4000	1.01	6.11
4500	0.86	4.71
5000	0.73	3.29
5500	0.45	-0.92
6000	0.12	-12.40
6500	0.05	-20.00
7000	0.03	-24.44
7500	0.01	-33.98
9000		- Kanjime
10000	70	F (Cont.)
14000	The The Company	# 37 day Committee -
18000	Compliance C-M Complete Comple	adation of Contraction of Contractio
20000	6.0	
30000	- 10 - 10 -	


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.





## Frequency Response of High Channel

## 12.5 KHz Channel Separations

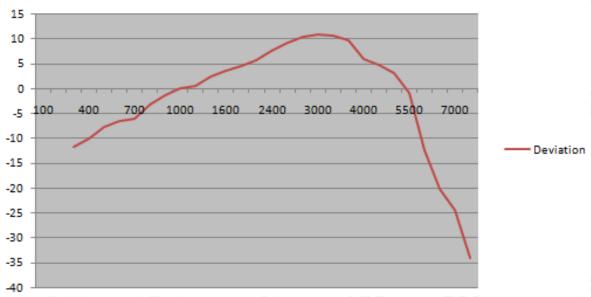

Note: All the modes had been tested, but only the worst data recorded in the report.

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China




Page 59 of 84

## Digital:

## (A). MODULATION LIMIT:

## High Channel @ 12.5 KHz Channel Separations---H Power

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.19	0.63	0.72	0.96
-15	0.29	0.75	0.83	1.02
-10	0.33	1.01	1.14	1.17
-5	0.35	1.22	1.28	1.35
O A d Good Com	0.52	1.36	1.53	1.53
+5	0.73	1.67	1.67	1.71
+10	0.88	1.71	1.76	1.85
+15	0.89	1.62	1.79	1.95
+20	0.92	1.56	1.65	1.92

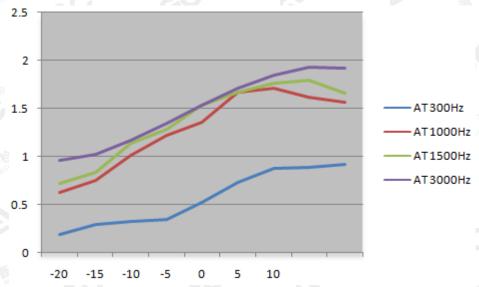

Note: All the modes had been tested, but only the worst data recorded in the report.

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




Page 60 of 84

## (B). AUDIO FREQUENCY RESPONSE:

High Channel @ 12.5 KHz Channel Separations---H Power


Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100		
200	<u></u>	B 100
300	0.11	-13.15
400	0.12	-12.40
500	0.23	-6.74
600	0.25	-6.02
700	0.26	-5.68
800	0.38	-2.38
900	0.45	-0.92
1000	0.46	-0.72
1200	0.55	0.83
1400	0.62	1.87
1600	0.71	3.05
1800	0.83	4.40
2000	0.95	5.58
2400	1.24	7.89
2500	<sup>®</sup> 1.38	8.82
2800	1.62	10.21
3000	1.73	10.78
3200	1.75	10.88
3600	1.45	9.25
4000	1.02	6.19
4500	0.84	4.51
5000	0.73	3.29
5500	0.46	-0.72
6000	0.17	-9.37
6500	0.05	-20.00
7000	0.03	-24.44
7500	0.02	-27.96
9000	-	EK Emplane
10000	F 70	The state of the s
14000	The Compiler	A Chopal Con.
18000	Those company (C-1) Those company (C)	festation C
20000	of Carrier Co	
30000	- CO	

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.





## Frequency Response of High Channel---H Power 12.5 KHz Channel Separations

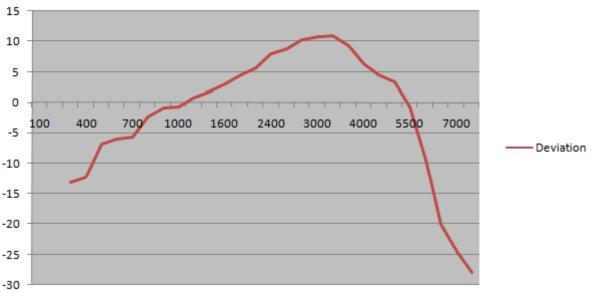

Note: All the modes had been tested, but only the worst data recorded in the report.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cert.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955

E-mail: agc@agc-cert.com

**@** 400 089 2118



Page 62 of 84

# 10. MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PEAK POWER 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 § 22.565 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

#### **10.2 TEST PROCEDURE**

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator. In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


#### **10.3 TEST CONFIGURATION**

#### **Conducted Output Power:**



#### **Effective Radiated Power**


#### Radiated Below1GHz

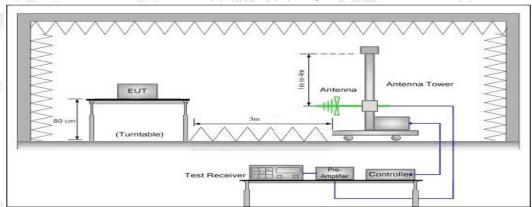


The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


(CC) Q



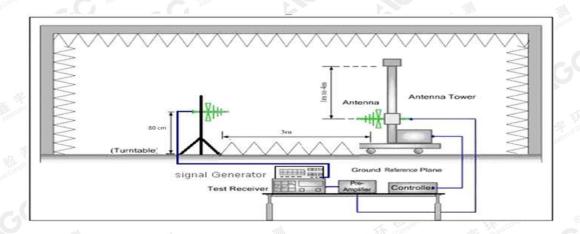

#### **Radiated Above 1 GHz**

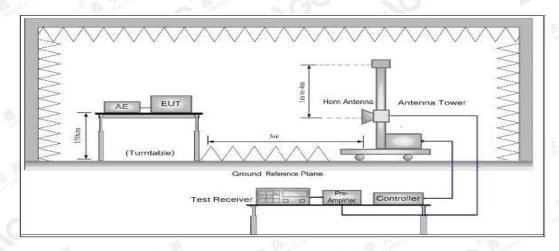

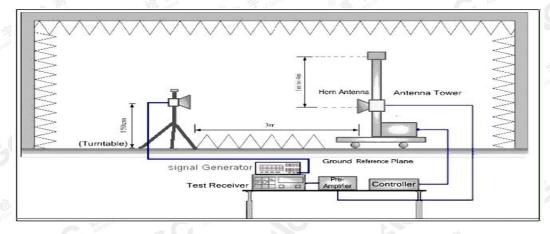

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 64 of 84

#### **10.4 TEST RESULT**

The maximum Conducted Power (CP) for VHF/UHF is

Analog: 2W/0.5 W for 12.5 KHz Channel Separation VHF Analog: 2W/0.5 W for 12.5 KHz Channel Separation UHF Digital: 2W/0.5 W for 12.5 KHz Channel Separation VHF Digital: 2W/0.5 W for 12.5 KHz Channel Separation UHF

Calculation Formula: CP = R + A + L

Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

The results spown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (30°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 65 of 84

UHF: Analog:

Conducted Power Measurement Results-2W			
Ohannal Cananatian	Channel	Measurement Result (dBm)	
Channel Separation		For 33dBm(2W)	
12.5 KHz	Bottom(400.025MHz)	32.51	
	Middle(453.225MHz)	32.48	
	Middle(454.025MHz)	32.38	
	Top (479.975MHz )	32.55	

Radiated Power Measurement Results-2W			
	Oh ammal	Measurement Result (dBm)	
Channel Separation	Channel	For 33dBm(2W)	
12.5 KHz	Bottom(400.025MHz)	32.31	
	Middle(453.225MHz)	32.28	
	Middle(454.025MHz)	32.22	
	Top (479.975MHz)	32.37	

Conducted Power Measurement Results-0.5W			
Channel Consection	Channel	Measurement Result (dBm)	
Channel Separation		For 26.99dBm(0.5W)	
8 Martin distance 8 Martin distance 1	Bottom(400.025MHz)	26.69	
GC SGO	Middle(453.225MHz)	26.72	
12.5 KHz	Middle(454.025MHz)	26.84	
The territory of the te	Top (479.975MHz )	26.75	

Radiated Power Measurement Results-0.5W				
Measurement Result (dBm)				
Channel Separation	Channel	For 26.99dBm(0.5W)		
12.5 KHz	Bottom(400.025MHz)	26.50		
	Middle(453.225MHz)	26.57		
	Middle(454.025MHz)	26.61		
	Top (479.975MHz )	26.59		

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a



Page 66 of 84

#### <u>Digital:</u> Date + voice:

Conducted Power Measurement Results-2W			
Measurement Result (di			
Channel Separation	Channel	For 33dBm(2W)	
12.5 KHz	Bottom(400.025MHz)	32.33	
	Middle(453.225MHz)	32.38	
	Middle(454.025MHz)	32.32	
	Top (479.975MHz)	32.34	

Radiated Power Measurement Results-2W			
Ohamad Oamandian	Channel	Measurement Result (dBm)	
Channel Separation		For 33dBm(2W)	
12.5 KHz	Bottom(400.025MHz)	32.19	
	Middle(453.225MHz)	32.22	
	Middle(454.025MHz)	32.25	
	Top (479.975MHz)	32.23	

## **Date transmission mode:**

Conducted Power Measurement Results-2W			
Channal Canavation	Measurement Result (dBm)		
Channel Separation	Channel	For 33dBm(2W)	
12.5 KHz	Bottom(400.025MHz)	32.11	
	Middle(453.225MHz)	32.09	
	Middle(454.025MHz)	32.08	
	Top (479.975MHz )	32.12	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a



Page 67 of 84

Radiated Power Measurement Results-2W			
		Measurement Result (dBm)	
Channel Separation	Channel	For 33dBm(2W)	
CO	Bottom(400.025MHz)	32.02	
40 5 1/115	Middle(453.225MHz)	31.98	
12.5 KHz	Middle(454.025MHz)	31.99	
of the second	Top (479.975MHz)	32.03	

#### Date + voice:

Conducted Power Measurement Results-0.5W				
Channel Consession	Channel	Measurement Result (dBm)		
Channel Separation		For 26.99dBm(0.5W)		
All Completions Co	Bottom(400.025MHz)	26.51		
12.5 KHz	Middle(453.225MHz)	26.55		
	Middle(454.025MHz)	26.52		
	Top (479.975MHz)	26.58		

Radiated Power Measurement Results-0.5W				
Channel Separation	Channel	Measurement Result (dBm)		
		For 26.99dBm(0.5W)		
CO CO	Bottom(400.025MHz)	26.38		
12.5 KHz	Middle(453.225MHz)	26.43		
	Middle(454.025MHz)	26.42		
	Top (479.975MHz)	26.46		

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 68 of 84

## **Date transmission mode:**

Conducted Power Measurement Results-0.5W				
Channel Consection	Chamal	Measurement Result (dBm)		
Channel Separation	Channel	For 26.99dBm(0.5W)		
GO F	Bottom(400.025MHz)	26.50		
TO FIGURE 1	Middle(453.225MHz)	26.46		
12.5 KHz	Middle(454.025MHz)	26.47		
	Top (479.975MHz )	26.45		

Radiated Power Measurement Results-0.5W			
Ol annual Oanamat'an	Ol	Measurement Result (dBm)	
Channel Separation	Channel	For 26.99dBm(0.5W)	
12.5 KHz	Bottom(400.025MHz)	26.20	
	Middle(453.225MHz)	26.18	
	Middle(454.025MHz)	26.21	
	Top (479.975MHz)	26.14	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 69 of 84

#### 10.5 CONDUCT SPURIOUS PLOT

Note: The EUT antenna is a non-removable antenna and does not need to measure Conduct spurious

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 70 of 84

#### 11. RANSMITTER FREQUENCY BEHAVIOR

#### 11.1PROVISIONS APPLICABLE

FCC §90.214

	Maximum frequency difference <sup>3</sup>	All equipment				
Time intervals 1. 2		150 to 174 MHz	421 to 512 MHz			
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels						
t <sub>1</sub> <sup>4</sup>	± 25.0 kHz ± 12.5 kHz ± 25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms			
Transient Frequency Behavior for Equipme	nt Designed to Operate	on 12.5 kHz Channels				
t <sub>1</sub> <sup>4</sup>	± 12.5 kHz ± 6.25 kHz ± 12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms			
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels						
t <sub>1</sub> <sup>4</sup>	± 6.25 kHz ± 3.125 kHz ± 6.25 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms			

#### 11.2 TEST METHOD

TIA/EIA-603 2.2.19.3

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cert.com.

 $<sup>^{1}</sup>$  t $_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.  $t_{1}$  is the time period immediately following  $t_{on}$ .  $t_{2}$  is the time period immediately following  $t_{1}$ .  $t_{3}$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .  $t_{off}$  is the instant when the 1 kHz test signal starts to rise.  $t_{2}$  During the time from the end of  $t_{2}$  to the beginning of  $t_{3}$ , the frequency difference must not exceed the limits specified in  $t_{3}$ . § 90.213.

 <sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.
 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.



Page 71 of 84

#### 11.3 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

t1: period of time starting at ton and finishing according to above 11.1

t2: period of time starting at the end of t1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

t3: period of time that finishing at toff and starting according to above 11.1

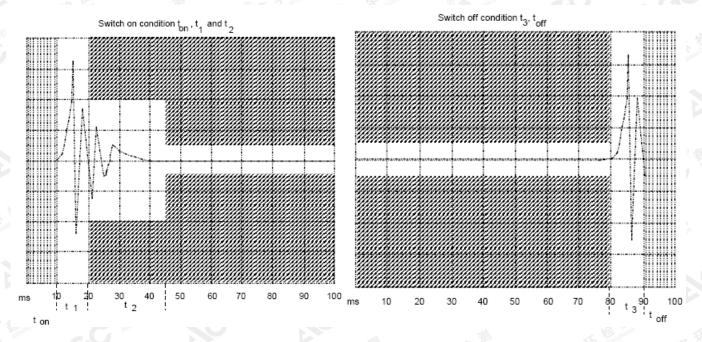

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 72 of 84


## 11.4 MEASURE RESULT

UHF:

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--Off to On

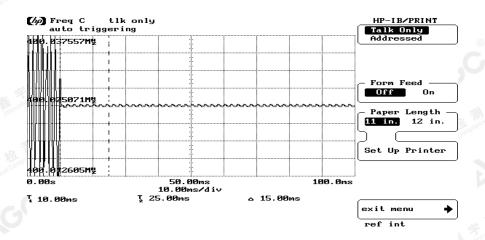

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--On to Off

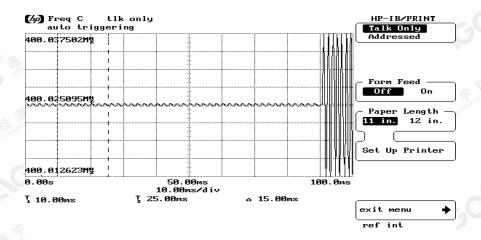

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

**IGC** 8