



**TX CH 157**

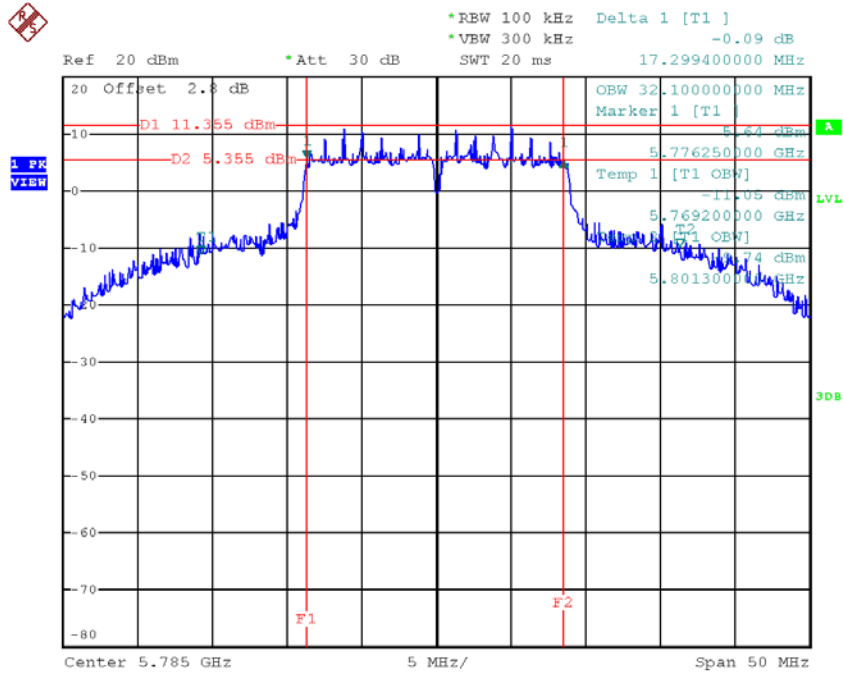

Date: 3.APR.2018 12:48:09

**TX CH 165**

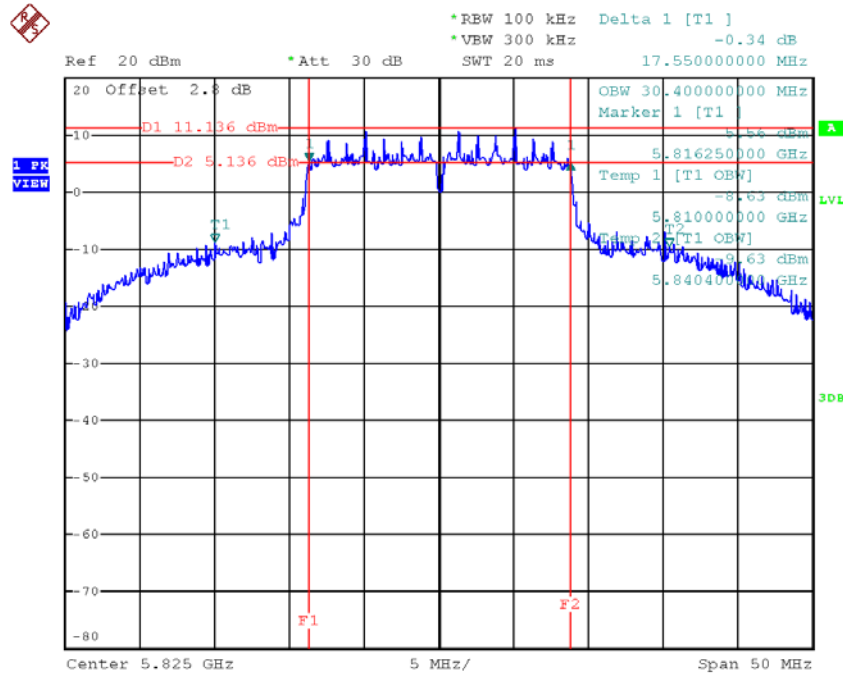


Date: 3.APR.2018 12:49:05

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159**


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH151   | 5755            | 36.50               | 67.80                        | >=500       |
| CH159   | 5795            | 36.50               | 67.40                        | >=500       |

**TX CH 151**

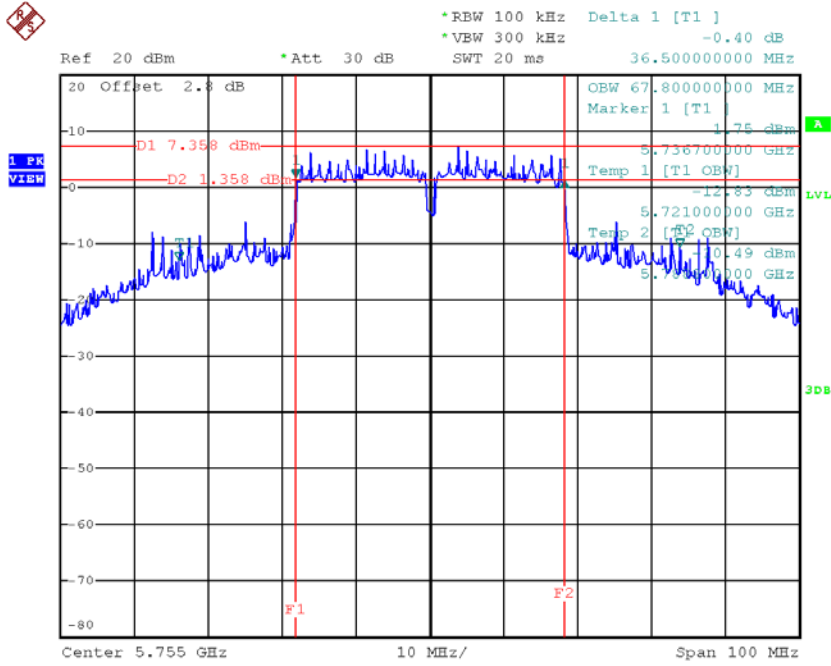

Date: 3.APR.2018 15:38:27


**TX CH 159**

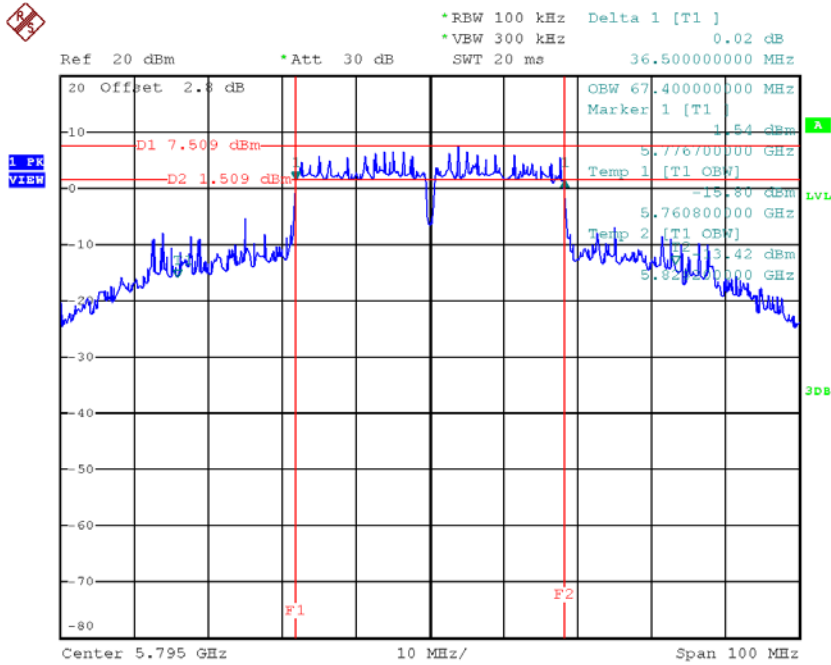

Date: 3.APR.2018 15:40:06

**Test Mode: UNII-3/ TX AC80 Mode\_CH155**

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH155   | 5775            | 75.80               | 76.00                        | >=500       |

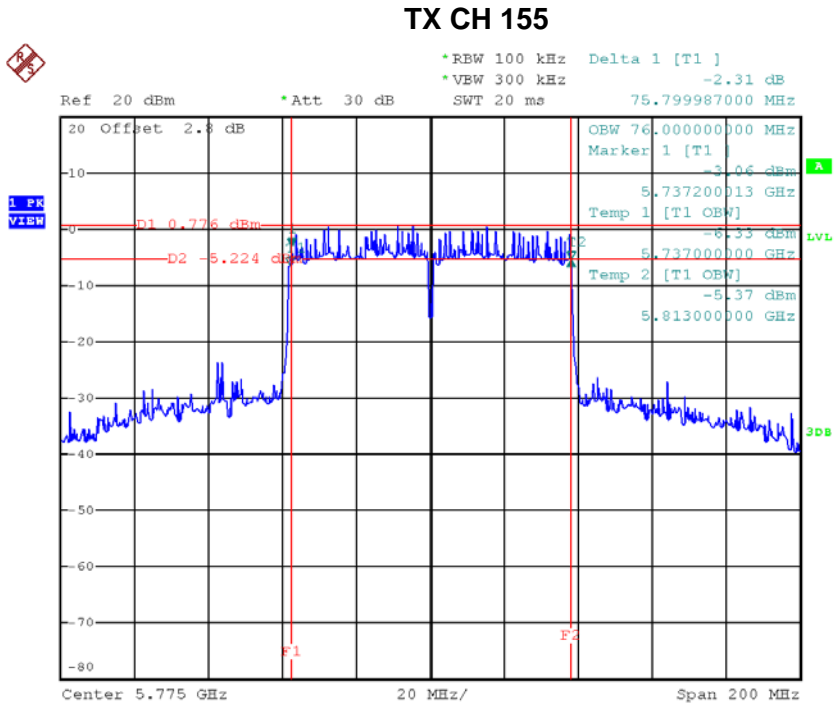

Date: 3.APR.2018 16:00:59

## APPENDIX F - MAXIMUM OUTPUT POWER

**Test Mode: UNII-1/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 17.67              | 0.35        | 18.02                            | 24.00       | 0.25         |
| CH40    | 5200            | 19.05              | 0.35        | 19.40                            | 24.00       | 0.25         |
| CH48    | 5240            | 19.15              | 0.35        | 19.50                            | 24.00       | 0.25         |

**Test Mode: UNII-1/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 19.72              | 0.35        | 20.07                            | 24.00       | 0.25         |
| CH40    | 5200            | 21.61              | 0.35        | 21.96                            | 24.00       | 0.25         |
| CH48    | 5240            | 21.21              | 0.35        | 21.56                            | 24.00       | 0.25         |

Remark: This test data is from original report BTL-FCCP-4-1602C038.

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.73              | 0.31        | 16.04                            | 22.51       | 0.18         |
| CH40    | 5200            | 15.45              | 0.31        | 15.76                            | 22.51       | 0.18         |
| CH48    | 5240            | 15.55              | 0.31        | 15.86                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.40              | 0.31        | 15.71                            | 22.51       | 0.18         |
| CH40    | 5200            | 15.20              | 0.31        | 15.51                            | 22.51       | 0.18         |
| CH48    | 5240            | 15.25              | 0.31        | 15.56                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 18.89              | 22.51       | 0.18         |
| CH40    | 5200            | 18.65              | 22.51       | 0.18         |
| CH48    | 5240            | 18.72              | 22.51       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 9.42               | 0.80        | 10.22                            | 22.51       | 0.18         |
| CH46    | 5230            | 17.25              | 0.80        | 18.05                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 9.24               | 0.80        | 10.04                            | 22.51       | 0.18         |
| CH46    | 5230            | 17.05              | 0.80        | 17.85                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode \_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 13.14              | 22.51       | 0.18         |
| CH46    | 5230            | 20.96              | 22.51       | 0.18         |



**Test Mode: UNII-2A/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 19.23              | 0.35        | 19.58                            | 24.00       | 0.25         |
| CH60    | 5300            | 18.85              | 0.35        | 19.20                            | 24.00       | 0.25         |
| CH64    | 5320            | 16.45              | 0.35        | 16.80                            | 24.00       | 0.25         |

**Test Mode: UNII-2A/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 20.34              | 0.35        | 20.69                            | 24.00       | 0.25         |
| CH60    | 5300            | 20.26              | 0.35        | 20.61                            | 24.00       | 0.25         |
| CH64    | 5320            | 19.28              | 0.35        | 19.63                            | 24.00       | 0.25         |

Remark: This test data is from original report BTL-FCCP-4-1602C038.

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.30              | 0.31        | 15.61                            | 22.61       | 0.18         |
| CH60    | 5300            | 15.15              | 0.31        | 15.46                            | 22.61       | 0.18         |
| CH64    | 5320            | 15.00              | 0.31        | 15.31                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 14.85              | 0.31        | 15.16                            | 22.61       | 0.18         |
| CH60    | 5300            | 14.85              | 0.31        | 15.16                            | 22.61       | 0.18         |
| CH64    | 5320            | 14.70              | 0.31        | 15.01                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 18.40              | 22.61       | 0.18         |
| CH60    | 5300            | 18.32              | 22.61       | 0.18         |
| CH64    | 5320            | 18.17              | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 17.05              | 0.80        | 17.85                            | 22.61       | 0.18         |
| CH62    | 5310            | 11.50              | 0.80        | 12.30                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 16.65              | 0.80        | 17.45                            | 22.61       | 0.18         |
| CH62    | 5310            | 11.05              | 0.80        | 11.85                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 20.66              | 22.61       | 0.18         |
| CH62    | 5310            | 15.09              | 22.61       | 0.18         |

**Test Mode: UNII-2C/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.90              | 0.35        | 16.25                            | 24.00       | 0.25         |
| CH116   | 5580            | 19.35              | 0.35        | 19.70                            | 24.00       | 0.25         |
| CH140   | 5700            | 14.25              | 0.35        | 14.60                            | 24.00       | 0.25         |

**Test Mode: UNII-2C/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 17.62              | 0.35        | 17.97                            | 24.00       | 0.25         |
| CH116   | 5580            | 20.07              | 0.35        | 20.42                            | 24.00       | 0.25         |
| CH140   | 5700            | 17.18              | 0.35        | 17.53                            | 24.00       | 0.25         |

Remark: This test data is from original report BTL-FCCP-4-1602C038.

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 13.95              | 0.31        | 14.26                            | 21.20       | 0.13         |
| CH116   | 5580            | 13.90              | 0.31        | 14.21                            | 21.20       | 0.13         |
| CH140   | 5700            | 14.00              | 0.31        | 14.31                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 13.40              | 0.31        | 13.71                            | 21.20       | 0.13         |
| CH116   | 5580            | 12.45              | 0.31        | 12.76                            | 21.20       | 0.13         |
| CH140   | 5700            | 11.35              | 0.31        | 11.66                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 17.00              | 21.20       | 0.13         |
| CH116   | 5580            | 16.56              | 21.20       | 0.13         |
| CH140   | 5700            | 16.19              | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 12.20              | 0.80        | 13.00                            | 21.20       | 0.13         |
| CH110   | 5550            | 16.10              | 0.80        | 16.90                            | 21.20       | 0.13         |
| CH134   | 5670            | 14.80              | 0.80        | 15.60                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 11.65              | 0.80        | 12.45                            | 21.20       | 0.13         |
| CH110   | 5550            | 14.77              | 0.80        | 15.57                            | 21.20       | 0.13         |
| CH134   | 5670            | 12.35              | 0.80        | 13.15                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 15.74              | 21.20       | 0.13         |
| CH110   | 5550            | 19.30              | 21.20       | 0.13         |
| CH134   | 5670            | 17.56              | 21.20       | 0.13         |

**Test Mode: UNII-3/ TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 19.64              | 0.35        | 19.99                            | 30.00       | 1.00         |
| CH157   | 5785            | 19.89              | 0.35        | 20.24                            | 30.00       | 1.00         |
| CH165   | 5825            | 20.13              | 0.35        | 20.48                            | 30.00       | 1.00         |

**Test Mode: UNII-3/ TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 23.18              | 0.35        | 23.53                            | 30.00       | 1.00         |
| CH157   | 5785            | 22.94              | 0.35        | 23.29                            | 30.00       | 1.00         |
| CH165   | 5825            | 22.74              | 0.35        | 23.09                            | 30.00       | 1.00         |

Remark: This test data is from original report BTL-FCCP-4-1602C038.

**Test Mode: UNII-3/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 19.41              | 0.31        | 19.72                            | 26.95       | 0.50         |
| CH157   | 5785            | 19.34              | 0.31        | 19.65                            | 26.95       | 0.50         |
| CH165   | 5825            | 19.57              | 0.31        | 19.88                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 17.31              | 0.31        | 17.62                            | 26.95       | 0.50         |
| CH157   | 5785            | 17.22              | 0.31        | 17.53                            | 26.95       | 0.50         |
| CH165   | 5825            | 17.37              | 0.31        | 17.68                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 21.81              | 26.95       | 0.50         |
| CH157   | 5785            | 21.73              | 26.95       | 0.50         |
| CH165   | 5825            | 21.93              | 26.95       | 0.50         |



**Test Mode: UNII-3/ TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 18.98              | 0.80        | 19.78                            | 26.95       | 0.50         |
| CH159   | 5795            | 18.81              | 0.80        | 19.61                            | 26.95       | 0.50         |

**Test Mode: UNII-3/ TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 18.22              | 0.80        | 19.02                            | 26.95       | 0.50         |
| CH159   | 5795            | 18.19              | 0.80        | 18.99                            | 26.95       | 0.50         |

**Test Mode: UNII-3/ TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 22.43              | 26.95       | 0.50         |
| CH159   | 5795            | 22.32              | 26.95       | 0.50         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.15              | 0.64        | 15.79                            | 22.51       | 0.18         |
| CH40    | 5200            | 15.05              | 0.64        | 15.69                            | 22.51       | 0.18         |
| CH48    | 5240            | 15.15              | 0.64        | 15.79                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 14.94              | 0.64        | 15.58                            | 22.51       | 0.18         |
| CH40    | 5200            | 14.96              | 0.64        | 15.60                            | 22.51       | 0.18         |
| CH48    | 5240            | 15.01              | 0.64        | 15.65                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 18.70              | 22.51       | 0.18         |
| CH40    | 5200            | 18.66              | 22.51       | 0.18         |
| CH48    | 5240            | 18.73              | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 10.85              | 1.31        | 12.16                            | 22.51       | 0.18         |
| CH46    | 5230            | 17.25              | 1.31        | 18.56                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 10.62              | 1.31        | 11.93                            | 22.51       | 0.18         |
| CH46    | 5230            | 17.02              | 1.31        | 18.33                            | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 15.06              | 22.51       | 0.18         |
| CH46    | 5230            | 21.46              | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 6.92               | 2.58        | 9.50                             | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 7.00               | 2.58        | 9.58                             | 22.51       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH42    | 5210            | 12.55              | 22.51       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.05              | 0.64        | 15.69                            | 22.61       | 0.18         |
| CH60    | 5300            | 14.85              | 0.64        | 15.49                            | 22.61       | 0.18         |
| CH64    | 5320            | 14.85              | 0.64        | 15.49                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 14.51              | 0.64        | 15.15                            | 22.61       | 0.18         |
| CH60    | 5300            | 14.62              | 0.64        | 15.26                            | 22.61       | 0.18         |
| CH64    | 5320            | 14.45              | 0.64        | 15.09                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 18.44              | 22.61       | 0.18         |
| CH60    | 5300            | 18.39              | 22.61       | 0.18         |
| CH64    | 5320            | 18.30              | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 17.30              | 1.31        | 18.61                            | 22.61       | 0.18         |
| CH62    | 5310            | 12.20              | 1.31        | 13.51                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 16.27              | 1.31        | 17.58                            | 22.61       | 0.18         |
| CH62    | 5310            | 12.01              | 1.31        | 13.32                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 21.08              | 22.61       | 0.18         |
| CH62    | 5310            | 16.43              | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 8.93               | 2.58        | 11.51                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 8.45               | 2.58        | 11.03                            | 22.61       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH58    | 5290            | 14.29              | 22.61       | 0.18         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 13.40              | 0.64        | 14.04                            | 21.20       | 0.13         |
| CH116   | 5580            | 13.55              | 0.64        | 14.19                            | 21.20       | 0.13         |
| CH140   | 5700            | 13.85              | 0.64        | 14.49                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 12.79              | 0.64        | 13.43                            | 21.20       | 0.13         |
| CH116   | 5580            | 12.16              | 0.64        | 12.80                            | 21.20       | 0.13         |
| CH140   | 5700            | 11.18              | 0.64        | 11.82                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 16.76              | 21.20       | 0.13         |
| CH116   | 5580            | 16.56              | 21.20       | 0.13         |
| CH140   | 5700            | 16.37              | 21.20       | 0.13         |



**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 13.30              | 1.31        | 14.61                            | 21.20       | 0.13         |
| CH110   | 5550            | 16.00              | 1.31        | 17.31                            | 21.20       | 0.13         |
| CH134   | 5670            | 15.40              | 1.31        | 16.71                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 12.34              | 1.31        | 13.65                            | 21.20       | 0.13         |
| CH110   | 5550            | 12.84              | 1.31        | 14.15                            | 21.20       | 0.13         |
| CH134   | 5670            | 13.01              | 1.31        | 14.32                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 17.17              | 21.20       | 0.13         |
| CH110   | 5550            | 19.02              | 21.20       | 0.13         |
| CH134   | 5670            | 18.69              | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 9.00               | 2.58        | 11.58                            | 21.20       | 0.13         |
| CH122   | 5610            | 14.55              | 2.58        | 17.13                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 8.13               | 2.58        | 10.71                            | 21.20       | 0.13         |
| CH122   | 5610            | 12.45              | 2.58        | 15.03                            | 21.20       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH106   | 5530            | 14.18              | 21.20       | 0.13         |
| CH122   | 5610            | 19.22              | 21.20       | 0.13         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 19.66              | 0.64        | 20.30                            | 26.95       | 0.50         |
| CH157   | 5785            | 19.87              | 0.64        | 20.51                            | 26.95       | 0.50         |
| CH165   | 5825            | 19.75              | 0.64        | 20.39                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 17.33              | 0.64        | 17.97                            | 26.95       | 0.50         |
| CH157   | 5785            | 17.12              | 0.64        | 17.76                            | 26.95       | 0.50         |
| CH165   | 5825            | 17.15              | 0.64        | 17.79                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 22.30              | 26.95       | 0.50         |
| CH157   | 5785            | 22.36              | 26.95       | 0.50         |
| CH165   | 5825            | 22.29              | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 19.28              | 1.31        | 20.59                            | 26.95       | 0.50         |
| CH159   | 5795            | 18.79              | 1.31        | 20.10                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 18.17              | 1.31        | 19.48                            | 26.95       | 0.50         |
| CH159   | 5795            | 18.23              | 1.31        | 19.54                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 23.08              | 26.95       | 0.50         |
| CH159   | 5795            | 22.84              | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 14.80              | 2.58        | 17.38                            | 26.95       | 0.50         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 11.75              | 2.58        | 14.33                            | 26.95       | 0.50         |


**Test Mode: UNII-3/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH155   | 5775            | 19.13              | 26.95       | 0.50         |

## APPENDIX G - POWER SPECTRAL DENSITY


**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 3.83                    | 0.35        | 4.18                                  | 11.00           |
| CH40    | 5200            | 9.29                    | 0.35        | 9.64                                  | 11.00           |
| CH48    | 5240            | 3.98                    | 0.35        | 4.33                                  | 11.00           |

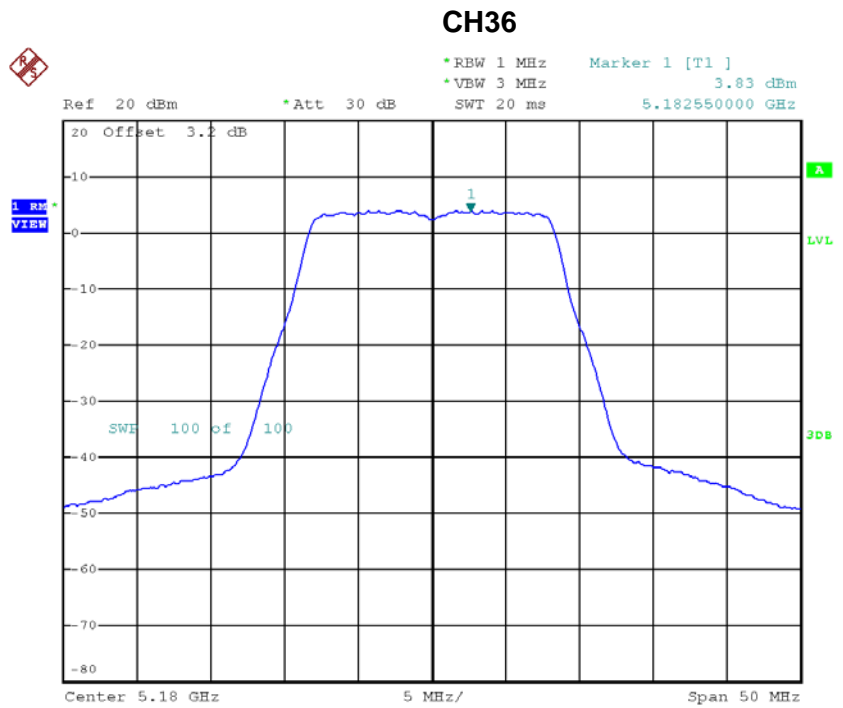


Date: 30.MAR.2018 19:02:54

### CH40

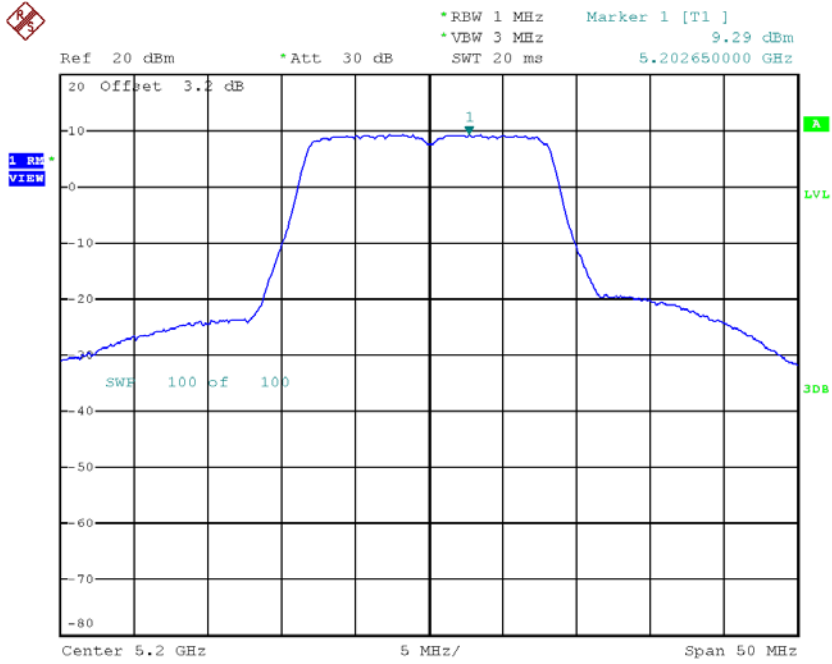

Date: 30.MAR.2018 10:40:09

### CH48

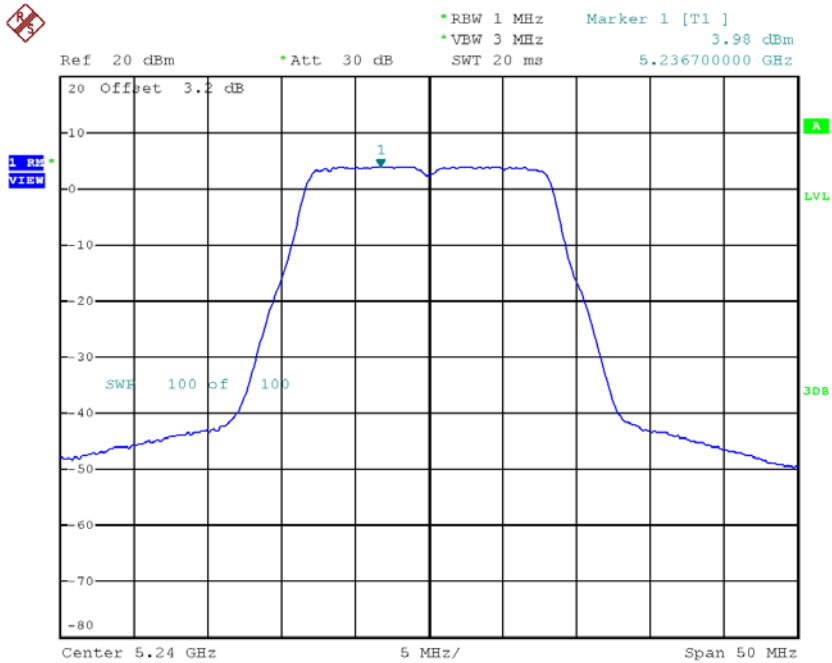


Date: 30.MAR.2018 19:55:58




**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.16                    | 0.35        | 4.51                                  | 11.00           |
| CH40    | 5200            | 4.29                    | 0.35        | 4.64                                  | 11.00           |
| CH48    | 5240            | 4.10                    | 0.35        | 4.45                                  | 11.00           |

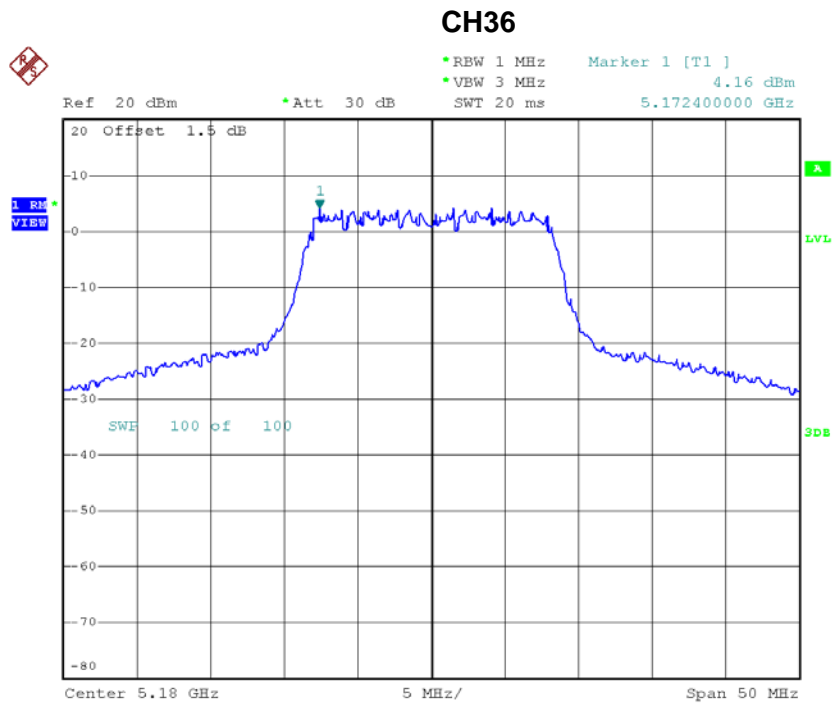


Date: 12.MAY.2016 17:24:53

### CH40

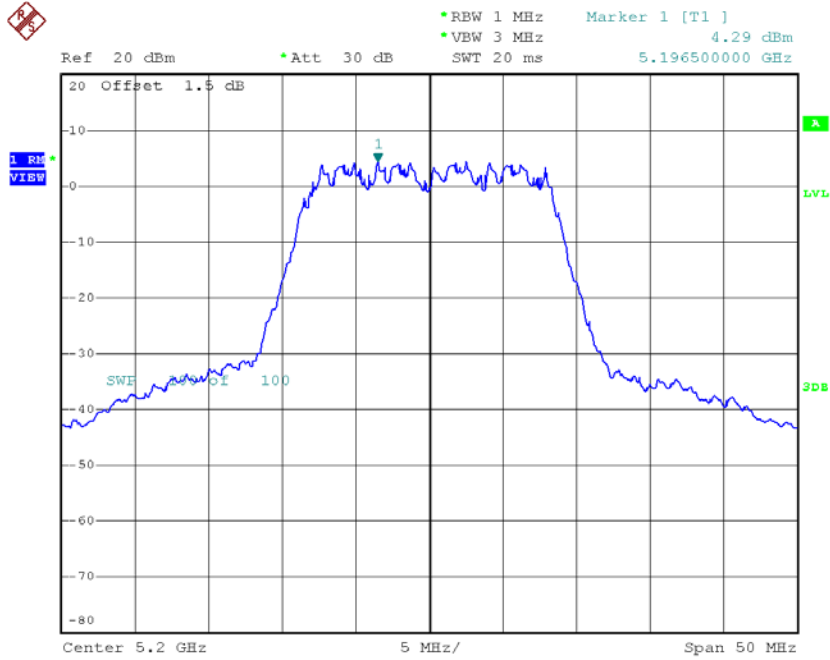

Date: 12.MAY.2016 17:26:29

### CH48

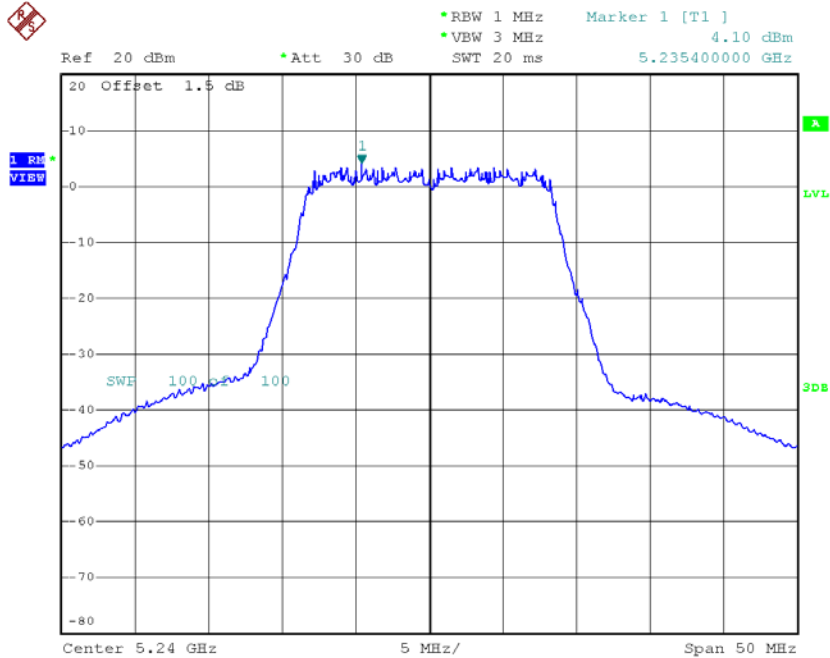


Date: 12.MAY.2016 17:28:12

Remark: This test data is from original report BTL-FCCP-4-1602C038.


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 5.46                    | 0.31        | 5.77                                  | 9.51            |
| CH40    | 5200            | 5.33                    | 0.31        | 5.64                                  | 9.51            |
| CH48    | 5240            | 5.41                    | 0.31        | 5.72                                  | 9.51            |

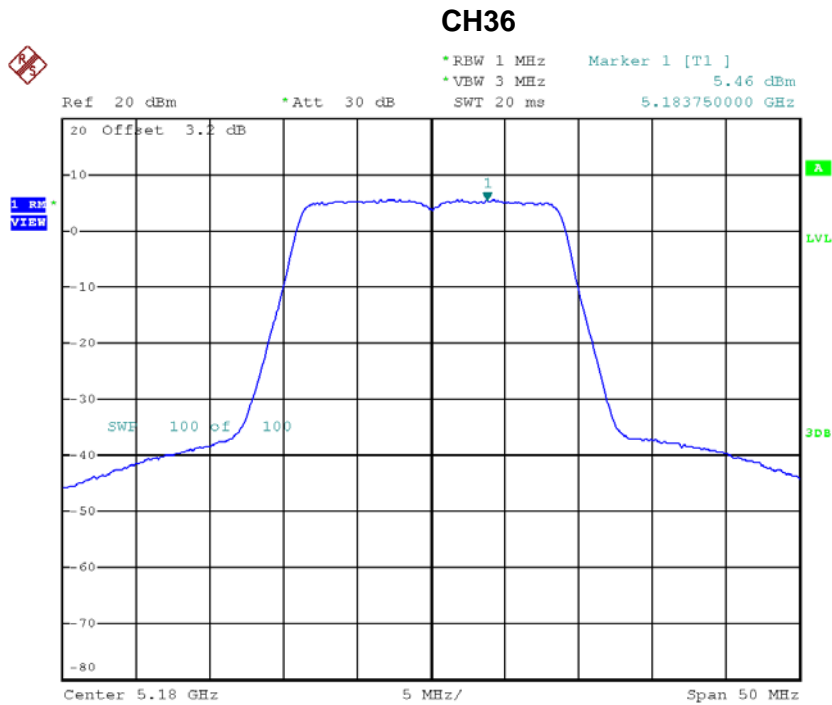


Date: 30.MAR.2018 10:47:40

### CH40

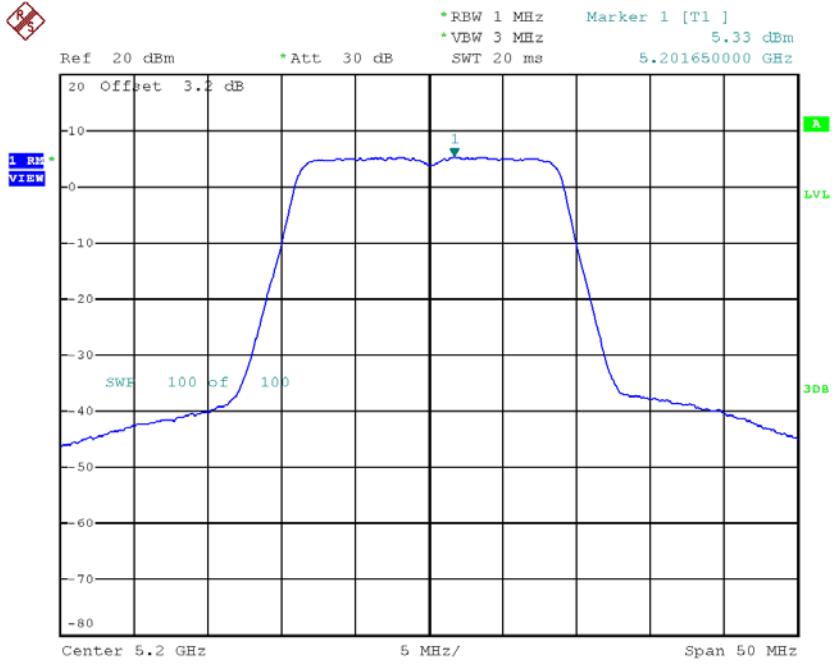

Date: 30.MAR.2018 10:50:45


### CH48

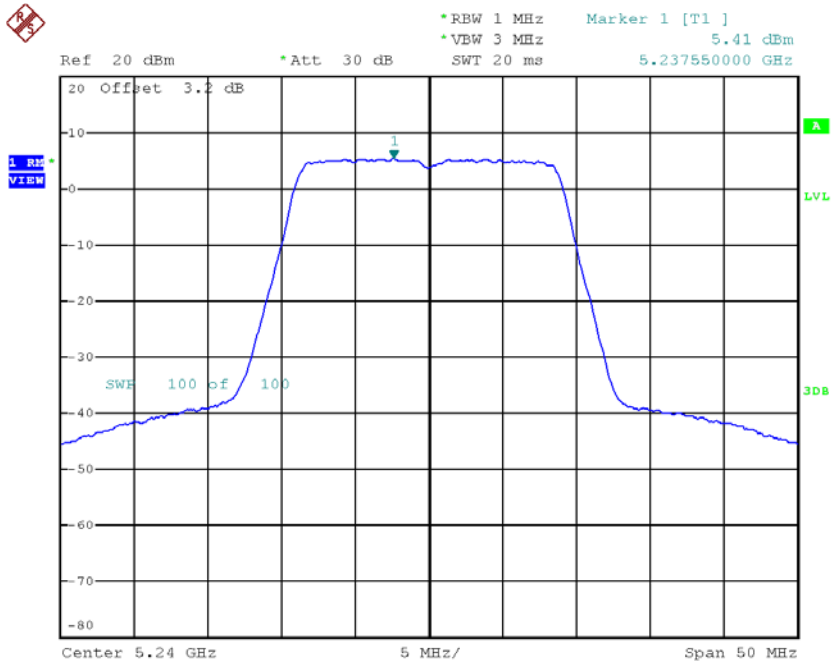

Date: 30.MAR.2018 10:52:06


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 5.09                    | 0.31        | 5.40                                  | 9.51            |
| CH40    | 5200            | 4.85                    | 0.31        | 5.16                                  | 9.51            |
| CH48    | 5240            | 4.87                    | 0.31        | 5.18                                  | 9.51            |

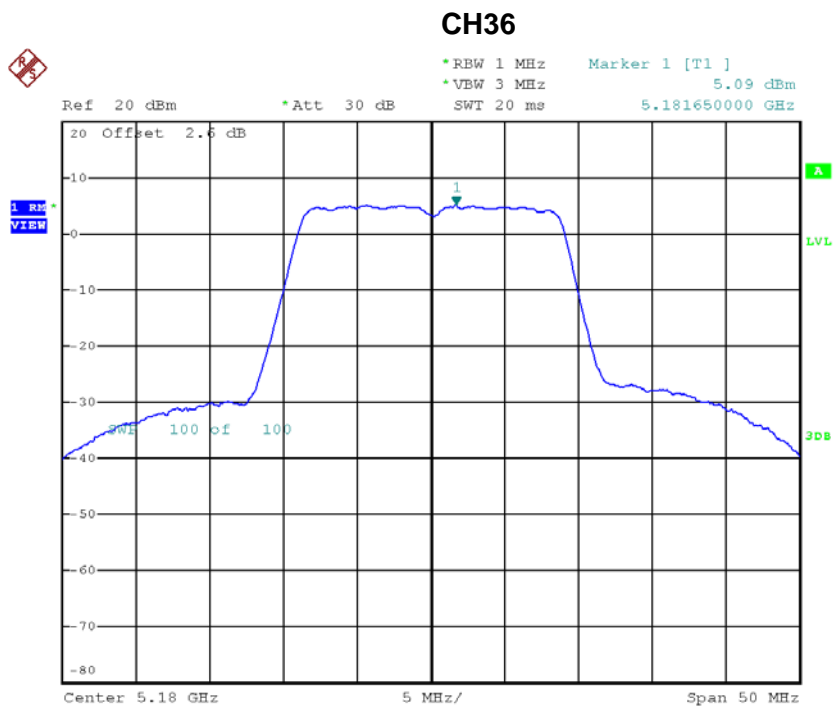


Date: 30.MAR.2018 11:46:54

### CH40

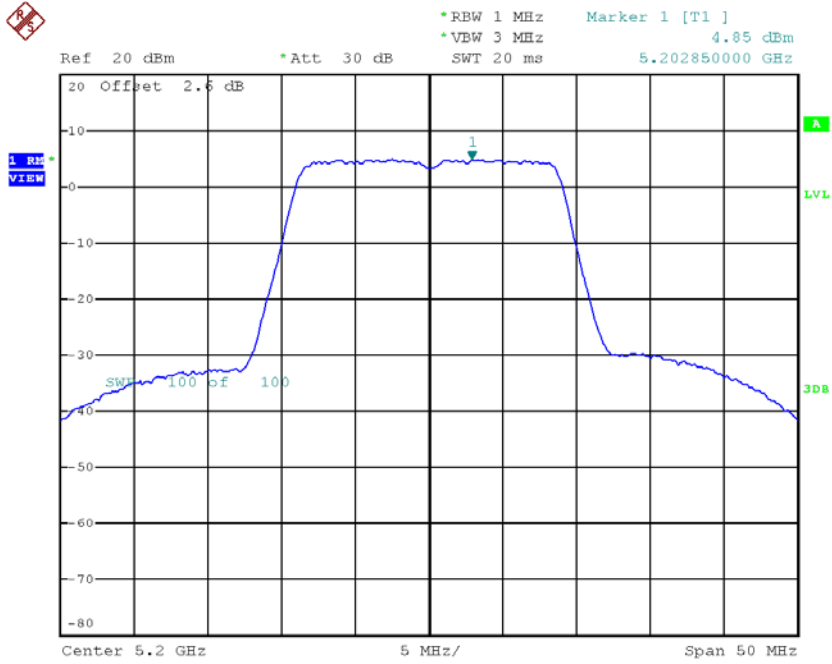

Date: 30.MAR.2018 12:06:07

### CH48

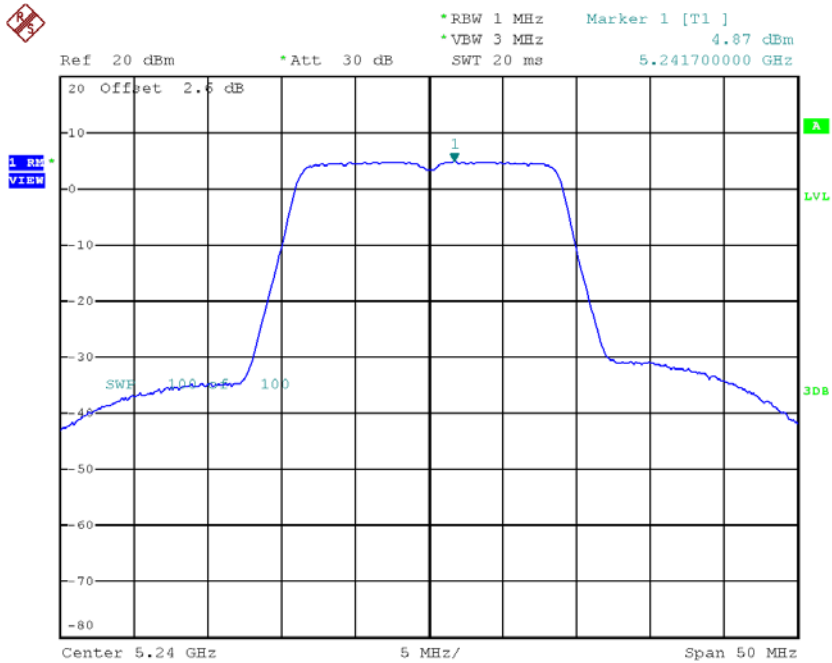

Date: 30.MAR.2018 11:50:31

**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_Total**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH36    | 5180            | 8.60                    | 9.51            |
| CH40    | 5200            | 8.42                    | 9.51            |
| CH48    | 5240            | 8.47                    | 9.51            |

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH38    | 5190            | -5.11                   | 0.80        | -4.31                                 | 9.51            |
| CH46    | 5230            | 2.58                    | 0.80        | 3.38                                  | 9.51            |




### CH38

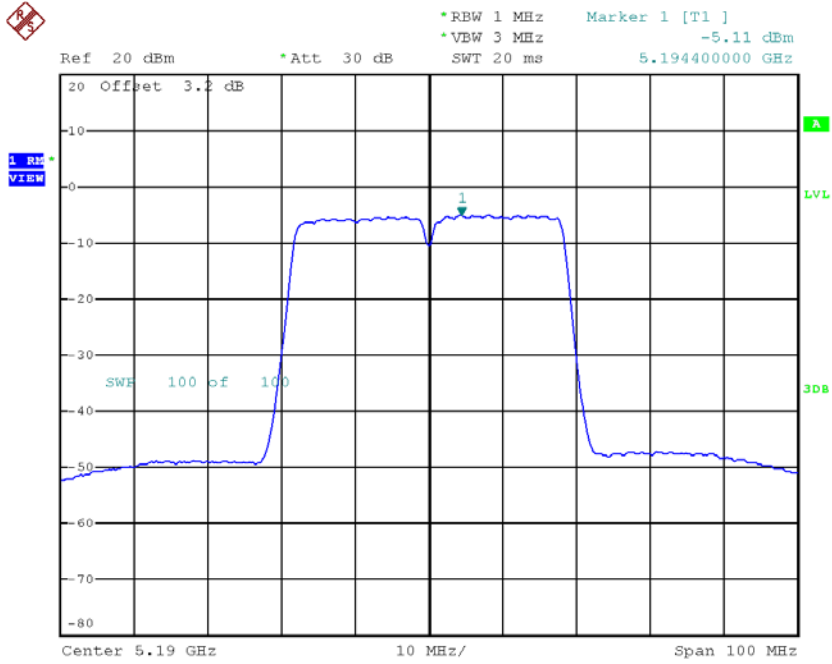

Date: 4.APR.2018 12:16:17

### CH46

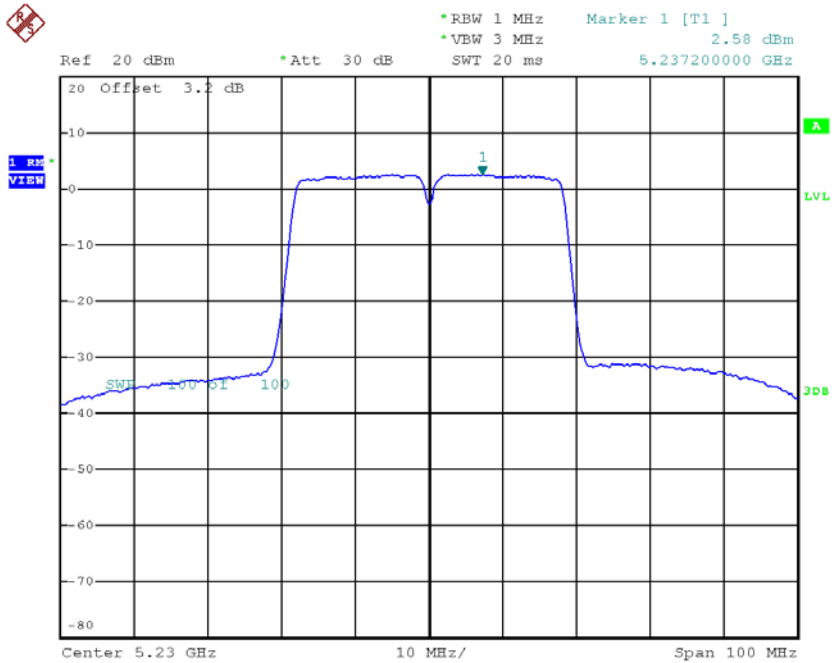


Date: 4.APR.2018 12:18:53

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH38    | 5190            | -4.48                   | 0.80        | -3.68                                 | 9.51            |
| CH46    | 5230            | -1.26                   | 0.80        | -0.46                                 | 9.51            |

### CH38

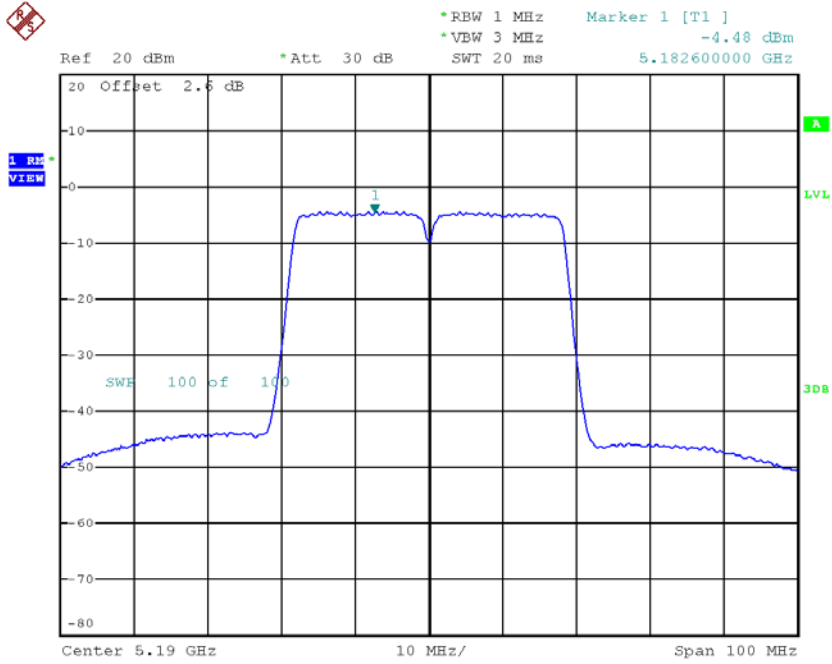

Date: 4.APR.2018 11:08:22

### CH46

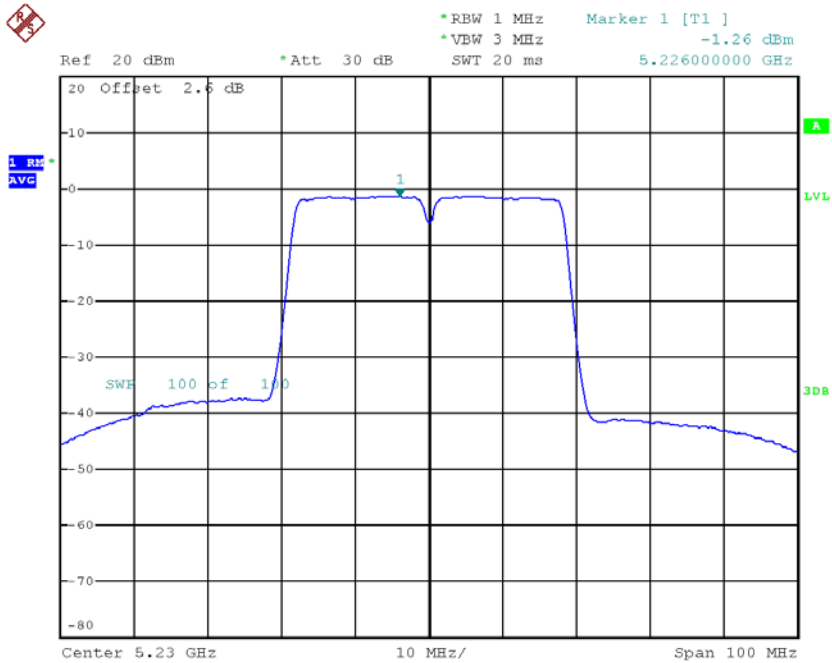


Date: 4.APR.2018 11:09:11

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH38    | 5190            | -0.97                   | 9.51            |
| CH46    | 5230            | 4.88                    | 9.51            |


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 9.56                    | 0.35        | 9.91                                  | 11.00           |
| CH60    | 5300            | 9.61                    | 0.35        | 9.96                                  | 11.00           |
| CH64    | 5320            | 7.56                    | 0.35        | 7.91                                  | 11.00           |

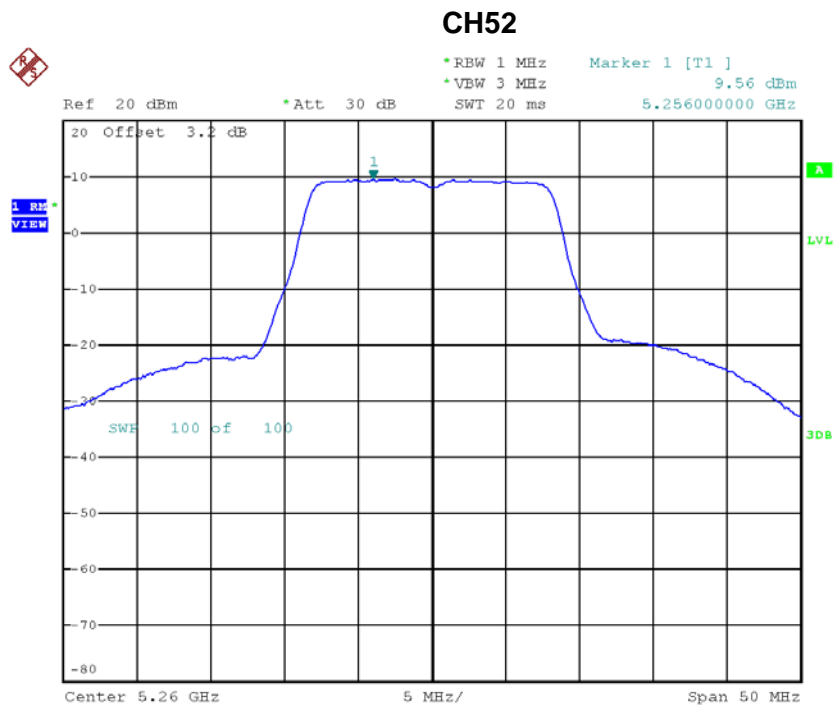


Date: 30.MAR.2018 10:26:00

### CH60

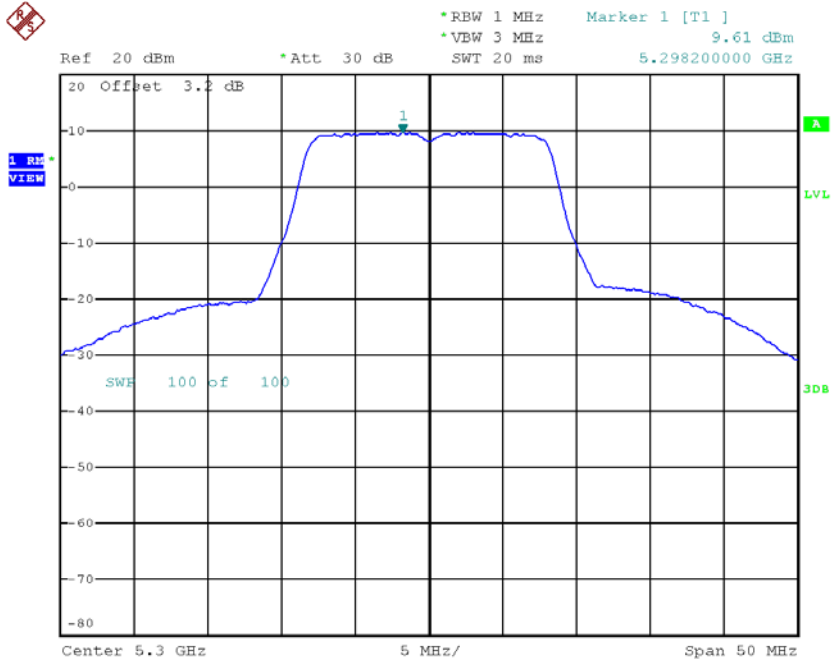

Date: 4.APR.2018 11:31:15


### CH64

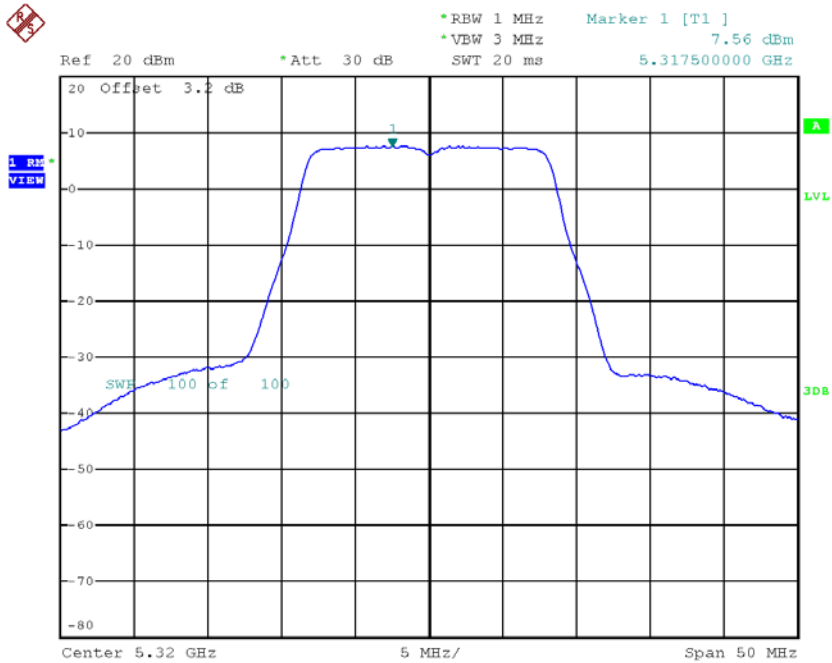

Date: 4.APR.2018 11:32:03


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 6.65                    | 0.35        | 7.00                                  | 11.00           |
| CH60    | 5300            | 5.97                    | 0.35        | 6.32                                  | 11.00           |
| CH64    | 5320            | 6.36                    | 0.35        | 6.71                                  | 11.00           |

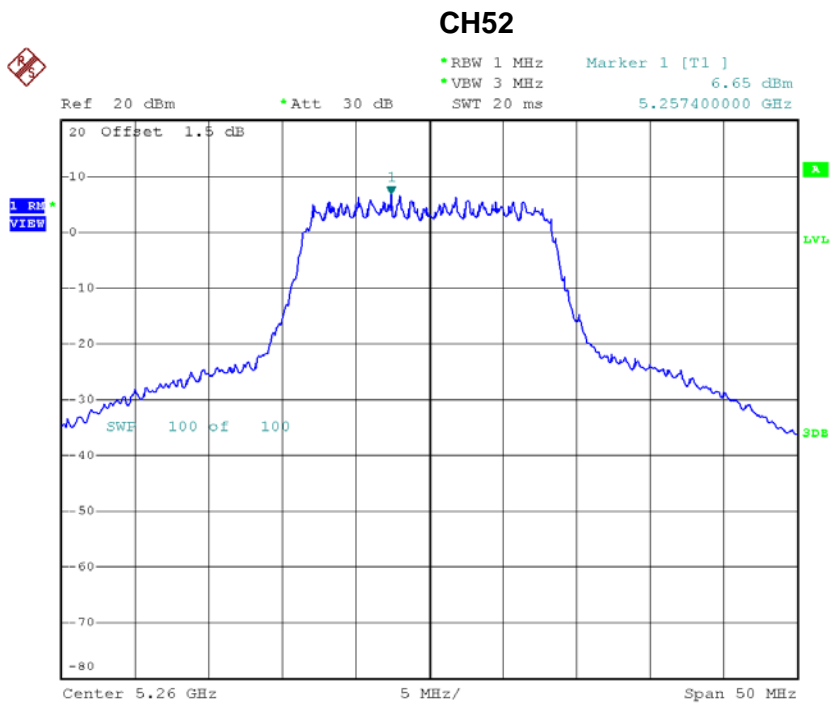


Date: 12.MAY.2016 11:58:42

### CH60

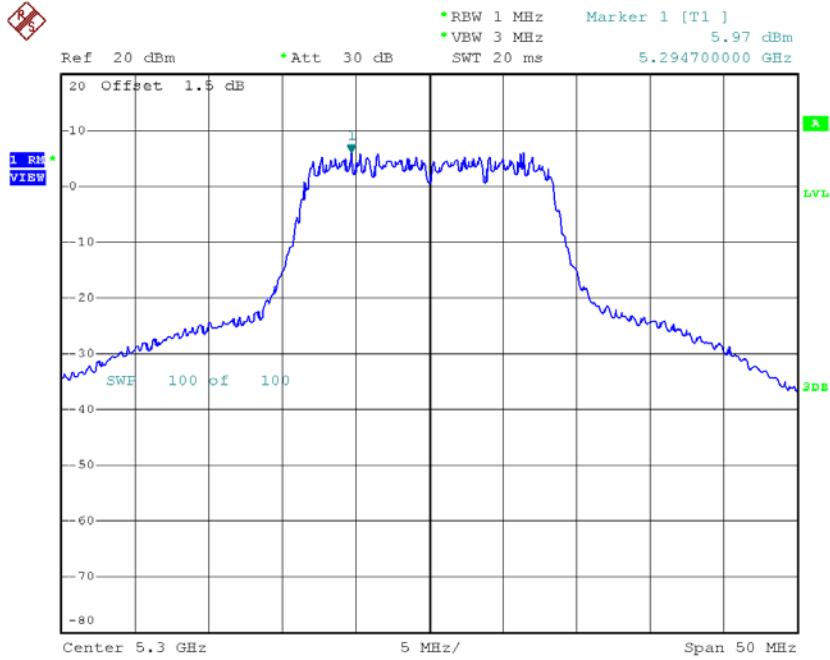

Date: 12.MAY.2016 11:59:05

### CH64

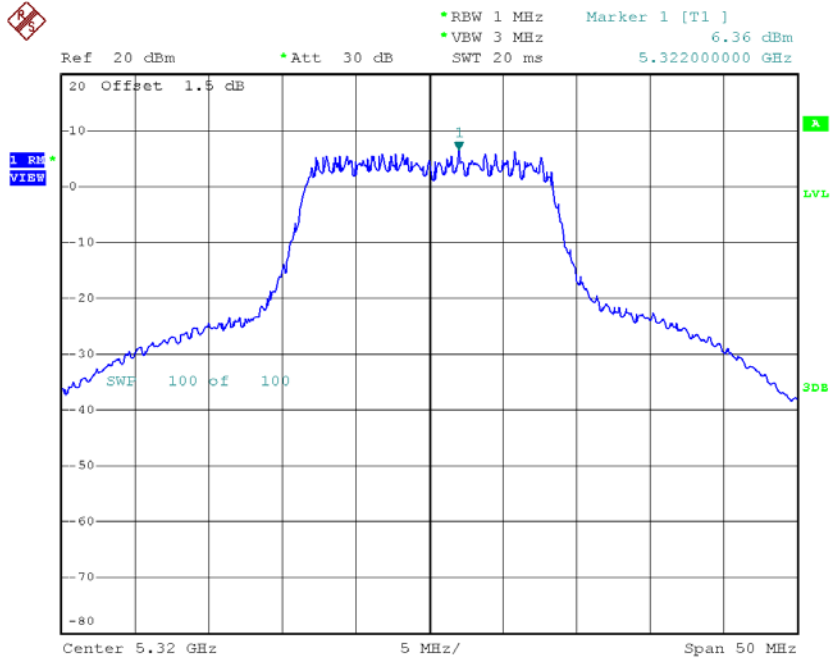


Date: 12.MAY.2016 11:59:28

Remark: This test data is from original report BTL-FCCP-4-1602C038.




**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 5.46                    | 0.31        | 5.77                                  | 9.61            |
| CH60    | 5300            | 5.49                    | 0.31        | 5.80                                  | 9.61            |
| CH64    | 5320            | 5.47                    | 0.31        | 5.78                                  | 9.61            |

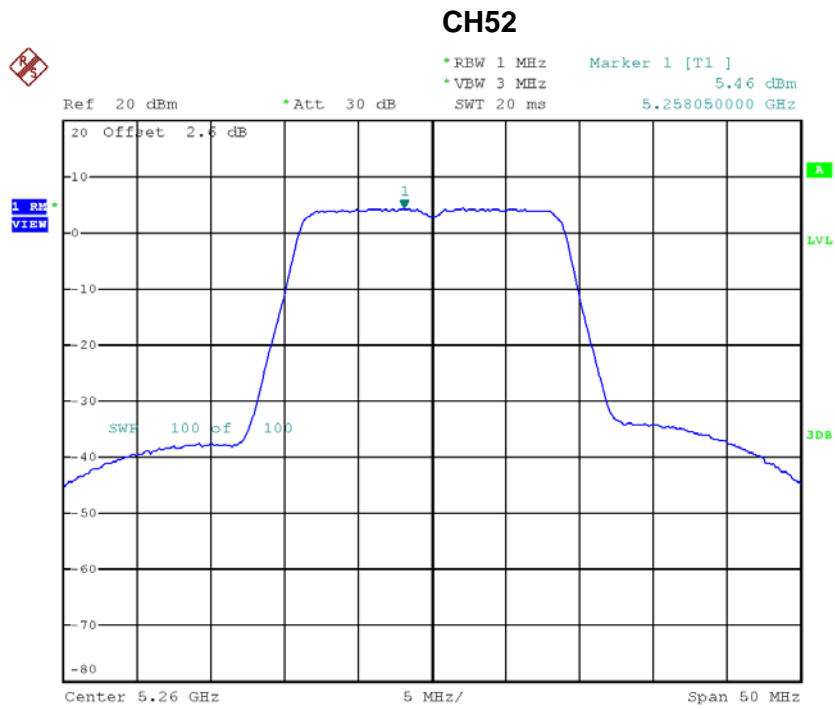


Date: 30.MAR.2018 11:52:10

### CH60

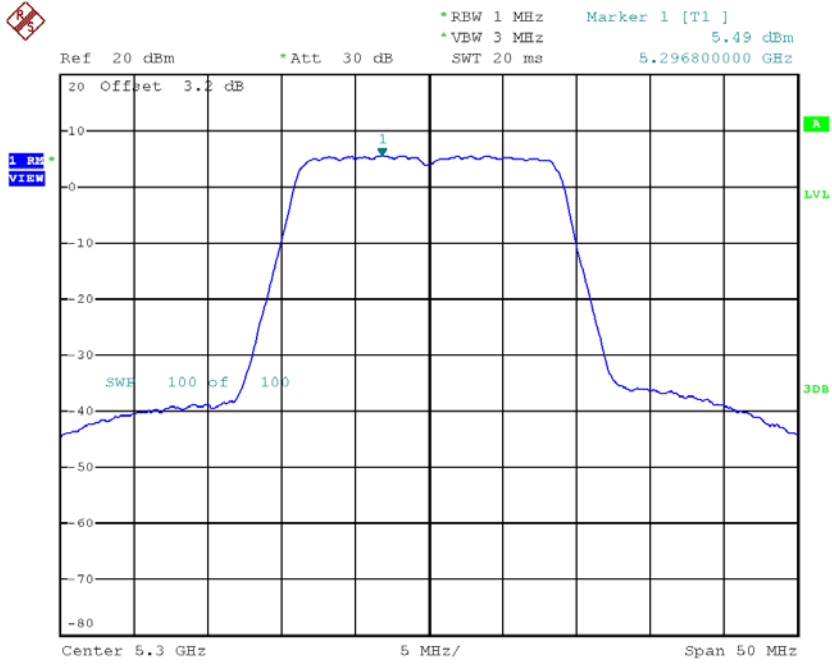

Date: 30.MAR.2018 10:55:16


### CH64

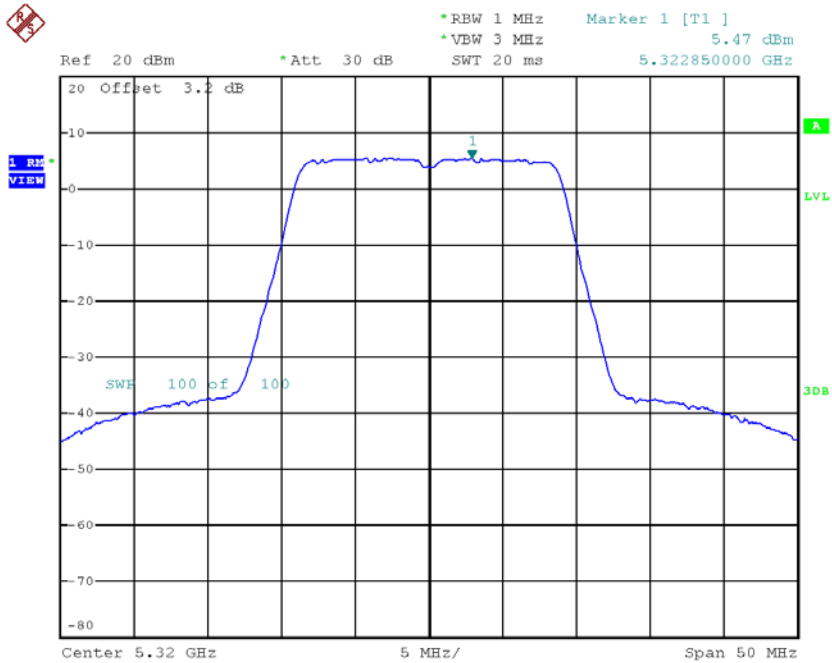

Date: 30.MAR.2018 10:58:05


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.36                    | 0.31        | 4.67                                  | 9.61            |
| CH60    | 5300            | 4.59                    | 0.31        | 4.90                                  | 9.61            |
| CH64    | 5320            | 4.52                    | 0.31        | 4.83                                  | 9.61            |

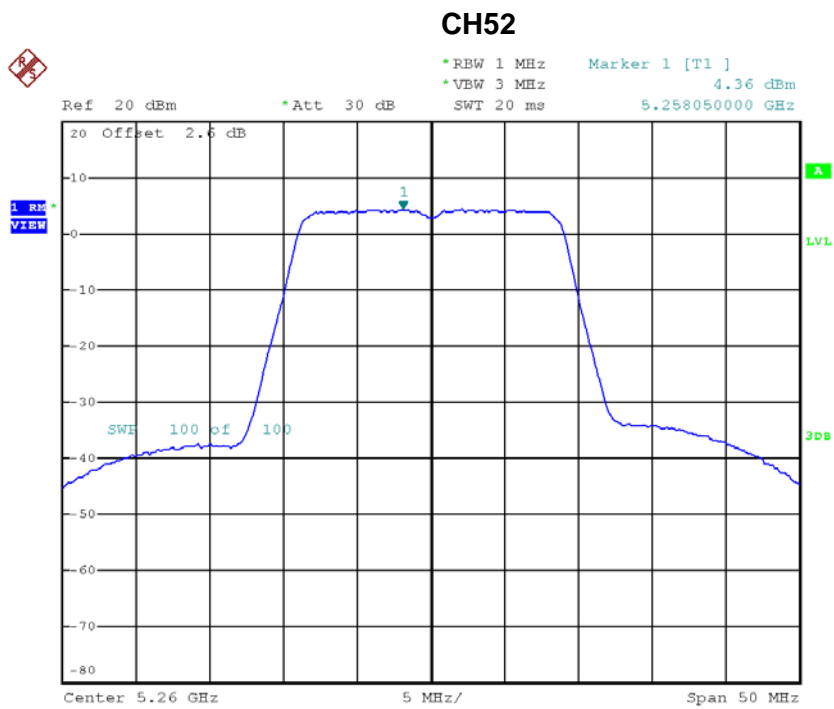


Date: 30.MAR.2018 11:52:10

### CH60

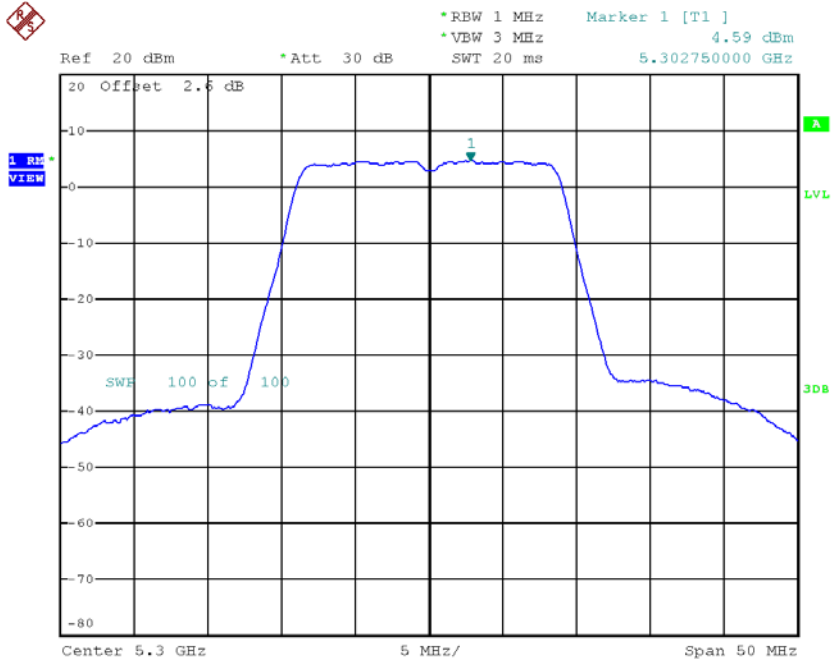

Date: 30.MAR.2018 11:53:42

### CH64

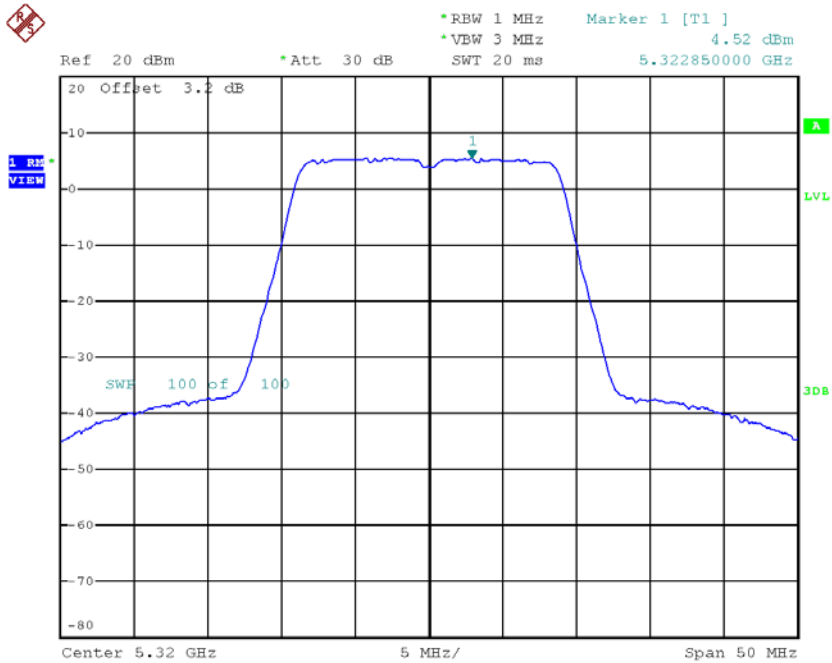

Date: 30.MAR.2018 10:58:05


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH52    | 5260            | 8.27                    | 9.61            |
| CH60    | 5300            | 8.38                    | 9.61            |
| CH64    | 5320            | 8.34                    | 9.61            |

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | 3.29                    | 0.80        | 4.09                                  | 9.61            |
| CH62    | 5310            | -1.50                   | 0.80        | -0.70                                 | 9.61            |

### CH54

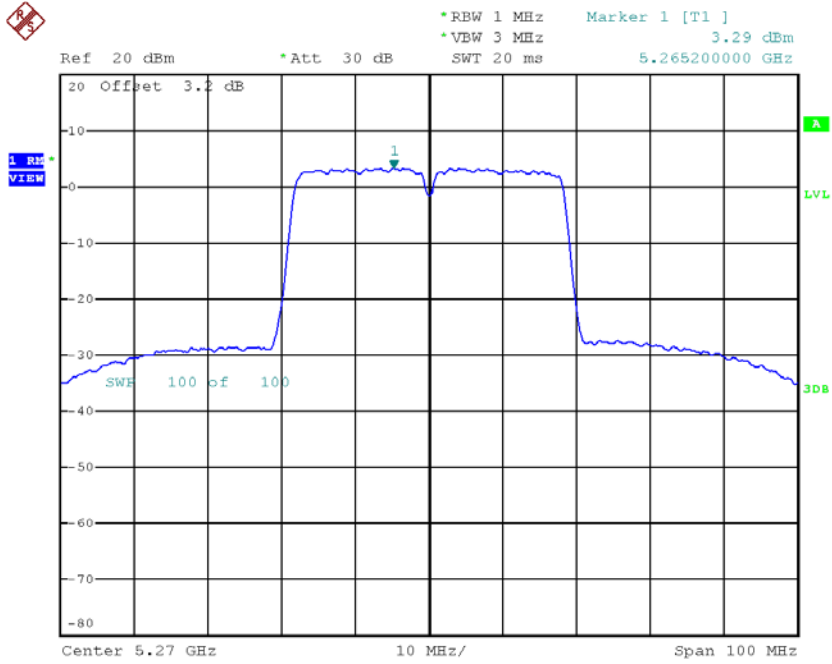

Date: 4.APR.2018 12:19:38

### CH62

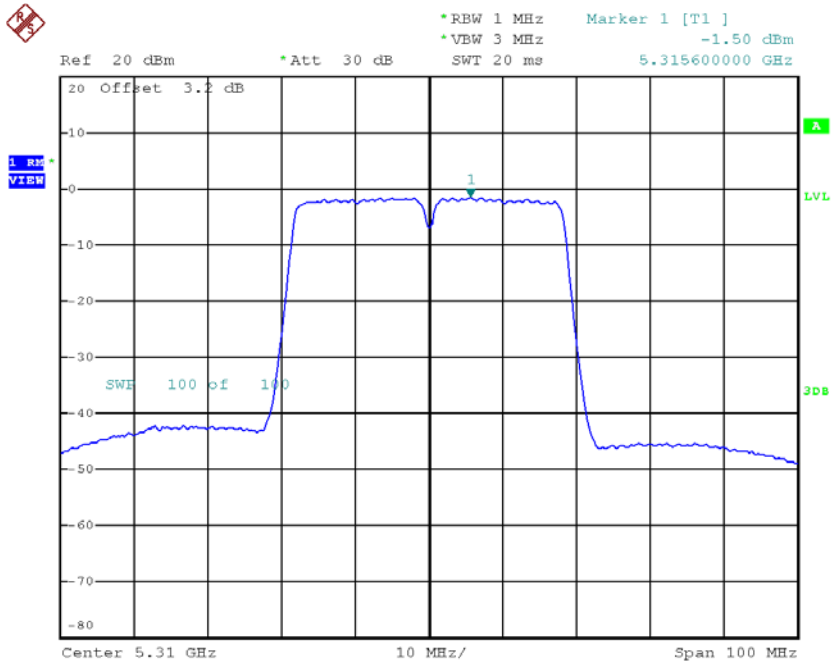


Date: 4.APR.2018 12:20:19

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | 4.30                    | 0.80        | 5.10                                  | 9.61            |
| CH62    | 5310            | -0.80                   | 0.80        | 0.00                                  | 9.61            |




### CH54

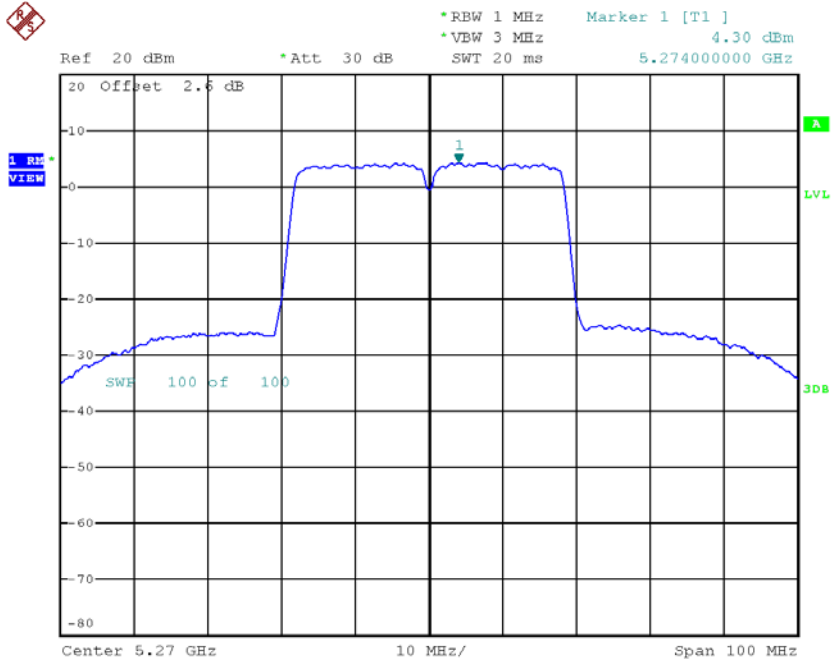

Date: 4.APR.2018 12:55:40

### CH62

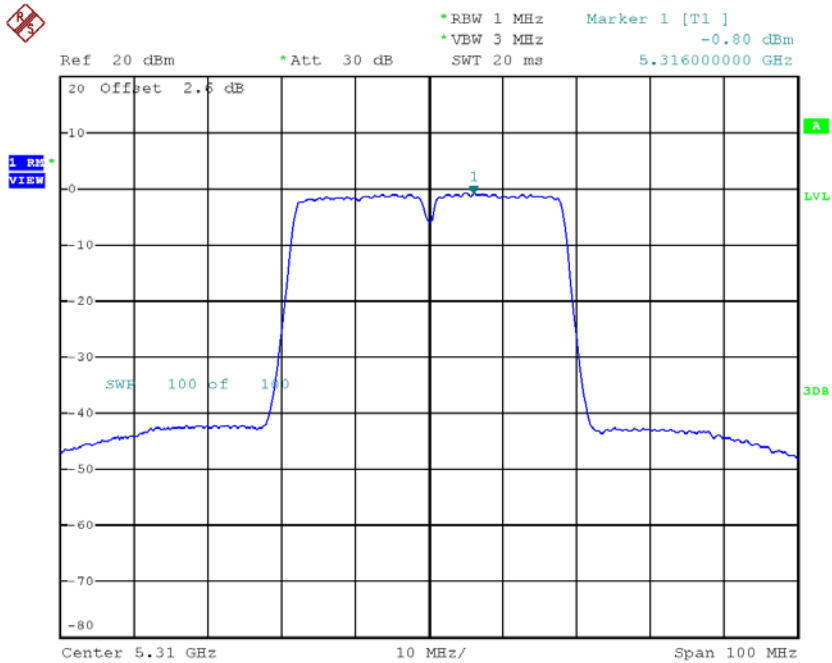


Date: 4.APR.2018 12:56:37

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH54    | 5270            | 7.63                    | 9.61            |
| CH62    | 5310            | 2.67                    | 9.61            |


**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_ANT1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 7.36                    | 0.35        | 7.71                                  | 11.00           |
| CH116   | 5580            | 9.46                    | 0.35        | 9.81                                  | 11.00           |
| CH140   | 5700            | 4.97                    | 0.35        | 5.32                                  | 11.00           |

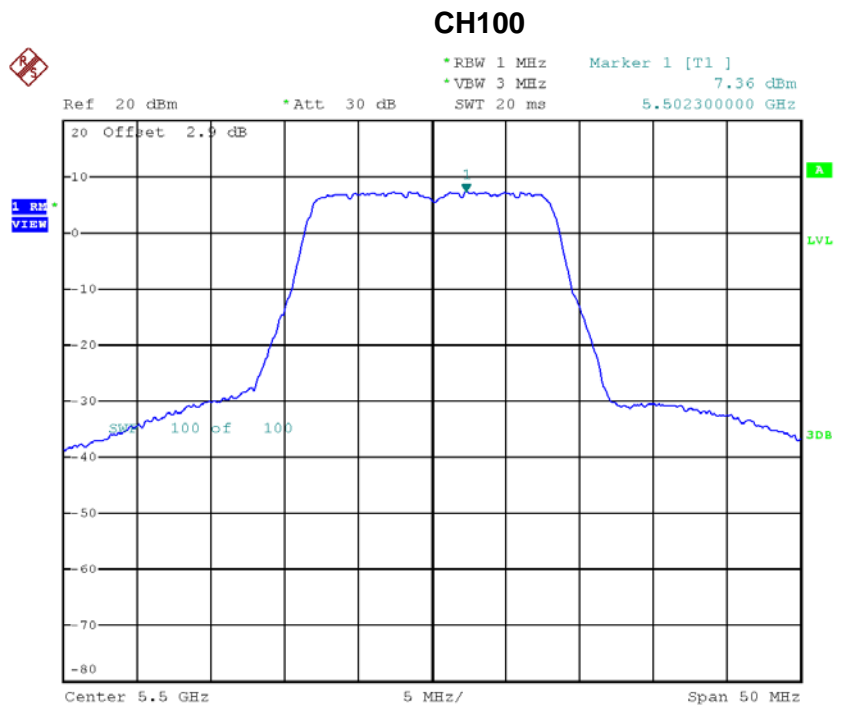


Date: 4.APR.2018 11:33:09

### CH116

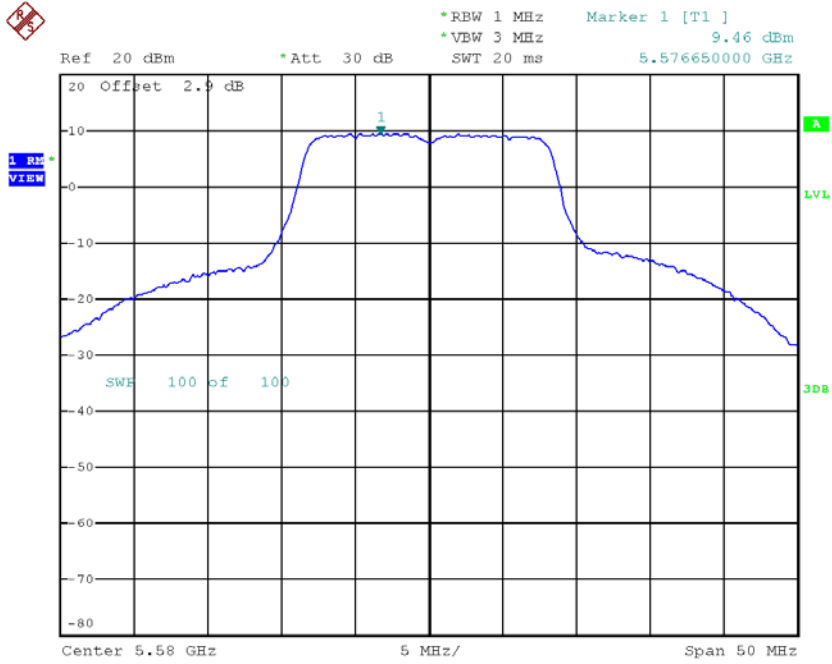

Date: 30.MAR.2018 10:36:34


### CH140

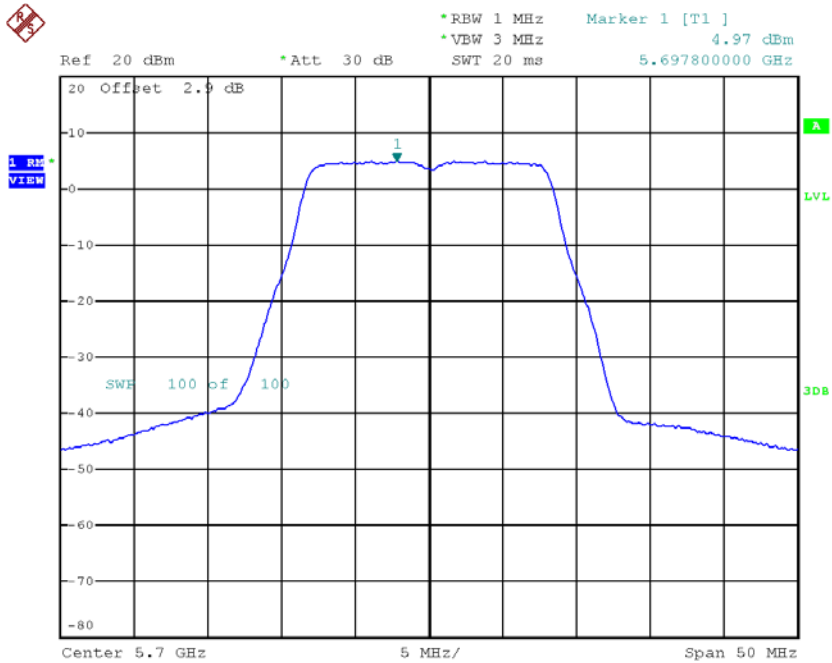

Date: 4.APR.2018 11:34:51


**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 6.22                    | 0.35        | 6.57                                  | 11.00           |
| CH116   | 5580            | 6.44                    | 0.35        | 6.79                                  | 11.00           |
| CH140   | 5700            | 6.45                    | 0.35        | 6.80                                  | 11.00           |

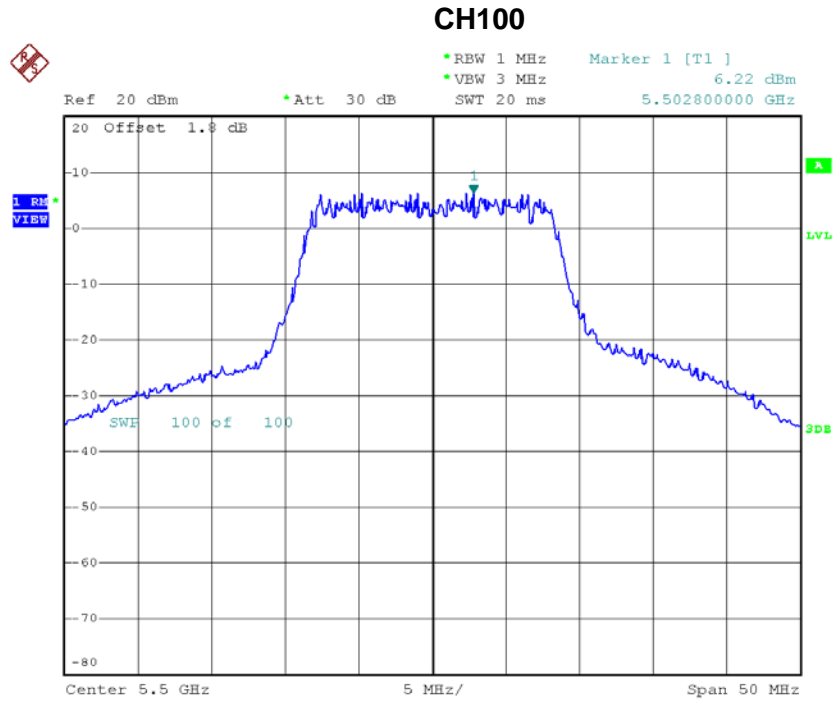


Date: 12.MAY.2016 11:59:50

### CH116

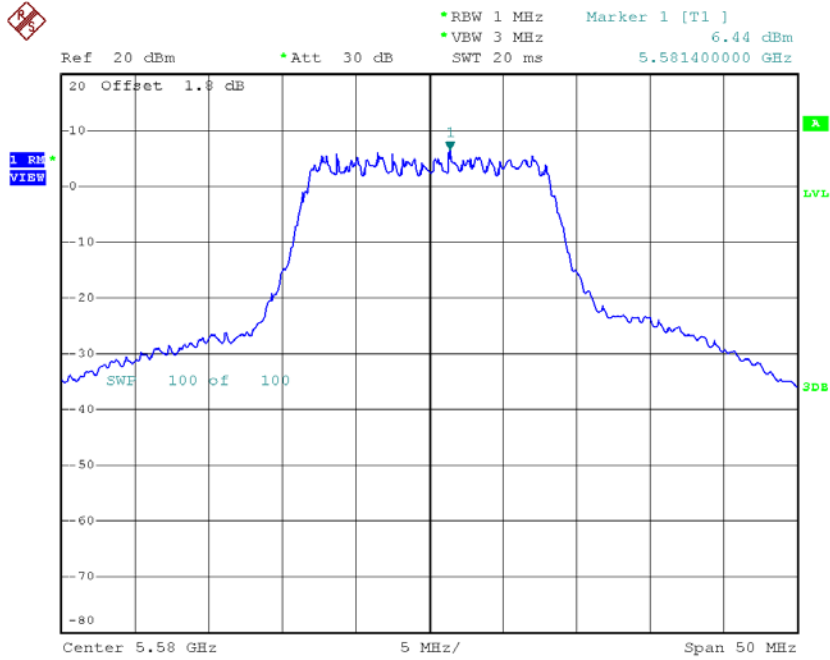

Date: 12.MAY.2016 12:00:15

### CH140

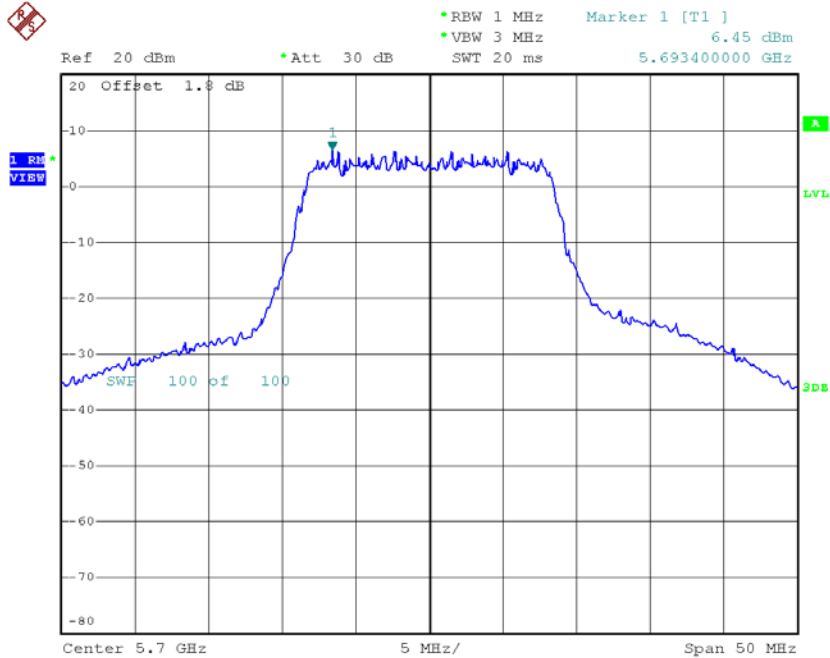


Date: 12.MAY.2016 12:00:41

Remark: This test data is from original report BTL-FCCP-4-1602C038.

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 4.17                    | 0.31        | 4.48                                  | 8.20            |
| CH116   | 5580            | 3.81                    | 0.31        | 4.12                                  | 8.20            |
| CH140   | 5700            | 3.59                    | 0.31        | 3.90                                  | 8.20            |

**CH100**

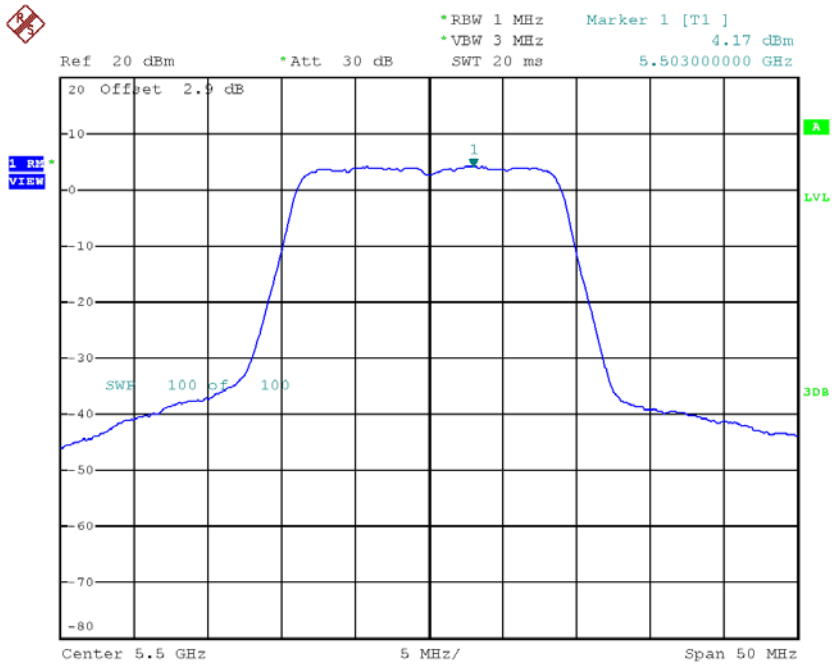


Date: 30.MAR.2018 10:59:56

### CH116

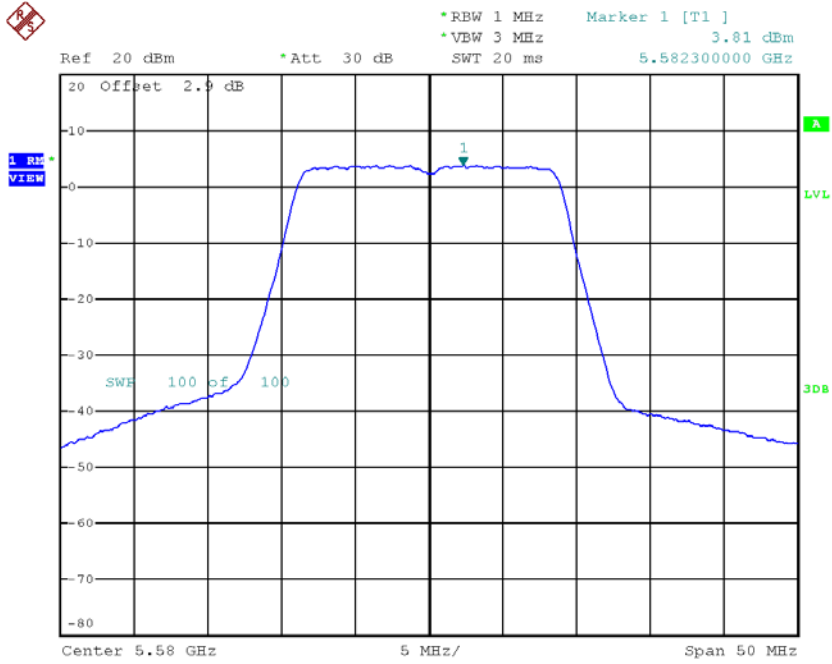

Date: 30.MAR.2018 11:02:00

### CH140

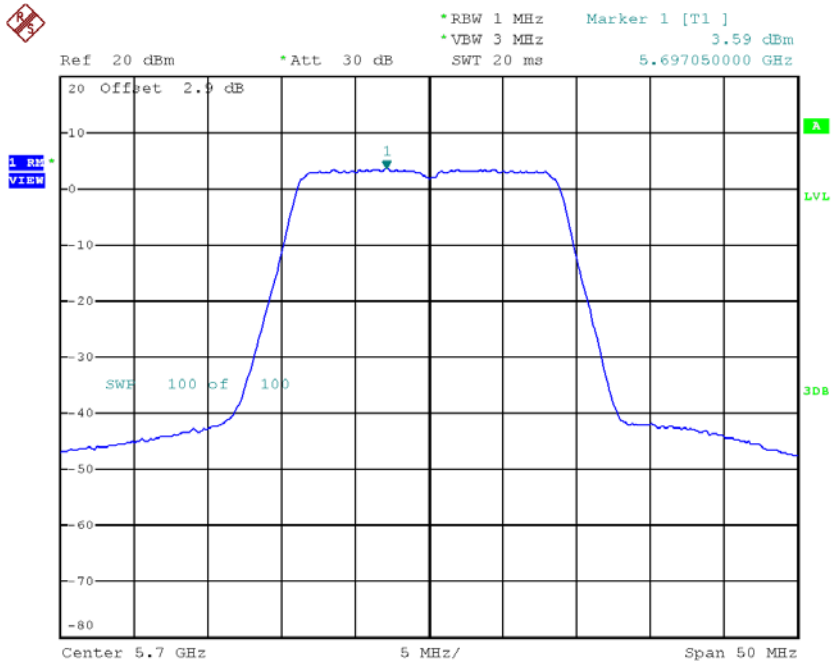


Date: 30.MAR.2018 11:05:18




**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 3.49                    | 0.31        | 3.80                                  | 8.20            |
| CH116   | 5580            | 3.10                    | 0.31        | 3.41                                  | 8.20            |
| CH140   | 5700            | 1.64                    | 0.31        | 1.95                                  | 8.20            |

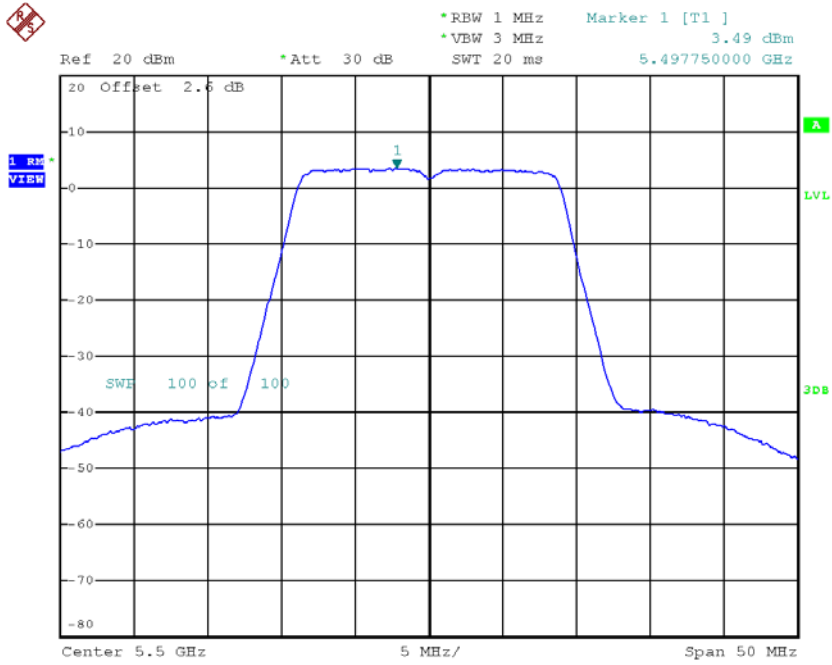**CH100**


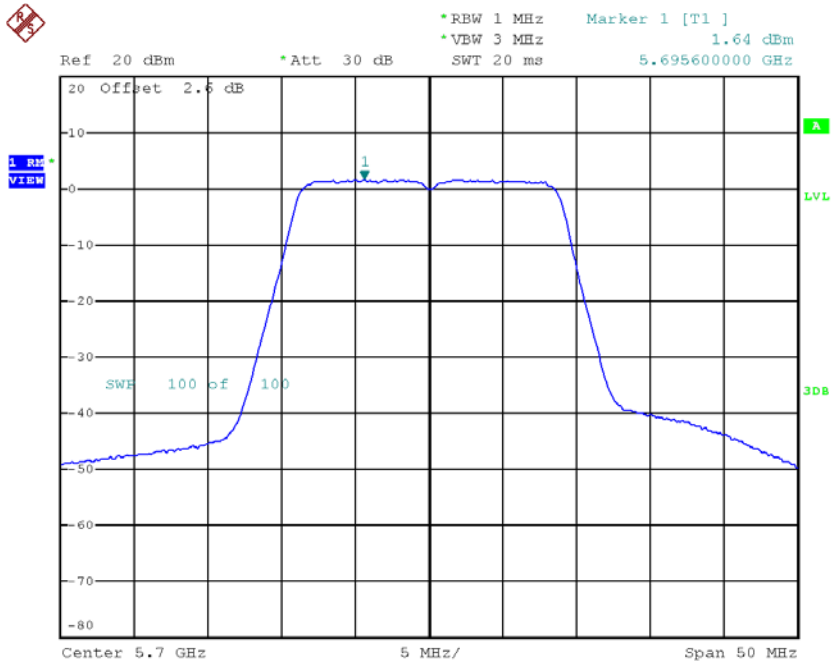
Date: 30.MAR.2018 11:57:34

### CH116

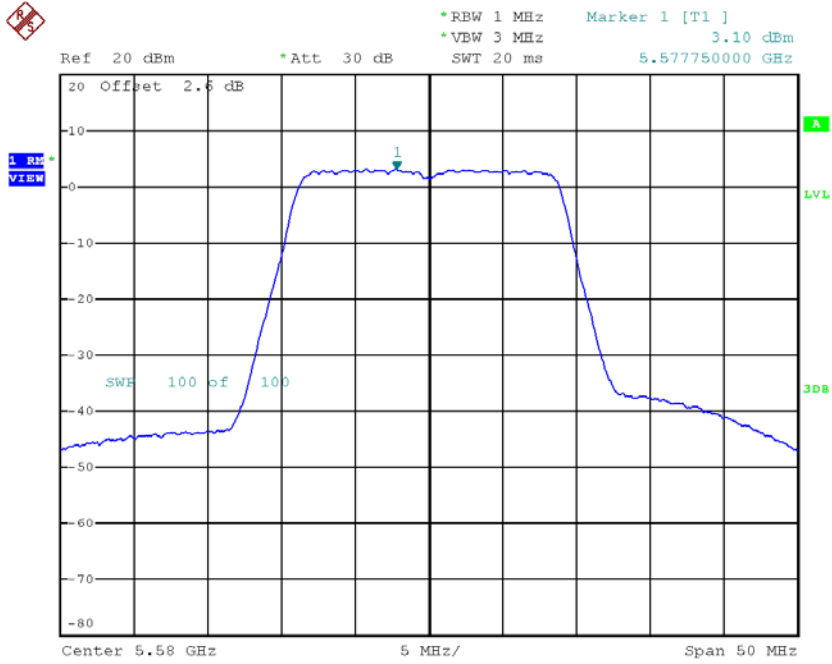

Date: 30.MAR.2018 12:00:42

### CH140




Date: 30.MAR.2018 12:04:40

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH100   | 5500            | 7.16                    | 8.20            |
| CH116   | 5580            | 6.79                    | 8.20            |
| CH140   | 5700            | 6.04                    | 8.20            |


**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | -0.36                   | 0.80        | 0.44                                  | 8.20            |
| CH110   | 5550            | 3.39                    | 0.80        | 4.19                                  | 8.20            |
| CH134   | 5670            | 1.48                    | 0.80        | 2.28                                  | 8.20            |

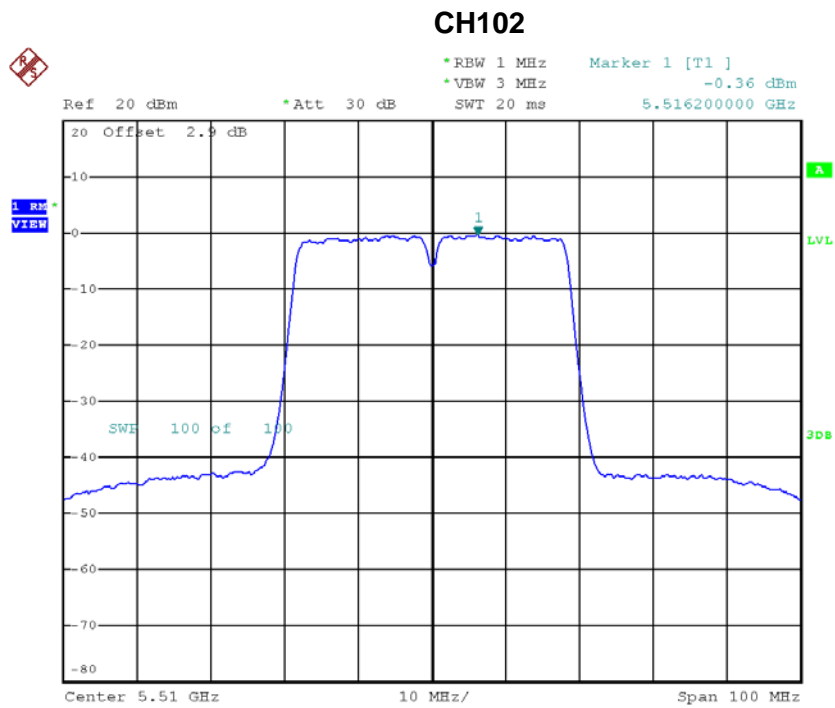


Date: 30.MAR.2018 11:09:21

### CH110

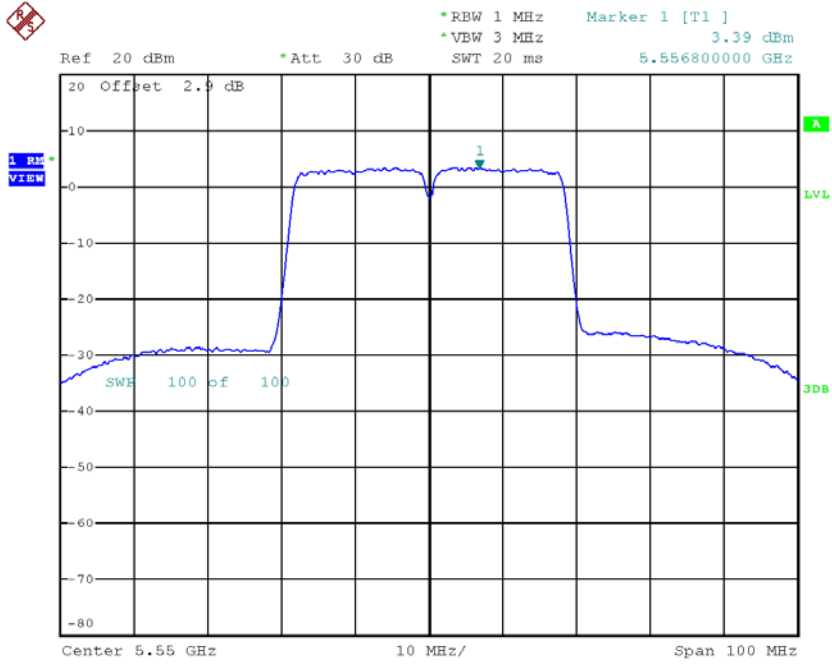

Date: 30.MAR.2018 11:10:54


### CH134

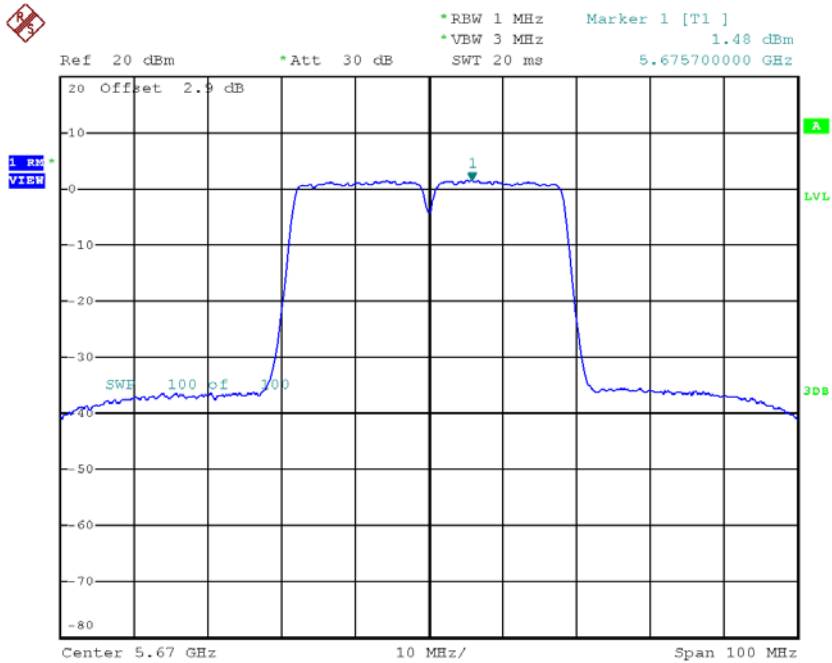

Date: 30.MAR.2018 11:17:42


**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | -0.26                   | 0.80        | 0.54                                  | 8.20            |
| CH110   | 5550            | 3.25                    | 0.80        | 4.05                                  | 8.20            |
| CH134   | 5670            | 1.32                    | 0.80        | 2.12                                  | 8.20            |

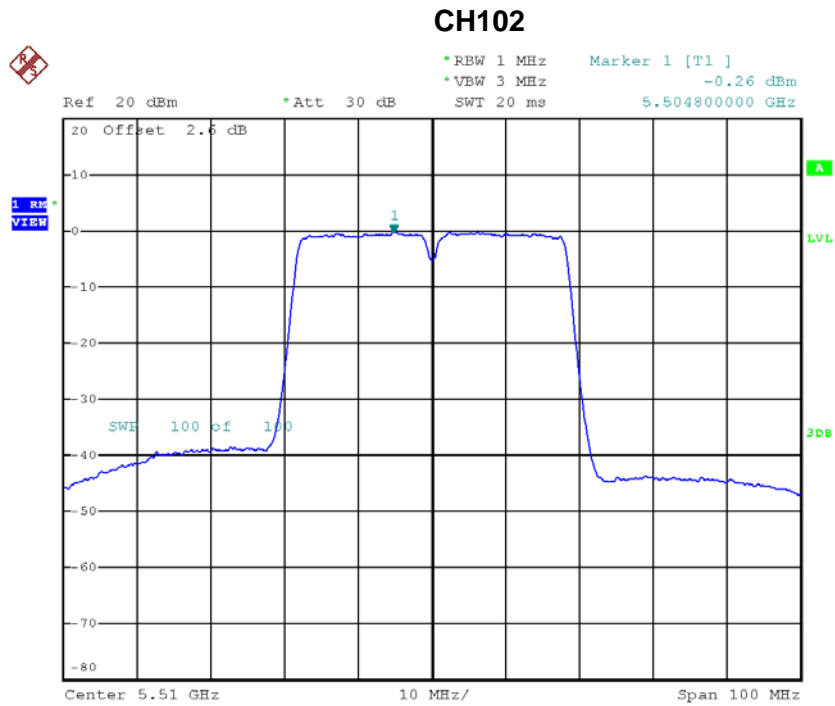


Date: 4.APR.2018 12:57:19

### CH110

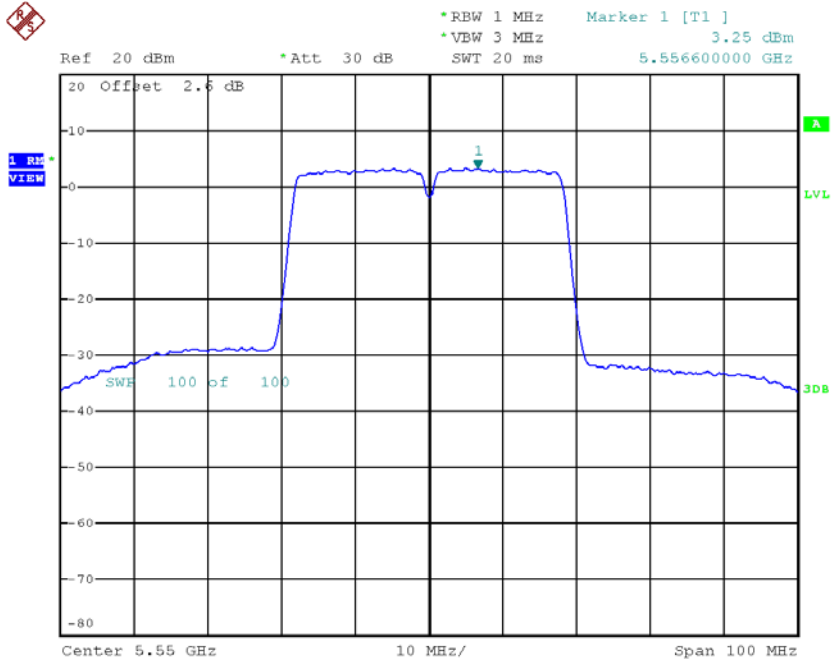

Date: 4.APR.2018 12:58:54

### CH134

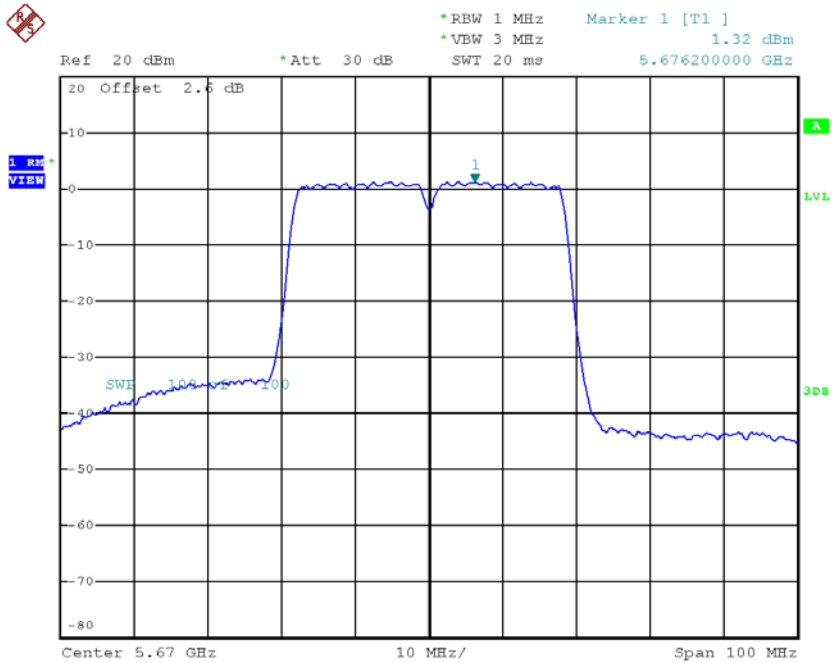

Date: 4.APR.2018 12:59:59

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_Total**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH102   | 5510            | 3.50                    | 8.20            |
| CH110   | 5550            | 7.13                    | 8.20            |
| CH134   | 5670            | 5.21                    | 8.20            |



**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165\_ANT1**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149   | 5745            | 7.90                       | 0.35        | 8.25                                     | 30.00              |
| CH157   | 5785            | 7.98                       | 0.35        | 8.33                                     | 30.00              |
| CH165   | 5825            | 7.96                       | 0.35        | 8.31                                     | 30.00              |

**TX CH149**

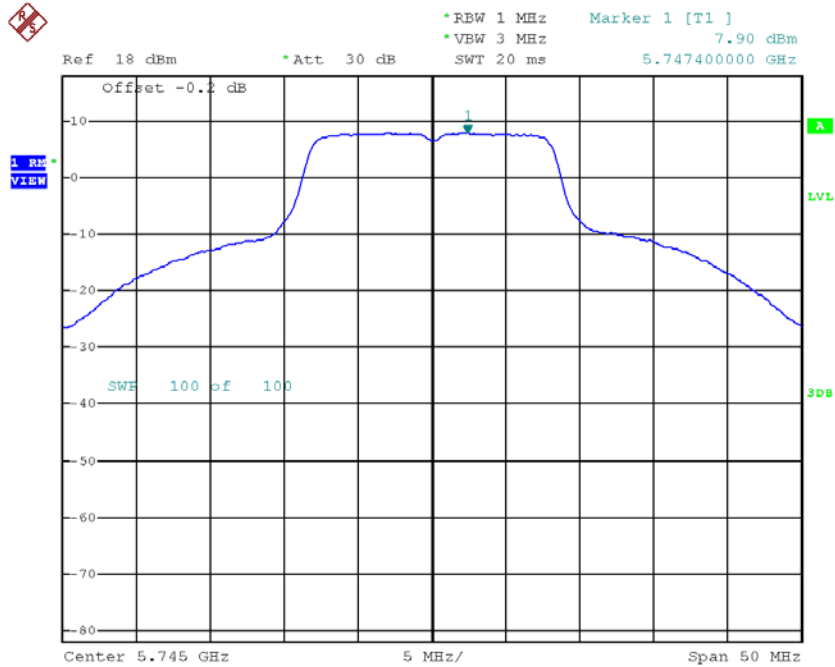


Date: 1.JAN.2003 08:04:19

**TX CH157**

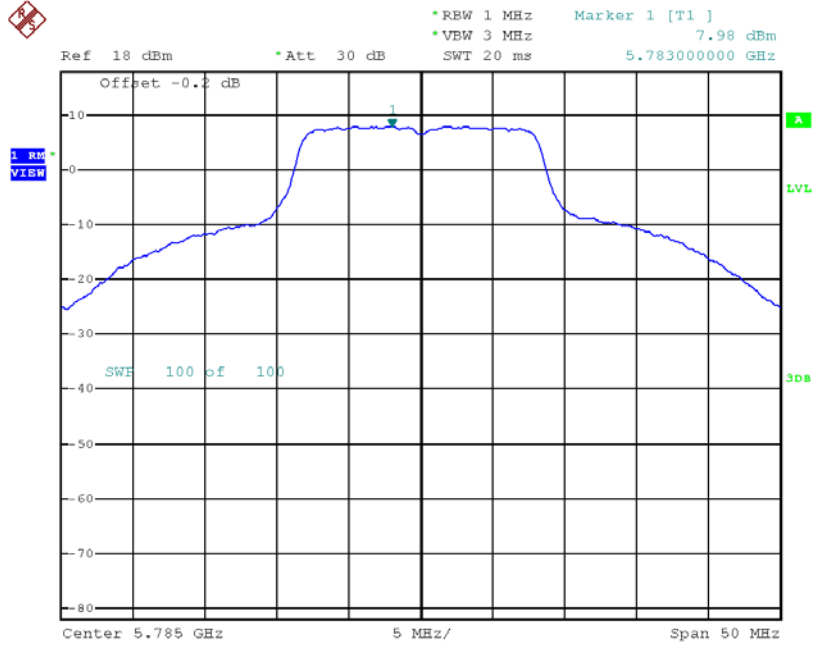

Date: 1.JAN.2003 08:05:34


**TX CH165**

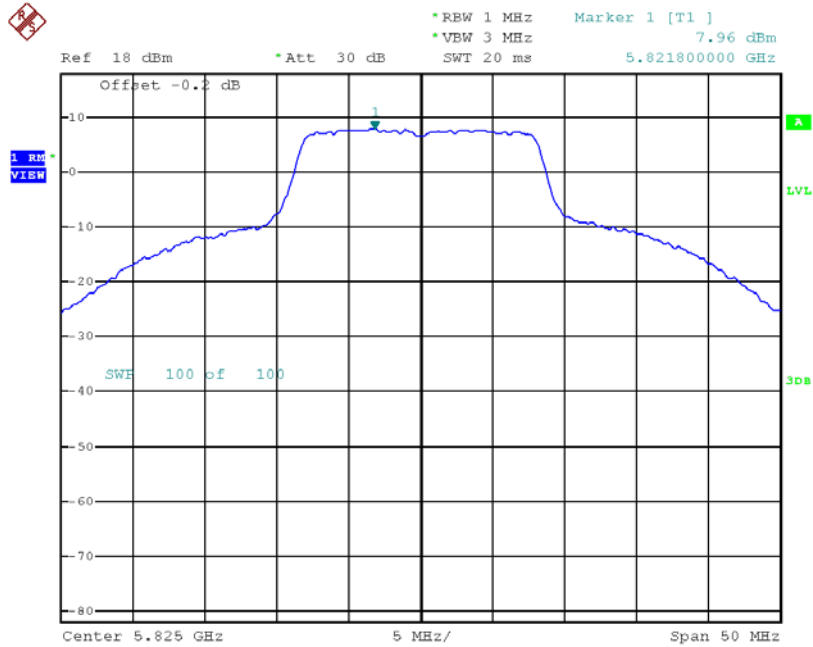

Date: 1.JAN.2003 08:05:57


**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149   | 5745            | 4.45                       | 0.35        | 4.80                                     | 30.00              |
| CH157   | 5785            | 4.01                       | 0.35        | 4.36                                     | 30.00              |
| CH165   | 5825            | 3.69                       | 0.35        | 4.04                                     | 30.00              |

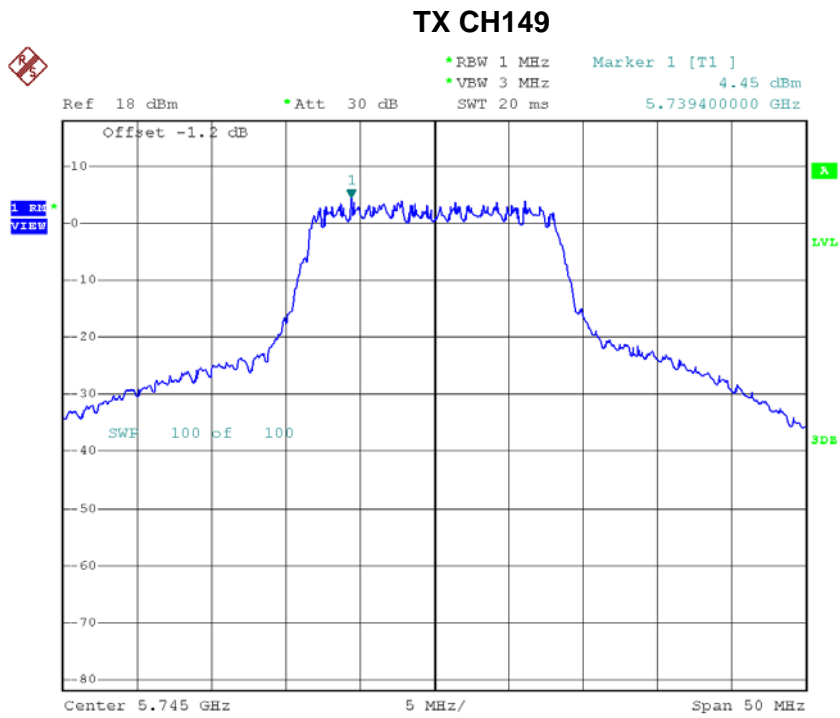


Date: 11.MAY.2016 17:13:09

### TX CH157

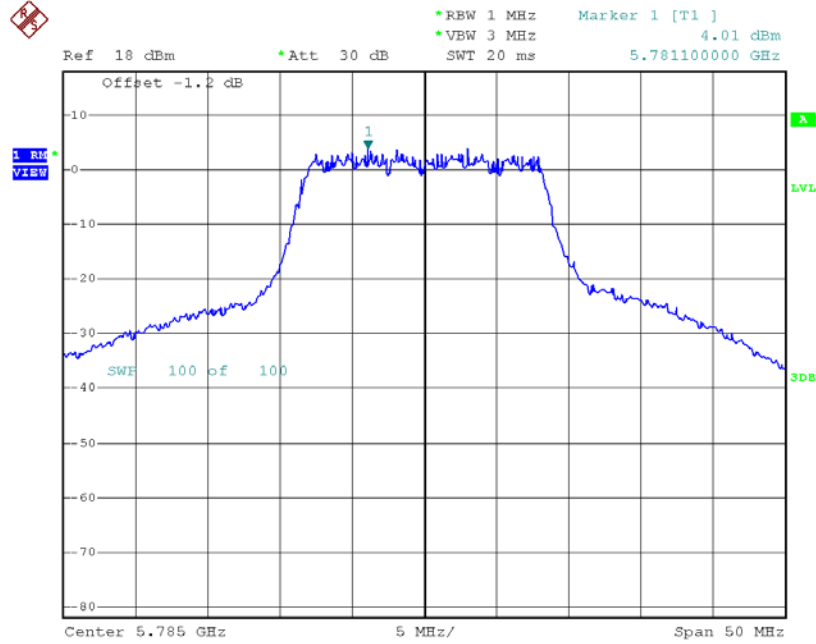

Date: 11.MAY.2016 17:13:44

### TX CH165

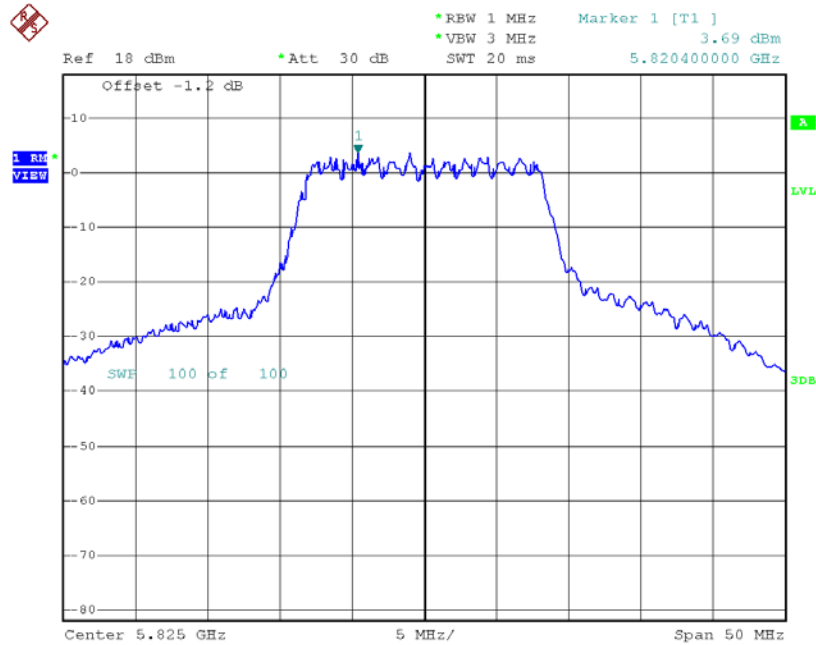


Date: 11.MAY.2016 17:14:16

Remark: This test data is from original report BTL-FCCP-4-1602C038.


**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149   | 5745            | 7.41                       | 0.31        | 7.72                                     | 26.95              |
| CH157   | 5785            | 7.17                       | 0.31        | 7.48                                     | 26.95              |
| CH165   | 5825            | 6.65                       | 0.31        | 6.96                                     | 26.95              |

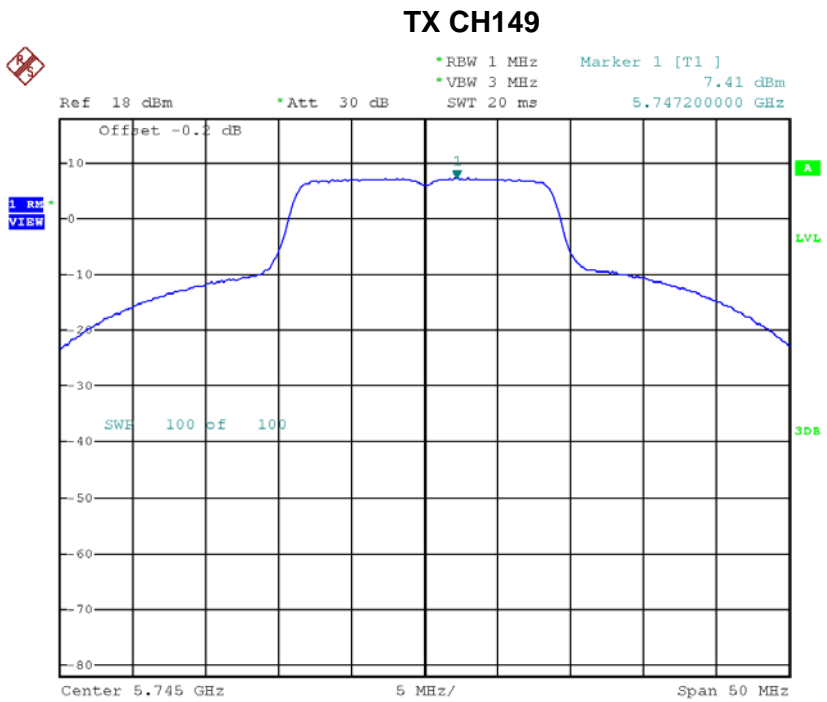


Date: 1.JAN.2003 08:07:32

### TX CH157

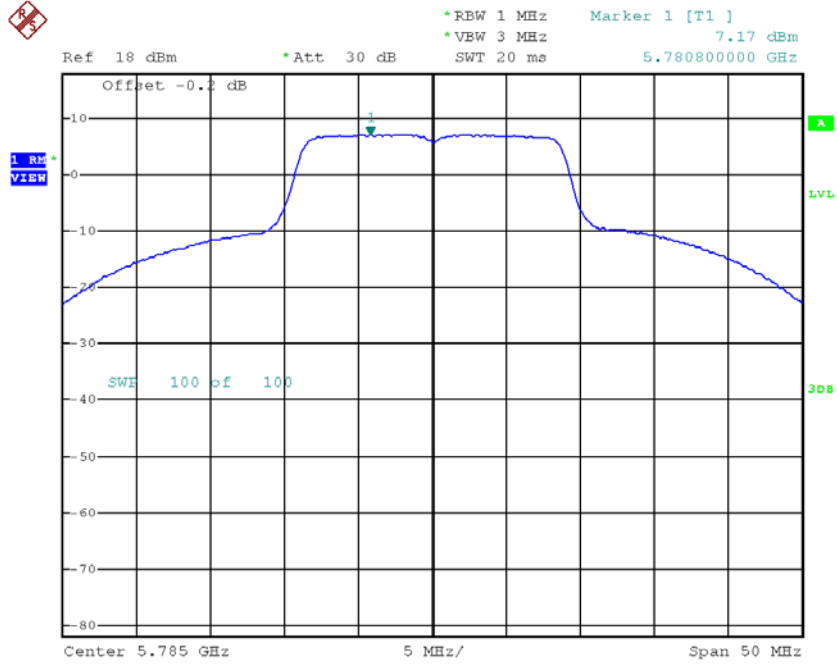

Date: 1.JAN.2003 08:07:49

### TX CH165

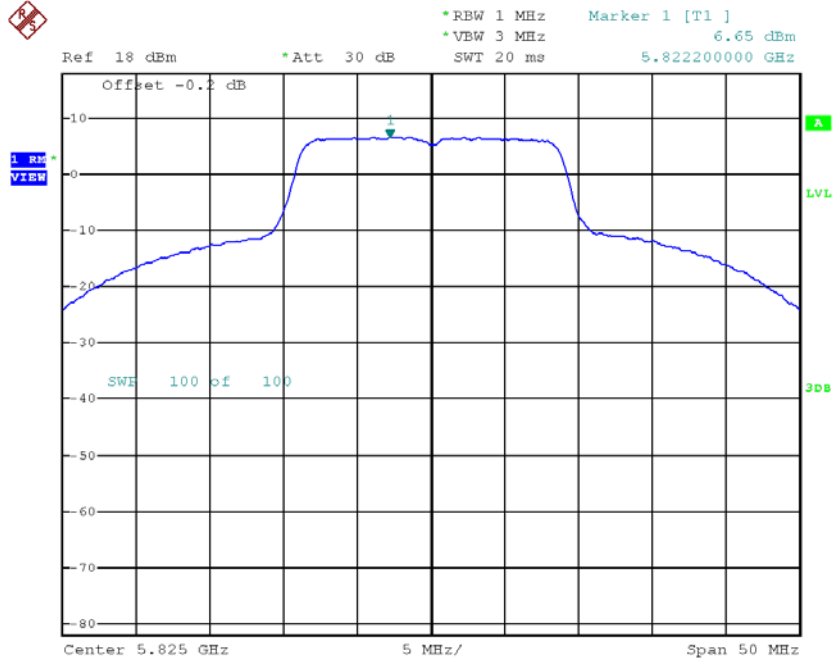


Date: 1.JAN.2003 08:08:03

**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149   | 5745            | 3.44                       | 0.31        | 3.75                                     | 26.95              |
| CH157   | 5785            | 2.95                       | 0.31        | 3.26                                     | 26.95              |
| CH165   | 5825            | 2.70                       | 0.31        | 3.01                                     | 26.95              |

**TX CH149**

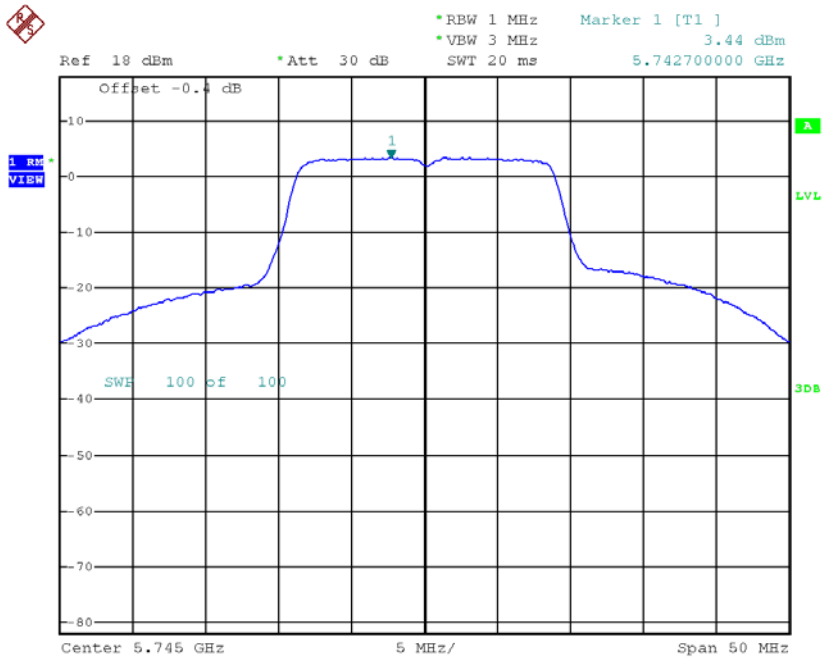


Date: 1.JAN.2003 08:23:07

### TX CH157

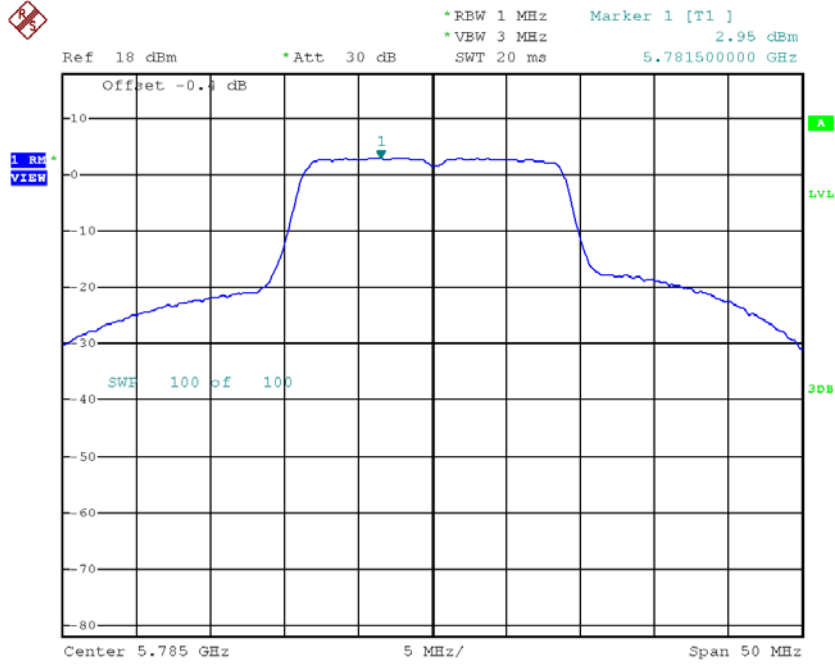

Date: 1.JAN.2003 08:24:12

### TX CH165

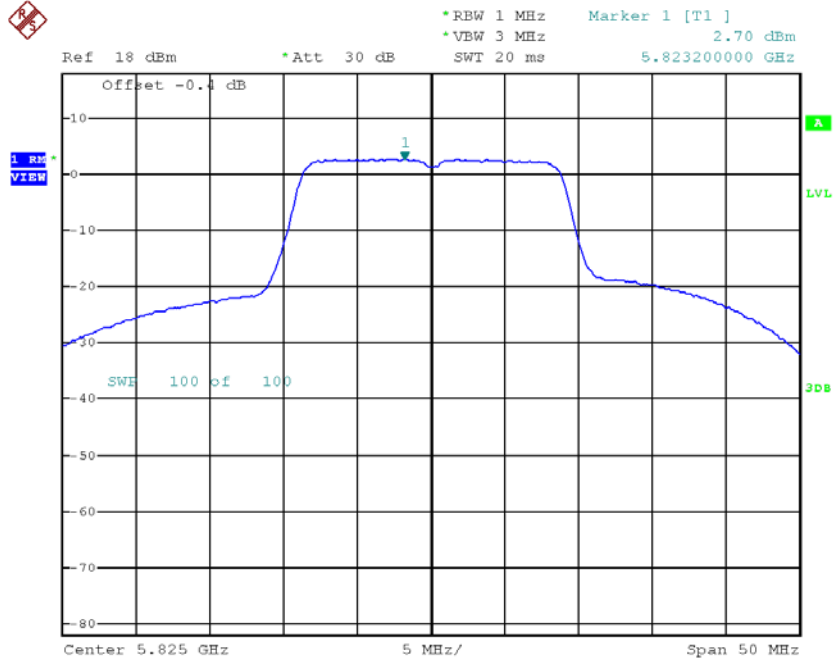

Date: 1.JAN.2003 08:25:09




**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|--------------------|
| CH149   | 5745            | 9.18                       | 26.95              |
| CH157   | 5785            | 8.87                       | 26.95              |
| CH165   | 5825            | 8.43                       | 26.95              |

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH151   | 5755            | 3.38                       | 0.80        | 4.18                                     | 26.95              |
| CH159   | 5795            | 3.16                       | 0.80        | 3.96                                     | 26.95              |

### TX CH151

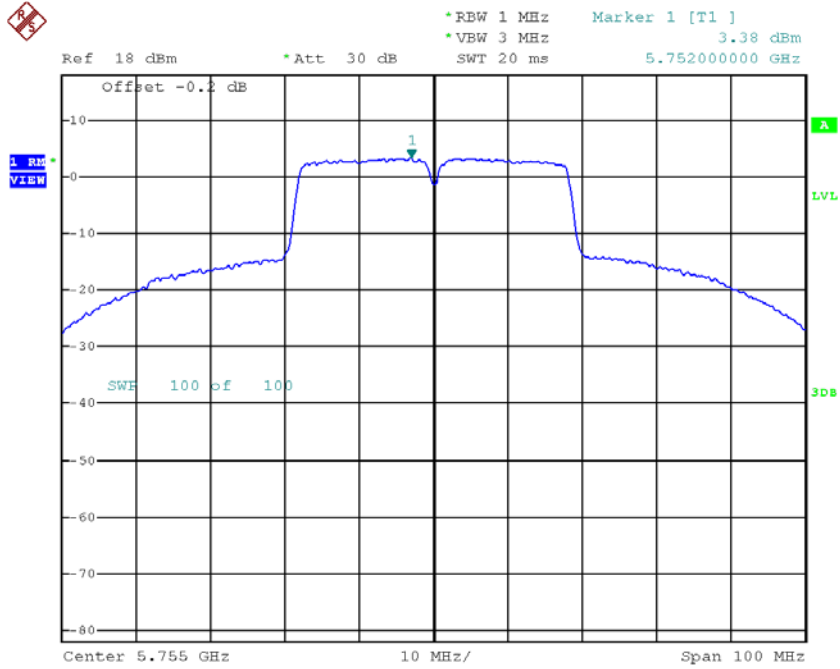

Date: 1.JAN.2003 08:11:24

### TX CH159

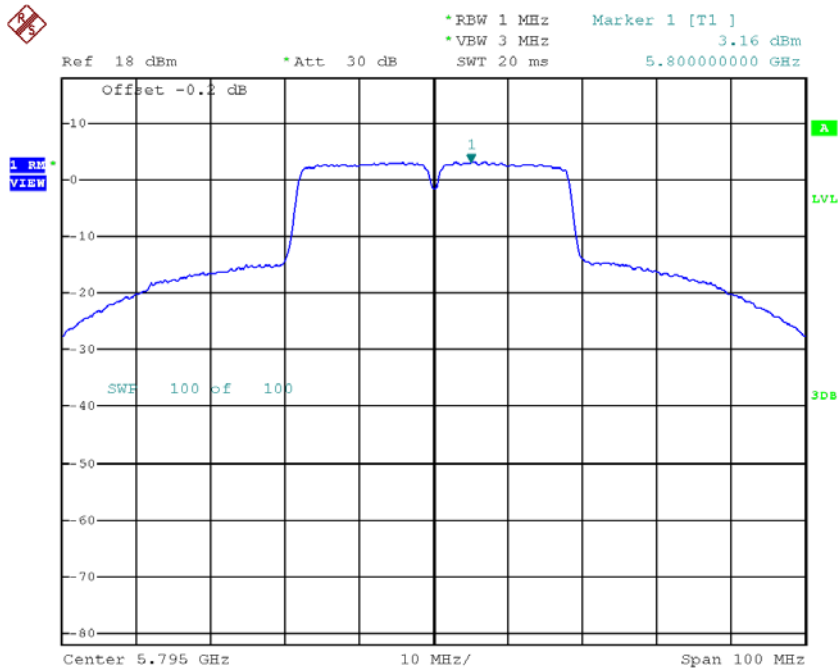


Date: 1.JAN.2003 08:11:44

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH151   | 5755            | 0.59                       | 0.80        | 1.39                                     | 26.95              |
| CH159   | 5795            | 0.67                       | 0.80        | 1.47                                     | 26.95              |

### TX CH151

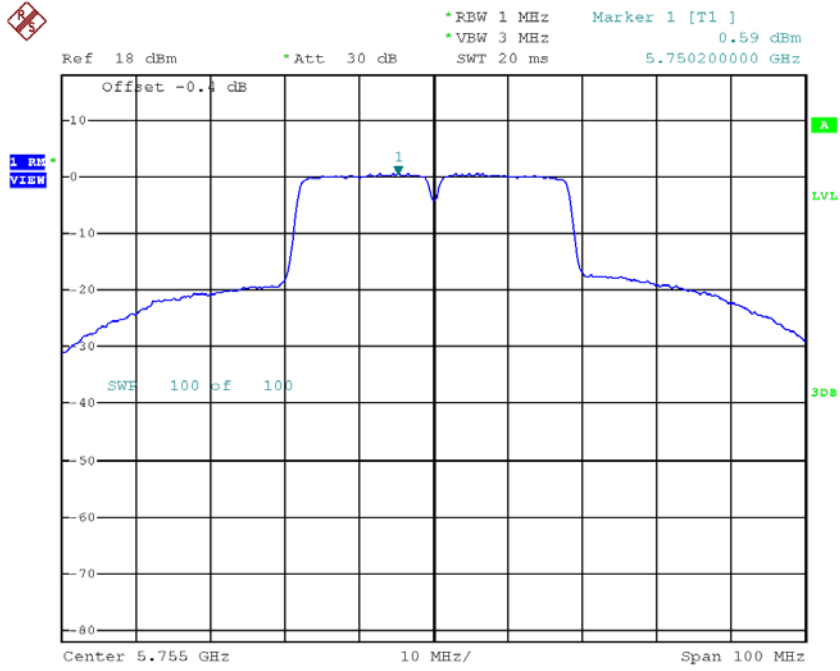

Date: 1.JAN.2003 08:27:11

### TX CH159

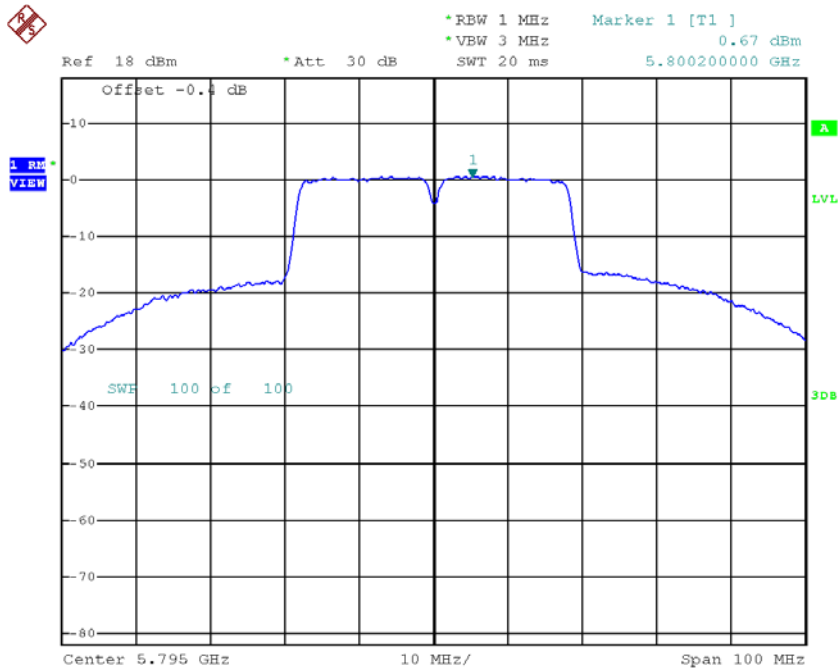


Date: 1.JAN.2003 08:27:34

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|--------------------|
| CH151   | 5755            | 6.02                       | 26.95              |
| CH159   | 5795            | 5.90                       | 26.95              |


**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 5.11                    | 0.64        | 5.75                                  | 9.51            |
| CH40    | 5200            | 5.25                    | 0.64        | 5.89                                  | 9.51            |
| CH48    | 5240            | 5.26                    | 0.64        | 5.90                                  | 9.51            |

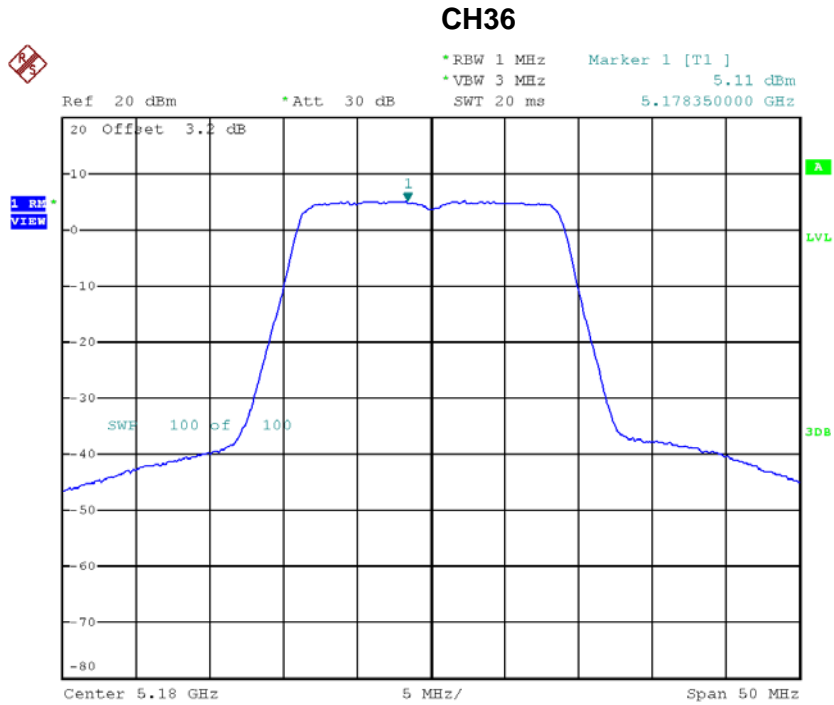


Date: 30.MAR.2018 11:30:35

### CH40

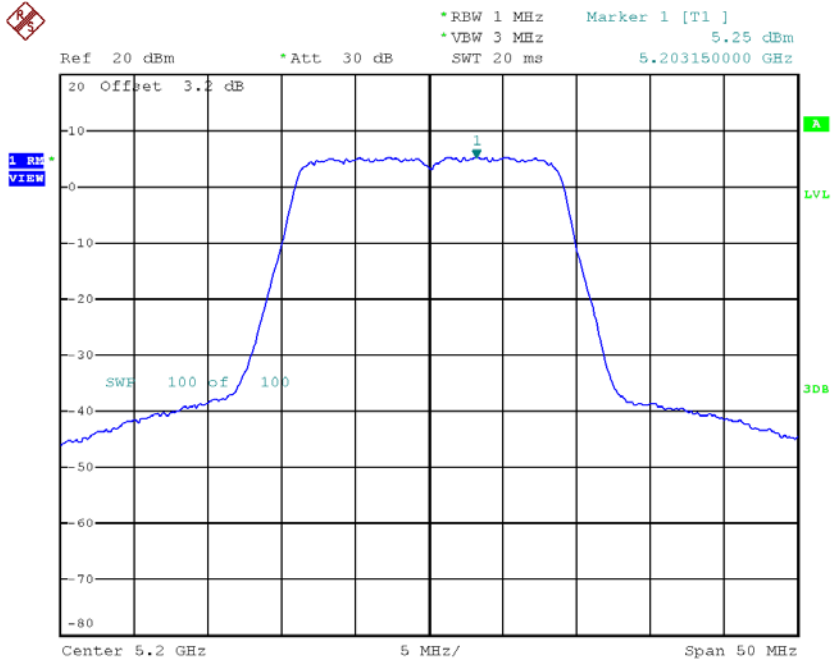

Date: 30.MAR.2018 11:32:11

### CH48

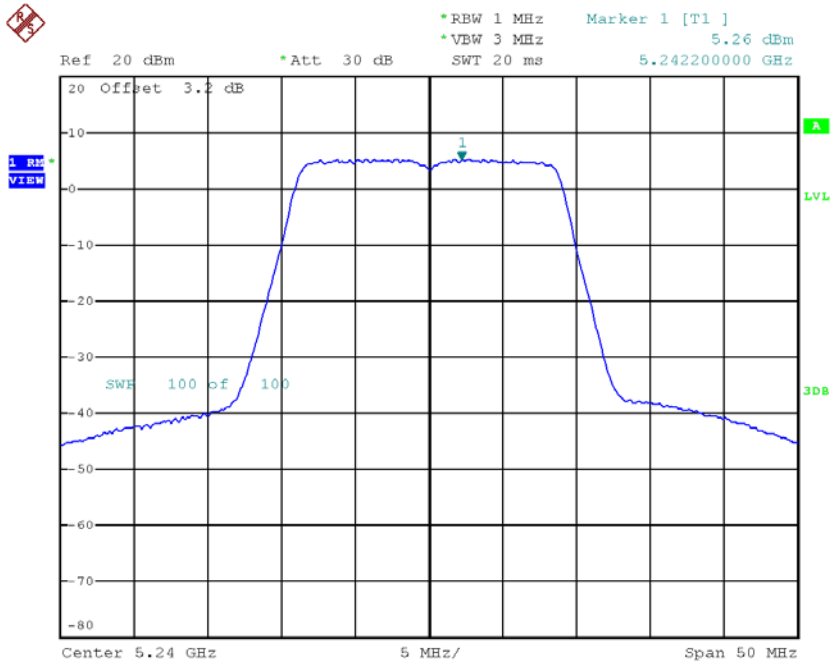


Date: 30.MAR.2018 11:33:51




**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | -1.07                   | 0.64        | -0.43                                 | 9.51            |
| CH40    | 5200            | -1.59                   | 0.64        | -0.95                                 | 9.51            |
| CH48    | 5240            | -0.74                   | 0.64        | -0.10                                 | 9.51            |

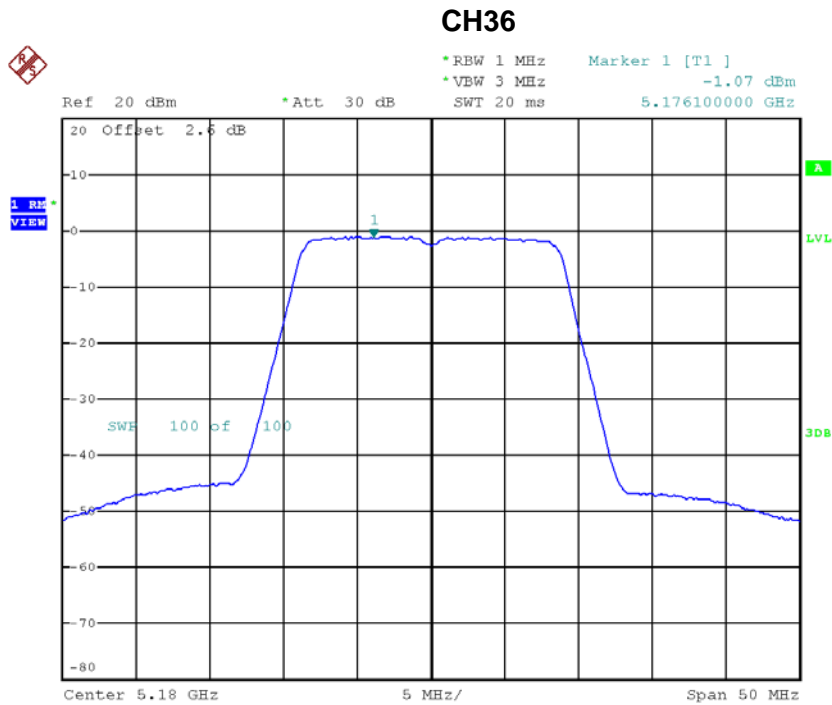


Date: 4.APR.2018 11:10:52

### CH40

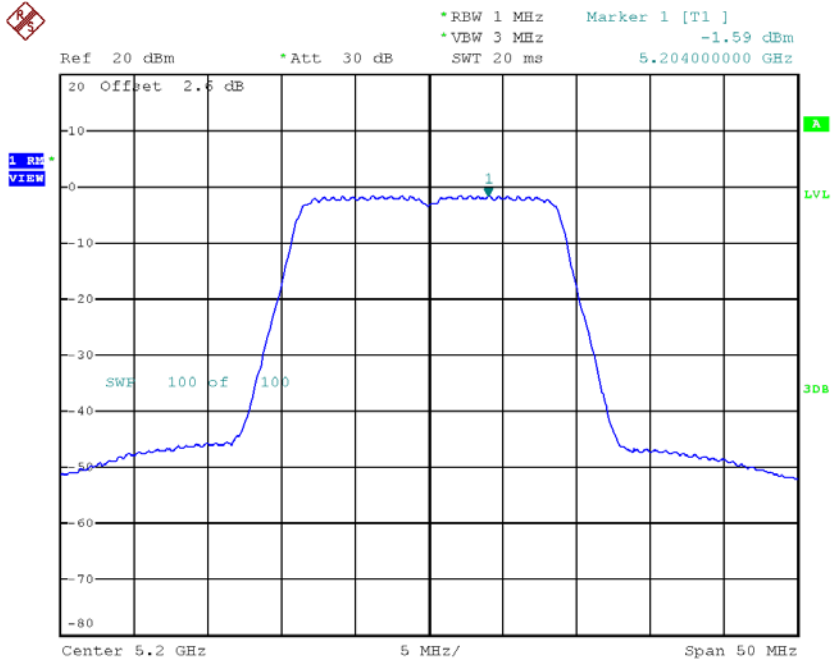

Date: 4.APR.2018 11:11:41

### CH48

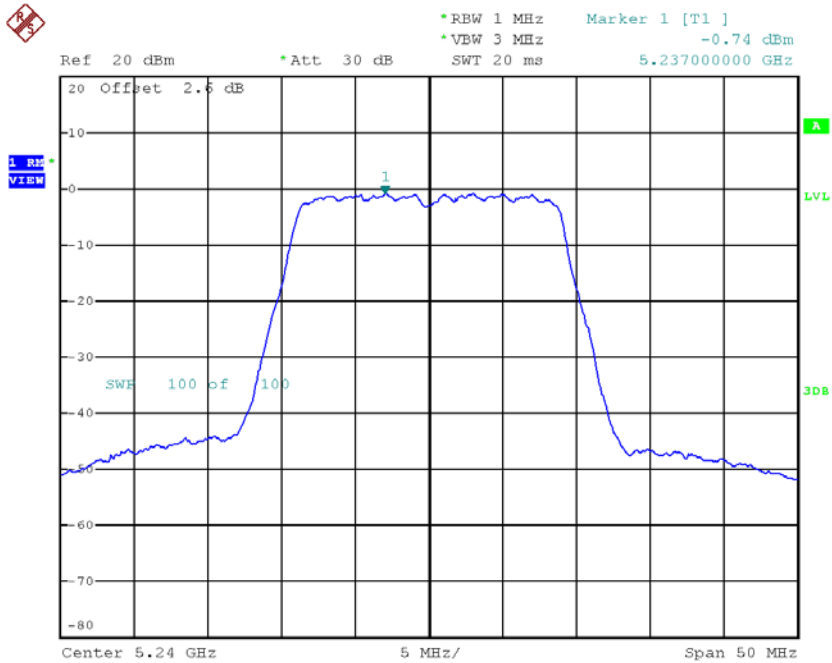

Date: 4.APR.2018 11:12:36


**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH36    | 5180            | 6.69                    | 9.51            |
| CH40    | 5200            | 6.71                    | 9.51            |
| CH48    | 5240            | 6.87                    | 9.51            |

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH38    | 5190            | -3.63                   | 1.31        | -2.32                                 | 9.51            |
| CH46    | 5230            | 4.75                    | 1.31        | 6.06                                  | 9.51            |

### CH38

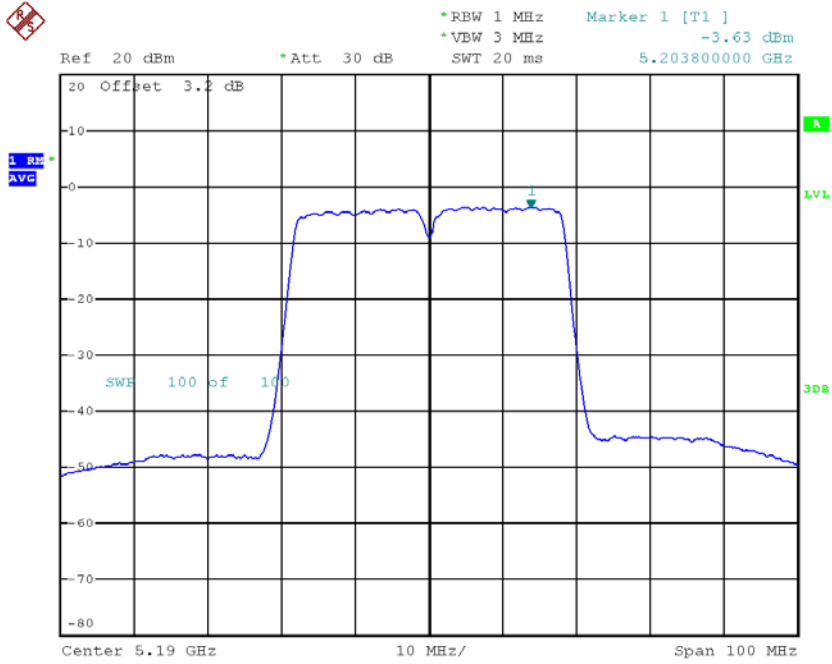

Date: 4.APR.2018 12:28:05

### CH46

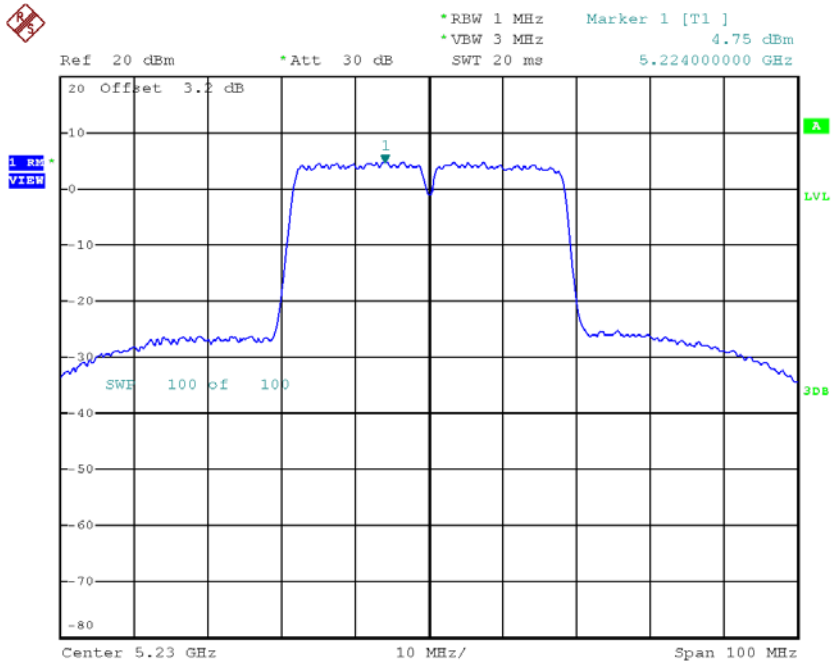


Date: 30.MAR.2018 11:21:13

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH38    | 5190            | -3.19                   | 1.31        | -1.88                                 | 9.51            |
| CH46    | 5230            | -3.80                   | 1.31        | -2.49                                 | 9.51            |

### CH38

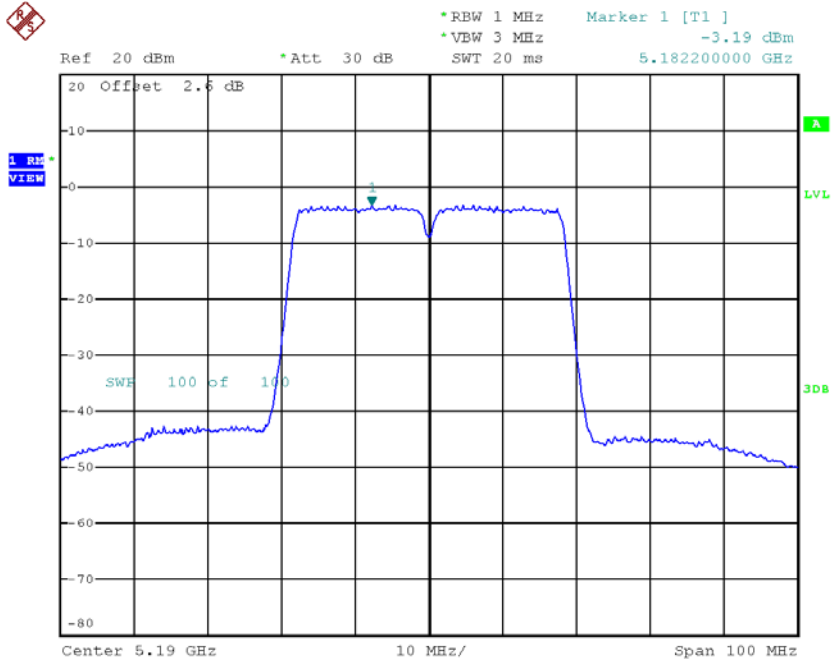

Date: 4.APR.2018 11:04:40

### CH46

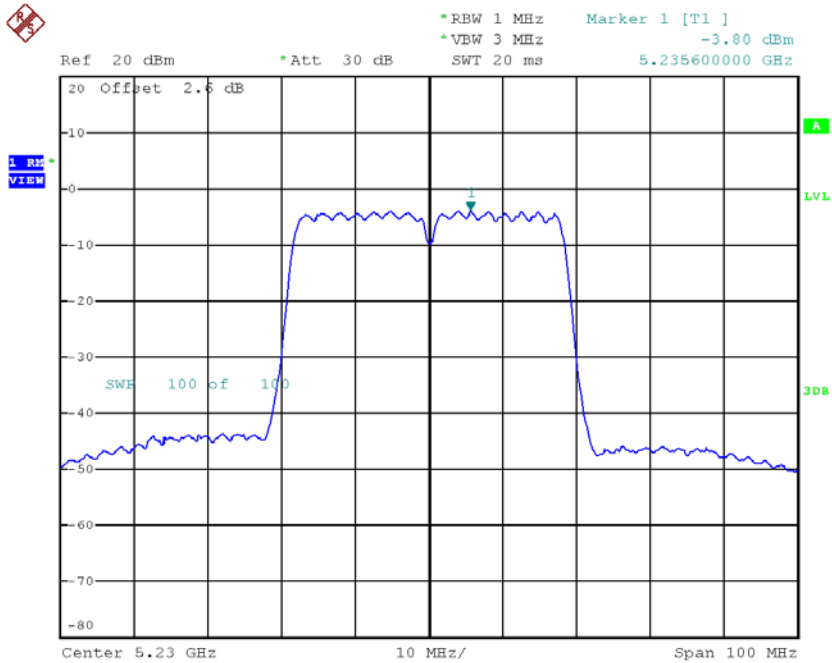

Date: 4.APR.2018 11:06:22


**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH38    | 5190            | 0.92                    | 9.51            |
| CH46    | 5230            | 6.63                    | 9.51            |



**Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH42    | 5210            | -8.46                   | 2.58        | -5.88                                 | 9.51            |

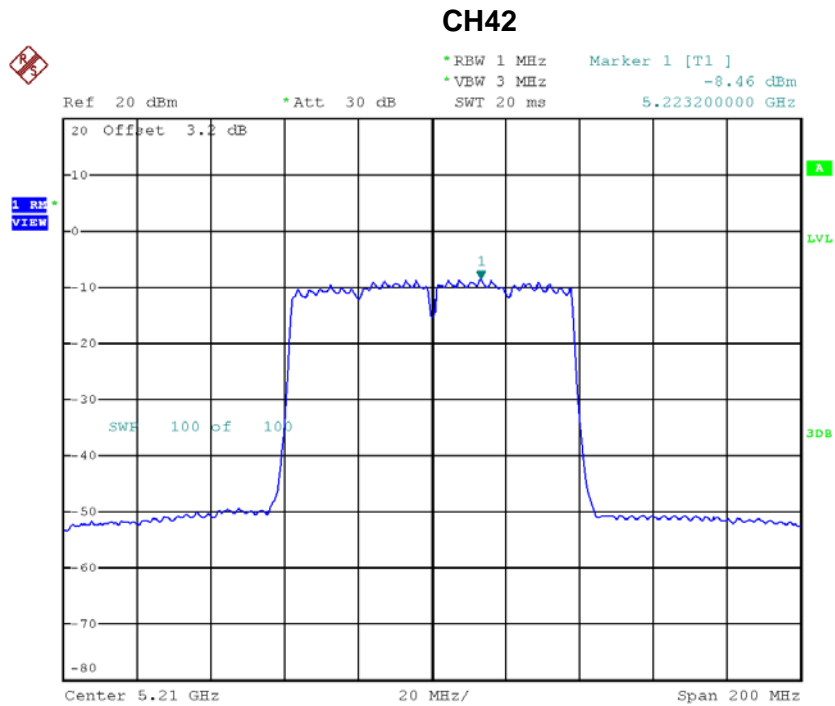

Date: 4.APR.2018 12:31:42

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH42    | 5210            | -9.48                   | 2.58        | -6.90                                 | 9.51            |

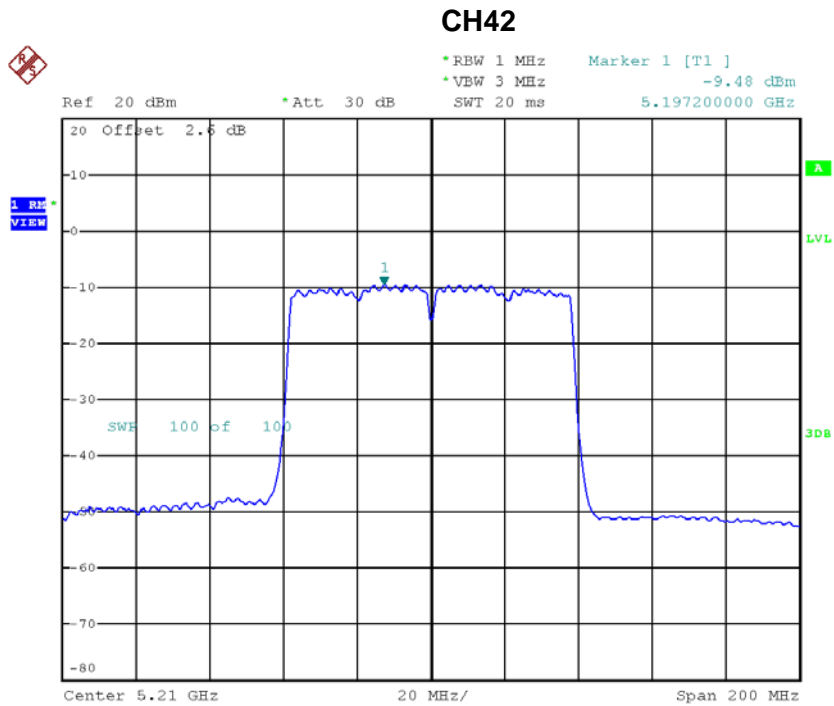


Date: 4.APR.2018 11:03:05

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH42    | 5210            | -3.35                   | 9.51            |


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.91                    | 0.64        | 5.55                                  | 9.61            |
| CH60    | 5300            | 5.12                    | 0.64        | 5.76                                  | 9.61            |
| CH64    | 5320            | 5.22                    | 0.64        | 5.86                                  | 9.61            |

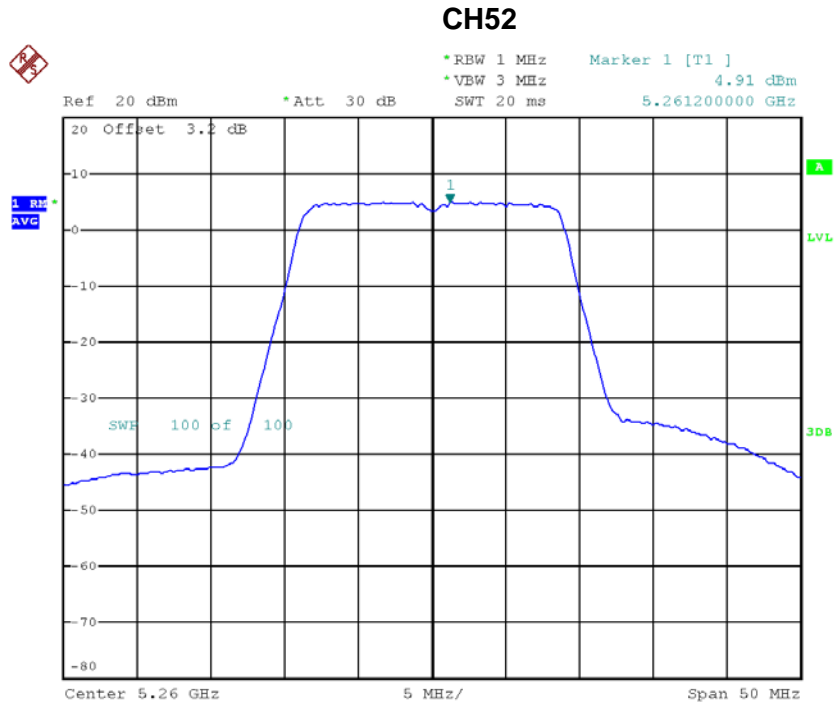


Date: 4.APR.2018 12:11:09

### CH60

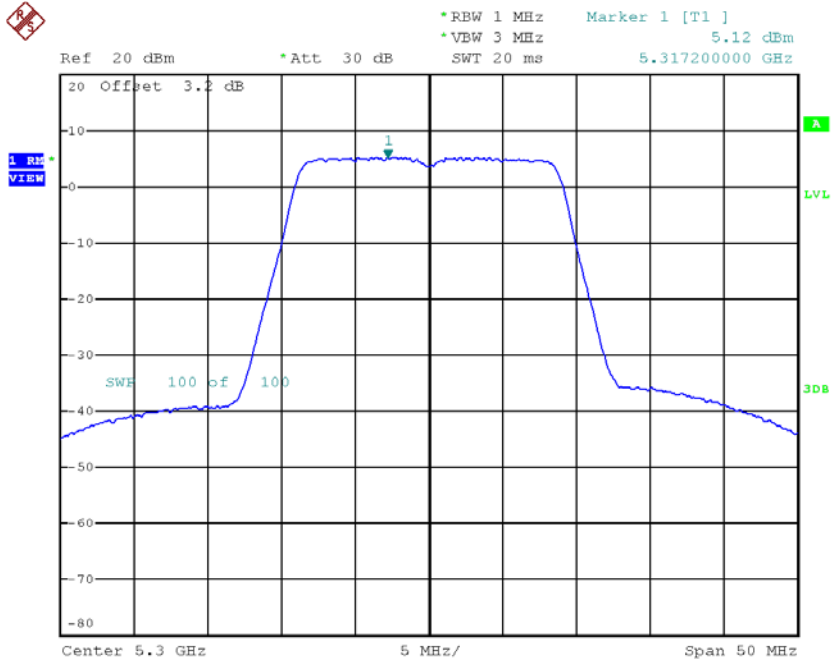

Date: 30.MAR.2018 11:35:44


### CH64

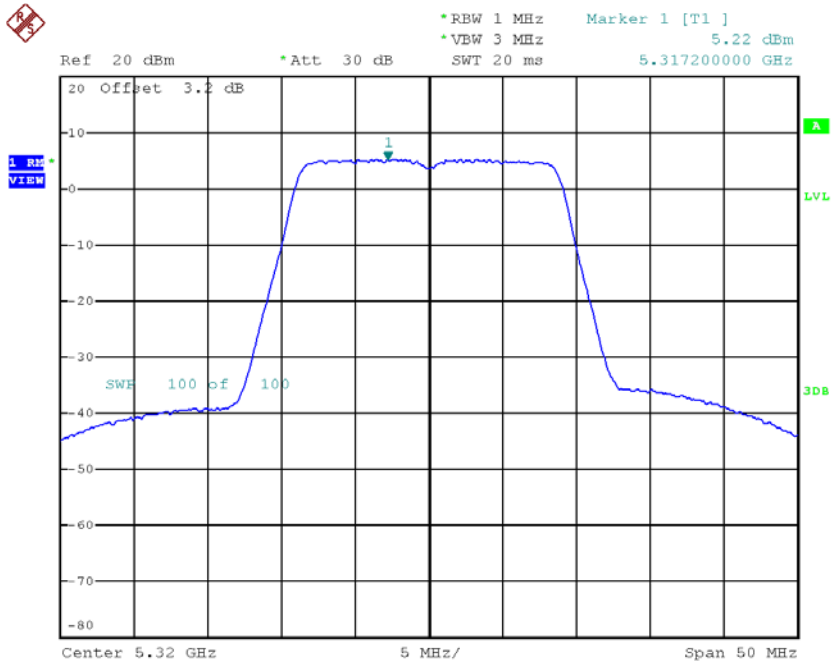

Date: 30.MAR.2018 11:35:44


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.87                    | 0.64        | 5.51                                  | 9.61            |
| CH60    | 5300            | 5.19                    | 0.64        | 5.83                                  | 9.61            |
| CH64    | 5320            | 5.32                    | 0.64        | 5.96                                  | 9.61            |

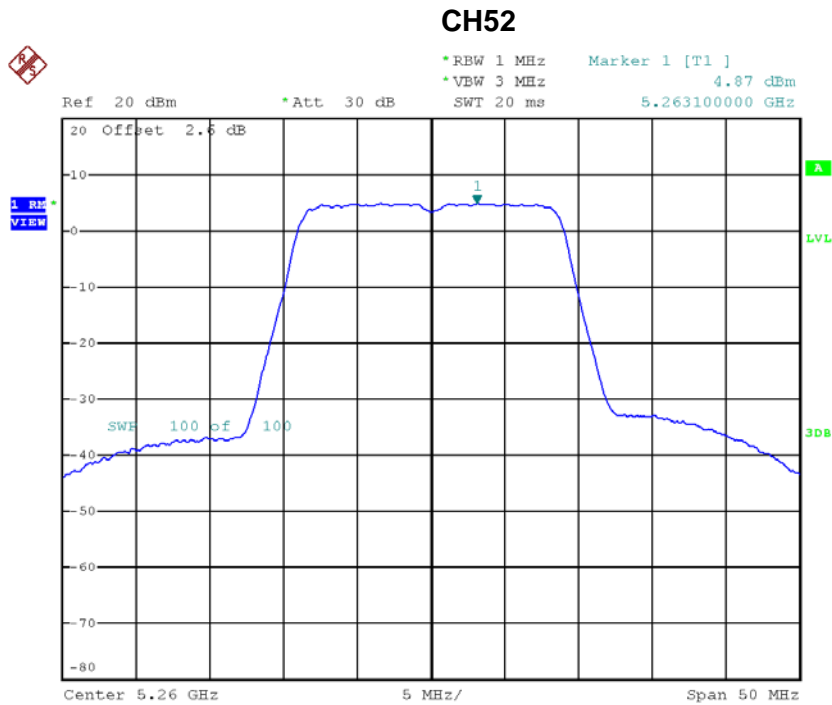


Date: 4.APR.2018 12:46:15

### CH60

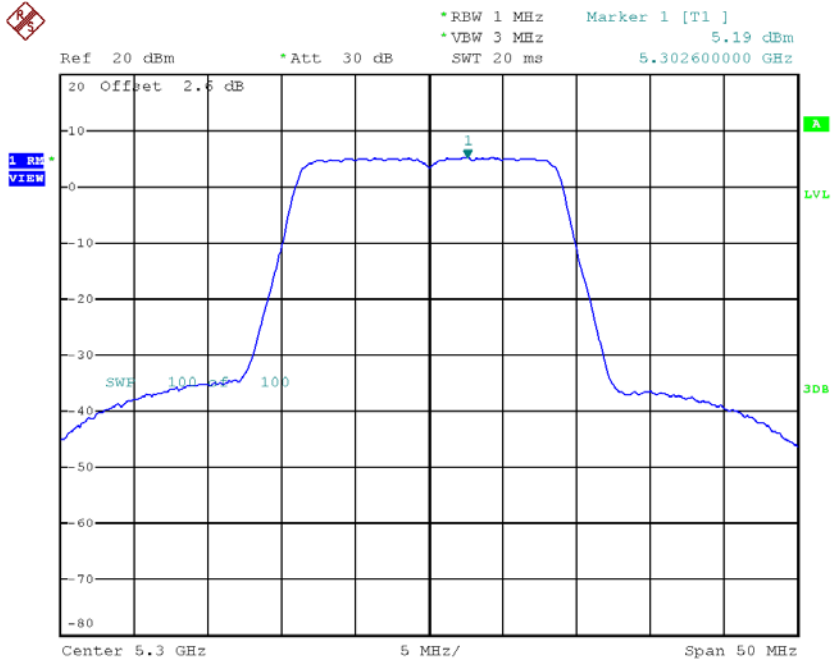

Date: 4.APR.2018 12:47:02

### CH64

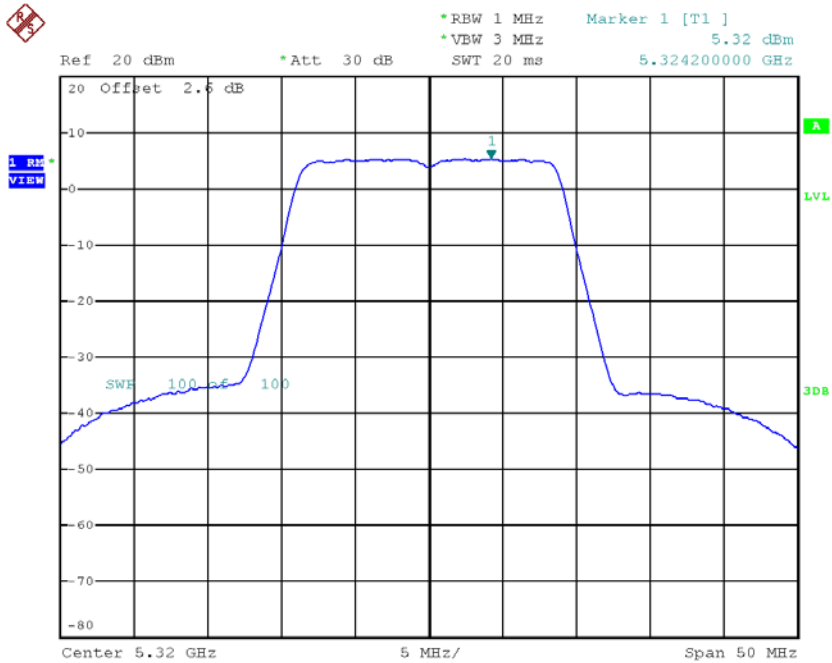

Date: 4.APR.2018 12:48:00

**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_Total**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH52    | 5260            | 8.54                    | 9.61            |
| CH60    | 5300            | 8.81                    | 9.61            |
| CH64    | 5320            | 8.92                    | 9.61            |



**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | 4.96                    | 1.31        | 6.27                                  | 9.61            |
| CH62    | 5310            | -0.39                   | 1.31        | 0.92                                  | 9.61            |

### CH54

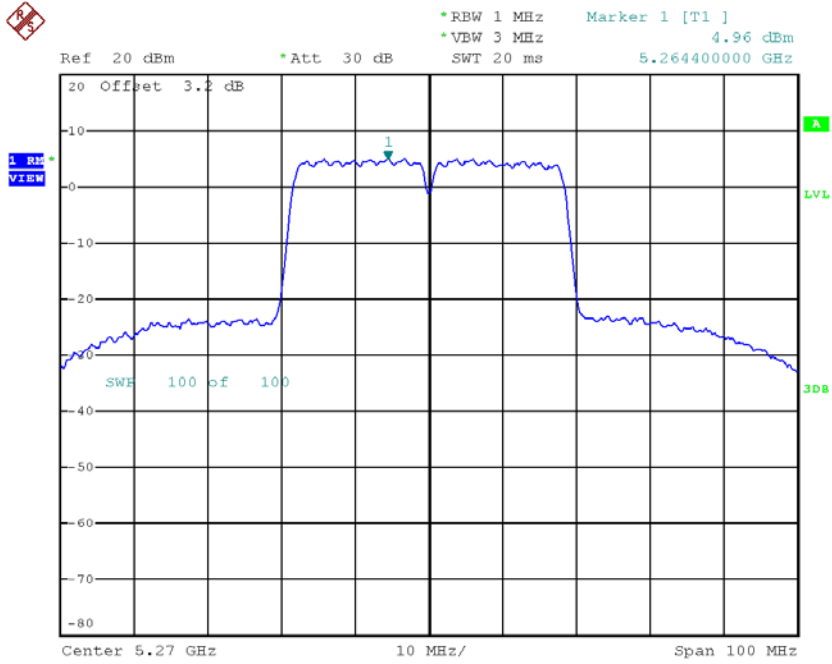

Date: 30.MAR.2018 11:23:30

### CH62

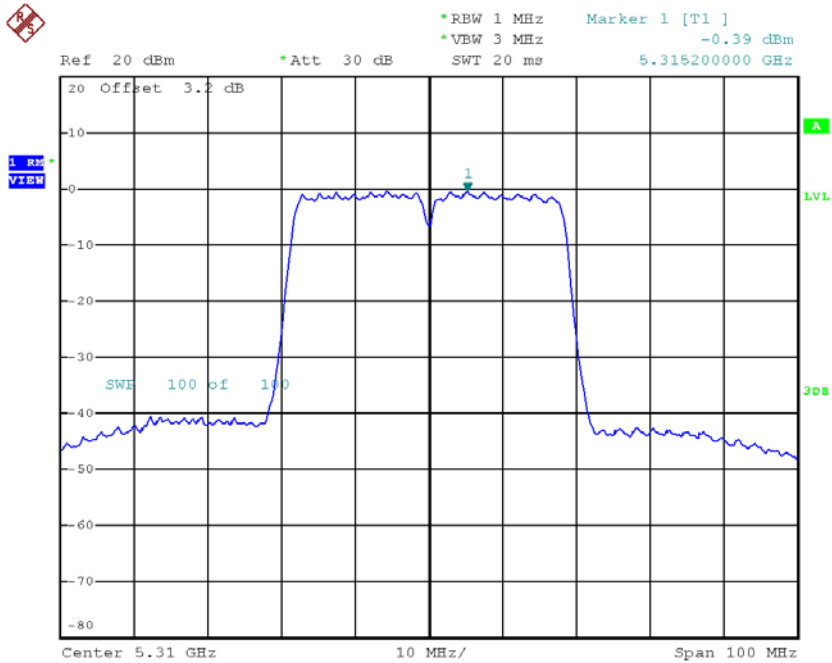


Date: 4.APR.2018 12:28:43

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | 4.55                    | 1.31        | 5.86                                  | 9.61            |
| CH62    | 5310            | 0.35                    | 1.31        | 1.66                                  | 9.61            |

### CH54

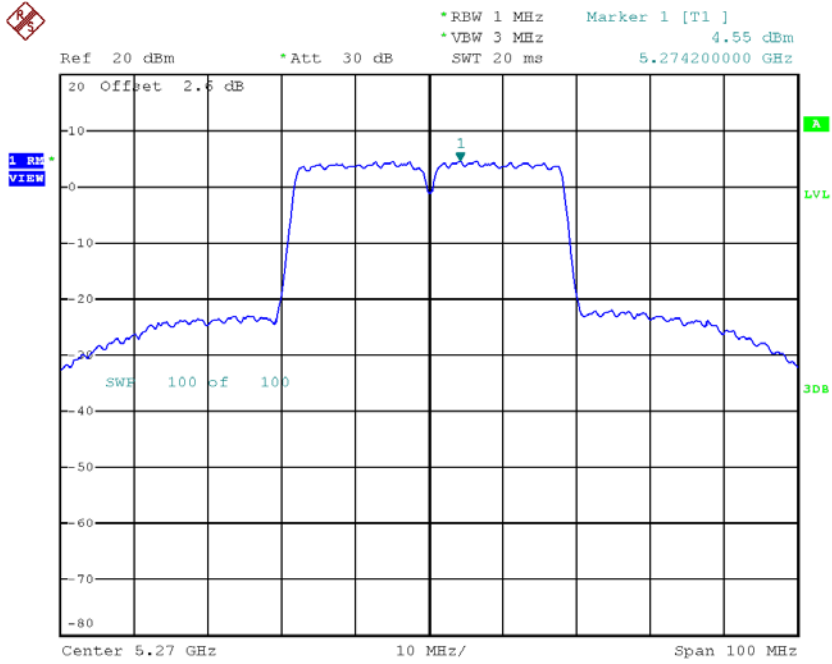

Date: 4.APR.2018 13:05:54

### CH62

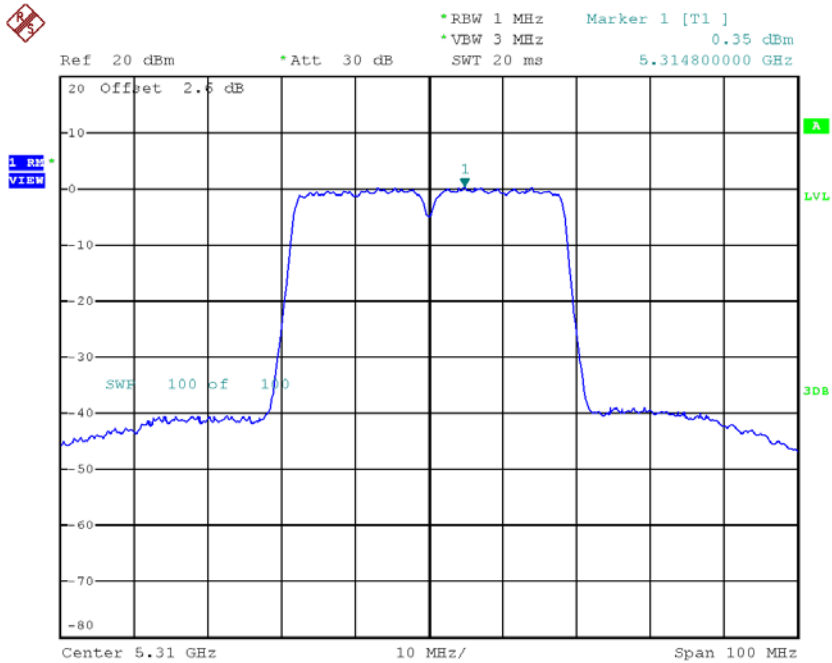


Date: 4.APR.2018 13:06:30

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH54    | 5270            | 9.08                    | 9.61            |
| CH62    | 5310            | 4.32                    | 9.61            |

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH58    | 5290            | -7.97                   | 2.58        | -5.39                                 | 9.61            |

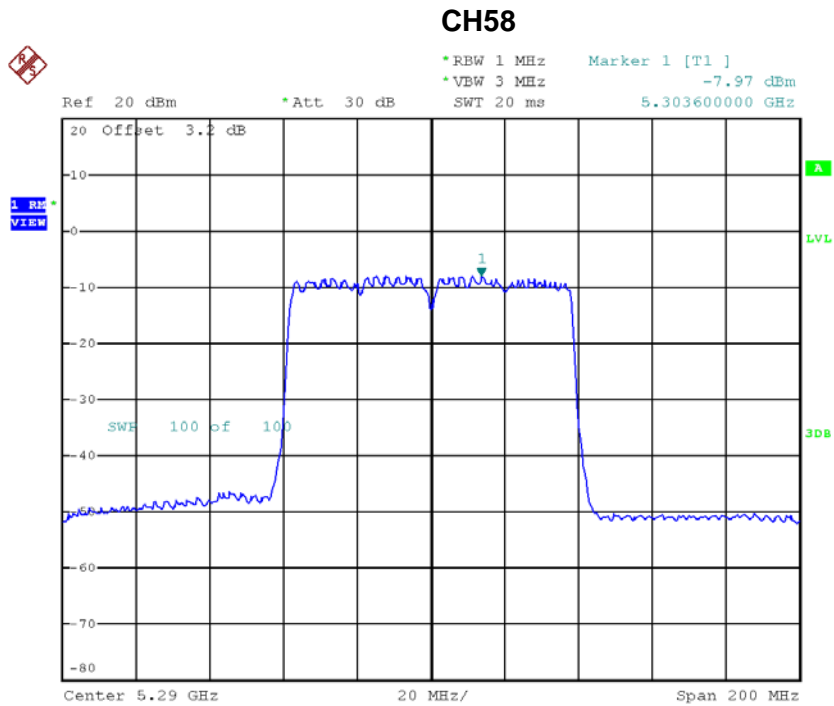

Date: 4.APR.2018 12:32:33

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH58    | 5290            | -6.17                   | 2.58        | -3.59                                 | 9.61            |

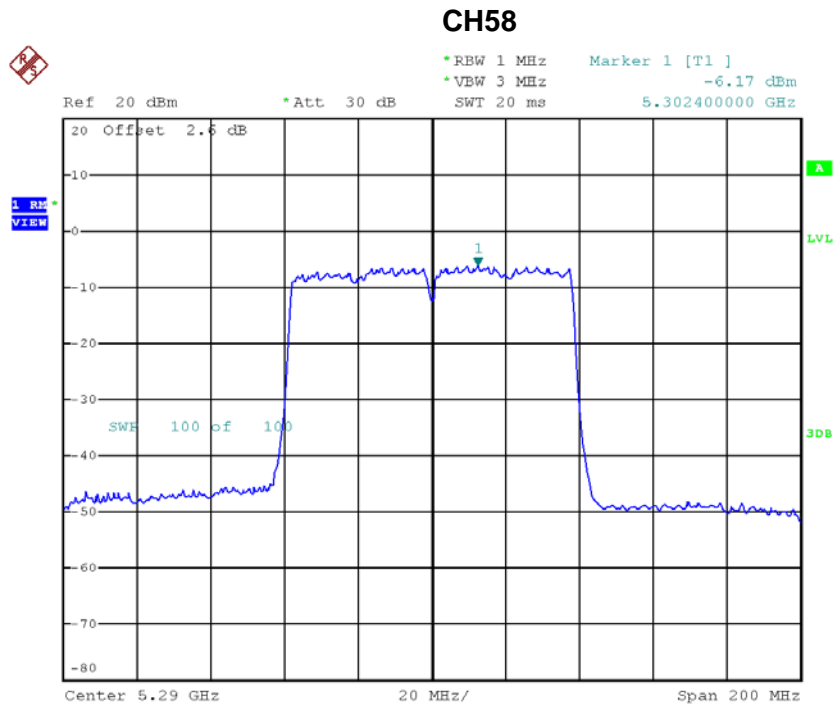

Date: 4.APR.2018 13:13:15

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_Total**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH58    | 5290            | -1.39                   | 9.61            |



**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 3.59                    | 0.64        | 4.23                                  | 8.20            |
| CH116   | 5580            | 3.66                    | 0.64        | 4.30                                  | 8.20            |
| CH140   | 5700            | 3.00                    | 0.64        | 3.64                                  | 8.20            |

**CH100**

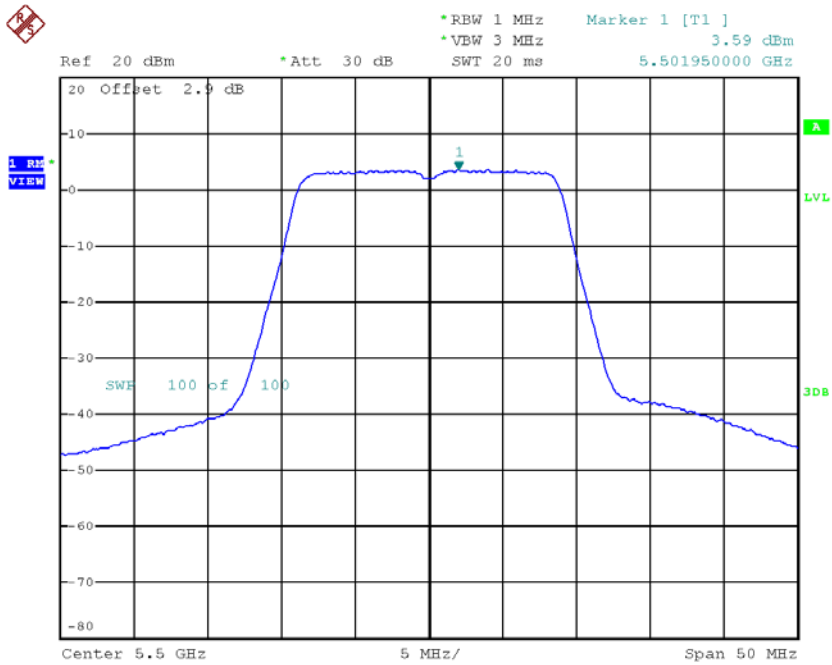


Date: 30.MAR.2018 11:40:53

### CH116

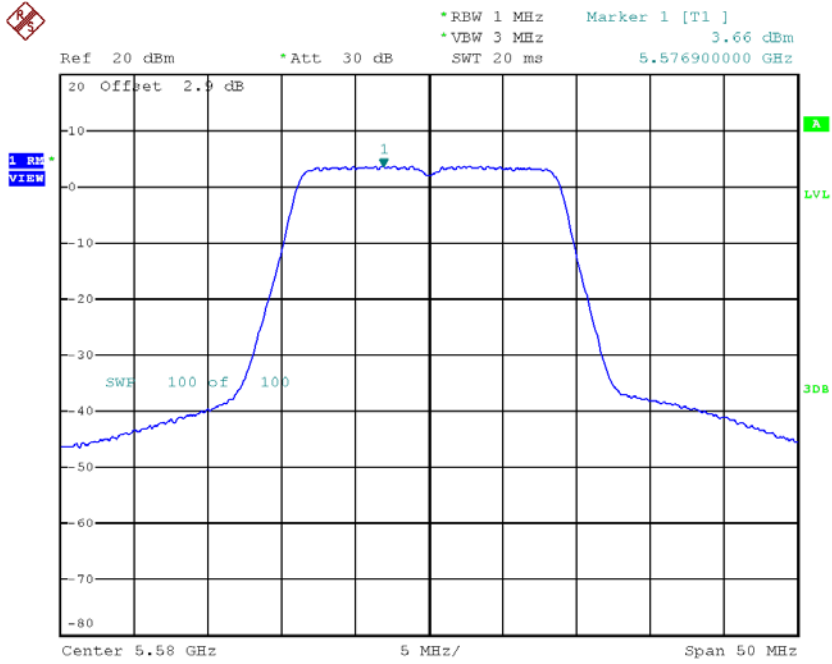

Date: 30.MAR.2018 11:41:42

### CH140

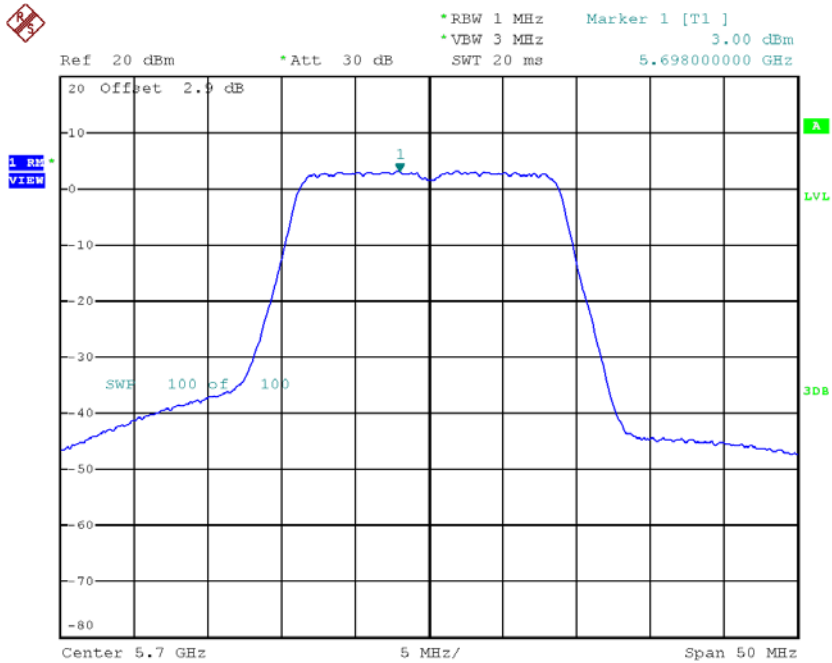


Date: 4.APR.2018 12:12:53

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 3.54                    | 0.64        | 4.18                                  | 8.20            |
| CH116   | 5580            | 3.47                    | 0.64        | 4.11                                  | 8.20            |
| CH140   | 5700            | 2.39                    | 0.64        | 3.03                                  | 8.20            |

**CH100**

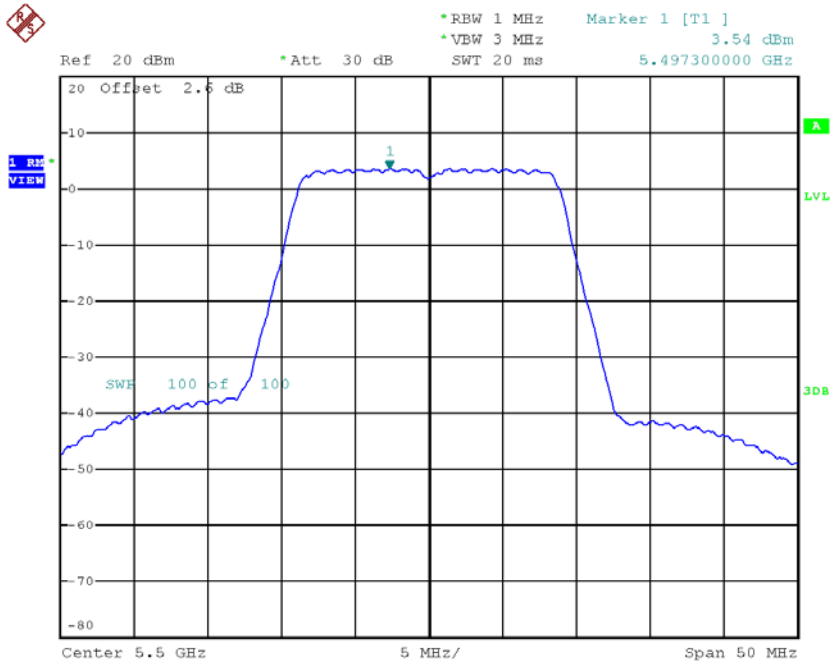


Date: 4.APR.2018 12:48:54

### CH116

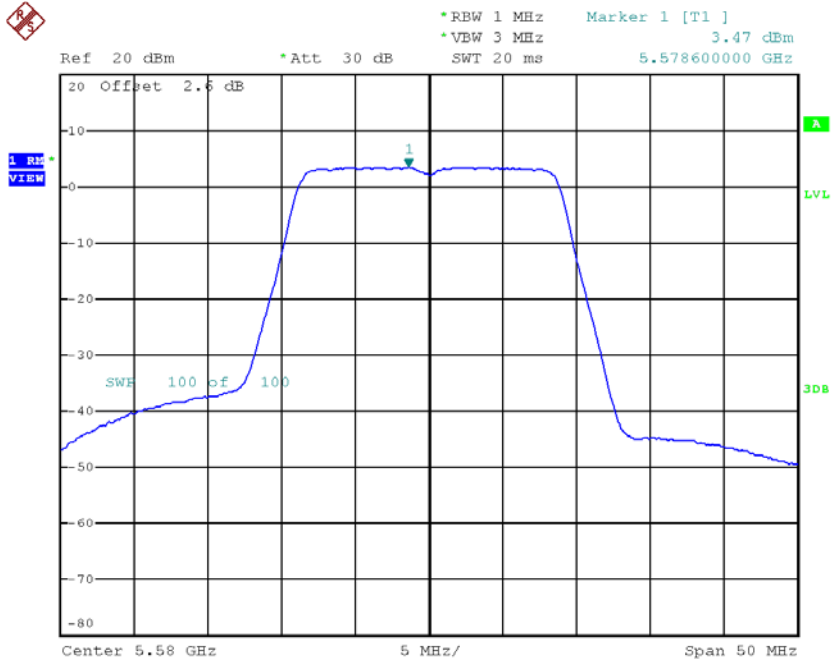

Date: 4.APR.2018 12:49:52

### CH140

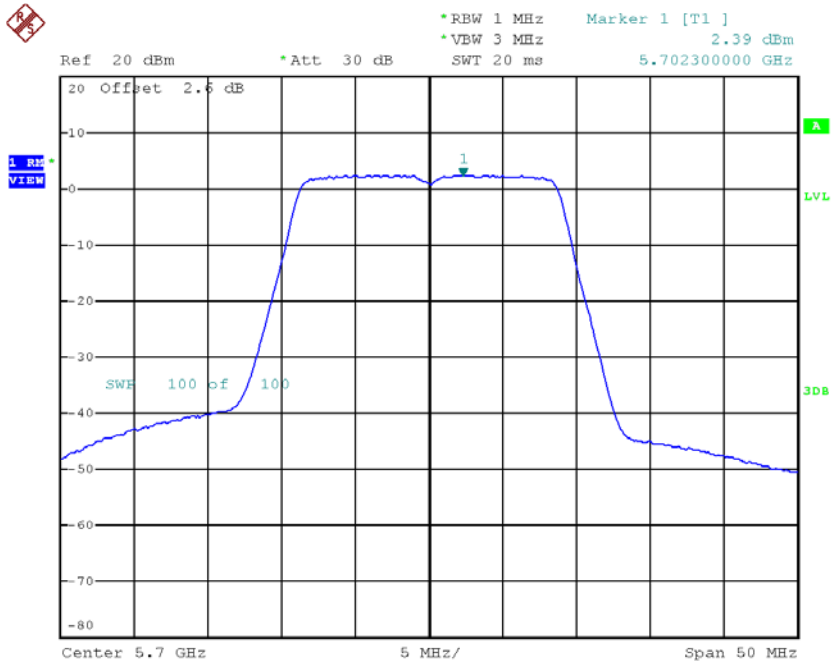


Date: 4.APR.2018 12:50:39

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH100   | 5500            | 7.22                    | 8.20            |
| CH116   | 5580            | 7.22                    | 8.20            |
| CH140   | 5700            | 6.36                    | 8.20            |


**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | -0.29                   | 1.31        | 1.02                                  | 8.20            |
| CH110   | 5550            | 3.55                    | 1.31        | 4.86                                  | 8.20            |
| CH134   | 5670            | 2.38                    | 1.31        | 3.69                                  | 8.20            |

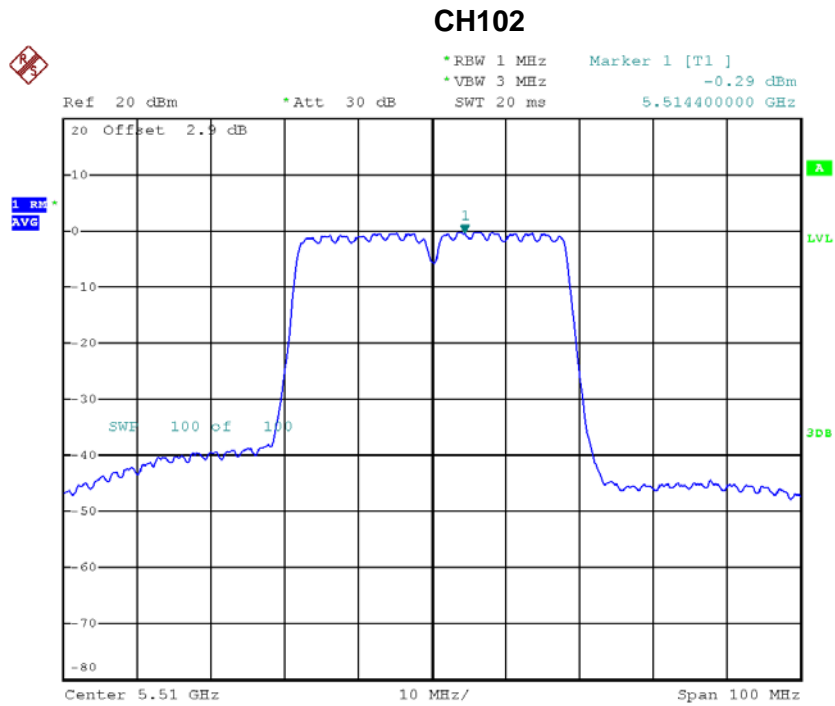


Date: 4.APR.2018 12:26:02

### CH110

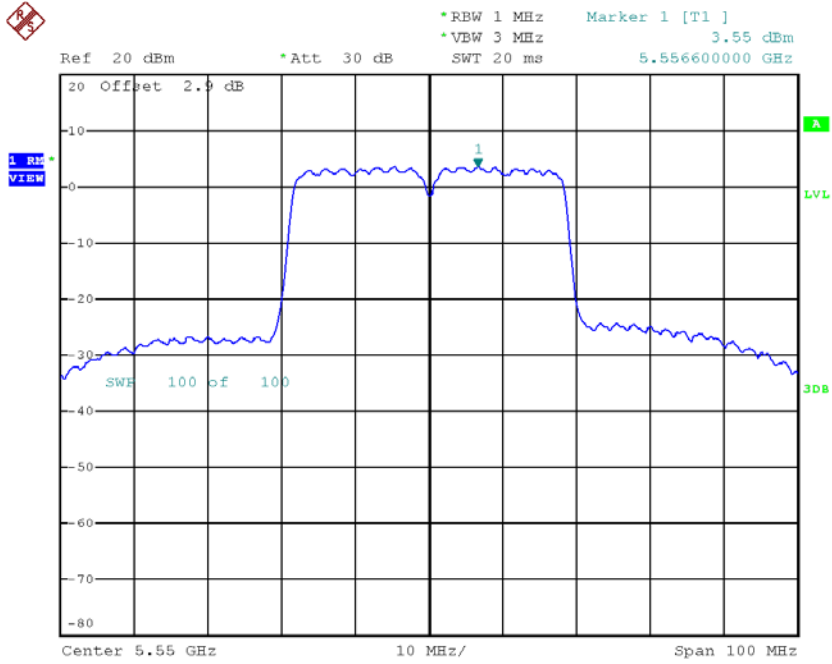

Date: 30.MAR.2018 11:26:14


### CH134

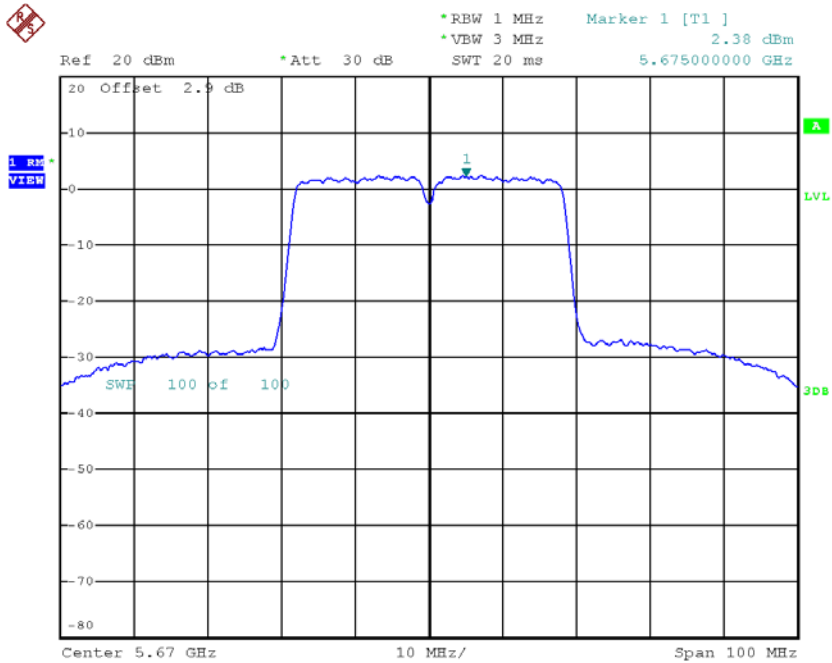

Date: 4.APR.2018 12:26:51

**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | 1.33                    | 1.31        | 2.64                                  | 8.20            |
| CH110   | 5550            | 3.35                    | 1.31        | 4.66                                  | 8.20            |
| CH134   | 5670            | 1.61                    | 1.31        | 2.92                                  | 8.20            |

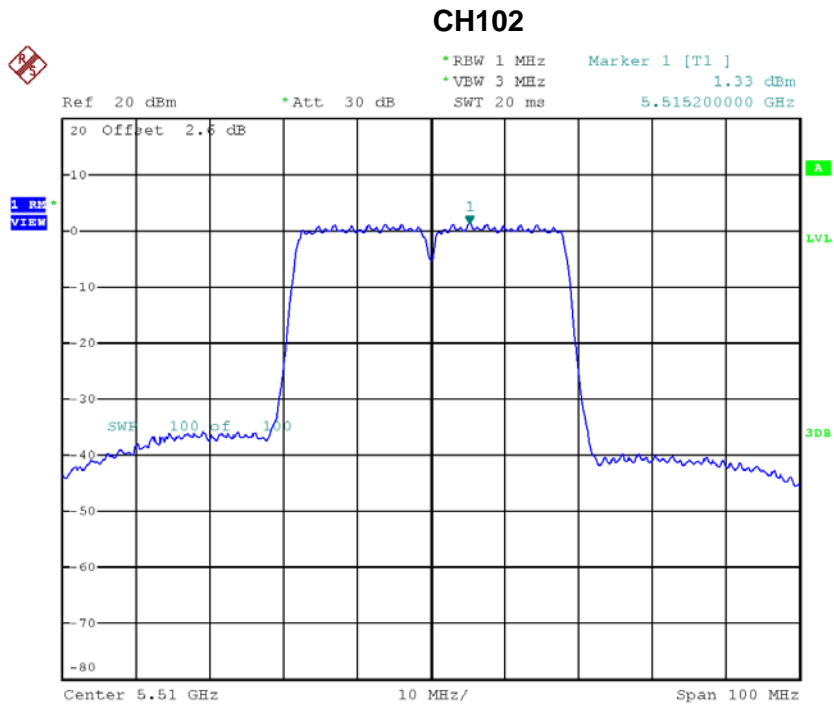

Date: 4.APR.2018 13:07:06




### CH110

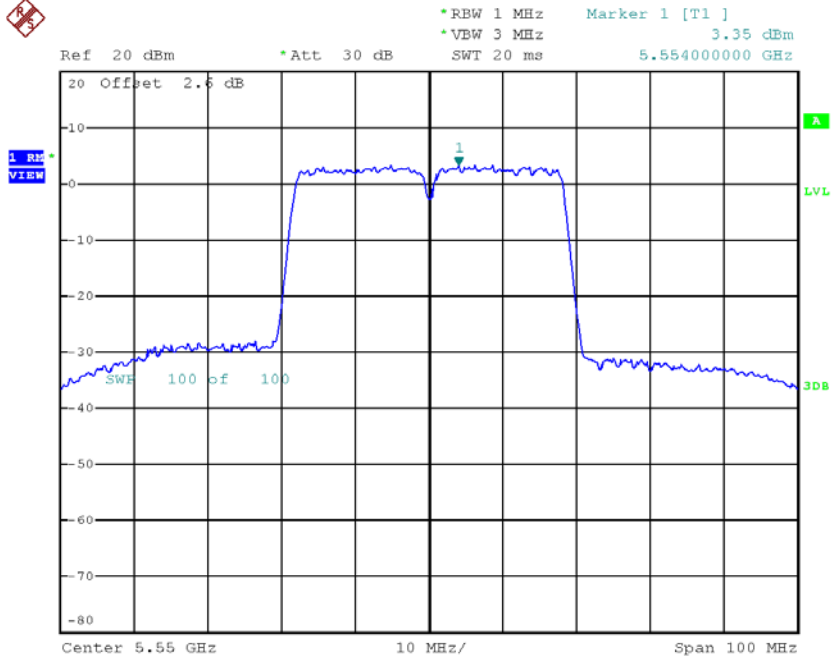

Date: 4.APR.2018 13:07:51

### CH134

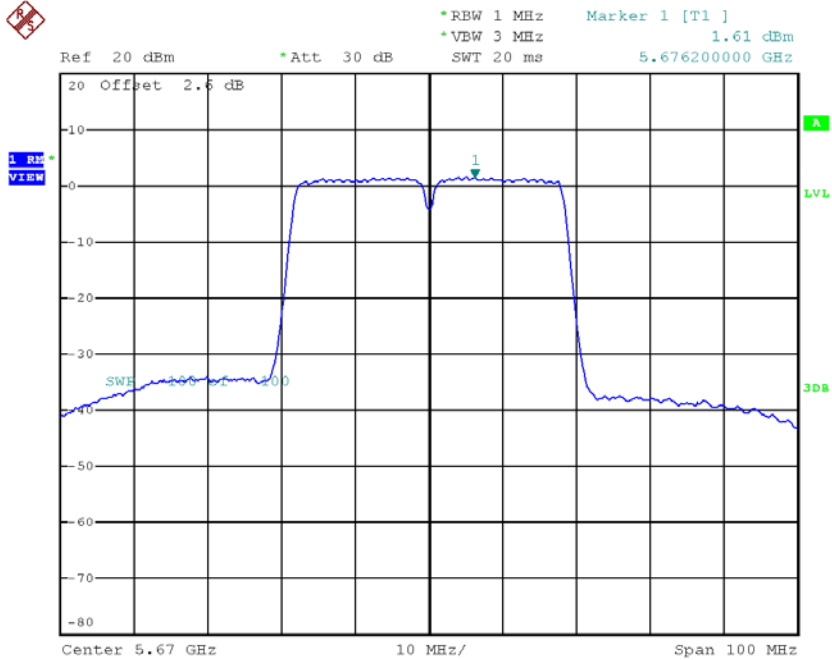

Date: 4.APR.2018 13:08:27


**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134\_Total**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-----------------|
| CH102   | 5510            | 4.92                    | 8.20            |
| CH110   | 5550            | 7.77                    | 8.20            |
| CH134   | 5670            | 6.33                    | 8.20            |

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH106   | 5530            | -5.42                   | 2.58        | -2.84                                 | 8.20            |
| CH122   | 5610            | -5.37                   | 2.58        | -2.79                                 | 8.20            |

### CH106

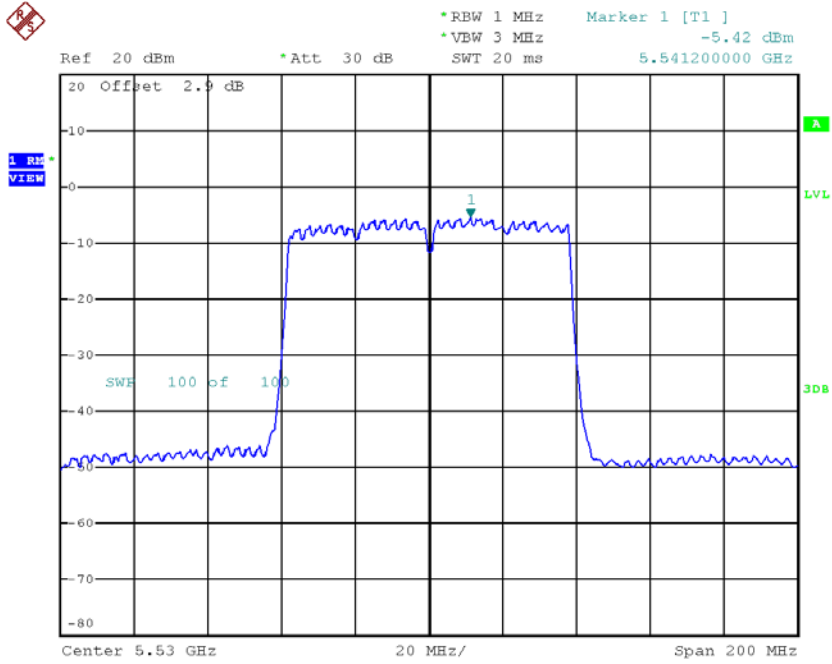

Date: 4.APR.2018 12:33:21

### CH122

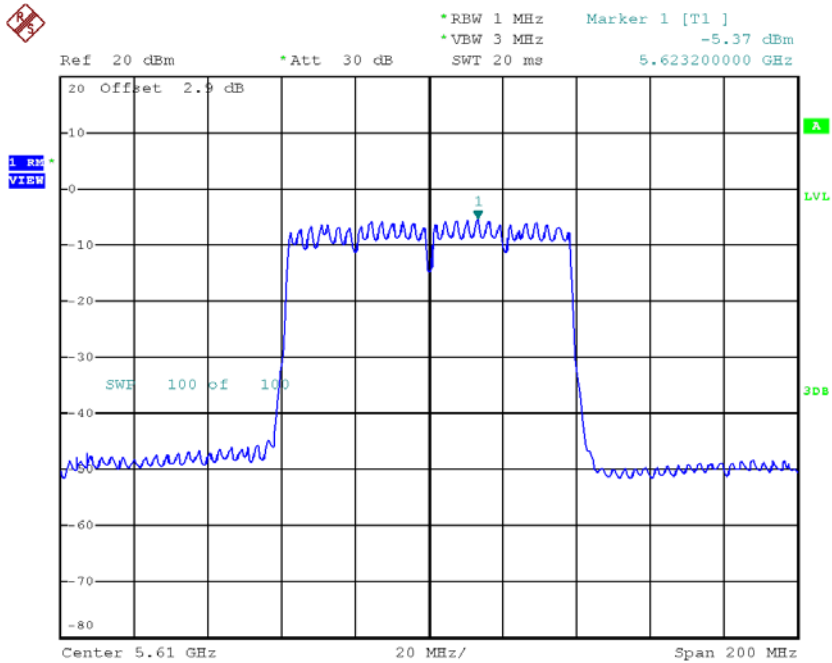

Date: 4.APR.2018 12:35:46

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH106   | 5530            | -6.51                   | 2.58        | -3.93                                 | 8.20            |
| CH122   | 5610            | -1.35                   | 2.58        | 1.23                                  | 8.20            |