

# FCC Part 15 Antenna Gain Test Report

FCC ID: VPYLB1VY  
Client: Murata Manufacturing Co., Ltd.  
Type of Equipment: Communication Module  
Model No.: Type1VY (\* installed in Host device 1VY006)  
Date of Testing: July 10, 2023 – July 14, 2023  
Date of Issue: July 18, 2023

**Sony Corporation**

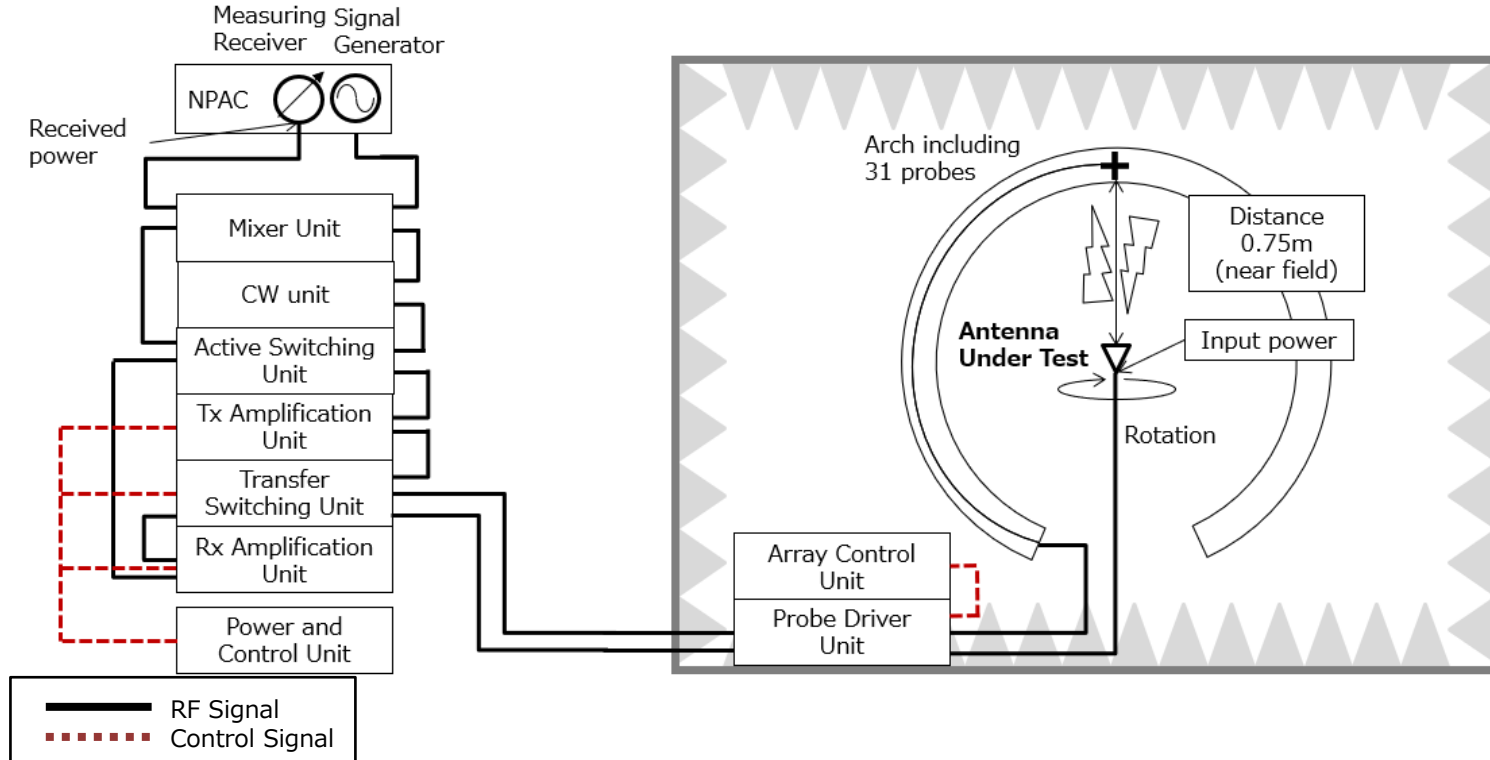
5-1-1 Minatomirai Nishi-ku Yokohama-shi Kanagawa, 220-8750, Japan

## Revision history

rev	Date.	Create	Comment	Remark
1	July 18, 2023	Keinan Gi	Issued	
2	November 15, 2023	Keinan Gi	•Additional Revision history page(This page) •4. Antenna Gains <b>Corrected the comment position for 5GHz Peak.</b>	
3	November 17, 2023	Keinan Gi	•4. Antenna Gains •5. Antenna Directivity Plots <b>Fixed Typo</b>	

# 1. Measurement Procedure

- The antenna gain is measured in a fully anechoic chamber



## 2. Test Equipment and Measurement Software

Used	Equipment Description	Model No.	Serial No.	Manufacturer	Cal. Interval	Last Cal.	Remark
Y	Absorber Chamber	B83117-A1421-T161	21061	Albatross Projects	N/A	N/A	
Y	Multi-Probe Measurement System	SG32	1102611-0001	MVG	12 months	2022.09.22	
N	Dual-Ridge Horn Antenna (0.6-6.0 GHz)	SH600	30	MVG	N/A	N/A	Reference Antenna
N	Sleeve-Dipole Antenna (0.69-0.8 GHz)	SD740	32	MVG	N/A	N/A	Reference Antenna
N	Sleeve-Dipole Antenna (0.865-0.93 GHz)	SD900	153	MVG	N/A	N/A	Reference Antenna
Y	Signal Generator and Receiver	NPAC	1102249-2495	MVG	N/A	N/A	For Passive
Y	Mixer Unit	MU	1102545-2491	MVG	N/A	N/A	
Y	CW Unit	CWU	1102188-2573	MVG	N/A	N/A	
Y	Active Switching Unit	ASU	1101217-2569	MVG	12 months	2022.09.28	
Y	Tx Amplification Unit	TxAU	1102527-2493	MVG	N/A	N/A	
Y	Rx Amplification Unit	RxAU	1102537-2492	MVG	N/A	N/A	
Y	Transfer Switching Unit	TSU	1102181-2494	MVG	N/A	N/A	
Y	Probe Driver Unit	PDU	1102186-2487	MVG	N/A	N/A	
Y	Power and Control Unit	PACU	1102184-2529	MVG	N/A	N/A	
Y	Array Control Unit	ACU	1102345-2489	MVG	N/A	N/A	

- The calibration is valid until the end of the expiration month.

## Measurement Software

Used	Software Description	Model No.	Version	Manufacturer	Remark
Y	Automated Antenna and OTA Measurement Software Suite	MVG WaveStudio	22.5.5	MVG	
Y	Near-Field to Far-Field Transformation Software	MV-Sphere	3.0.1	MVG	

### 3. Antenna Under Test

#### **Antenna 1**

Antenna Model Name: MODE DIAL LDS ANTENNA TYPE-B

Antenna Type: Monopole

Input Impedance: 50 ohm

#### **Antenna 2**

Antenna Model Name: SLA-2004

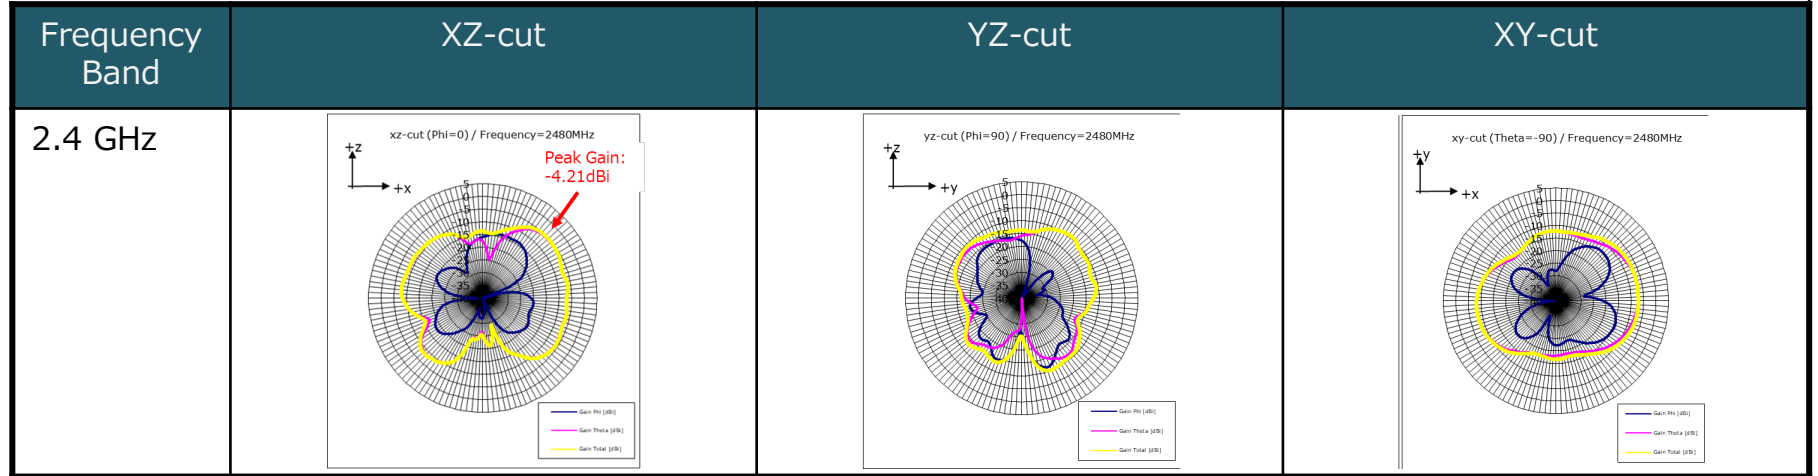
Antenna Type: Slot

Input Impedance: 50 ohm



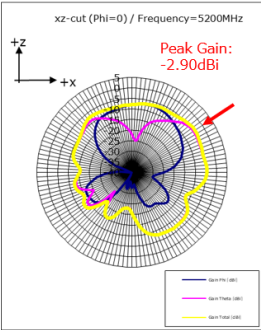
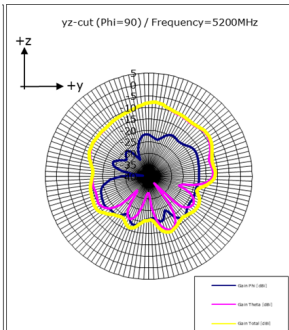
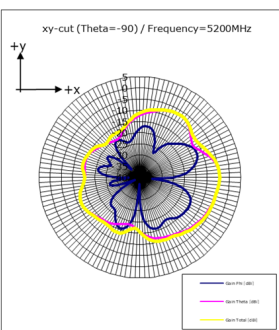
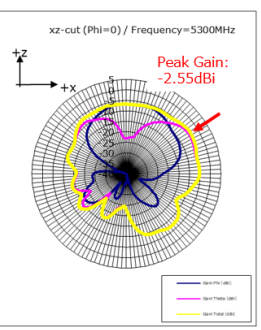
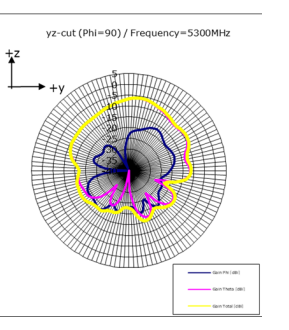
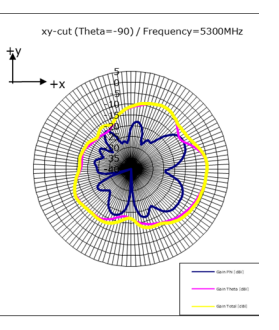
# 5. Antenna Directivity Plots

## Antenna 1 (1/3)

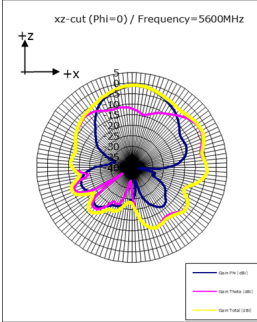
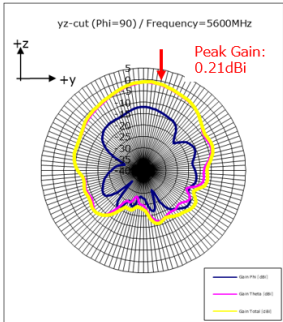
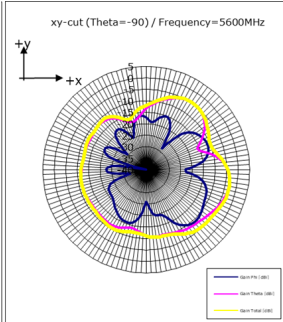
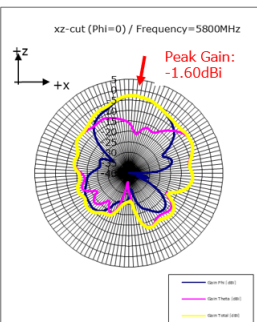
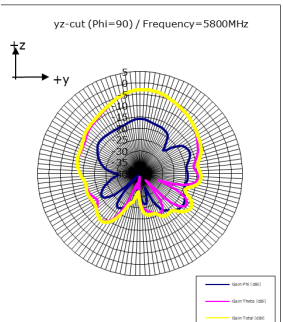
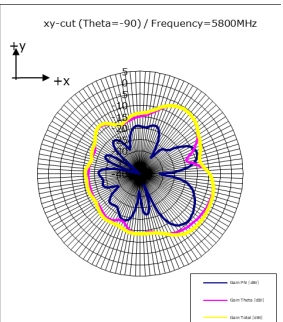




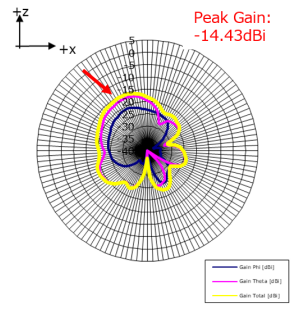
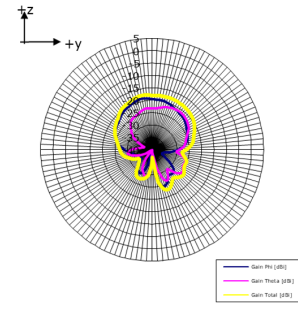
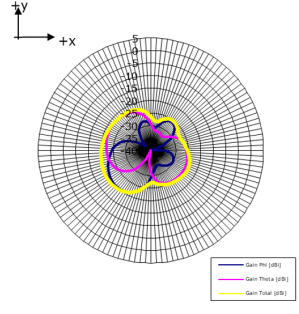
# Antenna 1 (2/3)

Frequency Band	XZ-cut	YZ-cut	XY-cut
W52 (5.2 GHz)	<p>xz-cut (Phi=0) / Frequency=5200MHz</p>  <p>Peak Gain: -2.90dBi</p>	<p>yz-cut (Phi=90) / Frequency=5200MHz</p> 	<p>xy-cut (Theta=-90) / Frequency=5200MHz</p> 
W53 (5.3 GHz)	<p>xz-cut (Phi=0) / Frequency=5300MHz</p>  <p>Peak Gain: -2.55dBi</p>	<p>yz-cut (Phi=90) / Frequency=5300MHz</p> 	<p>xy-cut (Theta=-90) / Frequency=5300MHz</p> 

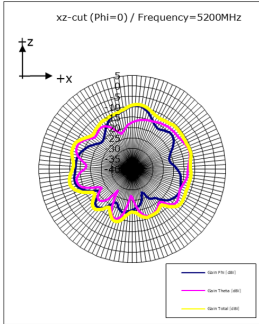
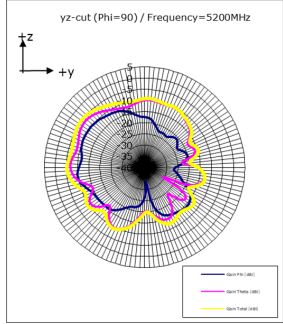
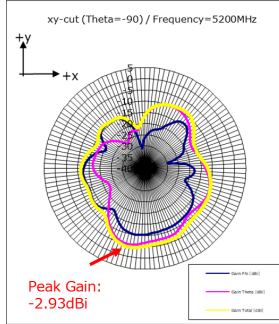
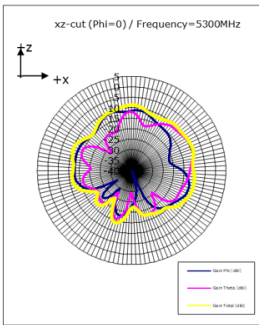
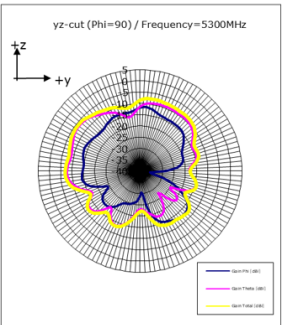
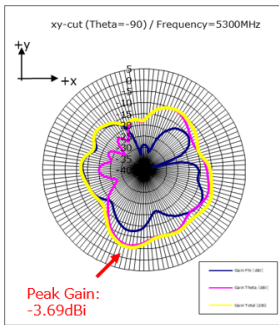
# Antenna 1 (3/3)

Frequency Band	XZ-cut	YZ-cut	XY-cut
W56 (5.6 GHz)	<p>xz-cut (Phi=0) / Frequency=5600MHz</p>  <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>	<p>yz-cut (Phi=90) / Frequency=5600MHz</p>  <p>Peak Gain: 0.21dBi</p> <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>	<p>xy-cut (Theta=-90) / Frequency=5600MHz</p>  <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>
W58 (5.8 GHz)	<p>xz-cut (Phi=0) / Frequency=5800MHz</p>  <p>Peak Gain: -1.60dBi</p> <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>	<p>yz-cut (Phi=90) / Frequency=5800MHz</p>  <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>	<p>xy-cut (Theta=-90) / Frequency=5800MHz</p>  <p>Legend: - Blue: Gain Phi (0) - Magenta: Gain Phi (90) - Yellow: Gain Phi (180)</p>

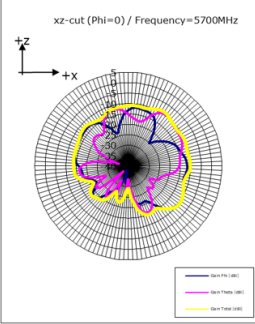
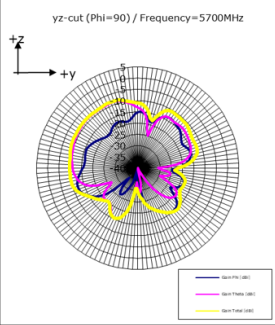
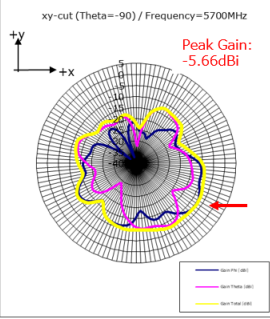
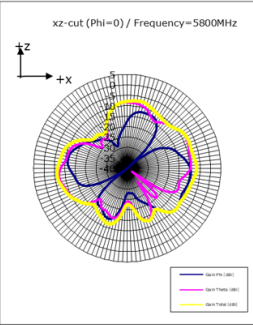
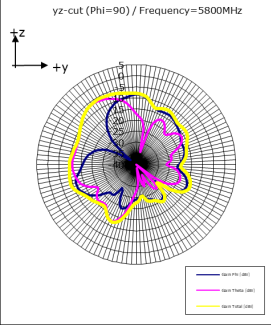
# Antenna 2 (1/3)

Frequency Band	XZ-cut	YZ-cut	XY-cut
2.4 GHz	<p data-bbox="396 390 695 406">xz-cut (Phi=0) / Frequency=2400MHz</p>  <p data-bbox="589 420 676 453">Peak Gain: -14.43dBi</p>	<p data-bbox="937 390 1236 406">yz-cut (Phi=90) / Frequency=2400MHz</p> 	<p data-bbox="1458 390 1758 406">xy-cut (Theta=-90) / Frequency=2400MHz</p> 

# Antenna 2 (2/3)

Frequency Band	XZ-cut	YZ-cut	XY-cut
W52 (5.2 GHz)			
W53 (5.3 GHz)			

# Antenna 2 (3/3)

Frequency Band	XZ-cut	YZ-cut	XY-cut
W56 (5.7 GHz)	<p>xz-cut (Phi=0) / Frequency=5700MHz</p> 	<p>yz-cut (Phi=90) / Frequency=5700MHz</p> 	<p>xy-cut (Theta=-90) / Frequency=5700MHz</p> <p>Peak Gain: -5.66dBi</p> 
W58 (5.8 GHz)	<p>xz-cut (Phi=0) / Frequency=5800MHz</p> 	<p>yz-cut (Phi=90) / Frequency=5800MHz</p> 	<p>xy-cut (Theta=-90) / Frequency=5800MHz</p> <p>Peak Gain: -4.16dBi</p> 