

Remote Control for Automatic Door

Thank you for buying this RITS-N product. This Remote control system will provide long and dependable service when properly installed. Please read this instruction Manual carefully for correct and effective use.

Parts and Specification

◆ Set composition


- Transmitter (RT-321 A) 1 EA
- Receiver (RMC-321GRX) 1 EA
- Battery 1EA
- Manual 1copy

◆ specification

● Transmitter	● Receiver
Model : RT-321 A	Model : RMC-321GRX
Frequency : 311.063MHz	Power input : DC5V
Modulation : AM	DATA Output : Pin Header
Power input : DC12V 1 EA	Operating Temp' : -10℃ ~60℃
23A	
Operating Temp' : -10℃ ~60℃	


Function

● Transmitter

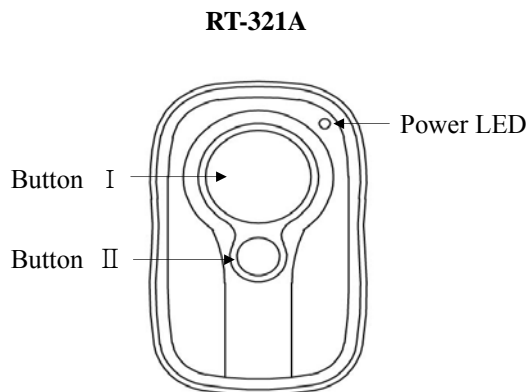

- Power LED : When users press any button, LED will be turned on. Please change the battery if LED light is weak.
- Press button I for door-open, Press button II for door-close.
- Transmitter can be used up to 4 thousand codes for one receiver.

● Receiver

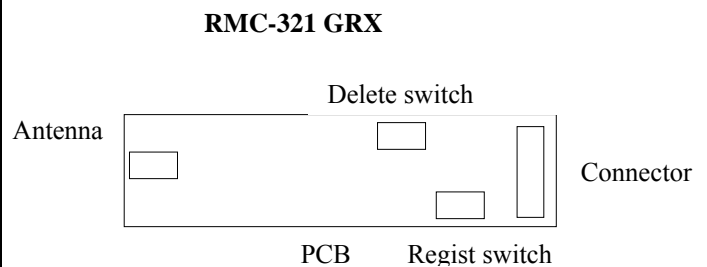

- Memorizing Transmitter ID
 1. Press transmitter's big button for 1 second during first 5 minutes of power on.
 2. Press transmitter's button for 1 second while you press the register button..
- Delete Transmitter ID
 1. Press transmitter's small button for 1 second during first 5 minutes of power on.
 2. Press transmitter's button for 1 second while you press the delete button
- Delete all Transmitter ID
 1. Press transmitter's small button for 10 seconds during first 5 minutes of power on.
 2. Press the register and delete button for 1 second at the same time

LABELLING REQUIREMENTS (FCC Part 15.19 (a)(3))

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operations.

INFORMATION TO THE USER (Part 15.105(b))

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING (Part 15.21)

The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.