



# TEST REPORT

No. 2013EEB00530-2G

for

**Shenzhen Sang Fei Consumer Communications Co., Ltd**

**WG-Raptor**

**Model Name: Philips W3500**

**Marketing Name: W3500**

**FCC ID: VQRCTW3500**

with

**Hardware Version: TMAO**

**Software Version: Philips\_T3500\_WCDMA\_4+8\_GPS\_V1.0\_20131031**

**Issued Date: 2013-12-06**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Shenzhen.

**Test Laboratory:**

**FCC 2.948 Listed: No.310359**

**IC O.A.T.S listed: No.6629C-1**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel: +86(0)10-62304633-2678, Fax: +86(0)10-62304633-2504 Email:welcome@emcite.com. [www.emcite.com](http://www.emcite.com)

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE .....</b>	<b>3</b>
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT .....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>5</b>
<b>3.4. NORMAL ACCESSORY SETTING .....</b>	<b>6</b>
<b>3.5. GENERAL DESCRIPTION .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>
<b>A.1 OUTPUT POWER .....</b>	<b>11</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>17</b>
<b>A.3 CONDUCTED EMISSION .....</b>	<b>23</b>
<b>A.4 FREQUENCY STABILITY .....</b>	<b>28</b>
<b>A.5 OCCUPIED BANDWIDTH .....</b>	<b>30</b>
<b>A.6 EMISSION BANDWIDTH .....</b>	<b>42</b>
<b>A.7 BAND EDGE COMPLIANCE .....</b>	<b>54</b>
<b>A.8 CONDUCTED SPURIOUS EMISSION .....</b>	<b>60</b>
<b>A.9 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>81</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Shenzhen, Telecommunication Metrology Center of MIIT  
Address: No. 12 Building, Shangsha Innovation and Technology Park, Futian District  
Postal Code: 518048  
Telephone: +86(0)755-33322000  
Fax: +86(0)755-33322001


### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data


Testing Start Date: 2013-11-11  
Testing End Date: 2013-12-05

### 1.4. Signature




---

Cao Junfei  
(Prepared this test report)



---

Zhang Bojun  
(Reviewed this test report)



---

Lu Minniu  
Deputy Director of the laboratory  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd  
Address /Post: 11 Science and Technology Road, Shenzhen  
Hi-tech Industrial Park, Nanshan District, Shenzhen, PRC  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Telephone: 0755-86138466  
Fax: 0755-26503914

### **2.2. Manufacturer Information**

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd  
Address /Post: 11 Science and Technology Road, Shenzhen  
Hi-tech Industrial Park, Nanshan District, Shenzhen, PRC  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Telephone: 0755-86138466  
Fax: 0755-26503914

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	WG-Raptor
Model Name	Philips W3500
Marketing Name	W3500
FCC ID	VQRCTW3500
Frequency	GSM850; PCS1900; WCDMA Band II; WCDMA Band V
GPRS operation mode	Class B
GPRS Class	Class 12
Antenna	Integrated
Power supply	Battery or Charger (AC Adaptor)
Output power	28.75dBm maximum EIRP measured for 1900MHz
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

Note:

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
N01	862813026600158	TMAO	Philips_T3500_WCDMA_4+8_GPS_V1.0_20131031

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Travel charger

AE1

Model	AB2200AWML
Manufacturer	SHENZHEN CYCLELONG POWER-TECH CO.LTD.
Capacitance	2200mAh
Nominal Voltage	3.7V

AE2-1

Model	A31-500650
Manufacturer	dongguan aohai power technology co.Ltd
Length of DC line	80cm

AE2-2

Model	3208SF
Manufacturer	Salcomp Co., Ltd. (Shenzhen)
Length of DC line	80cm

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. Normal Accessory setting**

Fully charged battery was used during the test;

#### **3.5. General Description**

The Equipment Under Test (EUT) is a model of WCDMA/GSM digital mobile phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	2011
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-12 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-12 Edition

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (11.20 meters×6.10meters×5.60meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 6 GHz, 3 m distance



## 6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(b)	P
2	Emission Limit	2.1051/22.917/24.238	P
3	Conducted Emission	15.107/15.207	P
4	Frequency Stability	2.1055/24.235	P
5	Occupied Bandwidth	2.1049(h)(i)	P
6	Emission Bandwidth	22.917(b)/24.238(b)	P
7	Band Edge Compliance	22.917(b)/24.238(b)	P
8	Conducted Spurious Emission	2.1057/22.917/24.238	P
9	PEAK-TO-AVERAGE POWER RATIO	KDB971168	P

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CAL PERIOD
1	Test Receiver	ESCI	100701	R&S	2014-07-31	1 year
2	Test Receiver	ESCI	100702	R&S	2014-07-31	1 year
3	EMI Antenna	VULB 9163	9163-330	Schwarzbeck	2014-02-24	3 years
4	EMI Antenna	3164-05	00085724	ETS-Lindgren	2014-02-17	3 years
5	EMI Antenna	3160-09	00118383	ETS-Lindgren	2015-09-05	3 years
6	Signal Generator	N5183A	MY49060052	Agilent	2014-03-19	1 year
7	Climatic chamber	SH-641	92008082	ESPEC	2014-03-08	1 year
8	Spectrum Analyzer	FSP40	100378	R&S	2013-12-21	1 year
9	Universal Radio Communication Tester	CMU200	114544	R&S	2014-02-24	1 year
10	DC Power Source	ZUP60-14	6MY-847Z13-00 02	TDK-Lambda	2014-03-10	1 year
11	LISN	ESH2-Z5	100196	R&S	2014-01-23	1 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak) These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

##### **A.1.2.2 Test Condition**

RBW	VBW	Sweep Time	Span
1MHz	1MHz	300ms	10MHz

#### **GSM850**

##### **Limit**

	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	5	33dBm(2W)	4	/
GPRS	3	33dBm(2W)	12	B
EGPRS	6	27dBm(0.5W)	10	B

#### **Measurement result**

##### **GSM (GMSK)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	32.77
836.6	5	32.69
848.8	5	32.35

##### **GPRS (GMSK, 1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	32.45
836.6	3	32.40
848.8	3	32.10

**EGPRS (GMSK, 1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	27.35
836.6	6	27.08
848.8	6	26.55

**PCS1900**

**Limit**

	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	0	30dBm(1W)	1	/
GPRS	3	30dBm(1W)	12	B
EGPRS	5	26dBm(0.4W)	10	B

**Measurement result**

**GSM (GMSK)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	29.45
1880.0	0	29.30
1909.8	0	28.76

**GPRS (GMSK, 1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	29.53
1880.0	3	29.38
1909.8	3	28.86

**EGPRS (GMSK, 1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	26.21
1880.0	5	26.23
1909.8	5	25.74

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

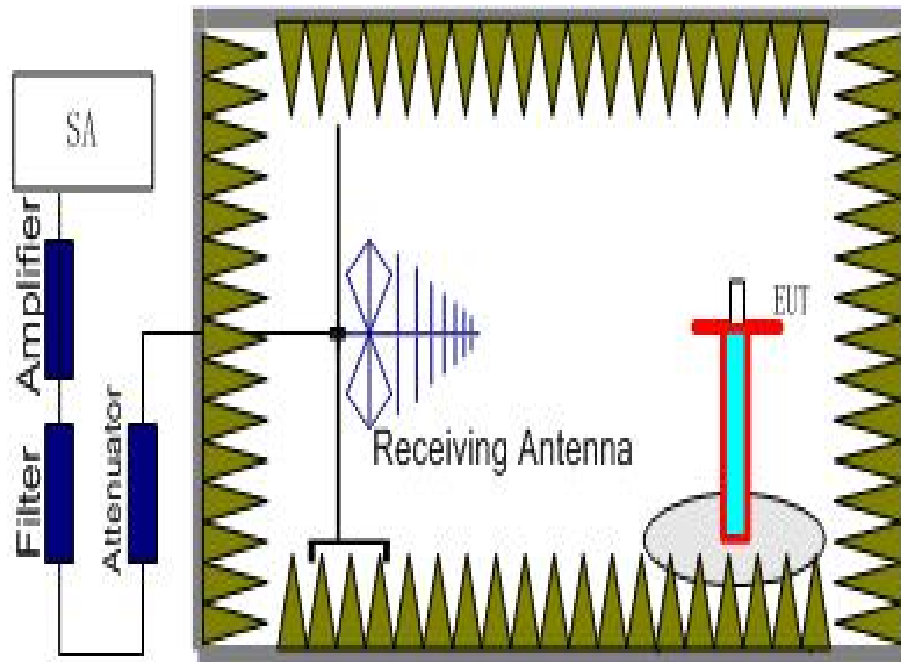

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

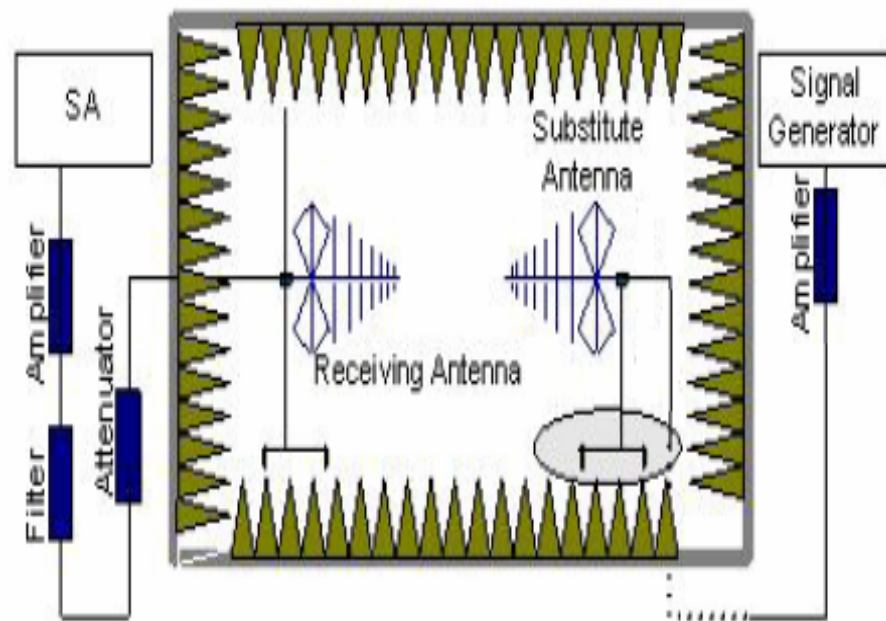

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna , and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitute Antenna.  
The cable loss ( $P_{cl}$ ) ,the Substitute Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

**GSM 850-ERP 22.913(a)**

**Limits**

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

**Measurement result**

**GSM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	4.23	2.07	-36.20	8.22	2.15	27.99	H
836.60	4.41	2.08	-36.00	8.22	2.15	27.96	H
848.80	5.30	2.09	-35.90	8.21	2.15	28.75	H

**GPRS**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	3.23	2.07	-36.20	8.22	2.15	26.99	V
836.60	4.51	2.08	-36.00	8.22	2.15	28.06	V
848.80	4.97	2.09	-35.90	8.21	2.15	28.42	V

**EGPRS**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	4.11	2.07	-36.20	8.22	2.15	27.87	V
836.60	4.22	2.08	-36.00	8.22	2.15	27.77	V
848.80	4.36	2.09	-35.90	8.21	2.15	27.81	V

Note: the result contains vertical part and Horizontal part

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

**PCS1900-EIRP 24.232(b)**

**Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

**Measurement result**

**GSM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	1.89	3.13	-35.80	7.81	26.75	H
1880.00	2.48	3.15	-35.60	7.80	27.13	H
1909.80	3.16	3.18	-35.40	7.77	27.61	H

**GPRS**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	1.55	3.13	-35.80	7.81	26.41	V
1880.00	2.71	3.15	-35.60	7.80	27.36	V
1909.80	2.55	3.18	-35.40	7.77	27.00	V

**EGPRS**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	1.86	3.13	-35.80	7.81	26.72	V
1880.00	2.81	3.15	-35.60	7.80	27.46	V
1909.80	2.80	3.18	-35.40	7.77	27.25	V

Note: the result contains vertical part and Horizontal part

**ANALYZER SETTINGS: RBW = VBW = 3MHz**



## A.2 EMISSION LIMIT


### **A.2.1 Measurement Method**

The measurement procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850

### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

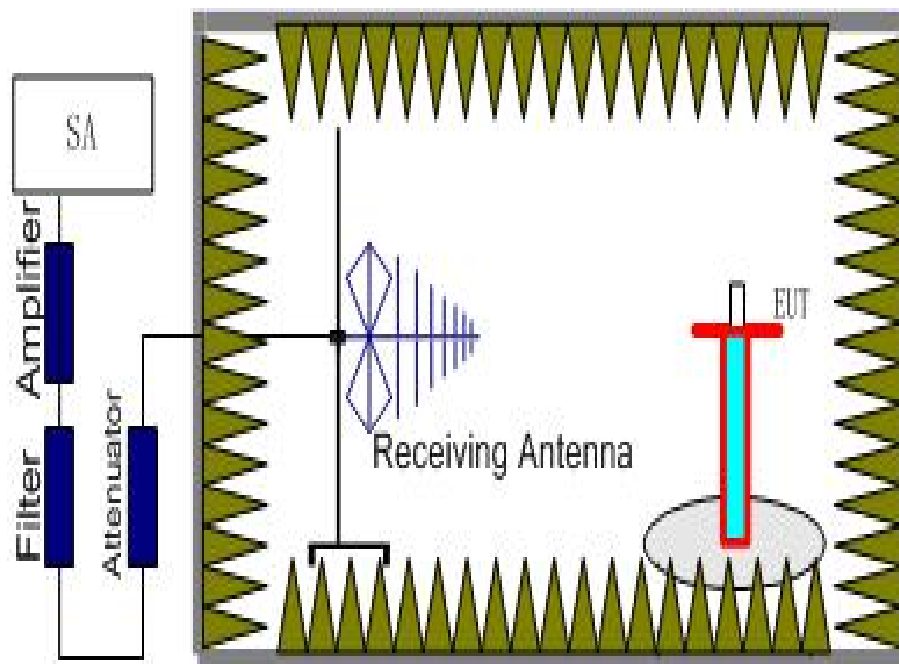

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

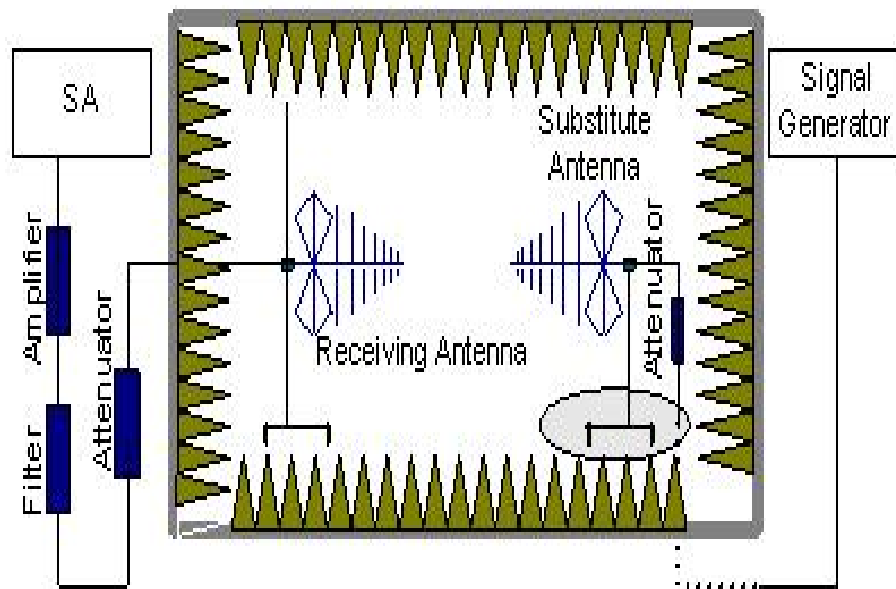

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.  
The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.  
The measurement results are obtained as described below:  
Power(EIRP)= $P_{Mea} - P_{pl} - G_a$
5. Use the power meter to measure the result of power in substitute antenna. Record the result of power meter( $P_{pm}$ ).  
The measurement results are obtained as described below:  
Power(EIRP)=  $P_{pm} - G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

### **A.2.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of PCS1900 (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 and GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

#### A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

Note: the result contains vertical part and Horizontal part

**GSM Mode Channel 128/824.2MHz**

Frequency(MHz)	P <sub>pm</sub> (dBm)	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
6664.875	-54.80	-10.7	2.15	-46.25	-13.00	V
7057.5	-53.00	-11.1	2.15	-44.05	-13.00	V
7423.5	-54.00	-11.5	2.15	-44.65	-13.00	V
8151	-54.20	-11.6	2.15	-44.75	-13.00	V
9224	-54.10	-12.3	2.15	-43.95	-13.00	V
9273.25	-52.40	-12.3	2.15	-42.25	-13.00	V

**GSM Mode Channel 190/836.6MHz**

Frequency(MHz)	Ppm(dBm)	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
6655.875	-54.90	-10.7	2.15	-46.35	-13.00	V
6987	-53.00	-11.1	2.15	-44.05	-13.00	V
7437.75	-54.10	-11.4	2.15	-44.85	-13.00	V
8143.5	-54.30	-11.6	2.15	-44.85	-13.00	V
9212.25	-52.70	-12.3	2.15	-42.55	-13.00	V
9253.875	-52.70	-12.3	2.15	-42.55	-13.00	V

**GSM Mode Channel 251/848.8MHz**

Frequency(MHz)	P <sub>pm</sub> (dBm)	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
6455.25	-54.60	-10.5	2.15	-46.25	-13.00	V
7009.125	-53.50	-11.1	2.15	-44.55	-13.00	V
7449.375	-53.90	-11.4	2.15	-44.65	-13.00	V
8374.5	-53.40	-11.7	2.15	-43.85	-13.00	V
9206.875	-53.80	-12.3	2.15	-43.65	-13.00	V
9894.5	-53.10	-12.3	2.15	-42.95	-13.00	V

**GSM Mode Channel 512/1850.2MHz**

Frequency(MHz)	P <sub>pm</sub> (dBm)	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
9269	-57.00	-12.3	-44.7	-13.00	V
12025.25	-57.30	-12.5	-44.8	-13.00	H
13199.5	-55.60	-13.2	-42.4	-13.00	H
15315.25	-53.90	-13.5	-40.4	-13.00	H
17431	-48.80	-12.9	-35.9	-13.00	H
18246.5	-47.90	-13.7	-34.2	-13.00	V

**GSM Mode Channel 661/1880.0MHz**

Frequency(MHz)	Ppm(dBm)	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7519	-53.80	-11.4	-42.4	-13.00	H
11824	-58.00	-12.5	-45.5	-13.00	H
13472.5	-56.20	-13.6	-42.6	-13.00	H
15121	-54.80	-13.5	-41.3	-13.00	H
17425.75	-49.70	-13.5	-36.2	-13.00	H
19616.75	-48.60	-13.9	-34.7	-13.00	V

**GSM Mode Channel 810/1909.8MHz**

Frequency(MHz)	Ppm(dBm)	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7638	-53.20	-11.4	-41.8	-13.00	H
9358.25	-58.10	-12.6	-45.5	-13.00	V
13680.75	-56.30	-13.6	-42.7	-13.00	V
15133.25	-54.30	-13.5	-40.8	-13.00	H
17438	-50.00	-13.5	-36.5	-13.00	H
19629	-47.80	-13.9	-33.9	-13.00	H

### **A.3 CONDUCTED EMISSION**


The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.

#### **A.3.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

**A.3.2 Measurement result**  
**AE2-1**  
**GSM850MHz**

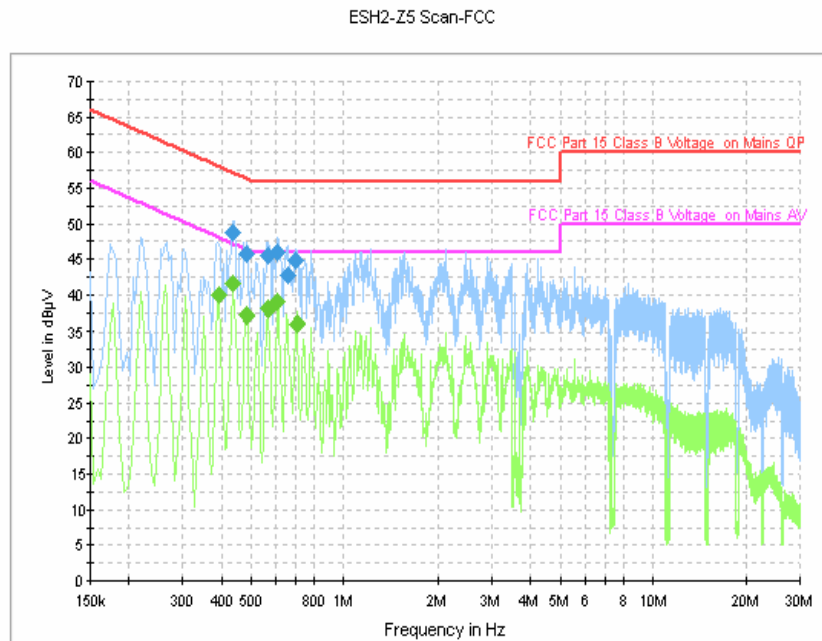

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.434000	48.7	FLO	L1	10.0	8.5	57.2
0.482000	45.7	FLO	L1	10.0	10.6	56.3
0.570000	45.4	FLO	L1	10.1	10.6	56.0
0.610000	45.9	FLO	L1	10.0	10.1	56.0
0.662000	42.8	FLO	L1	10.0	13.2	56.0
0.694000	44.8	FLO	L1	10.0	11.2	56.0


**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.394000	40.0	FLO	L1	10.0	8.0	48.0
0.434000	41.5	FLO	L1	10.0	5.7	47.2
0.482000	37.3	FLO	L1	10.0	9.0	46.3
0.566000	38.1	FLO	L1	10.1	7.9	46.0
0.610000	39.0	FLO	L1	10.0	7.0	46.0
0.702000	36.0	FLO	L1	10.0	10.0	46.0



**AE2-1**  
**PCS1900MHz**

ESH2-Z5 Scan-FCC

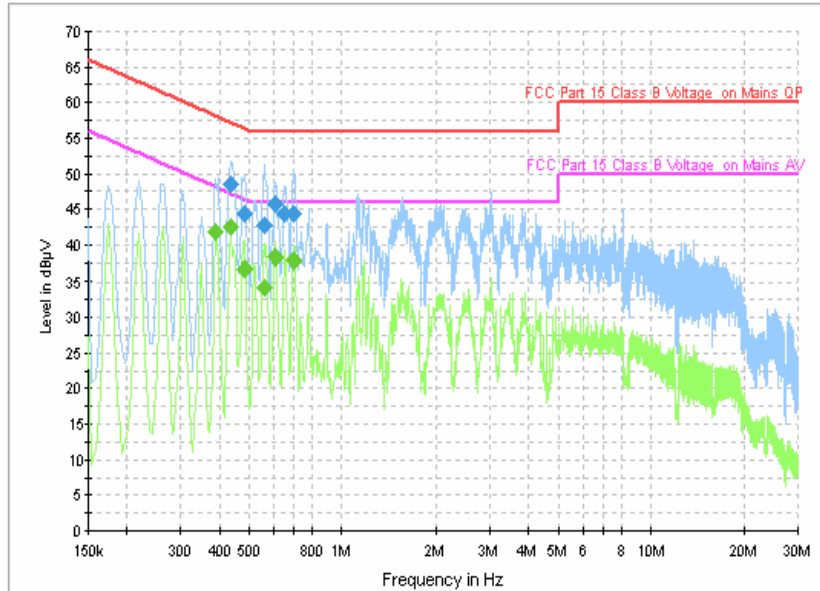

**Final Measurement Detector 1**


Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.434000	48.5	FLO	L1	10.0	8.7	57.2
0.482000	44.3	FLO	L1	10.0	12.0	56.3
0.558000	42.7	FLO	L1	10.1	13.3	56.0
0.610000	45.8	FLO	L1	10.0	10.2	56.0
0.654000	44.3	FLO	L1	10.0	11.7	56.0
0.694000	44.4	FLO	L1	10.0	11.6	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.390000	41.9	FLO	L1	10.0	6.2	48.1
0.434000	42.6	FLO	L1	10.0	4.6	47.2
0.482000	36.8	FLO	L1	10.0	9.5	46.3
0.558000	34.3	FLO	L1	10.1	11.7	46.0
0.610000	38.5	FLO	L1	10.0	7.5	46.0
0.698000	37.9	FLO	L1	10.0	8.1	46.0

**AE2-2**  
**GSM850MHz**

ESH2-Z5 Scan-FCC

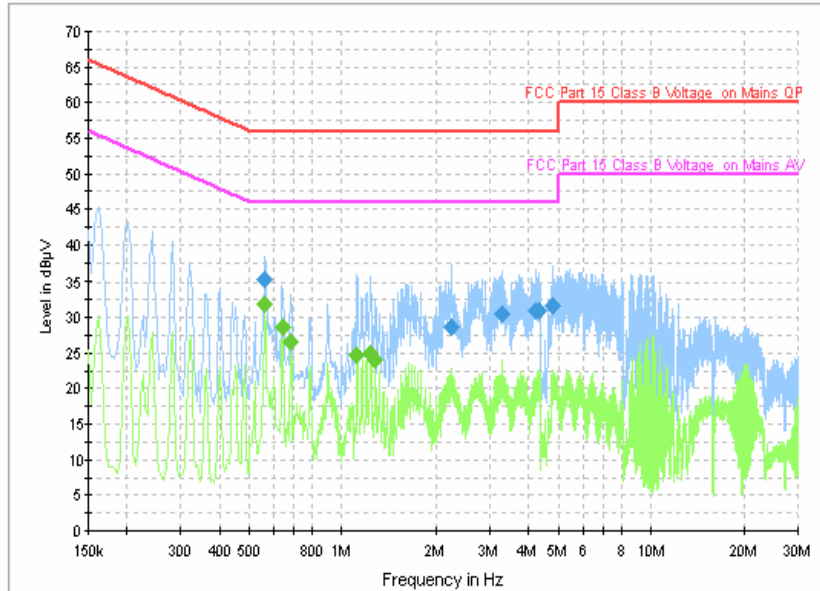

**Final Measurement Detector 1**


Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.562000	35.4	FLO	L1	10.1	20.6	56.0
2.254000	28.7	FLO	L1	10.1	27.3	56.0
3.262000	30.5	FLO	L1	10.2	25.5	56.0
4.230000	31.0	FLO	L1	10.2	25.0	56.0
4.310000	31.0	FLO	L1	10.2	25.0	56.0
4.810000	31.6	FLO	L1	10.2	24.4	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.562000	31.9	FLO	L1	10.1	14.1	46.0
0.642000	28.7	FLO	L1	10.0	17.3	46.0
0.682000	26.7	FLO	L1	10.0	19.3	46.0
1.122000	24.7	FLO	L1	10.1	21.3	46.0
1.242000	24.9	FLO	L1	10.1	21.1	46.0
1.282000	23.9	FLO	L1	10.1	22.1	46.0

**AE2-2**  
**PCS1900MHz**

ESH2-Z5 Scan-FCC

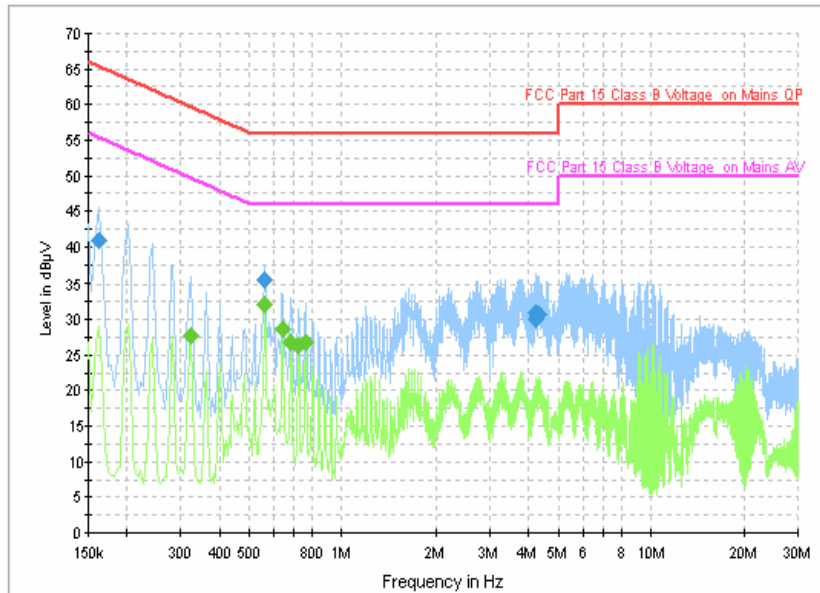

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.162000	40.8	FLO	L1	10.0	24.5	65.4
0.562000	35.6	FLO	L1	10.1	20.4	56.0
4.206000	30.0	FLO	L1	10.2	26.0	56.0
4.230000	30.9	FLO	L1	10.2	25.1	56.0
4.246000	30.5	FLO	L1	10.2	25.5	56.0
4.306000	30.8	FLO	L1	10.2	25.2	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.322000	27.7	FLO	L1	10.0	22.0	49.7
0.562000	32.1	FLO	L1	10.1	13.9	46.0
0.642000	28.6	FLO	L1	10.0	17.4	46.0
0.682000	26.8	FLO	L1	10.0	19.2	46.0
0.722000	26.3	FLO	L1	10.0	19.7	46.0
0.762000	26.9	FLO	L1	10.1	19.1	46.0

## **A.4 FREQUENCY STABILITY**

### **A.4.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 and channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.4.2 Measurement Limit**

#### **A.4.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **A.4.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### A.4.3 Measurement results

##### GSM 850

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-23	0.027
3.8	-32	0.038
4.2	-27	0.032

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-11	0.013
-20	-23	0.027
-10	-21	0.025
0	-31	0.037
10	-29	0.035
20	-25	0.030
30	-22	0.026
40	-14	0.017
50	-25	0.030

##### PCS 1900

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-41	0.022
3.8	-43	0.023
4.2	-54	0.029

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-43	0.023
-20	-36	0.019
-10	-50	0.027
0	-52	0.028
10	-45	0.024
20	-49	0.026
30	-51	0.027
40	-37	0.020
50	-46	0.024

## A.5 OCCUPIED BANDWIDTH

### A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Spectrum analyzer plots are included on the following pages.

#### GSM 850

Frequency(MHz)	Occupied Bandwidth ( kHz)
824.2	248.40
836.6	245.19
848.8	245.19


#### GSM 850

##### Channel 128-Occupied Bandwidth

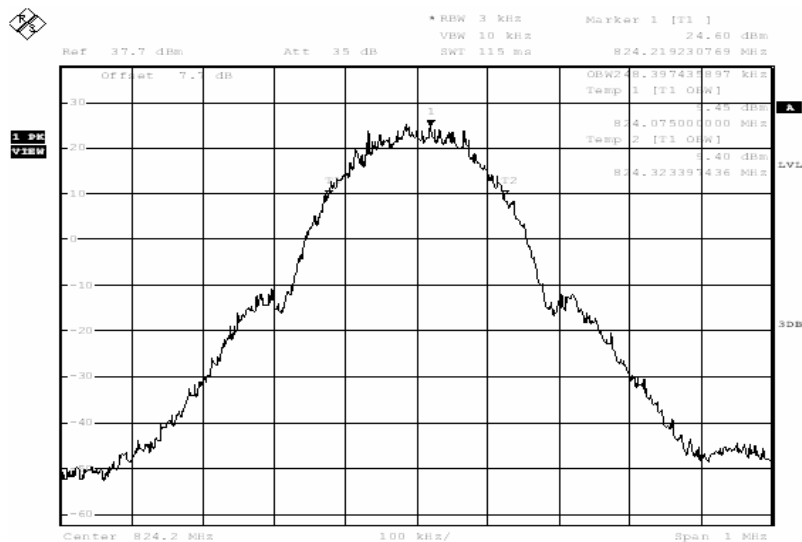


Date: 12.NOV.2013 21:50:23

### Channel 190-Occupied Bandwidth

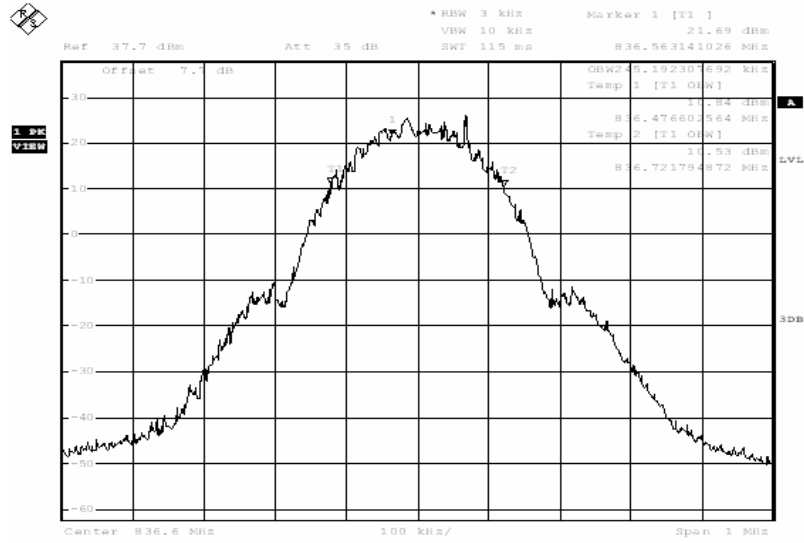

Date: 10.OCT.2013 19:15:41

### Channel 251-Occupied Bandwidth

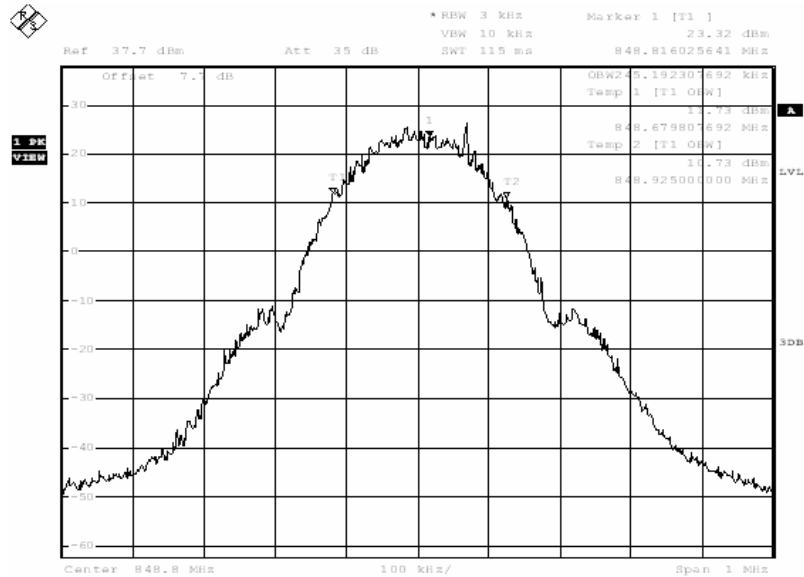


Date: 10.OCT.2013 19:16:53

**GPRS 850**

Frequency(MHz)	Occupied Bandwidth ( kHz)
824.2	245.19
836.6	245.19
848.8	246.79

**GPRS 850**


**Channel 128-Occupied Bandwidth**

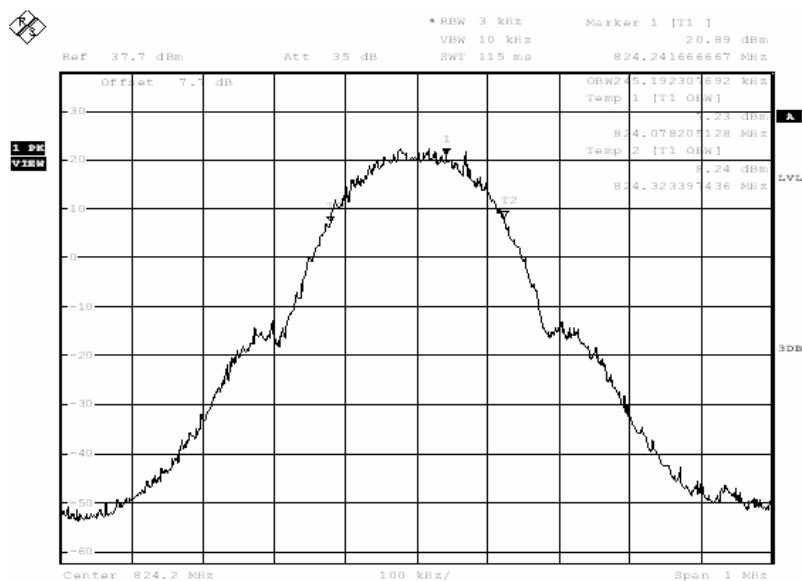

Date: 12.NOV.2013 22:09:12




### Channel 190-Occupied Bandwidth

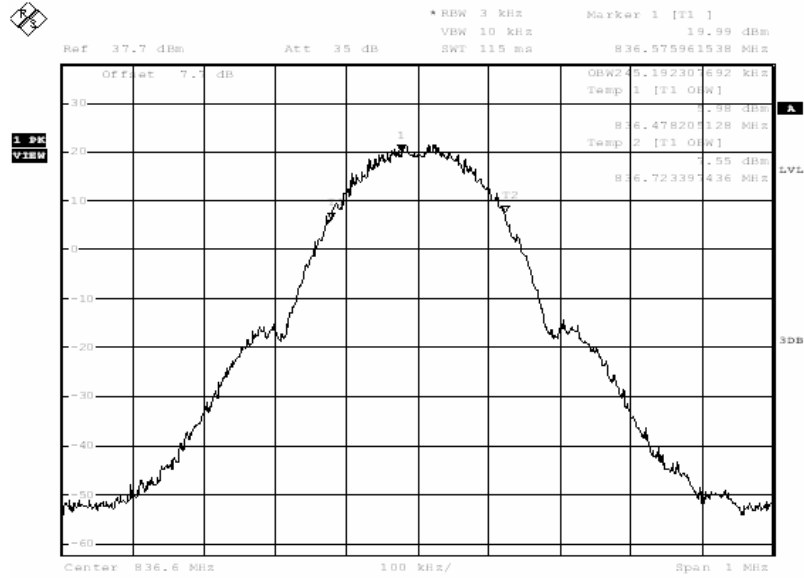

Date: 10.OCT.2013 20:21:58

### Channel 251-Occupied Bandwidth

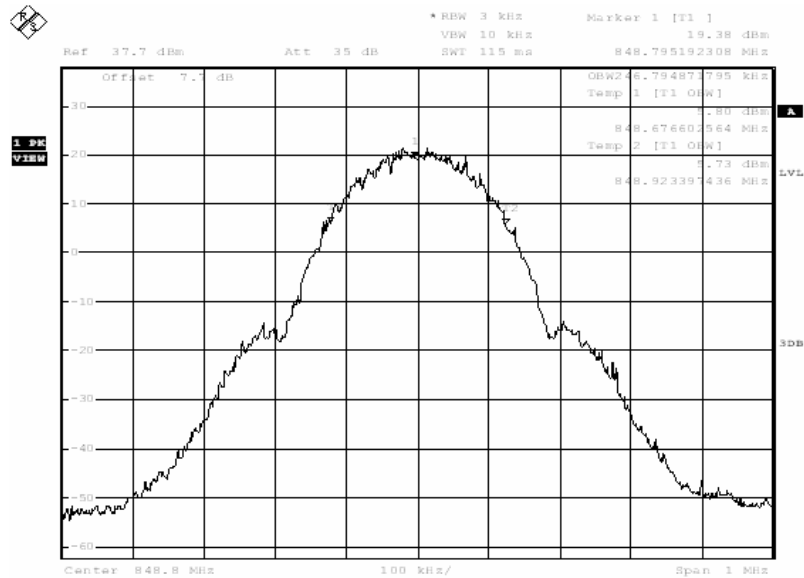


Date: 12.NOV.2013 22:11:35

**EGPRS 850**

Frequency(MHz)	Occupied Bandwidth ( kHz)
824.2	245.19
836.6	248.40
848.8	243.59


**EGPRS 850**

**Channel 128-Occupied Bandwidth**

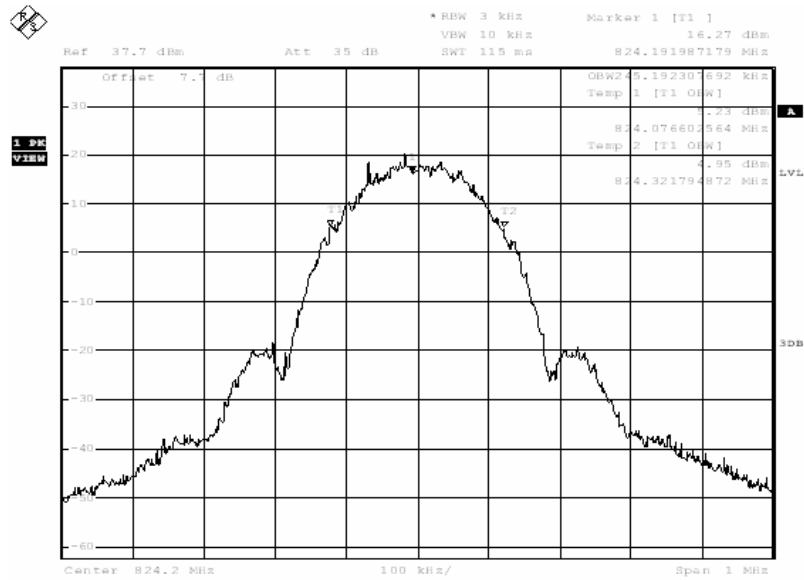


Date: 10.OCT.2013 22:24:41

### Channel 190-Occupied Bandwidth

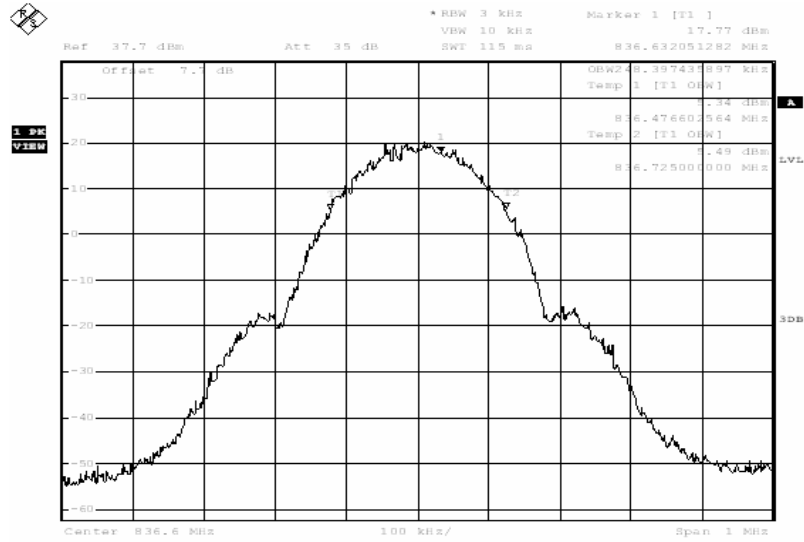

Date: 12.NOV.2013 22:25:39

### Channel 251-Occupied Bandwidth

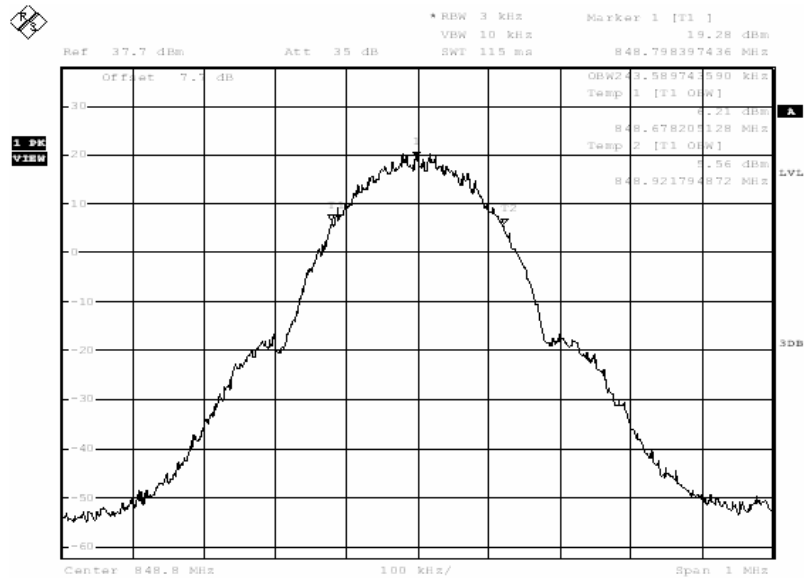


Date: 12.NOV.2013 22:26:49

**PCS 1900**

Frequency(MHz)	Occupied Bandwidth ( kHz)
1850.2	243.59
1880.0	245.19
1909.8	248.40


**PCS 1900**

**Channel 512-Occupied Bandwidth**

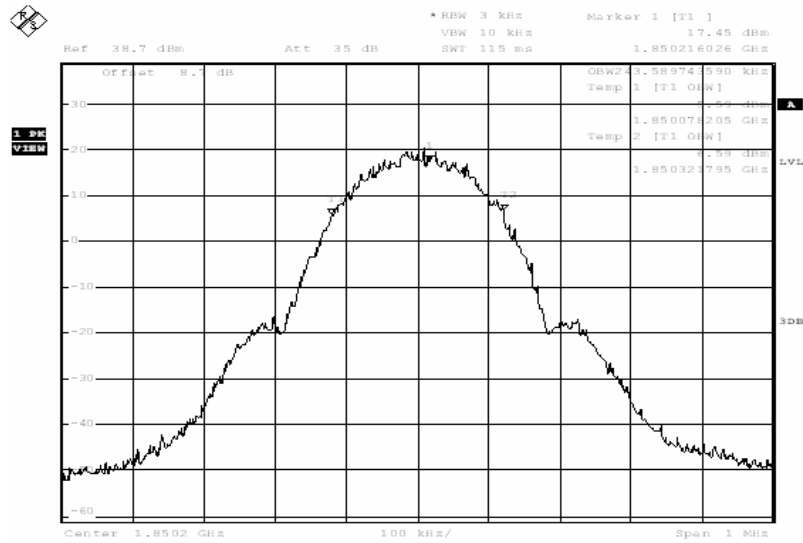


Date: 12.NOV.2013 22:15:14

### Channel 661-Occupied Bandwidth

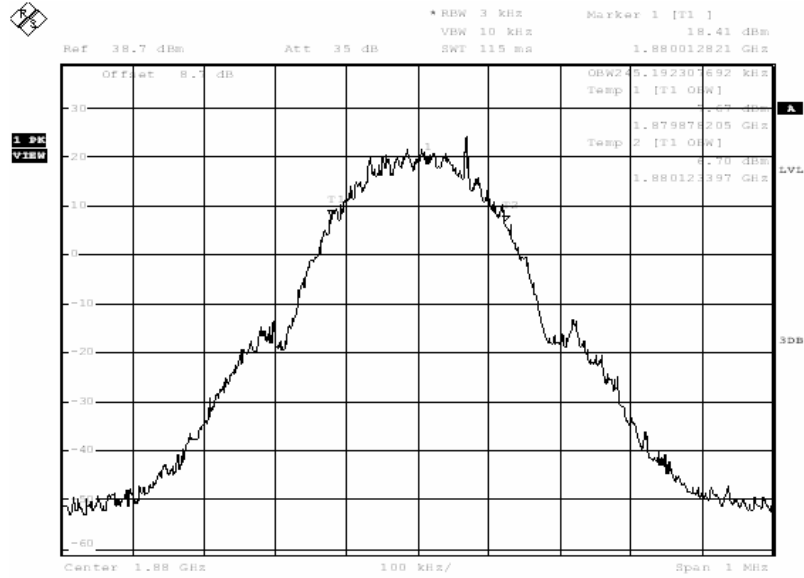

Date: 10.OCT.2013 22:39:18

### Channel 810-Occupied Bandwidth

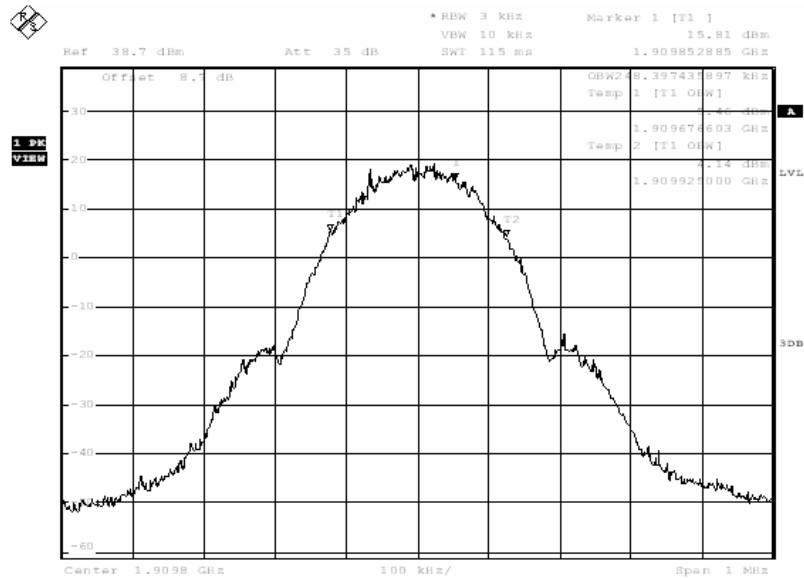


Date: 12.NOV.2013 23:17:36

**GPRS 1900**

Frequency(MHz)	Occupied Bandwidth ( kHz)
1850.2	241.99
1880.0	246.79
1909.8	243.59


**GPRS 1900**

**Channel 512-Occupied Bandwidth**

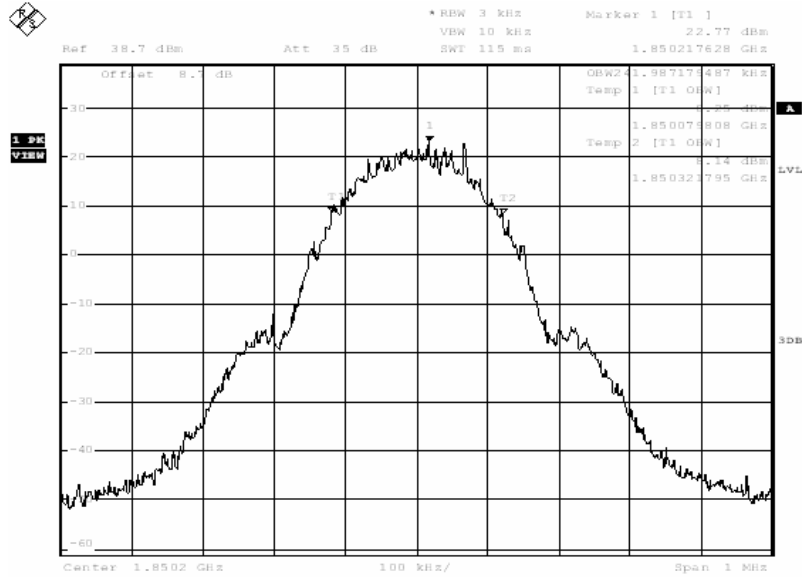


Date: 12.NOV.2013 22:38:31

### Channel 661-Occupied Bandwidth

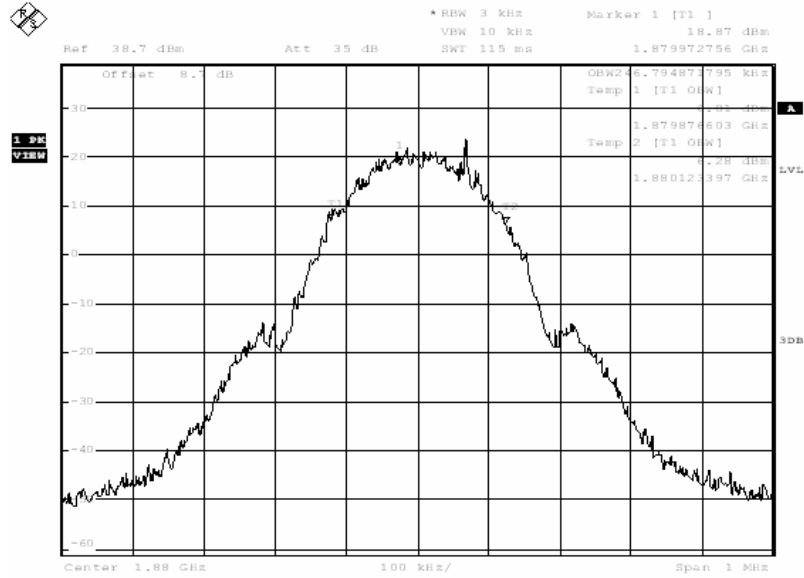

Date: 12.NOV.2013 22:39:43

### Channel 810-Occupied Bandwidth

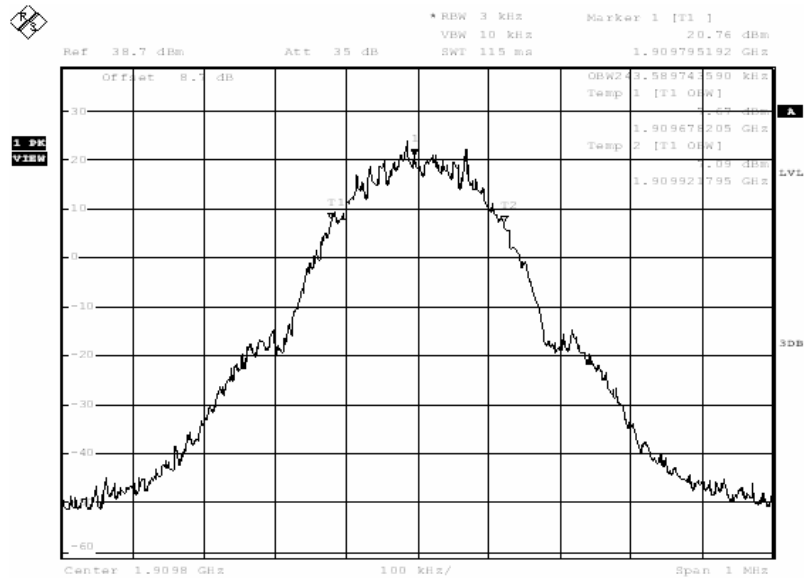


Date: 12.NOV.2013 22:40:54

**EGPRS 1900**

Frequency(MHz)	Occupied Bandwidth ( kHz)
1850.2	245.19
1880.0	243.59
1909.8	246.79


**Channel 512-Occupied Bandwidth**

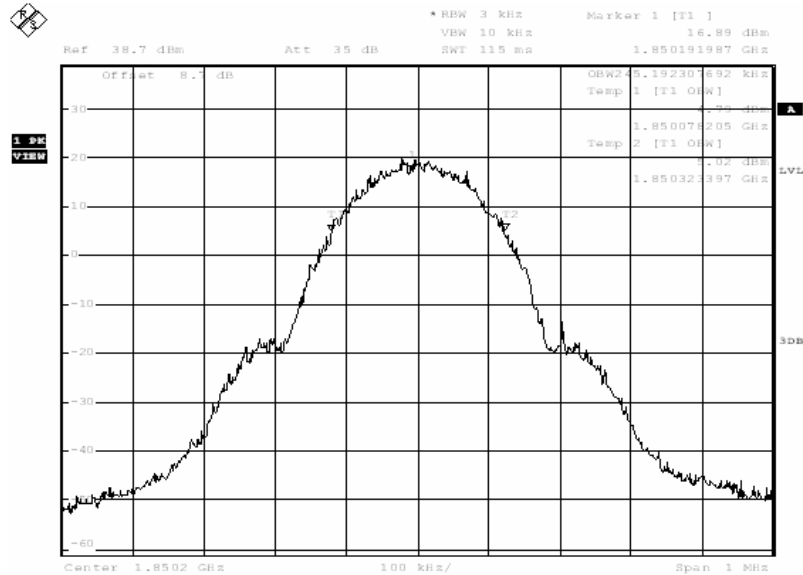

Date: 12.NOV.2013 22:53:20




### Channel 661-Occupied Bandwidth

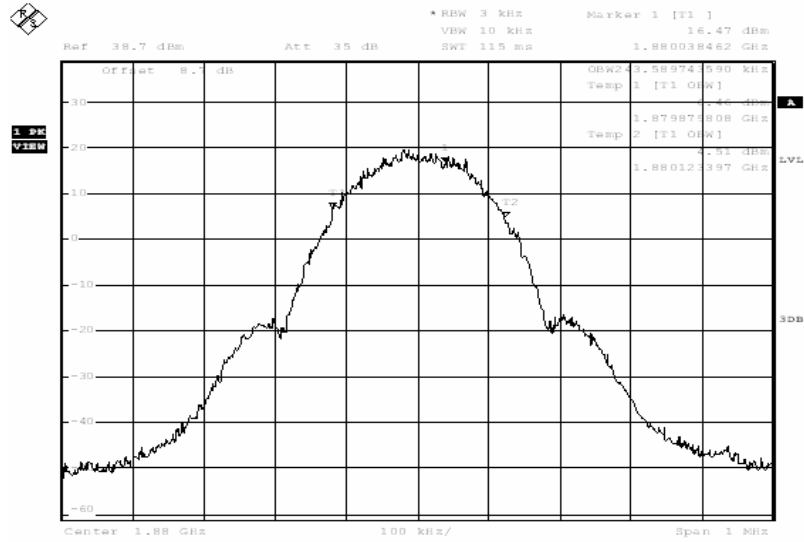

Date: 12.NOV.2013 23:00:31

### Channel 810-Occupied Bandwidth

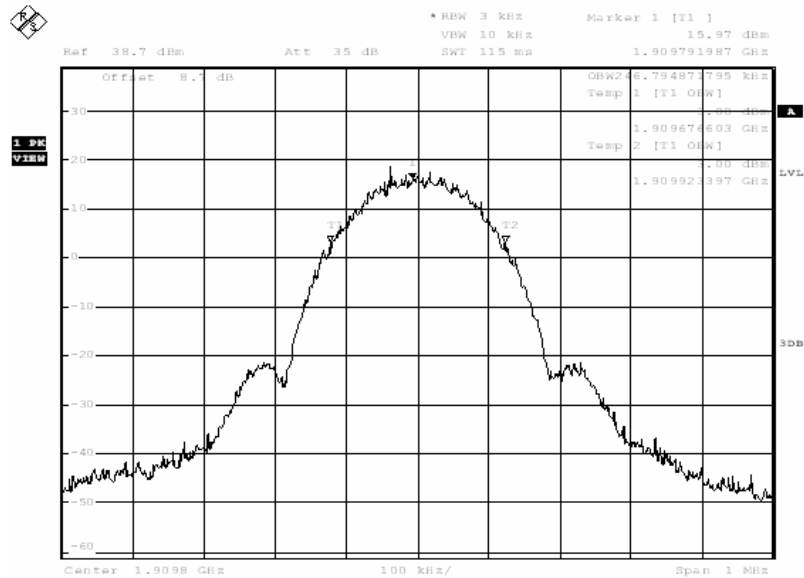

Date: 14.OCT.2013 00:17:12

## A.6 EMISSION BANDWIDTH

### A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### GSM 850(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	317.31
836.6	317.31
848.8	323.72


#### GSM 850

#### Channel 128-Occupied Bandwidth (-26dBc BW)

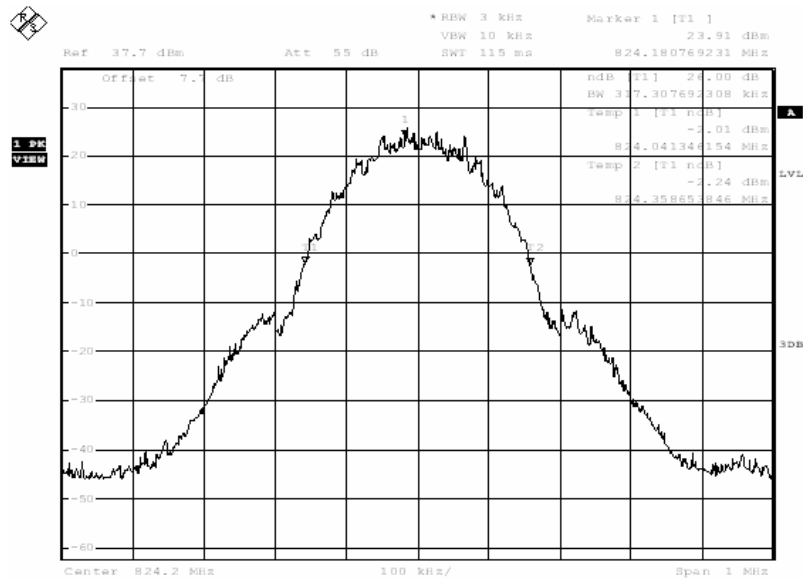


Date: 12.NOV.2013 21:54:01

### Channel 190-Occupied Bandwidth (-26dBc BW)

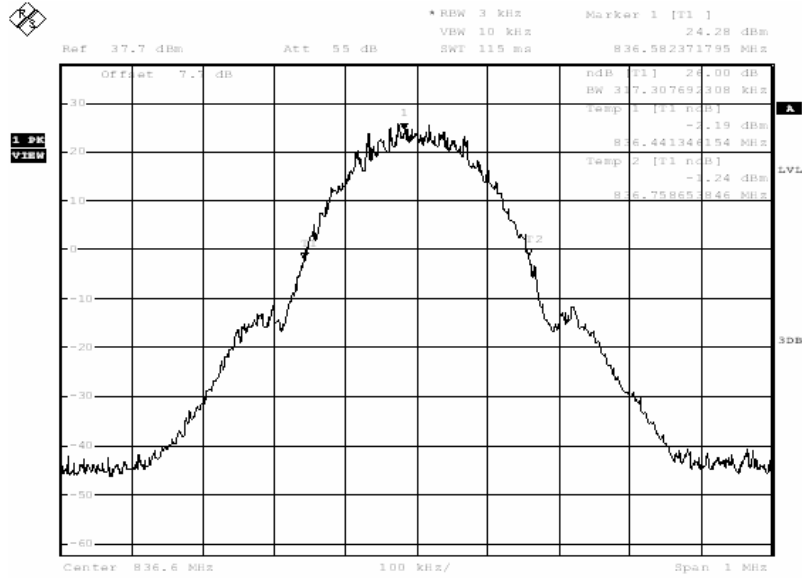

Date: 12.NOV.2013 21:55:15

### Channel 251-Occupied Bandwidth (-26dBc BW)

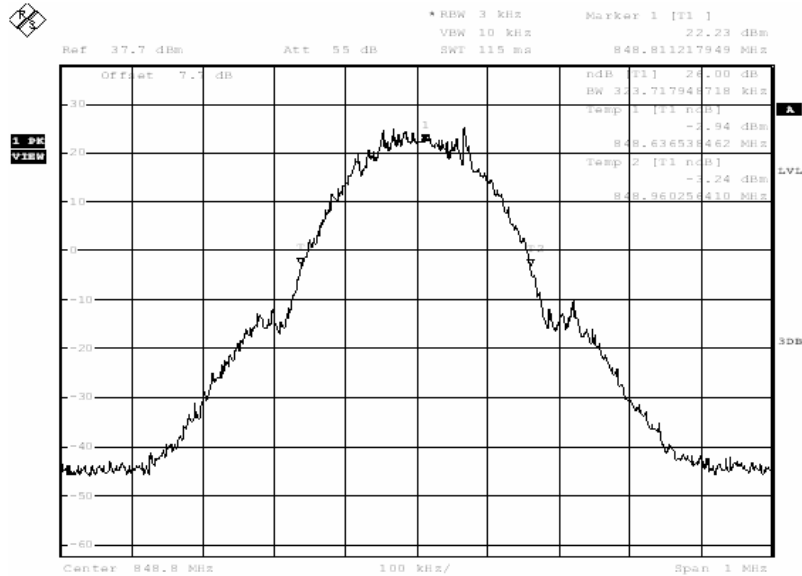


Date: 12.NOV.2013 21:56:29

**GPRS 850(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	328.53
836.6	322.12
848.8	325.32


**GPRS 850**

**Channel 128-Occupied Bandwidth (-26dBc BW)**

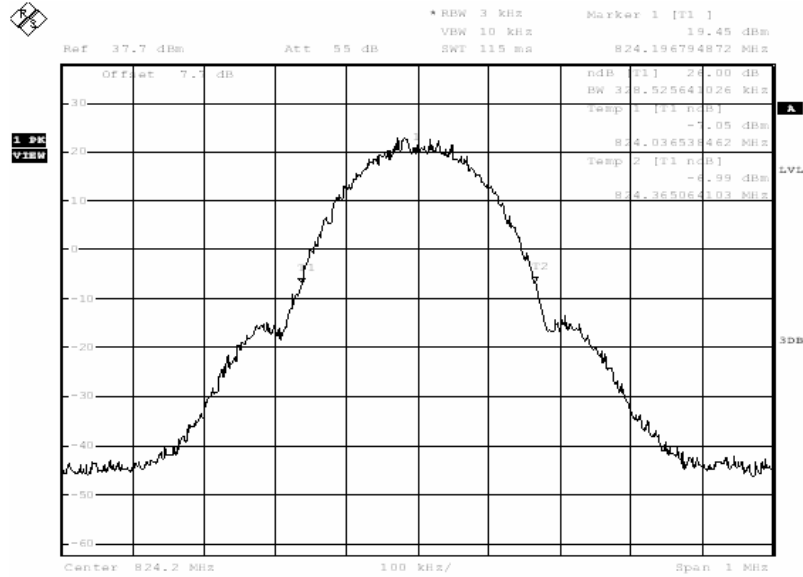


Date: 12.NOV.2013 22:12:51

### Channel 190-Occupied Bandwidth (-26dBc BW)

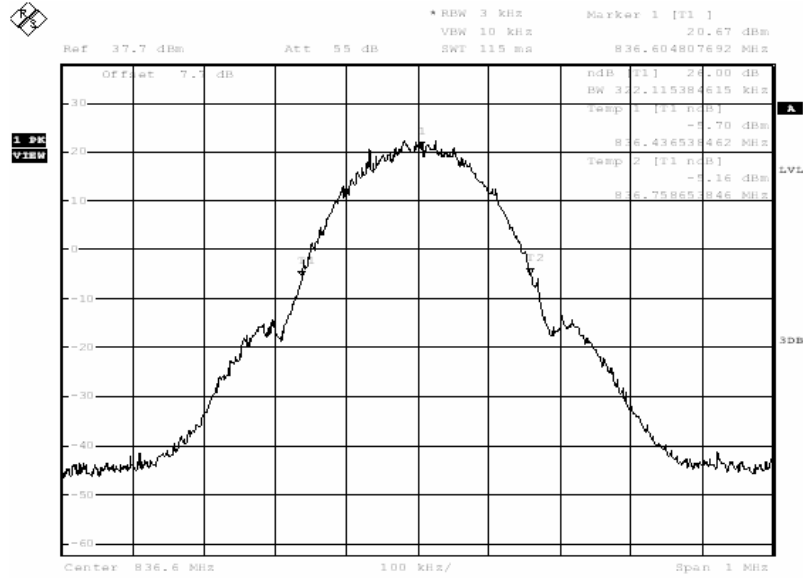

Date: 12.NOV.2013 22:14:05

### Channel 251-Occupied Bandwidth (-26dBc BW)

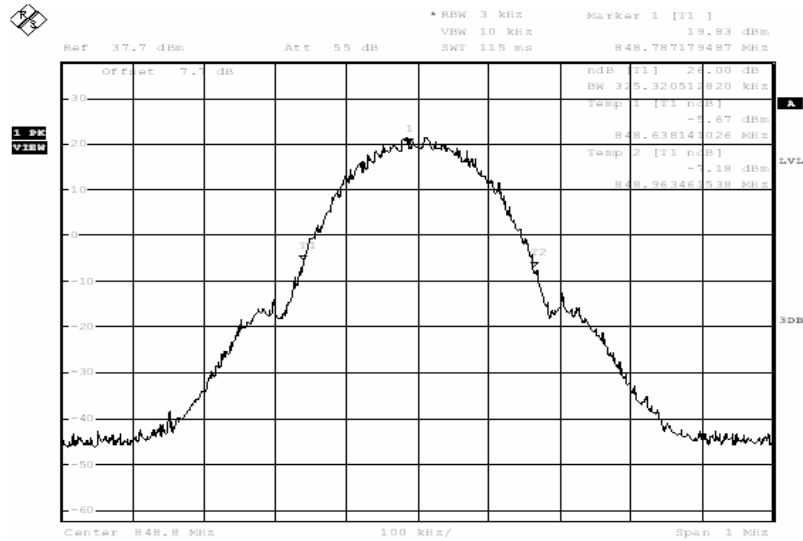


Date: 12.NOV.2013 22:15:18

**EGPRS 850(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	323.72
836.6	328.53
848.8	326.92


**EGPRS 850**

**Channel 128-Occupied Bandwidth (-26dBc BW)**

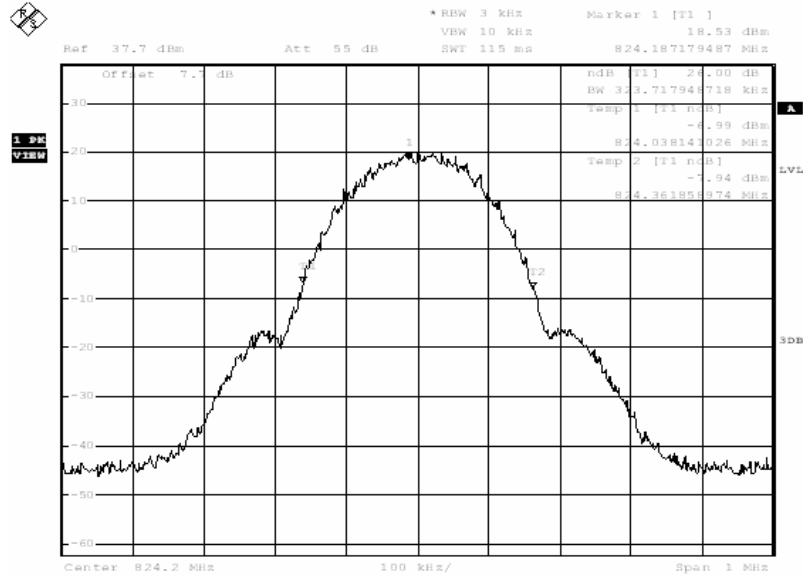


Date: 12.NOV.2013 22:28:06

### Channel 190-Occupied Bandwidth (-26dBc BW)

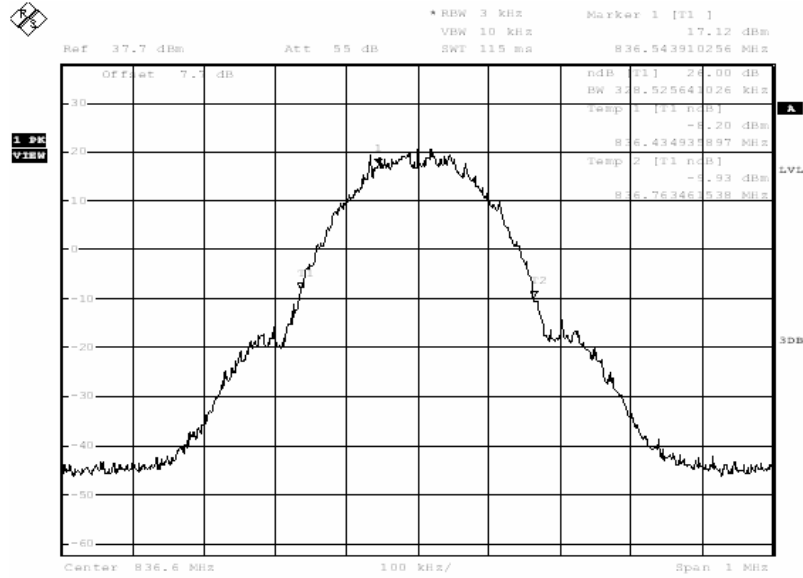

Date: 12.NOV.2013 22:29:20

### Channel 251-Occupied Bandwidth (-26dBc BW)

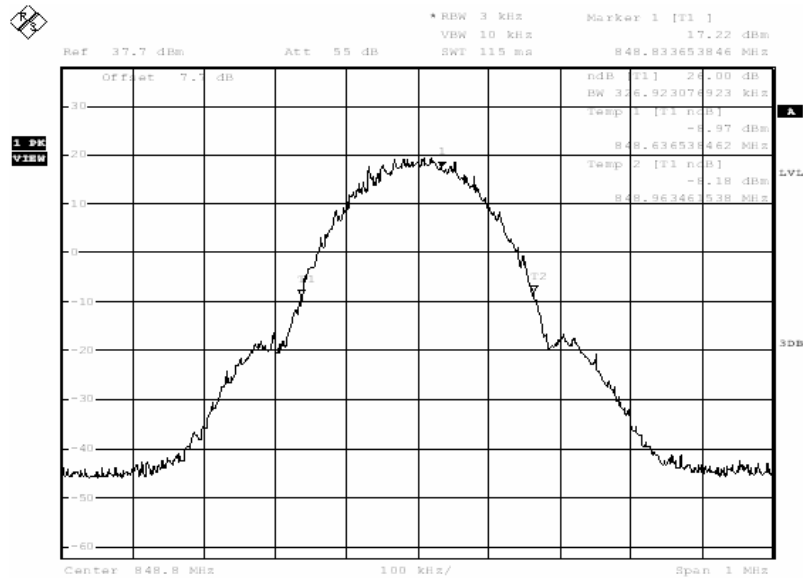


Date: 12.NOV.2013 22:30:33

**PCS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	317.31
1880.0	318.91
1909.8	318.91

**PCS 1900**


**Channel 512-Occupied Bandwidth (-26dBc BW)**

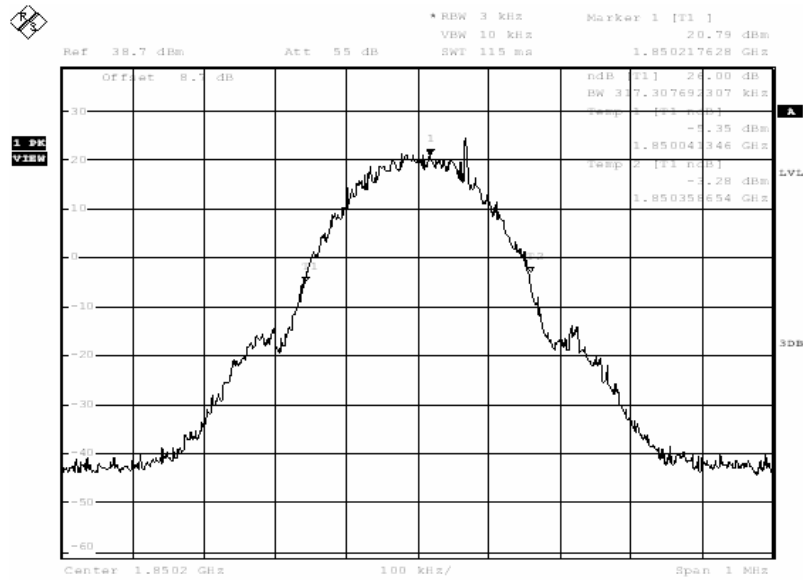

Date: 12.NOV.2013 22:42:09




### Channel 661-Occupied Bandwidth (-26dBc BW)

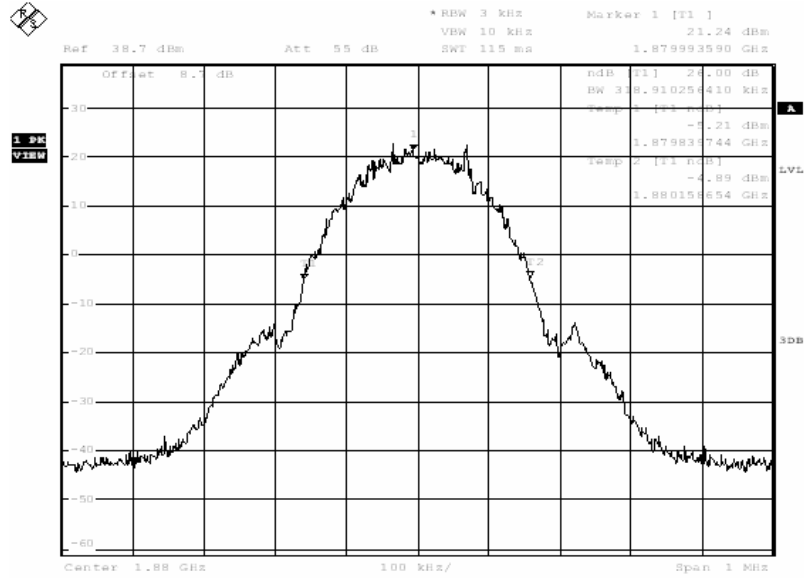

Date: 12.NOV.2013 22:43:23

### Channel 810-Occupied Bandwidth (-26dBc BW)

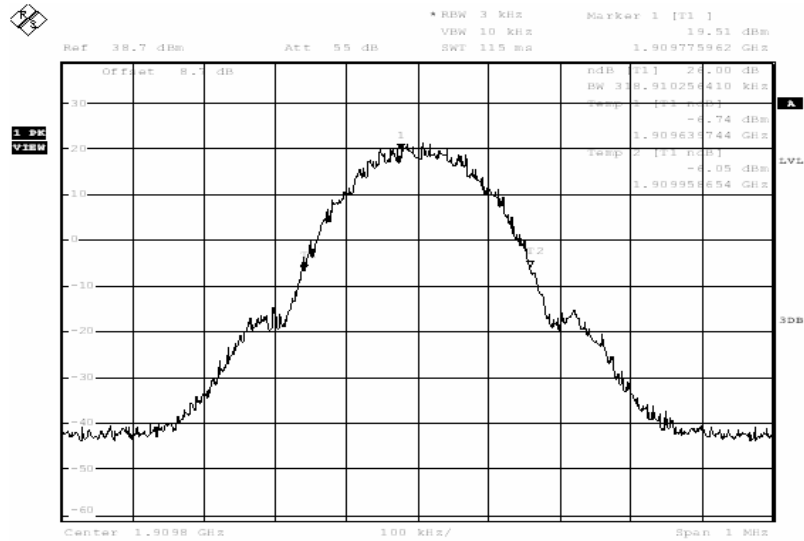


Date: 12.NOV.2013 22:44:27

**GPRS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	333.33
1880.0	341.35
1909.8	333.33


**GPRS 1900**

**Channel 512-Occupied Bandwidth (-26dBc BW)**

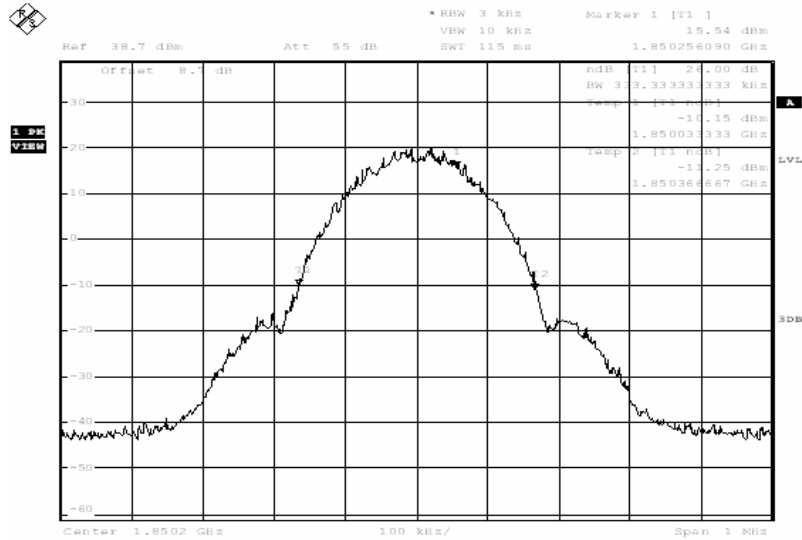


Date: 12.NOV.2013 23:02:59

### Channel 661-Occupied Bandwidth (-26dBc BW)

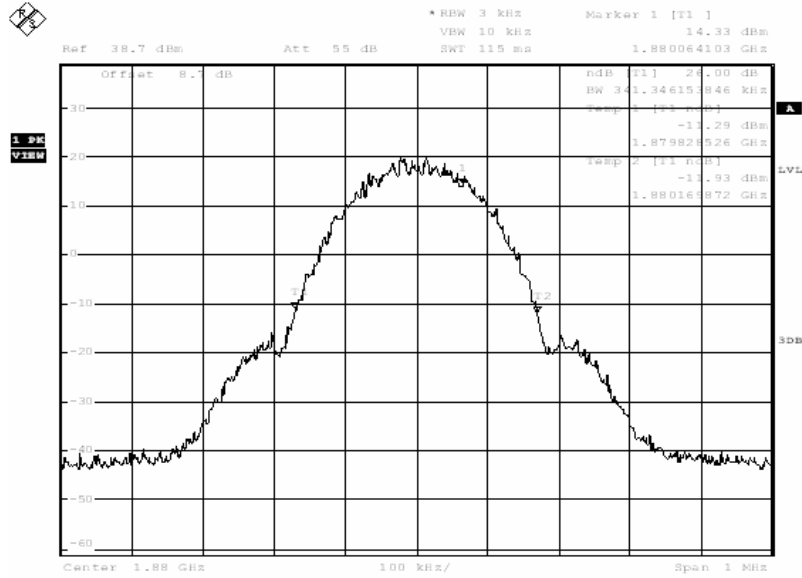

Date: 12.NOV.2013 23:04:12

### Channel 810-Occupied Bandwidth (-26dBc BW)

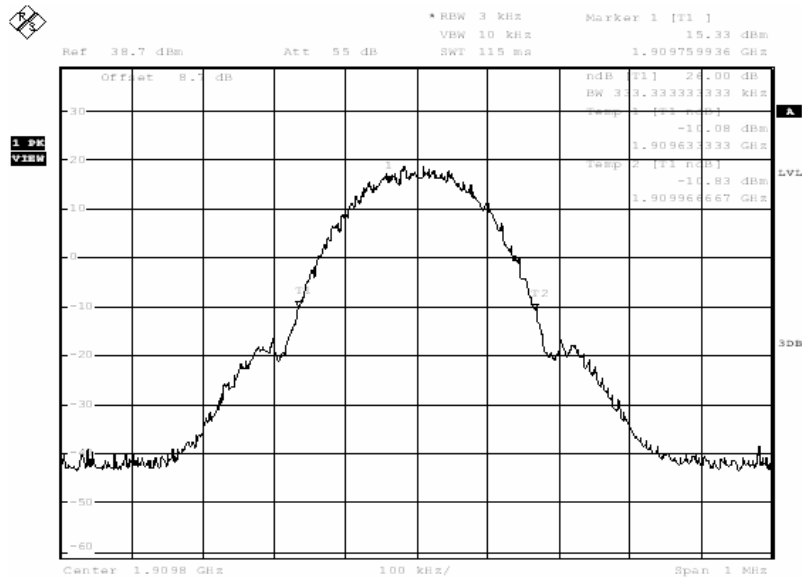


Date: 12.NOV.2013 23:05:25

**EGPRS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	328.53
1880.0	322.12
1909.8	322.12


**EGPRS 1900**

**Channel 512-Occupied Bandwidth (-26dBc BW)**

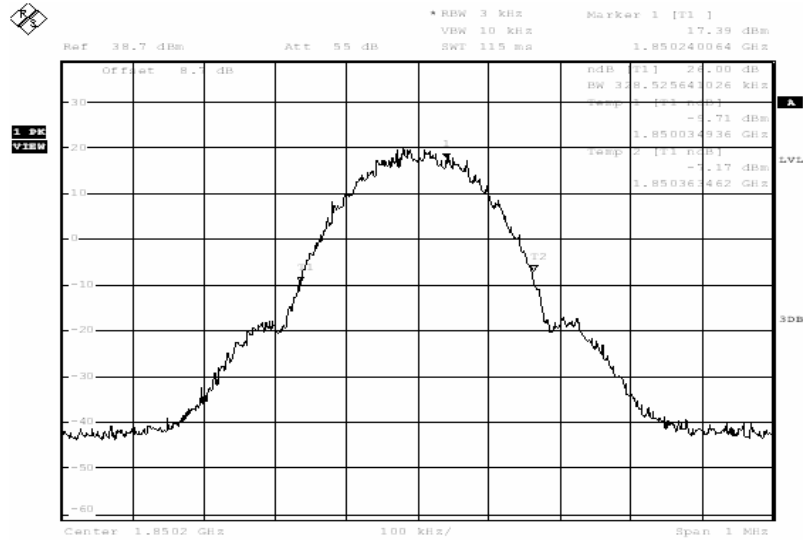


Date: 12.NOV.2013 23:18:53

### Channel 661-Occupied Bandwidth (-26dBc BW)

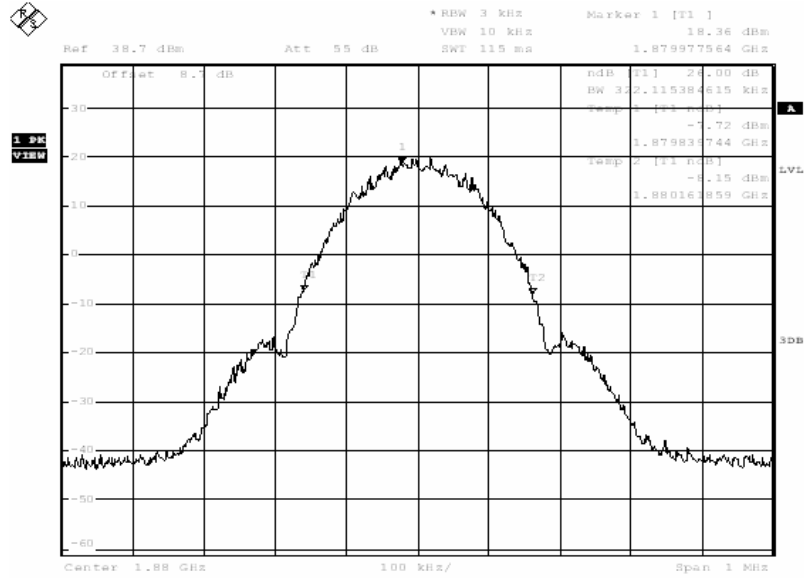

Date: 12.NOV.2013 23:20:06

### Channel 810-Occupied Bandwidth (-26dBc BW)

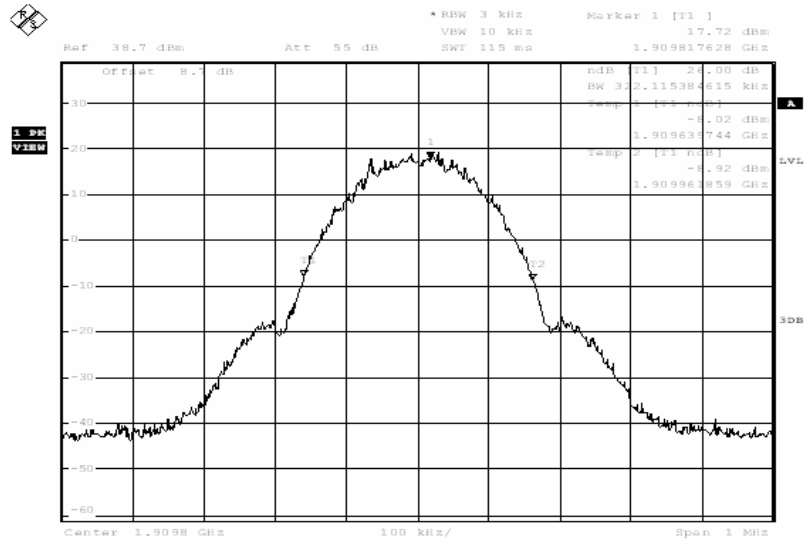


Date: 12.NOV.2013 23:21:19

## A.7 BAND EDGE COMPLIANCE


### GSM 850

#### LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

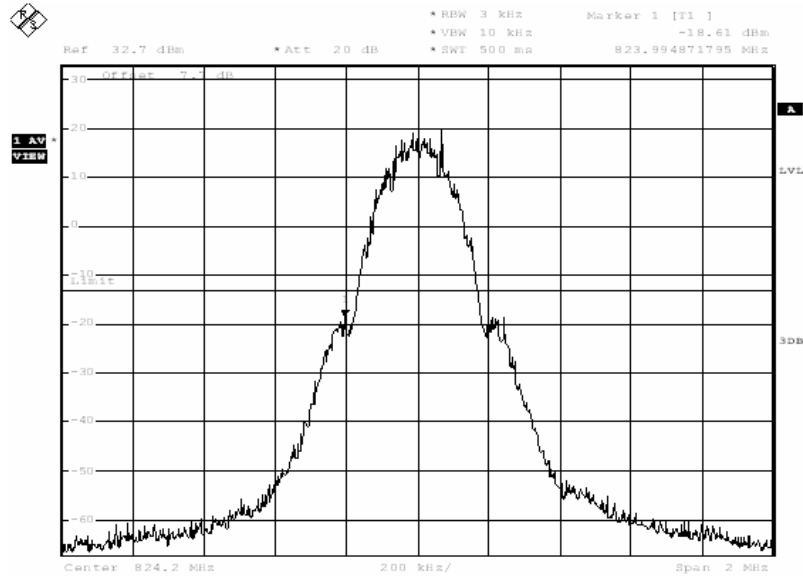


Date: 12.NOV.2013 21:58:19

#### HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

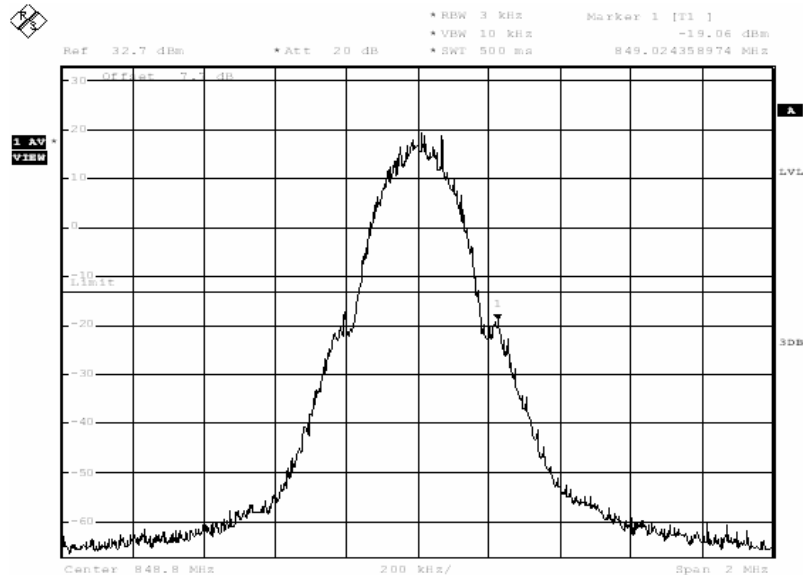


Date: 12.NOV.2013 22:00:08

**GPRS 850**  
**LOW BAND EDGE BLOCK-A (GSM850)-Channel 128**

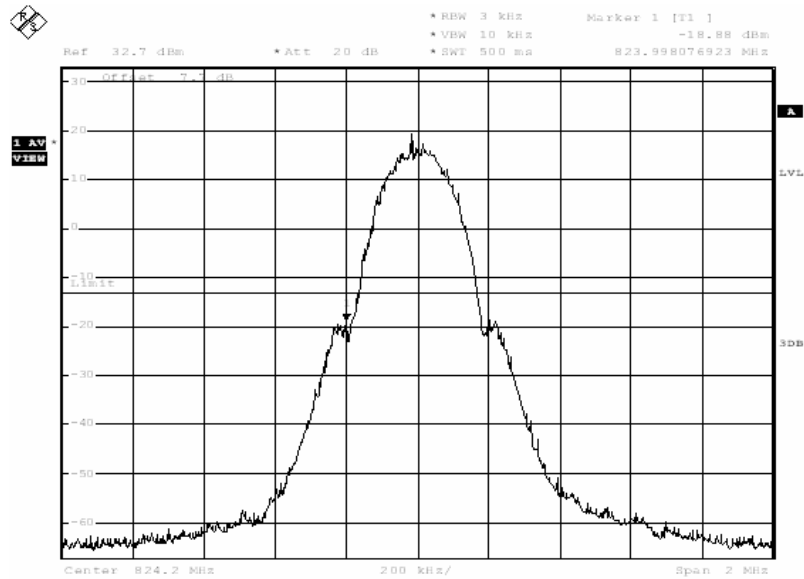

Date: 12.NOV.2013 22:17:10

**HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251**

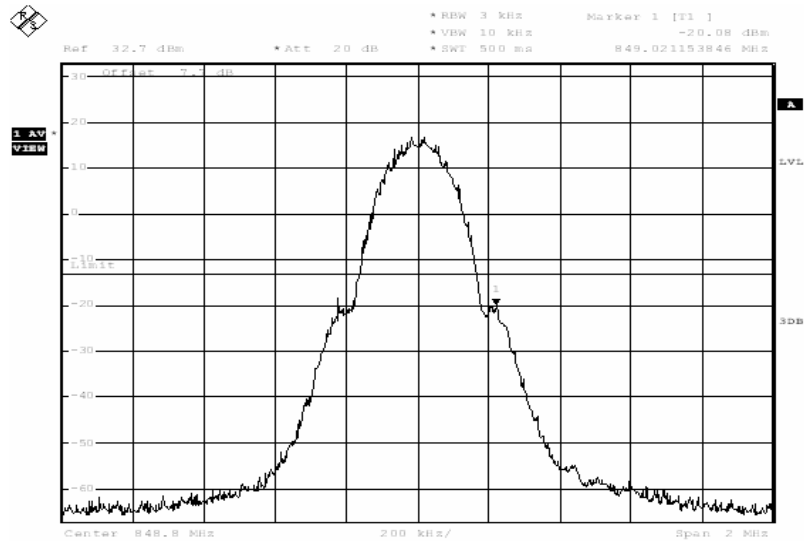


Date: 12.NOV.2013 22:18:59






**PCS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

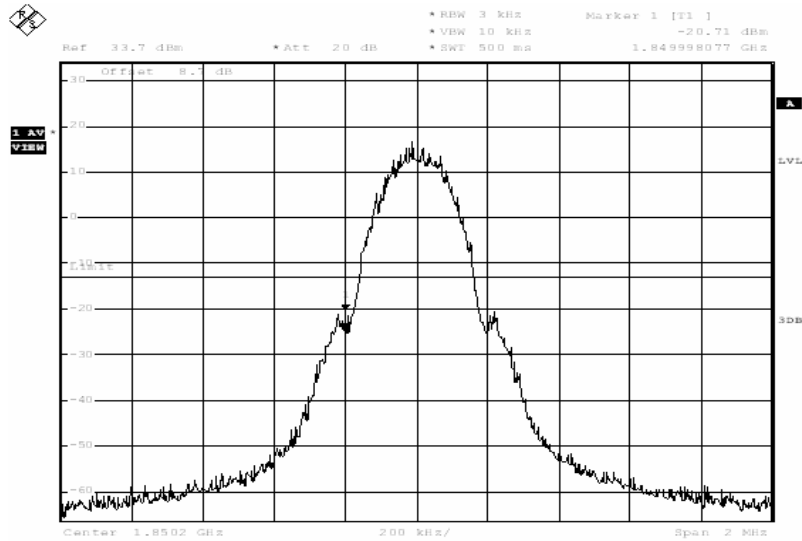


Date: 12.NOV.2013 22:46:29

**HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810**

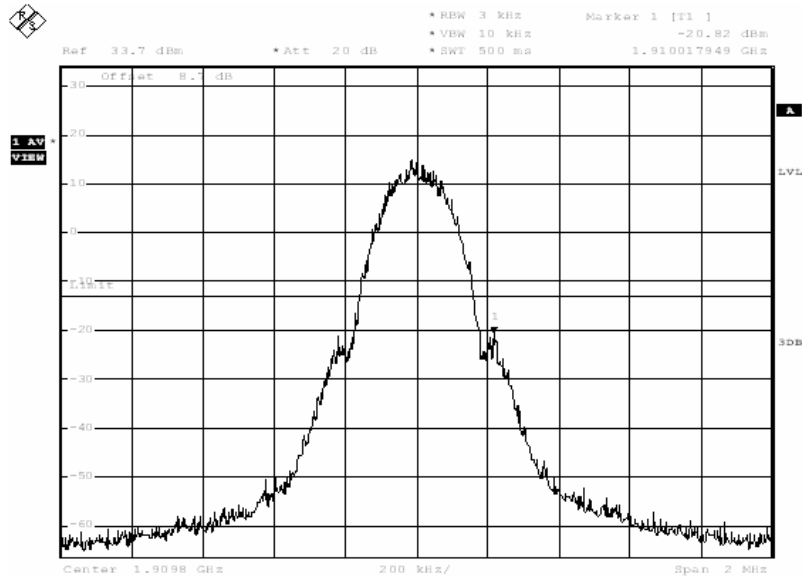


Date: 12.NOV.2013 22:46:16

**GPRS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

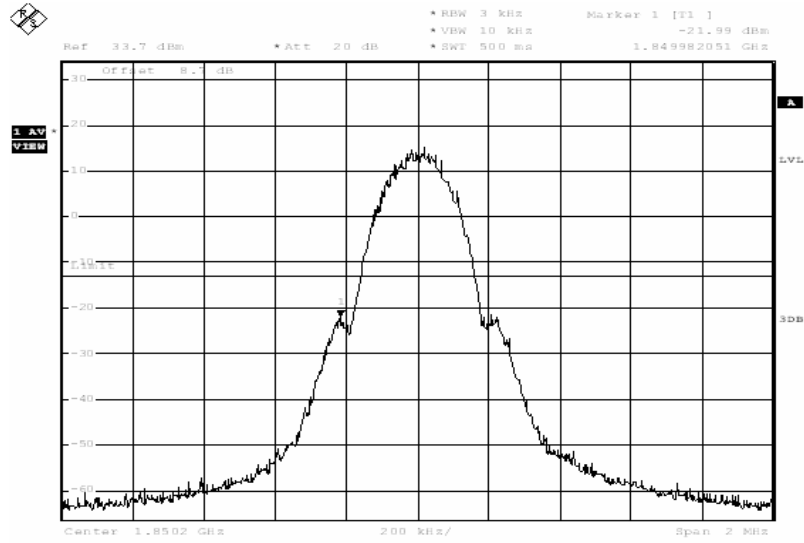


Date: 12.NOV.2013 23:07:17

**HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810**

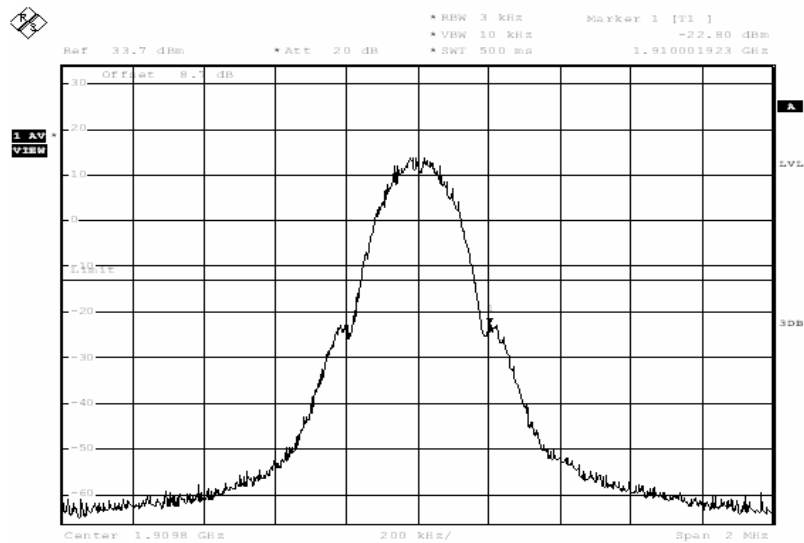


Date: 12.NOV.2013 23:09:05

**EGPRS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

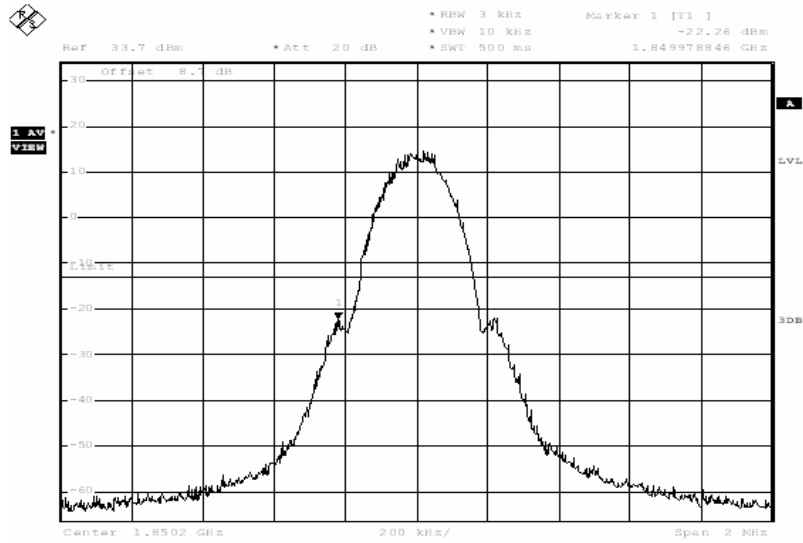

Date: 12.NOV.2013 23:23:11

**HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810**

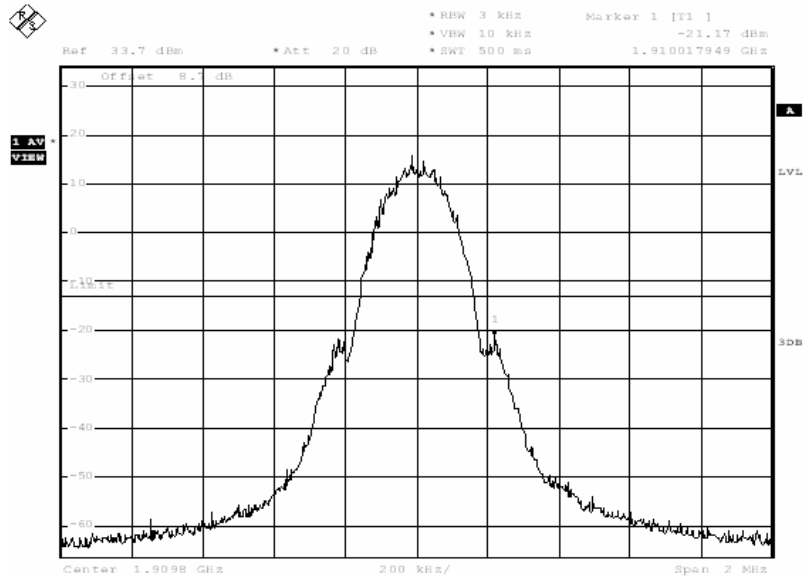

Date: 12.NOV.2013 23:25:00

## **A.8 CONDUCTED SPURIOUS EMISSION**

### **A.8.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;  
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **GSM850 Transmitter**

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

#### **PCS1900 Transmitter**

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

### **A. 8.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


### A. 8.3 Measurement result

#### GSM850

##### A.8.3.1 Channel 128: 30MHz – 1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

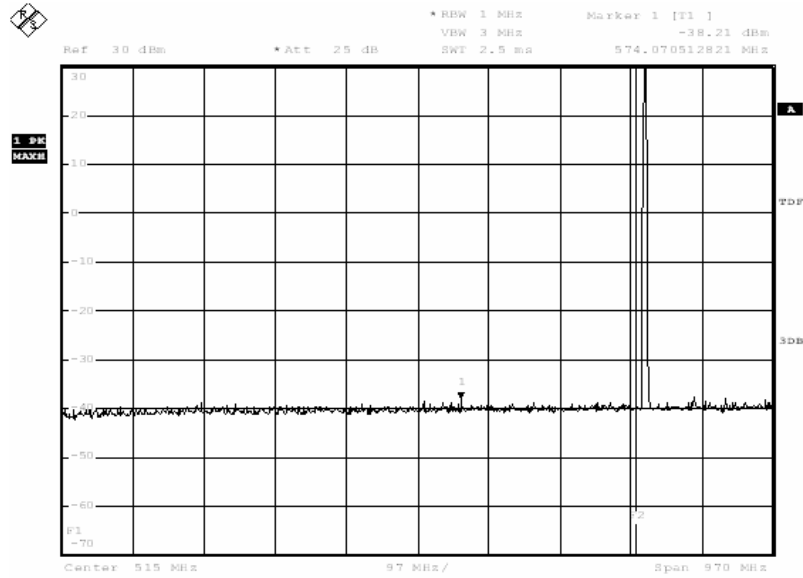

Date: 10.OCT.2013 19:24:37


##### A.8.3.2 Channel 128: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

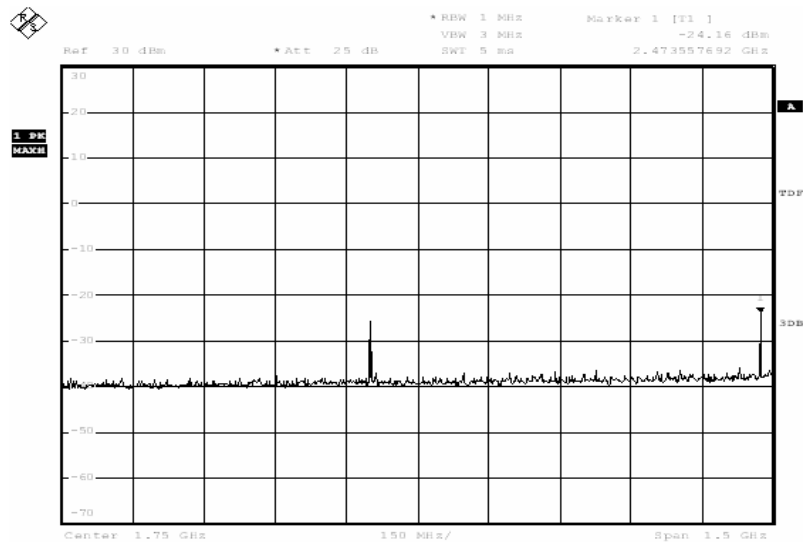


Date: 12.NOV.2013 22:00:48

**A.8.3.3 Channel 128: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

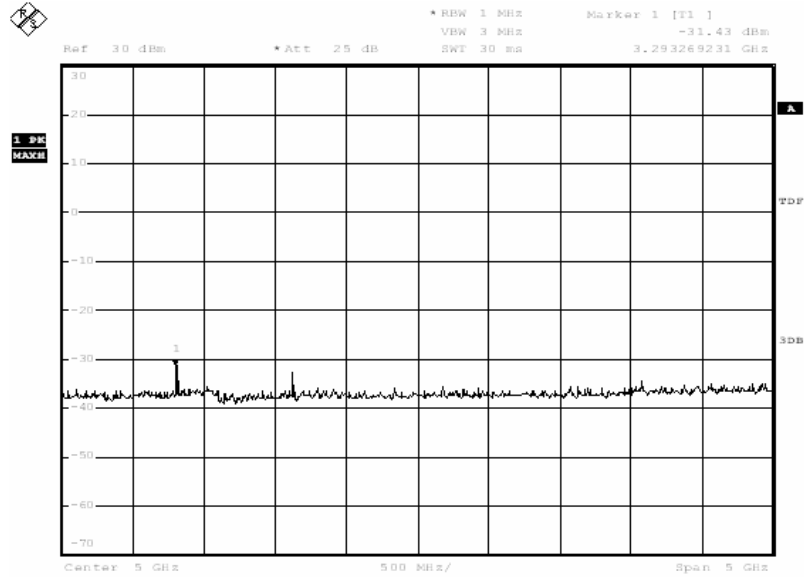

Date: 12.NOV.2013 22:01:07

**A.8.3.4 Channel 128: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

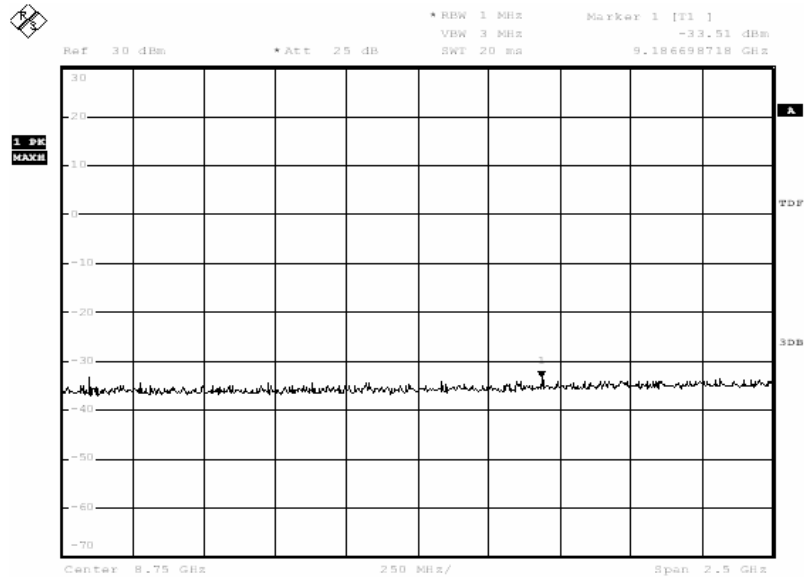


Date: 10.OCT.2013 19:25:30

### A.8.3.5 Channel 190: 30MHz – 1GHz

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

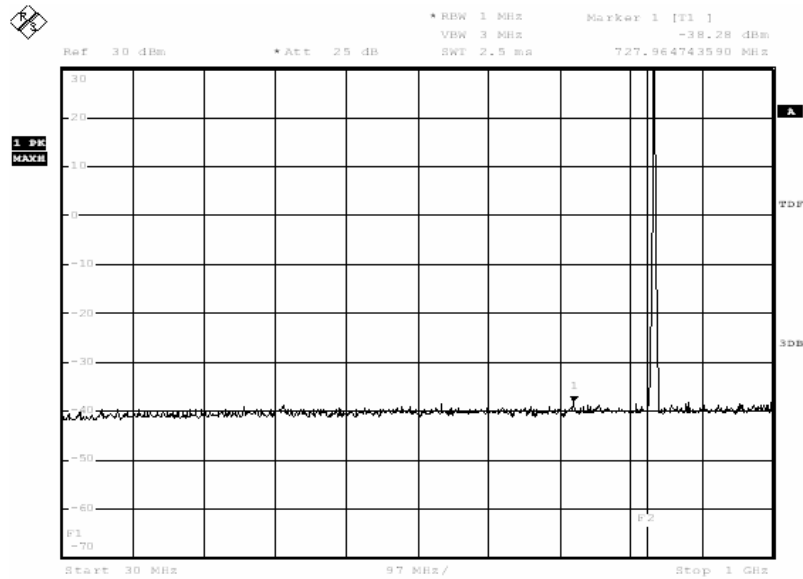

Date: 12.NOV.2013 22:01:45


### A.8.3.6 Channel 190: 1GHz –2.5GHz

Spurious emission limit –13dBm

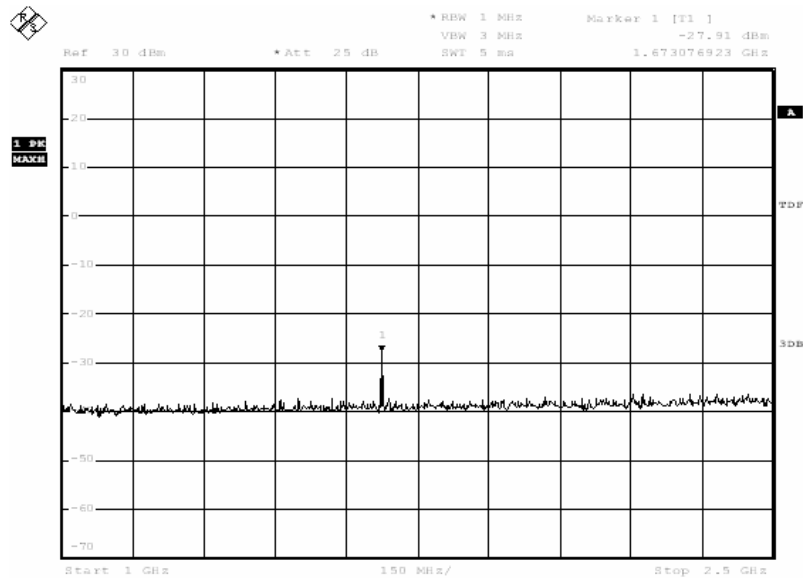


Date: 12.NOV.2013 22:02:03

**A.8.3.7 Channel 190: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm

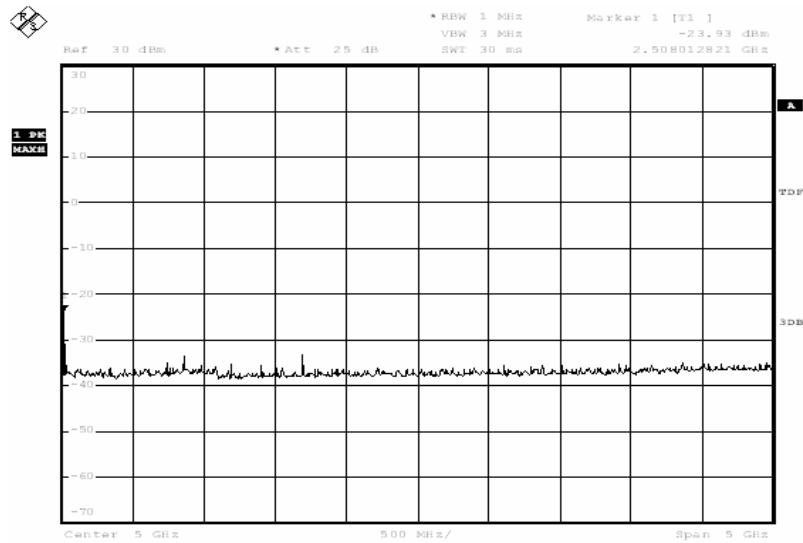

Date: 12.NOV.2013 22:02:21

**A.8.3.8 Channel 190: 7.5GHz –10GHz**  
Spurious emission limit –13dBm

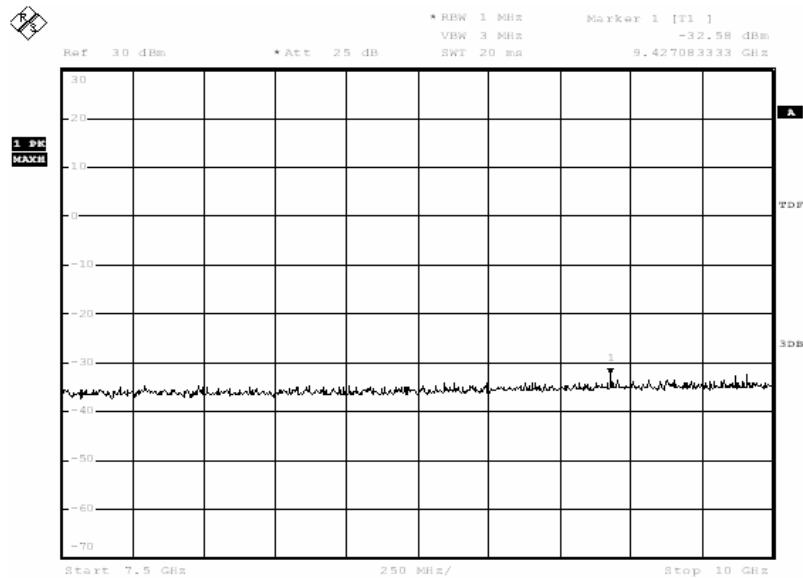


Date: 10.OCT.2013 19:26:46



### A.8.3.9 Channel 251: 30MHz – 1GHz

Spurious emission limit -13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

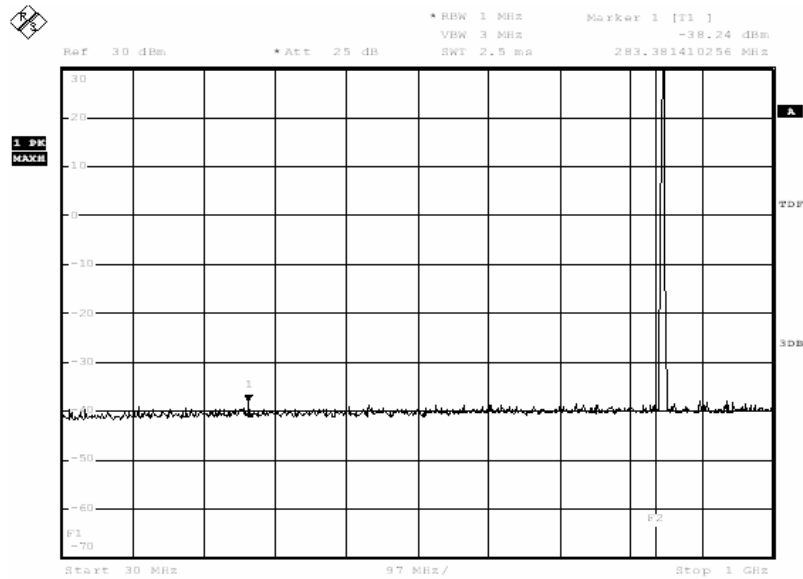

Date: 10.OCT.2013 19:27:06


### A.8.3.10 Channel 251: 1GHz – 2.5GHz

Spurious emission limit -13dBm.

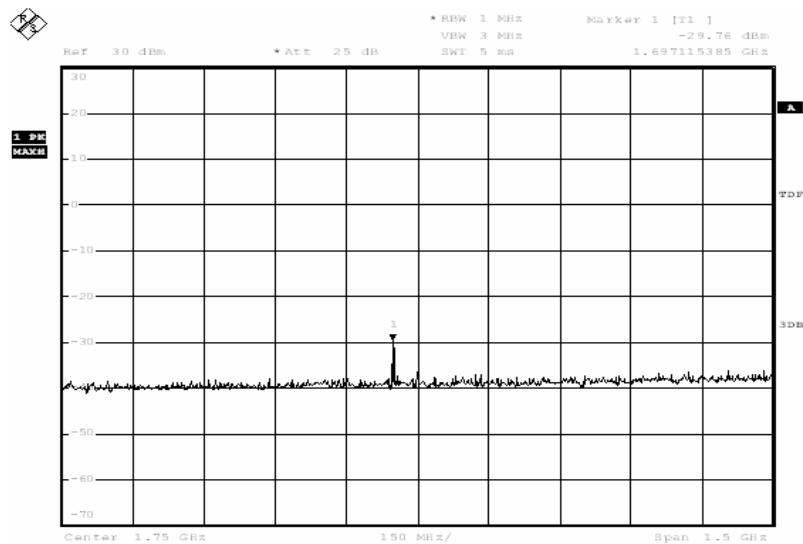


Date: 12.NOV.2013 22:03:19

**A.8.3.11 Channel 251:2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

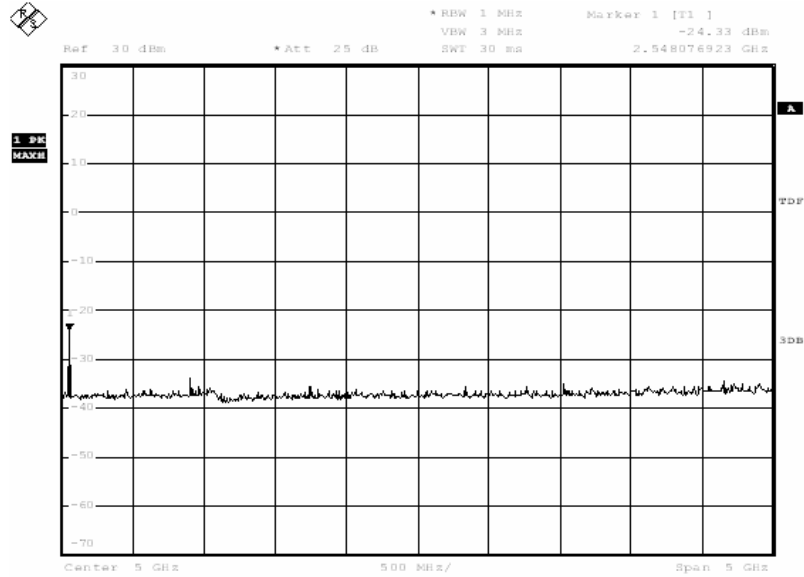


Date: 12.NOV.2013 22:03:37

**A.8.3.12 Channel 251: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

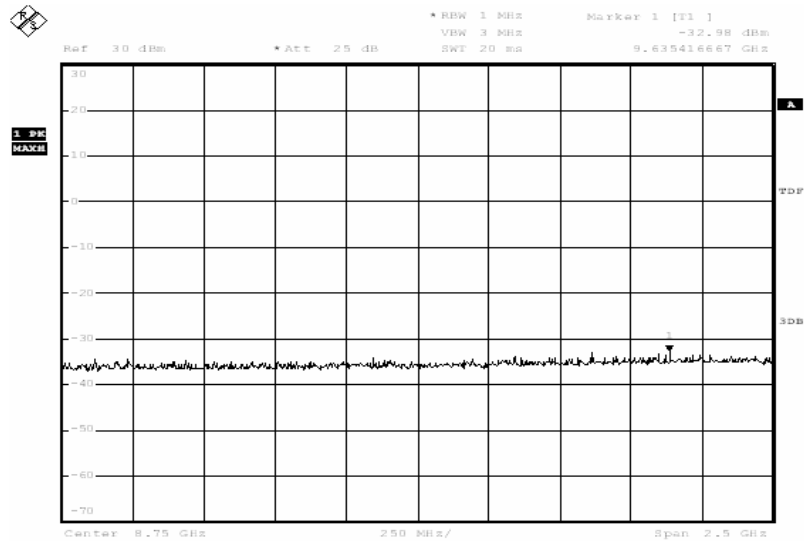


Date: 10.OCT.2013 19:28:01

**A.8.3.13 Idle mode: 30MHz – 1GHz**  
Spurious emission limit –13dBm.

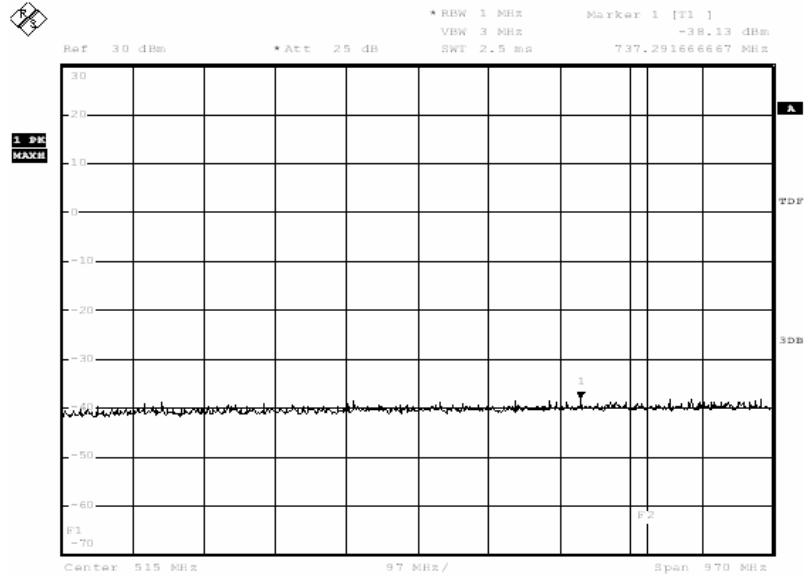


Date: 10.OCT.2013 19:28:25

**A.8.3.14 Idle mode: 1GHz – 2.5GHz**  
Spurious emission limit –13dBm.

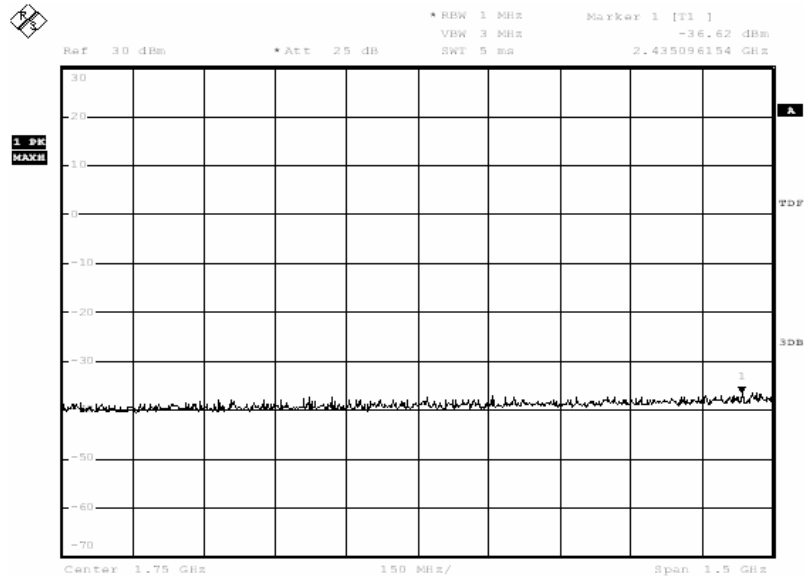


Date: 10.OCT.2013 19:28:42

**A.8.3.15 Idle mode: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

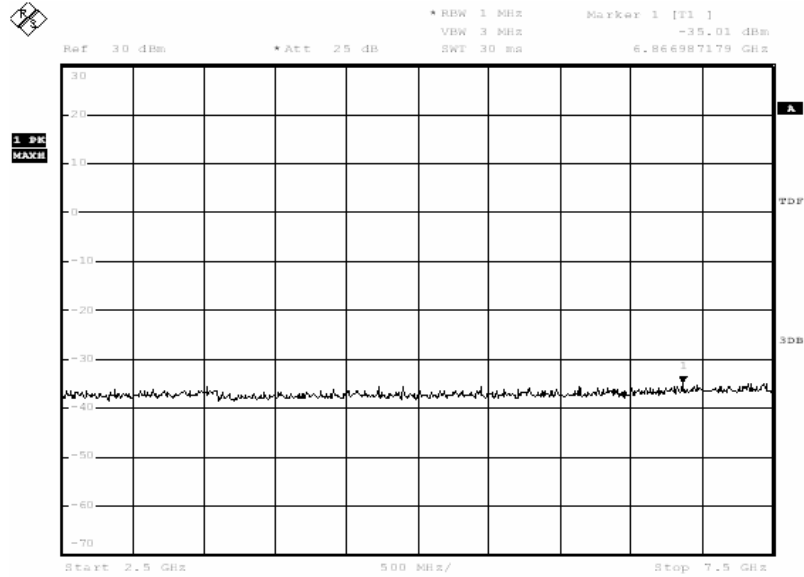

Date: 10.OCT.2013 19:29:00

**A.8.3.16 Idle mode: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

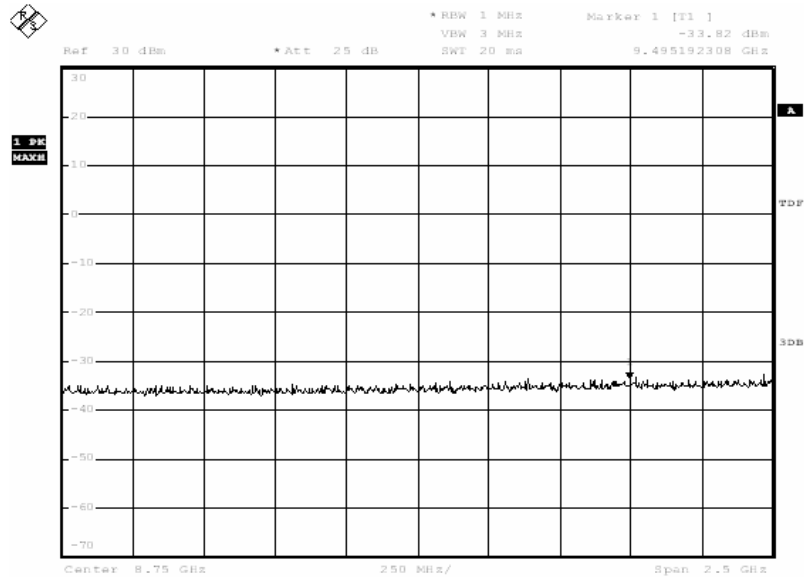


Date: 12.NOV.2013 22:05:10

PCS1900

A.8.3.17 Channel 512: 30MHz – 1GHz

Spurious emission limit -13dBm.

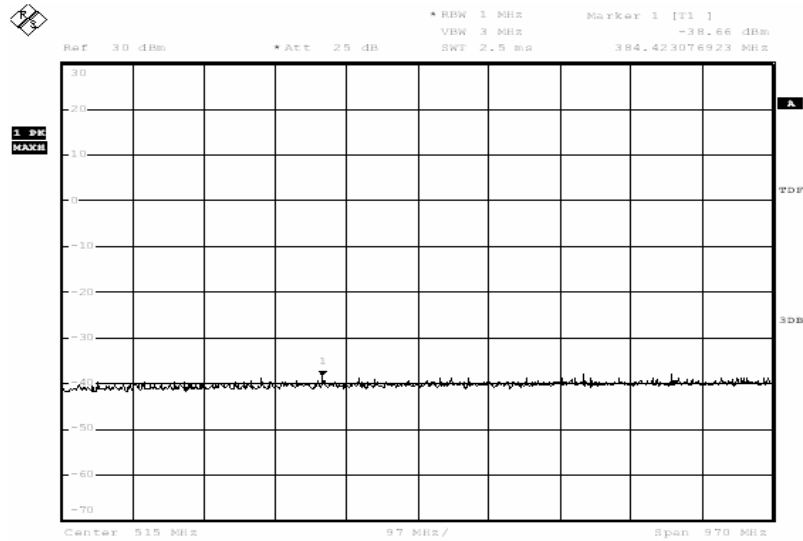


Date: 10.OCT.2013 22:48:13

A.8.3.18 Channel 512: 1GHz – 2.5GHz


Spurious emission limit -13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

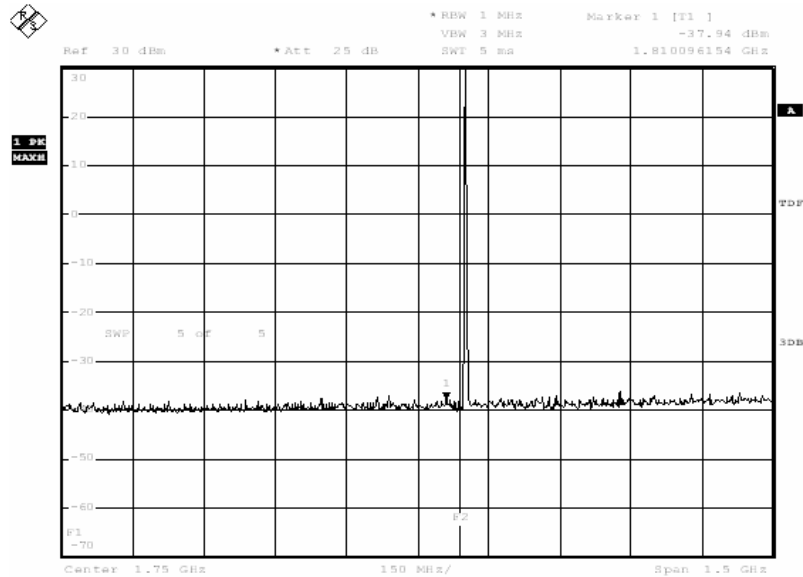


Date: 10.OCT.2013 22:48:26

**A.8.3.19 Channel 512: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

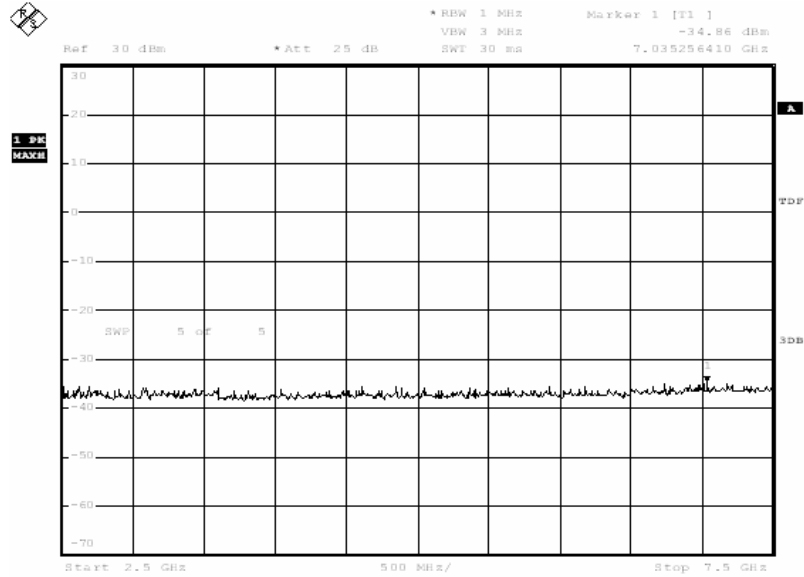


Date: 12.NOV.2013 22:49:11

**A.8.3.20 Channel 512: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

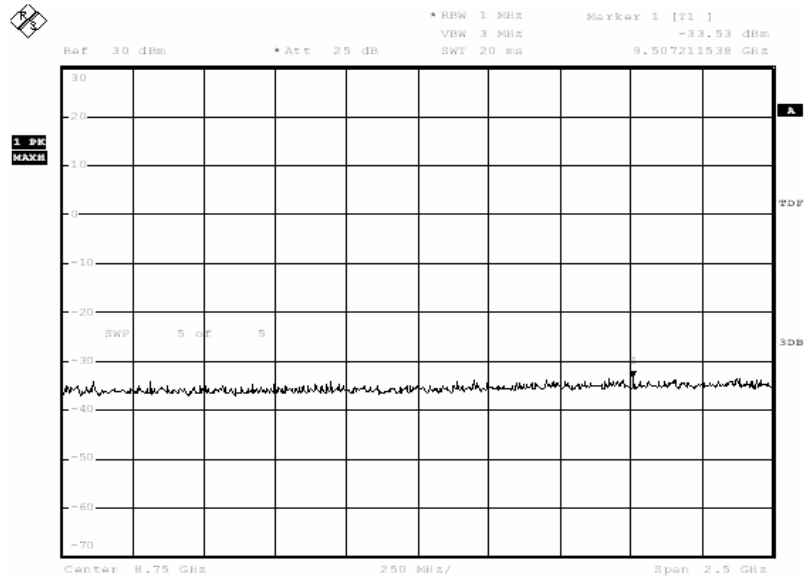


Date: 10.OCT.2013 22:49:02

**A.8.3.21 Channel 512: 10GHz –15GHz**  
Spurious emission limit –13dBm.

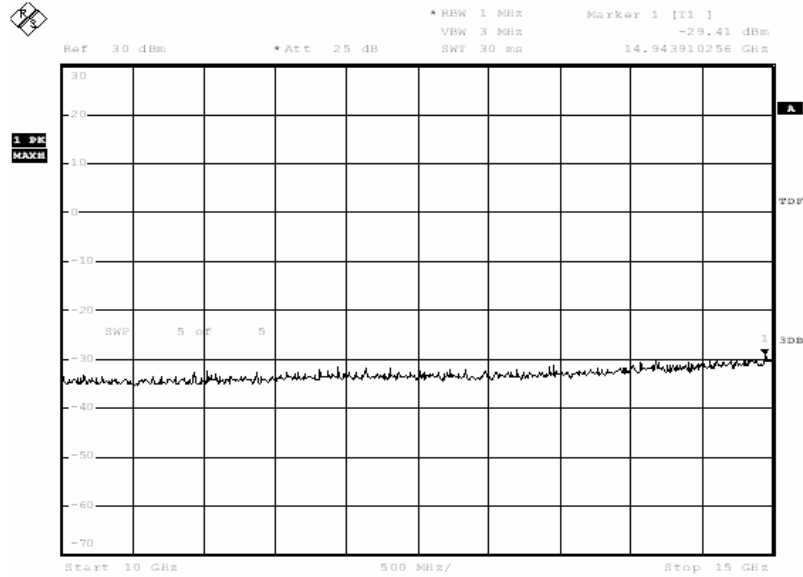


Date: 25.SEP.2013 01:29:22

**A.8.3.22 Channel 512: 15GHz –20GHz**  
Spurious emission limit –13dBm.

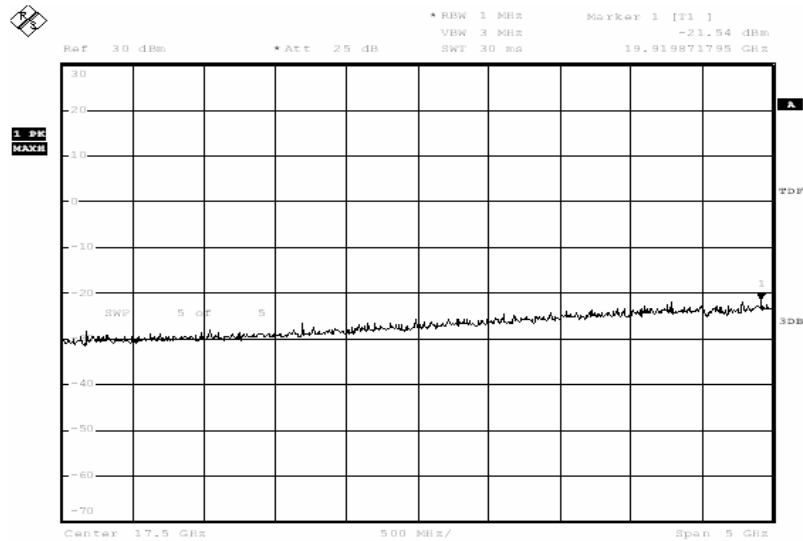

Date: 12.NOV.2013 22:50:05


**A.8.3.23 Channel 661: 30MHz – 1GHz**  
Spurious emission limit –13dBm

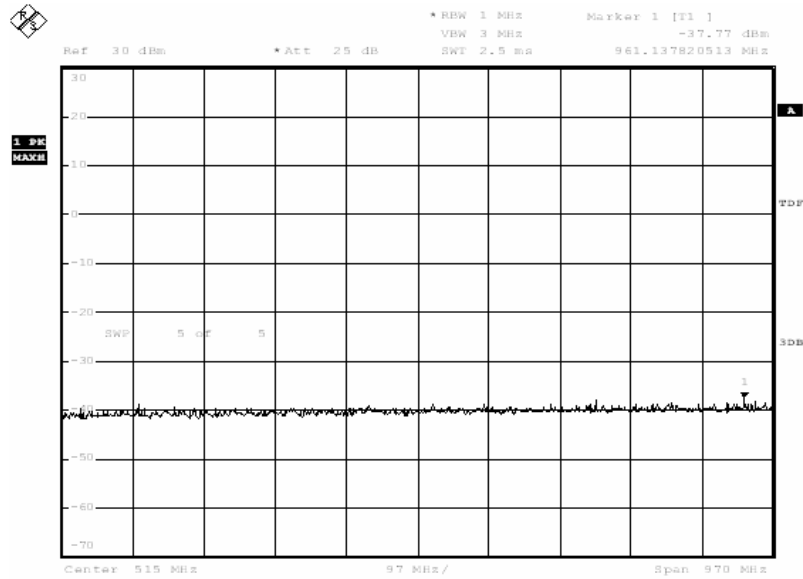

Date: 10.OCT.2013 22:49:58

**A.8.3.24 Channel 661: 1GHz –2.5GHz**  
Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

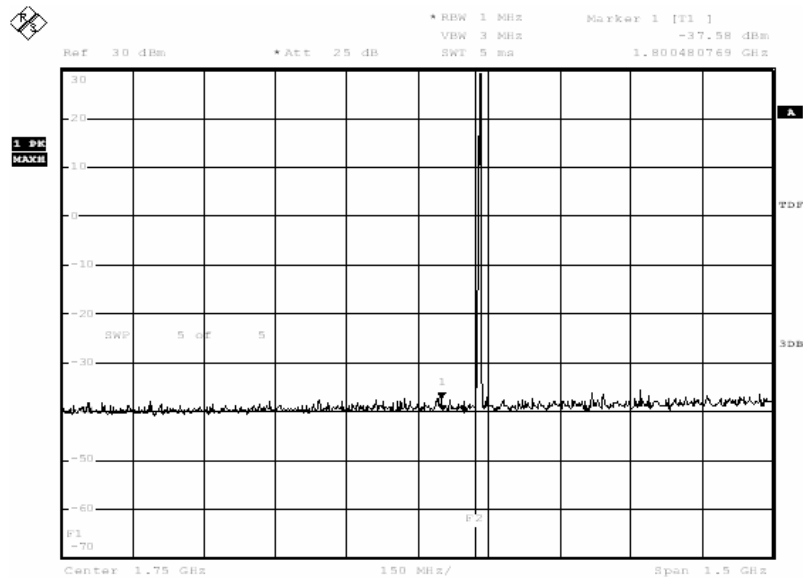

Date: 10.OCT.2013 22:50:12




**A.8.3.25 Channel 661: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm

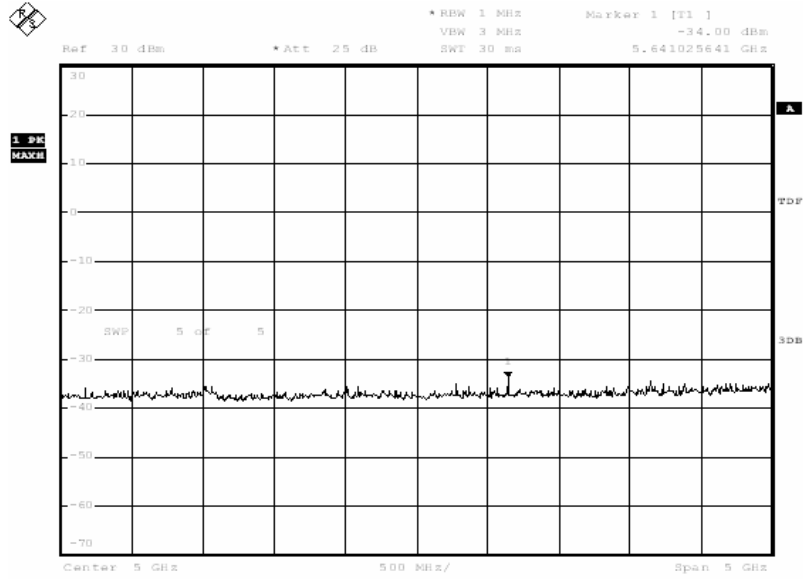


Date: 12.NOV.2013 22:50:58

**A.8.3.26 Channel 661: 7.5GHz –10GHz**  
Spurious emission limit –13dBm

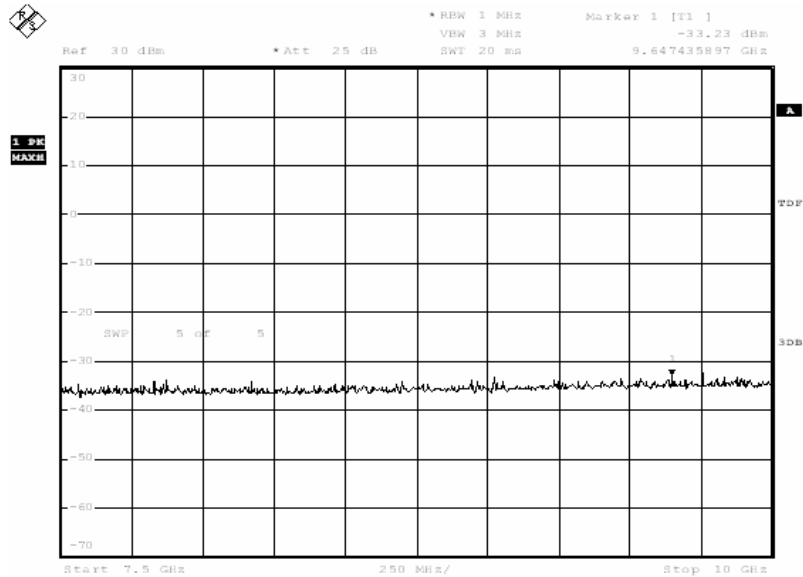


Date: 12.NOV.2013 22:51:15

**A.8.3.27 Channel 661: 10GHz –15GHz**  
Spurious emission limit –13dBm.

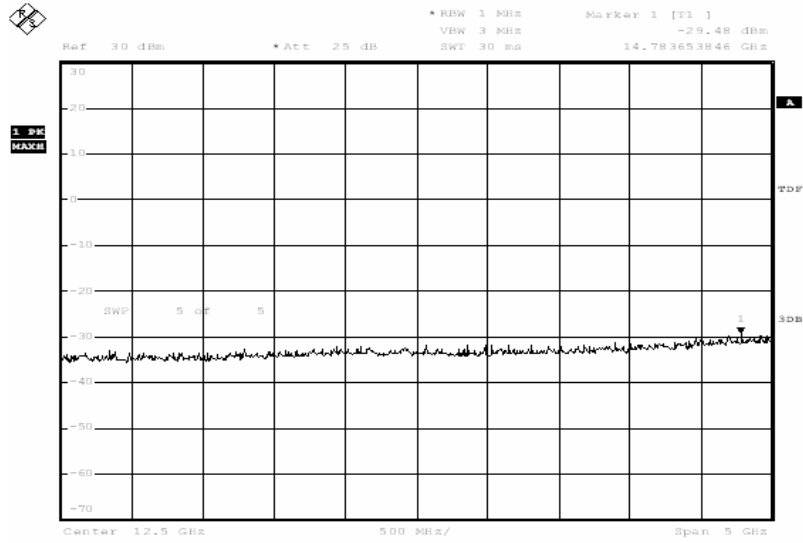


Date: 10.OCT.2013 22:51:06

**A.8.3.28 Channel 661: 15GHz –20GHz**  
Spurious emission limit –13dBm.

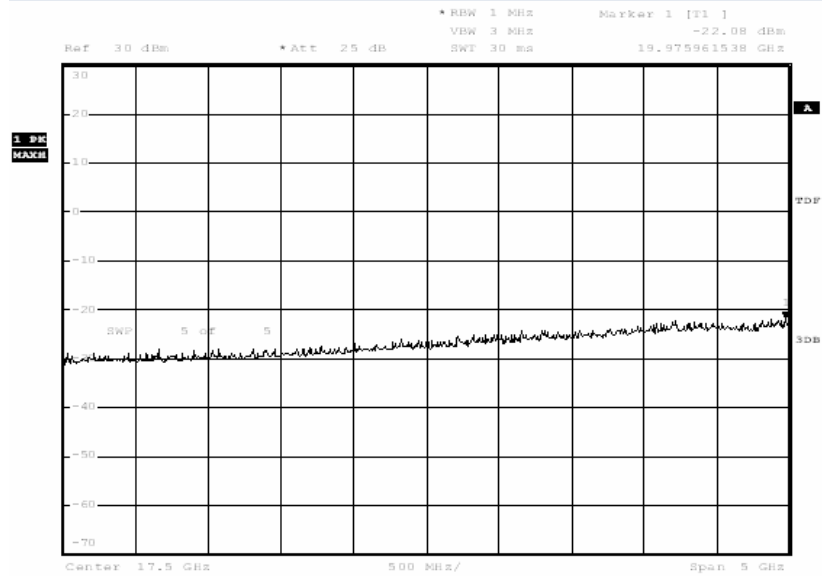

Date: 10.JUL.2013 01:07:36


**A.8.3.29 Channel 810: 30MHz – 1GHz**  
Spurious emission limit -13dBm.

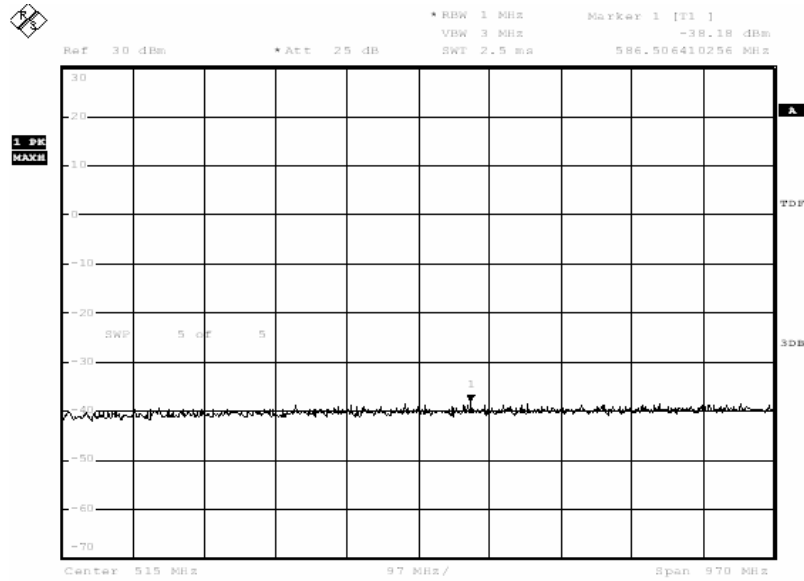

Date: 25.SEP.2013 01:31:46


**A.8.3.30 Channel 810: 1GHz – 2.5GHz**  
Spurious emission limit -13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

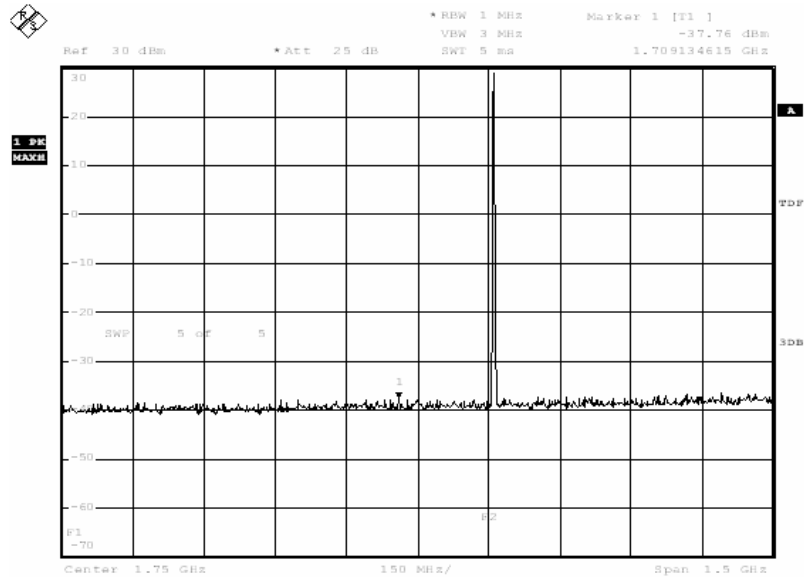


Date: 12.NOV.2013 22:52:25

**A.8.3.31 Channel 810:2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

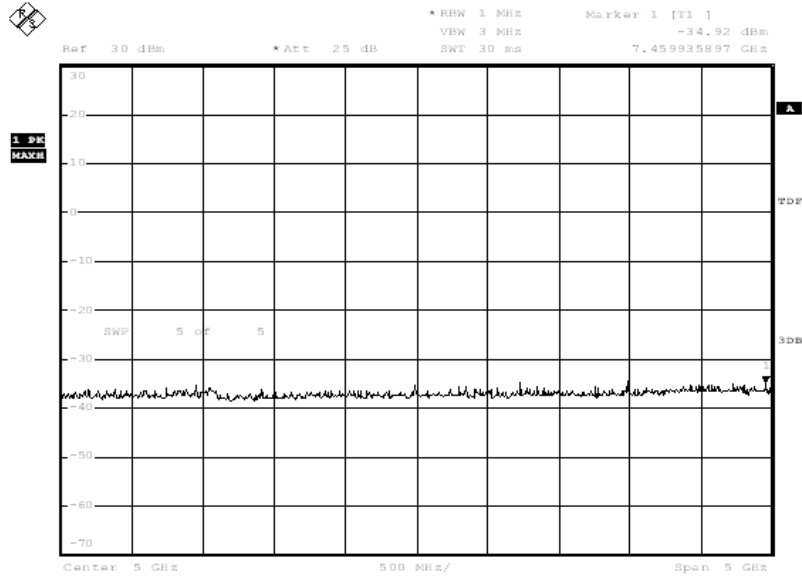


Date: 12.NOV.2013 22:52:43

**A.8.3.32 Channel 810: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

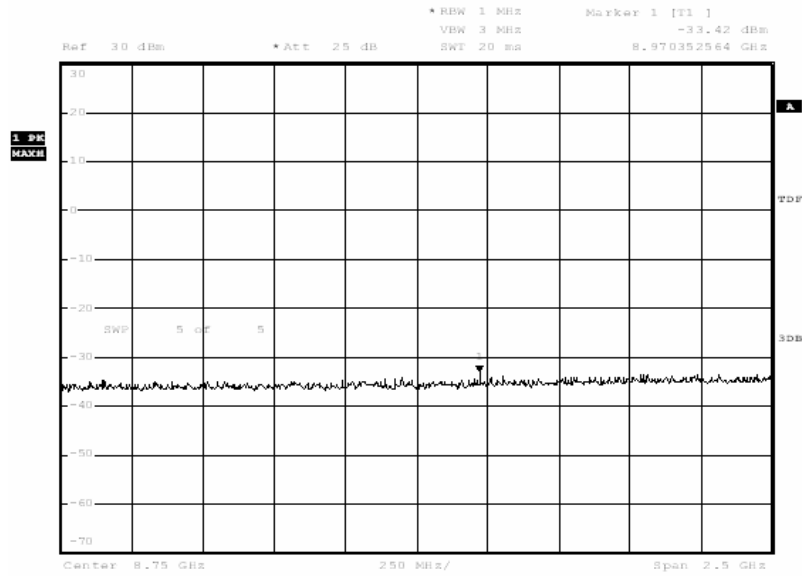


Date: 10.JUL.2013 01:00:51

**A.8.3.33 Channel 810: 10GHz –15GHz**  
Spurious emission limit –13dBm.

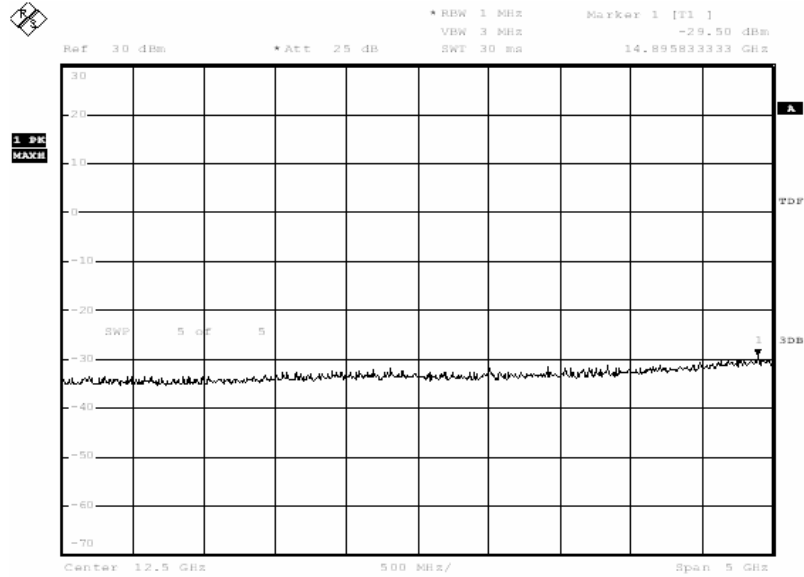


Date: 12.NOV.2013 22:53:19

**A.8.3.34 Channel 810: 15GHz –20GHz**  
Spurious emission limit –13dBm.

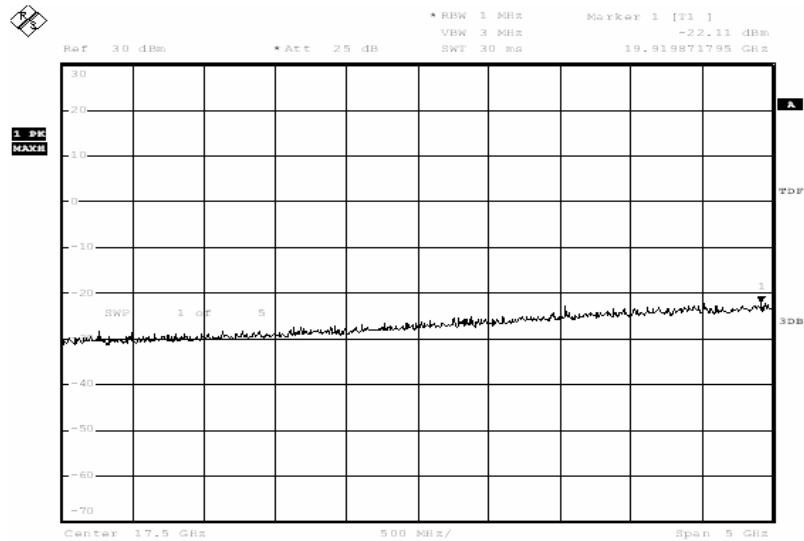


Date: 12.NOV.2013 22:53:27

**A.8.3.35 Idle mode: 30MHz – 1GHz**  
Spurious emission limit –13dBm.

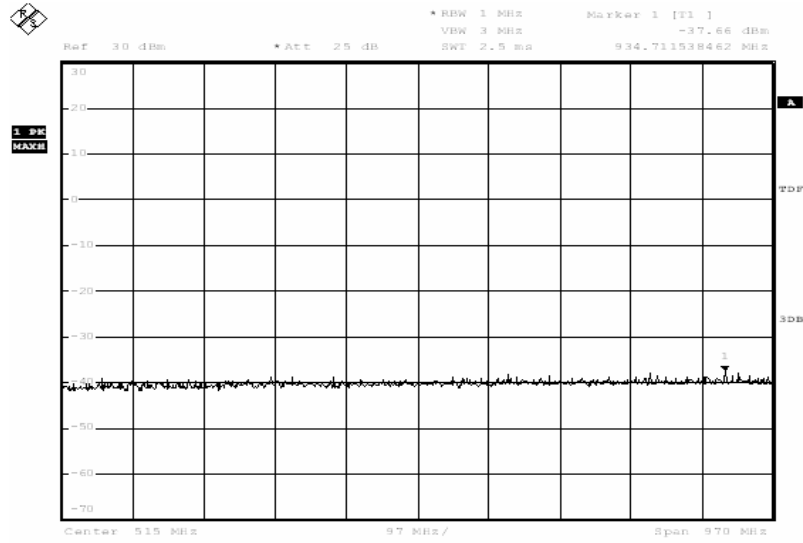


Date: 12.NOV.2013 22:54:00

**A.8.3.36 Idle mode: 1GHz – 2.5GHz**  
Spurious emission limit –13dBm.

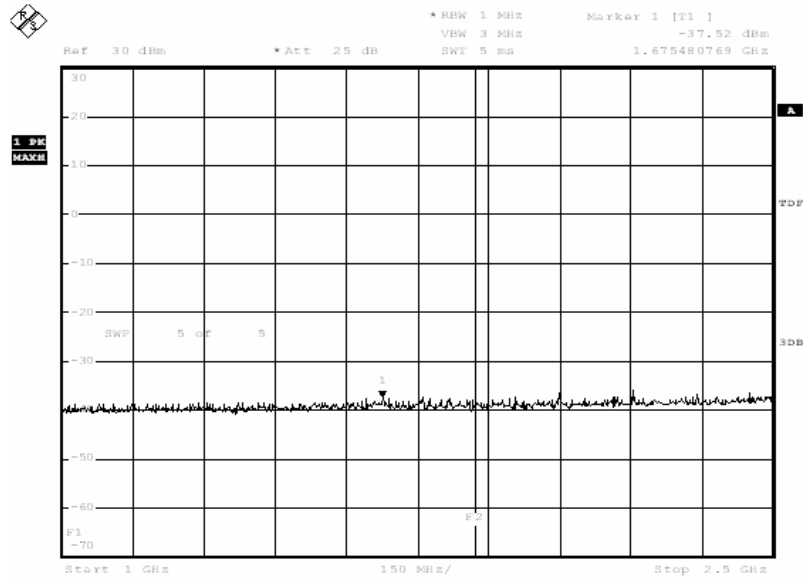


Date: 10.OCT.2013 22:53:46

**A.8.3.37 Idle mode: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

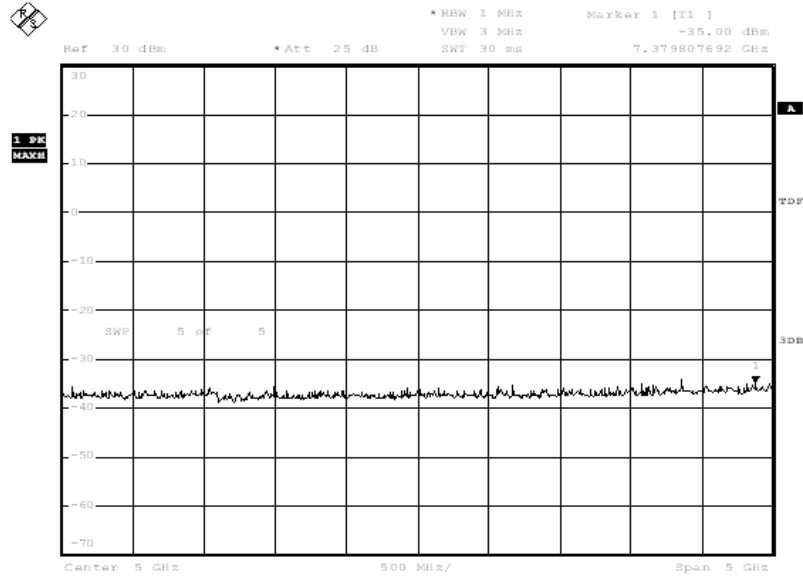


Date: 10.OCT.2013 22:54:04

**A.8.3.38 Idle mode: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

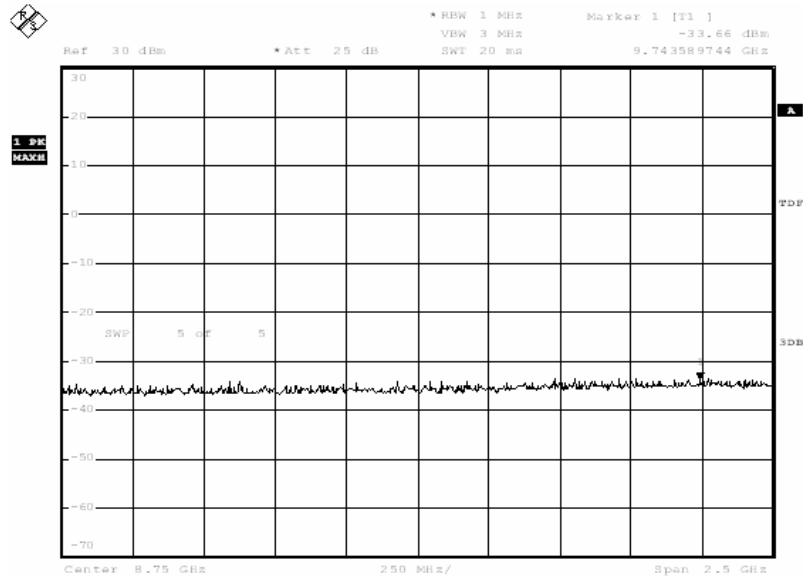


Date: 12.NOV.2013 22:54:50

**A.8.3.39 Idle mode: 10GHz –15GHz**  
Spurious emission limit –13dBm.

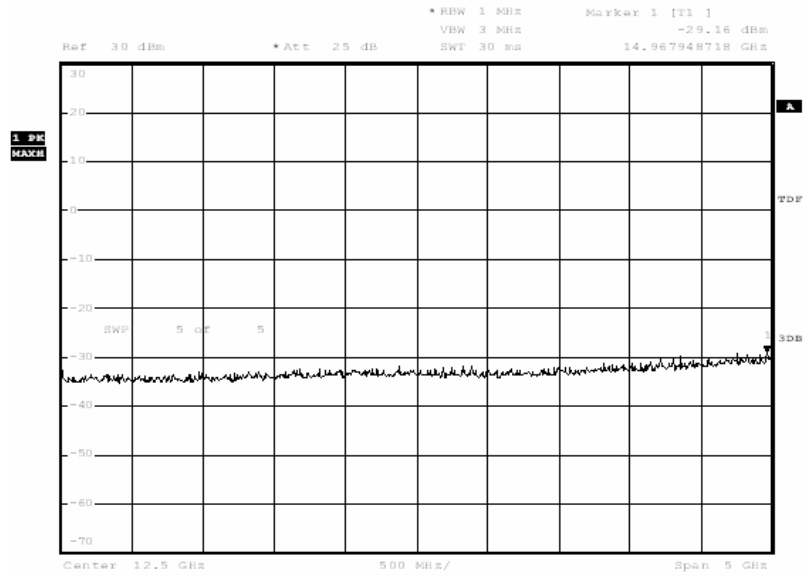

Date: 10.JUL.2013 01:11:02

**A.8.3.40 IDLE mode: 15GHz –20GHz**  
Spurious emission limit –13dBm.

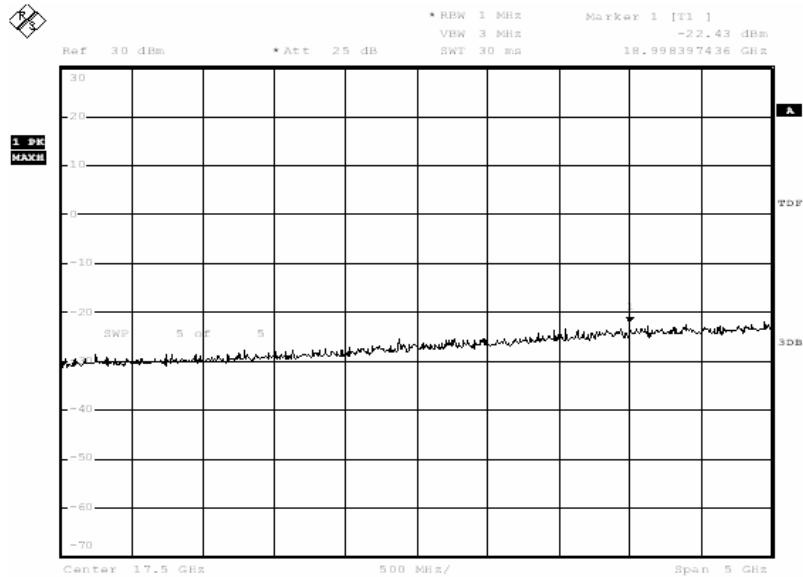

Date: 12.NOV.2013 22:55:26



## **A.9 PEAK-TO-AVERAGE POWER RATIO**

### **A.9.1 Measurement description**

According to KDB971168, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

The parameter of spectrum analyzer: RBW = 10MHz, detector = sample, No. of sample = 500,000

### **A.9.2 Measurement results**

#### **Frequency Error vs Temperature**

	Frequency(MHz)	PAPR(dB)
GSM850	836.60	7.56
GPRS850	836.60	7.49
EGPRS850	836.60	7.64
GSM1900	1880.00	7.73
GPRS1900	1880.00	7.68
EGPRS1900	1880.00	7.79

**\*\*\*END OF REPORT\*\*\***