

# TEST REPORT

Reference No..... : WTX20X09062234W-1  
FCC ID ..... : VVX-LM843  
Applicant ..... : LM Technologies Ltd.  
Address ..... : Camrose House,2A Camrose Avenue, Edgware, London HA8 6EG,  
Penelope Victoria  
Product Name ..... : LM843 WiFi 802.11ac / Bluetooth® 5.0 2T2R Combi USB Module  
Test Model. .... : LM843  
Standards ..... : FCC Part 15.407  
Date of Receipt sample .... : Sep.02, 2020  
Date of Test..... : Sep.02, 2020 to Apr.19, 2021  
Date of Issue ..... : Apr.19, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309

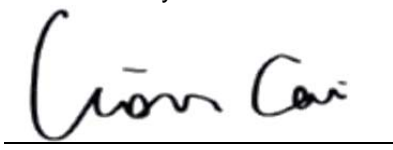
Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	7
1.6 TEST FACILITY.....	7
1.7 EUT SETUP AND TEST MODE.....	8
1.8 MEASUREMENT UNCERTAINTY.....	9
1.9 TEST EQUIPMENT LIST AND DETAILS.....	10
<b>2. SUMMARY OF TEST RESULTS</b> .....	<b>12</b>
<b>3. ANTENNA REQUIREMENT</b> .....	<b>13</b>
3.1 STANDARD APPLICABLE.....	13
3.2 EVALUATION INFORMATION.....	13
<b>4. AUTOMATICALLY DISCONTINUE TRANSMISSION</b> .....	<b>14</b>
4.1 STANDARD APPLICABLE.....	14
4.2 SUMMARY OF TEST RESULTS.....	14
<b>5. POWER SPECTRAL DENSITY</b> .....	<b>15</b>
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	16
<b>6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH</b> .....	<b>17</b>
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>7. MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>20</b>
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	21
<b>8. RADIATED SPURIOUS EMISSIONS</b> .....	<b>22</b>
8.1 STANDARD APPLICABLE.....	22
8.2 TEST PROCEDURE.....	22
8.3 TEST RECEIVER SETUP.....	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	24
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	25
<b>9. FREQUENCY STABILITY</b> .....	<b>46</b>
9.1 STANDARD APPLICABLE.....	46
9.2 TEST PROCEDURE.....	46
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	46
<b>10 CONDUCTED EMISSIONS</b> .....	<b>47</b>
10.1 TEST PROCEDURE.....	47
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	47
10.3 TEST RECEIVER SETUP.....	47
10.4 SUMMARY OF TEST RESULTS/PLOTS.....	47
<b>APPENDIX SUMMARY</b> .....	<b>50</b>
<b>APPENDIX A</b> .....	<b>51</b>
<b>APPENDIX B</b> .....	<b>64</b>
<b>APPENDIX C</b> .....	<b>83</b>
<b>APPENDIX D</b> .....	<b>97</b>

**APPENDIX PHOTOGRAPHS.....98**

**Report version**

Version No.	Date of issue	Description
Rev.00	Apr.19, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: LM Technologies Ltd.  
 Address of applicant: Camrose House,2A Camrose Avenue, Edgware, London HA8 6EG, Penelope Victoria

Manufacturer: LM Technologies Ltd.  
 Address of manufacturer: Camrose House,2A Camrose Avenue, Edgware, London HA8 6EG, Penelope Victoria

General Description of EUT	
Product Name:	LM843 WiFi 802.11ac / Bluetooth® 5.0 2T2R Combi USB Module
Trade Name:	LM Technologies
Model No.:	LM843
Adding Model(s):	843-8430, 843-8431, 843-8432, 843-8433, 843-8434, 843-8435, 843-8436, 843-8437, 843-8438, 843-8439, 843-8440, 843-8441
Rated Voltage:	DC5V
Battery Capacity:	/
Power Adapter:	/
Software Version:	/
Hardware Version:	PCB_843-84XX
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model LM843, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	Antenna A: 10.34dBm (Conducted) Antenna B: 9.49dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM
Type of Antenna:	External antenna
Antenna Gain:	3dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407:** General technical requirements.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01:** GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Table for parameters of Test Software setting

Enter “REALTEK 11ac 8822CU USB WLAN NIC Massproduction Kit” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT A	58	58	58	/	/	/	/	/	/	/	59	59	59
	ANT B	57	57	57	/	/	/	/	/	/	/	55	55	55
802.11n-HT20 MCS0	ANT A	58	58	58	/	/	/	/	/	/	/	71	71	71
	ANT B	57	57	57	/	/	/	/	/	/	/	55	55	55
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	ANT A	60	60	/	/	/	/	/	/	/	/	69	69	
	ANT B	59	59	/	/	/	/	/	/	/	/	56	56	
Mode	Ant.	NCB: 80MHz												
		5210	5290	5530	5610	5690	5775							
802.11ac-VH80 MCS0/Nss2	ANT A	60	/	/	/	/	65							
	ANT B	59	/	/	/	/	56							

## **1.5 EUT Operating during test**

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

## **1.6 Test Facility**

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775 MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	/



## 1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

**1.9 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has two External antennas, fulfill the requirement of this section.

## **4. Automatically Discontinue Transmission**

---

### **4.1 Standard Applicable**

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **4.2 Summary of Test Results**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

## 5. Power Spectral Density

---

### 5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set VBW  $\geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/\text{RBW})$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

### **5.3 Summary of Test Results/Plots**

**Please refer to Appendix A**



## 6. Emission Bandwidth and Occupied Bandwidth

---

### 6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

### **6.3 Summary of Test Results/Plots**

**Please refer to Appendix B**

## 7. Maximum Conducted Output Power

---

### 7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

### **7.3 Summary of Test Results/Plots**

**Please refer to Appendix C**

## 8. Radiated Spurious Emissions

---

### 8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.  
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

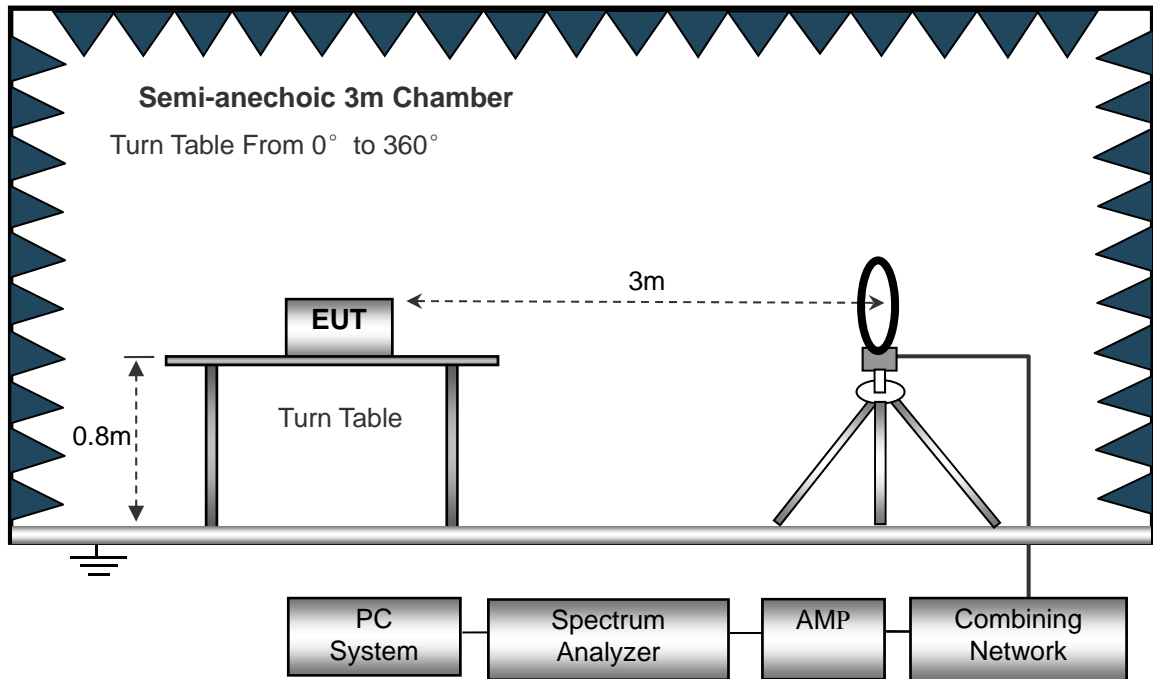
### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

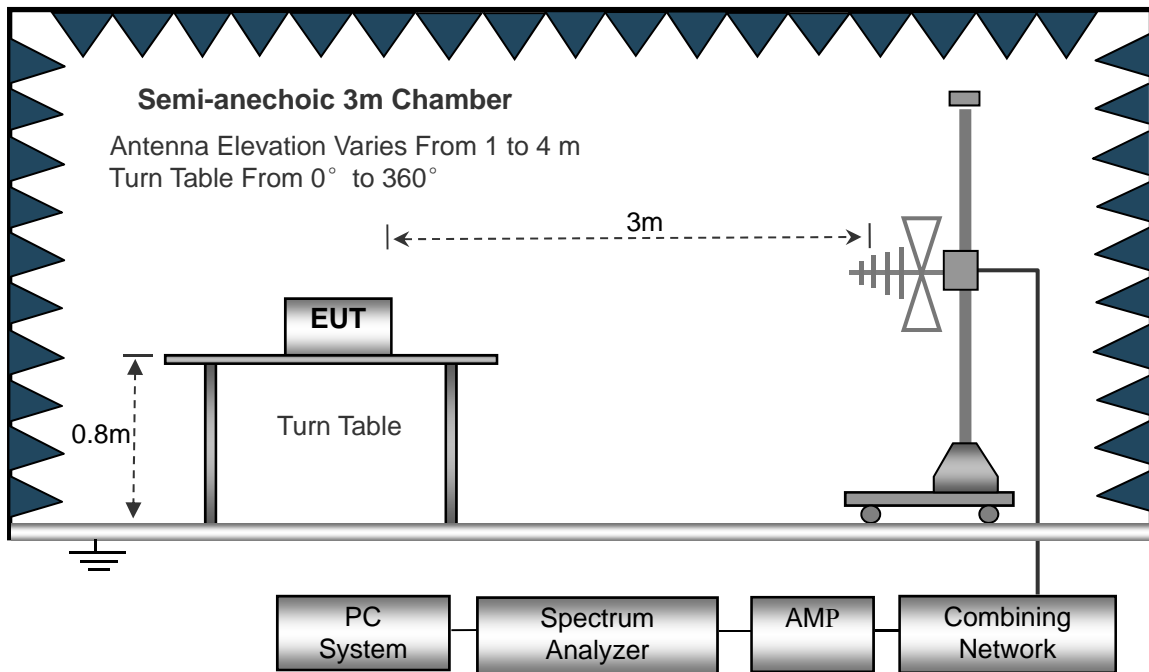
The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

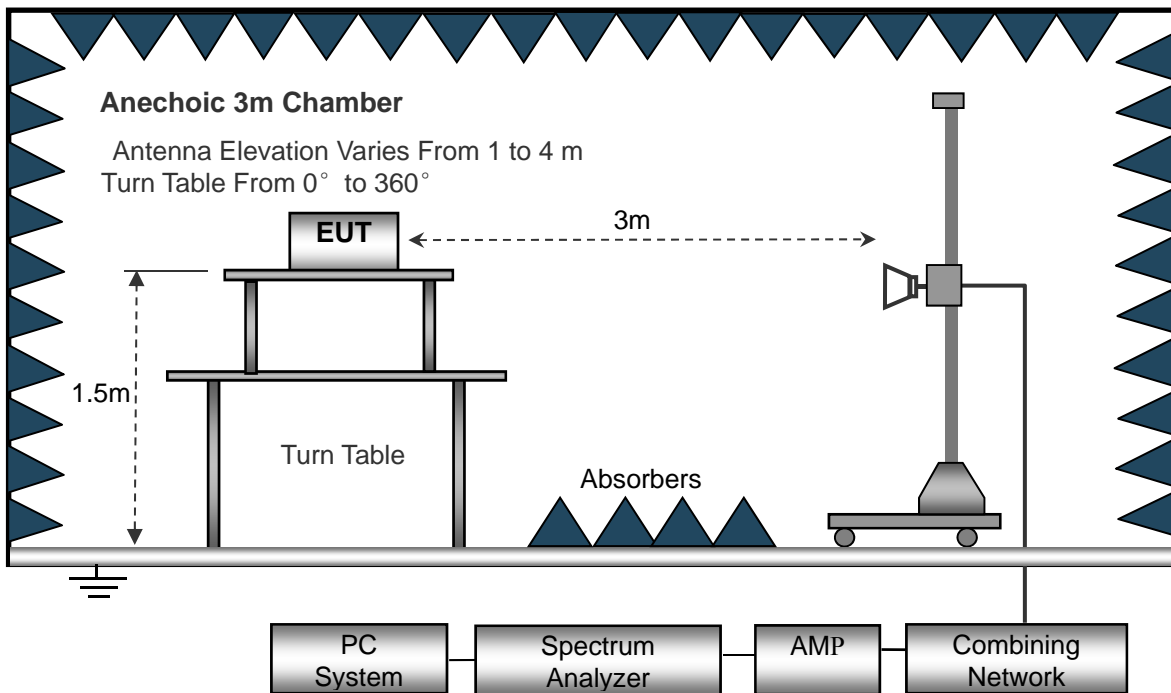
The test setup for emission measurement below 30MHz..



The test setup for emission measurement from 30 MHz to 1 GHz..



The test setup for emission measurement above 1 GHz..



### 8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$



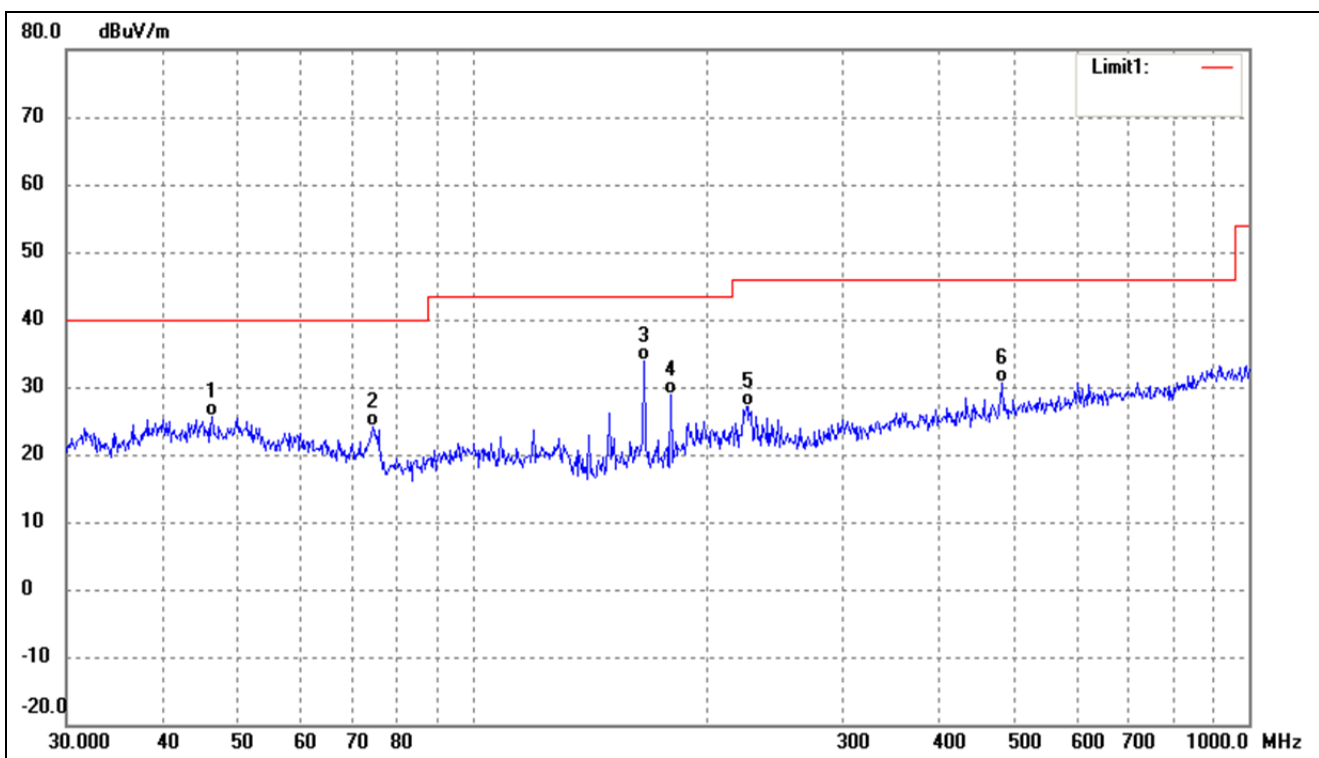
## 8.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

- Spurious Emission From 30 MHz to 1 GHz
- Antenna A(worst case)
- 5150-5250MHz

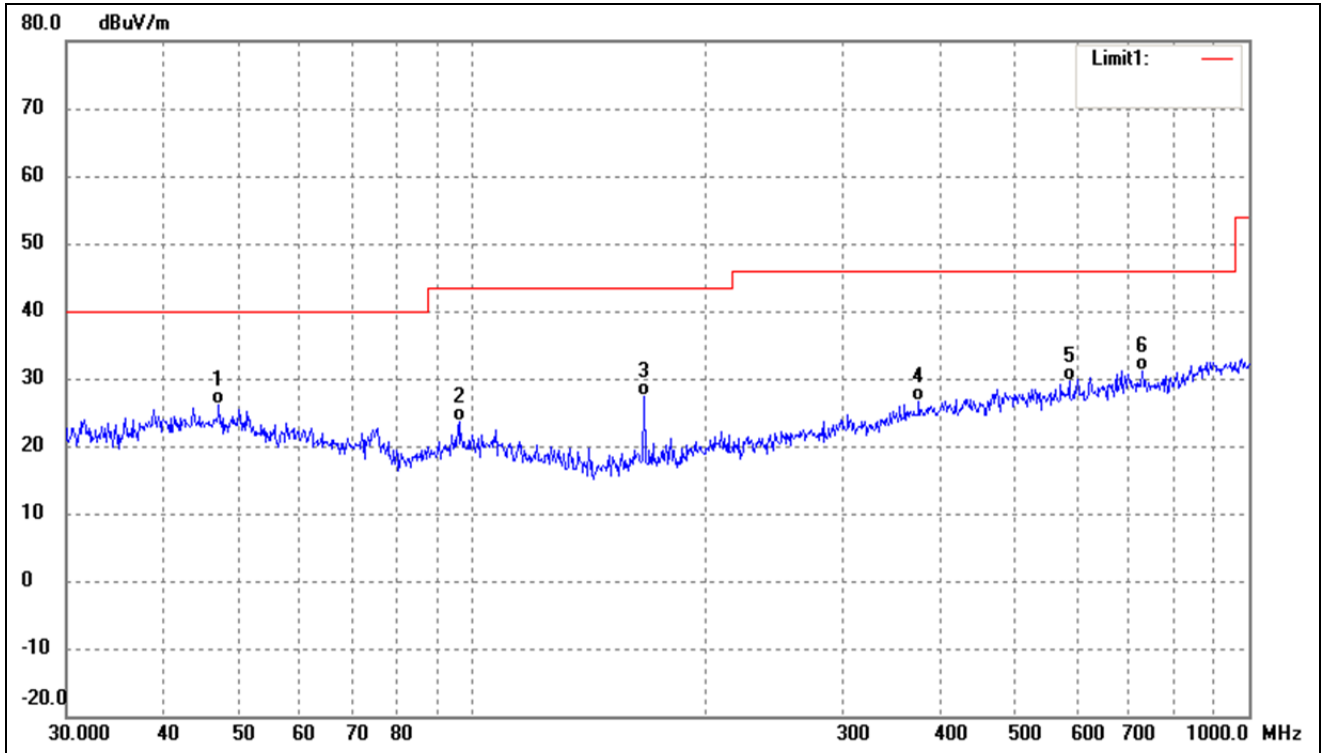
802.11a(worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



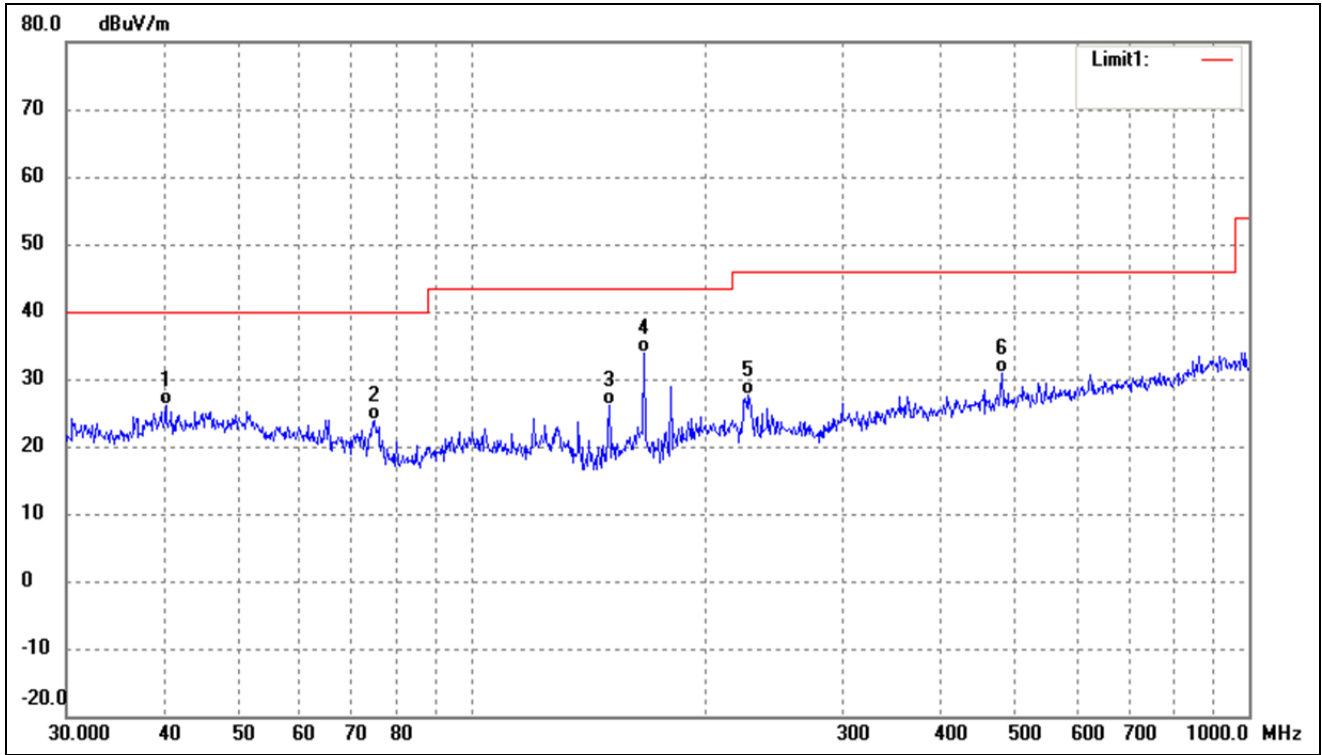
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.1780	37.29	-11.73	25.56	40.00	-14.44	-	-	QP
2	74.3955	39.91	-15.87	24.04	40.00	-15.96	-	-	QP
3	166.6514	49.14	-15.20	33.94	43.50	-9.56	-	-	QP
4	180.0165	43.12	-14.31	28.81	43.50	-14.69	-	-	QP
5	226.0994	39.20	-12.08	27.12	46.00	-18.88	-	-	QP
6	480.5276	35.31	-4.64	30.67	46.00	-15.33	-	-	QP

802.11a(worst case)			
Test Channel	5180MHz	Polarity:	Vertical



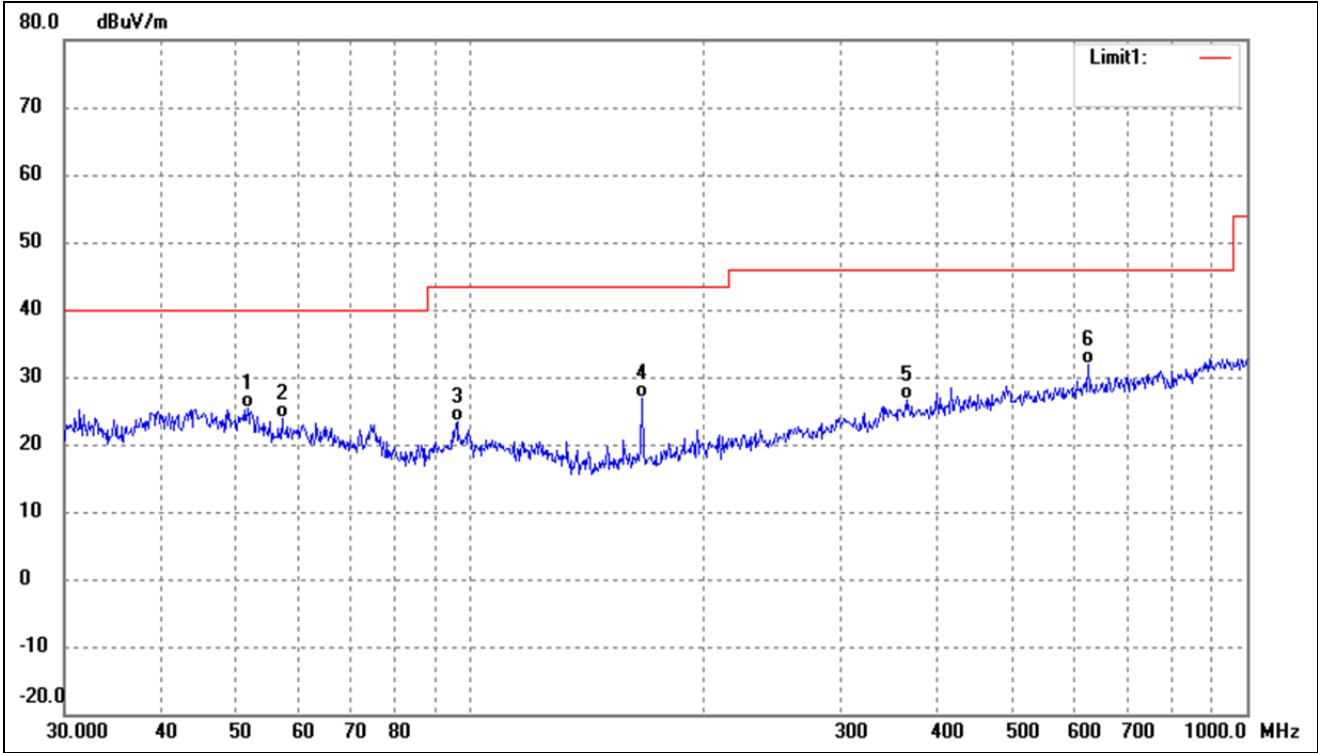
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.1599	37.91	-11.68	26.23	40.00	-13.77	-	-	QP
2	96.0986	37.68	-13.96	23.72	43.50	-19.78	-	-	QP
3	166.6514	42.46	-15.20	27.26	43.50	-16.24	-	-	QP
4	375.9385	33.68	-7.16	26.52	46.00	-19.48	-	-	QP
5	586.8437	31.91	-2.27	29.64	46.00	-16.36	-	-	QP
6	729.3583	32.21	-1.03	31.18	46.00	-14.82	-	-	QP

802.11a(worst case)			
Test Channel	5200MHz	Polarity:	Horizontal



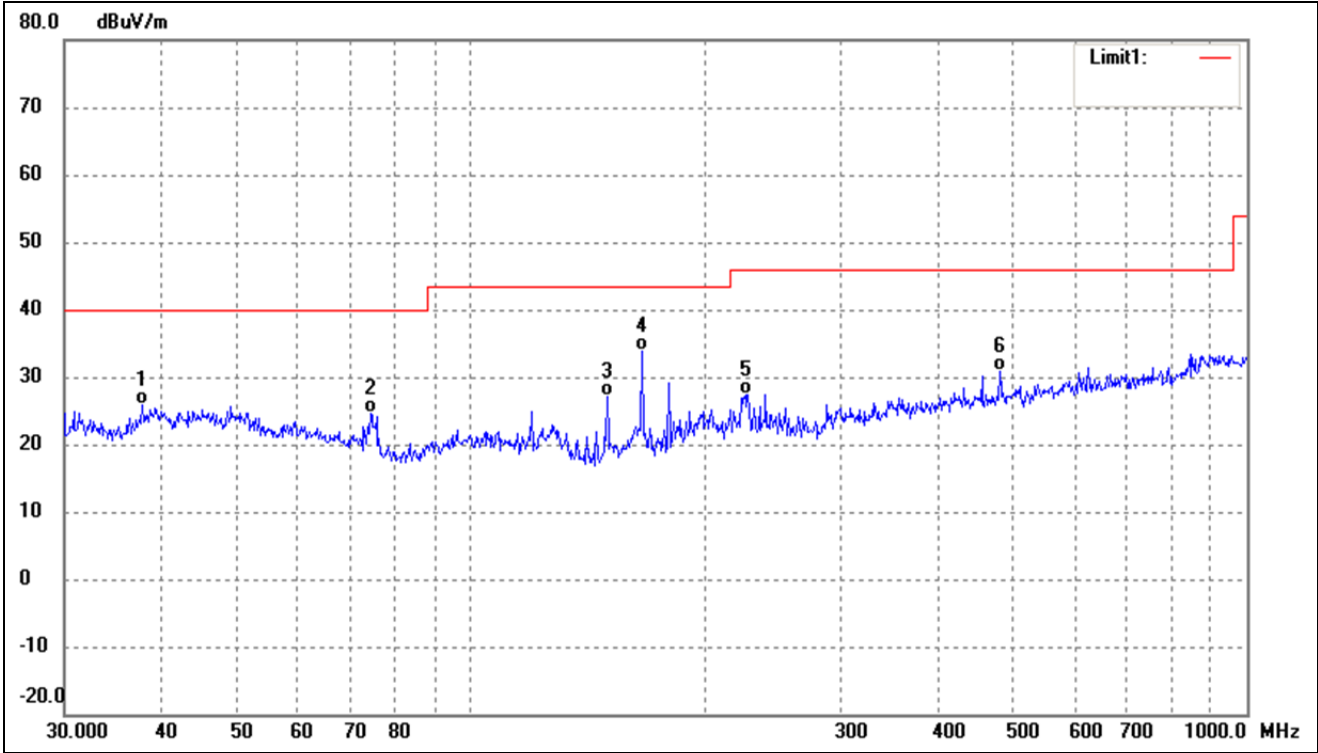
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	40.2757	38.17	-11.98	26.19	40.00	-13.81	-	-	QP
2	74.9191	39.97	-16.02	23.95	40.00	-16.05	-	-	QP
3	150.0108	41.57	-15.43	26.14	43.50	-17.36	-	-	QP
4	166.0680	49.20	-15.23	33.97	43.50	-9.53	-	-	QP
5	226.0994	39.62	-12.08	27.54	46.00	-18.46	-	-	QP
6	480.5276	35.57	-4.64	30.93	46.00	-15.07	-	-	QP

802.11a(worst case)			
Test Channel	5200MHz	Polarity:	Vertical



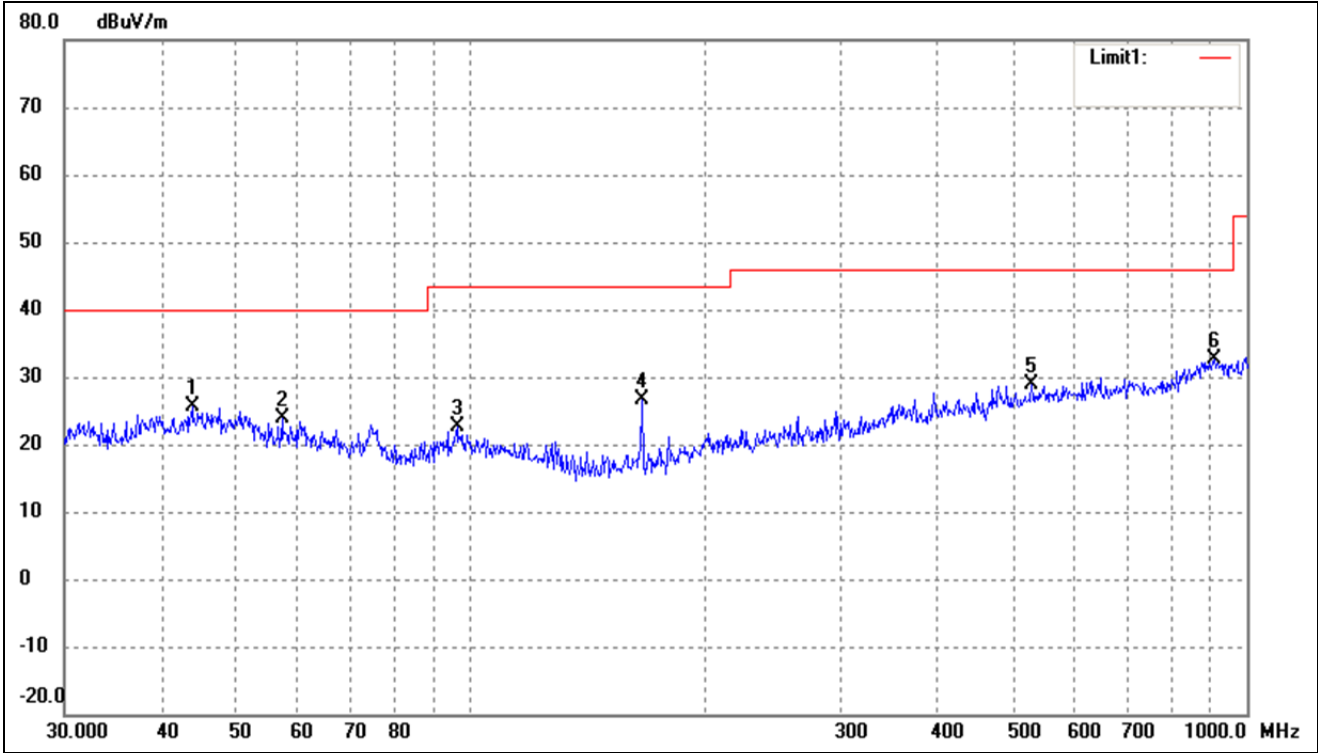
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.6616	37.36	-12.00	25.36	40.00	-14.64	-	-	QP
2	57.1914	36.77	-12.97	23.80	40.00	-16.20	-	-	QP
3	96.0986	37.41	-13.96	23.45	43.50	-20.05	-	-	QP
4	166.0680	42.21	-15.23	26.98	43.50	-16.52	-	-	QP
5	365.5391	33.88	-7.29	26.59	46.00	-19.41	-	-	QP
6	625.0780	33.98	-2.15	31.83	46.00	-14.17	-	-	QP

802.11a(worst case)			
Test Channel	5240MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	37.8121	38.76	-12.81	25.95	40.00	-14.05	-	-	QP
2	74.3955	40.59	-15.87	24.72	40.00	-15.28	-	-	QP
3	150.0108	42.54	-15.43	27.11	43.50	-16.39	-	-	QP
4	166.0680	49.23	-15.23	34.00	43.50	-9.50	-	-	QP
5	226.0994	39.49	-12.08	27.41	46.00	-18.59	-	-	QP
6	480.5276	35.63	-4.64	30.99	46.00	-15.01	-	-	QP

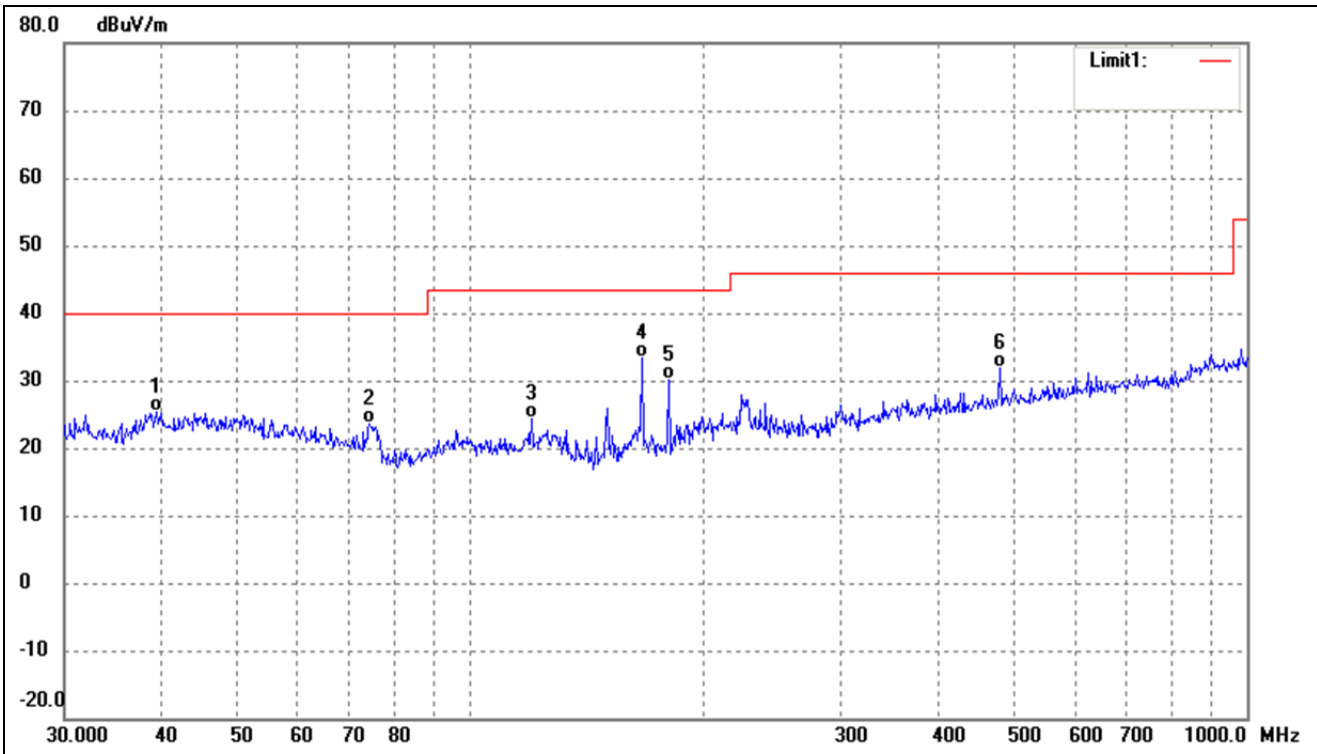
802.11a(worst case)			
Test Channel	5240MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.8119	37.46	-11.84	25.62	40.00	-14.38	-	-	QP
2	57.1914	36.89	-12.97	23.92	40.00	-16.08	-	-	QP
3	96.0986	36.67	-13.96	22.71	43.50	-20.79	-	-	QP
4	166.6514	41.88	-15.20	26.68	43.50	-16.82	-	-	QP
5	528.2458	33.03	-4.13	28.90	46.00	-17.10	-	-	QP
6	909.6667	30.94	1.67	32.61	46.00	-13.39	-	-	QP

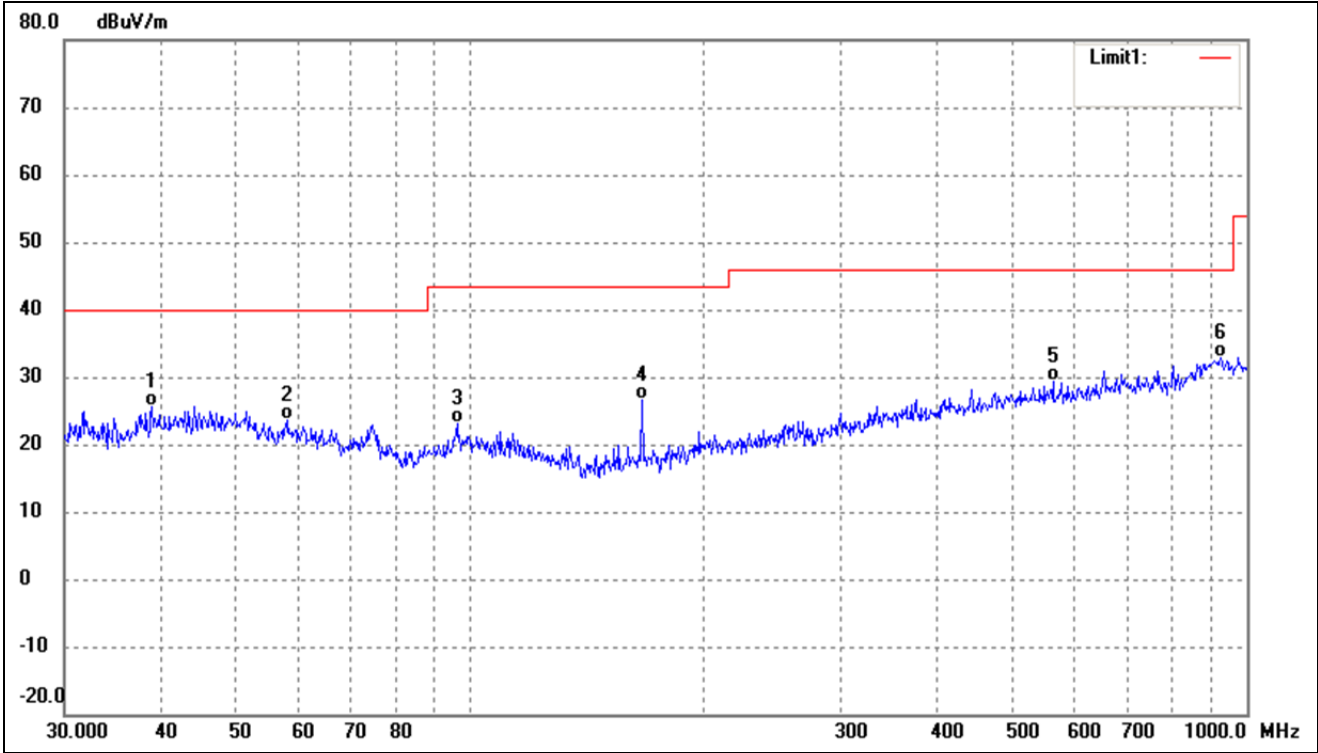
- Antenna A(worst case)
- 5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.4372	37.54	-12.19	25.35	40.00	-14.65	-	-	QP
2	74.1351	39.52	-15.79	23.73	40.00	-16.27	-	-	QP
3	119.8556	38.73	-14.28	24.45	43.50	-19.05	-	-	QP
4	166.0680	48.58	-15.23	33.35	43.50	-10.15	-	-	QP
5	180.0165	44.40	-14.31	30.09	43.50	-13.41	-	-	QP
6	480.5276	36.59	-4.64	31.95	46.00	-14.05	-	-	QP

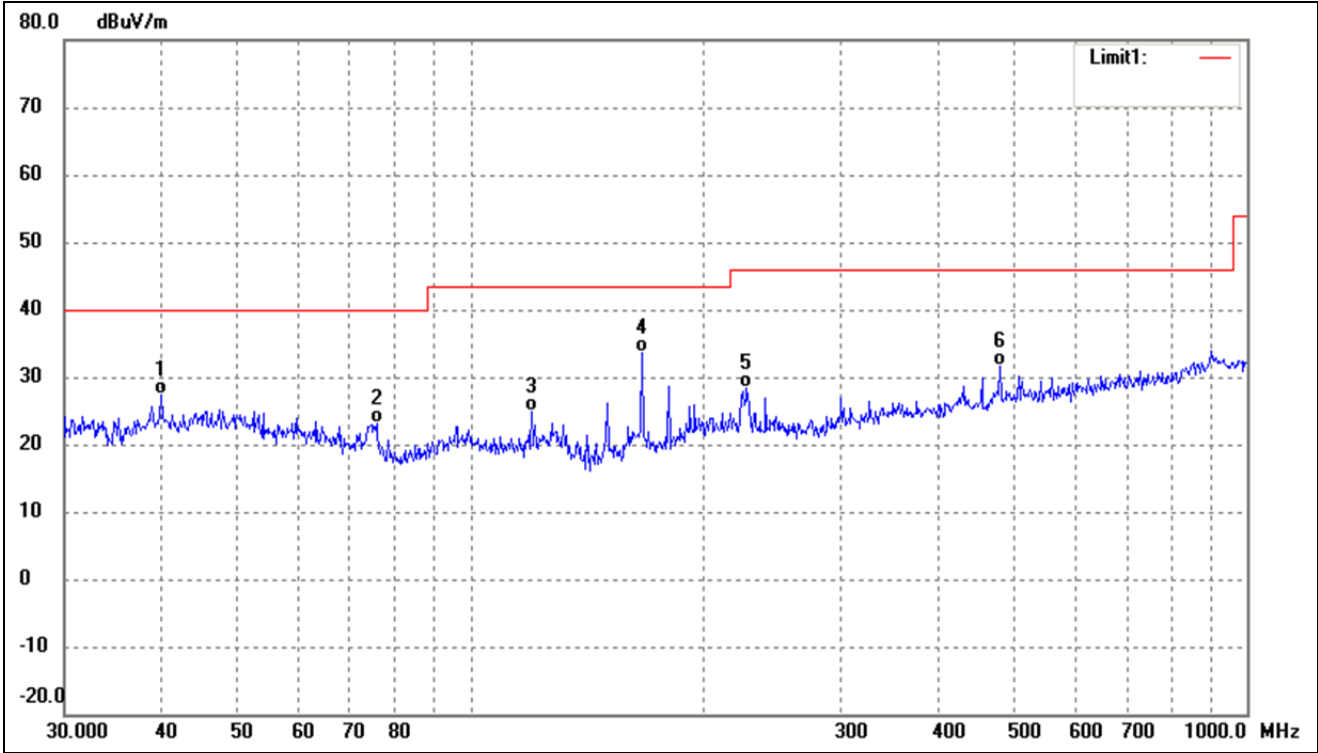
802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.8879	38.01	-12.40	25.61	40.00	-14.39	-	-	QP
2	58.2030	36.61	-12.97	23.64	40.00	-16.36	-	-	QP
3	96.0986	37.06	-13.96	23.10	43.50	-20.40	-	-	QP
4	166.0680	41.88	-15.23	26.65	43.50	-16.85	-	-	QP
5	562.6624	32.60	-3.17	29.43	46.00	-16.57	-	-	QP
6	925.7563	31.10	1.84	32.94	46.00	-13.06	-	-	QP

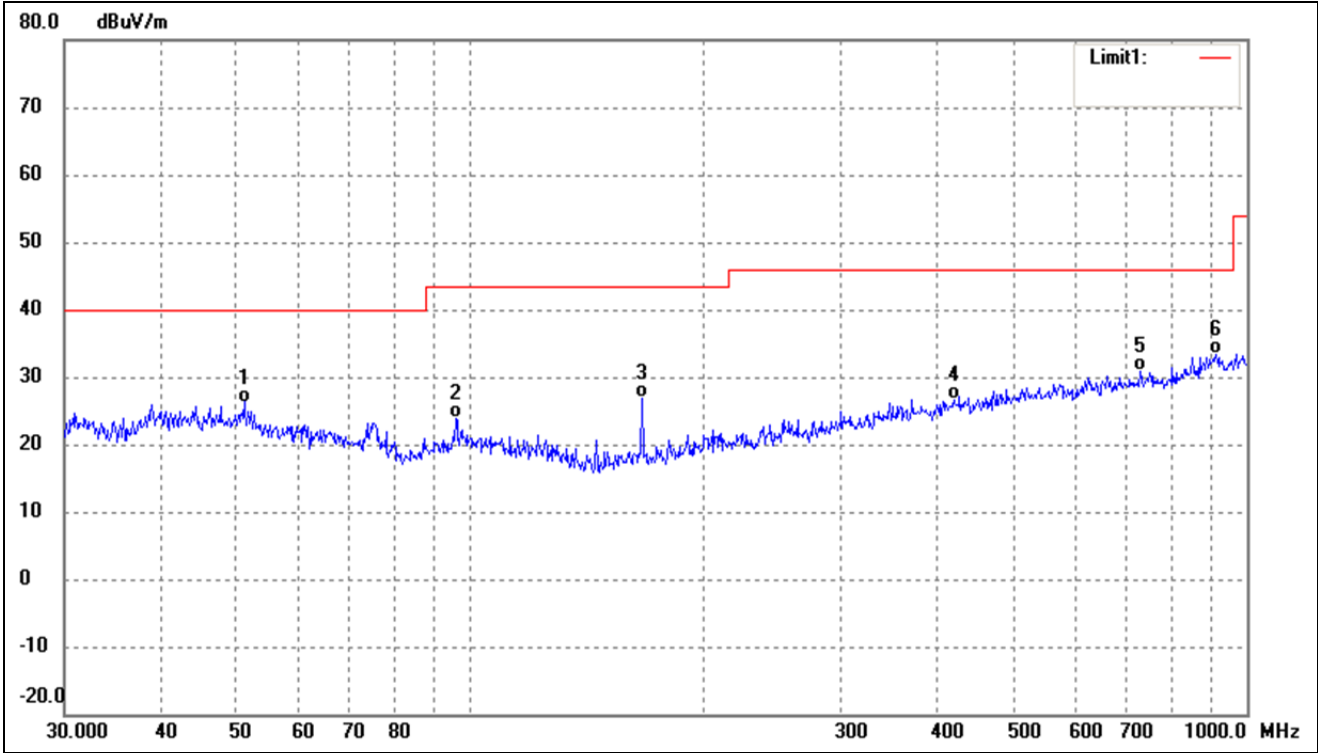


802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Horizontal



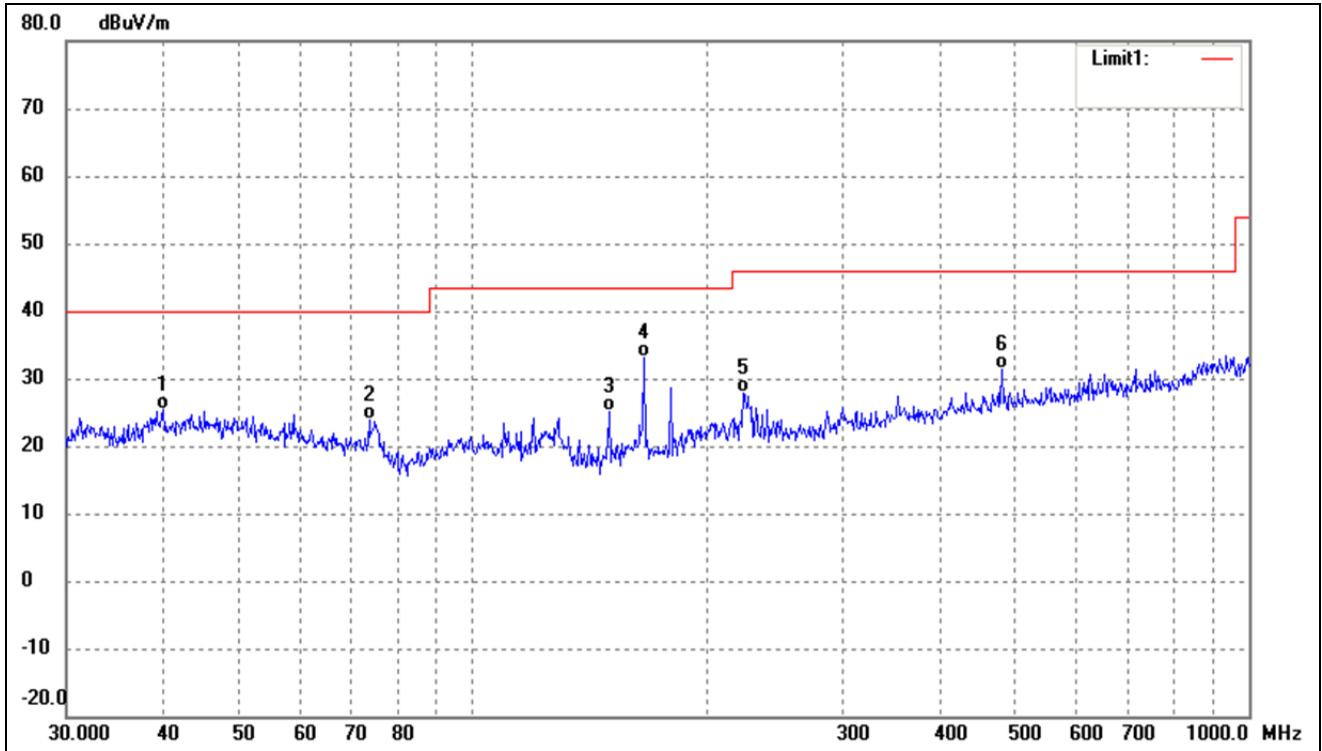
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.9942	39.42	-11.98	27.44	40.00	-12.56	-	-	QP
2	75.7114	39.29	-16.14	23.15	40.00	-16.85	-	-	QP
3	119.8556	39.16	-14.28	24.88	43.50	-18.62	-	-	QP
4	166.0680	48.77	-15.23	33.54	43.50	-9.96	-	-	QP
5	226.8936	40.36	-12.05	28.31	46.00	-17.69	-	-	QP
6	480.5276	36.32	-4.64	31.68	46.00	-14.32	-	-	QP

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical



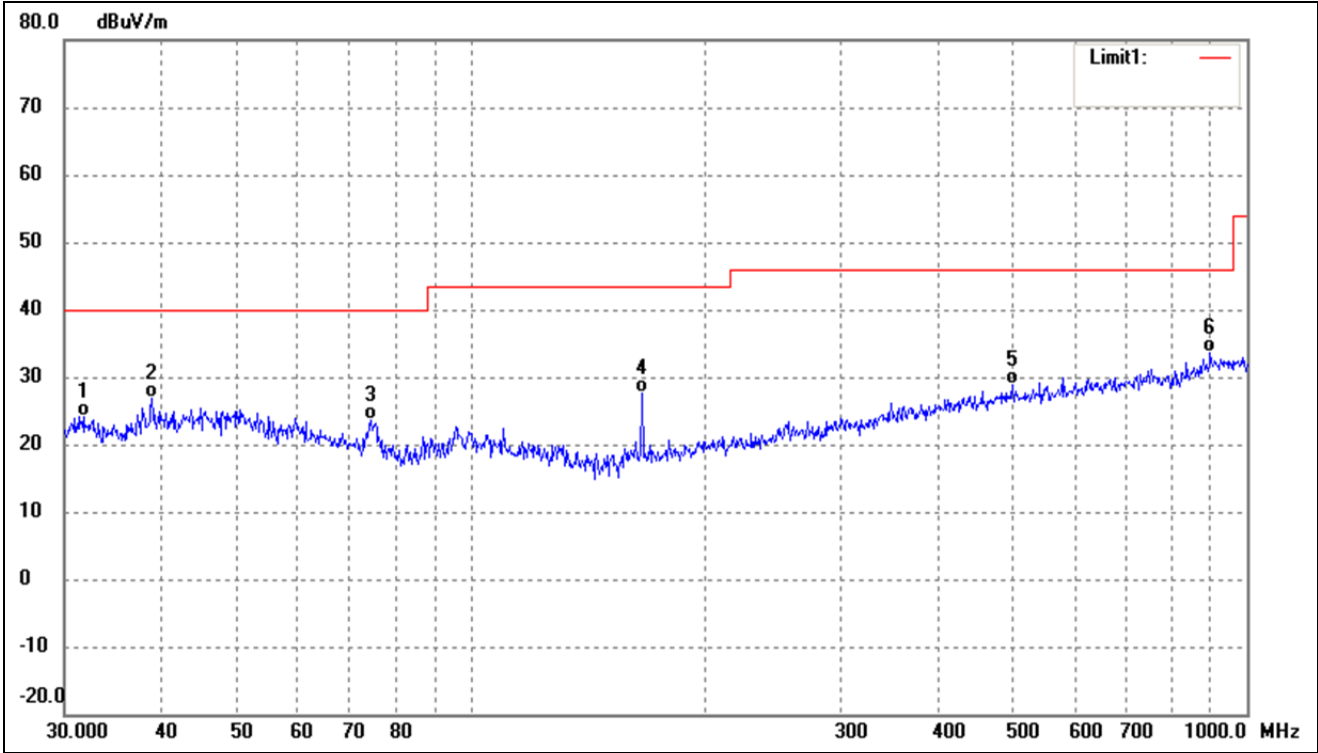
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.1209	38.10	-11.85	26.25	40.00	-13.75	-	-	QP
2	95.7622	37.92	-14.03	23.89	43.50	-19.61	-	-	QP
3	166.6514	41.96	-15.20	26.76	43.50	-16.74	-	-	QP
4	419.1081	32.68	-6.02	26.66	46.00	-19.34	-	-	QP
5	729.3583	31.90	-1.03	30.87	46.00	-15.13	-	-	QP
6	912.8620	31.62	1.71	33.33	46.00	-12.67	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.9942	37.33	-11.98	25.35	40.00	-14.65	-	-	QP
2	73.6170	39.63	-15.65	23.98	40.00	-16.02	-	-	QP
3	150.0108	40.65	-15.43	25.22	43.50	-18.28	-	-	QP
4	166.0680	48.35	-15.23	33.12	43.50	-10.38	-	-	QP
5	222.9502	40.05	-12.16	27.89	46.00	-18.11	-	-	QP
6	480.5276	36.00	-4.64	31.36	46.00	-14.64	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

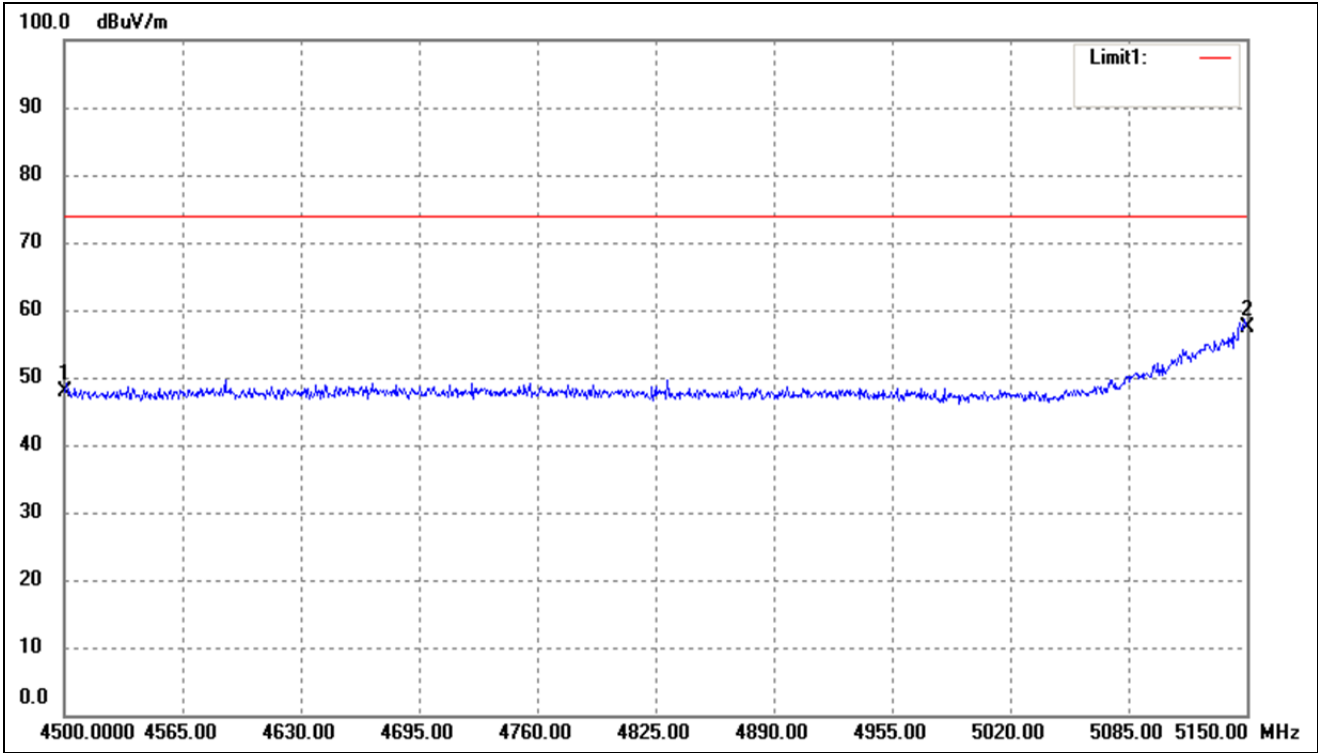


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	31.7313	38.17	-14.05	24.12	40.00	-15.88	-	-	QP
2	38.8879	39.18	-12.40	26.78	40.00	-13.22	-	-	QP
3	74.3955	39.61	-15.87	23.74	40.00	-16.26	-	-	QP
4	166.6514	42.77	-15.20	27.57	43.50	-15.93	-	-	QP
5	499.4247	32.88	-4.06	28.82	46.00	-17.18	-	-	QP
6	896.9965	32.13	1.42	33.55	46.00	-12.45	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

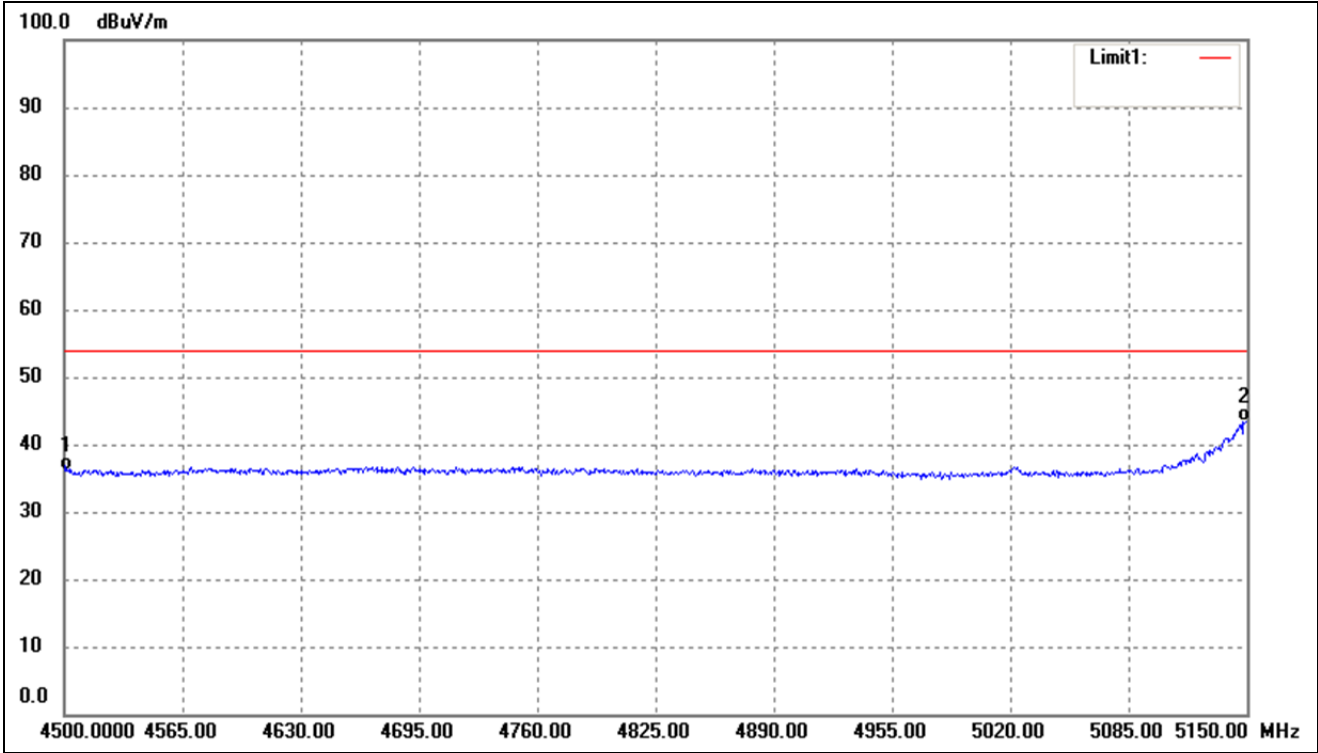
- Spurious Emission above 1GHz
- Antenna A(worst case)

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4500.000	52.49	-4.71	47.78	74.00	-26.22	-	-	peak
2	5150.000	61.77	-4.32	57.45	74.00	-16.55	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	Band4.50-5.15GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4500.000	40.80	-4.71	36.09	54.00	-17.91	-	-	AVG
2	5150.000	47.66	-4.32	43.34	54.00	-10.66	-	-	AVG

*Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.*

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna A(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.80	7.11	64.91	74	-9.09	H	PK
15540	38.40	8.22	46.62	54	-7.38	H	AV
10360	61.11	7.11	68.22	74	-5.78	V	PK
15540	38.63	8.22	46.85	54	-7.15	V	AV
Middle Channel (5200MHz)							
10400	59.55	7.22	66.77	74	-7.23	H	PK
15600	36.37	8.67	45.04	54	-8.96	H	AV
10400	58.15	7.22	65.37	74	-8.63	V	PK
15600	40.87	8.67	49.54	54	-4.46	V	AV
High Channel (5240MHz)							
10480	57.98	7.69	65.67	74	-8.33	H	PK
15720	38.70	8.93	47.63	54	-6.37	H	AV
10480	58.13	7.69	65.82	74	-8.18	V	PK
15720	39.40	8.93	48.33	54	-5.67	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	56.71	9.45	66.16	74	-7.84	H	PK
17235	34.21	10.36	44.57	54	-9.43	H	AV
11490	56.27	9.45	65.72	74	-8.28	V	PK
17235	38.12	10.36	48.48	54	-5.52	V	AV
Middle Channel (5785MHz)							
11570	57.63	9.62	67.25	74	-6.75	H	PK
17355	37.22	10.67	47.89	54	-6.11	H	AV
11570	56.40	9.62	66.02	74	-7.98	V	PK
17355	36.34	10.67	47.01	54	-6.99	V	AV
High Channel (5825MHz)							
11650	54.22	9.84	64.06	74	-9.94	H	PK
17475	33.62	10.95	44.57	54	-9.43	H	AV
11650	53.65	9.84	63.49	74	-10.51	V	PK
17475	37.94	10.95	48.89	54	-5.11	V	AV

## ➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.01	-27
Highest	Above 5350	-40.87	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.66	-27
	5715 to 5725	-39.88	-17
Highest	5850 to 5860	-42.75	-17
	Above 5860	-43.37	-27

Note: the data just list the worst cases



- For the frequency band 5.15-5.25GHz5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	58.34	7.11	65.45	74	-8.55	H	PK
15540	36.38	8.22	44.60	54	-9.40	H	AV
10360	57.96	7.11	65.07	74	-8.93	V	PK
15540	37.11	8.22	45.33	54	-8.67	V	AV
Middle Channel (5200MHz)							
10400	60.20	7.22	67.42	74	-6.58	H	PK
15600	35.10	8.67	43.77	54	-10.23	H	AV
10400	57.17	7.22	64.39	74	-9.61	V	PK
15600	36.19	8.67	44.86	54	-9.14	V	AV
High Channel (5240MHz)							
10480	55.64	7.69	63.33	74	-10.67	H	PK
15720	39.72	8.93	48.65	54	-5.35	H	AV
10480	59.84	7.69	67.53	74	-6.47	V	PK
15720	38.64	8.93	47.57	54	-6.43	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.02	9.45	67.47	74	-6.53	H	PK
17235	35.99	10.36	46.35	54	-7.65	H	AV
11490	56.28	9.45	65.73	74	-8.27	V	PK
17235	36.85	10.36	47.21	54	-6.79	V	AV
Middle Channel (5785MHz)							
11570	55.37	9.62	64.99	74	-9.01	H	PK
17355	34.93	10.67	45.60	54	-8.40	H	AV
11570	55.11	9.62	64.73	74	-9.27	V	PK
17355	37.16	10.67	47.83	54	-6.17	V	AV
High Channel (5825MHz)							
11650	57.11	9.84	66.95	74	-7.05	H	PK
17475	34.31	10.95	45.26	54	-8.74	H	AV
11650	56.82	9.84	66.66	74	-7.34	V	PK
17475	35.31	10.95	46.26	54	-7.74	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.94	-27
Highest	Above 5350	-38.93	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-45.07	-27
	5715 to 5725	-34.65	-17
Highest	5850 to 5860	-36.42	-17
	Above 5860	-42.63	-27
Note: the data just list the worst cases			

*Note: this EUT was tested in the low, high channel and the worst case position data was reported.*

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	58.39	7.25	65.64	74	-8.36	H	PK
15570	36.71	8.33	45.04	54	-8.96	H	AV
10380	59.37	7.25	66.62	74	-7.38	V	PK
15570	37.56	8.33	45.89	54	-8.11	V	AV
High Channel (5230MHz)							
10460	55.32	7.54	62.86	74	-11.14	H	PK
15690	40.04	8.86	48.90	54	-5.10	H	AV
10460	60.19	7.54	67.73	74	-6.27	V	PK
15690	39.93	8.86	48.79	54	-5.21	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.54	9.65	66.19	74	-7.81	H	PK
17265	36.88	10.87	47.75	54	-6.25	H	AV
11510	56.46	9.65	66.11	74	-7.89	V	PK
17265	37.38	10.87	48.25	54	-5.75	V	AV
High Channel (5795MHz)							
11590	54.60	9.81	64.41	74	-9.59	H	PK
17385	35.36	10.89	46.25	54	-7.75	H	AV
11590	57.92	9.81	67.73	74	-6.27	V	PK
17385	37.39	10.89	48.28	54	-5.72	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.86	-27
Highest	Above 5350	-41.32	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.21	-27
	5715 to 5725	-39.90	-17
Highest	5850 to 5860	-41.52	-17
	Above 5860	-42.90	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	59.72	7.33	67.05	74	-6.95	H	PK
15630	37.35	8.75	46.10	54	-7.90	H	AV
10420	56.07	7.33	63.40	74	-10.60	V	PK
15630	38.85	8.75	47.60	54	-6.40	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	56.64	9.54	66.18	74	-7.82	H	PK
17325	34.38	10.59	44.97	54	-9.03	H	AV
11550	56.32	9.54	65.86	74	-8.14	V	PK
17325	31.96	10.59	42.55	54	-11.45	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-31.35	-27
Highest	Above 5350	-30.51	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-34.57	-27
	5715 to 5725	-31.58	-17
Highest	5850 to 5860	-30.74	-17
	Above 5860	-39.53	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## **9. Frequency Stability**

---

### **9.1 Standard Applicable**

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### **9.2 Test Procedure**

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### **9.3 Summary of Test Results/Plots**

**Please refer to Appendix D**

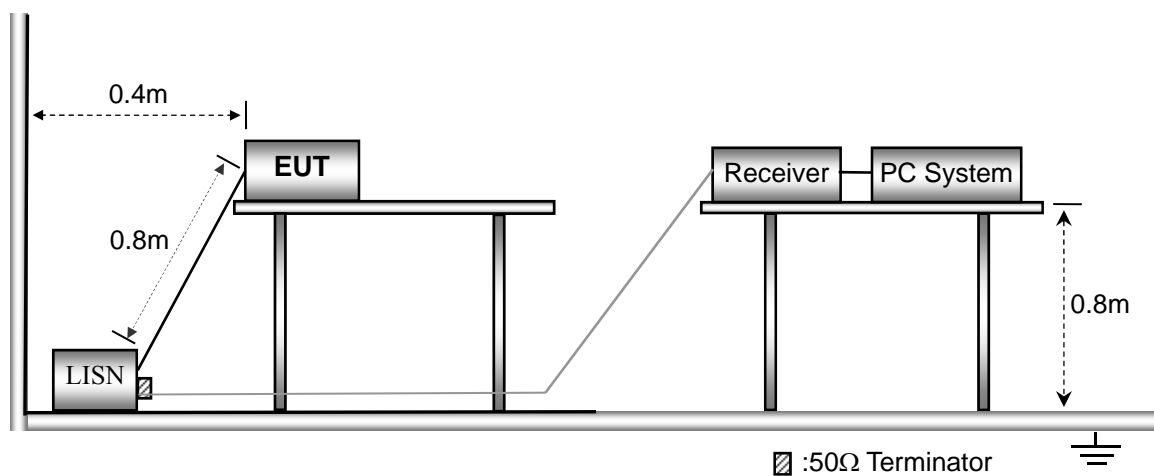
## 10 Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram



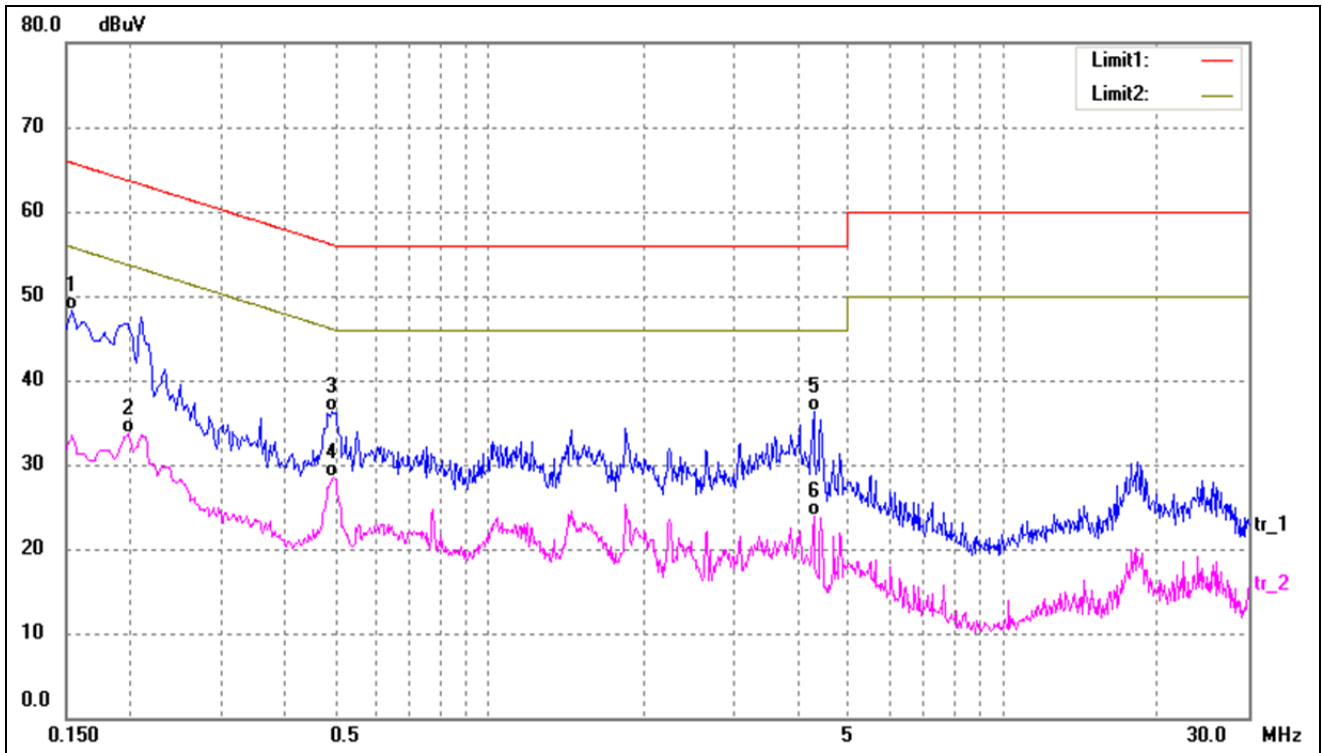
### 10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal

### 10.4 Summary of Test Results/Plots

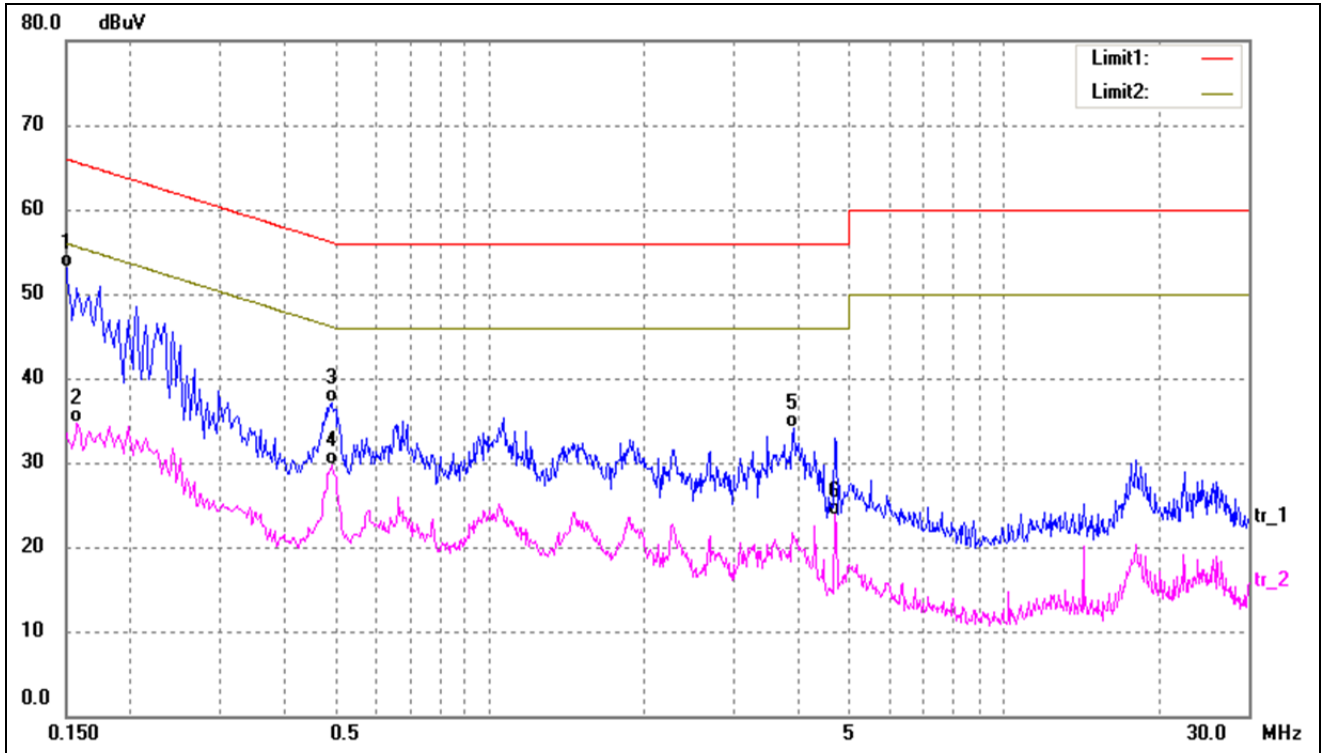
Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	38.01	10.25	48.26	65.78	-17.52	QP
2	0.1980	23.52	10.27	33.79	53.69	-19.90	AVG
3	0.4940	26.01	10.22	36.23	56.10	-19.87	QP
4*	0.4980	18.30	10.22	28.52	46.03	-17.51	AVG
5	4.2780	26.09	10.24	36.33	56.00	-19.67	QP
6	4.2780	13.74	10.24	23.98	46.00	-22.02	AVG



Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	42.92	10.25	53.17	66.00	-12.83	QP
2	0.1580	24.49	10.25	34.74	55.57	-20.83	AVG
3	0.4940	26.95	10.22	37.17	56.10	-18.93	QP
4	0.4940	19.57	10.22	29.79	46.10	-16.31	AVG
5	3.9060	23.77	10.25	34.02	56.00	-21.98	QP
6	4.7180	13.57	10.23	23.80	46.00	-22.20	AVG

**APPENDIX SUMMARY**

---

Project No.	WTX20X09062234W	Test Engineer	Moon
Start date	2021/04/13	Finish date	2021/04/16
Temperature	23.6℃	Humidity	48%
RF specifications	U-NII		

<b>APPENDIX</b>	<b>Description of Test Item</b>	<b>Result</b>
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

**APPENDIX A**

<b>Power Spectral Density</b>					
<b>U-NII-1:5150-5250MHz</b>					
Operating mode	Test Channel	ANT A dBm/MHz	ANT B dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	-3.636	-3.610	/	11
	5200	-3.370	-3.716	/	11
	5240	-3.131	-3.714	/	11
802.11n-HT20	5180	-2.470	-2.692	0.43	11
	5200	-2.285	-3.034	0.37	11
	5240	-1.959	-3.285	0.44	11
802.11n-HT40	5190	-6.675	-6.598	-3.63	11
	5230	-6.487	-7.229	-3.83	11
802.11ac-HT80	5210	-9.858	-10.31	-7.07	11

<b>Power Spectral Density</b>							
<b>U-NII-3: 5725-5850MHz</b>							
Operating mode	Test Channel	ANT A dBm/300kHz	ANT B dBm/300kHz	Factor	ANT A dBm/500kHz*	ANT B dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	-7.118	-8.036	2.22	-4.898	-5.816	30
	5785	-8.341	-10.040	2.22	-6.121	-7.82	30
	5825	-9.259	-10.690	2.22	-7.039	-8.47	30

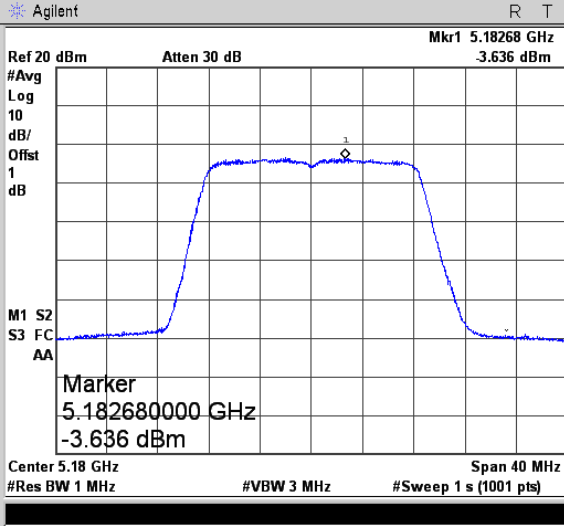
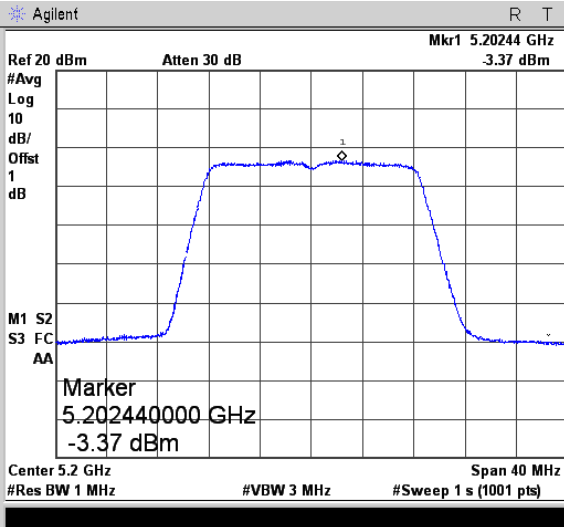
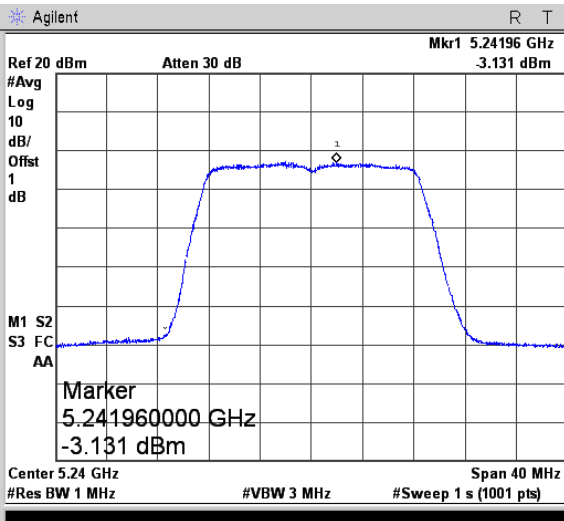
\*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

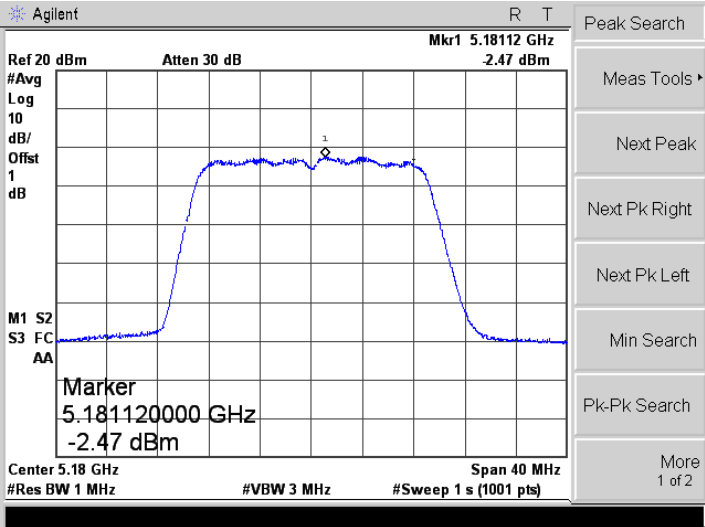
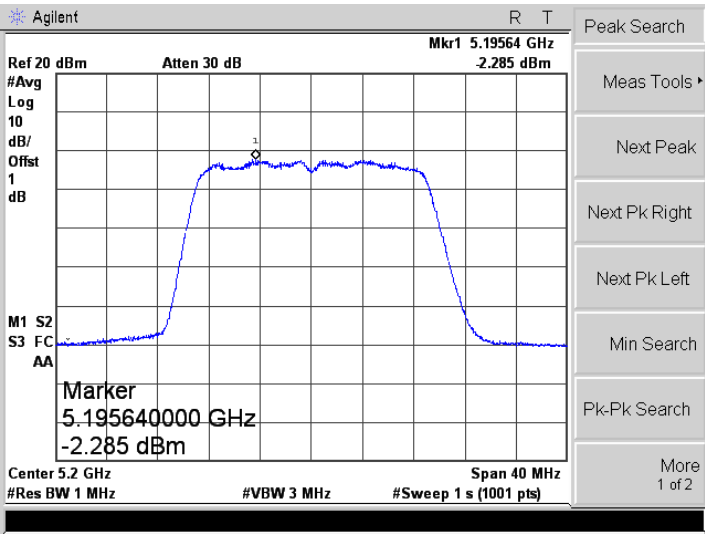
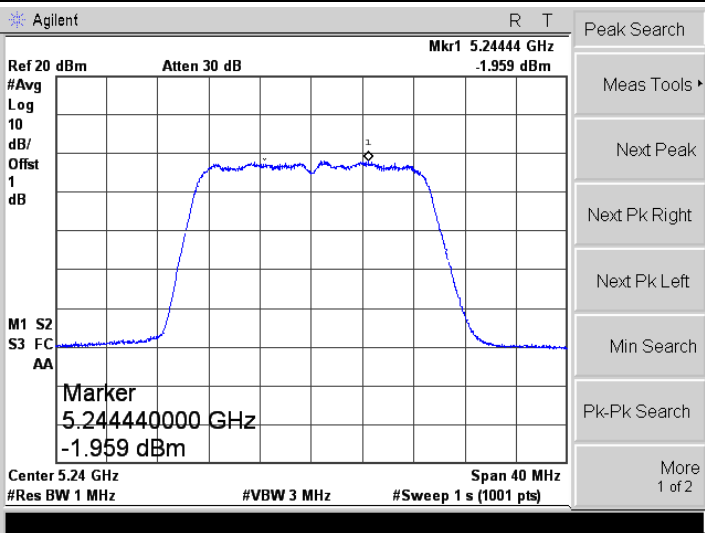
<b>Power Spectral Density</b>							
<b>U-NII-3: 5725-5850MHz</b>							
Operating mode	Test Channel	ANT A dBm/300kHz	ANT B dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz	
802.11n-HT20	5745	-3.887	-7.819	2.22	-0.19	30	
	5785	-5.176	-9.210	2.22	-1.51	30	
	5825	-6.509	-11.160	2.22	-3.01	30	
802.11n HT40	5755	-8.917	-11.700	2.22	-7.08	30	
	5795	-10.140	-12.980	2.22	-8.32	30	
802.11ac VH80	5775	-13.510	-15.430	2.22	-11.35	30	

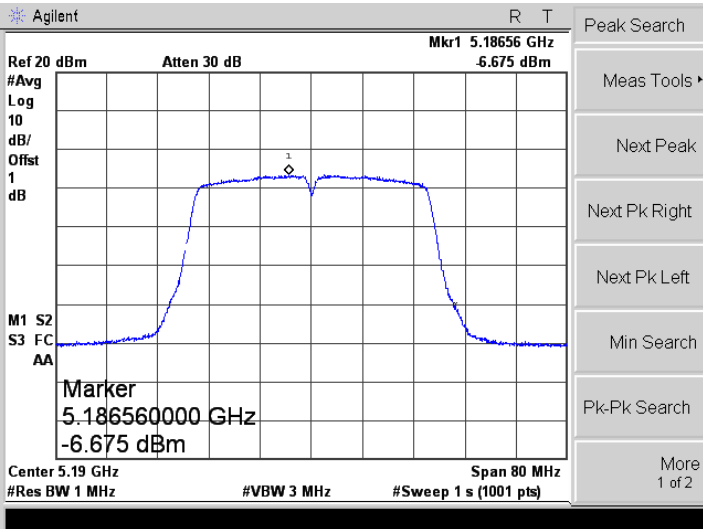
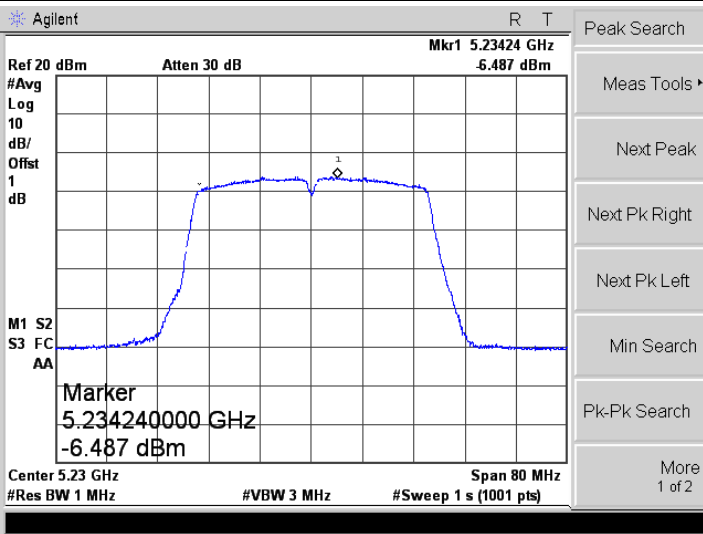
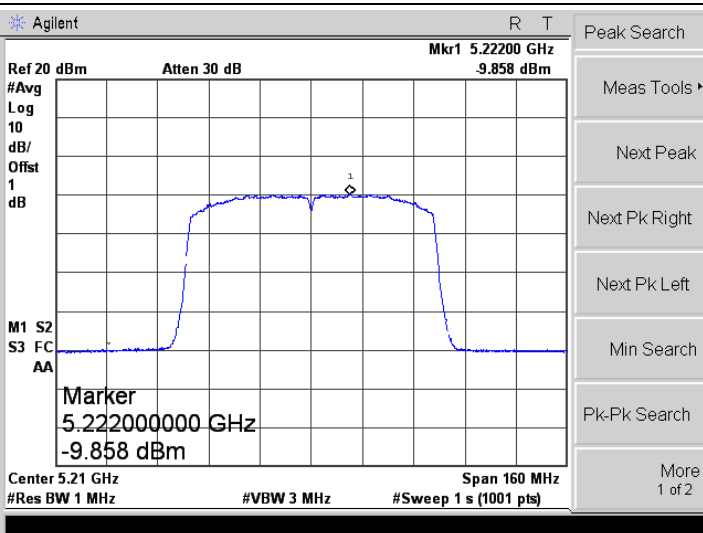
\*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

ANT A

5150-5250MHz

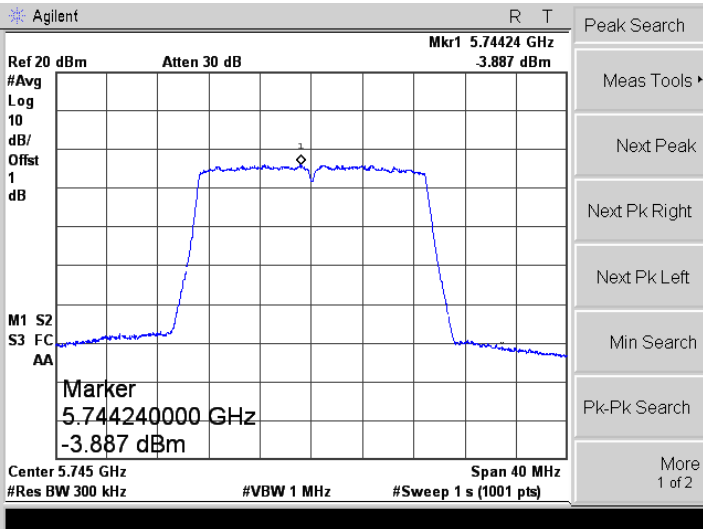
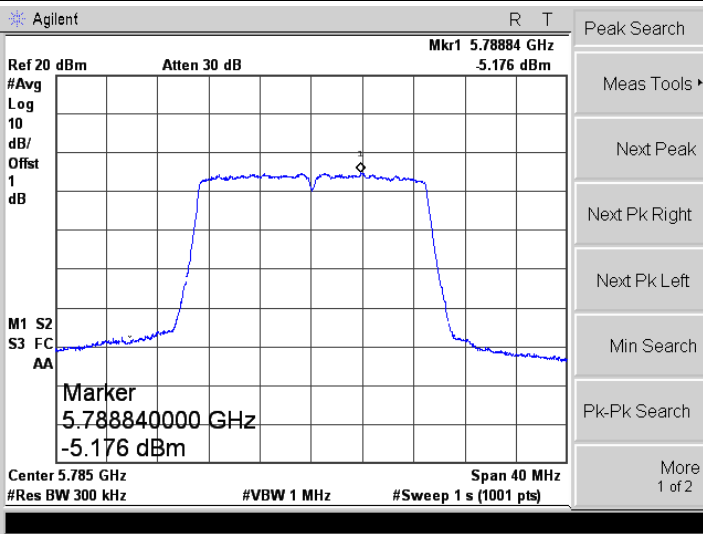
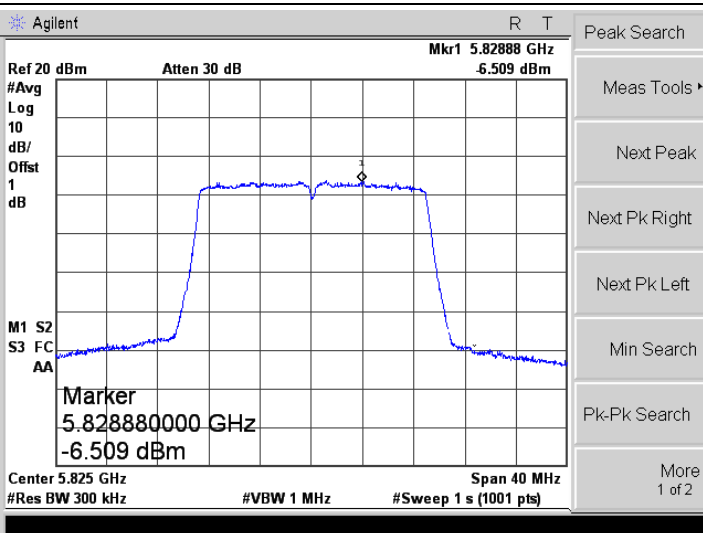
<p>802.11a-Low</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.18268 GHz -3.636 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.182680000 GHz          -3.636 dBm          Center 5.18 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-Middle</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.20244 GHz -3.37 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.202440000 GHz          -3.37 dBm          Center 5.2 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-High</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.24196 GHz -3.131 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.241960000 GHz          -3.131 dBm          Center 5.24 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

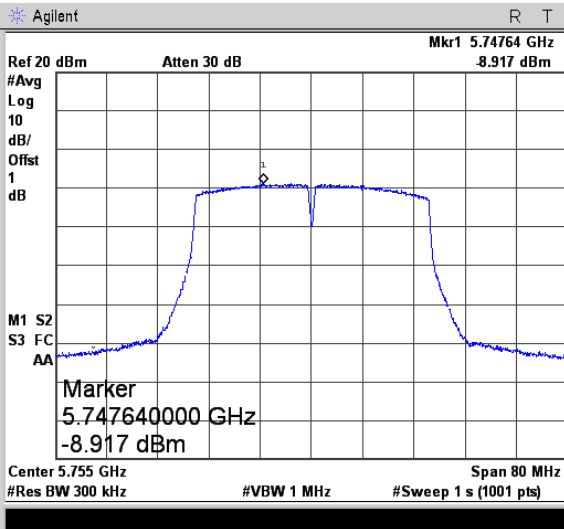
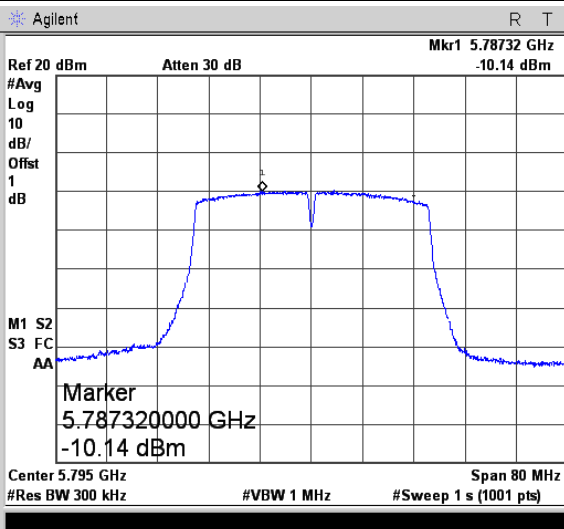
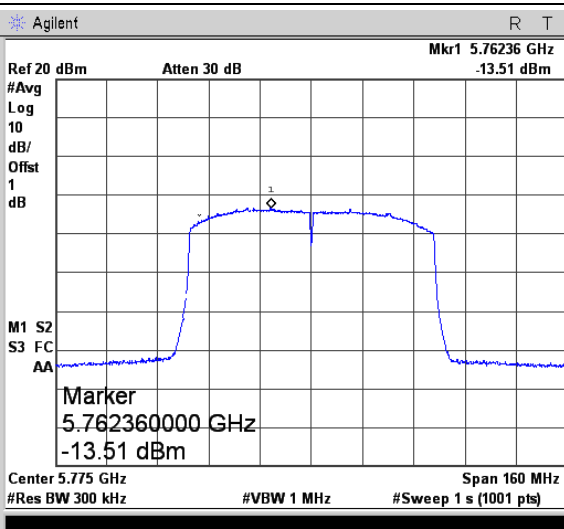
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

5725-5850MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.74704 GHz -7.118 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.747040000 GHz -7.118 dBm</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.78708 GHz -8.341 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.787080000 GHz -8.341 dBm</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.82348 GHz -9.259 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.823480000 GHz -9.259 dBm</p> <p>Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

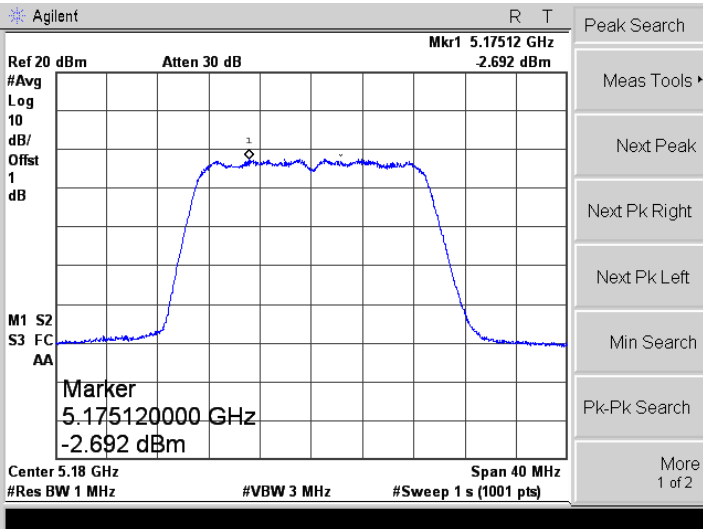
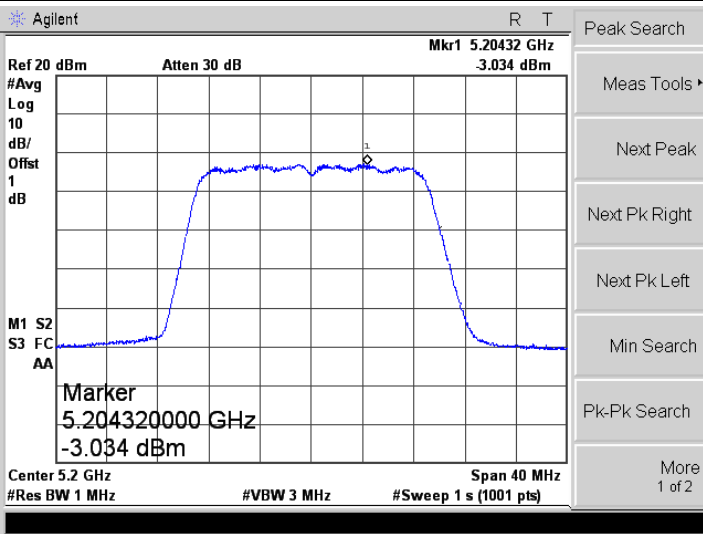
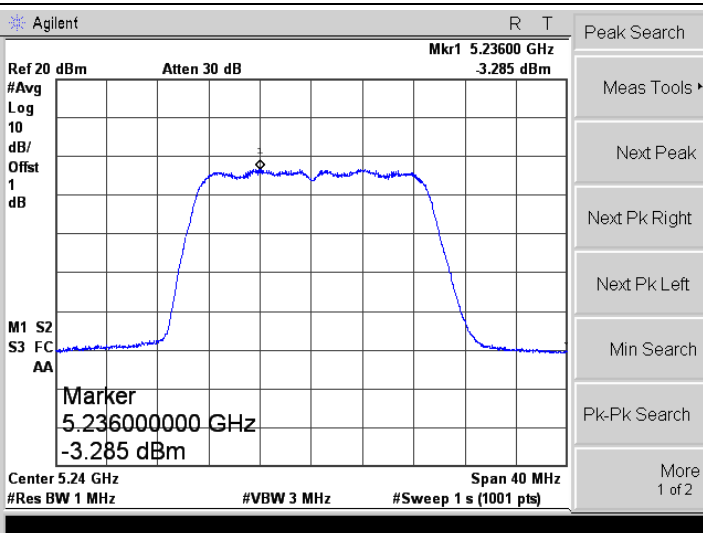


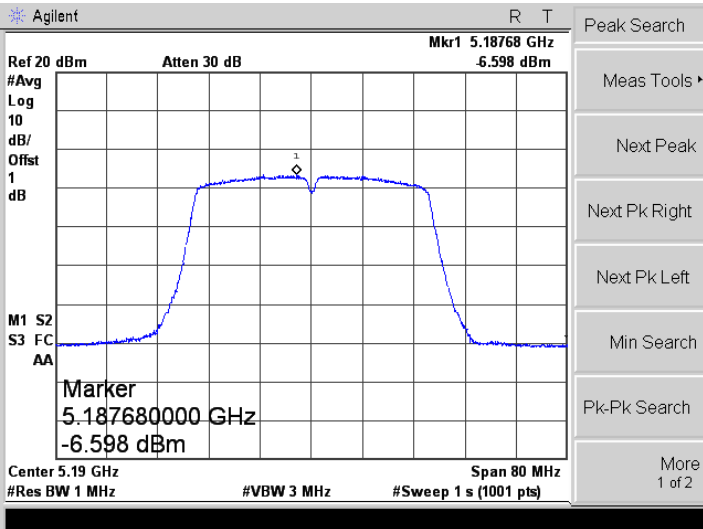
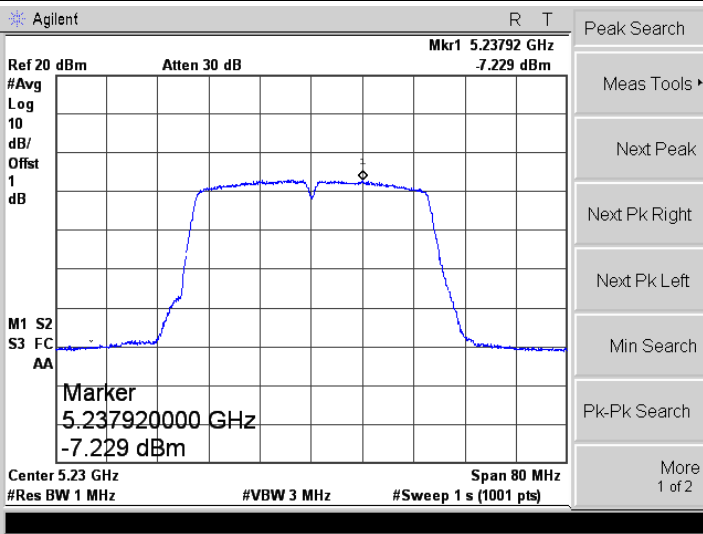
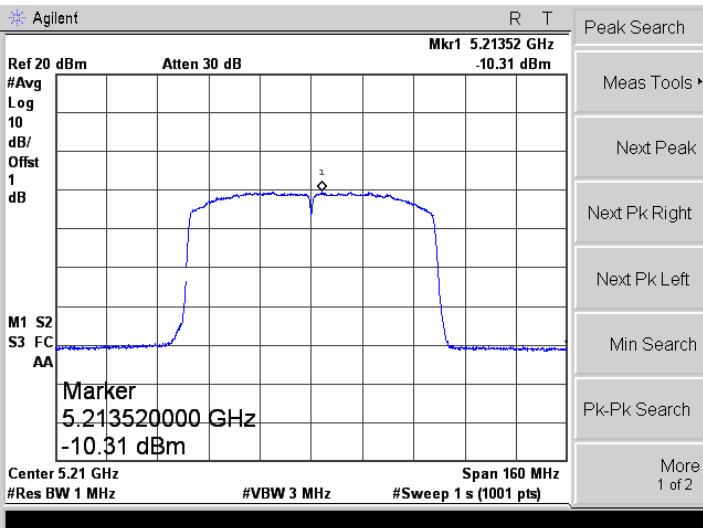
<p>802.11n-HT40-Low</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.74764 GHz          -8.917 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.747640000 GHz          -8.917 dBm          Center 5.755 GHz Span 80 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.78732 GHz          -10.14 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.787320000 GHz          -10.14 dBm          Center 5.795 GHz Span 80 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.76236 GHz          -13.51 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.762360000 GHz          -13.51 dBm          Center 5.775 GHz Span 160 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>

**ANT B**

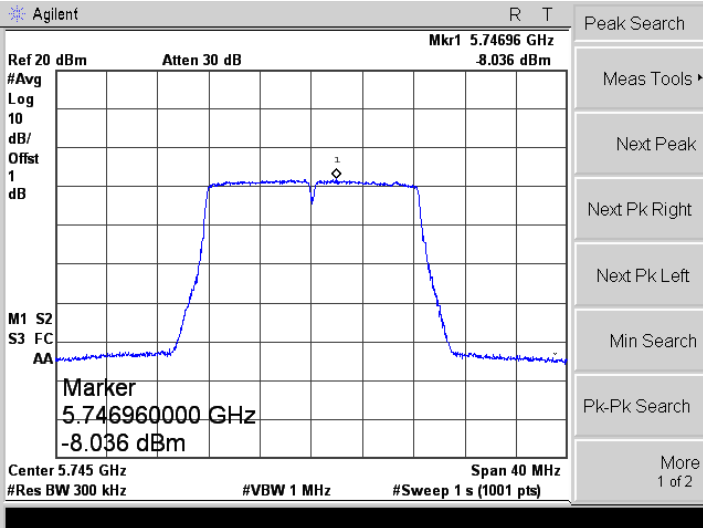
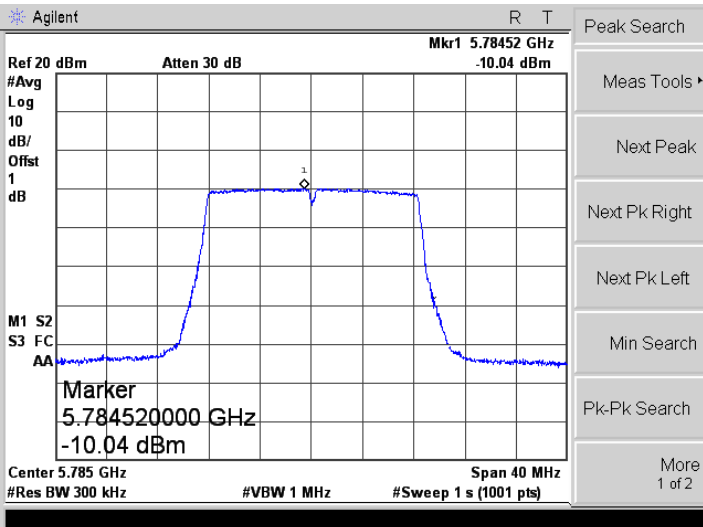
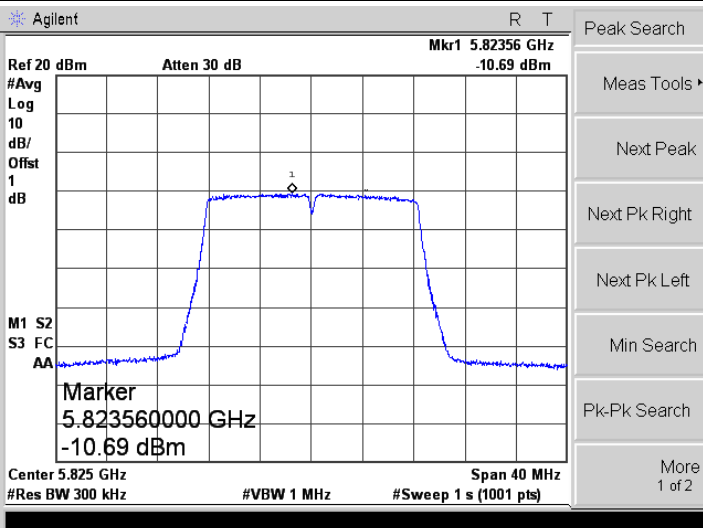
**5150-5250MHz**

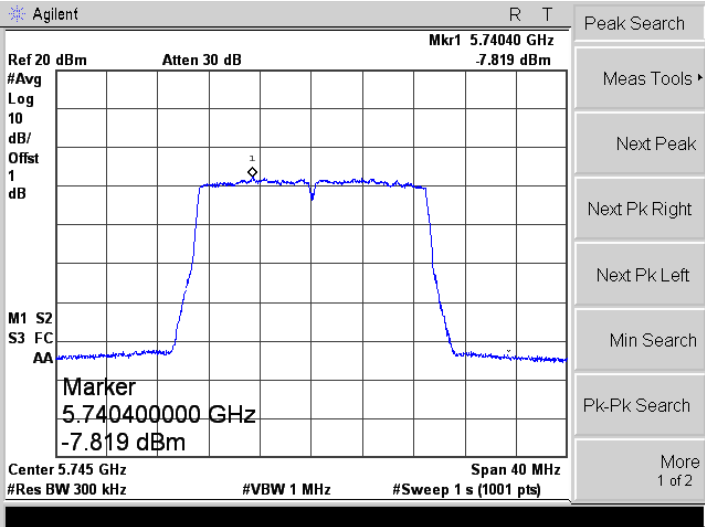
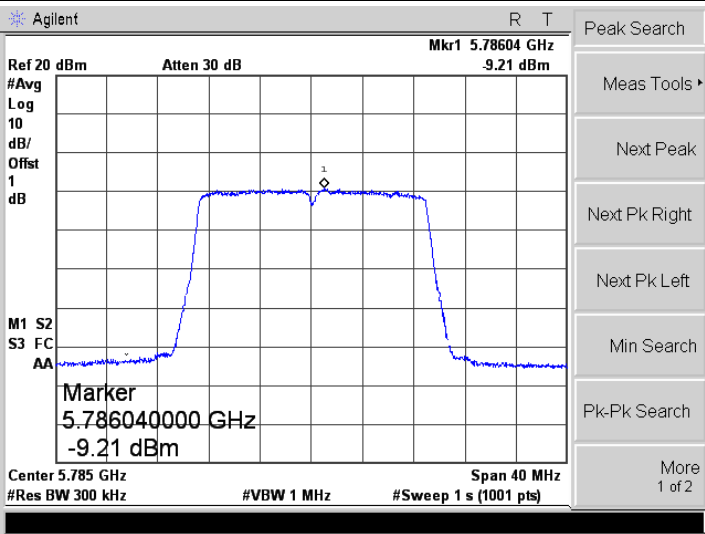
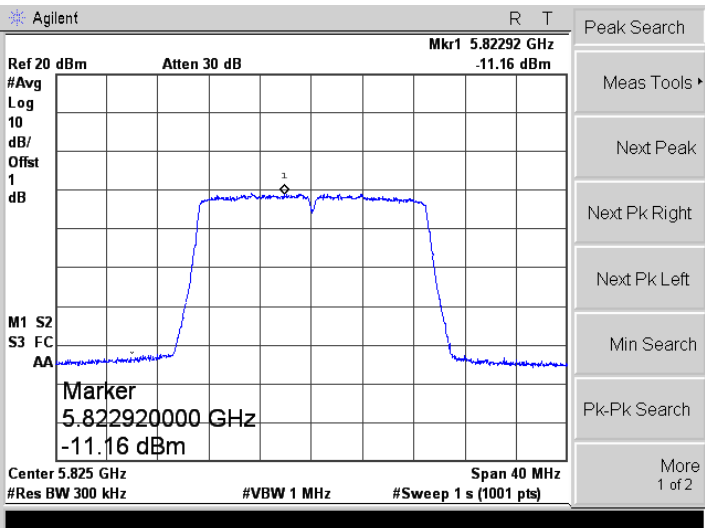
<p>802.11a-Low</p>	<p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.18080 GHz          -3.61 dBm          #Avg Log 10 dB/ Offst 1 dB          M1 S2 S3 FC AA          Marker          5.180800000 GHz          -3.61 dBm          Center 5.18 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-Middle</p>	<p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.20096 GHz          -3.716 dBm          #Avg Log 10 dB/ Offst 1 dB          M1 S2 S3 FC AA          Marker          5.200960000 GHz          -3.716 dBm          Center 5.2 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-High</p>	<p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.23868 GHz          -3.714 dBm          #Avg Log 10 dB/ Offst 1 dB          M1 S2 S3 FC AA          Marker          5.238680000 GHz          -3.714 dBm          Center 5.24 GHz Span 40 MHz          #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

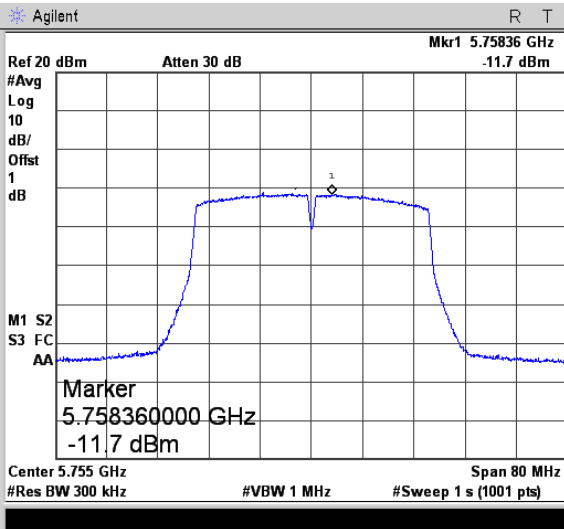
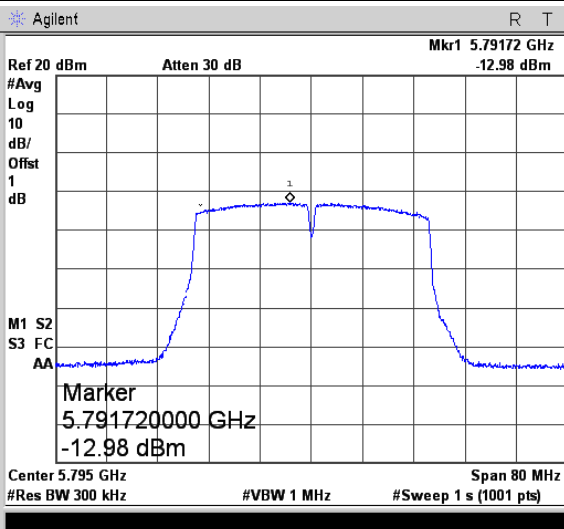
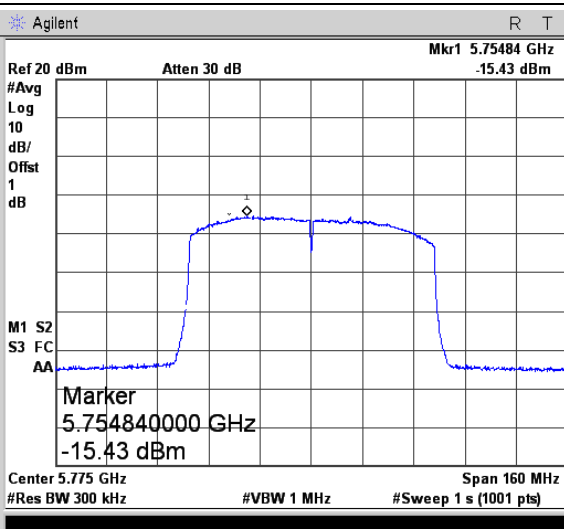
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

5725-5850MHz

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.74696 GHz -8.036 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.746960000 GHz -8.036 dBm</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.78452 GHz -10.04 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.784520000 GHz -10.04 dBm</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.82356 GHz -10.69 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.823560000 GHz -10.69 dBm</p> <p>Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.75836 GHz -11.7 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.758360000 GHz          -11.7 dBm          Center 5.755 GHz Span 80 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.79172 GHz -12.98 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.791720000 GHz          -12.98 dBm          Center 5.795 GHz Span 80 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T          Ref 20 dBm Atten 30 dB Mkr1 5.75484 GHz -15.43 dBm          #Avg 10          Log dB/ Offst 1 dB          M1 S2          S3 FC          AA          Marker          5.754840000 GHz          -15.43 dBm          Center 5.775 GHz Span 160 MHz          #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>

**APPENDIX B****Emission Bandwidth and Occupied Bandwidth**

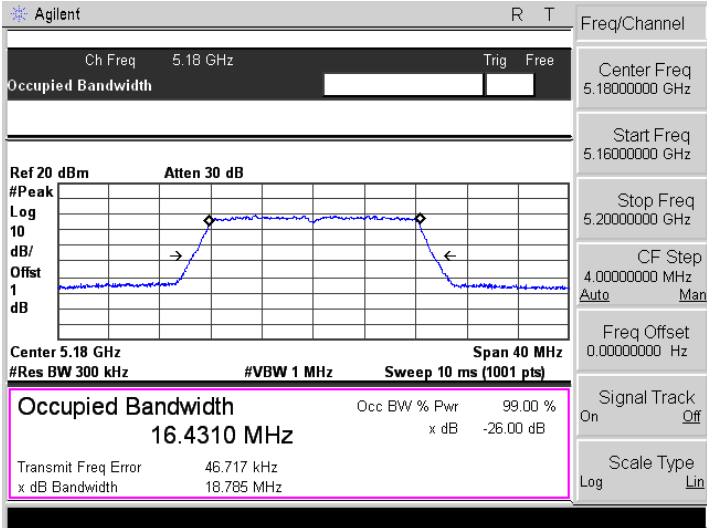
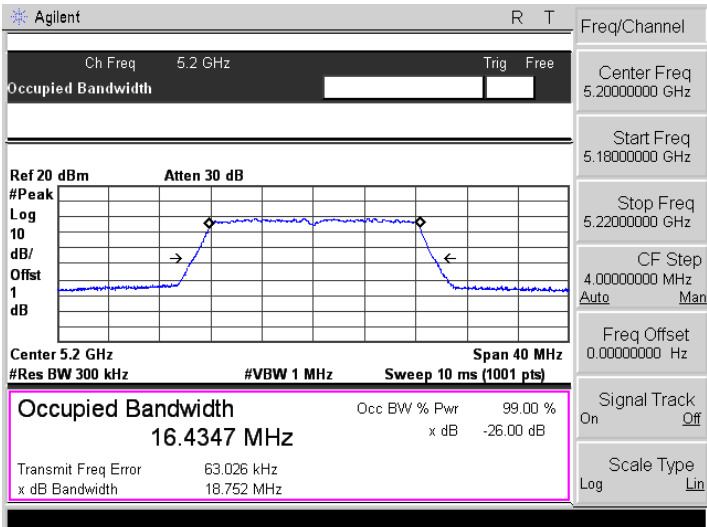
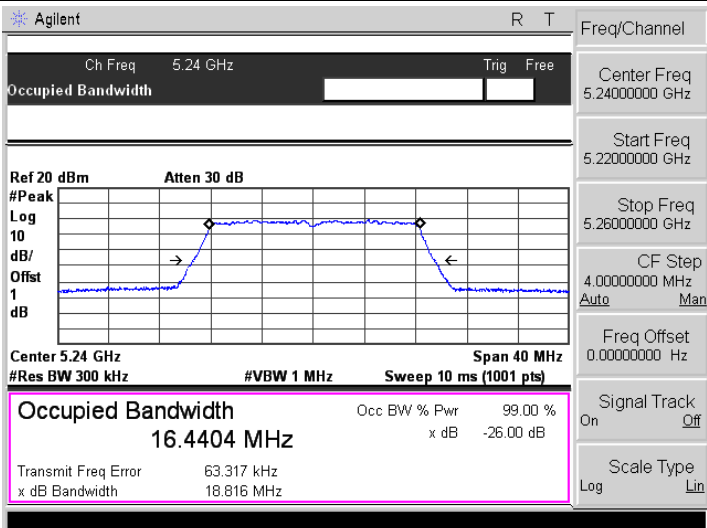
<b>U-NII-1:5150-5250MHz</b>						
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>ANT A</b>		<b>ANT B</b>		<b>Result</b>
		<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	
802.11a	5180	18.785	16.431	18.740	16.412	Pass
	5200	18.752	16.435	18.675	16.402	Pass
	5240	18.816	16.440	18.715	16.407	Pass
802.11n-HT20	5180	19.735	17.577	19.710	17.564	Pass
	5200	19.717	17.574	19.679	17.567	Pass
	5240	19.638	17.573	19.590	17.576	Pass
802.11n-HT40	5190	40.673	35.926	40.617	35.926	Pass
	5230	40.658	35.935	40.330	35.943	Pass
802.11ac-HT80	5210	81.329	74.556	81.289	74.520	Pass

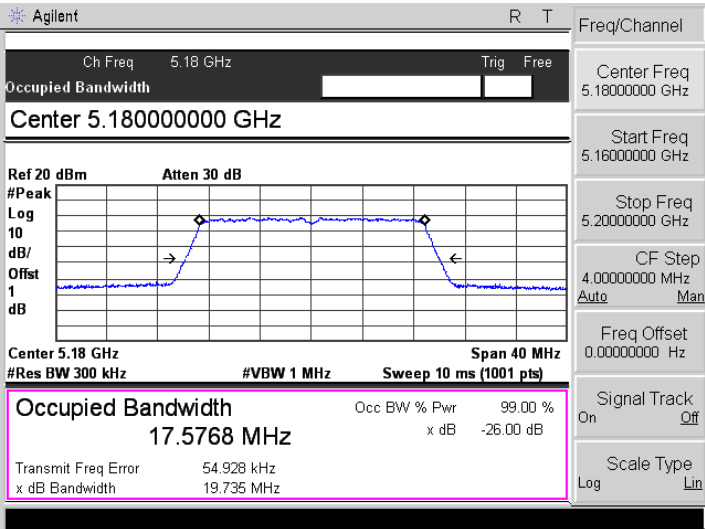
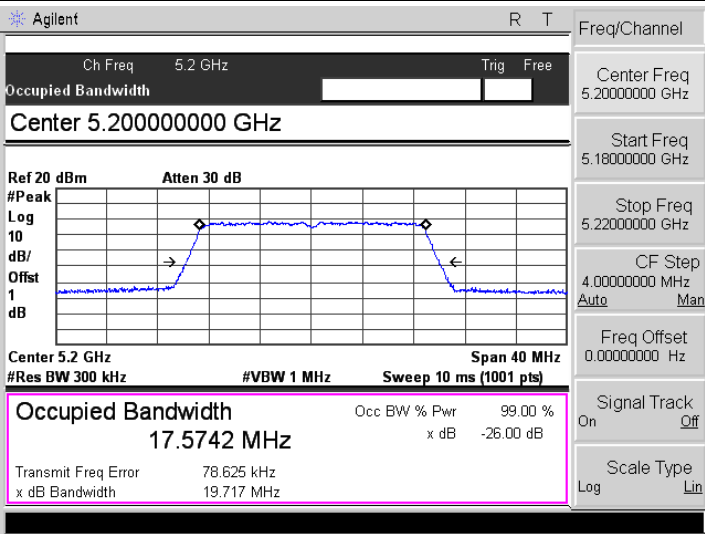
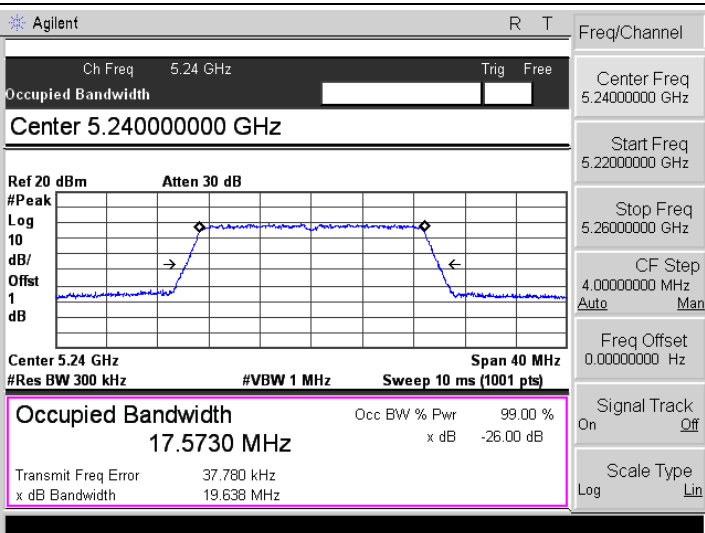
<b>U-NII-3: 5725-5850MHz</b>						
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>ANT A</b>		<b>ANT B</b>		<b>Limit kHz</b>
		<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	
802.11a	5745	16.443	16.438	16.446	16.421	≥500
	5785	16.458	16.436	16.437	16.415	≥500
	5825	16.448	16.430	16.436	16.425	≥500
802.11n-HT20	5745	17.698	17.562	17.676	17.559	≥500
	5785	17.665	17.570	17.644	17.560	≥500
	5825	17.649	17.571	17.686	17.555	≥500
802.11n-HT40	5755	35.395	35.914	36.407	35.908	≥500
	5795	36.393	35.910	36.393	35.911	≥500
802.11ac-HT80	5775	72.712	74.405	72.439	74.365	≥500



ANT A

5150-5250MHz

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4310 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 46.717 kHz x dB Bandwidth 18.785 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4347 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 63.026 kHz x dB Bandwidth 18.752 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4404 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 63.317 kHz x dB Bandwidth 18.816 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

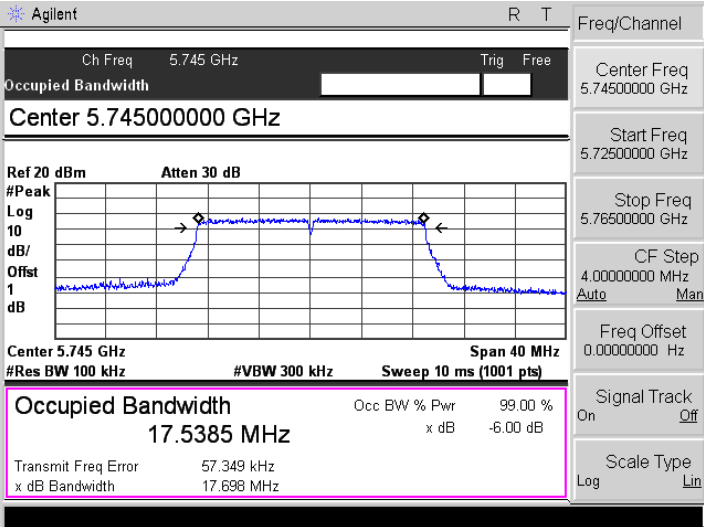
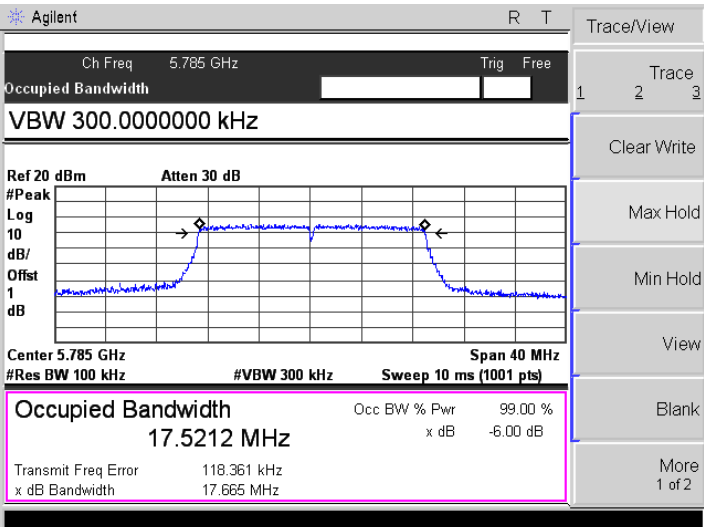
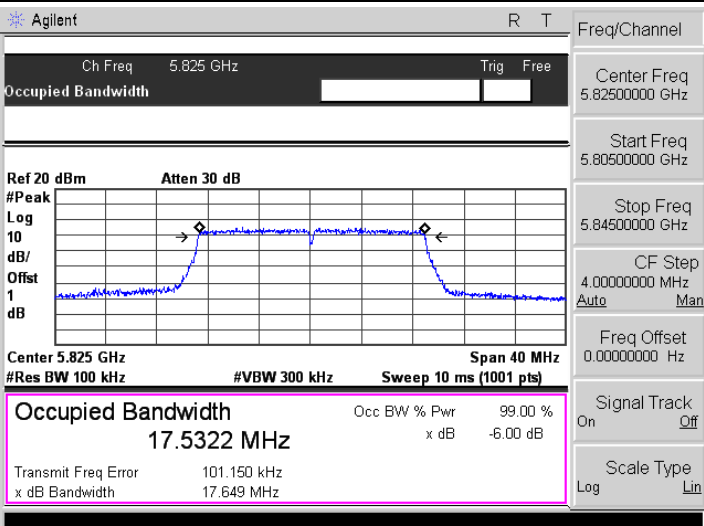
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5768 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 54.928 kHz x dB Bandwidth 19.735 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5742 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 78.625 kHz x dB Bandwidth 19.717 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5730 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 37.780 kHz x dB Bandwidth 19.638 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

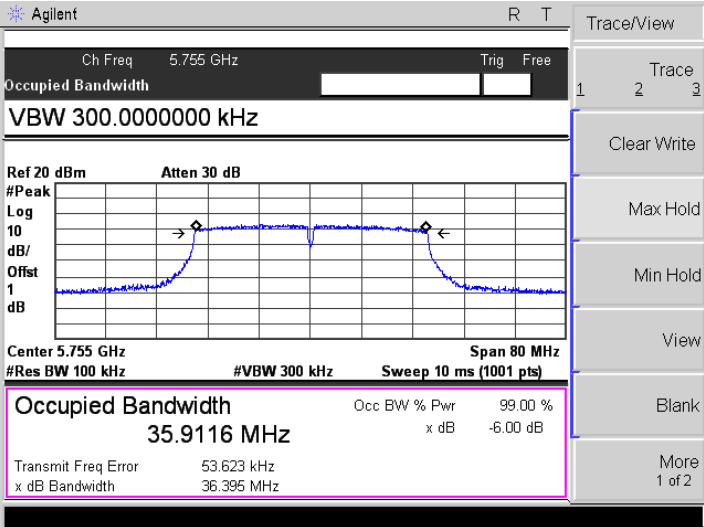
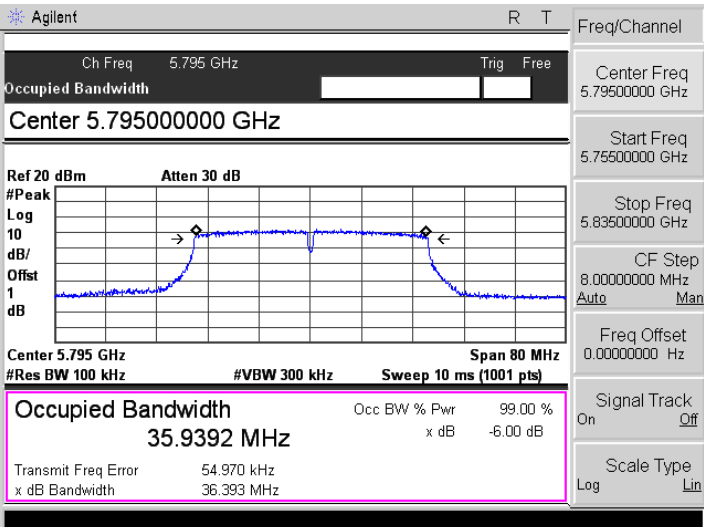
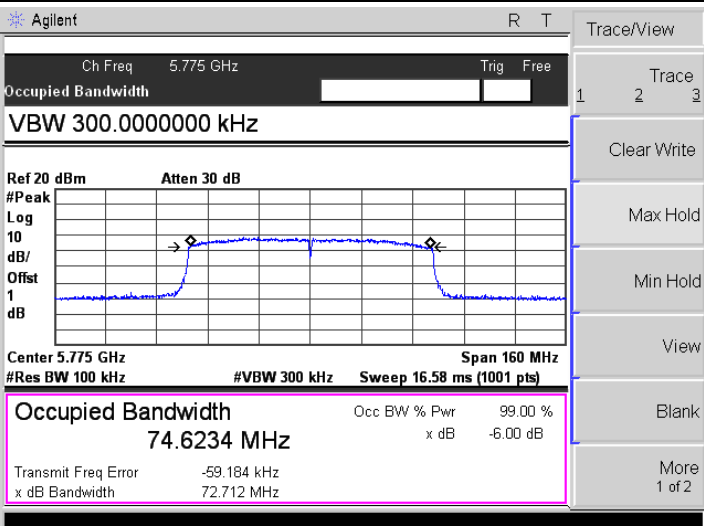
<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9255 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 91.119 kHz x dB Bandwidth 40.573 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9352 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 95.878 kHz x dB Bandwidth 40.658 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	<p>Agilent R T</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 74.5562 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 182.228 kHz x dB Bandwidth 81.329 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.21000000 GHz</p> <p>Start Freq 5.13000000 GHz</p> <p>Stop Freq 5.29000000 GHz</p> <p>CF Step 16.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

5725-5850MHz

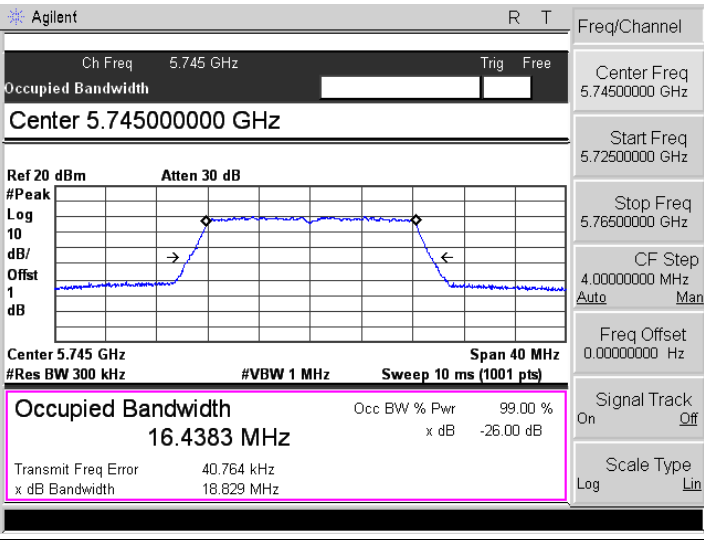
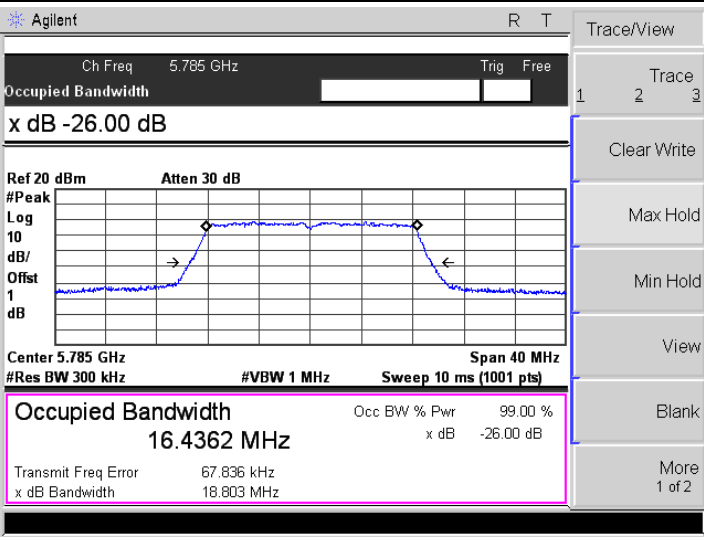
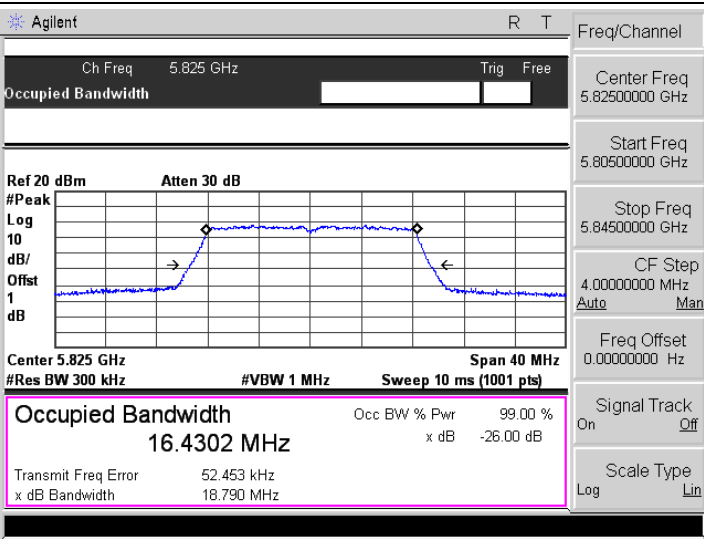
6 dB Bandwidth

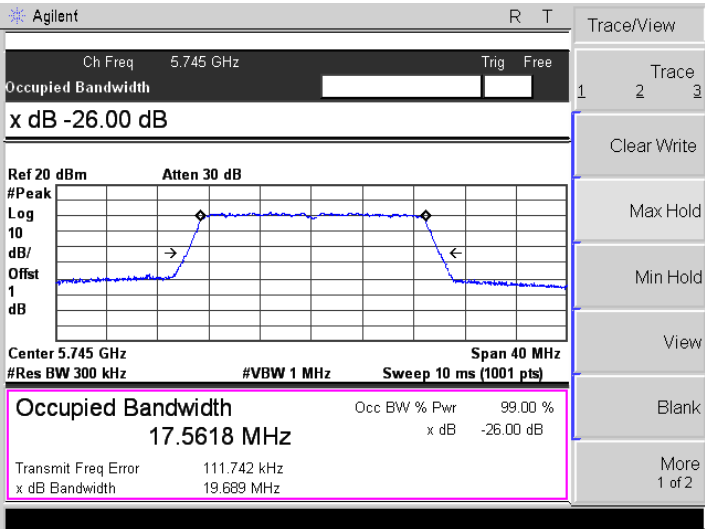
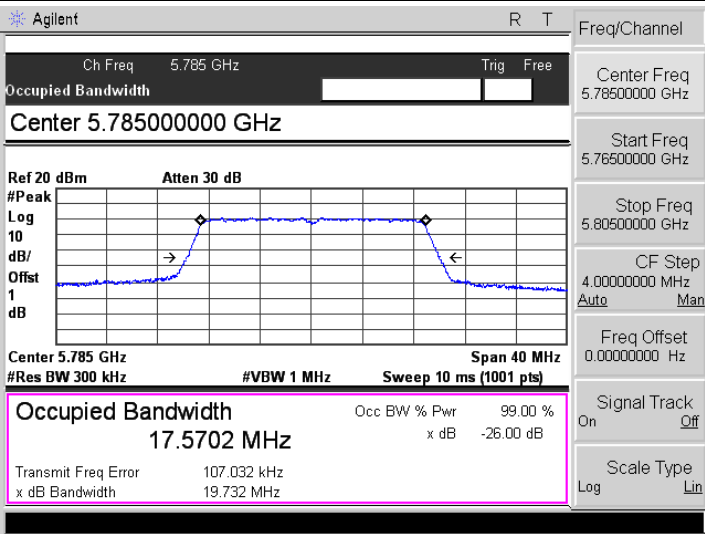
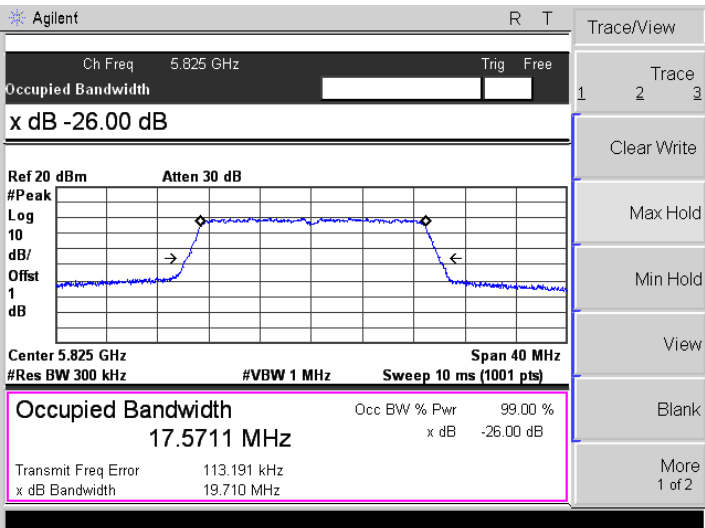
<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5385 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 57.349 kHz x dB Bandwidth 17.698 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>VBW 300.0000000 kHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5212 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 118.361 kHz x dB Bandwidth 17.665 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5322 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 101.150 kHz x dB Bandwidth 17.649 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

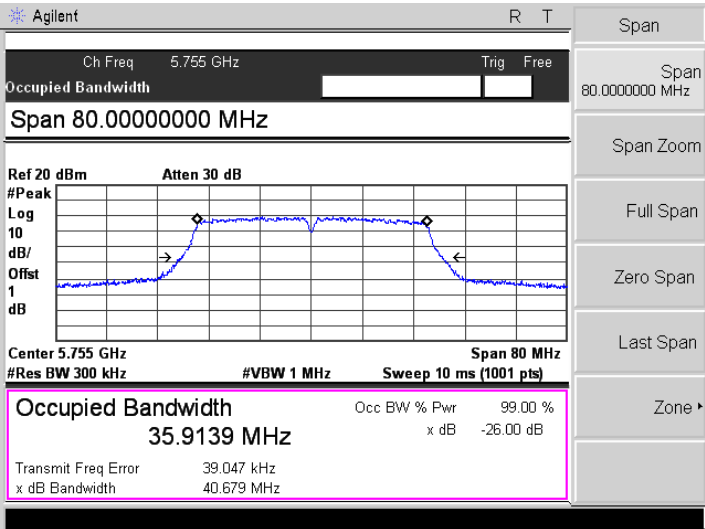
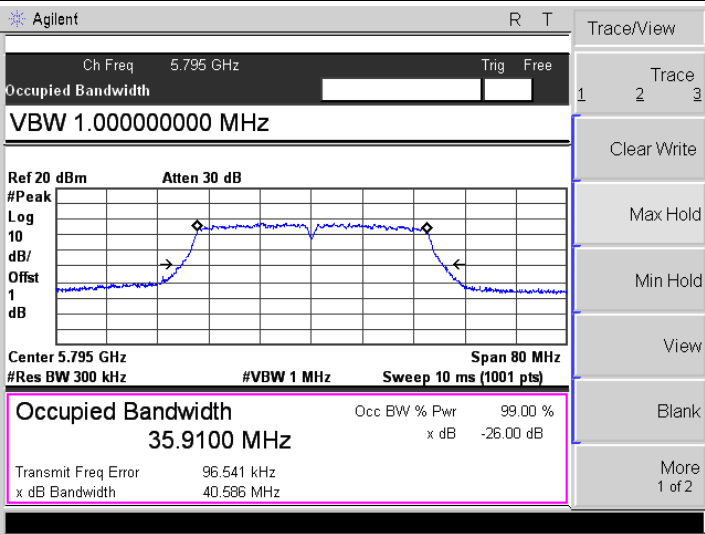
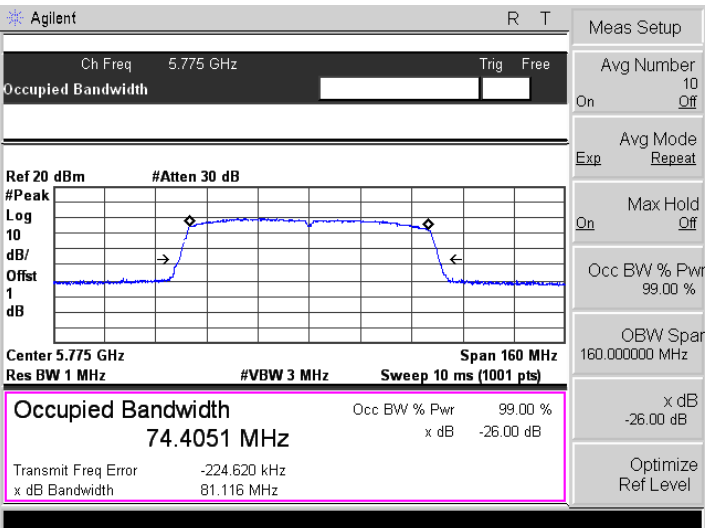
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 300.000000 kHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9116 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 53.623 kHz x dB Bandwidth 36.395 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.79500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9392 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 54.970 kHz x dB Bandwidth 36.393 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 300.000000 kHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts)</p> <p><b>Occupied Bandwidth 74.6234 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -59.184 kHz x dB Bandwidth 72.712 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

26 dB Bandwidth

<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5618 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 111.742 kHz x dB Bandwidth 19.689 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.785000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5702 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 107.032 kHz x dB Bandwidth 19.732 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.785000000 GHz</p> <p>Start Freq 5.765000000 GHz</p> <p>Stop Freq 5.805000000 GHz</p> <p>CF Step 4.000000000 MHz Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5711 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 113.191 kHz x dB Bandwidth 19.710 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

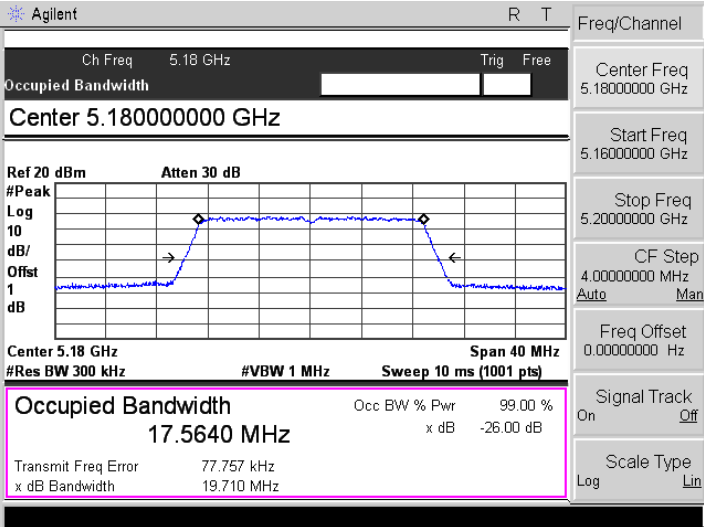
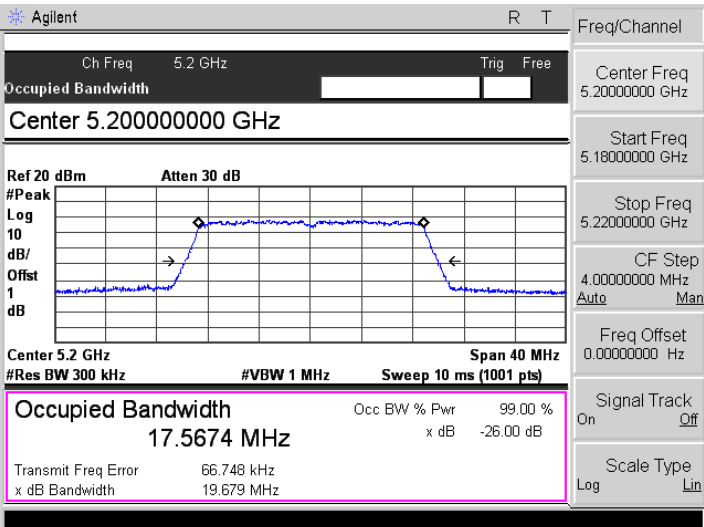
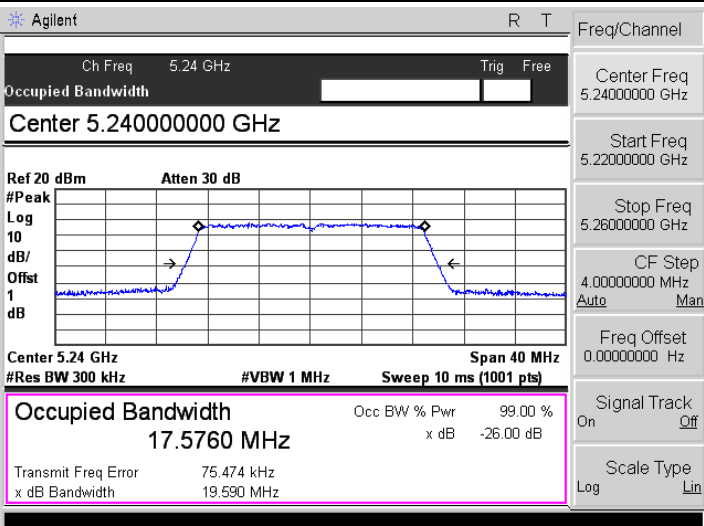


<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 80.00000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9139 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 39.047 kHz x dB Bandwidth 40.679 MHz</p> <p>Span</p> <p>Span 80.00000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>VBW 1.000000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9100 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 96.541 kHz x dB Bandwidth 40.586 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 160 MHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 74.4051 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -224.620 kHz x dB Bandwidth 81.116 MHz</p> <p>Meas Setup</p> <p>Avg Number 10 On Off</p> <p>Avg Mode Exp Repeat</p> <p>Max Hold On Off</p> <p>Occ BW % Pwr 99.00 %</p> <p>OBW Spar 160.000000 MHz</p> <p>x dB -26.00 dB</p> <p>Optimize Ref Level</p>

**ANT B**

**5150-5250MHz**

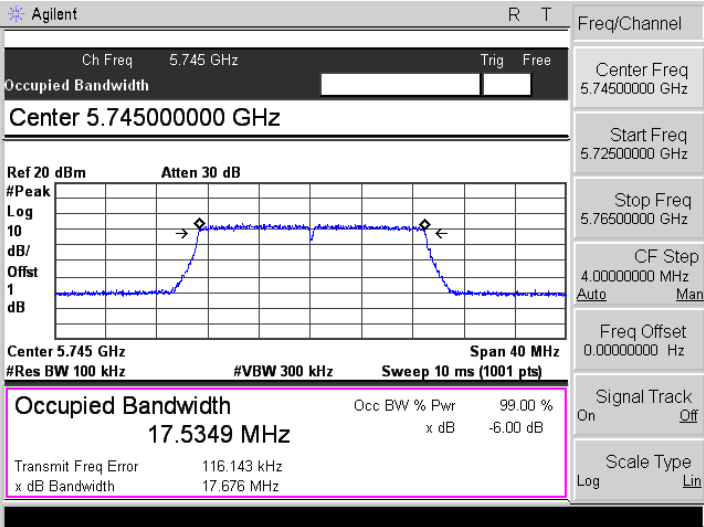
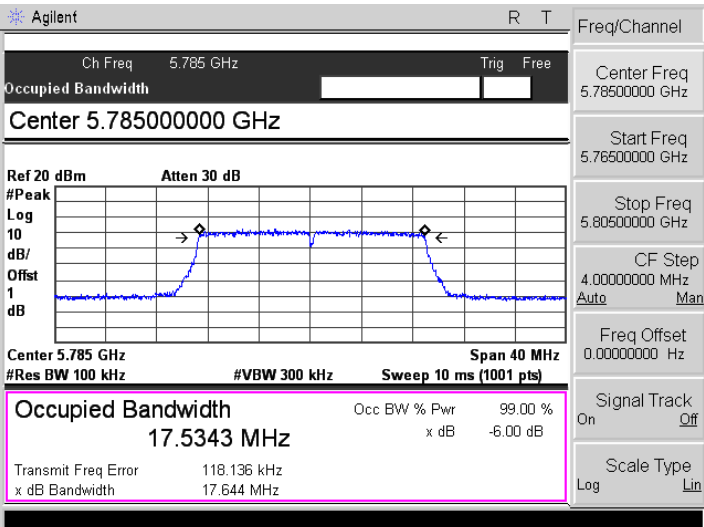
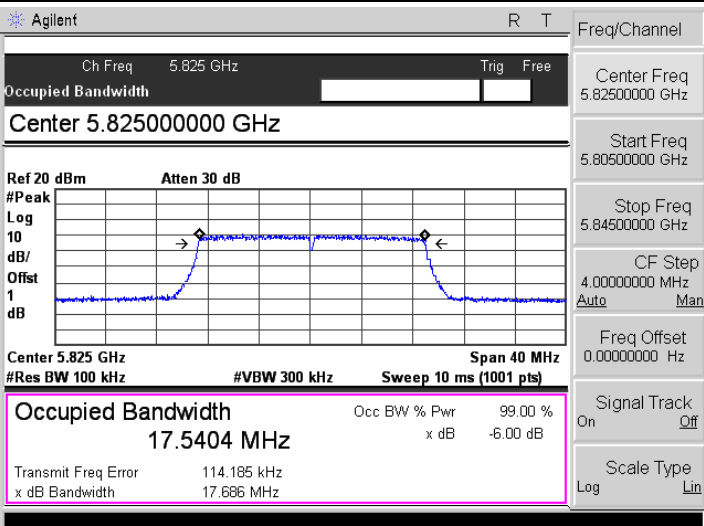
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4199 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 50.929 kHz</p> <p>x dB Bandwidth 18.740 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4017 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 73.452 kHz</p> <p>x dB Bandwidth 18.675 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4065 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 67.811 kHz</p> <p>x dB Bandwidth 18.715 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

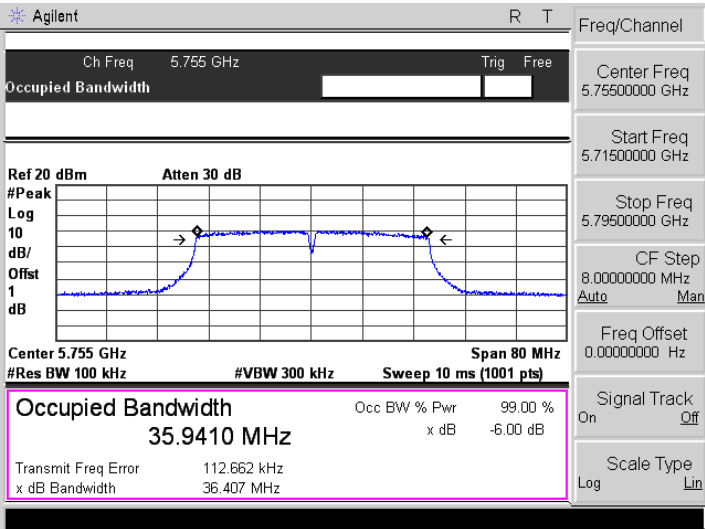
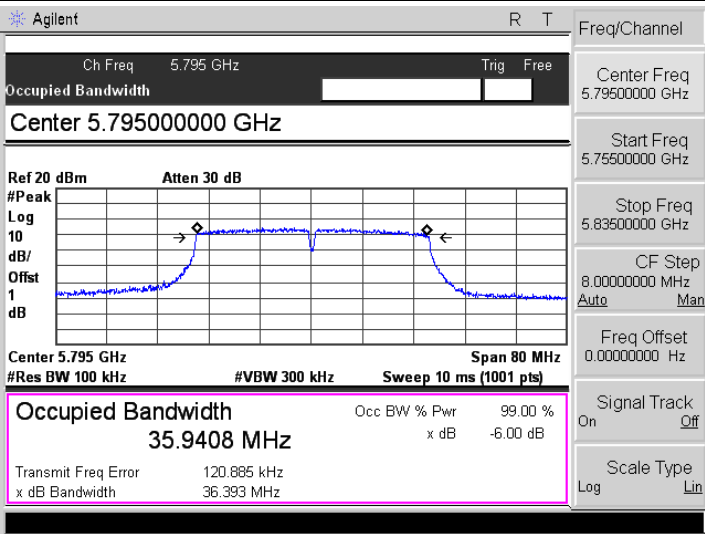
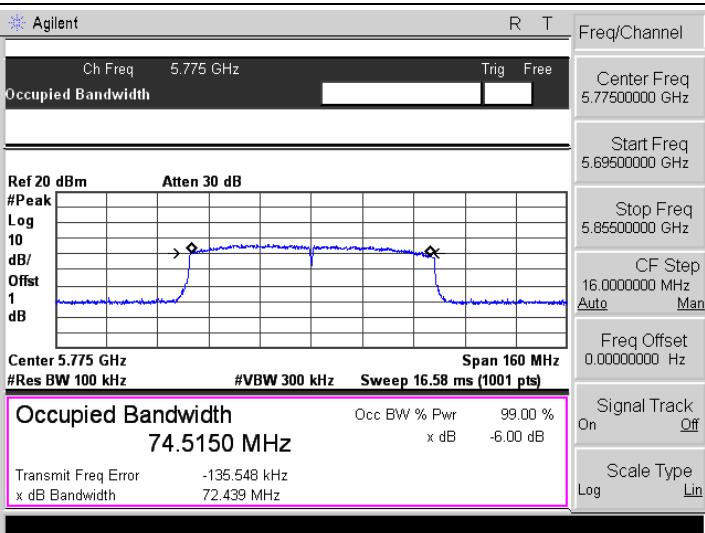
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5640 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 77.757 kHz x dB Bandwidth 19.710 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5674 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 66.748 kHz x dB Bandwidth 19.679 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5760 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 75.474 kHz x dB Bandwidth 19.590 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9263 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 101.792 kHz x dB Bandwidth 40.617 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9431 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 93.820 kHz x dB Bandwidth 40.330 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	<p>Agilent R T</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 74.5203 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 3.235 kHz x dB Bandwidth 81.289 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

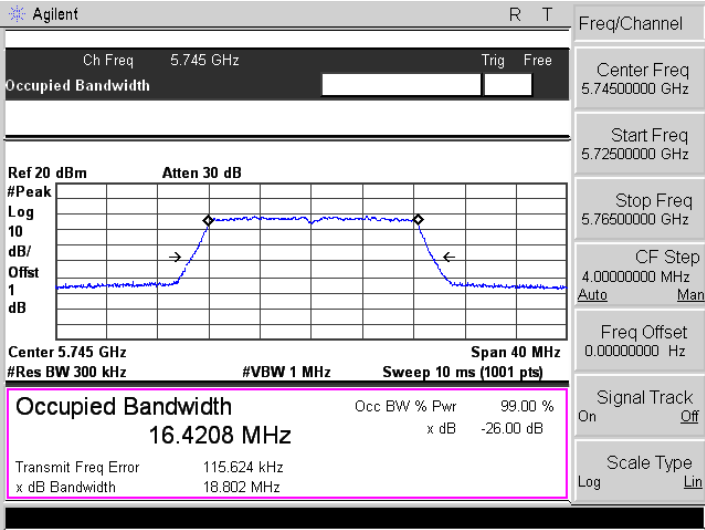
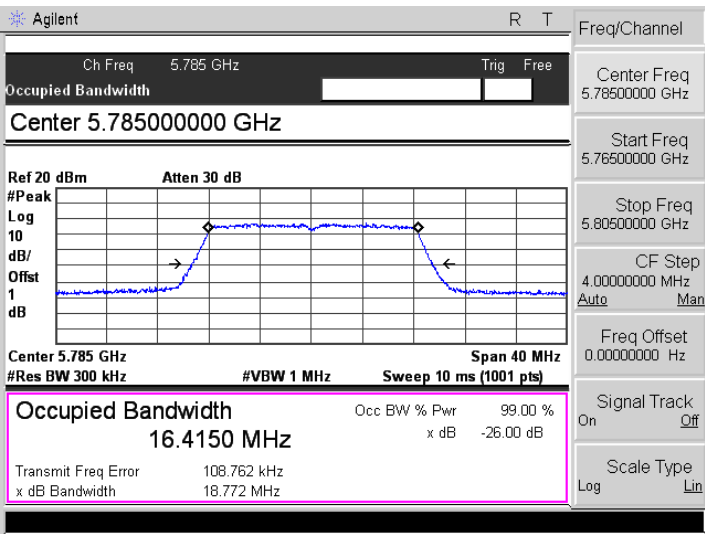
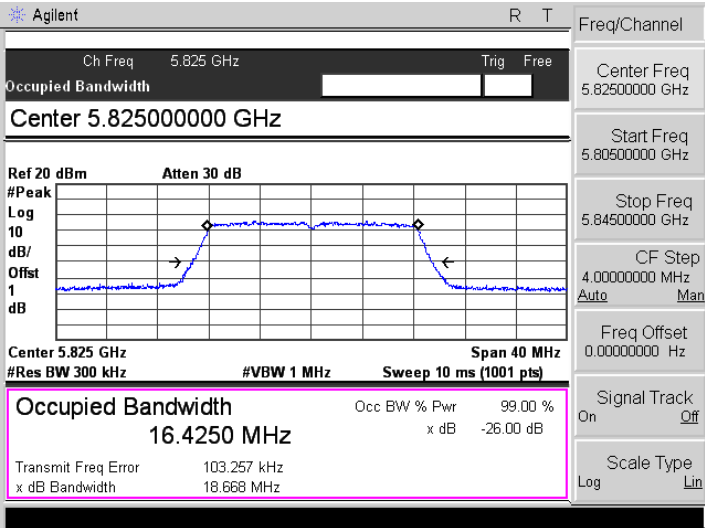
**5725-5850MHz**  
**6 dB Bandwidth**

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3136 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 130.685 kHz</p> <p>x dB Bandwidth 16.446 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3166 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 126.783 kHz</p> <p>x dB Bandwidth 16.437 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3183 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 124.667 kHz</p> <p>x dB Bandwidth 16.436 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

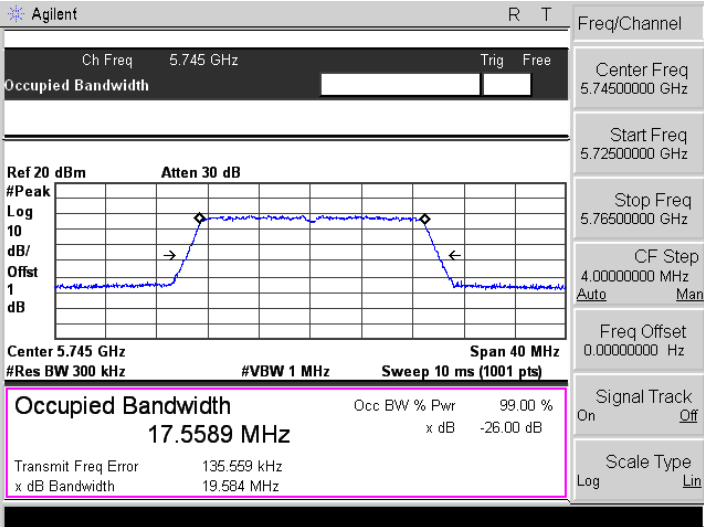
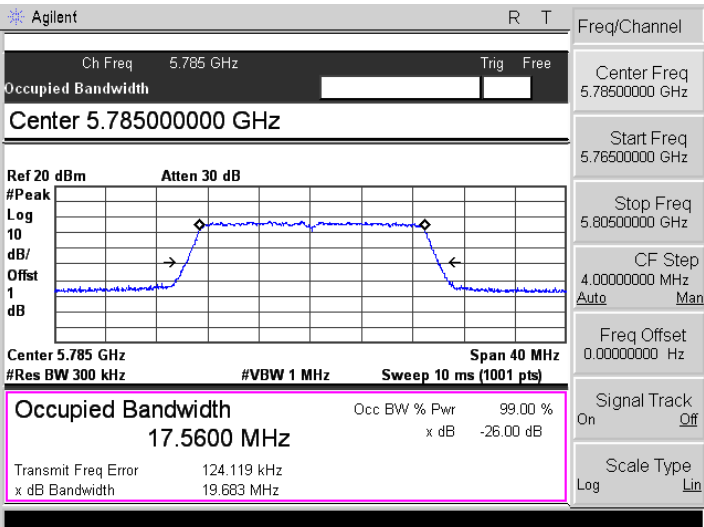
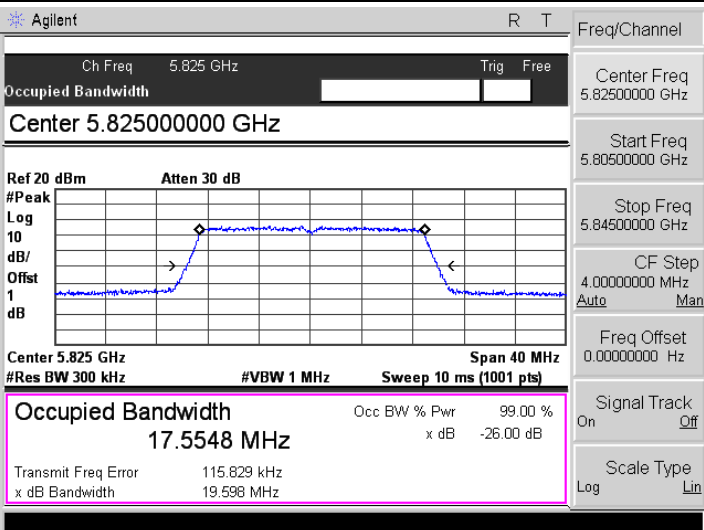
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5349 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 116.143 kHz x dB Bandwidth 17.676 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5343 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 118.136 kHz x dB Bandwidth 17.644 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5404 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 114.185 kHz x dB Bandwidth 17.686 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9410 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 112.662 kHz x dB Bandwidth 36.407 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.795000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9408 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 120.885 kHz x dB Bandwidth 36.393 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts)</p> <p><b>Occupied Bandwidth 74.5150 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -135.548 kHz x dB Bandwidth 72.439 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.77500000 GHz</p> <p>Start Freq 5.69500000 GHz</p> <p>Stop Freq 5.85500000 GHz</p> <p>CF Step 16.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

**5725-5850MHz**  
**26 dB Bandwidth**

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4208 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 115.624 kHz x dB Bandwidth 18.802 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4150 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 108.762 kHz x dB Bandwidth 18.772 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4250 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 103.257 kHz x dB Bandwidth 18.668 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 17.5589 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 135.559 kHz x dB Bandwidth 19.584 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.785000000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 17.5600 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 124.119 kHz x dB Bandwidth 19.683 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.825000000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 17.5548 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 115.829 kHz x dB Bandwidth 19.598 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9084 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 116.325 kHz x dB Bandwidth 40.340 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9111 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 106.799 kHz x dB Bandwidth 40.621 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	<p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 74.3651 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -96.471 kHz x dB Bandwidth 71.719 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.77500000 GHz</p> <p>Start Freq 5.69500000 GHz</p> <p>Stop Freq 5.85500000 GHz</p> <p>CF Step 16.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

## APPENDIX C

---

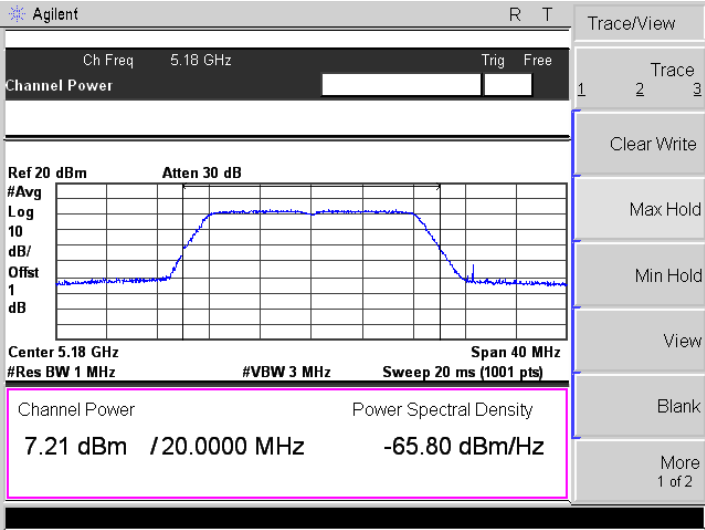
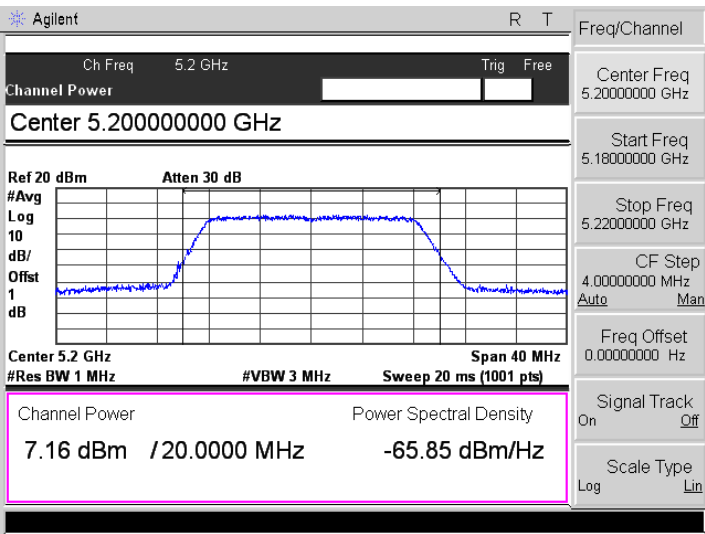
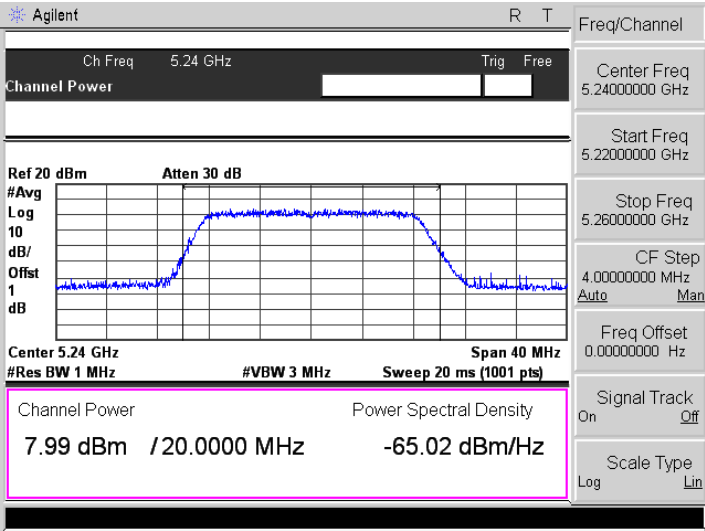
### Maximum Conducted Output Power

U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT A	ANT B		
802.11a	5180	7.21	8.17	/	23.98
	5200	7.16	8.03	/	23.98
	5240	7.99	8.07	/	23.98
802.11n-HT20	5180	7.99	7.72	10.87	23.98
	5200	7.58	7.50	10.55	23.98
	5240	8.65	7.45	11.10	23.98
802.11n-HT40	5190	8.15	7.97	11.07	23.98
	5230	8.09	7.73	10.92	23.98
802.11ac VH80	5210	6.58	7.72	10.20	23.98

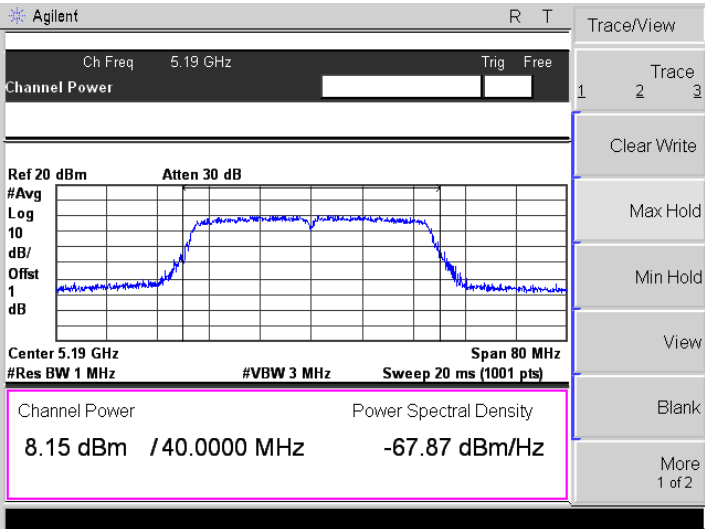
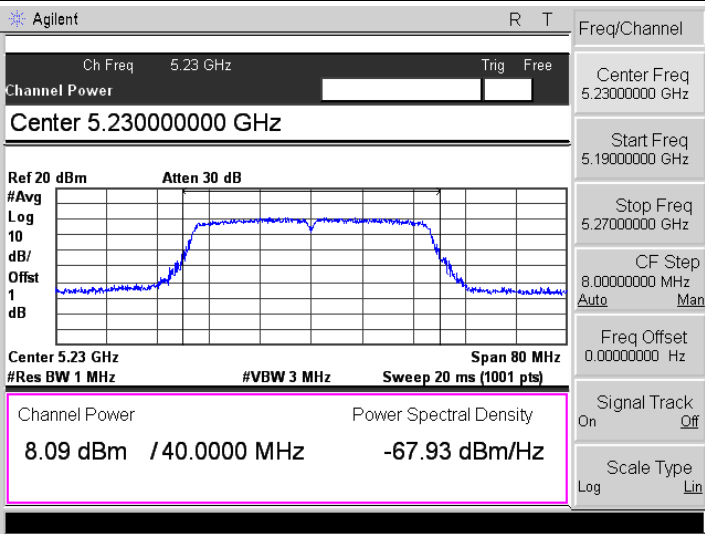
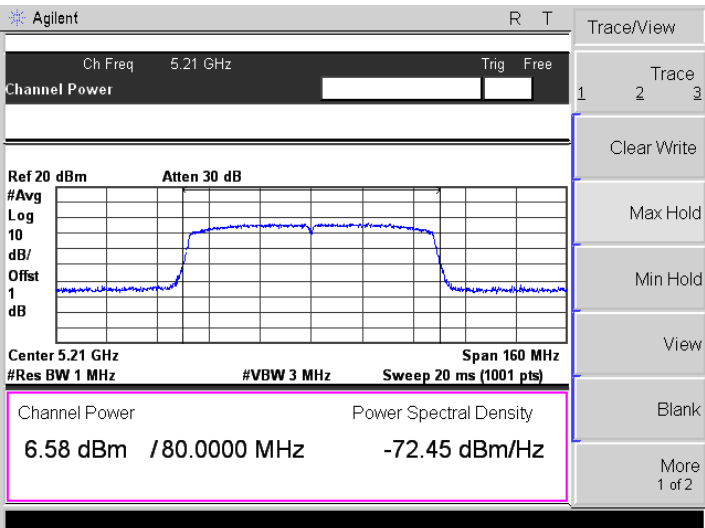
<b>U-NII-3: 5725-5850MHz</b>					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT A	ANT B		
802.11a	5745	7.56	8.22	/	5745
	5785	6.63	8.22	/	5785
	5825	6.34	7.42	/	5825
802.11n-HT20	5745	10.01	9.49	12.77	5745
	5785	10.34	7.19	12.05	5785
	5825	7.86	8.64	11.28	5825
802.11n-HT40	5755	8.87	8.18	11.55	5755
	5795	7.69	7.06	10.40	5795
802.11ac VH80	5775	7.15	7.24	10.21	5775

ANT A

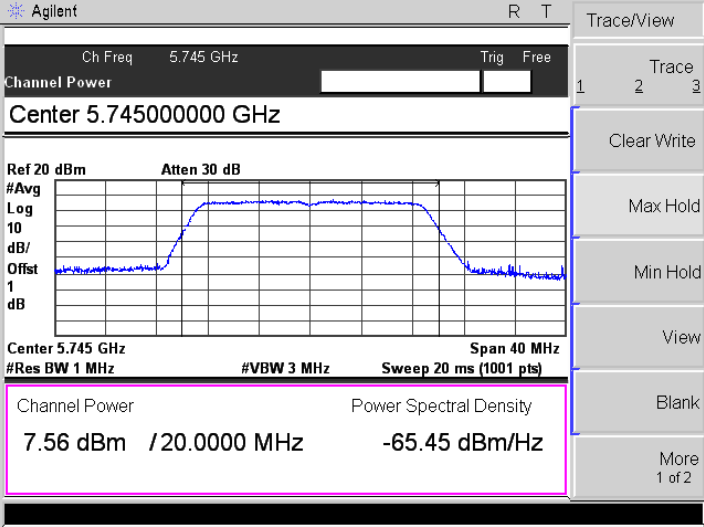
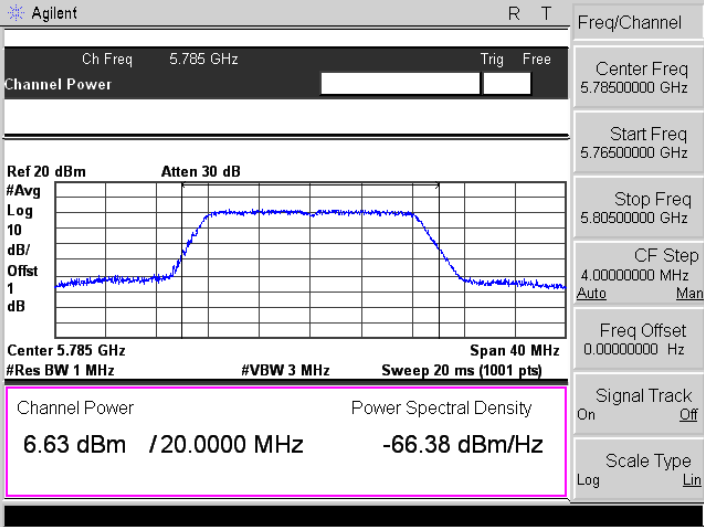
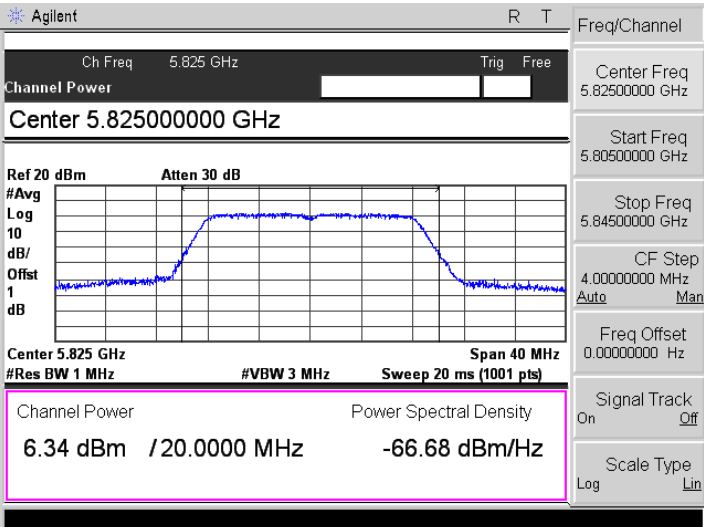
5150-5250MHz

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.21 dBm / 20.0000 MHz -65.80 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.16 dBm / 20.0000 MHz -65.85 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.99 dBm / 20.0000 MHz -65.02 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

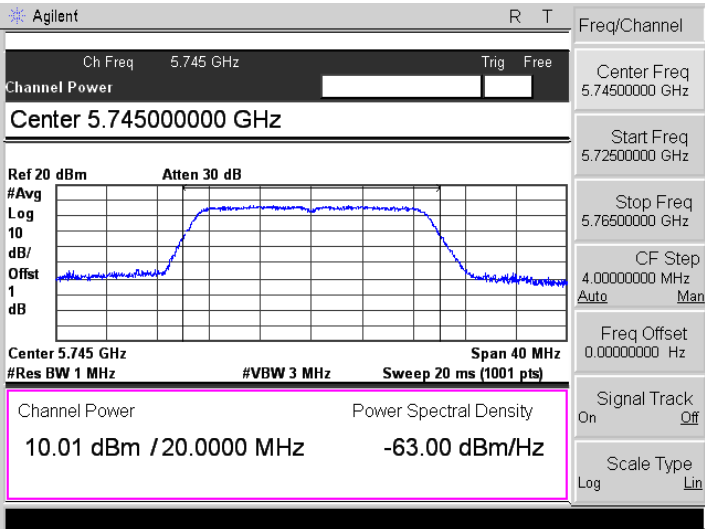
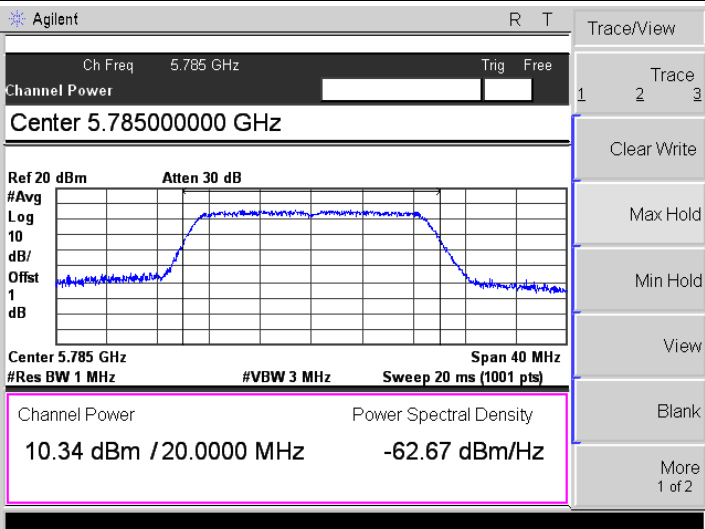
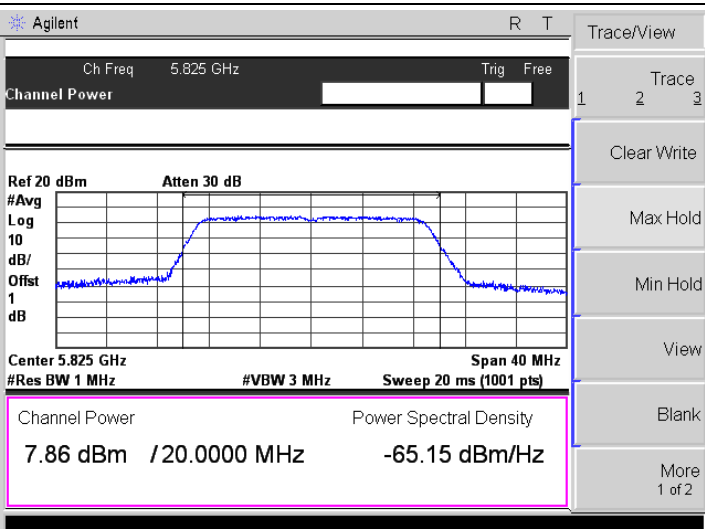
<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.99 dBm / 20.0000 MHz -65.02 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.58 dBm / 20.0000 MHz -65.43 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.240000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.65 dBm / 20.0000 MHz -64.36 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

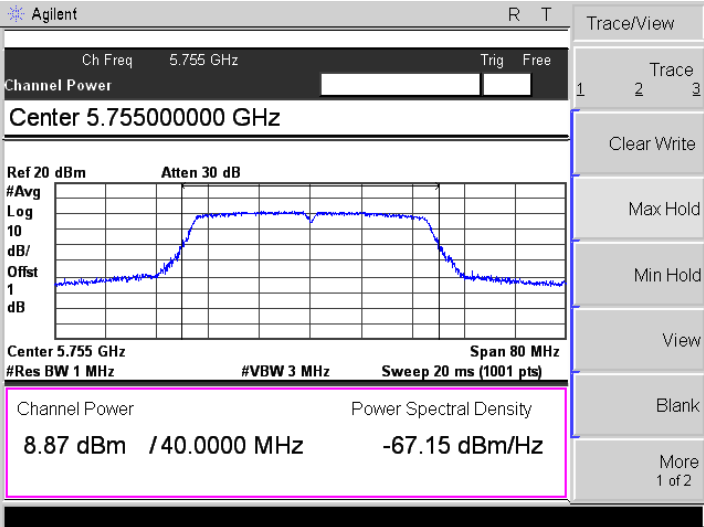
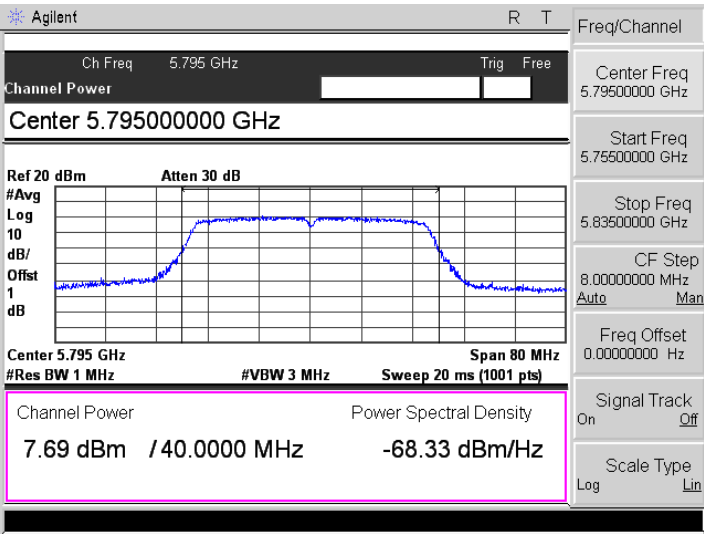
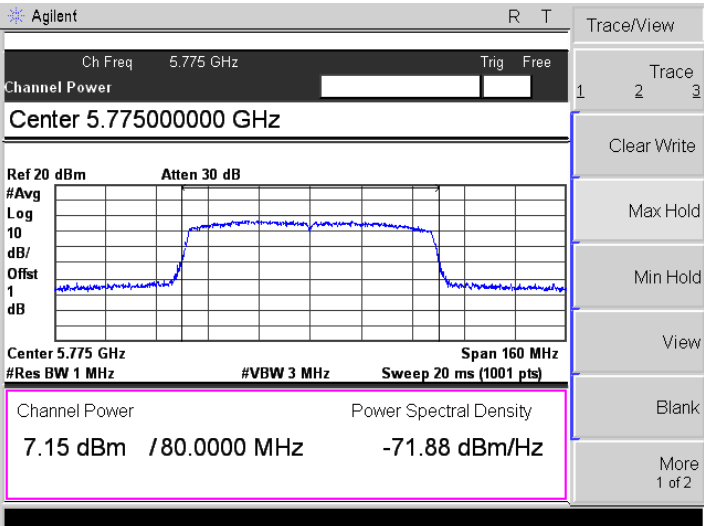
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

5725-5850MHz

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.56 dBm / 20.0000 MHz -65.45 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>6.63 dBm / 20.0000 MHz -66.38 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>6.34 dBm / 20.0000 MHz -66.68 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

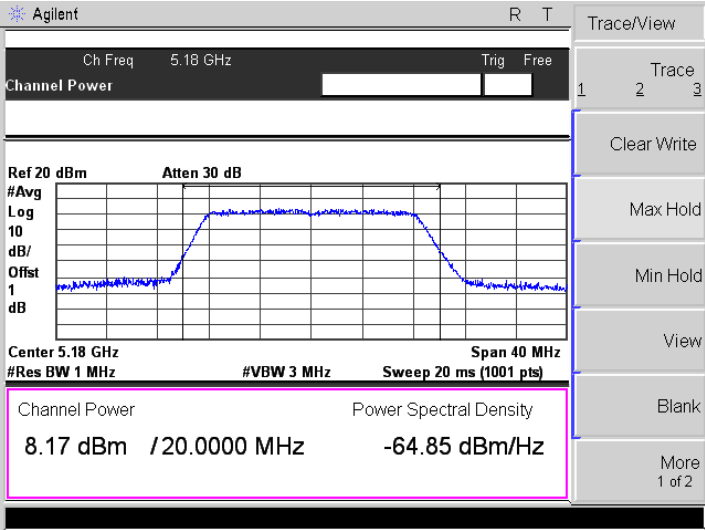
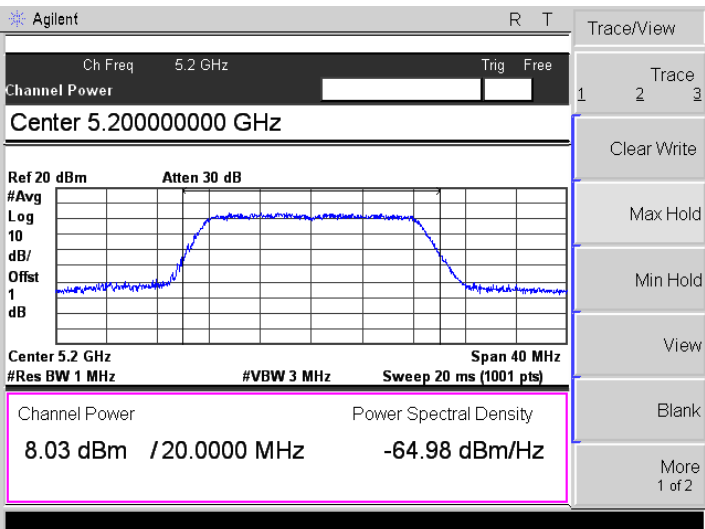
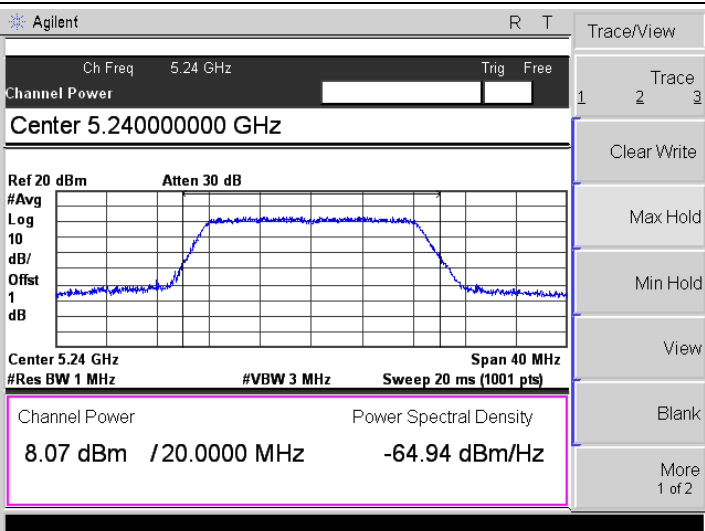


<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.01 dBm / 20.0000 MHz -63.00 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.34 dBm / 20.0000 MHz -62.67 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.86 dBm / 20.0000 MHz -65.15 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

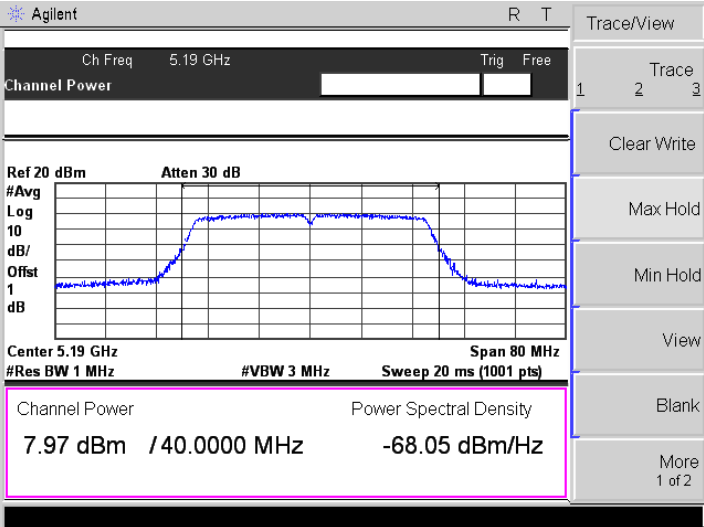
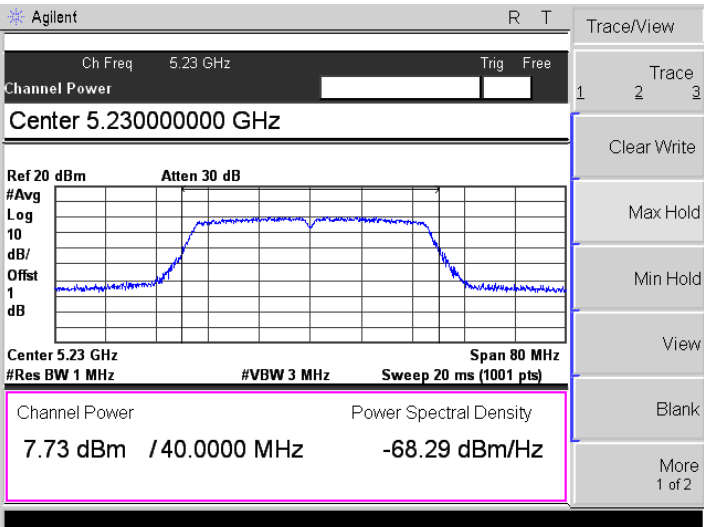
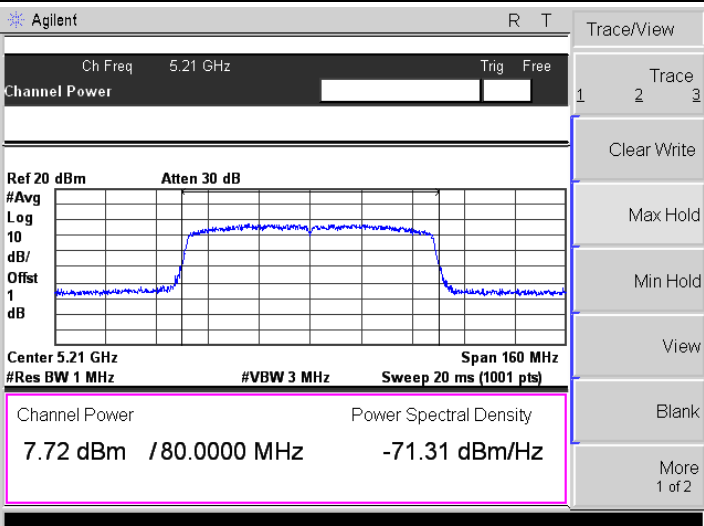
<p>802.11n-HT40-Low</p>	 <p>Agilent Channel Power measurement for 802.11n-HT40-Low. The display shows a center frequency of 5.755 GHz, a channel power of 8.87 dBm, and a power spectral density of -67.15 dBm/Hz. The span is 80 MHz and the resolution bandwidth is 1 MHz. The plot shows a signal with a 30 dB attenuation.</p>
<p>802.11n-HT40-High</p>	 <p>Agilent Channel Power measurement for 802.11n-HT40-High. The display shows a center frequency of 5.795 GHz, a channel power of 7.69 dBm, and a power spectral density of -68.33 dBm/Hz. The span is 80 MHz and the resolution bandwidth is 1 MHz. The plot shows a signal with a 30 dB attenuation.</p>
<p>802.11ac-HT80</p>	 <p>Agilent Channel Power measurement for 802.11ac-HT80. The display shows a center frequency of 5.775 GHz, a channel power of 7.15 dBm, and a power spectral density of -71.88 dBm/Hz. The span is 160 MHz and the resolution bandwidth is 1 MHz. The plot shows a signal with a 30 dB attenuation.</p>

**ANT B**

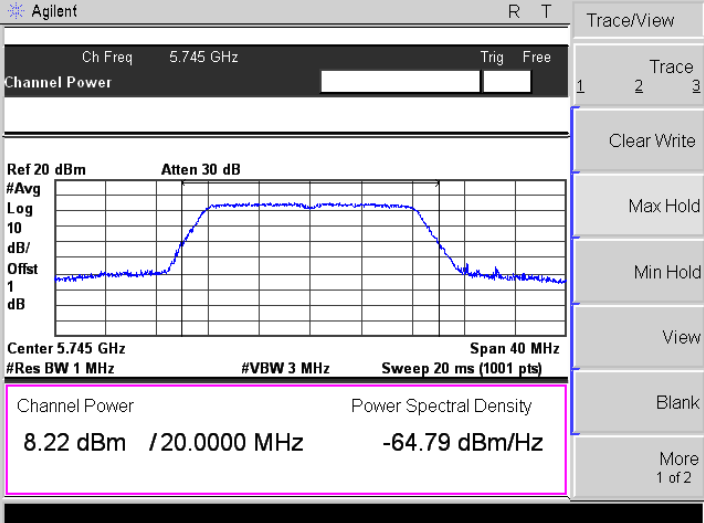
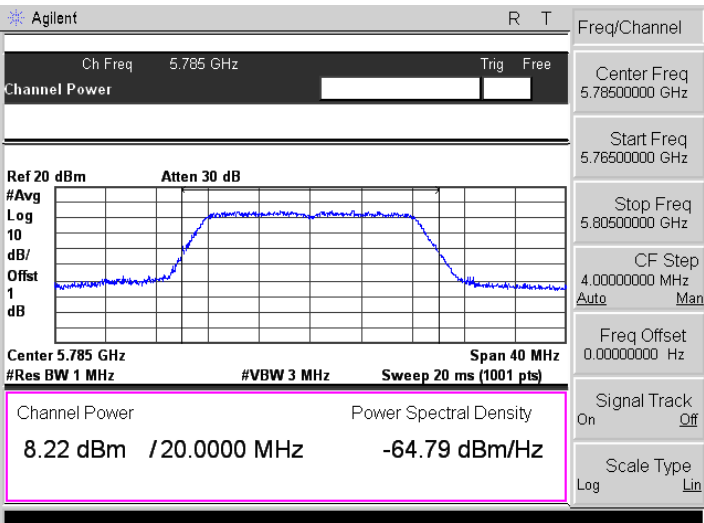
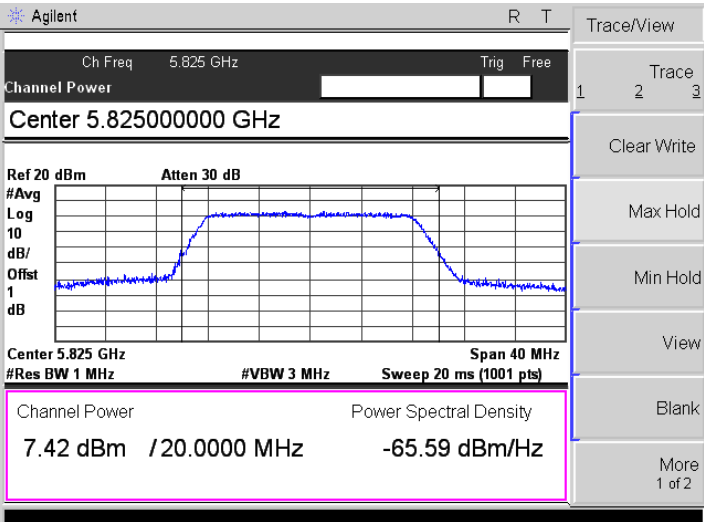
**5150-5250MHz**

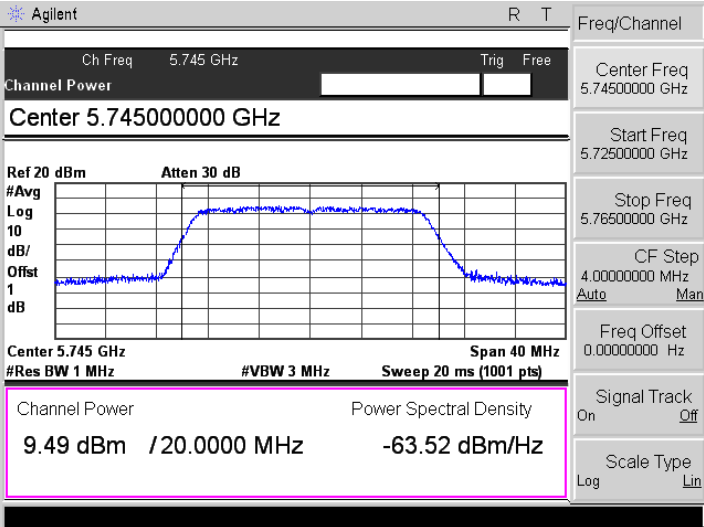
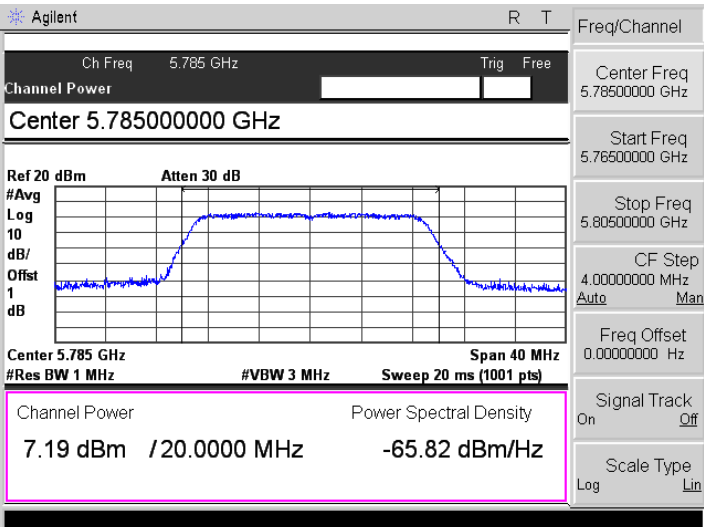
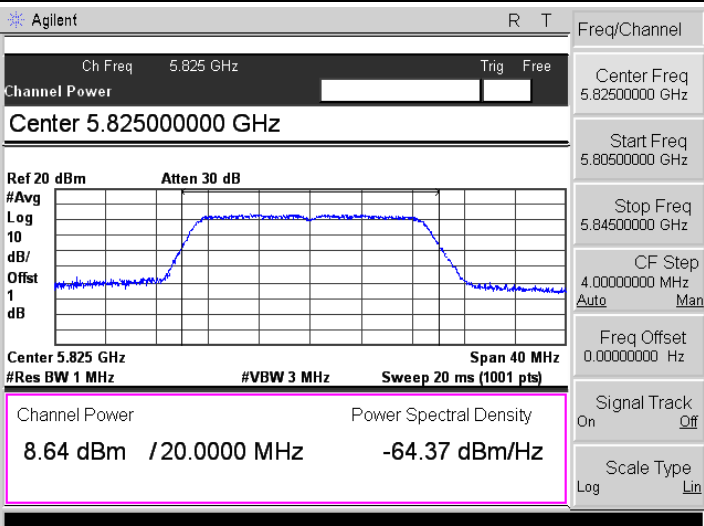
<p>802.11a-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.17 dBm / 20.0000 MHz -64.85 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.03 dBm / 20.0000 MHz -64.98 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.07 dBm / 20.0000 MHz -64.94 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

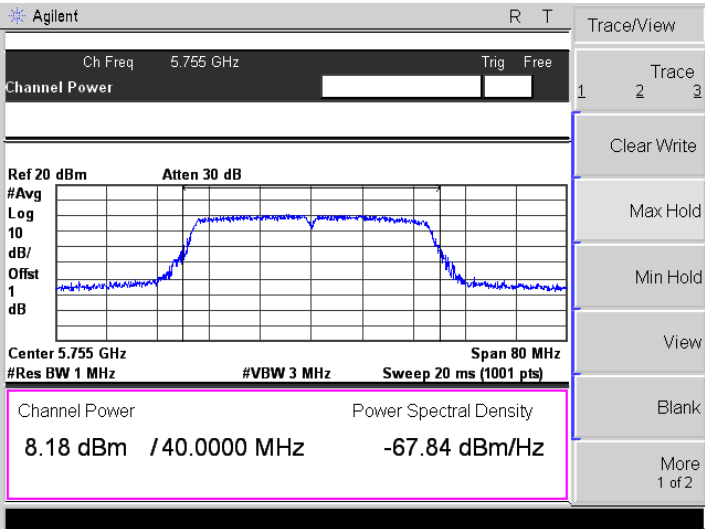
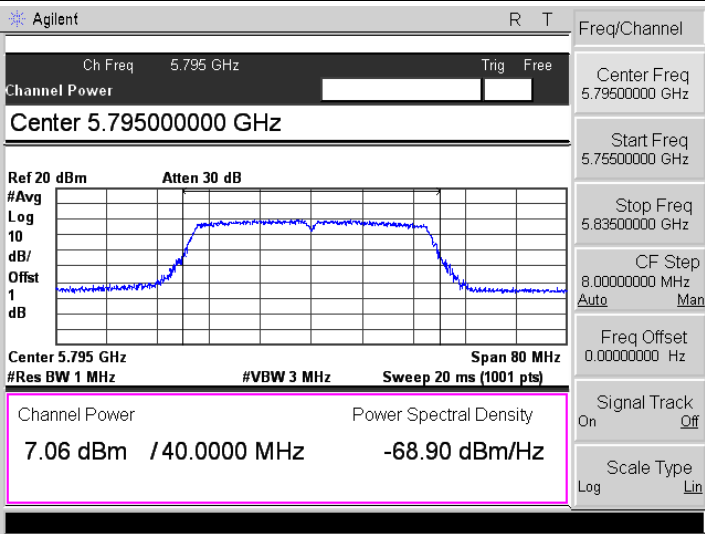
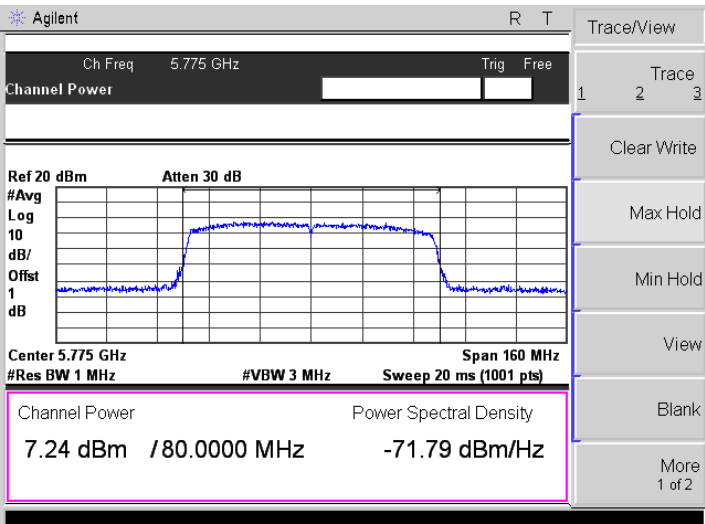
<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.72 dBm / 20.0000 MHz -65.29 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.50 dBm / 20.0000 MHz -65.51 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.45 dBm / 20.0000 MHz -65.56 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.97 dBm / 40.0000 MHz -68.05 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.73 dBm / 40.0000 MHz -68.29 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.72 dBm / 80.0000 MHz -71.31 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

5725-5850MHz

<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 5.74500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p><b>9.49 dBm / 20.0000 MHz -63.52 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 5.78500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p><b>7.19 dBm / 20.0000 MHz -65.82 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 5.82500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p><b>8.64 dBm / 20.0000 MHz -64.37 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>8.18 dBm / 40.0000 MHz</td> <td>-67.84 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	8.18 dBm / 40.0000 MHz	-67.84 dBm/Hz
Channel Power	Power Spectral Density				
8.18 dBm / 40.0000 MHz	-67.84 dBm/Hz				
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>7.06 dBm / 40.0000 MHz</td> <td>-68.90 dBm/Hz</td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Channel Power	Power Spectral Density	7.06 dBm / 40.0000 MHz	-68.90 dBm/Hz
Channel Power	Power Spectral Density				
7.06 dBm / 40.0000 MHz	-68.90 dBm/Hz				
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>7.24 dBm / 80.0000 MHz</td> <td>-71.79 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	7.24 dBm / 80.0000 MHz	-71.79 dBm/Hz
Channel Power	Power Spectral Density				
7.24 dBm / 80.0000 MHz	-71.79 dBm/Hz				



**APPENDIX D****Frequency Stability**

<b>U-NII-1:5150-5250MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	1894	0.3643
100%		-20	1897	0.3649
100%		-10	1893	0.3641
100%		0	1897	0.3648
100%		+10	1891	0.3637
100%		+20	1897	0.3649
100%		+30	1899	0.3652
100%		+40	1899	0.3653
100%		+50	1896	0.3646
Low Battery power		5.50	+20	1898
High Battery power	4.50	+20	1892	0.3639

<b>U-NII-1:5725-5850MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	1896	0.3284
100%		-20	1890	0.3273
100%		-10	1894	0.3279
100%		0	1897	0.3284
100%		+10	1897	0.3284
100%		+20	1897	0.3284
100%		+30	1892	0.3277
100%		+40	1892	0.3277
100%		+50	1899	0.3288
Low Battery power		5.50	+20	1895
High Battery power	4.50	+20	1897	0.3284

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***