


Site: WZ-AC2	Time: 2022/03/31 - 10:22
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 7095MHz	

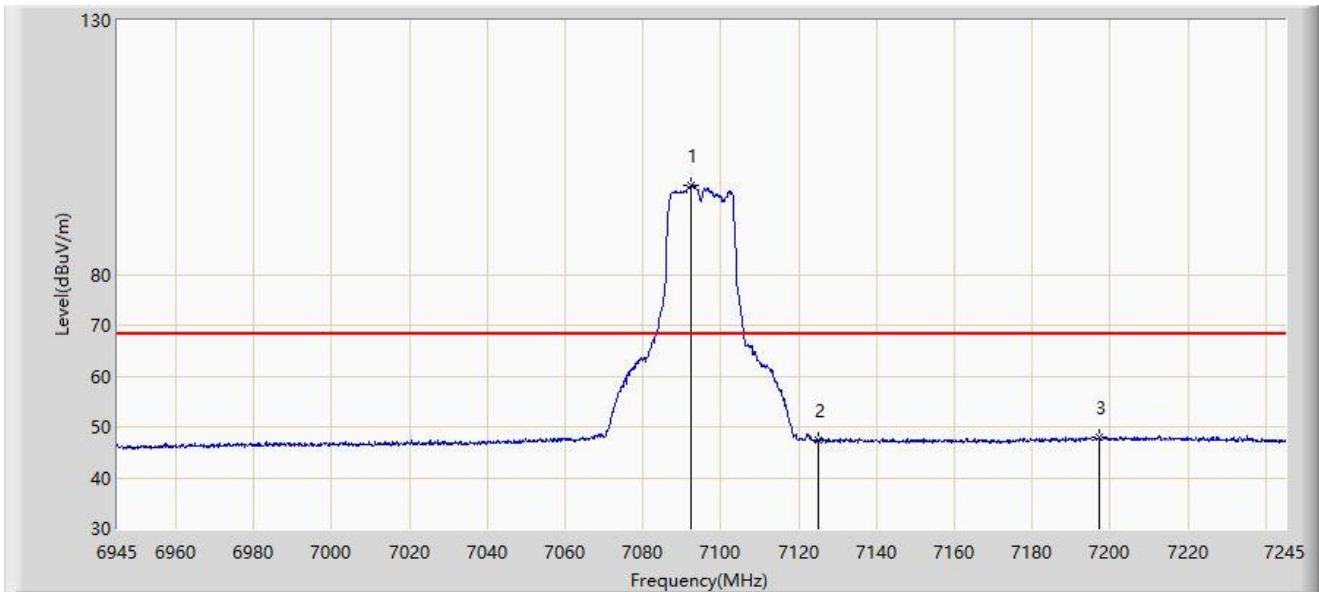


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7092.450	97.576	86.742	N/A	N/A	10.834	AV
2			7125.000	47.261	36.172	-20.939	68.200	11.089	AV
3			7197.150	47.918	36.475	-20.282	68.200	11.443	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5955MHz	

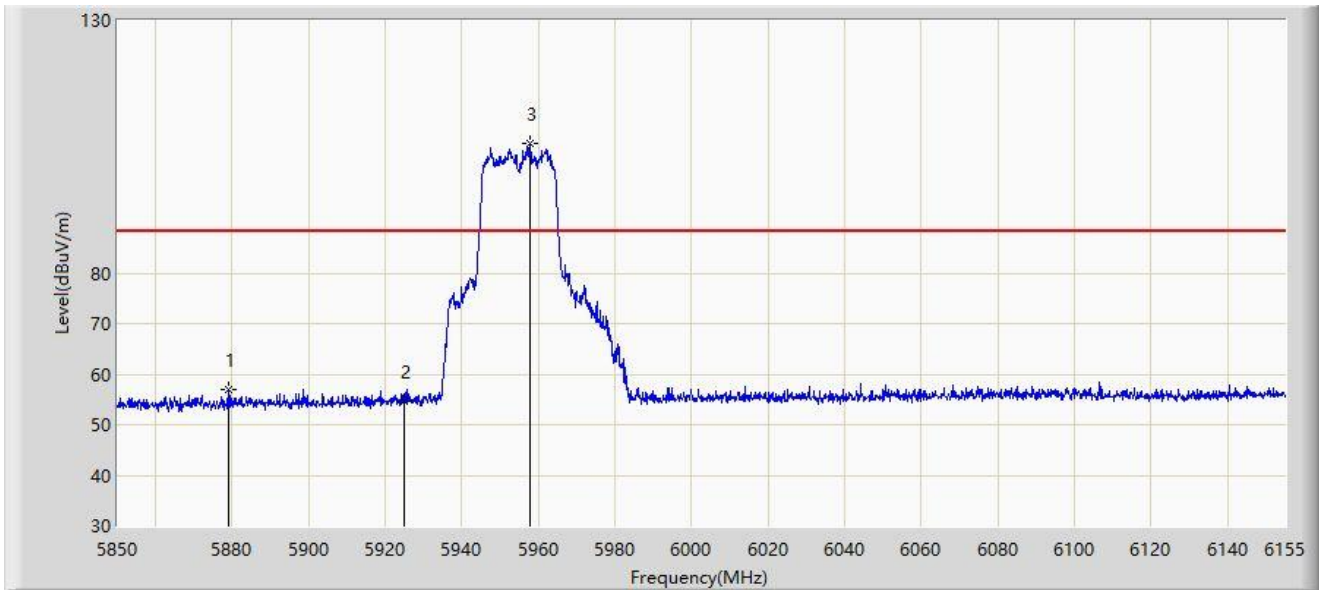


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5878.975	57.026	51.295	-31.174	88.200	5.731	PK
2			5925.000	54.593	48.573	-33.607	88.200	6.020	PK
3		*	5957.970	105.749	99.497	N/A	N/A	6.252	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:34
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5955MHz	

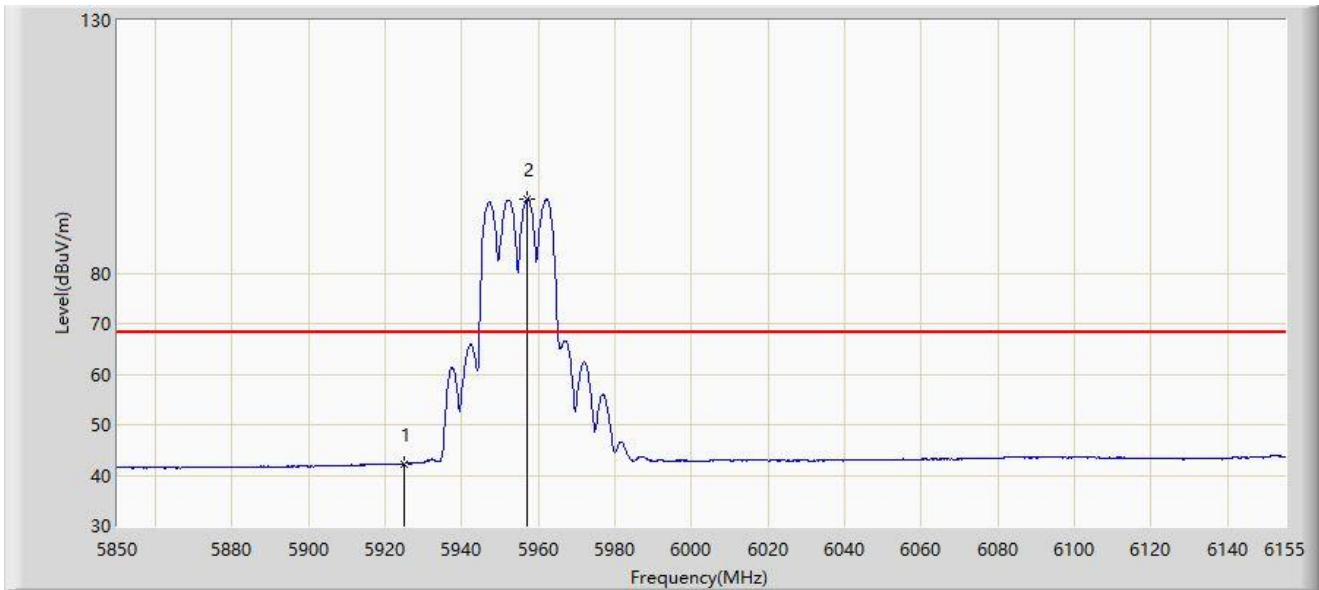


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	42.252	36.232	-25.948	68.200	6.020	AV
2		*	5957.055	94.525	88.267	N/A	N/A	6.257	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:32
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5955MHz	

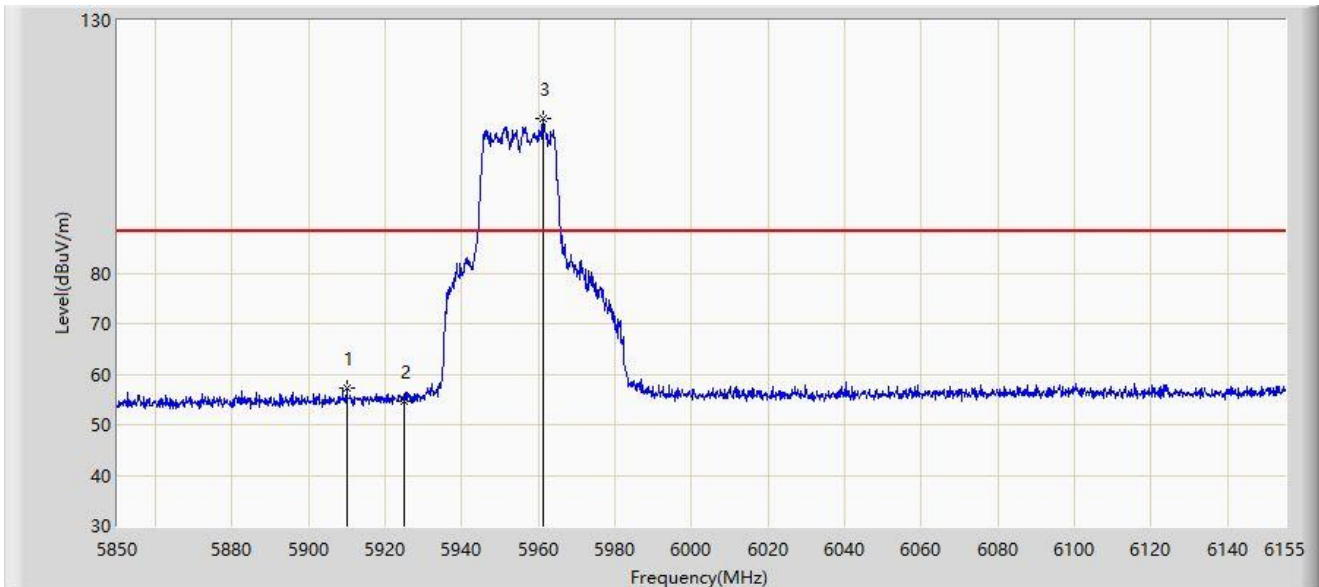


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5909.933	57.306	51.622	-30.894	88.200	5.684	PK
2			5925.000	54.757	48.737	-33.443	88.200	6.020	PK
3		*	5961.325	110.523	104.287	N/A	N/A	6.236	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:11
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5955MHz	

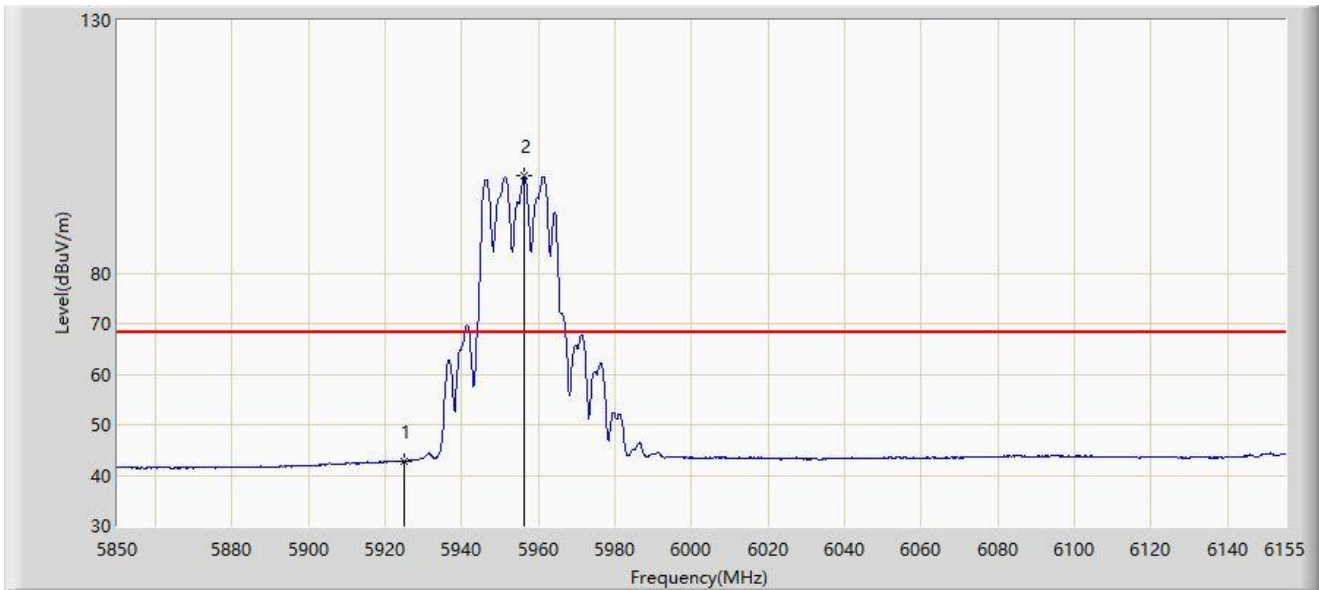


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5925.000	42.832	36.812	-25.368	68.200	6.020	AV
2		*	5956.140	99.165	92.901	N/A	N/A	6.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:49
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 7095MHz	

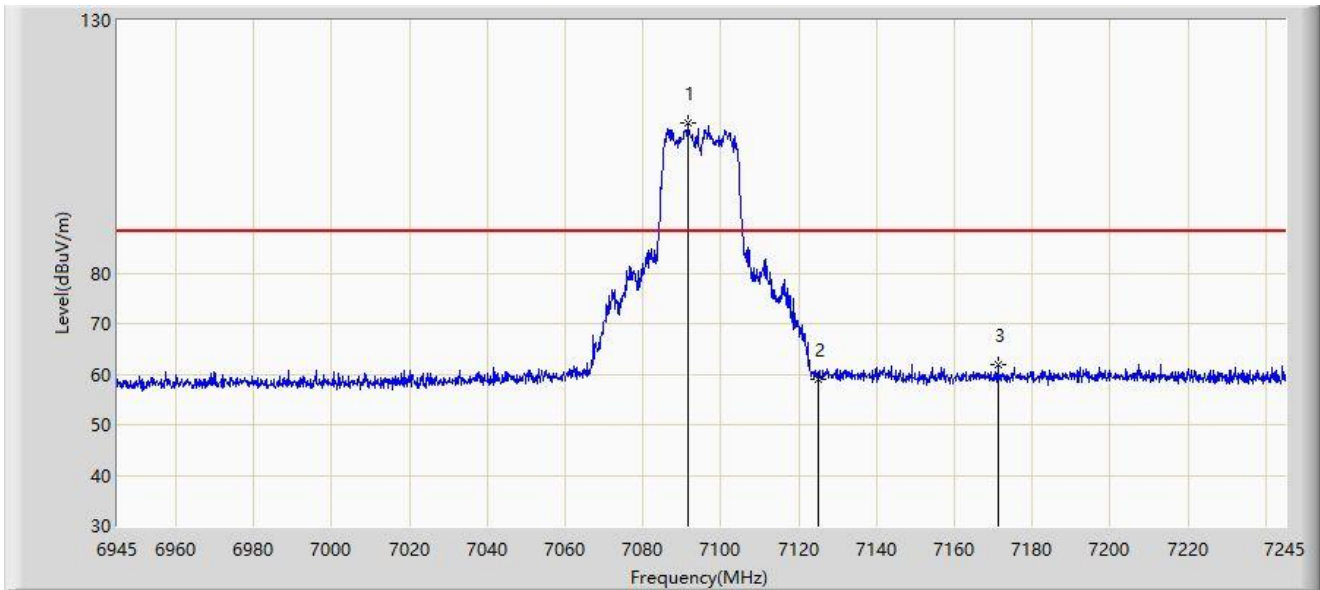


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7091.550	109.602	98.534	N/A	N/A	11.068	PK
2			7125.000	58.991	47.667	-29.209	88.200	11.324	PK
3			7171.200	61.990	50.831	-26.210	88.200	11.159	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:47
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 7095MHz	

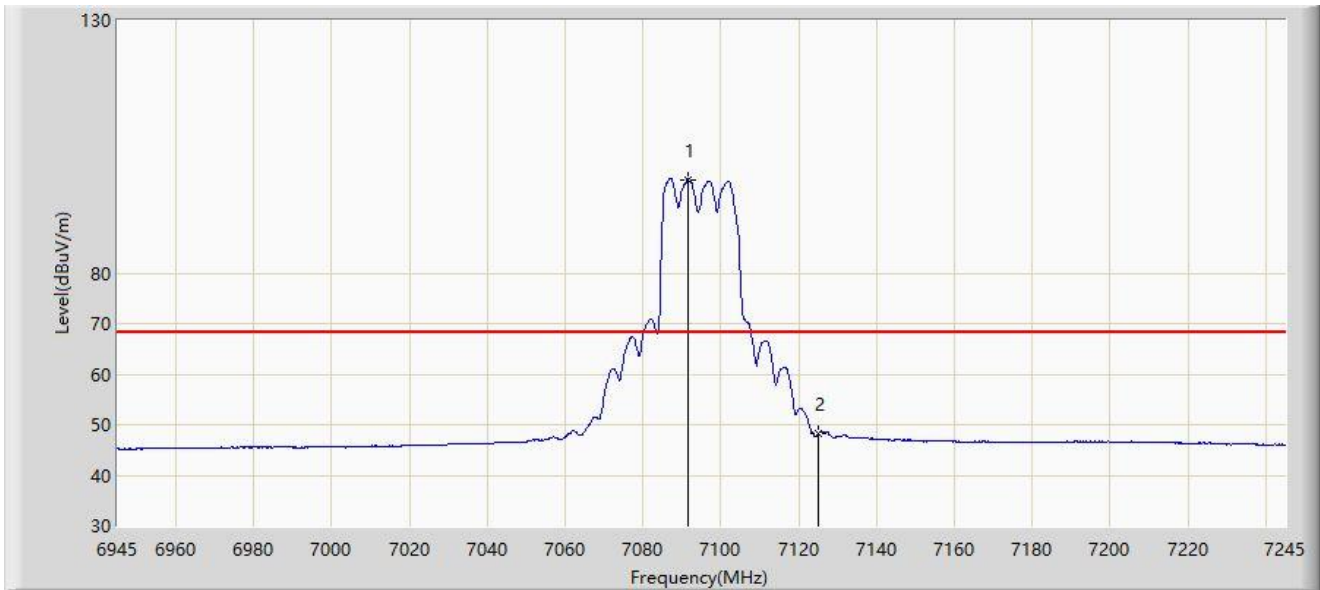


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7091.550	98.481	87.413	N/A	N/A	11.068	AV
2			7125.000	48.262	36.938	-19.938	68.200	11.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:46
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 7095MHz	

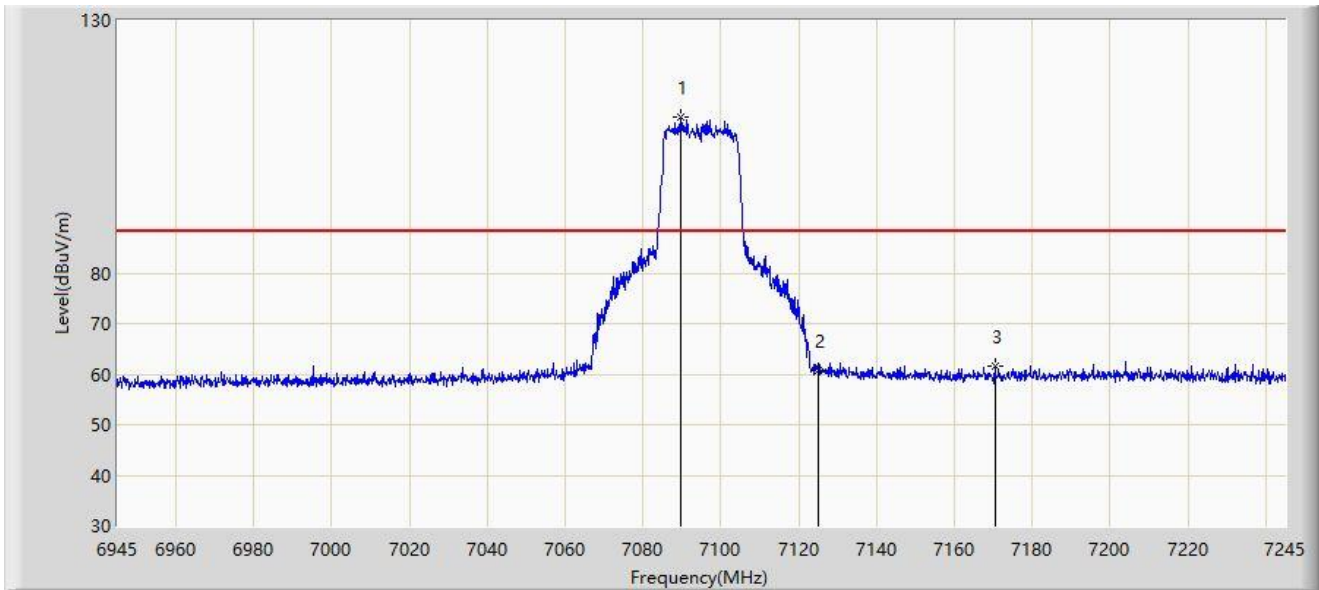


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	7089.600	110.753	99.680	N/A	N/A	11.073	PK
2			7125.000	60.721	49.397	-27.479	88.200	11.324	PK
3			7170.600	61.610	50.448	-26.590	88.200	11.162	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Time: 2022/03/07 - 13:42
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 7095MHz	

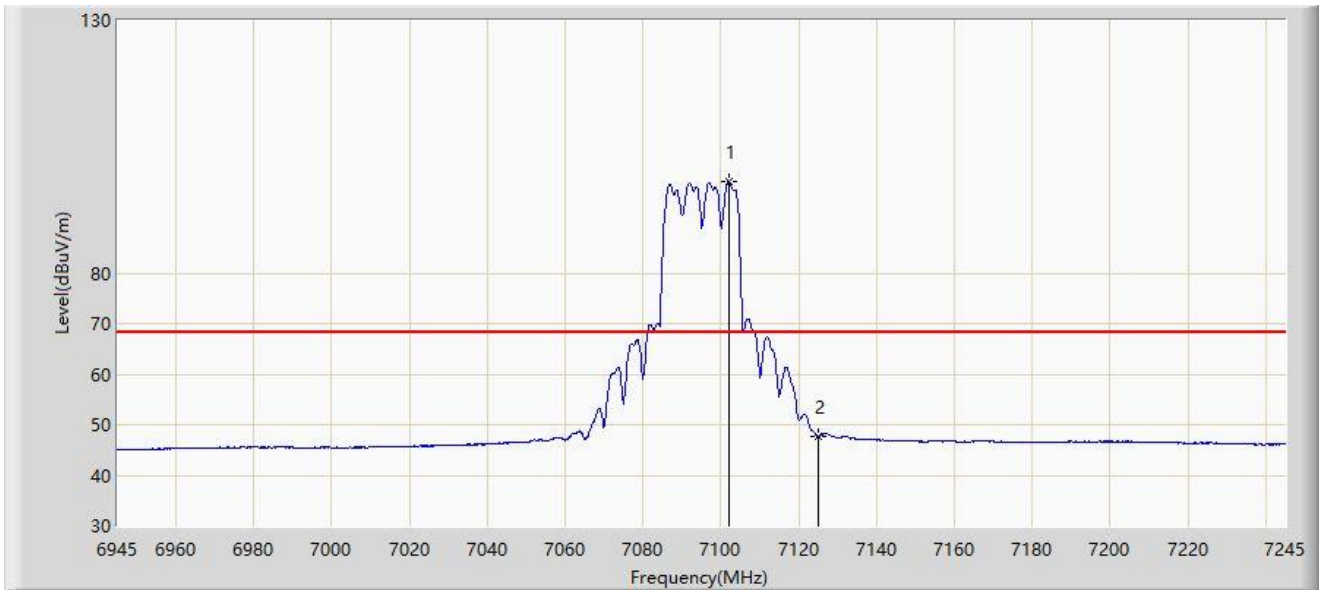


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7102.050	98.191	87.174	N/A	N/A	11.018	AV
2			7125.000	47.572	36.248	-20.628	68.200	11.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:07
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5965MHz	

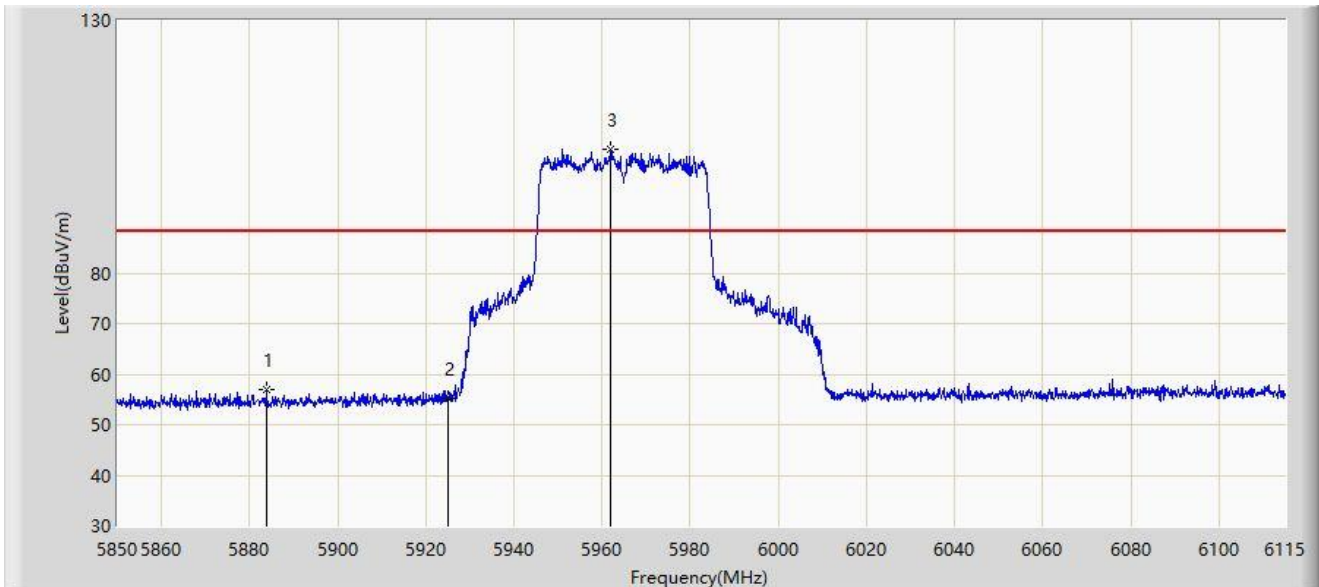


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5883.788	56.844	51.124	-31.356	88.200	5.720	PK
2			5925.000	55.124	49.104	-33.076	88.200	6.020	PK
3		*	5961.962	104.415	98.179	N/A	N/A	6.237	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:05
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5965MHz	

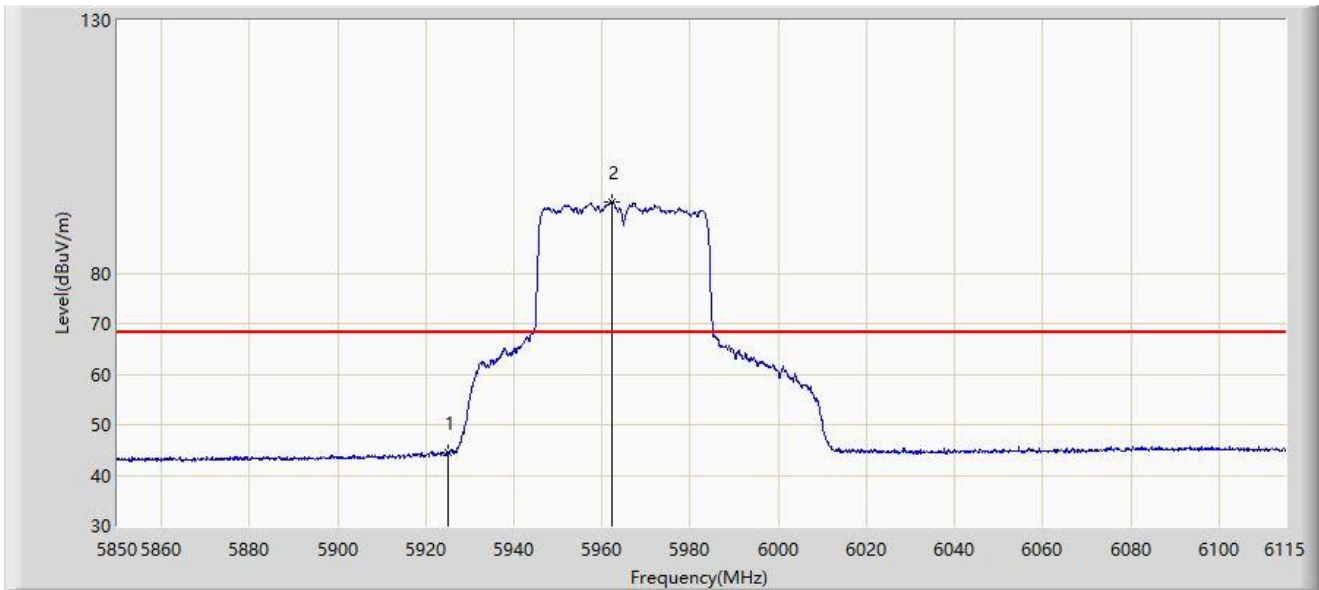


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	44.353	38.333	-23.847	68.200	6.020	AV
2		*	5962.360	93.960	87.724	N/A	N/A	6.236	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:04
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5965MHz	

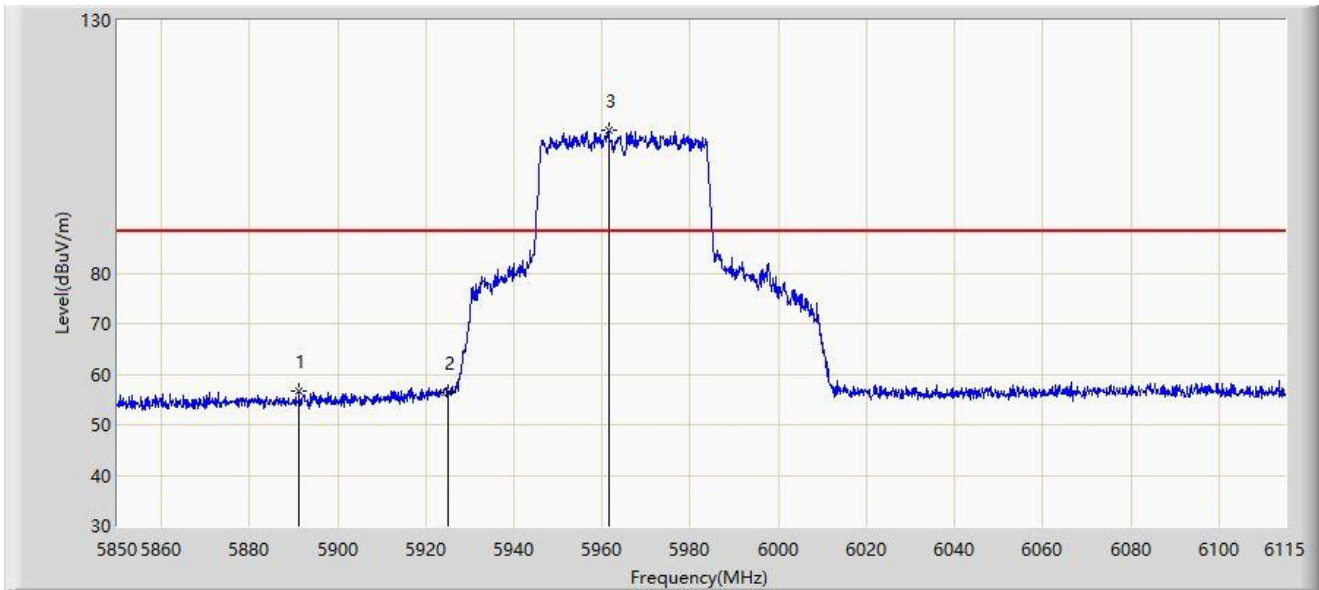


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5891.340	56.621	50.917	-31.579	88.200	5.704	PK
2			5925.000	56.343	50.323	-31.857	88.200	6.020	PK
3		*	5961.433	108.342	102.106	N/A	N/A	6.236	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 13:53
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5965MHz	

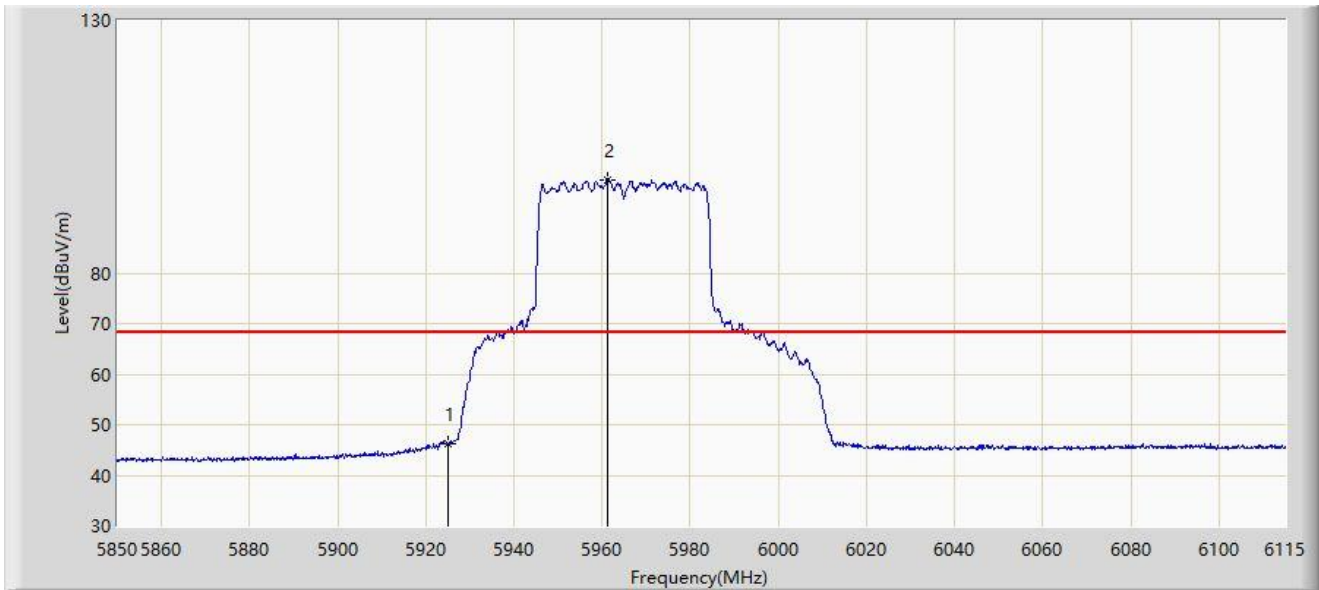


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	46.326	40.306	-21.874	68.200	6.020	AV
2		*	5961.167	98.542	92.306	N/A	N/A	6.236	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:15
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 7085MHz	

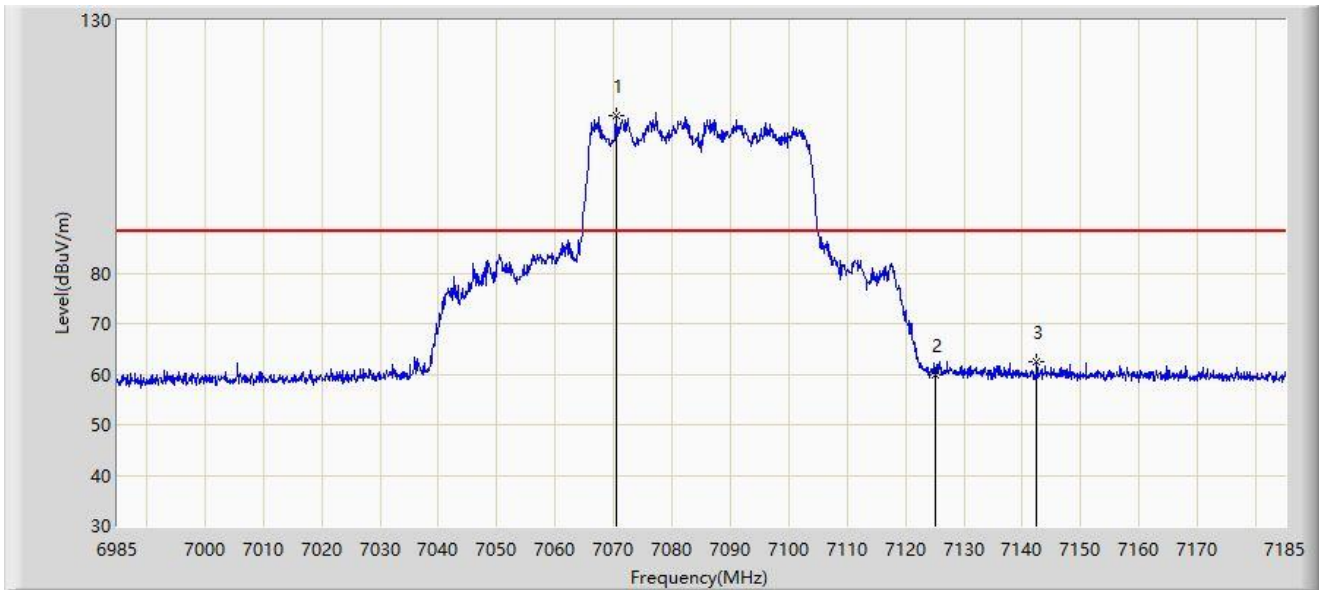


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7070.400	111.105	99.869	N/A	N/A	11.236	PK
2			7125.000	59.792	48.468	-28.408	88.200	11.324	PK
3			7142.500	62.560	51.319	-25.640	88.200	11.241	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:13
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 7085MHz	

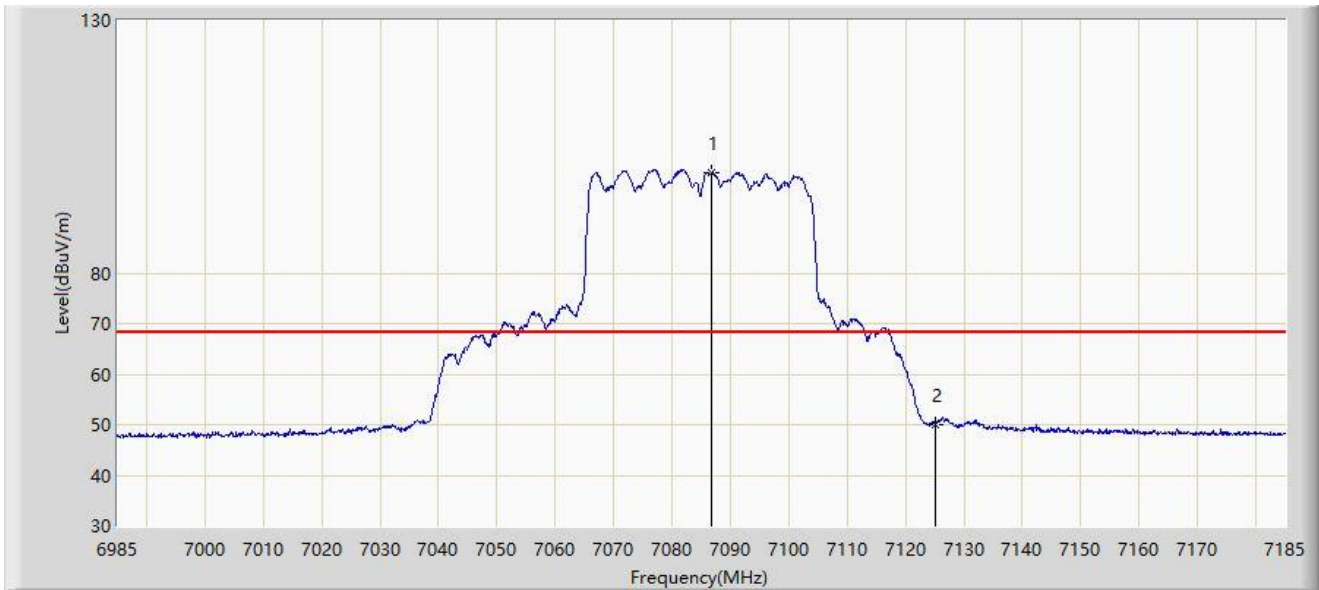


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	7086.700	99.740	88.660	N/A	N/A	11.081	AV
2			7125.000	50.001	38.677	-18.199	68.200	11.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:11
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 7085MHz	

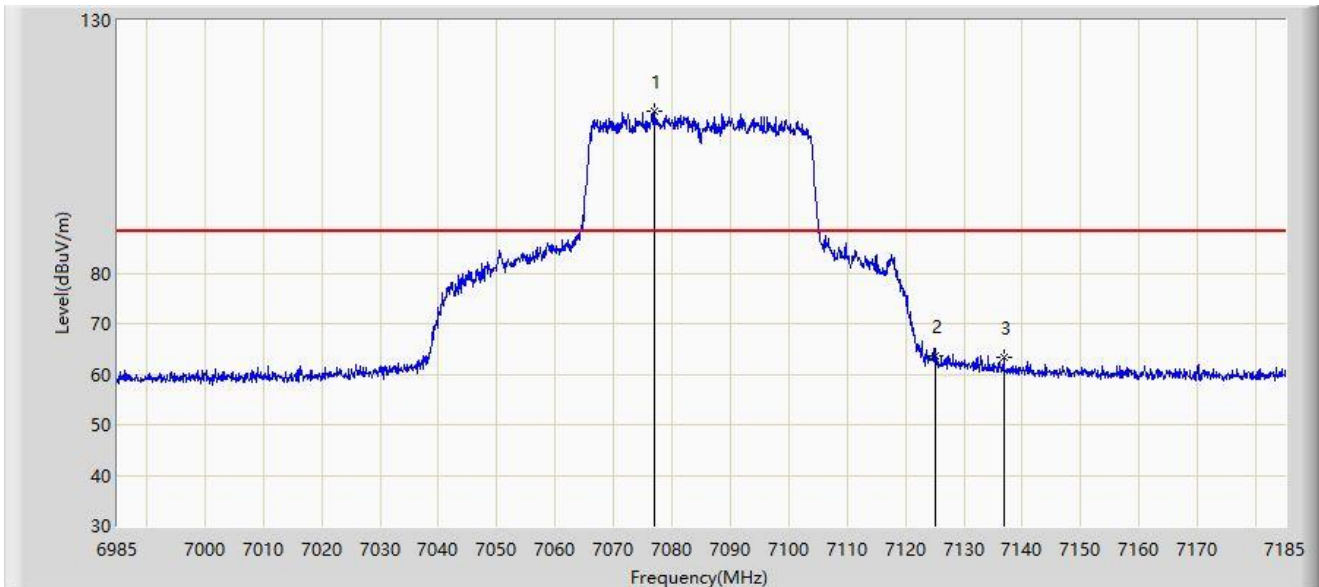


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	7077.100	111.949	100.771	N/A	N/A	11.177	PK
2			7125.000	63.517	52.193	-24.683	88.200	11.324	PK
3			7136.800	63.308	52.078	-24.892	88.200	11.231	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Time: 2022/03/07 - 14:09
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 7085MHz	

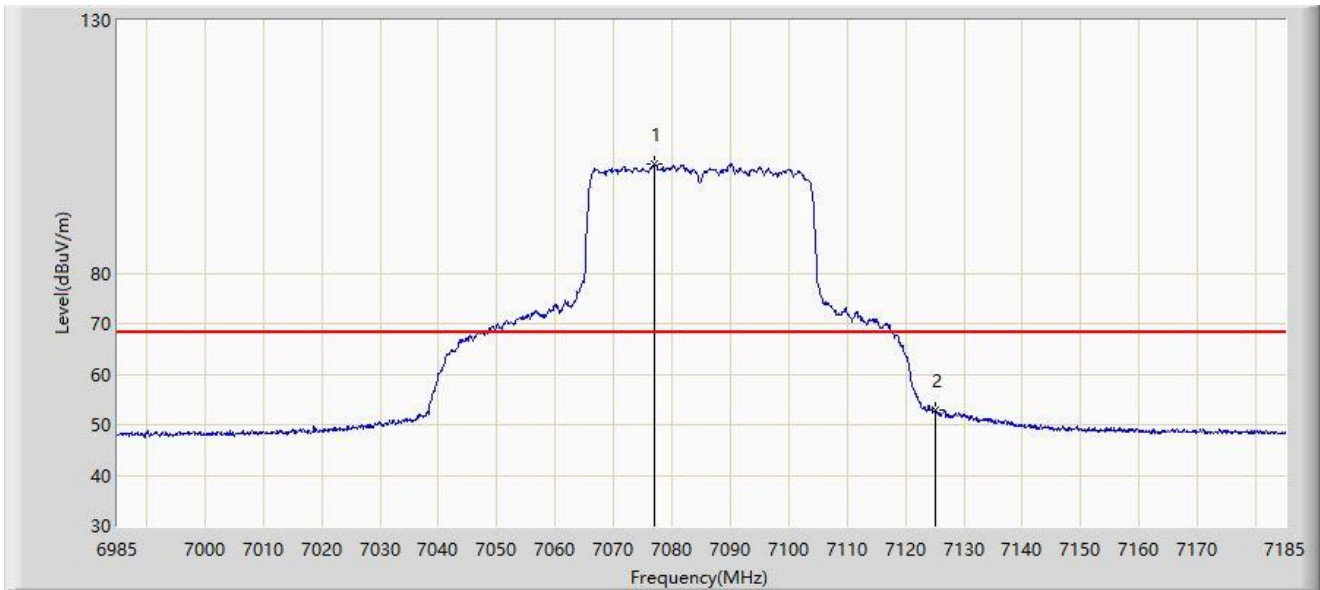


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	7077.000	101.456	90.277	N/A	N/A	11.179	AV
2			7125.000	52.849	41.525	-15.351	68.200	11.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:24
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5985MHz	

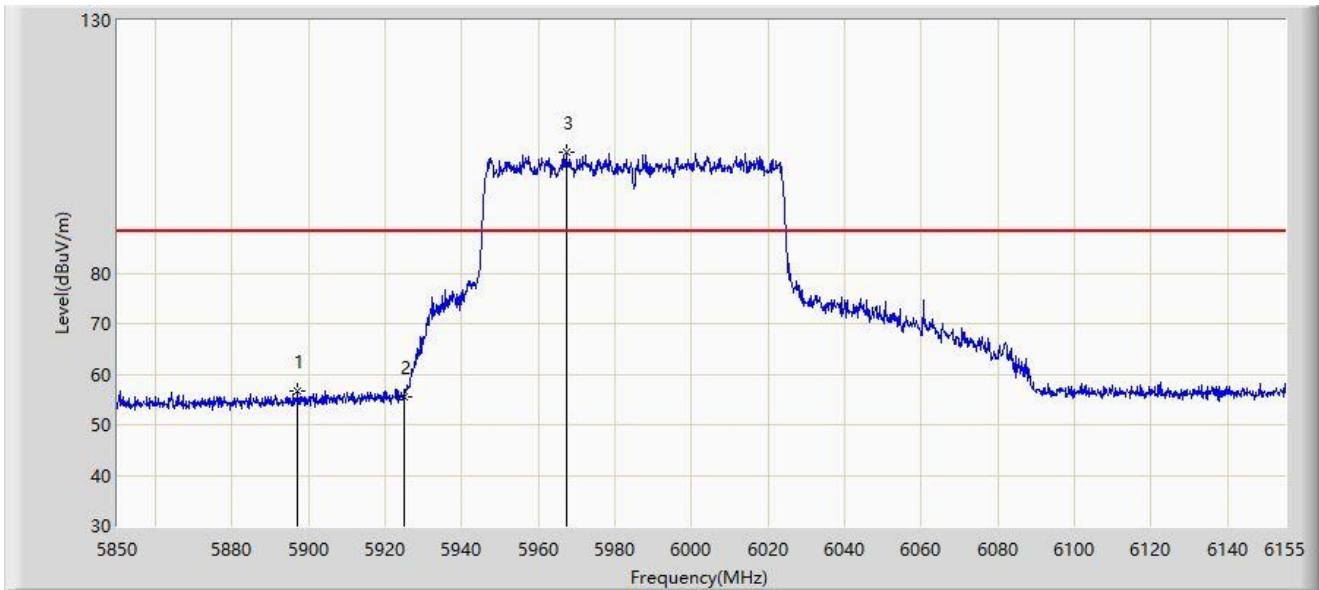


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5897.123	56.558	50.863	-31.642	88.200	5.695	PK
2			5925.000	55.646	49.626	-32.554	88.200	6.020	PK
3		*	5967.272	103.919	97.696	N/A	N/A	6.223	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:22
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5985MHz	

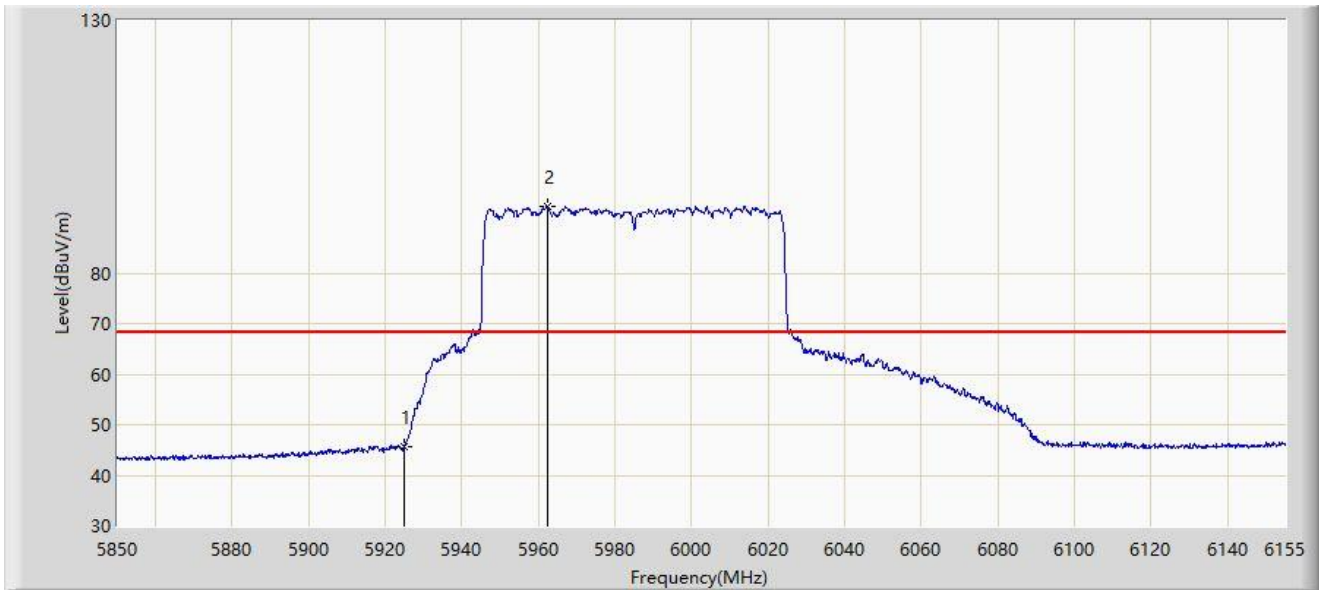


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	45.572	39.552	-22.628	68.200	6.020	AV
2		*	5962.240	93.272	87.036	N/A	N/A	6.236	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:21
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5985MHz	

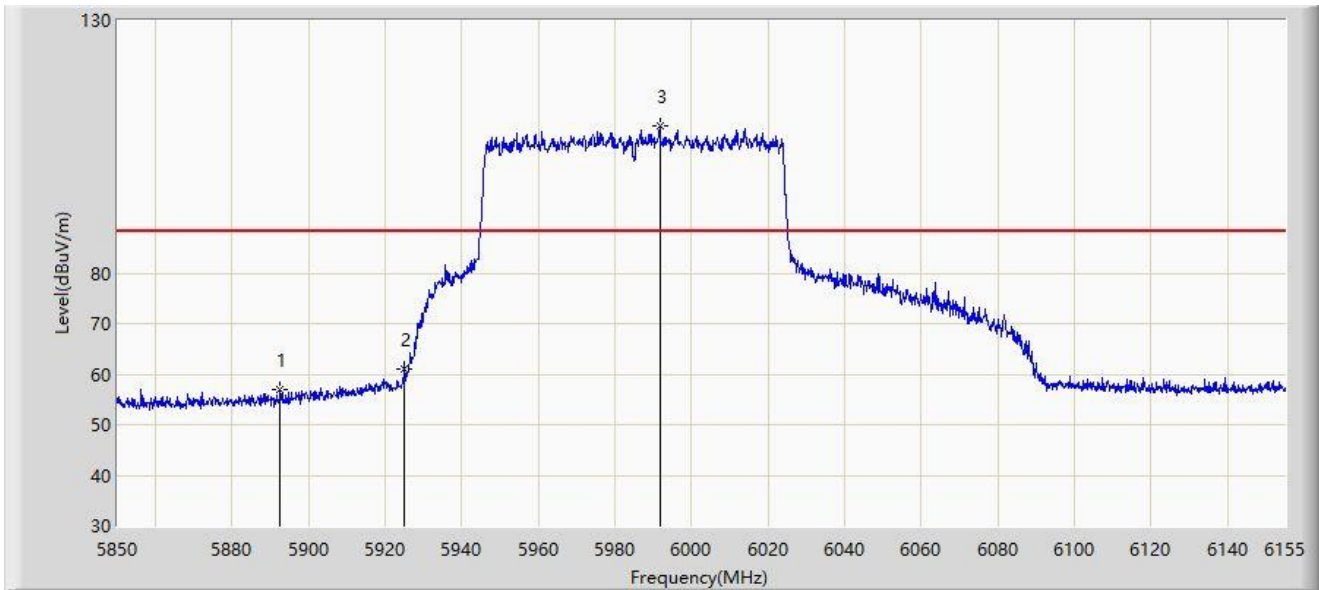


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5892.547	57.073	51.371	-31.127	88.200	5.702	PK
2			5925.000	61.063	55.043	-27.137	88.200	6.020	PK
3		*	5991.825	109.242	103.018	N/A	N/A	6.223	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:18
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5985MHz	

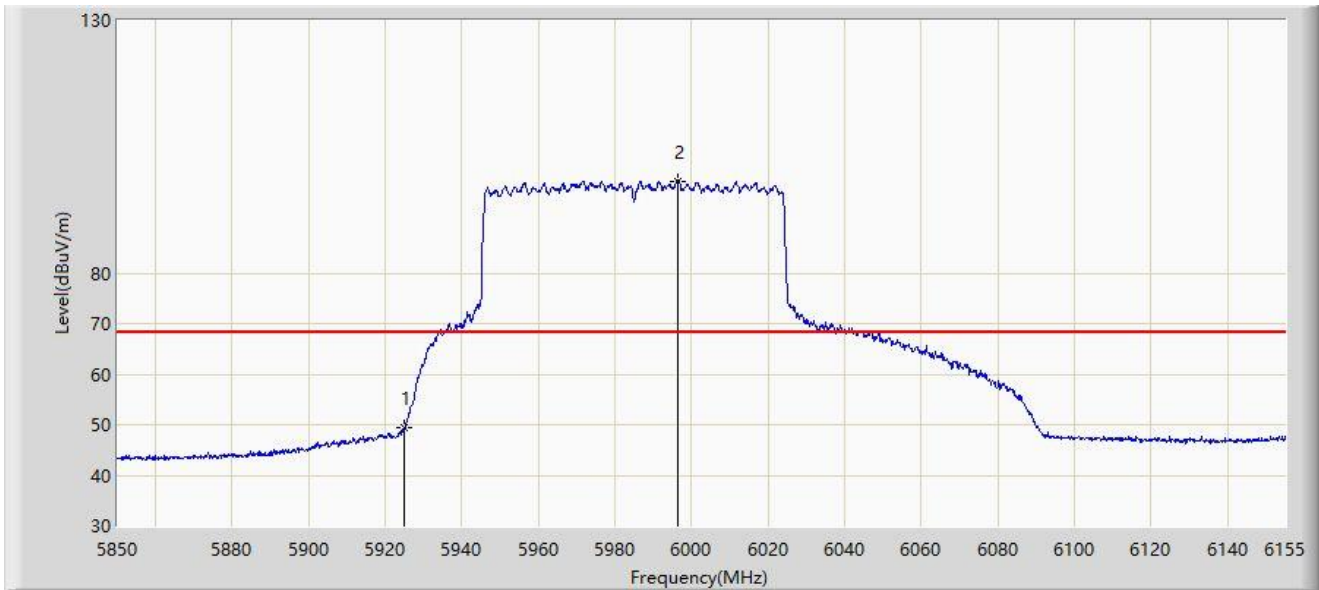


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	49.357	43.337	-18.843	68.200	6.020	AV
2		*	5996.400	98.242	91.998	N/A	N/A	6.244	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:33
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 7025MHz	

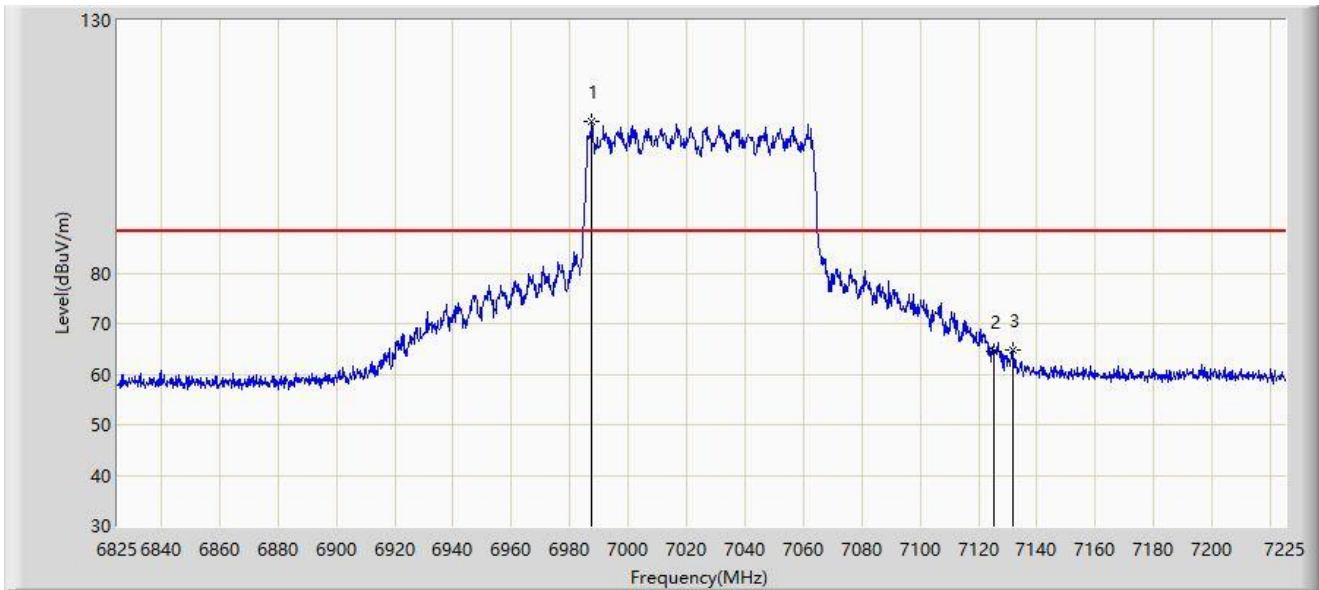


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	6987.400	110.129	99.691	N/A	N/A	10.439	PK
2			7125.000	64.485	53.161	-23.715	88.200	11.324	PK
3			7131.600	64.684	53.523	-23.516	88.200	11.162	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:32
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 7025MHz	

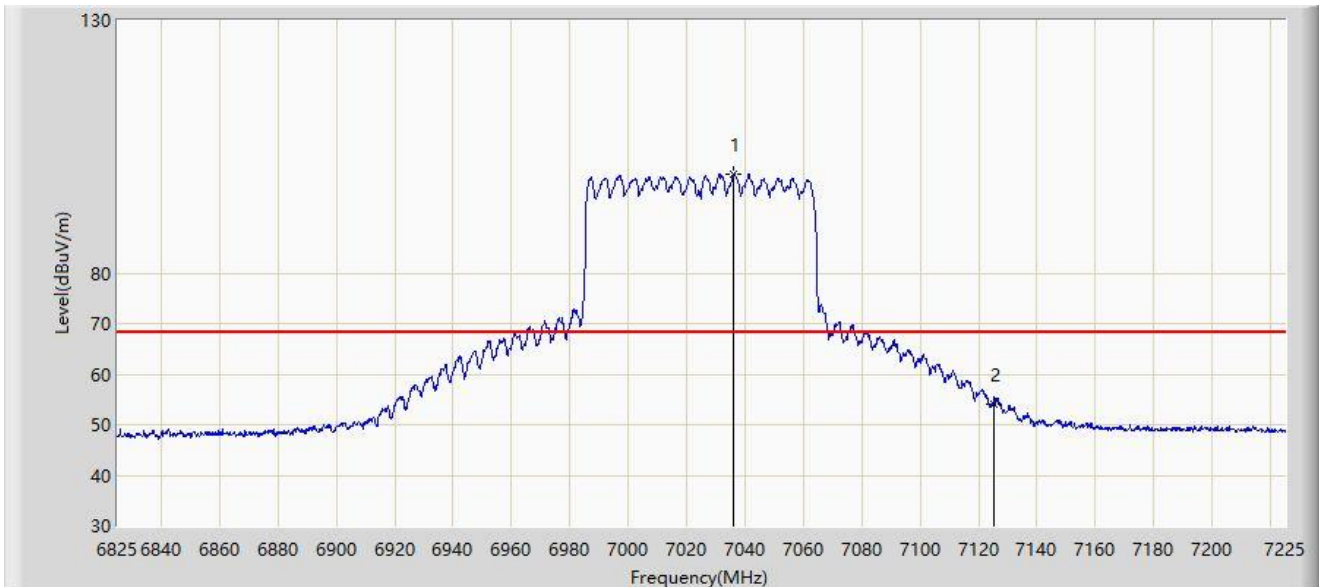


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7036.200	99.582	88.784	N/A	N/A	10.799	AV
2			7125.000	54.076	42.752	-14.124	68.200	11.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:30
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 7025MHz	

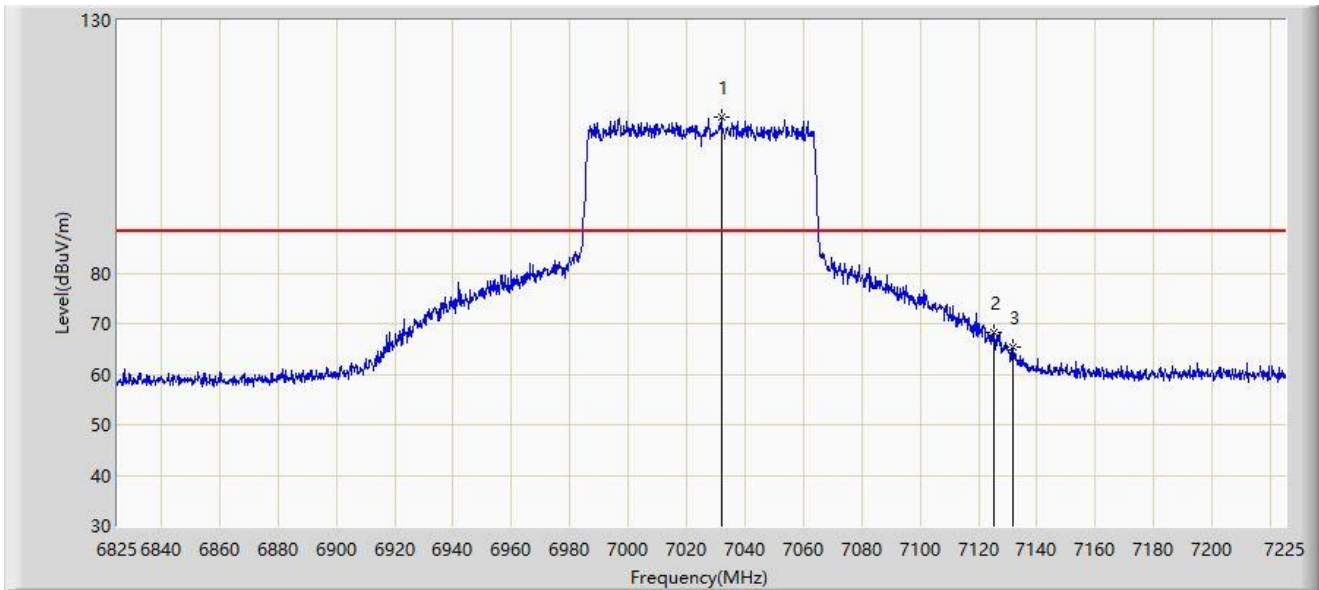


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	7031.800	110.988	100.265	N/A	N/A	10.723	PK
2			7125.000	68.343	57.019	-19.857	88.200	11.324	PK
3			7131.800	65.361	54.197	-22.839	88.200	11.164	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Time: 2022/03/07 - 14:27
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 7025MHz	

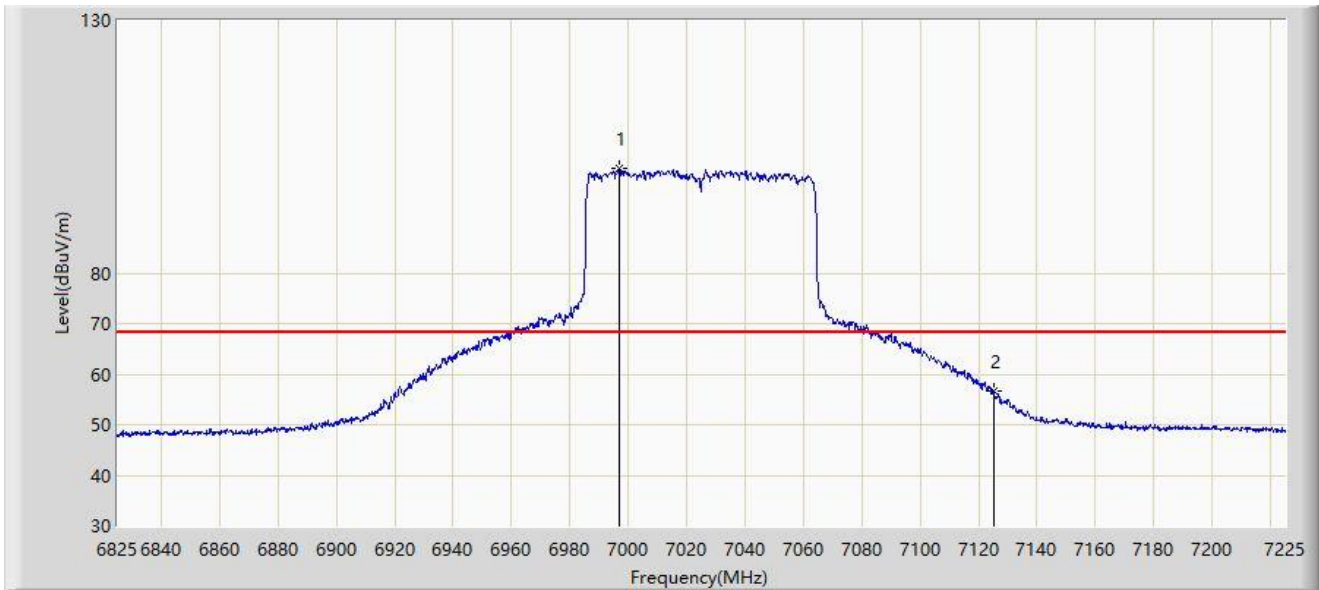


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	6996.800	100.706	90.271	N/A	N/A	10.435	AV
2			7125.000	56.524	45.200	-11.676	68.200	11.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:43
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6025MHz	

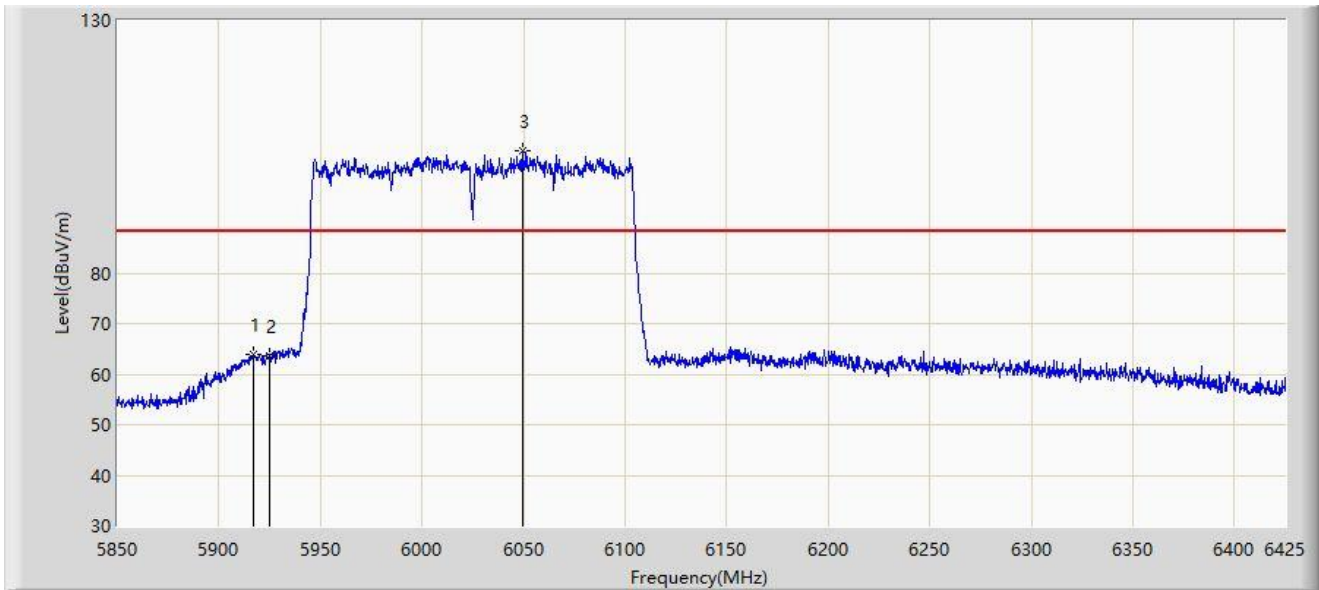


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5916.700	63.802	58.083	-24.398	88.200	5.719	PK
2			5925.000	63.670	57.650	-24.530	88.200	6.020	PK
3		*	6049.525	104.192	97.808	N/A	N/A	6.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:42
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6025MHz	

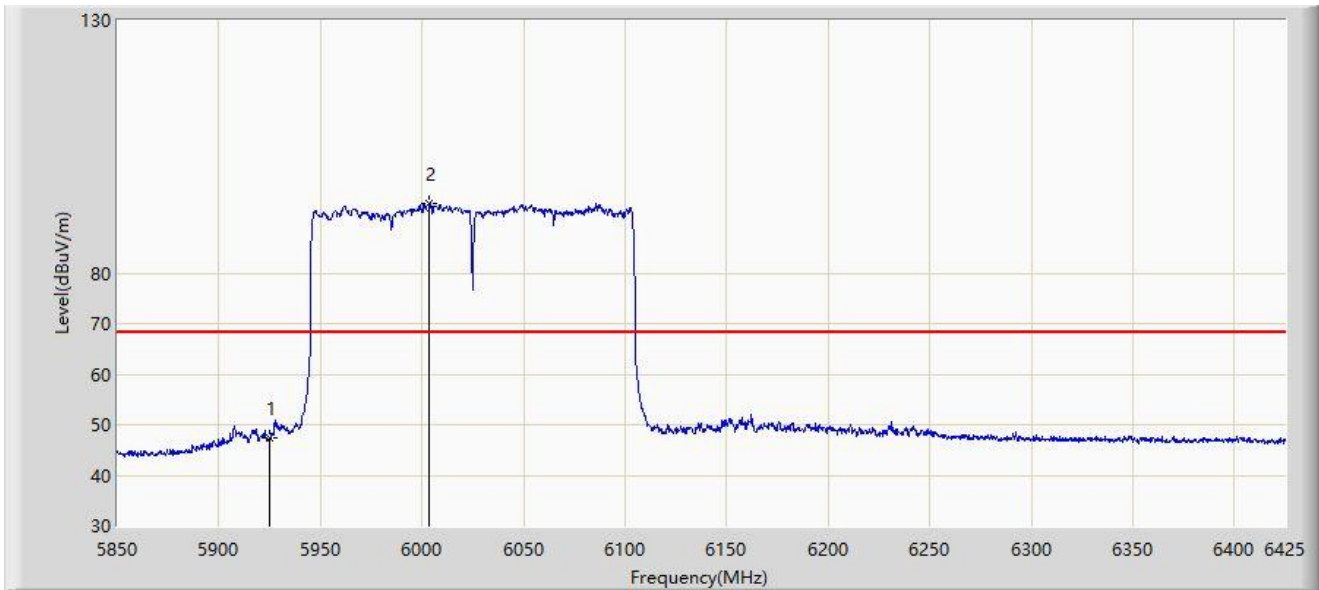


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	47.389	41.369	-20.811	68.200	6.020	AV
2		*	6003.812	93.854	87.574	N/A	N/A	6.280	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:40
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6025MHz	

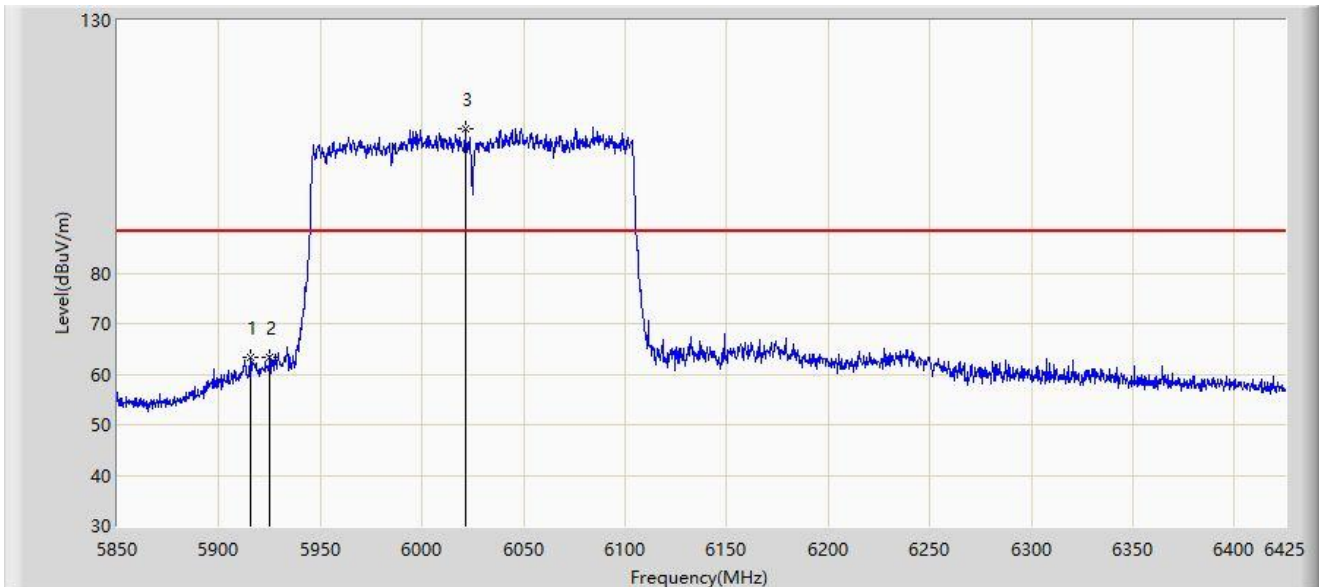


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5915.263	63.282	57.578	-24.918	88.200	5.705	PK
2			5925.000	63.414	57.394	-24.786	88.200	6.020	PK
3		*	6021.350	108.644	102.323	N/A	N/A	6.322	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 14:36
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6025MHz	

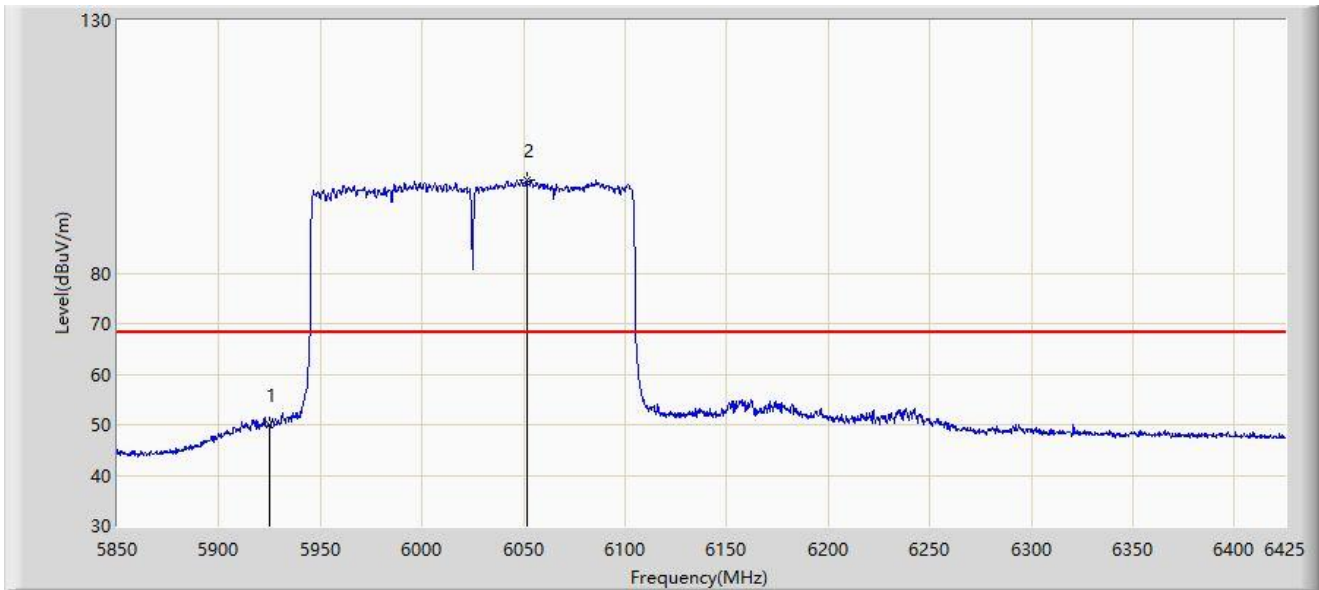


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5925.000	49.905	43.885	-18.295	68.200	6.020	AV
2		*	6051.538	98.363	91.970	N/A	N/A	6.393	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 15:03
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

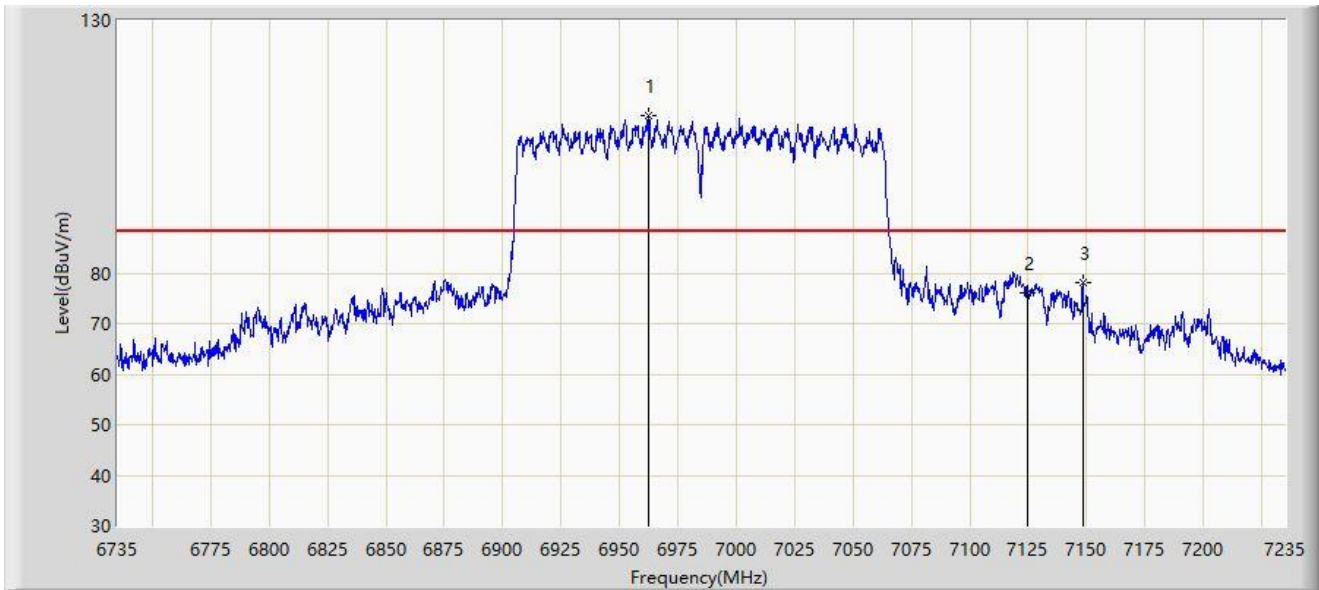


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	6962.750	111.078	100.938	N/A	N/A	10.140	PK
2			7125.000	76.180	64.856	-12.020	88.200	11.324	PK
3			7148.250	78.180	66.939	-10.020	88.200	11.240	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 15:02
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

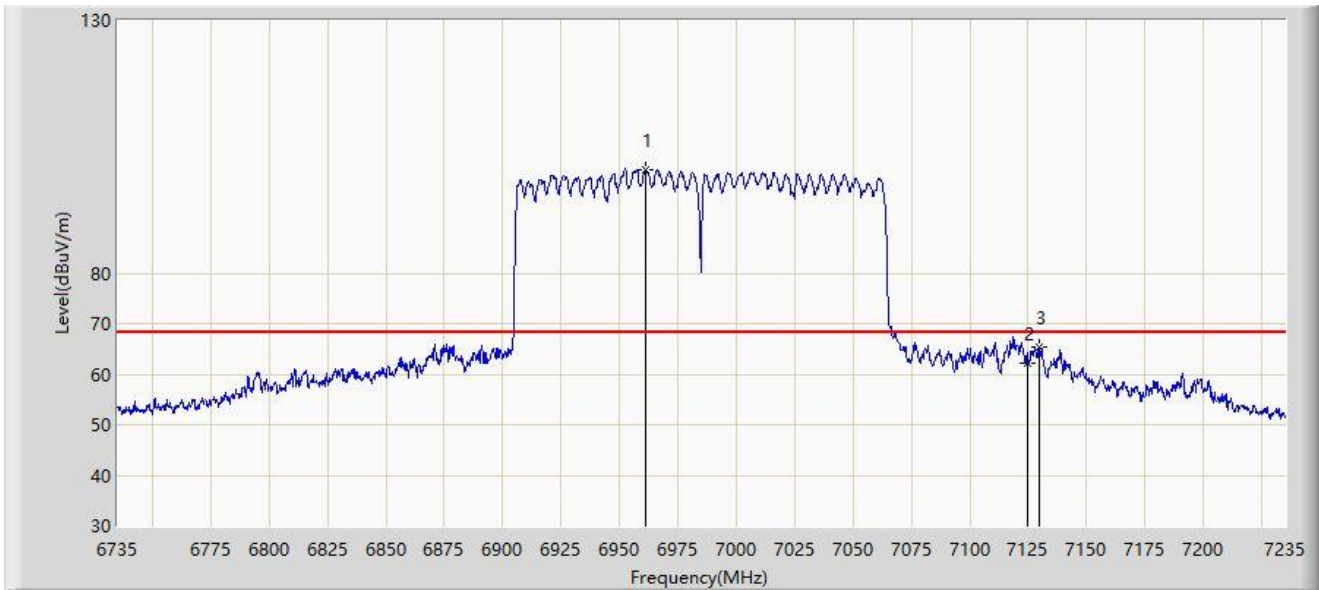


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	6961.250	100.443	90.329	N/A	N/A	10.114	AV
2			7125.000	62.161	50.837	-6.039	68.200	11.324	AV
3			7129.750	65.272	53.897	-2.928	68.200	11.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 15:00
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

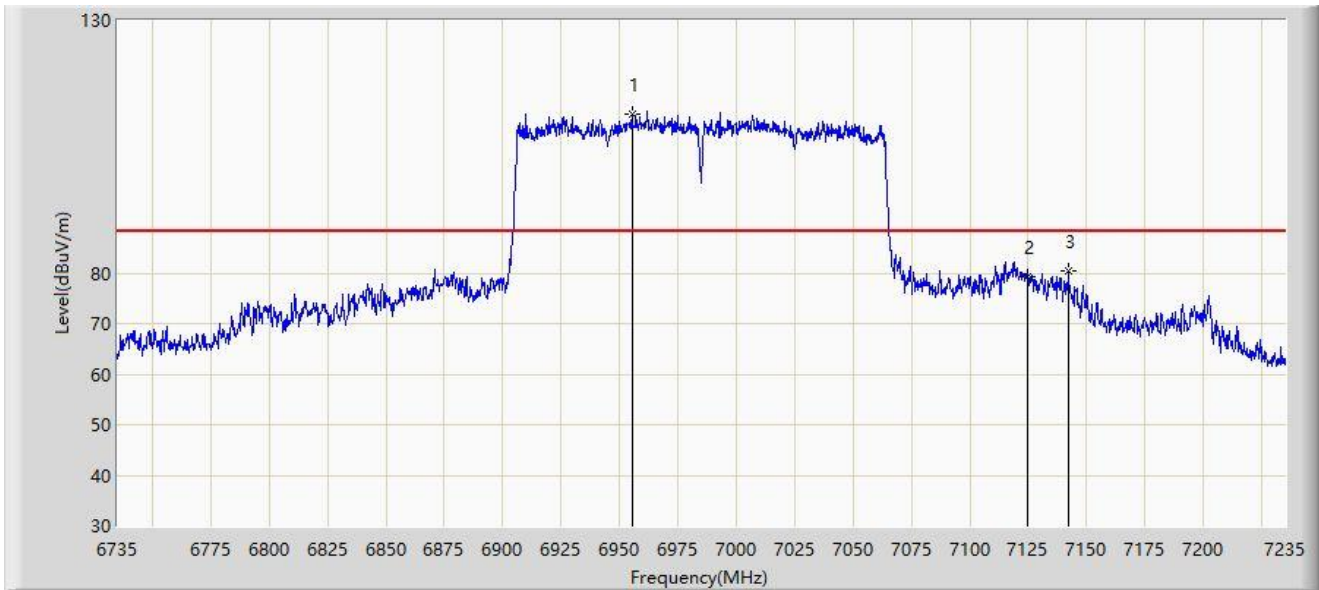


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	6955.250	111.524	101.512	N/A	N/A	10.012	PK
2			7125.000	79.365	68.041	-8.835	88.200	11.324	PK
3			7142.250	80.293	69.052	-7.907	88.200	11.241	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Time: 2022/03/07 - 14:52
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

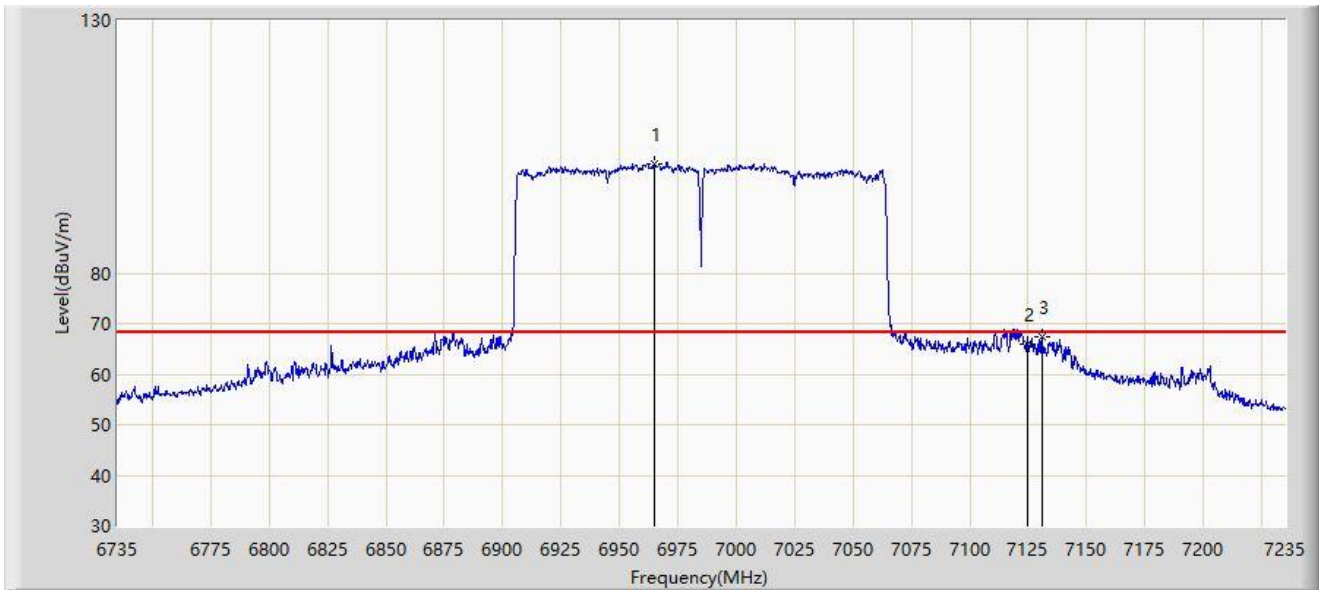


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	6965.000	101.713	91.534	N/A	N/A	10.179	AV
2			7125.000	65.942	54.618	-2.258	68.200	11.324	AV
3			7131.000	67.415	56.023	-0.785	68.200	11.392	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**A.10 AC Conducted Emissions Test Result**

Site: WZ-SR2	Time: 2022/03/17 - 09:51
Temperature: 22.6°C	Humidity: 66.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

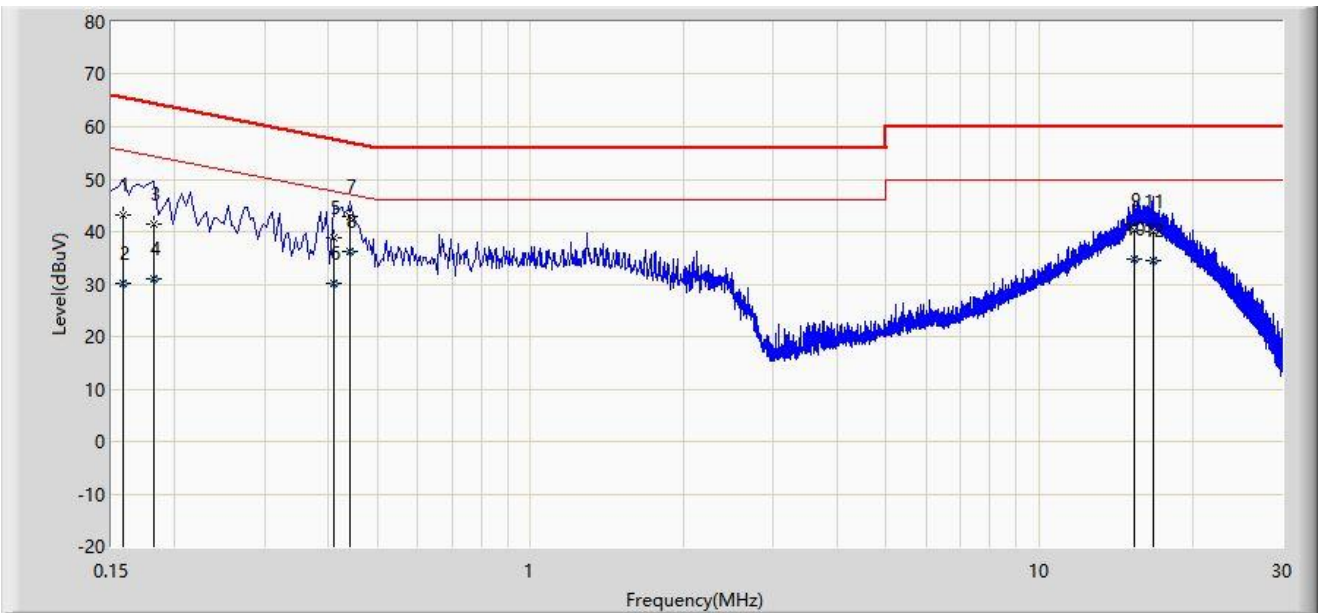


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	43.255	33.355	-22.314	65.568	9.900	QP
2			0.158	30.029	20.129	-25.540	55.568	9.900	AV
3			0.182	41.563	31.663	-22.831	64.394	9.900	QP
4			0.182	31.023	21.123	-23.371	54.394	9.900	AV
5			0.410	38.757	28.844	-18.891	57.648	9.914	QP
6			0.410	30.223	20.309	-17.426	47.648	9.914	AV
7			0.442	42.771	32.855	-14.253	57.024	9.916	QP
8		*	0.442	36.343	26.427	-10.681	47.024	9.916	AV
9			15.318	40.245	29.215	-19.755	60.000	11.029	QP
10			15.318	34.839	23.809	-15.161	50.000	11.029	AV
11			16.762	39.862	28.696	-20.138	60.000	11.166	QP
12			16.762	34.436	23.271	-15.564	50.000	11.166	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/03/17 - 09:55
Temperature: 22.6°C	Humidity: 66.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 6985MHz	

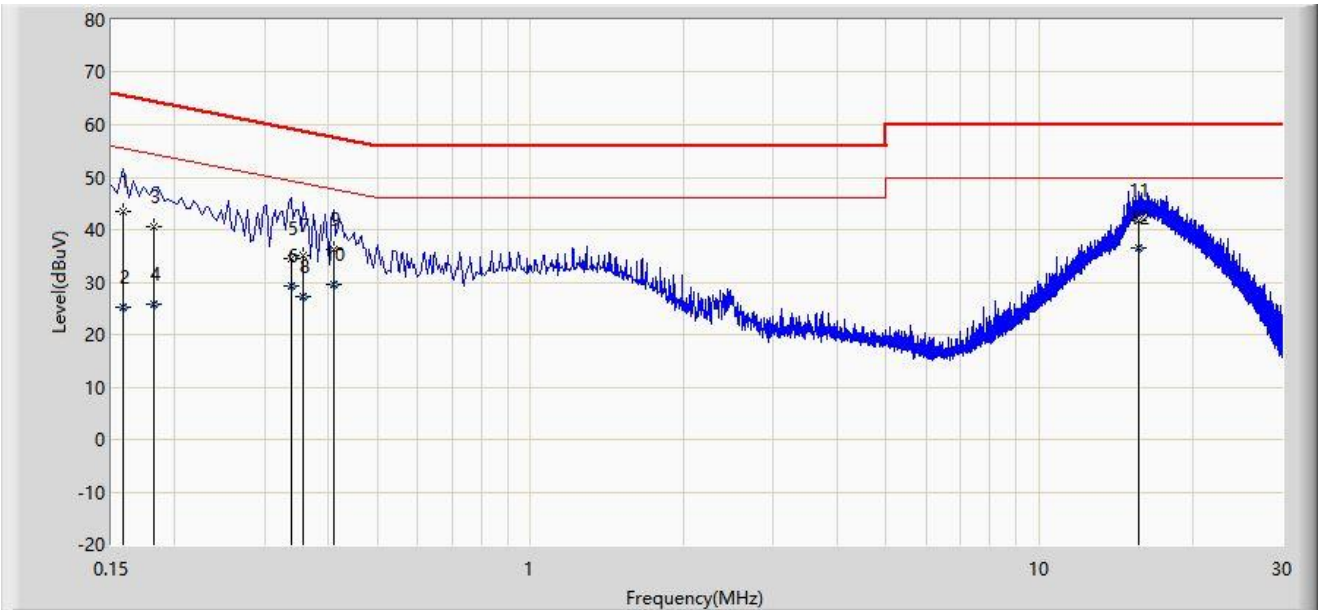

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	43.486	33.568	-22.082	65.568	9.918	QP
2			0.158	25.302	15.384	-30.266	55.568	9.918	AV
3			0.182	40.561	30.647	-23.833	64.394	9.913	QP
4			0.182	25.824	15.910	-28.570	54.394	9.913	AV
5			0.338	34.440	24.521	-24.813	59.252	9.919	QP
6			0.338	29.150	19.231	-20.102	49.252	9.919	AV
7			0.358	35.042	25.122	-23.733	58.775	9.920	QP
8			0.358	27.368	17.447	-21.407	48.775	9.920	AV
9			0.410	36.322	26.398	-21.326	57.648	9.924	QP
10			0.410	29.669	19.746	-17.979	47.648	9.924	AV
11			15.694	41.821	30.714	-18.179	60.000	11.107	QP
12		*	15.694	36.567	25.460	-13.433	50.000	11.107	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

## **Appendix B – Test Setup Photograph**

Refer to “2202RSU047-UT” file.

## Appendix C – EUT Photograph

Refer to “2202RSU047-UE” file.

————— The End —————