



FCC RF Test Report

APPLICANT : Chengdu Ebyte Electronic Technology Co.,Ltd.
EQUIPMENT : Wireless transceiver model
BRAND NAME : EBYTE
MODEL NAME : E22-400T22S, E220-400T22S, E32-433T20S
FCC ID : 2A8C3-240101
STANDARD : 47 CRF Part 15 Subpart C §15.231
CLASSIFICATION : (DSC) Security/Remote Control Transmitter
TEST DATE(S) : Dec. 12, 2023 ~ Jan. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

SUMMARY OF TEST RESULT4

1. GENERAL INFORMATION.....5

1.1 Applicant..... 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test 5

1.4 Product Specification of Equipment Under Test 5

1.5 Modification of EUT 5

1.6 Testing Location 6

1.7 Test Software 6

1.8 Applicable Standards..... 6

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST7

2.1 Descriptions of Test Mode 7

2.2 Connection Diagram of Test System 7

2.3 Table for Supporting Units 8

2.4 EUT Operation Test Setup 8

3. TEST RESULTS.....9

3.1 AC Power Line Conducted Emissions Measurement 9

3.2 Types of Momentarily Operated Devices..... 11

3.3 20dB Emission Bandwidth and 99% Bandwidth Measurement 13

3.4 Field Strength of Fundamental and Spurious Emissions 14

3.5 Antenna Requirements..... 18

4. LIST OF MEASURING EQUIPMENT19

5. MEASUREMENT UNCERTAINTY.....20

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

B1. Test Result of 20dB and 99% Occupied Bandwidth

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	Under limit 25.33 dB at 2.190MHz
3.2	15.231(a)	Types of Momentary Signals	Pass	-
3.3	15.231(c)	20dB and 99% Occupied Bandwidth	Pass	-
3.4	15.231(b) 15.205 15.209	Field Strength of Fundamental and Spurious Emissions	Pass	Under limit 1.53 dB at 410.24 MHz
3.5	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:
<ol style="list-style-type: none"> The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Information

1.1 Applicant

Chengdu Ebyte Electronic Technology Co.,Ltd.

B5, Mould Industrial Park, 199# Xiqu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

1.2 Manufacturer

Chengdu Ebyte Electronic Technology Co.,Ltd.

B5, Mould Industrial Park, 199# Xiqu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless transceiver model
Brand Name	EBYTE
Model Name	E22-400T22S, E220-400T22S, E32-433T20S
FCC ID	2A8C3-240101
SN	S202311600002
HW Version	V2.2
SW Version	V1.0
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The difference between the three models is that the corresponding labels are different.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	410.125 ~ 493.125MHz
20dB BW	290.90 kHz
99%OBW	251.81 kHz
Antenna Type	Rubber Antenna
Antenna Gain	4 dBi
Data Rate / Modulation	250k / DSSS

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.231
- ♦ ANSI C63.10-2013

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode


Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.


Summary table of Test Cases	
Test Item	Modulation
	250kHz DSSS
Conducted TCs	Mode 1: 410.255 MHz Tx Mode 2: 450 MHz Tx Mode 3: 492.995 MHz Tx
Radiated TCs	Mode 1: 410.255 MHz Tx Mode 2: 450 MHz Tx Mode 3: 492.995 MHz Tx
AC Conducted Emission	Mode 1: RF Tx + Charging from Notebook

2.2 Connection Diagram of Test System

Conducted Emission:

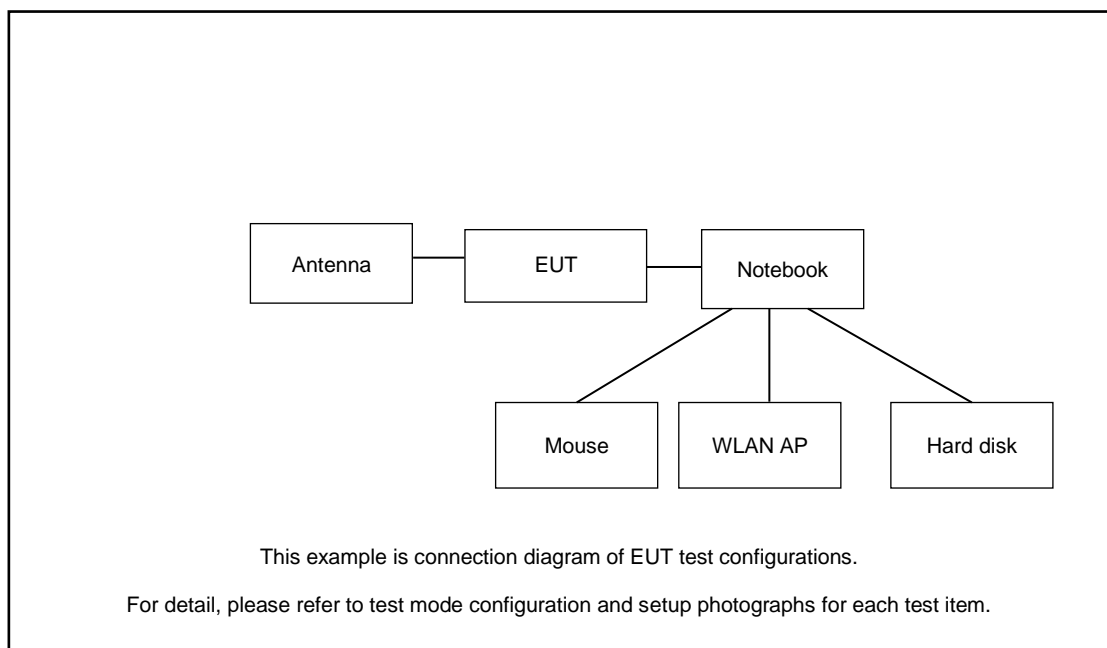

Radiated Emission:

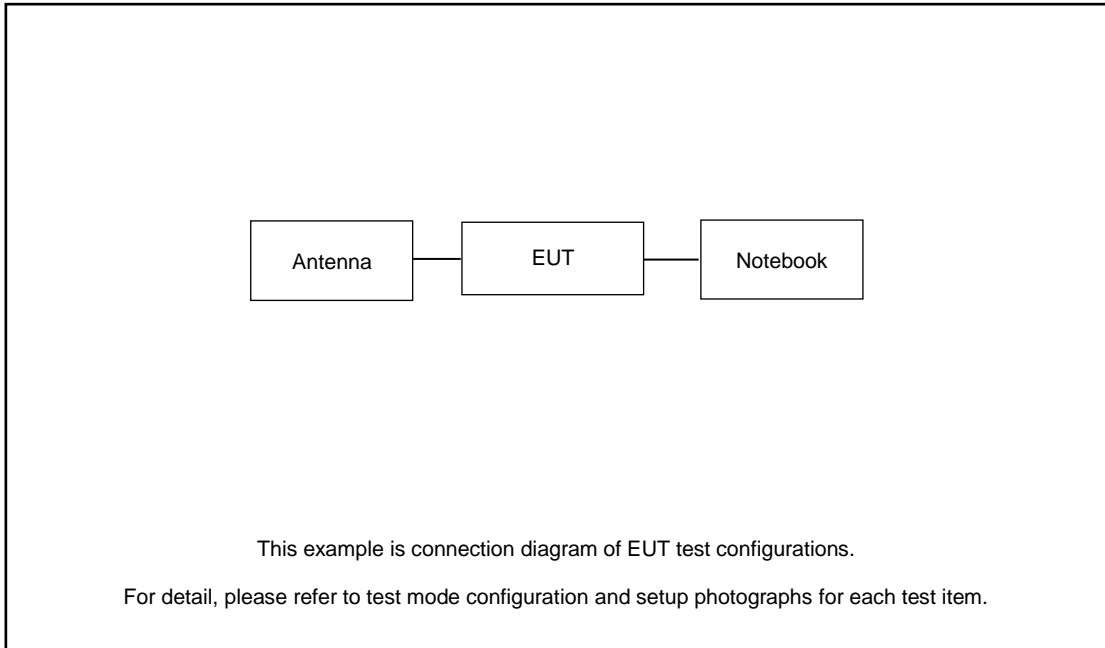

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G410	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
2.	Hard disk	KINGSHARE	KSP6120G	N/A	N/A	N/A
3.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	N/A
4.	Mouse	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT runs the test software “XCOM V2.6” and enabled to make EUT continuous transmit.



3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

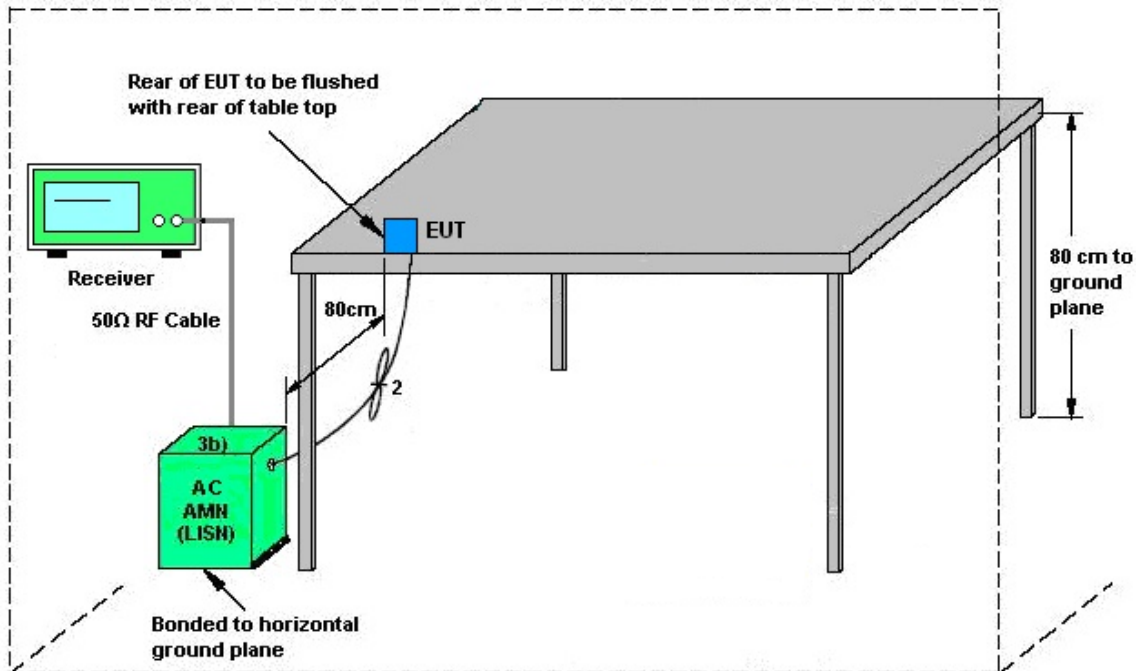

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.2 Types of Momentarily Operated Devices

3.2.1 Limit

<input checked="" type="checkbox"/>	<p>§15.231 (a)(1)</p> <p>A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.</p>
<input type="checkbox"/>	<p>§15.231 (a)(2)</p> <p>A transmitter activated automatically shall cease transmission within 5 seconds after activation.</p>
<input type="checkbox"/>	<p>§15.231 (a)(3)</p> <p>Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.</p>
<input type="checkbox"/>	<p>§15.231 (a)(4)</p> <p>Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.</p>
<input type="checkbox"/>	<p>§15.231 (a)(5)</p> <p>Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.</p>


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.


3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Set the spectrum analyzer for ZERO SPAN. Sweep time = 20 s
4. Runs the test software “XCOM V2.6” and enabled to make EUT continuous transmit.
5. Enter the "AT+MWAVE=0,0," command to manually stop transmitting
6. Record the duration time.

3.2.4 Test Setup

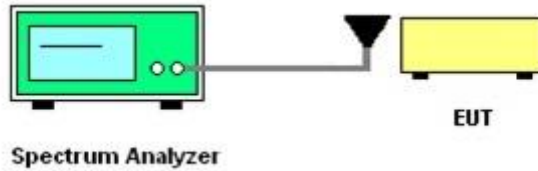

3.2.5 Test Result of transmission time

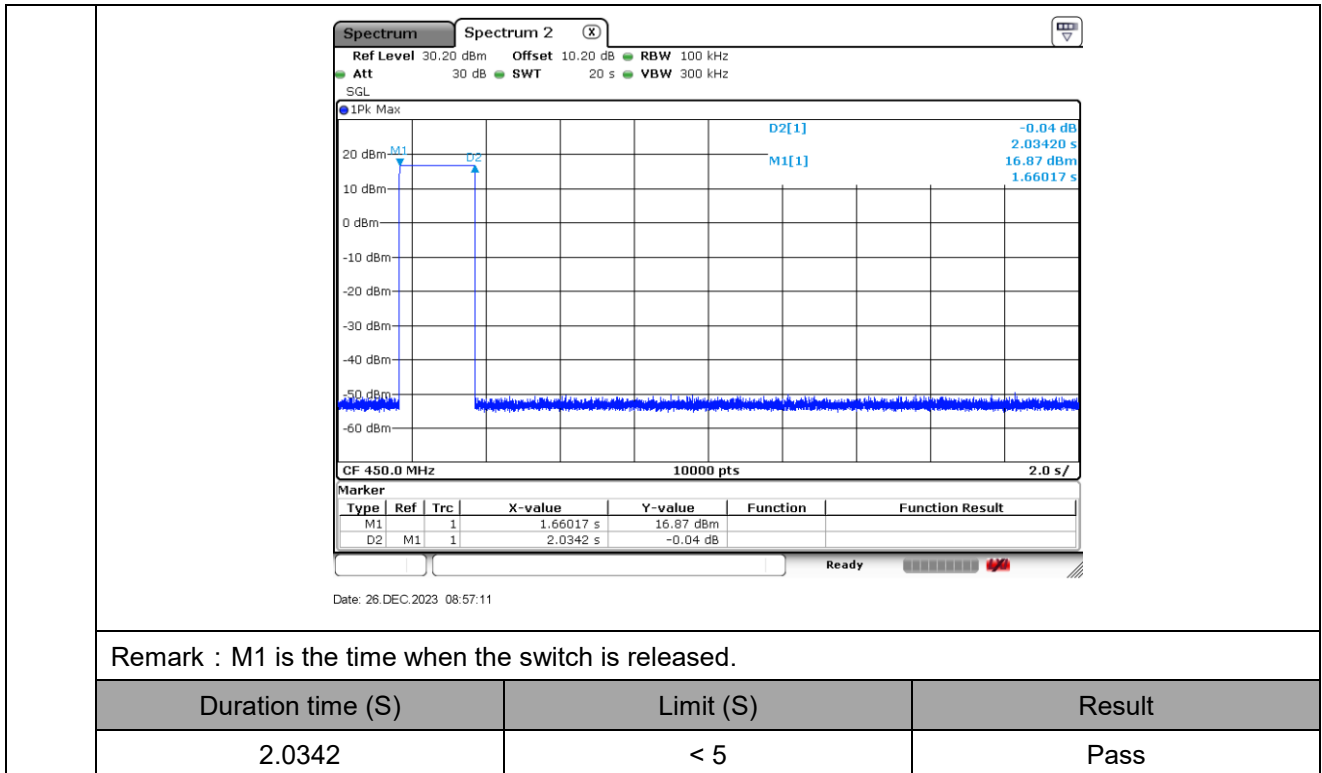

3.3 20dB Emission Bandwidth and 99% Bandwidth Measurement

3.3.1 Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The 99% bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99% bandwidth shall be less or equal to 0.5% of the centre frequency.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 10 kHz and the video bandwidth of 30 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% BW.

3.3.4 Test Setup

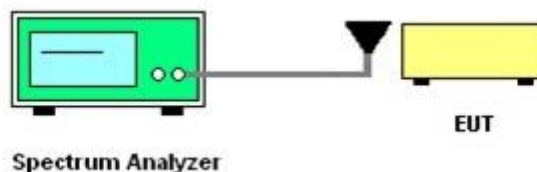

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental and Spurious Emissions

3.4.1 Limit

☒	<p>15.231(b)</p> <p>In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Rules and specifications</th> <th colspan="2" style="text-align: center;">FCC CFR 47 Part 15 section 15.231</th> </tr> <tr> <th style="text-align: center;">Fundamental frequency (MHz)</th> <th style="text-align: center;">Field strength of fundamental ($\mu\text{V/m}$) at 3m</th> <th style="text-align: center;">Field strength of spurious emissions ($\mu\text{V/m}$) at 3m</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">40.66-40.70</td> <td style="text-align: center;">2250</td> <td style="text-align: center;">225</td> </tr> <tr> <td style="text-align: center;">70-130</td> <td style="text-align: center;">1250</td> <td style="text-align: center;">125</td> </tr> <tr> <td style="text-align: center;">130-174</td> <td style="text-align: center;">1250 to 3750*</td> <td style="text-align: center;">125 to 375*</td> </tr> <tr> <td style="text-align: center;">174-260</td> <td style="text-align: center;">3750</td> <td style="text-align: center;">375</td> </tr> <tr> <td style="text-align: center;">260-470</td> <td style="text-align: center;">3750 to 12500*</td> <td style="text-align: center;">375 to 1250*</td> </tr> <tr> <td style="text-align: center;">Above 470</td> <td style="text-align: center;">12500</td> <td style="text-align: center;">1250</td> </tr> </tbody> </table> <p>* Linear interpolation with frequency, f, in MHz. [Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]</p>	Rules and specifications	FCC CFR 47 Part 15 section 15.231		Fundamental frequency (MHz)	Field strength of fundamental ($\mu\text{V/m}$) at 3m	Field strength of spurious emissions ($\mu\text{V/m}$) at 3m	40.66-40.70	2250	225	70-130	1250	125	130-174	1250 to 3750*	125 to 375*	174-260	3750	375	260-470	3750 to 12500*	375 to 1250*	Above 470	12500	1250
Rules and specifications	FCC CFR 47 Part 15 section 15.231																								
Fundamental frequency (MHz)	Field strength of fundamental ($\mu\text{V/m}$) at 3m	Field strength of spurious emissions ($\mu\text{V/m}$) at 3m																							
40.66-40.70	2250	225																							
70-130	1250	125																							
130-174	1250 to 3750*	125 to 375*																							
174-260	3750	375																							
260-470	3750 to 12500*	375 to 1250*																							
Above 470	12500	1250																							
☒	<p>15.209</p> <p>For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Frequency (MHz)</th> <th style="text-align: center;">Field Strength (microvolts/meter)</th> <th style="text-align: center;">Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">0.009 – 0.490</td> <td style="text-align: center;">$2400/F(\text{kHz})$</td> <td style="text-align: center;">300</td> </tr> <tr> <td style="text-align: center;">0.490 – 1.705</td> <td style="text-align: center;">$24000/F(\text{kHz})$</td> <td style="text-align: center;">30</td> </tr> <tr> <td style="text-align: center;">1.705 – 30.0</td> <td style="text-align: center;">30</td> <td style="text-align: center;">30</td> </tr> <tr> <td style="text-align: center;">30 – 88</td> <td style="text-align: center;">100</td> <td style="text-align: center;">3</td> </tr> <tr> <td style="text-align: center;">88 – 216</td> <td style="text-align: center;">150</td> <td style="text-align: center;">3</td> </tr> <tr> <td style="text-align: center;">216 - 960</td> <td style="text-align: center;">200</td> <td style="text-align: center;">3</td> </tr> <tr> <td style="text-align: center;">Above 960</td> <td style="text-align: center;">500</td> <td style="text-align: center;">3</td> </tr> </tbody> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009 – 0.490	$2400/F(\text{kHz})$	300	0.490 – 1.705	$24000/F(\text{kHz})$	30	1.705 – 30.0	30	30	30 – 88	100	3	88 – 216	150	3	216 - 960	200	3	Above 960	500	3
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)																							
0.009 – 0.490	$2400/F(\text{kHz})$	300																							
0.490 – 1.705	$24000/F(\text{kHz})$	30																							
1.705 – 30.0	30	30																							
30 – 88	100	3																							
88 – 216	150	3																							
216 - 960	200	3																							
Above 960	500	3																							

<input type="checkbox"/>	<p>15.231(e)</p> <p>Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:</p>																									
	<table border="1"> <thead> <tr> <th style="width: 35%;">Rules and specifications</th> <th colspan="2">FCC CFR 47 Part 15 section 15.231</th> </tr> <tr> <th>Fundamental frequency (MHz)</th> <th>Field strength of fundamental (μV/m) at 3m</th> <th>Field strength of spurious emissions (μV/m) at 3m</th> </tr> </thead> <tbody> <tr> <td>40.66-40.70</td> <td>1000</td> <td>100</td> </tr> <tr> <td>70-130</td> <td>500</td> <td>50</td> </tr> <tr> <td>130-174</td> <td>500 to 1500</td> <td>50 to 150</td> </tr> <tr> <td>174-260</td> <td>1500</td> <td>150</td> </tr> <tr> <td>260-470</td> <td>1500 to 5000</td> <td>150 to 500</td> </tr> <tr> <td>Above 470</td> <td>5000</td> <td>500</td> </tr> </tbody> </table>		Rules and specifications	FCC CFR 47 Part 15 section 15.231		Fundamental frequency (MHz)	Field strength of fundamental (μV/m) at 3m	Field strength of spurious emissions (μV/m) at 3m	40.66-40.70	1000	100	70-130	500	50	130-174	500 to 1500	50 to 150	174-260	1500	150	260-470	1500 to 5000	150 to 500	Above 470	5000	500
Rules and specifications	FCC CFR 47 Part 15 section 15.231																									
Fundamental frequency (MHz)	Field strength of fundamental (μV/m) at 3m	Field strength of spurious emissions (μV/m) at 3m																								
40.66-40.70	1000	100																								
70-130	500	50																								
130-174	500 to 1500	50 to 150																								
174-260	1500	150																								
260-470	1500 to 5000	150 to 500																								
Above 470	5000	500																								
	<p>* Linear interpolation with frequency, f, in MHz.</p>																									

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use of measurement instrumentation with a CISPR quasi-peak detector.
5. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported for frequency range below 1GHz.
6. If emission level of the EUT in Peak measurement mode is 20dB lower than Peak limit line (that

means the emission level in Peak measurement mode complies with both Peak and Average limit lines), then only Peak measurement result is reported. Otherwise, emissions in Average measurement mode shall be measured, and reported.


7. Test Results Explanation:

$$\text{Level(dB}\mu\text{V/m)} = \text{Read Level(dB}\mu\text{V)} + \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$


$$\text{Margin(dB)} = \text{Level(dB}\mu\text{V/m)} - \text{Limit Line(dB}\mu\text{V/m)}$$

3.4.4 Test Setup


For radiated emissions below 30MHz

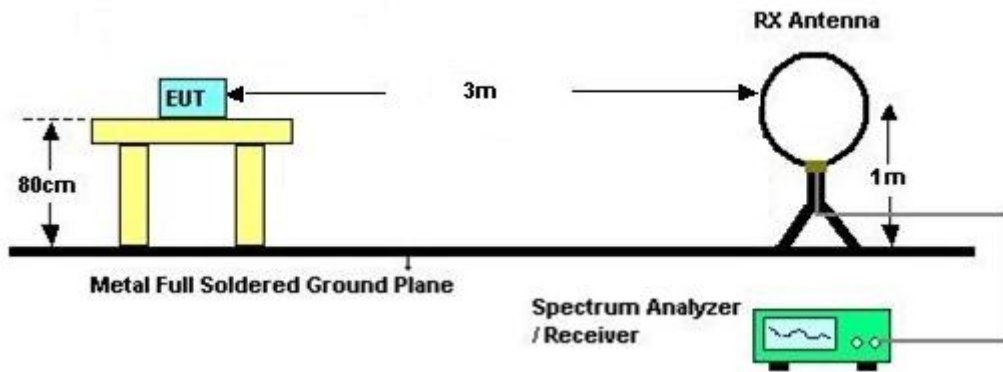

For radiated emissions from 30MHz to 1GHz

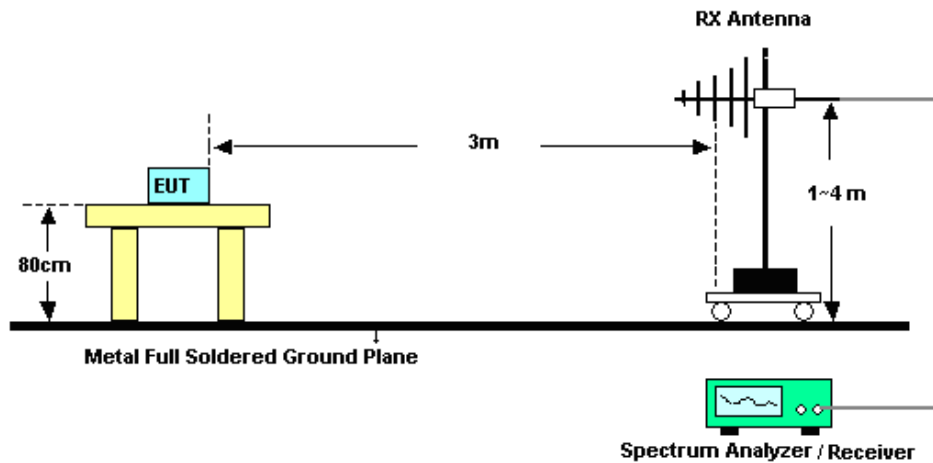

For radiated emissions above 1GHz

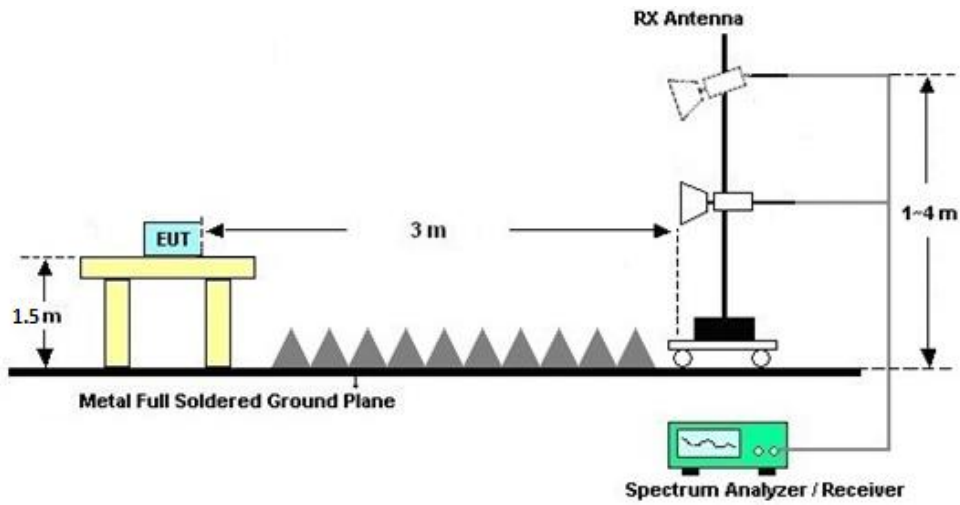

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Fundamental and Spurious Emissions

Please refer to Appendix C.



3.5 Antenna Requirements

3.5.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.5.2 Antenna Anti-Replacement Construction

This EUT uses an external antenna.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jan. 17, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Jan. 17, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jan. 17, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 10, 2023	Jan. 21, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Mar. 24, 2023	Jan. 21, 2024	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Jan. 21, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Jan. 21, 2024	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Jan. 21, 2024	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Jan. 21, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9kHz-1GHz	Jul. 06, 2023	Jan. 21, 2024	Jul. 05, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18G A	060839	1Ghz-18Ghz	Oct. 10, 2023	Jan. 21, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40G A	060852	18~40GHz	Jan. 05, 2024	Jan. 21, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 21, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 21, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 21, 2024	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Dec. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Dec. 12, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Dec. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Dec. 12, 2023	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (9kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

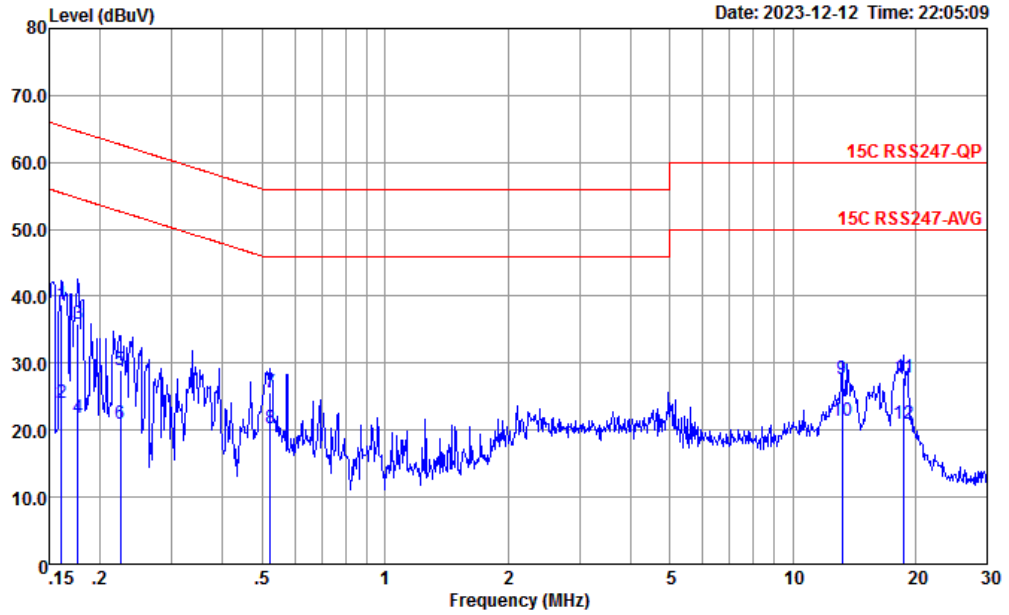


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060103-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.161	38.85	-26.58	65.43	28.11	0.29	10.45	QP
2	0.161	24.05	-31.38	55.43	13.31	0.29	10.45	Average
3	0.177	35.91	-28.73	64.64	25.19	0.31	10.41	QP
4	0.177	21.81	-32.83	54.64	11.09	0.31	10.41	Average
5	0.224	28.95	-33.71	62.66	18.28	0.32	10.35	QP
6	0.224	20.95	-31.71	52.66	10.28	0.32	10.35	Average
7	0.524	25.54	-30.46	56.00	14.97	0.33	10.24	QP
8 *	0.524	20.34	-25.66	46.00	9.77	0.33	10.24	Average
9	13.197	27.58	-32.42	60.00	16.70	0.50	10.38	QP
10	13.197	21.48	-28.52	50.00	10.60	0.50	10.38	Average
11	18.721	27.87	-32.13	60.00	16.88	0.52	10.47	QP
12	18.721	20.97	-29.03	50.00	9.98	0.52	10.47	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

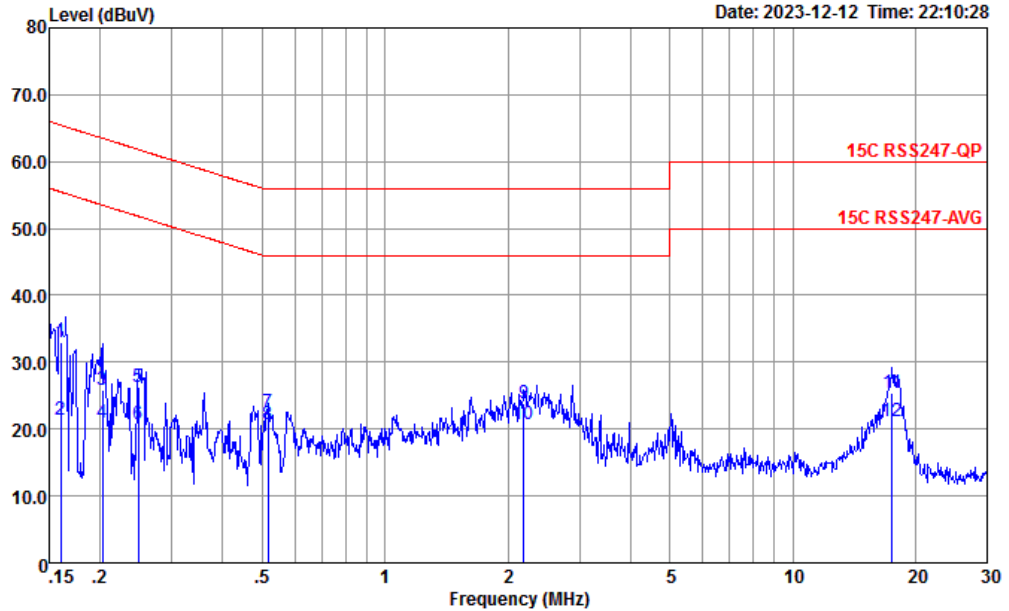

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060103-NEUTRAL NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	33.00	-32.47	65.47	22.30	0.25	10.45	QP
2	0.160	21.30	-34.17	55.47	10.60	0.25	10.45	Average
3	0.203	25.93	-37.56	63.49	15.30	0.27	10.36	QP
4	0.203	21.03	-32.46	53.49	10.40	0.27	10.36	Average
5	0.248	26.19	-35.63	61.82	15.60	0.26	10.33	QP
6	0.248	20.79	-31.03	51.82	10.20	0.26	10.33	Average
7	0.516	22.62	-33.38	56.00	12.10	0.28	10.24	QP
8	0.516	20.62	-25.38	46.00	10.10	0.28	10.24	Average
9	2.190	23.87	-32.13	56.00	13.30	0.34	10.23	QP
10 *	2.190	20.67	-25.33	46.00	10.10	0.34	10.23	Average
11	17.568	25.51	-34.49	60.00	14.60	0.46	10.45	QP
12	17.568	21.21	-28.79	50.00	10.30	0.46	10.45	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Bandwidth and Occupied Bandwidth

Test mode	410.255MHz Tx	Test Frequency (MHz)	410.255
20dB Bandwidth (kHz)	289.400	99% OBW(kHz)	251.809
20dB Bandwidth Limit	Shall be less than 0.25% of 410.255MHz	Shall be less than 0.25% of 410.255MHz	Test Result
	< 1025.6375kHz	< 1025.6375kHz	Complies

Test mode	450MHz Tx	Test Frequency (MHz)	450
20dB Bandwidth (kHz)	290.900	99% OBW(kHz)	251.809
20dB Bandwidth Limit	Shall be less than 0.25% of 450MHz	Shall be less than 0.25% of 450MHz	Test Result
	< 1125kHz	< 1125kHz	Complies




Test mode		492.995MHz Tx		Test Frequency (MHz)		492.995																																																																	
<p>Spectrum Ref Level 30.20 dBm Offset 10.20 dB RBW 10 kHz Att 30 dB SWT 1 ms VBW 30 kHz Mode Sweep IPk Max M1[1] 10.22 dBm 492.92840 MHz 20.00 dB 288.00000000 kHz 1711.6 T1 T2 CF 492.995 MHz 691 pts Span 1.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>492.9284 MHz</td> <td>10.22 dBm</td> <td>ndB down</td> <td>288.0 kHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>492.8778 MHz</td> <td>-10.00 dBm</td> <td>ndB</td> <td>20.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>493.1658 MHz</td> <td>-9.88 dBm</td> <td>Q factor</td> <td>1711.6</td> </tr> </tbody> </table> <p>Date: 17 JAN 2024 14:16:21</p>				Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			492.9284 MHz	10.22 dBm	ndB down	288.0 kHz	T1	1			492.8778 MHz	-10.00 dBm	ndB	20.00 dB	T2	1			493.1658 MHz	-9.88 dBm	Q factor	1711.6	<p>Spectrum Ref Level 30.20 dBm Offset 10.20 dB RBW 10 kHz Att 30 dB SWT 1 ms VBW 30 kHz Mode Sweep IPk Max M1[1] 10.23 dBm 492.92840 MHz Occ Bw 251.808972504 kHz T1 T2 CF 492.995 MHz 691 pts Span 1.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>492.9284 MHz</td> <td>10.23 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>492.8937 MHz</td> <td>-0.56 dBm</td> <td>Occ Bw</td> <td>251.808972504 kHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>493.14551 MHz</td> <td>-3.96 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 17 JAN 2024 14:16:42</p>				Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			492.9284 MHz	10.23 dBm			T1	1			492.8937 MHz	-0.56 dBm	Occ Bw	251.808972504 kHz	T2	1			493.14551 MHz	-3.96 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																
M1	1			492.9284 MHz	10.22 dBm	ndB down	288.0 kHz																																																																
T1	1			492.8778 MHz	-10.00 dBm	ndB	20.00 dB																																																																
T2	1			493.1658 MHz	-9.88 dBm	Q factor	1711.6																																																																
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																
M1	1			492.9284 MHz	10.23 dBm																																																																		
T1	1			492.8937 MHz	-0.56 dBm	Occ Bw	251.808972504 kHz																																																																
T2	1			493.14551 MHz	-3.96 dBm																																																																		
20dB Bandwidth (kHz)		288.000		99% OBW(kHz)		251.809																																																																	
20dB Bandwidth Limit		Shall be less than 0.25% of 492.995MHz < 1232.4875kHz		Shall be less than 0.25% of 492.995MHz < 1232.4875kHz		Test Result Complies																																																																	



Appendix C. Test Results of Radiated Test Items

Radiated Spurious Emissions (30MHz ~ 1GHz)


Mode 1:

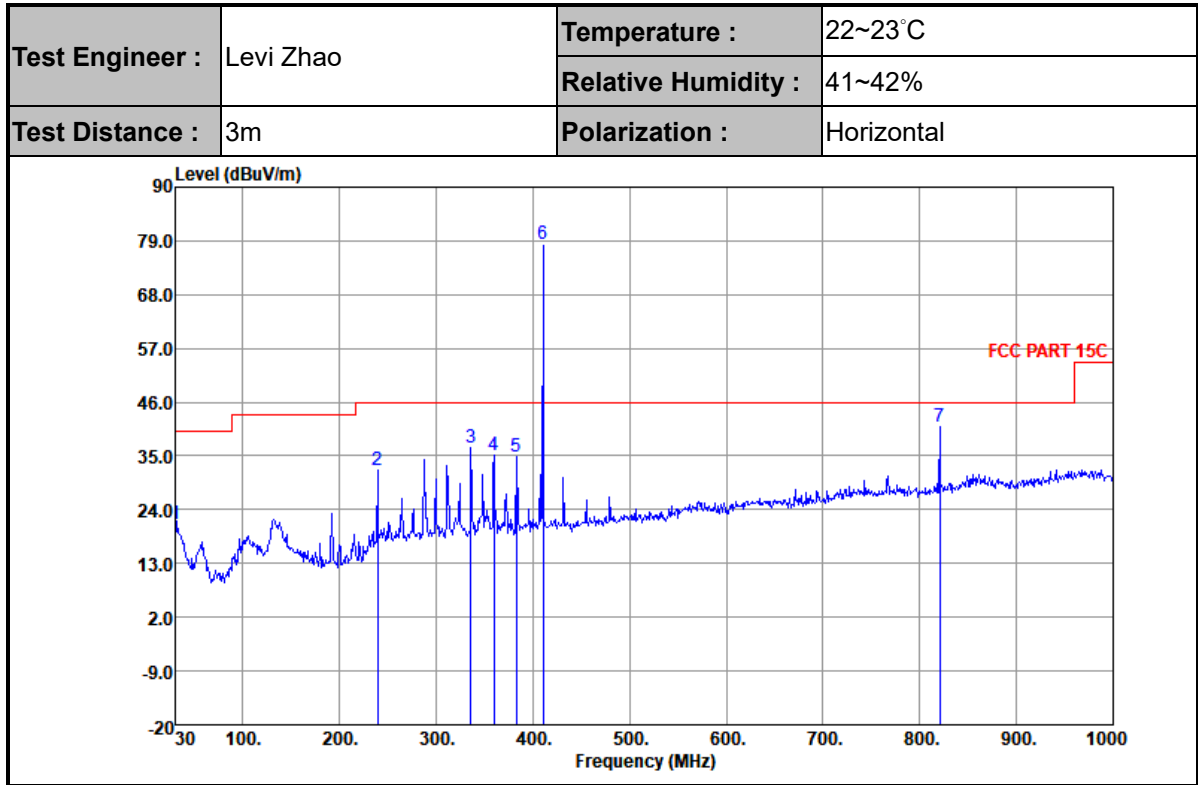

No.	Fre.	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Peak	Pol.
				Line	Level	Factor	Loss	Factor	Avg.	
	(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(P/A)	(H/V)
1	30	21.09	-18.91	40	27.87	24.83	0.5	32.11	P	H
2	239.52	31.98	-14.02	46	44.64	17.17	2.25	32.08	P	H
3	335.55	36.69	-9.31	46	46.26	19.82	2.68	32.07	P	H
4	359.80	35.12	-10.88	46	43.85	20.58	2.77	32.08	P	H
5	383.08	34.89	-11.11	46	43.04	21.09	2.86	32.1	P	H
6	410.24	78.48	-1.53	80.01	85.09	22.54	2.96	32.11	QP	H
7	820.55	41.09	-4.91	46	40.40	28.28	4.16	31.75	P	H



Test Engineer :	Levi Zhao	Temperature :	22~23°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

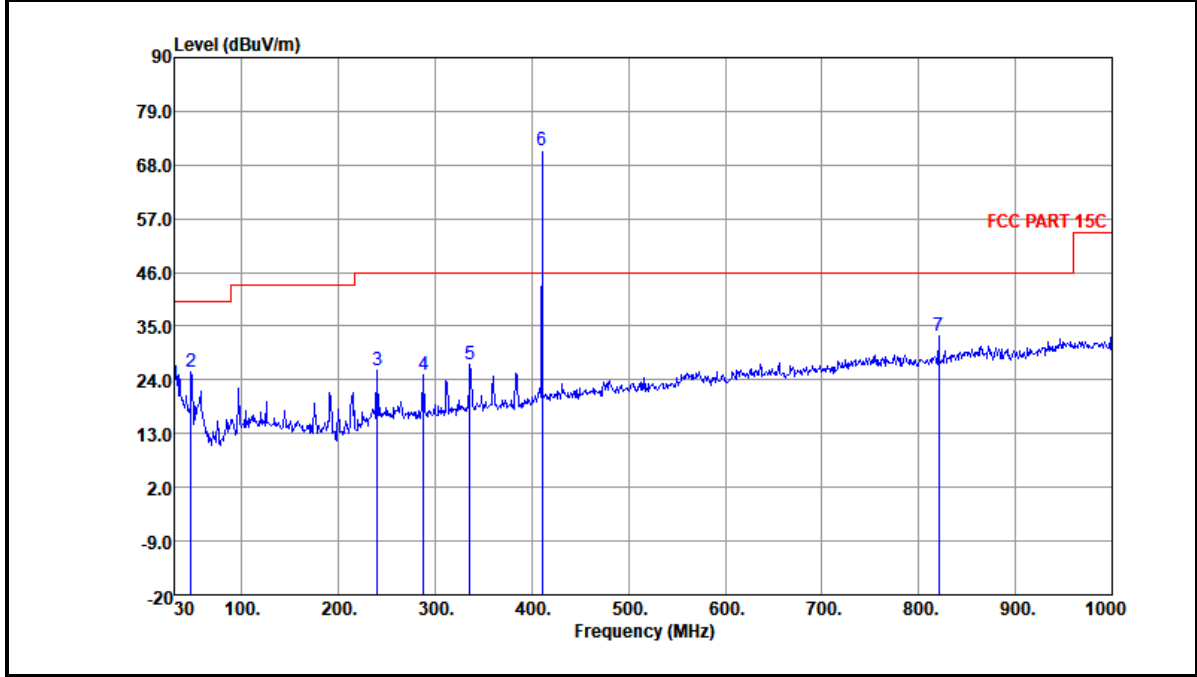


No.	Fre. (MHz)	Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Read	Antenna	Cable	Preamp	Peak	Pol.
					Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Avg. (P/A)	(H/V)
1	30	23.1	-16.9	40	29.88	24.83	0.5	32.11	P	V
2	47.46	25.55	-14.45	40	41.07	15.84	0.74	32.1	P	V
3	240.49	25.97	-20.03	46	38.53	17.26	2.26	32.08	P	V
4	288.02	25.06	-20.94	46	35.76	18.89	2.48	32.07	P	V
5	335.55	27.21	-18.79	46	36.78	19.82	2.68	32.07	P	V
6	410.24	71.09	-8.92	80.01	77.7	22.54	2.96	32.11	QP	V
7	820.55	32.93	-13.07	46	32.24	28.28	4.16	31.75	P	V



Mode 2:


Test Engineer :	Levi Zhao	Temperature :	22~23°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

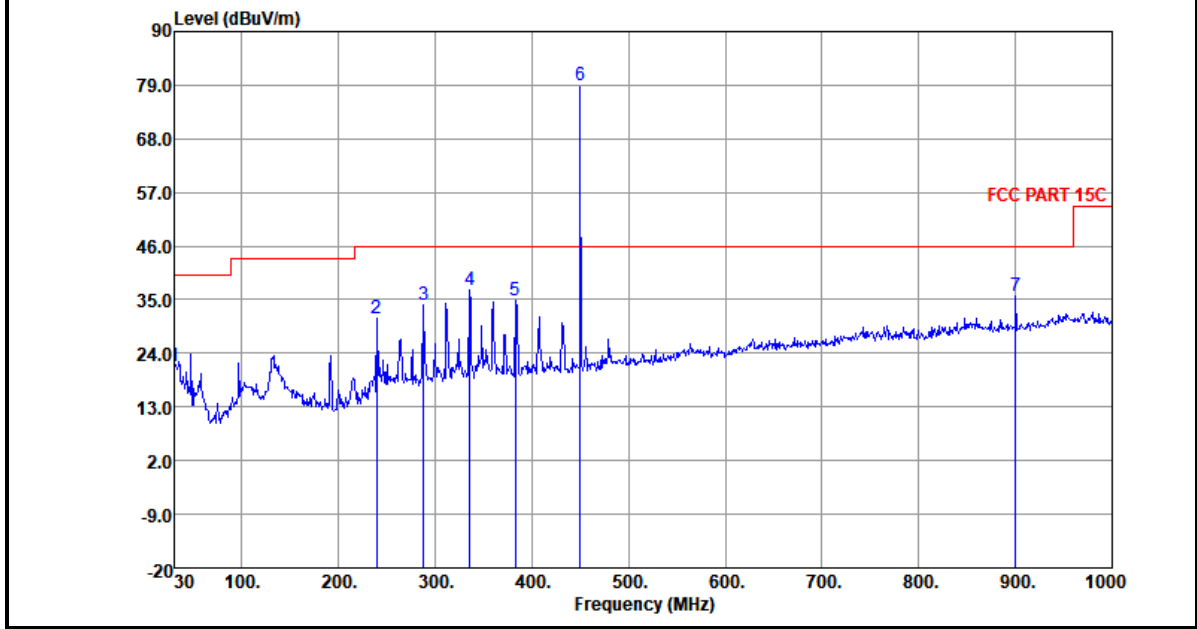

No.	Fre.	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Peak	Pol.
	(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	Factor	Loss	Factor	Avg.	(H/V)
1	30	21.27	-18.73	40	28.05	24.83	0.5	32.11	P	H
2	239.52	31.25	-14.75	46	43.91	17.17	2.25	32.08	P	H
3	288.02	33.98	-12.02	46	44.68	18.89	2.48	32.07	P	H
4	335.55	36.91	-9.09	46	46.48	19.82	2.68	32.07	P	H
5	383.08	34.8	-11.2	46	42.95	21.09	2.86	32.1	P	H
6	450.01	78.82	-2.52	81.34	85.00	22.86	3.09	32.13	QP	H
7	900.09	35.9	-10.1	46	33.69	29.13	4.37	31.29	P	H



Test Engineer :	Levi Zhao	Temperature :	22~23°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

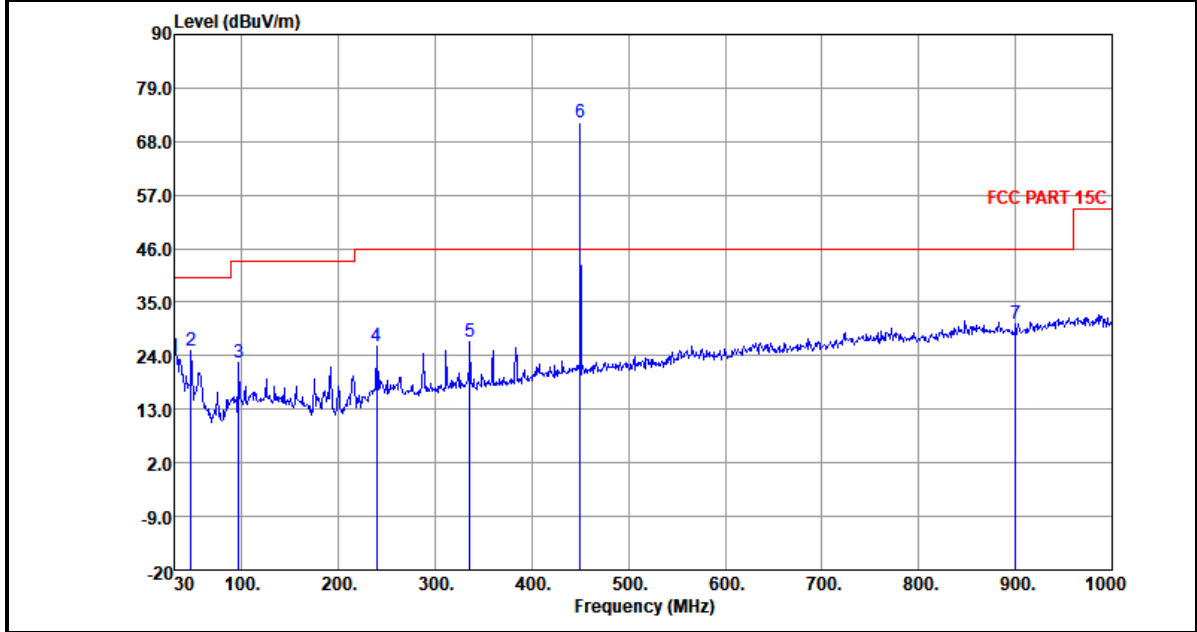


No.	Fre. (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Peak Avg. (P/A)	Pol. (H/V)
1	30	23.92	-16.08	40	30.7	24.83	0.5	32.11	P	V
2	47.46	25.02	-14.98	40	40.54	15.84	0.74	32.1	P	V
3	96.93	22.53	-20.97	43	37.64	15.84	1.42	32.07	P	V
4	239.52	26.03	-19.97	46	38.69	17.17	2.25	32.08	P	V
5	335.55	26.86	-19.14	46	36.43	19.82	2.68	32.07	P	V
6	450.01	71.88	-9.46	81.34	78.06	22.86	3.09	32.13	QP	V
7	900.09	30.42	-15.58	46	28.21	19.13	4.37	31.29	P	V



Mode 3:


Test Engineer :	Levi Zhao	Temperature :	22~23°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

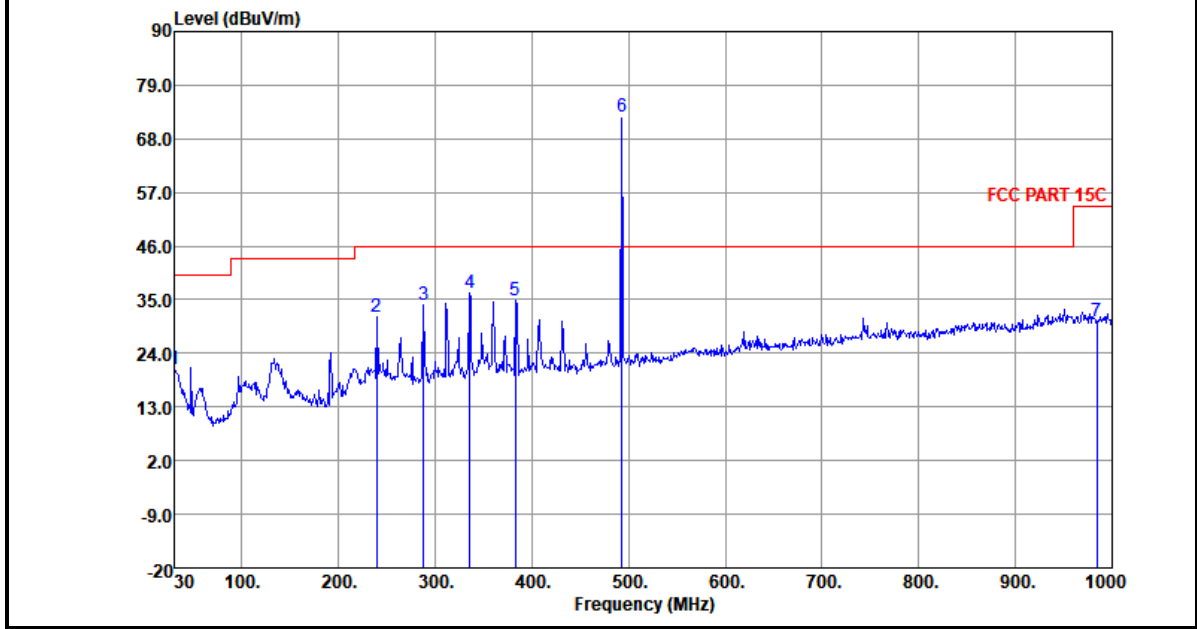

No.	Fre.	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Peak	Pol.
	(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	Factor	Loss	Factor	Avg.	(H/V)
1	30	20.81	-19.19	40	27.59	24.83	0.5	32.11	P	H
2	239.52	31.58	-14.42	46	44.24	17.17	2.25	32.08	P	H
3	288.02	34.05	-11.95	46	44.75	18.89	2.48	32.07	P	H
4	335.55	36.52	-9.48	46	46.09	19.82	2.68	32.07	P	H
5	383.08	34.78	-11.22	46	42.93	21.09	2.86	32.1	P	H
6	492.69	72.6	-9.98	82.58	77.8	23.8	3.23	32.23	QP	H
7	984.48	30.45	-23.55	54	25.72	30.81	4.56	30.64	P	H



Test Engineer :	Levi Zhao	Temperature :	22~23°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

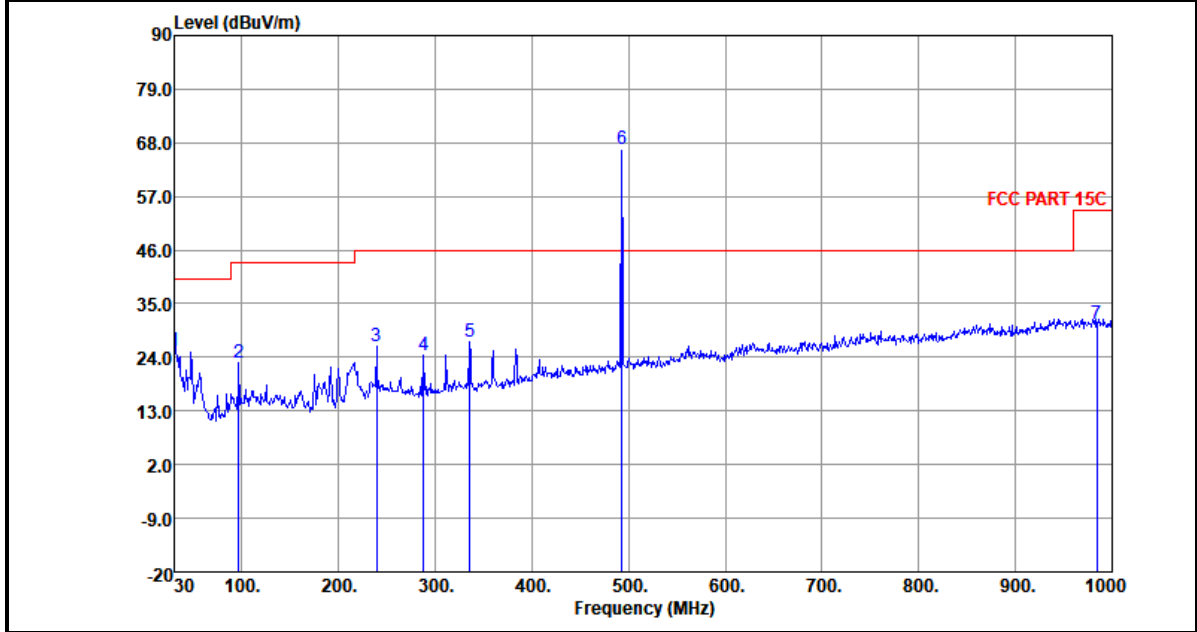

No.	Fre. (MHz)	Level (dBUV/m)	Margin (dB)	Limit Line (dBUV/m)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Peak Avg. (P/A)	Pol. (H/V)
1	30	25.49	-14.51	40	32.27	24.83	0.5	32.11	P	V
2	96.93	22.96	-20.54	43.5	38.07	15.54	1.42	32.07	P	V
3	239.52	26.18	-19.82	46	38.84	17.17	2.25	32.08	P	V
4	288.02	24.38	-21.62	46	35.08	18.89	2.48	32.07	P	V
5	335.55	27.21	-18.79	46	36.78	19.82	2.68	32.07	P	V
6	492.69	66.76	-15.82	82.58	71.96	23.8	3.23	32.23	QP	V
7	984.48	30.93	-23.07	54	26.2	30.81	4.56	30.64	P	V



Radiated Spurious Emissions (Above 1GHz)

Mode 1:

Fre.	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Peak	Pol.
(MHz)	(dBµV/m)	(dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Avg. (P/A)	(H/V)
1640.80	47.63	-34.3	81.93	78.38	28.62	5.87	65.24	P	H
2051.60	54.82	-27.11	81.93	81.92	31.69	6.58	65.37	P	H
2462	52.33	-29.6	81.93	78.41	32.41	7.22	65.71	P	H
2871.6	54.61	-19.39	74.00	80.11	32.21	7.81	65.52	P	H
2871.6	51.84	-2.16	54.00	77.34	32.21	7.81	65.52	A	H
3281.6	47.70	-34.23	81.93	72.13	32.72	8.39	65.54	P	H
3692.4	50.09	-23.91	74.00	73.76	33.19	8.90	65.76	P	H
3692.4	46.33	-7.67	54.00	70.00	33.19	8.90	65.76	A	H
4101.6	47.18	-26.82	74.00	70.53	33.40	9.42	66.17	P	H
4514.4	50.48	-23.52	74.00	71.81	33.91	9.90	65.14	P	H
4514.4	45.68	-8.32	54.00	67.01	33.91	9.90	65.14	A	H
4923.6	46.54	-27.46	74.00	67.53	33.95	10.35	65.29	P	H
1641.6	46.78	-35.15	81.93	77.53	28.62	5.87	65.24	P	V
2051.2	49.29	-32.64	81.93	76.38	31.7	6.58	65.37	P	V
2461.2	49.66	-32.27	81.93	75.74	32.41	7.22	65.71	P	V
2872.4	47.81	-26.19	74.00	73.3	32.22	7.81	65.52	P	V
3692.8	46.64	-27.36	74.00	70.31	33.19	8.9	65.76	P	V
4101.6	41.9	-32.1	74.00	65.25	33.4	9.42	66.17	P	V
4512.8	45.61	-28.39	74.00	66.93	33.91	9.9	65.13	P	V
4923.2	42.78	-31.22	74.00	63.77	33.95	10.35	65.29	P	V



Mode 2:

Fre. (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Peak Avg. (P/A)	Pol. (H/V)
1350	42.89	-31.11	74.00	74.34	28.35	5.33	65.13	P	H
2250.4	53.37	-20.63	74.00	80.42	31.65	6.89	65.59	P	H
2250.4	51.35	-2.65	54.00	78.4	31.65	6.89	65.59	A	H
2699.6	53.77	-20.23	74.00	79.48	32.3	7.57	65.58	P	H
2699.6	51.4	-2.6	54.00	77.11	32.3	7.57	65.58	A	H
3150.8	47.53	-34.4	81.93	71.61	33.14	8.22	65.44	P	H
3600.8	47.59	-26.41	74.00	71.2	33.1	8.76	65.47	P	H
4050	41.8	-32.2	74.00	65.18	33.4	9.36	66.14	P	H
4951.6	45.92	-28.08	74.00	66.83	34.00	10.39	65.3	P	H
1350	39.05	-42.88	81.93	70.50	28.35	5.33	65.13	P	V
2249.6	48.42	-25.58	74.00	75.47	31.65	6.89	65.59	P	V
2700	47.76	-26.24	74.00	73.47	32.3	7.57	65.58	P	V
3600.8	42.43	-31.57	74.00	66.04	33.1	8.76	65.47	P	V
4949.6	42.75	-31.25	74.00	63.66	34.00	10.39	65.30	P	V



Mode 3:

Fre. (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Peak Avg. (P/A)	Pol. (H/V)
1479.6	39.41	-34.59	74.00	71.12	27.86	5.58	65.15	P	H
1972	47.53	-34.4	81.93	74.82	31.54	6.45	65.28	P	H
2464.4	41.98	-39.95	81.93	68.03	32.42	7.23	65.7	P	H
2957.6	46.34	-35.59	81.93	71.33	32.59	7.94	65.52	P	H
3450.8	44.72	-37.21	81.93	69.09	32.6	8.59	65.56	P	H
3943.2	43.29	-30.71	74.00	66.68	33.46	9.23	66.08	P	H
4436.8	47.46	-34.47	81.93	69.11	33.9	9.8	65.35	P	H
4928.8	42.9	-31.1	74.00	63.88	33.96	10.36	65.3	P	H
1479.6	38.2	-35.8	74.00	69.91	27.86	5.58	65.15	P	V
1972.4	44.06	-37.87	81.93	71.35	31.54	6.45	65.28	P	V
2958	41.83	-40.1	81.93	66.82	32.59	7.94	65.52	P	V
4438.4	43.2	-38.73	81.93	64.84	33.9	9.8	65.34	P	V