



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

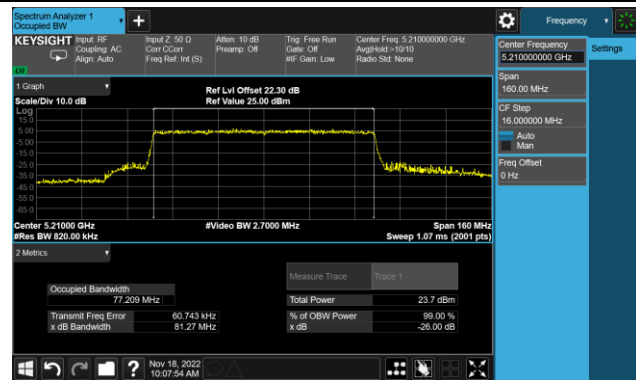


Channel 58 (5290MHz)

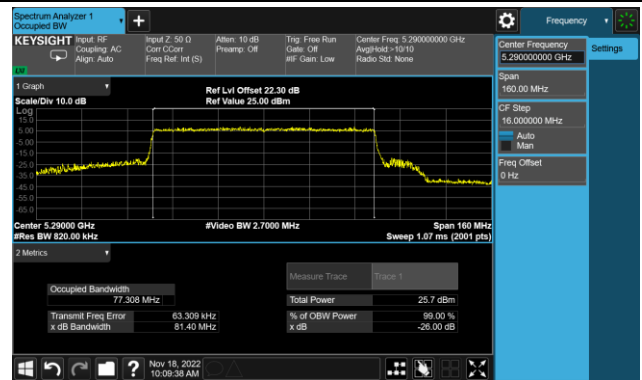


Channel 106 (5530MHz)

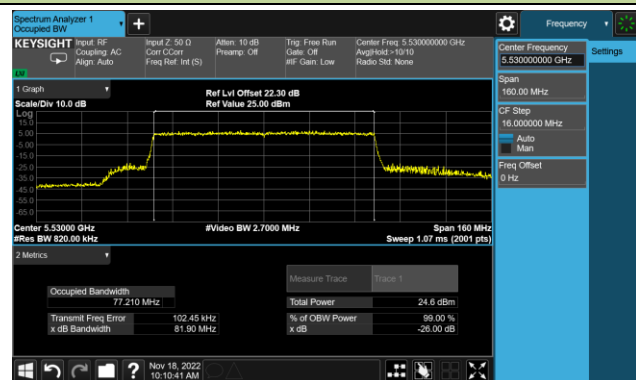


Channel 122 (5610MHz)

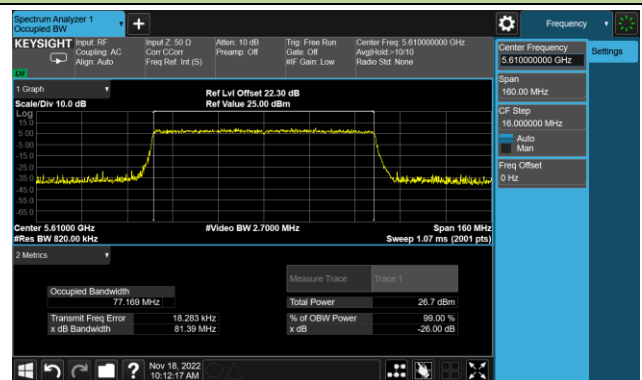


Channel 138 (5690MHz)

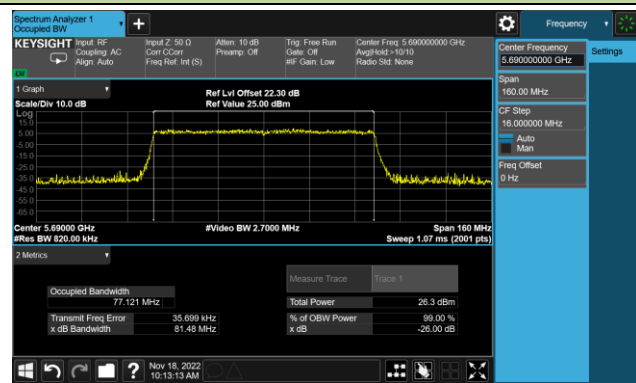

Channel 155 (5775MHz)

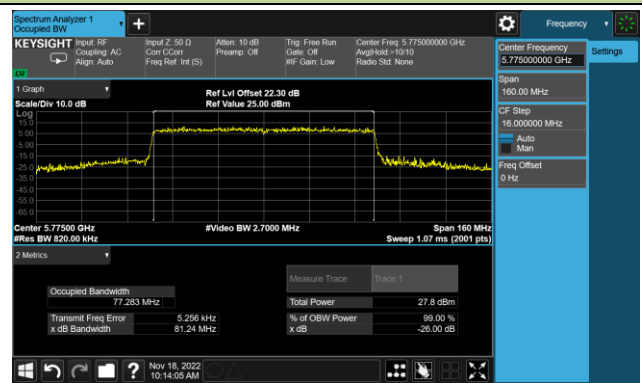

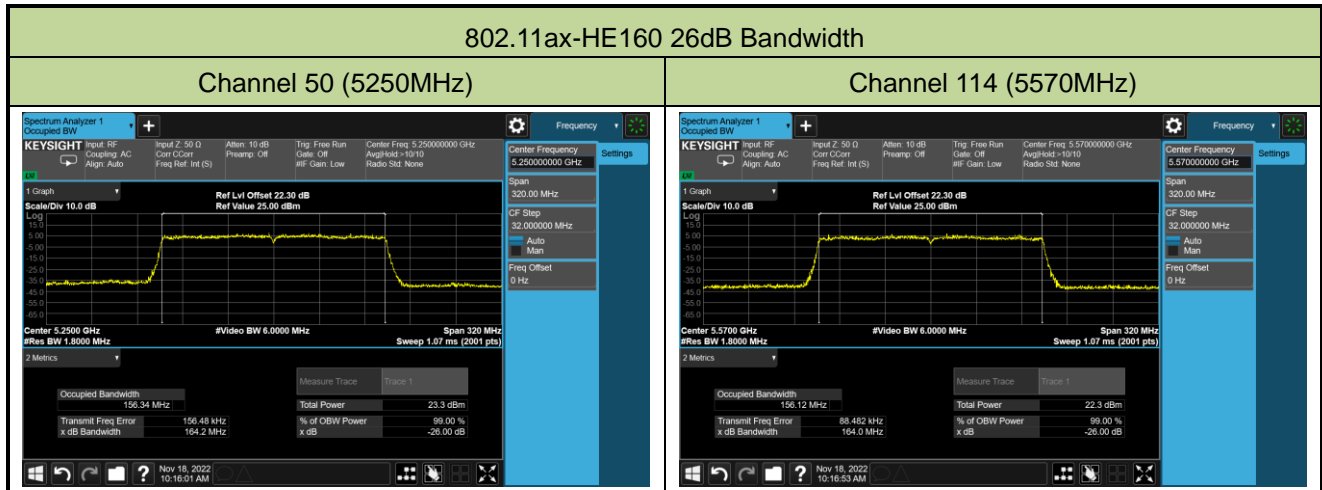


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022-11-18		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	24Mbps	149	5745	16.41	≥0.5
11a	24Mbps	157	5785	16.50	≥0.5
11a	24Mbps	165	5825	16.48	≥0.5
11ac-VHT20	MCS5	149	5745	17.68	≥0.5
11ac-VHT20	MCS5	157	5785	17.71	≥0.5
11ac-VHT20	MCS5	165	5825	17.75	≥0.5
11ac-VHT40	MCS5	151	5755	36.42	≥0.5
11ac-VHT40	MCS5	159	5795	36.41	≥0.5
11ac-VHT80	MCS5	155	5775	76.13	≥0.5
11ax-HE20	MCS6	149	5745	19.01	≥0.5
11ax-HE20	MCS6	157	5785	19.04	≥0.5
11ax-HE20	MCS6	165	5825	19.08	≥0.5
11ax-HE40	MCS6	151	5755	37.90	≥0.5
11ax-HE40	MCS6	159	5795	37.98	≥0.5
11ax-HE80	MCS6	155	5775	77.67	≥0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

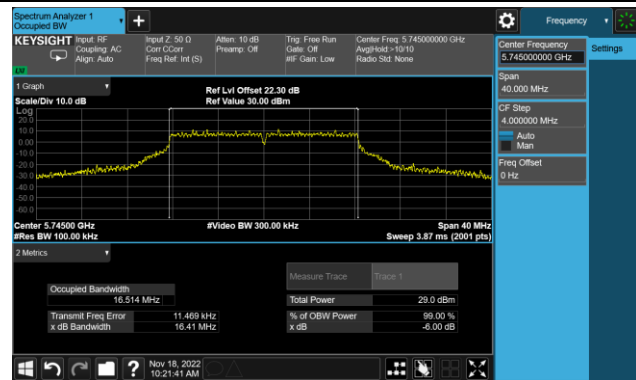

Channel 157 (5785MHz)

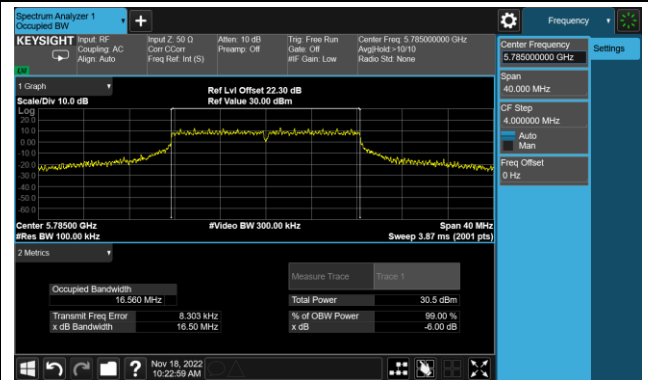


Channel 165 (5825MHz)

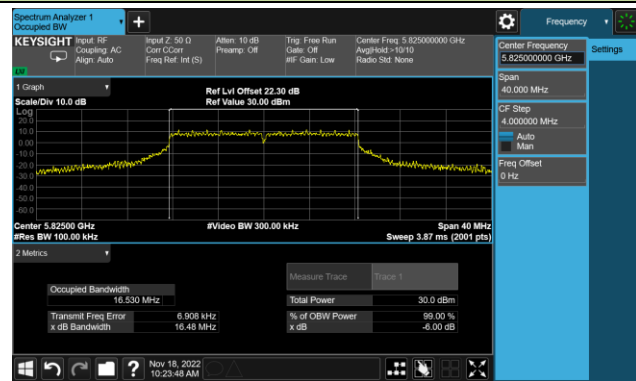


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

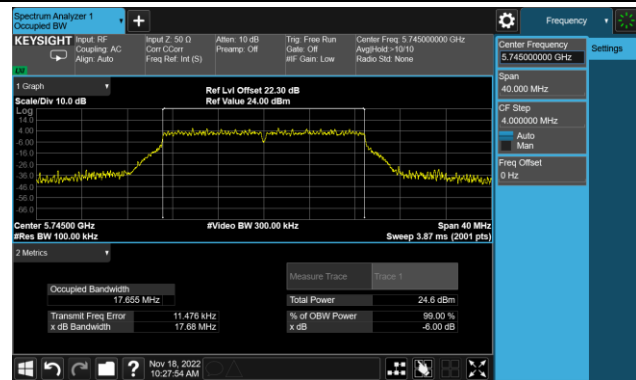

Channel 157 (5785MHz)

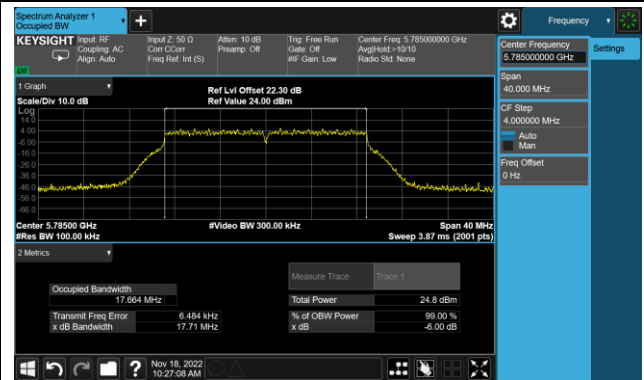


Channel 165 (5825MHz)

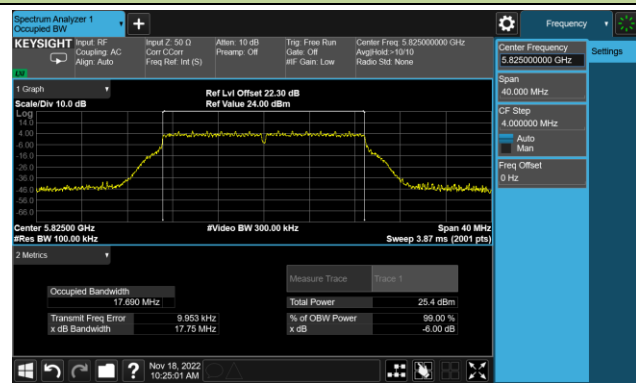



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

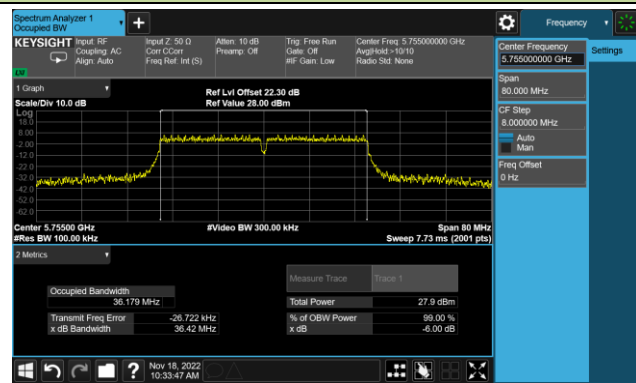


Channel 159 (5795MHz)

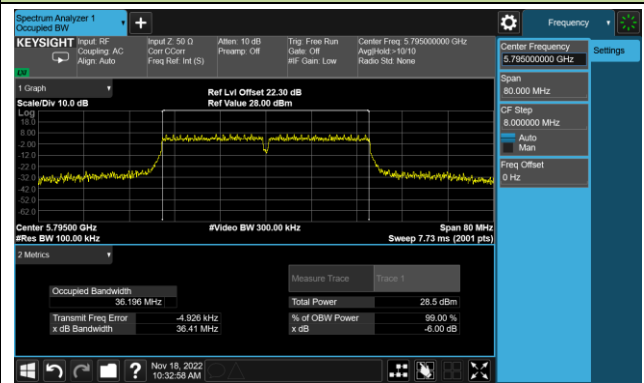

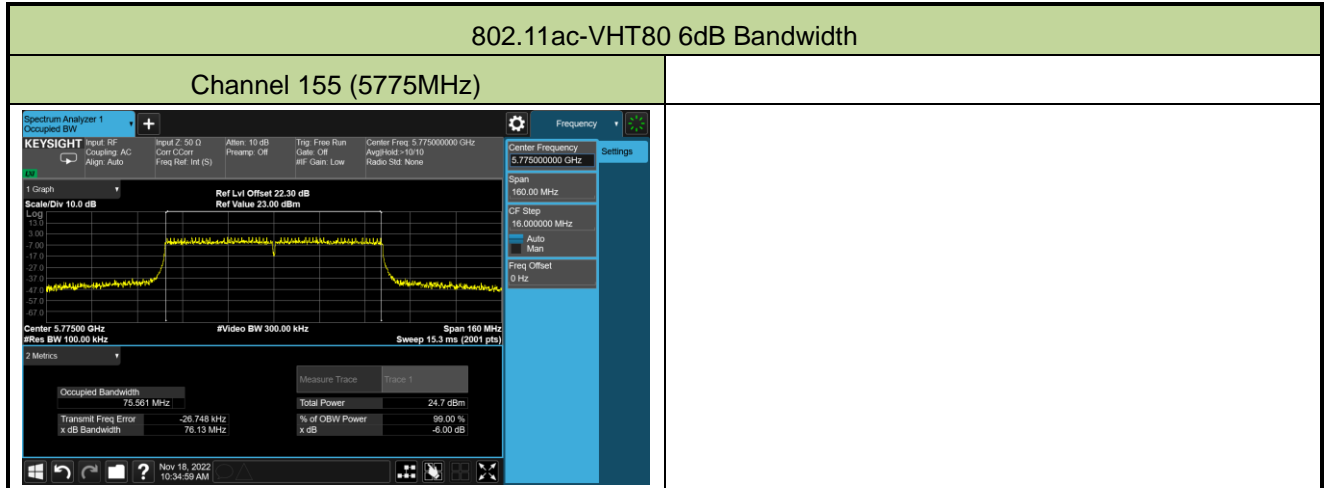


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

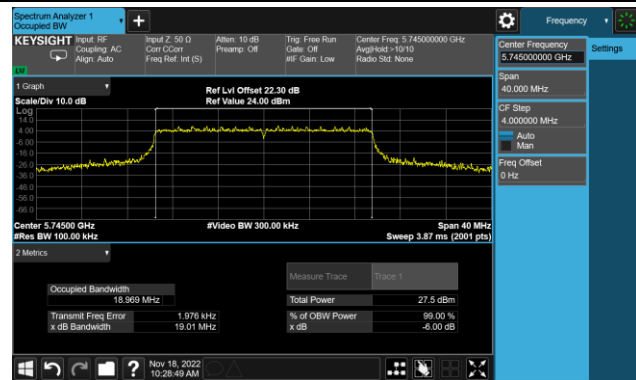

Channel 157 (5785MHz)

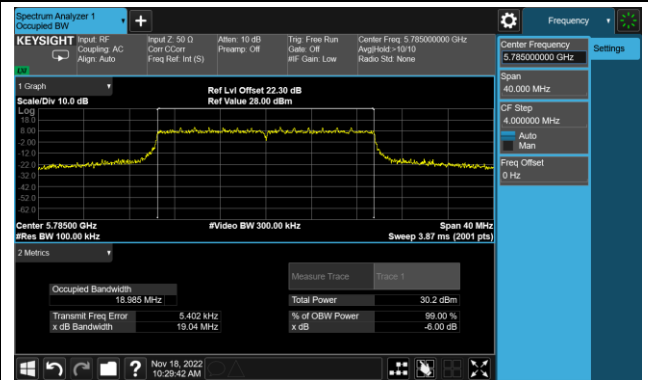


Channel 165 (5825MHz)

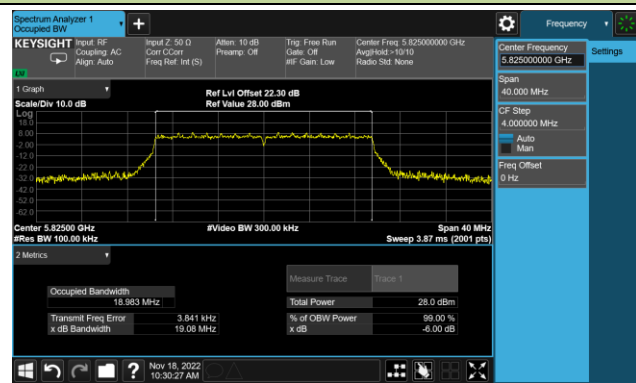



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

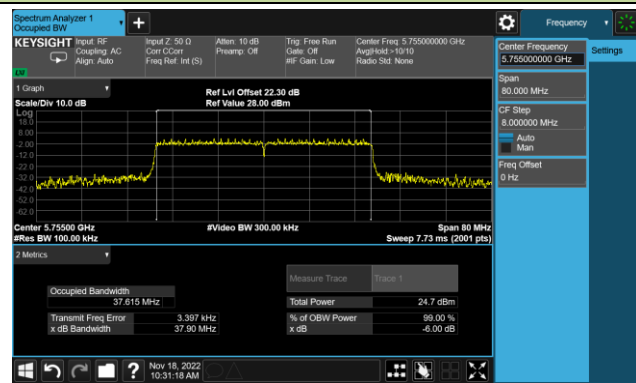

Channel 159 (5795MHz)

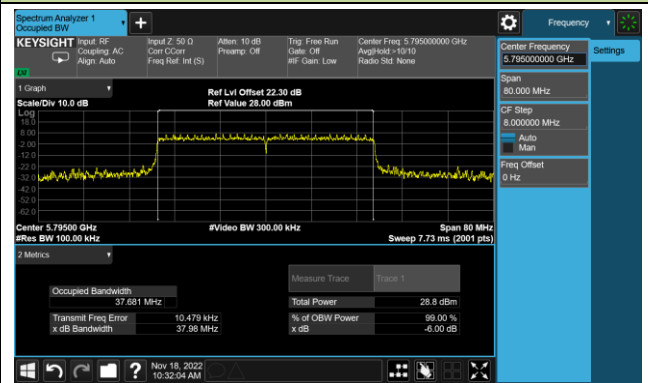

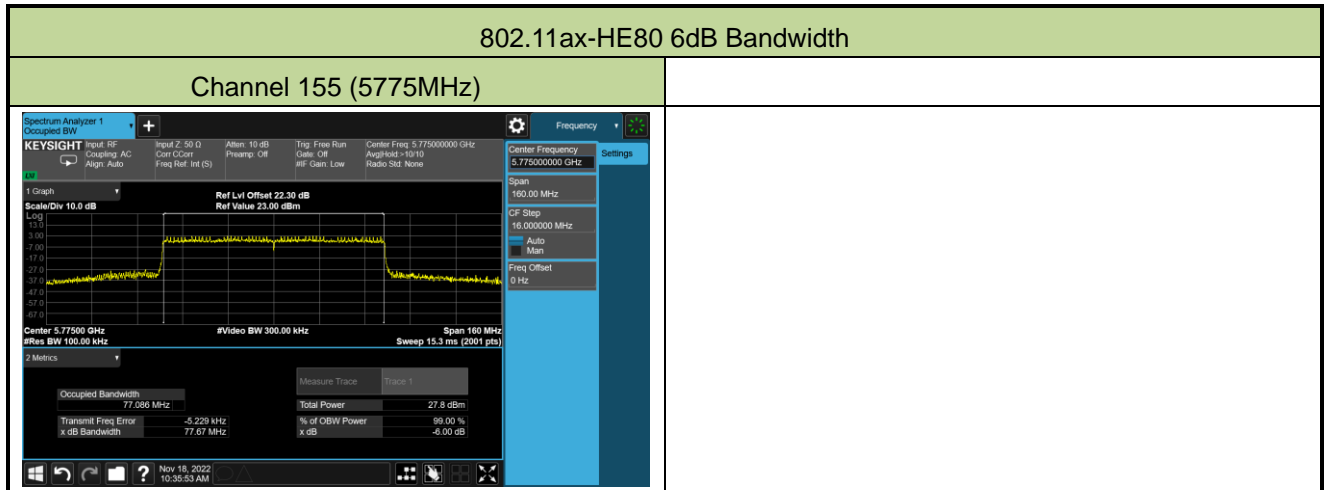

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022-11-28		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 1	Ant 2	Ant 3	Ant 4		
11a	24Mbps	36	5180	19.53	19.01	19.34	19.44	25.35	≤ 30.00
11a	24Mbps	44	5220	22.21	22.03	22.43	22.15	28.23	≤ 30.00
11a	24Mbps	48	5240	22.35	21.97	22.46	22.04	28.23	≤ 30.00
11a	24Mbps	52	5260	16.13	15.79	15.68	15.82	21.88	≤ 23.98
11a	24Mbps	60	5300	16.01	16.16	15.93	16.13	22.08	≤ 23.98
11a	24Mbps	64	5320	16.21	15.90	15.66	15.75	21.91	≤ 23.98
11a	24Mbps	100	5500	16.70	16.48	16.51	16.04	22.46	≤ 23.98
11a	24Mbps	116	5580	16.41	16.13	16.29	16.02	22.24	≤ 23.98
11a	24Mbps	140	5700	16.51	16.32	16.58	16.48	22.49	≤ 23.98
11a	24Mbps	144	5720	16.23	16.49	16.85	16.88	22.64	≤ 22.92
11a	24Mbps	149	5745	22.14	22.04	22.12	22.39	28.20	≤ 30.00
11a	24Mbps	157	5785	23.32	23.24	23.39	23.42	29.36	≤ 30.00
11a	24Mbps	165	5825	22.44	22.26	22.44	22.31	28.38	≤ 30.00
11ac-VHT20	MCS5	36	5180	17.45	17.24	17.66	17.71	23.54	≤ 30.00
11ac-VHT20	MCS5	44	5220	22.11	22.05	22.55	22.16	28.24	≤ 30.00
11ac-VHT20	MCS5	48	5240	22.53	22.16	22.56	22.09	28.36	≤ 30.00
11ac-VHT20	MCS5	52	5260	15.81	15.92	15.82	15.99	21.91	≤ 23.98
11ac-VHT20	MCS5	60	5300	16.08	16.01	15.88	15.82	21.97	≤ 23.98
11ac-VHT20	MCS5	64	5320	15.93	15.82	15.78	15.87	21.87	≤ 23.98
11ac-VHT20	MCS5	100	5500	16.66	16.33	16.62	16.17	22.47	≤ 23.98
11ac-VHT20	MCS5	116	5580	16.69	16.44	16.66	16.56	22.61	≤ 23.98
11ac-VHT20	MCS5	140	5700	16.44	16.42	16.66	16.33	22.48	≤ 23.98
11ac-VHT20	MCS5	144	5720	16.18	16.27	16.67	16.48	22.42	≤ 22.96
11ac-VHT20	MCS5	149	5745	22.50	22.61	22.84	23.09	28.79	≤ 30.00
11ac-VHT20	MCS5	157	5785	23.67	23.57	23.79	23.62	29.68	≤ 30.00
11ac-VHT20	MCS5	165	5825	22.51	22.63	22.83	22.76	28.70	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 1	Ant 2	Ant 3	Ant 4		
11ac-VHT40	MCS5	38	5190	14.35	13.93	14.12	14.31	20.20	≤ 30.00
11ac-VHT40	MCS5	46	5230	22.70	22.64	22.59	22.89	28.73	≤ 30.00
11ac-VHT40	MCS5	54	5270	17.71	17.66	17.47	17.52	23.61	≤ 23.98
11ac-VHT40	MCS5	62	5310	15.11	14.95	14.81	14.90	20.96	≤ 23.98
11ac-VHT40	MCS5	102	5510	16.30	16.17	16.52	16.19	22.32	≤ 23.98
11ac-VHT40	MCS5	110	5550	17.61	17.50	17.95	17.83	23.75	≤ 23.98
11ac-VHT40	MCS5	134	5670	15.88	16.08	16.35	16.14	22.14	≤ 23.98
11ac-VHT40	MCS5	142	5710	17.69	17.59	17.86	17.44	23.67	≤ 23.98
11ac-VHT40	MCS5	151	5755	22.02	22.16	22.52	22.66	28.37	≤ 30.00
11ac-VHT40	MCS5	159	5795	21.48	21.62	21.76	21.74	27.67	≤ 30.00
11ac-VHT80	MCS5	42	5210	14.32	14.83	15.01	15.29	20.90	≤ 30.00
11ac-VHT80	MCS5	58	5290	16.34	16.85	16.69	16.52	22.62	≤ 23.98
11ac-VHT80	MCS5	106	5530	15.33	15.46	15.67	15.78	21.58	≤ 23.98
11ac-VHT80	MCS5	122	5610	17.71	17.75	17.59	17.63	23.69	≤ 23.98
11ac-VHT80	MCS5	138	5690	17.79	17.49	17.38	17.41	23.54	≤ 23.98
11ac-VHT80	MCS5	155	5775	18.78	18.95	19.33	19.30	25.12	≤ 30.00
11ac-VHT160	MCS0	50	5250	12.65	12.48	12.89	12.94	18.76	≤ 23.98
11ac-VHT160	MCS0	114	5570	12.55	12.47	12.95	12.46	18.63	≤ 23.98
11ax-HE20	MCS6	36	5180	16.64	16.02	16.56	16.14	22.37	≤ 30.00
11ax-HE20	MCS6	44	5220	21.96	21.69	22.09	21.92	27.94	≤ 30.00
11ax-HE20	MCS6	48	5240	22.70	22.22	22.41	22.19	28.41	≤ 30.00
11ax-HE20	MCS6	52	5260	16.64	16.39	16.30	16.04	22.37	≤ 23.98
11ax-HE20	MCS6	60	5300	16.44	16.33	16.24	16.46	22.39	≤ 23.98
11ax-HE20	MCS6	64	5320	14.92	15.06	14.91	15.21	21.05	≤ 23.98
11ax-HE20	MCS6	100	5500	15.53	15.09	15.15	14.88	21.19	≤ 23.98
11ax-HE20	MCS6	116	5580	17.03	16.86	16.98	16.68	22.91	≤ 23.98
11ax-HE20	MCS6	140	5700	14.84	14.79	15.33	15.55	21.16	≤ 23.98
11ax-HE20	MCS6	144	5720	16.75	16.64	16.95	16.75	22.79	≤ 22.96
11ax-HE20	MCS6	149	5745	22.57	22.46	22.76	22.95	28.71	≤ 30.00
11ax-HE20	MCS6	157	5785	23.52	23.45	23.72	23.46	29.56	≤ 30.00
11ax-HE20	MCS6	165	5825	22.46	22.52	22.62	22.78	28.62	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 1	Ant 2	Ant 3	Ant 4		
11ax-HE40	MCS6	38	5190	15.66	15.49	15.52	15.63	21.60	≤ 30.00
11ax-HE40	MCS6	46	5230	22.91	22.84	23.01	23.25	29.03	≤ 30.00
11ax-HE40	MCS6	54	5270	17.94	17.76	17.81	17.63	23.81	≤ 23.98
11ax-HE40	MCS6	62	5310	13.76	13.66	13.49	13.62	19.65	≤ 23.98
11ax-HE40	MCS6	102	5510	15.32	15.19	15.68	15.41	21.42	≤ 23.98
11ax-HE40	MCS6	110	5550	17.81	17.58	17.88	17.65	23.75	≤ 23.98
11ax-HE40	MCS6	134	5670	16.01	16.21	16.51	16.18	22.25	≤ 23.98
11ax-HE40	MCS6	142	5710	17.59	17.61	17.87	17.78	23.73	≤ 23.98
11ax-HE40	MCS6	151	5755	20.46	20.59	20.91	21.07	26.78	≤ 30.00
11ax-HE40	MCS6	159	5795	20.51	20.43	20.74	20.88	26.66	≤ 30.00
11ax-HE80	MCS6	42	5210	14.11	14.46	14.51	14.88	20.52	≤ 30.00
11ax-HE80	MCS6	58	5290	15.81	16.48	16.43	16.48	22.33	≤ 23.98
11ax-HE80	MCS6	106	5530	15.38	15.54	15.62	15.51	21.53	≤ 23.98
11ax-HE80	MCS6	122	5610	17.67	17.77	17.82	17.78	23.78	≤ 23.98
11ax-HE80	MCS6	138	5690	17.63	17.72	17.66	18.08	23.80	≤ 23.98
11ax-HE80	MCS6	155	5775	18.17	18.72	18.88	18.91	24.70	≤ 30.00
11ax-HE160	MCS0	50	5250	12.59	12.72	13.06	13.28	18.94	≤ 23.98
11ax-HE160	MCS0	114	5570	12.97	13.14	13.31	12.66	19.05	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} + 10^{(\text{Ant 4 Average Power} / 10)} \}$.

Note 2: For 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + 26 \text{dBc} / 2)$.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022-11-16~2022-11-28		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 1	Ant 2	Ant 3	Ant 4			
11a	24Mbps	36	5180	6.91	6.74	7.15	7.03	95.05	13.20	≤16.56
11a	24Mbps	44	5220	10.50	9.89	10.58	9.81	95.05	16.45	≤16.56
11a	24Mbps	48	5240	10.08	9.92	10.44	10.29	95.05	16.43	≤16.56
11a	24Mbps	52	5260	3.78	3.80	3.80	4.16	95.05	10.13	≤10.56
11a	24Mbps	60	5300	3.96	4.10	4.00	4.23	95.05	10.31	≤10.56
11a	24Mbps	64	5320	3.96	4.10	3.97	3.92	95.05	10.23	≤10.56
11a	24Mbps	100	5500	4.03	4.35	4.74	4.10	95.05	10.56	≤11.00
11a	24Mbps	116	5580	4.53	4.33	4.44	4.16	95.05	10.61	≤11.00
11a	24Mbps	140	5700	4.14	4.43	4.55	4.65	95.05	10.69	≤11.00
11a	24Mbps	144	5720	4.34	4.41	4.75	4.42	95.05	10.72	≤11.00
11ac-VHT20	MCS5	36	5180	5.99	5.13	5.43	5.01	90.55	11.86	≤16.56
11ac-VHT20	MCS5	44	5220	10.05	9.49	9.86	9.63	90.55	16.21	≤16.56
11ac-VHT20	MCS5	48	5240	9.64	9.57	10.18	10.00	90.55	16.31	≤16.56
11ac-VHT20	MCS5	52	5260	3.67	3.91	3.62	3.78	90.55	10.20	≤10.56
11ac-VHT20	MCS5	60	5300	4.06	3.90	3.82	3.65	90.55	10.31	≤10.56
11ac-VHT20	MCS5	64	5320	3.74	3.70	3.67	3.74	90.55	10.16	≤10.56
11ac-VHT20	MCS5	100	5500	4.23	4.07	4.55	3.81	90.55	10.62	≤11.00
11ac-VHT20	MCS5	116	5580	4.29	4.42	4.41	4.57	90.55	10.88	≤11.00
11ac-VHT20	MCS5	140	5700	3.86	4.18	4.68	4.12	90.55	10.67	≤11.00
11ac-VHT20	MCS5	144	5720	3.98	4.27	4.25	4.18	90.55	10.62	≤11.00
11ac-VHT40	MCS5	38	5190	-1.04	-1.24	-1.57	-1.40	84.39	5.45	≤16.56
11ac-VHT40	MCS5	46	5230	7.01	7.23	7.16	7.98	84.39	14.12	≤16.56
11ac-VHT40	MCS5	54	5270	1.63	1.97	2.01	2.53	84.39	8.80	≤10.56
11ac-VHT40	MCS5	62	5310	-0.14	-0.42	-0.52	-0.64	84.39	6.33	≤10.56
11ac-VHT40	MCS5	102	5510	0.65	0.45	0.82	1.07	84.39	7.51	≤11.00
11ac-VHT40	MCS5	110	5550	2.42	2.06	2.45	2.29	84.39	9.06	≤11.00
11ac-VHT40	MCS5	134	5670	0.70	0.65	0.74	0.56	84.39	7.42	≤11.00
11ac-VHT40	MCS5	142	5710	2.09	2.03	2.12	2.04	84.39	8.83	≤11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 1	Ant 2	Ant 3	Ant 4			
11ac-VHT80	MCS5	42	5210	-3.76	-3.26	-3.33	-3.41	77.22	3.71	≤16.56
11ac-VHT80	MCS5	58	5290	-1.62	-1.31	-1.29	-1.28	77.22	5.77	≤10.56
11ac-VHT80	MCS5	106	5530	-2.41	-2.92	-2.88	-2.14	77.22	4.57	≤11.00
11ac-VHT80	MCS5	122	5610	-0.84	-0.68	-0.70	-0.36	77.22	6.50	≤11.00
11ac-VHT80	MCS5	138	5690	-0.89	-0.60	-1.04	-0.93	77.22	6.28	≤11.00
11ac-VHT160	MCS0	50	5250	-8.36	-8.18	-7.59	-7.51	89.66	-1.40	≤10.56
11ac-VHT160	MCS0	114	5570	-8.03	-8.56	-8.09	-8.50	89.66	-1.79	≤11.00
11ax-HE20	MCS6	36	5180	3.76	3.71	4.11	4.06	88.18	10.48	≤16.56
11ax-HE20	MCS6	44	5220	9.92	9.44	9.85	9.50	88.18	16.25	≤16.56
11ax-HE20	MCS6	48	5240	9.47	9.30	9.80	9.77	88.18	16.16	≤16.56
11ax-HE20	MCS6	52	5260	3.83	3.60	3.46	3.38	88.18	10.14	≤10.56
11ax-HE20	MCS6	60	5300	3.77	3.69	3.71	3.80	88.18	10.31	≤10.56
11ax-HE20	MCS6	64	5320	2.75	2.84	2.38	2.30	88.18	9.14	≤10.56
11ax-HE20	MCS6	100	5500	2.48	2.50	2.74	2.74	88.18	9.18	≤11.00
11ax-HE20	MCS6	116	5580	3.84	4.34	4.47	4.38	88.18	10.83	≤11.00
11ax-HE20	MCS6	140	5700	2.20	2.41	2.66	2.42	88.18	8.99	≤11.00
11ax-HE20	MCS6	144	5720	4.01	4.05	4.13	3.94	88.18	10.60	≤11.00
11ax-HE40	MCS6	38	5190	-0.40	-0.25	0.36	0.15	83.08	6.80	≤16.56
11ax-HE40	MCS6	46	5230	7.45	7.15	7.21	7.35	83.08	14.12	≤16.56
11ax-HE40	MCS6	54	5270	2.05	1.96	1.82	1.98	83.08	8.78	≤10.56
11ax-HE40	MCS6	62	5310	-1.87	-1.89	-2.06	-1.64	83.08	4.96	≤10.56
11ax-HE40	MCS6	102	5510	0.14	-0.31	-0.01	-0.22	83.08	6.73	≤11.00
11ax-HE40	MCS6	110	5550	2.15	2.19	2.34	2.52	83.08	9.13	≤11.00
11ax-HE40	MCS6	134	5670	0.33	0.51	0.68	0.89	83.08	7.43	≤11.00
11ax-HE40	MCS6	142	5710	2.33	1.88	1.94	1.85	83.08	8.83	≤11.00
11ax-HE80	MCS6	42	5210	-4.48	-3.67	-3.71	-3.57	77.75	3.27	≤16.56
11ax-HE80	MCS6	58	5290	-2.22	-2.29	-2.41	-2.42	77.75	4.78	≤10.56
11ax-HE80	MCS6	106	5530	-3.12	-2.88	-2.94	-2.51	77.75	4.25	≤11.00
11ax-HE80	MCS6	122	5610	-0.36	-0.61	-0.76	-0.40	77.75	6.58	≤11.00
11ax-HE80	MCS6	138	5690	-1.11	-0.95	-0.69	-0.49	77.75	6.31	≤11.00
11ax-HE160	MCS0	50	5250	-8.01	-8.21	-7.87	-7.86	89.04	-1.46	≤10.56
11ax-HE160	MCS0	114	5570	-8.35	-8.07	-7.68	-7.75	89.04	-1.43	≤11.00

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022-11-21		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510kHz)				Duty Cycle (%)	Total PSD (dBm/ 510kHz)	PSD Limit (dBm/ 500kHz)
				Ant 1	Ant 2	Ant 3	Ant 4			
11a	24Mbps	149	5745	8.88	8.23	8.24	7.87	95.05	14.56	≤29.34
11a	24Mbps	157	5785	9.13	9.10	9.80	9.38	95.05	15.60	≤29.34
11a	24Mbps	165	5825	8.53	8.41	8.10	8.14	95.05	14.54	≤29.34
11ac-VHT20	MCS5	149	5745	7.81	7.87	8.11	8.01	90.55	14.40	≤29.34
11ac-VHT20	MCS5	157	5785	8.87	8.80	9.55	8.69	90.55	15.44	≤29.34
11ac-VHT20	MCS5	165	5825	8.02	8.16	7.85	8.06	90.55	14.47	≤29.34
11ac-VHT40	MCS5	151	5755	5.05	4.99	4.97	4.81	84.39	11.71	≤29.34
11ac-VHT40	MCS5	159	5795	4.22	4.44	4.59	4.65	84.39	11.24	≤29.34
11ac-VHT80	MCS5	155	5775	-0.52	-0.24	-0.38	0.03	77.22	6.87	≤29.34
11ax-HE20	MCS6	149	5745	8.66	8.41	8.14	8.00	88.18	14.88	≤29.34
11ax-HE20	MCS6	157	5785	8.46	8.66	9.80	8.99	88.18	15.57	≤29.34
11ax-HE20	MCS6	165	5825	8.34	7.94	7.68	8.00	88.18	14.56	≤29.34
11ax-HE40	MCS6	151	5755	3.81	3.81	4.05	4.36	83.08	10.84	≤29.34
11ax-HE40	MCS6	159	5795	3.84	4.17	4.03	3.95	83.08	10.82	≤29.34
11ax-HE80	MCS6	155	5775	-0.79	-0.96	-0.74	-0.84	89.04	6.28	≤29.34


Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.

Note 2: PSD Limit (dBm/500kHz) = 30 - (6.66 - 6) = 29.34dBm/MHz.

802.11a Power Spectral Density - Ant 1


Channel 36 (5180MHz)

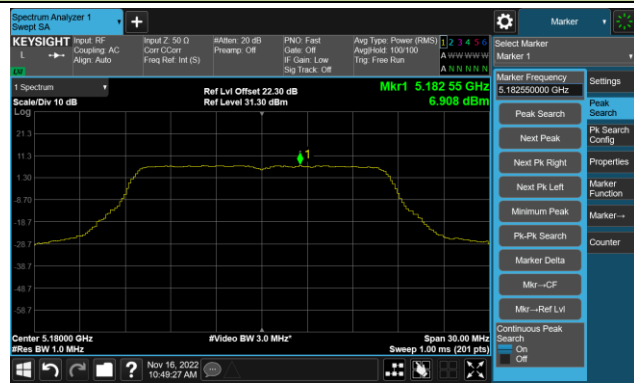


Channel 44 (5220MHz)



Channel 48 (5240MHz)

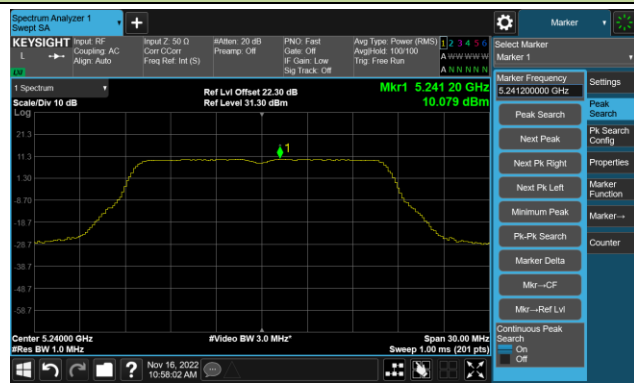

Channel 52 (5260MHz)

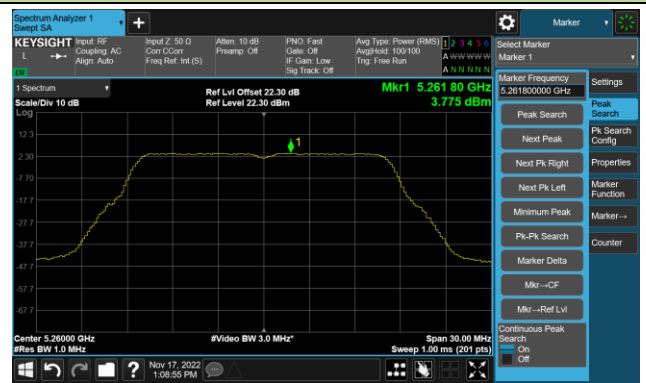


Channel 60 (5300MHz)



Channel 64 (5320MHz)



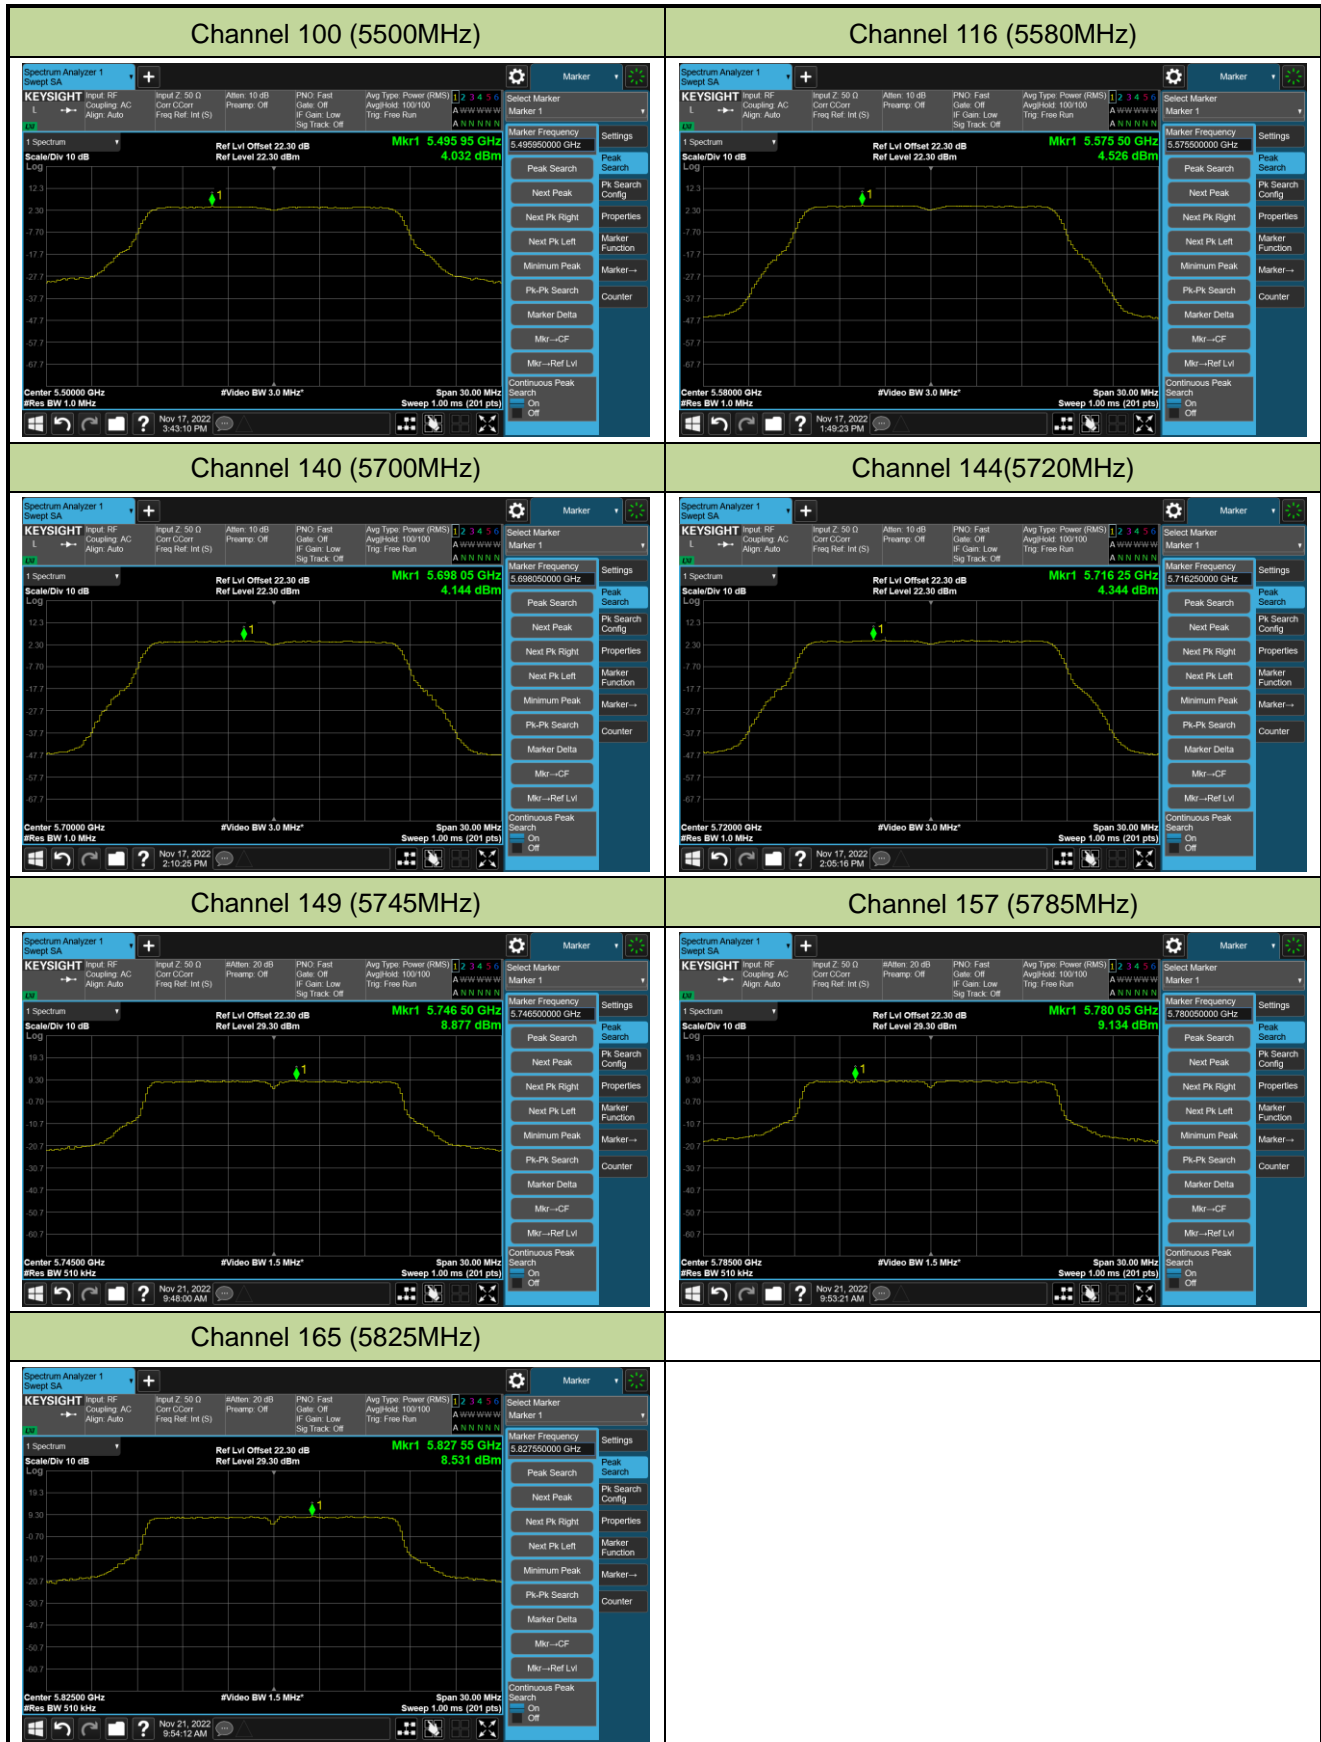

802.11ac-VHT20 Power Spectral Density - Ant 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)

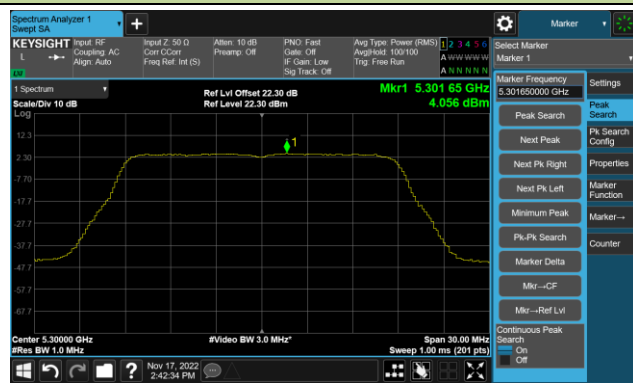


Channel 64 (5320MHz)



802.11ac-VHT20 Power Spectral Density - Ant 1

Channel 100 (5500MHz)

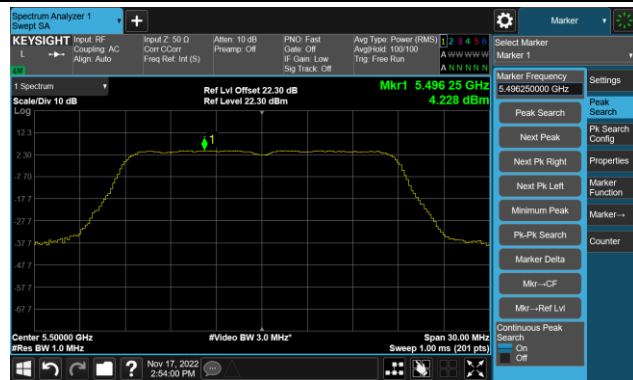

Channel 116 (5580MHz)




Channel 140 (5700MHz)




Channel 144(5720MHz)




Channel 149 (5745MHz)

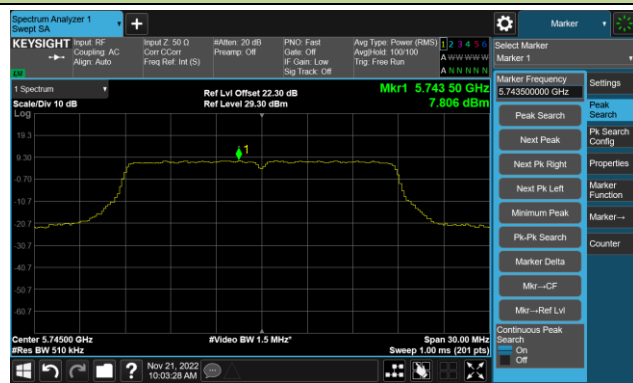

Channel 157 (5785MHz)

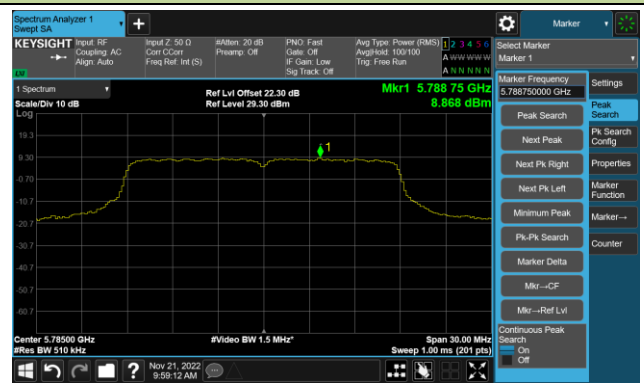


Channel 165 (5825MHz)

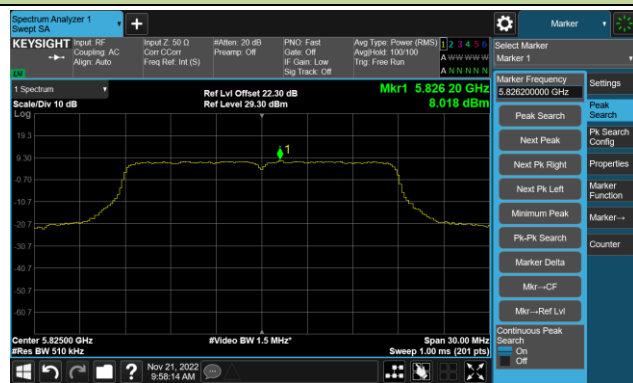

802.11ac-VHT40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

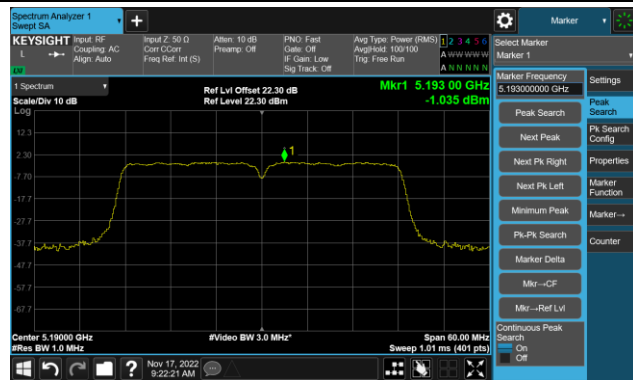

Channel 46 (5230MHz)




Channel 54 (5270MHz)

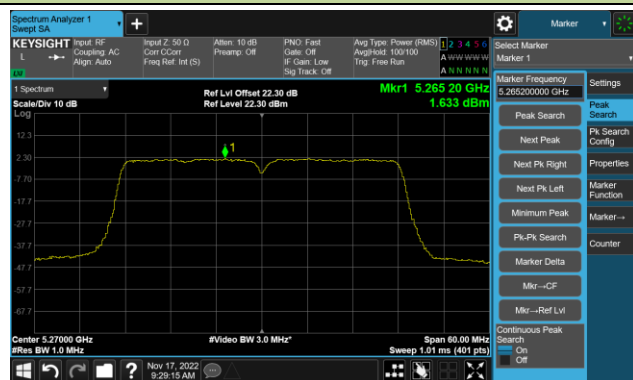


Channel 62 (5310MHz)



Channel 102 (5510MHz)

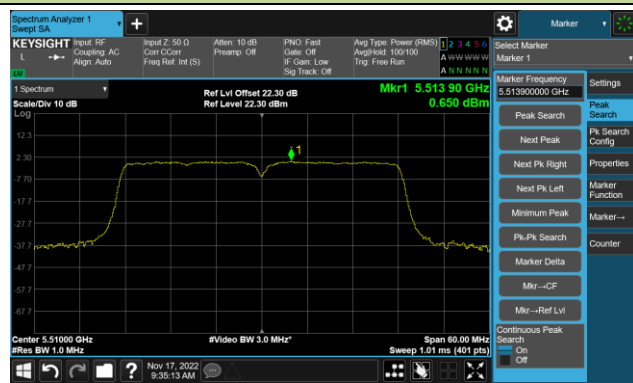


Channel 110 (5550MHz)

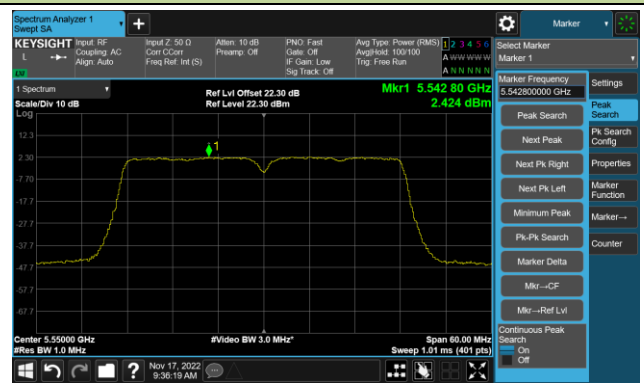

802.11ac-VHT40 Power Spectral Density - Ant 1

Channel 134 (5670MHz)

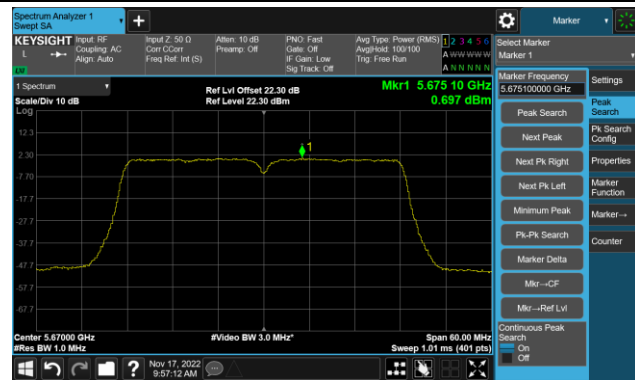


Channel 142(5710MHz)



Channel 151 (5755MHz)




Channel 159 (5795MHz)

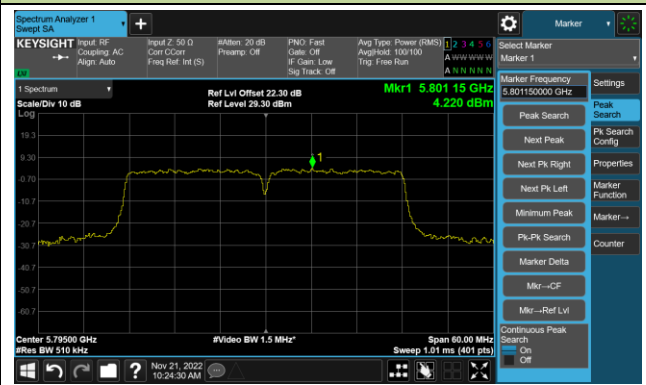


802.11ac-VHT80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

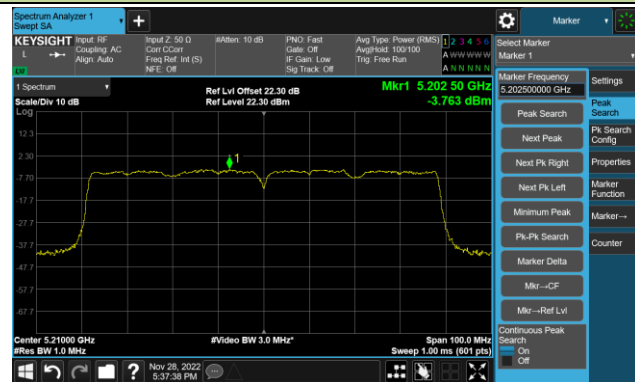

Channel 58 (5290MHz)

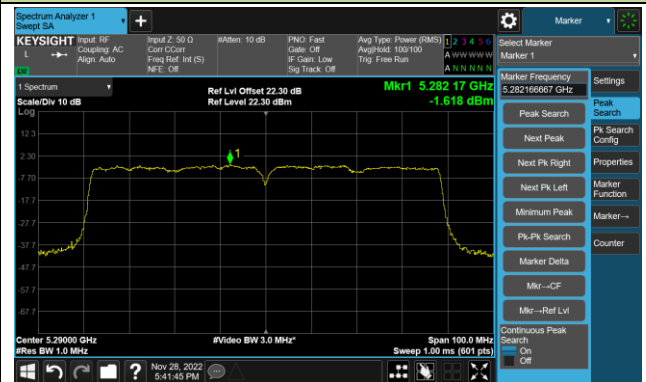

Channel 106 (5530MHz)

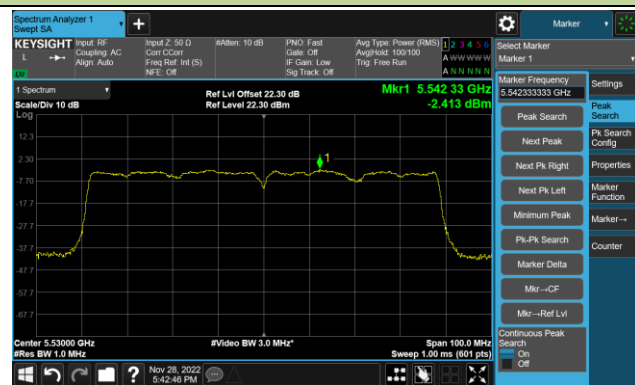


Channel 122 (5610MHz)



Channel 138 (5690MHz)



Channel 155 (5775MHz)

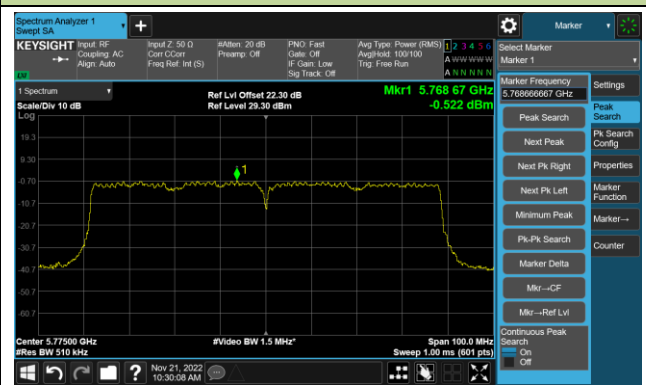

802.11ac-VHT160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)



Channel 114 (5570MHz)



802.11ax-HE20 Power Spectral Density - Ant 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)

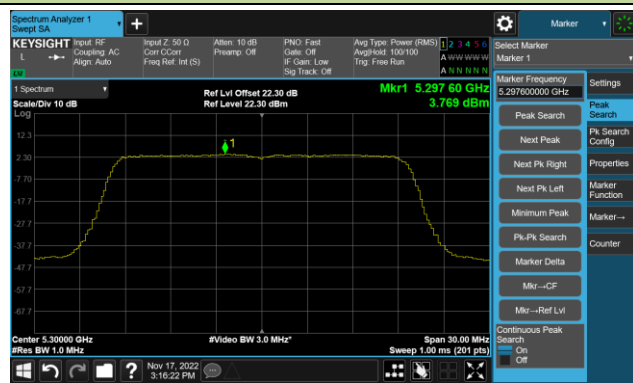

Channel 64 (5320MHz)



802.11ax-HE20 Power Spectral Density - Ant 1

Channel 100 (5500MHz)



Channel 116 (5580MHz)



Channel 140 (5700MHz)



Channel 144(5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)

