



TX915-JKS-20 Product Data Sheet

**915MHz Bendable Rubber Antenna
RP-SMA Connector**

Chengdu Ziisor Technology Co., Ltd

I. Product Introduction



TX915-JKS-20 is a 915MHz bendable rubber antenna. Height of the antenna is 200mm. With a RP-SMA connector, it can be applied to such broadband communication system, WLAN and mobile terminal equipment with frequency of 915MHz as router, AP, radio station, WiFi, smart TV and so on.


II. Specification and Parameters

Physical Parameters	
Frequency	915MHz
Bandwidth	895-935MHz
Gain	3.5dBi
SWR	≤1.5
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50Ω
Power Capacity	20W
Other Parameters	
Height	200mm
Total Weight	21g
Coat Material	TPEE
Diameter	Φ 20mm
Connector	RP-SMA
Working Temperature	-30℃~+75℃
Storage Temperature	-30℃~+75℃



III. Testing

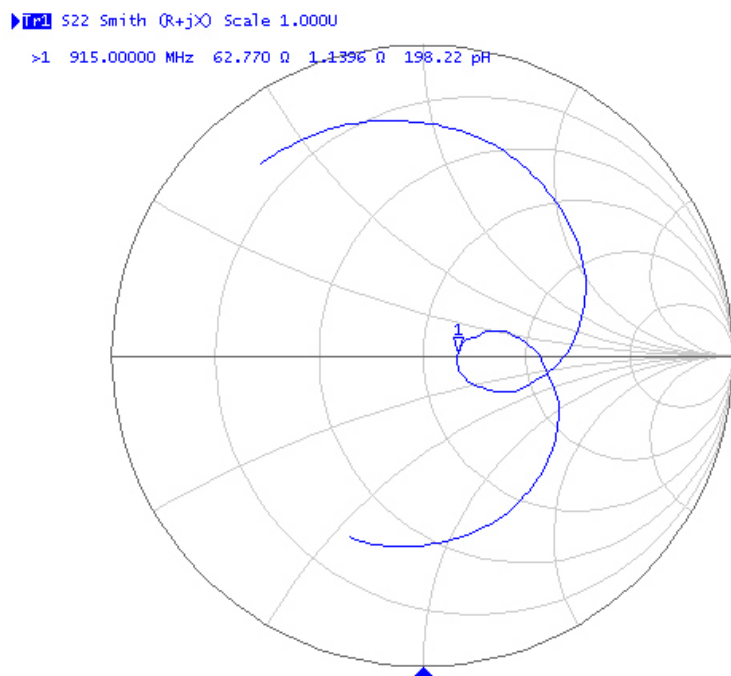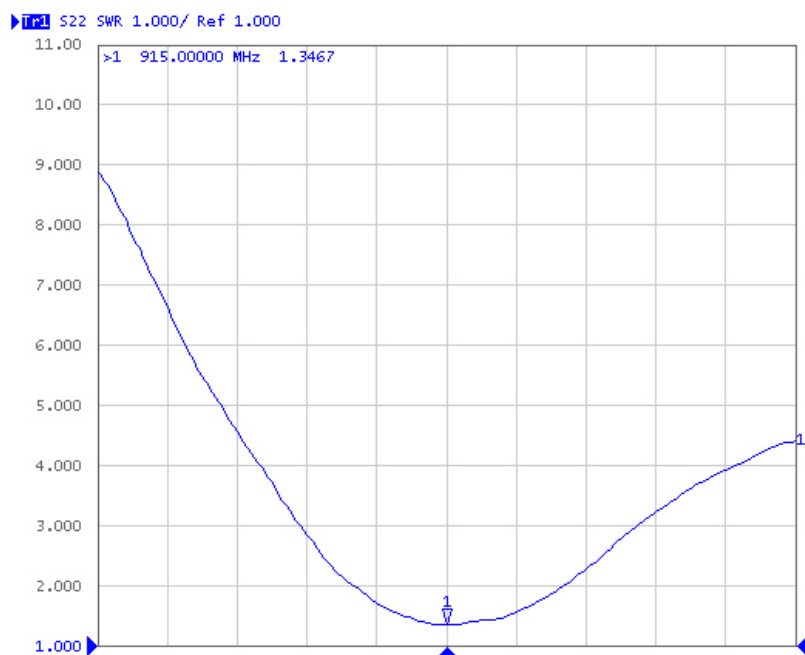

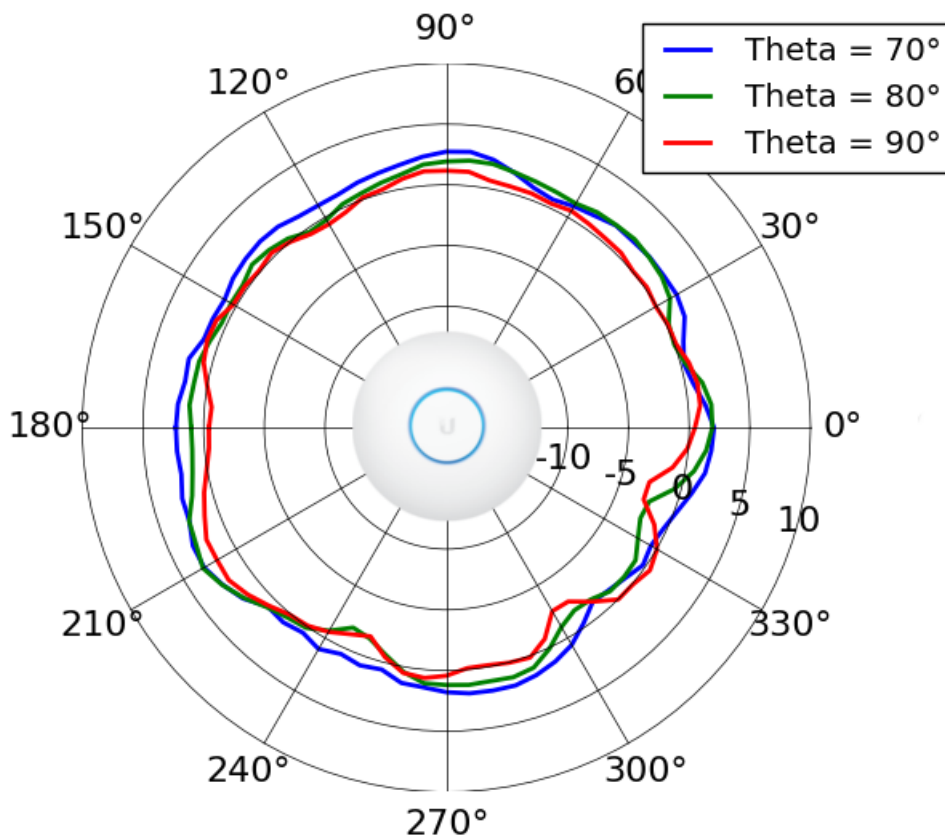

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

Chengdu Ziisor Technology Co., Ltd

Tel: +86-028-61542639

Technical Support: support@ziisor.com

Website: www.ziisor.com

Address: B231 Innovation Center, No.4 Xixin Avenue, High-Tech Zone, Chengdu, Sichuan Province, China.

