


Site: WZ-AC1	Time: 2022/01/12 - 00:09
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

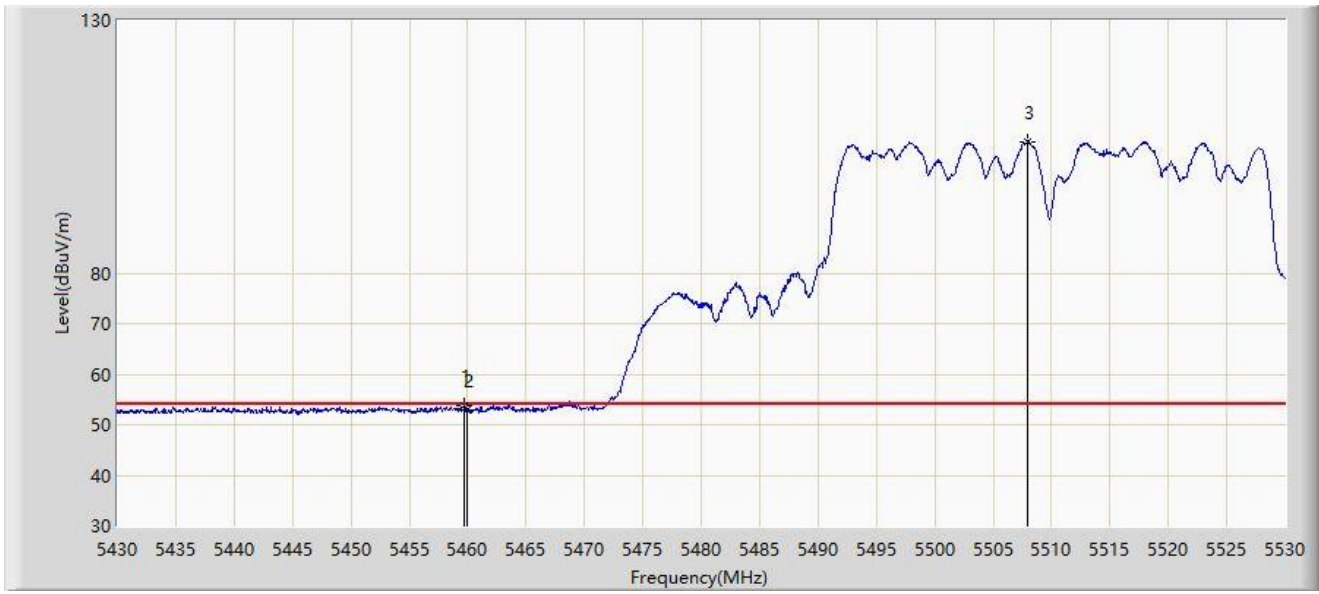


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5459.700	53.672	48.958	-0.328	54.000	4.714	AV
2			5460.000	52.962	48.250	-1.038	54.000	4.711	AV
3		*	5507.900	105.985	101.102	N/A	N/A	4.884	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 00:34
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

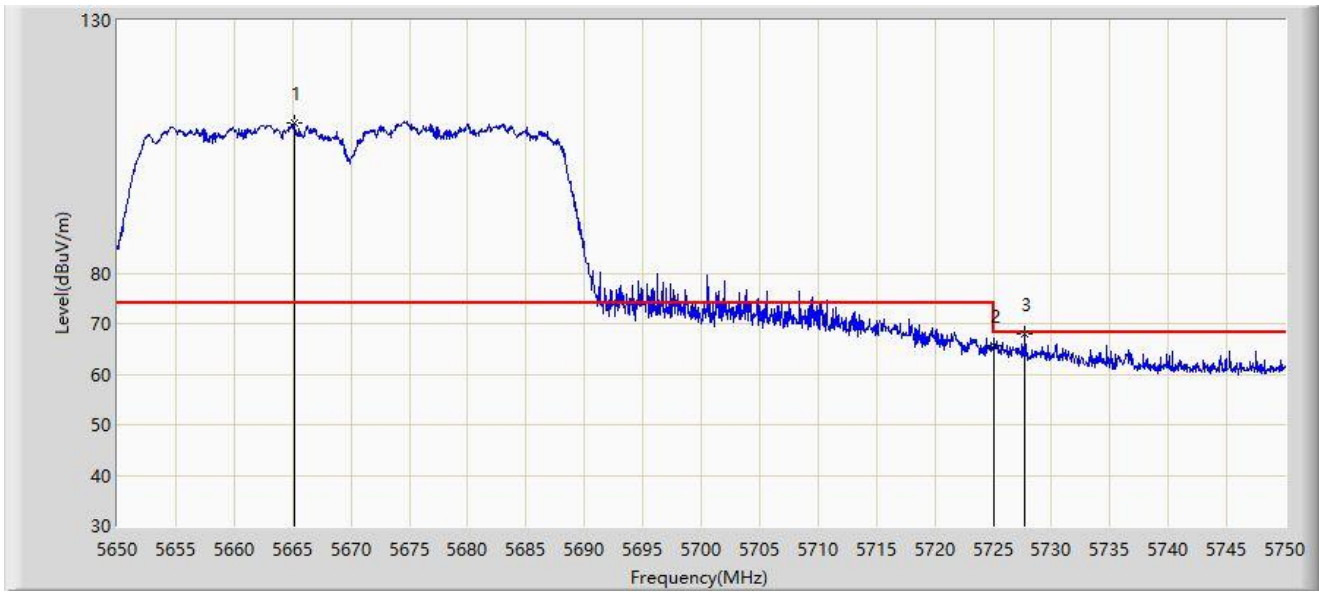


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5665.150	109.819	104.748	N/A	N/A	5.070	PK
2			5725.000	65.640	60.400	-2.560	68.200	5.241	PK
3			5727.750	67.864	62.613	-0.336	68.200	5.250	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 00:36
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

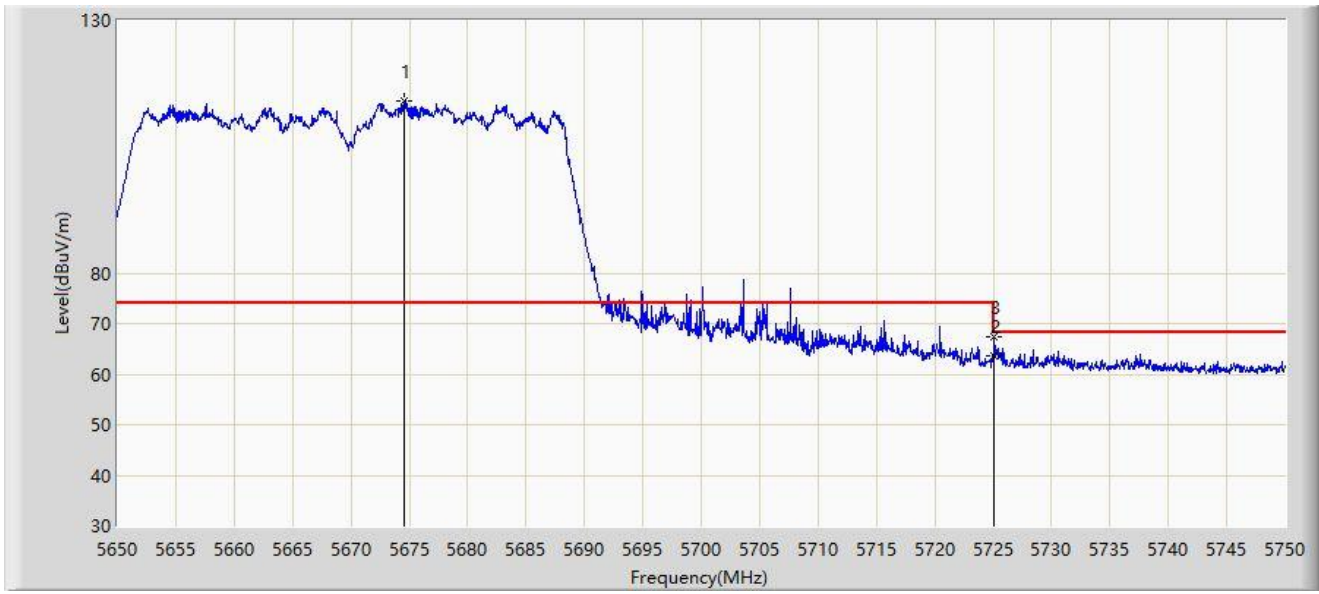


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5674.500	113.952	108.729	N/A	N/A	5.223	PK
2			5725.000	63.521	58.281	-4.679	68.200	5.241	PK
3			5725.100	67.501	62.261	-0.699	68.200	5.240	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 21:51
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

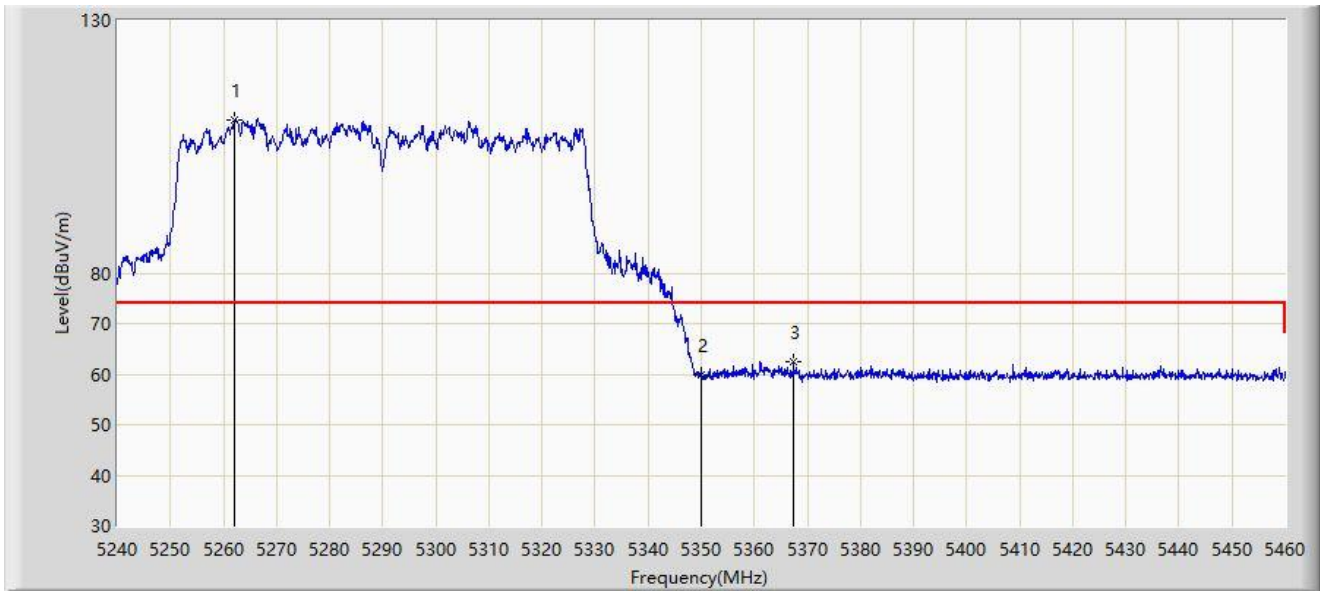


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5262.110	110.335	105.412	N/A	N/A	4.923	PK
2			5350.000	59.846	54.989	-14.154	74.000	4.857	PK
3			5367.380	62.599	57.844	-11.401	74.000	4.756	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 21:53
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

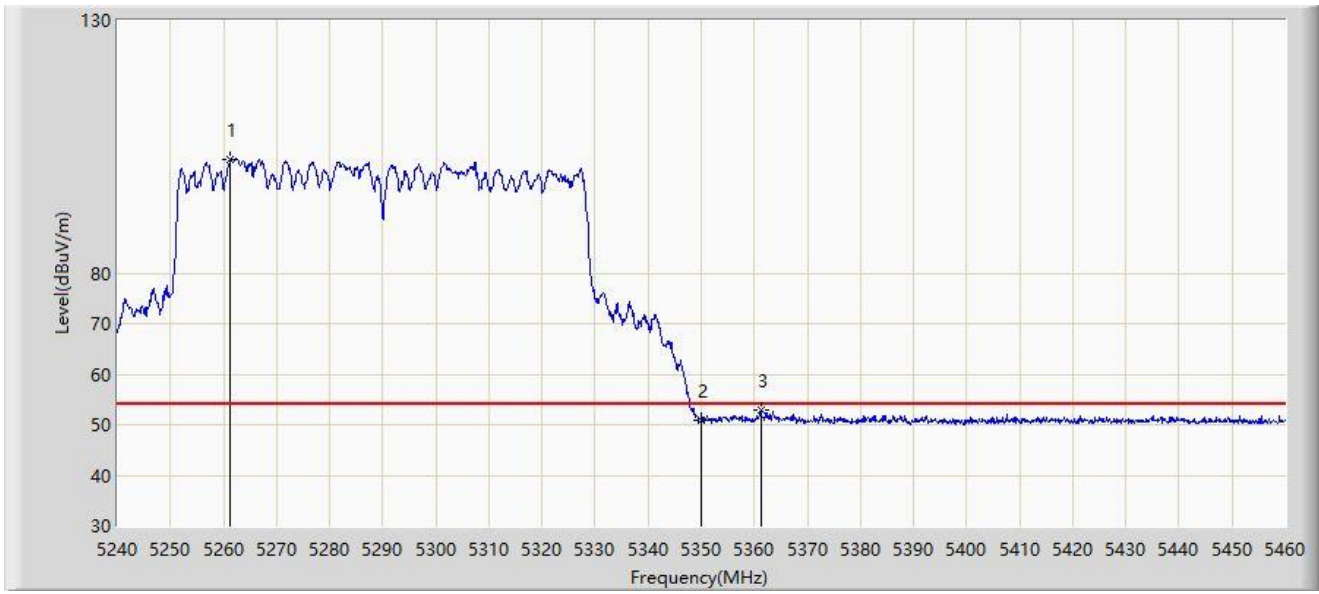


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5261.340	102.574	97.652	N/A	N/A	4.921	AV
2			5350.000	50.900	46.043	-3.100	54.000	4.857	AV
3			5361.220	52.866	48.066	-1.134	54.000	4.800	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 21:49
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

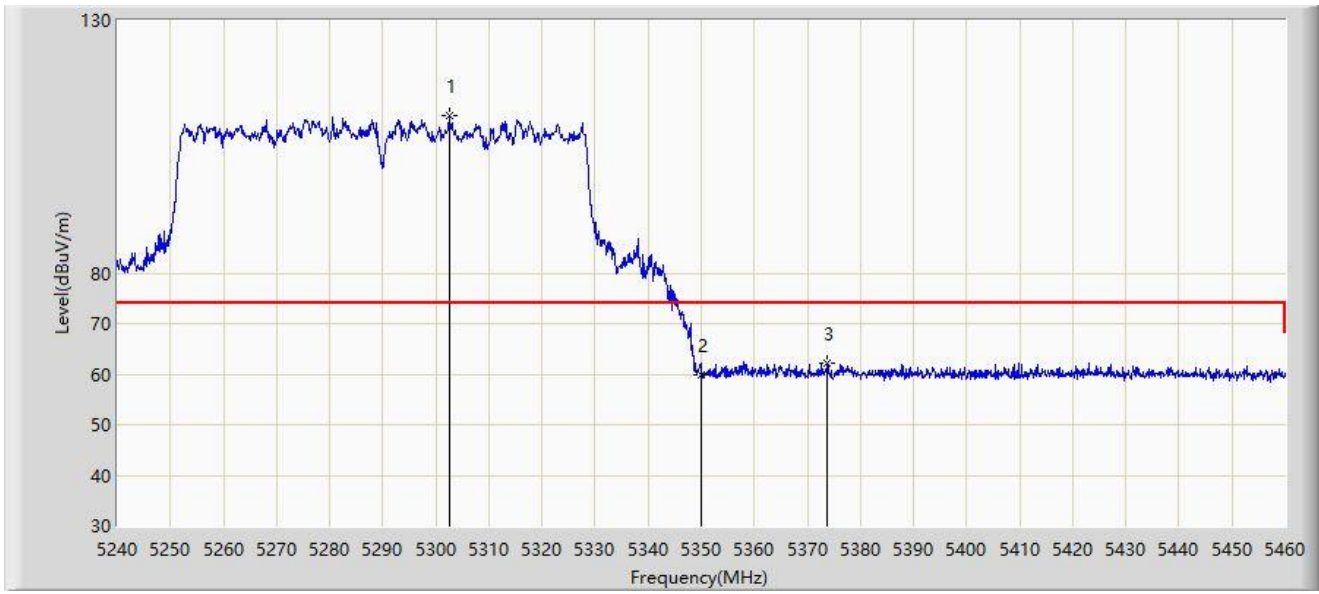


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5302.480	111.284	106.660	N/A	N/A	4.624	PK
2			5350.000	59.940	55.083	-14.060	74.000	4.857	PK
3			5373.760	62.186	57.457	-11.814	74.000	4.729	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 21:45
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

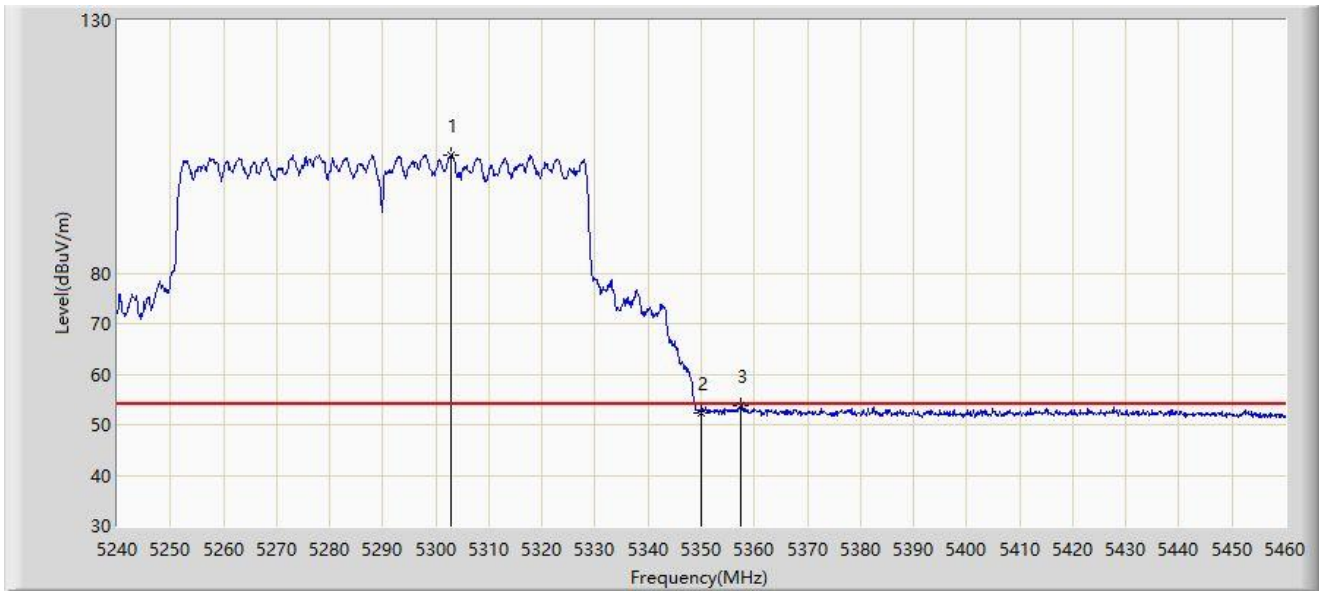


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5302.920	103.465	98.839	N/A	N/A	4.627	AV
2			5350.000	52.305	47.448	-1.695	54.000	4.857	AV
3			5357.480	53.692	48.865	-0.308	54.000	4.828	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 22:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

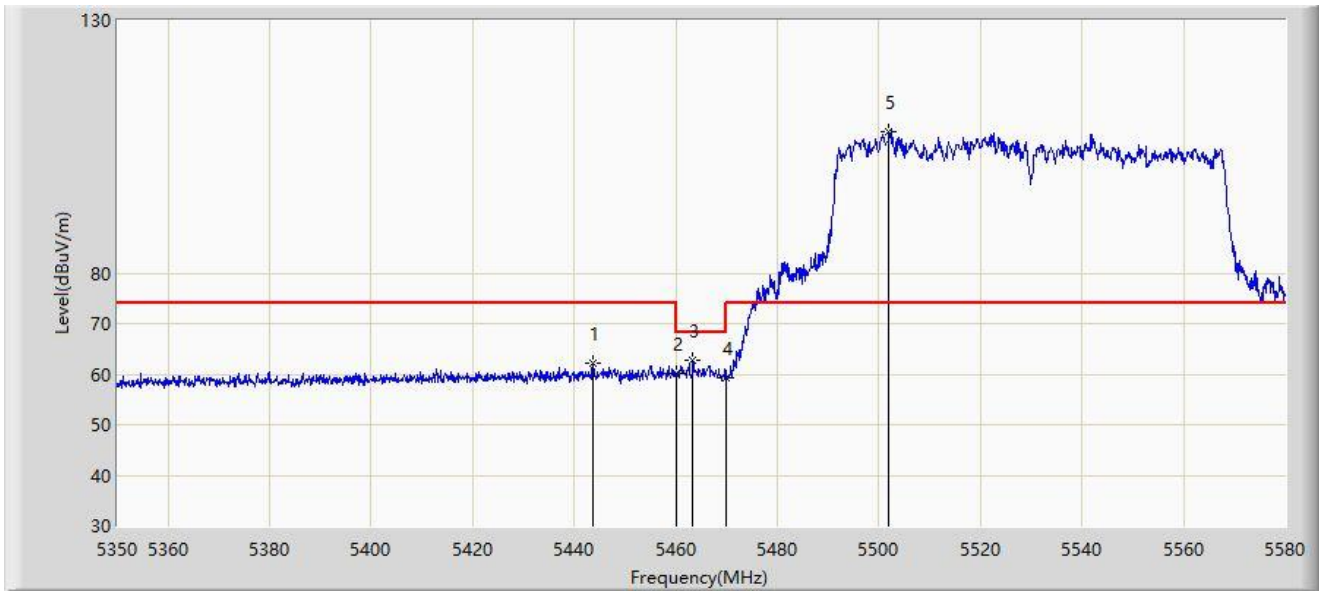


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5443.610	62.030	57.215	-11.970	74.000	4.815	PK
2			5460.000	60.173	55.461	-13.827	74.000	4.711	PK
3			5463.390	62.828	58.139	-5.372	68.200	4.689	PK
4			5470.000	59.326	54.682	-8.874	68.200	4.644	PK
5		*	5502.030	108.110	103.290	N/A	N/A	4.820	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: WZ-AC1	Time: 2022/01/12 - 22:14
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

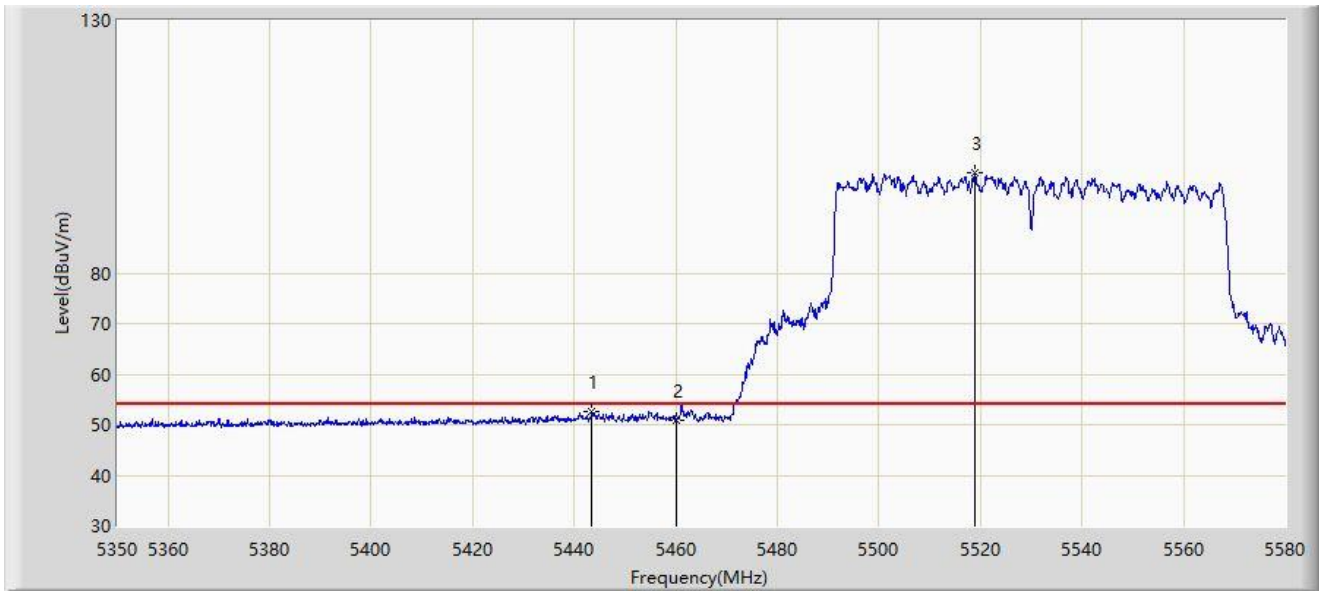


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5443.495	52.501	47.686	-1.499	54.000	4.816	AV
2			5460.000	50.921	46.209	-3.079	54.000	4.711	AV
3		*	5518.820	99.741	94.806	N/A	N/A	4.935	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 22:11
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

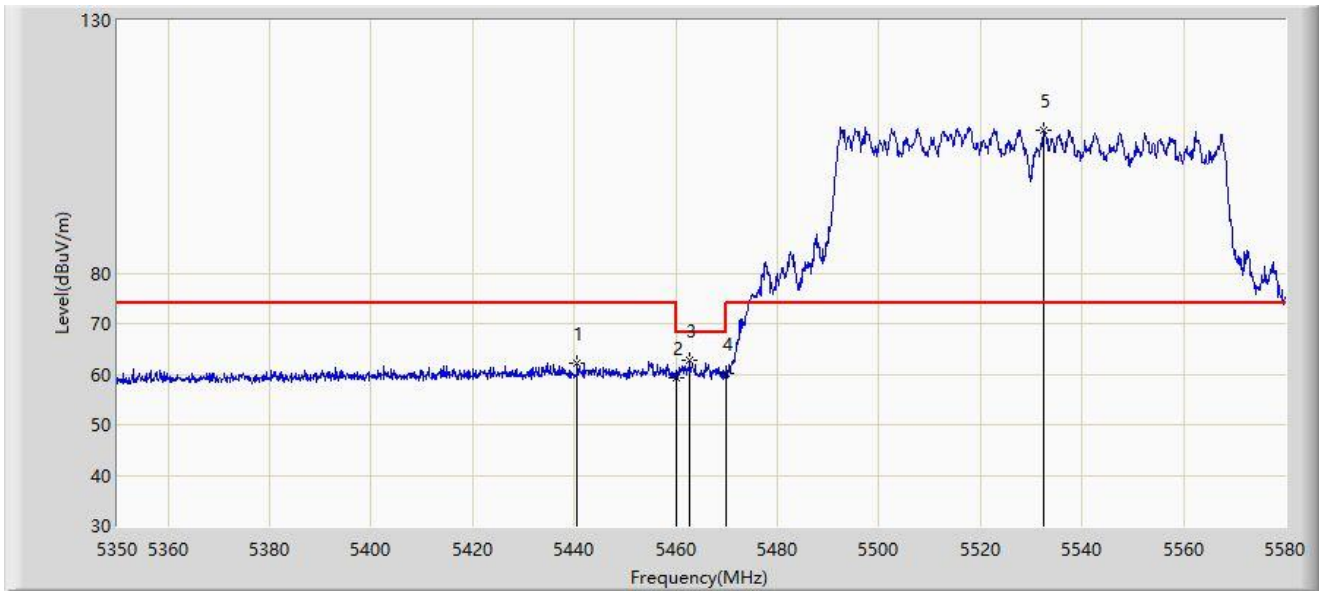


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5440.620	62.148	57.316	-11.852	74.000	4.831	PK
2			5460.000	59.348	54.636	-14.652	74.000	4.711	PK
3			5462.700	62.754	58.061	-5.446	68.200	4.694	PK
4			5470.000	60.138	55.494	-8.062	68.200	4.644	PK
5		*	5532.505	108.117	103.249	N/A	N/A	4.868	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 22:09
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

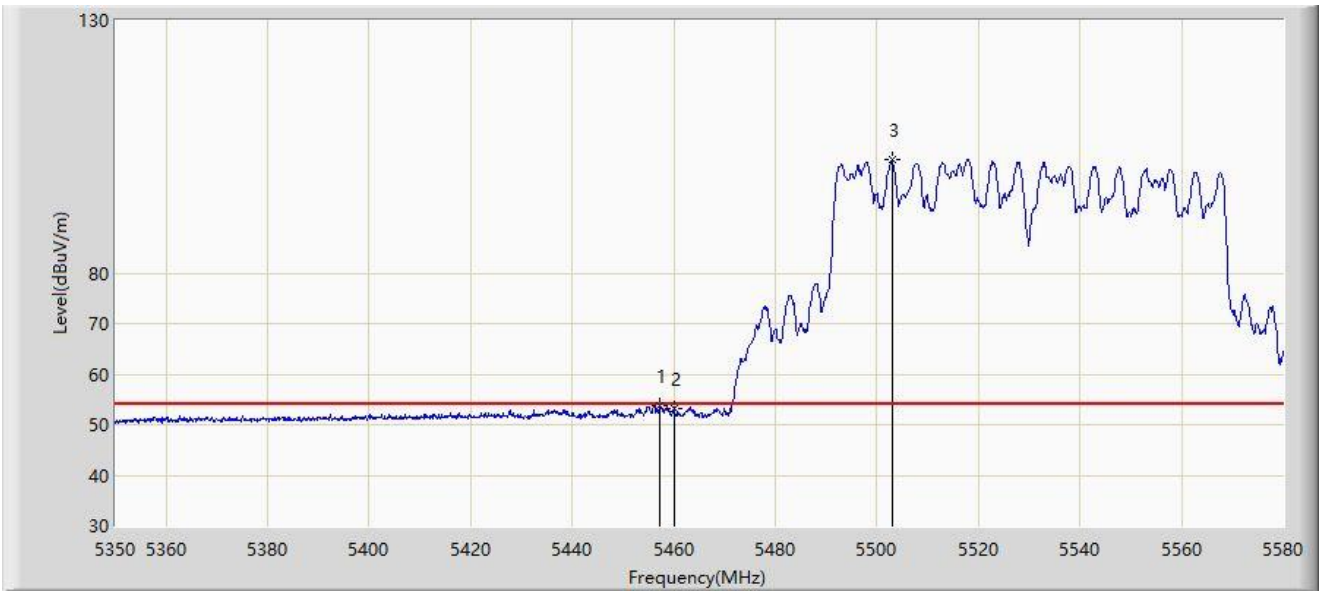


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5457.295	53.667	48.937	-0.333	54.000	4.729	AV
2			5460.000	53.069	48.357	-0.931	54.000	4.711	AV
3		*	5502.950	102.320	97.487	N/A	N/A	4.833	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:56
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

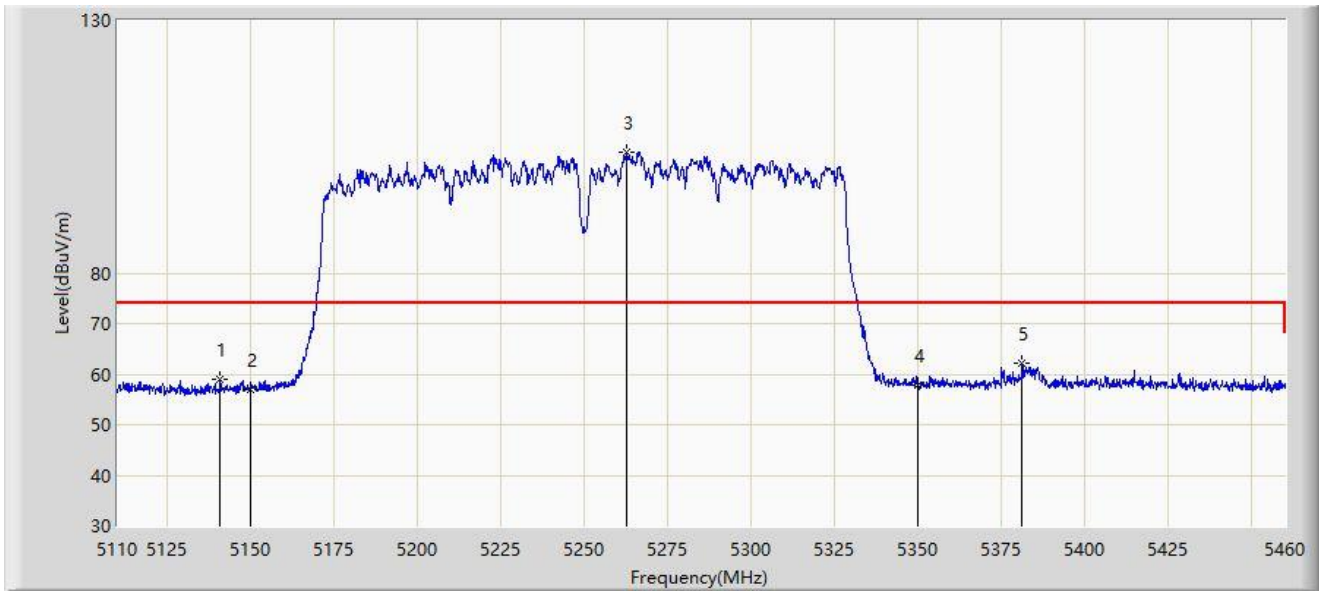


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5140.800	59.104	54.302	-14.896	74.000	4.801	PK
2			5150.000	56.934	52.141	-17.066	74.000	4.793	PK
3		*	5262.425	103.841	98.918	N/A	N/A	4.923	PK
4			5350.000	57.930	53.073	-16.070	74.000	4.857	PK
5			5381.075	62.029	57.327	-11.971	74.000	4.702	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:55
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

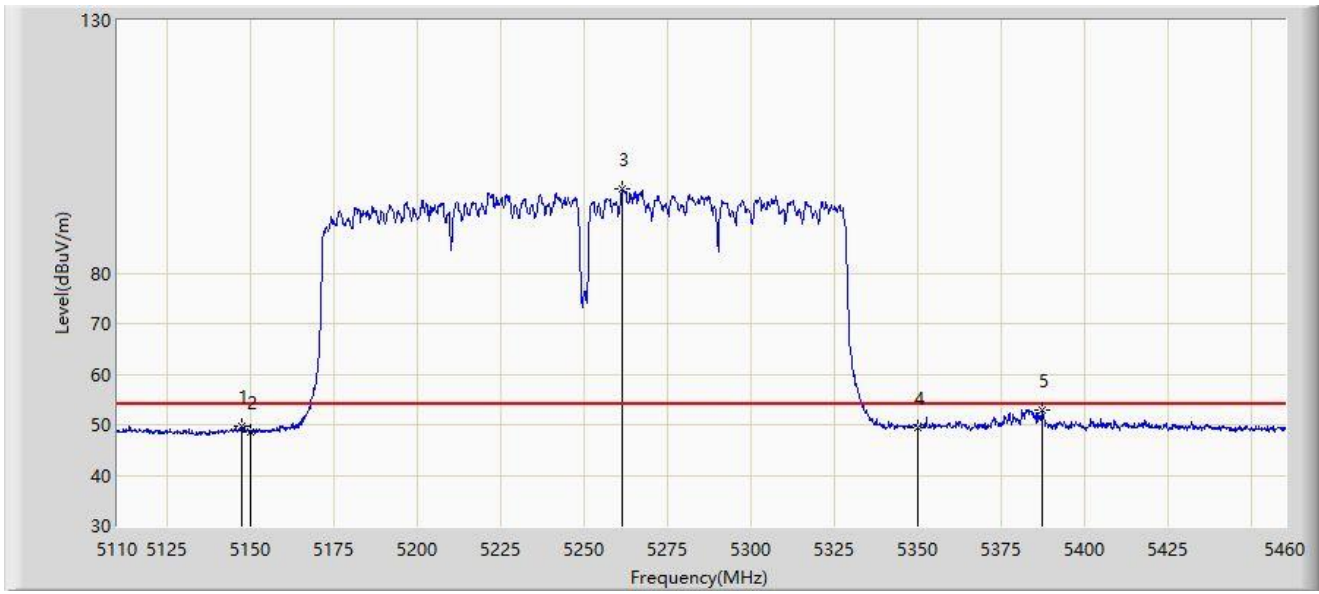


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.275	49.781	44.998	-4.219	54.000	4.783	AV
2			5150.000	48.660	43.867	-5.340	54.000	4.793	AV
3		*	5261.375	96.694	91.772	N/A	N/A	4.922	AV
4			5350.000	49.442	44.585	-4.558	54.000	4.857	AV
5			5387.200	53.042	48.359	-0.958	54.000	4.683	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:57
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

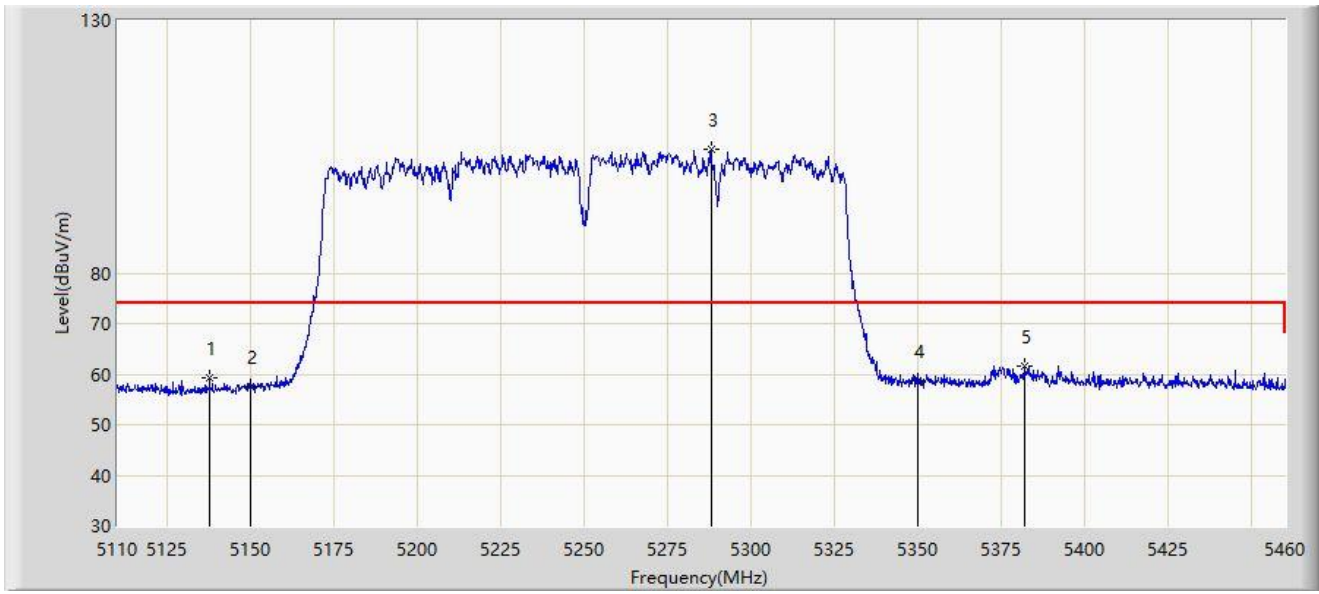


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5137.650	59.347	54.536	-14.653	74.000	4.812	PK
2			5150.000	57.542	52.749	-16.458	74.000	4.793	PK
3		*	5287.975	104.501	99.784	N/A	N/A	4.718	PK
4			5350.000	58.589	53.732	-15.411	74.000	4.857	PK
5			5381.950	61.571	56.872	-12.429	74.000	4.699	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:52
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

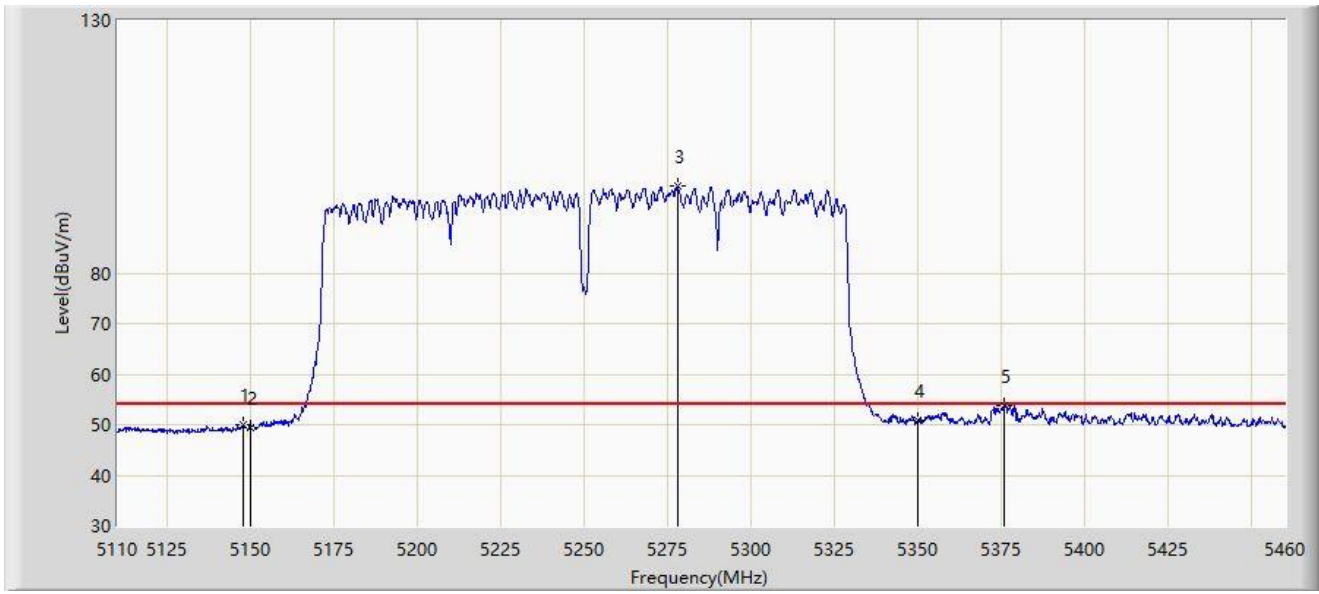


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.625	50.082	45.300	-3.918	54.000	4.782	AV
2			5150.000	49.421	44.628	-4.579	54.000	4.793	AV
3		*	5277.825	97.175	92.343	N/A	N/A	4.832	AV
4			5350.000	50.837	45.980	-3.163	54.000	4.857	AV
5			5376.000	53.805	49.084	-0.195	54.000	4.721	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

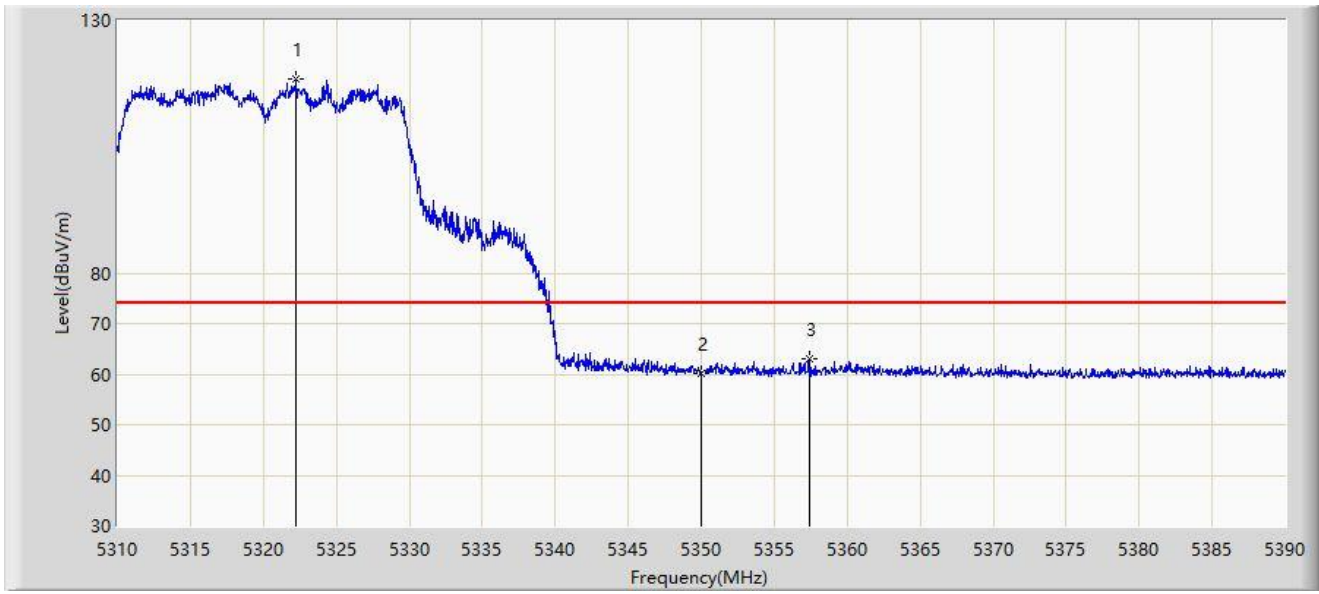


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5322.280	118.265	113.585	N/A	N/A	4.680	PK
2			5350.000	60.136	55.279	-13.864	74.000	4.857	PK
3			5357.400	63.098	58.270	-10.902	74.000	4.828	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: WZ-AC1	Time: 2022/01/12 - 23:16
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

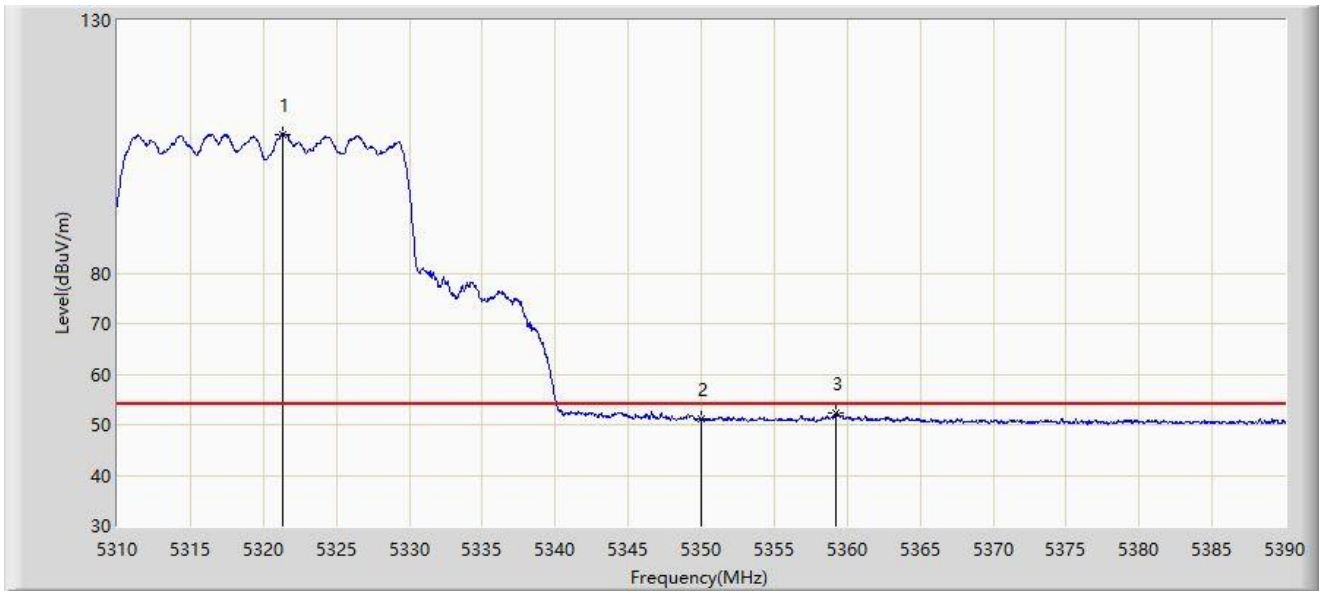


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5321.280	107.529	102.852	N/A	N/A	4.676	AV
2			5350.000	51.040	46.183	-2.960	54.000	4.857	AV
3			5359.200	52.361	47.546	-1.639	54.000	4.814	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:12
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

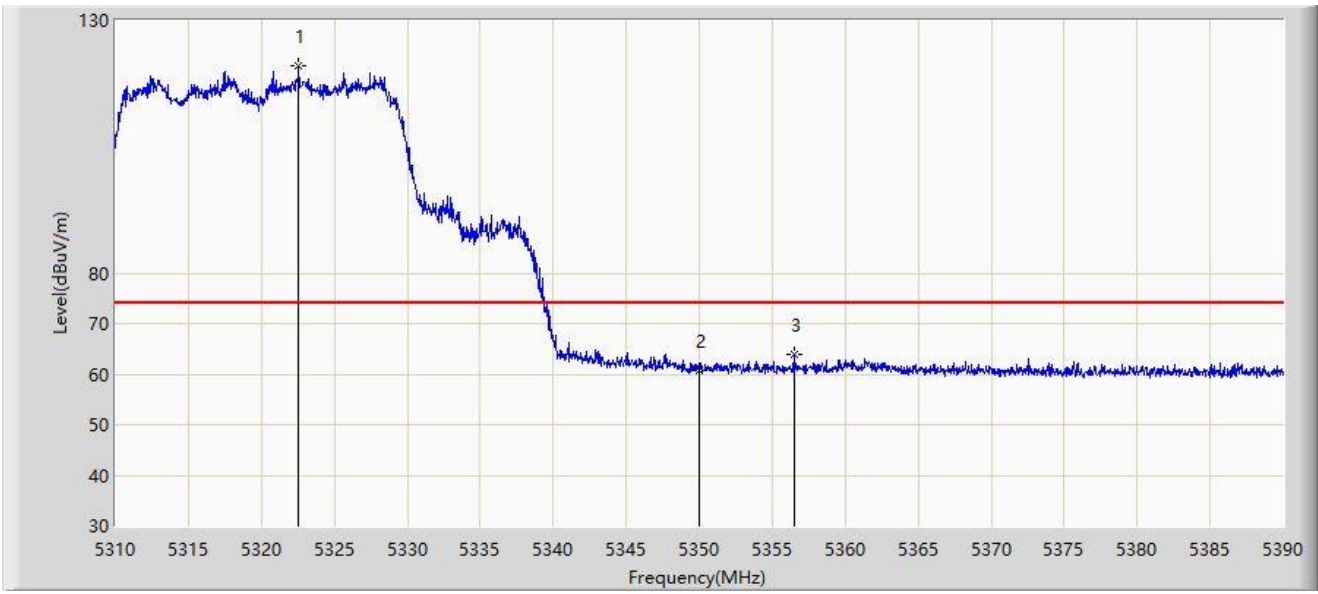


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5322.560	120.947	116.266	N/A	N/A	4.682	PK
2			5350.000	60.732	55.875	-13.268	74.000	4.857	PK
3			5356.480	64.020	59.186	-9.980	74.000	4.835	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:11
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

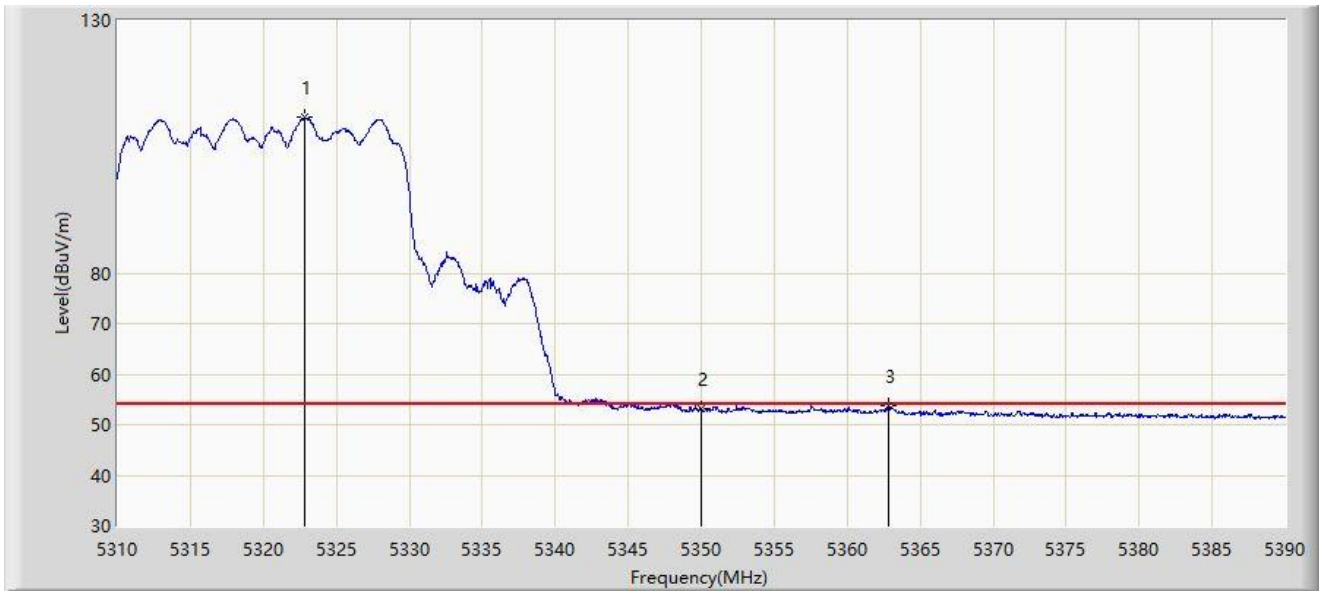


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	X	*	5322.880	110.727	106.044	N/A	N/A	4.683	AV
2			5350.000	53.076	48.219	-0.924	54.000	4.857	AV
3			5362.840	53.786	48.998	-0.214	54.000	4.788	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

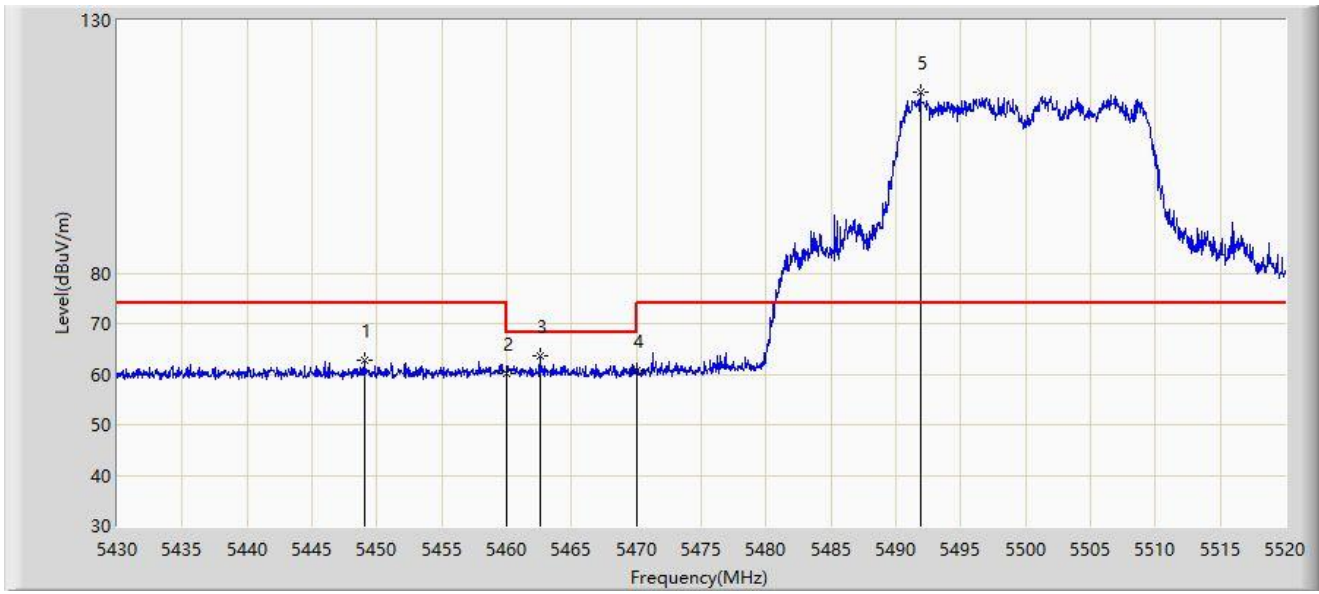


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5449.035	62.783	57.999	-11.217	74.000	4.784	PK
2			5460.000	60.128	55.416	-13.872	74.000	4.711	PK
3			5462.580	63.587	58.893	-4.613	68.200	4.695	PK
4			5470.000	60.750	56.106	-7.450	68.200	4.644	PK
5		*	5491.875	115.688	111.006	N/A	N/A	4.683	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:32
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

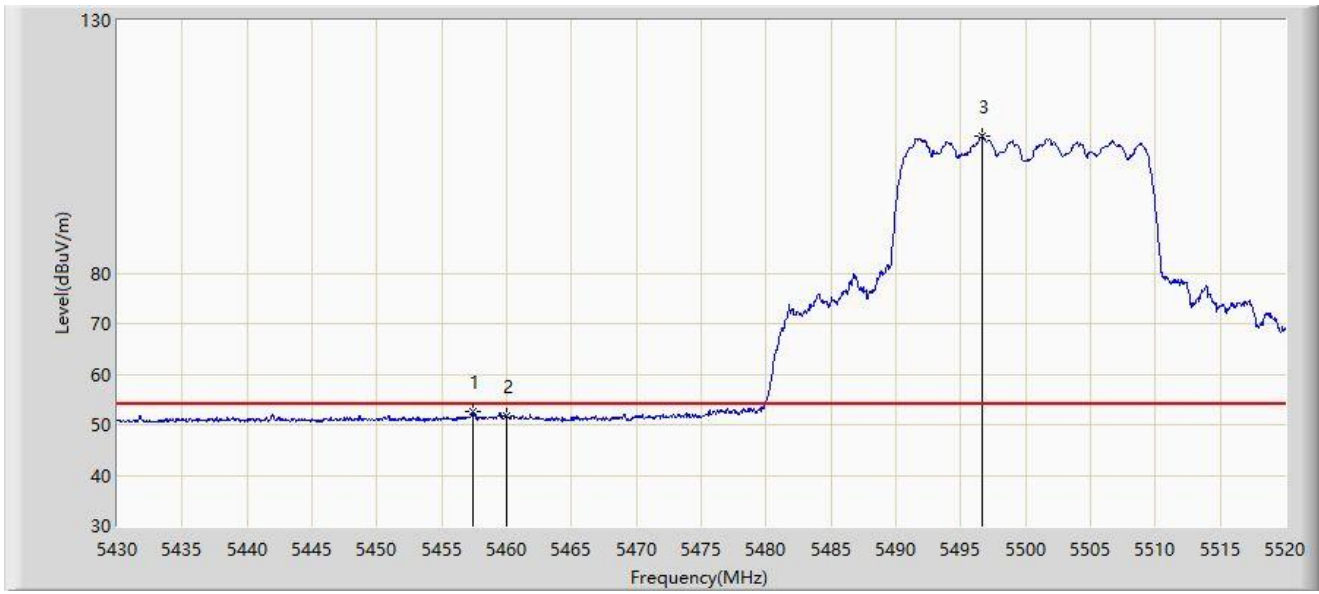


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5457.450	52.566	47.837	-1.434	54.000	4.729	AV
2			5460.000	51.688	46.976	-2.312	54.000	4.711	AV
3		*	5496.600	107.188	102.447	N/A	N/A	4.741	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:29
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

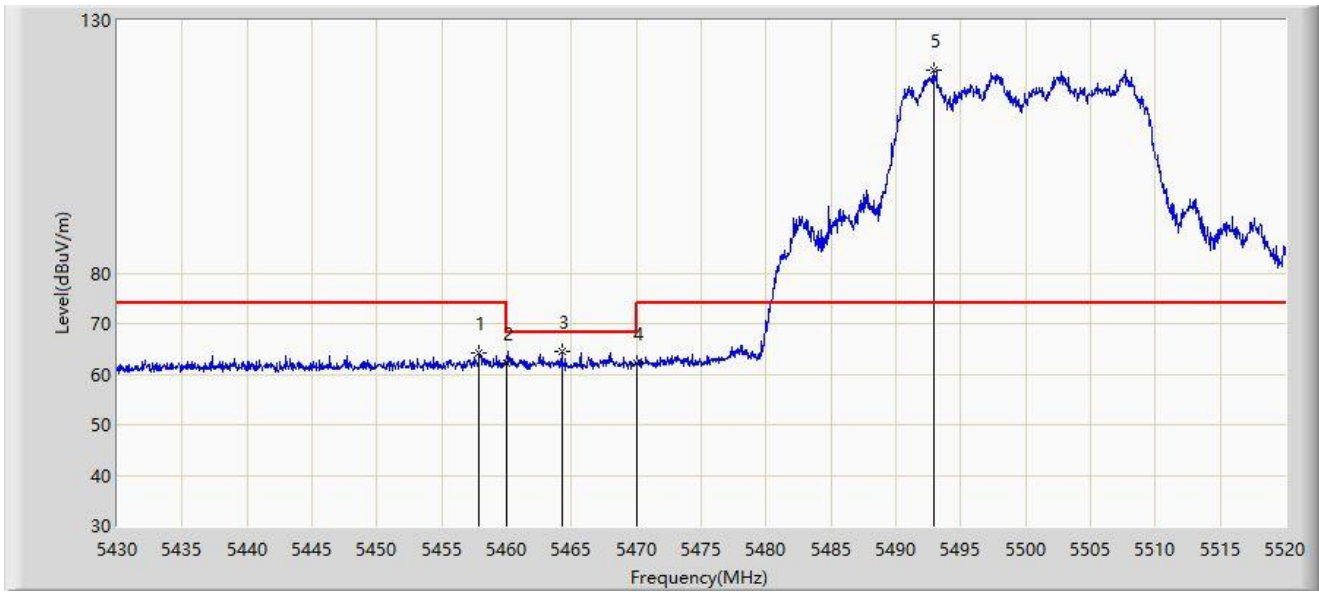


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5457.855	64.222	59.496	-9.778	74.000	4.725	PK
2			5460.000	62.223	57.511	-11.777	74.000	4.711	PK
3			5464.245	64.388	59.705	-3.812	68.200	4.683	PK
4			5470.000	62.164	57.520	-6.036	68.200	4.644	PK
5		*	5492.955	120.031	115.342	N/A	N/A	4.688	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:26
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

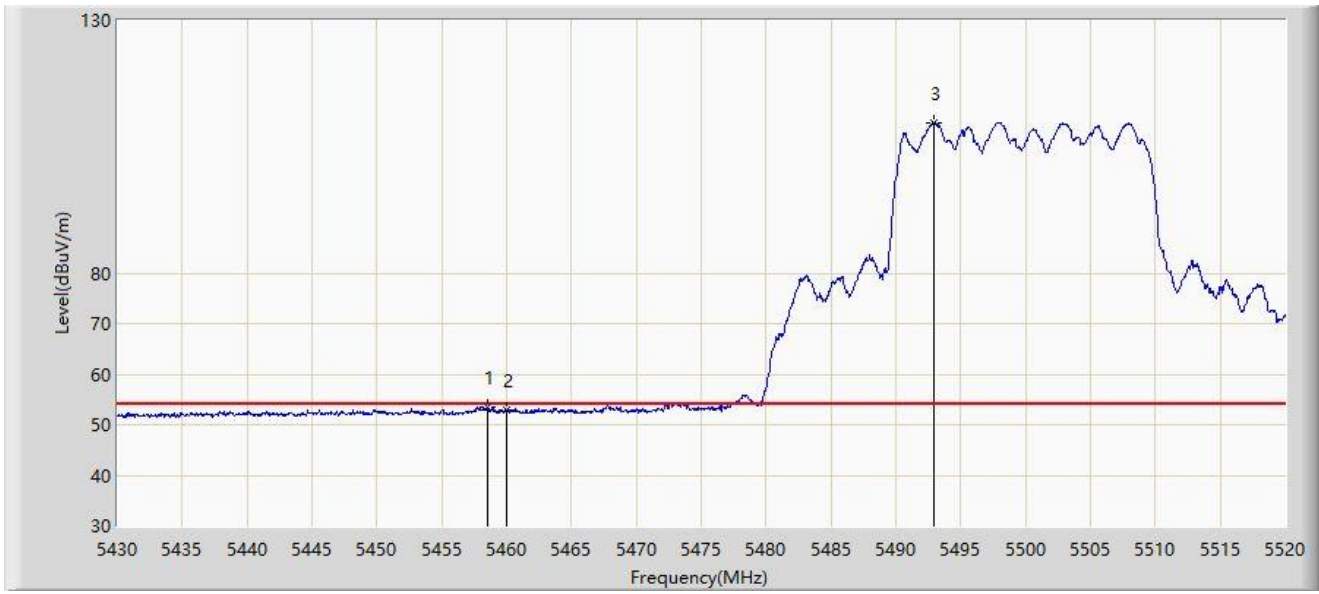


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5458.485	53.583	48.861	-0.417	54.000	4.722	AV
2			5460.000	52.792	48.080	-1.208	54.000	4.711	AV
3	X	*	5492.910	109.717	105.029	N/A	N/A	4.687	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/12 - 23:56
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

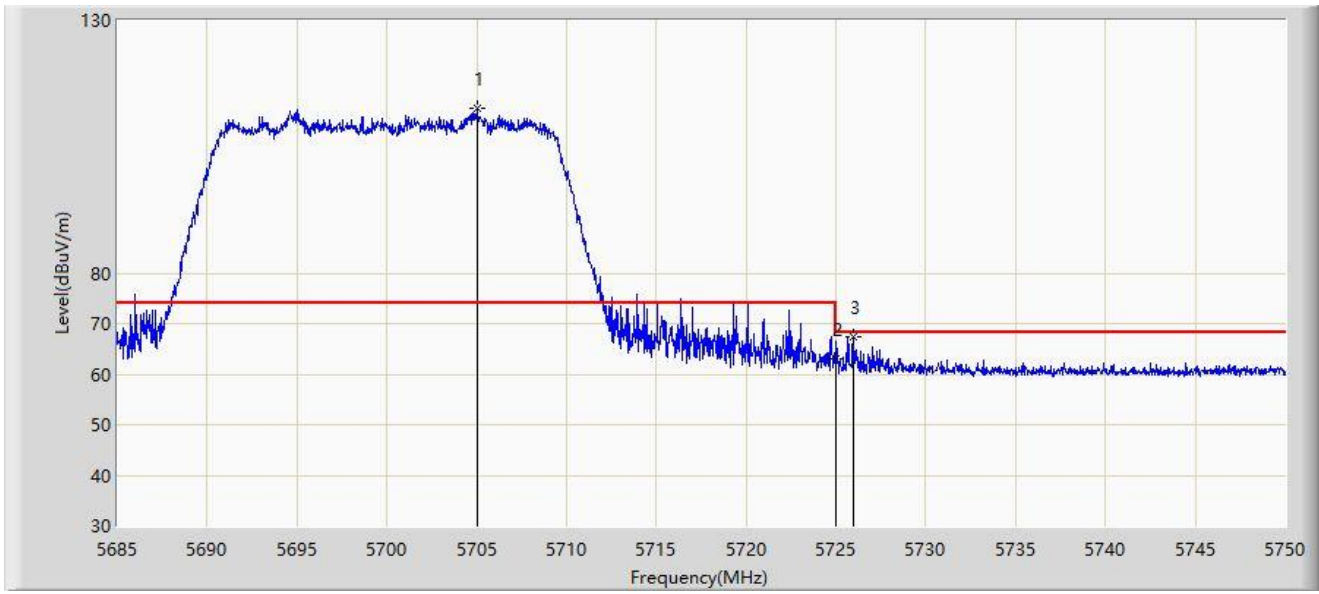


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5705.020	112.535	107.323	N/A	N/A	5.213	PK
2			5725.000	62.962	57.722	-5.238	68.200	5.241	PK
3			5725.950	67.524	62.282	-0.676	68.200	5.242	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: WZ-AC1	Time: 2022/01/12 - 23:58
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

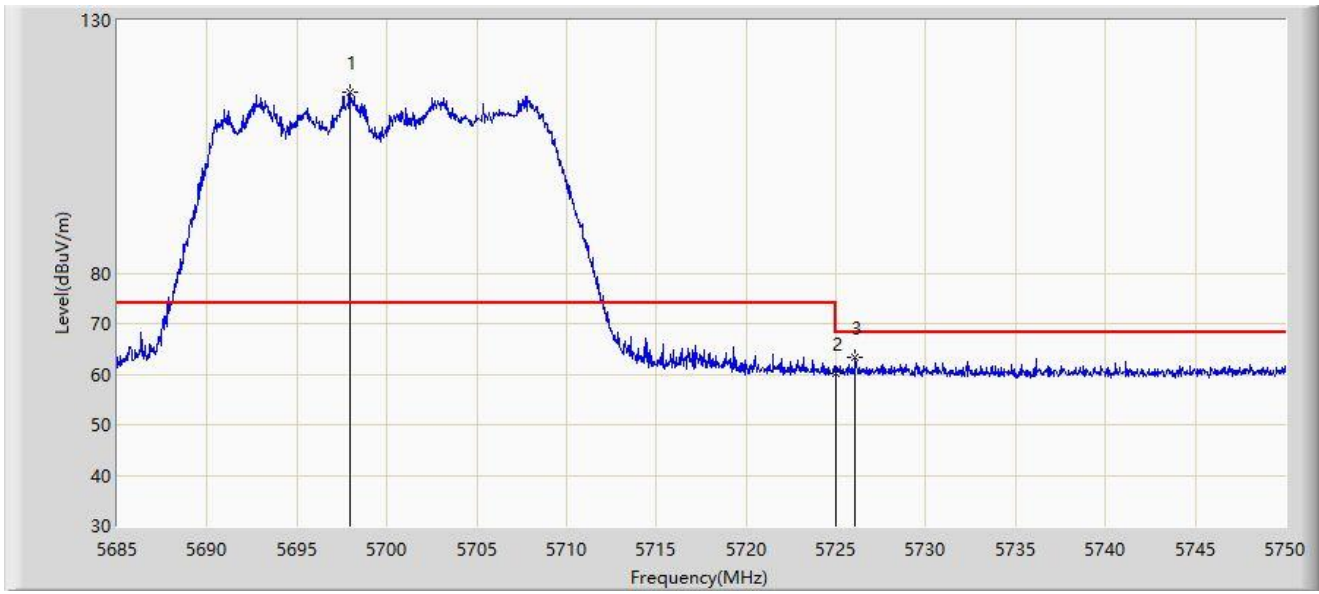


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5697.967	115.895	110.673	N/A	N/A	5.222	PK
2			5725.000	60.126	54.886	-8.074	68.200	5.241	PK
3			5726.080	63.377	58.134	-4.823	68.200	5.243	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:29
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

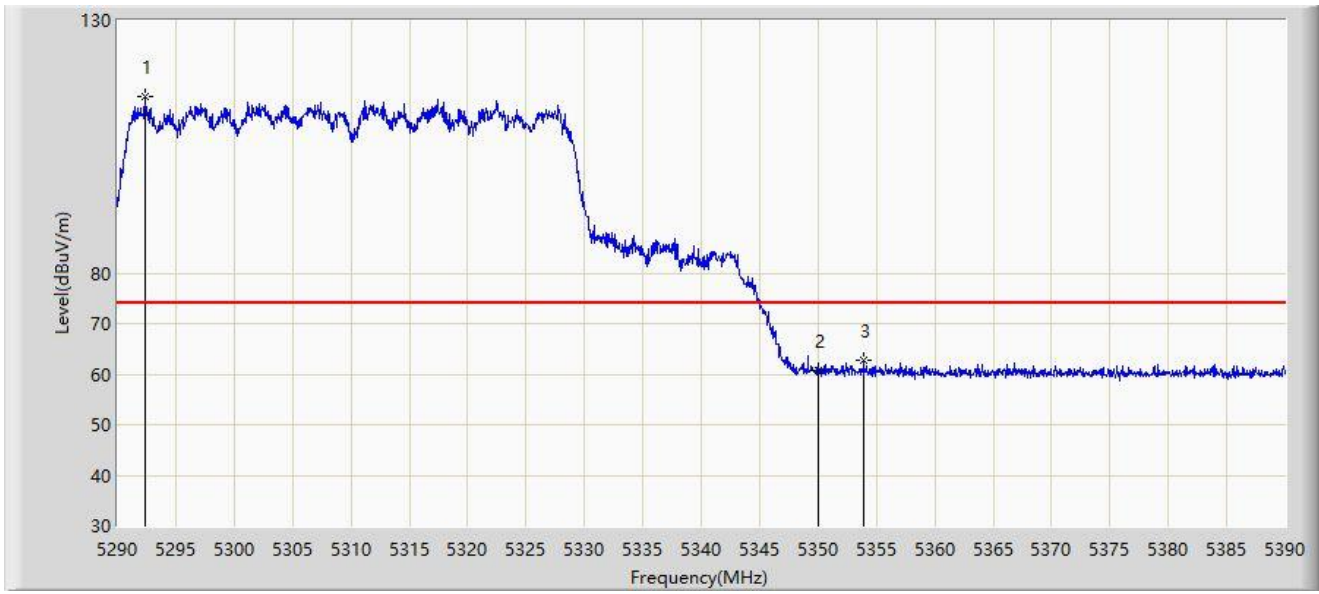


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5292.350	115.052	110.391	N/A	N/A	4.661	PK
2			5350.000	60.647	55.790	-13.353	74.000	4.857	PK
3			5353.900	62.790	57.937	-11.210	74.000	4.853	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

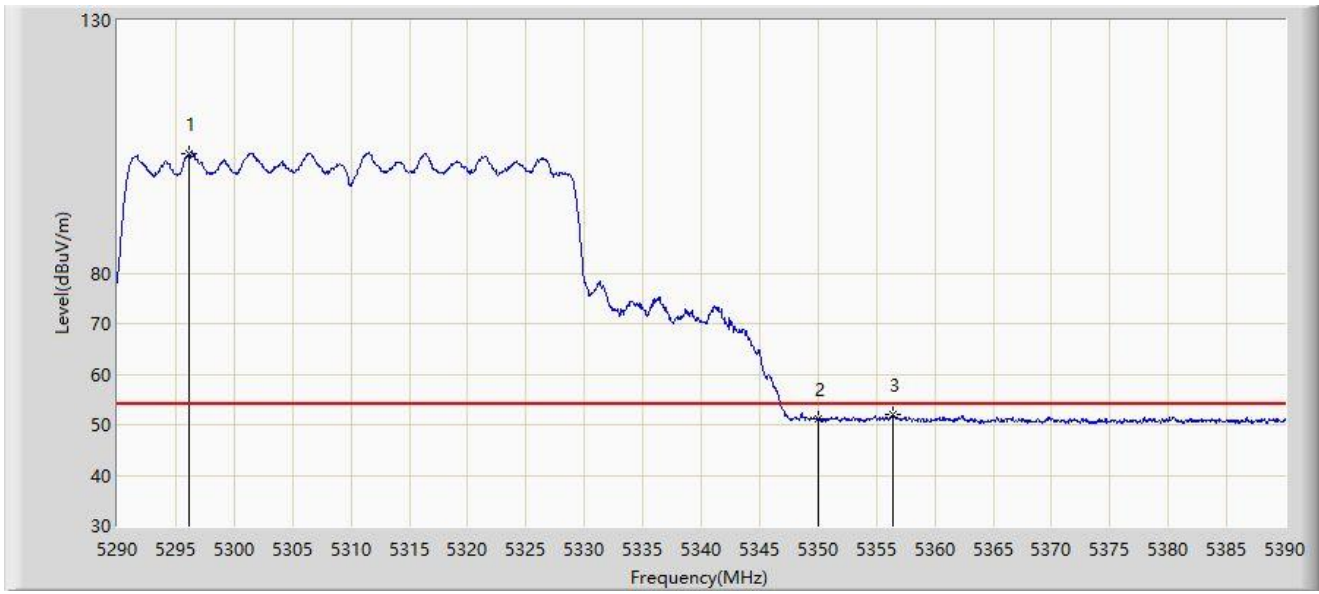


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5296.200	103.759	99.136	N/A	N/A	4.623	AV
2			5350.000	51.196	46.339	-2.804	54.000	4.857	AV
3			5356.400	51.960	47.125	-2.040	54.000	4.835	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:28
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

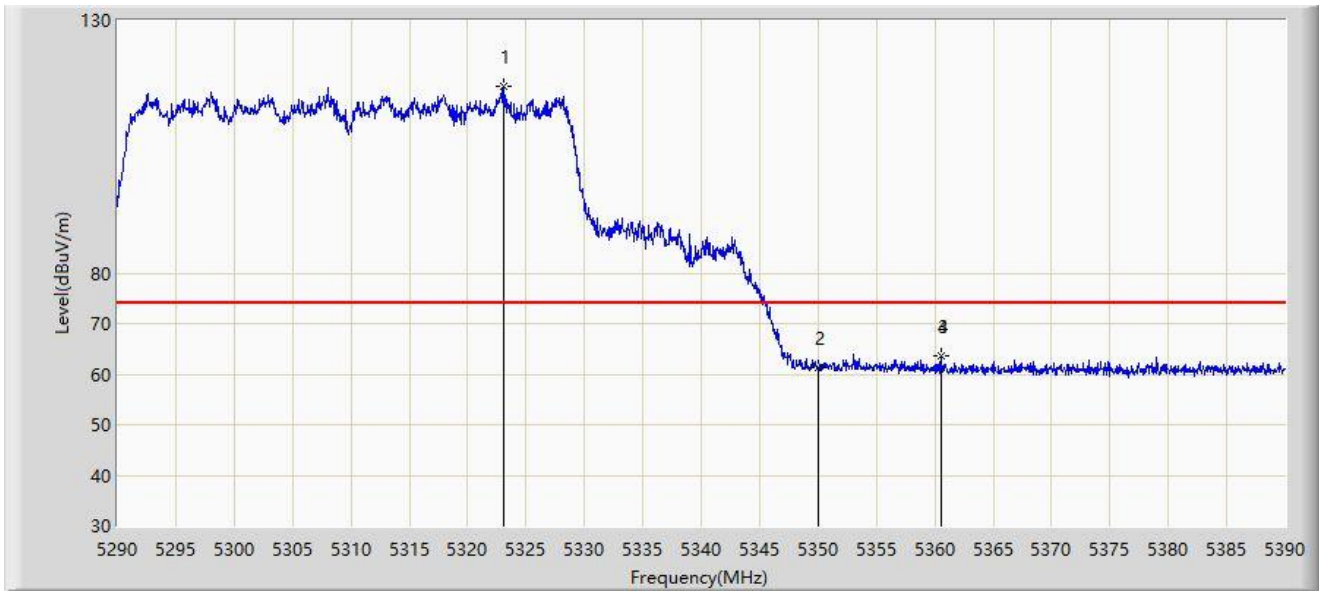


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5323.050	116.969	112.286	N/A	N/A	4.684	PK
2			5350.000	61.218	56.361	-12.782	74.000	4.857	PK
3			5360.500	63.514	58.709	-10.486	74.000	4.805	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:26
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

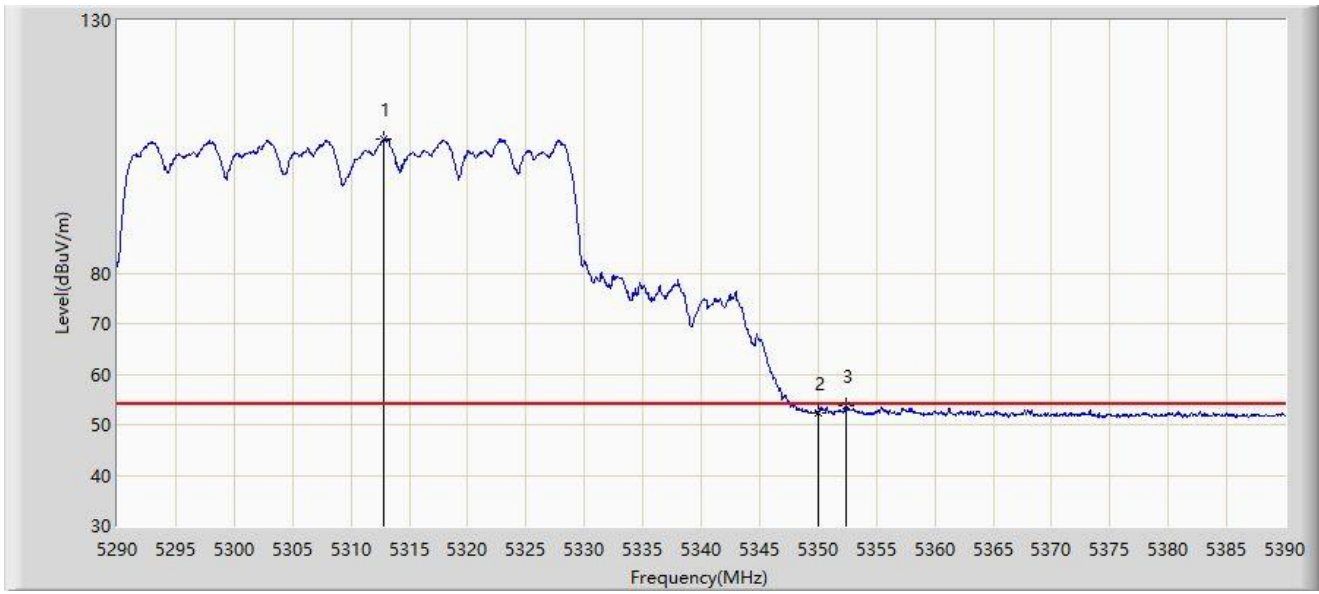


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5312.800	106.581	101.909	N/A	N/A	4.672	AV
2			5350.000	52.433	47.576	-1.567	54.000	4.857	AV
3			5352.350	53.778	48.913	-0.222	54.000	4.865	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:46
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

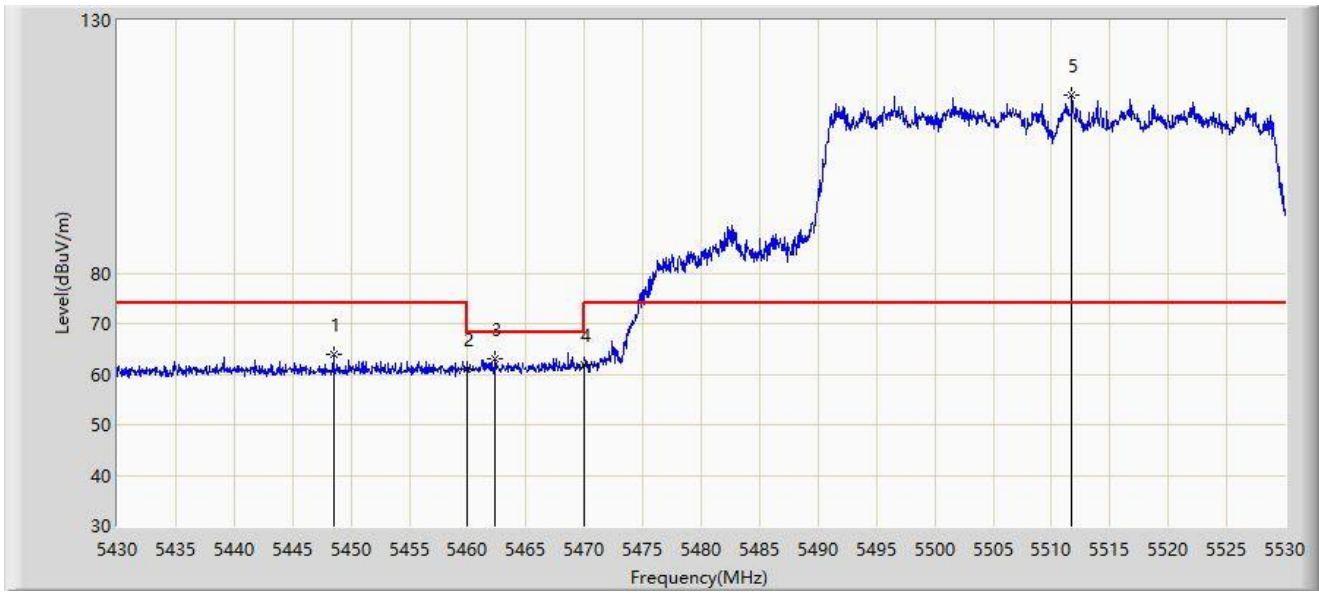


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5448.500	63.815	59.028	-10.185	74.000	4.786	PK
2			5460.000	61.157	56.445	-12.843	74.000	4.711	PK
3			5462.350	62.954	58.258	-5.246	68.200	4.696	PK
4			5470.000	61.945	57.301	-6.255	68.200	4.644	PK
5		*	5511.750	115.138	110.230	N/A	N/A	4.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:47
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

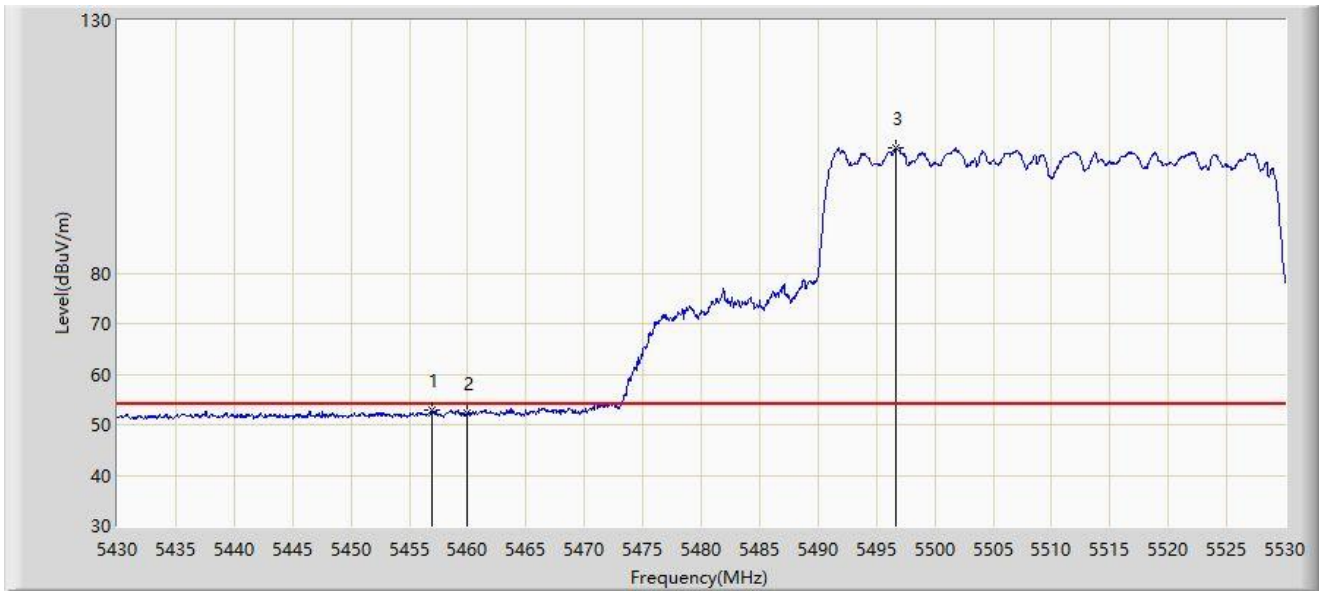


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5457.000	52.860	48.128	-1.140	54.000	4.732	AV
2			5460.000	52.240	47.528	-1.760	54.000	4.711	AV
3		*	5496.650	104.866	100.124	N/A	N/A	4.742	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 00:45
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

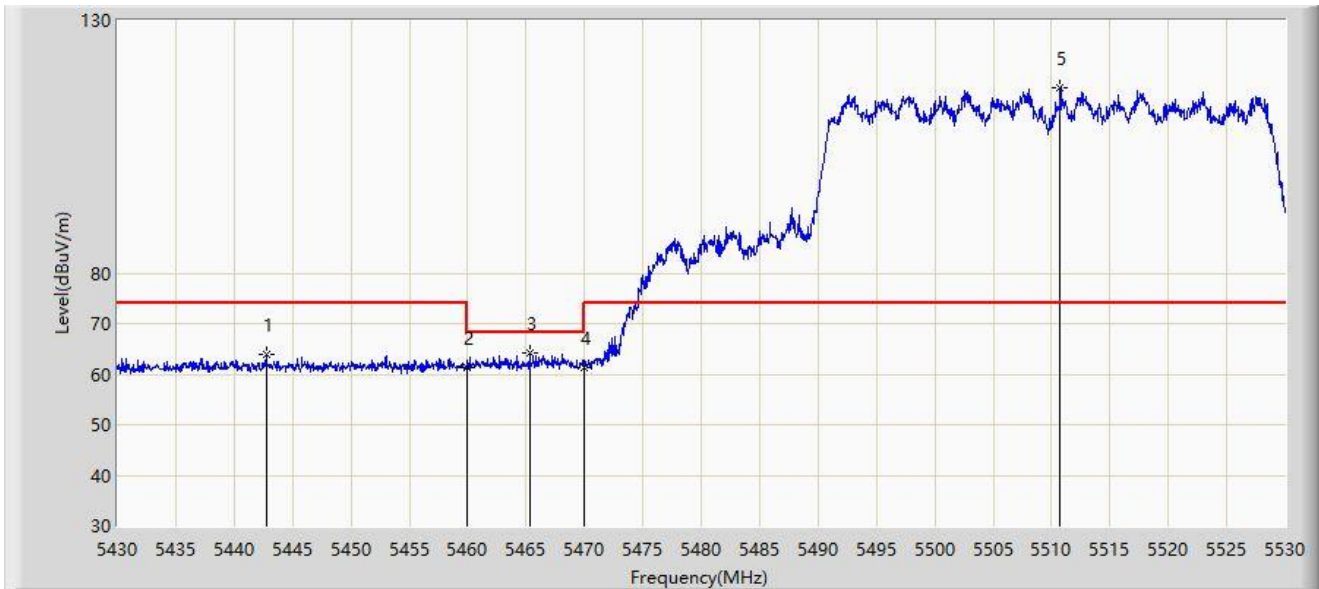


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5442.750	63.849	59.029	-10.151	74.000	4.820	PK
2			5460.000	61.335	56.623	-12.665	74.000	4.711	PK
3			5465.300	64.070	59.394	-4.130	68.200	4.676	PK
4			5470.000	61.323	56.679	-6.877	68.200	4.644	PK
5		*	5510.750	116.588	111.685	N/A	N/A	4.904	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: WZ-AC1	Time: 2022/01/13 - 00:43
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

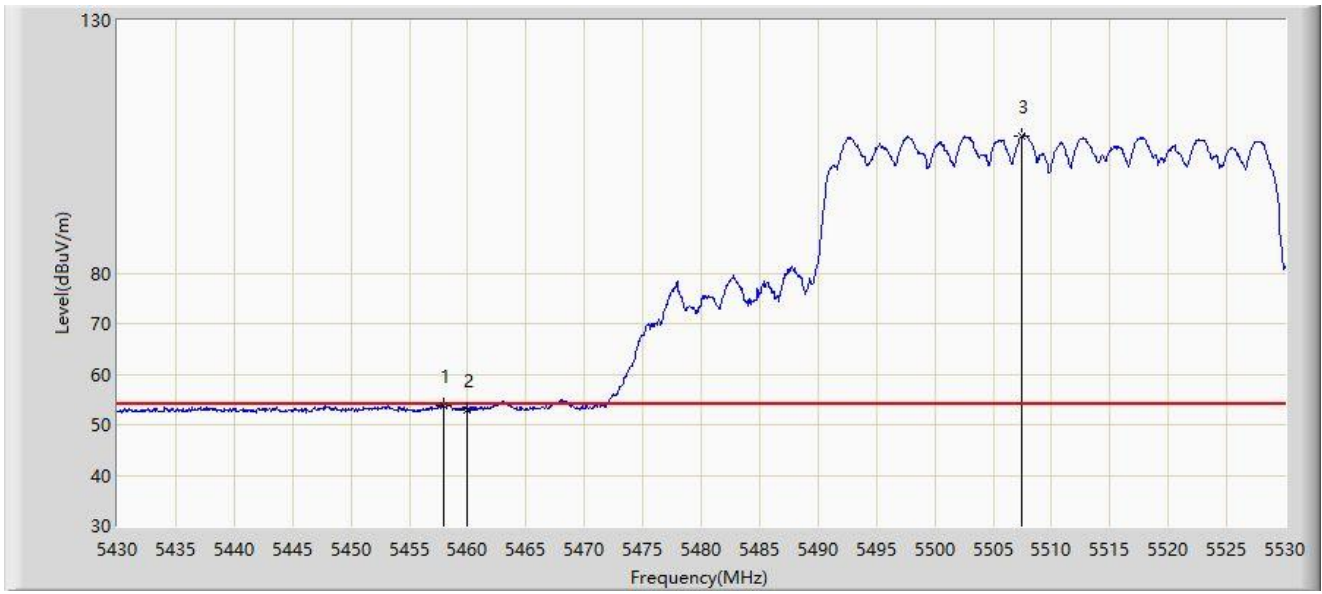


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5457.950	53.825	49.100	-0.175	54.000	4.725	AV
2			5460.000	52.979	48.267	-1.021	54.000	4.711	AV
3		*	5507.500	107.238	102.358	N/A	N/A	4.880	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 01:05
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

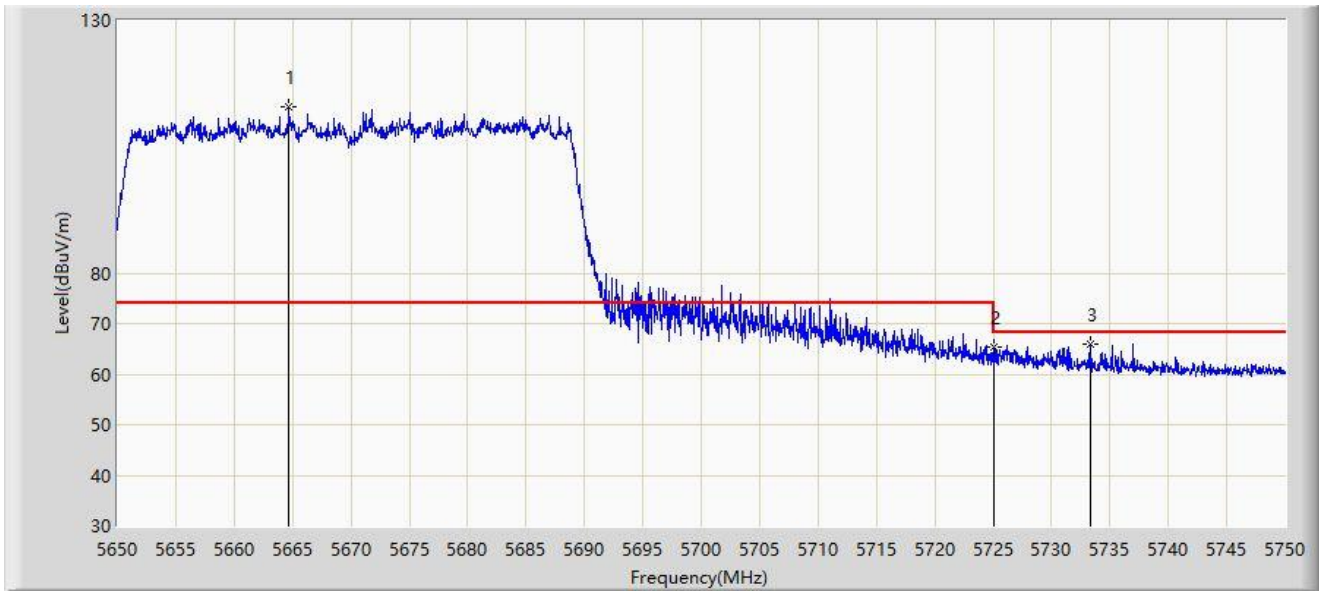


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5664.700	112.829	107.766	N/A	N/A	5.063	PK
2			5725.000	65.448	60.208	-2.752	68.200	5.241	PK
3			5733.350	65.956	60.696	-2.244	68.200	5.259	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 01:06
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

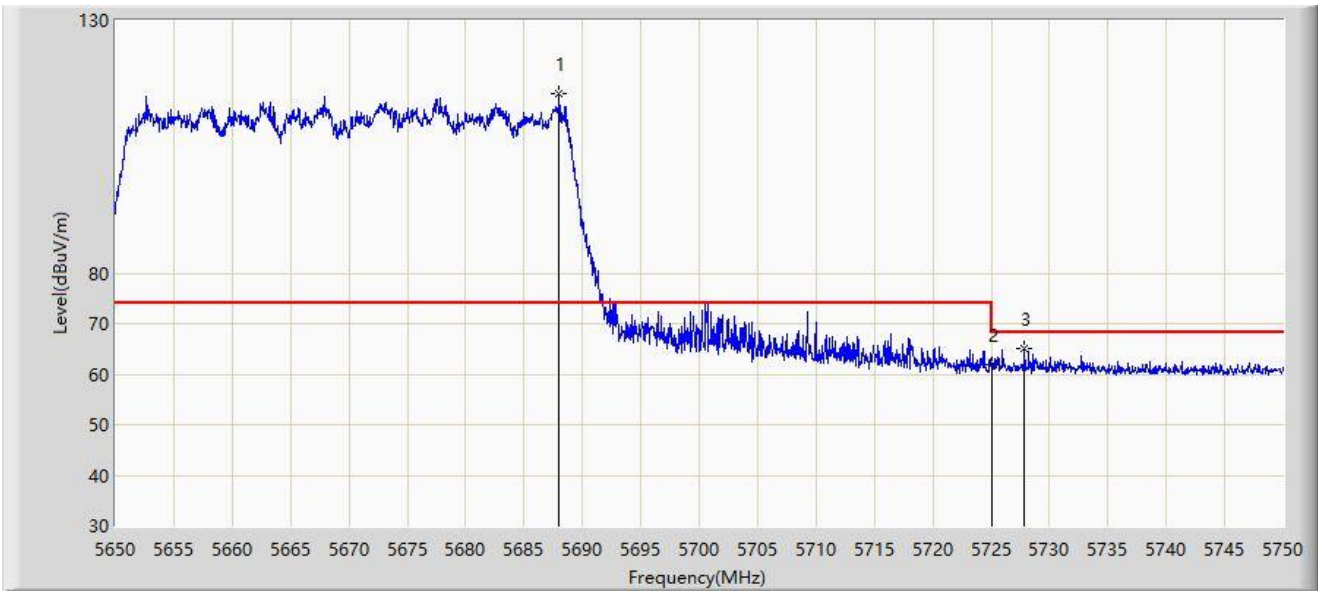


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	5688.000	115.483	110.258	N/A	N/A	5.225	PK
2			5725.000	61.849	56.609	-6.351	68.200	5.241	PK
3			5727.850	65.121	59.870	-3.079	68.200	5.251	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:12
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

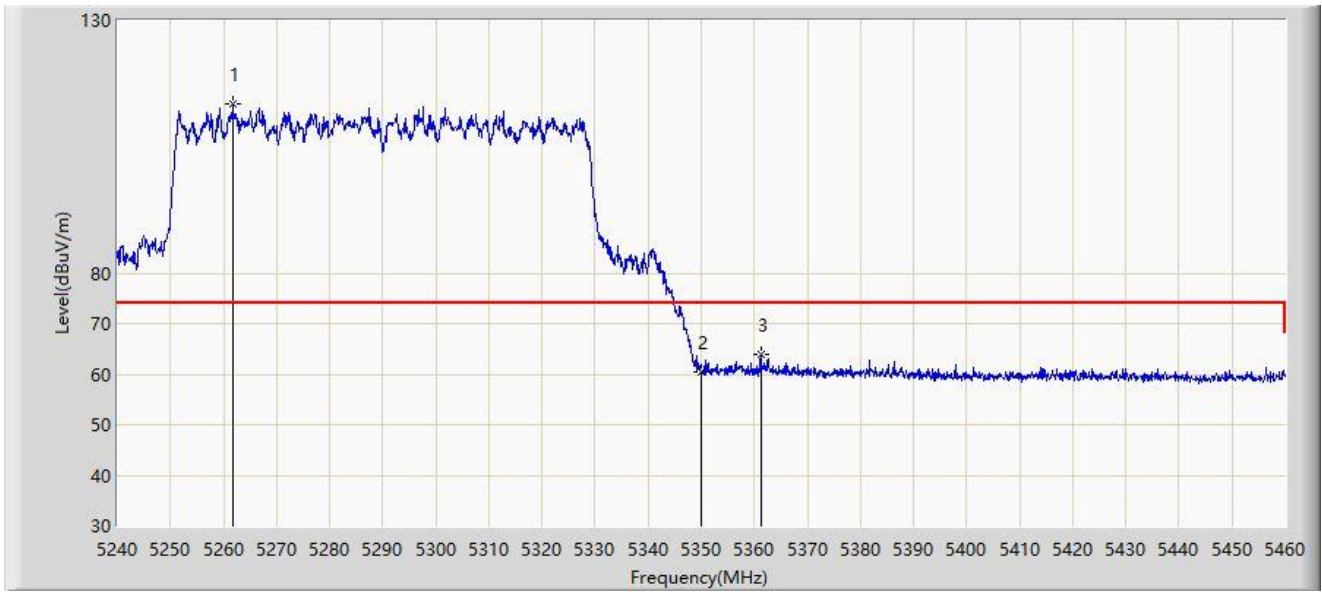


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5261.780	113.489	108.567	N/A	N/A	4.922	PK
2			5350.000	60.518	55.661	-13.482	74.000	4.857	PK
3			5361.220	63.843	59.043	-10.157	74.000	4.800	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

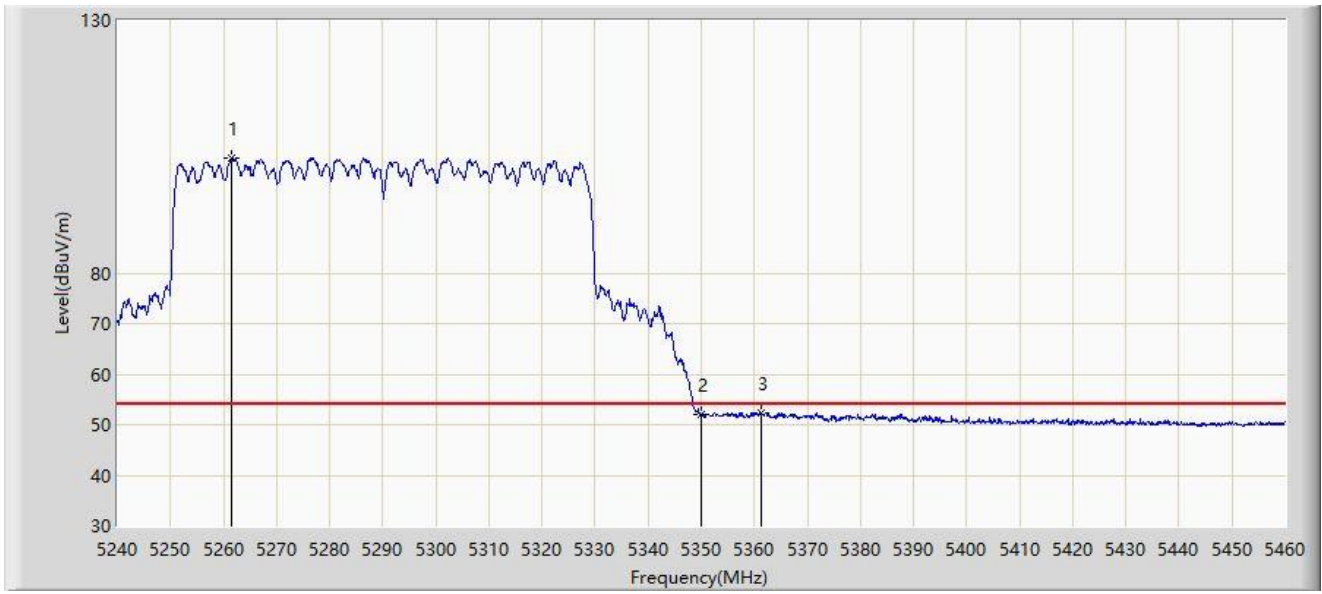


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5261.560	102.621	97.699	N/A	N/A	4.922	AV
2			5350.000	51.995	47.138	-2.005	54.000	4.857	AV
3			5361.220	52.373	47.573	-1.627	54.000	4.800	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:11
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

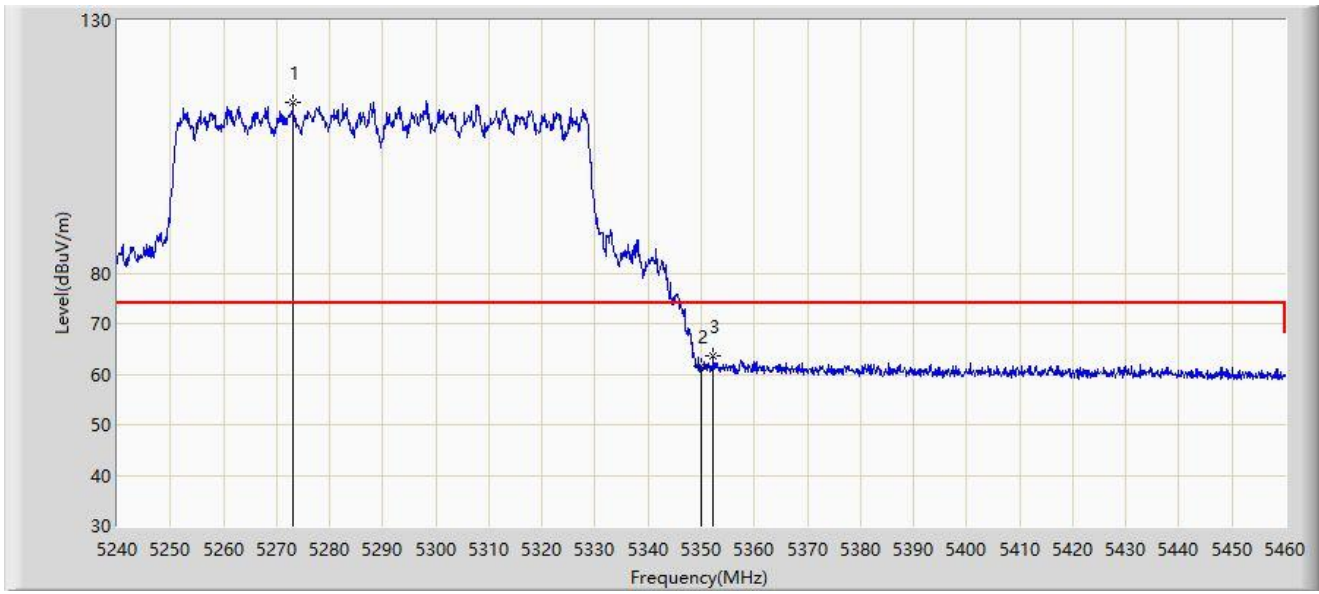


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5273.110	113.739	108.863	N/A	N/A	4.875	PK
2			5350.000	61.515	56.658	-12.485	74.000	4.857	PK
3			5352.310	63.544	58.679	-10.456	74.000	4.865	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:07
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

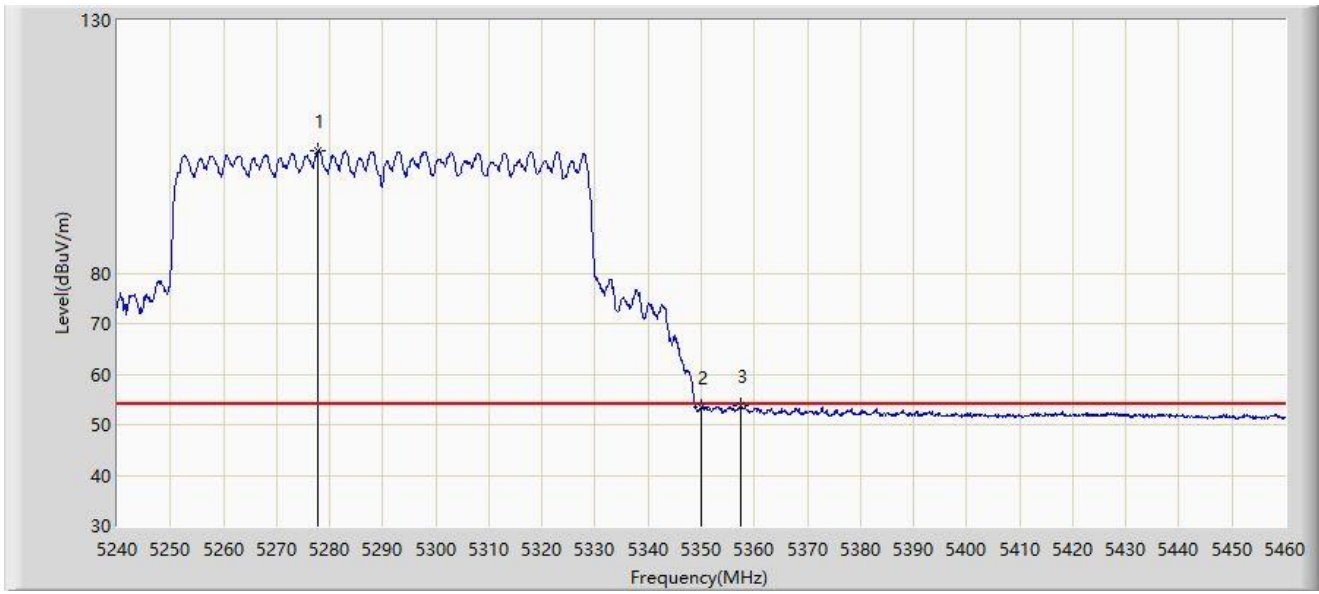


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5277.840	104.257	99.425	N/A	N/A	4.832	AV
2			5350.000	53.541	48.684	-0.459	54.000	4.857	AV
3			5357.370	53.642	48.814	-0.358	54.000	4.829	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:28
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

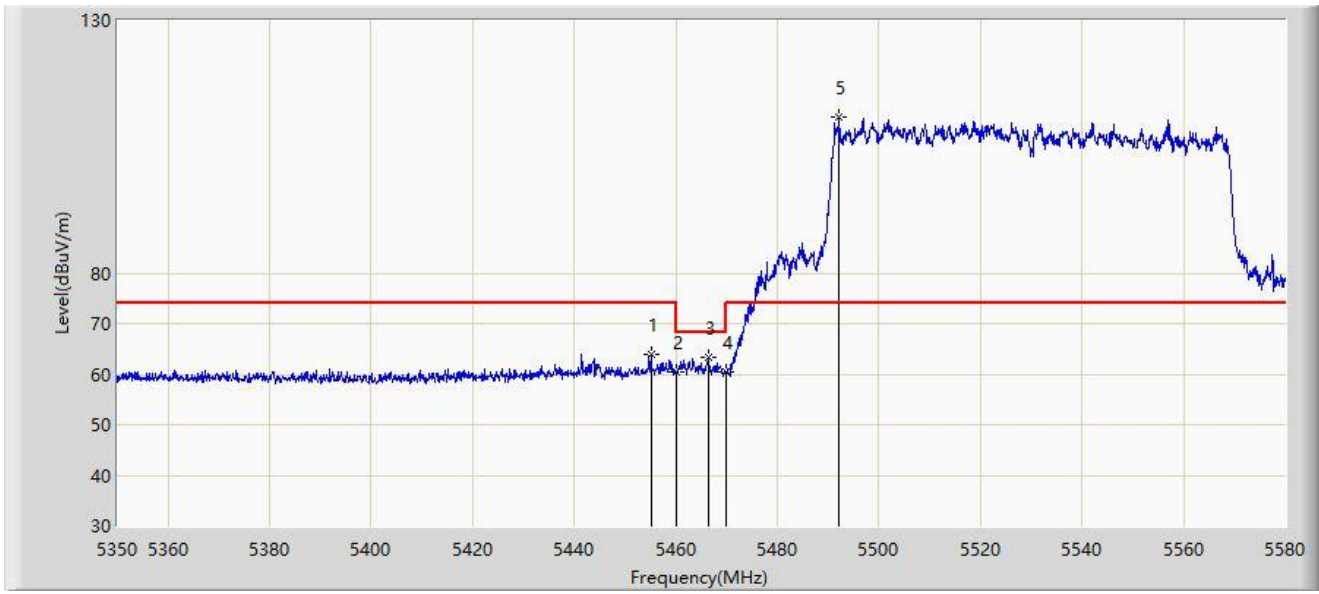


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5455.110	64.025	59.278	-9.975	74.000	4.747	PK
2			5460.000	60.373	55.661	-13.627	74.000	4.711	PK
3			5466.380	63.211	58.542	-4.989	68.200	4.668	PK
4			5470.000	60.558	55.914	-7.642	68.200	4.644	PK
5		*	5492.140	110.853	106.169	N/A	N/A	4.684	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: WZ-AC1	Time: 2022/01/13 - 22:29
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

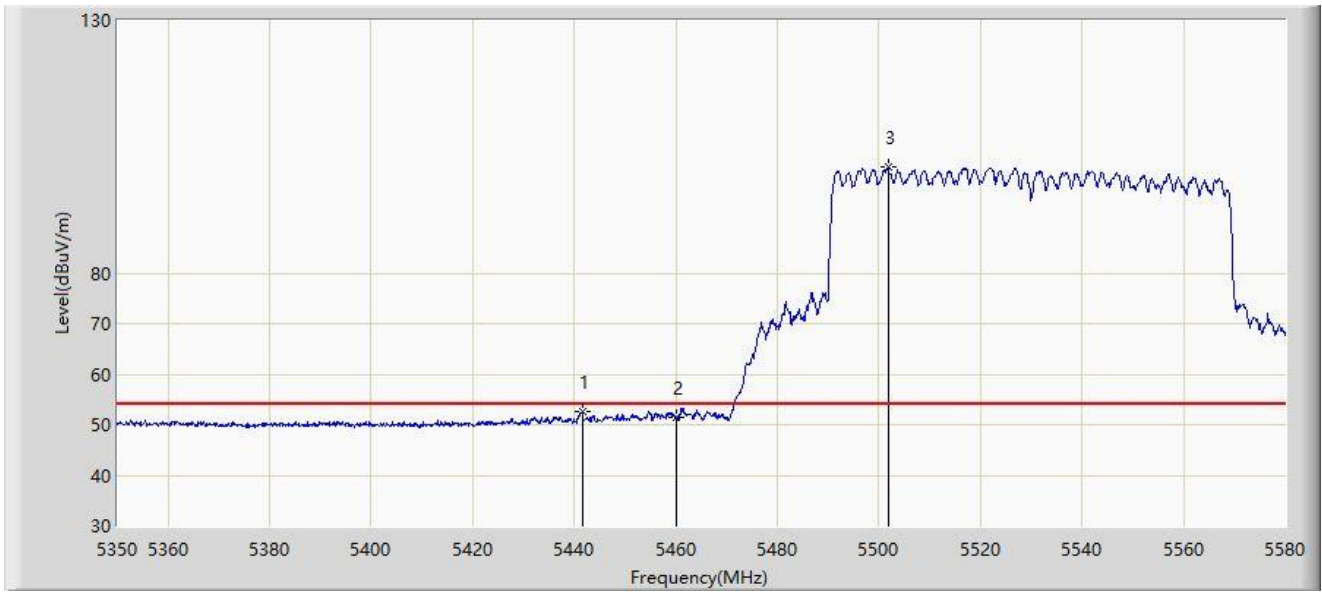


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5441.540	52.470	47.643	-1.530	54.000	4.827	AV
2			5460.000	51.430	46.718	-2.570	54.000	4.711	AV
3		*	5501.800	100.883	96.067	N/A	N/A	4.816	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:26
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

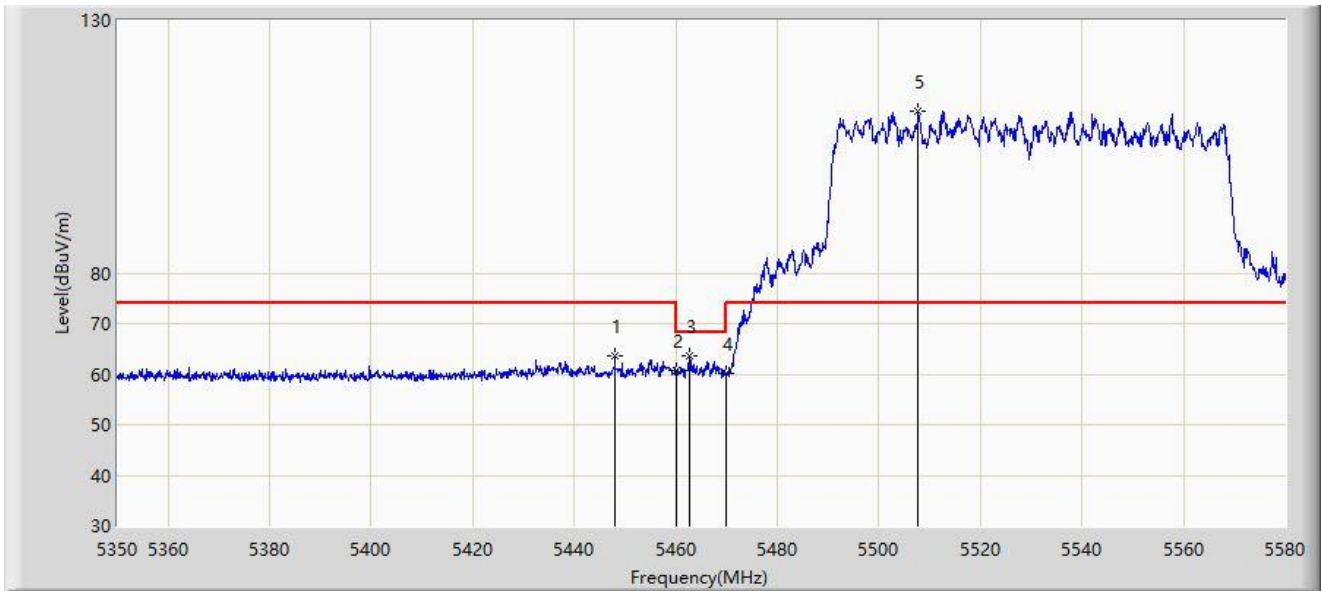


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5447.980	63.707	58.917	-10.293	74.000	4.790	PK
2			5460.000	60.671	55.959	-13.329	74.000	4.711	PK
3			5462.815	63.485	58.792	-4.715	68.200	4.693	PK
4			5470.000	60.159	55.515	-8.041	68.200	4.644	PK
5		*	5507.780	112.129	107.247	N/A	N/A	4.882	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 22:23
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

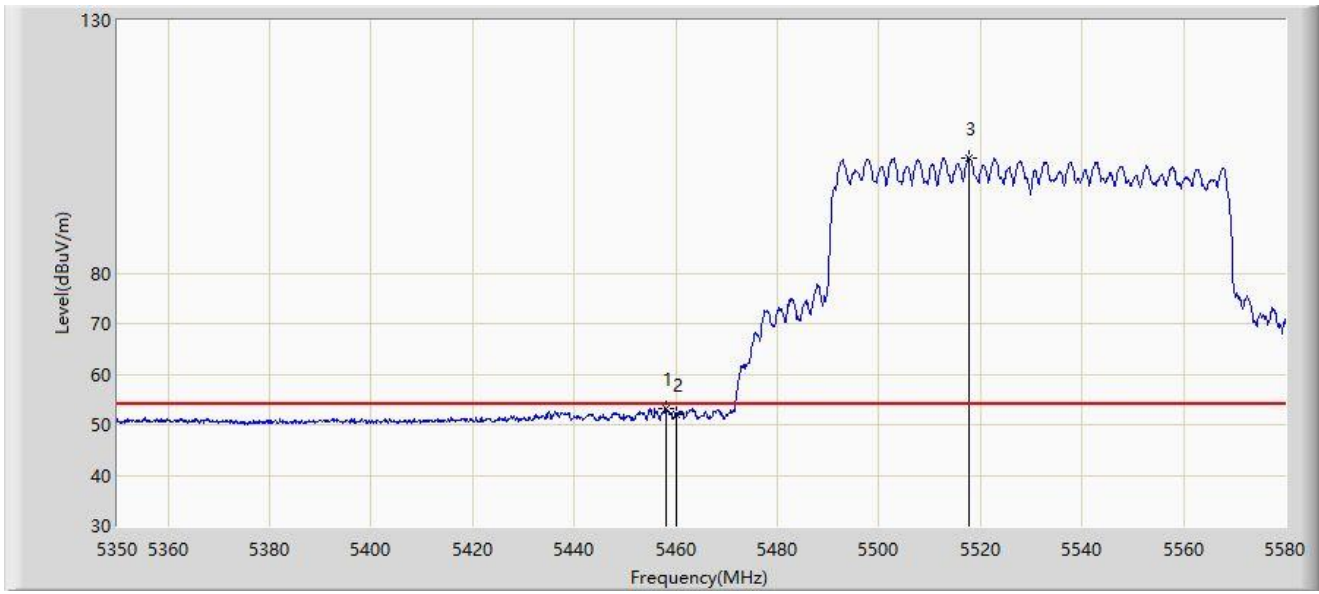


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5458.100	53.284	48.560	-0.716	54.000	4.725	AV
2			5460.000	52.115	47.403	-1.885	54.000	4.711	AV
3		*	5517.670	102.839	97.908	N/A	N/A	4.931	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:12
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

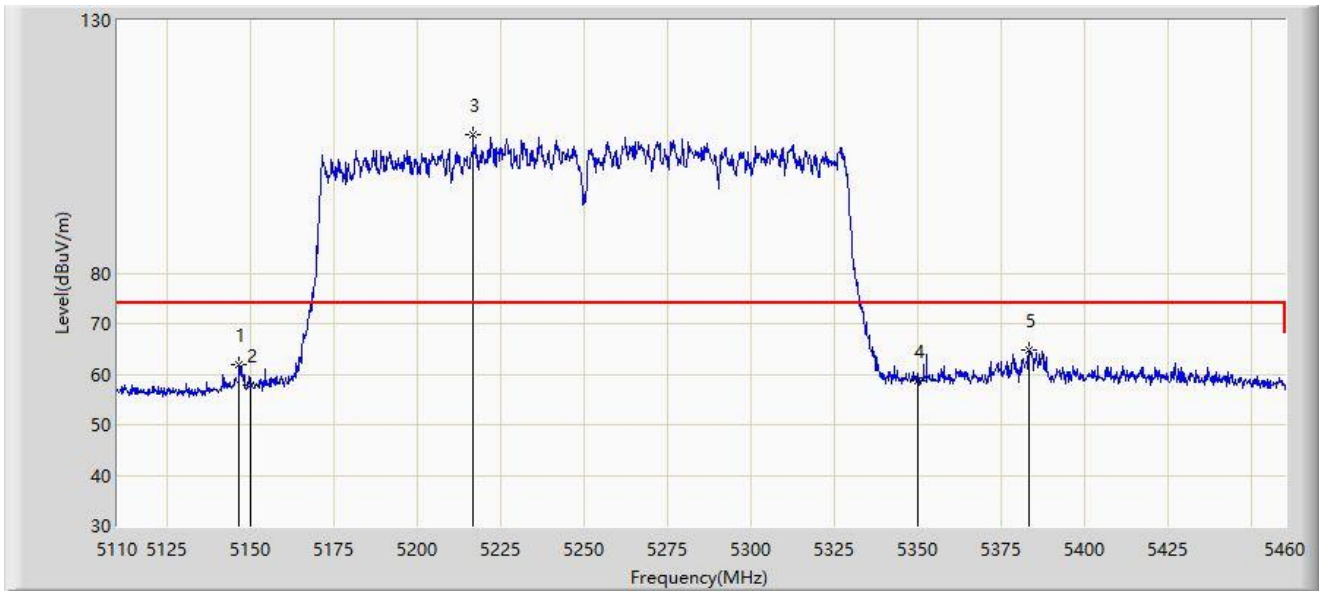


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			5146.400	61.775	56.989	-12.225	74.000	4.786	PK
2			5150.000	57.856	53.063	-16.144	74.000	4.793	PK
3		*	5216.575	107.321	102.418	N/A	N/A	4.904	PK
4			5350.000	58.756	53.899	-15.244	74.000	4.857	PK
5			5383.350	64.770	60.077	-9.230	74.000	4.693	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

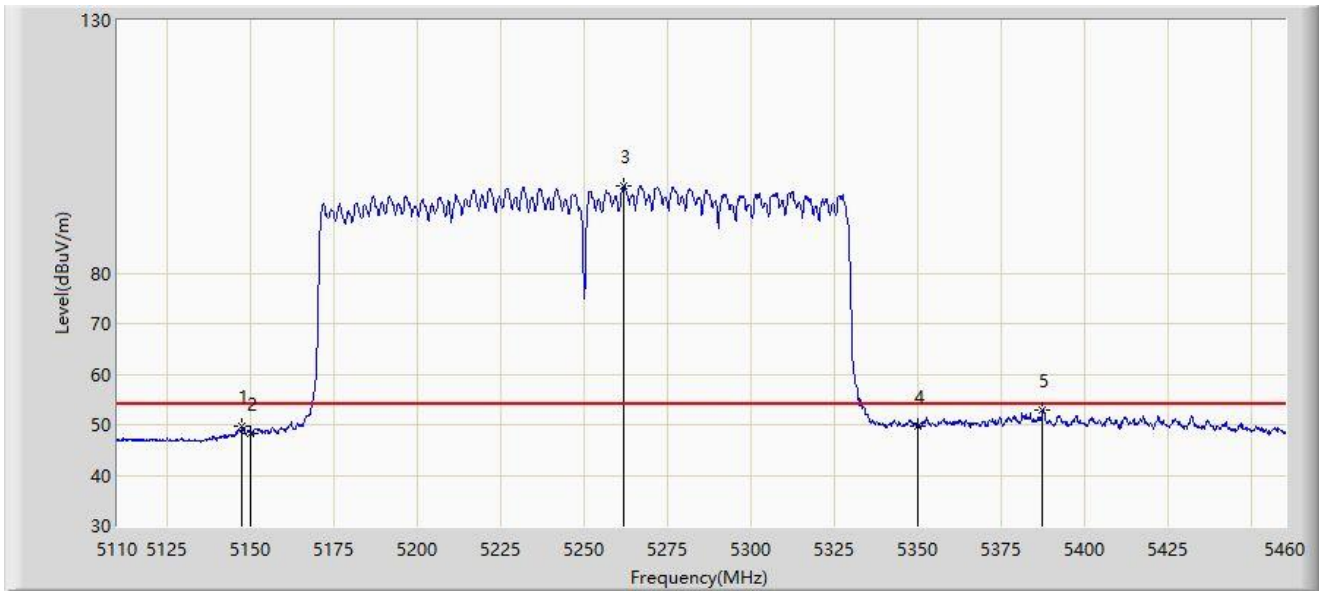


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.450	49.623	44.841	-4.377	54.000	4.783	AV
2			5150.000	48.223	43.430	-5.777	54.000	4.793	AV
3		*	5261.900	97.249	92.326	N/A	N/A	4.922	AV
4			5350.000	49.818	44.961	-4.182	54.000	4.857	AV
5			5387.375	52.947	48.264	-1.053	54.000	4.684	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:10
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

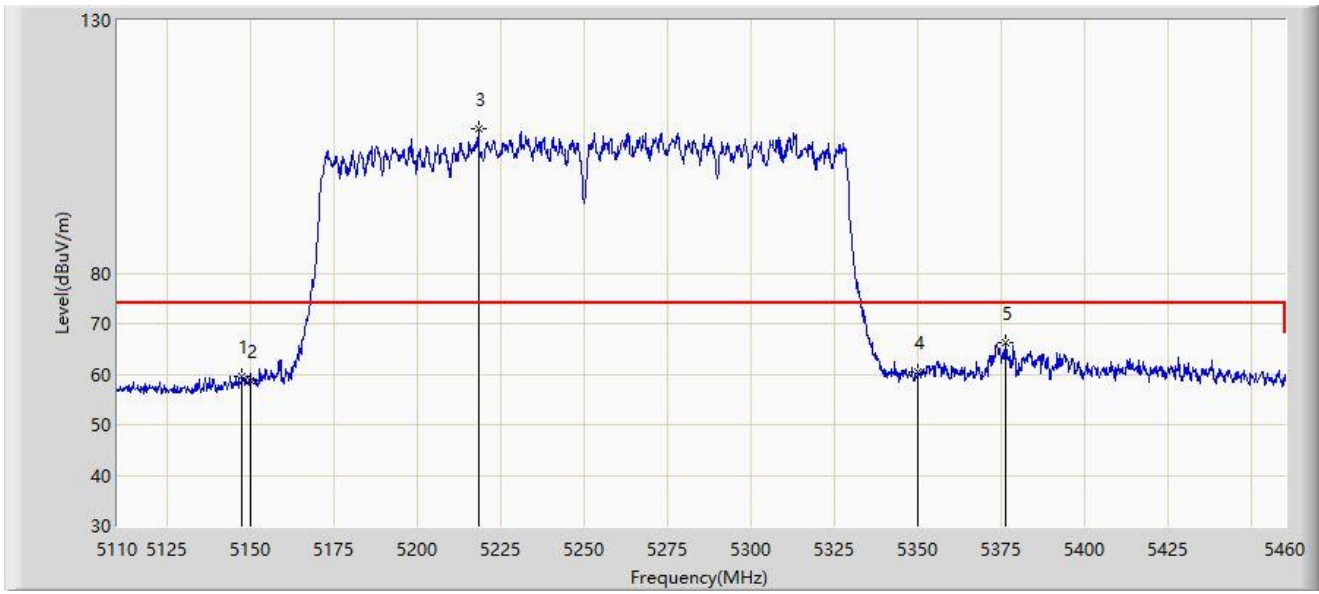


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.275	59.495	54.712	-14.505	74.000	4.783	PK
2			5150.000	58.779	53.986	-15.221	74.000	4.793	PK
3		*	5218.150	108.541	103.636	N/A	N/A	4.905	PK
4			5350.000	60.299	55.442	-13.701	74.000	4.857	PK
5			5376.350	66.136	61.416	-7.864	74.000	4.720	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2022/01/13 - 23:09
Limit: FCC_Part15_Band Edge(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Giga Hub	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

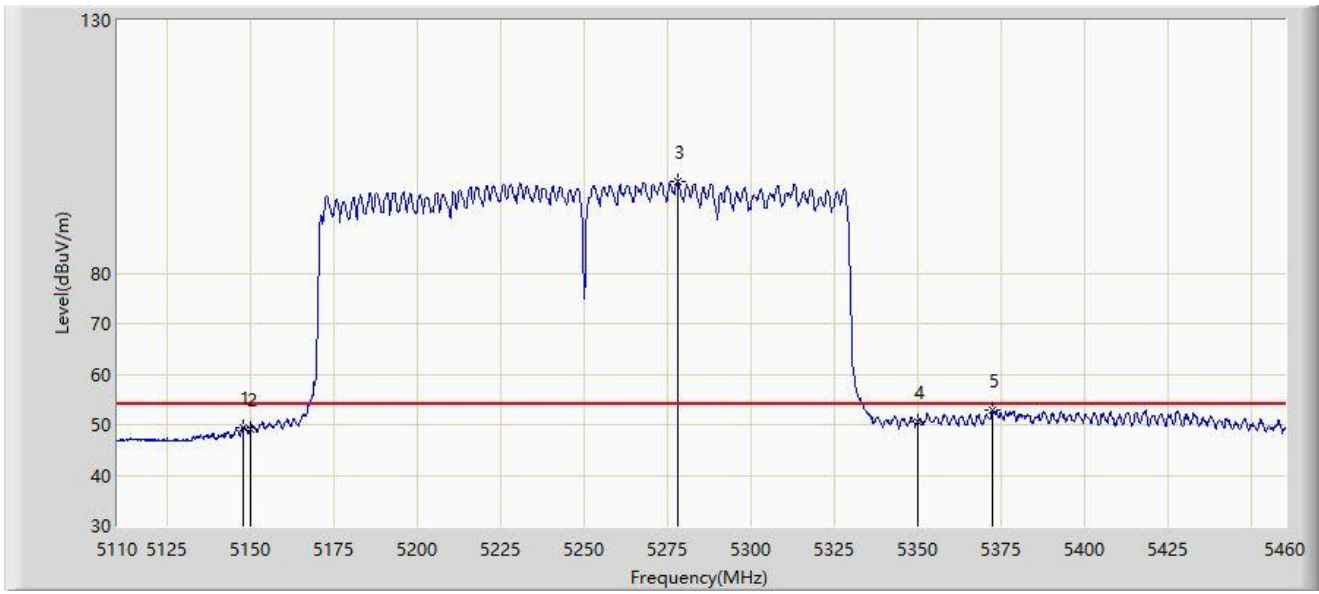

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.800	49.545	44.764	-4.455	54.000	4.782	AV
2			5150.000	49.222	44.429	-4.778	54.000	4.793	AV
3		*	5277.825	98.218	93.386	N/A	N/A	4.832	AV
4			5350.000	50.712	45.855	-3.288	54.000	4.857	AV
5			5372.150	52.911	48.176	-1.089	54.000	4.736	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## **Appendix B – Test Setup Photograph**

Refer to “2201RSU021-UT” file.



## Appendix C – EUT Photograph

Refer to “2201RSU021-UE” file.