



RF MEASUREMENT REPORT

FCC ID: VW3FAST5689E
Applicant: SAGEMCOM BROADBAND SAS
Product: Giga Hub
Model No.: FAST 5689E
Brand Name: SAGEMCOM
FCC Classification: 15E 6GHz Low Power Indoor Access Point (6ID)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Test Date: January 17 ~ March 20, 2022

Reviewed By:

Sunny Sun



Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2201RSU021-U6	Rev. 01	Initial Report	03-30-2022	Invalid
2201RSU021-U6	Rev. 02	Add the CBP Test Result of Lowest Level	05-05-2022	Valid
2201RSU021-U6	Rev. 03	Added the Directional Gain Calculation	05-29-2022	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant.....	6
1.2. Manufacturer.....	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification	7
1.6. Working Frequencies	8
1.7. Antenna Details	9
2. Test Configuration	10
2.1. Test Mode.....	10
2.2. Test System Connection Diagram	10
2.3. Test Software.....	10
2.4. Applied Standards.....	11
2.5. Test Environment Condition.....	11
3. Antenna Requirements	12
4. Measuring Instrument.....	13
5. Measurement Uncertainty.....	14
6. Test Result.....	15
6.1. Summary	15
6.2. 26dB Bandwidth Measurement	16
6.2.1. Test Limit	16
6.2.2. Test Procedure.....	16
6.2.3. Test Setting.....	16
6.2.4. Test Setup.....	17
6.2.5. Test Result.....	17
6.3. Output Power Measurement.....	18
6.3.1. Test Limit	18
6.3.2. Test Procedure.....	18
6.3.3. Test Setting.....	18
6.3.4. Test Setup.....	19
6.3.5. Test Result.....	19
6.4. Power Spectral Density Measurement.....	20
6.4.1. Test Limit	20
6.4.2. Test Procedure.....	20
6.4.3. Test Setting.....	20

6.4.4.	Test Setup.....	21
6.4.5.	Test Result.....	21
6.5.	In-Band Emission Measurement.....	22
6.5.1.	Test Limit	22
6.5.2.	Test Procedure.....	22
6.5.3.	Test Setting.....	22
6.5.4.	Test Setup.....	23
6.5.5.	Test Result.....	23
6.6.	Frequency Stability Measurement	24
6.6.1.	Test Limit	24
6.6.2.	Test Procedure.....	24
6.6.3.	Test Setup.....	25
6.6.4.	Test Result.....	25
6.7.	Contention Based Protocol Measurement	26
6.7.1.	Test Limit	26
6.7.2.	Test Procedure.....	26
6.7.3.	Test Setting.....	26
6.7.4.	Test Setup.....	27
6.7.5.	Test Result.....	27
6.8.	Radiated Spurious Emission Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Procedure.....	28
6.8.3.	Test Setting.....	28
6.8.4.	Test Setup.....	30
6.8.5.	Test Result.....	30
6.9.	Radiated Restricted Band Edge Measurement	31
6.9.1.	Test Limit	31
6.9.2.	Test Procedure.....	32
6.9.3.	Test Setting.....	32
6.9.4.	Test Setup.....	33
6.9.5.	Test Result.....	33
6.10.	AC Conducted Emissions Measurement	34
6.10.1.	Test Limit	34
6.10.2.	Test Setup	34
6.10.3.	Test Result.....	34
Appendix A – Test Result	35	
A.1	Duty Cycle Test Result.....	35
A.2	26dB Bandwidth Test Result	36

A.3	Output Power Test Result	47
A.4	Power Spectral Density Test Result	49
A.5	In-Band Emission Measurement.....	60
A.6	Frequency Stability Test Result	144
A.7	Contention Based Protocol Test Result.....	145
A.8	Radiated Spurious Emission Test Result	158
A.9	Radiated Restricted Band Edge Test Result	216
A.10	AC Conducted Emissions Test Result.....	256
	Appendix B – Test Setup Photograph.....	258
	Appendix C – EUT Photograph	259

1. General Information

1.1. Applicant

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.2. Manufacturer

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong)
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP)
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020
	<input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen)
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan)
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725
	FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Giga Hub
Model No.	FAST 5689E
EUT Identification No.	20220107Sample#17(Radiated) 20220107Sample#16(Conducted)
Wi-Fi Specification	802.11b/g/n/ac/ax
Zigbee Specification	802.15.4
Z-Wave Specification	800 ~ 900MHz radio frequency range
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter
Operating Environment	Indoor Use
Accessories	
Adapter 1#	Model No.: NBS60E120500M2 Input: 100-127V, 50/60Hz, 1.5A Output: 12.0V=5.0A
Adapter 2#	Model No.: MS-Z5000R120-060C0-P Input: 100-127V, 50/60Hz, 1.5A Output: 12.0V=5.0A
Adapter 3#	Model No.: ADS-65HI-12A-2 12060E-L Input: 100-127V, 50/60Hz, 1.5A Output: 12.0V=5.0A
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	For 802.11a: 5955 ~ 7095MHz For 802.11ax-HE20: 5955 ~ 7095MHz For 802.11ax-HE40: 5965 ~ 7085MHz For 802.11ax-HE80: 5985 ~ 7025MHz For 802.11ax-HE160: 6025 ~ 6985MHz
Type of Modulation	802.11a: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11ax: up to 4804Mbps
Remark:	
1. For other features of this EUT, test report will be issued separately; This device doesn't support 5600 ~ 5650MHz.	

1.6. Working Frequencies

802.11a/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
07	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz			183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)				Directional Gain (dBi)							
		Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD						
Wi-Fi Antenna (4*4 MIMO)													
PIFA & Dipole	2.4 ~ 2.5	2.79	2.38	2.95	1.91	2.95	6.40						
	5.15 ~ 5.25	3.37	4.41	3.51	3.53	4.41	6.46						
	5.25 ~ 5.35	4.87	3.61	3.02	3.25	4.87	6.45						
	5.47 ~ 5.725	4.73	4.07	3.46	3.88	4.73	6.76						
	5.725 ~ 5.85	4.89	4.53	3.46	3.25	4.89	6.90						
	5.925 ~ 7.125	4.13	3.18	4.51	4.83	4.83	7.03						
ZigBee Antenna													
Dipole	2.4 ~ 2.5	2.98											
Z-Wave Antenna													
Dipole	0.9 ~ 1	-0.34											
Note 1: The antenna gain and directional gain refer to manufacturer's antenna specification.													
Note 2: Software automatically backs power down based on a $10\log(N)$ factor for beamforming operation.													
Note 3: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.													
<ul style="list-style-type: none"> For power measurements: Array Gain = 0 dB for $N_{ANT} \leq 4$, the directional gain = max antenna gain + array gain For power density measurements: the max directional gain (each angle) = $10^{\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}]} \text{dBi}$. 													

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps)

Mode 2: Transmit by 802.11ax-HE20 (MCS0)

Mode 3: Transmit by 802.11ax-HE40 (MCS0)


Mode 4: Transmit by 802.11ax-HE80 (MCS0)

Mode 5: Transmit by 802.11 ax-HE160 (MCS0)

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram – Radiated Emission testing & AC Conducted Emissions

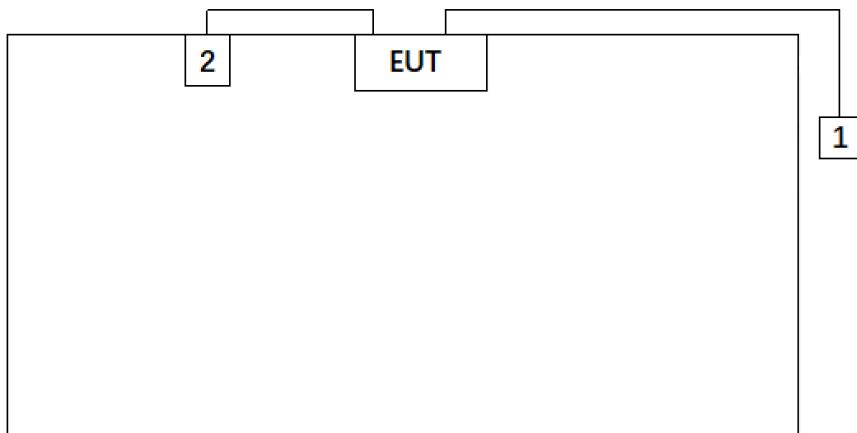

Product	Manufacturer	Model No.
1 Notebook	DELL	Precision 3510
2 AC Adapter	Sagemcom	NBS60E120500M2

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.2.1.3.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v01
- FCC KDB 987594 D04v01
- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/12/29	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2022/9/16	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2022/11/12	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/8/5	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2022/4/29	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2022/6/28	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/12/29	WZ-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11039	1 year	2022/11/11	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2022/10/28	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/12/1	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023/1/13	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/5/24	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2022/6/24	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022/12/1	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2022/10/21	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2022/11/12	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2022/4/29	WZ-AC2
Thermohygrometer	testo	Testo 608-H1	MRTSUE11038	1 year	2022/11/11	WZ-AC2
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022/10/10	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022/6/28	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2022/6/24	WZ-TR3
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/4/13	WZ-TR3
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2022/6/8	WZ-TR3
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022/6/8	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2022/6/28	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2022/10/13	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022/11/1	WZ-SR2

Software	Version	Function
EMI Software	V3	EMI Test Software

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{C(y)}$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB & 99% Bandwidth	Conducted	Pass
15.407(a)(5), (a)(6)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P)		Pass
15.407(a)(5), (a)(6)	Peak Power Spectral Density (E.I.R.P)		Pass
15.407(b)(6)	In-Band Emission		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(5)	Unwanted Emissions		Pass
15.407(b)(7), (8), (9)	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
3. EUT supports one configuration only in 802.11ax full RU mode.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW \geq 3 \times RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW \geq 3 \times RBW
5. Detector = Peak.

Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

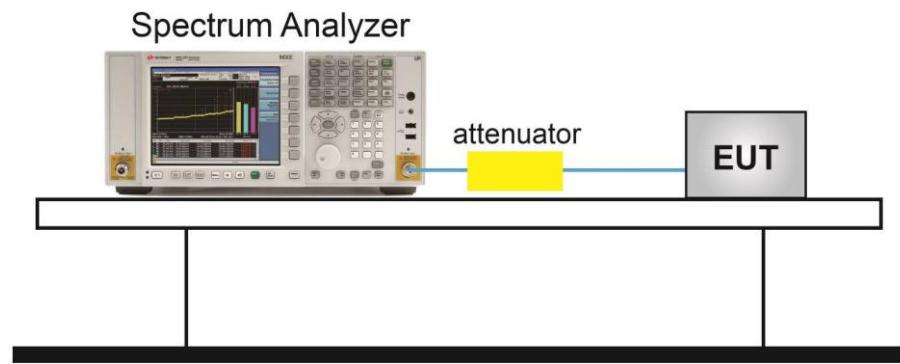

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.


6.3.2. Test Procedure

KDB 789033D02v02r01- Section E)2)d) Method SA-2

6.3.3. Test Setting

1. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
2. Set RBW = 1 MHz
3. Set VBW \geq 3 MHz
4. Number of points in sweep $\geq 2 \times$ span / RBW
5. Sweep time = auto
6. Detector = power averaging (rms)
7. Allow the sweep to “free run”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Use the Channel Power function of the instrument.
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

6.3.4. Test Setup

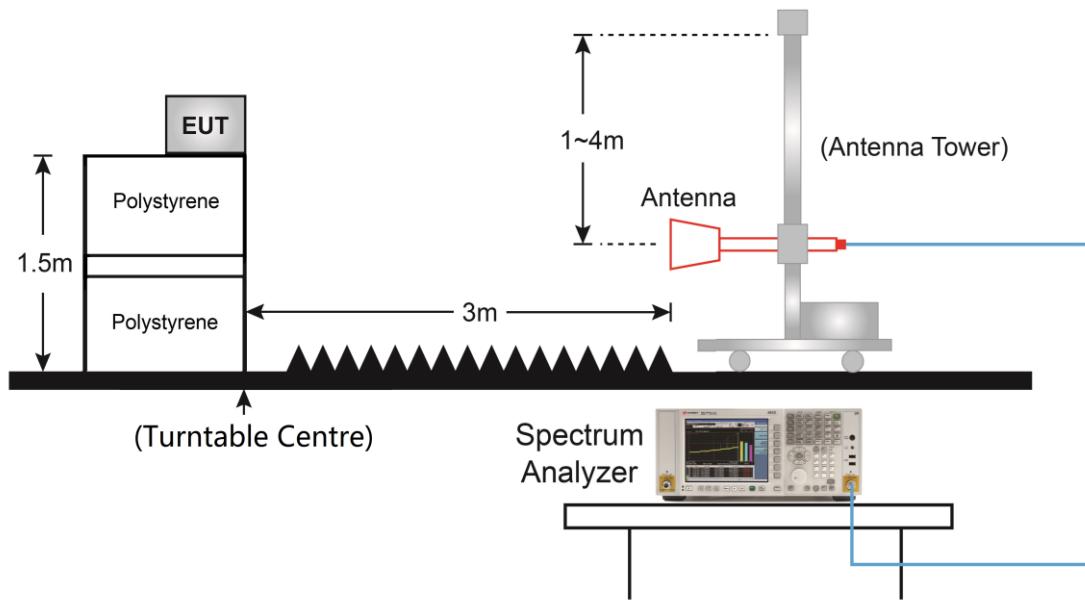

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02v02r01-SectionF

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

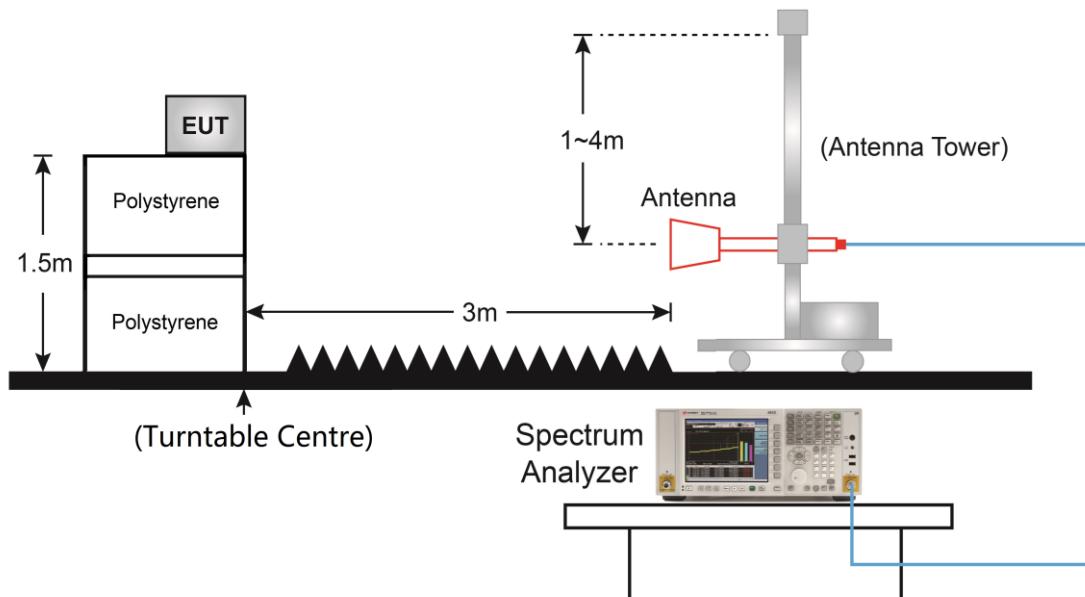

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02v01r01- Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

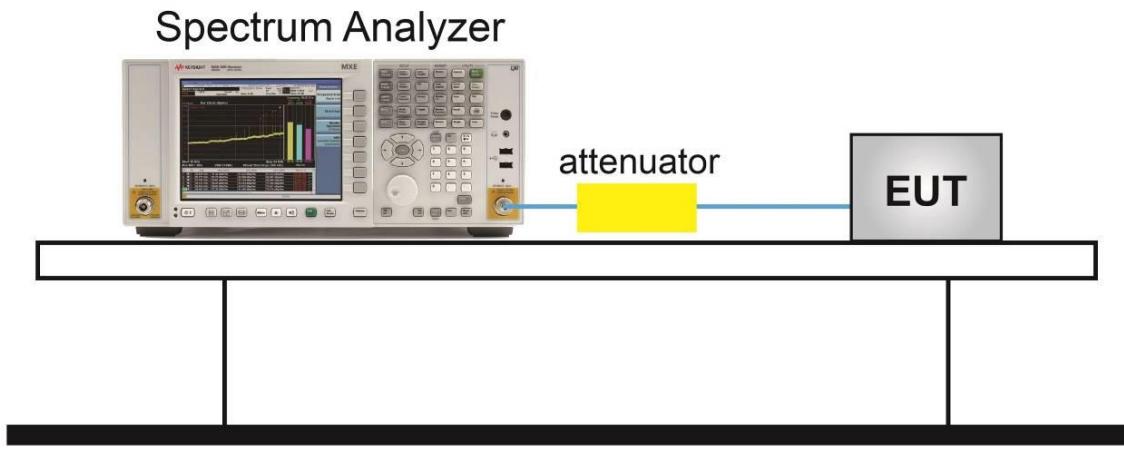

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

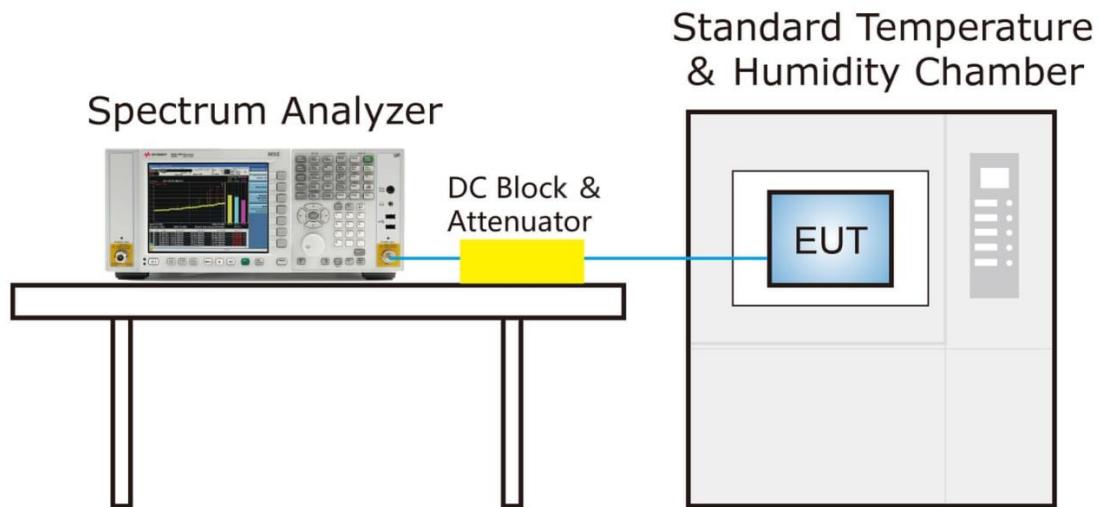

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm
(The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure

KDB 987594 D02v01- Section I

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.


Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.

4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.

10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

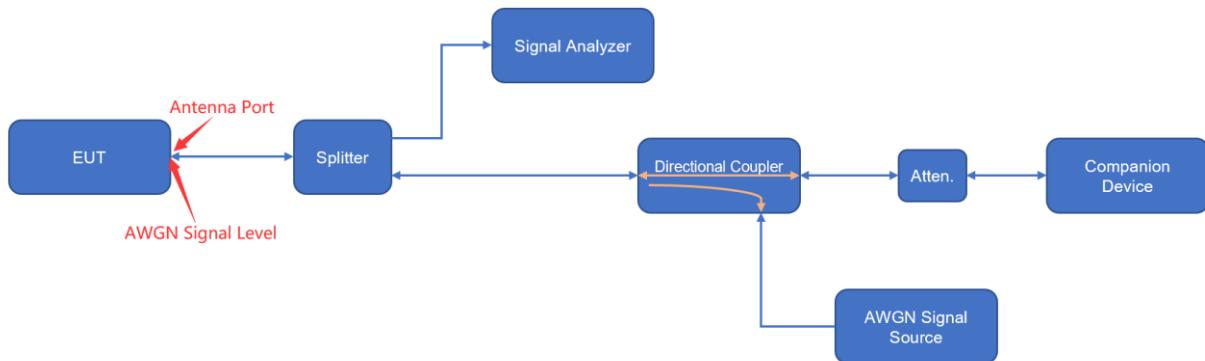

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

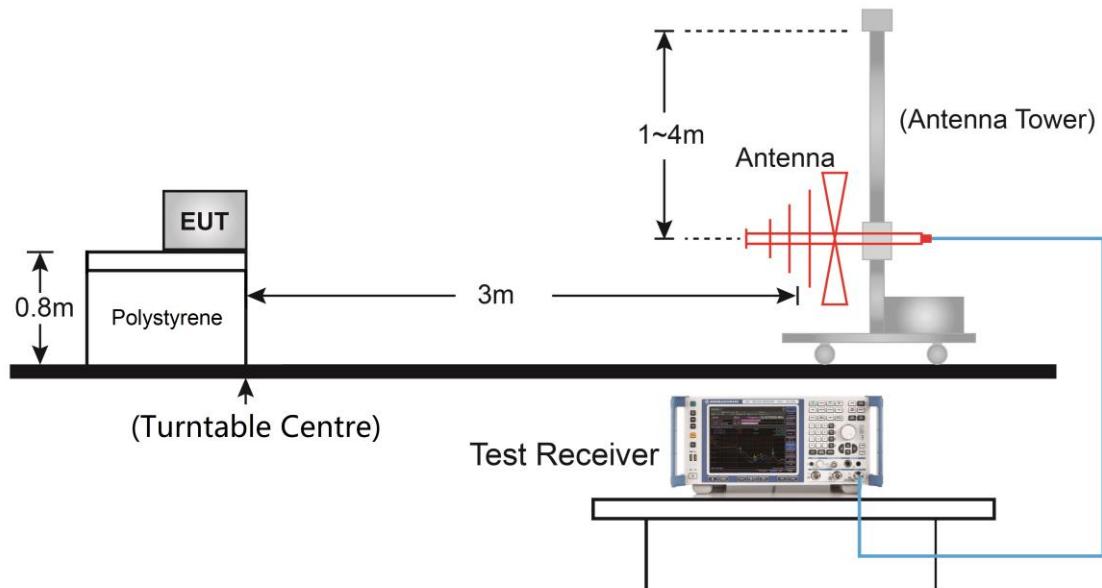

Above 1GHz Test Setup:

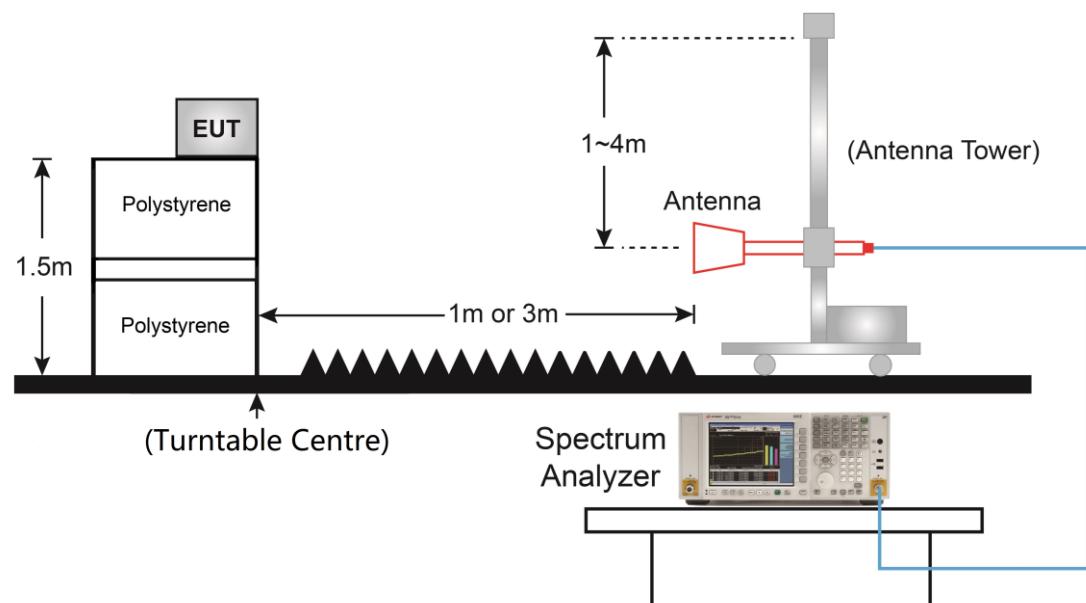

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration
5. Detector = Peak

6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

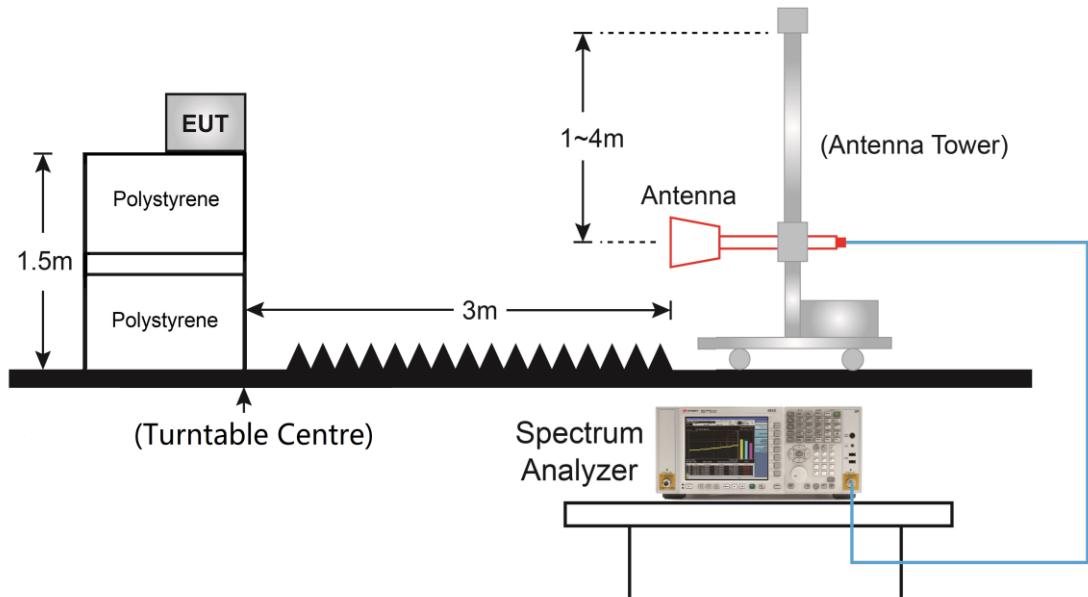

6.9.5. Test Result

Refer to Appendix A.9.


6.10. AC Conducted Emissions Measurement

6.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

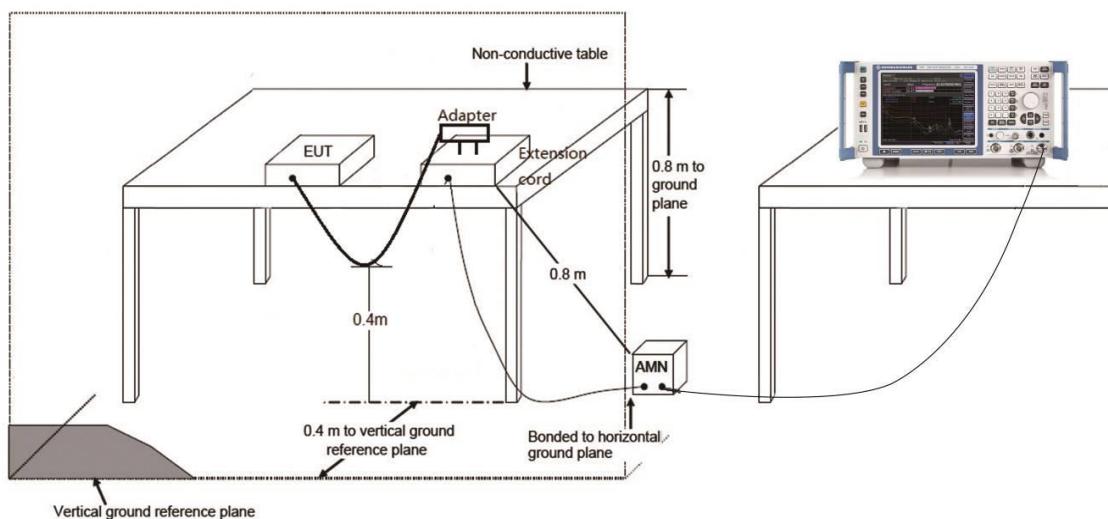

6.10.3. Test Result

Refer to Appendix A.10.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Mode	Duty Cycle
802.11a	95.07%
802.11ax-HE20	91.90%
802.11ax-HE40	91.00%
802.11ax-HE80	90.87%
802.11ax-HE160	93.73%
Duty Cycle (T = Transmission Duration)	
802.11a (T = 2.063ms)	802.11ax-HE20 (T = 317.5us)
<p>Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF Coupling DC Freq Ref. Int (S) Atten: 50.0 dB PNO Fast Gate Off If Gain: Low Sig Track: Off W W W W W P P P N N N Ref Lvl Offset 22.27 dB Ref Level 128.00 dBµV</p> <p>1 Spectrum Scale/Div 10 dB Log X Y 13.04 ΔMkr3 2.170 ms -1.36 dB</p> <p>Center 5.955000000 GHz Res BW 8 MHz Sweep 7.60 ms (2001 pts) Span 0 Hz</p> <p>Marker Table Mode Trace Scale X Y Function Function Width Function Value 1 Δ2 1 t (Δ) 2.063 ms (-Δ) -0.1198 dB 2 F 1 t 1.547 ms 114.4 dBµV 3 Δ4 1 t (Δ) 2.170 ms (-Δ) -1.367 dB 4 F 1 t 1.547 ms 114.4 dBµV</p> <p>Marker 3 Marker Δ Time 2.1698 ms Marker Mode Normal Marker Function Delta (Δ) Marker Table On Off Marker Settings Diagram All Markers Off Couple Markers On Off</p>	<p>Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF Coupling DC Freq Ref. Int (S) Atten: 10.0 dB PNO Fast Gate Off If Gain: Low Sig Track: Off W W W W W P P P N N N Ref Lvl Offset 21.75 dB Ref Level 128.00 dBµV</p> <p>1 Spectrum Scale/Div 10 dB Log X Y 13.04 ΔMkr3 345.5 μs 0.48 dB</p> <p>Center 5.955000000 GHz Res BW 8 MHz Sweep 1.00 ms (2001 pts) Span 0 Hz</p> <p>Marker Table Mode Trace Scale X Y Function Function Width Function Value 1 Δ2 1 t (Δ) 341.5 μs (-Δ) -1.363 dB 2 F 1 t 341.0 μs 122.6 dBµV 3 Δ4 1 t (Δ) 345.5 μs (-Δ) 0.4797 dB 4 F 1 t 341.5 μs 122.6 dBµV</p> <p>Marker 3 Marker Δ Time 345.500 μs Marker Mode Normal Marker Function Delta (Δ) Marker Table On Off Marker Settings Diagram All Markers Off Couple Markers On Off</p>
802.11ax-HE40 (T = 302.4μs)	802.11ax-HE80 (T = 288.5μs)
<p>Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF Coupling DC Freq Ref. Int (S) Atten: 5.0 dB PNO Fast Gate Off If Gain: Low Sig Track: Off W W W W W P P P N N N Ref Lvl Offset 21.71 dB Ref Level 120.00 dBµV</p> <p>1 Spectrum Scale/Div 10 dB Log X Y 13.04 ΔMkr3 332.3 μs 0.66 dB</p> <p>Center 5.965000000 GHz Res BW 8 MHz Sweep 1.07 ms (2001 pts) Span 0 Hz</p> <p>Marker Table Mode Trace Scale X Y Function Function Width Function Value 1 Δ2 1 t (Δ) 322.4 μs (-Δ) -0.9264 dB 2 F 1 t 105.1 μs 109.6 dBµV 3 Δ4 1 t (Δ) 332.3 μs (-Δ) 0.6560 dB 4 F 1 t 105.1 μs 109.6 dBµV</p> <p>Marker 3 Marker Δ Time 332.267 μs Marker Mode Normal Marker Function Delta (Δ) Marker Table On Off Marker Settings Diagram All Markers Off Couple Markers On Off</p>	<p>Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF Coupling DC Freq Ref. Int (S) Atten: 6.0 dB PNO Fast Gate Off If Gain: Low Sig Track: Off W W W W W P P P N N N Ref Lvl Offset 21.74 dB Ref Level 120.00 dBµV</p> <p>1 Spectrum Scale/Div 10 dB Log X Y 13.04 ΔMkr3 317.5 μs -2.97 dB</p> <p>Center 5.985000000 GHz Res BW 8 MHz Sweep 1.00 ms (2001 pts) Span 0 Hz</p> <p>Marker Table Mode Trace Scale X Y Function Function Width Function Value 1 Δ2 1 t (Δ) 298.5 μs (-Δ) -1.112 dB 2 F 1 t 95.5 μs 110.0 dBµV 3 Δ4 1 t (Δ) 317.5 μs (-Δ) -2.972 dB 4 F 1 t 95.5 μs 110.0 dBµV</p> <p>Marker 3 Marker Δ Time 317.500 μs Marker Mode Normal Marker Function Delta (Δ) Marker Table On Off Marker Settings Diagram All Markers Off Couple Markers On Off</p>
802.11ax-HE160 (T = 448.5μs)	
<p>Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF Coupling DC Freq Ref. Int (S) Atten: 6.0 dB PNO Fast Gate Off If Gain: Low Sig Track: Off W W W W W P P P N N N Ref Lvl Offset 21.84 dB Ref Level 120.00 dBµV</p> <p>1 Spectrum Scale/Div 10 dB Log X Y 13.04 ΔMkr3 478.5 μs 1.75 dB</p> <p>Center 6.025000000 GHz Res BW 8 MHz Sweep 1.00 ms (2001 pts) Span 0 Hz</p> <p>Marker Table Mode Trace Scale X Y Function Function Width Function Value 1 Δ2 1 t (Δ) 448.5 μs (-Δ) 2.979 dB 2 F 1 t 333.5 μs 102.6 dBµV 3 Δ4 1 t (Δ) 478.5 μs (-Δ) 1.754 dB 4 F 1 t 333.5 μs 102.6 dBµV</p> <p>Marker 3 Marker Δ Time 478.500 μs Marker Mode Normal Marker Function Delta (Δ) Marker Table On Off Marker Settings Diagram All Markers Off Couple Markers On Off</p>	


A.2 26dB & 99% Bandwidth Test Result


Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2022/01/22 ~ 2022/03/18		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6Mbps	01	5955	23.04	17.29
802.11a	6Mbps	49	6195	23.08	17.25
802.11a	6Mbps	93	6415	22.55	17.08
802.11a	6Mbps	97	6435	23.32	17.12
802.11a	6Mbps	105	6475	22.66	16.99
802.11a	6Mbps	113	6515	22.09	16.97
802.11a	6Mbps	117	6535	22.38	17.02
802.11a	6Mbps	149	6695	21.98	16.98
802.11a	6Mbps	181	6855	22.03	16.93
802.11a	6Mbps	185	6875	22.29	17.00
802.11a	6Mbps	189	6895	21.65	17.01
802.11a	6Mbps	209	6995	23.87	17.03
802.11a	6Mbps	229	7095	22.23	17.21
802.11ax-HE20	MCS0	01	5955	22.83	19.19
802.11ax-HE20	MCS0	49	6195	22.34	19.17
802.11ax-HE20	MCS0	93	6415	21.90	19.13
802.11ax-HE20	MCS0	97	6435	21.80	19.16
802.11ax-HE20	MCS0	105	6475	22.09	19.13
802.11ax-HE20	MCS0	113	6515	22.29	19.17
802.11ax-HE20	MCS0	117	6535	24.22	19.25
802.11ax-HE20	MCS0	149	6695	23.24	19.15
802.11ax-HE20	MCS0	181	6855	24.11	19.16
802.11ax-HE20	MCS0	185	6875	26.81	19.26
802.11ax-HE20	MCS0	189	6895	26.33	19.24
802.11ax-HE20	MCS0	209	6995	23.08	19.19
802.11ax-HE20	MCS0	229	7095	23.90	19.19


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ax-HE40	MCS0	03	5965	41.49	37.82
802.11ax-HE40	MCS0	51	6205	42.31	37.78
802.11ax-HE40	MCS0	91	6405	43.35	37.82
802.11ax-HE40	MCS0	99	6445	42.21	37.86
802.11ax-HE40	MCS0	107	6485	42.18	37.85
802.11ax-HE40	MCS0	115	6525	43.65	37.80
802.11ax-HE40	MCS0	123	6565	42.37	37.85
802.11ax-HE40	MCS0	147	6685	42.43	37.80
802.11ax-HE40	MCS0	187	6885	43.99	37.81
802.11ax-HE40	MCS0	195	6925	42.89	37.84
802.11ax-HE40	MCS0	211	7005	43.22	37.80
802.11ax-HE40	MCS0	227	7085	42.36	37.81
802.11ax-HE80	MCS0	07	5985	86.06	77.37
802.11ax-HE80	MCS0	55	6225	84.79	77.34
802.11ax-HE80	MCS0	87	6385	85.06	77.49
802.11ax-HE80	MCS0	103	6465	84.18	77.41
802.11ax-HE80	MCS0	119	6545	86.21	77.42
802.11ax-HE80	MCS0	135	6625	83.95	77.47
802.11ax-HE80	MCS0	151	6705	86.91	77.48
802.11ax-HE80	MCS0	167	6785	83.65	77.49
802.11ax-HE80	MCS0	183	6865	83.89	77.31
802.11ax-HE80	MCS0	199	6945	82.74	77.26
802.11ax-HE80	MCS0	215	7025	82.67	77.38
802.11ax-HE160	MCS0	15	6025	165.10	156.83
802.11ax-HE160	MCS0	47	6185	164.60	156.59
802.11ax-HE160	MCS0	79	6345	164.80	156.74
802.11ax-HE160	MCS0	111	6505	231.70	157.23
802.11ax-HE160	MCS0	143	6665	231.70	157.40
802.11ax-HE160	MCS0	175	6825	271.80	157.82
802.11ax-HE160	MCS0	207	6985	267.90	157.87

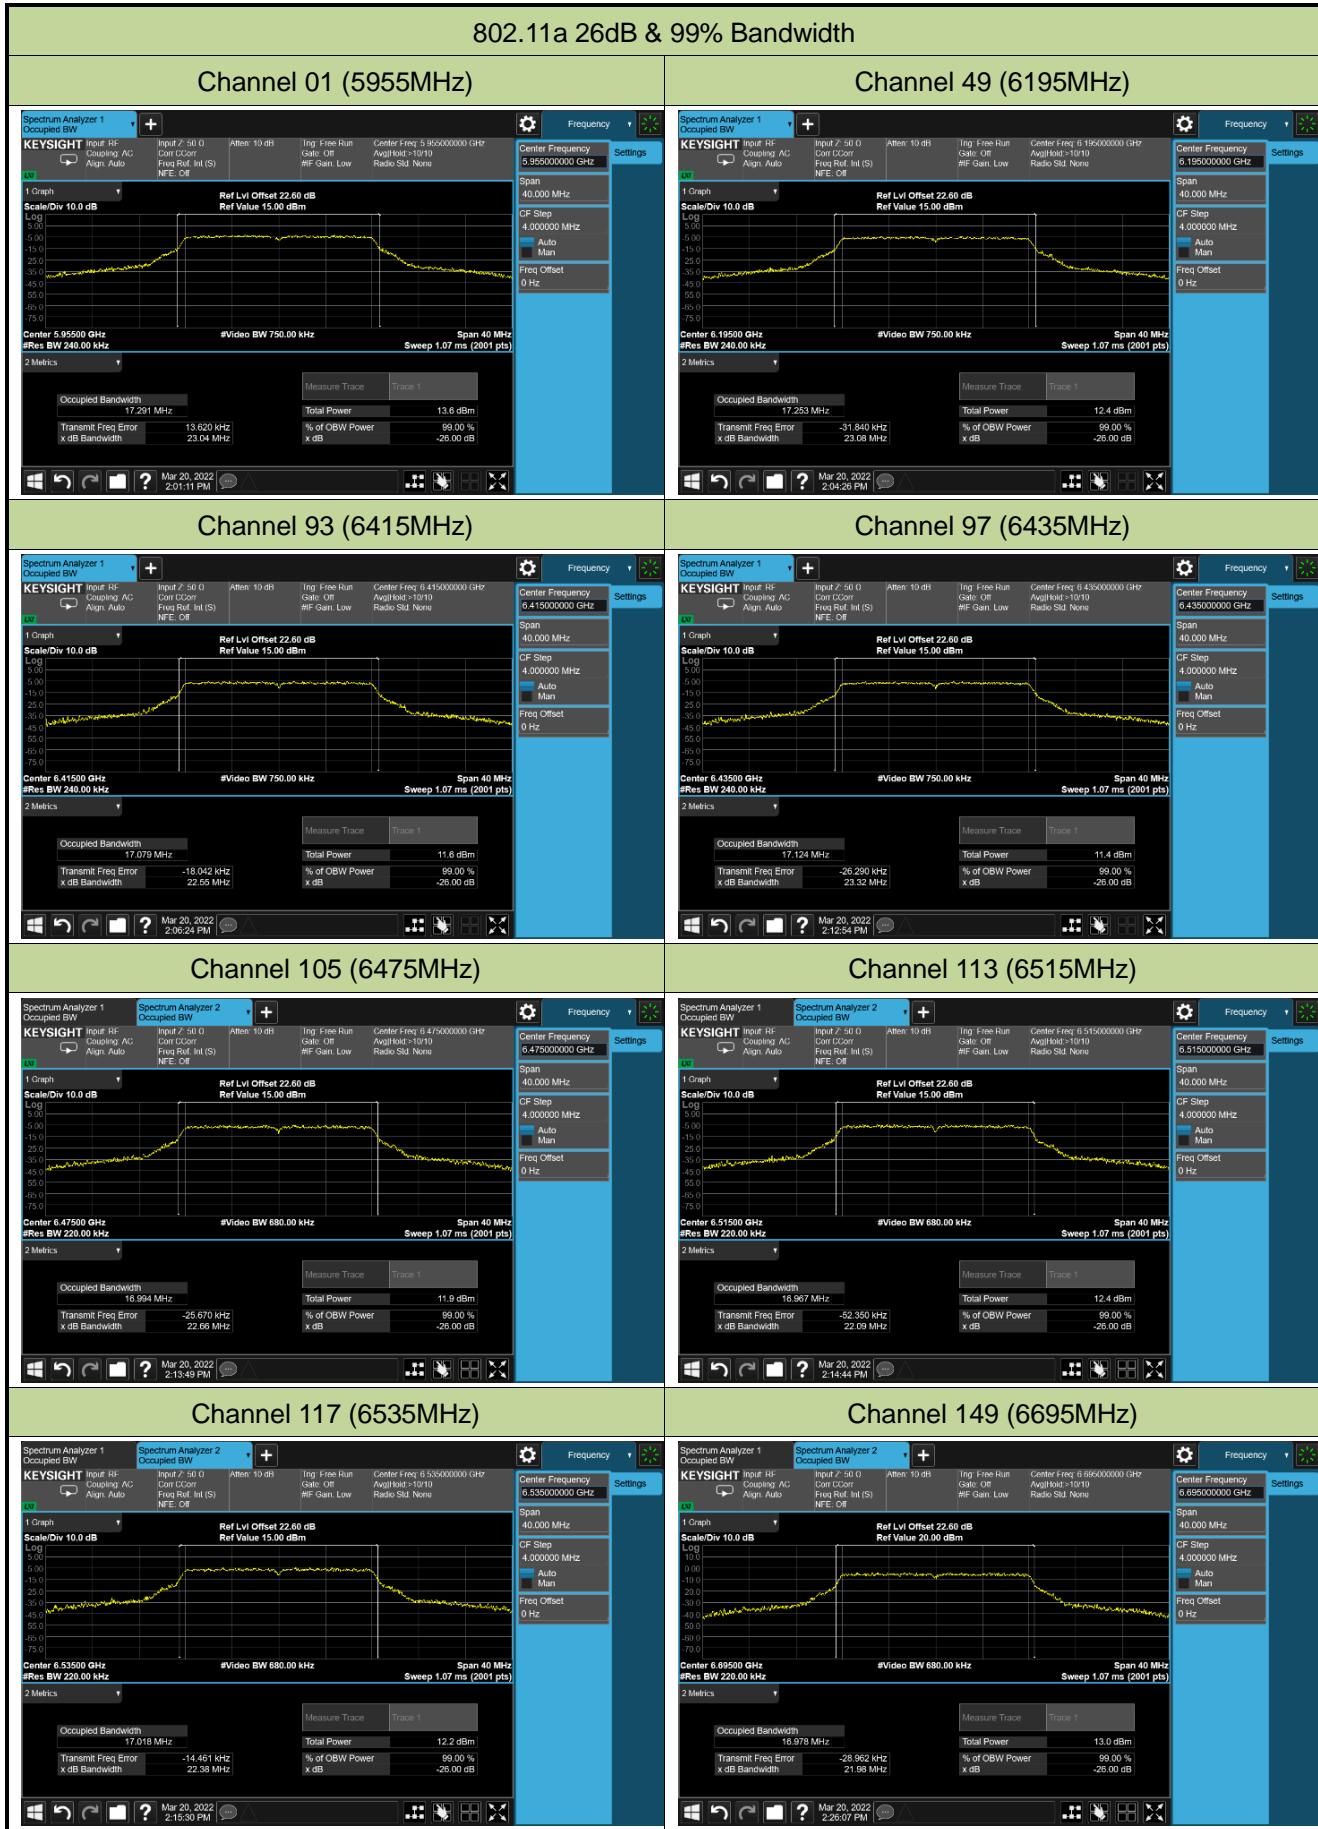


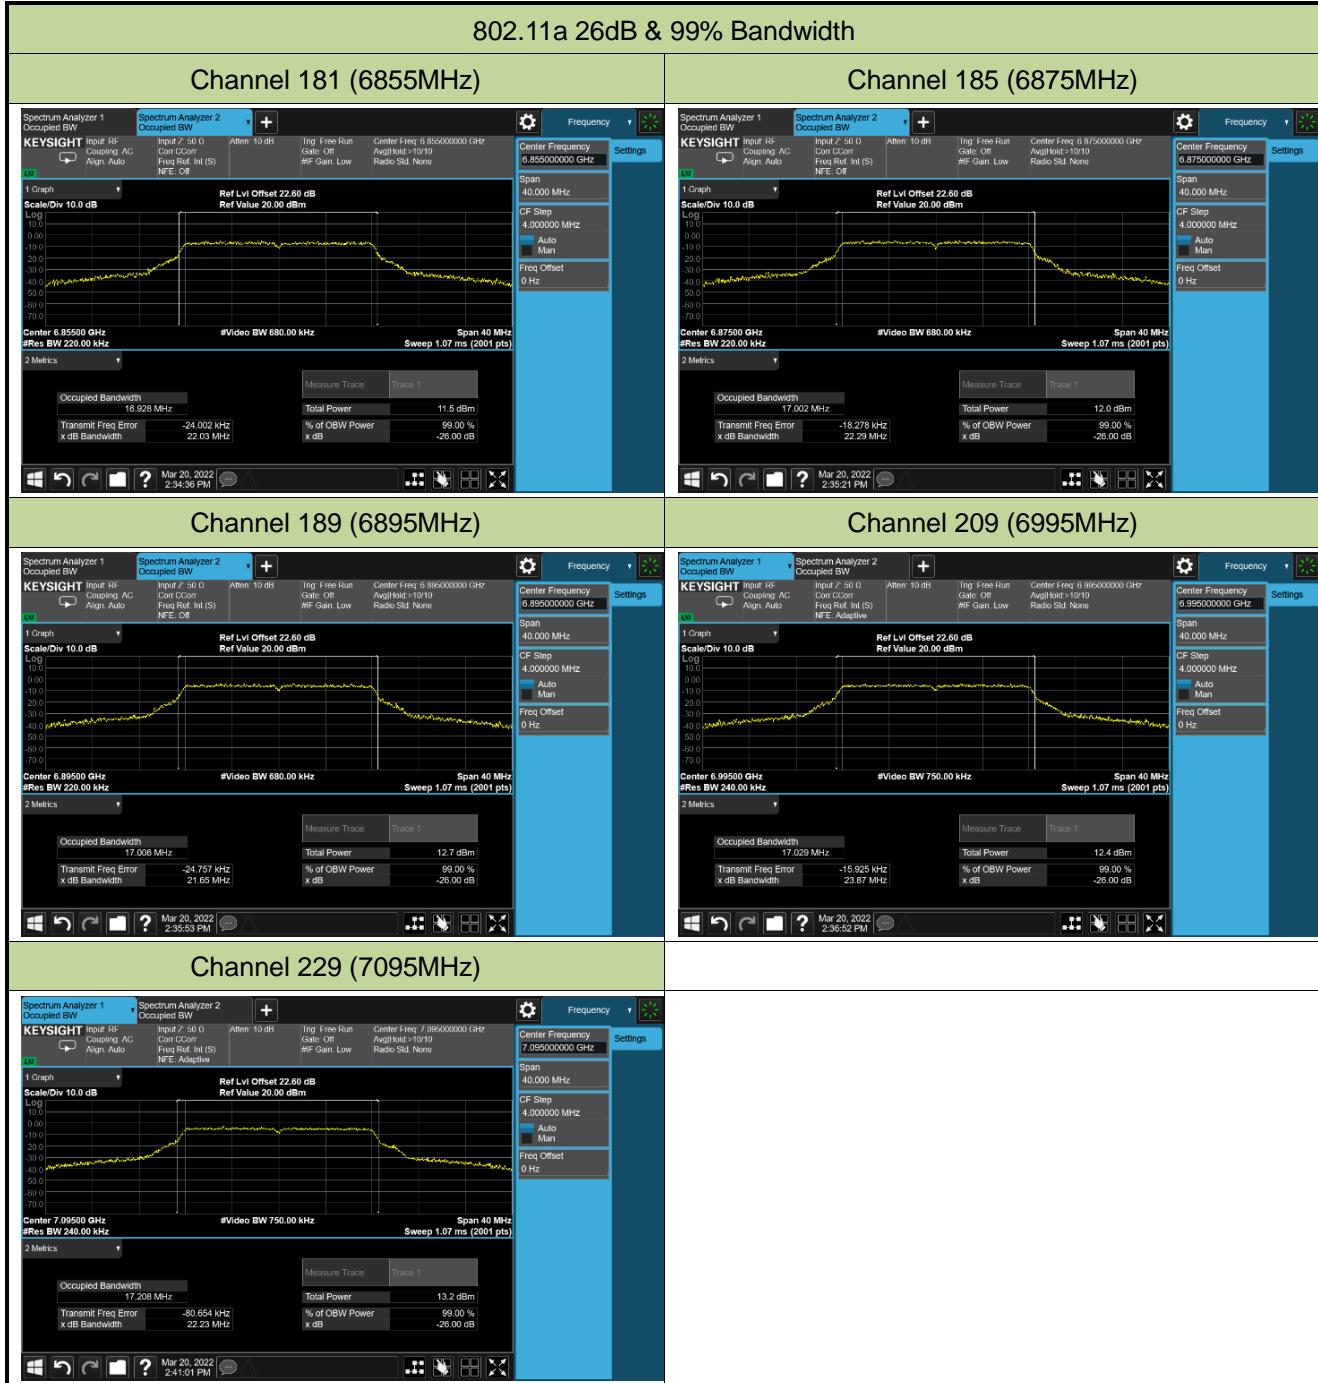


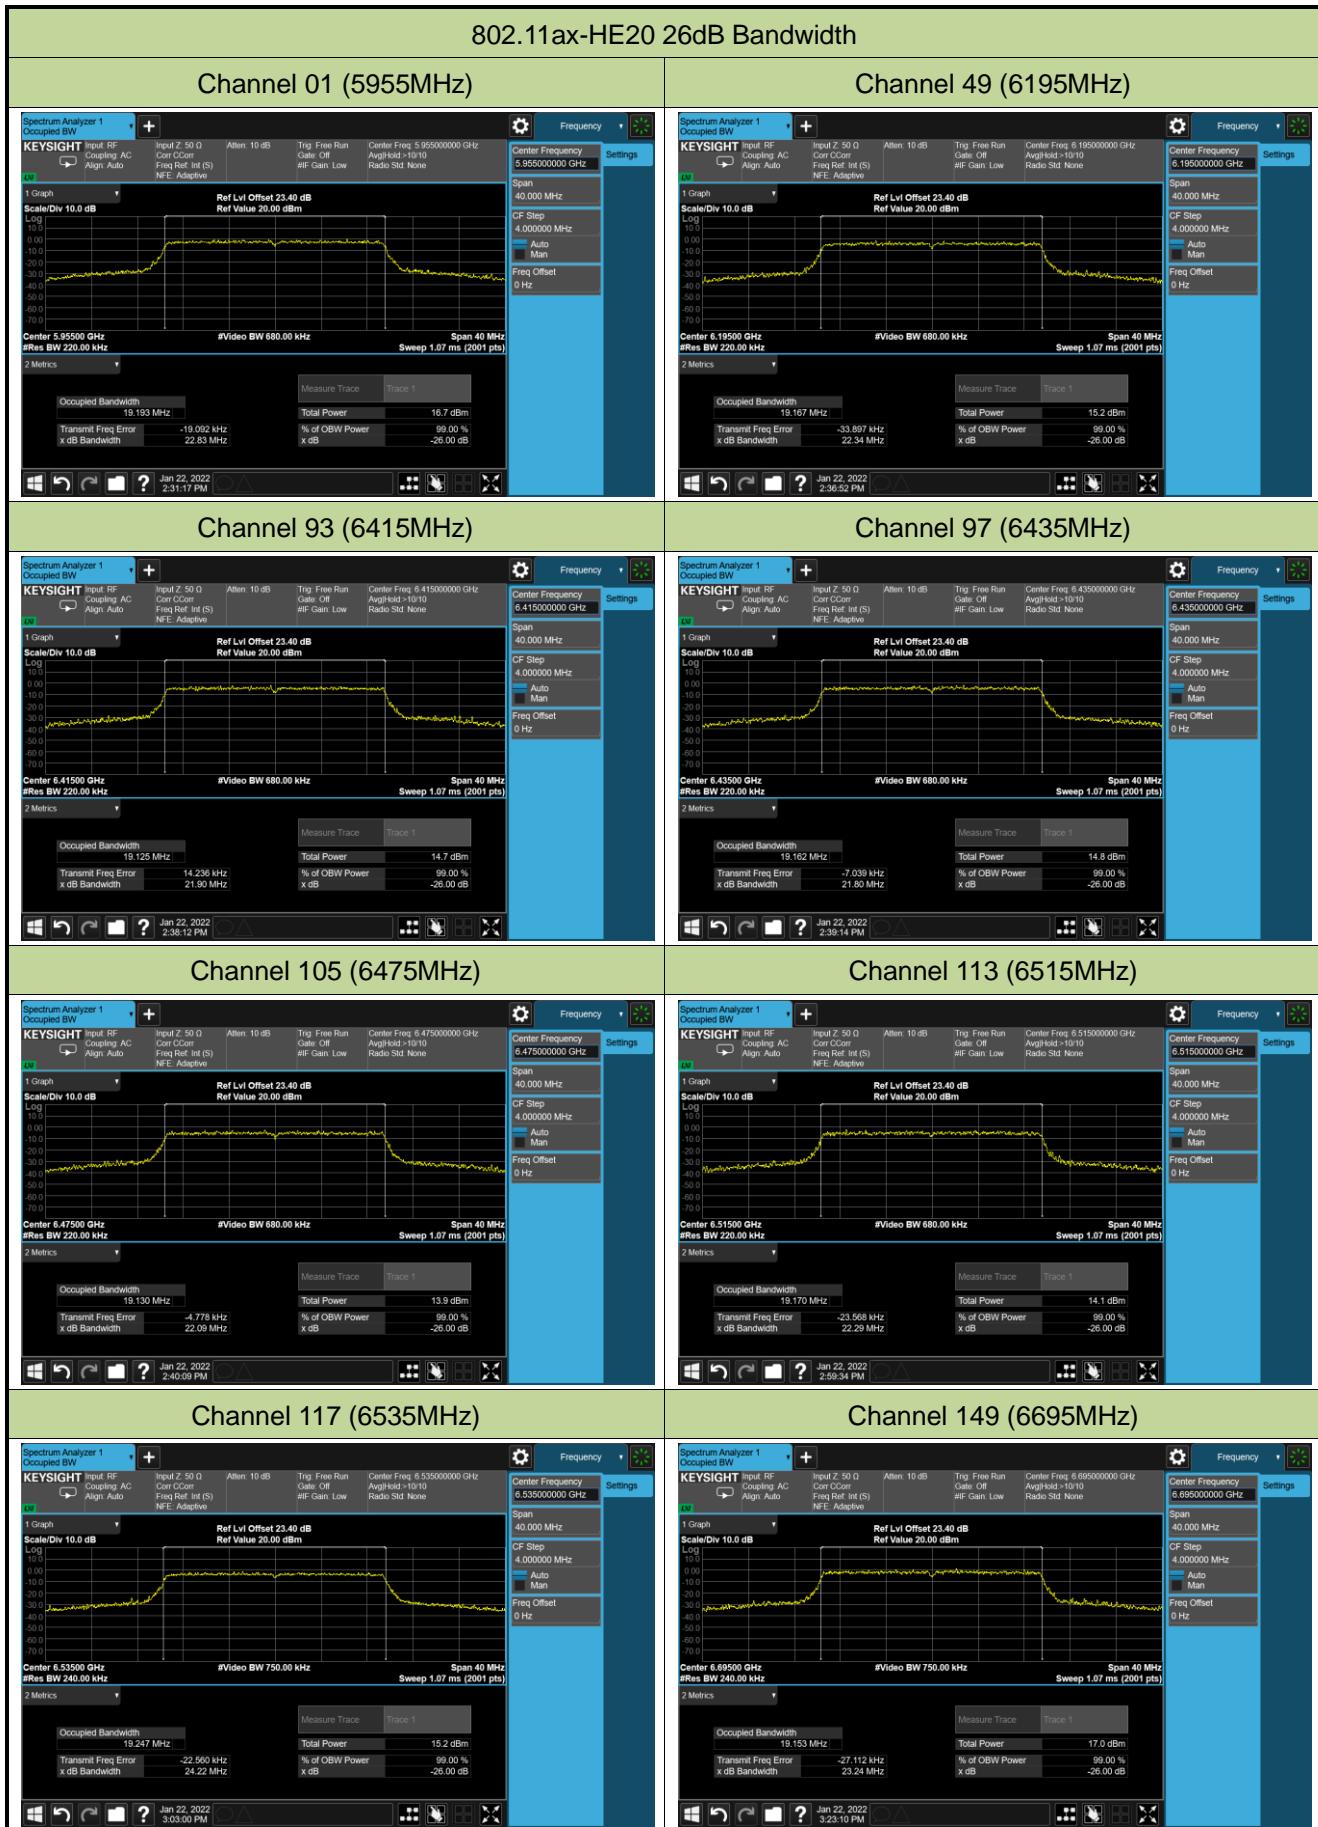


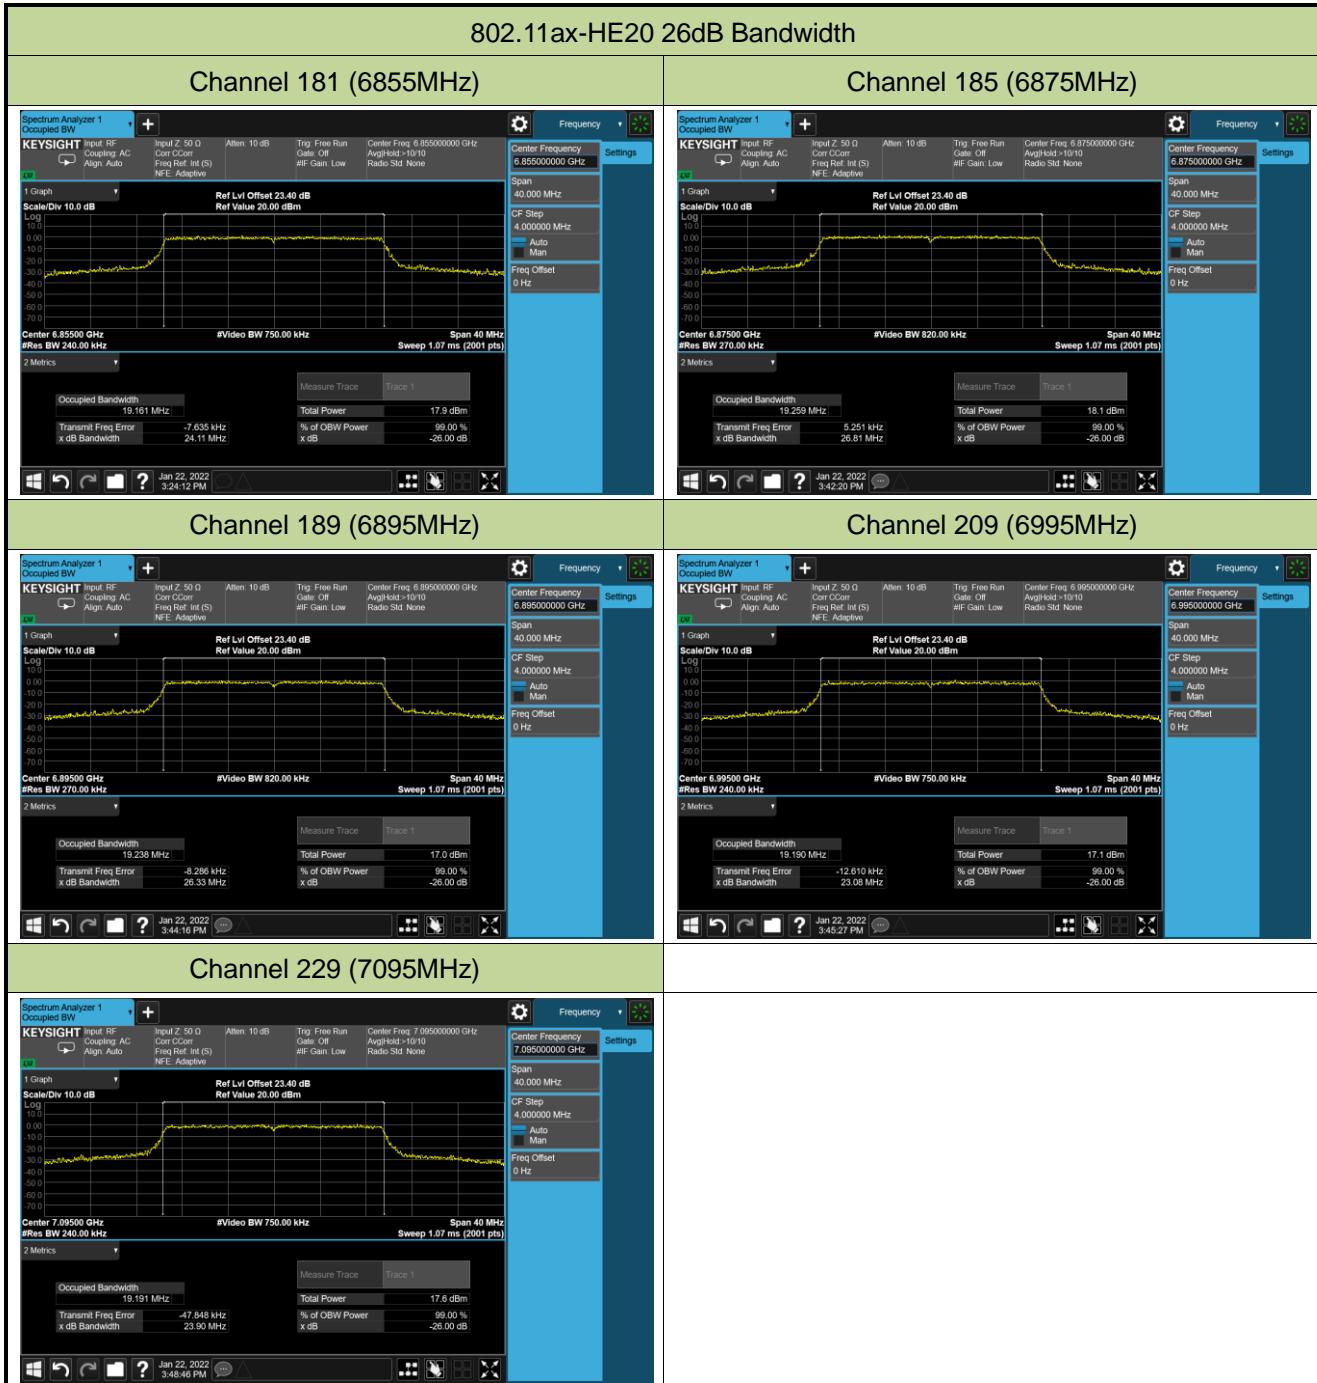


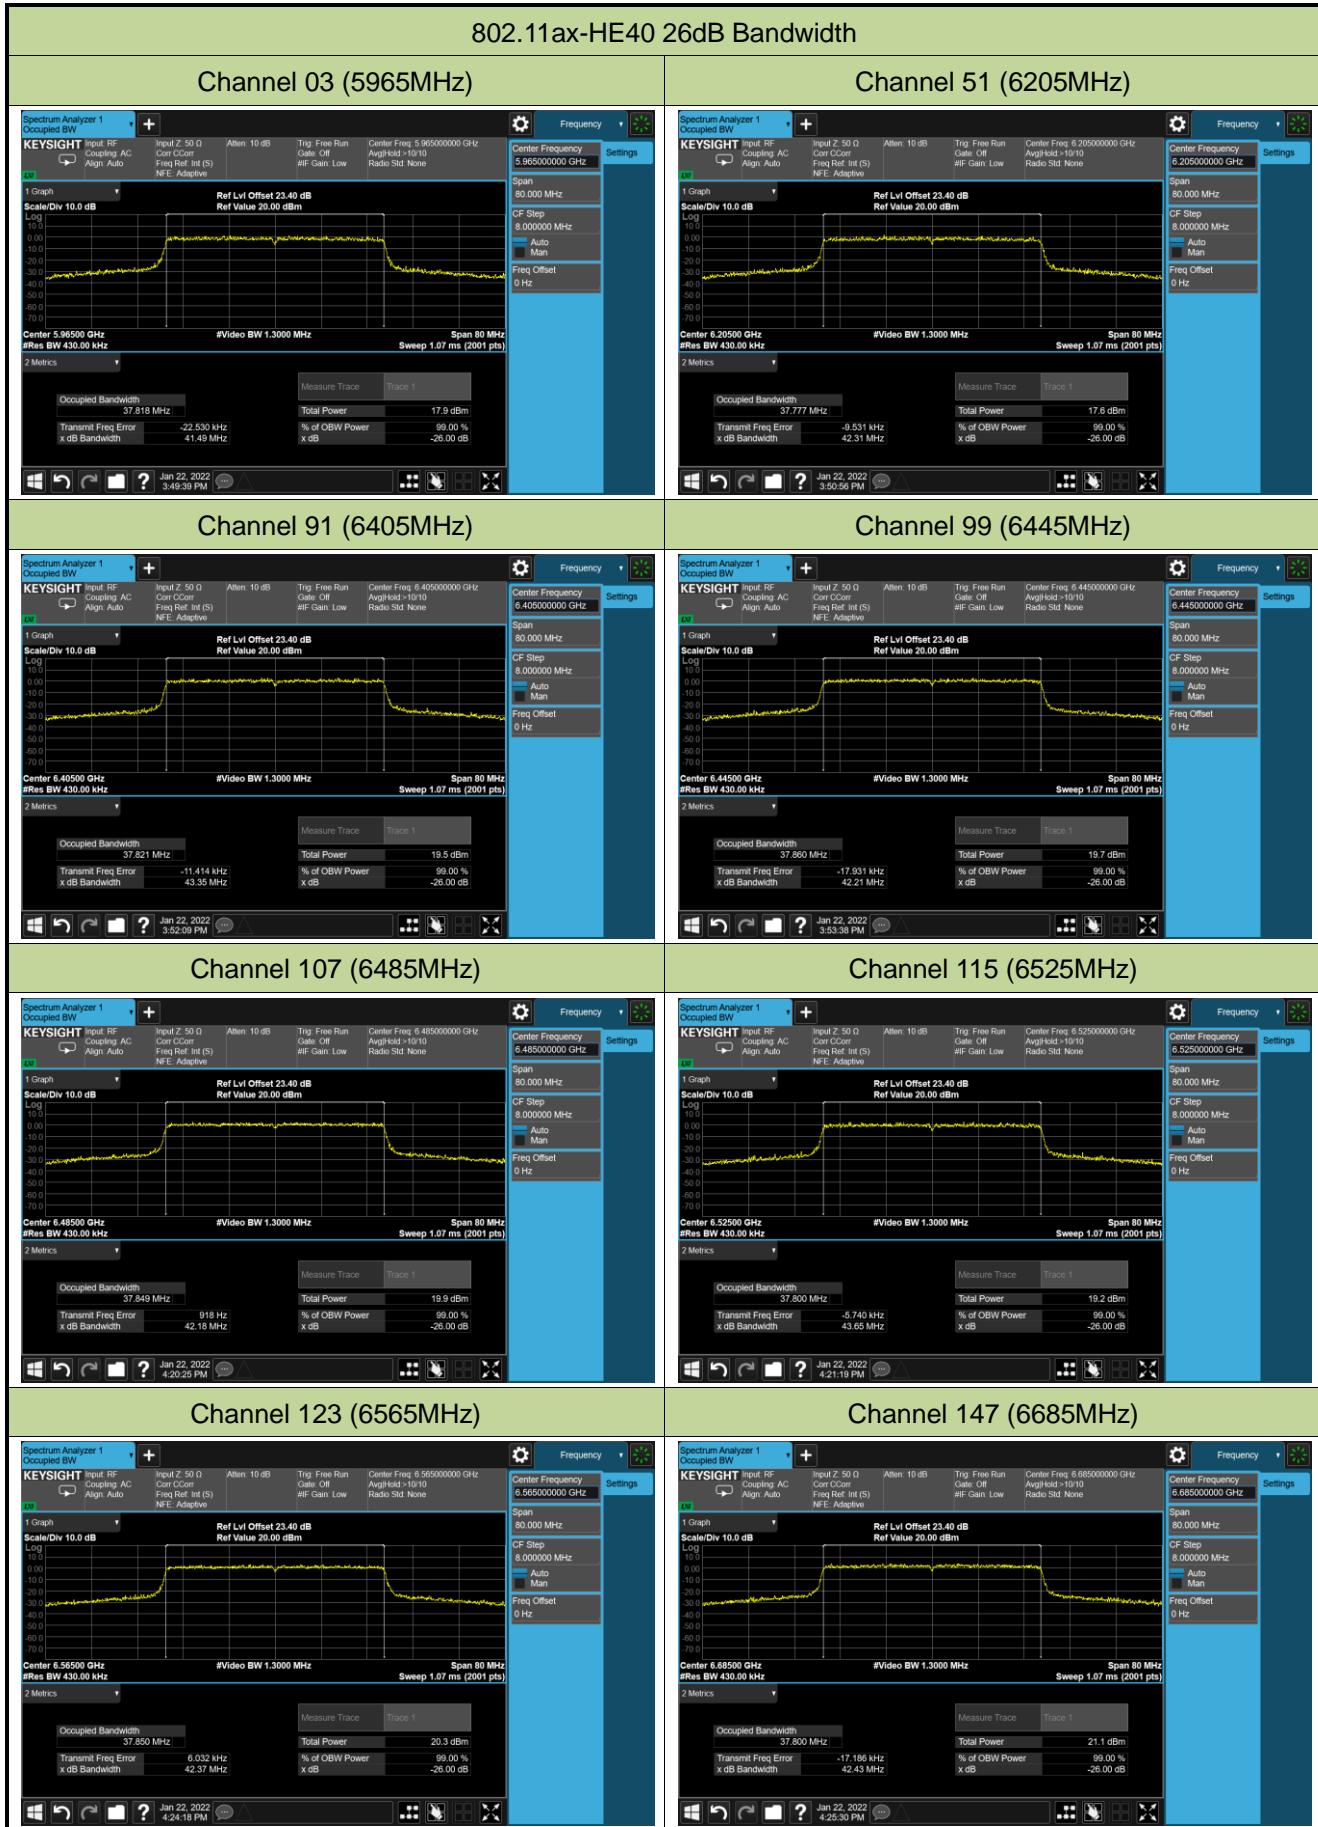

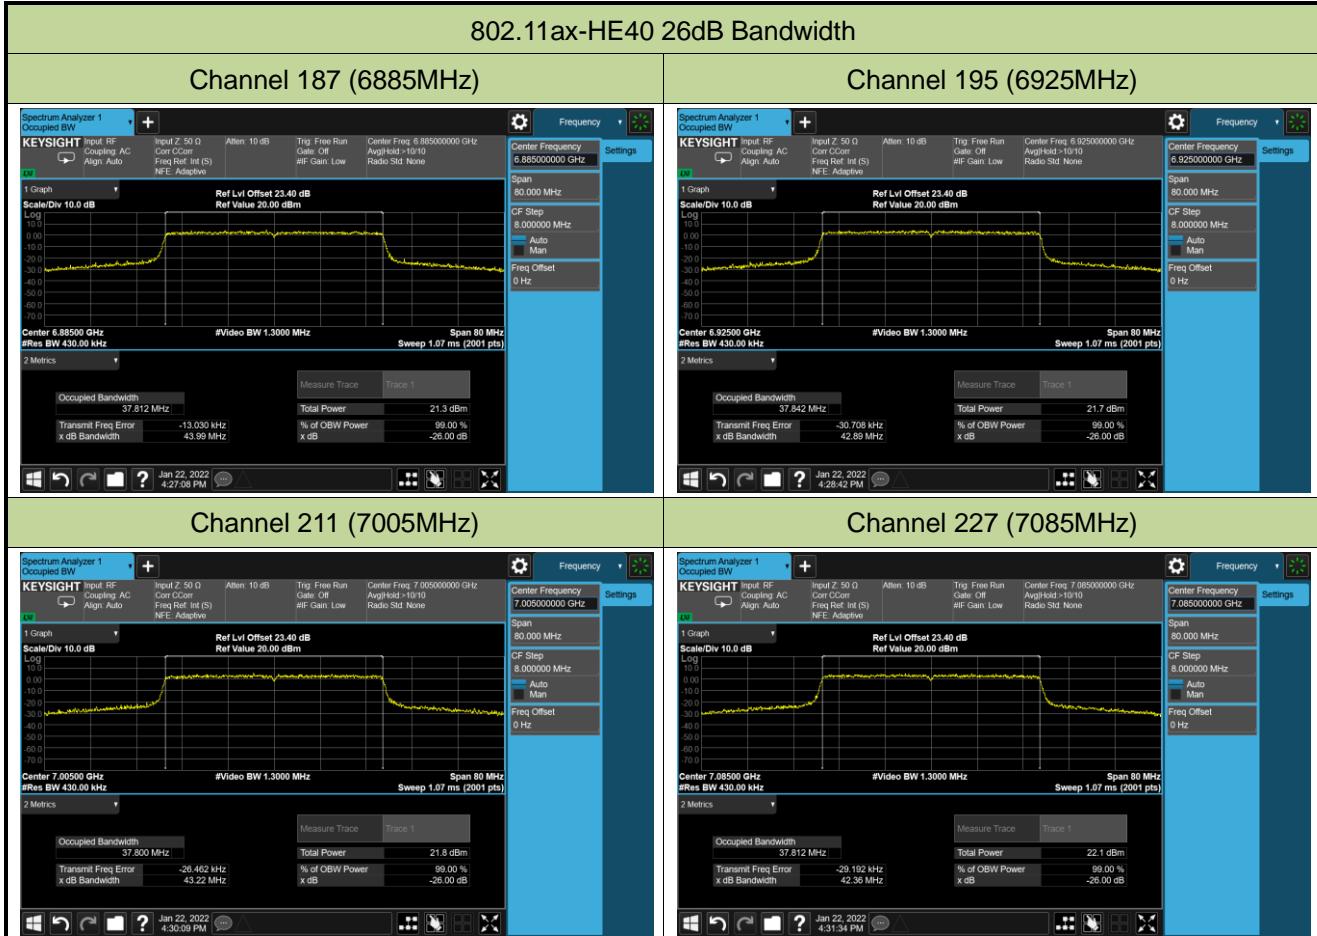

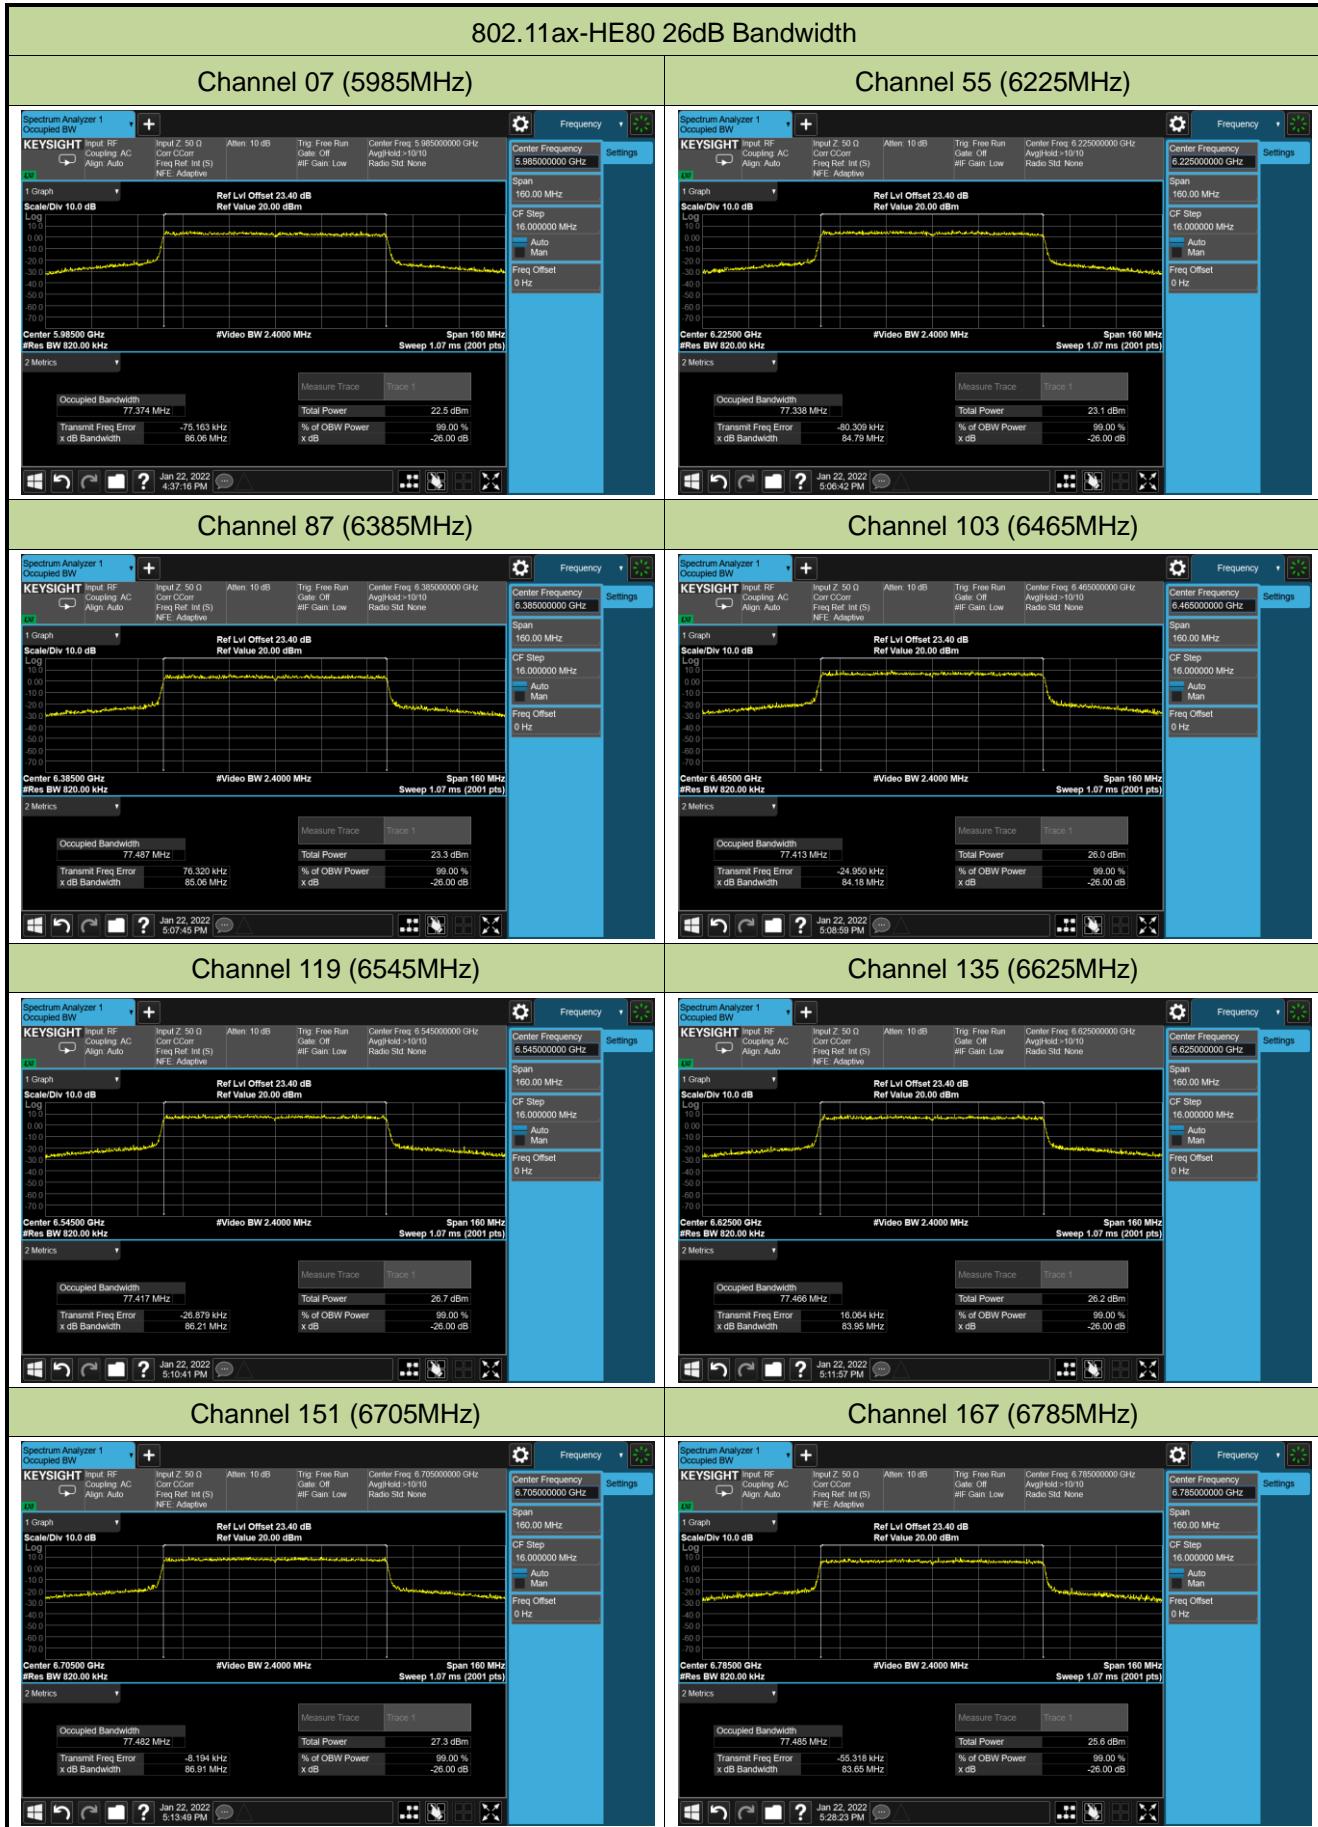

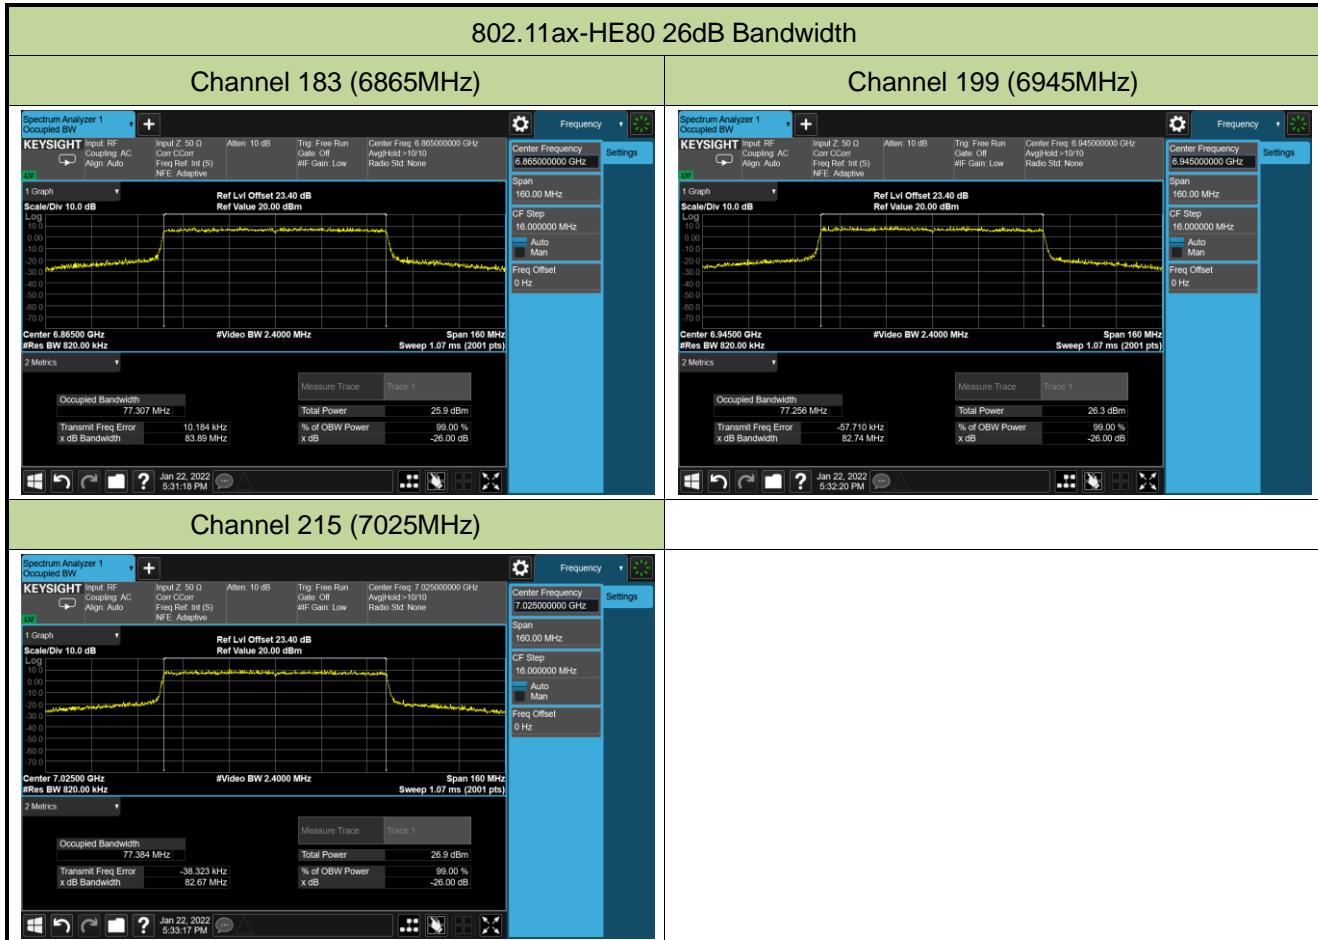

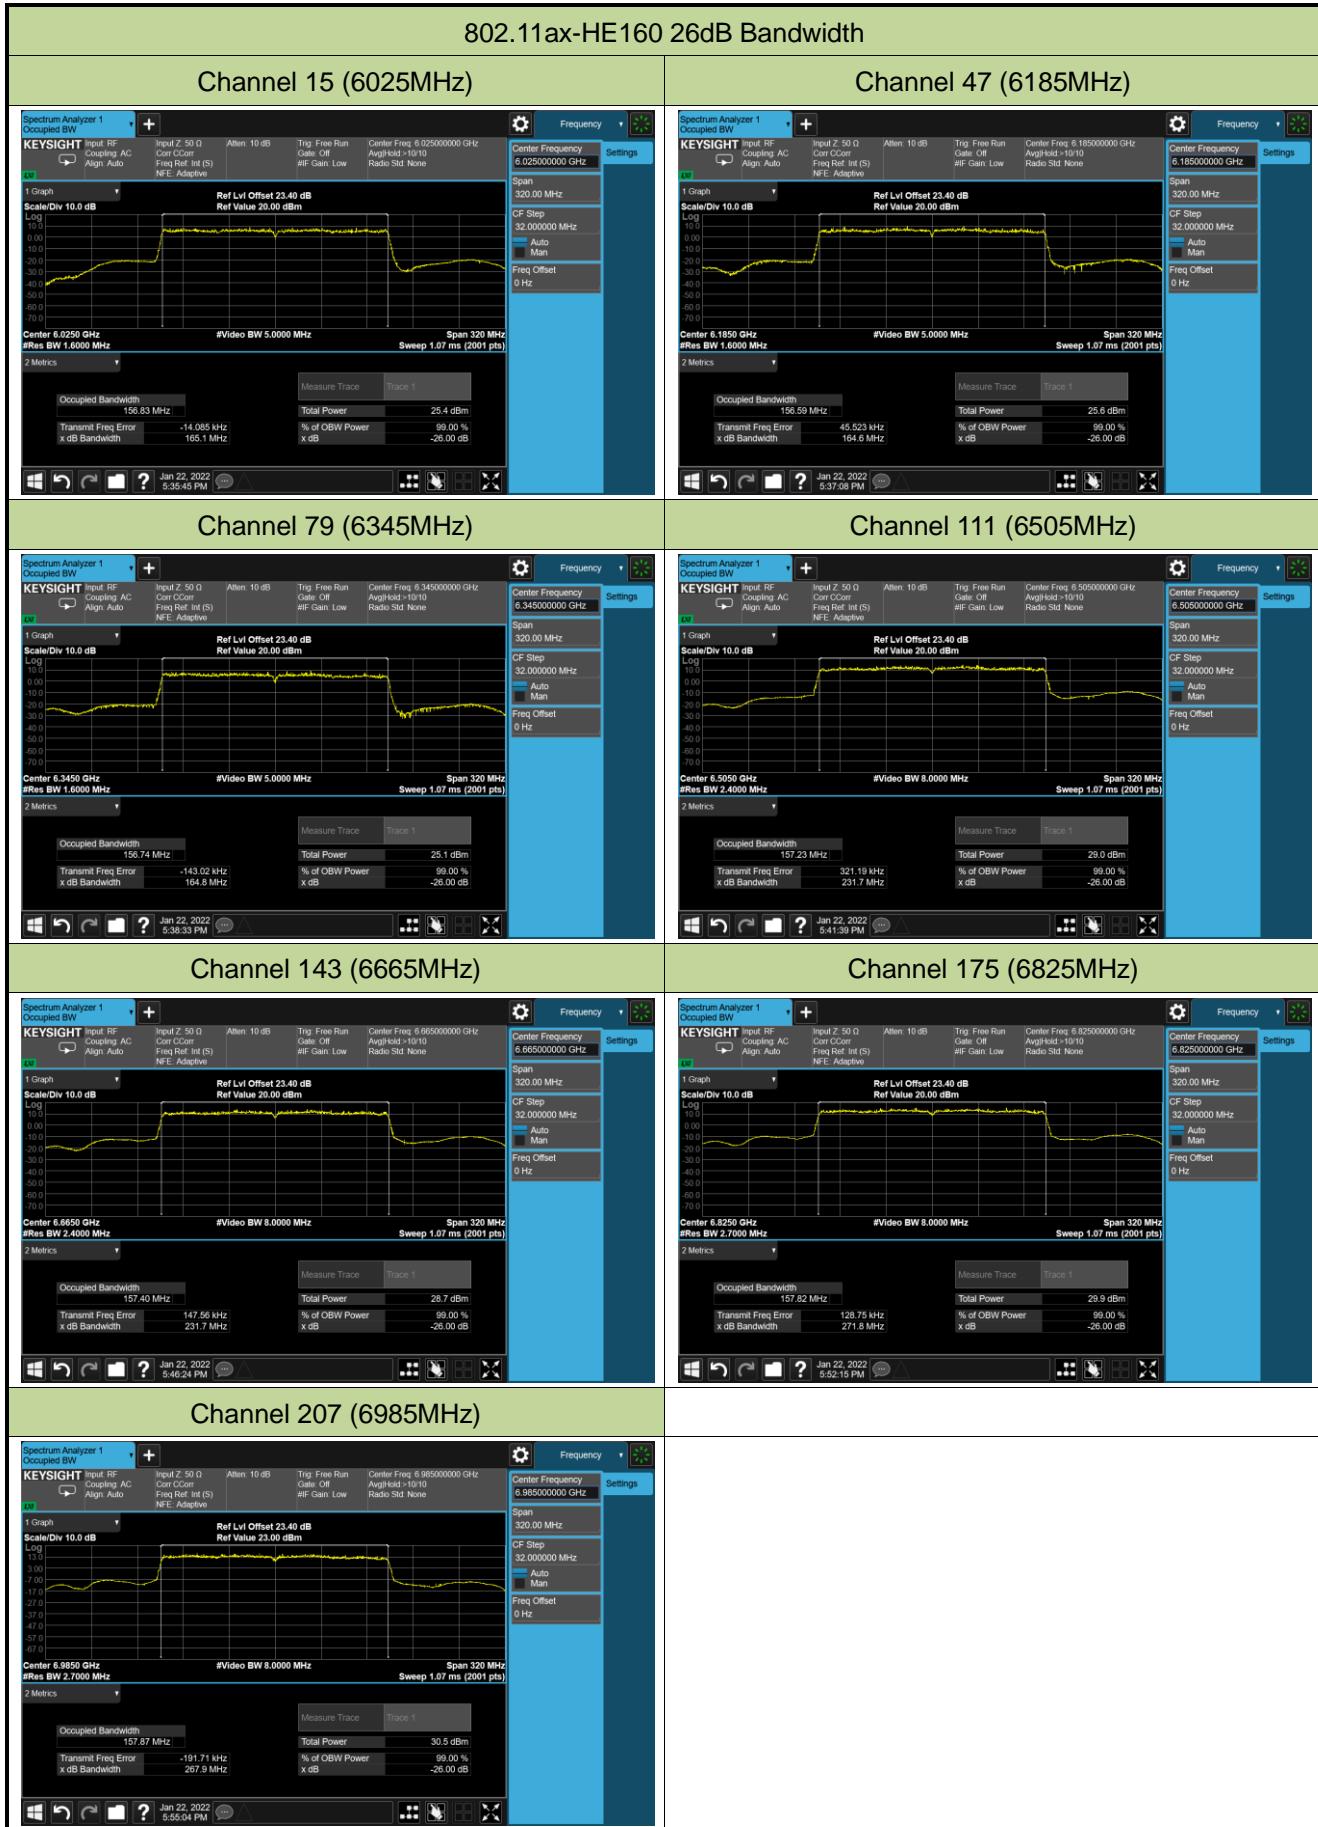

A.3 Output Power Test Result

Test Site	WZ-AC1/WZ-AC2		Test Engineer	Liz Yuan
Test Date	2022/01/20 ~ 2022/03/18			

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dB μ V/m)	EIRP (dBm)	Total EIRP (dBm)	E.I.R.P Limit (dBm)
11a	6Mbps	01	5955	107.7	12.50	12.72	≤ 30.00
11a	6Mbps	49	6195	106.4	11.20	11.42	≤ 30.00
11a	6Mbps	93	6415	106.9	11.70	11.92	≤ 30.00
11a	6Mbps	97	6435	107.3	12.10	12.32	≤ 30.00
11a	6Mbps	105	6475	107.5	12.30	12.52	≤ 30.00
11a	6Mbps	113	6515	107.1	11.90	12.12	≤ 30.00
11a	6Mbps	117	6535	107.1	11.90	12.12	≤ 30.00
11a	6Mbps	149	6695	107.2	12.00	12.22	≤ 30.00
11a	6Mbps	181	6855	106.8	11.60	11.82	≤ 30.00
11a	6Mbps	185	6875	107.1	11.90	12.12	≤ 30.00
11a	6Mbps	189	6895	107.3	12.10	12.32	≤ 30.00
11a	6Mbps	209	6995	107.5	12.30	12.52	≤ 30.00
11a	6Mbps	229	7095	107.6	12.40	12.62	≤ 30.00
11ax-HE20	MCS0	01	5955	108.8	13.60	13.97	≤ 30.00
11ax-HE20	MCS0	49	6195	108.1	12.90	13.27	≤ 30.00
11ax-HE20	MCS0	93	6415	108.2	13.00	13.37	≤ 30.00
11ax-HE20	MCS0	97	6435	108.3	13.10	13.47	≤ 30.00
11ax-HE20	MCS0	105	6475	108.2	13.00	13.37	≤ 30.00
11ax-HE20	MCS0	113	6515	107.5	12.30	12.67	≤ 30.00
11ax-HE20	MCS0	117	6535	107.6	12.40	12.77	≤ 30.00
11ax-HE20	MCS0	149	6695	108.2	13.00	13.37	≤ 30.00
11ax-HE20	MCS0	181	6855	109.8	14.60	14.97	≤ 30.00
11ax-HE20	MCS0	185	6875	109.5	14.30	14.67	≤ 30.00
11ax-HE20	MCS0	189	6895	109.3	14.10	14.47	≤ 30.00
11ax-HE20	MCS0	209	6995	107.4	12.20	12.57	≤ 30.00
11ax-HE20	MCS0	229	7095	107.8	12.60	12.97	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dB μ V/m)	EIRP (dBm)	Total EIRP (dBm)	E.I.R.P Limit (dBm)
11ax-HE40	MCS0	03	5965	111.8	16.60	17.01	≤ 30.00
11ax-HE40	MCS0	51	6205	110.7	15.50	15.91	≤ 30.00
11ax-HE40	MCS0	91	6405	111.8	16.60	17.01	≤ 30.00
11ax-HE40	MCS0	99	6445	111.4	16.20	16.61	≤ 30.00
11ax-HE40	MCS0	107	6485	111.2	16.00	16.41	≤ 30.00
11ax-HE40	MCS0	115	6525	110.9	15.70	16.11	≤ 30.00
11ax-HE40	MCS0	123	6565	110.4	15.20	15.61	≤ 30.00
11ax-HE40	MCS0	147	6685	111.0	15.80	16.21	≤ 30.00
11ax-HE40	MCS0	187	6885	111.6	16.40	16.81	≤ 30.00
11ax-HE40	MCS0	195	6925	111.8	16.60	17.01	≤ 30.00
11ax-HE40	MCS0	211	7005	110.7	15.50	15.91	≤ 30.00
11ax-HE40	MCS0	227	7085	110.4	15.20	15.61	≤ 30.00
11ax-HE80	MCS0	07	5985	114.4	19.20	19.62	≤ 30.00
11ax-HE80	MCS0	55	6225	114.7	19.50	19.92	≤ 30.00
11ax-HE80	MCS0	87	6385	115.0	19.80	20.22	≤ 30.00
11ax-HE80	MCS0	103	6465	115.8	20.60	21.02	≤ 30.00
11ax-HE80	MCS0	119	6545	115.3	20.10	20.52	≤ 30.00
11ax-HE80	MCS0	135	6625	114.5	19.30	19.72	≤ 30.00
11ax-HE80	MCS0	151	6705	114.8	19.60	20.02	≤ 30.00
11ax-HE80	MCS0	167	6785	114.6	19.40	19.82	≤ 30.00
11ax-HE80	MCS0	183	6865	115.3	20.10	20.52	≤ 30.00
11ax-HE80	MCS0	199	6945	115.2	20.00	20.42	≤ 30.00
11ax-HE80	MCS0	215	7025	114.6	19.40	19.82	≤ 30.00
11ax-HE160	MCS0	15	6025	116.6	21.40	21.68	≤ 30.00
11ax-HE160	MCS0	47	6185	116.8	21.60	21.88	≤ 30.00
11ax-HE160	MCS0	79	6345	117.0	21.80	22.08	≤ 30.00
11ax-HE160	MCS0	111	6505	117.9	22.70	22.98	≤ 30.00
11ax-HE160	MCS0	143	6665	116.7	21.50	21.78	≤ 30.00
11ax-HE160	MCS0	175	6825	117.0	21.80	22.08	≤ 30.00
11ax-HE160	MCS0	207	6985	117.2	22.00	22.28	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dB μ V/m) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle < 98%, Total EIRP (dBm) = EIRP (dBm) + $10 * \log(1/\text{Duty cycle})$.

A.4 Power Spectral Density Test Result

Test Site	WZ-AC1/WZ-AC2			Test Engineer	Liz Yuan		
Test Date	2022/01/17~2022/03/18						

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dB μ V/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11a	6Mbps	01	5955	99.66	4.46	95.07	4.68	\leq 5.00
802.11a	6Mbps	49	6195	99.48	4.28	95.07	4.50	\leq 5.00
802.11a	6Mbps	93	6415	99.45	4.25	95.07	4.47	\leq 5.00
802.11a	6Mbps	97	6435	99.86	4.66	95.07	4.88	\leq 5.00
802.11a	6Mbps	105	6475	99.68	4.48	95.07	4.70	\leq 5.00
802.11a	6Mbps	113	6515	99.76	4.55	95.07	4.77	\leq 5.00
802.11a	6Mbps	117	6535	99.57	4.37	95.07	4.59	\leq 5.00
802.11a	6Mbps	149	6695	99.81	4.61	95.07	4.83	\leq 5.00
802.11a	6Mbps	181	6855	99.68	4.48	95.07	4.70	\leq 5.00
802.11a	6Mbps	185	6875	99.80	4.60	95.07	4.82	\leq 5.00
802.11a	6Mbps	189	6895	99.69	4.49	95.07	4.70	\leq 5.00
802.11a	6Mbps	209	6995	99.51	4.31	95.07	4.53	\leq 5.00
802.11a	6Mbps	229	7095	99.82	4.61	95.07	4.83	\leq 5.00
802.11ax-HE20	MCS0	01	5955	99.50	4.30	91.90	4.67	\leq 5.00
802.11ax-HE20	MCS0	49	6195	99.67	4.47	91.90	4.84	\leq 5.00
802.11ax-HE20	MCS0	93	6415	99.45	4.25	91.90	4.62	\leq 5.00
802.11ax-HE20	MCS0	97	6435	99.57	4.37	91.90	4.74	\leq 5.00
802.11ax-HE20	MCS0	105	6475	99.67	4.47	91.90	4.83	\leq 5.00
802.11ax-HE20	MCS0	113	6515	99.63	4.43	91.90	4.80	\leq 5.00
802.11ax-HE20	MCS0	117	6535	99.41	4.21	91.90	4.57	\leq 5.00
802.11ax-HE20	MCS0	149	6695	99.44	4.24	91.90	4.60	\leq 5.00
802.11ax-HE20	MCS0	181	6855	99.46	4.26	91.90	4.62	\leq 5.00
802.11ax-HE20	MCS0	185	6875	99.66	4.46	91.90	4.83	\leq 5.00
802.11ax-HE20	MCS0	189	6895	99.44	4.24	91.90	4.60	\leq 5.00
802.11ax-HE20	MCS0	209	6995	99.35	4.15	91.90	4.52	\leq 5.00
802.11ax-HE20	MCS0	229	7095	99.56	4.36	91.90	4.73	\leq 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dB μ V/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE40	MCS0	03	5965	99.51	4.31	91.00	4.72	≤ 5.00
802.11ax-HE40	MCS0	51	6205	99.45	4.25	91.00	4.66	≤ 5.00
802.11ax-HE40	MCS0	91	6405	99.32	4.12	91.00	4.53	≤ 5.00
802.11ax-HE40	MCS0	99	6445	99.44	4.24	91.00	4.65	≤ 5.00
802.11ax-HE40	MCS0	107	6485	99.65	4.45	91.00	4.86	≤ 5.00
802.11ax-HE40	MCS0	115	6525	99.51	4.31	91.00	4.72	≤ 5.00
802.11ax-HE40	MCS0	123	6565	99.54	4.34	91.00	4.75	≤ 5.00
802.11ax-HE40	MCS0	147	6685	99.32	4.12	91.00	4.53	≤ 5.00
802.11ax-HE40	MCS0	187	6885	99.43	4.23	91.00	4.64	≤ 5.00
802.11ax-HE40	MCS0	195	6925	99.33	4.13	91.00	4.54	≤ 5.00
802.11ax-HE40	MCS0	211	7005	99.58	4.38	91.00	4.79	≤ 5.00
802.11ax-HE40	MCS0	227	7085	99.58	4.38	91.00	4.79	≤ 5.00
802.11ax-HE80	MCS0	07	5985	99.64	4.44	90.87	4.86	≤ 5.00
802.11ax-HE80	MCS0	55	6225	99.36	4.16	90.87	4.58	≤ 5.00
802.11ax-HE80	MCS0	87	6385	99.41	4.21	90.87	4.62	≤ 5.00
802.11ax-HE80	MCS0	103	6465	99.43	4.23	90.87	4.64	≤ 5.00
802.11ax-HE80	MCS0	119	6545	99.54	4.33	90.87	4.75	≤ 5.00
802.11ax-HE80	MCS0	135	6625	99.31	4.11	90.87	4.52	≤ 5.00
802.11ax-HE80	MCS0	151	6705	99.56	4.36	90.87	4.78	≤ 5.00
802.11ax-HE80	MCS0	167	6785	99.48	4.28	90.87	4.70	≤ 5.00
802.11ax-HE80	MCS0	183	6865	99.61	4.41	90.87	4.82	≤ 5.00
802.11ax-HE80	MCS0	199	6945	99.65	4.45	90.87	4.87	≤ 5.00
802.11ax-HE80	MCS0	215	7025	99.31	4.11	90.87	4.53	≤ 5.00
802.11ax-HE160	MCS0	15	6025	99.66	4.46	93.73	4.74	≤ 5.00
802.11ax-HE160	MCS0	47	6185	99.54	4.34	93.73	4.62	≤ 5.00
802.11ax-HE160	MCS0	79	6345	99.70	4.50	93.73	4.78	≤ 5.00
802.11ax-HE160	MCS0	111	6505	99.40	4.20	93.73	4.48	≤ 5.00
802.11ax-HE160	MCS0	143	6665	99.45	4.25	93.73	4.53	≤ 5.00
802.11ax-HE160	MCS0	175	6825	99.41	4.21	93.73	4.49	≤ 5.00
802.11ax-HE160	MCS0	207	6985	99.36	4.16	93.73	4.44	≤ 5.00

Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dB μ V/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle < 98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + $10^{\ast}\log(1/\text{Duty cycle})$.

