


FUNCTIONS

- ❶ ON/OFF
- ❷ Volume up
- ❸ Volume down
- ❹ LED Indicator
- ❺ DC Power Slot
- ❻ Microphone
- ❼ Speaker
- ❽ Ear hook

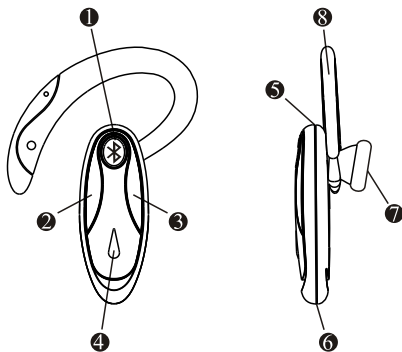

FIRST USE

BATTERY CHARGING

The Headset is equipped with a lightweight and durable Lithium Polymer rechargeable battery. In your first use, Please charge 3 hours. The battery is fully charged when the red light goes off, and it usually takes 2 to 3 hours.

ACTIVATING THE Bluetooth

You must activate your Bluetooth to establish a Bluetooth connection between your mobile phone and other Bluetooth devices. Go the Menu Key by pressing the joystick. Scroll to Connect, press YES to SELECT. A list of options will be displayed. Choose Bluetooth, press YES to connect the Bluetooth link. (Please refer your mobile phone user's manual for establishing connection with Bluetooth device)

PAIRING TO THE CELLULAR PHONE

- Step1. Pressing ❶ button more than 6 seconds to turn on Bluetooth Headset, then keep pressing it for more than 2 seconds till a red light and blue light blinking simultaneously, and it goes to pairing mode when a short and a long sounds are heard.
- Step2. Please look up to user's manual to proceed with Bluetooth Headset pairing mode.
- Step3. Bluetooth Headset asks for putting pairing code 1234, and press confirm button (1234 is preset code). When pairing is done, a red light turns off and a blue light blinking.

Note: If pairing with mobile phone can't be done within about 3 minutes, Headset will close pairing mode. (If pairing has to be done, please repeat step 1~ step 3)

ANSWERING/RECEIVING A CALL

When the phone is receiving a call, a ring tone will be heard on the Headset.

1. Just press the ❶ button down once to answer the call. Pressing the button again will hang-up and terminate the call.
2. To terminate the call, simply press the ❶ again.

MAKING A CALL WITH THE HEADSET ON

Normal dialing

1. Enter the contact number and press SEND/ANS button on the phone. Audio is automatically transferred to the Headset.
2. Press the ❶ button to hang-up and terminate the call.

Voice dialing

- Step 1. When the Headset is under linked state, press the ② button to activate the voice dialing.
 - Step 2. A beep will then be heard on the Headset prompting the user to say the name of the person to call.
 - Step 3. Say the name. Then, the name will be played back to you. The phone will then place the call automatically. In case the cell phone does not recognize the spoken name, the steps above may need to be repeated.
 - Step 4. Press the ① button again to terminate the call.
- Note: Voice dialing control needs mobile phone support, please look up to your user's manual of mobile phone.

REDIALING

Press quickly the ① button twice to activate the last dialed out telephone number.

REJECTING A CALL

Press the ① button more than 2 seconds to refuse the incoming call.

SETTING THE VOLUME

Volume setting can be done during calls only.


1. ② : Volume Up.
2. ③ : Volume down.

Remark: If the volume set is too high, it will cause echo or background noise during calls on some cell phones.


MUTE

It goes to mute function when ③ buttons is pressed more than 2 seconds while talking, and it will back to talking function when ③ is pressed again more than 2 seconds.

TO SWITCH HEADSET ON EITHER EAR

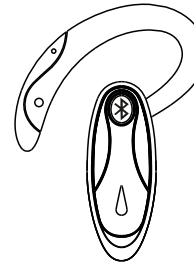

Right ear

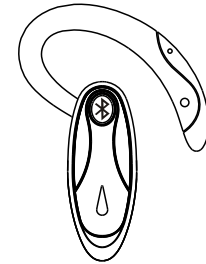

Left ear

Please put the on earhook behind your ear and the microphone toward your mouth.

SPECIFICATIONS

Product	X-Bleu Z Headset
Weight	7g (incl. Cell)
Talk time	3hr ~ 4hr
Standby time	140 hr ~ 160 hr
Output Power	0 dBm (class II)
Security	128 bits encryption
Power Consumption	24mA (working) < 0.6mA (standby)
Battery	Li-ion polymer 90mAh
Charging	5V DC USB Charger
Car Charger	Optional
Charging time	2hr~3hr
Operating Temperature	-10 ~ 55C
Storage Temperature	-20 ~ 60C
Humidity	10% ~ 90%
Certification	CE, FCC, BQB

If using BT Headset not under regular environment, the warranty shall be invalid.

Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

1) this device may not cause interference and

2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.