

FCC PART 15 SUBPART E TEST REPORT

for

4x4 Dual Band 802.11ac wave2 Wireless Module

Model No.: WMX6402-AS

FCC ID: W23-WMXWAVE2AS

of

Applicant: JJPlus Corporation

Address: 13F.-3, No.120, Qiaohe Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

A2LA Accredited No.: 2732.01



Report No.: W6R22002-19655-C-54

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



TABLE OF CONTENTS

1 GENERAL INFORMATION.....2

1.1 NOTES.....2

1.2 TESTING LABORATORY3

 1.2.1 Location3

 1.2.2 Details of accreditation status3

1.3 DETAILS OF APPROVAL HOLDER.....3

1.4 APPLICATION DETAILS3

1.5 GENERAL INFORMATION OF TEST ITEM.....3

1.6 TEST STANDARDS.....15

2 TECHNICAL TEST16

2.1 SUMMARY OF TEST RESULTS 16

2.2 TEST ENVIRONMENT16

2.3 TEST EQUIPMENT LIST18

2.4 TEST PROCEDURE21

3 TEST RESULTS (ENCLOSURE)24

3.1 PEAK TRANSMIT POWER, FCC 15.407 (A)25

3.2 26DB EMISSION BANDWIDTH, 99% OCCUPIED BANDWIDTH, FCC 15.407 (A)108

3.3 6DB EMISSION BANDWIDTH, 99% OCCUPIED BANDWIDTH, FCC 15.407 (A)164

3.4 PEAK POWER SPECTRAL DENSITY, FCC 15.407 (A)182

3.5 UNDESIRABLE EMISSION LIMITS, FCC 15.407 (B)261

3.6 AUTOMATIC DISCONTINUATION OF TRANSMISSION, FCC 15.407 (C).....264

3.7 RESERVED, FCC 15.407 (D).....264

3.8 INDOOR OPERATION RESTRICTION, FCC 15.407 (E)264

3.9 EQUIVALENT ISOTROPIC RADIATED POWER, FCC 15.407 (F)264

3.10 RF EXPOSURE COMPLIANCE REQUIREMENTS265

3.11 TRANSMIT POWER CONTROL (TPC)267

3.12 DYNAMIC FREQUENCY SELECTION (DFS)268

 3.12.1 DFS Detection Threshold268

 3.12.2 Channel move time plot of Type1 radar waveform on 5270MHz.....270

 3.12.3 30Minutes Non-Occupancy Time.....271

3.13 CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME.....272

3.14 RADIATED EMISSIONS FROM RECEIVER PART273

3.15 POWER LINE CONDUCTED EMISSION274



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

May 05, 2020

Kent Lin

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

May 05, 2020

Kevin Wang

Date

WTS

Name

Signature



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,

Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: JJPlus Corporation

Street: 13F.-3, No.120, Qiaohe Rd., Zhonghe Dist.,

Town: New Taipei City 235,

Country: Taiwan

Telephone: 02-2248-5700

Fax: 02-2248-5977

1.4 Application details

Date of receipt of test item(1st): August 23, 2019

Date of test(1st): from August 26, 2019 to October 22, 2019

Date of receipt of test item(2nd): February 20, 2020

Date of test(2nd): from February 21, 2020 to May 04, 2020



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

1.5 General information of Test item

Type of test item: 4x4 Dual Band 802.11ac wave2 Wireless Module
Model Number: WMX6402-AS
Brand Name: jjPlus CORP.
Multi-listing model number: WMX6302-AS,WMX5402-AS,WMX2402-AS,
WMX6401-AS,WMX6301-AS,WMX5401-AS,WMX2401-AS
Photos: ./.

Technical data

Frequency band: Band 1: 5.150 GHz-5.250 GHz, Band 2: 5.250 GHz-5.350 GHz
Band 3: 5.470 GHz-5.725 GHz, Band 4: 5.725 GHz-5.850 GHz

Band 1

802.11a: Low Channel (CH36): 5180 MHz
Middle Channel (CH44): 5220 MHz
High Channel (CH48): 5240 MHz

802.11n 20MHz: Low Channel (CH36): 5180 MHz
Middle Channel (CH44): 5220 MHz
High Channel (CH48): 5240 MHz

802.11n 40MHz: Low Channel (CH38): 5190 MHz
High Channel (CH46): 5230 MHz

802.11ac 80MHz: CH42: 5210 MHz

Band 2

802.11a: Low Channel (CH52): 5260 MHz
Middle Channel (CH60): 5300 MHz
High Channel (CH64): 5320 MHz

802.11n 20MHz: Low Channel (CH52): 5260 MHz
Middle Channel (CH60): 5300 MHz
High Channel (CH64): 5320 MHz

802.11n 40MHz: Low Channel (CH54): 5270 MHz
High Channel (CH62): 5310 MHz

802.11ac 80MHz: CH58: 5290 MHz



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

Band 3

802.11a: Low Channel (CH100): 5500MHz
Middle Channel (CH116): 5580 MHz
High Channel (CH140): 5700 MHz

802.11n 20MHz: Low Channel (CH100): 5500 MHz
Middle Channel (CH116): 5580 MHz
High Channel (CH140): 5700 MHz

802.11n 40MHz: Low Channel (CH102): 5510 MHz
Middle Channel (CH110): 5550 MHz
High Channel (CH134): 5670 MHz

802.11ac 80MHz Low Channel (CH106): 5530 MHz

Band 4

802.11a: Low Channel (CH149): 5745 MHz
Middle Channel (CH157): 5785 MHz
High Channel (CH165): 5825 MHz

802.11n 20MHz: Low Channel (CH149): 5745 MHz
Middle Channel (CH157): 5785 MHz
High Channel (CH165): 5825 MHz

802.11n 40MHz: Low Channel (CH151): 5755 MHz
High Channel (CH159): 5795 MHz

802.11ac 80MHz CH155: 5775 MHz



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Band 1

Numbers of channel: 802.11a: 4 channels
802.11n 20 MHz: 4 channels
802.11n 40 MHz: 2 channels
802.11ac 80 MHz: 1 channel

Band 2

Numbers of channel: 802.11a: 4 channels
802.11n 20 MHz: 4 channels
802.11n 40 MHz: 2 channels
802.11ac 80 MHz: 1 channel

Band 3

Numbers of channel: 802.11a: 11 channels
802.11n 20 MHz: 11 channels
802.11n 40 MHz: 5 channels
802.11ac 80 MHz: 1 channel

Band 4

Numbers of channel: 802.11a: 5 channels
802.11n20 MHz: 5 channels
802.11n 40 MHz: 2 channels
802.11ac 80 MHz: 1 channel

Operating modes: Duplex

Type of modulation: OFDM

Fixed point to point operation: Yes / No

Antenna: Dipole Antenna

Antenna gain: 3 dBi (for model no: AOA160-221020-000000)
2 dBi (for model no : A8-A003-A9001)

Directional gain: 9.02 dBi

According to KDB 662911, Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, \dots, G_N dBi. If transmit signals are correlated, then Directional gain
 $= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Power supply: 3.3Vd.c.



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

ANT1

Band 1

Emission designator: 802.11a: 16M63D1D
802.11n 20 MHz: 18M17D1D
802.11n 40 MHz: 36M54D1D
802.11ac 80 MHz: 76M28D1D

Band 2

Emission designator: 802.11a: 16M73D1D
802.11n 20 MHz: 18M08D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 3

Emission designator: 802.11a: 19M13D1D
802.11n 20 MHz: 18M56D1D
802.11n 40 MHz: 37M50D1D
802.11ac 80 MHz: 77M56D1D

Band 4

Emission designator: 802.11a: 16M44D1D
802.11n 20 MHz: 18M37D1D
802.11n 40 MHz: 36M54D1D
802.11ac 80 MHz: 75M96D1D

ANT2

Band 1

Emission designator: 802.11a: 16M83D1D
802.11n 20 MHz: 18M08D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 2

Emission designator: 802.11a: 16M63D1D
802.11n 20 MHz: 18M08D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M60D1D

Band 3

Emission designator: 802.11a: 16M54D1D
802.11n 20 MHz: 18M08D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 4

Emission designator: 802.11a: 16M44D1D
802.11n 20 MHz: 17M79D1D
802.11n 40 MHz: 36M35D1D
802.11ac 80 MHz: 75M96D1D



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

ANT3

Band 1

Emission designator: 802.11a: 16M63D1D
802.11n 20 MHz: 18M27D1D
802.11n 40 MHz: 36M54D1D
802.11ac 80 MHz: 75M96D1D

Band 2

Emission designator: 802.11a: 16M73D1D
802.11n 20 MHz: 18M37D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 75M96D1D

Band 3

Emission designator: 802.11a: 16M54D1D
802.11n 20 MHz: 18M94D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 4

Emission designator: 802.11a: 16M44D1D
802.11n 20 MHz: 26M83D1D
802.11n 40 MHz: 36M54D1D
802.11ac 80 MHz: 75M64D1D

ANT4

Band 1

Emission designator: 802.11a: 16M63D1D
802.11n 20 MHz: 18M27D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 75M96D1D

Band 2

Emission designator: 802.11a: 16M73D1D
802.11n 20 MHz: 18M37D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 3

Emission designator: 802.11a: 16M54D1D
802.11n 20 MHz: 18M27D1D
802.11n 40 MHz: 36M73D1D
802.11ac 80 MHz: 76M28D1D

Band 4

Emission designator: 802.11a: 16M44D1D
802.11n 20 MHz: 34M81D1D
802.11n 40 MHz: 36M35D1D
802.11ac 80 MHz: 75M64D1D

Note: Tests were performed under worst case mode 802.11a 6 Mbps, 802.11n 20MHz(MCS0), 802.11n 40MHz(MCS0) and 802.11ac 80MHz(MCS0).



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>
Modular Radio Device	<input checked="" type="checkbox"/>

Note: This device was functioned as a Master Slave device during the DFS

Manufacturer: (if applicable)

Name: ./.
 Street: ./.
 Town: ./.
 Country: ./.

		ANT 1	ANT 2	ANT 3	ANT 4
5.15 GHz~5.25GHz	IEEE 802.11 a	Mode A	Mode A	Mode A	Mode A
	IEEE 802.11 n(20M)	Mode B	Mode B	Mode B	Mode B
	IEEE 802.11 n(40M)	Mode C	Mode C	Mode C	Mode C
	IEEE 802.11 ac(80M)	Mode D	Mode D	Mode D	Mode D
5.25 GHz~5.35GHz	IEEE 802.11 a	Mode E	Mode E	Mode E	Mode E
	IEEE 802.11 n(20M)	Mode F	Mode F	Mode F	Mode F
	IEEE 802.11 n(40M)	Mode G	Mode G	Mode G	Mode G
	IEEE 802.11 ac(80M)	Mode H	Mode H	Mode H	Mode H
5.47 GHz~5.725GHz	IEEE 802.11 a	Mode I	Mode I	Mode I	Mode I
	IEEE 802.11 n(20M)	Mode J	Mode J	Mode J	Mode J
	IEEE 802.11 n(40M)	Mode K	Mode K	Mode K	Mode K
	IEEE 802.11 ac(80M)	Mode L	Mode L	Mode L	Mode L
5.725 GHz~5.85GHz	IEEE 802.11 a	Mode M	Mode M	Mode M	Mode M
	IEEE 802.11 n(20M)	Mode N	Mode N	Mode N	Mode N
	IEEE 802.11 n(40M)	Mode O	Mode O	Mode O	Mode O
	IEEE 802.11 ac(80M)	Mode P	Mode P	Mode P	Mode P



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

<u>Transmitter</u>	<u>Unom</u>
Antenna T	
Band 1	
Mode A (OFDM)	
Power (ch 36 or A):	Conducted: 19.51 dBm
Power (ch 44 or B):	Conducted: 19.80 dBm
Power (ch 48 or C):	Conducted: 19.64 dBm
Mode B (OFDM)	
Power (ch 36 or A):	Conducted: 16.27 dBm
Power (ch 44 or B):	Conducted: 16.41 dBm
Power (ch 48 or C):	Conducted: 15.68 dBm
Mode C (OFDM)	
Power (ch 38 or A):	Conducted: 13.41 dBm
Power (ch 46 or B):	Conducted: 15.44 dBm
Mode D (OFDM)	
Power (ch 42 or A):	Conducted: 14.05 dBm
Band 2	
Mode E (OFDM)	
Power (ch 52 or A):	Conducted: 19.18 dBm
Power (ch 60 or B):	Conducted: 19.17 dBm
Power (ch 64 or C):	Conducted: 18.76 dBm
Mode F (OFDM)	
Power (ch 52 or A):	Conducted: 12.97 dBm
Power (ch 60 or B):	Conducted: 12.93 dBm
Power (ch 64 or C):	Conducted: 11.37 dBm
Mode G (OFDM)	
Power (ch 54 or A):	Conducted: 11.47 dBm
Power (ch 62 or B):	Conducted: 12.54 dBm
Mode H (OFDM)	
Power (ch 58 or A):	Conducted: 11.70 dBm
Band 3	
Mode I (OFDM)	
Power (ch 100 or A):	Conducted: 16.86 dBm
Power (ch 116 or B):	Conducted: 16.72 dBm
Power (ch 140 or C):	Conducted: 17.31 dBm
Mode J (OFDM)	
Power (ch 100 or A):	Conducted: 12.11 dBm
Power (ch 116 or B):	Conducted: 12.18 dBm
Power (ch 140 or C):	Conducted: 9.45 dBm
Mode K (OFDM)	
Power (ch 102 or A):	Conducted: 11.99 dBm
Power (ch 110 or B):	Conducted: 11.64 dBm
Power (ch 134 or C):	Conducted: 9.83 dBm
Mode L (OFDM)	
Power (ch 106 or A):	Conducted: 11.48 dBm



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Band 4

Mode M (OFDM)

Power (ch 149 or A): Conducted: 16.24 dBm
Power (ch 157 or B): Conducted: 16.25 dBm
Power (ch 165 or C): Conducted: 16.21 dBm

Mode N (OFDM)

Power (ch 149 or A): Conducted: 16.40 dBm
Power (ch 157 or B): Conducted: 16.50 dBm
Power (ch 165 or C): Conducted: 15.93 dBm

Mode O (OFDM)

Power (ch 151 or A): Conducted: 15.07 dBm
Power (ch 159 or B): Conducted: 15.11 dBm

Mode P (OFDM)

Power (ch 155 or A): Conducted: 14.35 dBm

Antenna 2

Band 1

Mode A (OFDM)

Power (ch 36 or A): Conducted: 19.64 dBm
Power (ch 44 or B): Conducted: 19.39 dBm
Power (ch 48 or C): Conducted: 19.32 dBm

Mode B (OFDM)

Power (ch 36 or A): Conducted: 13.10 dBm
Power (ch 44 or B): Conducted: 12.46 dBm
Power (ch 48 or C): Conducted: 13.44 dBm

Mode C (OFDM)

Power (ch 38 or A): Conducted: 12.46 dBm
Power (ch 46 or B): Conducted: 13.45 dBm

Mode D (OFDM)

Power (ch 42 or A): Conducted: 12.35 dBm

Band 2

Mode E (OFDM)

Power (ch 52 or A): Conducted: 18.90 dBm
Power (ch 60 or B): Conducted: 18.56 dBm
Power (ch 64 or C): Conducted: 18.20 dBm

Mode F (OFDM)

Power (ch 52 or A): Conducted: 10.88 dBm
Power (ch 60 or B): Conducted: 11.00 dBm
Power (ch 64 or C): Conducted: 10.27 dBm

Mode G (OFDM)

Power (ch 54 or A): Conducted: 10.50 dBm
Power (ch 62 or B): Conducted: 12.17 dBm

Mode H (OFDM)

Power (ch 58 or A): Conducted: 12.34 dBm



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Band 3

Mode I (OFDM)

Power (ch 100 or A):	Conducted: 17.06 dBm
Power (ch 116 or B):	Conducted: 17.44 dBm
Power (ch 140 or C):	Conducted: 17.69 dBm

Mode J (OFDM)

Power (ch 100 or A):	Conducted: 11.54 dBm
Power (ch 116 or B):	Conducted: 10.69 dBm
Power (ch 140 or C):	Conducted: 10.51 dBm

Mode K (OFDM)

Power (ch 102 or A):	Conducted: 12.23 dBm
Power (ch 110 or B):	Conducted: 11.21 dBm
Power (ch 134 or C):	Conducted: 11.03 dBm

Mode L (OFDM)

Power (ch 106 or A):	Conducted: 11.91 dBm
-----------------------	----------------------

Band 4

Mode M (OFDM)

Power (ch 149 or A):	Conducted: 15.09 dBm
Power (ch 157 or B):	Conducted: 15.61 dBm
Power (ch 165 or C):	Conducted: 15.61 dBm

Mode N (OFDM)

Power (ch 149 or A):	Conducted: 13.37 dBm
Power (ch 157 or B):	Conducted: 13.83 dBm
Power (ch 165 or C):	Conducted: 13.59 dBm

Mode O (OFDM)

Power (ch 151 or A):	Conducted: 13.76 dBm
Power (ch 159 or B):	Conducted: 14.07 dBm

Mode P (OFDM)

Power (ch 155 or A):	Conducted: 12.93 dBm
-----------------------	----------------------

Antenna 3

Band 1

Mode A (OFDM)

Power (ch 36 or A):	Conducted: 18.47 dBm
Power (ch 44 or B):	Conducted: 19.05 dBm
Power (ch 48 or C):	Conducted: 19.22 dBm

Mode B (OFDM)

Power (ch 36 or A):	Conducted: 14.46 dBm
Power (ch 44 or B):	Conducted: 15.01 dBm
Power (ch 48 or C):	Conducted: 14.28 dBm

Mode C (OFDM)

Power (ch 38 or A):	Conducted: 12.14 dBm
Power (ch 46 or B):	Conducted: 14.12 dBm

Mode D (OFDM)

Power (ch 42 or A):	Conducted: 12.08 dBm
----------------------	----------------------



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Band 2

Mode E (OFDM)

Power (ch 52 or A): Conducted: 18.76 dBm
Power (ch 60 or B): Conducted: 18.48 dBm
Power (ch 64 or C): Conducted: 18.22 dBm

Mode F (OFDM)

Power (ch 52 or A): Conducted: 11.65 dBm
Power (ch 60 or B): Conducted: 11.14 dBm
Power (ch 64 or C): Conducted: 12.49 dBm

Mode G (OFDM)

Power (ch 54 or A): Conducted: 11.87 dBm
Power (ch 62 or B): Conducted: 10.50 dBm

Mode H (OFDM)

Power (ch 58 or A): Conducted: 10.57 dBm

Band 3

Mode I (OFDM)

Power (ch 100 or A): Conducted: 16.49 dBm
Power (ch 116 or B): Conducted: 17.51 dBm
Power (ch 140 or C): Conducted: 18.06 dBm

Mode J (OFDM)

Power (ch 100 or A): Conducted: 11.89 dBm
Power (ch 116 or B): Conducted: 11.13 dBm
Power (ch 140 or C): Conducted: 13.24 dBm

Mode K (OFDM)

Power (ch 102 or A): Conducted: 11.23 dBm
Power (ch 110 or B): Conducted: 12.00 dBm
Power (ch 134 or C): Conducted: 12.60 dBm

Mode L (OFDM)

Power (ch 106 or A): Conducted: 11.40 dBm

Band 4

Mode M (OFDM)

Power (ch 149 or A): Conducted: 15.35 dBm
Power (ch 157 or B): Conducted: 15.39 dBm
Power (ch 165 or C): Conducted: 15.37 dBm

Mode N (OFDM)

Power (ch 149 or A): Conducted: 15.00 dBm
Power (ch 157 or B): Conducted: 14.86 dBm
Power (ch 165 or C): Conducted: 14.84 dBm

Mode O (OFDM)

Power (ch 151 or A): Conducted: 13.67 dBm
Power (ch 159 or B): Conducted: 13.71 dBm

Mode P (OFDM)

Power (ch 155 or A): Conducted: 12.90 dBm



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Antenna 4

Band 1

Mode A (OFDM)

Power (ch 36 or A): Conducted: 18.52 dBm

Power (ch 44 or B): Conducted: 18.66 dBm

Power (ch 48 or C): Conducted: 18.76 dBm

Mode B (OFDM)

Power (ch 36 or A): Conducted: 14.89 dBm

Power (ch 44 or B): Conducted: 14.89 dBm

Power (ch 48 or C): Conducted: 14.49 dBm

Mode C (OFDM)

Power (ch 38 or A): Conducted: 13.92 dBm

Power (ch 46 or B): Conducted: 14.06 dBm

Mode D (OFDM)

Power (ch 42 or A): Conducted: 12.46 dBm

Band 2

Mode E (OFDM)

Power (ch 52 or A): Conducted: 18.69 dBm

Power (ch 60 or B): Conducted: 18.49 dBm

Power (ch 64 or C): Conducted: 18.47 dBm

Mode F (OFDM)

Power (ch 52 or A): Conducted: 11.50 dBm

Power (ch 60 or B): Conducted: 11.62 dBm

Power (ch 64 or C): Conducted: 12.37 dBm

Mode G (OFDM)

Power (ch 54 or A): Conducted: 12.97 dBm

Power (ch 62 or B): Conducted: 12.05 dBm

Mode H (OFDM)

Power (ch 58 or A): Conducted: 12.39 dBm

Band 3

Mode I (OFDM)

Power (ch 100 or A): Conducted: 16.09 dBm

Power (ch 116 or B): Conducted: 17.05 dBm

Power (ch 140 or C): Conducted: 17.41 dBm

Mode J (OFDM)

Power (ch 100 or A): Conducted: 10.94 dBm

Power (ch 116 or B): Conducted: 10.36 dBm

Power (ch 140 or C): Conducted: 12.75 dBm

Mode K (OFDM)

Power (ch 102 or A): Conducted: 11.18 dBm

Power (ch 110 or B): Conducted: 12.26 dBm

Power (ch 134 or C): Conducted: 12.97 dBm

Mode L (OFDM)

Power (ch 106 or A): Conducted: 11.69 dBm



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

Band 4

Mode M (OFDM)

Power (ch 149 or A): Conducted: 16.06 dBm

Power (ch 157 or B): Conducted: 16.01 dBm

Power (ch 165 or C): Conducted: 15.24 dBm

Mode N (OFDM)

Power (ch 149 or A): Conducted: 16.34 dBm

Power (ch 157 or B): Conducted: 16.08 dBm

Power (ch 165 or C): Conducted: 15.21 dBm

Mode O (OFDM)

Power (ch 151 or A): Conducted: 15.12 dBm

Power (ch 159 or B): Conducted: 14.95 dBm

Mode P (OFDM)

Power (ch 155 or A): Conducted: 14.27 dBm

5.15GHz~5.25GHz

Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	121.54	123.90	113.97	20.85	20.93	20.57
802.11n 40MHz	80.58	--	108.41	19.06	--	20.35
802.11ac	76.35	--	--	18.83	--	--

5.25GHz~5.35GHz

Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	60.82	59.74	59.35	17.84	17.76	17.73
802.11n 40MHz	60.45	--	61.68	17.81	--	17.90
802.11ac	60.67	--	--	17.83	--	--

5.47GHz~5.725GHz

Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	58.39	52.07	59.99	17.66	17.17	17.78
802.11n 40MHz	58.91	60.48	60.32	17.70	17.82	17.80
802.11ac	58.14	--	--	17.65	--	--

5.725GHz~5.85GHz

Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	140.05	139.99	125.70	21.46	21.46	20.99
802.11n 40MHz	111.70	--	112.72	20.48	--	20.52
802.11ac	93.09	--	--	19.69	--	--

1.6 Test standards

Technical standard : 47 CFR FCC Part 15 Subpart E § 15.407 (2019-10)



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations were ascertained in the course of the tests performed.

2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply: 3.3Vd.c.

Special statement

1. This test report is based on the test report no. W6M21906-19115-C-54.
2. The differences are heat sink delete, filter change, version of standard and brand name. Except for Radiated Emission and Conducted Emission and Power test item were re-tested, the other test result is based on the original test report no. W6M21906-19115-C-54 without re-testing.



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : AMN : 1.06 dB Voltage probe : 1.12 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 0.009-30 MHz : 1.88 dB 30-1000 MHz : 2.79 dB 1-18 GHz : 2.36 dB 18-40 GHz : 1.55 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement Output power	Expanded Uncertainty : 1.14 dB
Estimation Result of Uncertainty of Power Density Measurement Power density	Expanded Uncertainty : 1.45 dB
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty : 1.01 dBc
Estimation Result of Uncertainty of Conducted Spurious Emission Measurement Conducted spurious emission	Expanded Uncertainty : 1.45 dB
Estimation Result of Uncertainty of EIRP Measurement EIRP 、 ERP 、 Output power(dBm) 、 Radiated spurious emission(dBm), Receiver spurious radiations (≥30 MHz)	Expanded Uncertainty : 30-200MHz : 2.32 dB 200-1000MHz : 2.32 dB 1-18GHz : 3.24 dB 18-40GHz : 2.88 dB
Estimation Result of Uncertainty of DFS Timing	Expanded Uncertainty : 0.6 ms
Estimation Result of Uncertainty of DFS Threshold	Expanded Uncertainty : 1.29 dB

The decision rule is : Measurement uncertainty is not taken into account.



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2019/6/4	2020/6/3
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2019/11/1	2020/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2019/9/24	2020/9/23
ETSTW-CE 008	HF-EICHLLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2019/7/23	2020/7/22
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2019/10/3	2020/10/2
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2019/7/18	2020/7/17
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2019/6/4	2020/6/3
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2019/5/29	2020/5/28
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2019/7/25	2020/7/24
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2019/7/22	2020/7/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2020/3/25	2021/3/24
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2020/2/18	2021/2/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2020/4/22	2021/4/21
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2019/5/13	2020/5/12
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2020/3/6	2021/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2020/2/20	2021/2/19
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2019/5/16	2020/5/15
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2019/9/23	2020/9/22
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2019/9/18	2020/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2019/5/9	2020/5/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2020/1/13	2021/1/12



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2019/6/3	2020/6/2
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2020/2/20	2021/2/19
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2019/5/16	2020/5/15
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2020/4/9	2021/4/8
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2019/5/27	2020/5/26
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2019/5/16	2020/5/15
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2020/3/9	2021/3/8
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2020/3/25	2021/3/24
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2019/10/25	2020/10/24
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2019/9/12	2020/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2020/3/27	2021/3/26
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2019/8/9	2020/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2019/7/2	2020/7/1
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2019/5/14	2020/5/13
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2020/2/20	2021/2/19
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2019/5/16	2020/5/15
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2019/6/6	2020/6/5
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2019/5/16	2020/5/15
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2019/9/24	2020/9/23
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2019/6/6	2020/6/5



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2019/5/16	2020/5/15
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2019/5/16	2020/5/15
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 001	Thermohygrometer	608-H1	45204316	Testo	2019/9/9	2020/9/8
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2019/9/9	2020/9/8



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

2.4 Test Procedure

The test procedures are performed following the test stands ANSI STANDARD C63.10 and FCC 789033 D02 General UNII Test Procedures New Rules v01r04.

■ Minimum Emission Bandwidth for the band 5.150-5.250 GHz, 5.725-5.850 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section H)3)d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the 6-dB emission bandwidth to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section E). However, the 6-dB bandwidth must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth.

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

■ Maximum conducted output power

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep \geq Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

■ Power Density

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.1.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

Conducted measurement test setup

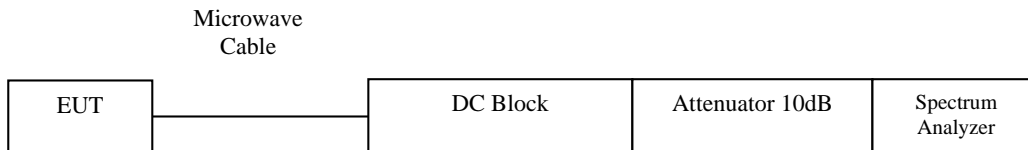



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS


3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
Peak Transmit Power	15.407(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6-dB emission bandwidth	15.407(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26-dB emission bandwidth	15.407(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
99 % Occupied Bandwidth	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak Power Spectral Density	15.407(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Undesirable emission limits	15.407(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radio Frequency Exposure	15.407(f)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Transmit Power Control	15.407(h)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Dynamic Frequency Selection (DFS)	15.407(h)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Channel Move Time, Channel Closing Transmission Time	15.407(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Receiver Part	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Conducted Emissions	15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>


The following is intentionally left blank.




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

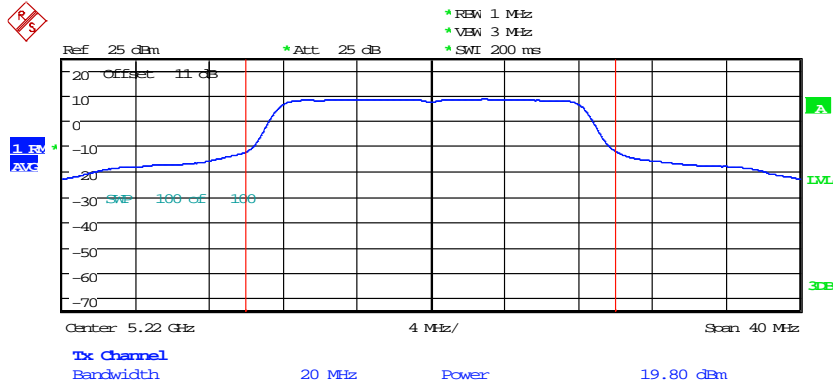


MAXIMUM CONDUCTED POWER ANT1_11aCH44
Date: 17.MAR.2020 16:18:37

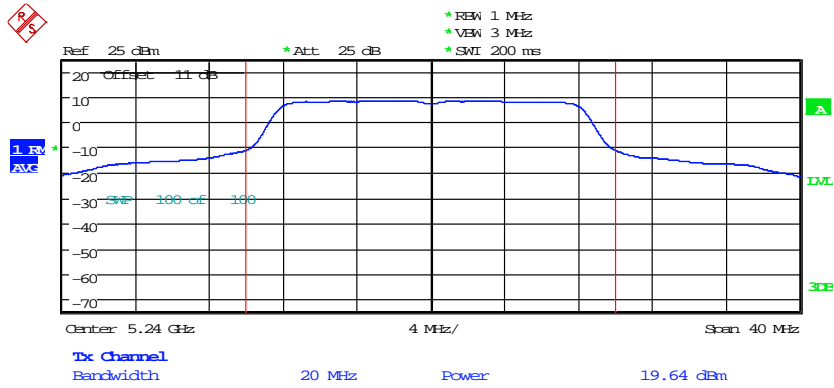


MAXIMUM CONDUCTED POWER ANT1_11aCH48
Date: 17.MAR.2020 16:19:46



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

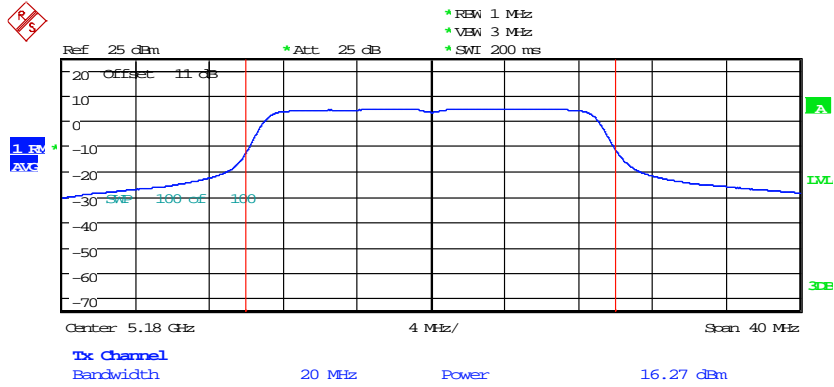


MAXIMUM CONDUCTED POWER ANT1_11n20CH36
Date: 17.MAR.2020 16:21:56

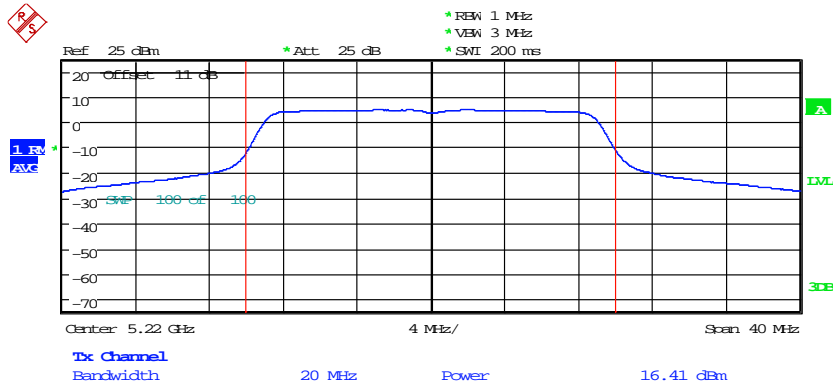


MAXIMUM CONDUCTED POWER ANT1_11n20CH44
Date: 17.MAR.2020 16:23:39



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

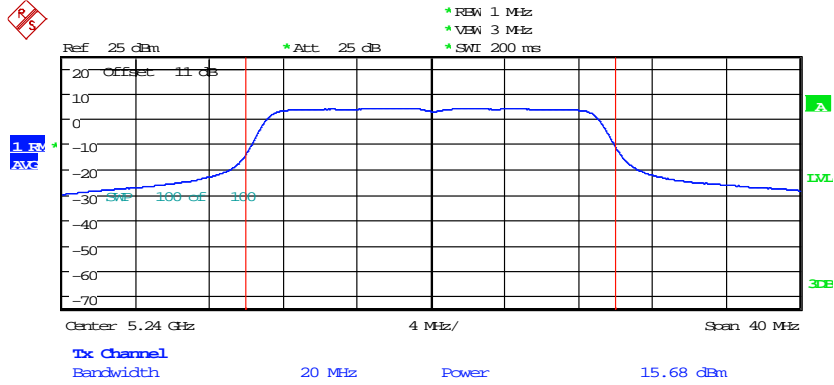


MAXIMUM CONDUCTED POWER ANT1_11n20CH48
Date: 20.MAR.2020 20:29:46

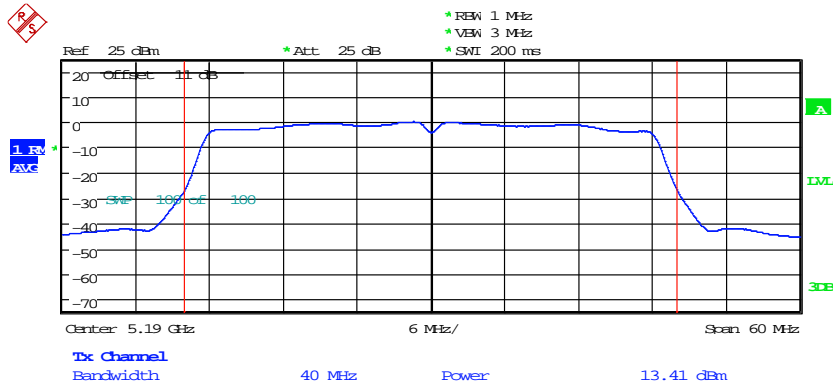


MAXIMUM CONDUCTED POWER ANT1_11n40CH38
Date: 30.APR.2020 16:10:39



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

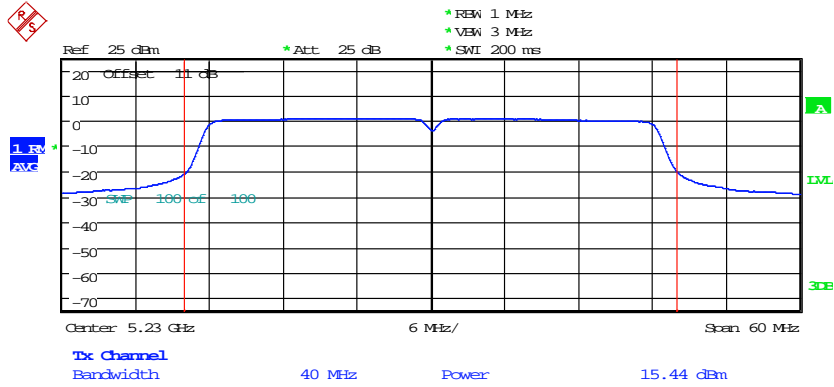

MAXIMUM CONDUCTED POWER ANT1_11n40CH46
Date: 17.MAR.2020 16:27:38

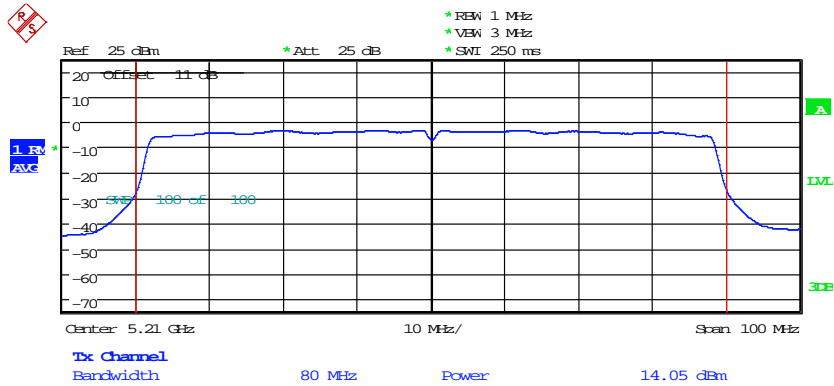


MAXIMUM CONDUCTED POWER ANT1_11ac80CH42
Date: 17.MAR.2020 16:29:42



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.25 GHz ~ 5.35 GHz

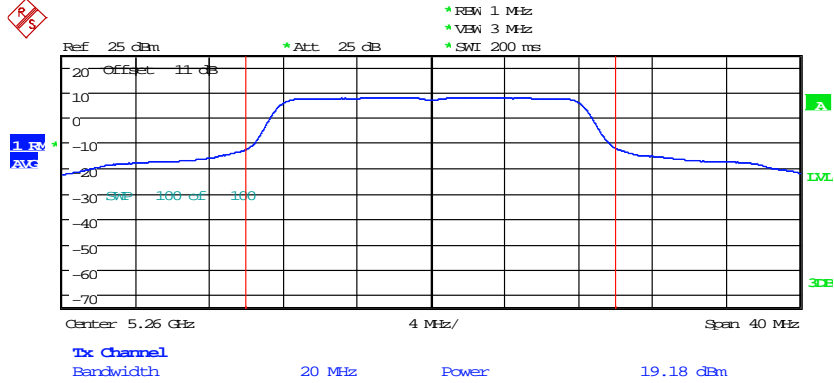

MAXIMUM CONDUCTED POWER ANT1_11aCH52

Date: 20.MAR.2020 14:10:25

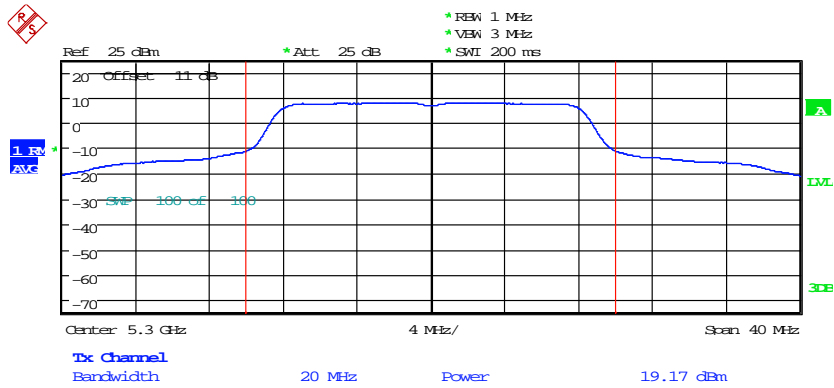


MAXIMUM CONDUCTED POWER ANT1_11aCH60


Date: 20.MAR.2020 14:11:55



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

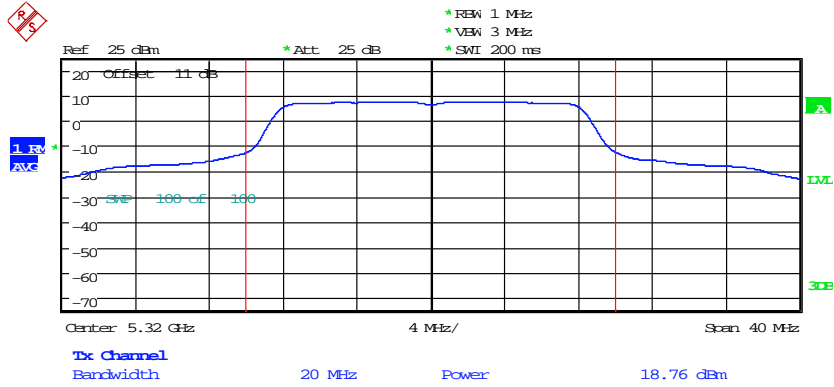


MAXIMUM CONDUCTED POWER ANT1_11aCH4
Date: 20.MAR.2020 14:13:15

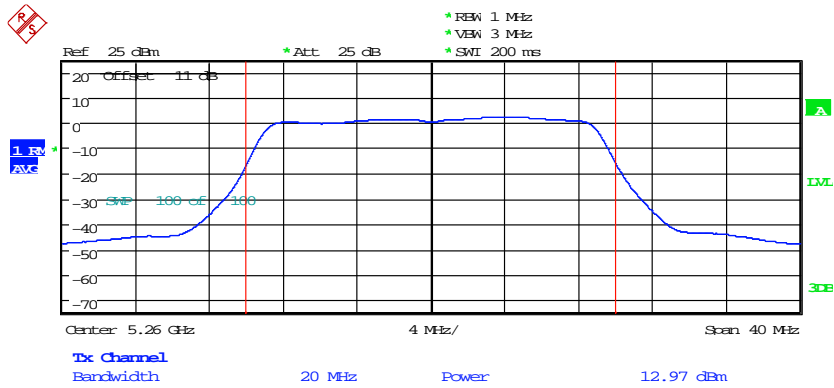


MAXIMUM CONDUCTED POWER ANT1_11n20CH52
Date: 30.APR.2020 14:29:03



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

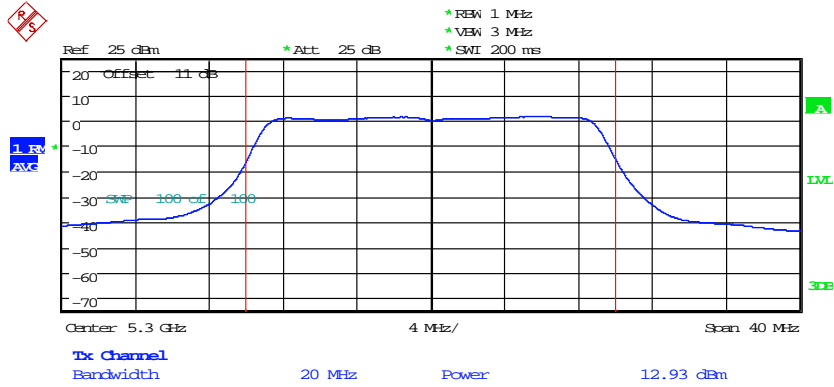


MAXIMUM CONDUCTED POWER ANT1_11n20CH60
Date: 30.APR.2020 14:30:22

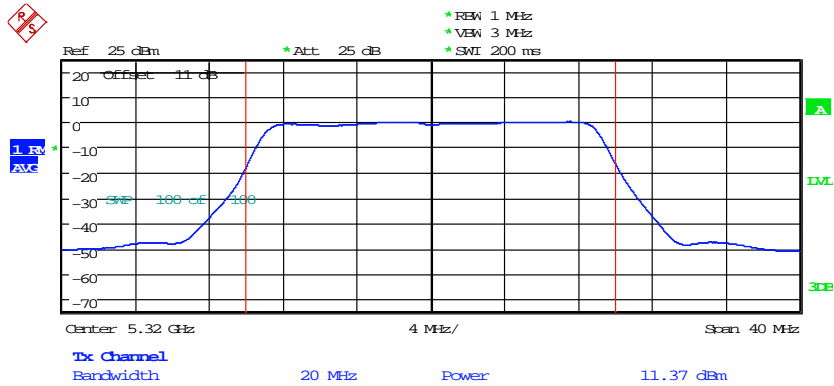


MAXIMUM CONDUCTED POWER ANT1_11n20CH64
Date: 30.APR.2020 15:59:50



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

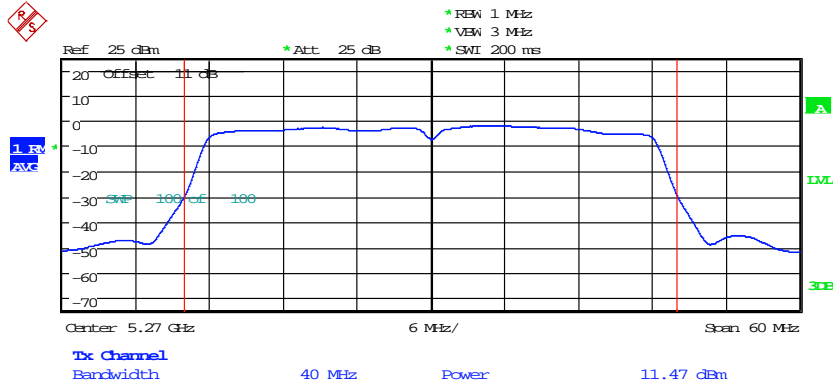


MAXIMUM CONDUCTED POWER ANT1_11n40CH54
Date: 30.APR.2020 16:12:57

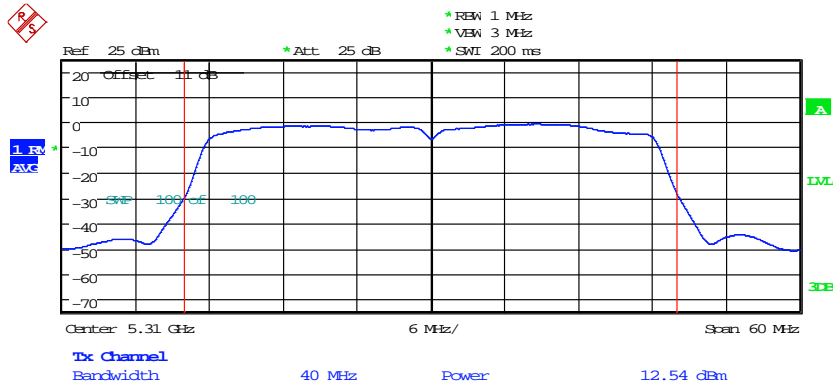

MAXIMUM CONDUCTED POWER ANT1_11n40CH62
Date: 30.APR.2020 16:56:30




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

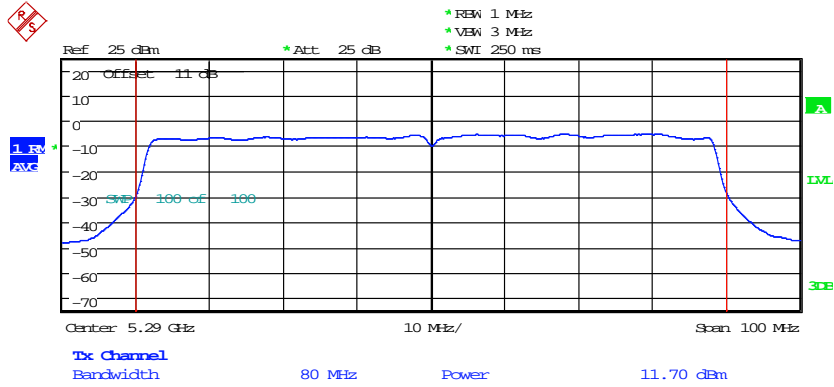


MAXIMUM CONDUCTED POWER ANT1_11ac80CH58
Date: 30.APR.2020 17:33:49


5.47 GHz ~ 5.725 GHz

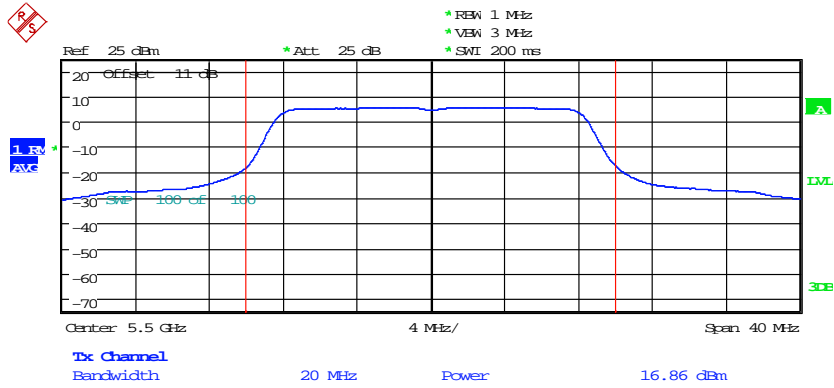


MAXIMUM CONDUCTED POWER ANT1_11acH100
Date: 20.MAR.2020 15:33:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

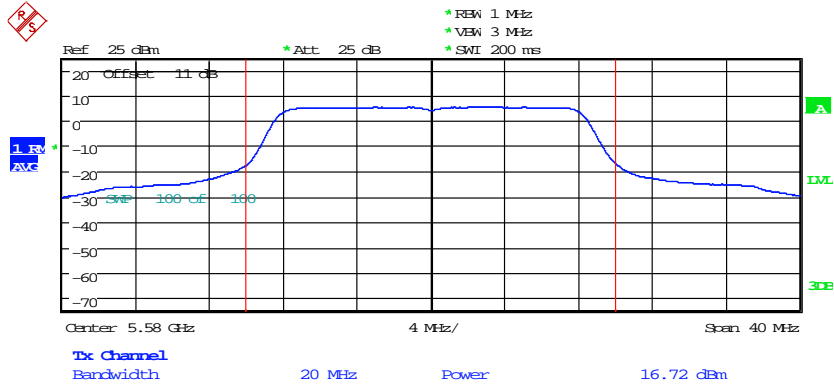


MAXIMUM CONDUCTED POWER ANT1_11aCH116
Date: 20.MAR.2020 15:34:35

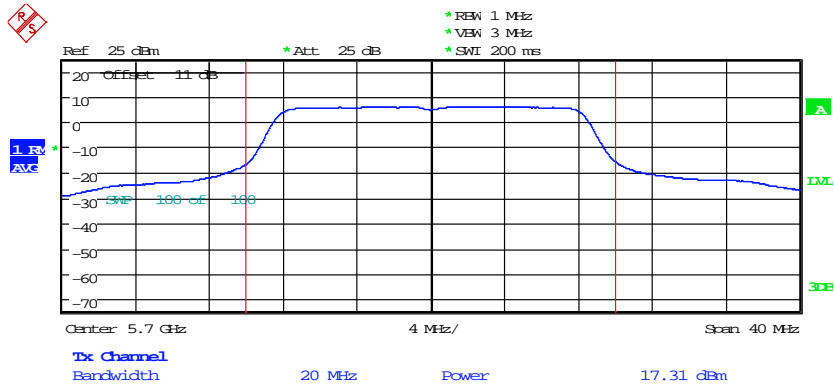


MAXIMUM CONDUCTED POWER ANT1_11aCH140
Date: 20.MAR.2020 15:35:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

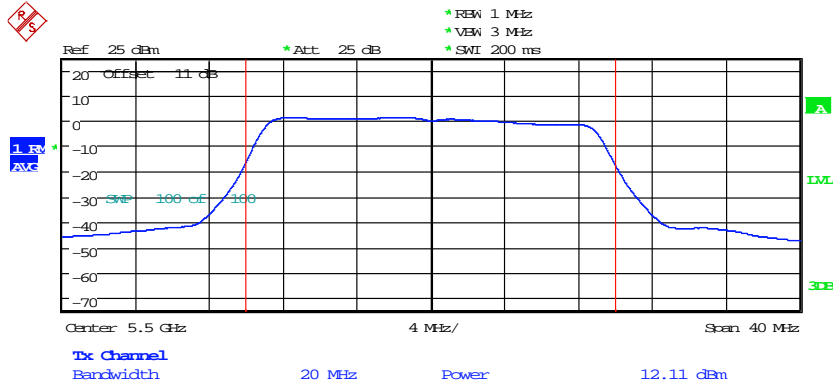


MAXIMUM CONDUCTED POWER ANT1_11n20CH100
Date: 30.APR.2020 14:34:08

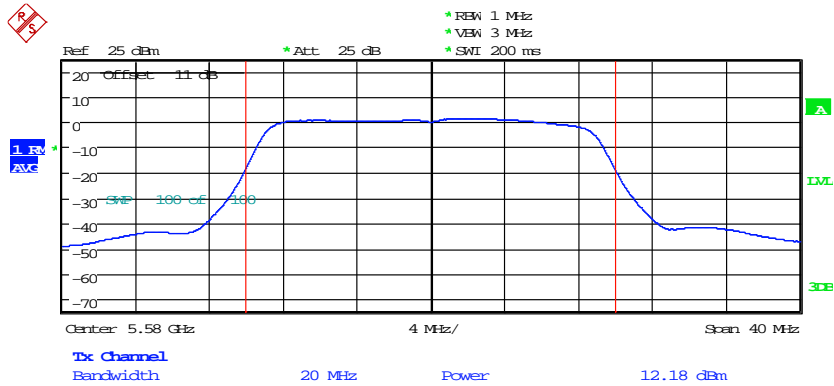


MAXIMUM CONDUCTED POWER ANT1_11n20CH116
Date: 30.APR.2020 14:35:33



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

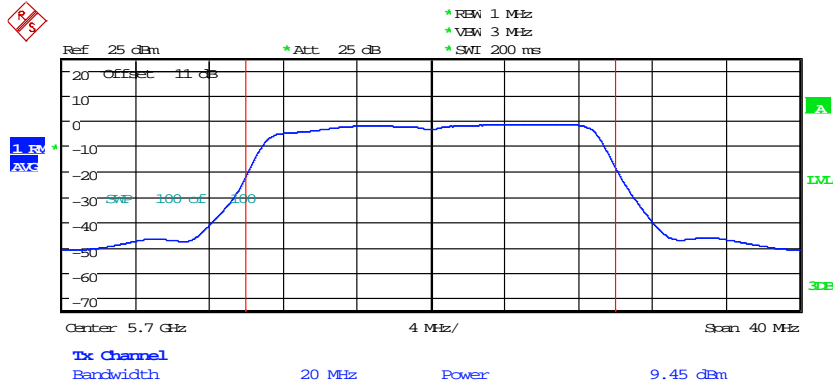


MAXIMUM CONDUCTED POWER ANT1_11n20CH140
 Date: 30.APR.2020 15:57:03

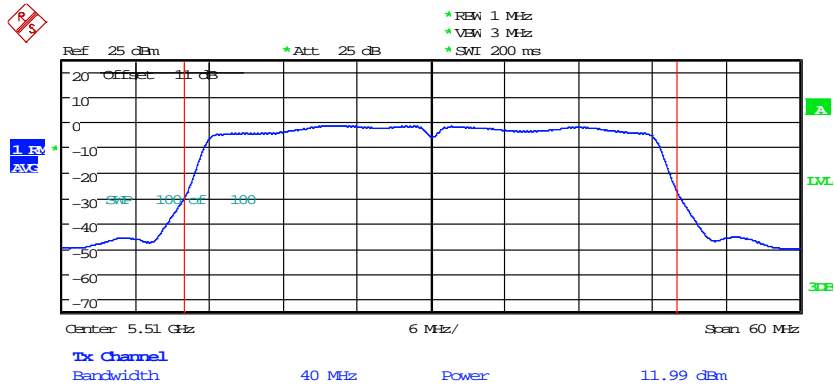


MAXIMUM CONDUCTED POWER ANT1_11n40CH102
 Date: 30.APR.2020 17:05:25



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

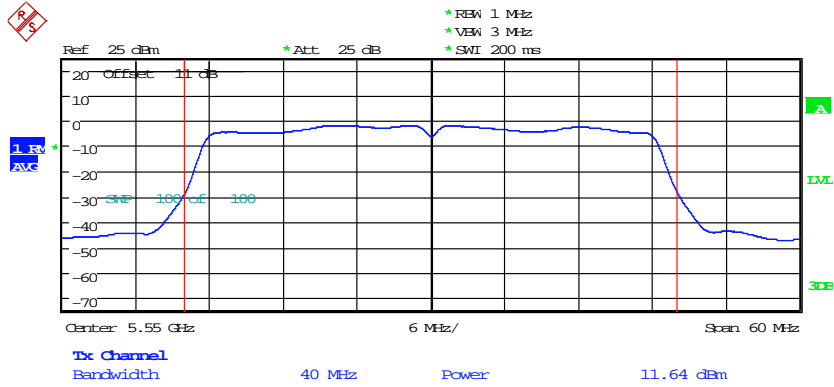


MAXIMUM CONDUCTED POWER ANT1_11n40CH10
Date: 30.APR.2020 17:16:01

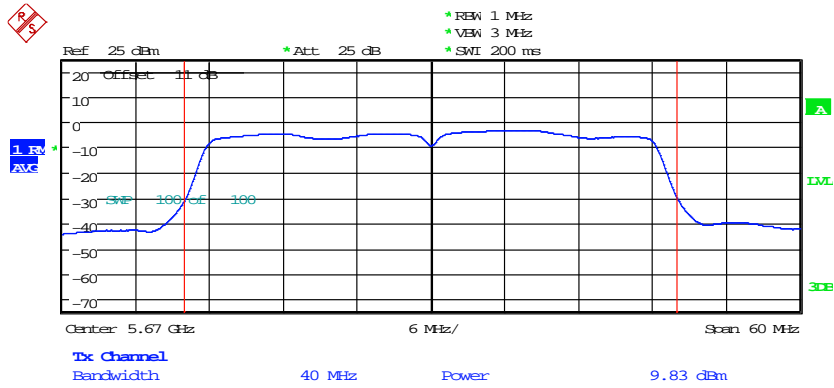

MAXIMUM CONDUCTED POWER ANT1_11n40CH134
Date: 30.APR.2020 16:18:42




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

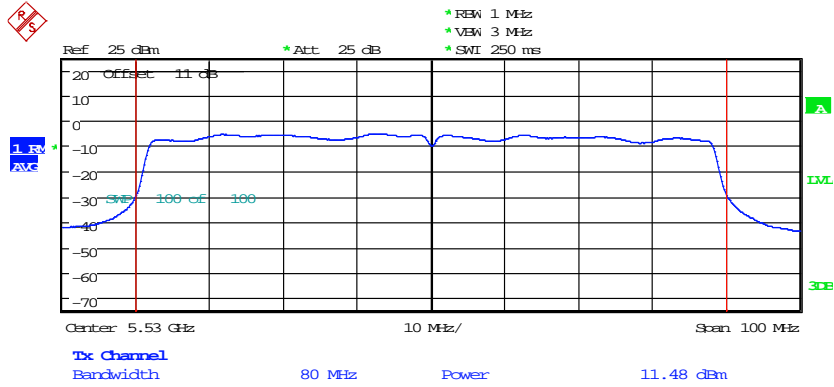

MAXIMUM CONDUCTED POWER ANT1_11ac80CH106
Date: 30.APR.2020 17:41:52


5.725 GHz ~ 5.85 GHz

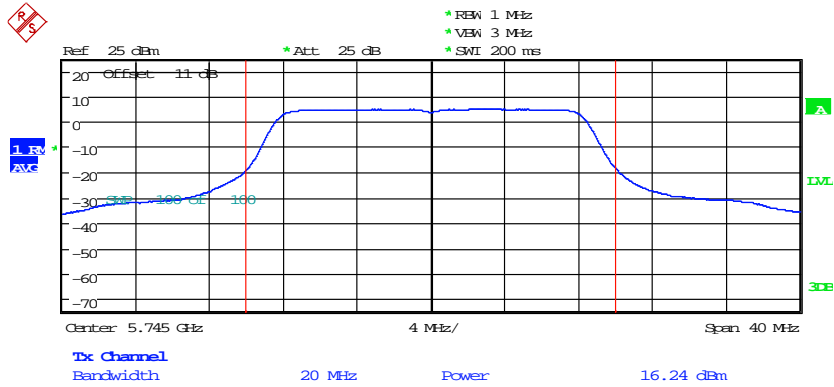


MAXIMUM CONDUCTED POWER ANT1_11acH149
Date: 20.MAR.2020 17:32:25



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

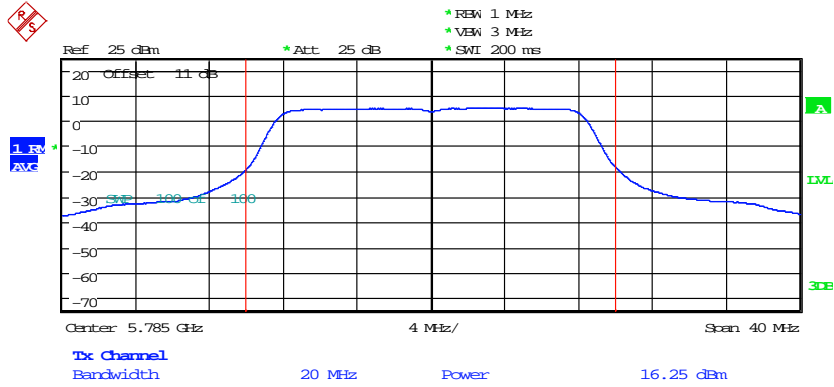


MAXIMUM CONDUCTED POWER ANT1_11aCH157
Date: 20.MAR.2020 17:33:15

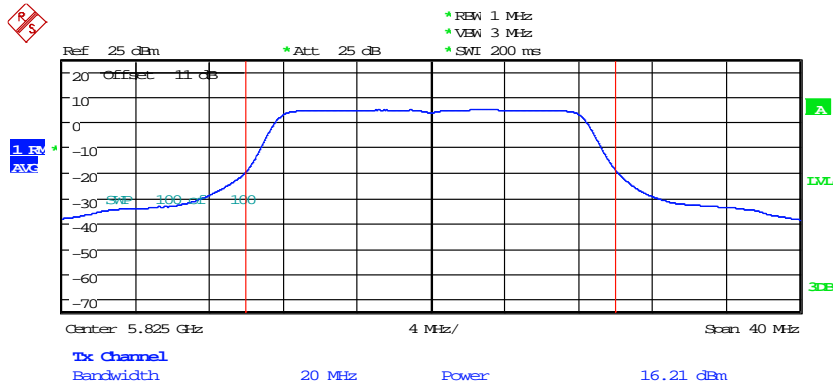


MAXIMUM CONDUCTED POWER ANT1_11aCH165
Date: 20.MAR.2020 17:34:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

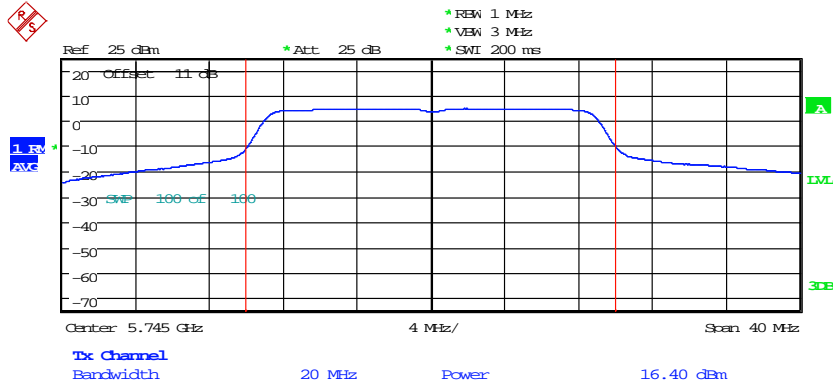


MAXIMUM CONDUCTED POWER ANT1_11n20CH149
Date: 20.MAR.2020 17:36:15

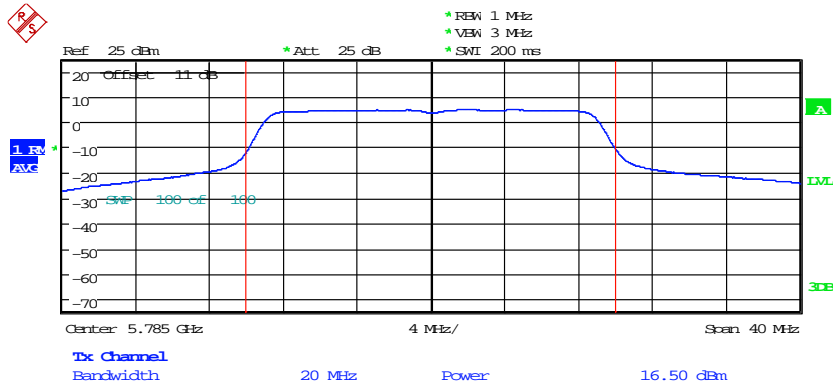


MAXIMUM CONDUCTED POWER ANT1_11n20CH157
Date: 20.MAR.2020 17:37:15




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

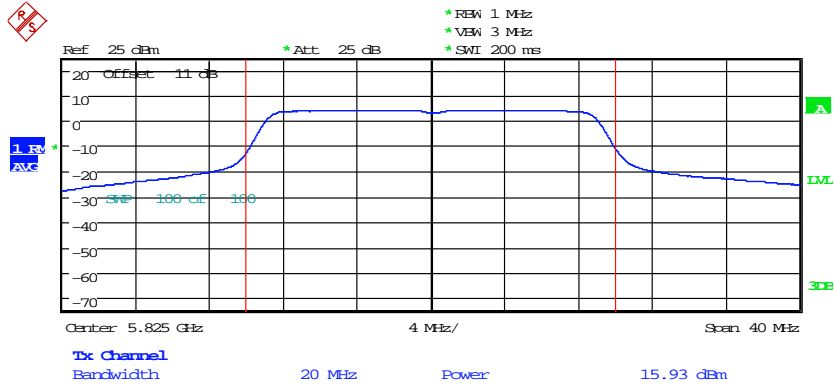


MAXIMUM CONDUCTED POWER ANT1_11n20CH165
Date: 20.MAR.2020 17:38:15

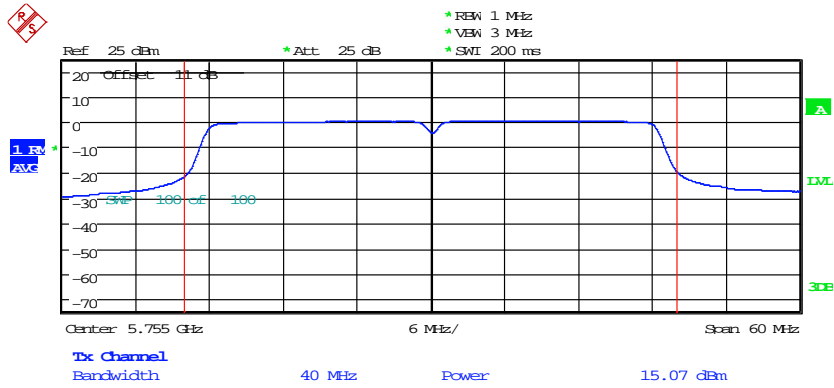


MAXIMUM CONDUCTED POWER ANT1_11n40CH151
Date: 20.MAR.2020 17:41:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

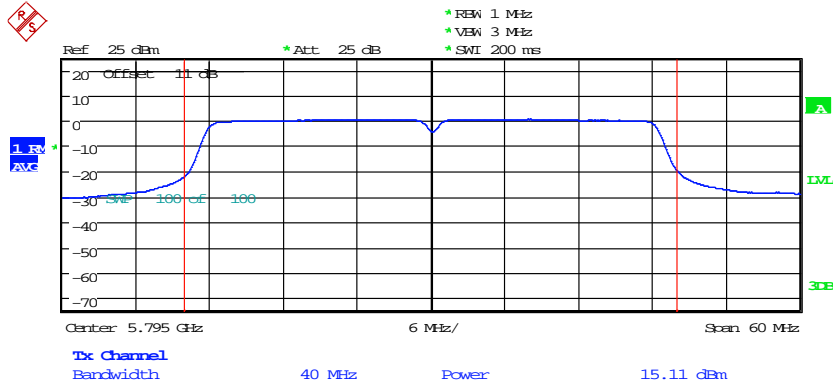

MAXIMUM CONDUCTED POWER ANT1_11n40CH159
Date: 20.MAR.2020 17:42:25

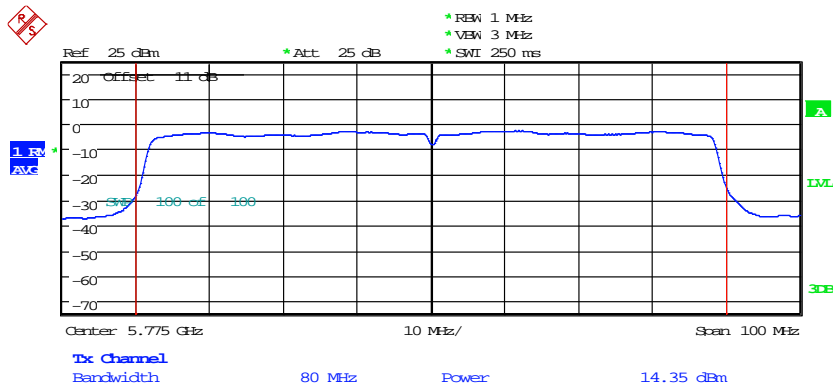

MAXIMUM CONDUCTED POWER ANT1_11ac80CH155
Date: 20.MAR.2020 17:44:11




Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS


ANT2

5.15 GHz ~ 5.25 GHz

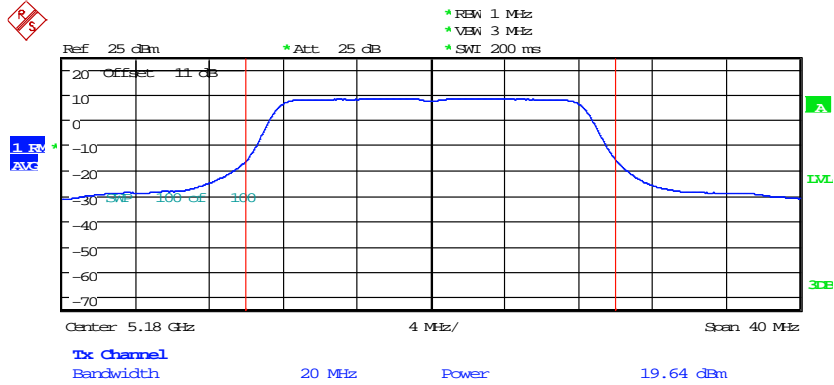

MAXIMUM CONDUCTED POWER ANT2_11aCH36

Date: 17.MAR.2020 16:36:16

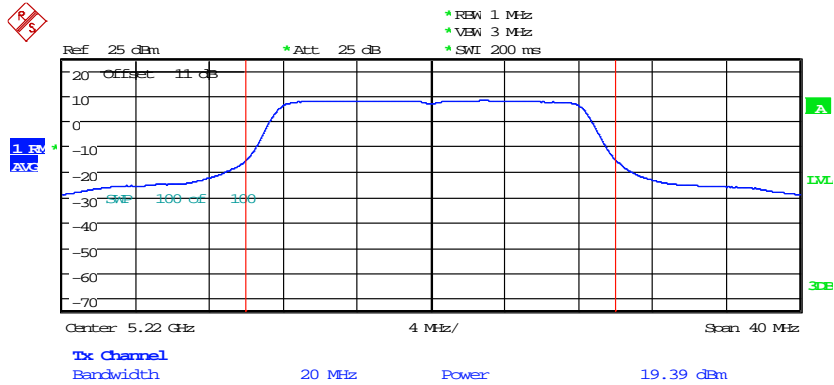


MAXIMUM CONDUCTED POWER ANT2_11aCH44


Date: 17.MAR.2020 16:37:46



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

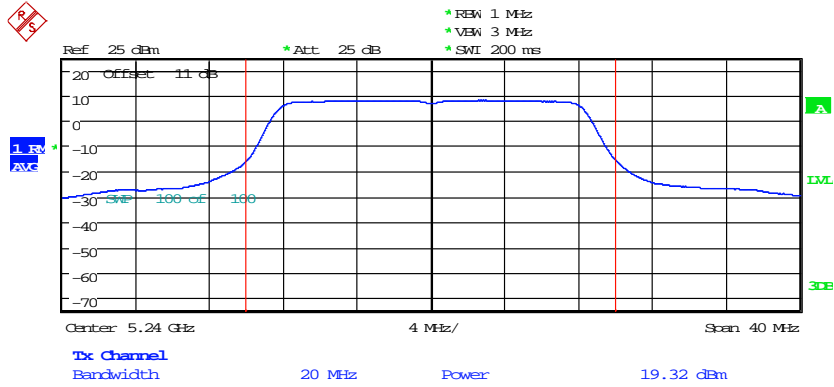


MAXIMUM CONDUCTED POWER ANT2_11aCH48
Date: 17.MAR.2020 16:39:06

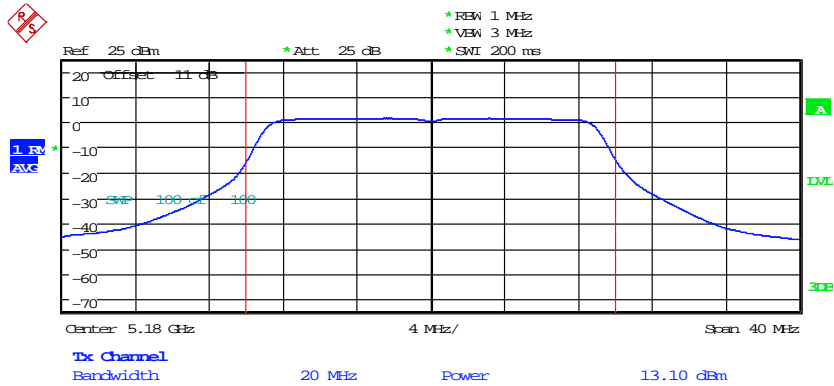


MAXIMUM CONDUCTED POWER ANT2_11n20CH36
Date: 17.MAR.2020 16:40:46



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

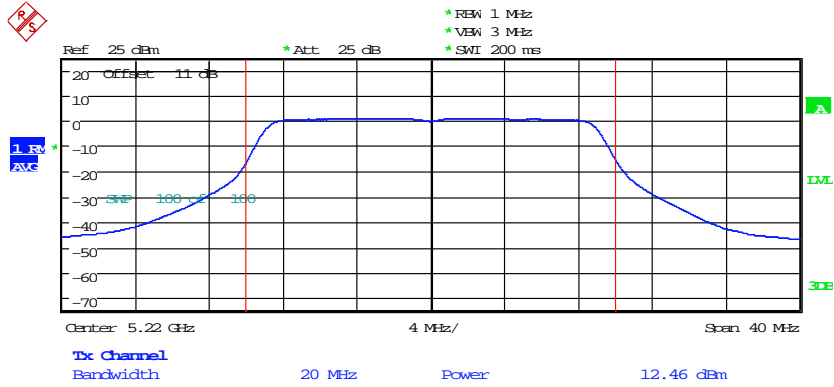


MAXIMUM CONDUCTED POWER ANT2_11n20CH44
Date: 17.MAR.2020 16:41:56

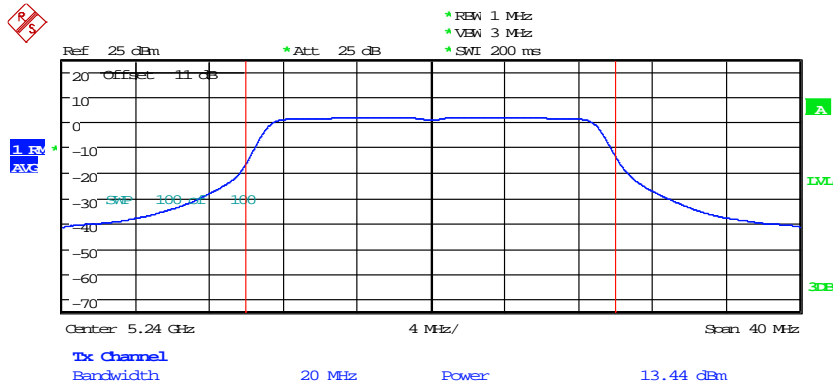


MAXIMUM CONDUCTED POWER ANT2_11n20CH48
Date: 20.MAR.2020 20:28:16



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

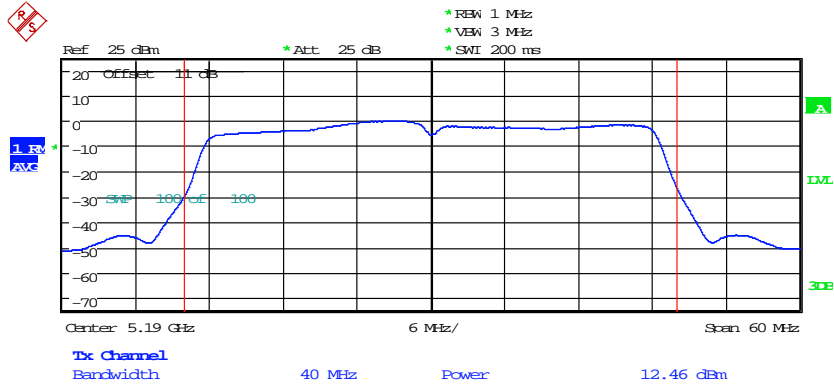


MAXIMUM CONDUCTED POWER ANT2_11n40CH38
 Date: 30.APR.2020 16:46:23

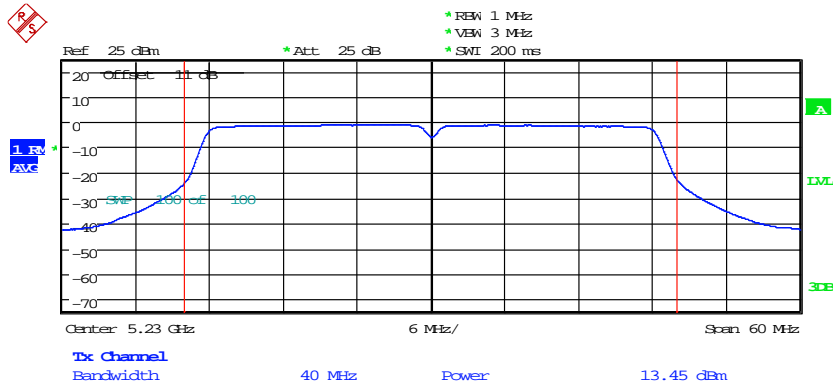

MAXIMUM CONDUCTED POWER ANT2_11n40CH46
 Date: 17.MAR.2020 16:45:16




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

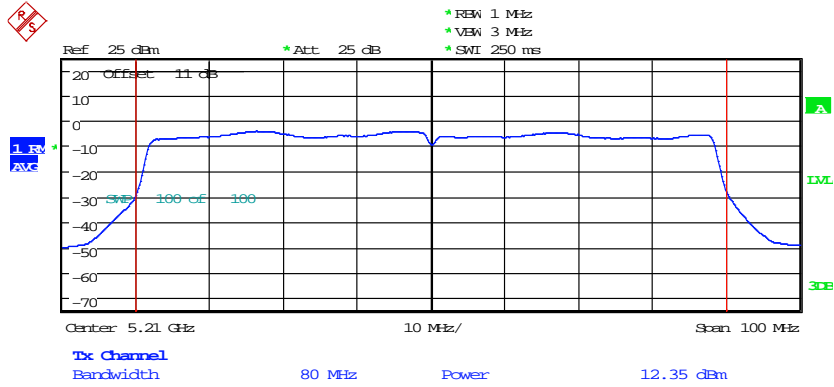

MAXIMUM CONDUCTED POWER ANT2_11ac80CH42
Date: 17.MAR.2020 16:46:36


5.25 GHz ~ 5.35 GHz

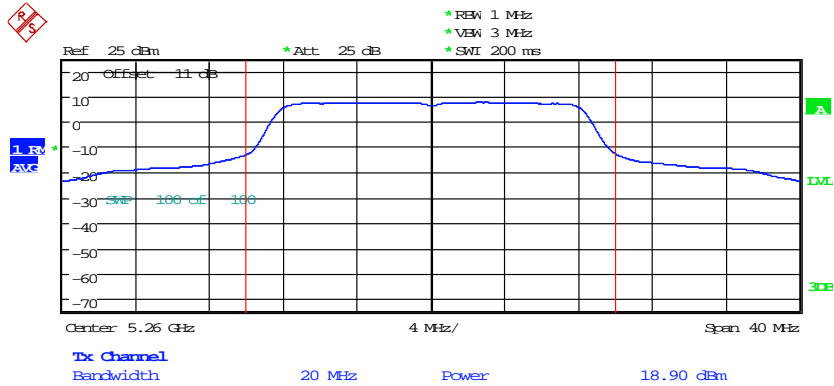


MAXIMUM CONDUCTED POWER ANT2_11acH52
Date: 20.MAR.2020 14:26:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

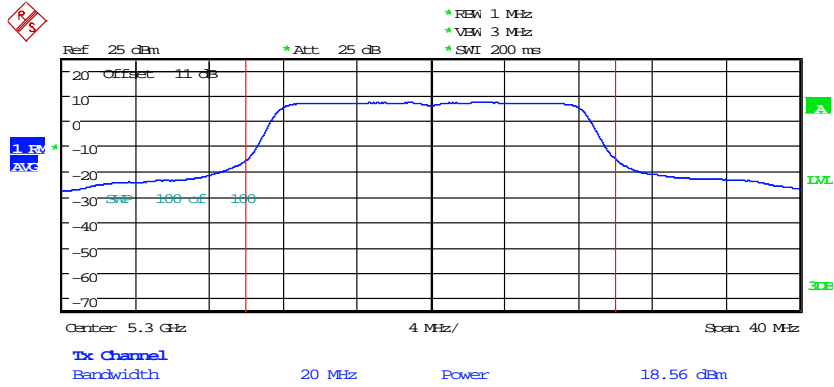


MAXIMUM CONDUCTED POWER ANT2_11aCH60
Date: 20.MAR.2020 14:33:35

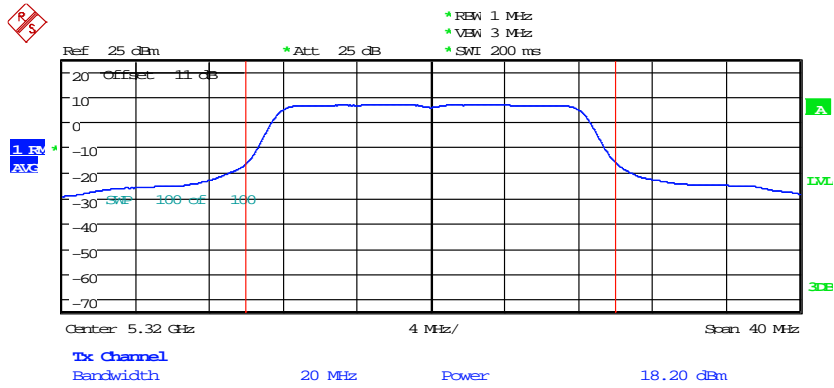


MAXIMUM CONDUCTED POWER ANT2_11aCH64
Date: 20.MAR.2020 14:34:35




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

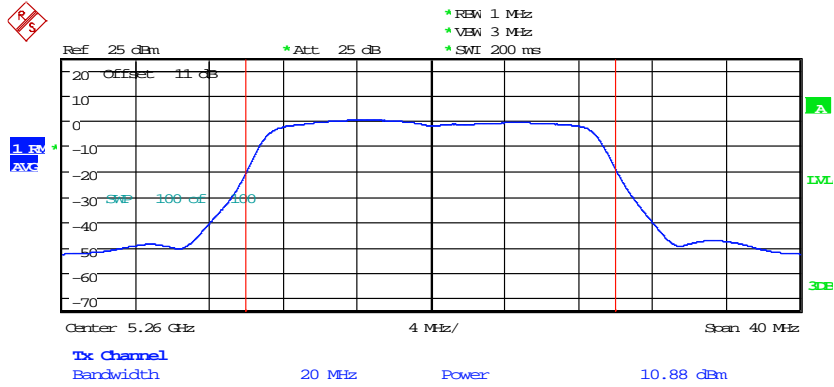


MAXIMUM CONDUCTED POWER ANT2_11n20CH52
Date: 30.APR.2020 15:02:43

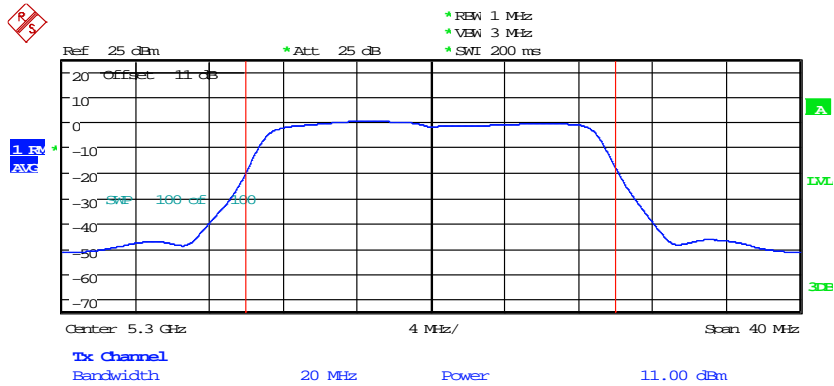


MAXIMUM CONDUCTED POWER ANT2_11n20CH60
Date: 30.APR.2020 14:59:44



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

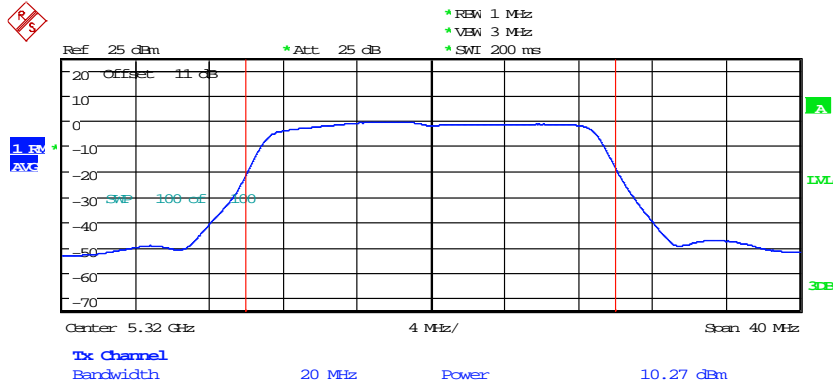


MAXIMUM CONDUCTED POWER ANT2_11n20CH64
Date: 30.APR.2020 14:58:10

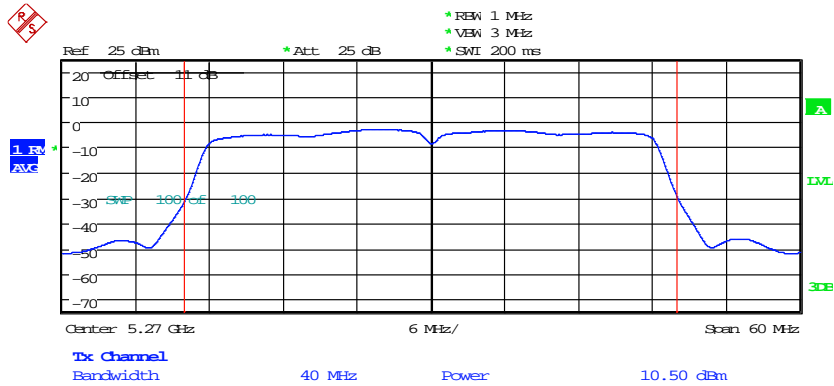


MAXIMUM CONDUCTED POWER ANT2_11n40CH54
Date: 30.APR.2020 16:47:36



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

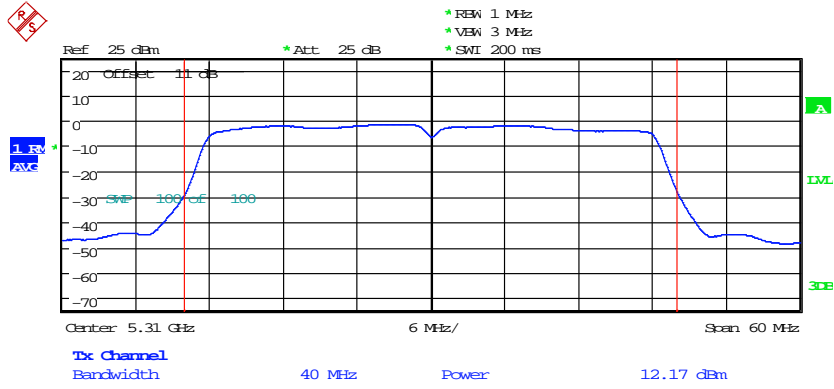

MAXIMUM CONDUCTED POWER ANT2_11n40CH62
Date: 30.APR.2020 16:58:17

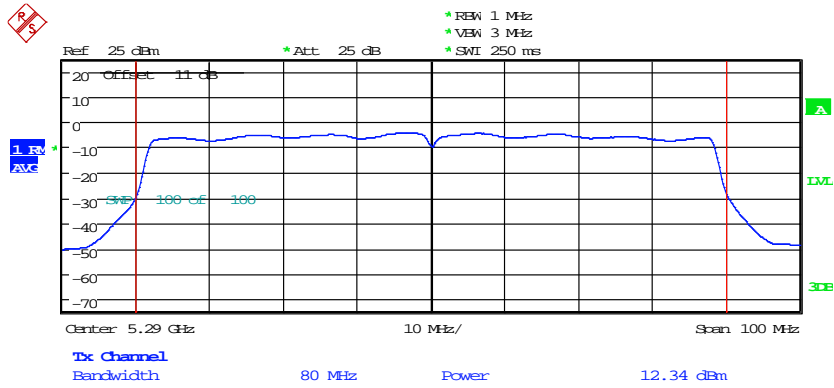


MAXIMUM CONDUCTED POWER ANT2_11ac80CH58
Date: 30.APR.2020 17:36:59




Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.47 GHz ~ 5.725 GHz

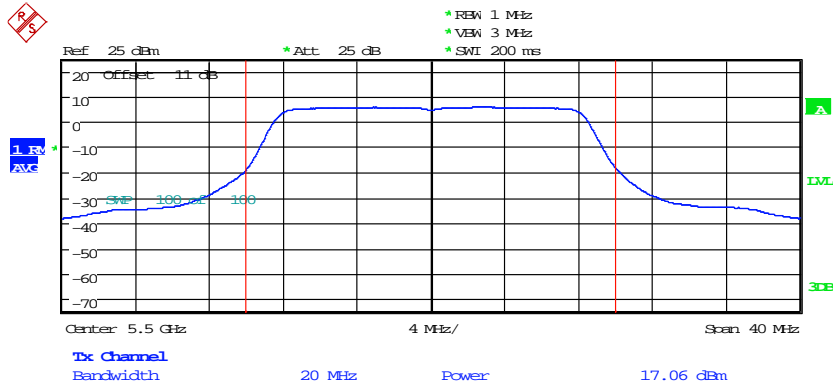


MAXIMUM CONDUCTED POWER ANT2_11aCH100
Date: 20.MAR.2020 15:55:05

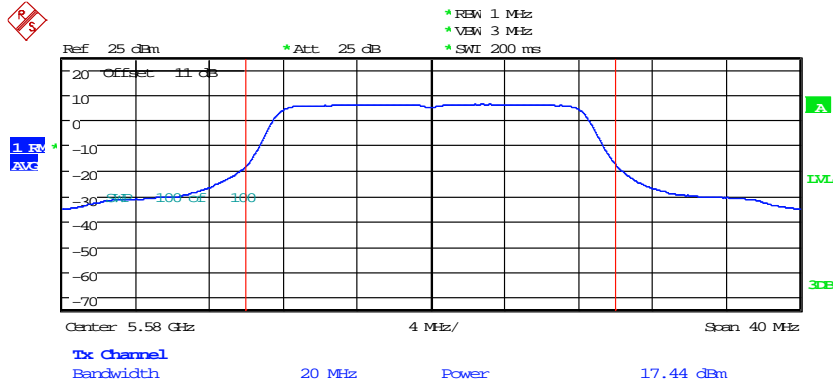


MAXIMUM CONDUCTED POWER ANT2_11aCH116
Date: 20.MAR.2020 15:56:25



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

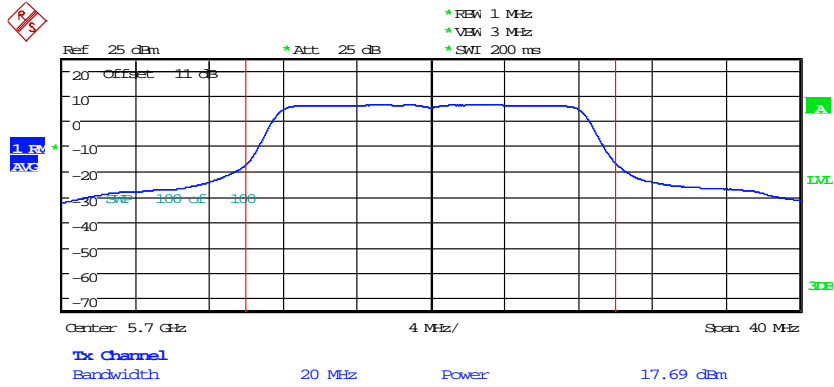


MAXIMUM CONDUCTED POWER ANT2_11aCH140
Date: 20.MAR.2020 15:57:25

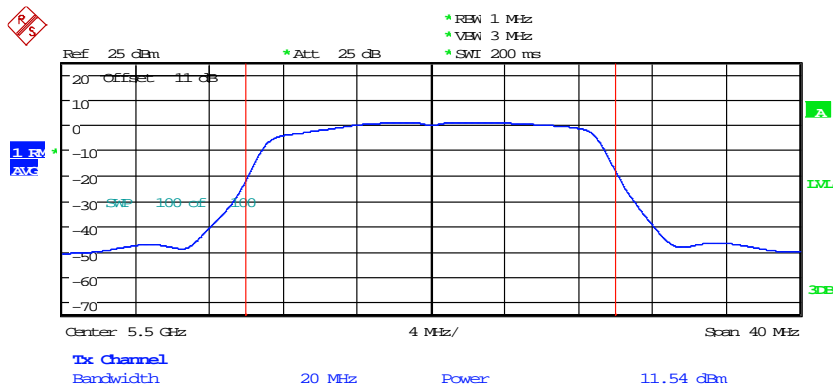


MAXIMUM CONDUCTED POWER ANT2_11n20CH100
Date: 30.APR.2020 14:47:45



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

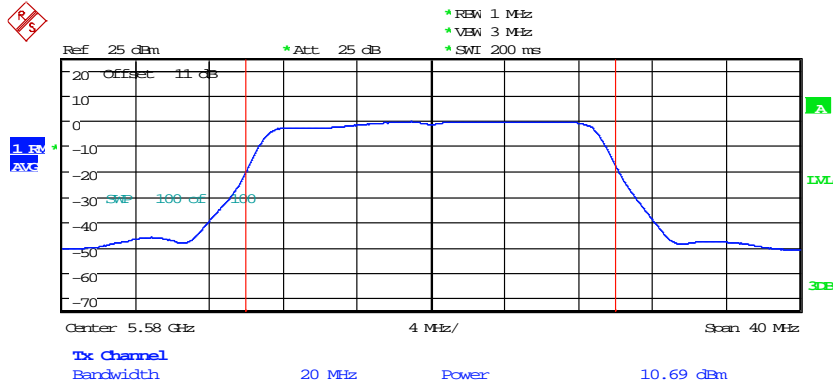


MAXIMUM CONDUCTED POWER ANT2_11n20CH116
Date: 30.APR.2020 14:46:18

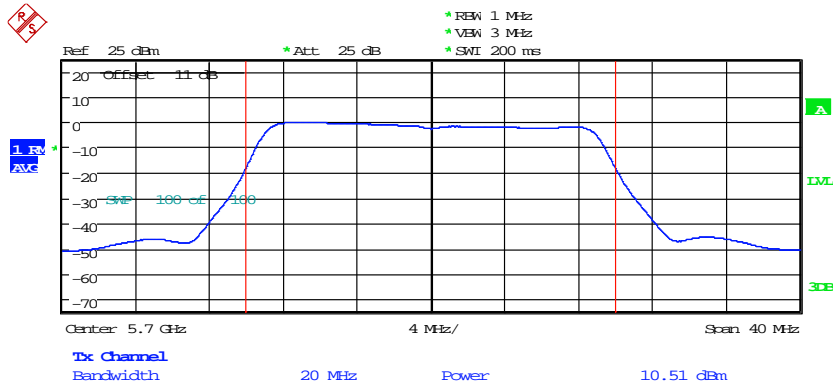


MAXIMUM CONDUCTED POWER ANT2_11n20CH140
Date: 30.APR.2020 14:44:58



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

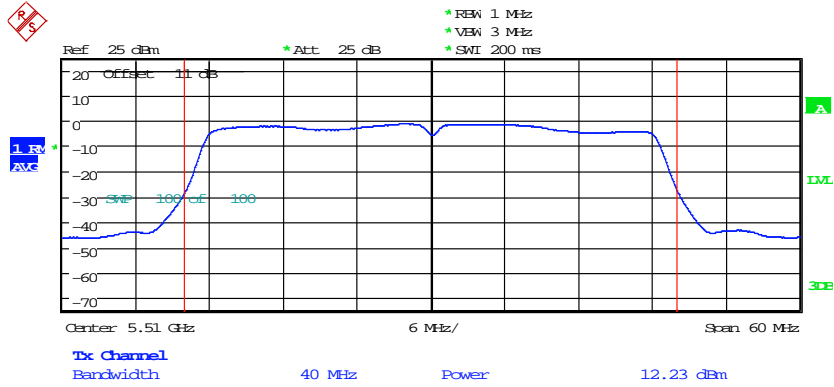


MAXIMUM CONDUCTED POWER ANT2_11n40CH102
Date: 30.APR.2020 17:06:14

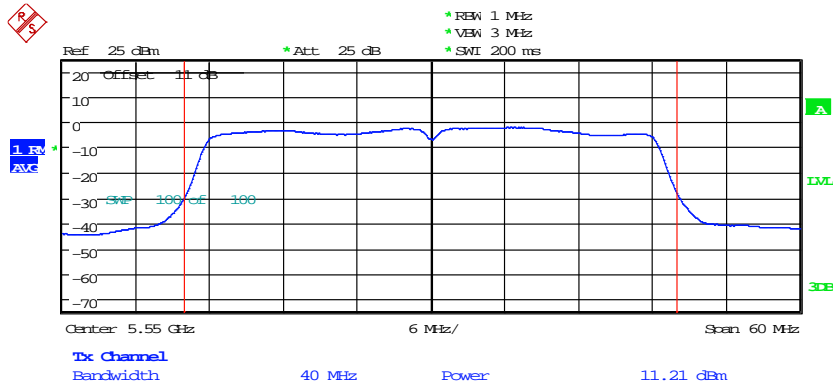


MAXIMUM CONDUCTED POWER ANT2_11n40CH110
Date: 30.APR.2020 17:21:03



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

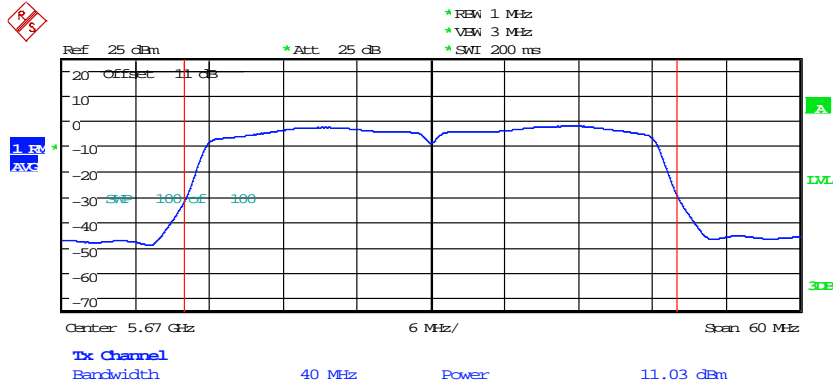

MAXIMUM CONDUCTED POWER ANT2_11n40CH134
Date: 30.APR.2020 16:51:08

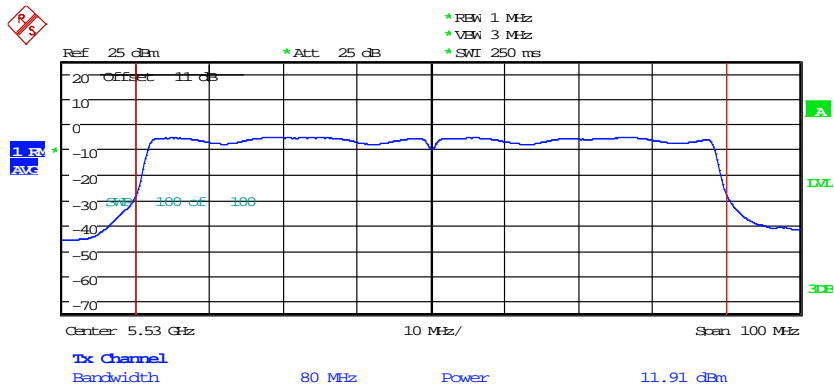


MAXIMUM CONDUCTED POWER ANT2_11ac80CH106
Date: 30.APR.2020 17:42:49



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.725 GHz ~ 5.85 GHz

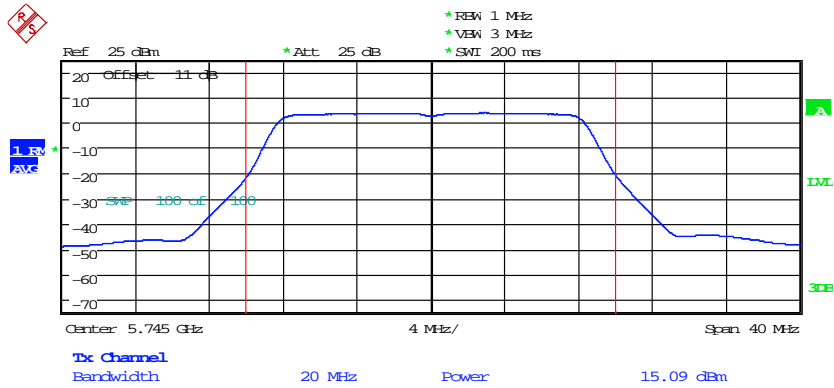

MAXIMUM CONDUCTED POWER ANT2_11aCH149

Date: 20.MAR.2020 17:50:05

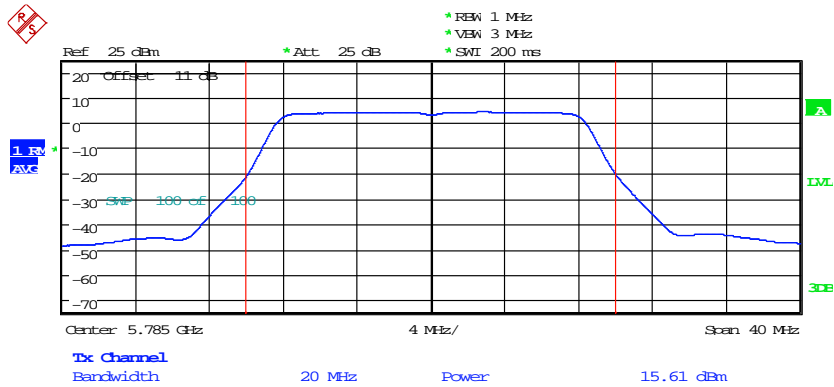


MAXIMUM CONDUCTED POWER ANT2_11aCH157


Date: 20.MAR.2020 17:51:15




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

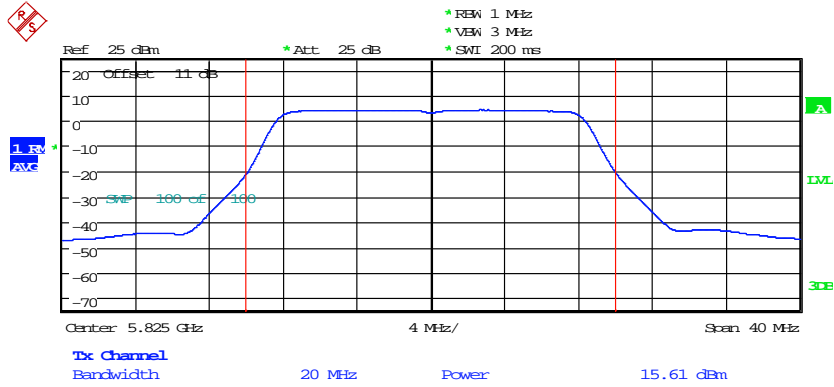


MAXIMUM CONDUCTED POWER ANT2_11aCH165
Date: 20.MAR.2020 17:52:15

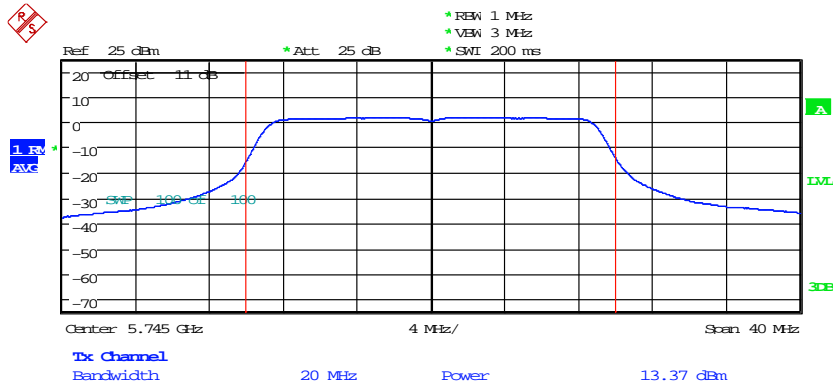


MAXIMUM CONDUCTED POWER ANT2_11n20CH149
Date: 20.MAR.2020 18:05:06



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

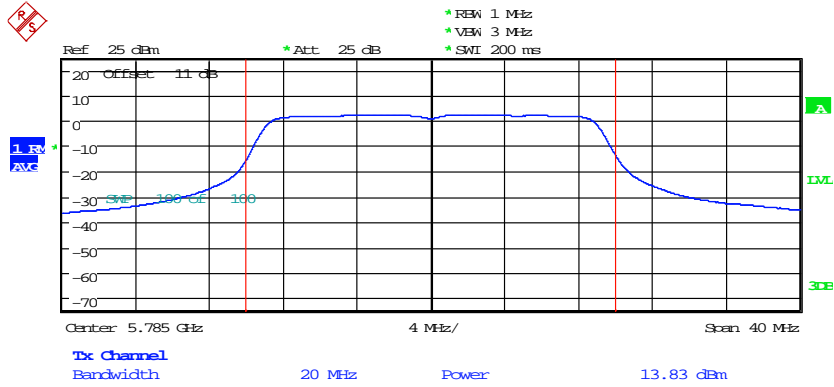


MAXIMUM CONDUCTED POWER ANT2_11n20CH157
Date: 20.MAR.2020 17:55:56

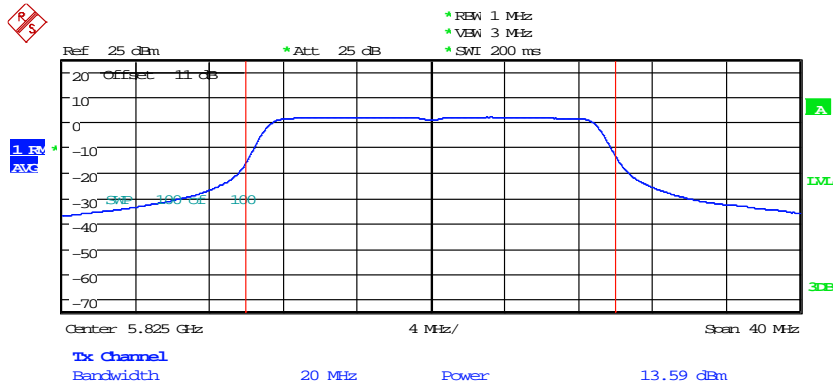


MAXIMUM CONDUCTED POWER ANT2_11n20CH165
Date: 20.MAR.2020 17:57:06



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

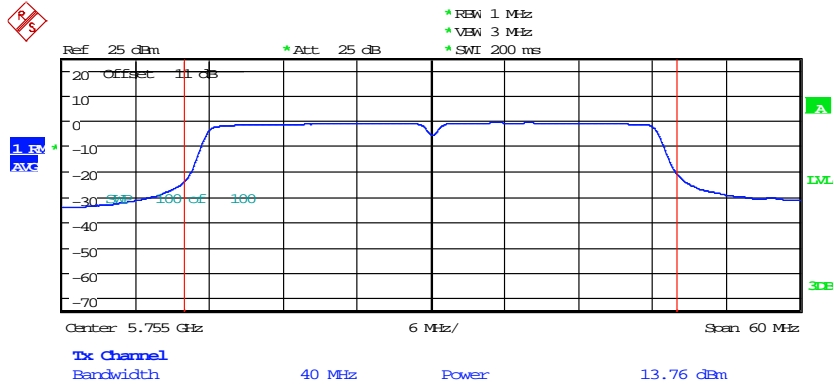


MAXIMUM CONDUCTED POWER ANT2_11n40CH151
Date: 20.MAR.2020 17:58:57

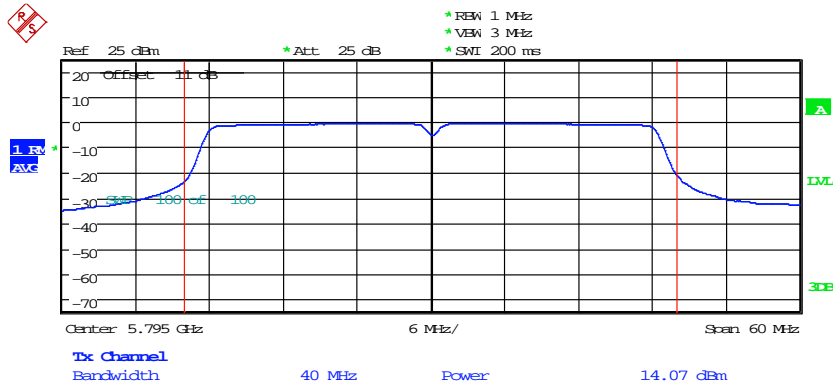

MAXIMUM CONDUCTED POWER ANT2_11n40CH159
Date: 20.MAR.2020 17:59:56




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

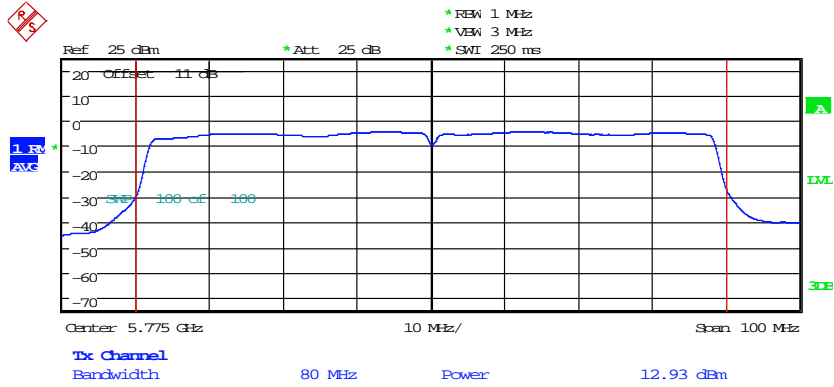

MAXIMUM CONDUCTED POWER ANT2_11ac80CH155
Date: 20.MAR.2020 18:02:13


ANT3 5.15 GHz ~ 5.25 GHz

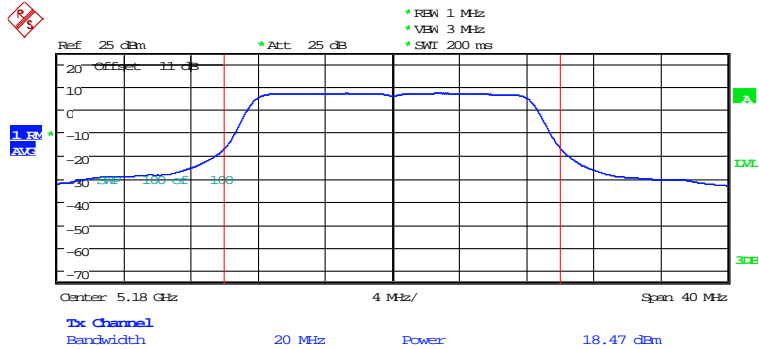


MAXIMUM CONDUCTED POWER ANT3_11acCH36
Date: 17.MAR.2020 16:54:06



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

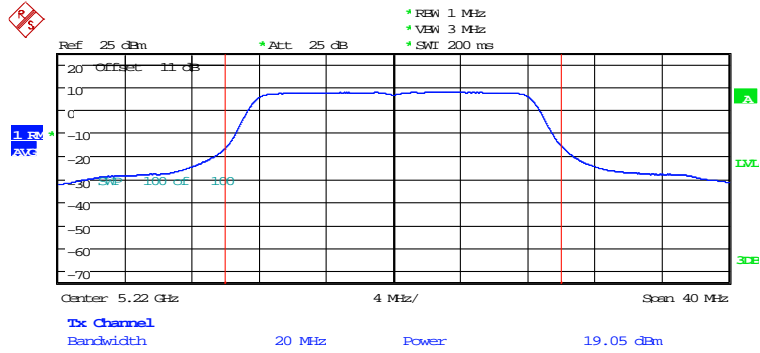


MAXIMUM CONDUCTED POWER ANT3_11aCH44
Date: 17.MAR.2020 16:55:06

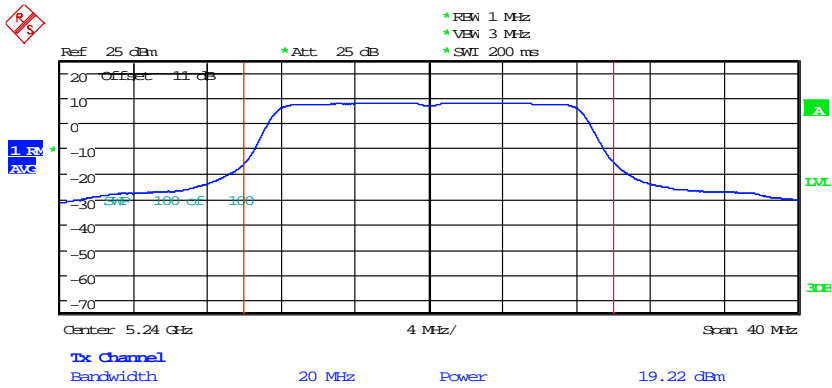


MAXIMUM CONDUCTED POWER ANT3_11aCH48
Date: 17.MAR.2020 16:56:06



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

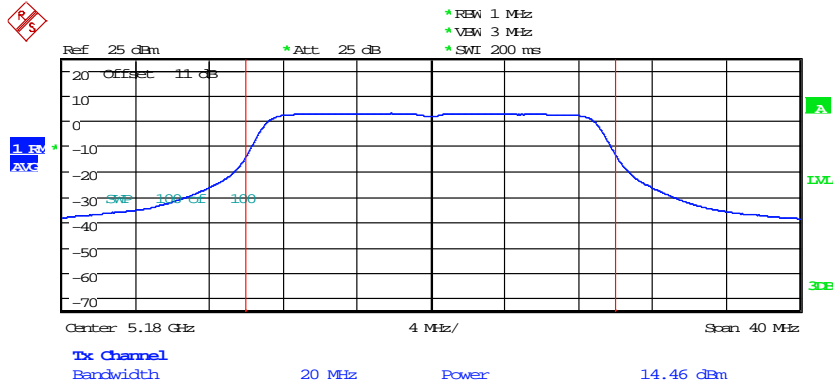


MAXIMUM CONDUCTED POWER ANT3_11n20CH36
Date: 17.MAR.2020 16:57:36

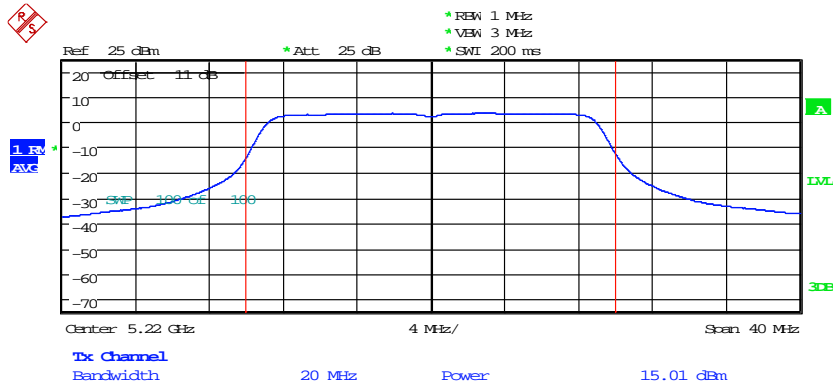


MAXIMUM CONDUCTED POWER ANT3_11n20CH44
Date: 17.MAR.2020 16:58:36



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

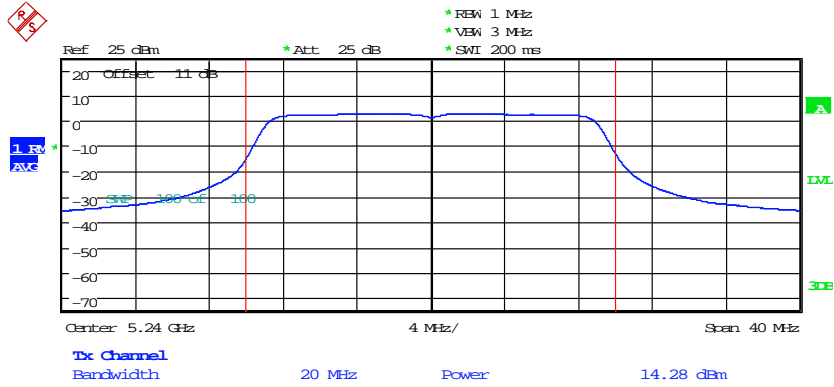


MAXIMUM CONDUCTED POWER ANT3_11n20CH48
Date: 20.MAR.2020 20:27:06

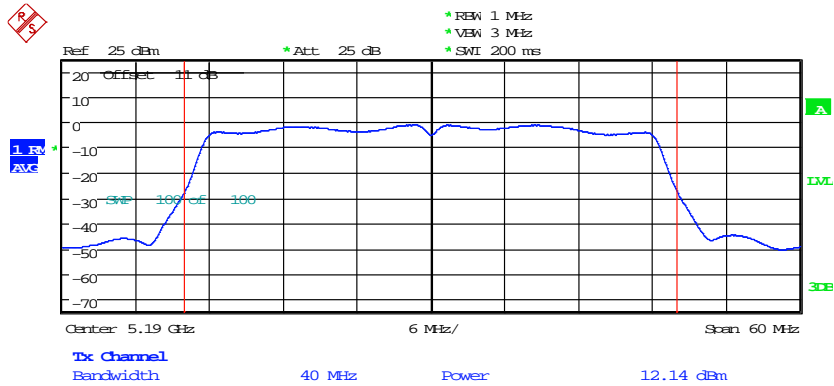


MAXIMUM CONDUCTED POWER ANT3_11n40CH38
Date: 30.APR.2020 16:30:54




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

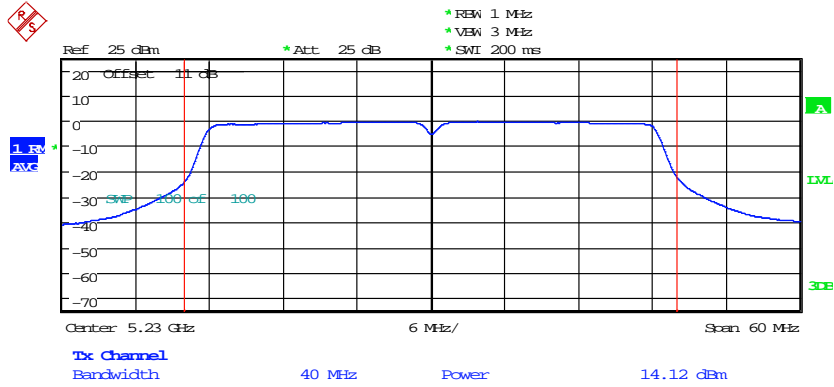

MAXIMUM CONDUCTED POWER ANT3_11n40CH46
Date: 17.MAR.2020 17:01:26

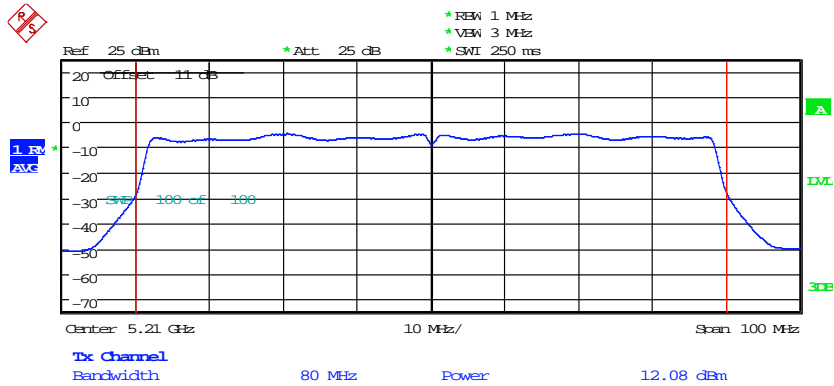


MAXIMUM CONDUCTED POWER ANT3_11ac80CH42
Date: 17.MAR.2020 17:04:26



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.25 GHz ~ 5.35 GHz

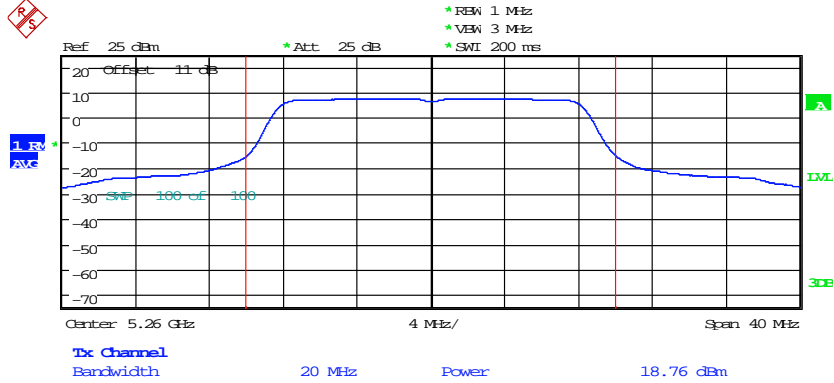

MAXIMUM CONDUCTED POWER ANT3_11aCH52

Date: 20.MAR.2020 14:59:55

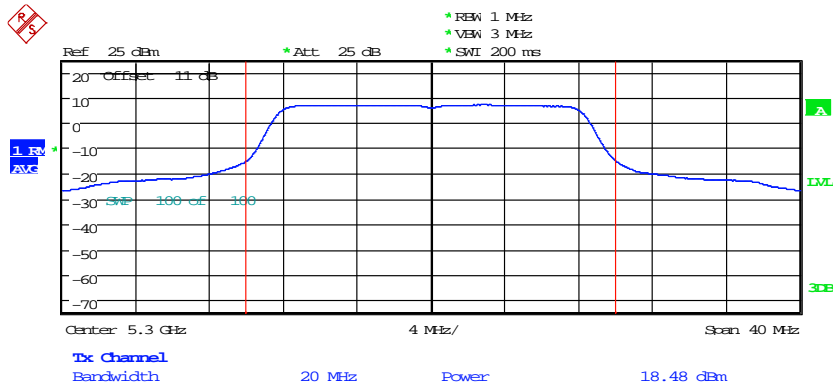


MAXIMUM CONDUCTED POWER ANT3_11aCH60


Date: 20.MAR.2020 15:01:16



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

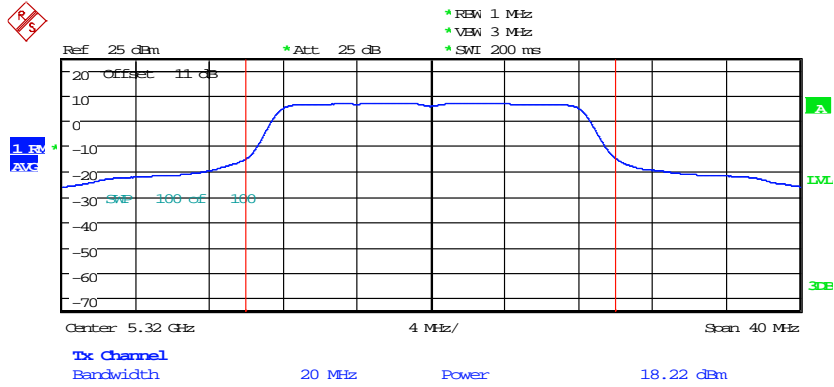


MAXIMUM CONDUCTED POWER ANT3_11aCH64
Date: 20.MAR.2020 15:02:05

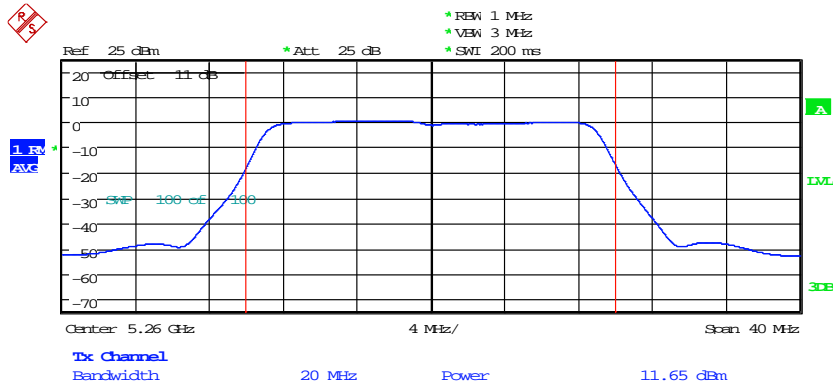


MAXIMUM CONDUCTED POWER ANT3_11n20CH52
Date: 30.APR.2020 15:31:33



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

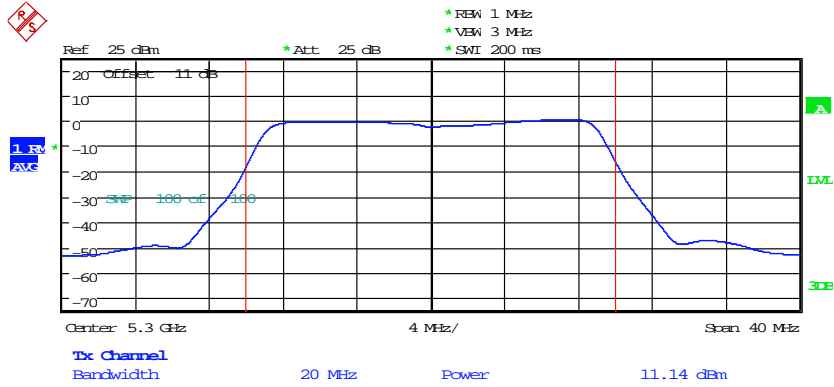


MAXIMUM CONDUCTED POWER ANT3_11n20CH60
Date: 30.APR.2020 15:30:18

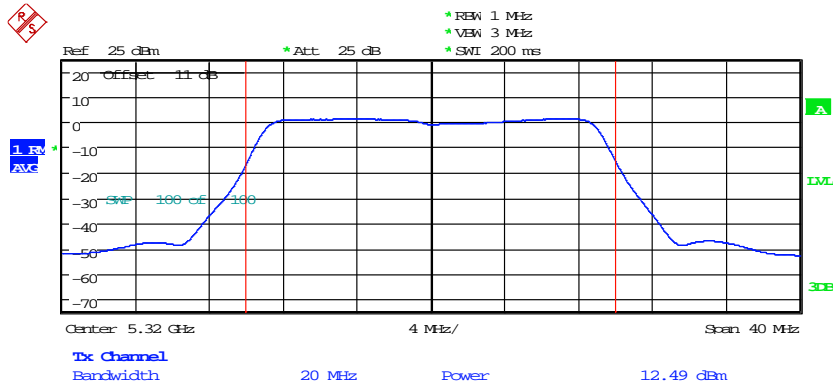


MAXIMUM CONDUCTED POWER ANT3_11n20CH64
Date: 30.APR.2020 15:28:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

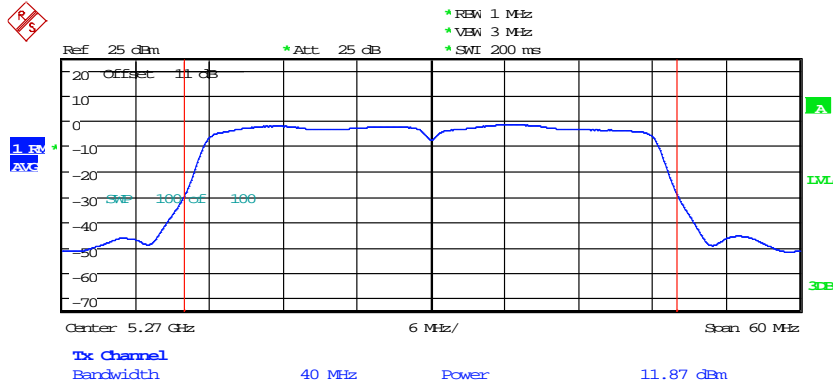


MAXIMUM CONDUCTED POWER ANT3_11n40CH54
Date: 30.APR.2020 16:32:54

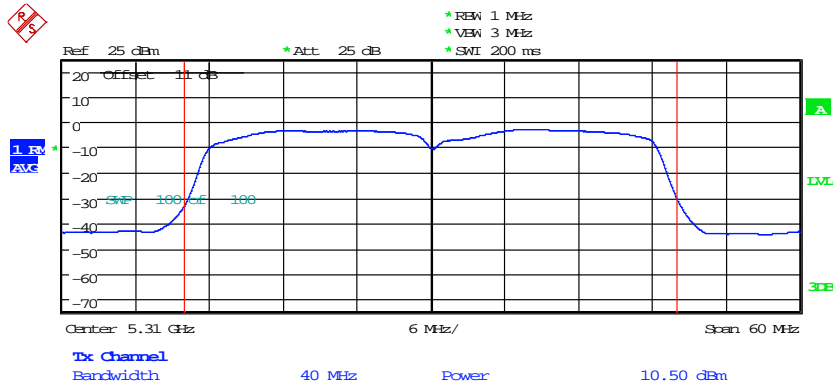

MAXIMUM CONDUCTED POWER ANT3_11n40CH62
Date: 30.APR.2020 16:59:08




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

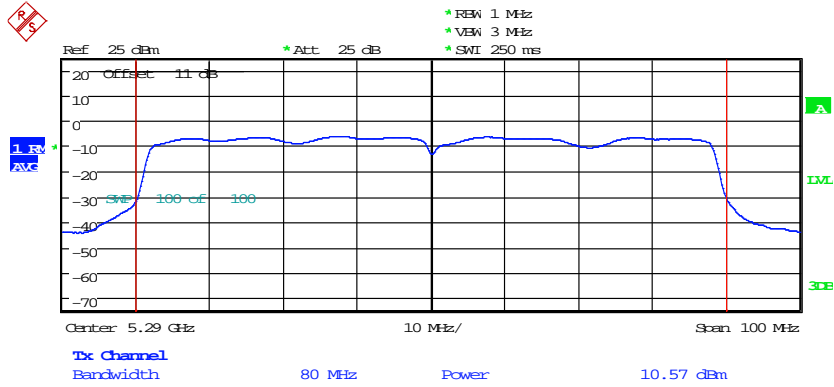

MAXIMUM CONDUCTED POWER ANT3_11ac80CH58
 Date: 30.APR.2020 17:35:14


5.47 GHz ~ 5.725 GHz

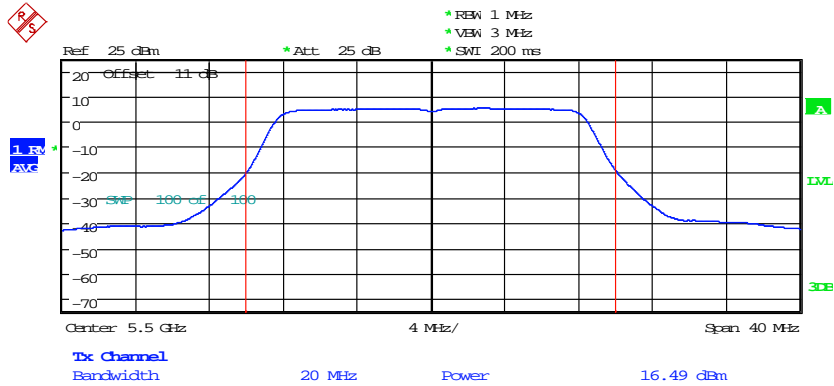


MAXIMUM CONDUCTED POWER ANT3_11acH100
 Date: 20.MAR.2020 16:39:45



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

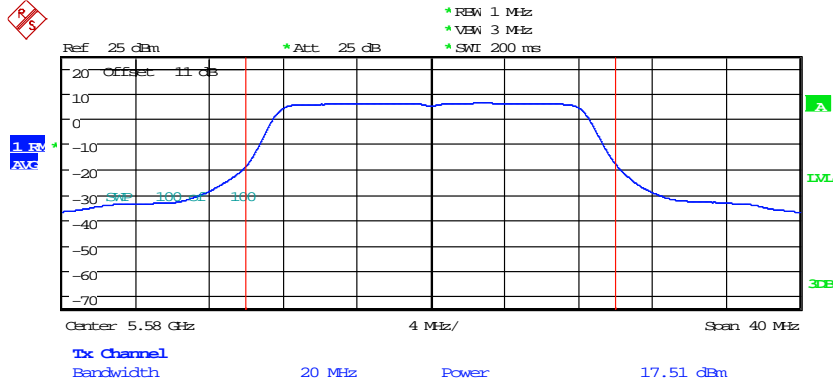


MAXIMUM CONDUCTED POWER ANT3_11aCH116
Date: 20.MAR.2020 16:41:05

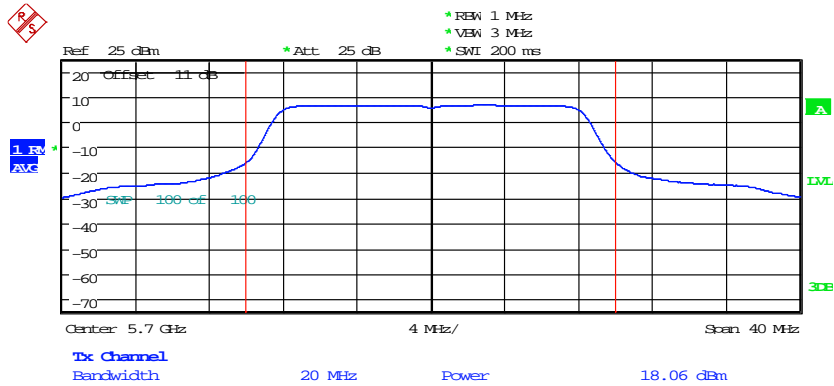


MAXIMUM CONDUCTED POWER ANT3_11aCH140
Date: 20.MAR.2020 16:42:05



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

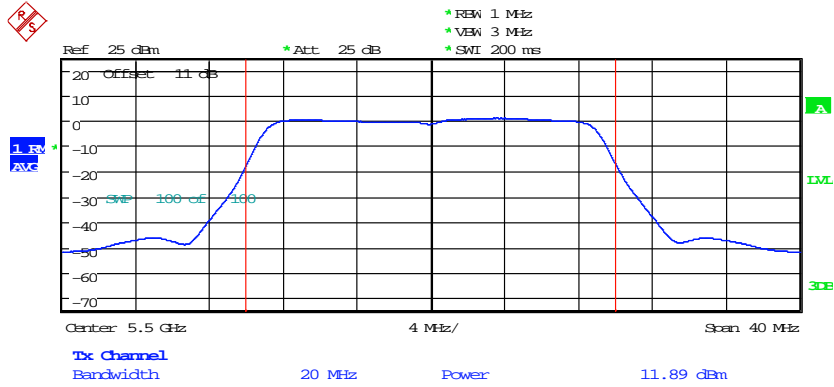


MAXIMUM CONDUCTED POWER ANT3_11n20CH100
Date: 30.APR.2020 15:27:14

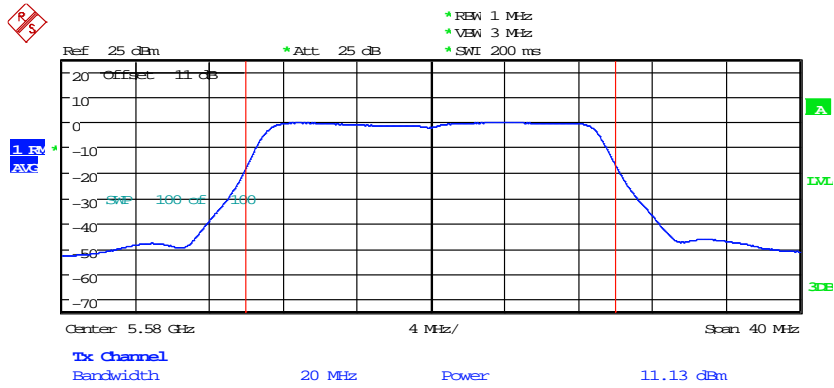


MAXIMUM CONDUCTED POWER ANT3_11n20CH116
Date: 30.APR.2020 15:24:43




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

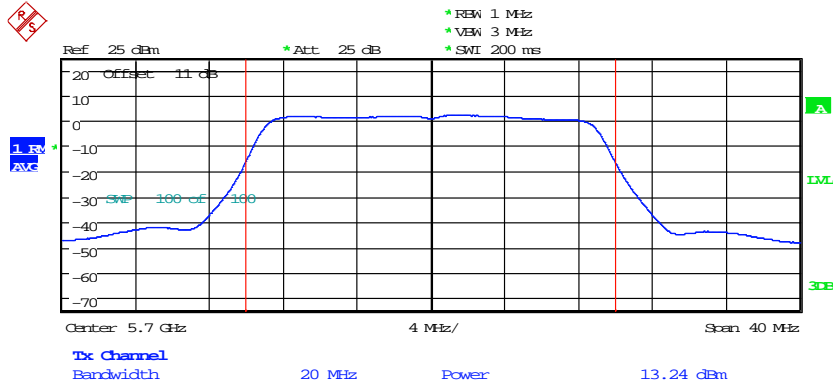


MAXIMUM CONDUCTED POWER ANT3_11n20CH140
Date: 30.APR.2020 15:23:10

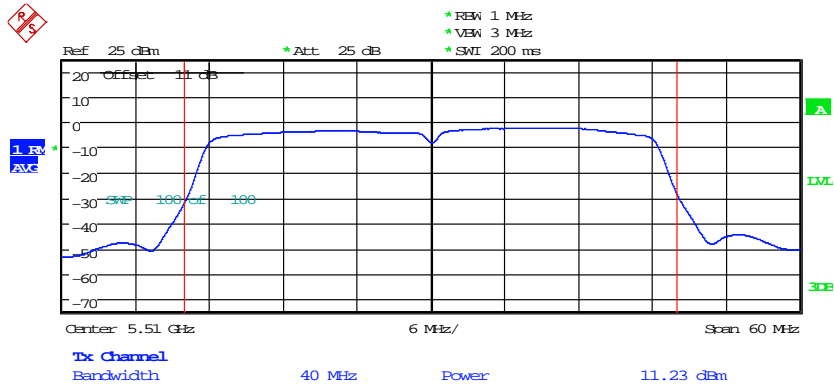


MAXIMUM CONDUCTED POWER ANT3_11n40CH102
Date: 30.APR.2020 17:06:55



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

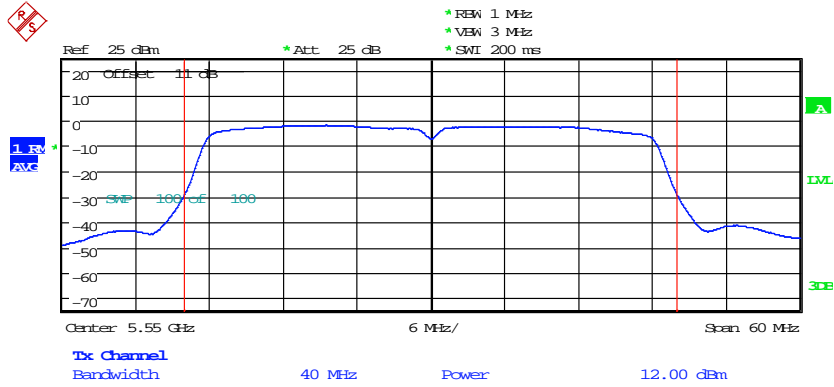


MAXIMUM CONDUCTED POWER ANT3_11n40CH10
Date: 30.APR.2020 17:17:17

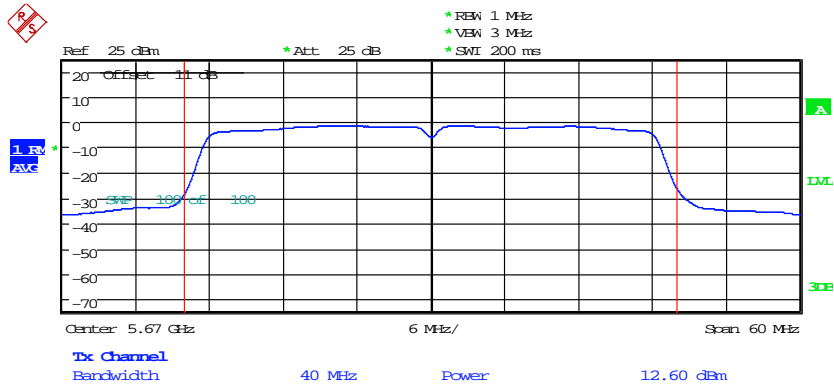

MAXIMUM CONDUCTED POWER ANT3_11n40CH134
Date: 30.APR.2020 16:51:50




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

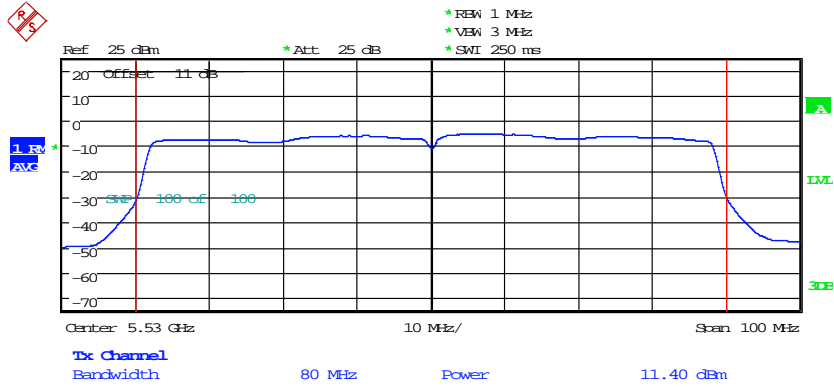

MAXIMUM CONDUCTED POWER ANT3_11ac80CH106
Date: 30.APR.2020 17:44:35


5.725 GHz ~ 5.85 GHz

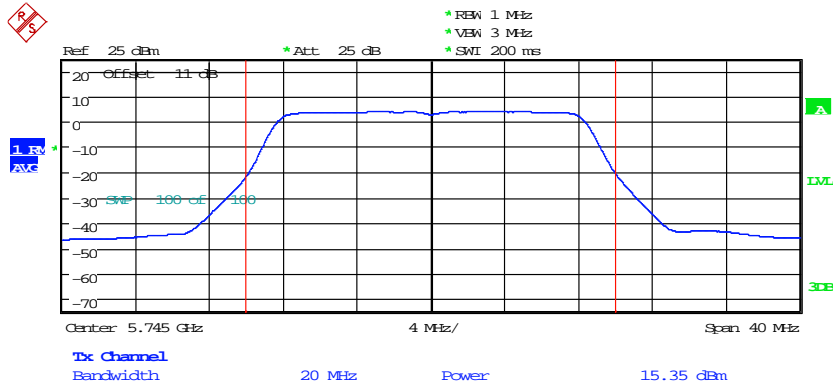


MAXIMUM CONDUCTED POWER ANT3_11acH149
Date: 20.MAR.2020 19:40:46



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

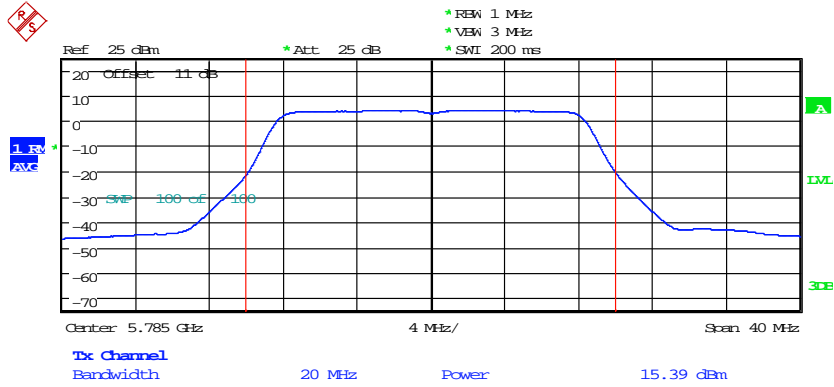


MAXIMUM CONDUCTED POWER ANT3_11aCH157
Date: 20.MAR.2020 19:41:36

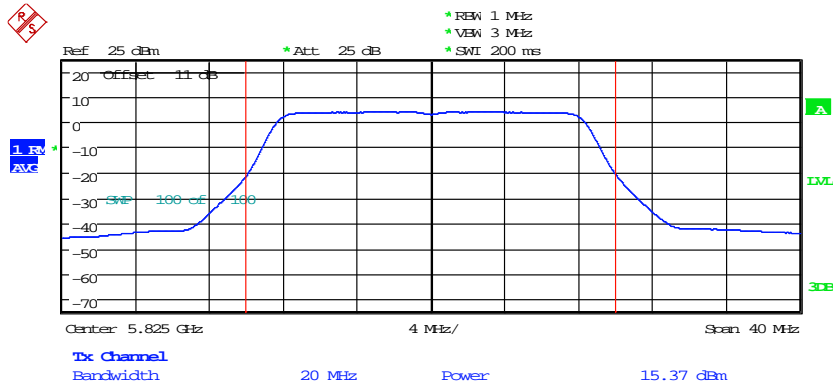


MAXIMUM CONDUCTED POWER ANT3_11aCH165
Date: 20.MAR.2020 19:43:05



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

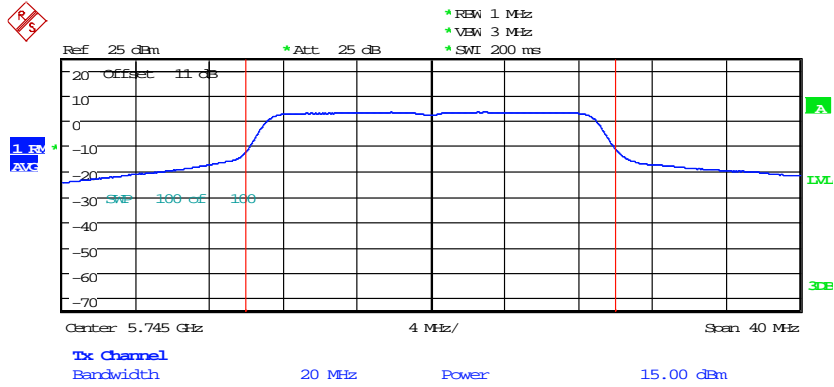


MAXIMUM CONDUCTED POWER ANT3_11n20CH149
Date: 20.MAR.2020 19:44:16

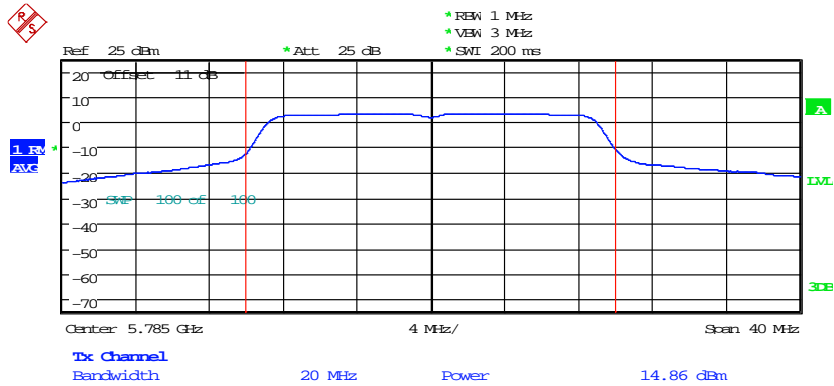


MAXIMUM CONDUCTED POWER ANT3_11n20CH157
Date: 20.MAR.2020 19:45:46



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

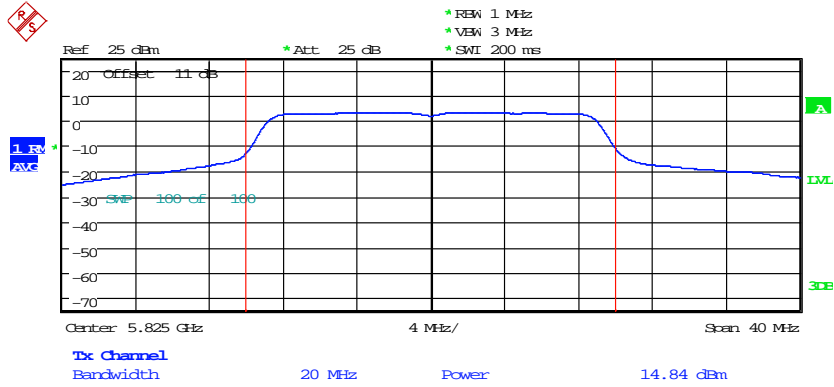


MAXIMUM CONDUCTED POWER ANT3_11n20CH165
Date: 20.MAR.2020 19:46:46

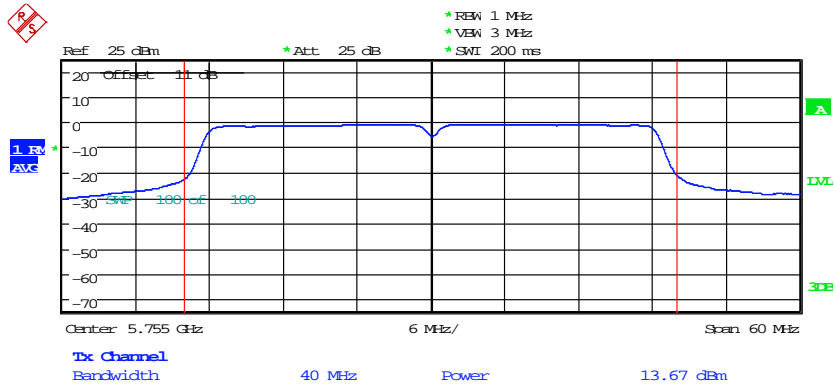


MAXIMUM CONDUCTED POWER ANT3_11n40CH151
Date: 20.MAR.2020 19:48:16



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

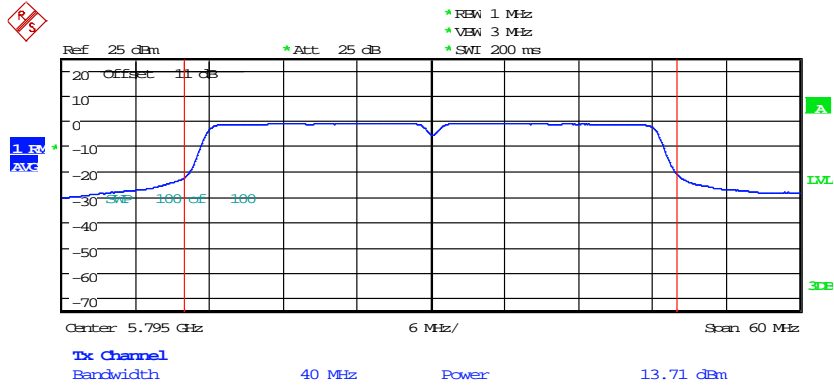

MAXIMUM CONDUCTED POWER ANT3_11n40CH159
Date: 20.MAR.2020 19:49:06

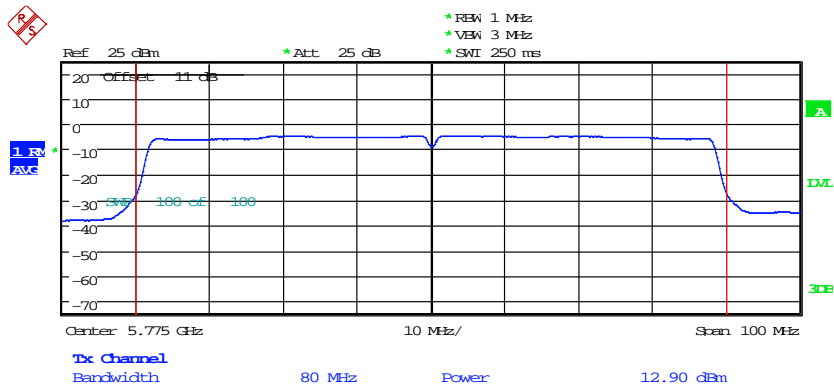

MAXIMUM CONDUCTED POWER ANT3_11ac80CH155
Date: 20.MAR.2020 19:50:26




Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS


ANT4

5.15 GHz ~ 5.25 GHz

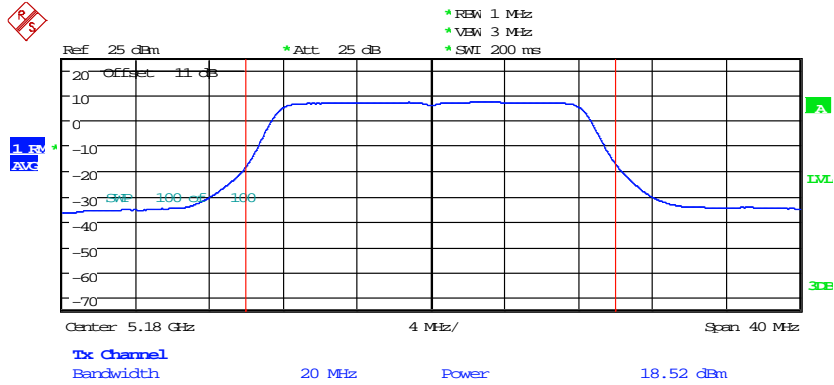

MAXIMUM CONDUCTED POWER ANT4_11aCH36

Date: 17.MAR.2020 17:11:16

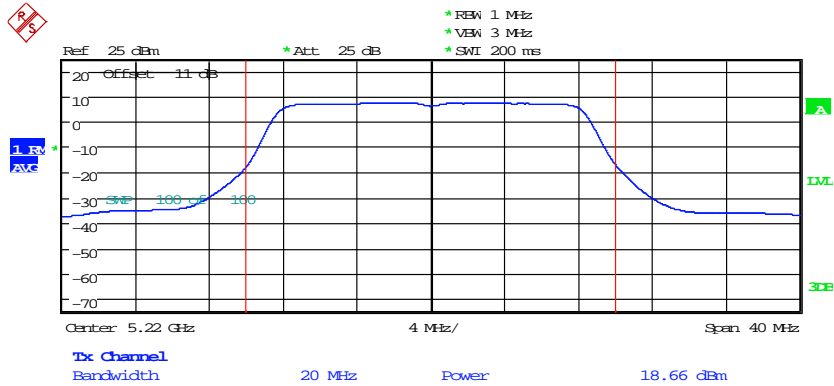


MAXIMUM CONDUCTED POWER ANT4_11aCH44


Date: 17.MAR.2020 17:12:06




Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

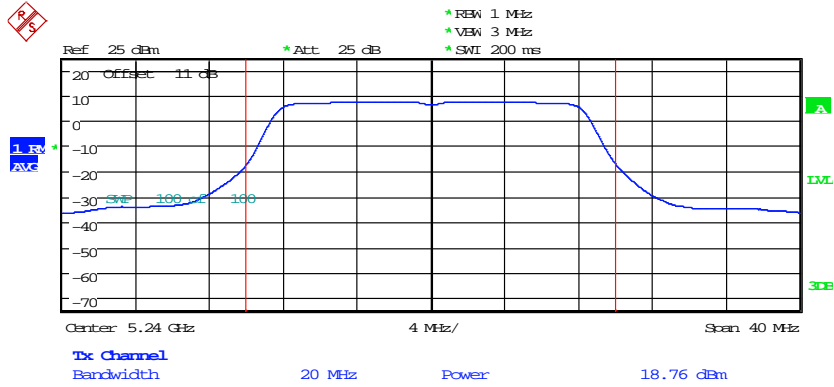


MAXIMUM CONDUCTED POWER ANT4_11aCH48
Date: 17.MAR.2020 17:12:56

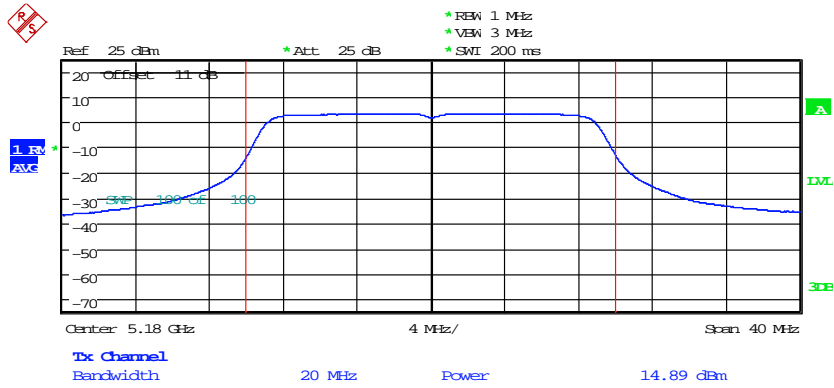


MAXIMUM CONDUCTED POWER ANT4_11n20CH36
Date: 17.MAR.2020 17:14:16



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

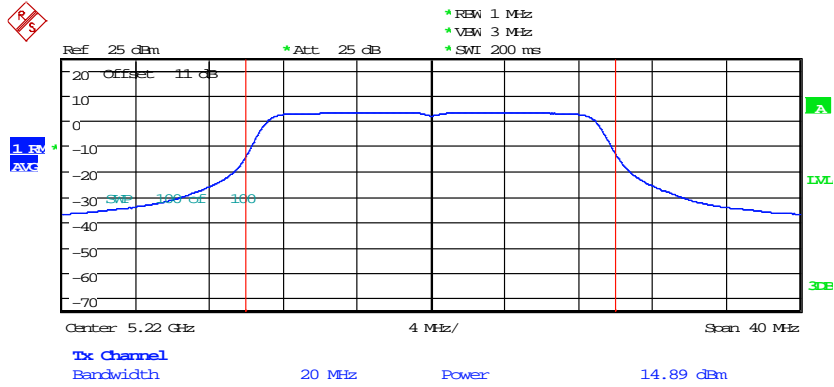


MAXIMUM CONDUCTED POWER ANT4_11n20CH44
Date: 17.MAR.2020 17:15:16

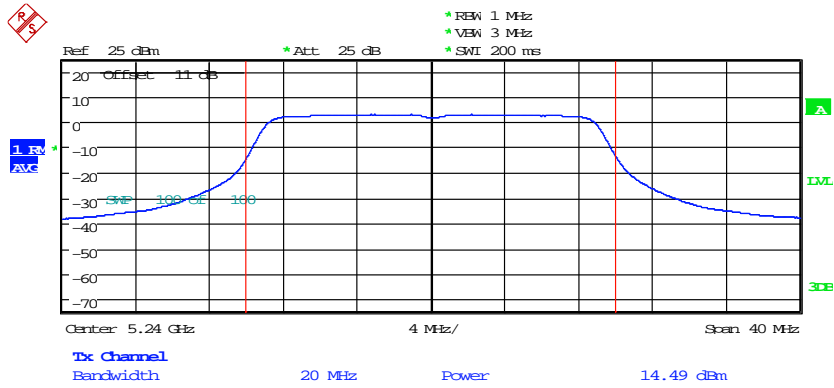


MAXIMUM CONDUCTED POWER ANT4_11n20CH48
Date: 20.MAR.2020 20:25:56



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

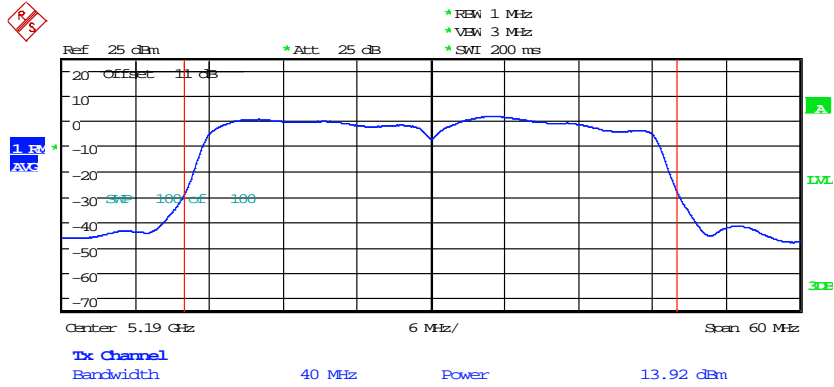


MAXIMUM CONDUCTED POWER ANT4_11n40CH38
Date: 30.APR.2020 16:27:31

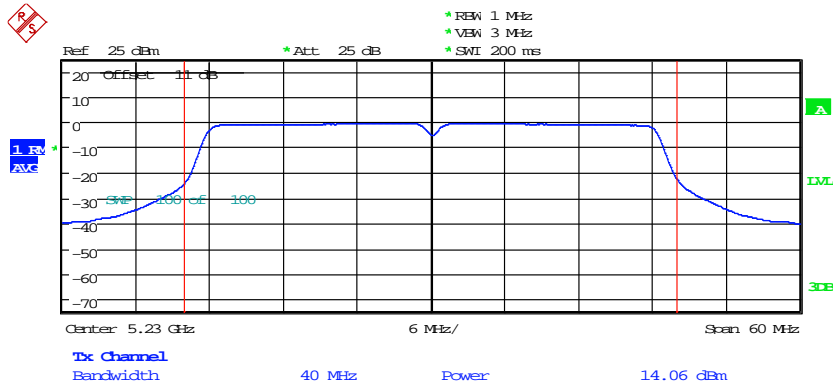

MAXIMUM CONDUCTED POWER ANT4_11n40CH46
Date: 17.MAR.2020 17:20:26




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

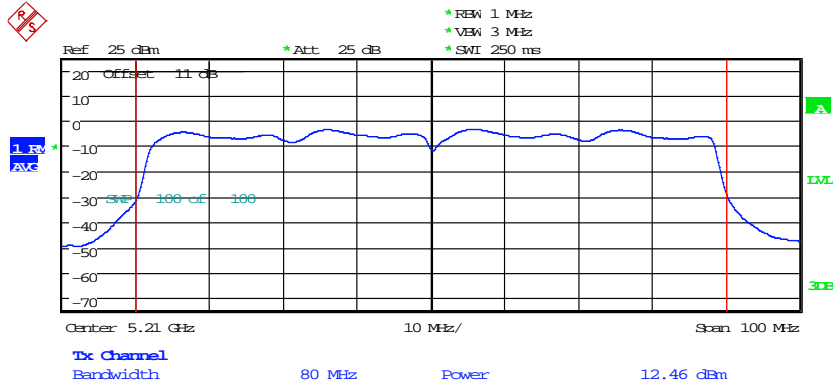

MAXIMUM CONDUCTED POWER ANT4_11ac80CH42
 Date: 17.MAR.2020 17:22:17


5.25 GHz ~ 5.35 GHz

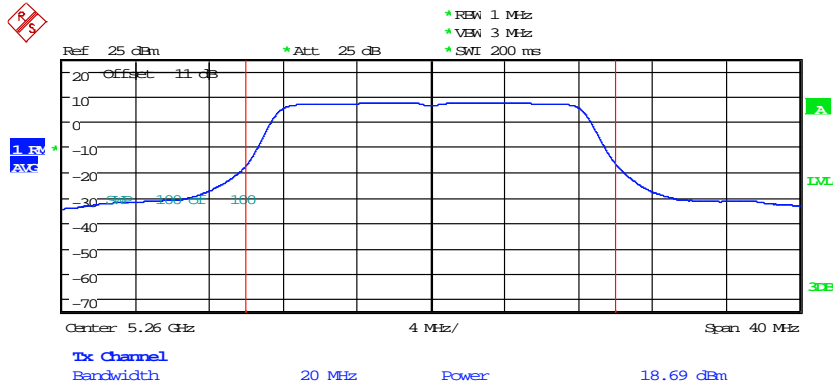


MAXIMUM CONDUCTED POWER ANT4_11acH52
 Date: 20.MAR.2020 15:16:14



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

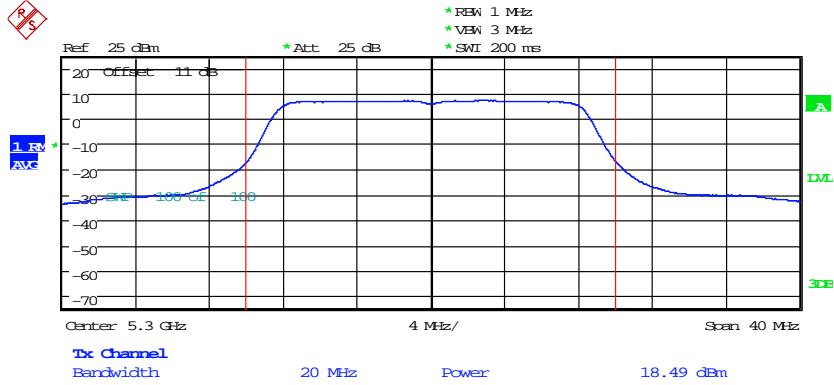


MAXIMUM CONDUCTED POWER ANT4_11aCH60
Date: 20.MAR.2020 15:17:15

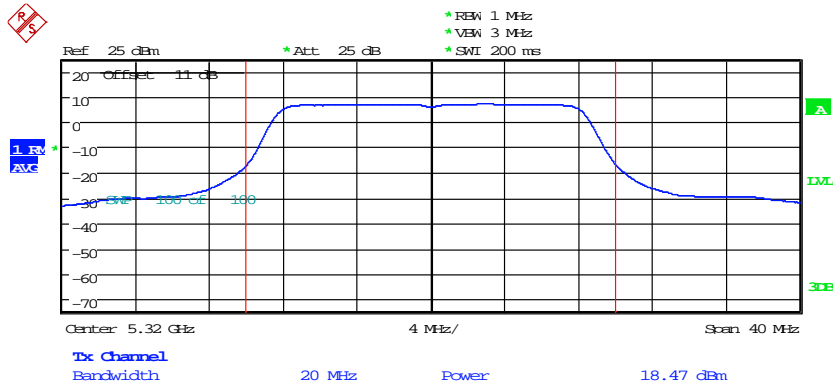


MAXIMUM CONDUCTED POWER ANT4_11aCH64
Date: 20.MAR.2020 15:18:35



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

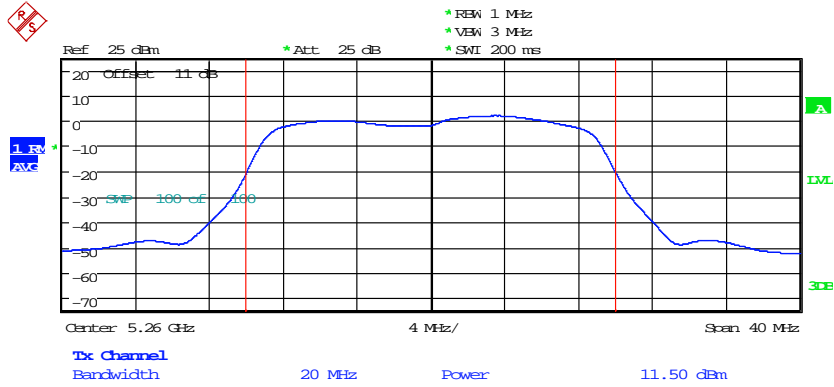


MAXIMUM CONDUCTED POWER ANT4_11n20CH52
Date: 30.APR.2020 15:45:35

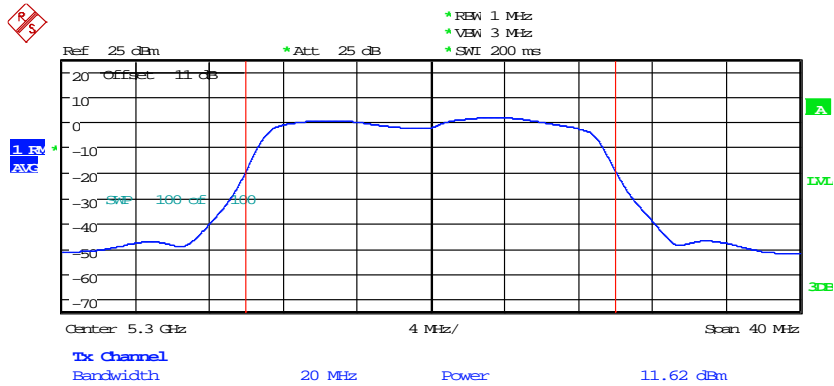


MAXIMUM CONDUCTED POWER ANT4_11n20CH60
Date: 30.APR.2020 15:46:34



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

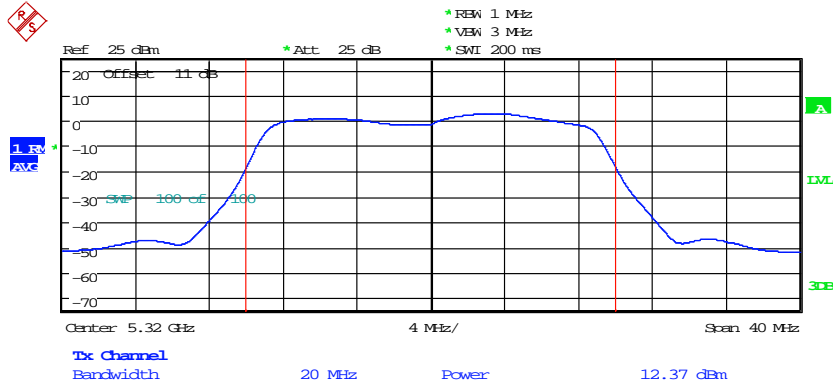


MAXIMUM CONDUCTED POWER ANT4_11n20CH64
Date: 30.APR.2020 15:48:54

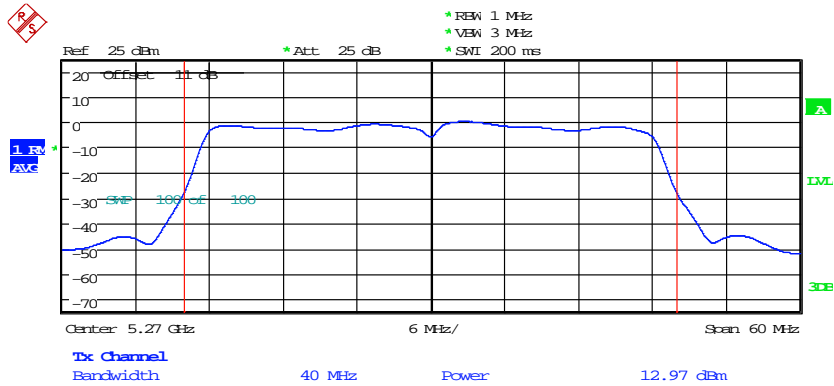


MAXIMUM CONDUCTED POWER ANT4_11n40CH54
Date: 30.APR.2020 16:26:23



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

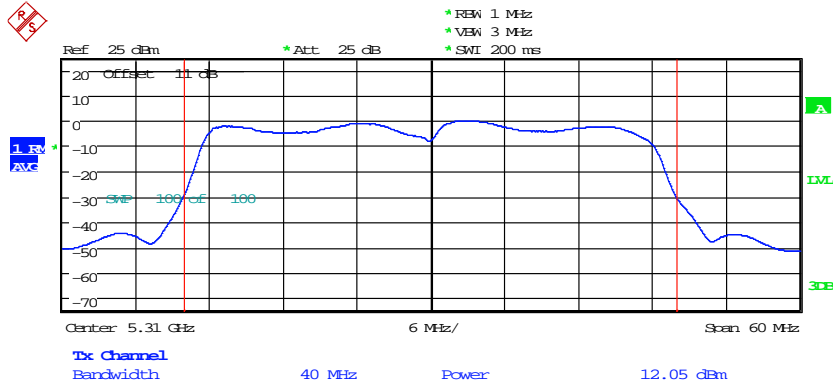

MAXIMUM CONDUCTED POWER ANT4_11n40CH62
Date: 30.APR.2020 17:01:12

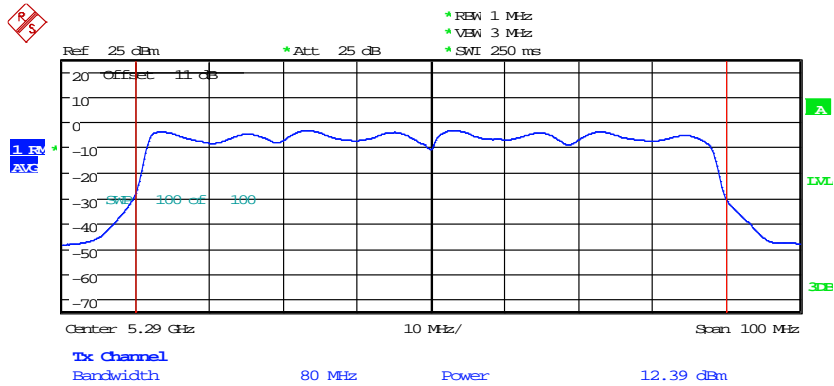


MAXIMUM CONDUCTED POWER ANT4_11ac80CH58
Date: 30.APR.2020 17:36:05



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.47 GHz ~ 5.725 GHz

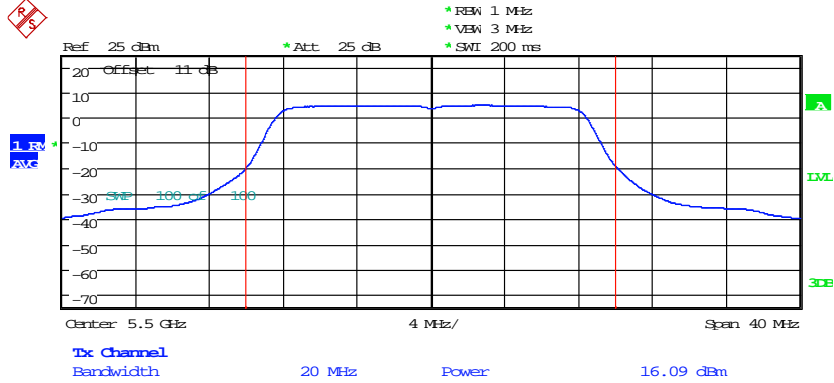


MAXIMUM CONDUCTED POWER ANT4_11aCH100

Date: 20.MAR.2020 17:00:35

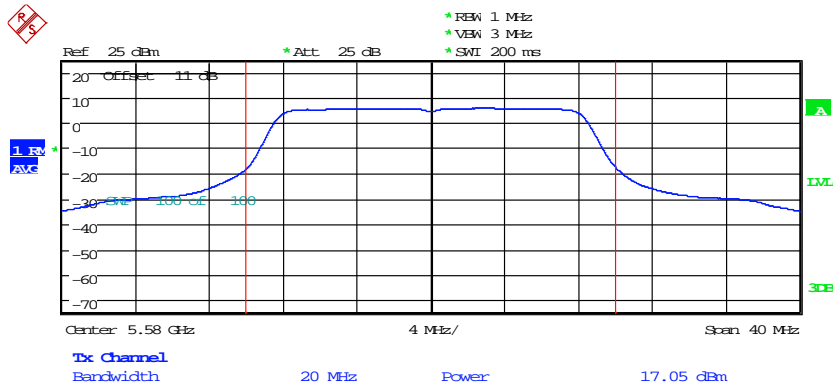


MAXIMUM CONDUCTED POWER ANT4_11aCH116


Date: 20.MAR.2020 17:01:45



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

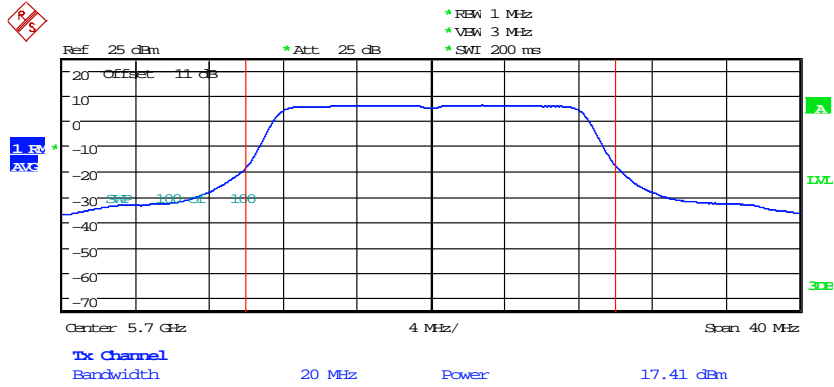


MAXIMUM CONDUCTED POWER ANT4_11aCH140
Date: 20.MAR.2020 17:02:45

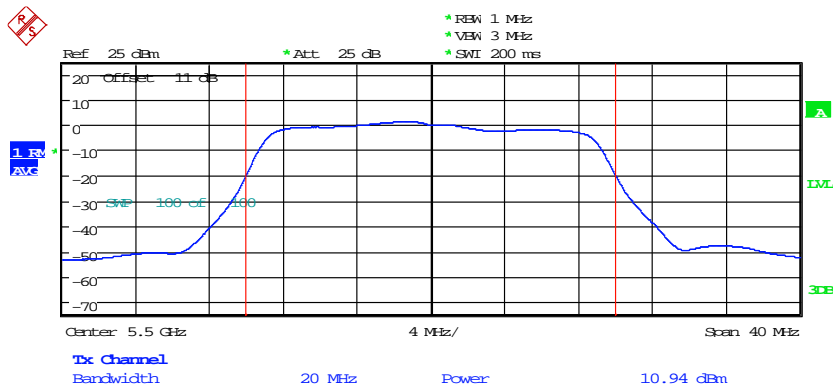


MAXIMUM CONDUCTED POWER ANT4_11n20CH100
Date: 30.APR.2020 15:49:49



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

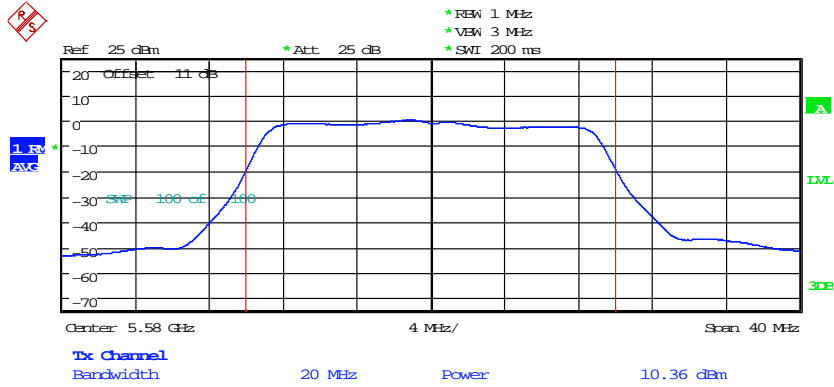


MAXIMUM CONDUCTED POWER ANT4_11n20CH116
Date: 30.APR.2020 15:51:04

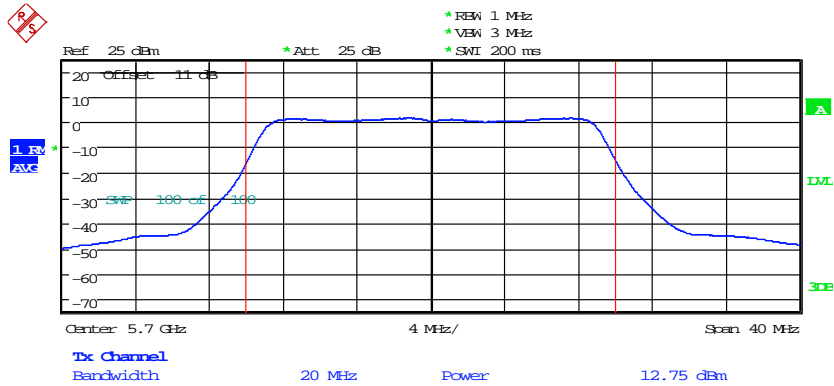


MAXIMUM CONDUCTED POWER ANT4_11n20CH140
Date: 30.APR.2020 15:57:59



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

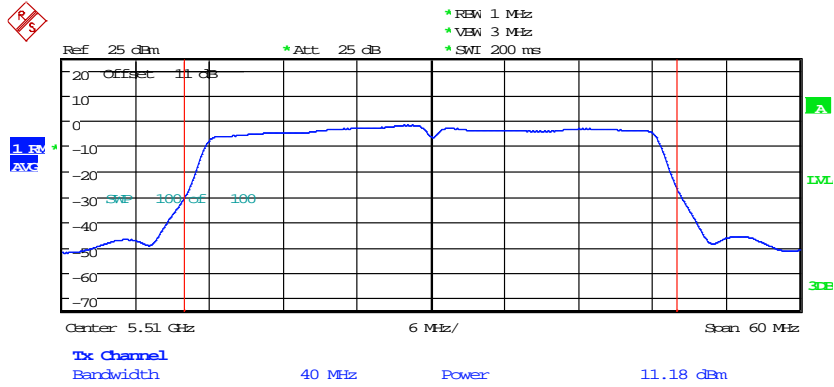


MAXIMUM CONDUCTED POWER ANT4_11n40CH102
Date: 30.APR.2020 17:07:40

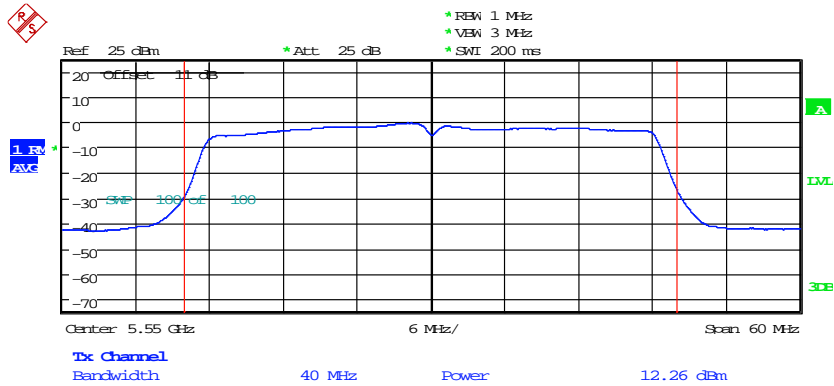


MAXIMUM CONDUCTED POWER ANT4_11n40CH110
Date: 30.APR.2020 17:18:02



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

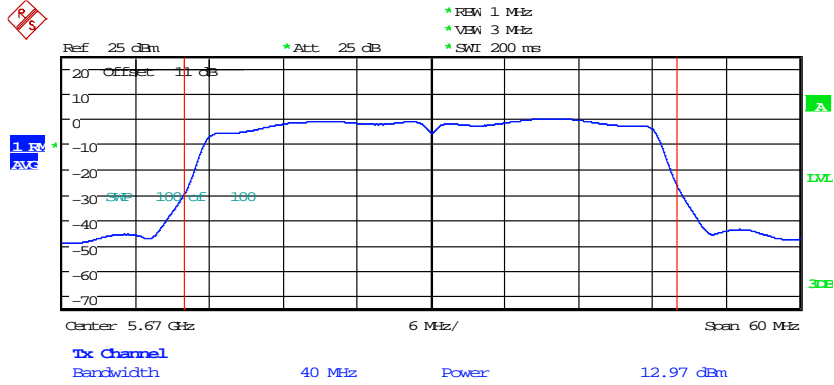

MAXIMUM CONDUCTED POWER ANT4_11n40CH134
Date: 30.APR.2020 16:22:31

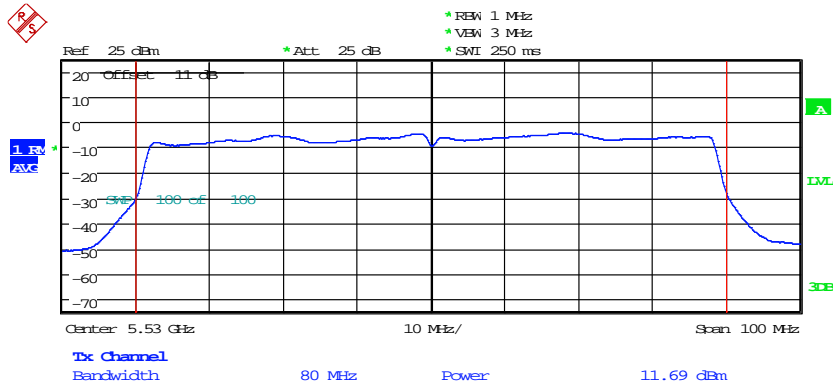


MAXIMUM CONDUCTED POWER ANT4_11ac80CH106
Date: 30.APR.2020 17:45:31



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.725 GHz ~ 5.85 GHz

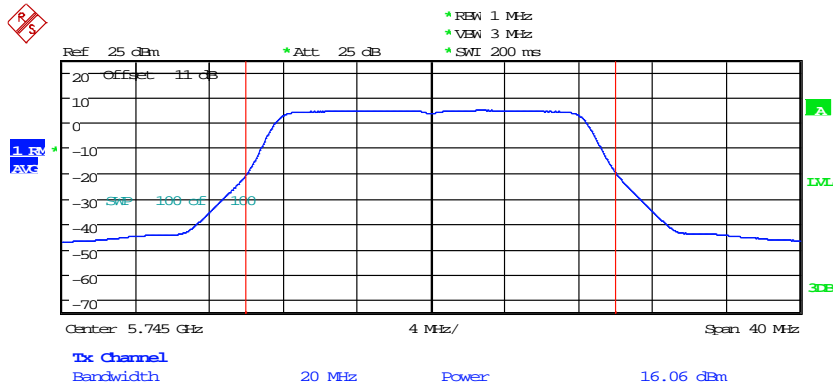

MAXIMUM CONDUCTED POWER ANT4_11aCH149

Date: 20.MAR.2020 19:55:16

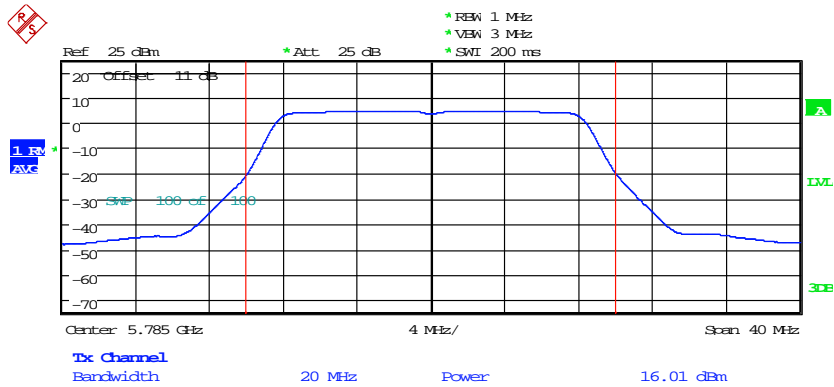


MAXIMUM CONDUCTED POWER ANT4_11aCH157


Date: 20.MAR.2020 19:56:06



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

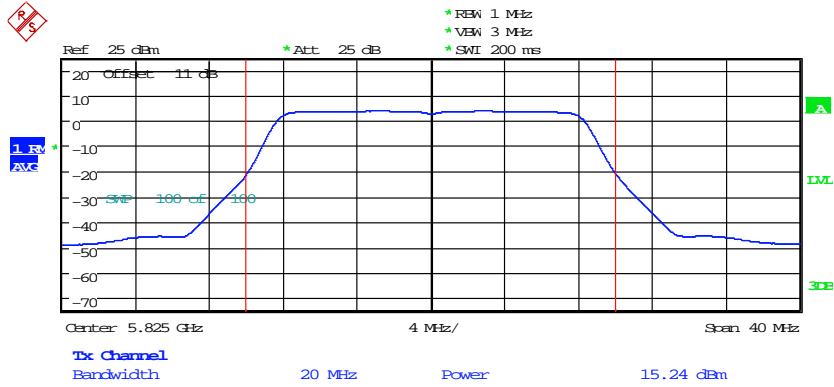


MAXIMUM CONDUCTED POWER ANT4_11aCH165
Date: 20.MAR.2020 19:56:56

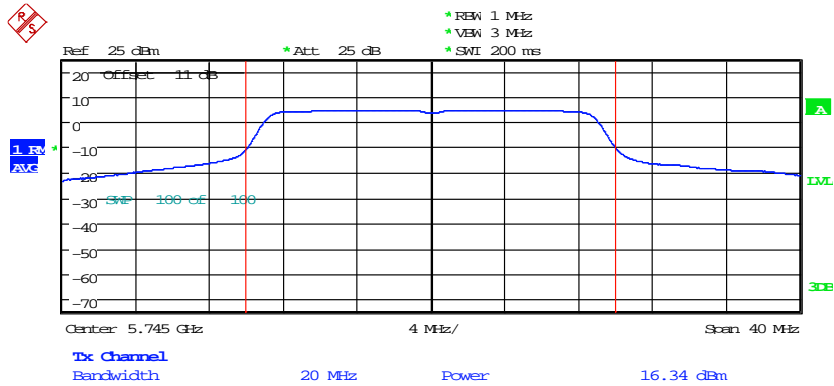


MAXIMUM CONDUCTED POWER ANT4_11n20CH149
Date: 20.MAR.2020 19:58:16



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

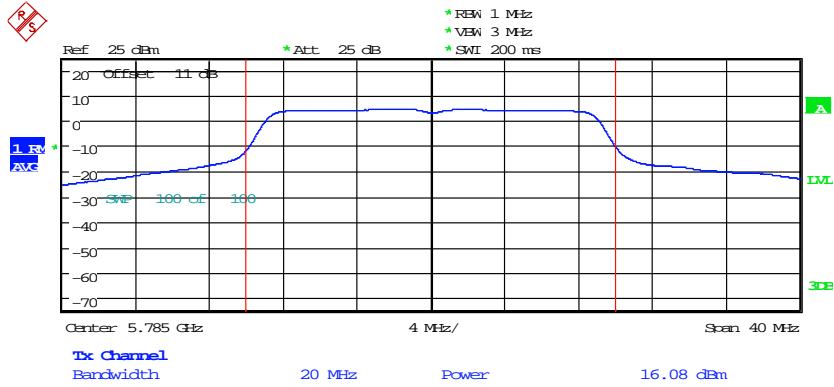


MAXIMUM CONDUCTED POWER ANT4_11n20CH157
Date: 20.MAR.2020 19:59:26

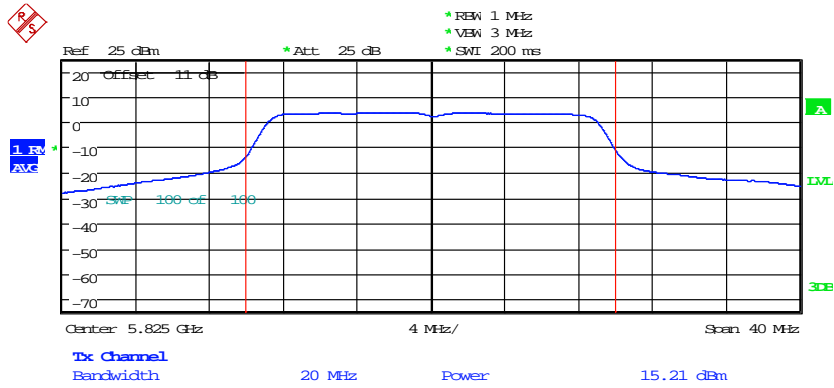


MAXIMUM CONDUCTED POWER ANT4_11n20CH165
Date: 20.MAR.2020 20:00:50



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

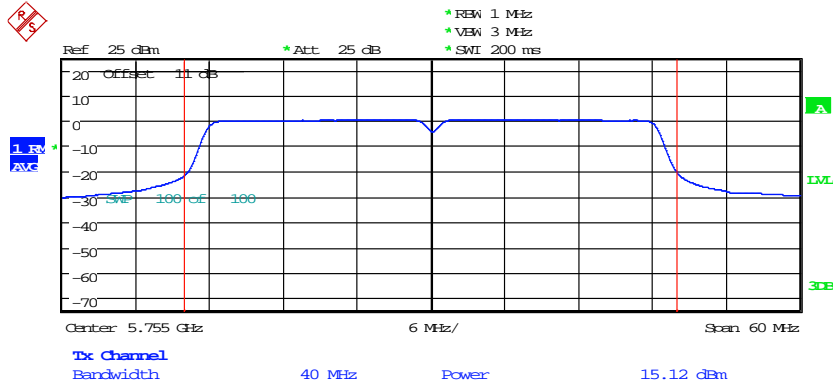


MAXIMUM CONDUCTED POWER ANT4_11n40CH151
Date: 20.MAR.2020 20:02:06

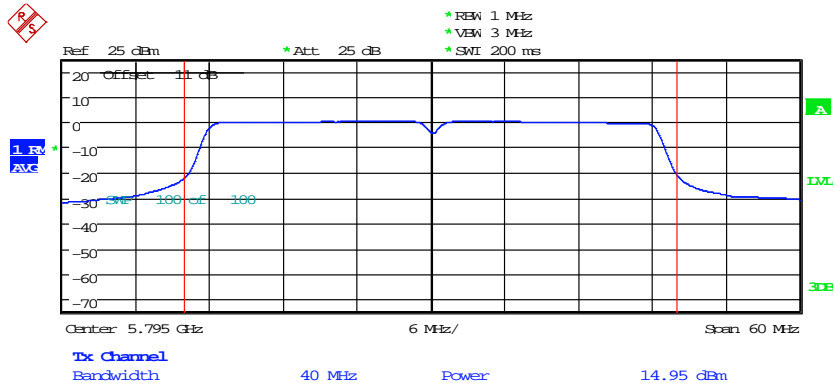

MAXIMUM CONDUCTED POWER ANT4_11n40CH159
Date: 20.MAR.2020 20:02:56



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

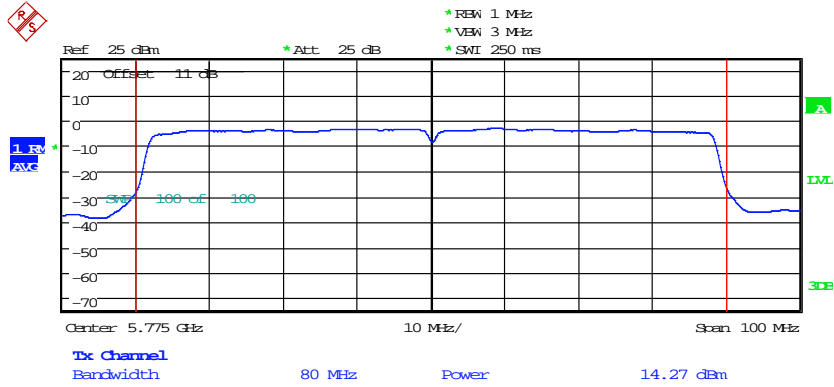

MAXIMUM CONDUCTED POWER ANT4_11ac80CH155
Date: 20.MAR.2020 20:04:40



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

4*4 Antenna

5.15GHz~5.25GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	42.36	43.75	36.98	16.27	16.41	15.68
802.11n 40MHz	21.93	--	34.99	13.41	--	15.44
802.11ac	25.41	--	--	14.05	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	20.42	17.62	22.08	13.10	12.46	13.44
802.11n 40MHz	17.62	--	22.13	12.46	--	13.45
802.11ac	17.18	--	--	12.35	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	27.93	31.70	26.79	14.46	15.01	14.28
802.11n 40MHz	16.37	--	25.82	12.14	--	14.12
802.11ac	16.14	--	--	12.08	--	--
Antenna 4	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	30.83	30.83	28.12	14.89	14.89	14.49
802.11n 40MHz	24.66	--	25.47	13.92	--	14.06
802.11ac	17.62	--	--	12.46	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	121.54	123.90	113.97	20.85	20.93	20.57
802.11n 40MHz	80.58	--	108.41	19.06	--	20.35
802.11ac	76.35	--	--	18.83	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.25GHz~5.35GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	19.82	19.63	13.71	12.97	12.93	11.37
802.11n 40MHz	14.03	--	17.95	11.47	--	12.54
802.11ac	14.79	--	--	11.70	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	12.25	12.59	10.64	10.88	11.00	10.27
802.11n 40MHz	11.22	--	16.48	10.50	--	12.17
802.11ac	17.14	--	--	12.34	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	14.62	13.00	17.74	11.65	11.14	12.49
802.11n 40MHz	15.38	--	11.22	11.87	--	10.50
802.11ac	11.40	--	--	10.57	--	--
Antenna 4	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	14.13	14.52	17.26	11.50	11.62	12.37
802.11n 40MHz	19.82	--	16.03	12.97	--	12.05
802.11ac	17.34	--	--	12.39	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	60.82	59.74	59.35	17.84	17.76	17.73
802.11n 40MHz	60.45	--	61.68	17.81	--	17.90
802.11ac	60.67	--	--	17.83	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.47GHz~5.725GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	16.26	16.52	8.81	12.11	12.18	9.45
802.11n 40MHz	15.81	14.59	9.62	11.99	11.64	9.83
802.11ac	14.06	--	--	11.48	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	14.26	11.72	11.25	11.54	10.69	10.51
802.11n 40MHz	16.71	13.21	12.68	12.23	11.21	11.03
802.11ac	15.52	--	--	11.91	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	15.45	12.97	21.09	11.89	11.13	13.24
802.11n 40MHz	13.27	15.85	18.20	11.23	12.00	12.60
802.11ac	13.80	--	--	11.40	--	--
Antenna 4	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	12.42	10.86	18.84	10.94	10.36	12.75
802.11n 40MHz	13.12	16.83	19.82	11.18	12.26	12.97
802.11ac	14.76	--	--	11.69	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	58.39	52.07	59.99	17.66	17.17	17.78
802.11n 40MHz	58.91	60.48	60.32	17.70	17.82	17.80
802.11ac	58.14	--	--	17.65	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.725GHz~5.85GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	43.65	44.67	39.17	16.40	16.50	15.93
802.11n 40MHz	32.14	--	32.43	15.07	--	15.11
802.11ac	27.23	--	--	14.35	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	21.73	24.15	22.86	13.37	13.83	13.59
802.11n 40MHz	23.77	--	25.53	13.76	--	14.07
802.11ac	19.63	--	--	12.93	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	31.62	30.62	30.48	15.00	14.86	14.84
802.11n 40MHz	23.28	--	23.50	13.67	--	13.71
802.11ac	19.50	--	--	12.90	--	--
Antenna 4	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	43.05	40.55	33.19	16.34	16.08	15.21
802.11n 40MHz	32.51	--	31.26	15.12	--	14.95
802.11ac	26.73	--	--	14.27	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	140.05	139.99	125.70	21.46	21.46	20.99
802.11n 40MHz	111.70	--	112.72	20.48	--	20.52
802.11ac	93.09	--	--	19.69	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

3*3 Antenna

5.15GHz~5.25GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	42.36	43.75	36.98	16.27	16.41	15.68
802.11n 40MHz	21.93	--	34.99	13.41	--	15.44
802.11ac	25.41	--	--	14.05	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	20.42	17.62	22.08	13.10	12.46	13.44
802.11n 40MHz	17.62	--	22.13	12.46		13.45
802.11ac	17.18	--	--	12.35	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	27.93	31.70	26.79	14.46	15.01	14.28
802.11n 40MHz	16.37	--	25.82	12.14	--	14.12
802.11ac	16.14	--	--	12.08	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	90.71	93.07	85.85	19.58	19.69	19.34
802.11n 40MHz	55.92	--	82.94	17.48	--	19.19
802.11ac	58.73	--	--	17.69	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.25GHz~5.35GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	19.82	19.63	13.71	12.97	12.93	11.37
802.11n 40MHz	14.03	--	17.95	11.47	--	12.54
802.11ac	14.79	--	--	11.70	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	12.25	12.59	10.64	10.88	11.00	10.27
802.11n 40MHz	11.22	--	16.48	10.50	--	12.17
802.11ac	17.14	--	--	12.34	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	14.62	13.00	17.74	11.65	11.14	12.49
802.11n 40MHz	15.38	--	11.22	11.87	--	10.50
802.11ac	11.40	--	--	10.57	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	46.69	45.22	42.09	16.69	16.55	16.24
802.11n 40MHz	40.63	--	45.65	16.09	--	16.59
802.11ac	43.33	--	--	16.37	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.47GHz~5.725GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	16.26	16.52	8.81	12.11	12.18	9.45
802.11n 40MHz	15.81	14.59	9.62	11.99	11.64	9.83
802.11ac	14.06	--	--	11.48	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	14.26	11.72	11.25	11.54	10.69	10.51
802.11n 40MHz	16.71	13.21	12.68	12.23	11.21	11.03
802.11ac	15.52	--	--	11.91	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	15.45	12.97	21.09	11.89	11.13	13.24
802.11n 40MHz	13.27	15.85	18.20	11.23	12.00	12.60
802.11ac	13.80	--	--	11.40	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	45.97	41.21	41.15	16.62	16.15	16.14
802.11n 40MHz	45.79	43.65	40.50	16.61	16.40	16.07
802.11ac	43.38	--	--	16.37	--	--



Registration number: W6R22002-19655-C-54

FCC ID: W23-WMXWAVE2AS

5.725GHz~5.85GHz

Antenna 1	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	43.65	44.67	39.17	16.40	16.50	15.93
802.11n 40MHz	32.14	--	32.43	15.07	--	15.11
802.11ac	27.23	--	--	14.35	--	--
Antenna 2	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	21.73	24.15	22.86	13.37	13.83	13.59
802.11n 40MHz	23.77	--	25.53	13.76	--	14.07
802.11ac	19.63	--	--	12.93	--	--
Antenna 3	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	31.62	30.62	30.48	15.00	14.86	14.84
802.11n 40MHz	23.28	--	23.50	13.67	--	13.71
802.11ac	19.50	--	--	12.90	--	--
Combine	mW			dBm		
	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	97.00	99.44	92.51	19.87	19.98	19.66
802.11n 40MHz	79.19	--	81.46	18.99	--	19.11
802.11ac	66.36	--	--	18.22	--	--

Test equipment used: ETSTW-RE 055, ETSTW-RE 050




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

3.2 26dB emission bandwidth, 99% Occupied Bandwidth, FCC 15.407 (a)


According to §15.407(a). No Limit required.

Result:

ANT1 5.15 GHz ~ 5.25 GHz

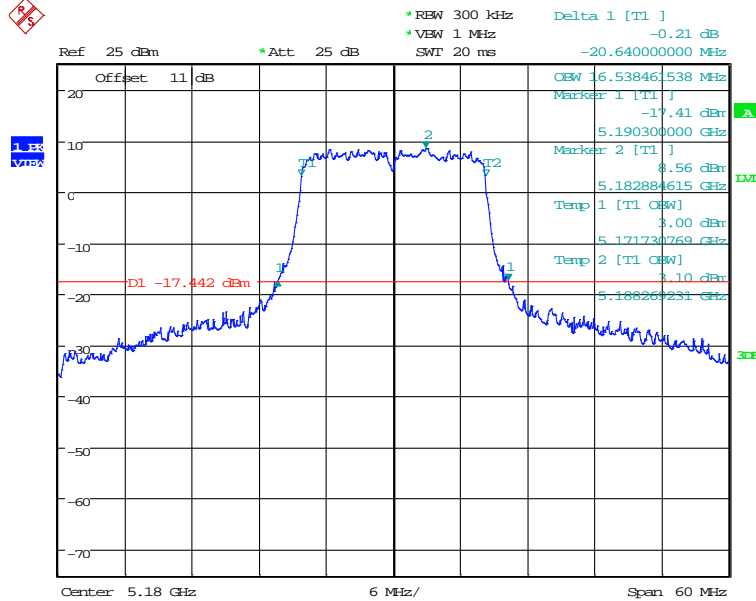


99% OBW & 26DB BANDWIDTH ANT1_11a_CH36
 Date: 15.OCT.2019 21:00:40

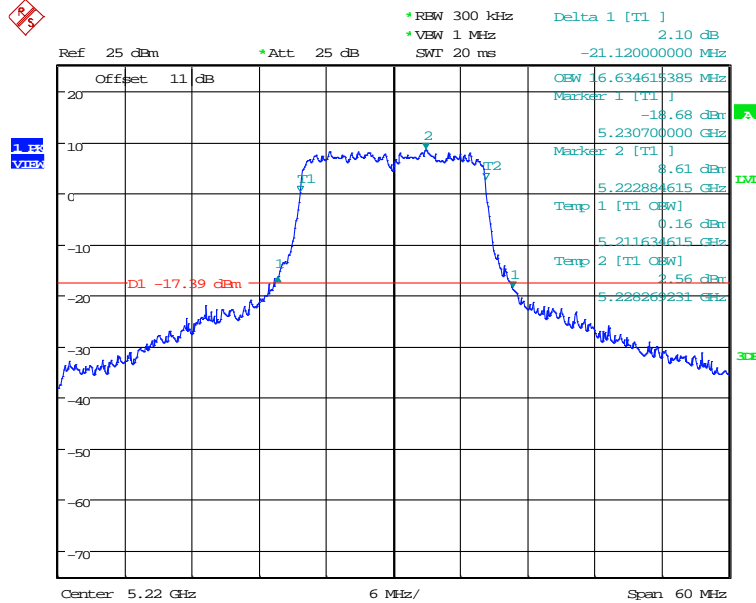


99% OBW & 26DB BANDWIDTH ANT1_11a_CH44
 Date: 15.OCT.2019 21:07:44



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

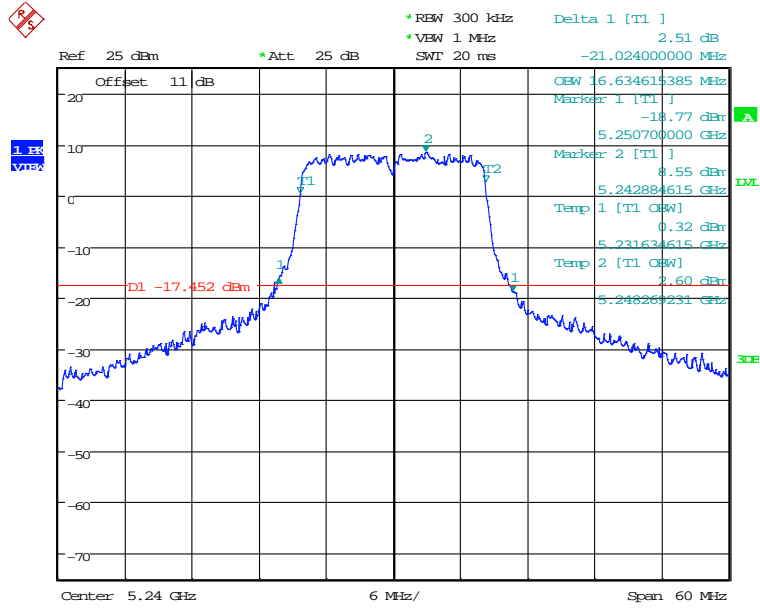


99% OBW & 26DB BANDWIDTH ANTI_11a_CH48
 Date: 15.OCT.2019 21:14:09

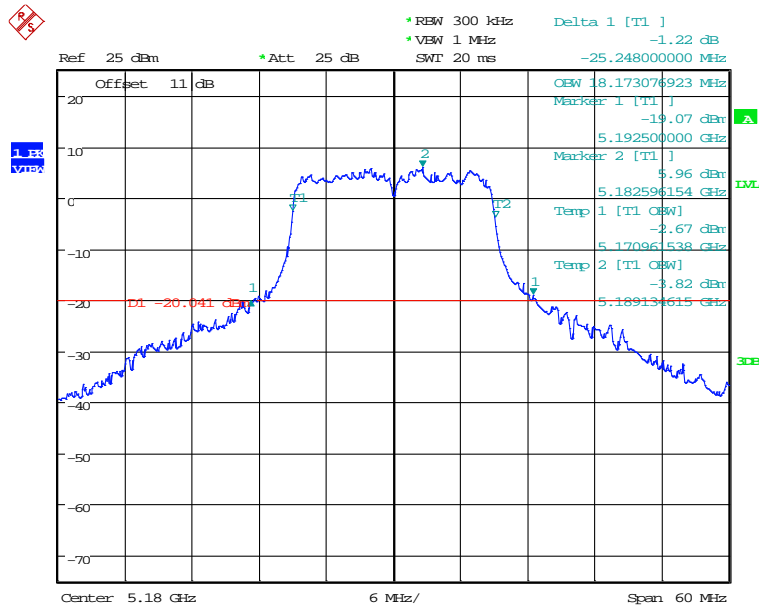


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH36
 Date: 16.OCT.2019 14:10:15



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

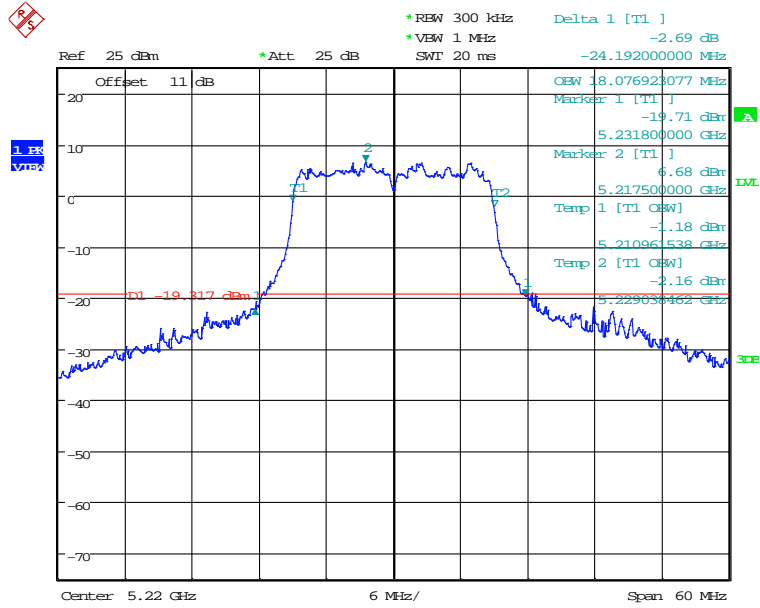


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH44
 Date: 16.OCT.2019 14:23:44

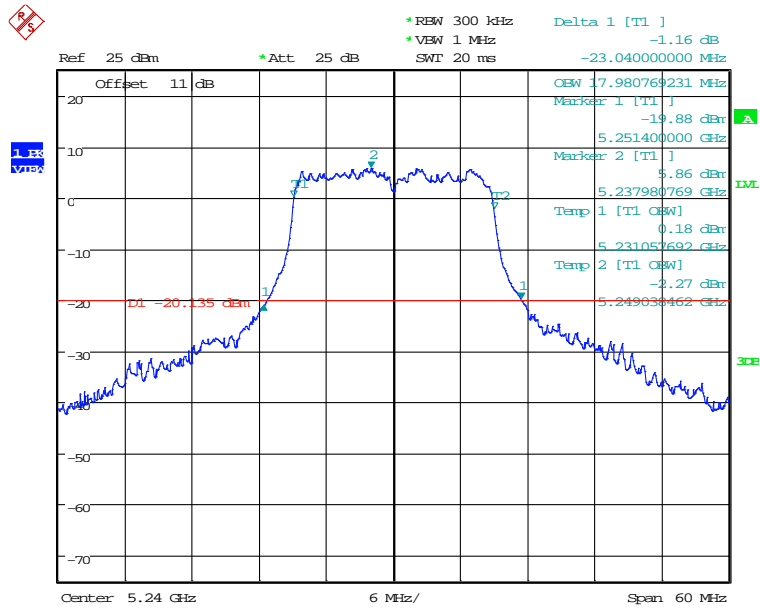

99% OBW & 26DB BANDWIDTH ANTI_11n20_CH48
 Date: 16.OCT.2019 14:29:25




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

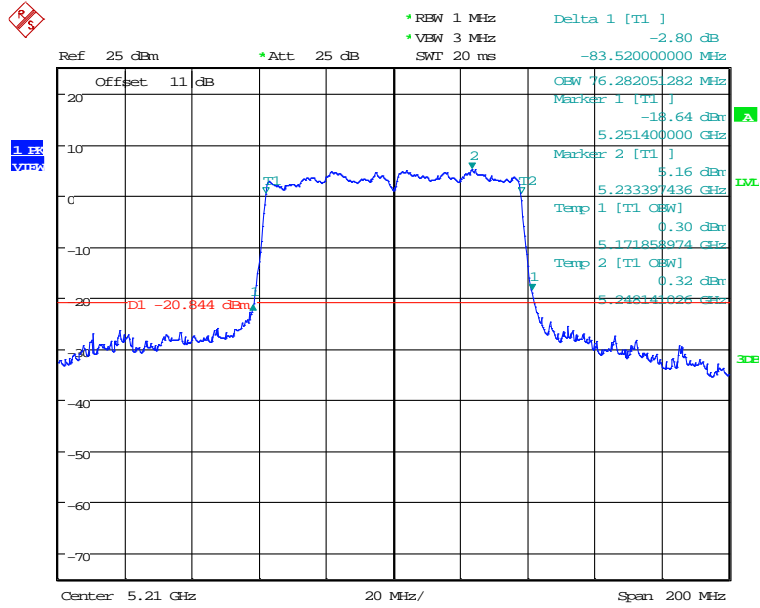

99% OBW & 26DB BANDWIDTH ANT1_11ac80_CH42
 Date: 16.OCT.2019 15:08:06


5.25 GHz ~ 5.35 GHz

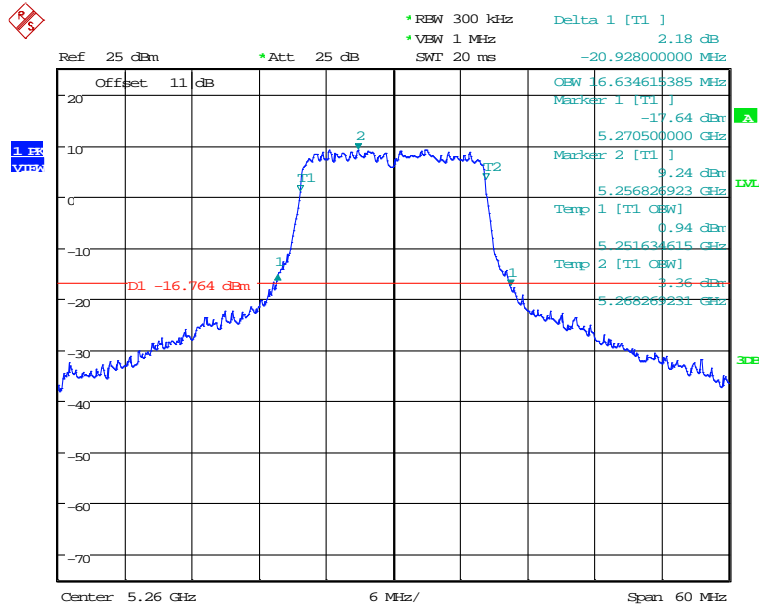


99% OBW & 26DB BANDWIDTH ANT1_11a_CH52
 Date: 16.OCT.2019 15:27:26



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

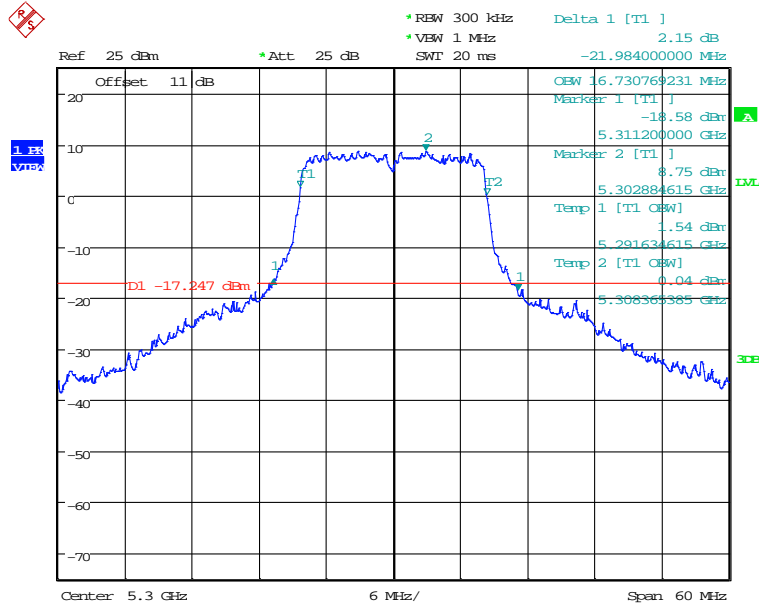


99% OBW & 26DB BANDWIDTH ANT1_11a_CH60
 Date: 16.OCT.2019 15:33:51

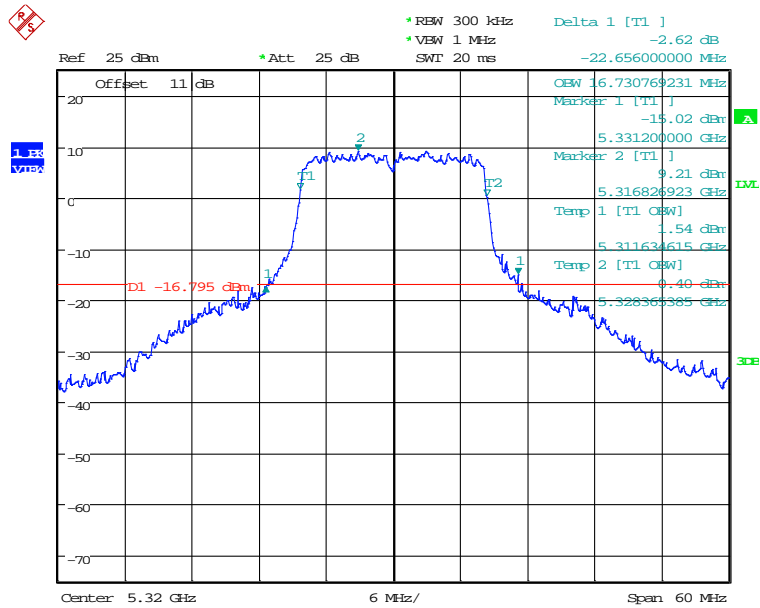


99% OBW & 26DB BANDWIDTH ANT1_11a_CH64
 Date: 16.OCT.2019 15:40:22




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

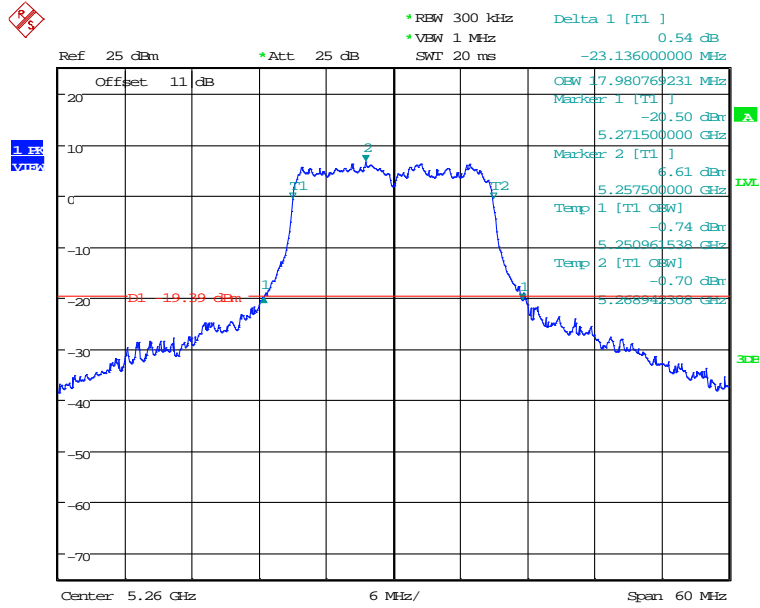


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH52
 Date: 16.OCT.2019 16:01:16

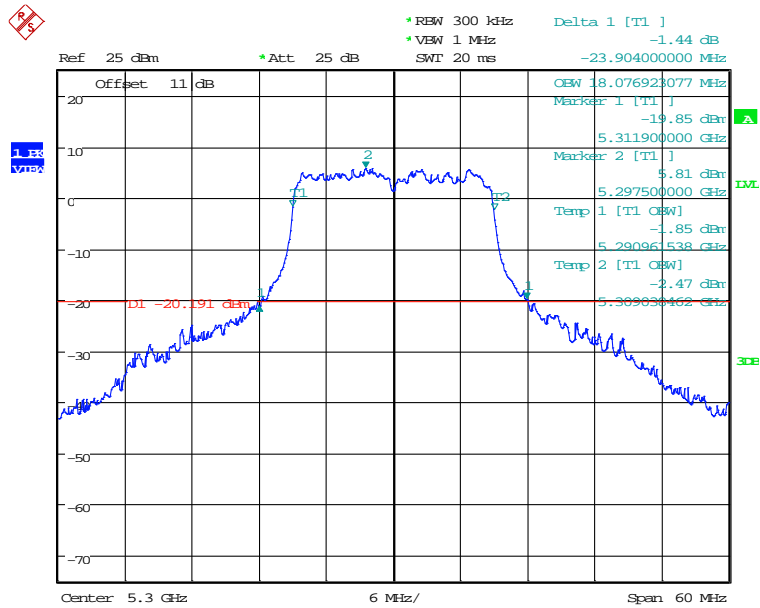


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH60
 Date: 16.OCT.2019 16:07:19



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

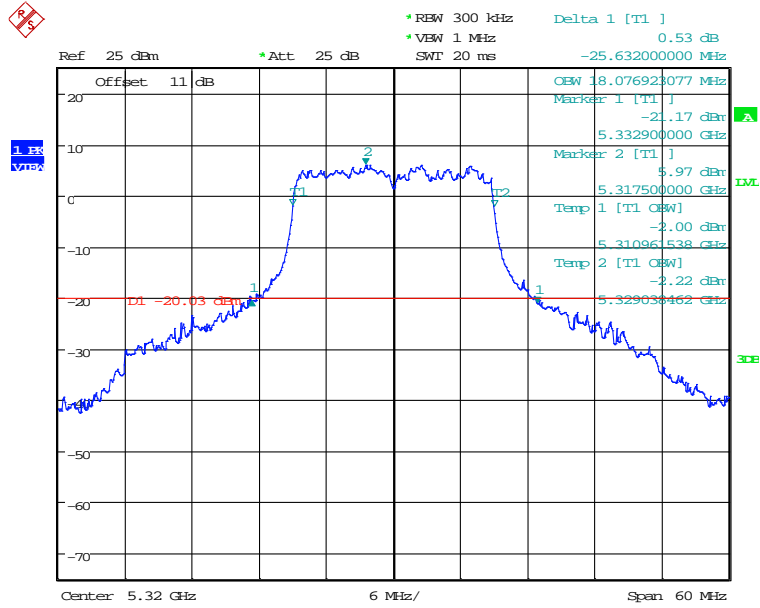


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH64
 Date: 16.OCT.2019 16:13:16

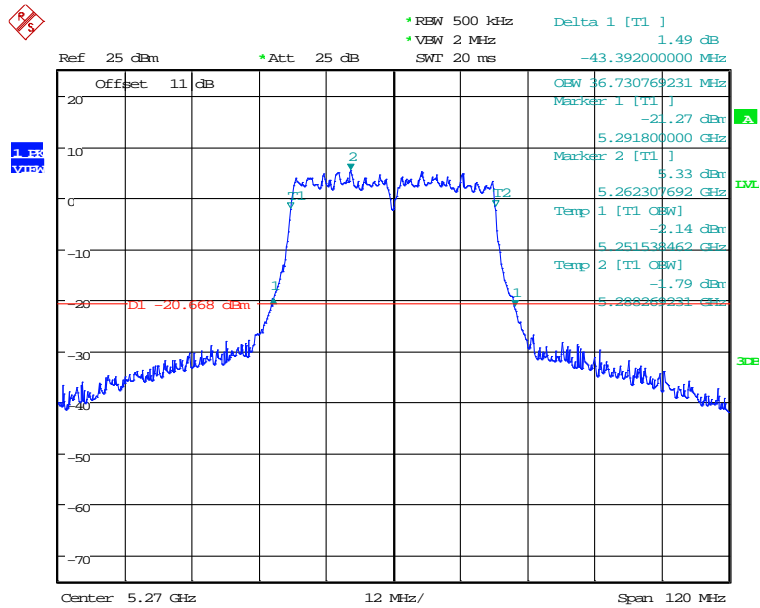


99% OBW & 26DB BANDWIDTH ANTI_11n40_CH54
 Date: 16.OCT.2019 16:28:07



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

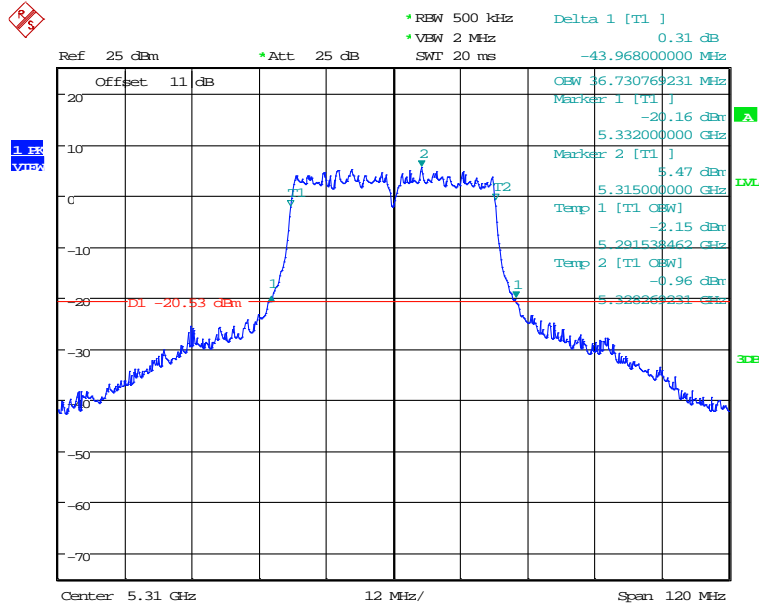

99% OBW & 26DB BANDWIDTH ANTI_11n40_CH62
 Date: 16.OCT.2019 16:35:55

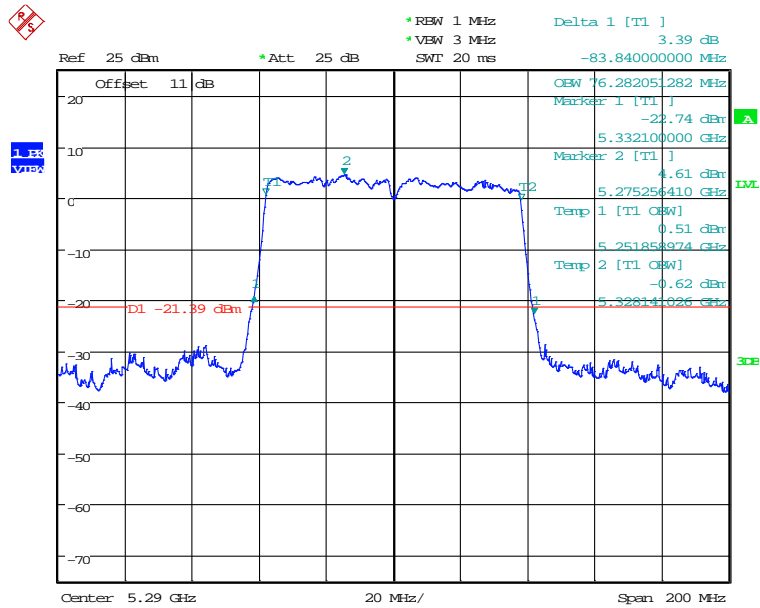


99% OBW & 26DB BANDWIDTH ANTI_11ac80_CH58
 Date: 16.OCT.2019 16:46:16



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.47 GHz ~ 5.725 GHz

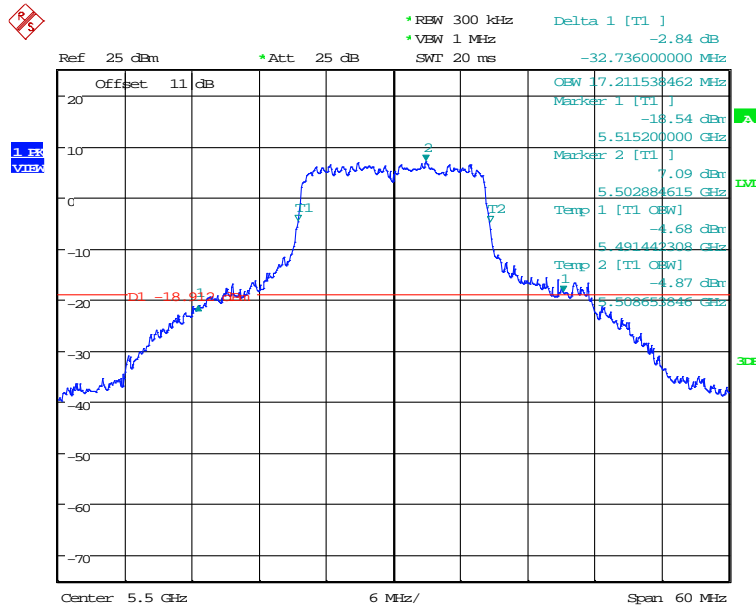

99% OBW & 26DB BANDWIDTH ANT1_11a_CH100

Date: 16.OCT.2019 17:16:20

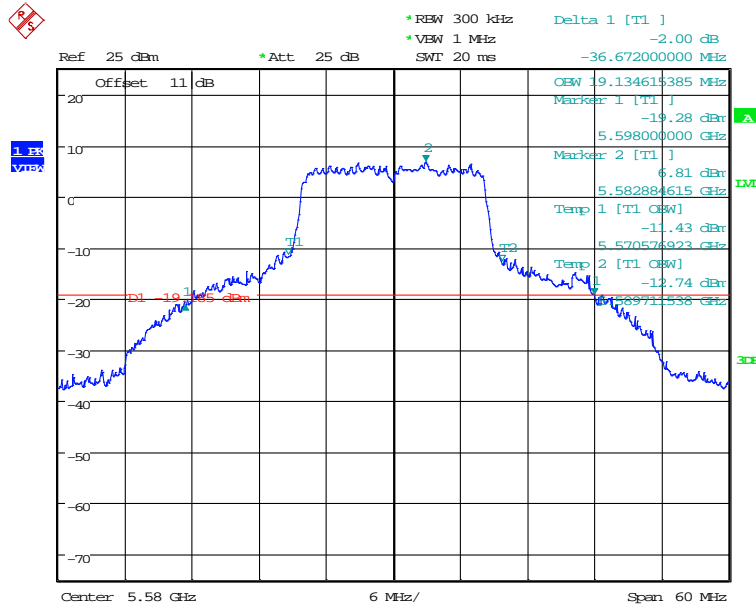


99% OBW & 26DB BANDWIDTH ANT1_11a_CH116


Date: 16.OCT.2019 17:22:51



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

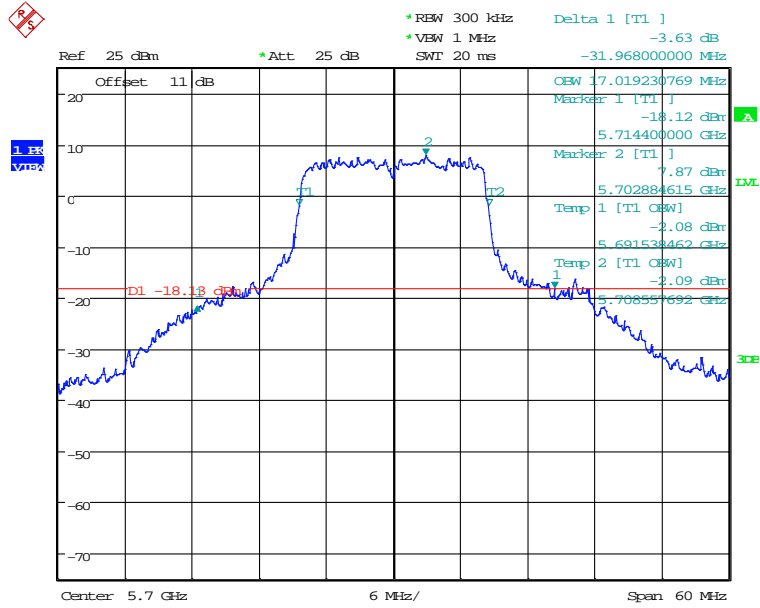


99% OBW & 26DB BANDWIDTH ANTI_11a_CH140
 Date: 16.OCT.2019 19:23:12

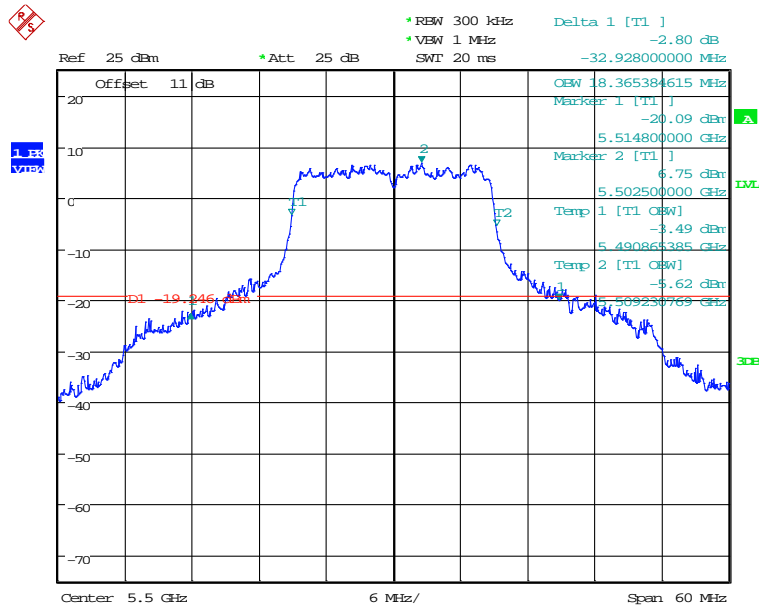


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH100
 Date: 16.OCT.2019 19:49:09



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

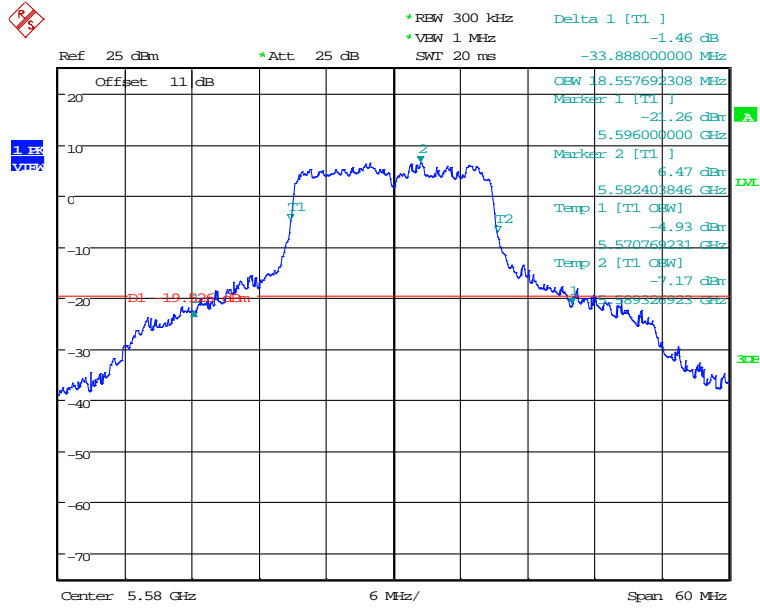


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH116
 Date: 16.OCT.2019 19:55:39

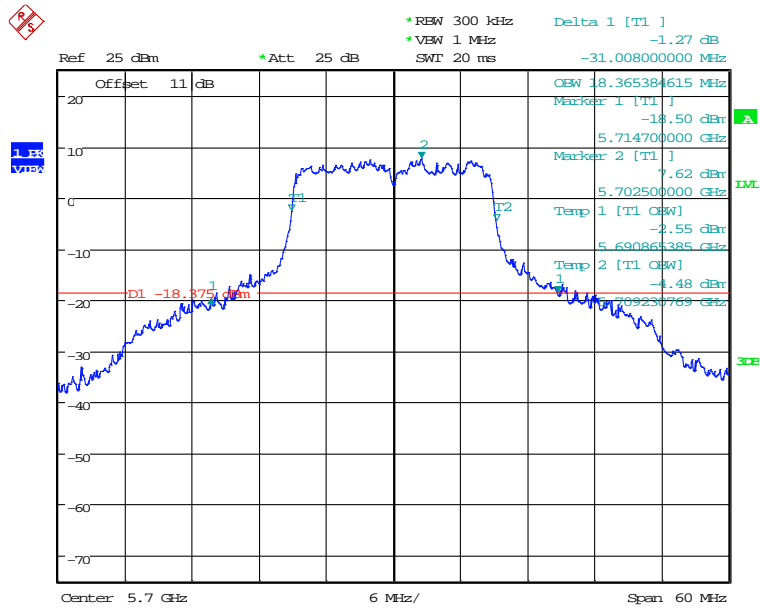


99% OBW & 26DB BANDWIDTH ANTI_11n20_CH140
 Date: 16.OCT.2019 20:01:26



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

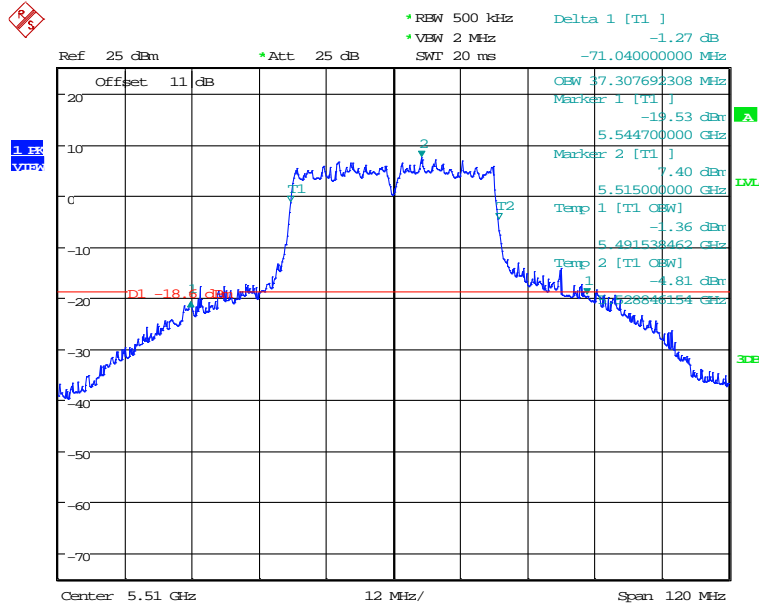


99% OBW & 26DB BANDWIDTH ANT1_11n40_CH102
 Date: 16.OCT.2019 20:19:46

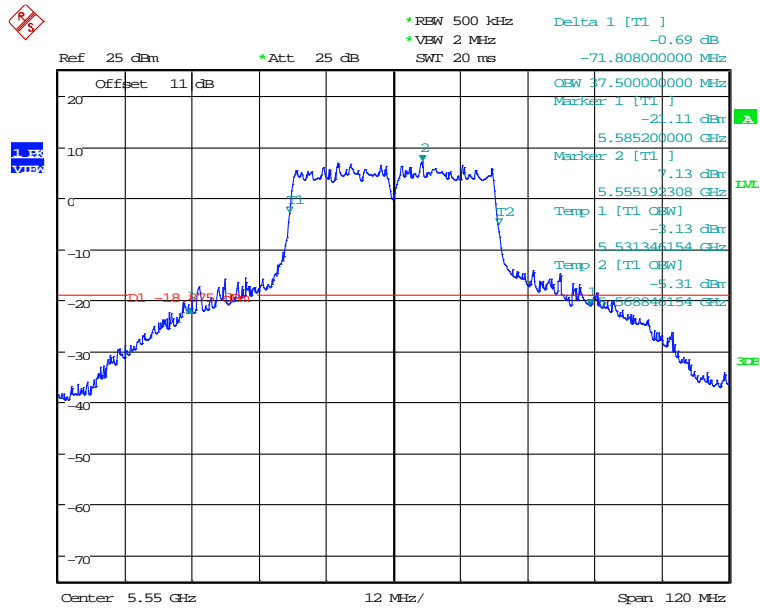


99% OBW & 26DB BANDWIDTH ANT1_11n40_CH110
 Date: 16.OCT.2019 20:26:22



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

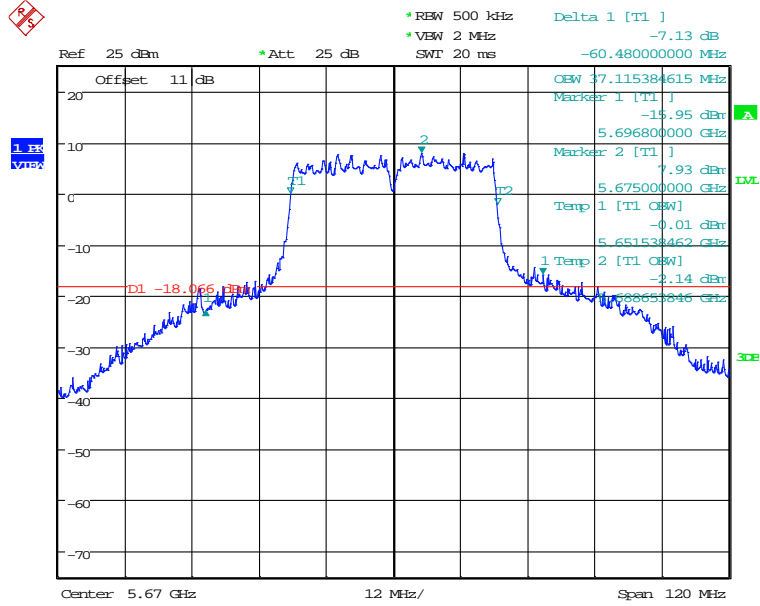

99% OBW & 26DB BANDWIDTH ANTI_11n40_CH134
 Date: 16.OCT.2019 20:32:36

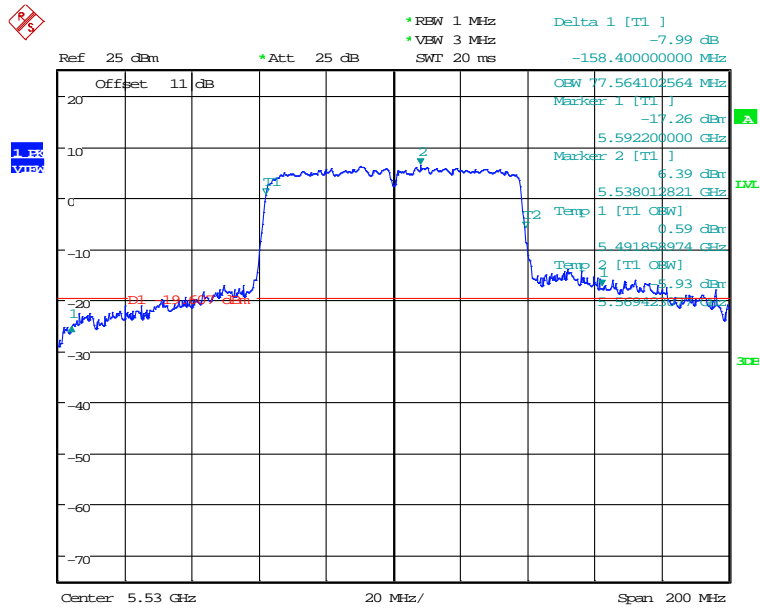

99% OBW & 26DB BANDWIDTH ANTI_11lac80_CH106
 Date: 16.OCT.2019 20:44:20




Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

ANT2


5.15 GHz ~ 5.25 GHz

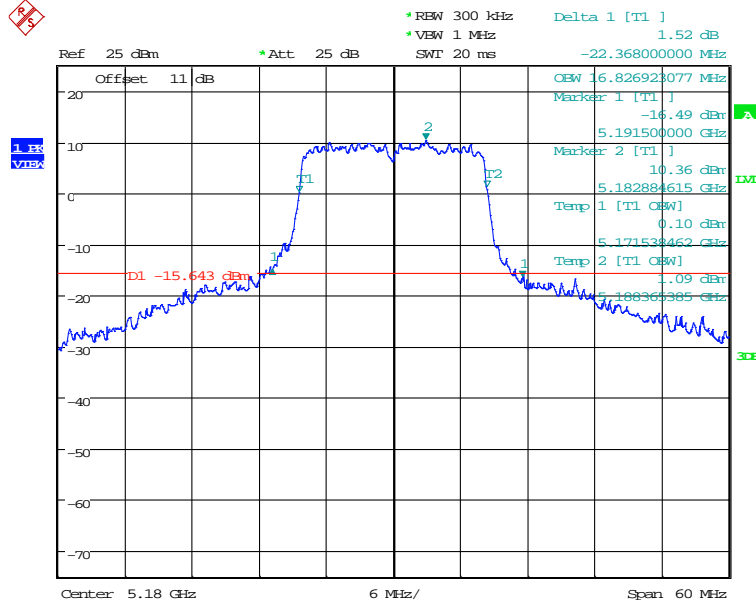


99% OBW & 26DB BANDWIDTH ANT2_11a_CH36
Date: 15.OCT.2019 21:02:14

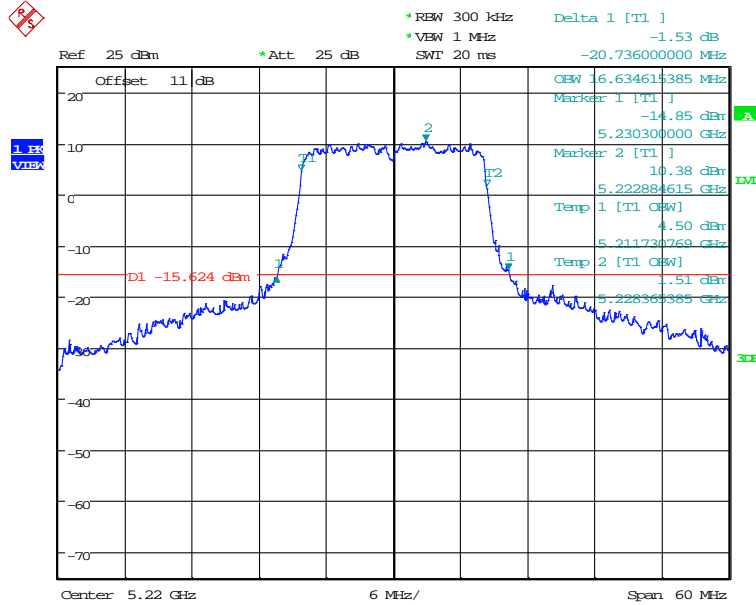


99% OBW & 26DB BANDWIDTH ANT2_11a_CH44
Date: 15.OCT.2019 21:09:12



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

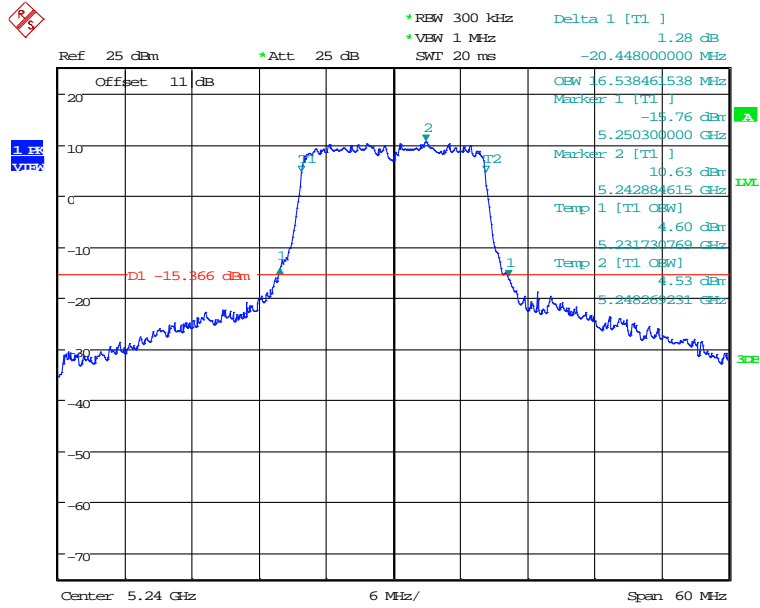


99% OBW & 26DB BANDWIDTH ANT2_11a_CH48
 Date: 15.OCT.2019 21:15:37

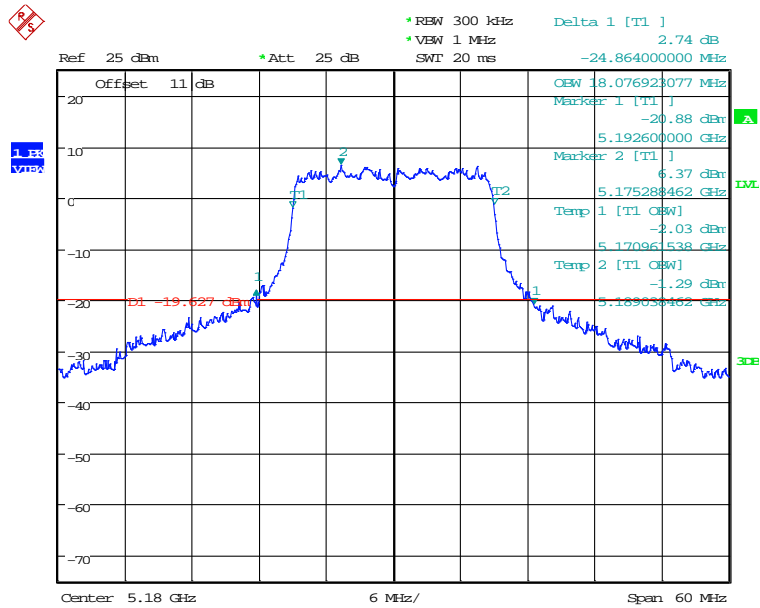


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH36
 Date: 16.OCT.2019 14:11:32



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

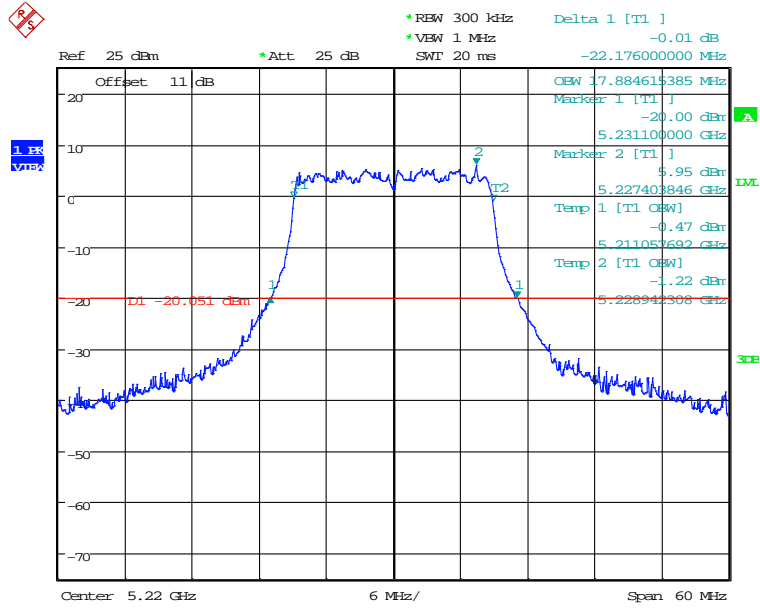


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH44
 Date: 16.OCT.2019 14:24:55

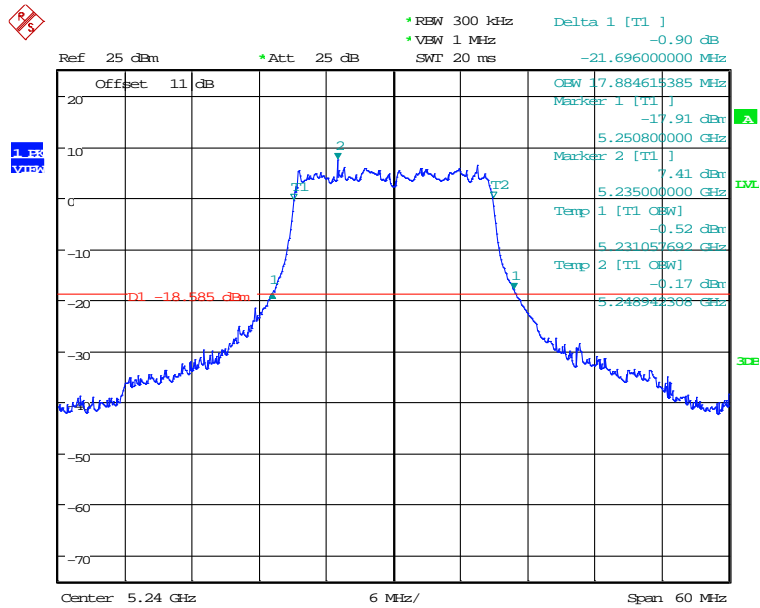


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH48
 Date: 16.OCT.2019 14:30:42



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

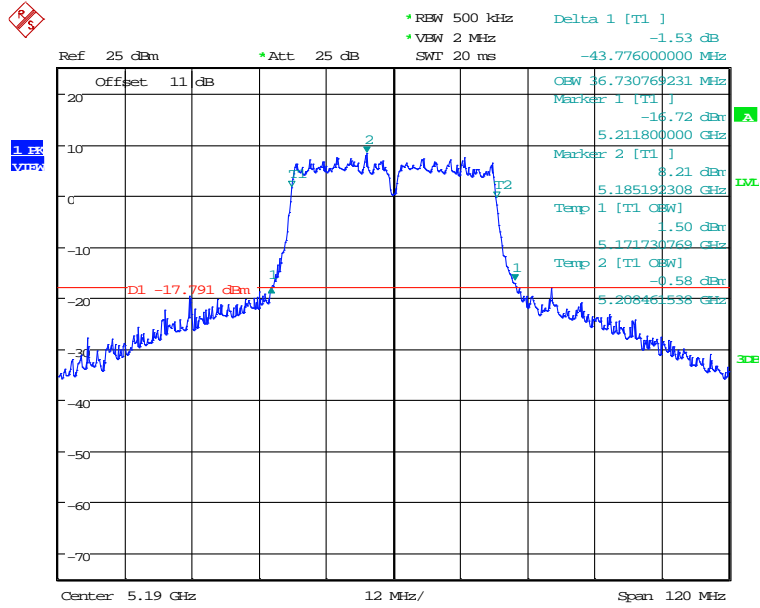


99% OBW & 26DB BANDWIDTH ANT2_11n40_CH38
 Date: 16.OCT.2019 14:53:20

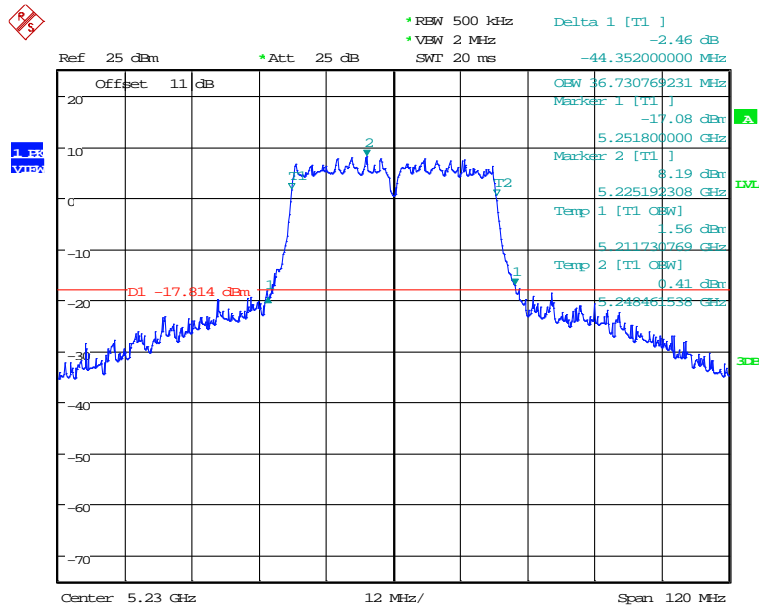

99% OBW & 26DB BANDWIDTH ANT2_11n40_CH46
 Date: 16.OCT.2019 14:59:29




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

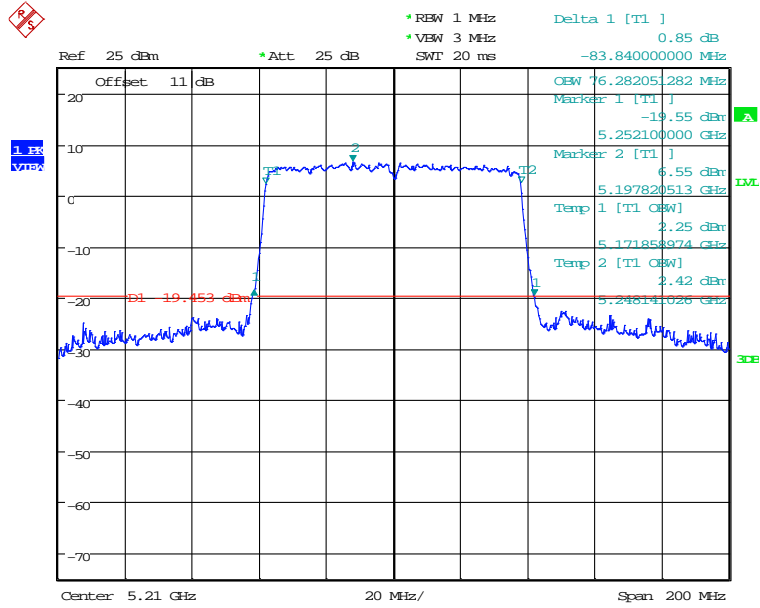

99% OBW & 26DB BANDWIDTH ANT2_11ac80_CH42
 Date: 16.OCT.2019 15:10:18


5.25 GHz ~ 5.35 GHz

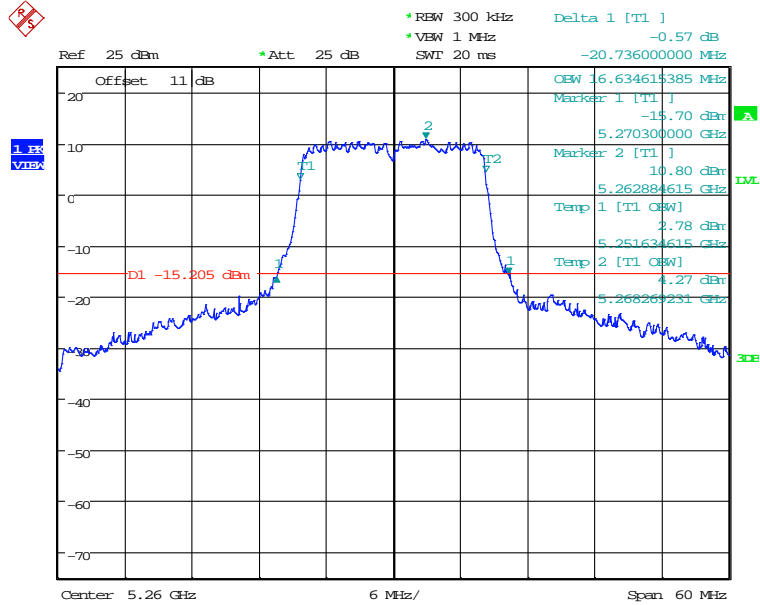


99% OBW & 26DB BANDWIDTH ANT2_11a_CH52
 Date: 16.OCT.2019 15:28:54



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

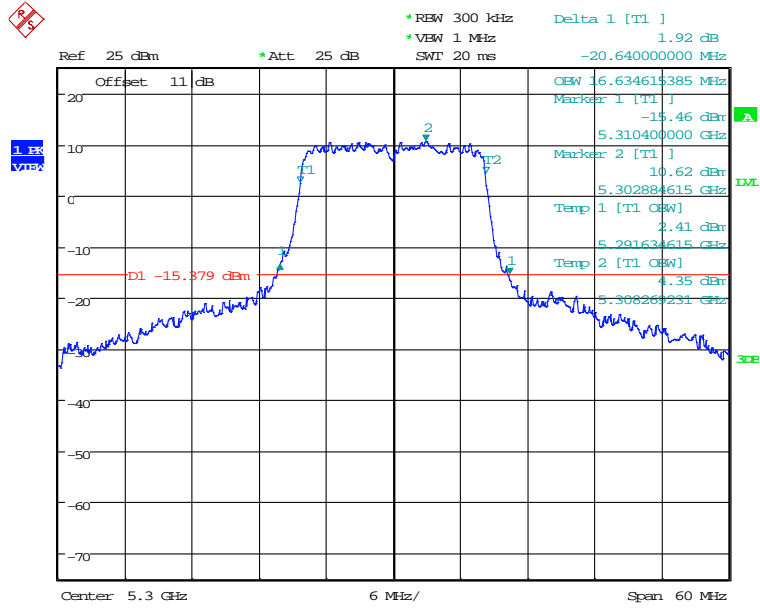


99% OBW & 26DB BANDWIDTH ANT2_11a_CH60
 Date: 16.OCT.2019 15:35:19

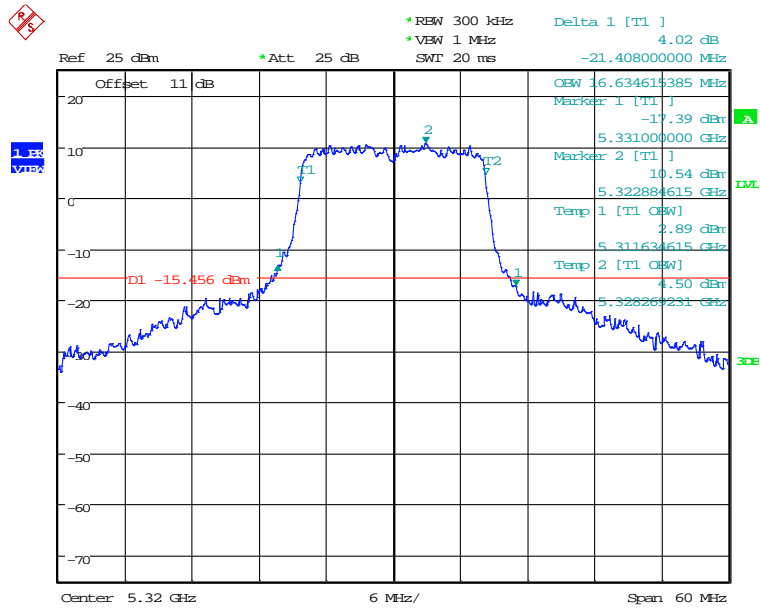


99% OBW & 26DB BANDWIDTH ANT2_11a_CH64
 Date: 16.OCT.2019 15:41:44



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

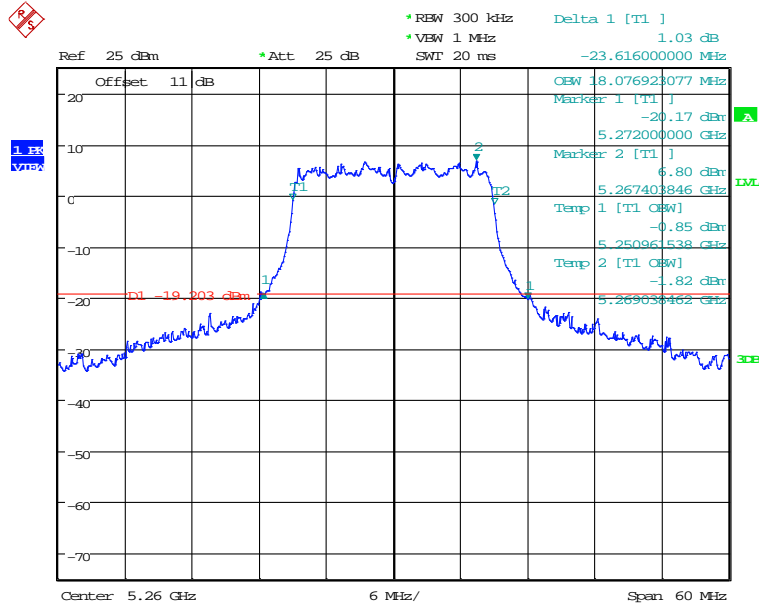


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH52
 Date: 16.OCT.2019 16:02:38

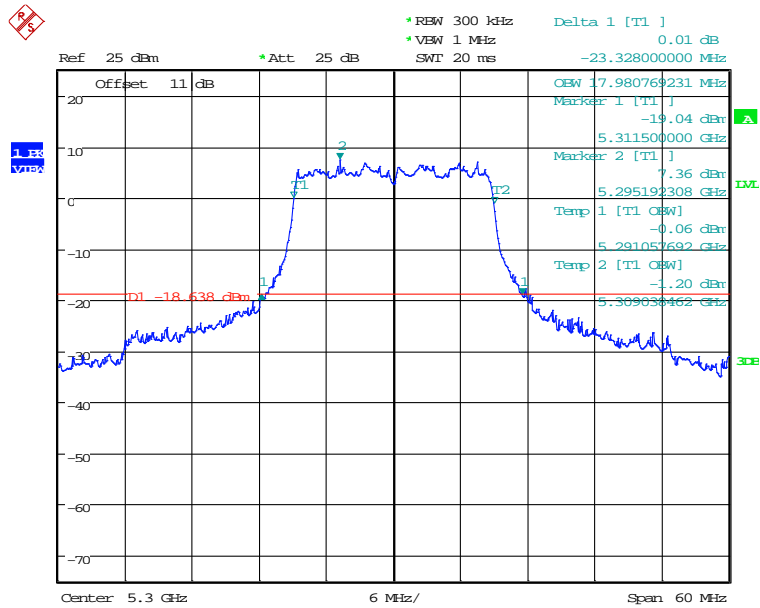


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH60
 Date: 16.OCT.2019 16:08:30



Registration number: W6R22002-19655-C-54
FCC ID: W23-WMXWAVE2AS

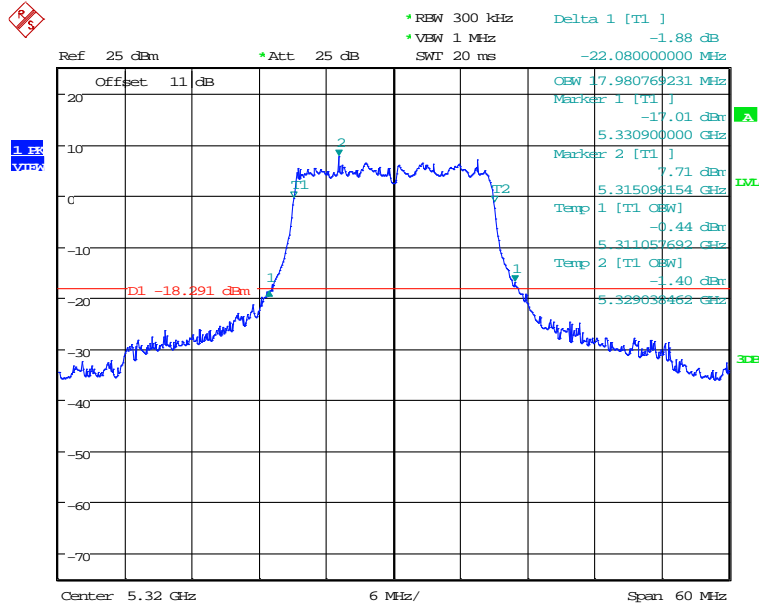


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH64
Date: 16.OCT.2019 16:14:39

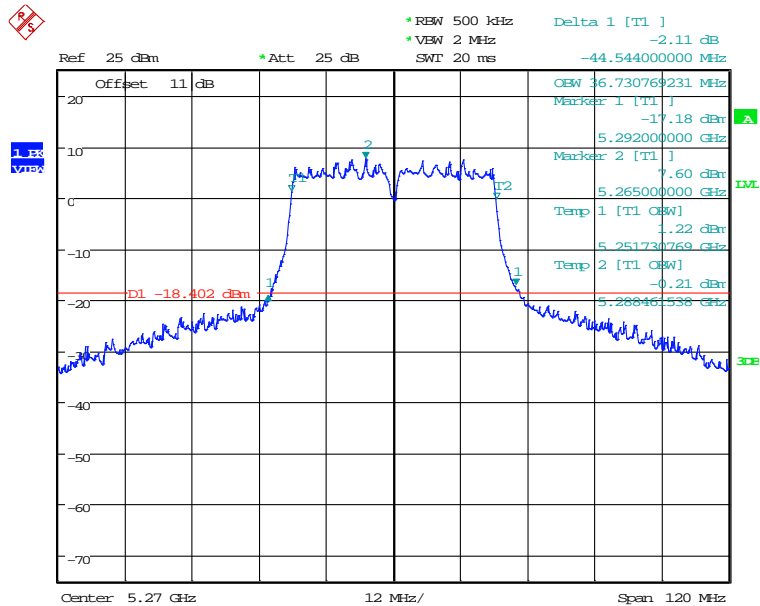


99% OBW & 26DB BANDWIDTH ANT2_11n40_CH54
Date: 16.OCT.2019 16:29:24




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

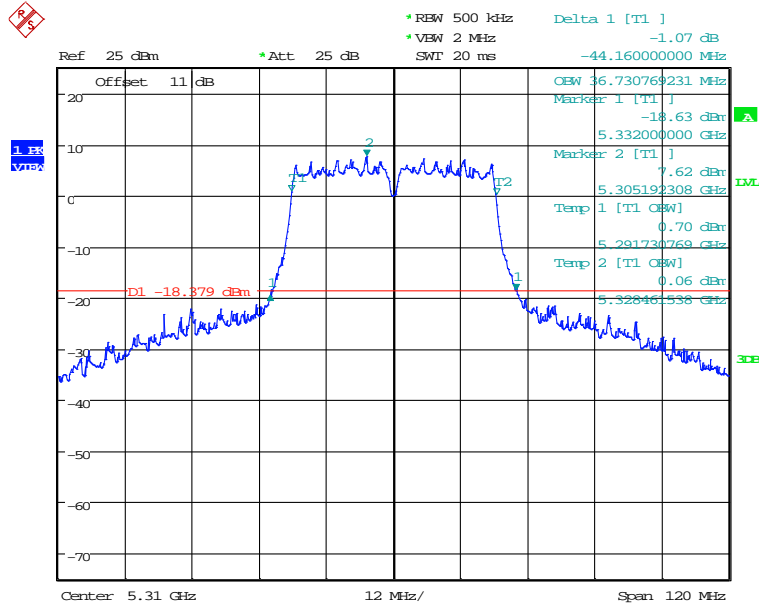

99% OBW & 26DB BANDWIDTH ANT2_11n40_CH62
 Date: 16.OCT.2019 16:37:23

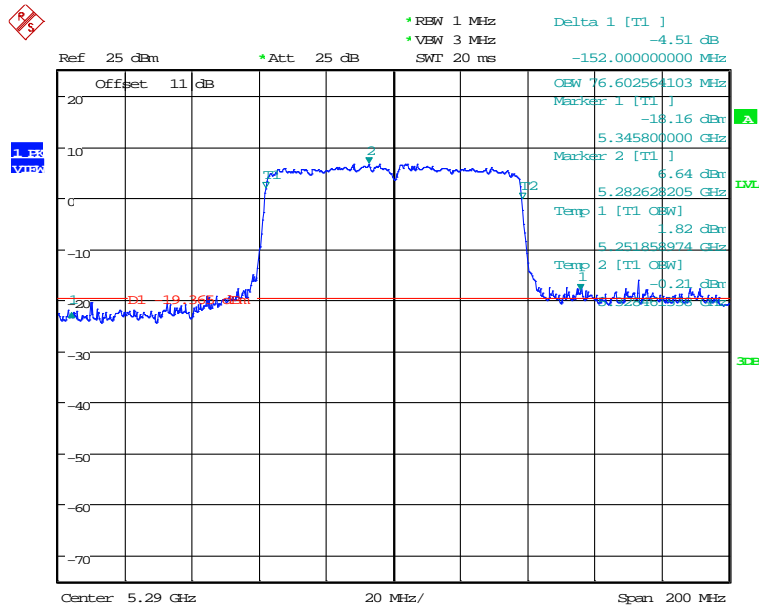


99% OBW & 26DB BANDWIDTH ANT2_11ac80_CH58
 Date: 16.OCT.2019 16:50:07



Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

5.47 GHz ~ 5.725 GHz

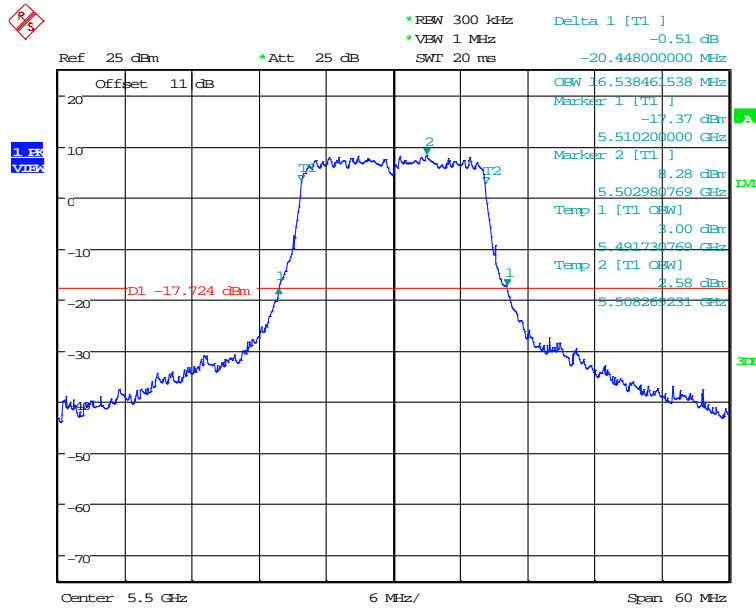

99% OBW & 26DB BANDWIDTH ANT2_11a_CH100

Date: 16.OCT.2019 17:17:48

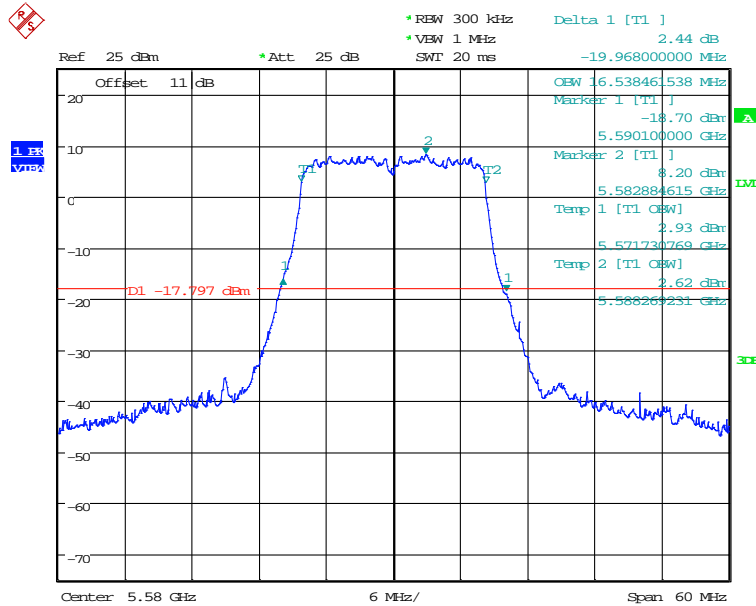


99% OBW & 26DB BANDWIDTH ANT2_11a_CH116


Date: 16.OCT.2019 19:17:48



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

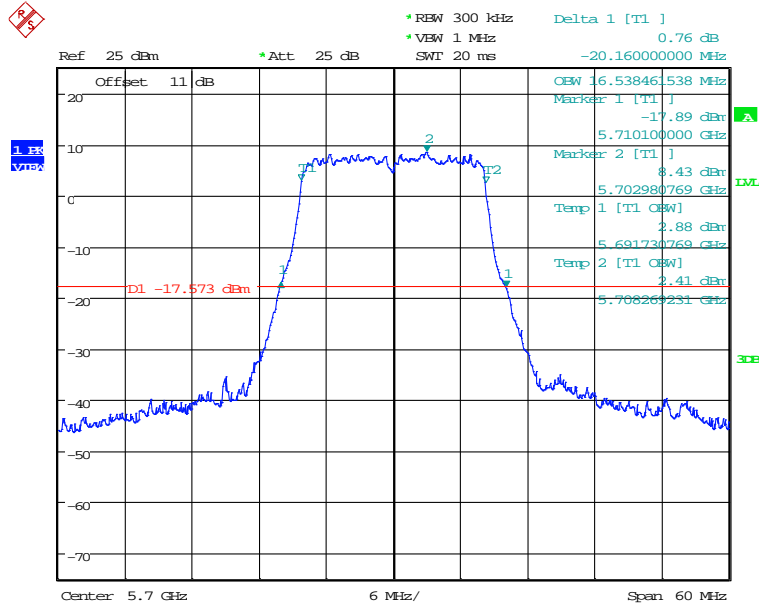


99% OBW & 26DB BANDWIDTH ANT2_11a_CH140
 Date: 16.OCT.2019 19:24:40

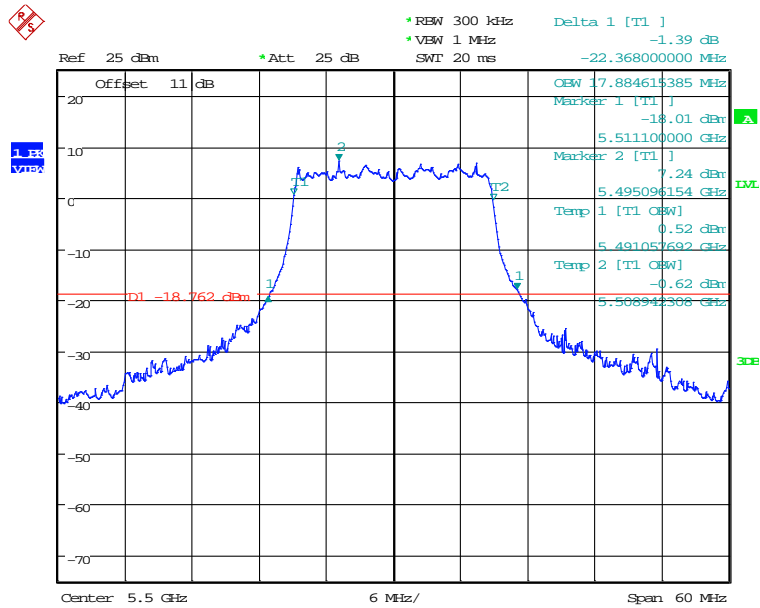


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH100
 Date: 16.OCT.2019 19:50:31



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

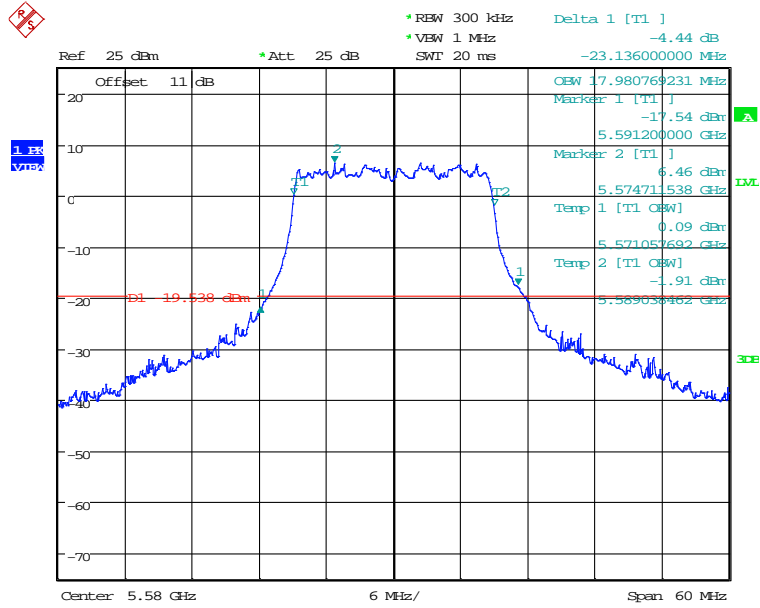


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH116
 Date: 16.OCT.2019 19:57:07

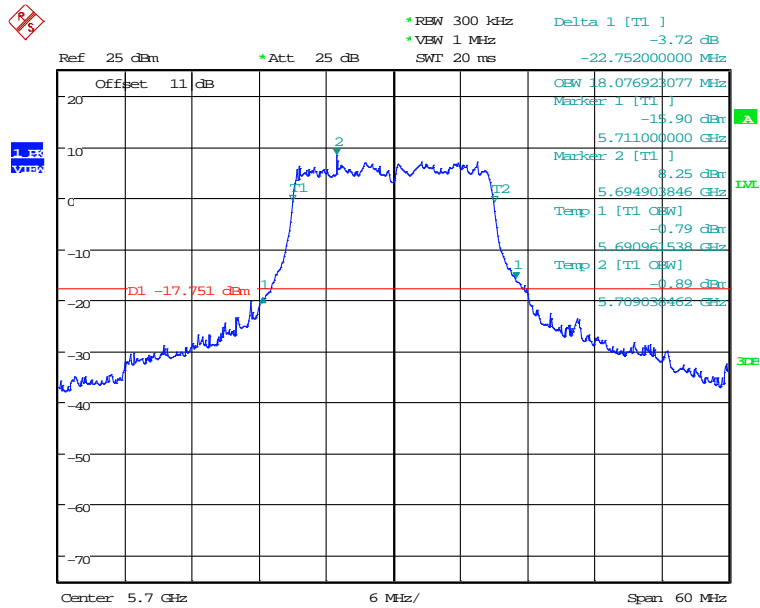


99% OBW & 26DB BANDWIDTH ANT2_11n20_CH140
 Date: 16.OCT.2019 20:02:37



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

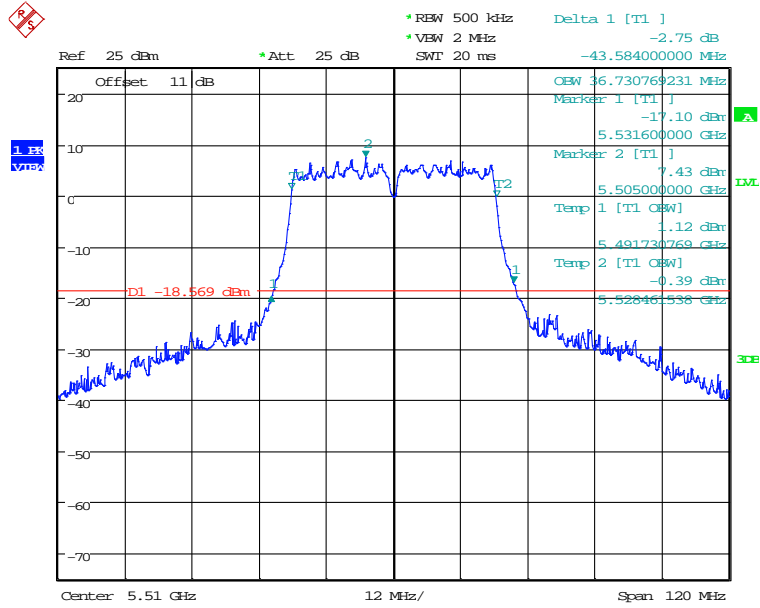


99% OBW & 26DB BANDWIDTH ANT2_11n40_CH102
 Date: 16.OCT.2019 20:20:57

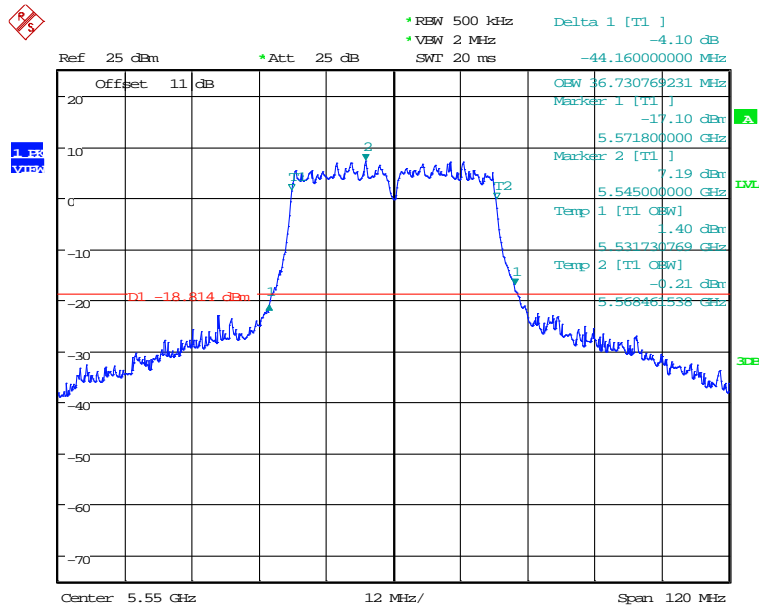


99% OBW & 26DB BANDWIDTH ANT2_11n40_CH110
 Date: 16.OCT.2019 20:27:44



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

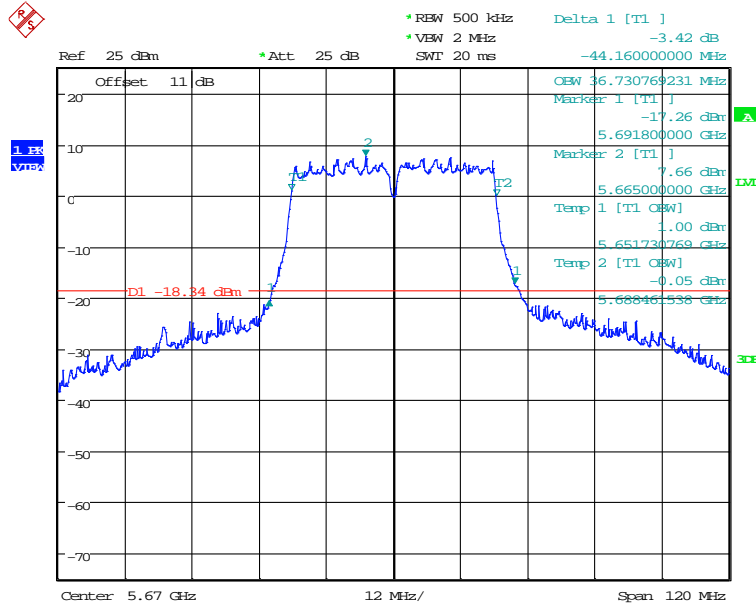

99% OBW & 26DB BANDWIDTH ANT2_11n40_CH134
 Date: 16.OCT.2019 20:35:43

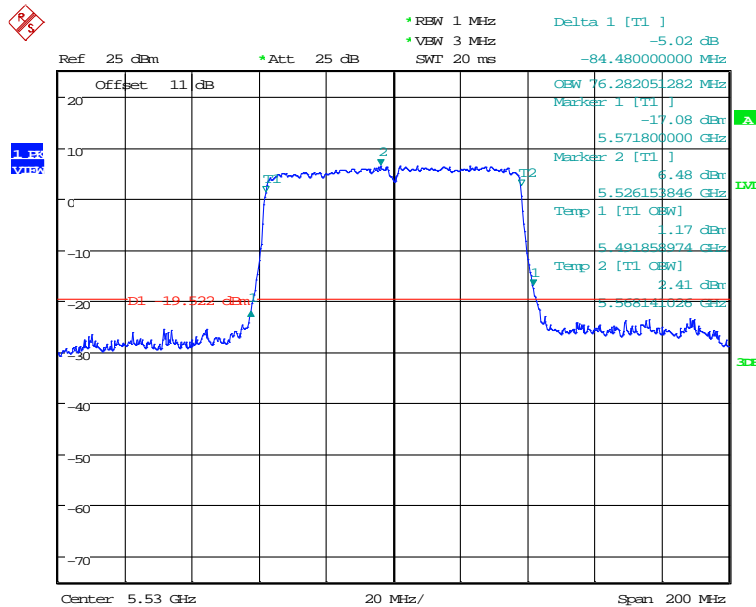

99% OBW & 26DB BANDWIDTH ANT2_11ac80_CH106
 Date: 16.OCT.2019 20:46:43




Registration number: W6R22002-19655-C-54


FCC ID: W23-WMXWAVE2AS

ANT3

5.15 GHz ~ 5.25 GHz

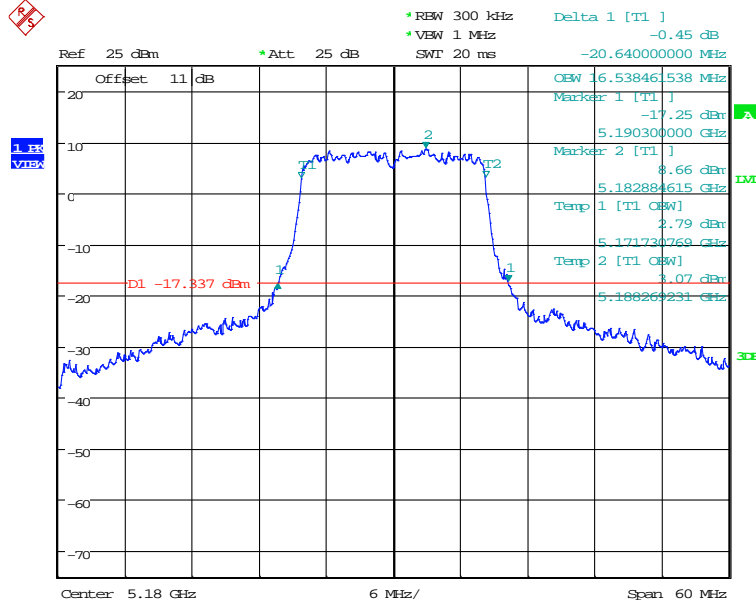


99% OBW & 26DB BANDWIDTH ANT3_11a_CH36
 Date: 15.OCT.2019 21:03:42

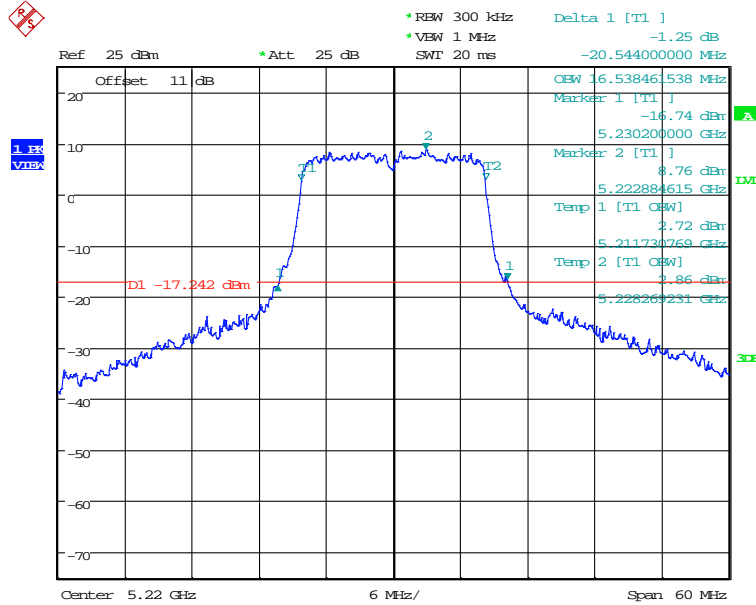


99% OBW & 26DB BANDWIDTH ANT3_11a_CH44
 Date: 15.OCT.2019 21:10:35



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

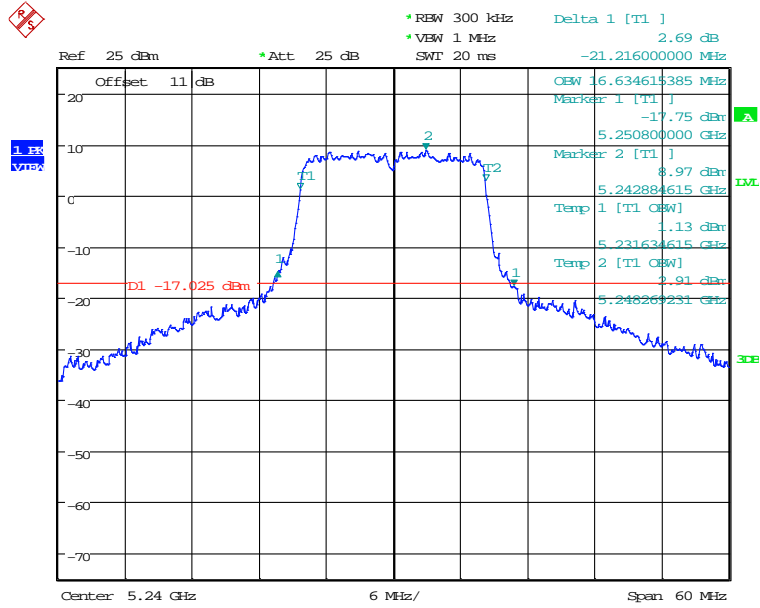


99% OBW & 26DB BANDWIDTH ANT3_11a_CH48
 Date: 15.OCT.2019 21:17:00

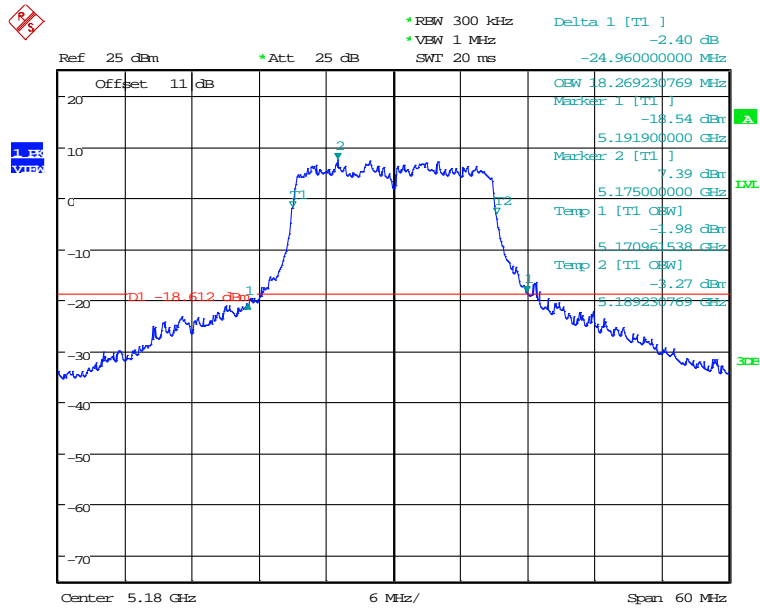


99% OBW & 26DB BANDWIDTH ANT3_11n20_CH36
 Date: 16.OCT.2019 14:12:49




Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

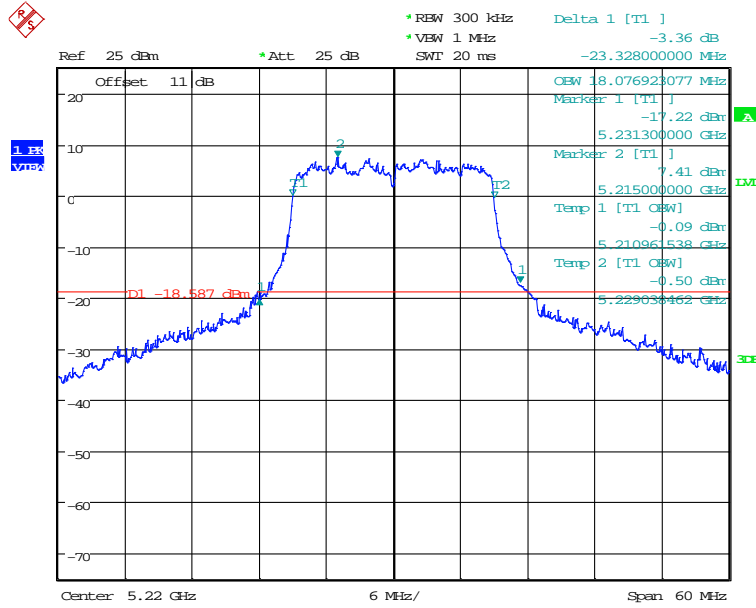


99% OBW & 26DB BANDWIDTH ANT3_11n20_CH44
 Date: 16.OCT.2019 14:43:43

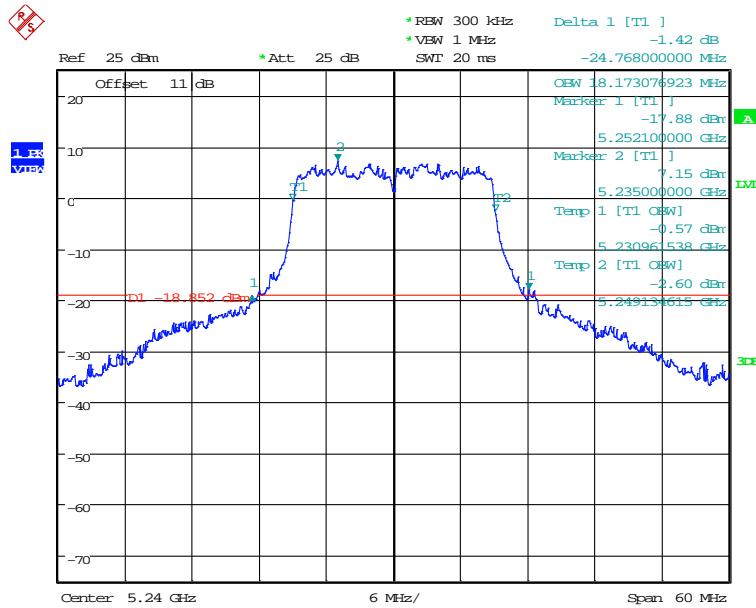


99% OBW & 26DB BANDWIDTH ANT3_11n20_CH48
 Date: 16.OCT.2019 14:31:53



Registration number: W6R22002-19655-C-54
 FCC ID: W23-WMXWAVE2AS

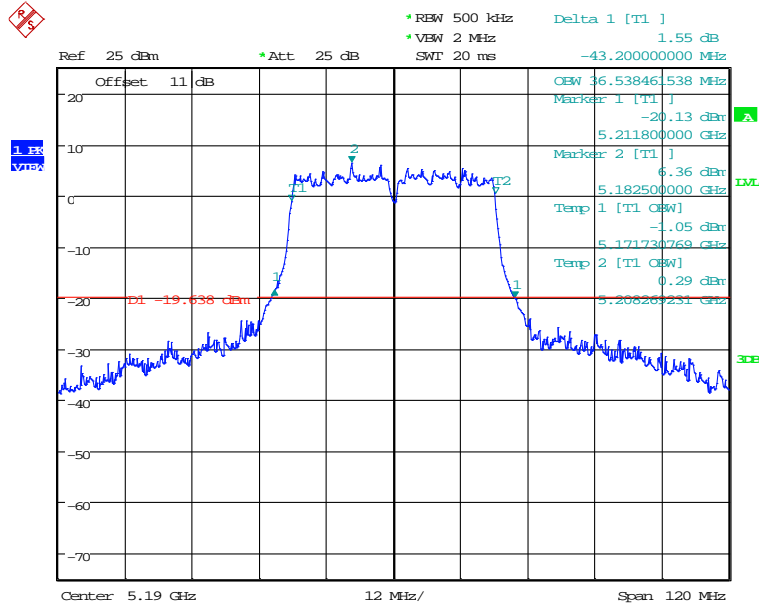

99% OBW & 26DB BANDWIDTH ANT3_11n40_CH38
 Date: 16.OCT.2019 14:54:37

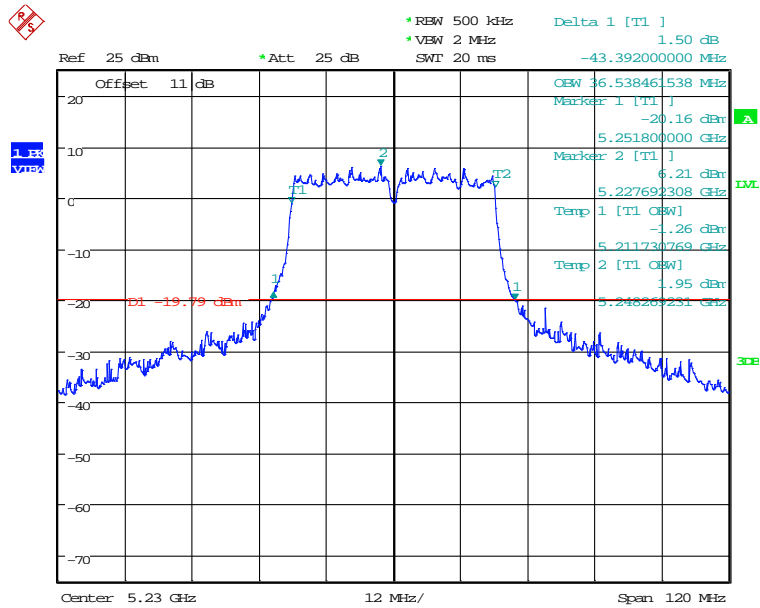

99% OBW & 26DB BANDWIDTH ANT3_11n40_CH46
 Date: 16.OCT.2019 15:00:51