



Appendix A. Test Result of AC Power Line Conducted Emission

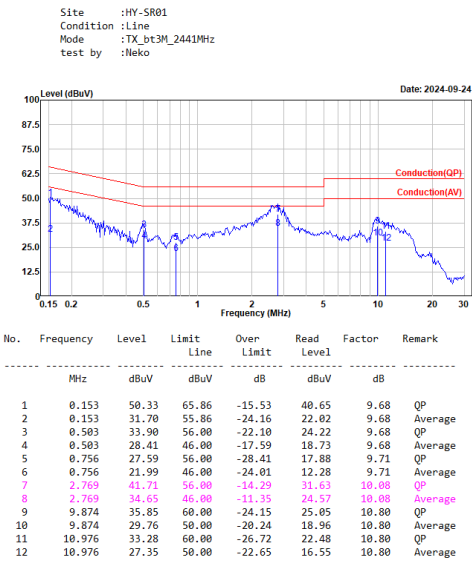

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

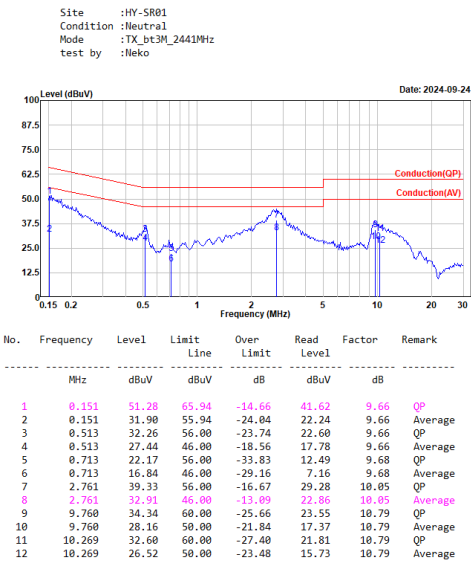


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK	2402	0.95	-
	2441	0.95	-
	2480	0.95	-
8DPSK	2402	1.29	-
	2441	1.29	-
	2480	1.29	-


GFSK(DH5) / 2402 MHz

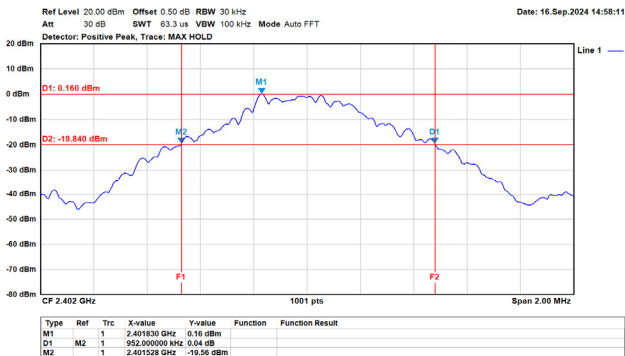


GFSK(DH5) / 2441 MHz

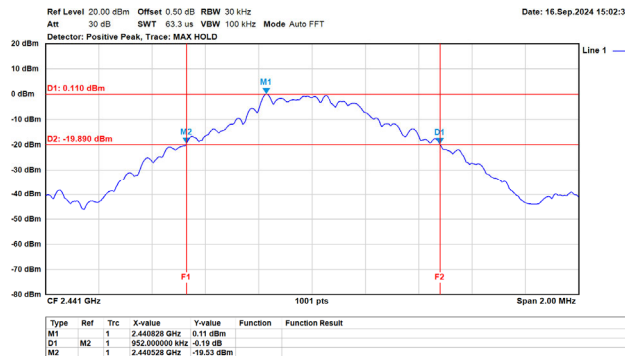


GFSK(DH5) / 2480 MHz

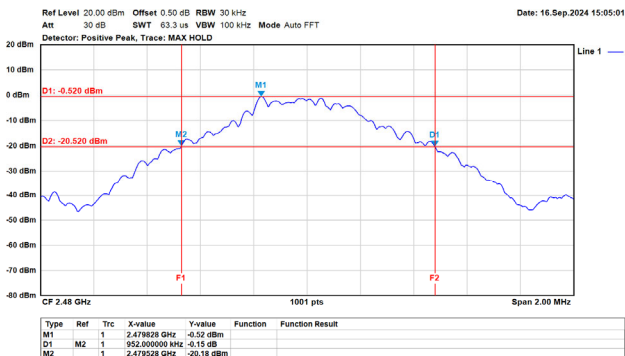


8DPSK(3DH5) / 2402 MHz

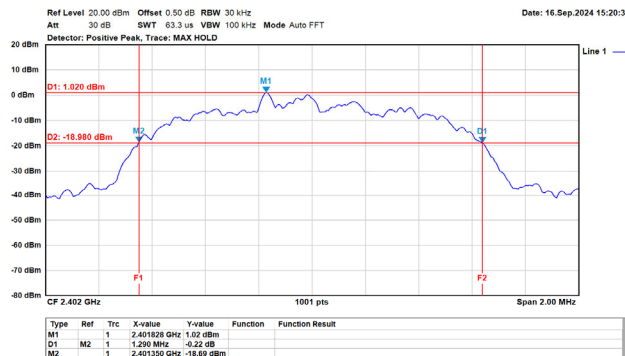

8DPSK(3DH5) / 2441 MHz

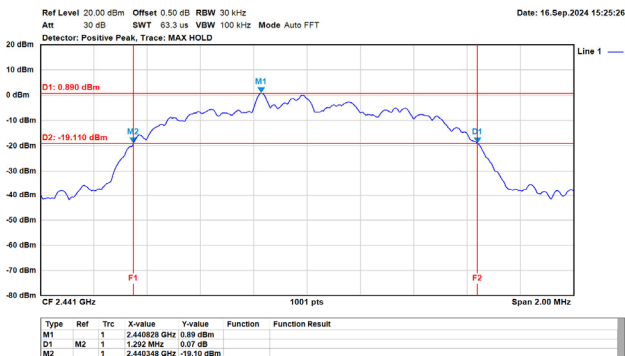


8DPSK(3DH5) / 2480 MHz

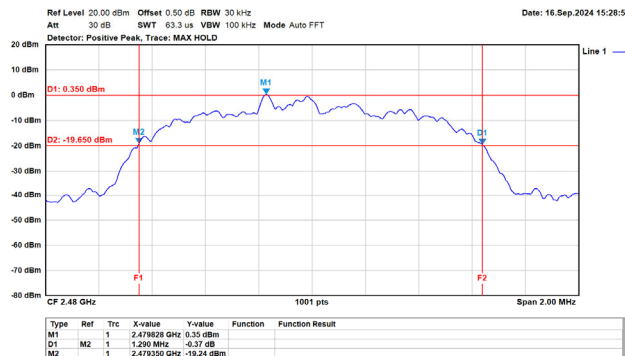

Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.635	Pass
	2441	0.99	0.635	Pass
	2480	1.00	0.635	Pass
8DPSK	2402	1.00	0.860	Pass
	2441	0.99	0.861	Pass
	2480	0.99	0.860	Pass

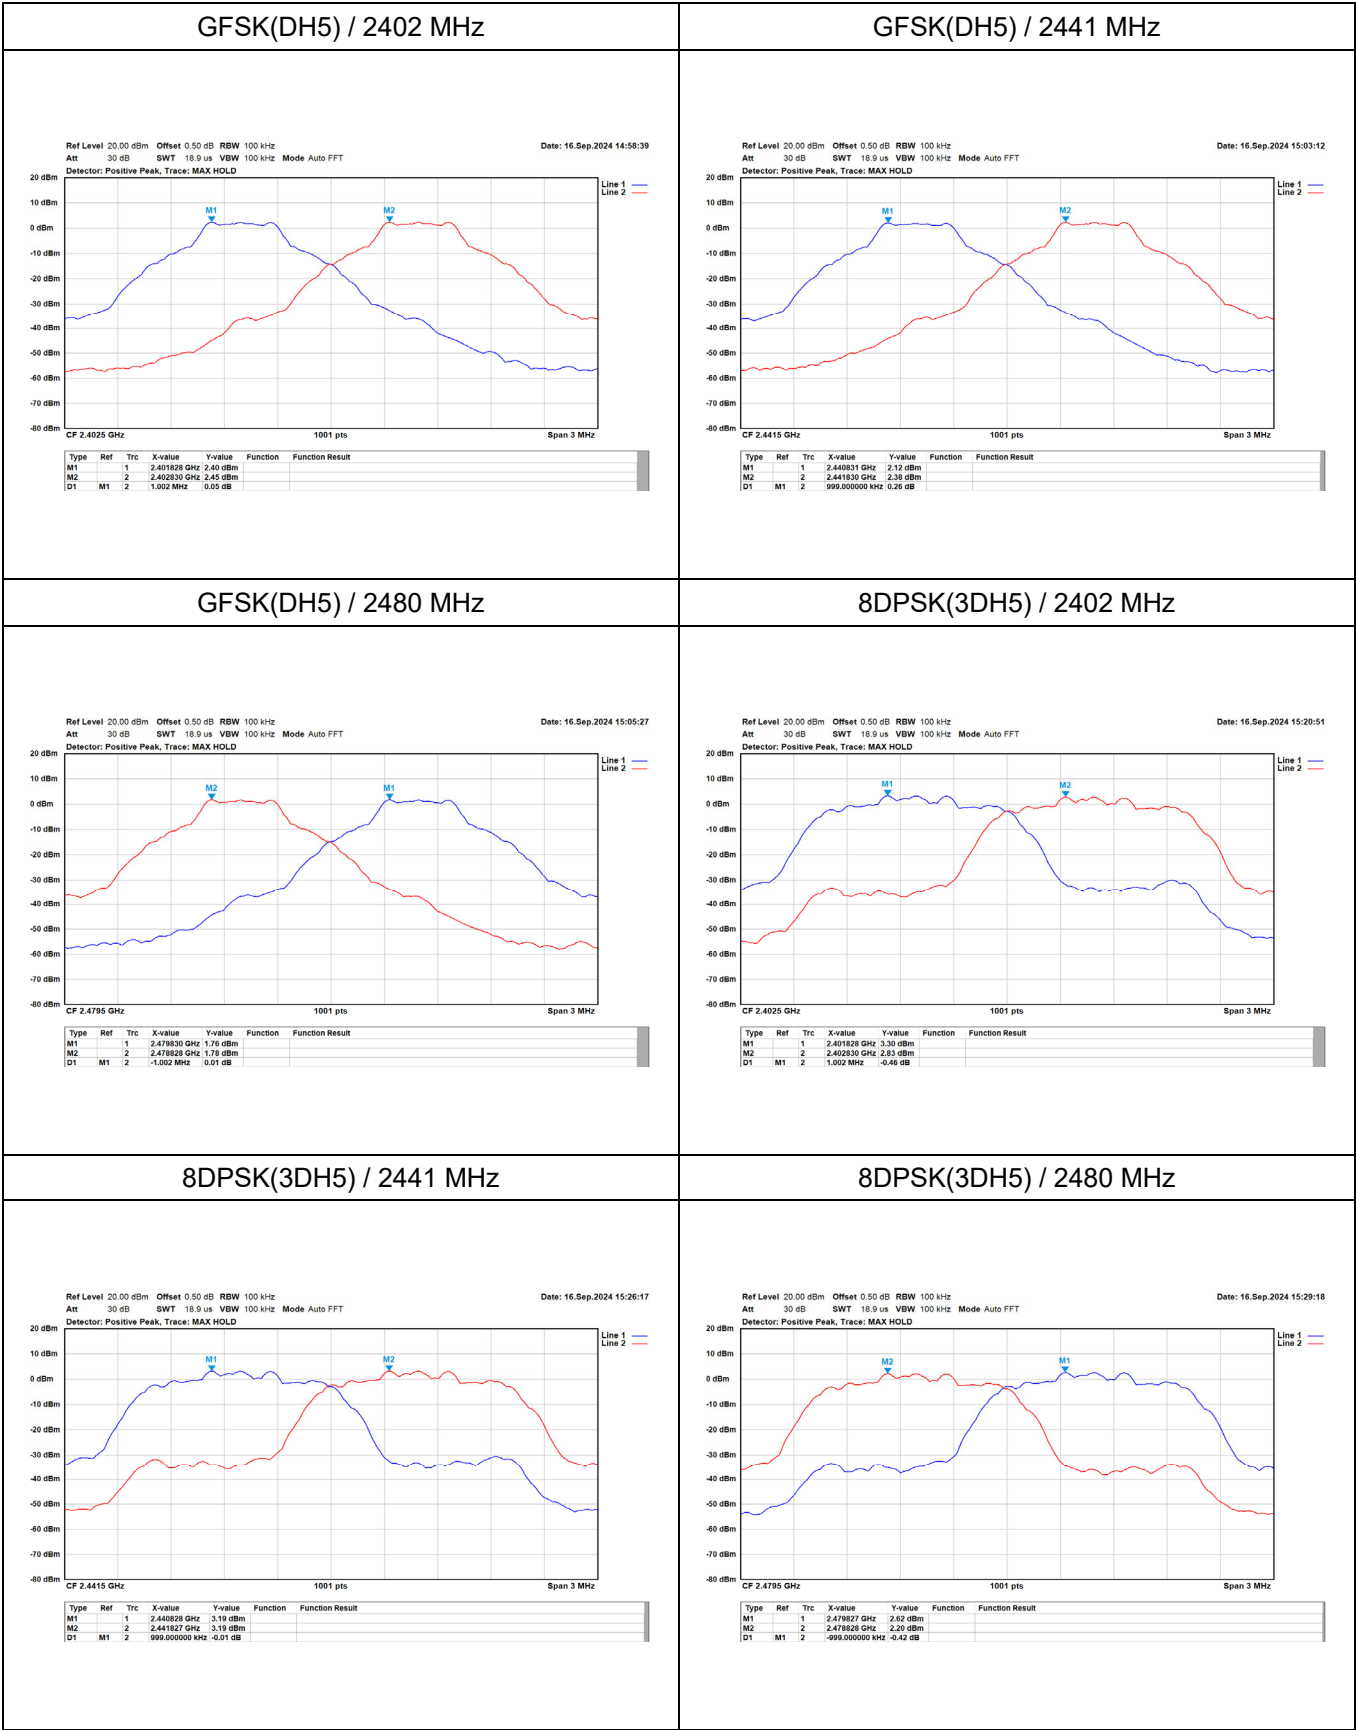


Appendix D. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	4.03	21.00	Pass
	2441	3.88	21.00	Pass
	2480	3.21	21.00	Pass
8DPSK	2402	6.60	21.00	Pass
	2441	6.33	21.00	Pass
	2480	5.53	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

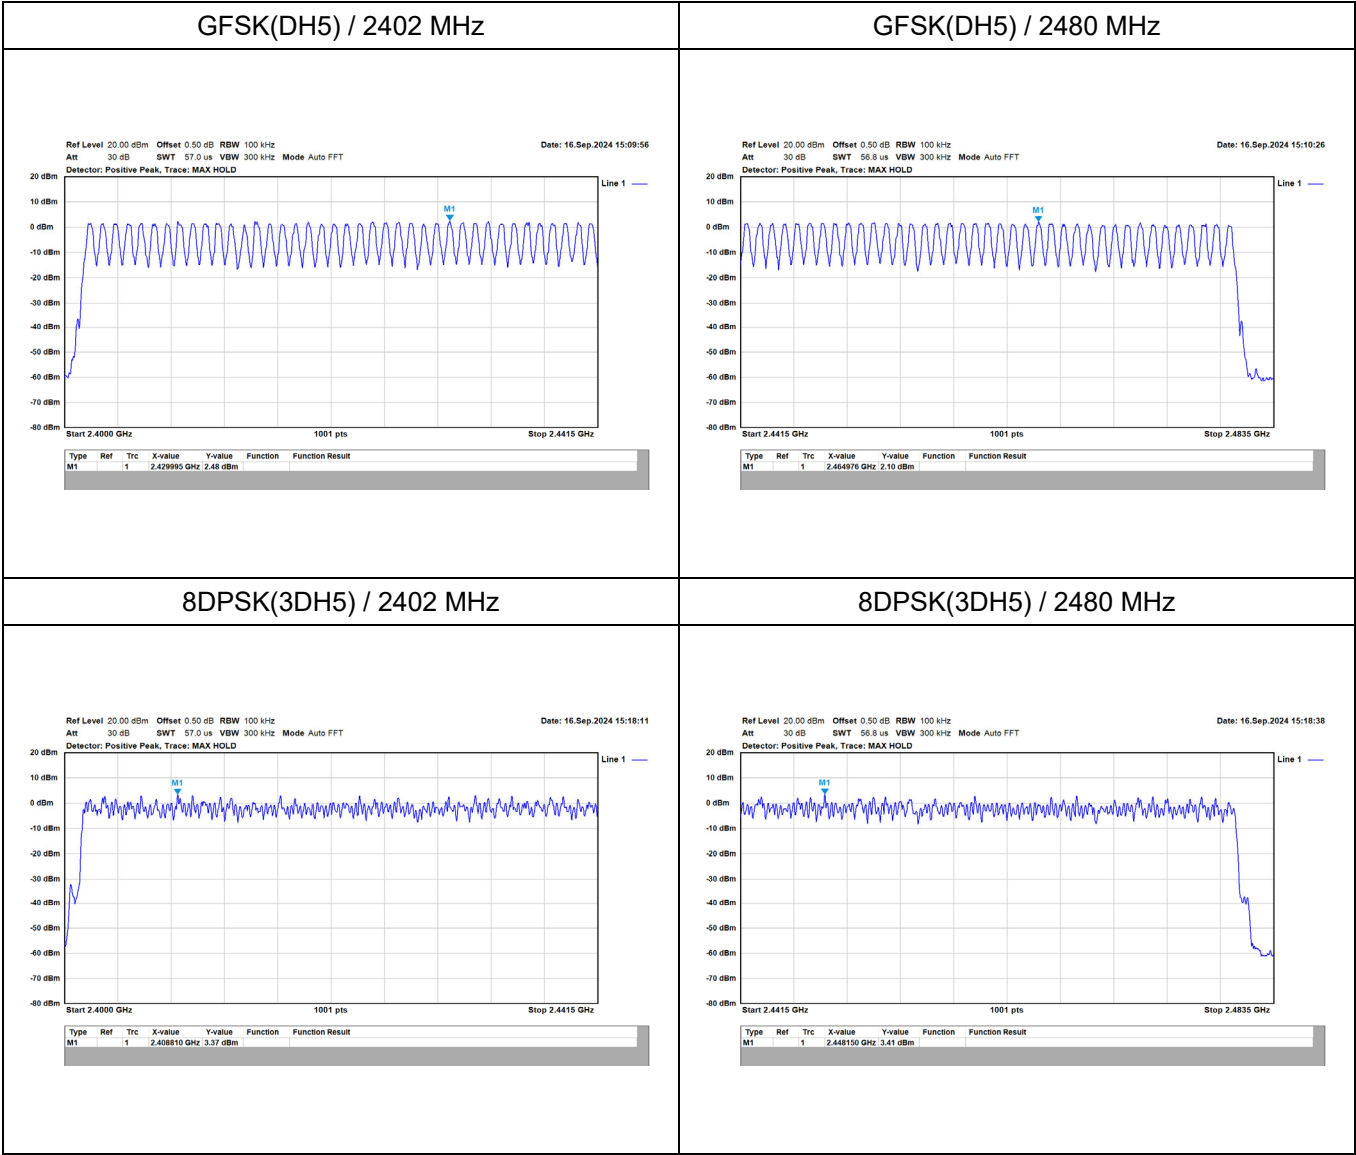


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4 sec, And Corresponds to The Standard °	

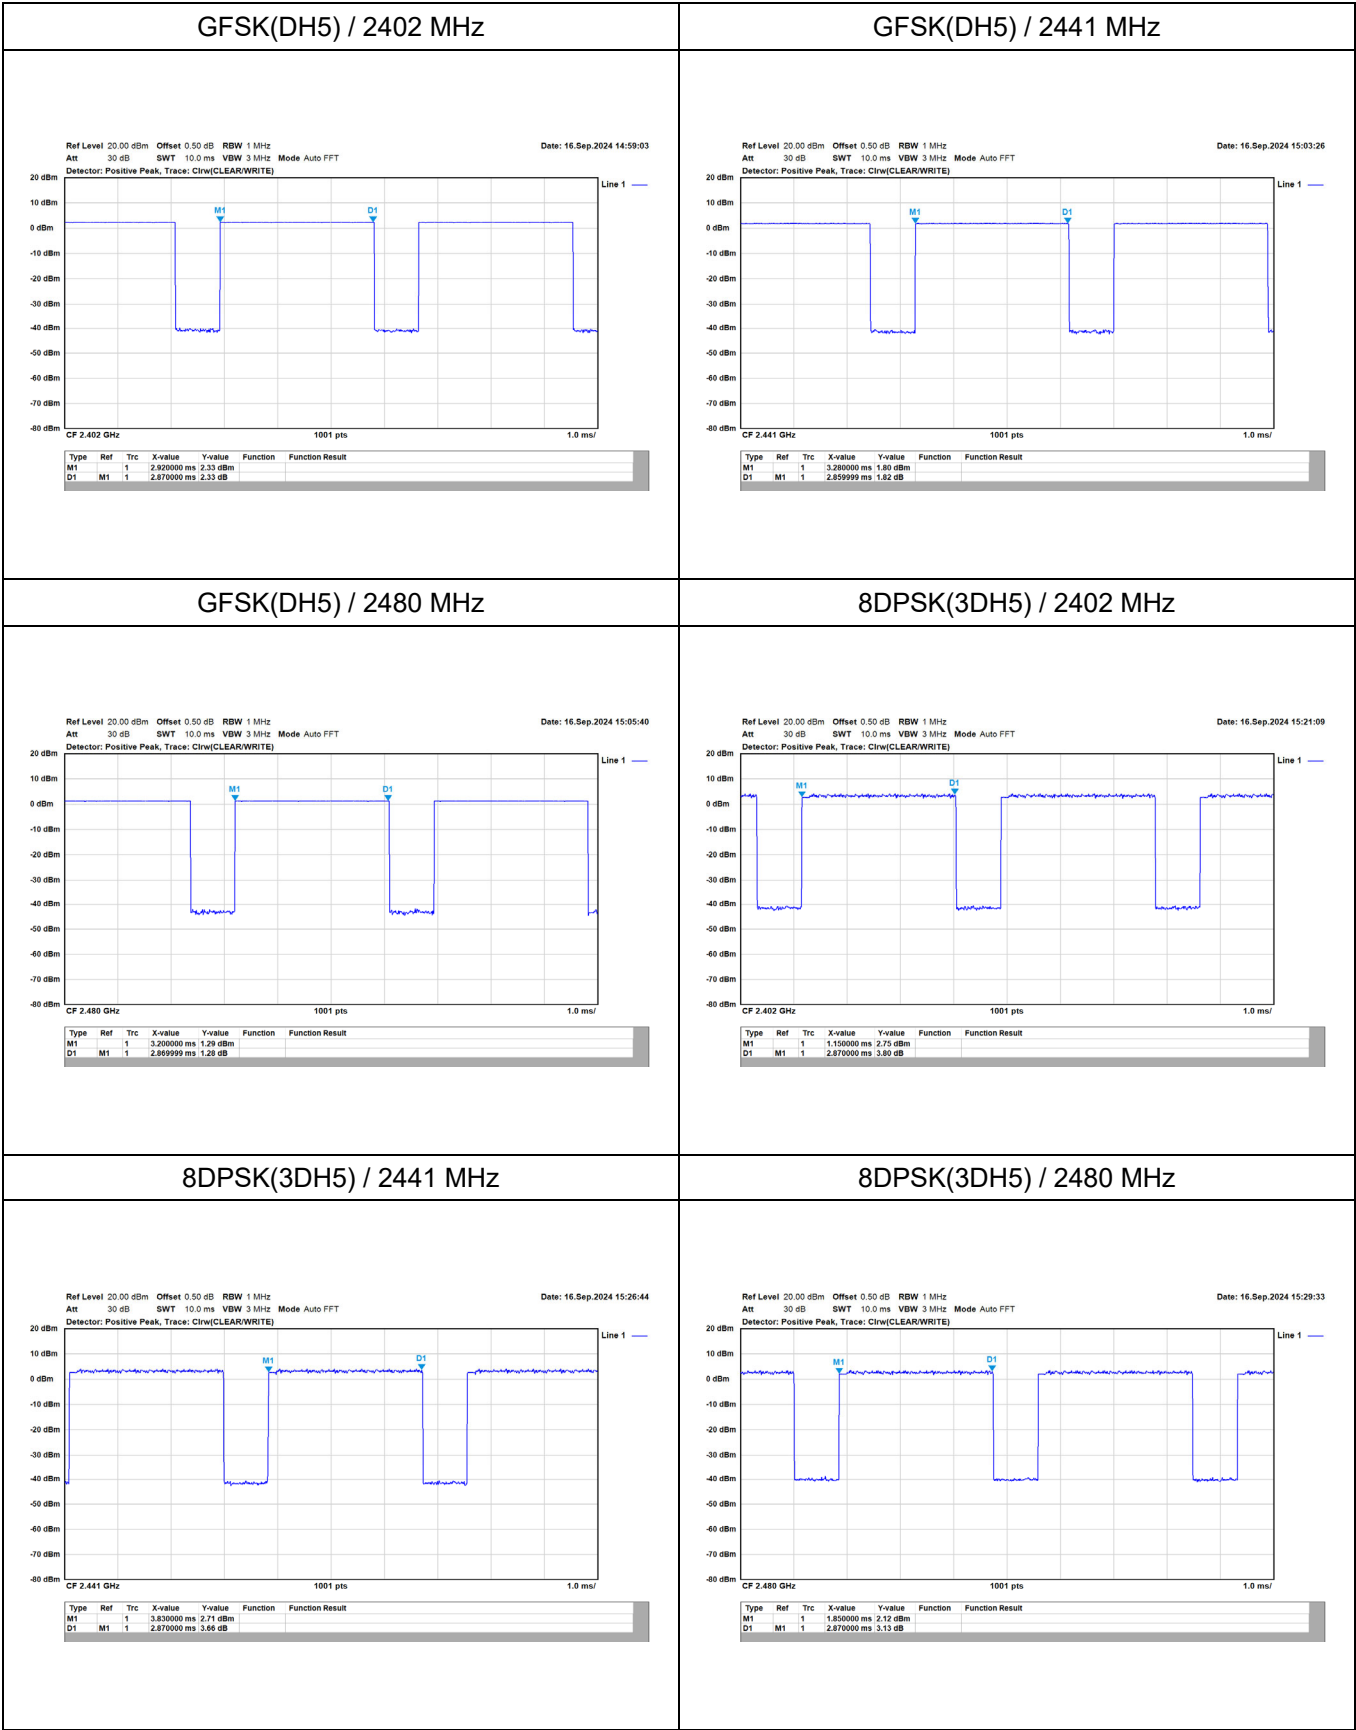


Appendix G. Test Result of Antenna Port Conducted Emission

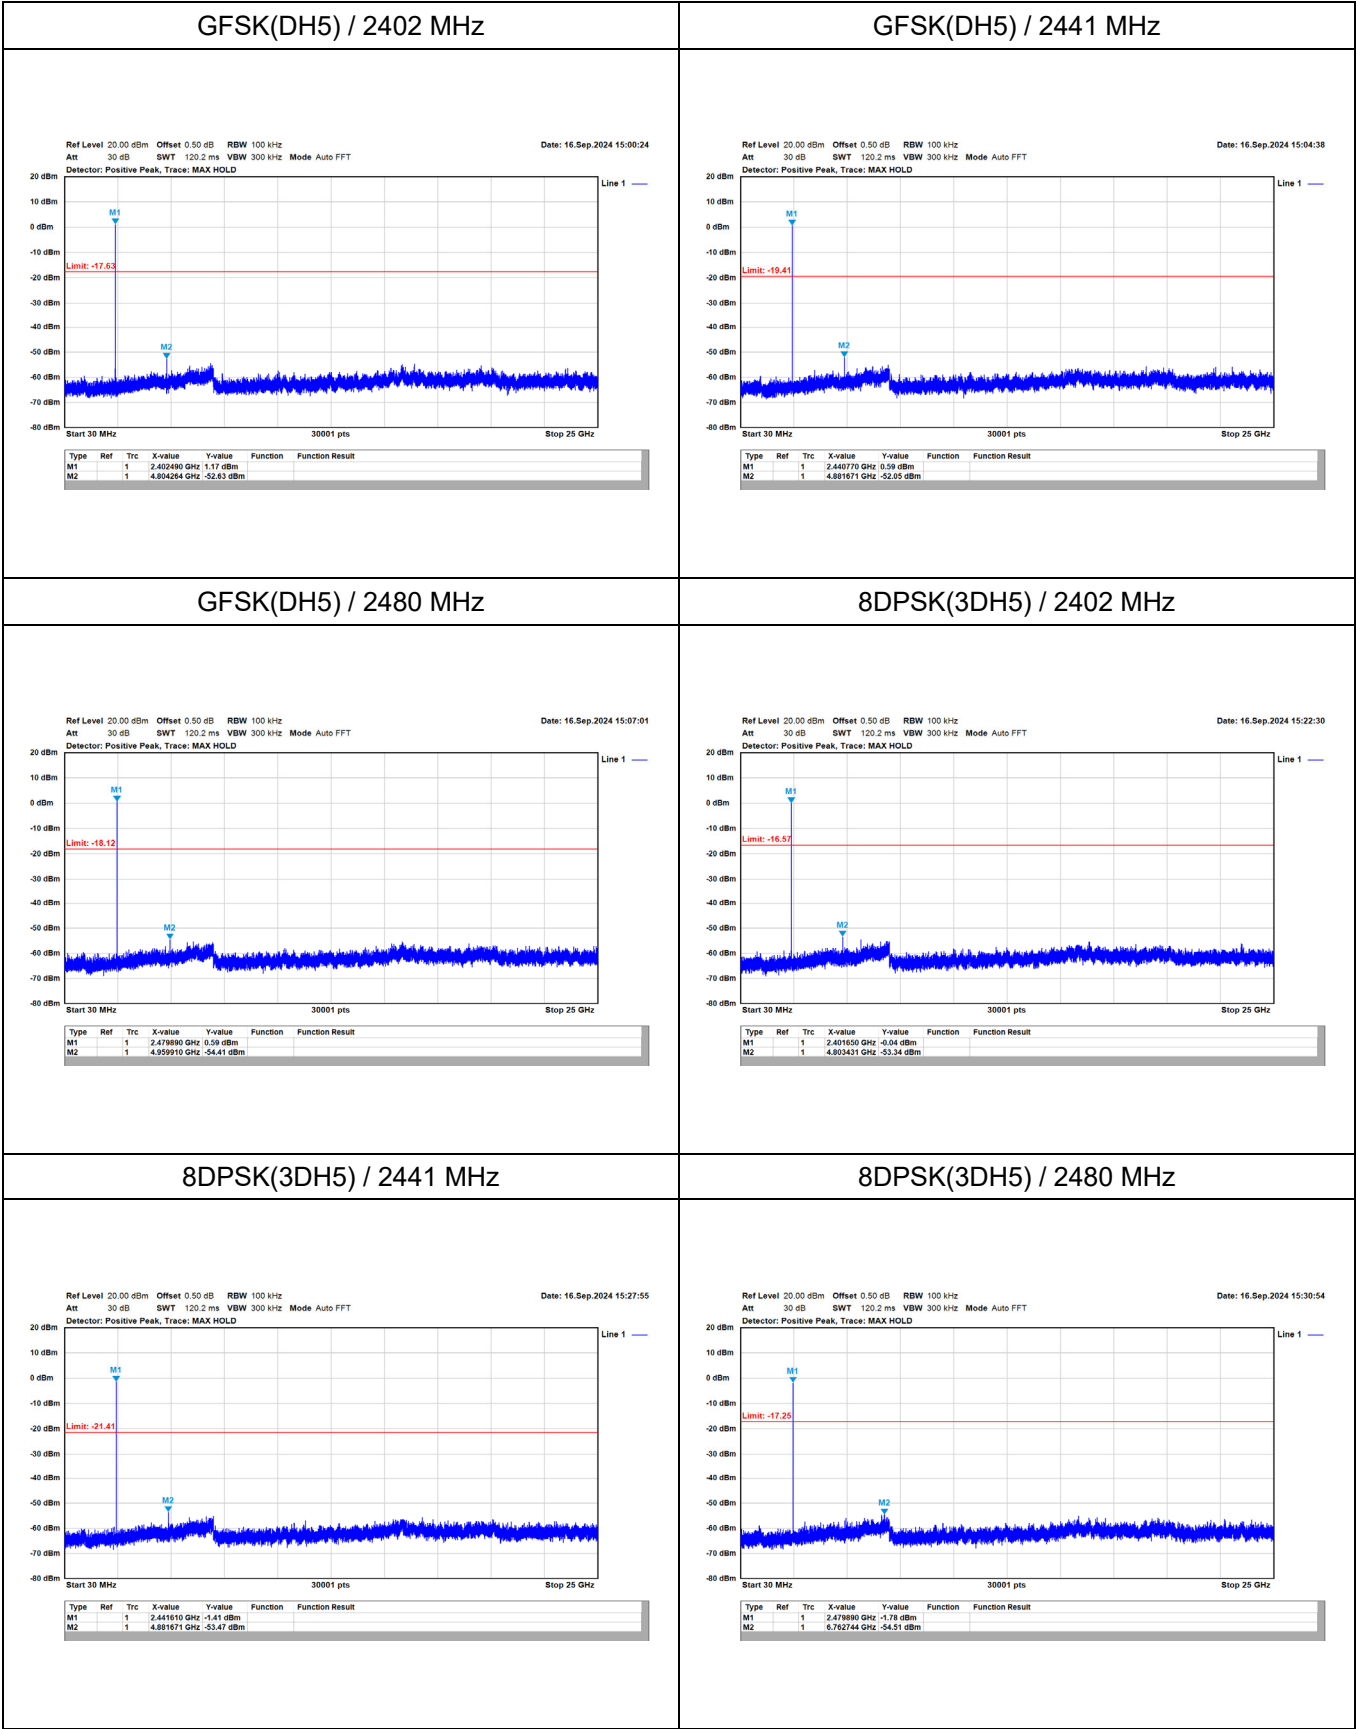


Hopping off

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass


GFSK(DH5) (Band Edge) / 2402 MHz

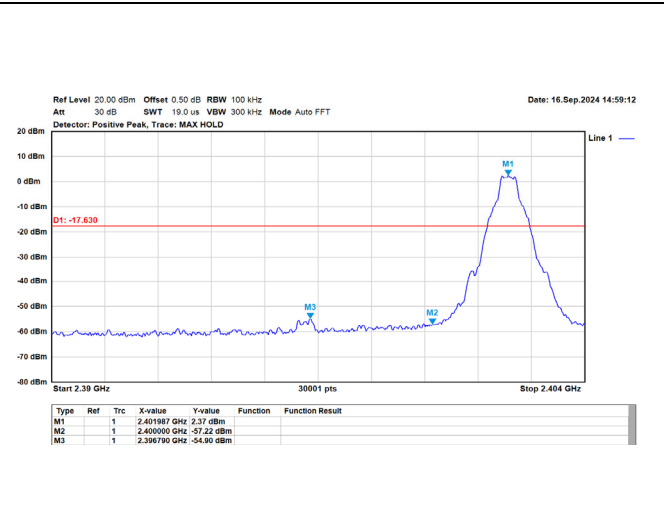


GFSK(DH5) (Band Edge) / 2480 MHz

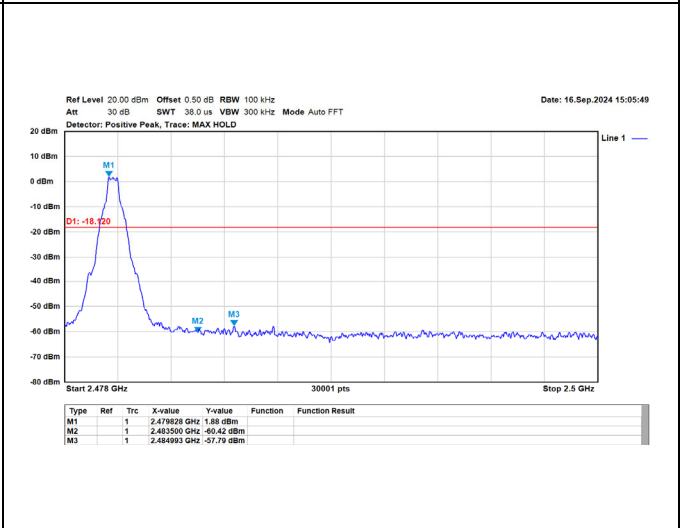

8DPSK(3DH5) (Band Edge) / 2402 MHz

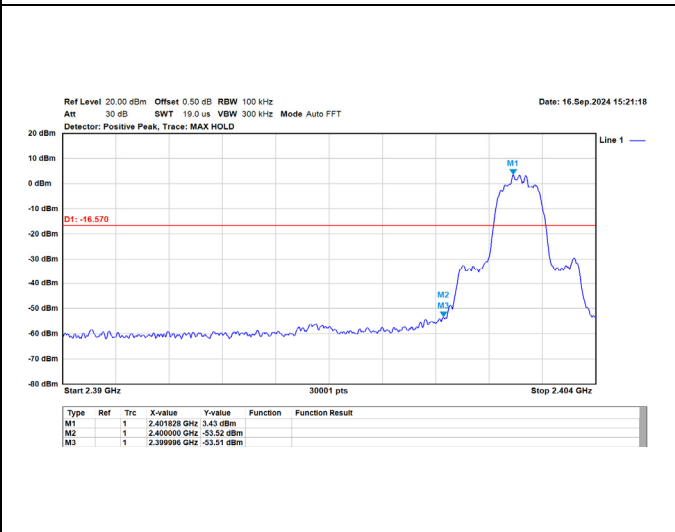


8DPSK(3DH5) (Band Edge) / 2480 MHz

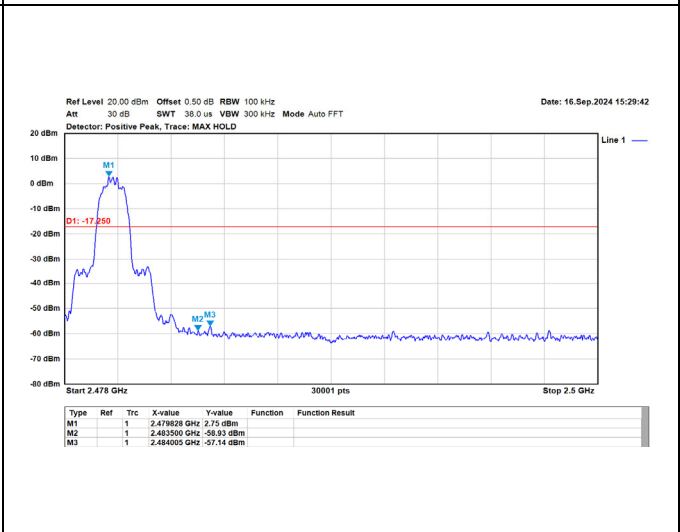


Hopping on

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

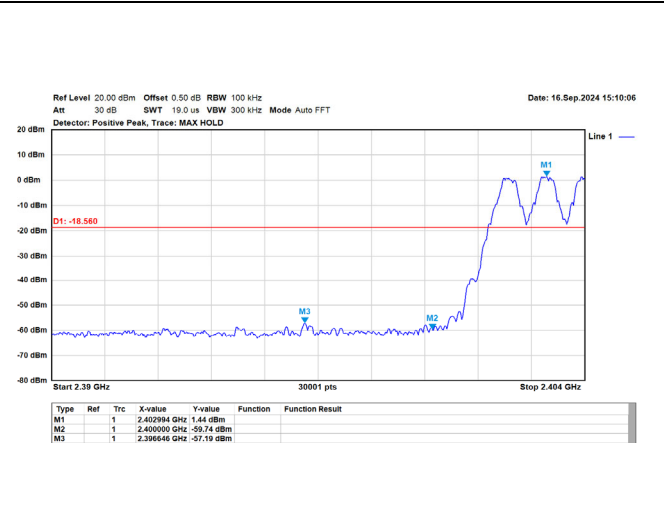


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

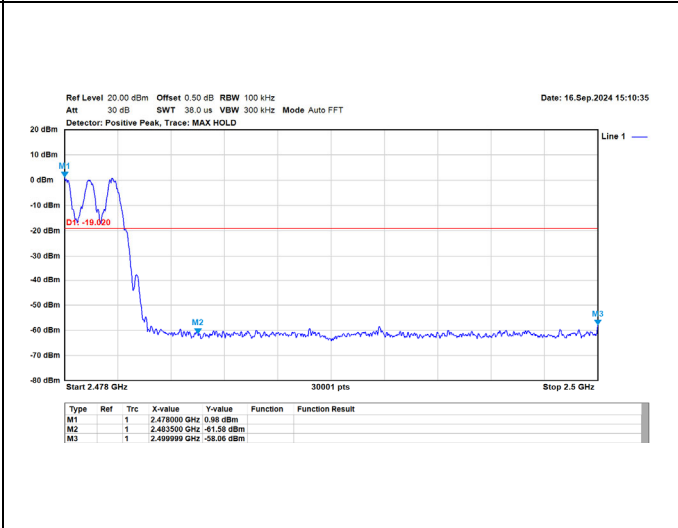

8DPSK(3DH5) (Band Edge Hopping) / 2402 MHz

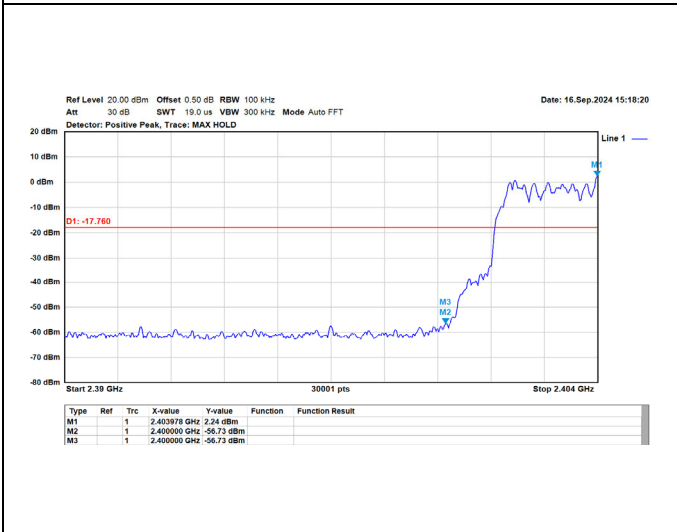


8DPSK(3DH5) (Band Edge Hopping) / 2480 MHz

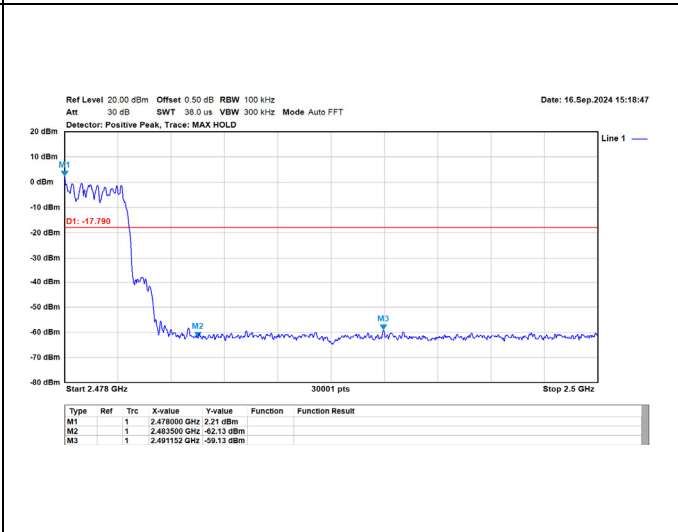

Appendix H. Test Result of Radiated Emission


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt1M_2402MHz
TEST BY :Caster

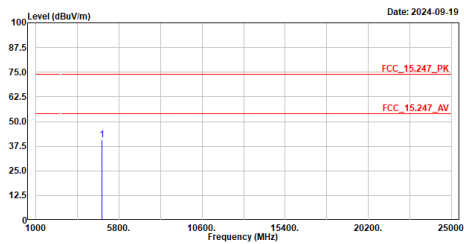

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt1M_2402MHz
TEST BY :Caster

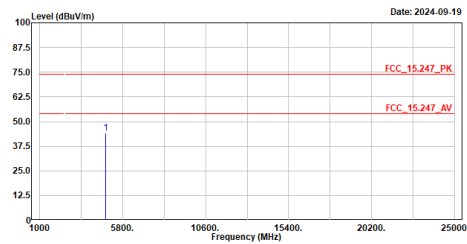

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt1M_2441MHz
TEST BY :Caster

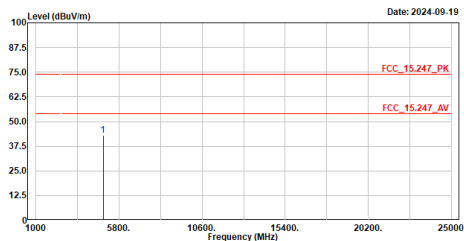

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt1M_2441MHz
TEST BY :Caster

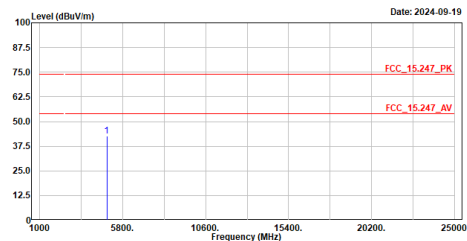

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2480MHz
TEST BY :Caster

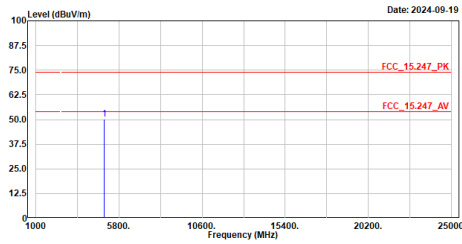


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	50.08	74.00	-23.92	64.40	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt3M_2480MHz
TEST BY :Caster

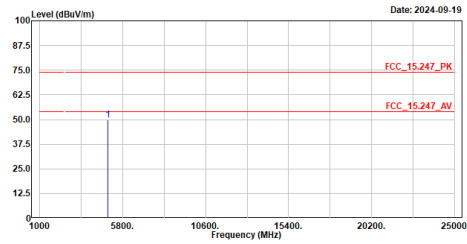


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	49.80	74.00	-24.20	64.12	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2402MHz
TEST BY :Caster

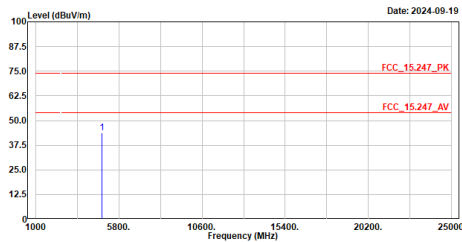


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	43.67	74.00	-30.33	58.49	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt3M_2402MHz
TEST BY :Caster

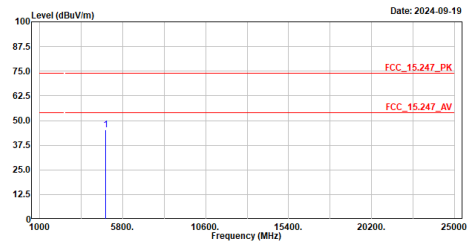


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	45.33	74.00	-28.67	60.15	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2441MHz
TEST BY :Caster

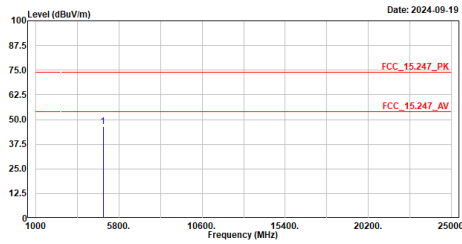


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	46.41	74.00	-27.59	60.98	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt3M_2441MHz
TEST BY :Caster

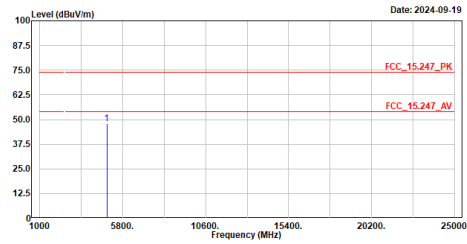


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	47.90	74.00	-26.10	62.47	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2480MHz
TEST BY :Caster

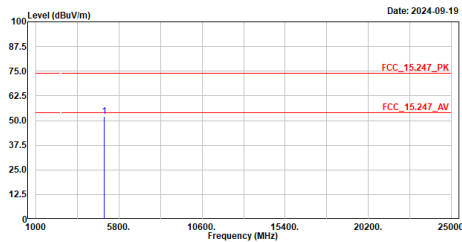


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	52.15	74.00	-21.85	66.47	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt3M_2480MHz
TEST BY :Caster

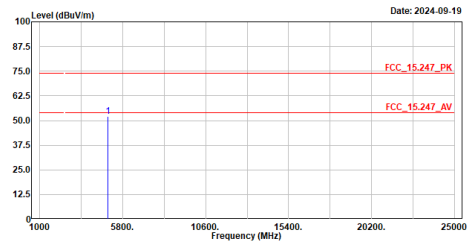


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	52.09	74.00	-21.91	66.41	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2441MHz
TEST BY :Caster

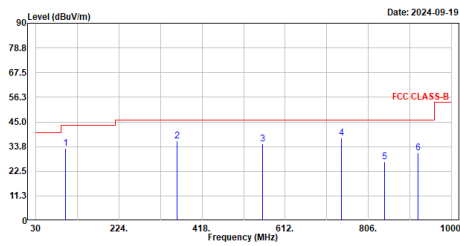


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	99.840	33.00	43.50	-10.50	61.24	-28.24	QP
2	359.800	36.41	46.00	-9.59	58.13	-21.72	QP
3	559.620	34.91	46.00	-11.09	51.62	-16.71	QP
4	742.950	37.68	46.00	-8.32	50.86	-13.18	QP
5	844.800	26.80	46.00	-19.20	38.80	-12.00	QP
6	921.430	31.05	46.00	-14.95	42.11	-11.06	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_bt3M_2441MHz
TEST BY :Caster

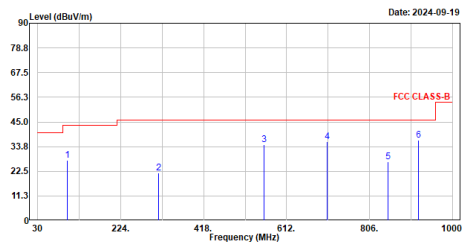


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	99.840	27.40	43.50	-16.10	55.64	-28.24	QP
2	312.270	21.80	46.00	-24.20	44.39	-22.59	QP
3	559.620	34.70	46.00	-11.30	51.41	-16.71	QP
4	706.090	36.08	46.00	-9.92	50.01	-13.93	QP
5	848.680	26.85	46.00	-19.15	38.78	-11.93	QP
6	920.460	36.53	46.00	-9.47	47.63	-11.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2402MHz
 TEST BY :Peter

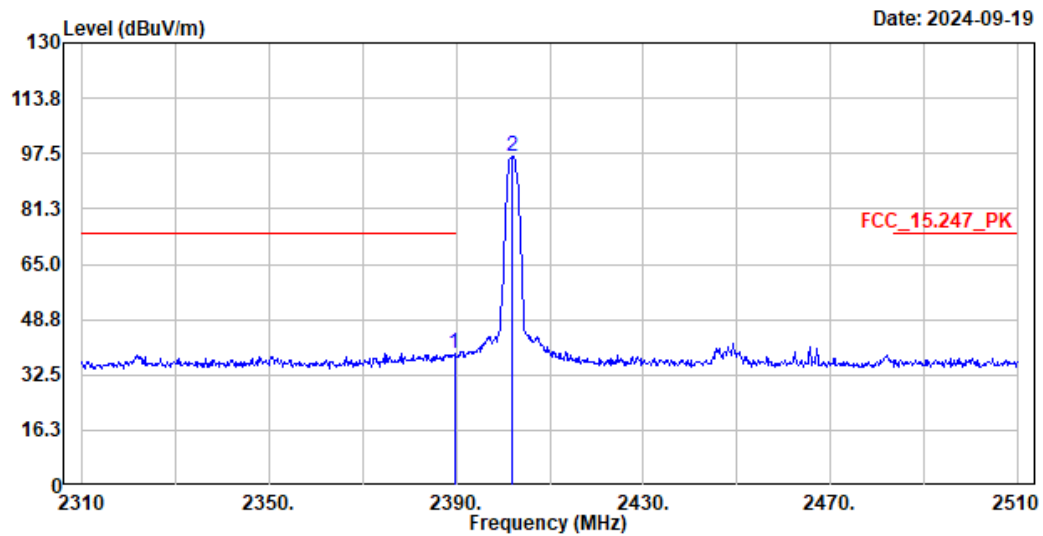

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	38.90	74.00	-35.10	33.01	5.89	Peak
2	2402.000	96.72	-----	-----	90.92	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.6	38.9	-30.752	8.148	-45.852	54.000
2402	96.72	-30.752	65.968	--	--

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_bt1M_2402MHz
TEST BY :Peter

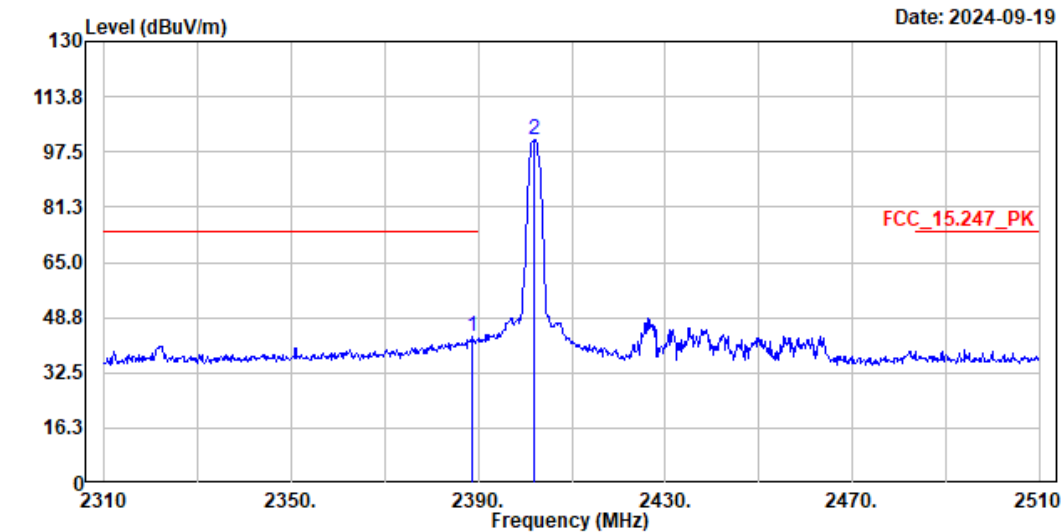

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	43.00	74.00	-31.00	37.12	5.88	Peak
2	2402.000	101.09	-----	-----	95.29	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2388.8	43	-30.752	12.248	-41.752	54.000
2402	101.09	-30.752	70.338	--	--

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2480MHz
 TEST BY :Peter

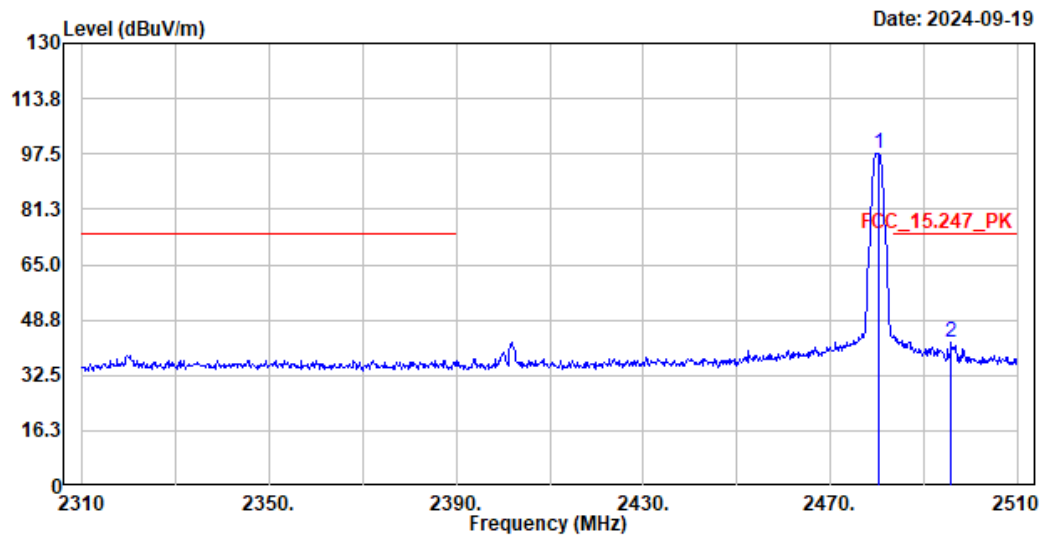

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	97.68	-----	-----	91.96	5.72	Peak
2	2495.800	42.17	74.00	-31.83	36.43	5.74	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	97.68	-30.752	66.928	--	--
2495.8	42.17	-30.752	11.418	-42.582	54.000

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :TX_bt1M_2480MHz
 TEST BY :Peter

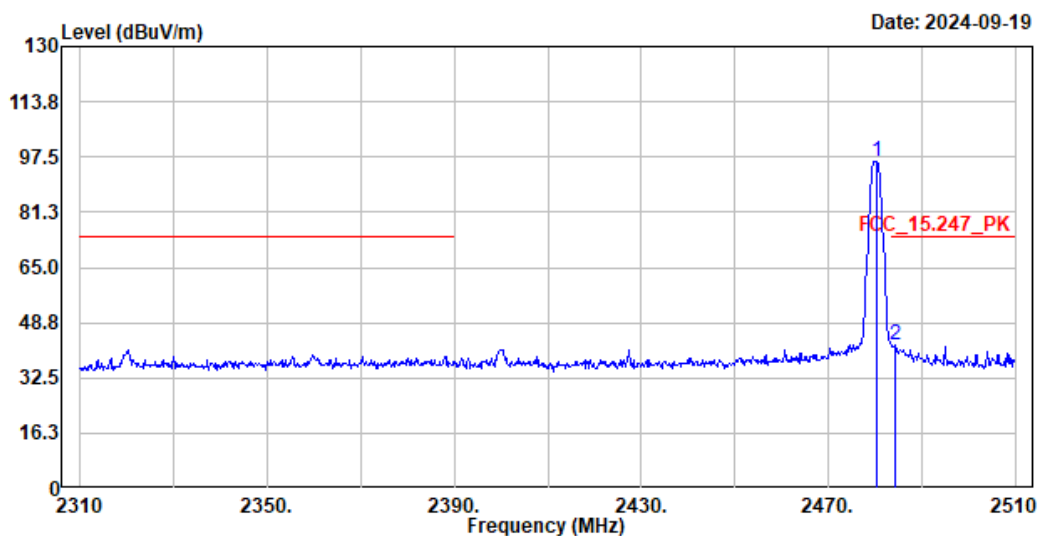

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	96.17	-----	-----	90.45	5.72	Peak
2	2484.200	42.05	74.00	-31.95	36.33	5.72	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480.2	96.17	-30.752	65.418	--	--
2484.2	42.05	-30.752	11.298	-42.702	54.000

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2402MHz
 TEST BY :Peter

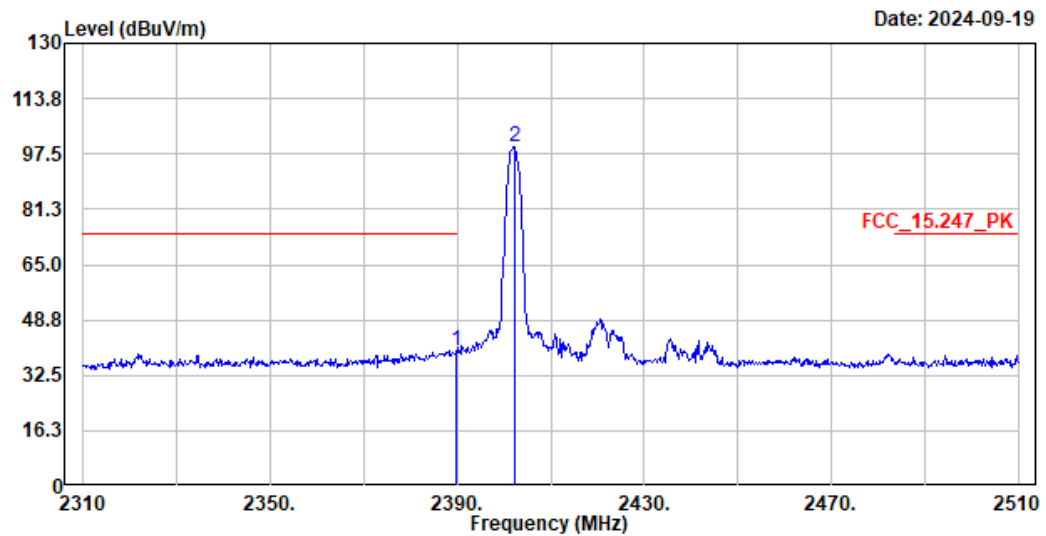

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2389.800	39.68	74.00	-34.32	33.79	5.89	Peak
2	2402.200	99.56	-----	-----	93.76	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.8	39.68	-30.752	8.928	-45.072	54.000
2402.2	99.56	-30.752	68.808	--	--

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :TX_bt3M_2402MHz
 TEST BY :Peter

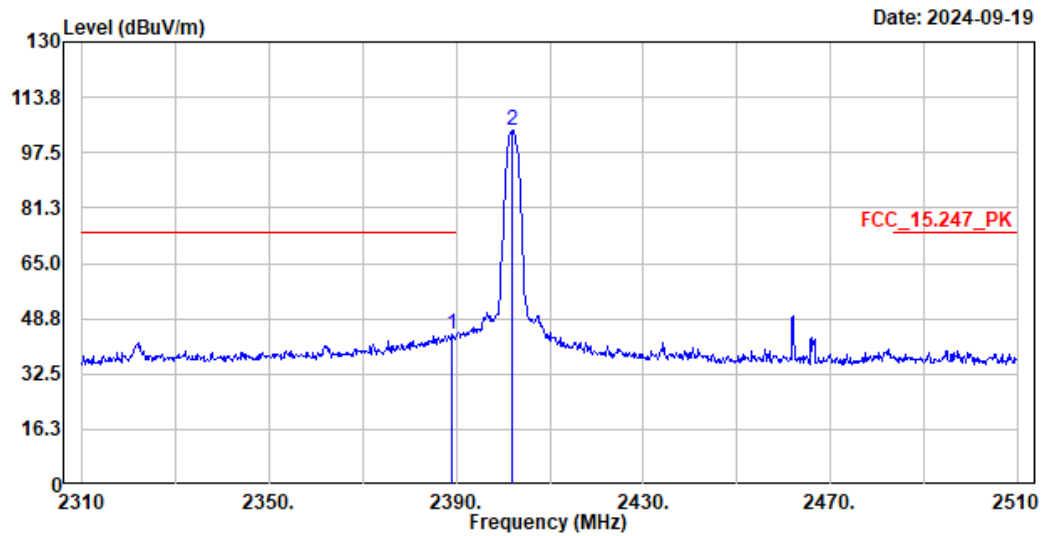

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	44.24	74.00	-29.76	38.36	5.88	Peak
2	2402.000	104.01	-----	-----	98.21	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.2	44.24	-30.752	13.488	-40.512	54.000
2402	104.01	-30.752	73.258	--	--

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2480MHz
 TEST BY :Peter

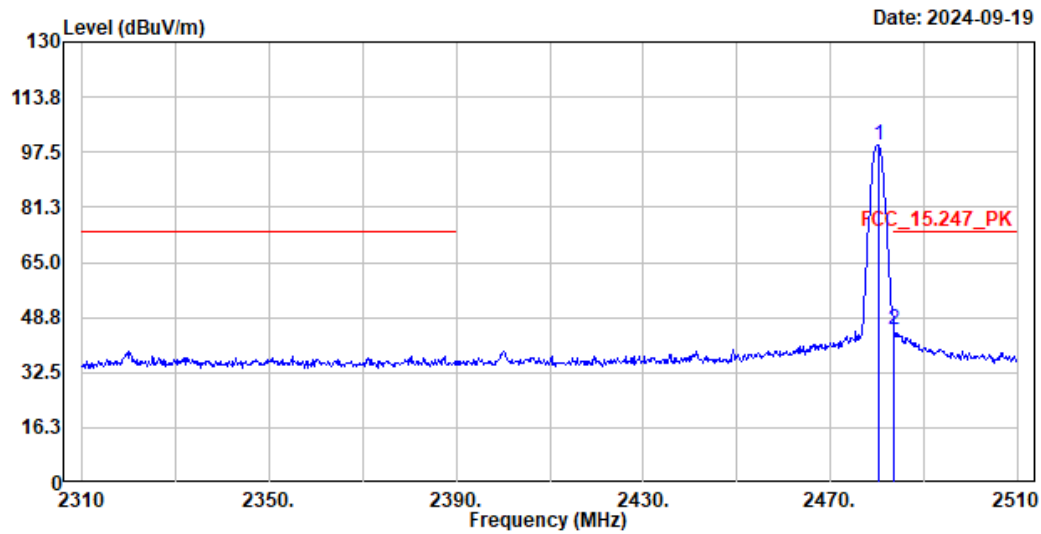

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	99.75	-----	-----	94.03	5.72	Peak
2	2483.600	45.10	74.00	-28.90	39.38	5.72	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	99.75	-30.752	68.998	--	--
2483.6	45.1	-30.752	14.348	-39.652	54.000

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :TX_bt3M_2480MHz
 TEST BY :Peter

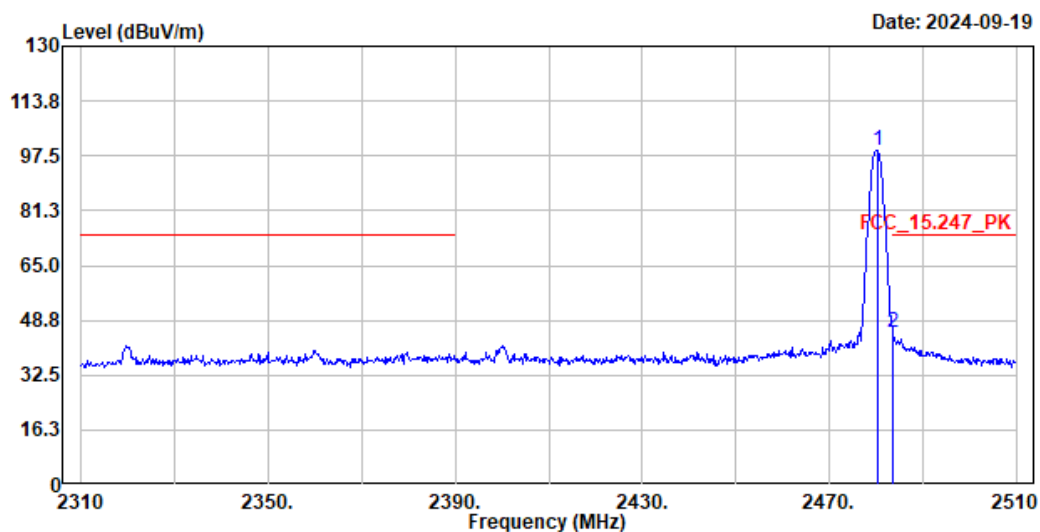

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	99.14	-----	-----	93.42	5.72	Peak
2	2483.600	44.91	74.00	-29.09	39.19	5.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	99.14	-30.752	68.388	--	--
2483.6	44.91	-30.752	14.158	-39.842	54.000