



Quick User Guide

DV-725


* The figures provided in this document are just for reference only.
Please prevail in kind.

LED Indication




| LED Indicators | Color | Status | Description |
|----------------|-------|---------------------------|--|
| | Green | Steady on | Registered |
| | | Blinking (500ms interval) | Connection has been established and is in a state with hook or ringing |
| | | Off | Unregistered |
| | Green | Steady on | 2.4G/5G WIFI available |
| | | Blinking (500ms interval) | Data transmission |
| | | Blinking (1sec interval) | Setting up WPS connection |
| | | Off | 2.4G/5G WIFI unavailable |
| | Green | Steady on | Internet available |
| | | Off | Internet unavailable |
| | | Blinking (500ms interval) | Data transmission |
| | Green | Steady on | Power on |
| | | Off | No power supply |
| | Green | Steady on | Display the current LTE network signal, the stronger signal the more bars on |
| | | Off | No signal |
| | | Blinking (1sec interval) | Searching network of LTE |
| | | Blinking one by one | Firmware upgrade |

Device Package

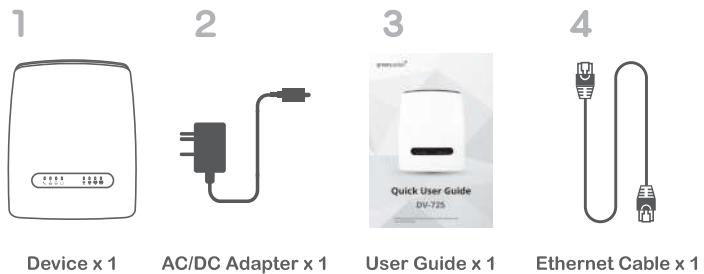

Device External Interface

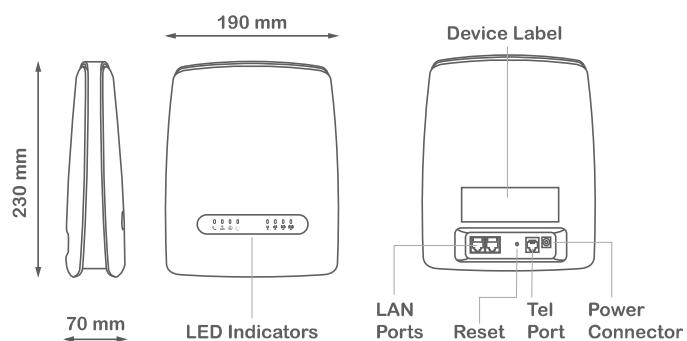

Environmental Specification

| Feature | Specs. | Feature | Specs. |
|-----------------------|----------|--------------------|---------|
| Operating temperature | 0 ~ 40°C | Operating humidity | 0 ~ 95% |
| Storage temperature | -20~60°C | Storage humidity | 0 ~ 95% |


1

Getting your Device Ready for Connection

Step 1

Insert SIM Card

Before powering on the CPE, please make sure to insert the LTE SIM card provided by your service provider.

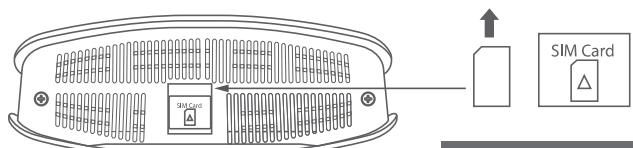


Note:
The metal part of the SIM card is facing back.

Step 2

Power On

Connect your CPE to power with the power cord and plug. Then, the LEDs will blink for a few seconds and go off.

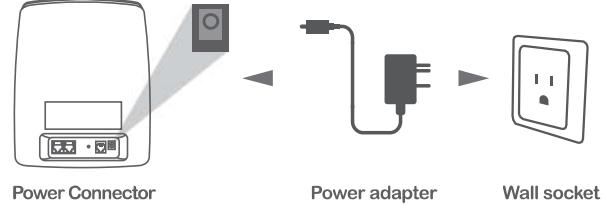

Power Connector

Power adapter

Wall socket

Step 3

Establish LTE Connection

Once power on, the CPE will automatically connect to your subscribed LTE services. The operation to set up connections will take place afterwards.

Note: Adjust the location of the LTE CPE for optimized signal reception. Usually, it is recommended to place the indoor modem near the window, facing toward the base station.


2

3

Using Web User Interface to Access Device

Step 1

Connect to the device via the LAN cable or WLAN.
To connect WLAN, please refer to the SSID and WIFI key on the device label located on the back of the device.

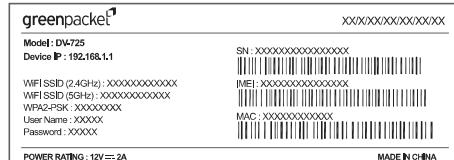

Note:
RJ-11 cable is not included
in DV series

Step 2

Open the browser, enter <http://192.168.1.1> in the address box, and login Username and Password.

Default IP address: 192.168.1.1

Username: admin
Password: admin



Note:

- If the device operates in routing mode, it is recommended you automatically obtain the IP address and DNS server address.
- The Username and Password to the device may vary depending on your LTE service providers.

4

Set up Wi-Fi Connection

If you have Wi-Fi devices in your home, you can connect them to the Internet with your CPE. When the Wi-Fi LED lights up, it indicates that Wi-Fi is enabled. When the Wi-Fi LTE starts blinking, it indicates that data is being transmitted.

Step 1

Switch on Wi-Fi on Your Laptop

Step 2

Find the Wireless Network

Right-Click on the Wireless Network Connection icon at the bottom right of the screen and select "View Available Wireless Networks."

Step 3

Enter Security Password

In the list of available networks, choose the one that matches the SSID Key. Click "Connect", you will be prompted to key in the WIFI Key (See label content on Page 4).


Step 4

Click on Your Internet Browser

Now you will be able to connect to the Internet.


Step 4

Once login, the overview page will be displayed, and you can have a status overview on device activity.

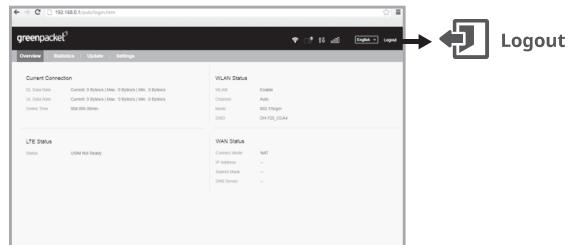

Step 5

On the overview page, you can click on each sections to see the information or detailed configurations. Below is an example of **Device Information**.

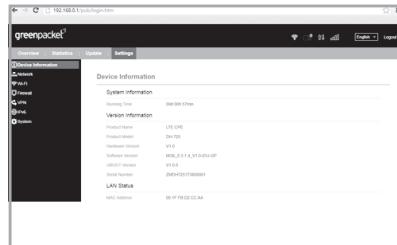

5

Declaration of Conformity with Regard to the R&TTE Directive 1999/5/EC

| | |
|---|--|
| <input type="checkbox"/> Česky [Czech] | Greenpacket tímto prohlašuje, že tento DV-725 je ve shodě se základními požadavkami a dalšími příslušnými ustanoveními směrnice 1999/5/ES. |
| <input type="checkbox"/> Dansk [Danish] | Undertegnede Greenpacket erklærer herved, at følgende udstyr DV-725 overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EU. |
| <input type="checkbox"/> Deutsch [German] | Hiermit erklärt Greenpacket, dass sich das Gerät DV-725 in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet. |
| <input type="checkbox"/> Eesti [Estonian] | Käesolevaga kinnitab Greenpacket seadme DV-725 vastavust direktiivi 1999/5/EÜ põhimõudele ja nimetatult direktiivist tulenevatele teistele asjakohastele sätetele. |
| <input type="checkbox"/> English | Hereby, Greenpacket, declares that this DV-725 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. |
| <input type="checkbox"/> Español [Spanish] | Por medio de la presente Greenpacket declara que el DV-725 cumple con los requisitos esenciales y cualesquier otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE. |
| <input type="checkbox"/> Ελληνική [Greek] | ΜΕΤΗΝ ΠΑΡΟΥΣΙΑ ΣΑ Greenpacket ΔΗΛΩΝΕΙ ΟΤΙ DV-725 ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΗΣ ΟΥΣΙΔΑΣ ΛΑΠΤΗΤΗΣ ΚΑΙΣ ΛΟΓΙΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ. |
| <input type="checkbox"/> Français [French] | Par la présente Greenpacket déclare que l'appareil DV-725 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE. |
| <input type="checkbox"/> Italiano [Italian] | Con la presente Greenpacket dichiara che questo DV-725 è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabiliti dalla direttiva 1999/5/CE. |
| <input type="checkbox"/> Latviski [Latvian] | Ar šo Greenpacket deklarē, ka DV-725 atbilst Direktivas 1999/5/EK būtiskajām prasībām un citiem ar saistījumiem noteikumiem. |
| <input type="checkbox"/> Lietuvių [Lithuanian] | Šiuo Greenpacket deklaruoja, kad šis DV-725 atitinka esminius reikalavimus ir kitas 1999/5/EK Direktivo nuostatas. |
| <input type="checkbox"/> Nederlands [Dutch] | Hierbij verklaart Greenpacket dat het toestel DV-725 in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG. |
| <input type="checkbox"/> Malti [Maltese] | Hawnhekk, Greenpacket, jiddikkjara li dan DV-725 jikkonforma mal-htiġijiet eszenzjalji u ma provaliedi oħraji relevanti li hemm fid-Direttiva 1999/5/EC. |
| <input type="checkbox"/> Magyar [Hungarian] | Alkírott, Greenpacket nyilatkozom, hogy a DV-725 megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak. |
| <input type="checkbox"/> Polski [Polish] | Niniejszym Greenpacket oświadczyc, że DV-725 jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC. |
| <input type="checkbox"/> Português [Portuguese] | Greenpacket declara que este DV-725 está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE. |
| <input type="checkbox"/> Slovenško [Slovenian] | Greenpacket izjavlja, da je ta DV-725 v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES. |
| <input type="checkbox"/> Slovensky [Slovak] | Greenpacket týmto vyhlašuje, že DV-725 splňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES. |
| <input type="checkbox"/> Suomi [Finnish] | Greenpacket vakuuttaa täten että DV-725 tyyppinen laite on direktiivin 1999/5/EY olevien vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen. |
| <input type="checkbox"/> Svenska [Swedish] | Härmed intygar Greenpacket att denna DV-725 står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG. |
| <input type="checkbox"/> Íslenska [Icelandic] | Hér með lýsir Greenpacket yfir því að DV-725 er í samræmi við grunnnormur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC. |
| <input type="checkbox"/> Norsk [Norwegian] | Greenpacket erklærer herved at utstyret DV-725 er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EC. |

6

7

FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.