



LTE Band XVII (Part 27)




LTE Band XVII - Low CH QPSK-5

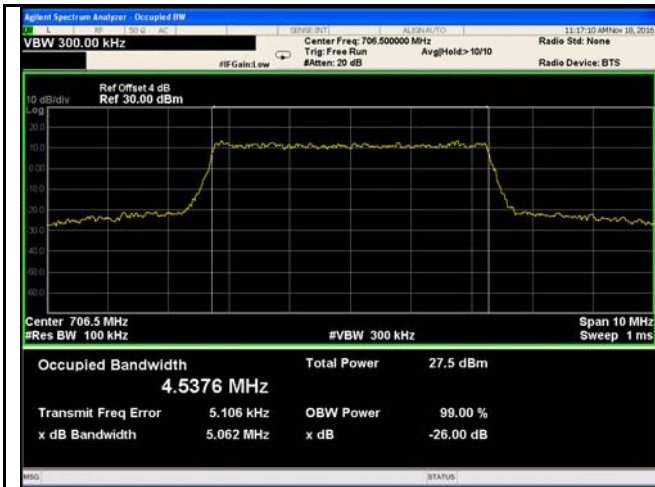


LTE Band XVII - Low CH 16QAM-5

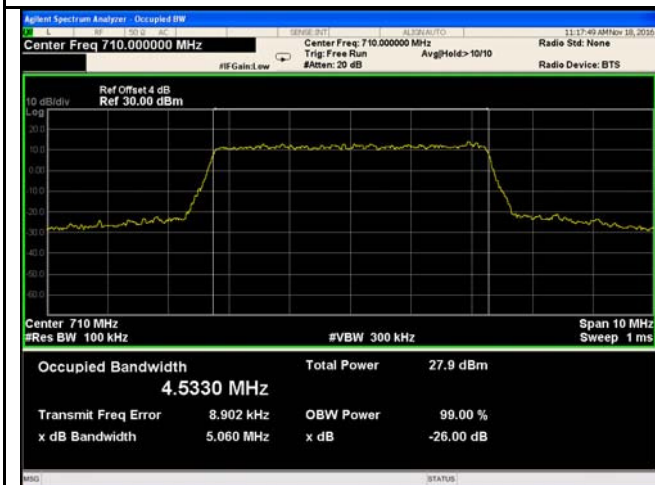

LTE Band XVII - Middle CH QPSK-5

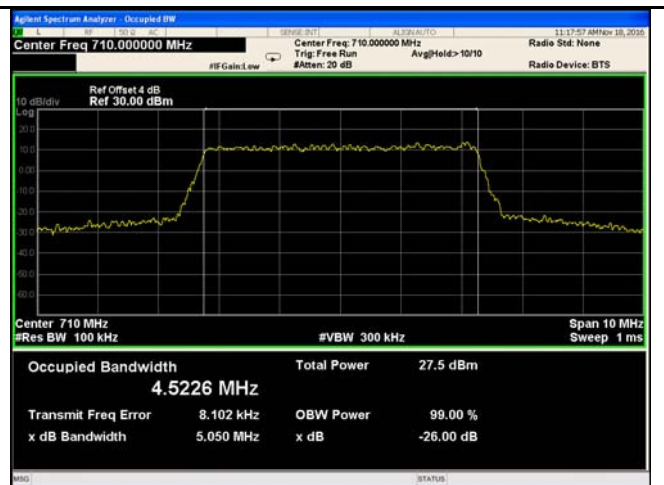


LTE Band XVII - Middle CH 16QAM-5

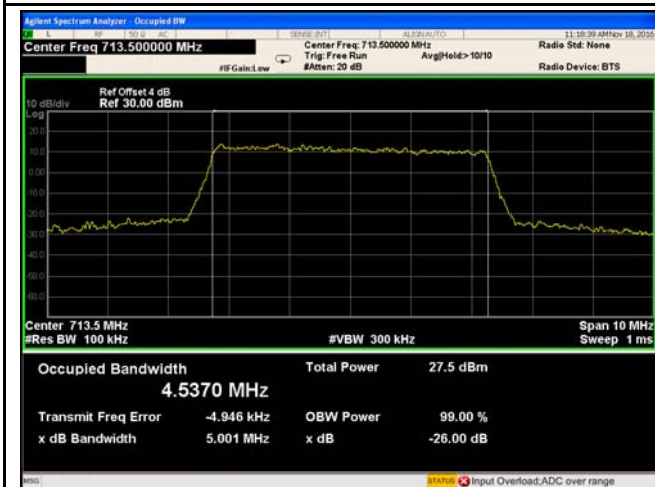

LTE Band XVII - High CH QPSK-5




LTE Band XVII - High CH 16QAM-5

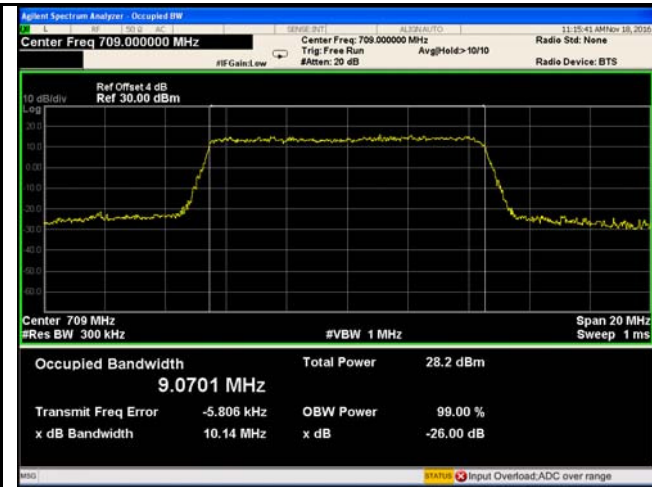

LTE Band XVII - Low CH QPSK-10




LTE Band XVII - Low CH 16QAM-10

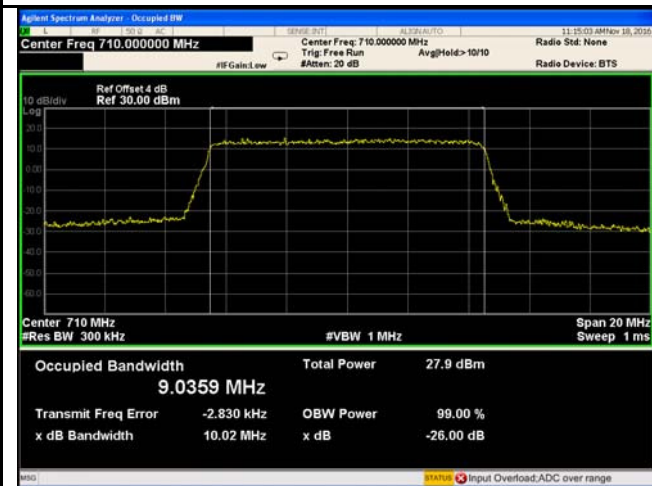


LTE Band XVII - Middle CH QPSK-10



LTE Band XVII - Middle CH 16QAM-10

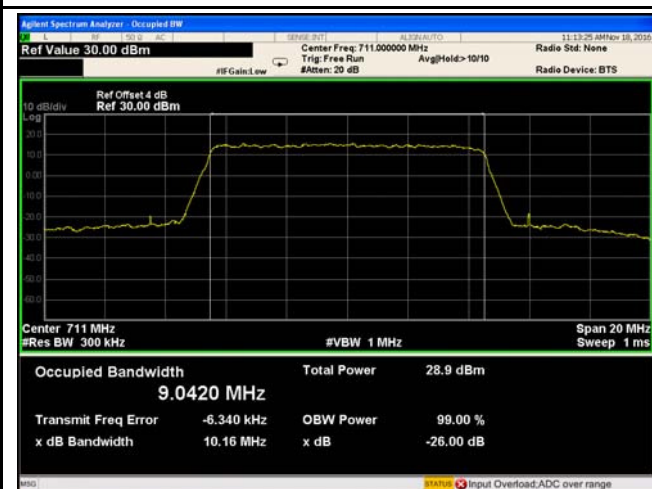

LTE Band XVII - High CH QPSK-10

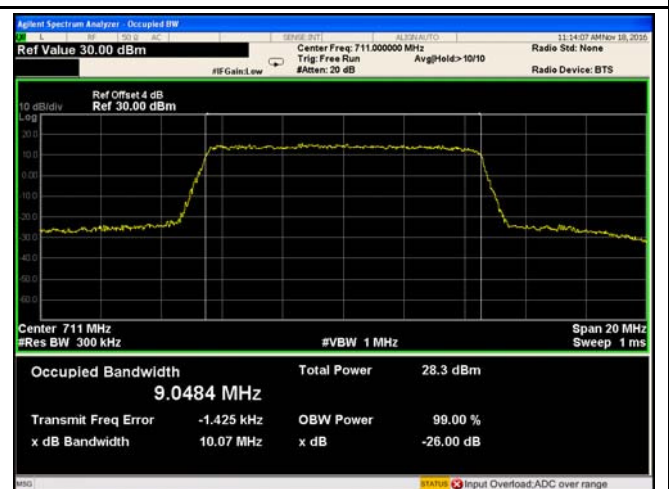


LTE Band XVII - High CH 16QAM-10

6.5 Spurious Emissions at Antenna Terminals


Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	November 19, 2016
Tested By :	Loren Luo

Requirement(s):

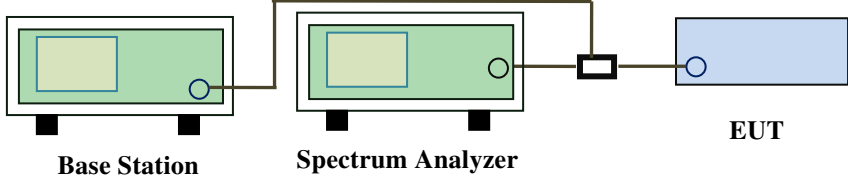Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram shows a Base Station (green box) connected to a Spectrum Analyzer (green box) and an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to the power divider, which then splits the signal to the EUT.</p>		
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A
 Test Plot Yes (See below) N/A


Test Plots 30MHz-5GHz
LTE Band II (Part 24E)

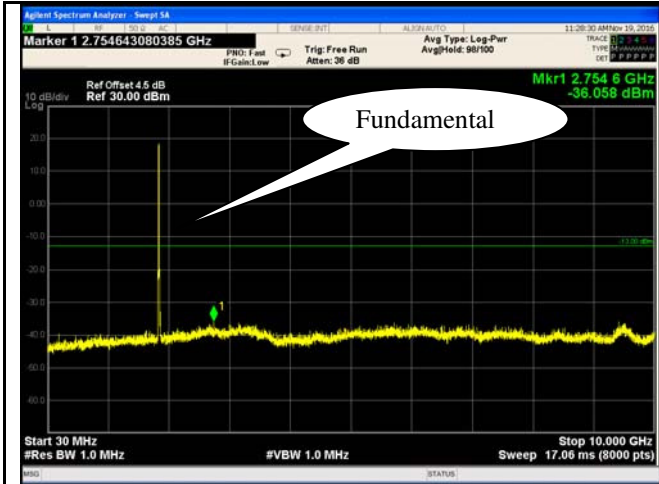


LTE Band II - Low Channel-1




LTE Band II - Low Channel-2

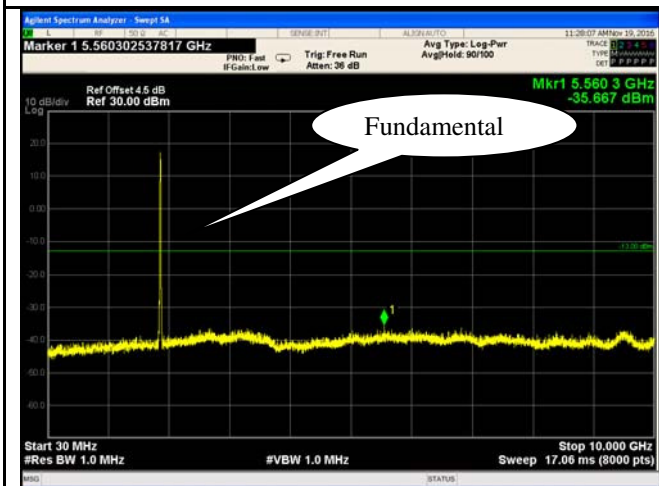


LTE Band II Middle Channel-1

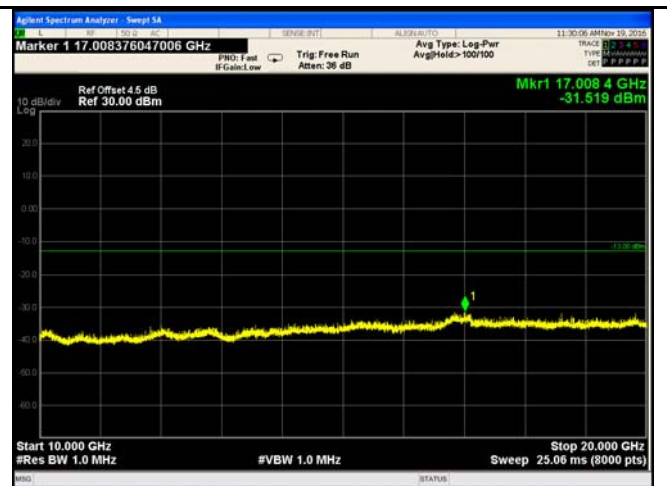

LTE Band II Middle Channel-2

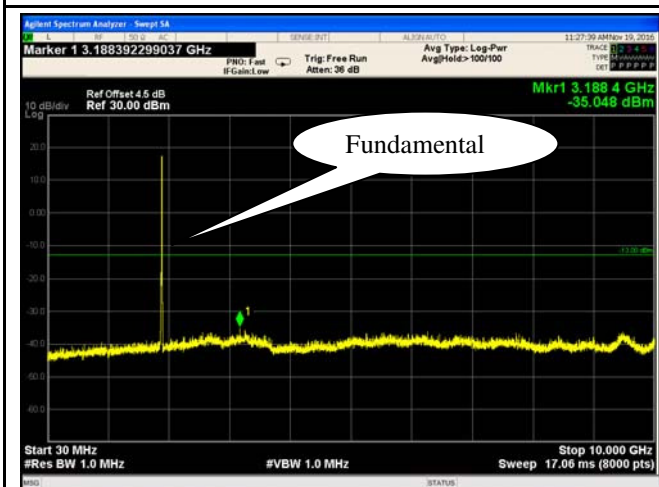


LTE Band II - High Channel-1

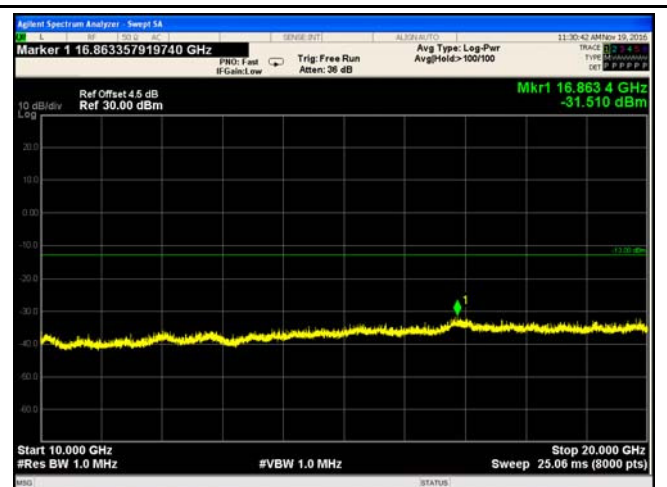

LTE Band II - High Channel-2


LTE Band IV (Part27) result

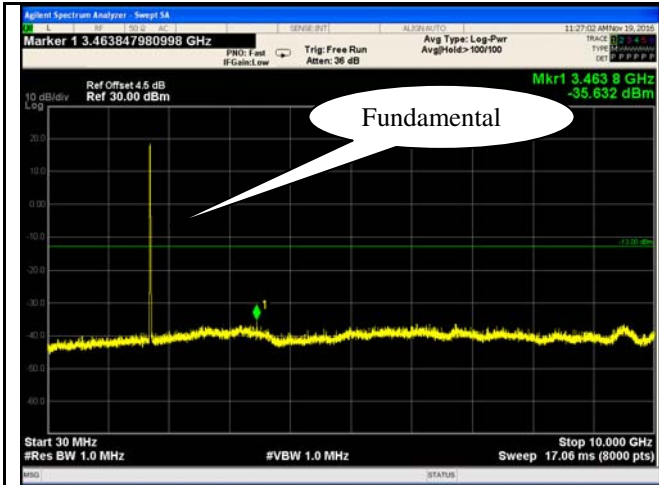


LTE Band IV - Low Channel-1




LTE Band IV - Low Channel-2

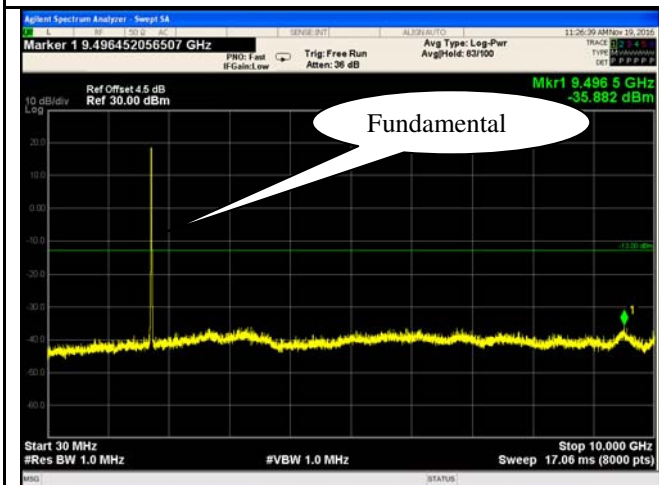


LTE Band IV - Middle Channel-1

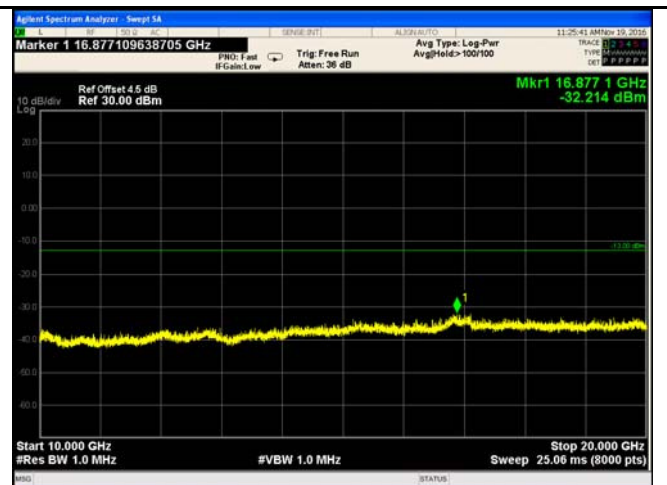

LTE Band IV - Middle Channel-2

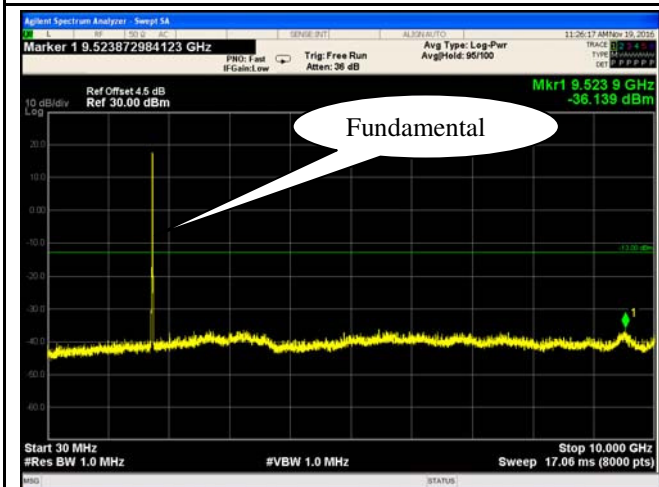


LTE Band IV - High Channel-1

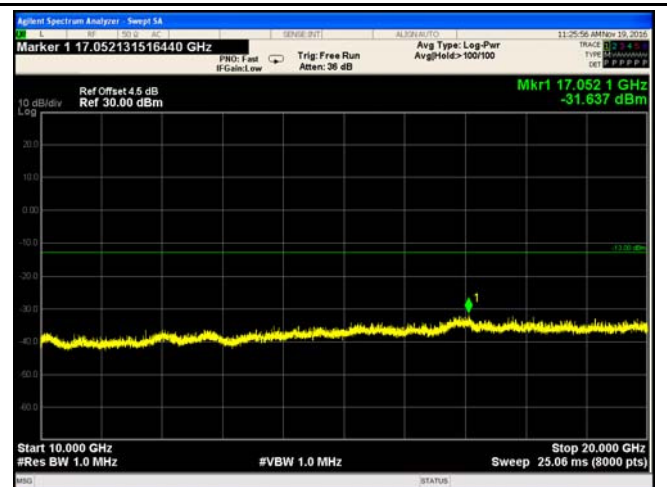


LTE Band IV - High Channel-2


LTE Band V (Part 22H)

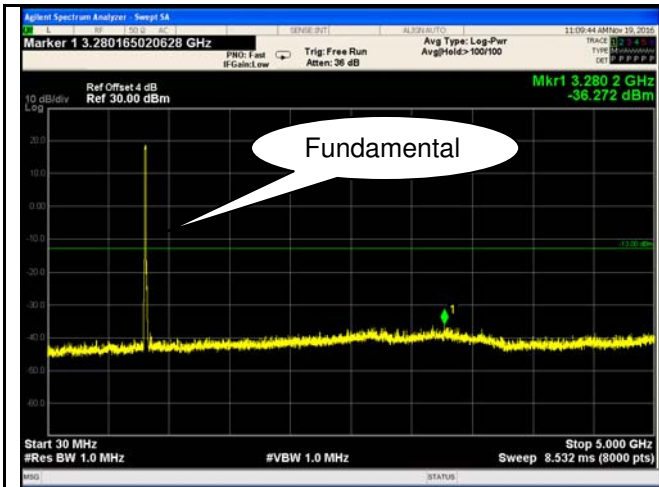


LTE Band V - Low Channel-1

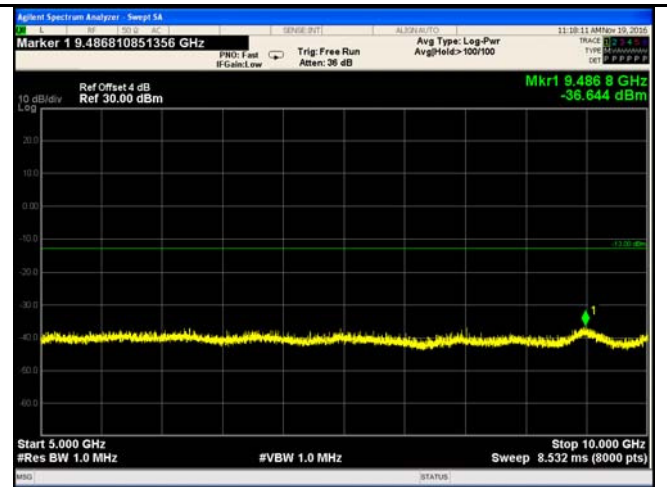


LTE Band V - Low Channel-2

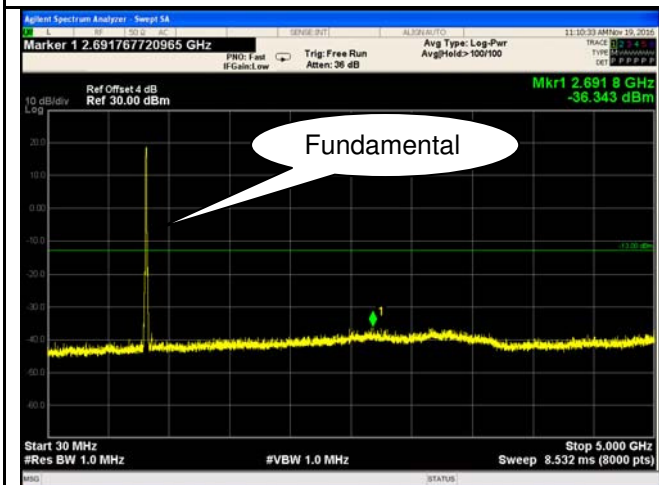


LTE Band V - Middle Channel-1

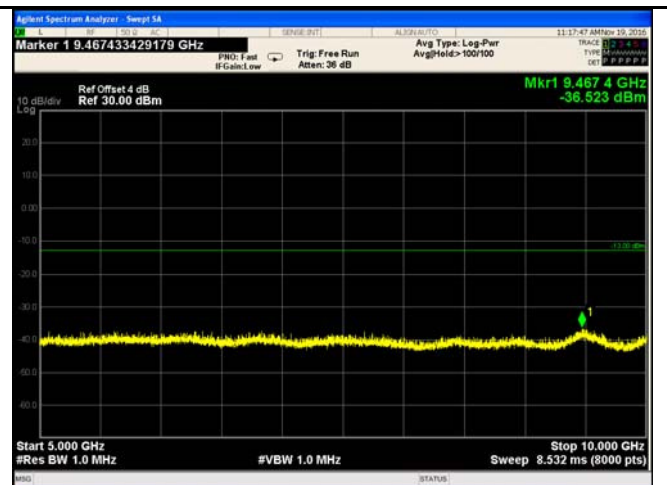

LTE Band V - Middle Channel-2

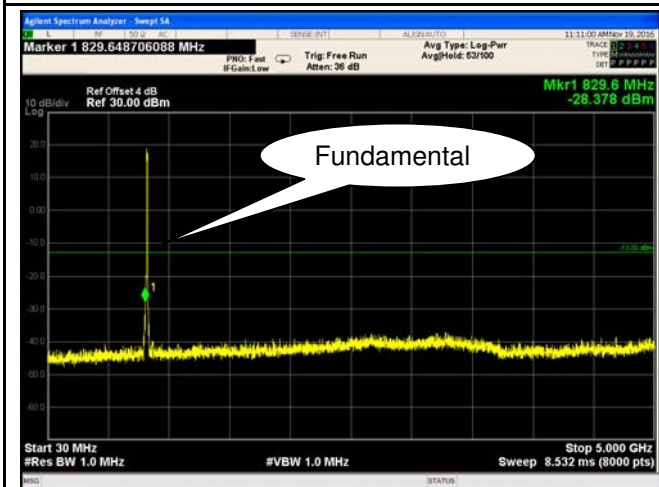


LTE Band V - High Channel-1

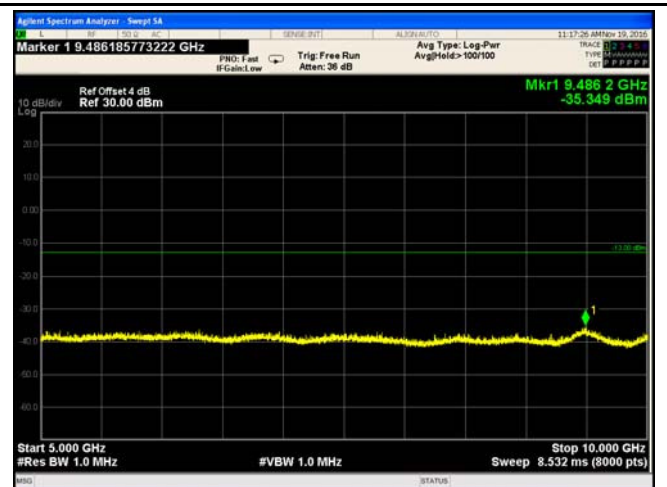


LTE Band V - High Channel-2


LTE Band VII (Part 27)

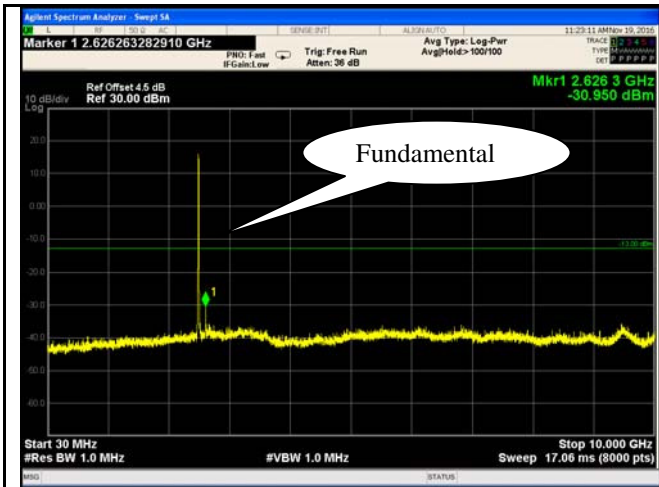


LTE Band VII - Low Channel-1

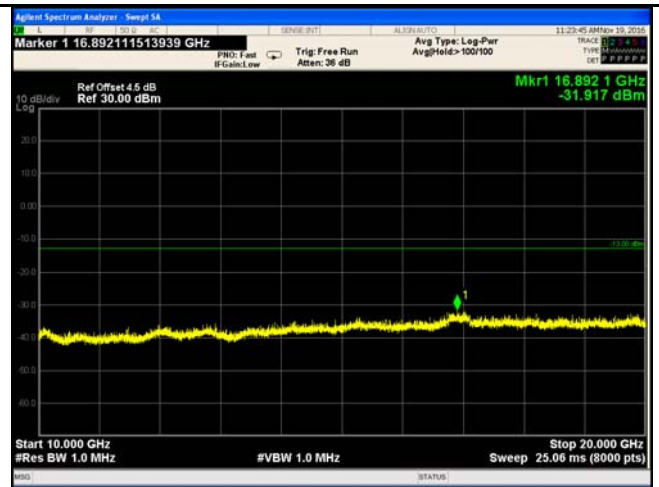


LTE Band VII - Low Channel-2

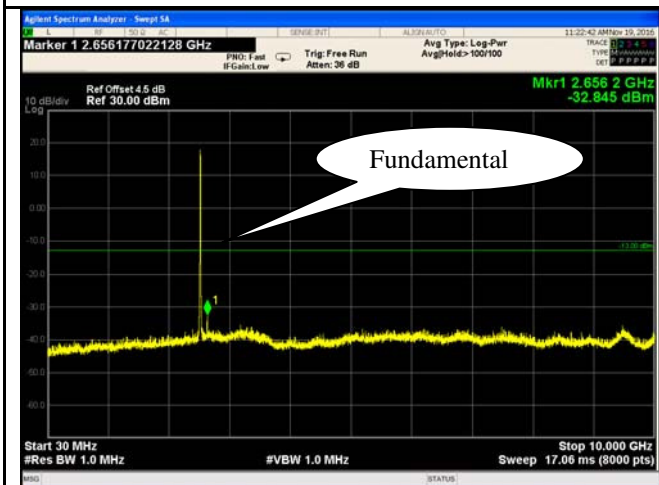


LTE Band VII - Middle Channel-1

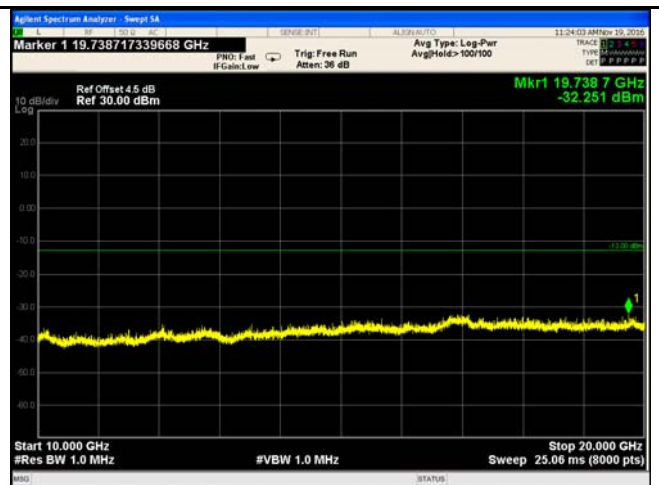

LTE Band VII - Middle Channel-2

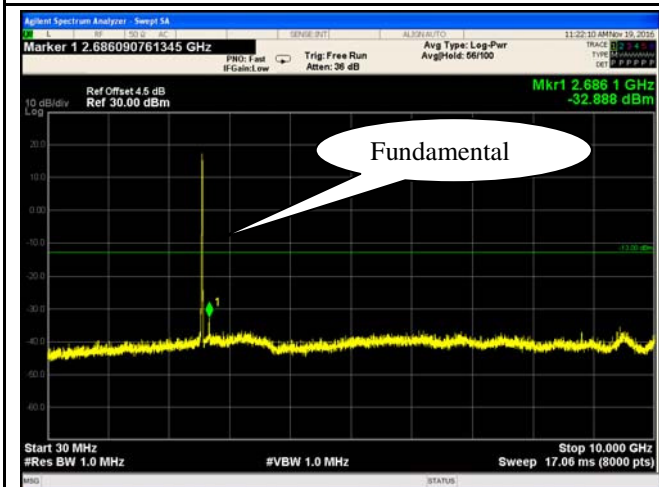


LTE Band VII - High Channel-1

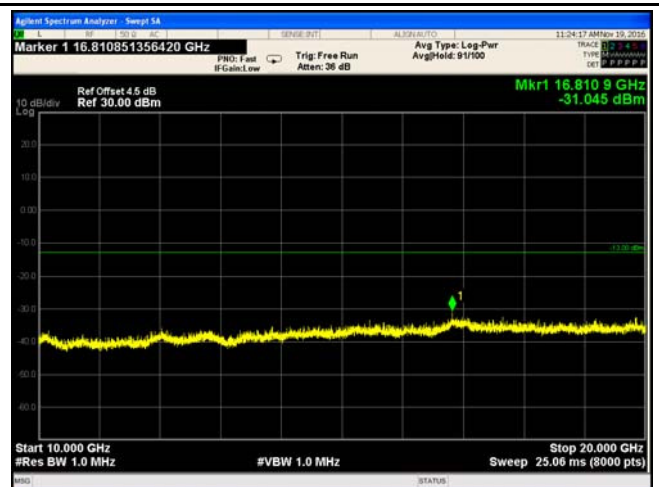


LTE Band VII - High Channel-2


LTE Band XII (Part 27)

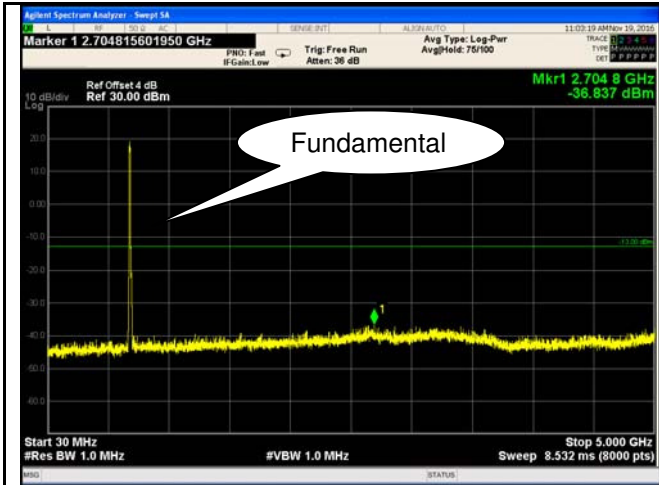


LTE Band XII - Low Channel-1

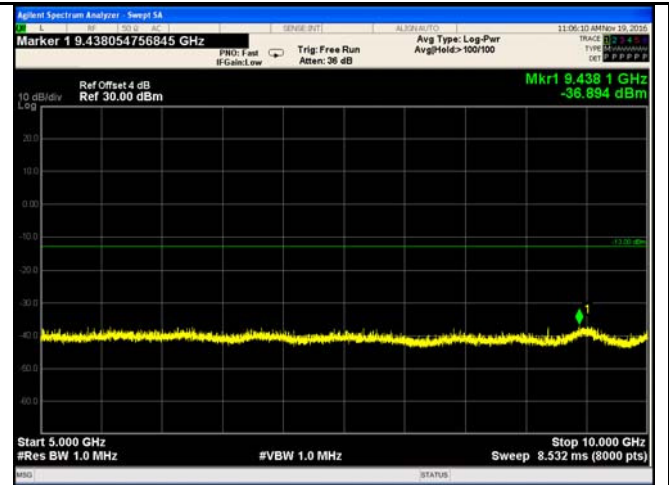


LTE Band XII - Low Channel-2

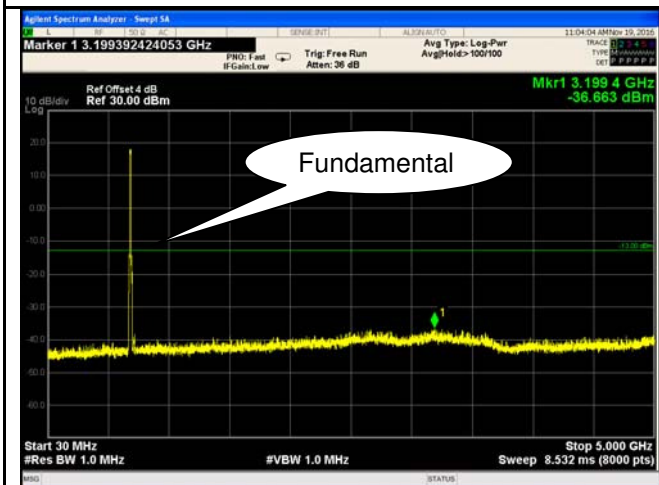


LTE Band XII - Middle Channel-1

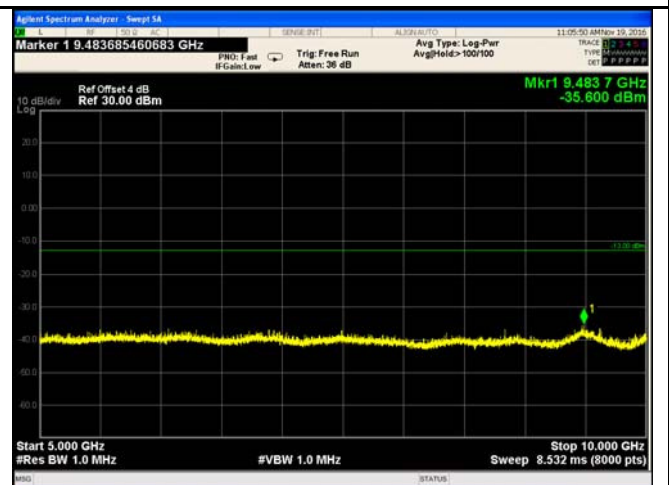

LTE Band XII - Middle Channel-2

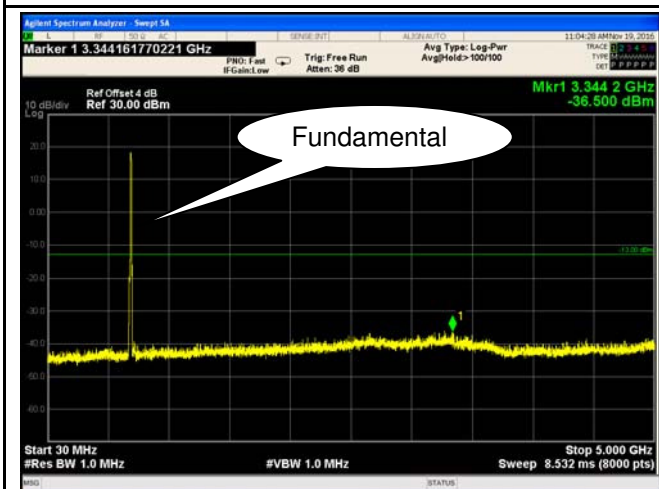


LTE Band XII - High Channel-1

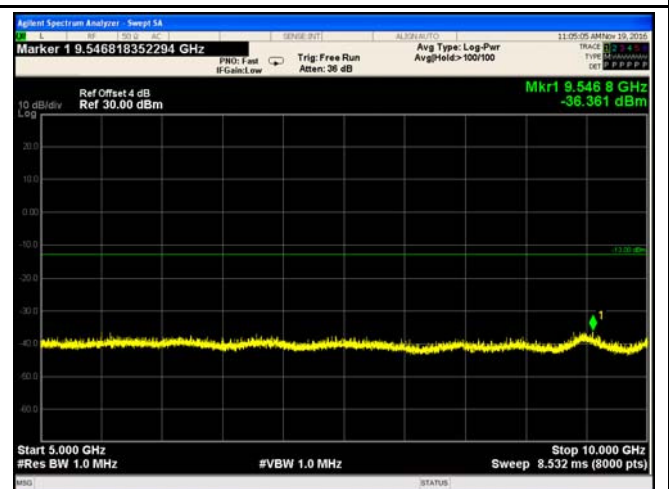


LTE Band XII - High Channel-2


LTE Band XVII (Part 27)

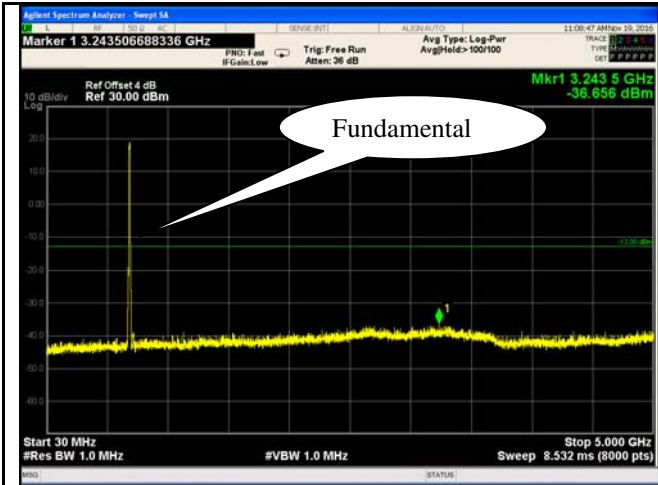


LTE Band XVII - Low Channel-1

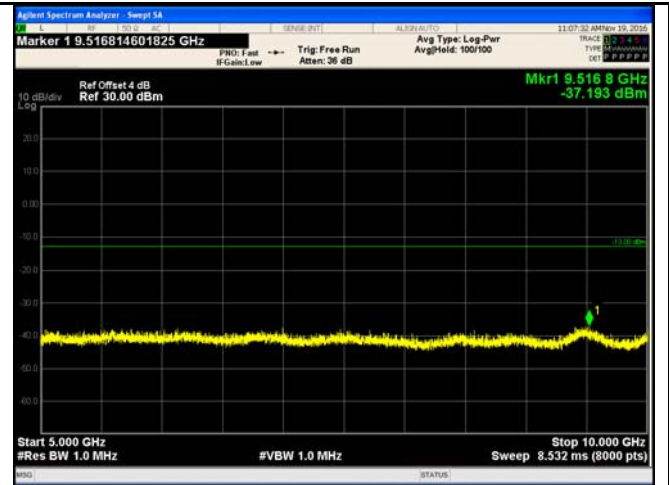


LTE Band XVII - Low Channel-2

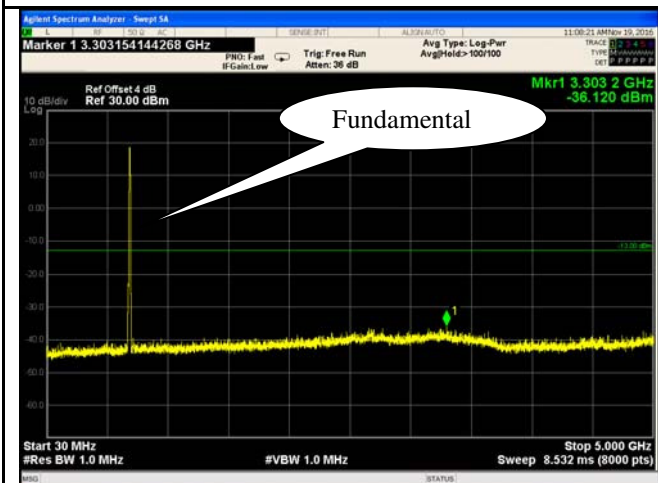


LTE Band XVII - Middle Channel-1

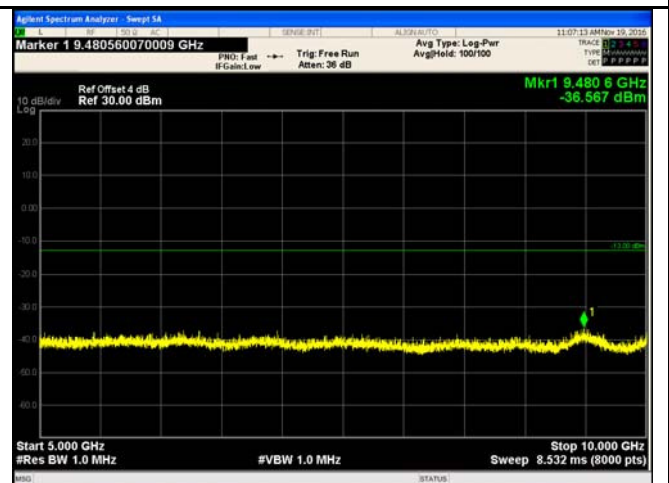

LTE Band XVII - Middle Channel-2

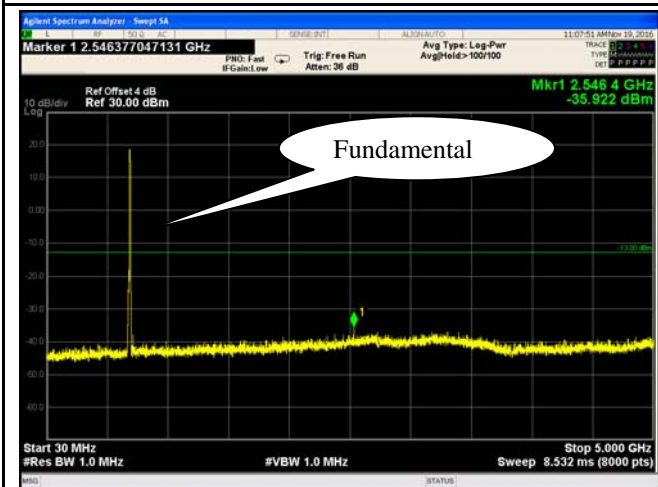

LTE Band XVII - High Channel-1

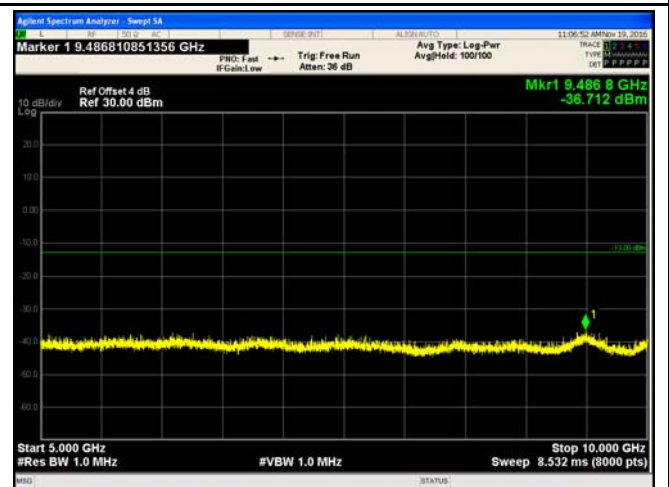


LTE Band XVII - High Channel-2

6.6 Spurious Radiated Emissions

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238 § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	<input checked="" type="checkbox"/>

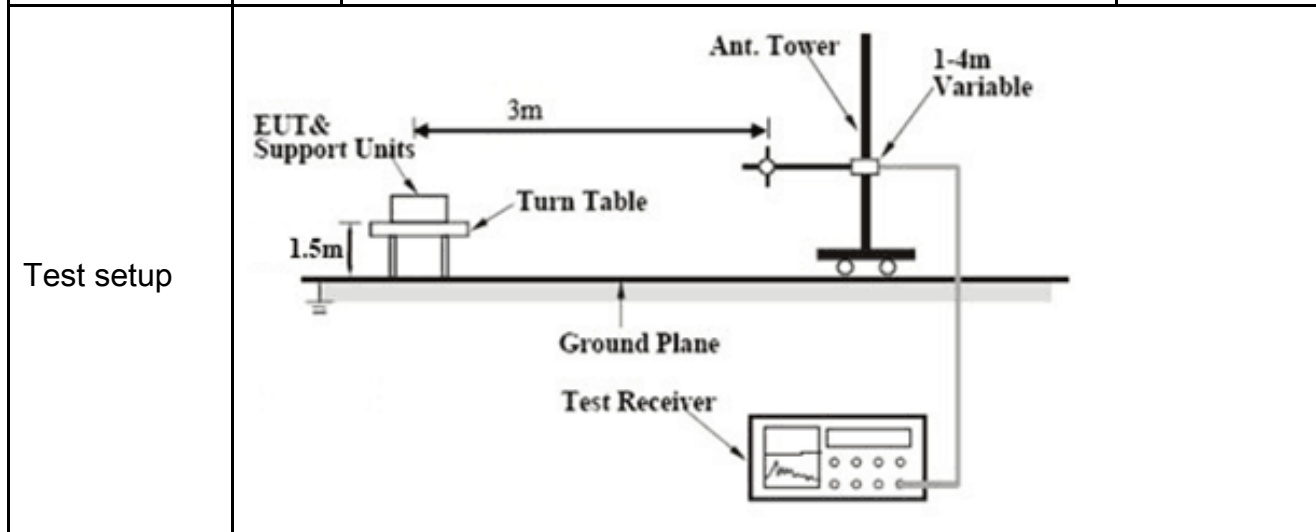

Test Procedure	<ol style="list-style-type: none"> The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	--

Test Report	16071314-FCC-R5
Page	99 of 152

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
Test Plot Yes (See below) N/A

LTE Band II (Part 24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3720	-46.13	V	10.25	2.73	-38.61	-13	-25.61
3720	-46.57	H	10.25	2.73	-39.05	-13	-26.05
50.6	-44.89	V	-4.2	0.11	-49.2	-13	-36.20
204.7	-48.62	H	4.6	0.18	-44.2	-13	-31.20

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-45.87	V	10.25	2.73	-38.35	-13	-25.35
3760	-46.98	H	10.25	2.73	-39.46	-13	-26.46
50.1	-44.82	V	-4.2	0.11	-49.13	-13	-36.13
204.3	-47.53	H	4.6	0.18	-43.11	-13	-30.11

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3800	-45.63	V	10.36	2.73	-38	-13	-25.00
3800	-46.57	H	10.36	2.73	-38.94	-13	-25.94
50.3	-44.82	V	-4.2	0.11	-49.13	-13	-36.13
204.1	-46.53	H	4.6	0.18	-42.11	-13	-29.11

Note:

- 1, The testing has been conformed to $10 \times 1907.5 \text{ MHz} = 19,075 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band IV (Part27) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3440	-45.82	V	10.06	2.52	-38.28	-13	-25.28
3440	-46.87	H	10.06	2.52	-39.33	-13	-26.33
51.3	-45.13	V	-4.2	0.11	-49.44	-13	-36.44
205.7	-48.62	H	4.6	0.18	-44.2	-13	-31.20

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3465	-45.86	V	10.09	2.52	-38.29	-13	-25.29
3465	-46.72	H	10.09	2.52	-39.15	-13	-26.15
50.6	-46.28	V	-4.2	0.11	-50.59	-13	-37.59
204.7	-48.87	H	4.6	0.18	-44.45	-13	-31.45

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3490	-45.87	V	10.09	2.52	-38.3	-13	-25.30
3490	-47.23	H	10.09	2.52	-39.66	-13	-26.66
50.7	-46.23	V	-4.2	0.11	-50.54	-13	-37.54
204.5	-48.67	H	4.6	0.18	-44.25	-13	-31.25

Note:

- 1, The testing has been conformed to $10 \times 1752.5 \text{ MHz} = 17,525 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band V (Part22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1658	-44.58	V	7.95	0.78	-37.41	-13	-24.41
1658	-45.16	H	7.95	0.78	-37.99	-13	-24.99
50.1	-45.68	V	-4.2	0.11	-49.99	-13	-36.99
205.8	-48.25	H	4.6	0.18	-43.83	-13	-30.83

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673	-44.61	V	7.95	0.78	-37.44	-13	-24.44
1673	-45.26	H	7.95	0.78	-38.09	-13	-25.09
51.6	-45.28	V	-4.2	0.11	-49.59	-13	-36.59
202.3	-49.12	H	4.6	0.18	-44.7	-13	-31.70

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1688	-44.23	V	7.95	0.78	-37.06	-13	-24.06
1688	-44.76	H	7.95	0.78	-37.59	-13	-24.59
52.1	-44.89	V	-4.2	0.11	-49.2	-13	-36.20
205.9	-48.67	H	4.6	0.18	-44.25	-13	-31.25

Note:

- 1, The testing has been conformed to $10 \times 846.5 \text{ MHz} = 8,465 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band VII (Part27) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5020	-48.56	V	10.29	0.98	-39.25	-13	-26.25
5020	-48.75	H	10.29	0.98	-39.44	-13	-26.44
50.7	-46.31	V	-4.2	0.11	-50.62	-13	-37.62
204.5	-48.42	H	4.6	0.18	-44.00	-13	-31.00

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5070	-47.58	V	10.3	0.99	-38.27	-13	-25.27
5070	-47.68	H	10.3	0.99	-38.37	-13	-25.37
53.4	-45.86	V	-4.2	0.11	-50.17	-13	-37.17
208.4	-48.53	H	4.6	0.18	-44.11	-13	-31.11

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5120	-48.15	V	10.32	1	-38.83	-13	-25.83
5120	-48.35	H	10.32	1	-39.03	-13	-26.03
52.3	-46.13	V	-4.2	0.11	-50.44	-13	-37.44
205.8	-47.64	H	4.6	0.18	-43.22	-13	-30.22

Note:

- 1, The testing has been conformed to $10 \times 2567.5 \text{ MHz} = 25,675 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band XII (Part27) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1408	-48.11	V	7.65	0.75	-41.21	-13	-28.21
1408	-48.57	H	7.65	0.75	-41.67	-13	-28.67
573.5	-56.32	V	6.5	0.36	-50.18	-13	-37.18
846.2	-50.68	H	6.8	0.44	-44.32	-13	-31.32

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1415	-47.65	V	7.65	0.75	-40.75	-13	-27.75
1415	-47.23	H	7.65	0.75	-40.33	-13	-27.33
573.8	-54.98	V	6.5	0.36	-48.84	-13	-35.84
845.3	-50.48	H	6.8	0.44	-44.12	-13	-31.12

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-46.85	V	7.65	0.75	-39.95	-13	-26.95
1422	-47.53	H	7.65	0.75	-40.63	-13	-27.63
571.6	-56.84	V	6.5	0.36	-50.7	-13	-37.70
848.5	-49.68	H	6.8	0.44	-43.32	-13	-30.32

Note:

- 1, The testing has been conformed to $10 \times 715.3 \text{ MHz} = 7,153 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band XVII (Part27) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1418	-43.59	V	7.65	0.75	-36.69	-13	-23.69
1418	-44.32	H	7.65	0.75	-37.42	-13	-24.42
50.3	-45.12	V	-4.2	0.11	-49.43	-13	-36.43
205.7	-48.67	H	4.6	0.18	-44.25	-13	-31.25

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1420	-43.26	V	7.65	0.75	-36.36	-13	-23.36
1420	-44.68	H	7.65	0.75	-37.78	-13	-24.78
50.1	-45.19	V	-4.2	0.11	-49.5	-13	-36.50
205.8	-48.85	H	4.6	0.18	-44.43	-13	-31.43

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-44.16	V	7.65	0.75	-37.26	-13	-24.26
1422	-44.85	H	7.65	0.75	-37.95	-13	-24.95
51.6	-45.23	V	-4.2	0.11	-49.54	-13	-36.54
204.9	-48.63	H	4.6	0.18	-44.21	-13	-31.21


Note:

- 1, The testing has been conformed to $10 \times 713.5 \text{MHz} = 7,135 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

6.7 Band Edge

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18&19, 2016
Tested By :	Loren Luo

Requirement(s):

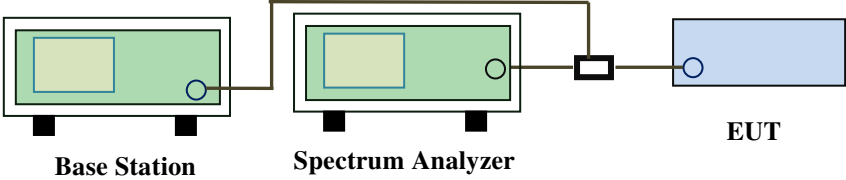Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
Test setup	 <p>The diagram shows a Base Station (green box) connected to a Spectrum Analyzer (green box) and an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to each other, and the Spectrum Analyzer is connected to the power divider, which then splits the signal to the EUT.</p>		
Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

LTE Band II (Part 24E) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	18607	1850	QPSK	-25.334	-13
			16QAM	-26.066	-13
1.4	18900	1910	QPSK	-25.601	-13
			16QAM	-25.528	-13
3	18615	1850	QPSK	-20.900	-13
			16QAM	-19.852	-13
3	19185	1910	QPSK	-24.977	-13
			16QAM	-22.978	-13
5	18625	1850	QPSK	-16.981	-13
			16QAM	-17.021	-13
5	19175	1910	QPSK	-21.251	-13
			16QAM	-21.089	-13
10	18650	1850	QPSK	-19.711	-13
			16QAM	-19.770	-13
10	19150	1910	QPSK	-21.717	-13
			16QAM	-21.610	-13
15	18675	1850	QPSK	-21.230	-13
			16QAM	-18.547	-13
15	19125	1910	QPSK	-21.884	-13
			16QAM	-21.941	-13
20	18700	1850	QPSK	-23.544	-13
			16QAM	-24.893	-13
20	19100	1910	QPSK	-27.191	-13
			16QAM	-26.924	-13

LTE Band IV (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	19957	1709.9	QPSK	-25.003	-13
			16QAM	-25.280	-13
1.4	20393	1755	QPSK	-26.682	-13
			16QAM	-26.620	-13
3	19965	1709.9	QPSK	-18.838	-13
			16QAM	-19.231	-13
3	20385	1755	QPSK	-21.598	-13
			16QAM	-21.350	-13
5	19975	1709.9	QPSK	-18.470	-13
			16QAM	-15.626	-13
5	20375	1755	QPSK	-17.535	-13
			16QAM	-17.430	-13
10	20000	1709.9	QPSK	-19.224	-13
			16QAM	-19.553	-13
10	20350	1755	QPSK	-20.234	-13
			16QAM	-19.484	-13
15	20025	1710	QPSK	-21.959	-13
			16QAM	-21.060	-13
15	20325	1755	QPSK	-21.915	-13
			16QAM	-23.510	-13
20	20050	1710	QPSK	-24.420	-13
			16QAM	-23.443	-13
20	20300	1755	QPSK	-25.115	-13
			16QAM	-25.298	-13

LTE Band V (Part 22H) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	20407	823.9	QPSK	-27.453	-13
			16QAM	-28.133	-13
1.4	20643	849	QPSK	-25.599	-13
			16QAM	-26.091	-13
3	20415	824	QPSK	-19.691	-13
			16QAM	-19.064	-13
3	20635	849	QPSK	-21.527	-13
			16QAM	-21.323	-13
5	20425	824	QPSK	-16.393	-13
			16QAM	-16.738	-13
5	20625	849	QPSK	-17.704	-13
			16QAM	-18.491	-13
10	20450	824	QPSK	-18.683	-13
			16QAM	-17.594	-13
10	20800	849	QPSK	-20.267	-13
			16QAM	-19.861	-13

LTE Band XII (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	23017	699	QPSK	-24.108	-13
			16QAM	-24.040	-13
1.4	23173	716	QPSK	-23.138	-13
			16QAM	-23.129	-13
3	23025	699	QPSK	-19.899	-13
			16QAM	-21.359	-13
3	23165	716	QPSK	-19.050	-13
			16QAM	-20.695	-13
5	23035	699	QPSK	-16.166	-13
			16QAM	-16.595	-13
5	23155	716	QPSK	-18.012	-13
			16QAM	-18.633	-13
10	23060	698	QPSK	-17.868	-13
			16QAM	-17.909	-13
10	23130	716	QPSK	-19.530	-13
			16QAM	-19.899	-13

LTE Band XVII (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	23755	704	QPSK	-16.446	-13
			16QAM	-16.060	-13
5	23825	716	QPSK	-20.545	-13
			16QAM	-20.473	-13
10	23780	704	QPSK	-18.667	-13
			16QAM	-19.332	-13
10	23800	716	QPSK	-19.816	-13
			16QAM	-20.797	-13


Test Plots

LTE Band II (Part 24E)

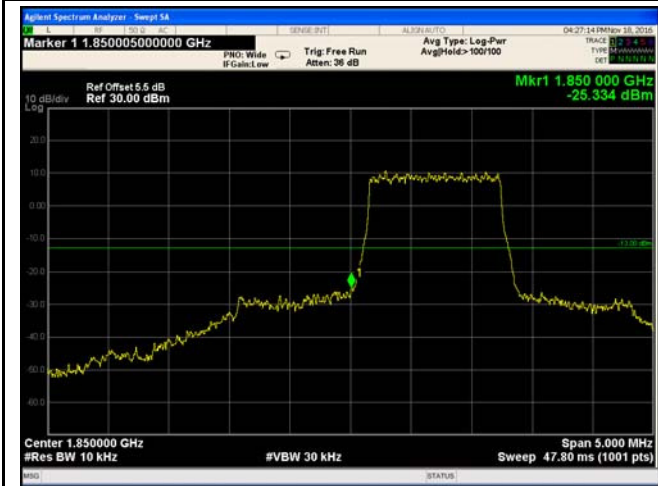

LTE Band II - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.72/10)=4.5+1.0=5.5dB

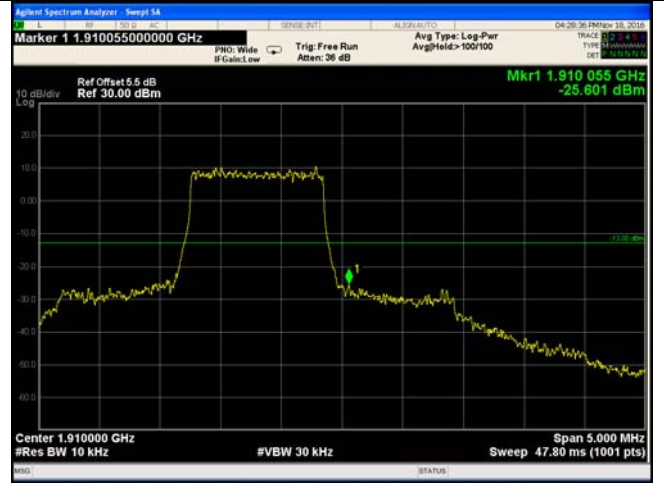


LTE Band II - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.70/10)=4.5+1.0=5.5dB




LTE Band II - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.76/10)=4.5+1.1=5.6 dB

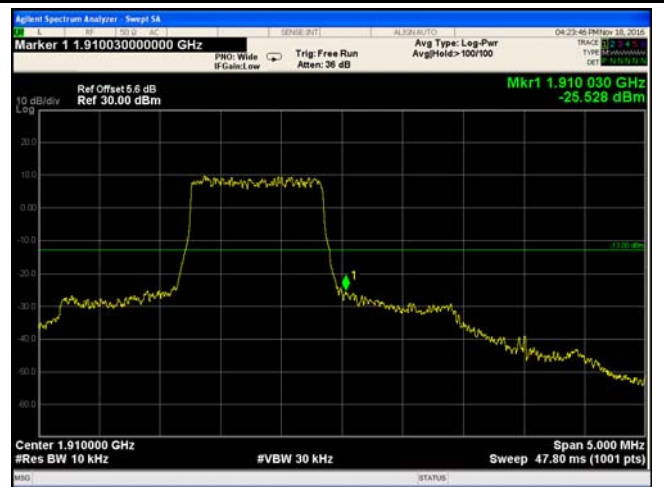


LTE Band II - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.78/10)=4.5+1.1=5.6 dB

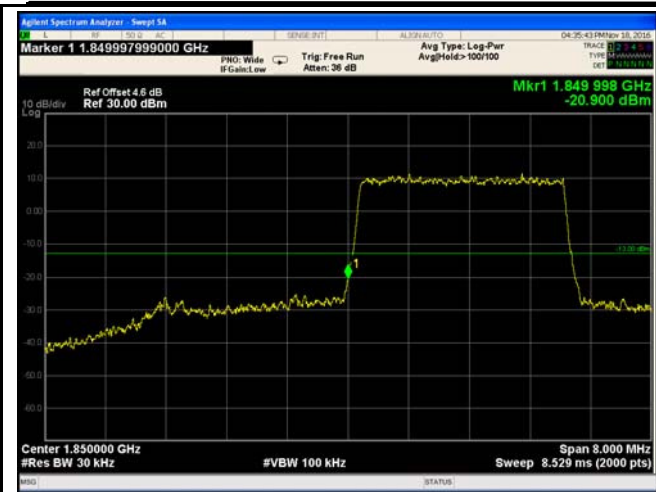


LTE Band II - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.66/30)=4.5+0.1=4.6 dB

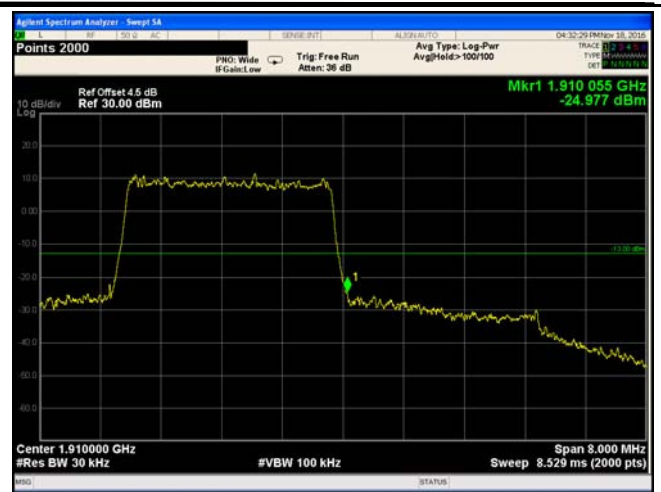

LTE Band II - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.34/30)=4.5+0.0=4.5 dB

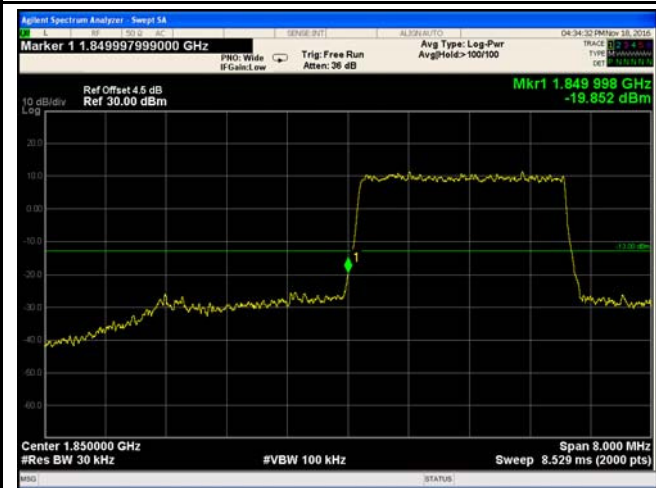


LTE Band II - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.34/30)=4.5+0.0=4.5 dB



LTE Band II - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.38/30)=4.5+0.1=4.6 dB

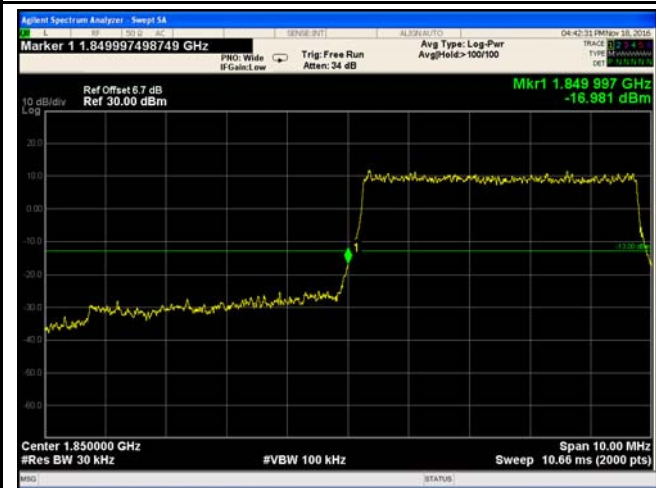


LTE Band II - Low Channel QPSK-5



LTE Band II - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.18/30)=4.5+2.2=6.7 dB

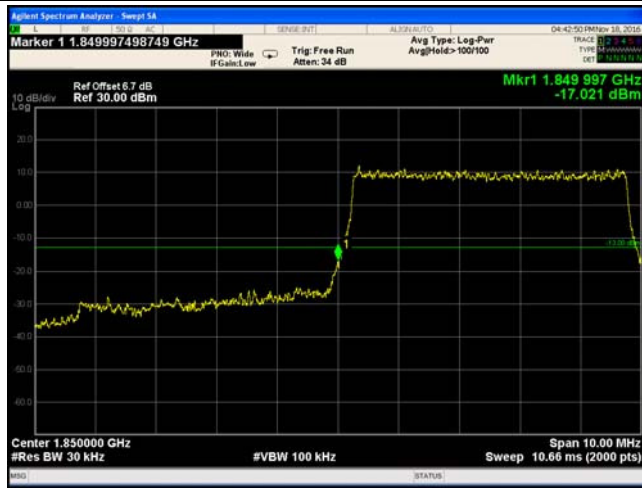


LTE Band II - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.48/30)=4.5+2.3=6.8 dB




LTE Band II - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.06/30)=4.5+2.2=6.7 dB

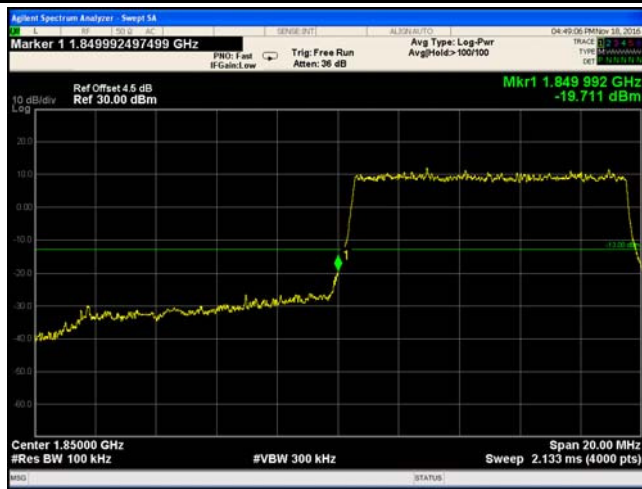


LTE Band II - Low Channel QPSK-10


Note: Offset=Cable loss (4.5) + 10log
(50.15/30)=4.5+2.2=6.7 dB

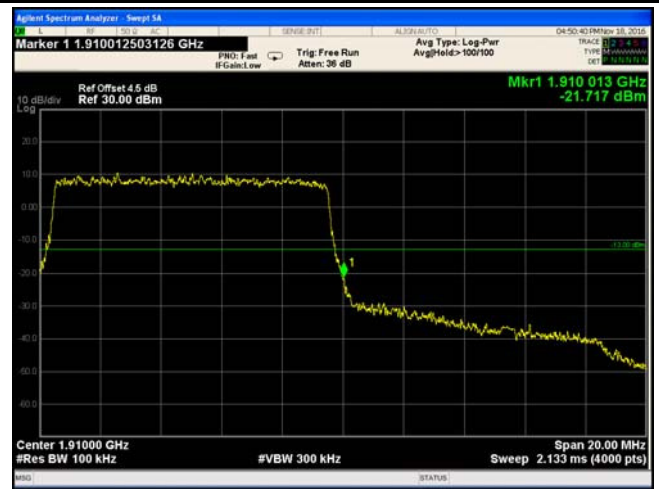

LTE Band II - High Channel QPSK-10

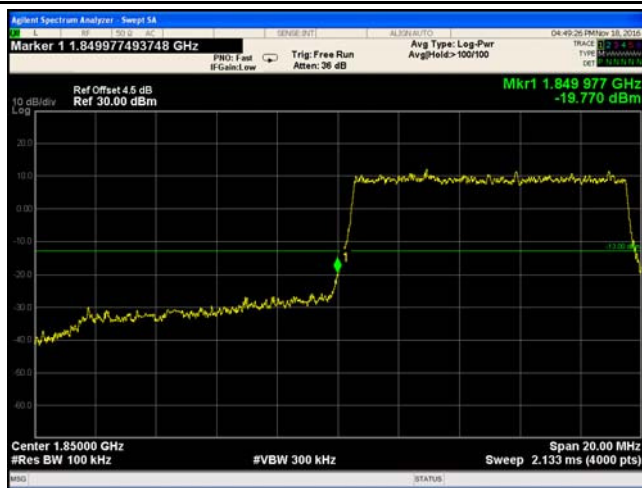

LTE Band II - Low Channel 16QAM-10

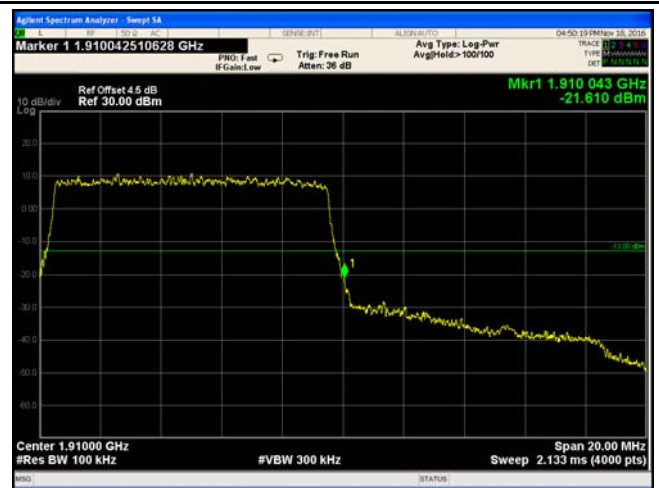

LTE Band II - High Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(101.5/100)=4.5+0.0=4.5 dB



LTE Band II - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(100.4/100)=4.5+0.0=4.5 dB




LTE Band II - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(147.2/100)=4.5+1.7=6.2 dB



LTE Band II - Low Channel 16QAM-15


Note: Offset=Cable loss (4.5) + 10log
(148.7/100)=4.5+1.7=6.2 dB

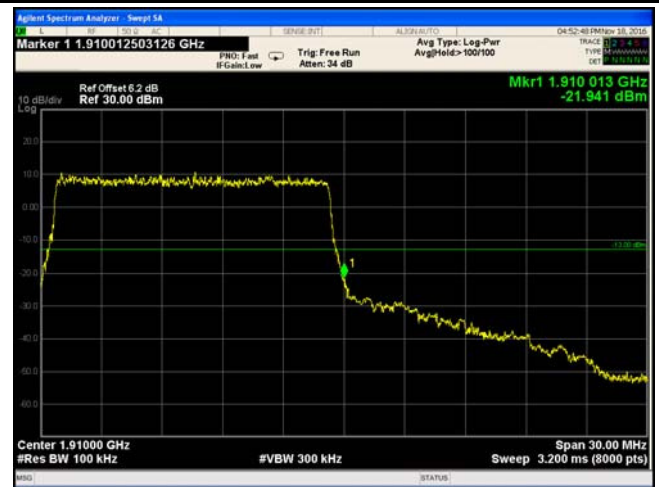

LTE Band II - High Channel 16QAM-15


Note: Offset=Cable loss (4.5) + 10log
(148.1/100)=4.5+1.7=6.2 dB

Note: Offset=Cable loss (4.5) + 10log
(148/100)=4.5+1.7=6.2 dB

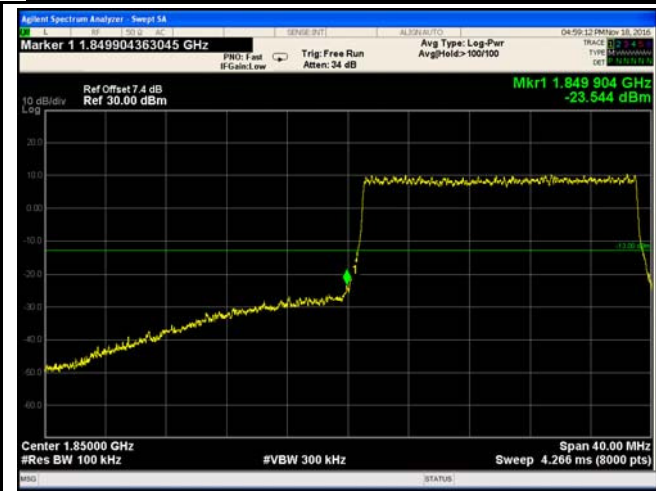


LTE Band II - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(192.8/100)=4.5+2.9=7.4 dB

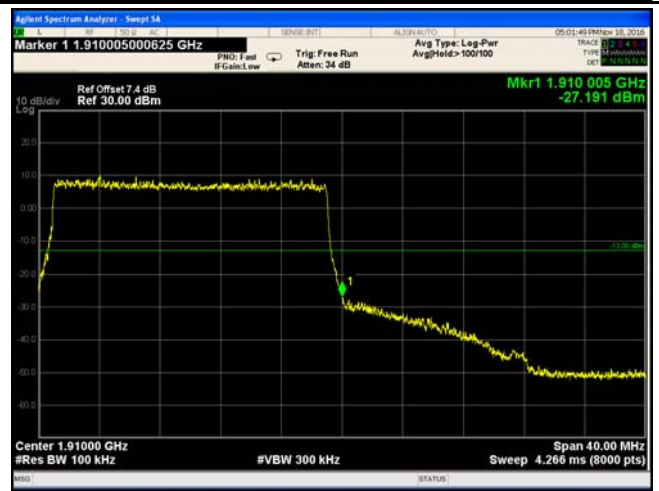

LTE Band II - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193.6/100)=4.5+2.9=7.4 dB

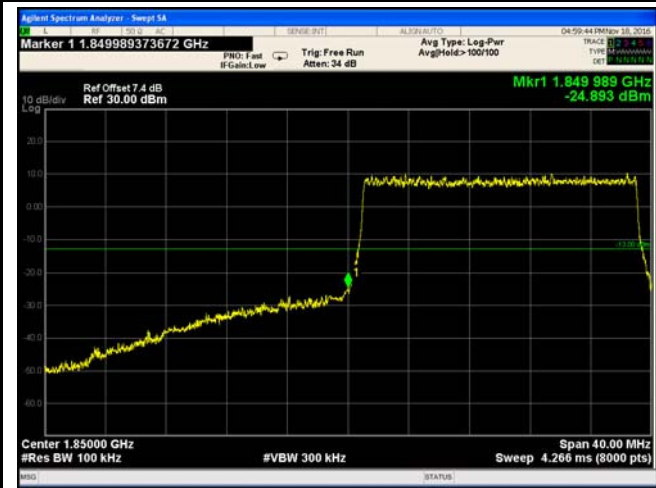

LTE Band II - Low Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194.7/100)=4.5+2.9=7.4 dB



LTE Band II - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(192.9/100)=4.5+2.9=7.4 dB

LTE Band IV (Part 27)

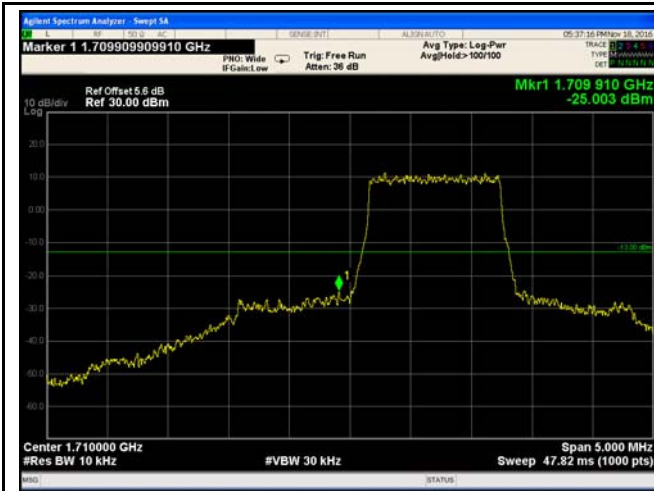


LTE Band IV - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.85/10)=4.5+1.1=5.6 dB

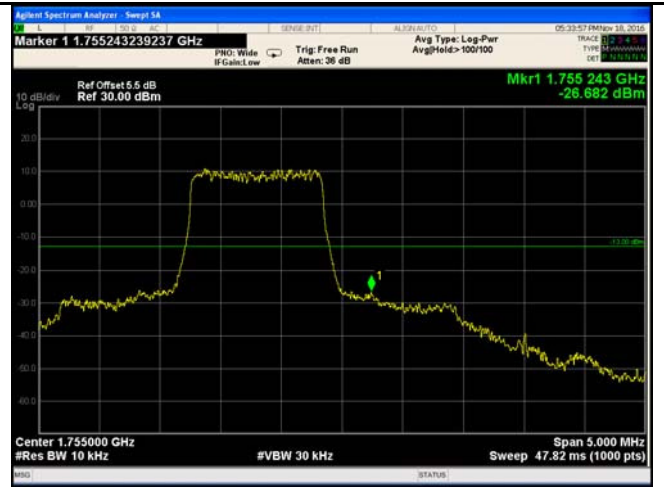


LTE Band IV - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.71/10)=4.5+1.0=5.5 dB

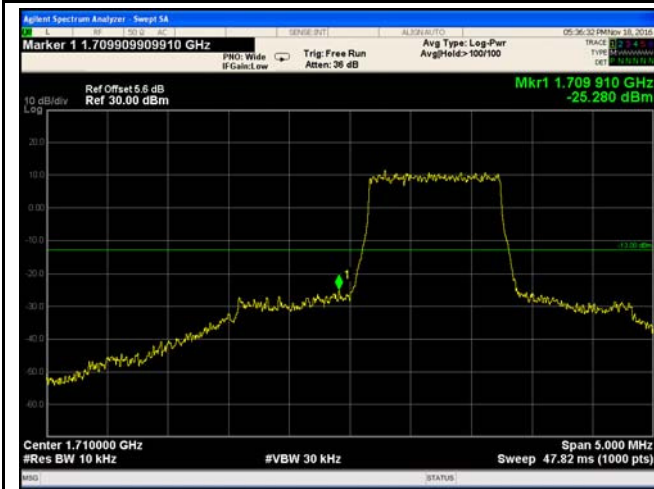


LTE Band IV - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.82/10)=4.5+1.1=5.6 dB

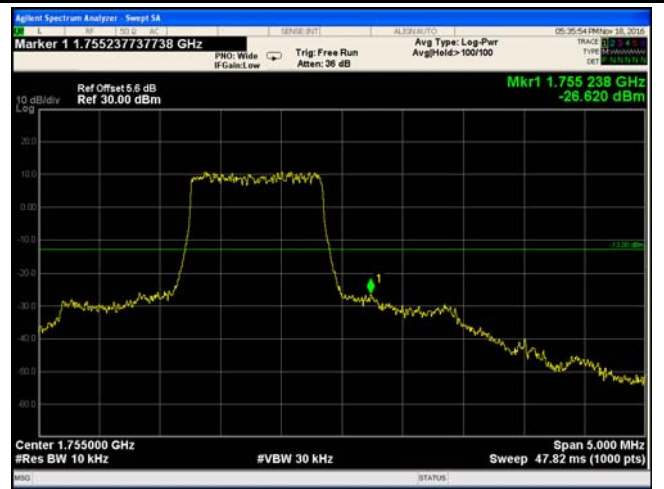


LTE Band IV - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
((12.78/10)=4.5+1.1=5.6 dB

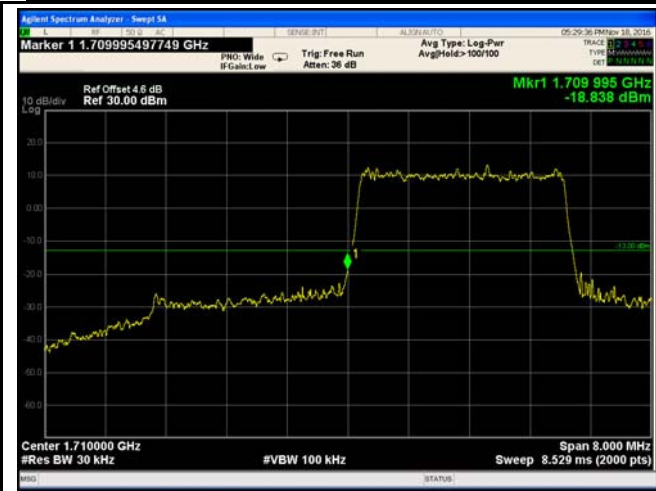

LTE Band IV - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.59/30)=4.5+0.1=4.6 dB

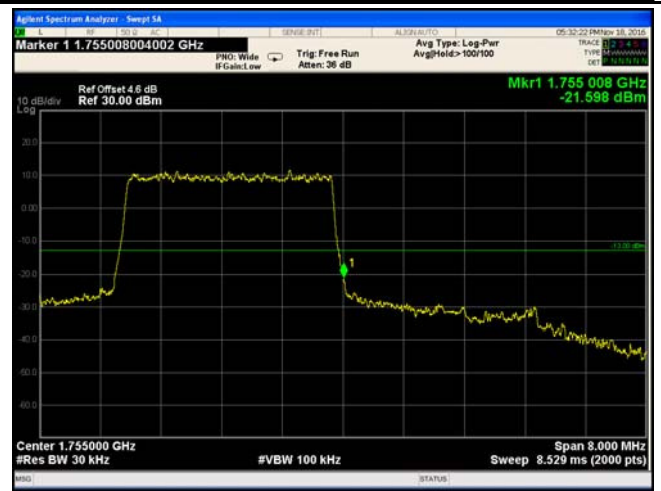


LTE Band IV - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.63/30)=4.5+0.1=4.6 dB



LTE Band IV - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.6/30)=4.5+0.1=4.6 dB

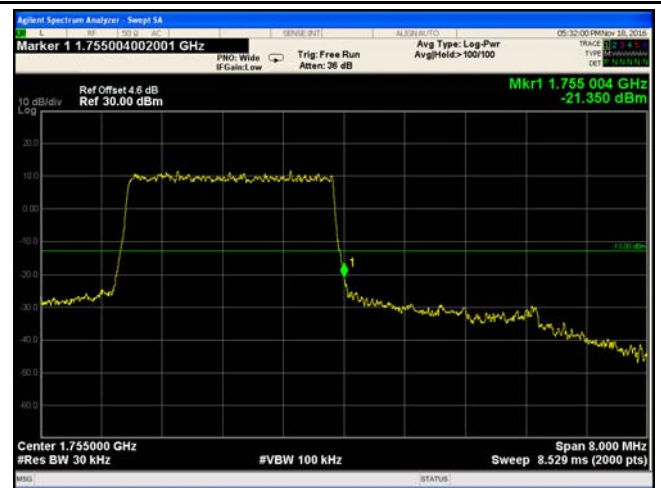

LTE Band IV - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.39/30)=4.5+0.1=4.6 dB



LTE Band IV - Low Channel QPSK-5



LTE Band IV - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.15/30)=4.5+2.2=6.7 dB




LTE Band IV - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.34/30)=4.5+2.2=6.7 dB




LTE Band IV - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.33/30)=4.5+2.2=6.7 dB

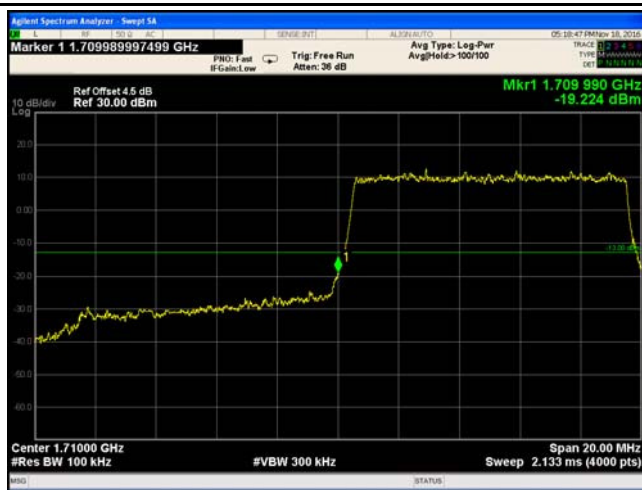


LTE Band IV - Low Channel QPSK-10

Note: Offset=Cable loss (4.5) + 10log
(50.39/30)=4.5+2.3=6.8 dB

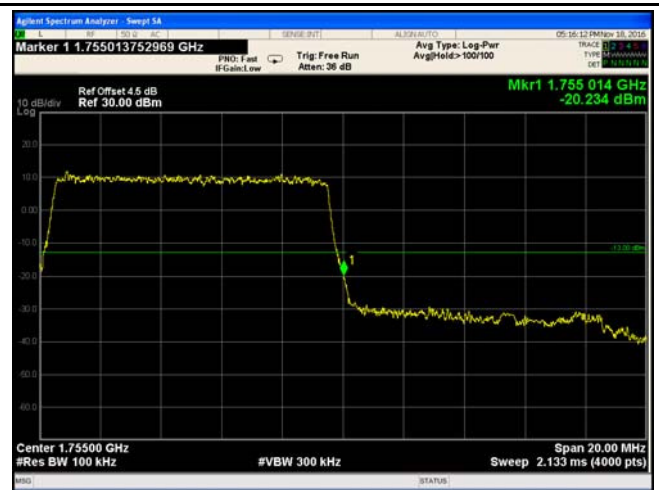

LTE Band IV - High Channel QPSK-10

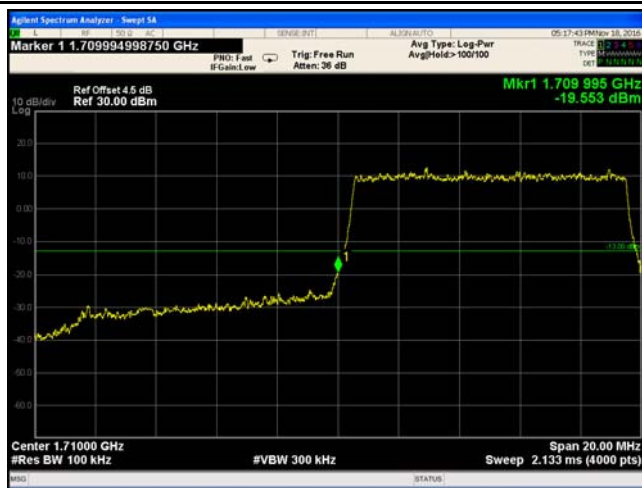

LTE Band IV - Low Channel 16QAM-10




LTE Band IV - High Channel 16QAM-10



LTE Band IV - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.5/100)=4.5+1.7=6.2 dB

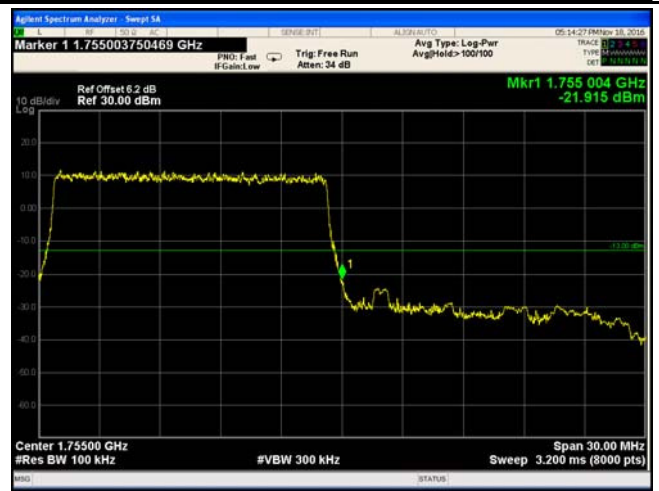


LTE Band IV - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.9/100)=4.5+1.7=6.2 dB




LTE Band IV - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(148.1/100)=4.5+1.7=6.2 dB

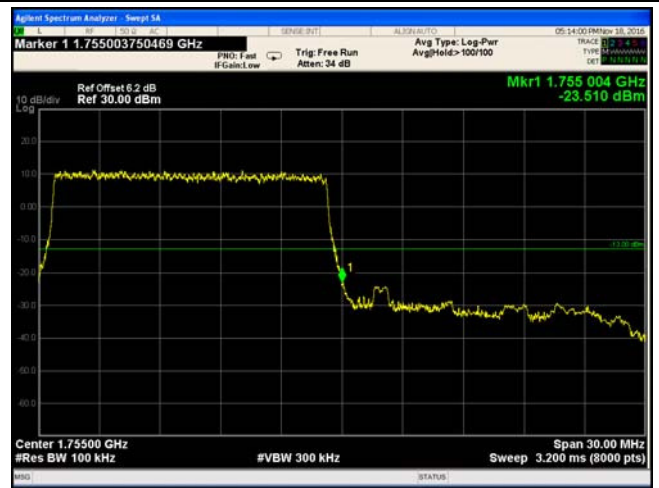


LTE Band IV - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(149.4/100)=4.5+1.7=6.2 dB

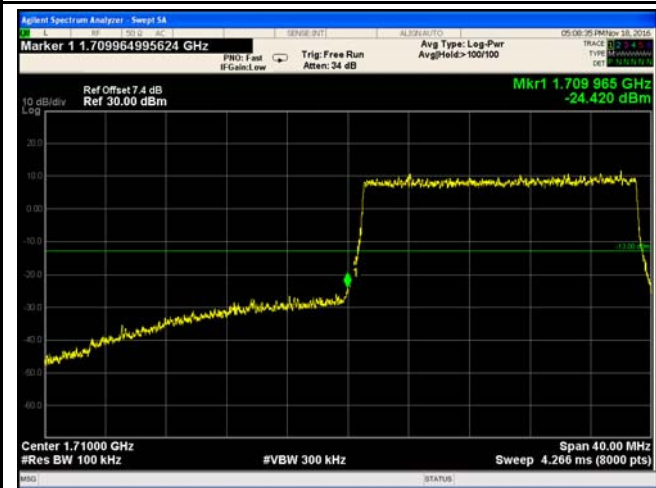


LTE Band IV - Low Channel QPSK-20

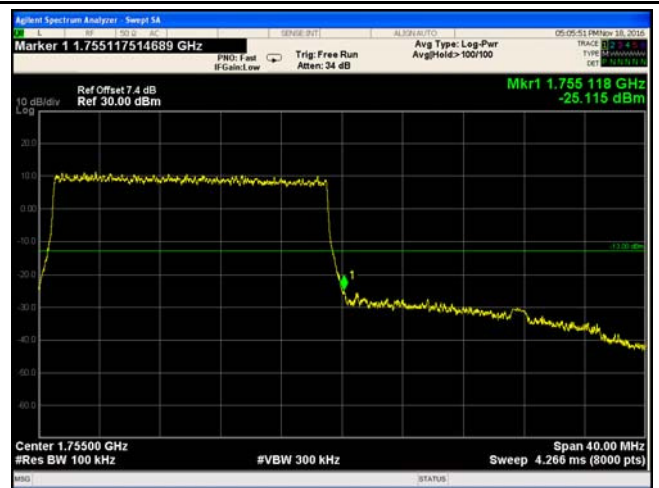

LTE Band IV - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193.6/100)=4.5+2.9=7.4 dB

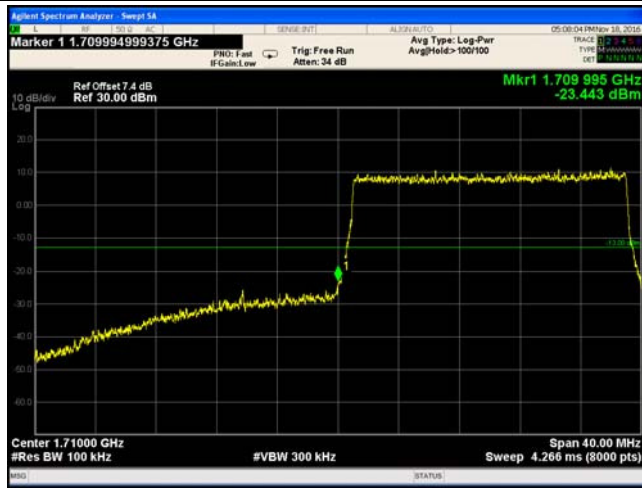

LTE Band IV - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(193.7/100)=4.5+2.9=7.4dB

Note: Offset=Cable loss (4.5) + 10log
(193.7/100)=4.5+2.9=7.4 dB



LTE Band IV - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194/100)=4.5+2.9=7.4 dB

LTE Band V (Part 22H)




LTE Band V - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.8/10)=4.0+1.1=5.1 dB

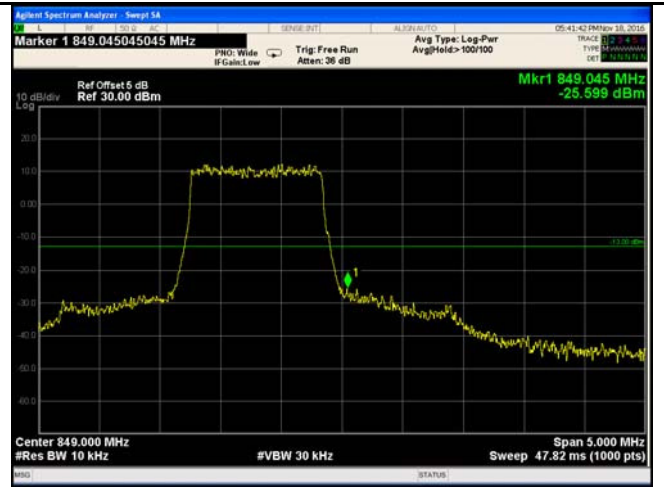


LTE Band V - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.64/10)=4.0+1.0=5.0 dB

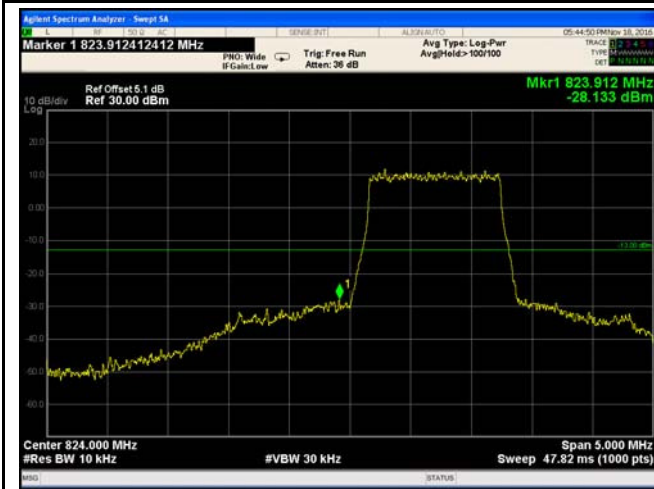


LTE Band V - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.76/10)=4.0+1.1=5.1 dB

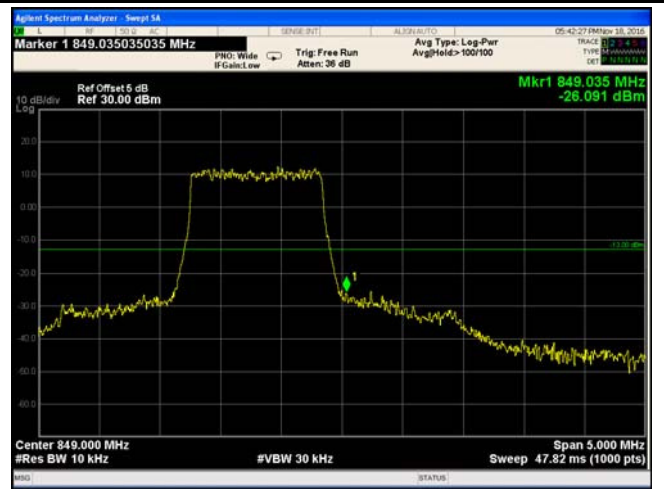

LTE Band V - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.68/10)=4.0+1.0=5.0 dB

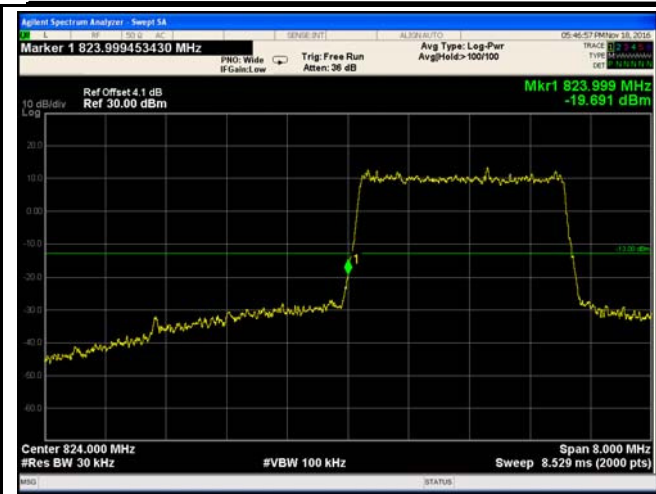

LTE Band V - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.7/30)=4.0+0.1=4.1 dB




LTE Band V - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.57/30)=4.0+0.1=4.1 dB




LTE Band V - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.53/30)=4.0+0.1=4.1 dB

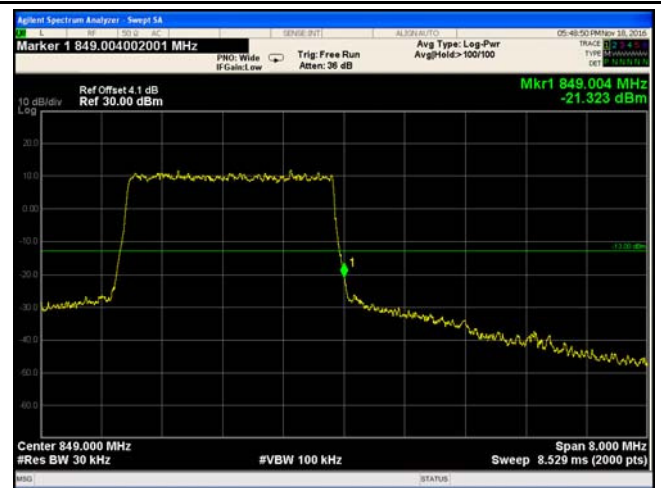


LTE Band V - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.64/30)=4.5+0.1=4.1 dB

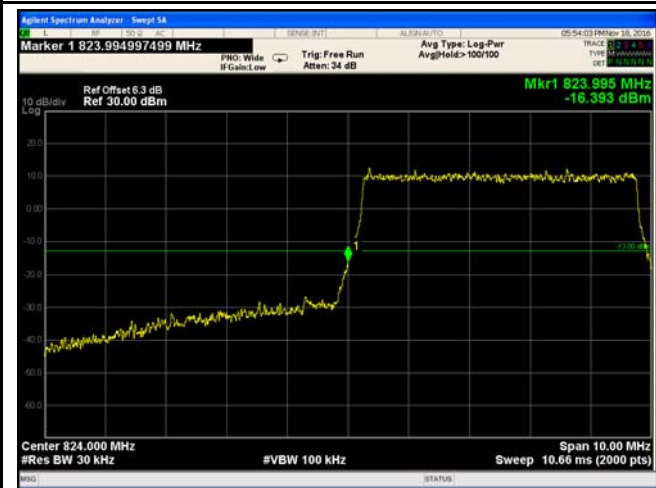


LTE Band V - Low Channel QPSK-5

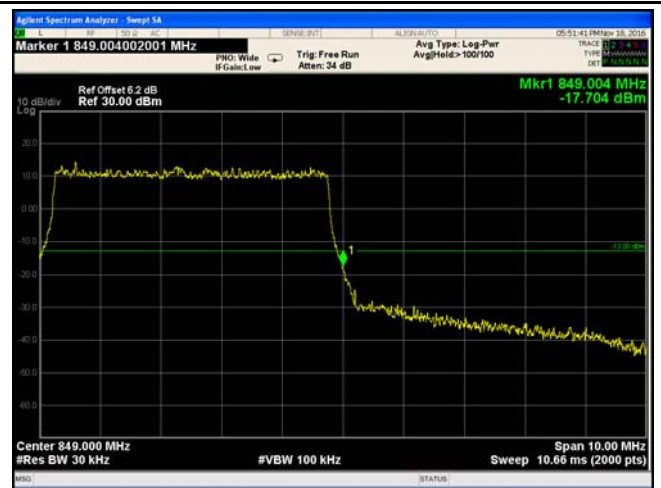

LTE Band V - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.45/30)=4.0+2.3=6.3 dB

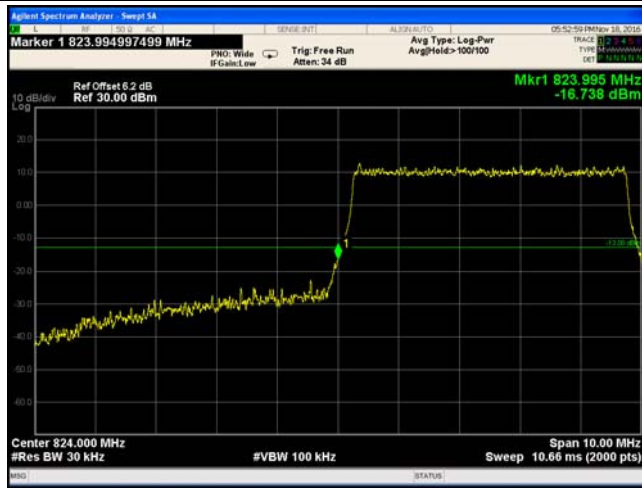


LTE Band V - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.26/30)=4.0+2.2=6.2 dB




LTE Band V - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.19/30)=4.0+2.2=6.2 dB

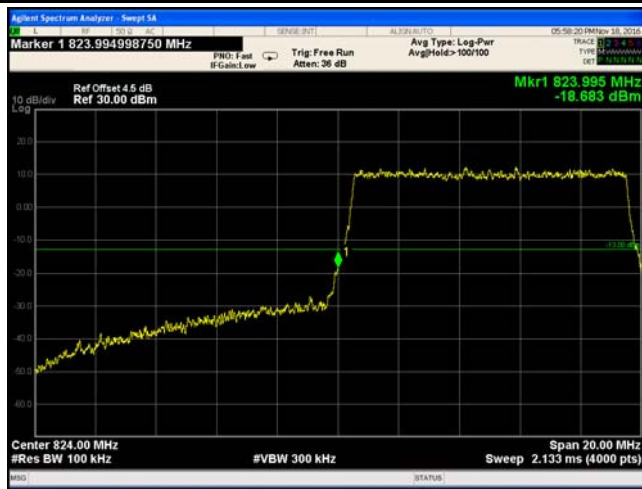


LTE Band V - Low Channel QPSK-10


Note: Offset=Cable loss (4.5) + 10log
(40.46/30)=4.0+2.3=6.3dB

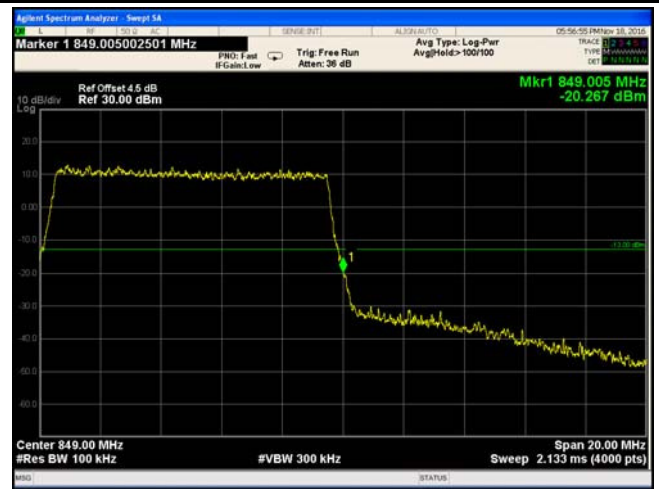

LTE Band V - High Channel QPSK-10

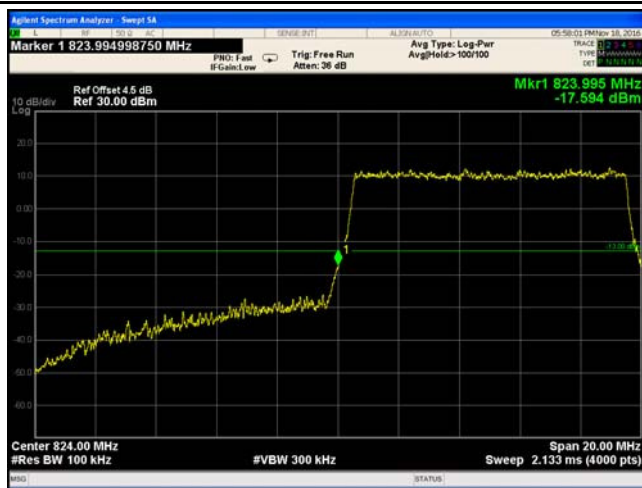

LTE Band V - Low Channel 16QAM-10

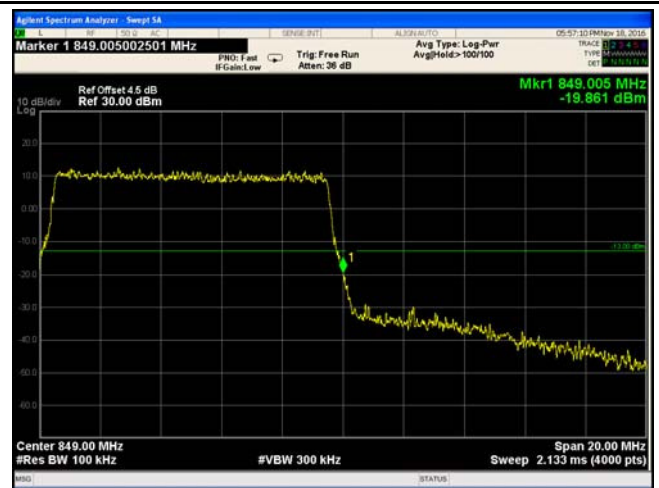


LTE Band V - High Channel 16QAM-10

LTE Band XII (Part 27)



LTE Band XII - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.71/10)=4.0+1.1=5.1 dB

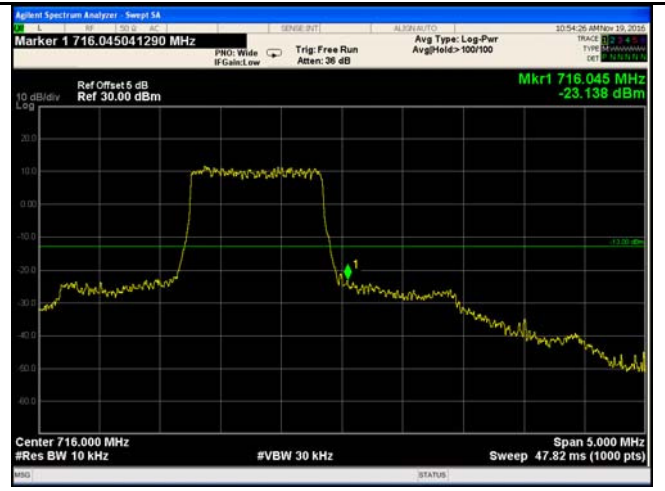


LTE Band XII - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.73/10)=4.0+1.0=5.0 dB



LTE Band XII - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.88/10)=4.0+1.1=5.1 dB

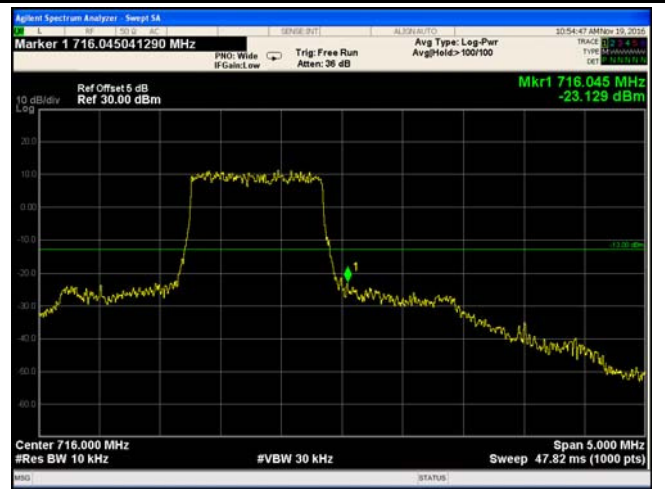

LTE Band XII - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.69/10)=4.0+1.0=5.0 dB



LTE Band XII - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.57/30)=4.0+0.1=4.1 dB



LTE Band XII - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.46/30)=4.0+0.1=4.1 dB



LTE Band XII - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.54/30)=4.0+0.1=4.1 dB




LTE Band XII - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.56/30)=4.0+0.1=4.1 dB



LTE Band XII - Low Channel QPSK-5

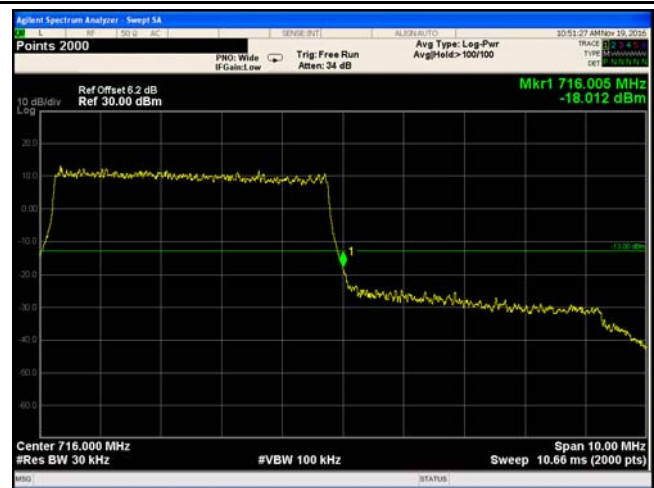


LTE Band XII - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.78/30)=4.0+2.3=6.3 dB




LTE Band XII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.4/30)=4.0+2.2=6.2 dB

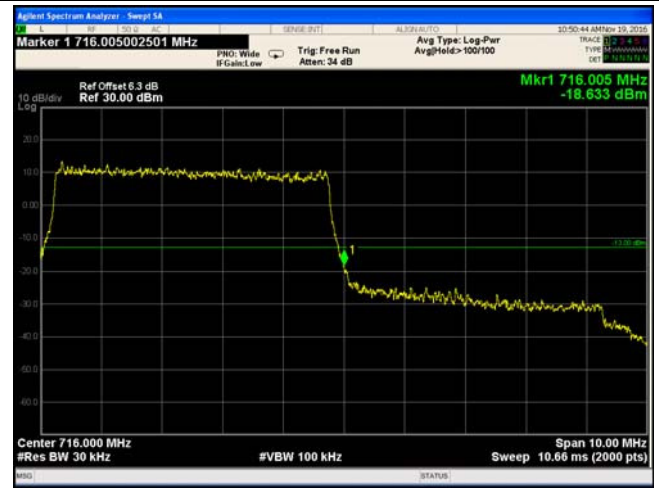

LTE Band XII - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.17/30)=4.0+2.2=6.2 dB

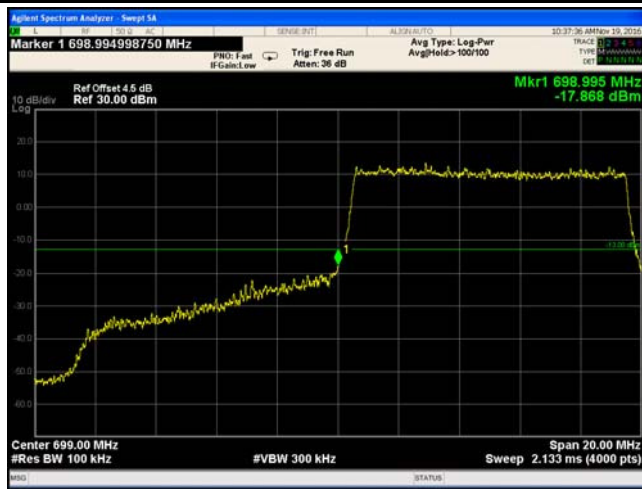


LTE Band XII - Low Channel QPSK-10


Note: Offset=Cable loss (4.5) + 10log
(50.22/30)=4.0+2.3=6.3 dB



LTE Band XII - High Channel QPSK-10

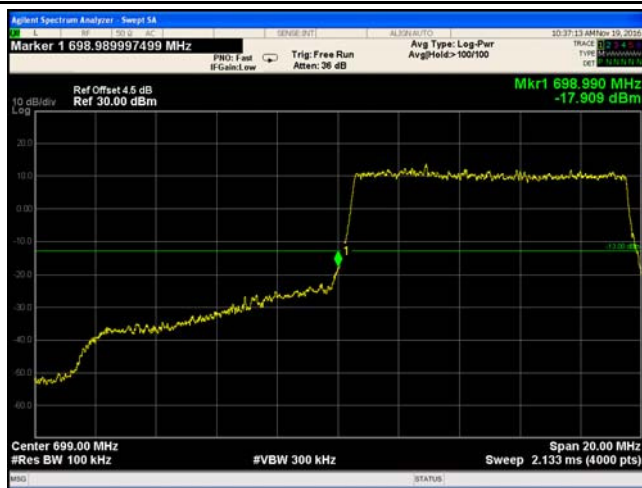

LTE Band XII - Low Channel 16QAM-10

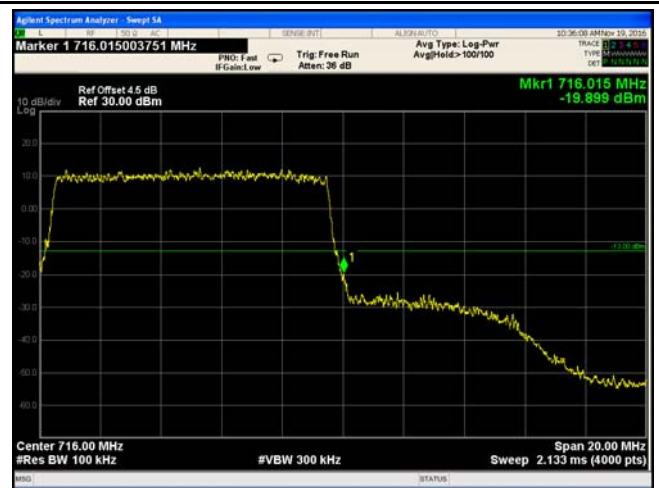

LTE Band XII - High Channel 16QAM-10

LTE Band XVII (Part 27)




LTE Band XVII - Low Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.62/30)=4.0+2.3=6.3 dB




LTE Band XVII - High Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.0130)=4.0+2.2=6.2 dB

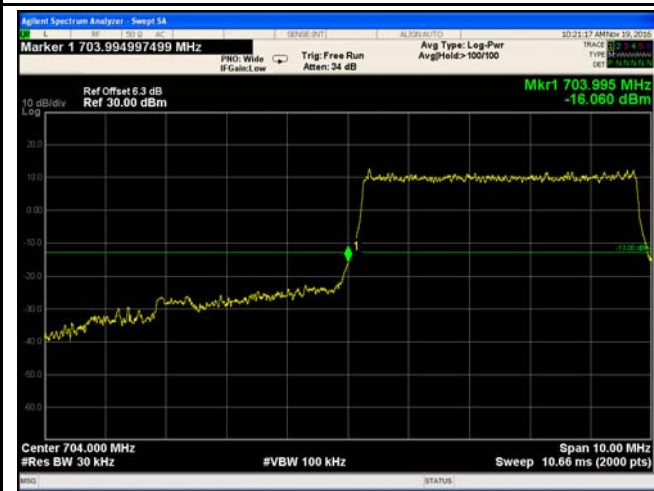


LTE Band XVII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.0) + 10log
(50.84/30)=4.0+2.3=6.3 dB

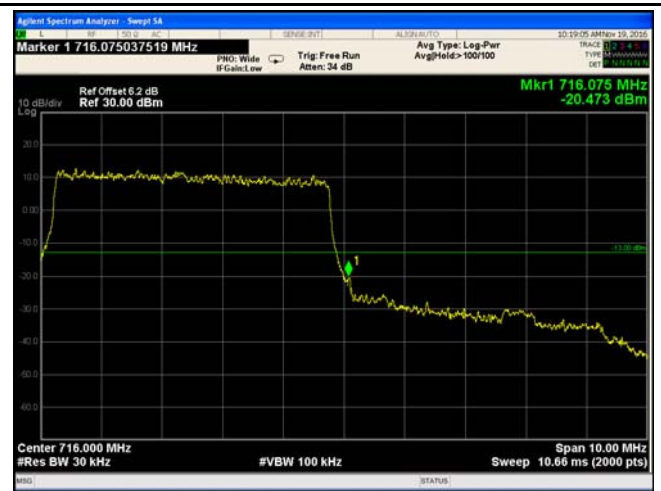

LTE Band XVII - High Channel 16QAM-5


Note: Offset=Cable loss (4.0) + 10log
(50.29/30)=4.0+2.2=6.2 dB

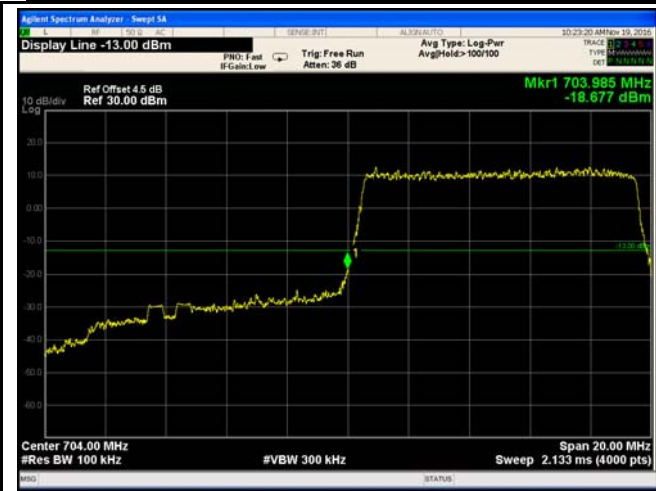


LTE Band XVII - Low Channel QPSK-10



LTE Band XVII - High Channel QPSK-10

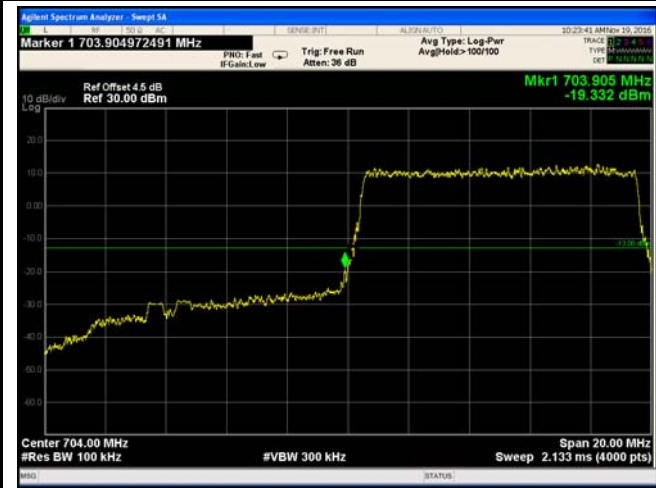

LTE Band XVII - Low Channel 16QAM-10

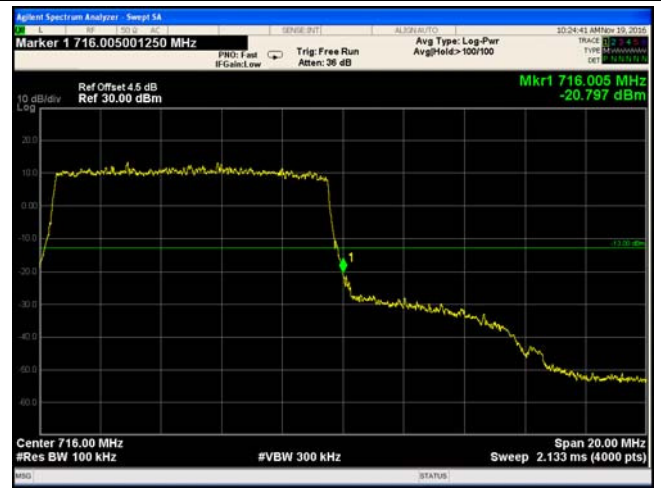


LTE Band XVII - High Channel 16QAM-10

6.8 Band Edge 27.53(m)

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	November 19, 2016
Tested By :	Loren Luo

Requirement(s):

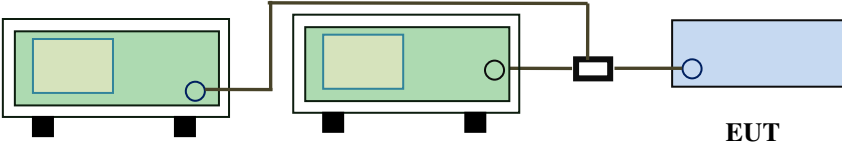Spec	Requirement	Applicable
§27.53(m)	According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power(P) by a factor shall be not less than $43+10\log(P)$ dB at the channel edge, the limit of emission equal to -13dBm. And $55+10\log(P)$ dB at 5.5MHz from the channel edges, the limit of emission equal to -25dBm. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;"> Base Station Spectrum Analyzer EUT </p>	
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. 	
Remark		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data Yes N/A
 Test Plot Yes (See below) N/A

LTE Band VII (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	20775	2500	QPSK	-19.631	-13
			16QAM	-19.356	-13
5	21425	2570	QPSK	-20.231	-13
			16QAM	-19.874	-13
10	20800	2500	QPSK	-21.798	-13
			16QAM	-22.152	-13
10	21400	2570	QPSK	-19.902	-13
			16QAM	-22.338	-13
15	20825	2500	QPSK	-24.472	-13
			16QAM	-24.500	-13
15	21400	2570	QPSK	-22.461	-13
			16QAM	-21.471	-13
20	20850	2500	QPSK	-25.751	-13
			16QAM	-27.463	-13
20	21350	2571	QPSK	-25.876	-13
			16QAM	-26.418	-13

LTE Band VII (Part 27)



LTE Band VII - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.88/30)=4.5+2.3=6.8 dB



LTE Band VII - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.78/30)=4.5+2.3=6.8 dB



LTE Band VII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(51.05/30)=4.5+2.3=6.8 dB



LTE Band VII - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(50.37/30)=4.5+2.3=6.8 dB




LTE Band VII - Low Channel QPSK-10



LTE Band VII - High Channel QPSK-10

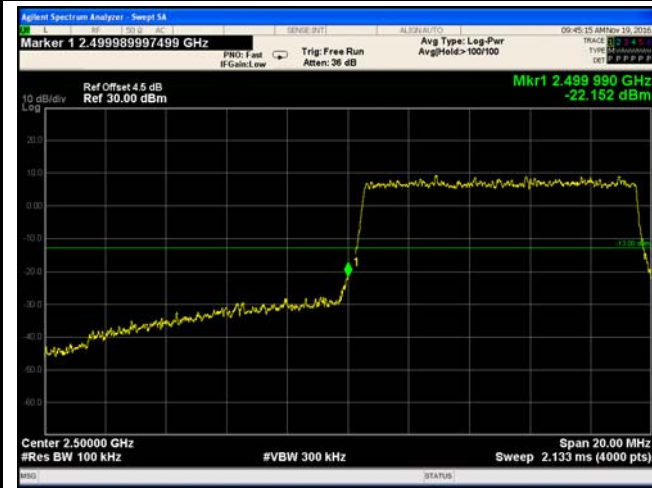

LTE Band VII - Low Channel 16QAM-10

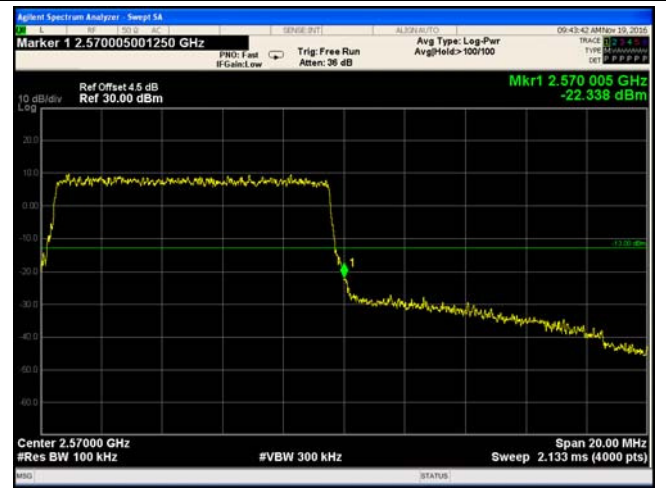


LTE Band VII - High Channel 16QAM-10




LTE Band VII - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(147.8/100)=4.5+1.7=6.2 dB

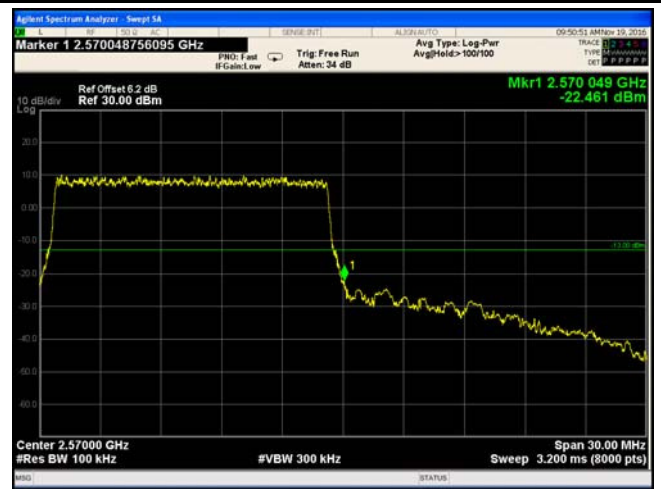


LTE Band VII - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.5/100)=4.5+1.7=6.2 dB

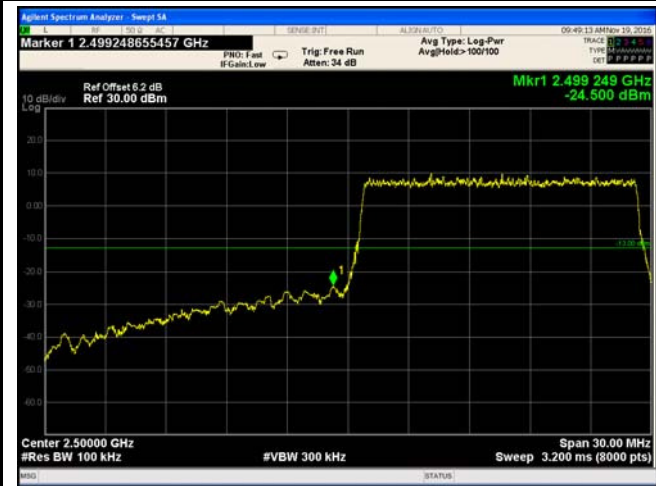


LTE Band VII - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(147.5/100)=4.5+1.7=6.2dB

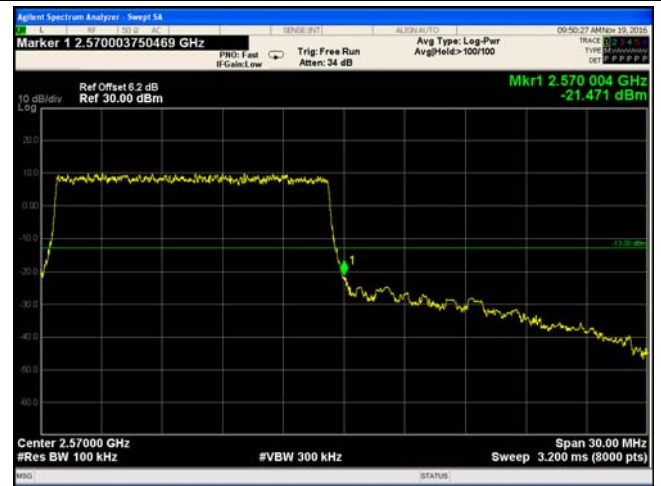


LTE Band VII - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(148.2/100)=4.5+1.7=6.2 dB

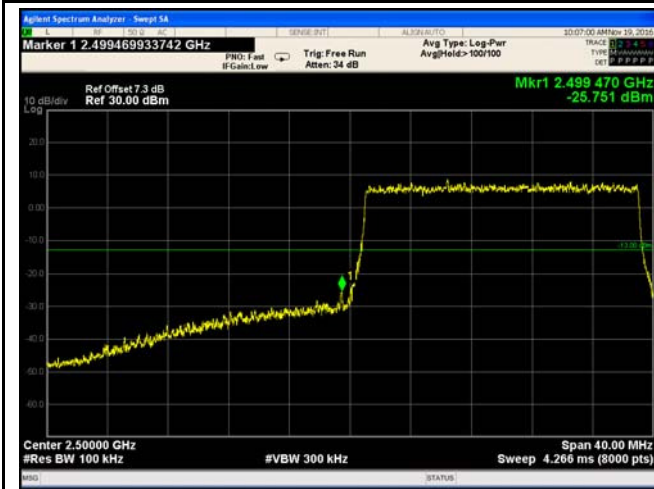


LTE Band VII - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(195.2/100)=4.5+2.8=7.3 dB

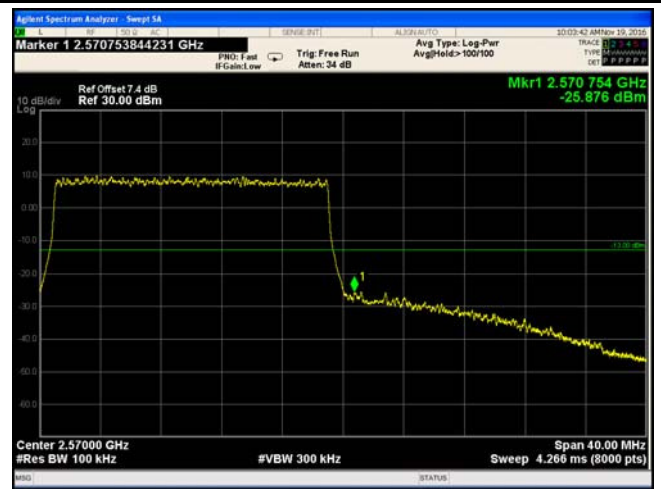


LTE Band VII - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(194 /100)=4.5+2.9=7.4dB

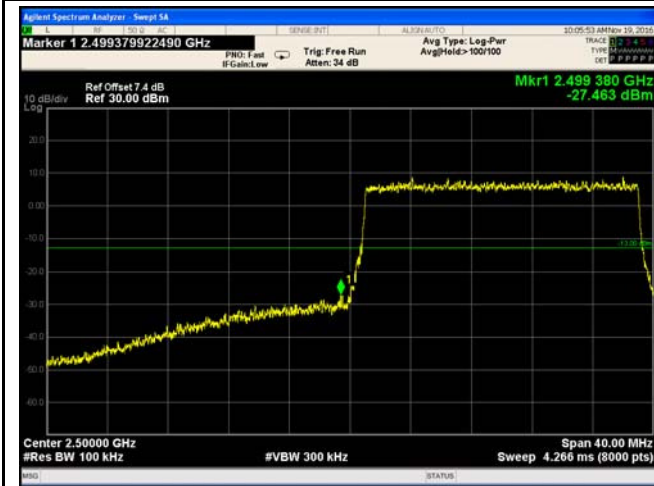

LTE Band VII - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(191.6/100)=4.5+2.8=7.3 dB

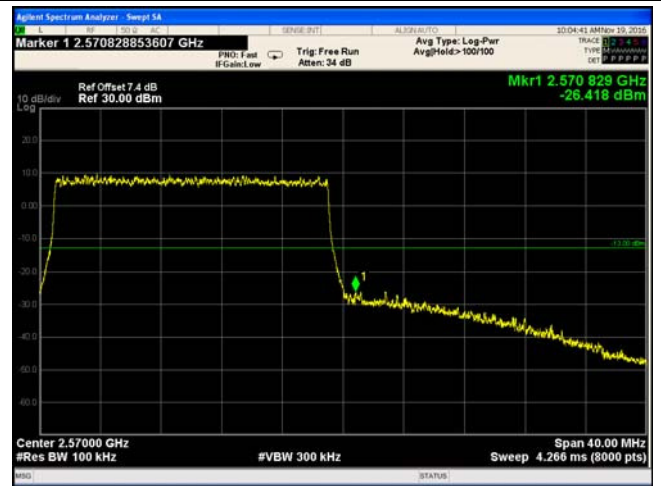

LTE Band VII - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194.7/100)=4.5+2.9=7.4 dB

6.9 Frequency Stability

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	<p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5 0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929.</td> <td>5.0</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>929 to 960.</td> <td>1.5</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p> <p>According to §27.54, The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.</p>	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5 0	821 to 896	1.5	2.5	2.5	928 to 929.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	<input checked="" type="checkbox"/>
		Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																														
		25 to 50	20.0	20.0	50.0																														
		to 450	5.0	5.0	50.0																														
		450 to 512	2.5	5.0	5 0																														
		821 to 896	1.5	2.5	2.5																														
		928 to 929.	5.0	N/A	N/A																														
		929 to 960.	1.5	N/A	N/A																														
		2110 to 2220	10.0	N/A	N/A																														
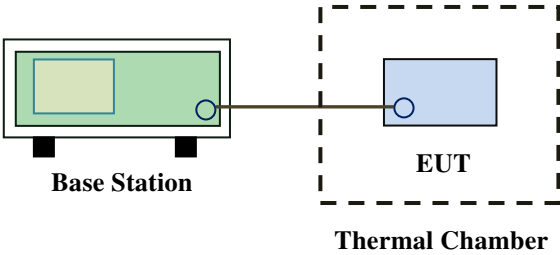
<p>Test setup</p>	 <p>The diagram illustrates the test setup. On the left, a green rectangular box labeled 'Base Station' is shown with a smaller green box inside it. A horizontal line connects the right side of the Base Station to the left side of a blue rectangular box labeled 'EUT'. The EUT is enclosed within a dashed-line rectangular box labeled 'Thermal Chamber'.</p>
<p>Procedure</p>	<p>A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.</p> <p>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.</p>
<p>Remark</p>	<p>Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to $+55^{\circ}\text{C}$ at normal supply voltage.</p>
<p>Result</p>	<p><input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail</p>

Test Data Yes N/A

Test Plot Yes (See below) N/A

LTE Band II (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-8	0.0043	2.5
0		-10	0.0053	2.5
10		-9	0.0048	2.5
20		-11	0.0059	2.5
30		-12	0.0064	2.5
40		-7	0.0037	2.5
50		-8	0.0043	2.5
55		-10	0.0053	2.5
25		4.2	-12	0.0064
	3.5	-14	0.0074	2.5

LTE Band IV (Part 27) result

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-9	0.0052	2.5
0		-17	0.0098	2.5
10		-16	0.0092	2.5
20		-10	0.0058	2.5
30		-9	0.0052	2.5
40		-11	0.0063	2.5
50		-13	0.0075	2.5
55		-15	0.0087	2.5
25		4.2	-15	0.0087
	3.5	-17	0.0098	2.5

LTE Band V (Part 22H) result

Middle Channel, $f_0 = 836.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-9	0.0108	2.5
0		-5	0.0060	2.5
10		-6	0.0072	2.5
20		-11	0.0132	2.5
30		-13	0.0155	2.5
40		-6	0.0072	2.5
50		-11	0.0132	2.5
55		-6	0.0072	2.5
25	4.2	-6	0.0072	2.5
	3.5	-10	0.0120	2.5

LTE Band VII (Part 27) result

Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-9	0.0036	2.5
0		-7	0.0028	2.5
10		-6	0.0024	2.5
20		-10	0.0039	2.5
30		-11	0.0043	2.5
40		-9	0.0036	2.5
50		-7	0.0028	2.5
55		-6	0.0024	2.5
25	4.2	-10	0.0039	2.5
	3.5	-12	0.0047	2.5

LTE Band XII (Part 27) result

Middle Channel, $f_0 = 707.5\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-7	0.0027	2.5
0		-10	0.0059	2.5
10		-11	0.0037	2.5
20		-11	0.0053	2.5
30		-13	0.0064	2.5
40		-10	0.0048	2.5
50		-9	0.0064	2.5
55		-9	0.0032	2.5
25	4.2	-8	0.0059	2.5
	3.5	-9	0.0053	2.5

LTE Band XVII (Part 27) result

Middle Channel, $f_0 = 710\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	7	0.0099	2.5
0		5	0.0070	2.5
10		6	0.0085	2.5
20		5	0.0070	2.5
30		7	0.0099	2.5
40		5	0.0070	2.5
50		11	0.0155	2.5
55		10	0.0141	2.5
25	4.2	11	0.0155	2.5
	3.5	10	0.0141	2.5

Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Wideband Radio Communication Tester	CMW500	120906	03/27/2016	03/26/2017	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Tunable Notch Filter	3NF-800/1000-S	AA4	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>


Test Report	16071314-FCC-R5
Page	141 of 152

Tunable Notch Filter	3NF- 1000/2000-S	AM 4	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
----------------------	---------------------	------	------------	------------	-------------------------------------


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

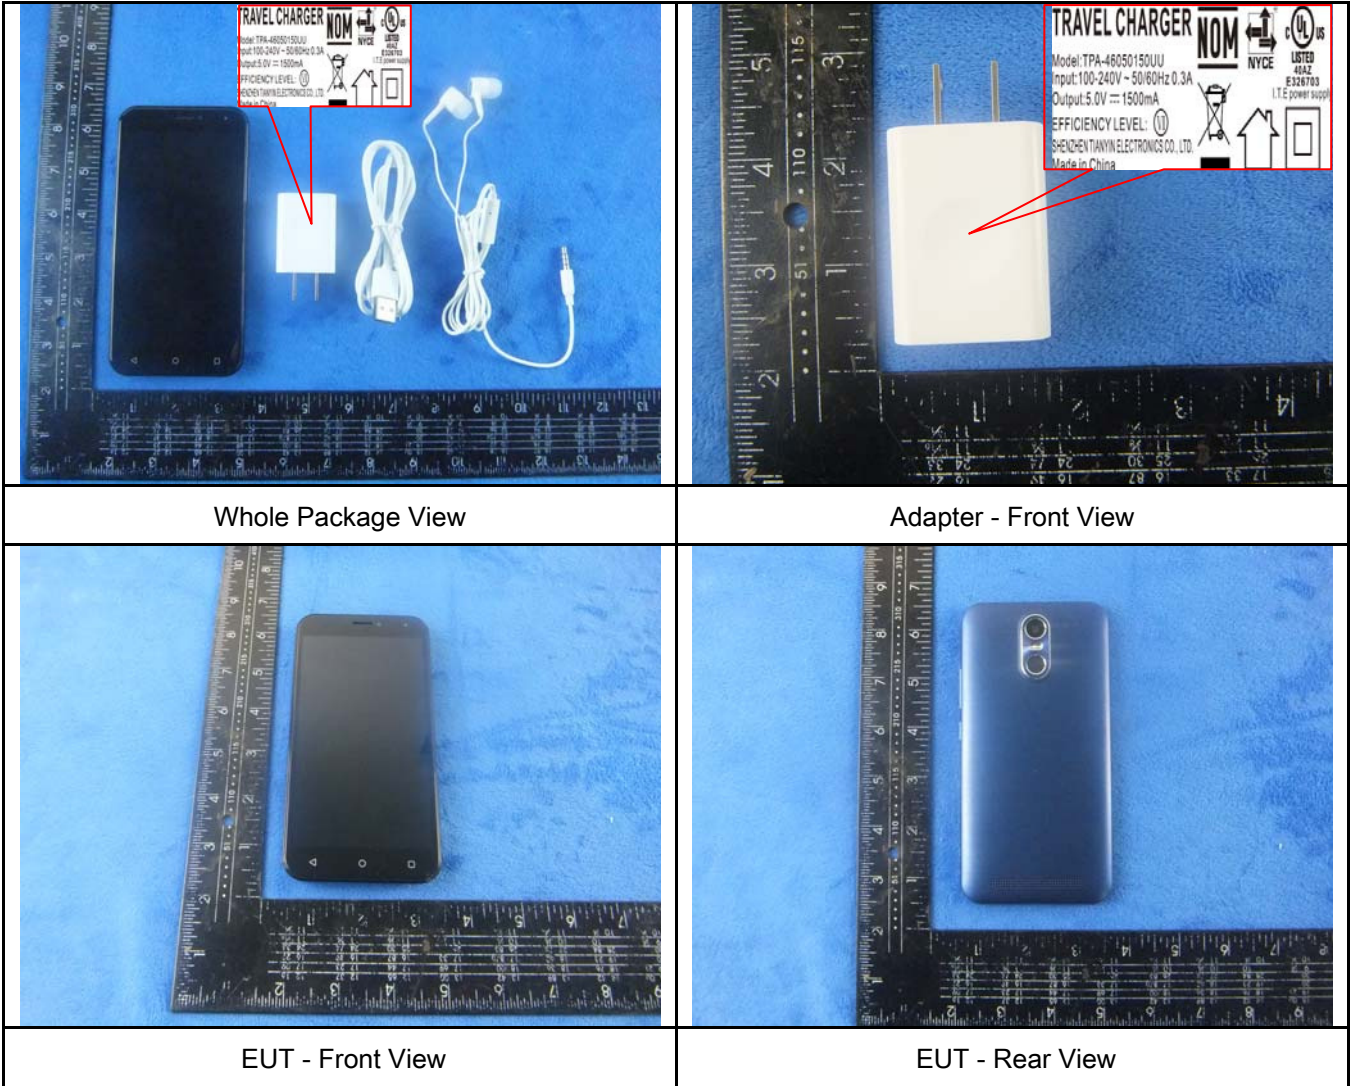

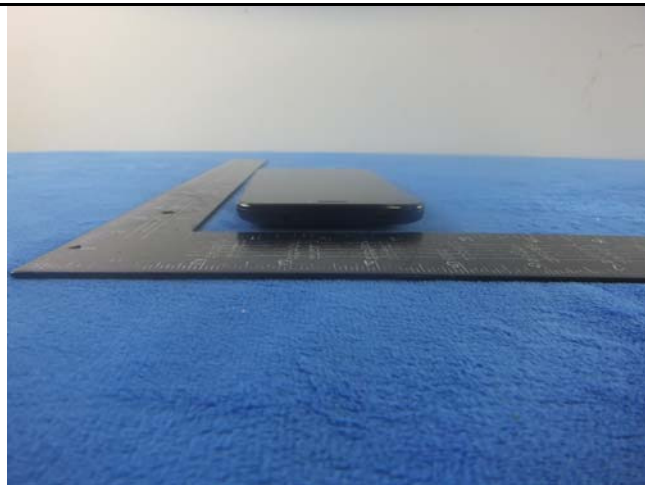


EUT - Top View

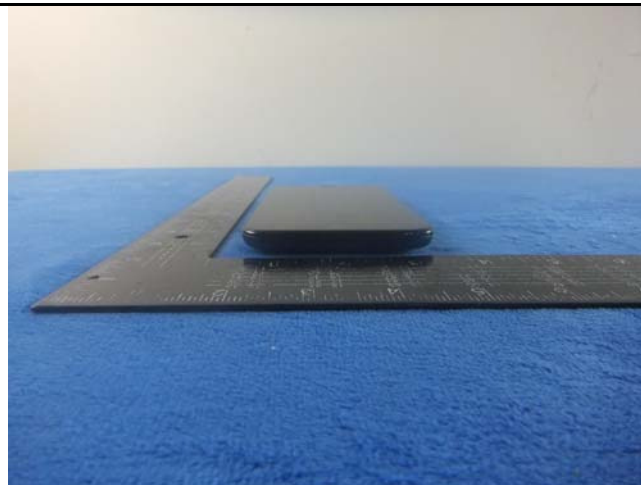

EUT - Bottom View



EUT - Left View

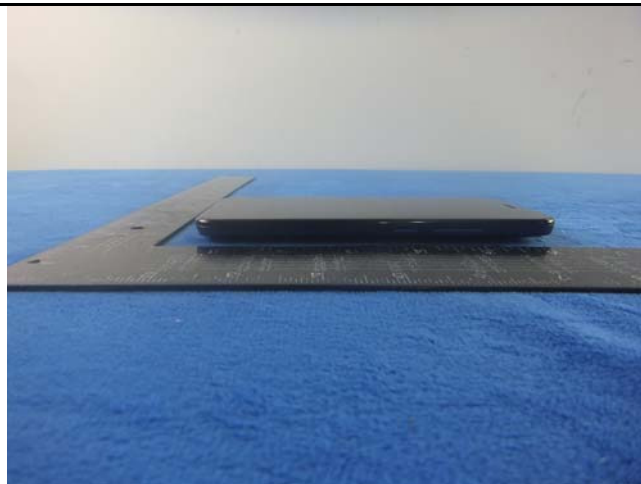

EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

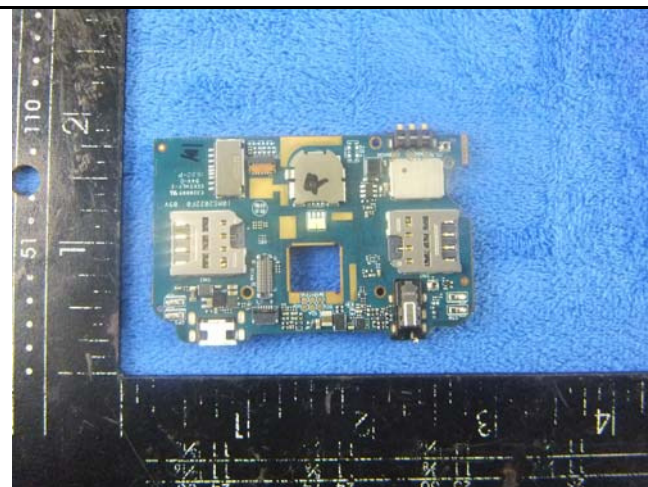

Mainboard with Shielding - Front View

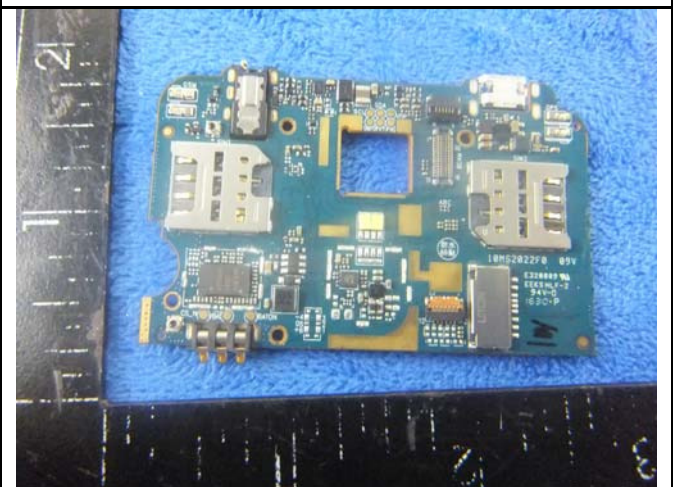

Mainboard without Shielding - Front View

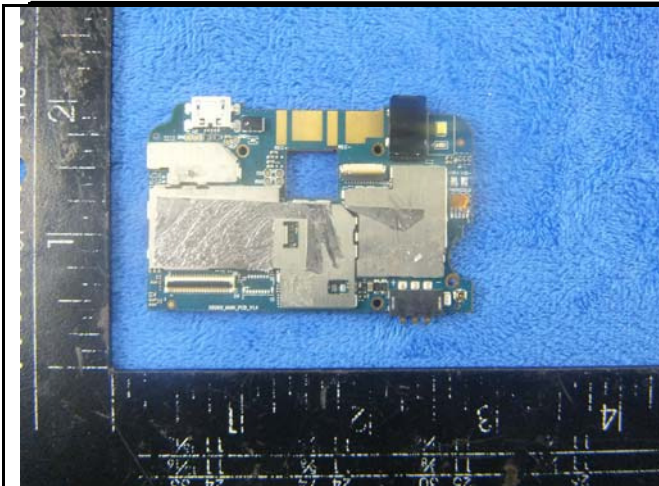

Mainboard with Shielding – Rear View




Mainboard without Shielding - Rear View



LCD – Front View



LCD – Rear View

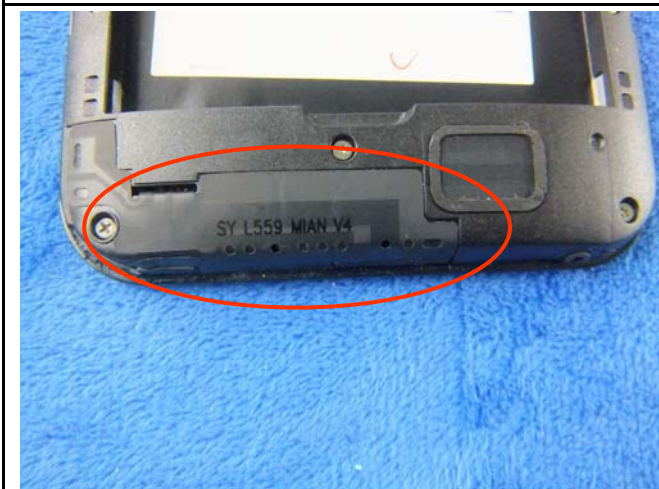

GSM/PCS/UMTS-FDD Antenna View




LTE - Antenna View




WIFI/BT/BLE/GPS - Antenna View

Annex B.iii. Photograph: Test Setup Photo

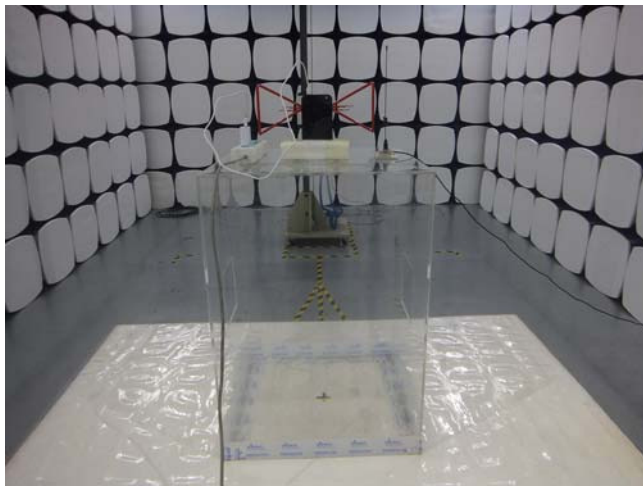

Radiated Spurious Emissions Test Setup Below 1GHz

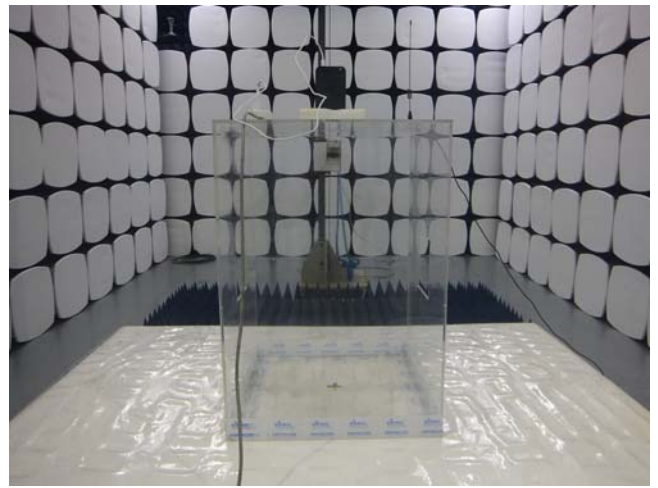


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

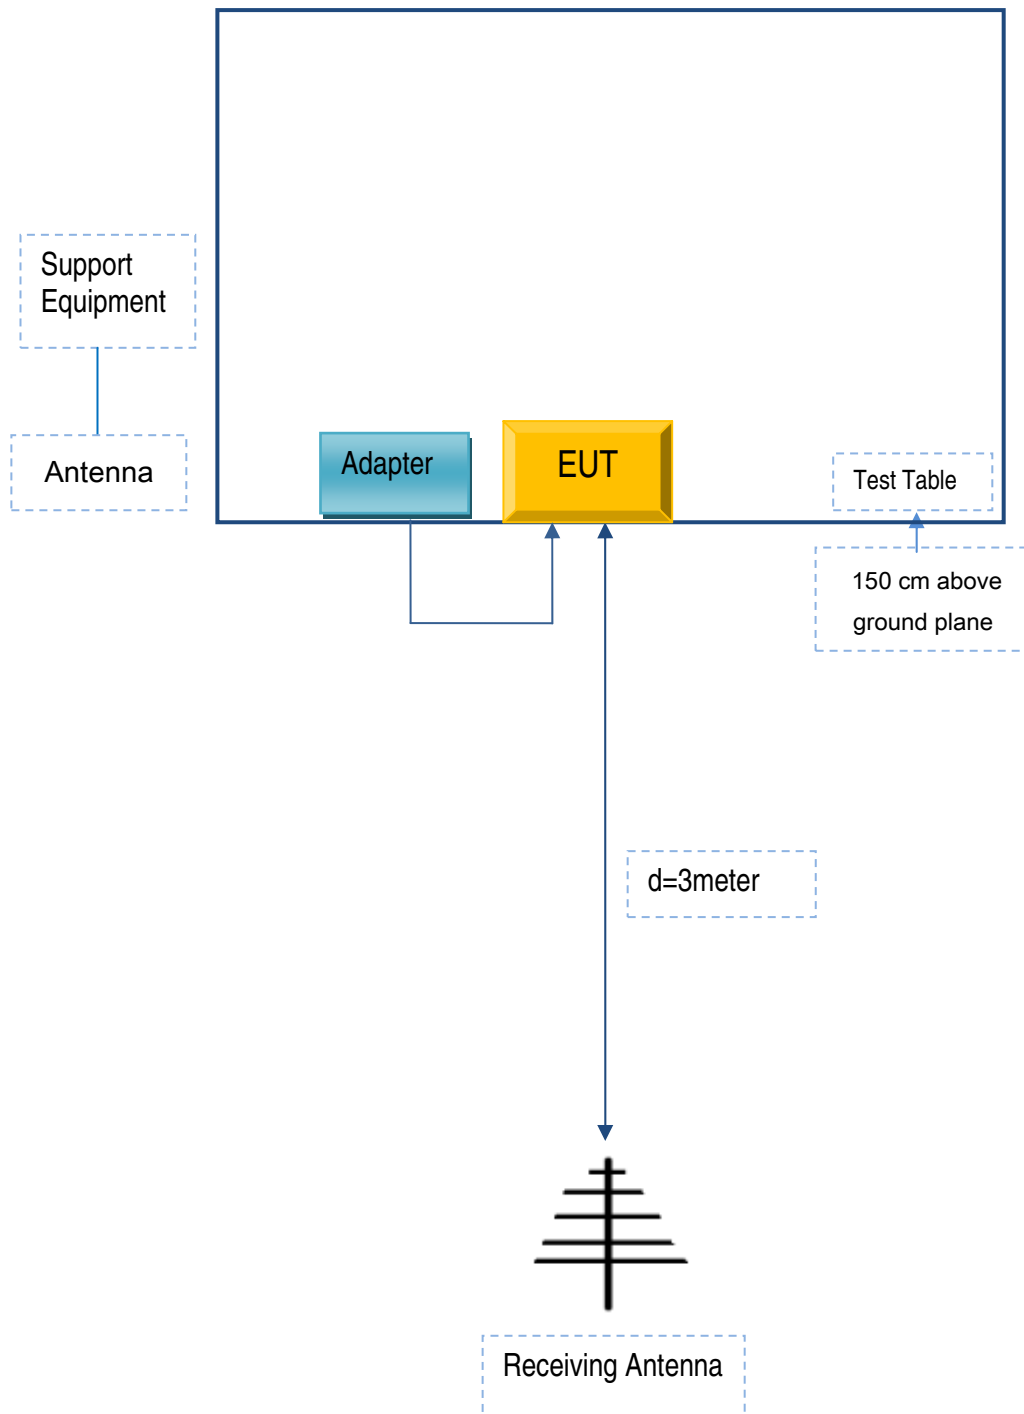

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Verykool USA Inc	Adapter	TPA-46050150UU	S05432D3

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	S05432D3

Test Report	16071314-FCC-R5
Page	150 of 152

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	16071314-FCC-R5
Page	151 of 152

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	16071314-FCC-R5
Page	152 of 152

Annex E. DECLARATION OF SIMILARITY

N/A