

1.6X0.8X0.5 (mm) WiFi/Bluetooth Ceramic Chip Antenna (MB1608)

Engineering Specification

1. Product Number

MB 1608F06 - R

1 2 3 4 5



(1)Product Type	Chip Antenna
(2)Size Code	1.6X0.8 mm
(3)Type Code	F06
(4)Packing	Paper &Reel
(5)Frequency	2.45GHz



深圳市明博电子有限公司

LOTUS ELECTRO NICS CO.

TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (MB1608) Engineering Specification

DOCUMENT NO.

MB1608F06-R

REV. B

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

LOTUS chip antenna series are specially designed for WiFi/Bluetooth applications. Based on LOTUS proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (80 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		1.6x0.8x0.8	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	2.5 (typical)	dBi
	Efficiency	58 (typical)	%



深圳市明博电子有限公司

LOTUS ELECTRONICS CO.

TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
Antenna (MB1608) Engineering Specification


DOCUMENT
NO.

MB1608F06-R


REV.
B

5-2. Return Loss & VSWR

Return Loss (S₁₁)

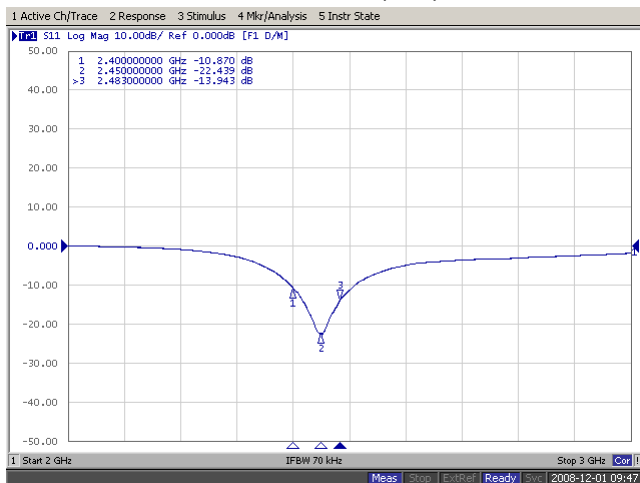


VSWR(S₁₁)

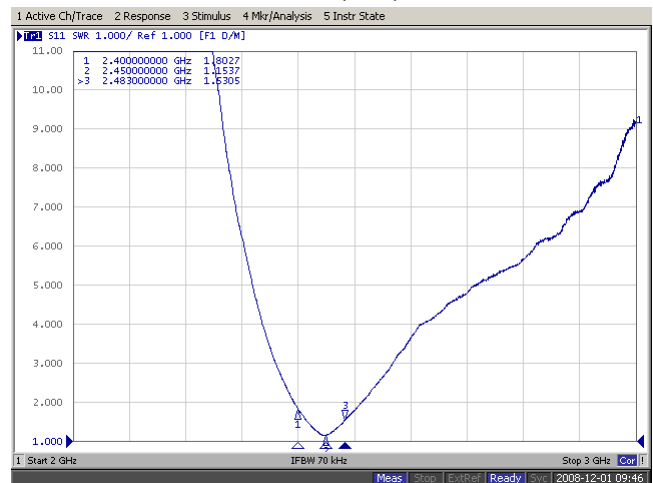

6. Antenna Dimensions & Test Board (unit: mm)

a. Antenna Dimensions

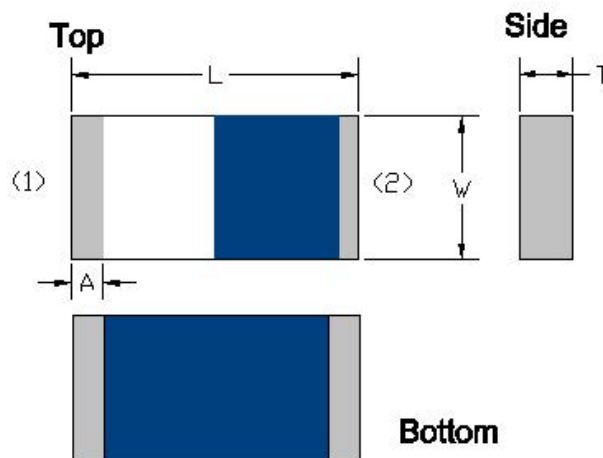

深圳市明博电子有限公司

LOTUS ELECTRO NICS CO.

TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
Antenna (MB1608) Engineering Specification

DOCUMENT
NO.


MB1608F06-R

REV.
B

b. Test Board with Antenna

Unit: mm

Evaluation Board Reference

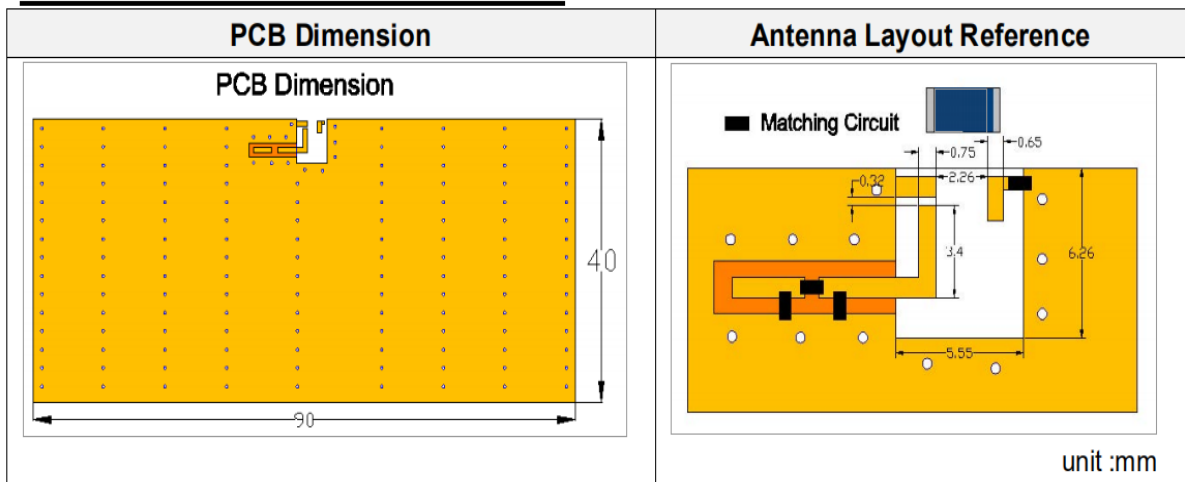

深圳市明博电子有限公司

LOTUS ELECTRO NICS CO.


**TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
Antenna (MB1608) Engineering Specification**

**DOCUMENT
NO.**

MB1608F06-R



**REV.
B**

原理图

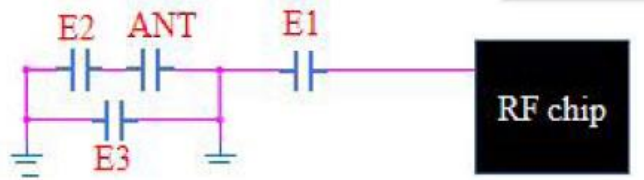

7. Radiation Pattern (80 x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2442 MHz

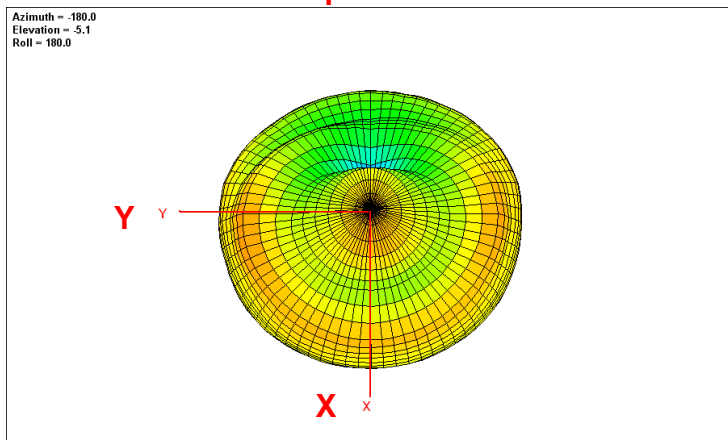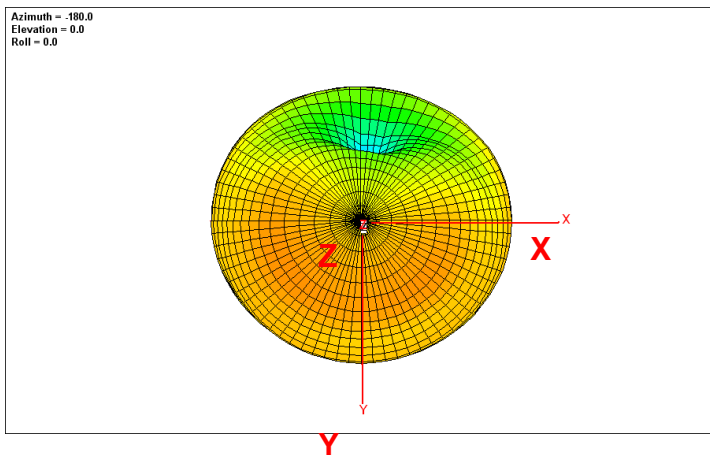

深圳市明博电子有限公司

LOTUS ELECTRO NICS CO.



TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
Antenna (MB1608) Engineering Specification

DOCUMENT
NO.

MB1608F06-R

REV.
B

Azimuth = 0.0
 Elevation = -90.0
 Roll = 180.0

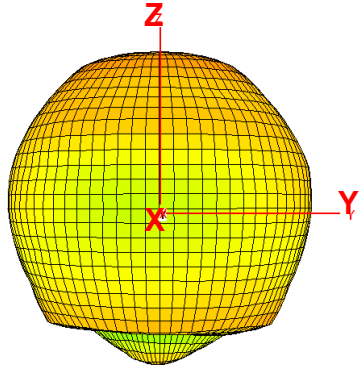

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	53.8	54.7	55.3	56.4	57.5	58.0	57.0	56.6	55.1	54.6	54.5
Gain (dBi)	2.1	2.2	2.3	2.4	2.5	2.5	2.4	1.8	1.7	1.6	1.4



深圳市明博电子有限公司

LOTUS ELECTRO NICS CO.

TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
 Antenna (MB1608) Engineering Specification

DOCUMENT
NO.

MB1608F06-R

REV.
B

Dependability Test

Test Temperature	25°C ± 3°C
Operating Temperature	-25°C~+85°C
Temperature	5~40°C
Relative Humidity	20~70%


Moisture Proof

Temperature: 40 ± 2°C Humidity: 90~95%RH
 Duration: 500h
 Recovery conditions: Room temperature Recovery Time: 24h (Class1) or 48h (Class2)

Solderability


At least 95% of the terminal electrode is covered by new solder.
 Preheating conditions: 80 to 120°C; 10~30s.
 Solder Temperature: 235 ± 5°C Duration 2 ± 0.5s, Solder Temperature 245 ± 5°C Duration: 2 ± 0.5s

Optimum Solder Amount for Reflow Soldering

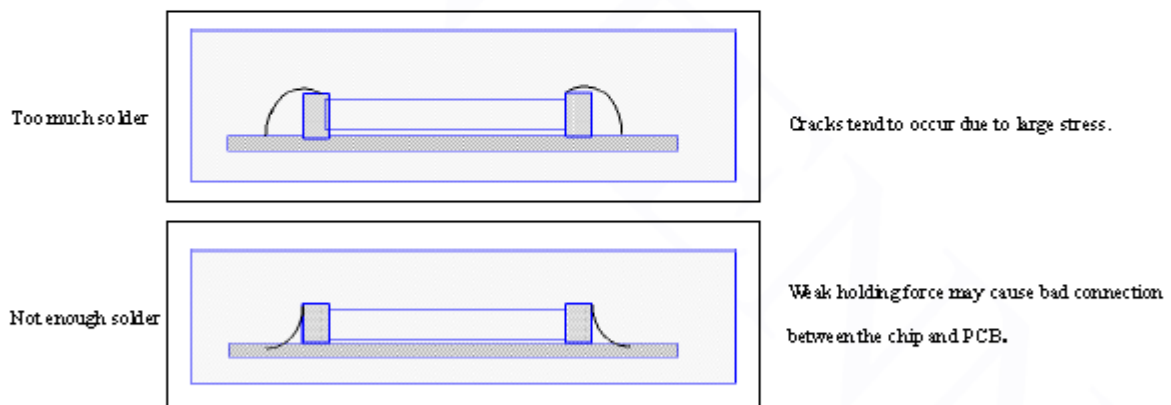


Recommended Soldering Amounts

The optimal solder fillet amounts for re-flow soldering

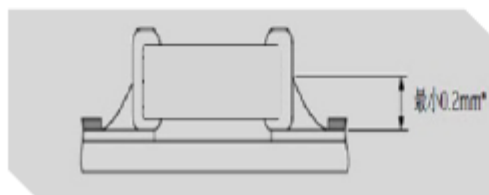


The optimal solder fillet amounts for wave soldering

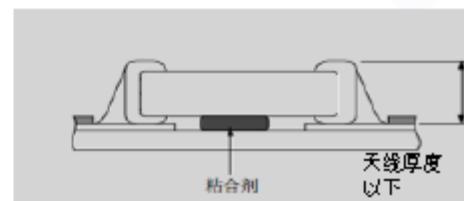

深圳市明博电子有限公司

LOTUS ELECTRONICS CO.

Dimensions of paper taping

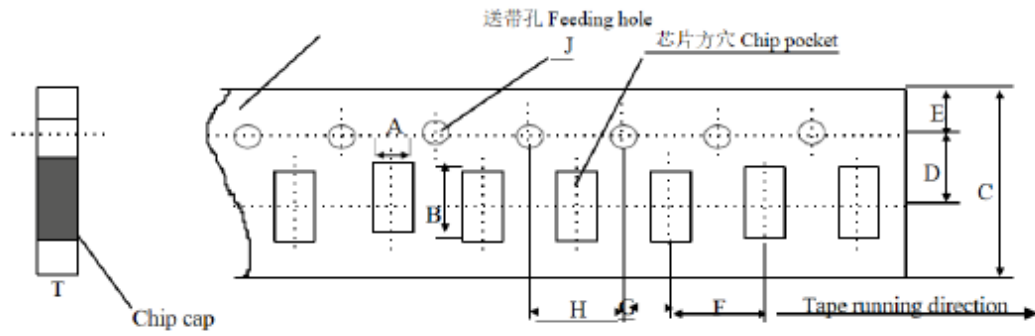


Unit: mm

代号 Code 纸带规格 papersize	A	B	C	D*	E	F	G*	H	J	T
尺寸	1.10 ±0.10	1.90 ±0.10	8.00 ±0.10	3.50 ±0.05	1.75 ±0.10	4.00 ±0.10	2.00 ±0.10	4.00 ±0.10	1.50 ±0.10	1.10 Max

Reel (4000 pcs/Reel)

EMBOSED TAPING

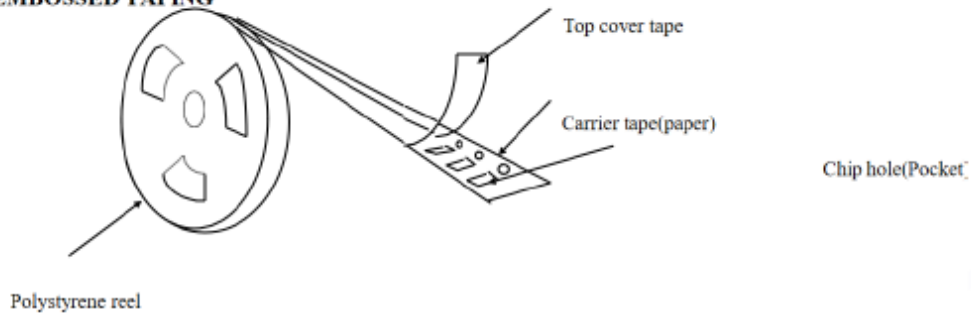

Storage Period

The guaranteed period for solderability is 6 months (Under deliver package condition).
Temperature: 5~40°C /Relative Humidity: 20~70%



深圳市明博电子有限公司

LOTUS ELECTRONICS CO.

TITLE : 1.6 x0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip
Antenna (MB1608) Engineering Specification

DOCUMENT
NO.

MB1608F06-R

REV.
B

PAGE 9 OF 9