



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: **CTC20200482E04**

FCC ID.....: **WNA-HP5116**

Applicant.....: **Shenzhen Skyworth Digital Technology Co.,LTD.**

Address.....: 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Manufacturer.....: Shenzhen Skyworth Digital Technology Co.,LTD.

Address.....: 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Product Name.....: **Set Top Box**

Trade Mark.....: SKYWORTH, TVUP

Model/Type reference.....: HP5116

Listed Model(s): HPA12

Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample...: Apr. 30, 2020

Date of testing.....: May. 01, 2020 to May. 20, 2020

Date of issue.....: May. 21, 2020

Result.....: **PASS**

| | | |
|--------------------------|-------------|--------------------|
| Compiled by: | | |
| (Printed name+signature) | Terry Su | <i>Terry Su</i> |
| Supervised by: | | |
| (Printed name+signature) | Miller Ma | <i>Miller Ma</i> |
| Approved by: | | |
| (Printed name+signature) | Walter Chen | <i>Walter Chen</i> |

Testing Laboratory Name.....: **CTC Laboratories, Inc.**

Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY..... 3

1.1. TEST STANDARDS.....3

1.2. REPORT VERSION.....3

1.3. TEST DESCRIPTION.....4

1.4. TEST FACILITY5

1.5. MEASUREMENT UNCERTAINTY5

1.6. ENVIRONMENTAL CONDITIONS6

2. GENERAL INFORMATION..... 7

2.1. CLIENT INFORMATION7

2.2. GENERAL DESCRIPTION OF EUT7

2.3. ACCESSORY EQUIPMENT INFORMATION8

2.4. OPERATION STATE.....8

2.5. MEASUREMENT INSTRUMENTS LIST10

3. TEST ITEM AND RESULTS 12

3.1. CONDUCTED EMISSION.....12

3.2. RADIATED EMISSION17

3.3. BAND EDGE EMISSIONS47

3.4. DTS BANDWIDTH.....64

3.5. PEAK OUTPUT POWER74

3.6. POWER SPECTRAL DENSITY76

3.7. DUTY CYCLE86

3.8. ANTENNA REQUIREMENT96



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

| Revised No. | Date of issue | Description |
|-------------|---------------|-------------|
| 01 | May. 21, 2020 | Original |
| | | |
| | | |
| | | |



1.3. Test Description

| FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2 | | | | |
|--|------------------|-----------------------------|--------|---------------|
| Test Item | Standard Section | | Result | Test Engineer |
| | FCC | IC | | |
| Antenna Requirement | 15.203 | / | Pass | Rod Luo |
| Conducted Emission | 15.207 | RSS-Gen 8.8 | Pass | Terry Su |
| Band Edge Emissions | 15.247(d) | RSS 247 5.5 | Pass | Rod Luo |
| 6dB Bandwidth | 15.247(a)(2) | RSS 247 5.2 (a) | Pass | Rod Luo |
| Conducted Max Output Power | 15.247(b)(3) | RSS 247 5.4 (d) | Pass | Rod Luo |
| Power Spectral Density | 15.247(e) | RSS 247 5.2 (b) | Pass | Rod Luo |
| Transmitter Radiated Spurious | 15.209&15.247(d) | RSS 247 5.5& RSS-Gen 8.9 | Pass | Rod Luo |

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation.

Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025:2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



| Test Items | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted | 0.42 dB | (1) |
| Transmitter power Radiated | 2.14 dB | (1) |
| Conducted spurious emissions 9kHz~40GHz | 1.60 dB | (1) |
| Radiated spurious emissions 9kHz~40GHz | 2.20 dB | (1) |
| Conducted Emissions 9kHz~30MHz | 3.20 dB | (1) |
| Radiated Emissions 30~1000MHz | 4.70 dB | (1) |
| Radiated Emissions 1~18GHz | 5.00 dB | (1) |
| Radiated Emissions 18~40GHz | 5.54 dB | (1) |
| Occupied Bandwidth | ----- | (1) |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|--------------------|-------------|
| Temperature: | 21°C ~ 27°C |
| Relative Humidity: | 40% ~ 60% |
| Air Pressure: | 101kPa |



2. GENERAL INFORMATION

2.1. Client Information

| | |
|---------------|---|
| Applicant: | Shenzhen Skyworth Digital Technology Co.,LTD. |
| Address: | 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China |
| Manufacturer: | Shenzhen Skyworth Digital Technology Co.,LTD. |
| Address: | 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China |
| Factory: | Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Branch Factory |
| Address: | 2-5F, Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyuan Street, Baoan District, Shenzhen city, China. |

2.2. General Description of EUT

| | |
|--|--|
| Product Name: | Set Top Box |
| Trade Mark: | SKYWORTH, TVUP |
| Model/Type reference: | HP5116 |
| Listed Model(s): | HPA12 |
| Model Difference: | All these models are identical in the same PCB, layout and electrical circuit, the only difference is trade mark and model name. |
| Power supply: | 12Vdc/1A from AC/DC Adapter |
| Adapter 1 Model: | RJ23-W120100US Input:100-240V~ 50/60Hz 0.5A Output:12Vdc/1A |
| Adapter 2 Model: | F12L33-120100SPAU Input:100-240V~ 50/60Hz 0.3A Output:12Vdc/1A |
| Hardware version: | N/A |
| Software version: | N/A |
| WIFI 802.11b/ g/ n(HT20)/ n(HT40) | |
| Modulation: | 802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK, QPSK, 16QAM, 64QAM) |
| Operation frequency: | 802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz |
| Channel number: | 802.11b/g/n(HT20):11channels 802.11n(HT40):7channels |
| Channel separation: | 5MHz |
| Antenna 1 and 2 type: | FPC Antenna |
| Antenna 1 gain: | 4dBi |
| Antenna 2 gain: | 3dBi |

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.3. Accessory Equipment information

| Equipment Information | | | |
|-----------------------|---------------|-----------------|--------------|
| Name | Model | S/N | Manufacturer |
| Notebook | X220 | R9-NCMYL 12/04 | Lenovo |
| Display | U28E590D | 0MSFHTPJA02039X | Samsung |
| Cable Information | | | |
| Name | Shielded Type | Ferrite Core | Length |
| HDMI Cable | Yes | N/A | 1.5M |

2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 01 | 2412 |
| 02 | 2417 |
| 03 | 2422 |
| 04 | 2427 |
| 05 | 2432 |
| 06 | 2437 |
| 07 | 2442 |
| 08 | 2447 |
| 09 | 2452 |
| 10 | 2457 |
| 11 | 2462 |

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40)

Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

| Mode | Data rate (worst mode) |
|---------------|------------------------|
| 802.11b | 1Mbps |
| 802.11g | 6Mbps |
| 802.11n(HT20) | HT-MCS0 |
| 802.11n(HT40) | HT-MCS0 |

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Test mode

| |
|--|
| For RF test items: |
| The engineering test program was provided and enabled to make EUT continuous transmit. |
| For AC power line conducted emissions: |
| The EUT was set to connect with the WLAN AP under large package sizes transmission. |
| For Radiated spurious emissions test item: |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report. |



2.5. Measurement Instruments List

| Tonscend JS0806-2 Test system | | | | | |
|-------------------------------|-------------------------------------|-----------------|-----------|------------|------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated until |
| 1 | Spectrum Analyzer | Rohde & Schwarz | FSU26 | 100105 | Dec. 27, 2020 |
| 2 | Spectrum Analyzer | Rohde & Schwarz | FUV40-N | 101331 | Mar. 15, 2021 |
| 3 | MXG Vector Signal Generator | Agilent | N5182A | MY47420864 | Dec. 27, 2020 |
| 4 | Signal Generator | Agilent | E8257D | MY46521908 | Dec. 27, 2020 |
| 5 | Power Sensor | Agilent | U2021XA | MY5365004 | Dec. 27, 2020 |
| 6 | Power Sensor | Agilent | U2021XA | MY5365006 | Dec. 27, 2020 |
| 7 | Simultaneous Sampling DAQ | Agilent | U2531A | TW54493510 | Dec. 27, 2020 |
| 8 | Climate Chamber | TABAI | PR-4G | A8708055 | Dec. 27, 2020 |
| 9 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | 116410 | Dec. 27, 2020 |
| 10 | Climate Chamber | ESPEC | MT3065 | / | Dec. 27, 2020 |
| 11 | 300328 v2.2.2 test system | TONSCEND | v2.6 | / | / |

| Radiated Emission and Transmitter spurious emissions | | | | | |
|--|-------------------------|---------------------|--------------|------------|------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated until |
| 1 | EMI Test Receiver | Rohde & Schwarz | ESCI | 100658 | Dec. 27, 2020 |
| 2 | High pass filter | micro-tranics | HPM50111 | 142 | Dec. 27, 2020 |
| 3 | Log-Bicon Antenna | Schwarzbeck | CBL6141A | 4180 | Dec. 27, 2020 |
| 4 | Ultra-Broadband Antenna | ShwarzBeck | BBHA9170 | 25841 | Dec. 27, 2020 |
| 5 | Loop Antenna | LAPLAC | RF300 | 9138 | Dec. 27, 2020 |
| 6 | Spectrum Analyzer | Rohde & Schwarz | FSU26 | 100105 | Dec. 27, 2020 |
| 7 | Horn Antenna | Schwarzbeck | BBHA 9120D | 647 | Dec. 27, 2020 |
| 8 | Pre-Amplifier | HP | 8447D | 1937A03050 | Dec. 27, 2020 |
| 9 | Pre-Amplifier | EMCI | EMC051835 | 980075 | Dec. 27, 2020 |
| 10 | Antenna Mast | UC | UC3000 | N/A | N/A |
| 11 | Turn Table | UC | UC3000 | N/A | N/A |
| 12 | Cable Below 1GHz | Schwarzbeck | AK9515E | 33155 | Dec. 27, 2020 |
| 13 | Cable Above 1GHz | Hubersuhner | SUCOFLEX 102 | DA1580 | Dec. 27, 2020 |
| 14 | Splitter | Mini-Circuit | ZAPD-4 | 400059 | Dec. 27, 2020 |
| 15 | RF Connection Cable | HUBER+SUHNER | RE-7-FL | N/A | Dec. 27, 2020 |
| 16 | RF Connection Cable | Chengdu E-Microwave | --- | --- | Dec. 27, 2020 |
| 17 | High pass filter | Compliance | BSU-6 | 34202 | Dec. 27, 2020 |

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



| | | | | | |
|----|------------------------------|---------------------|-----------------|----------|---------------|
| | | Direction systems | | | |
| 18 | Attenuator | Chengdu E-Microwave | EMCAXX-10 RNZ-3 | --- | Dec. 27, 2020 |
| 19 | High and low temperature box | ESPEC | MT3065 | 12114019 | Dec. 27, 2020 |

| Conducted Emission | | | | | |
|--------------------|-------------------|--------------|-----------|------------|------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated until |
| 1 | LISN | R&S | ENV216 | 101112 | Dec. 27, 2020 |
| 2 | LISN | R&S | ENV216 | 101113 | Dec. 27, 2020 |
| 3 | EMI Test Receiver | R&S | ESCI | 100658 | Dec. 27, 2020 |

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

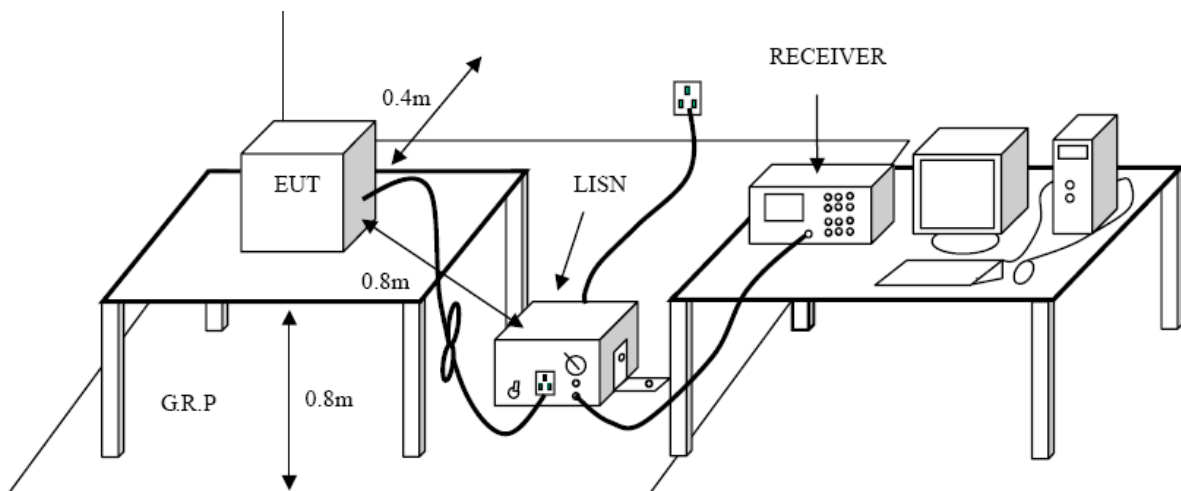

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.




Test Mode:

Please refer to the clause 2.4.

Test Results

| | |
|----------------------|----------------|
| Test Voltage: | AC 120V/60 Hz |
| Adapter Mode: | RJ23-W120100US |
| Terminal: | Line |

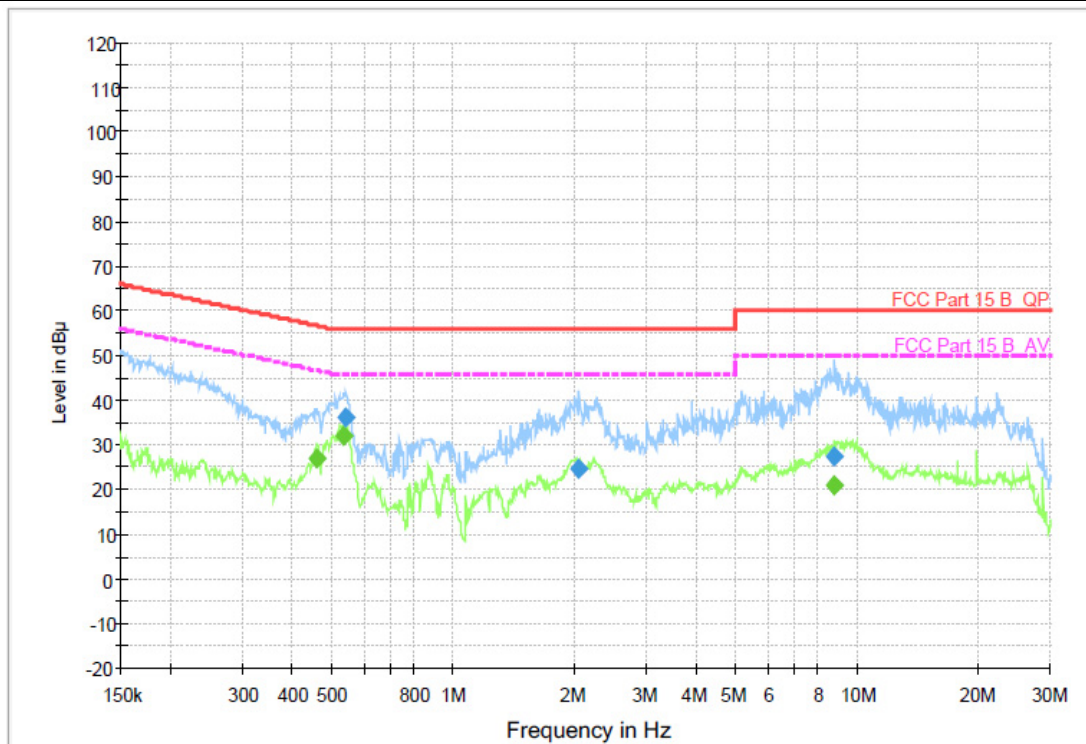

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.542430 | 36.2 | 1000.00 | 9.000 | On | L1 | 9.4 | 19.8 | 56.0 | |
| 2.041450 | 24.5 | 1000.00 | 9.000 | On | L1 | 9.5 | 31.5 | 56.0 | |
| 8.764860 | 27.6 | 1000.00 | 9.000 | On | L1 | 9.6 | 32.4 | 60.0 | |


Final Measurement Detector 2

| Frequency (MHz) | Average (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.460540 | 27.0 | 1000.00 | 9.000 | On | L1 | 9.4 | 19.7 | 46.7 | |
| 0.531710 | 32.2 | 1000.00 | 9.000 | On | L1 | 9.4 | 13.8 | 46.0 | |
| 8.729940 | 20.9 | 1000.00 | 9.000 | On | L1 | 9.6 | 29.1 | 50.0 | |

Emission Level= Read Level+ Correct Factor



| | |
|----------------------|----------------|
| Test Voltage: | AC 120V/60 Hz |
| Adapter Mode: | RJ23-W120100US |
| Terminal: | Neutral |

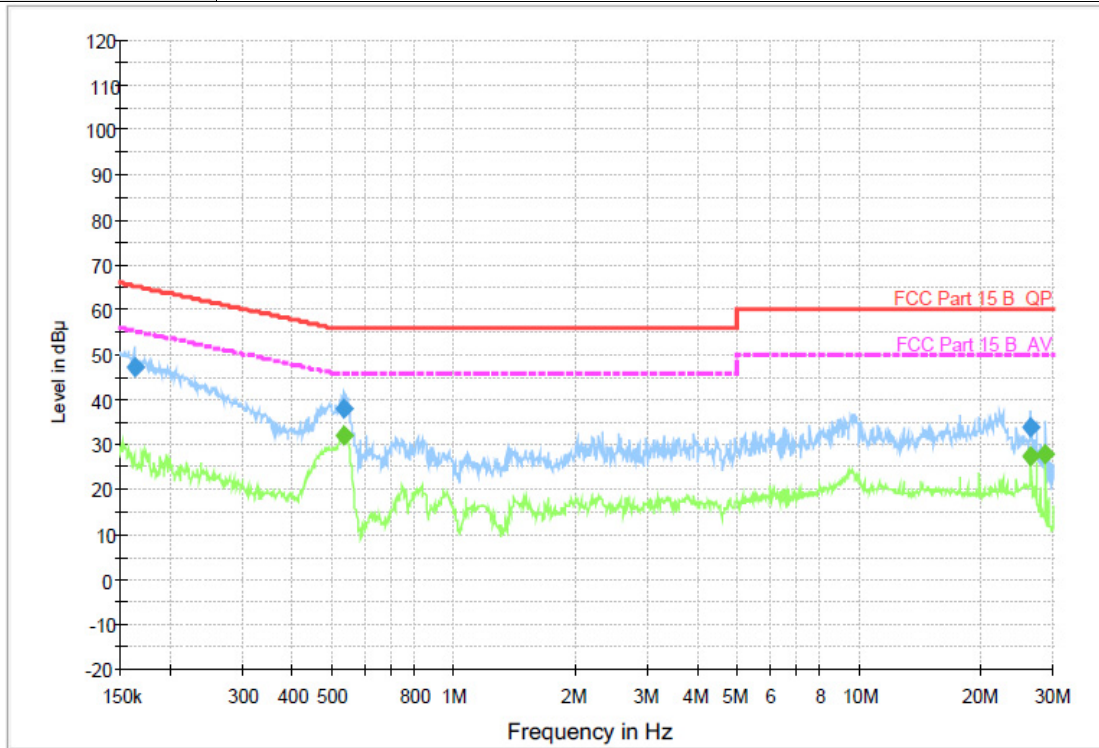

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.162470 | 47.1 | 1000.00 | 9.000 | On | N | 9.4 | 18.2 | 65.3 | |
| 0.535980 | 37.8 | 1000.00 | 9.000 | On | N | 9.4 | 18.2 | 56.0 | |
| 26.483990 | 34.0 | 1000.00 | 9.000 | On | N | 9.8 | 26.0 | 60.0 | |


Final Measurement Detector 2

| Frequency (MHz) | Average (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.535980 | 32.1 | 1000.00 | 9.000 | On | N | 9.4 | 13.9 | 46.0 | |
| 26.483990 | 27.6 | 1000.00 | 9.000 | On | N | 9.8 | 22.4 | 50.0 | |
| 28.685180 | 27.8 | 1000.00 | 9.000 | On | N | 9.9 | 22.2 | 50.0 | |

Emission Level= Read Level+ Correct Factor



| | |
|----------------------|-------------------|
| Test Voltage: | AC 120V/60 Hz |
| Adapter Mode: | F12L33-120100SPAU |
| Terminal: | Line |

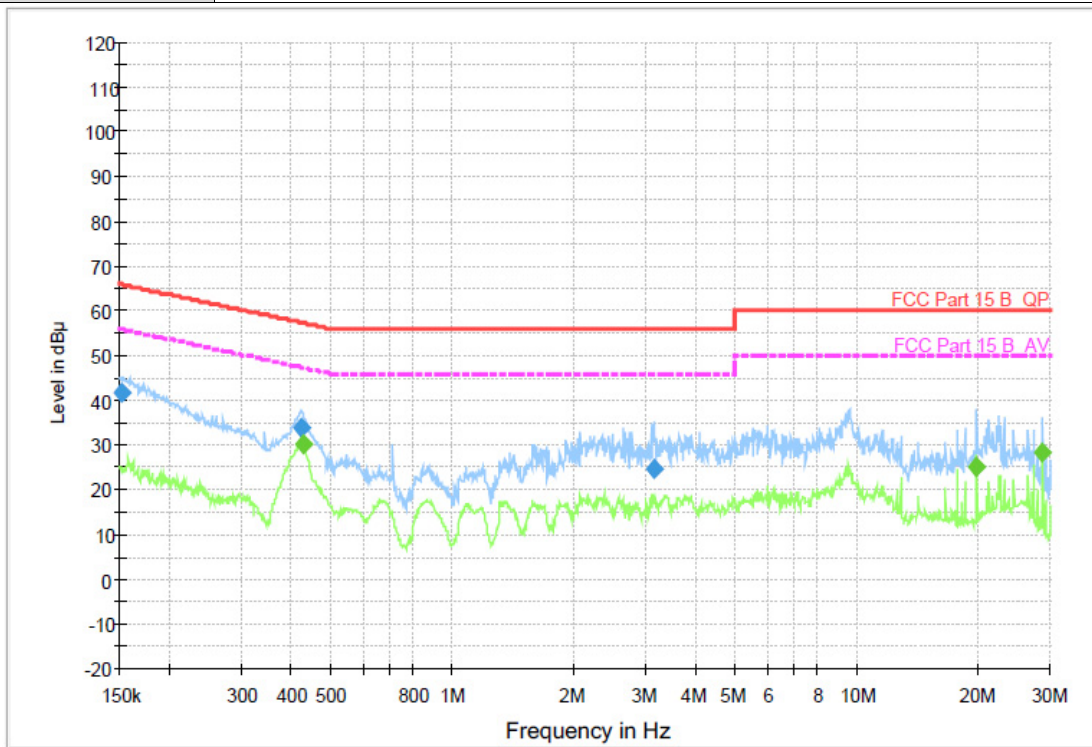

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dB µV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB µV) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.151810 | 41.7 | 1000.00 | 9.000 | On | L1 | 9.4 | 24.2 | 65.9 | |
| 0.423500 | 34.1 | 1000.00 | 9.000 | On | L1 | 9.4 | 23.3 | 57.4 | |
| 3.141820 | 24.8 | 1000.00 | 9.000 | On | L1 | 9.5 | 31.2 | 56.0 | |


Final Measurement Detector 2

| Frequency (MHz) | Average (dB µV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB µV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.425200 | 30.2 | 1000.00 | 9.000 | On | L1 | 9.4 | 17.1 | 47.3 | |
| 19.710090 | 25.0 | 1000.00 | 9.000 | On | L1 | 9.8 | 25.0 | 50.0 | |
| 28.685180 | 28.5 | 1000.00 | 9.000 | On | L1 | 9.8 | 21.5 | 50.0 | |

Emission Level= Read Level+ Correct Factor



| | |
|----------------------|-------------------|
| Test Voltage: | AC 120V/60 Hz |
| Adapter Mode: | F12L33-120100SPAU |
| Terminal: | Neutral |

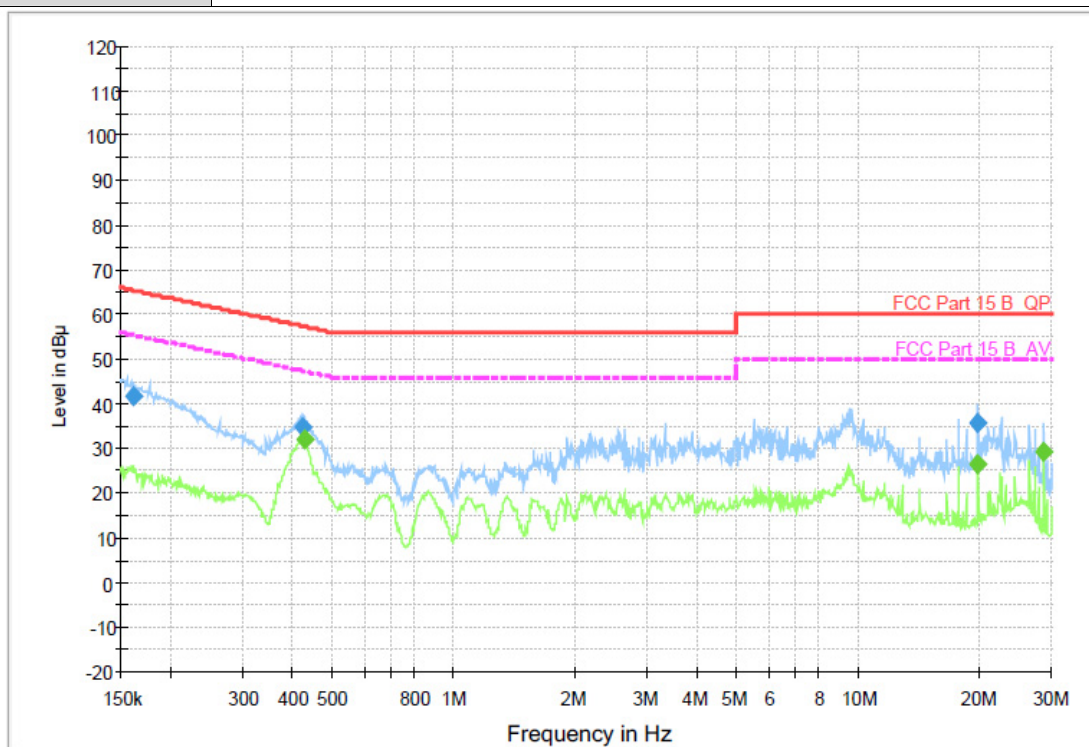

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.161180 | 41.6 | 1000.00 | 9.000 | On | N | 9.4 | 23.8 | 65.4 | |
| 0.423500 | 34.9 | 1000.00 | 9.000 | On | N | 9.4 | 22.5 | 57.4 | |
| 19.710090 | 35.9 | 1000.00 | 9.000 | On | N | 9.7 | 24.1 | 60.0 | |

Final Measurement Detector 2

| Frequency (MHz) | Average (dB μV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.426900 | 32.2 | 1000.00 | 9.000 | On | N | 9.4 | 15.1 | 47.3 | |
| 19.710090 | 26.3 | 1000.00 | 9.000 | On | N | 9.7 | 23.7 | 50.0 | |
| 28.685180 | 29.5 | 1000.00 | 9.000 | On | N | 9.9 | 20.5 | 50.0 | |

Emission Level= Read Level+ Correct Factor

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9:

| Frequency | Limit (dBuV/m @3m) | Value |
|-------------------|--------------------|------------|
| 30 MHz ~ 88 MHz | 40.00 | Quasi-peak |
| 88 MHz ~ 216 MHz | 43.50 | Quasi-peak |
| 216 MHz ~ 960 MHz | 46.00 | Quasi-peak |
| 960 MHz ~ 1 GHz | 54.00 | Quasi-peak |
| Above 1 GHz | 54.00 | Average |
| | 74.00 | Peak |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

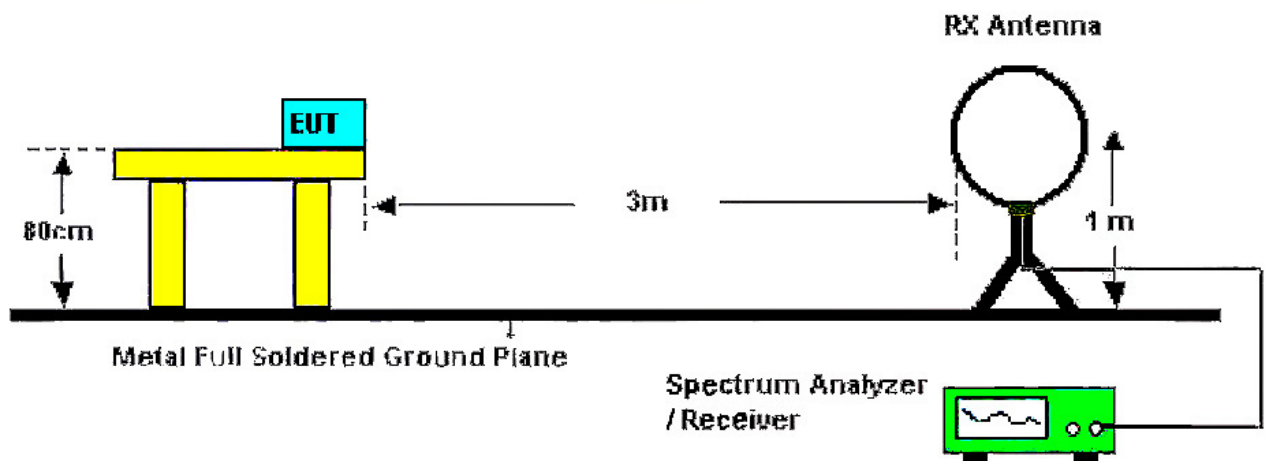

Below 30MHz Test Setup

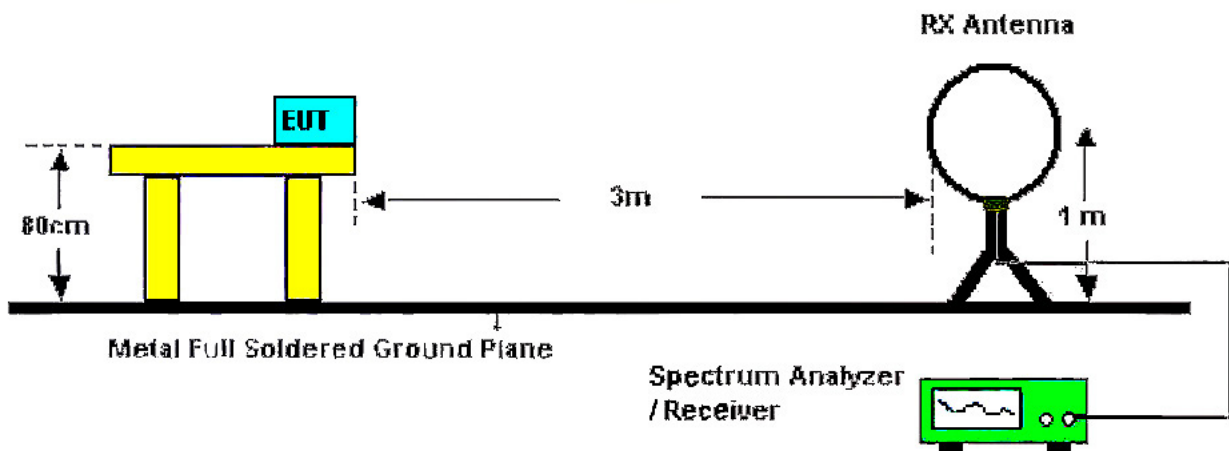

Below 1000MHz Test Setup

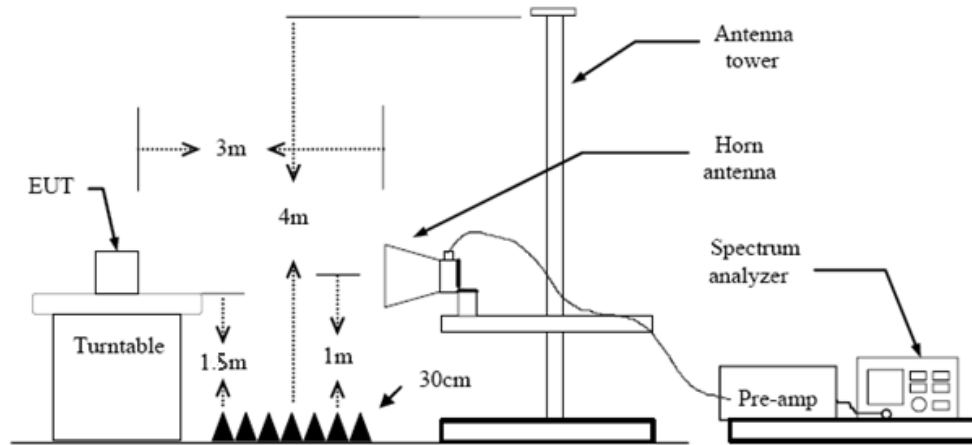

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz

| | |
|---------------|-----------------------------|
| Ant. Pol. | Horizontal |
| Adapter Mode: | RJ23-W120100US |
| Test Mode: | Ant 2 802.11b Mode 2412MHz |
| Remark: | Only worse case is reported |

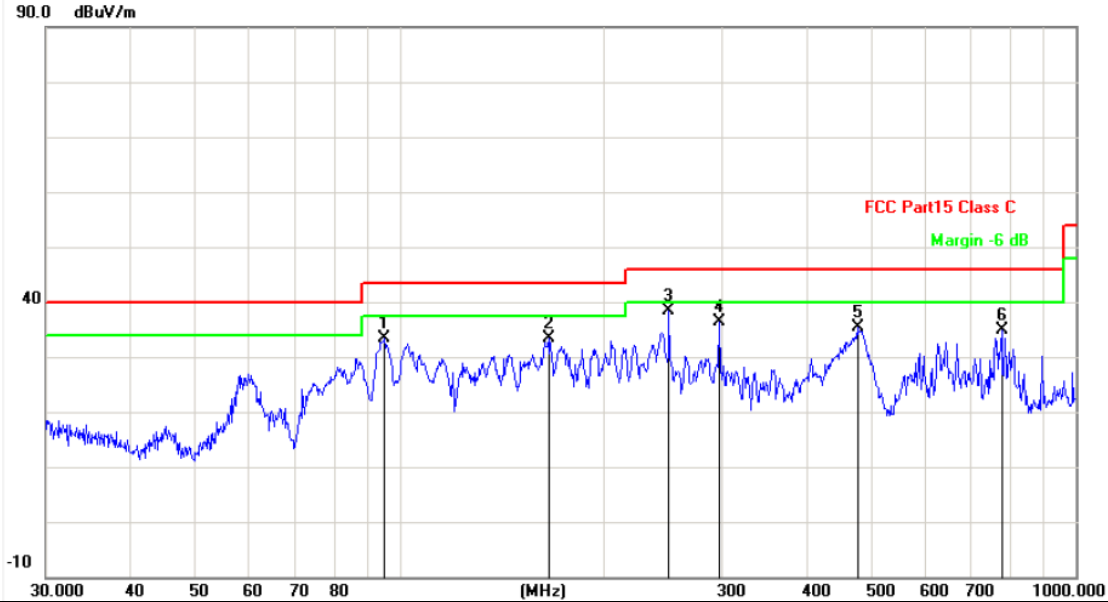

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 95.0929 | -21.33 | 54.74 | 33.41 | 43.50 | -10.09 | QP |
| 2 | 166.0680 | -18.12 | 51.41 | 33.29 | 43.50 | -10.21 | QP |
| 3 | 250.3011 | -19.11 | 57.52 | 38.41 | 46.00 | -7.59 | QP |
| 4 | 297.2240 | -17.88 | 54.26 | 36.38 | 46.00 | -9.62 | QP |
| 5 | 475.4991 | -14.16 | 49.55 | 35.39 | 46.00 | -10.61 | QP |
| 6 | 776.8778 | -9.82 | 44.60 | 34.78 | 46.00 | -11.22 | QP |


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





| | |
|---------------|-----------------------------|
| Ant. Pol. | Vertical |
| Adapter Mode: | RJ23-W120100US |
| Test Mode: | Ant 2 802.11b Mode 2412MHz |
| Remark: | Only worse case is reported |

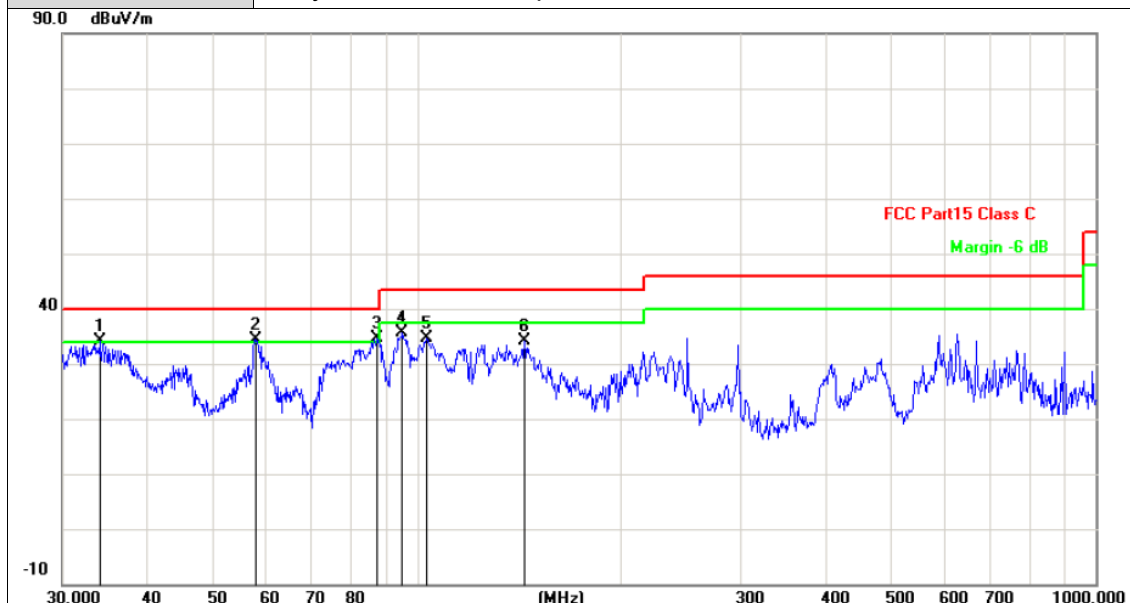


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 34.0365 | -18.03 | 52.05 | 34.02 | 40.00 | -5.98 | QP |
| 2 | 57.7962 | -18.35 | 52.80 | 34.45 | 40.00 | -5.55 | QP |
| 3 | 87.4177 | -21.78 | 56.49 | 34.71 | 40.00 | -5.29 | QP |
| 4 | 95.0930 | -21.33 | 57.06 | 35.73 | 43.50 | -7.77 | QP |
| 5 | 103.4421 | -20.69 | 55.25 | 34.56 | 43.50 | -8.94 | QP |
| 6 | 143.8295 | -17.30 | 51.46 | 34.16 | 43.50 | -9.34 | QP |

Remarks:
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2.Margin value = Level -Limit value



| | |
|----------------------|-----------------------------|
| Ant. Pol. | Horizontal |
| Adapter Mode: | F12L33-120100SPAU |
| Test Mode: | Ant 2 802.11b Mode 2412MHz |
| Remark: | Only worse case is reported |

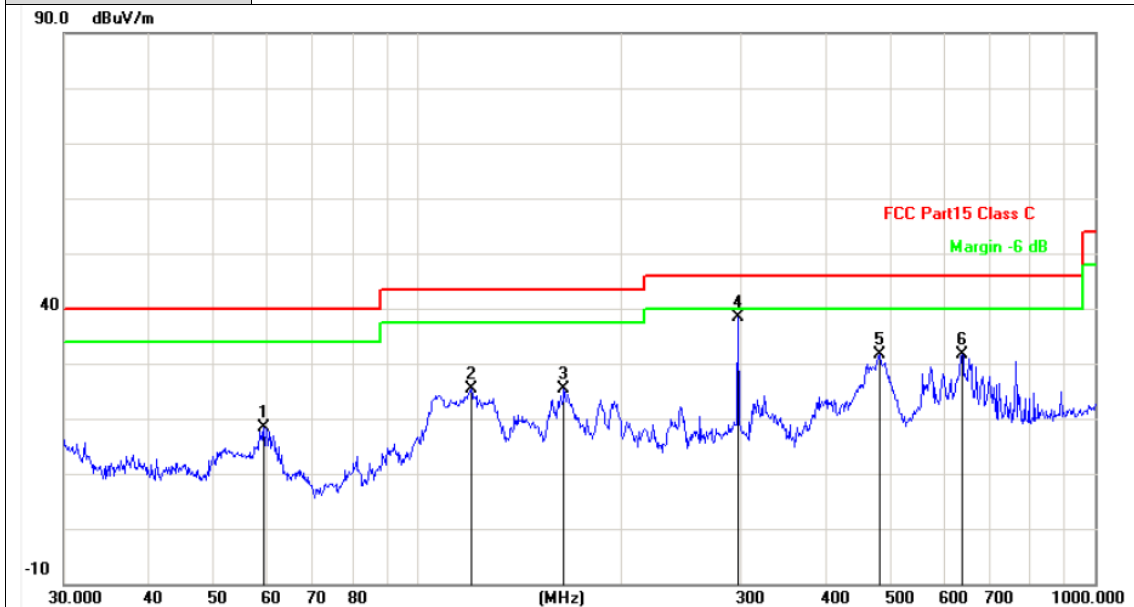


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 59.2323 | -18.45 | 36.93 | 18.48 | 40.00 | -21.52 | QP |
| 2 | 119.8555 | -19.31 | 44.64 | 25.33 | 43.50 | -18.17 | QP |
| 3 | 164.3300 | -17.98 | 43.47 | 25.49 | 43.50 | -18.01 | QP |
| 4 | 297.2238 | -17.88 | 56.33 | 38.45 | 46.00 | -7.55 | QP |
| 5 | 480.5276 | -14.10 | 45.78 | 31.68 | 46.00 | -14.32 | QP |
| 6 | 636.1340 | -11.68 | 43.28 | 31.60 | 46.00 | -14.40 | QP |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|---------------|-----------------------------|
| Ant. Pol. | Vertical |
| Adapter Mode: | F12L33-120100SPAU |
| Test Mode: | Ant 2 802.11b Mode 2412MHz |
| Remark: | Only worse case is reported |

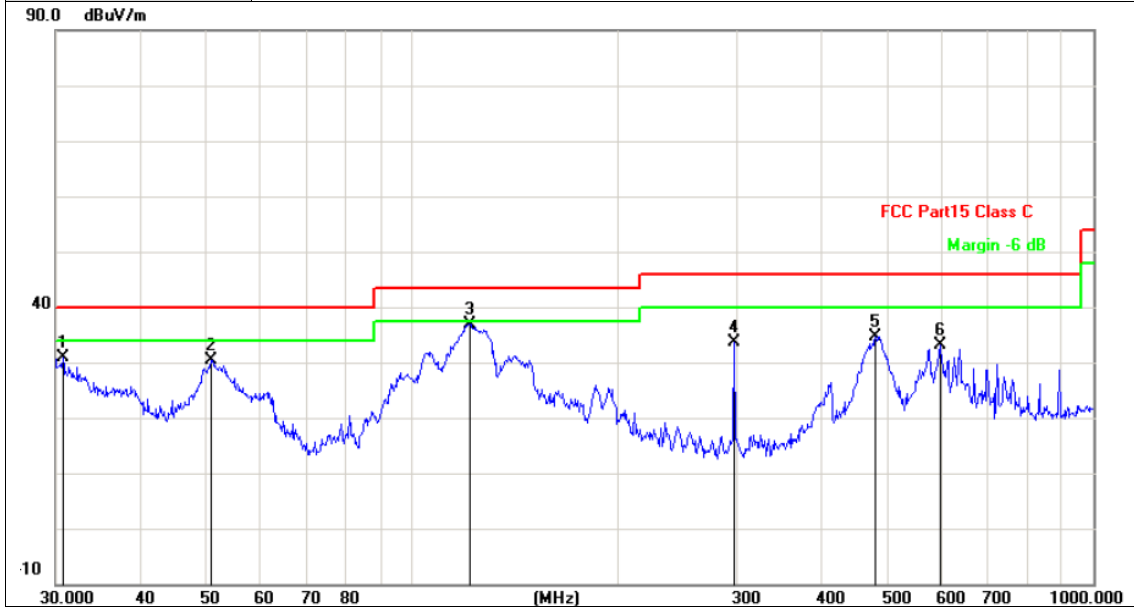


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 30.7454 | -18.15 | 48.97 | 30.82 | 40.00 | -9.18 | QP |
| 2 | 50.7636 | -17.83 | 48.28 | 30.45 | 40.00 | -9.55 | QP |
| 3 | 121.5485 | -19.16 | 56.12 | 36.96 | 43.50 | -6.54 | QP |
| 4 | 297.2240 | -17.88 | 51.50 | 33.62 | 46.00 | -12.38 | QP |
| 5 | 478.8455 | -14.13 | 48.83 | 34.70 | 46.00 | -11.30 | QP |
| 6 | 595.1327 | -12.31 | 45.35 | 33.04 | 46.00 | -12.96 | QP |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Adobe 1GHz

| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX B Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

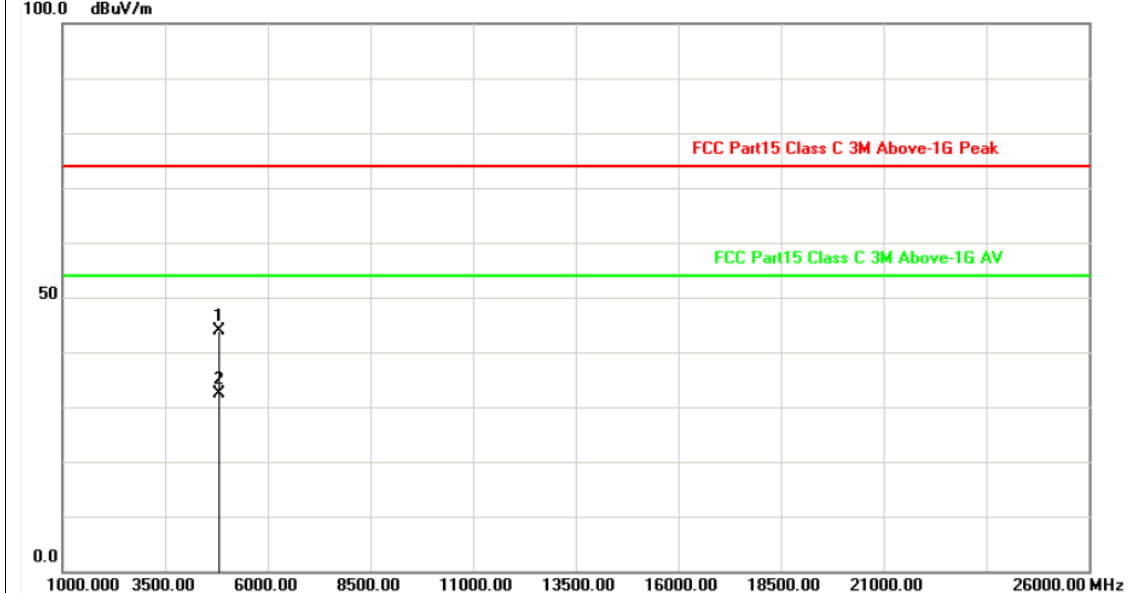


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4823.502 | -2.76 | 46.61 | 43.85 | 74.00 | -30.15 | peak |
| 2 | 4824.135 | -2.76 | 35.12 | 32.36 | 54.00 | -21.64 | AVG |

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX B Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

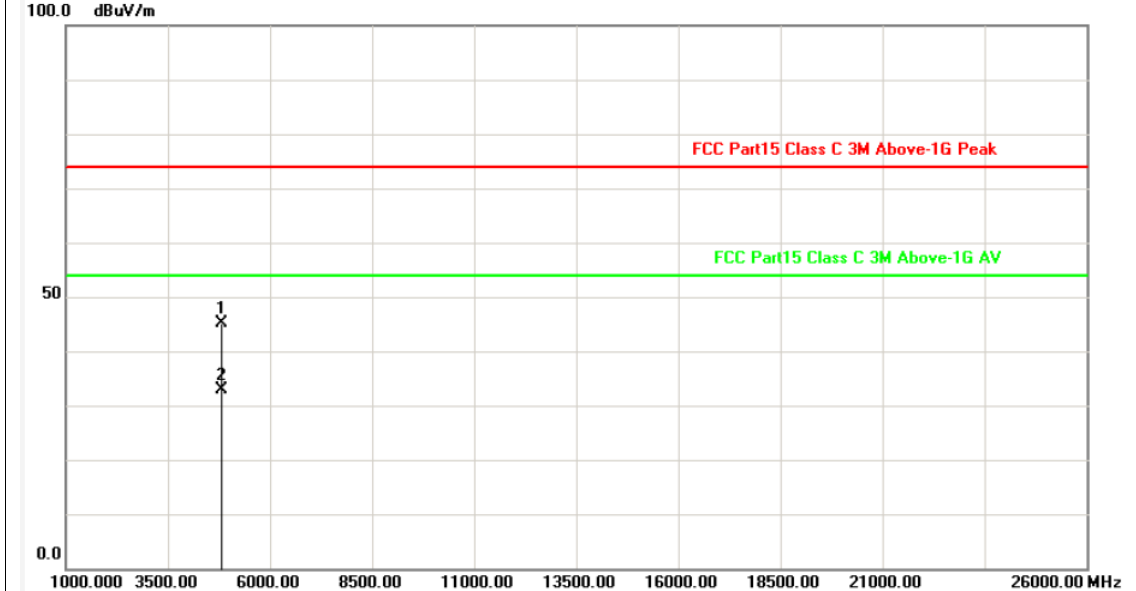


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4822.002 | -2.77 | 47.94 | 45.17 | 74.00 | -28.83 | peak |
| 2 | 4822.062 | -2.77 | 35.58 | 32.81 | 54.00 | -21.19 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX B Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

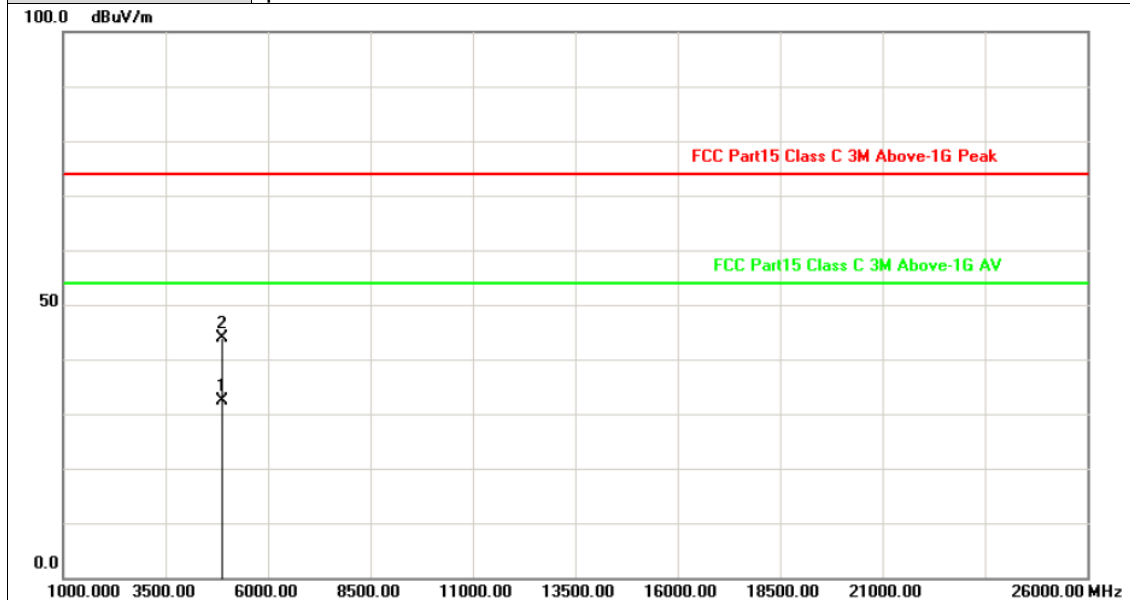


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4873.627 | -2.61 | 35.03 | 32.42 | 54.00 | -21.58 | AVG |
| 2 | 4873.628 | -2.61 | 46.57 | 43.96 | 74.00 | -30.04 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX B Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

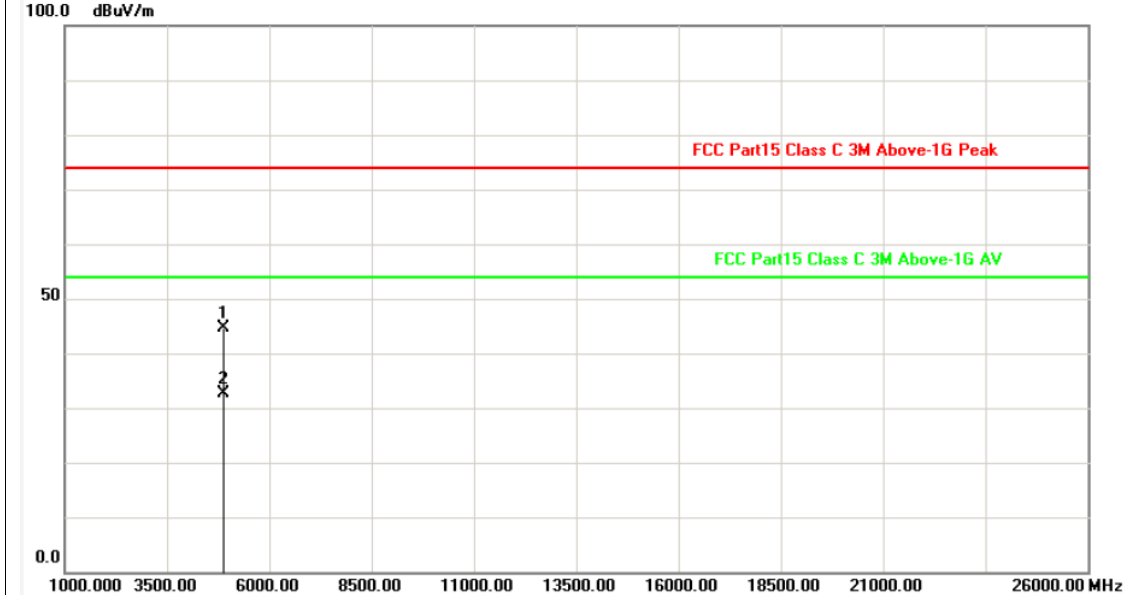


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4872.585 | -2.61 | 47.17 | 44.56 | 74.00 | -29.44 | peak |
| 2 | 4872.606 | -2.61 | 35.12 | 32.51 | 54.00 | -21.49 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX B Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

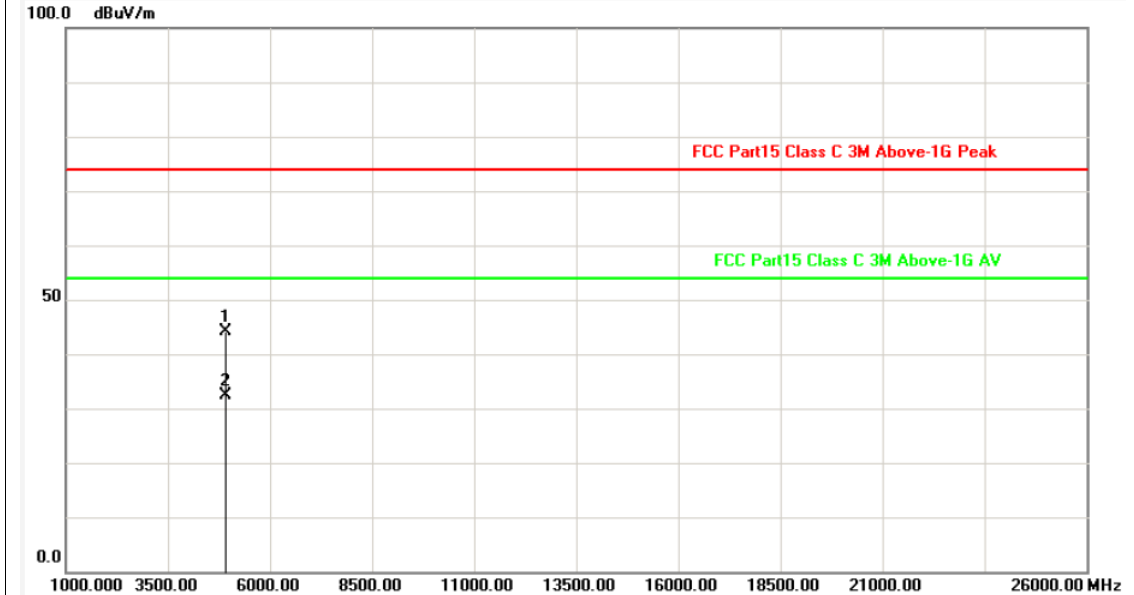


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4923.164 | -2.47 | 46.53 | 44.06 | 74.00 | -29.94 | peak |
| 2 | 4925.495 | -2.47 | 34.91 | 32.44 | 54.00 | -21.56 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX B Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

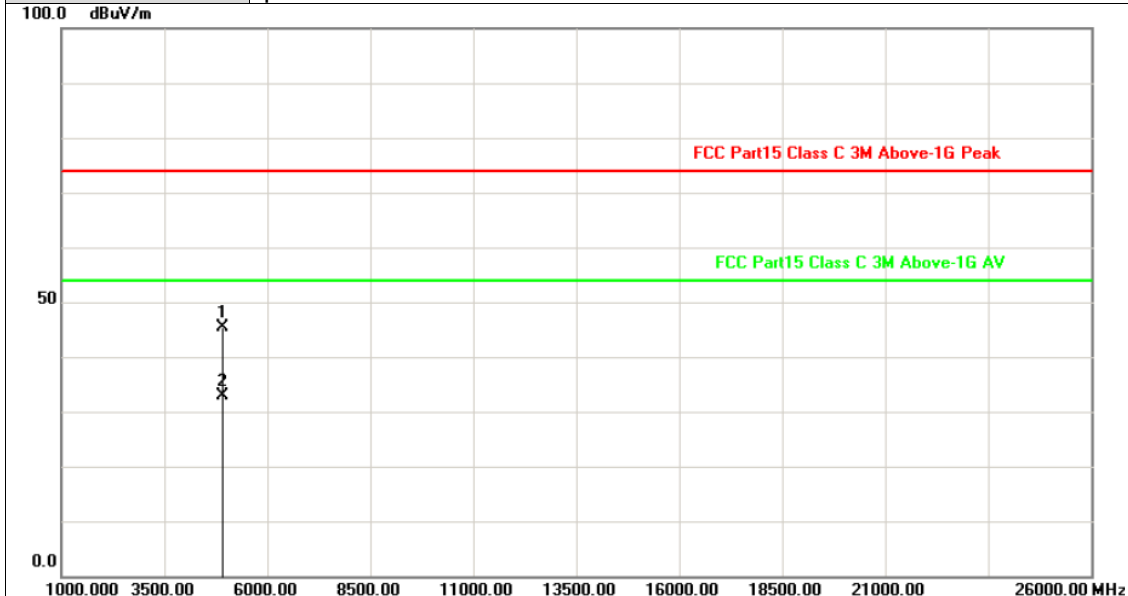


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4922.841 | -2.47 | 47.76 | 45.29 | 74.00 | -28.71 | peak |
| 2 | 4924.156 | -2.47 | 35.34 | 32.87 | 54.00 | -21.13 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX G Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

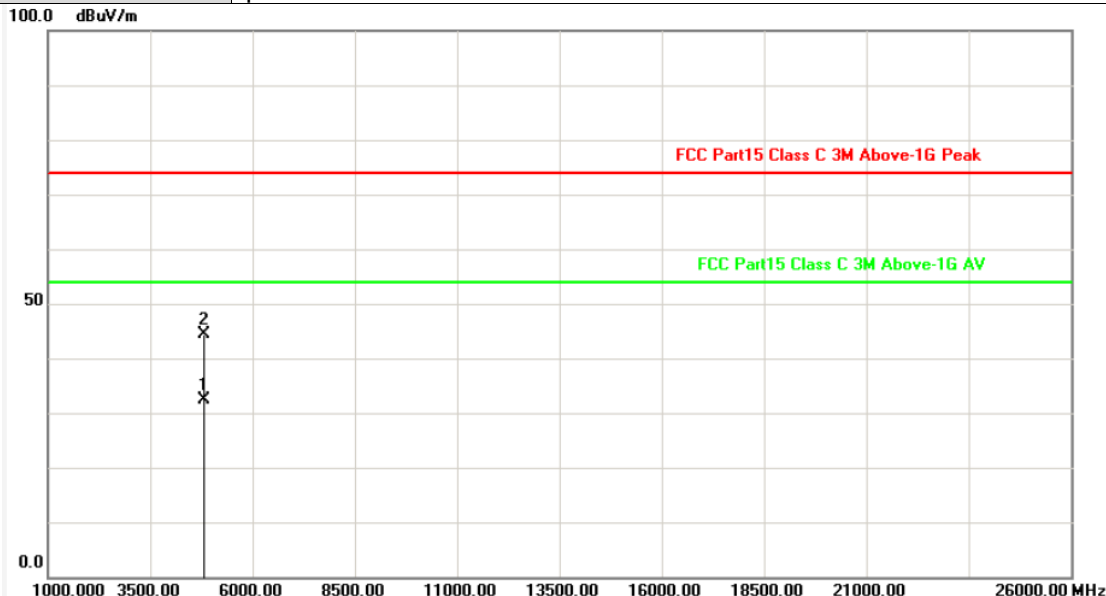


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4823.541 | -2.76 | 35.05 | 32.29 | 54.00 | -21.71 | AVG |
| 2 | 4823.843 | -2.76 | 47.21 | 44.45 | 74.00 | -29.55 | peak |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX G Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

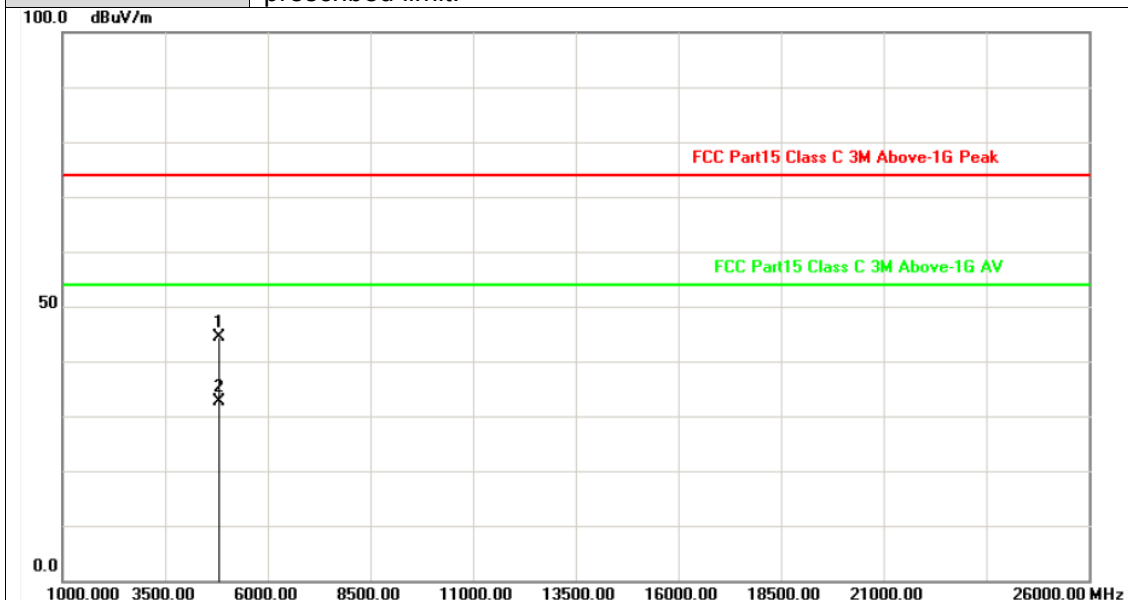


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4822.639 | -2.76 | 47.04 | 44.28 | 74.00 | -29.72 | peak |
| 2 | 4824.710 | -2.76 | 35.27 | 32.51 | 54.00 | -21.49 | AVG |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX G Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

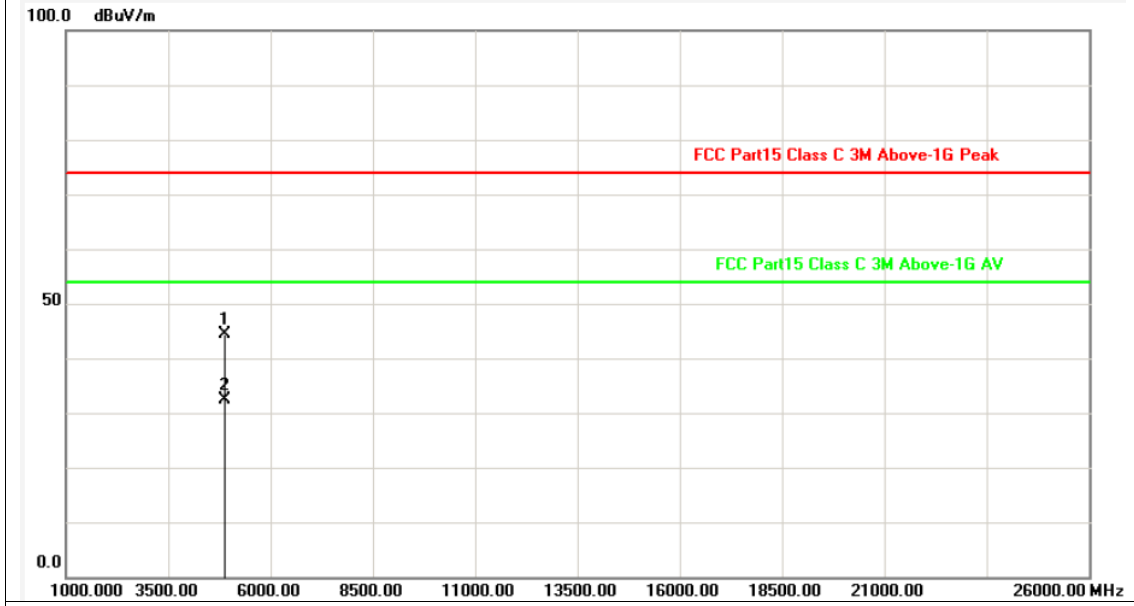


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4873.047 | -2.61 | 47.09 | 44.48 | 74.00 | -29.52 | peak |
| 2 | 4874.995 | -2.61 | 34.99 | 32.38 | 54.00 | -21.62 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX G Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

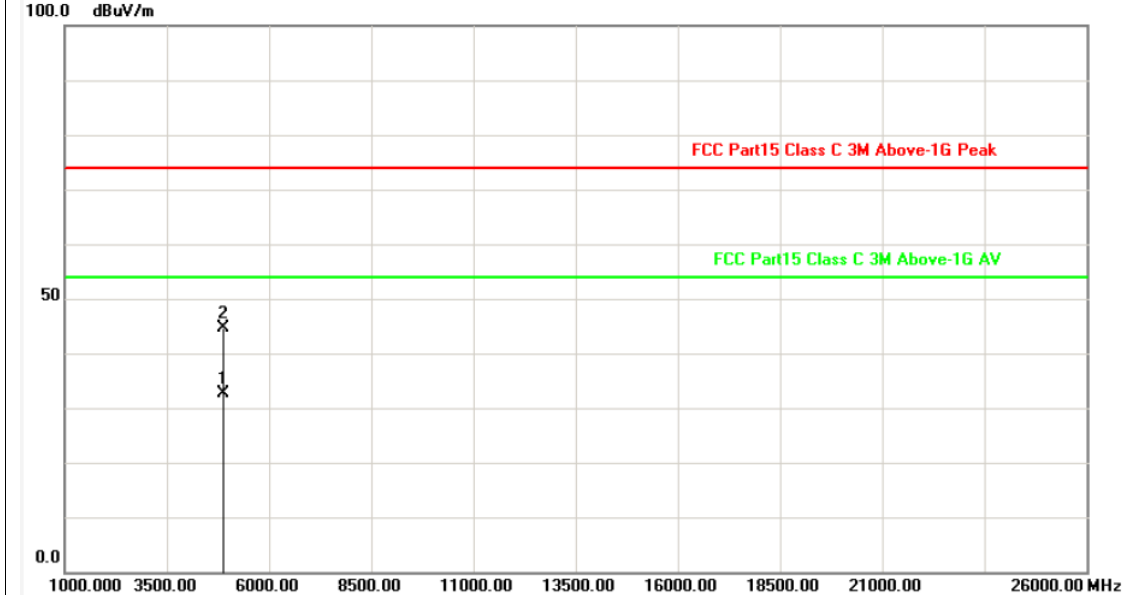


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4872.507 | -2.61 | 35.20 | 32.59 | 54.00 | -21.41 | AVG |
| 2 | 4872.981 | -2.61 | 47.22 | 44.61 | 74.00 | -29.39 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | TX G Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

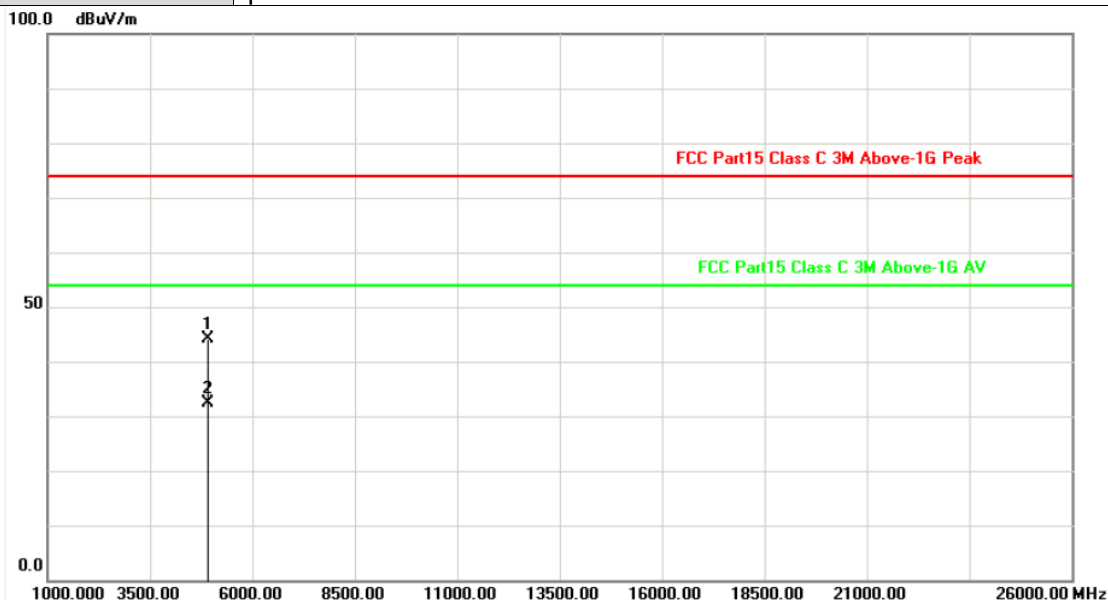


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4924.384 | -2.47 | 46.53 | 44.06 | 74.00 | -29.94 | peak |
| 2 | 4924.941 | -2.47 | 34.80 | 32.33 | 54.00 | -21.67 | AVG |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | TX G Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

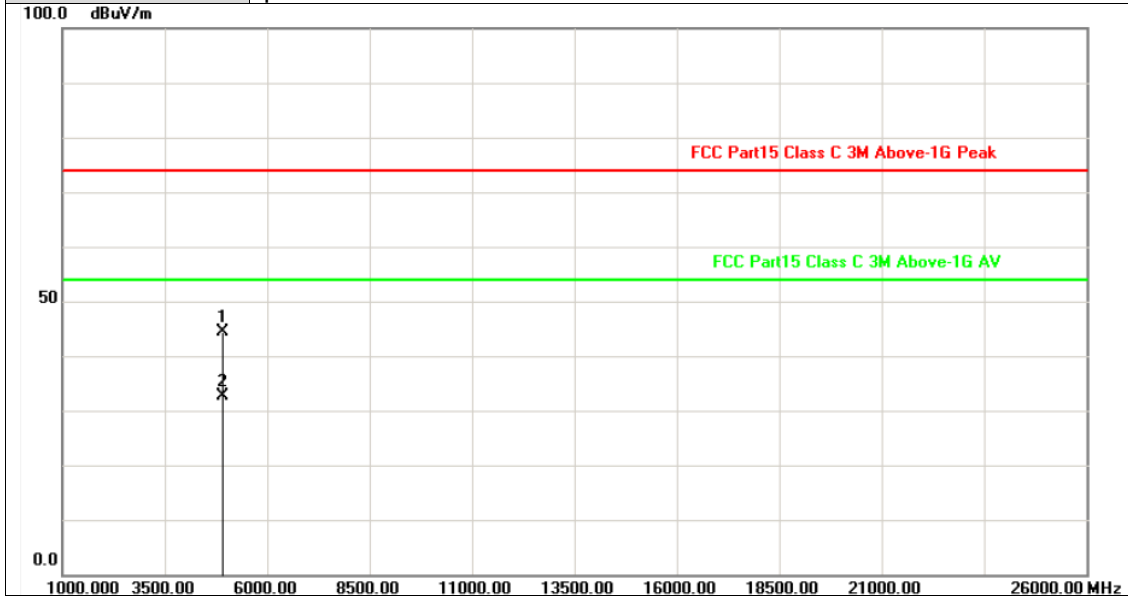


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4922.873 | -2.47 | 46.89 | 44.42 | 74.00 | -29.58 | peak |
| 2 | 4924.746 | -2.47 | 35.14 | 32.67 | 54.00 | -21.33 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N20 Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

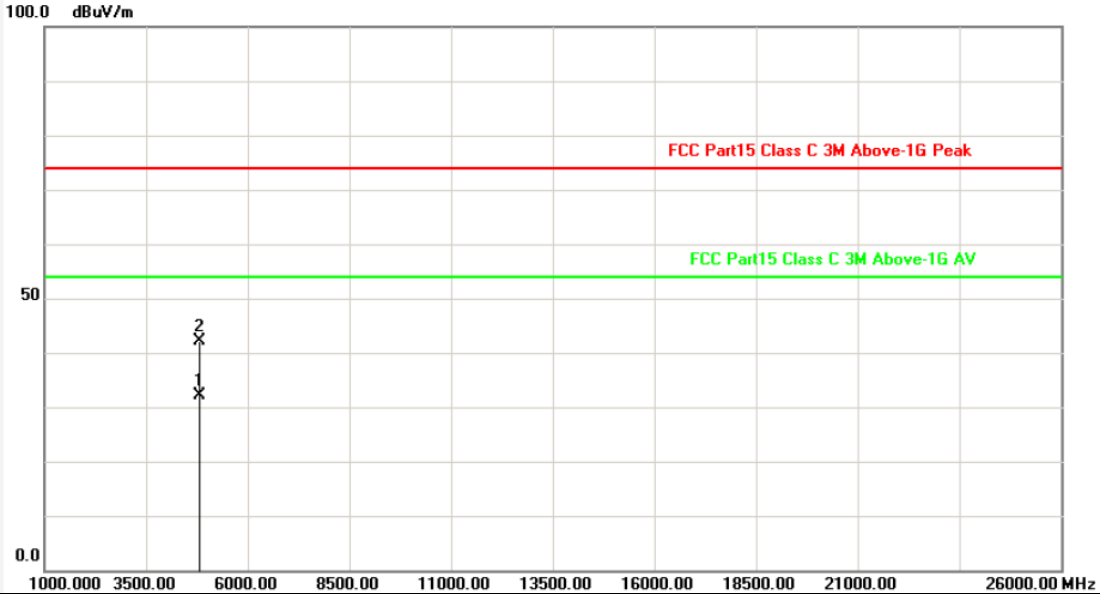


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4823.401 | -2.76 | 35.00 | 32.24 | 54.00 | -21.76 | AVG |
| 2 | 4823.472 | -2.76 | 44.96 | 42.20 | 74.00 | -31.80 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N20 Mode 2412MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

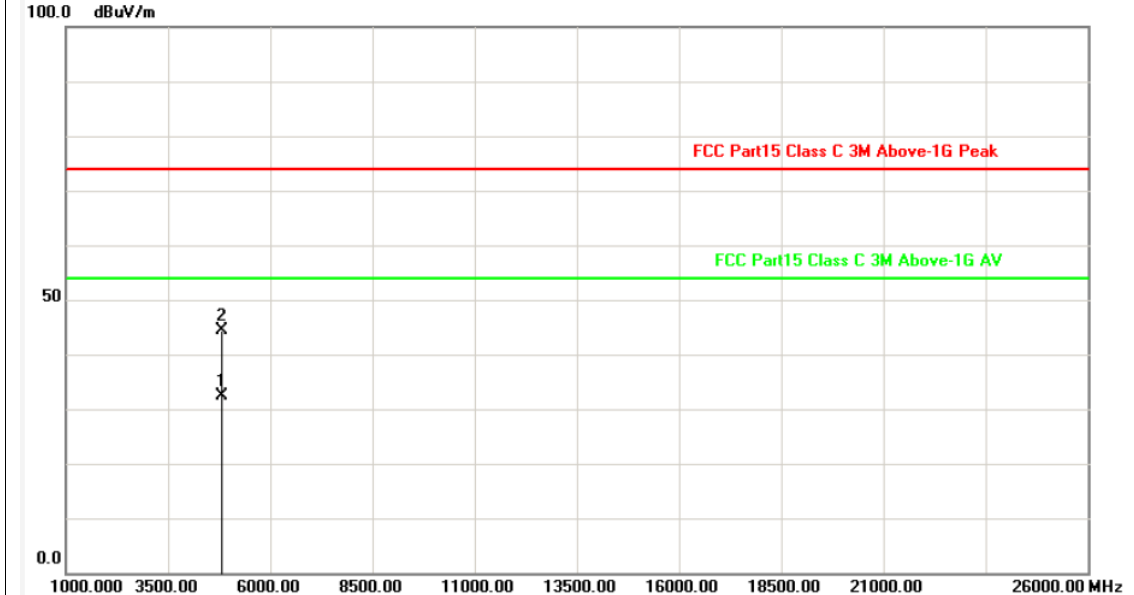


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4823.508 | -2.76 | 35.15 | 32.39 | 54.00 | -21.61 | AVG |
| 2 | 4823.592 | -2.76 | 47.07 | 44.31 | 74.00 | -29.69 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N20 Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

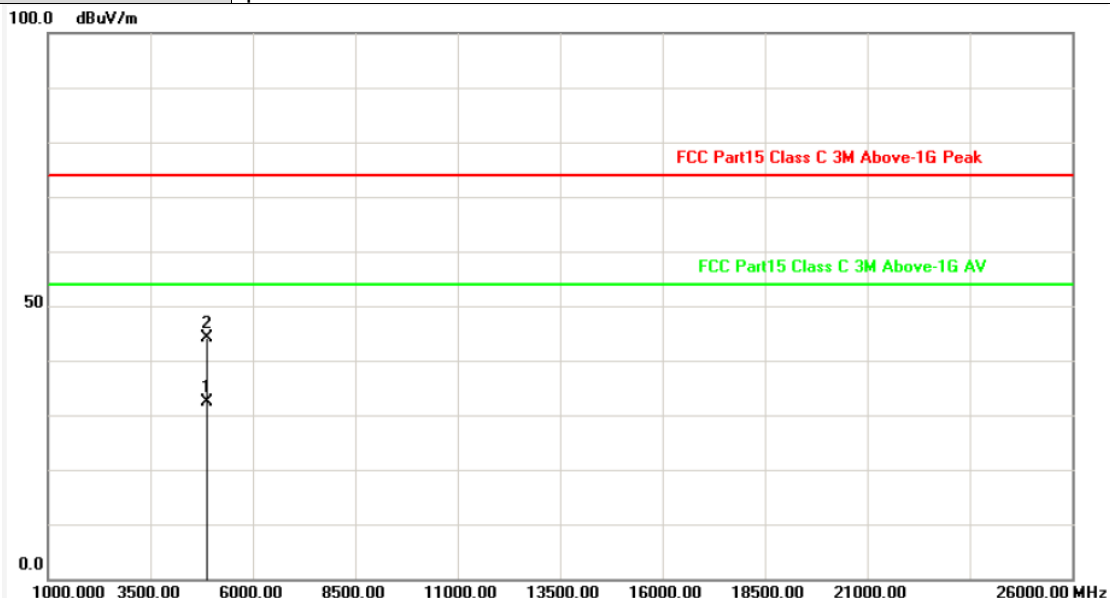


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4873.092 | -2.61 | 34.98 | 32.37 | 54.00 | -21.63 | AVG |
| 2 | 4875.367 | -2.61 | 46.62 | 44.01 | 74.00 | -29.99 | peak |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N20 Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

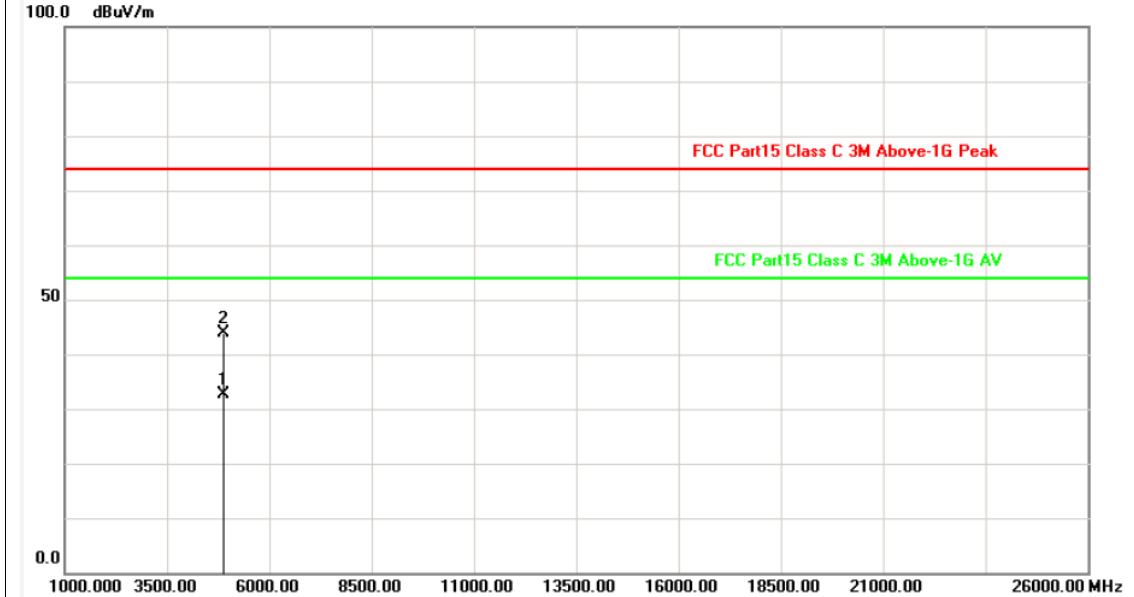


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4872.843 | -2.61 | 35.23 | 32.62 | 54.00 | -21.38 | AVG |
| 2 | 4873.907 | -2.61 | 46.52 | 43.91 | 74.00 | -30.09 | peak |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N20 Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

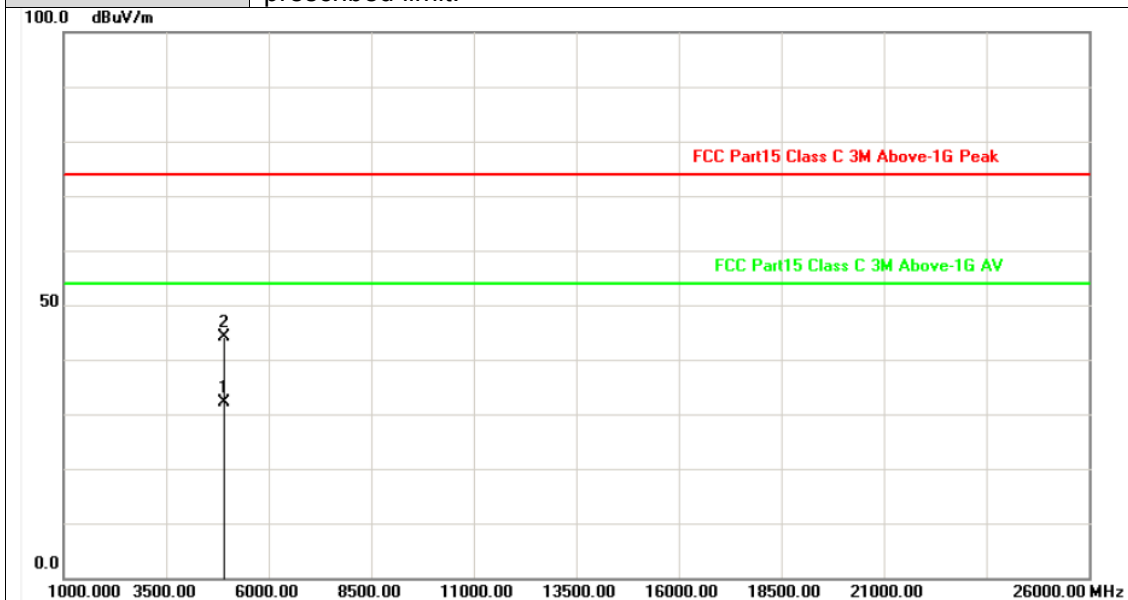


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4922.891 | -2.47 | 34.62 | 32.15 | 54.00 | -21.85 | AVG |
| 2 | 4925.498 | -2.47 | 46.71 | 44.24 | 74.00 | -29.76 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N20 Mode 2462MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

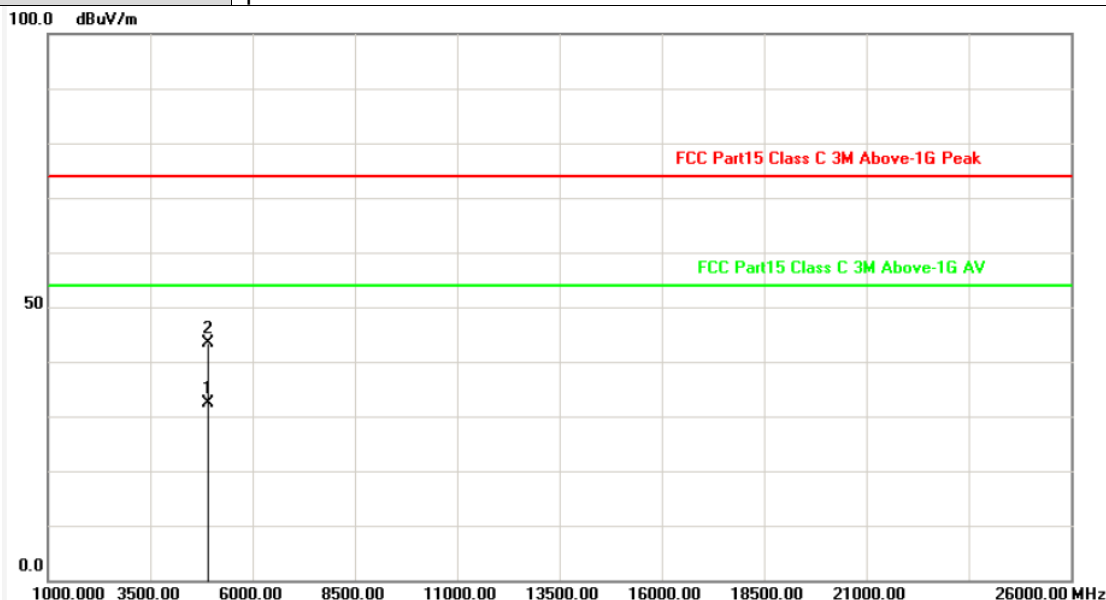


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4924.525 | -2.47 | 34.88 | 32.41 | 54.00 | -21.59 | AVG |
| 2 | 4925.498 | -2.47 | 45.85 | 43.38 | 74.00 | -30.62 | peak |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N40 Mode 2422MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

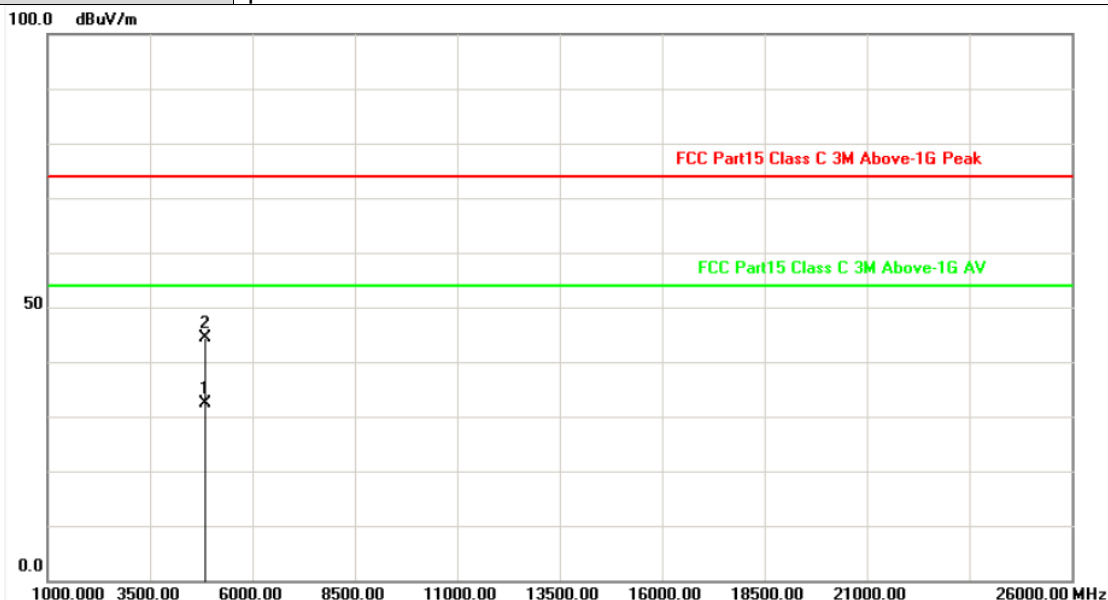


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4843.299 | -2.70 | 35.01 | 32.31 | 54.00 | -21.69 | AVG |
| 2 | 4845.498 | -2.70 | 47.18 | 44.48 | 74.00 | -29.52 | peak |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N40 Mode 2422MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

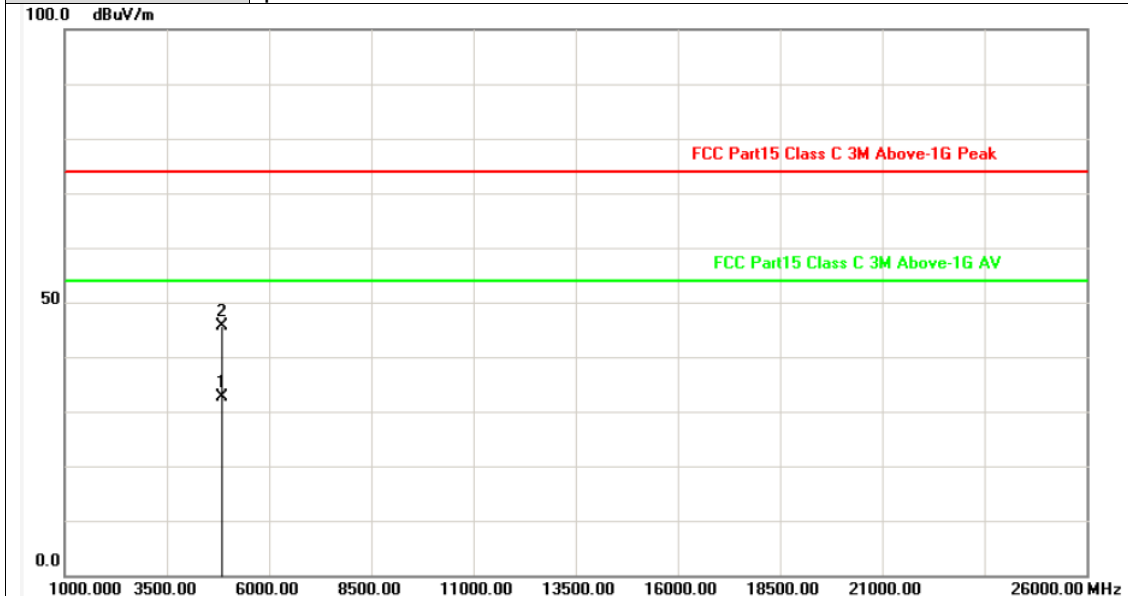


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4842.606 | -2.70 | 35.26 | 32.56 | 54.00 | -21.44 | AVG |
| 2 | 4842.717 | -2.70 | 48.22 | 45.52 | 74.00 | -28.48 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N40 Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

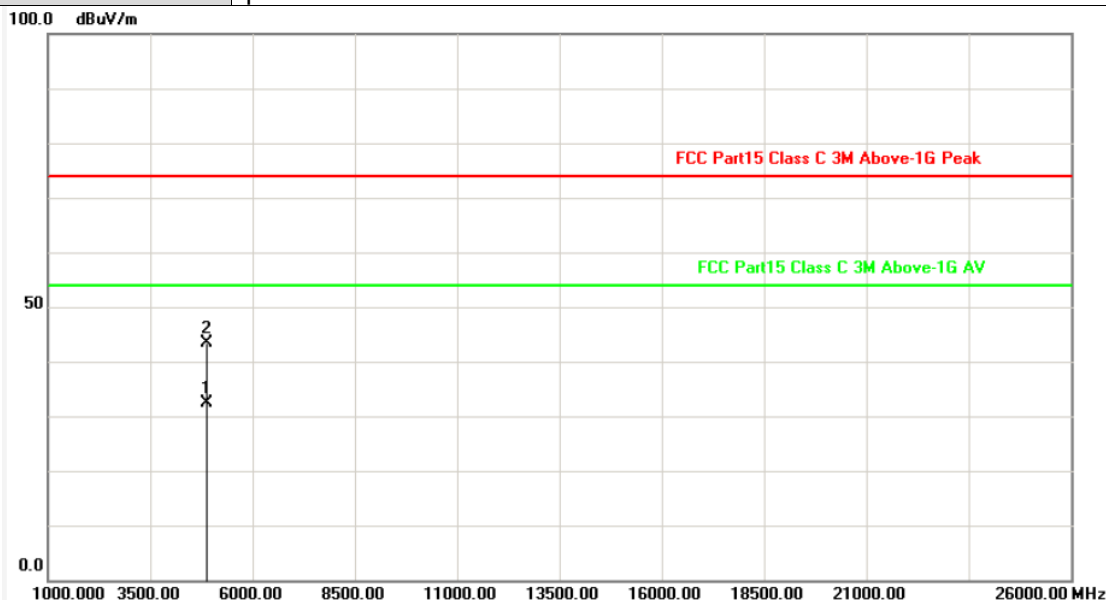


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4873.589 | -2.61 | 34.92 | 32.31 | 54.00 | -21.69 | AVG |
| 2 | 4873.748 | -2.61 | 46.10 | 43.49 | 74.00 | -30.51 | peak |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N40 Mode 2437MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

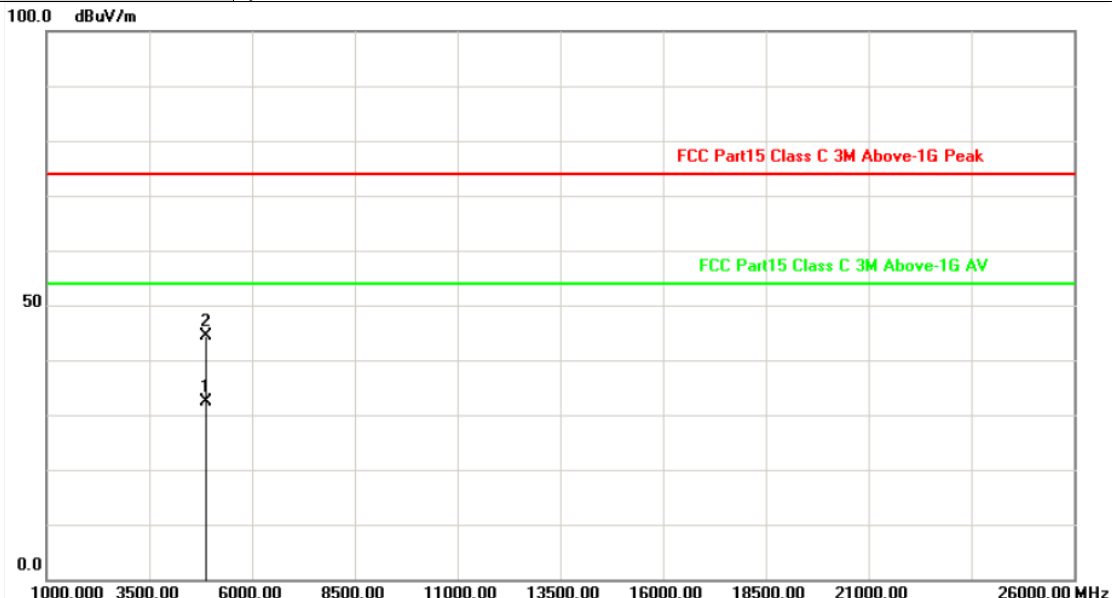


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4872.720 | -2.61 | 35.00 | 32.39 | 54.00 | -21.61 | AVG |
| 2 | 4873.502 | -2.61 | 47.11 | 44.50 | 74.00 | -29.50 | peak |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | TX N40 Mode 2452MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

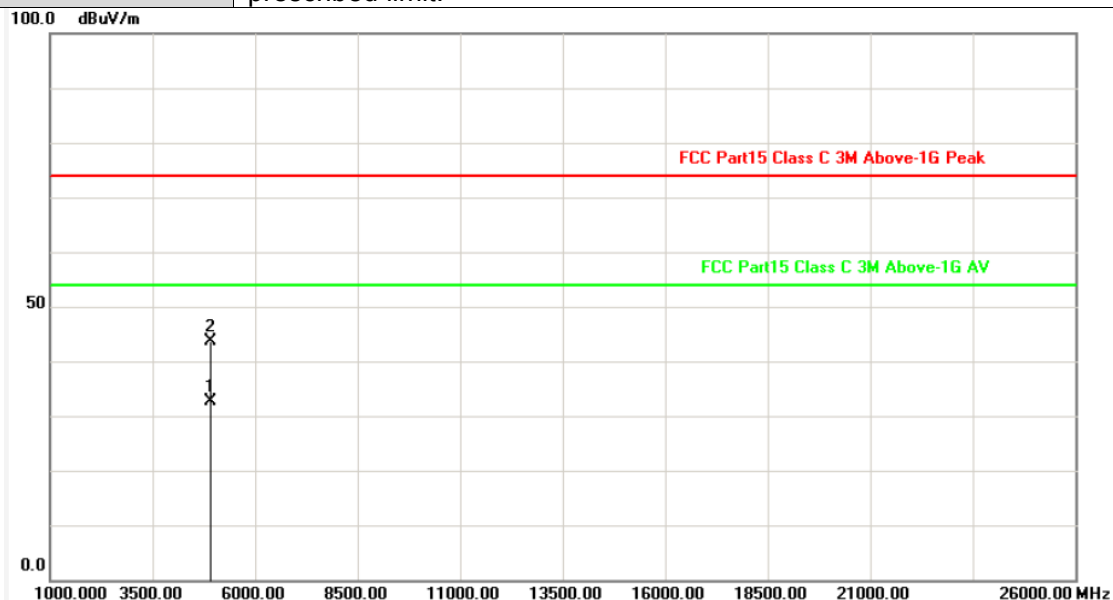


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4903.176 | -2.53 | 35.14 | 32.61 | 54.00 | -21.39 | AVG |
| 2 | 4904.405 | -2.53 | 46.05 | 43.52 | 74.00 | -30.48 | peak |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|--|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | TX N40 Mode 2452MHz |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. |

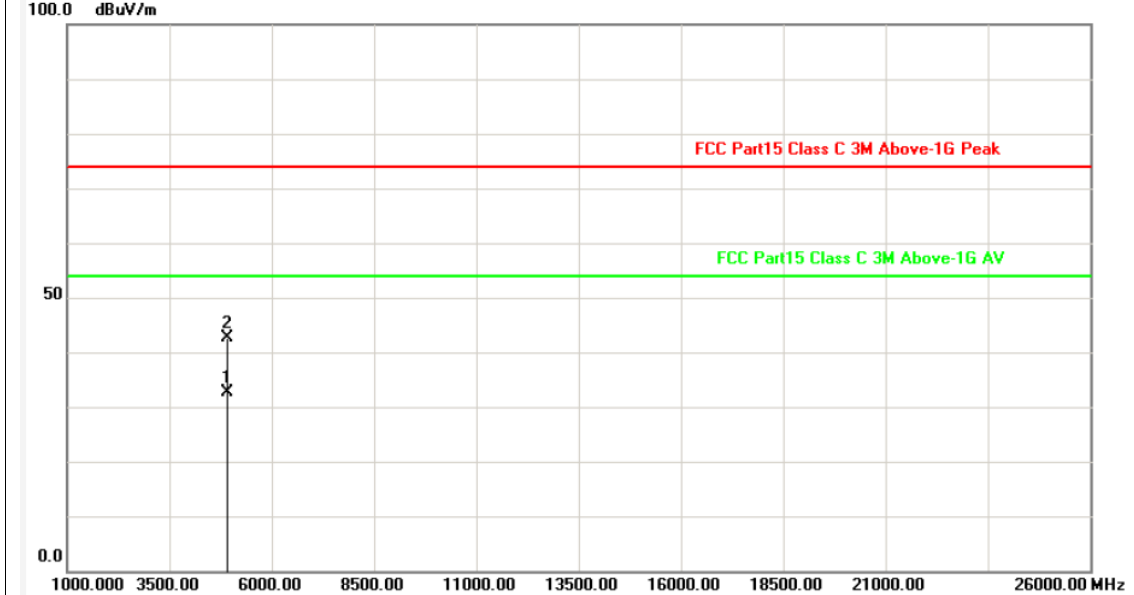

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 4902.502 | -2.53 | 35.17 | 32.64 | 54.00 | -21.36 | AVG |
| 2 | 4903.071 | -2.53 | 45.13 | 42.60 | 74.00 | -31.40 | peak |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value

3.3. Band Edge Emissions


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

| Restricted Frequency Band (MHz) | (dBuV/m)(at 3m) | |
|---------------------------------|-----------------|---------|
| | Peak | Average |
| 2310 ~2390 | 74 | 54 |
| 2483.5 ~2500 | 74 | 54 |

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

Test Configuration

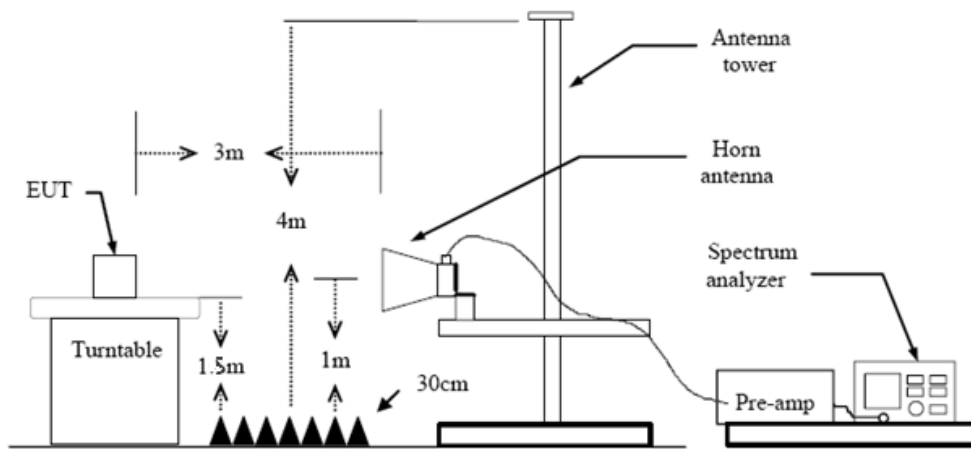

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.7 Duty Cycle.

2: Duty Cycle > 98%, VBW=10Hz.

Test Mode


Please refer to the clause 2.4.

Test Results

Pre-scan all antenna, only show the test data for worse case antenna on the test report.



| | |
|------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | B Mode 2412MHz |

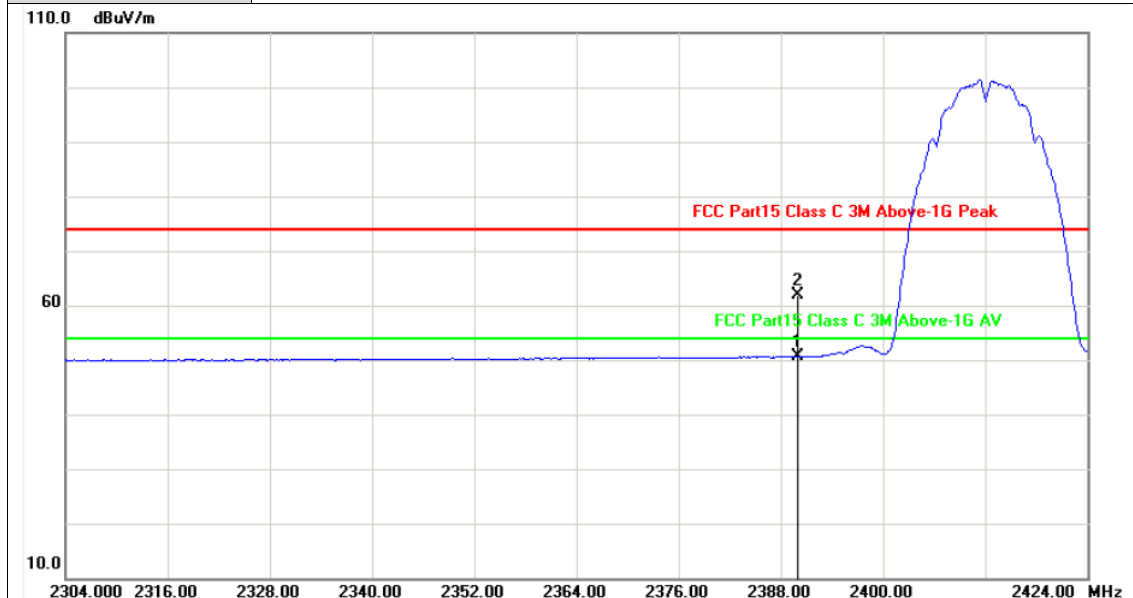


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 19.51 | 50.61 | 54.00 | -3.39 | AVG |
| 2 | 2390.000 | 31.10 | 30.70 | 61.80 | 74.00 | -12.20 | peak |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | B Mode 2412MHz |

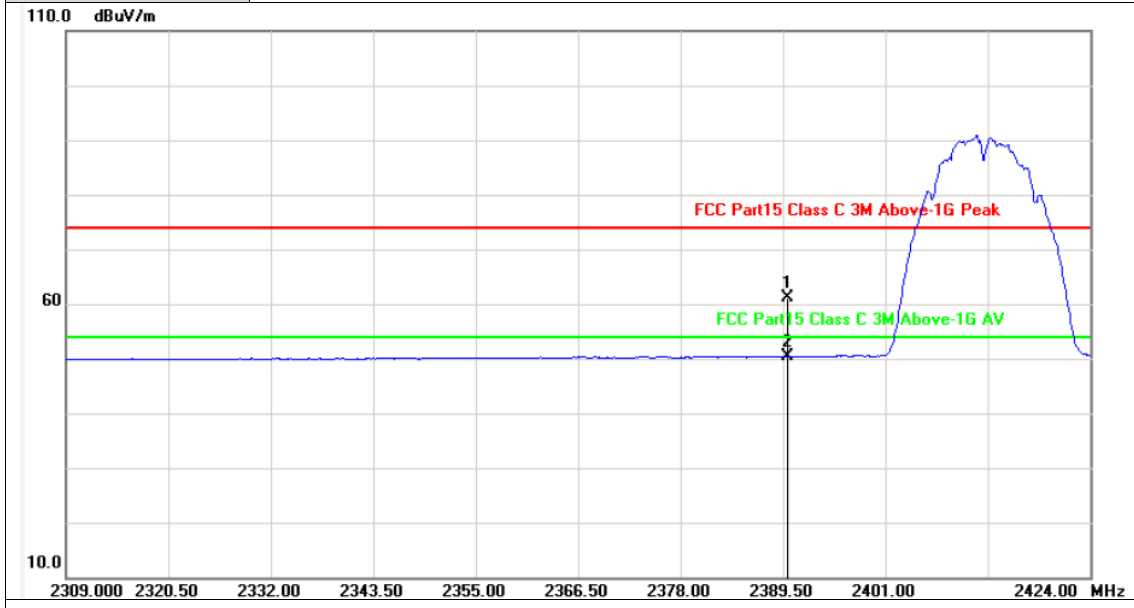


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 29.93 | 61.03 | 74.00 | -12.97 | peak |
| 2 | 2390.000 | 31.10 | 19.28 | 50.38 | 54.00 | -3.62 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|-----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | B Mode 2462 MHz |

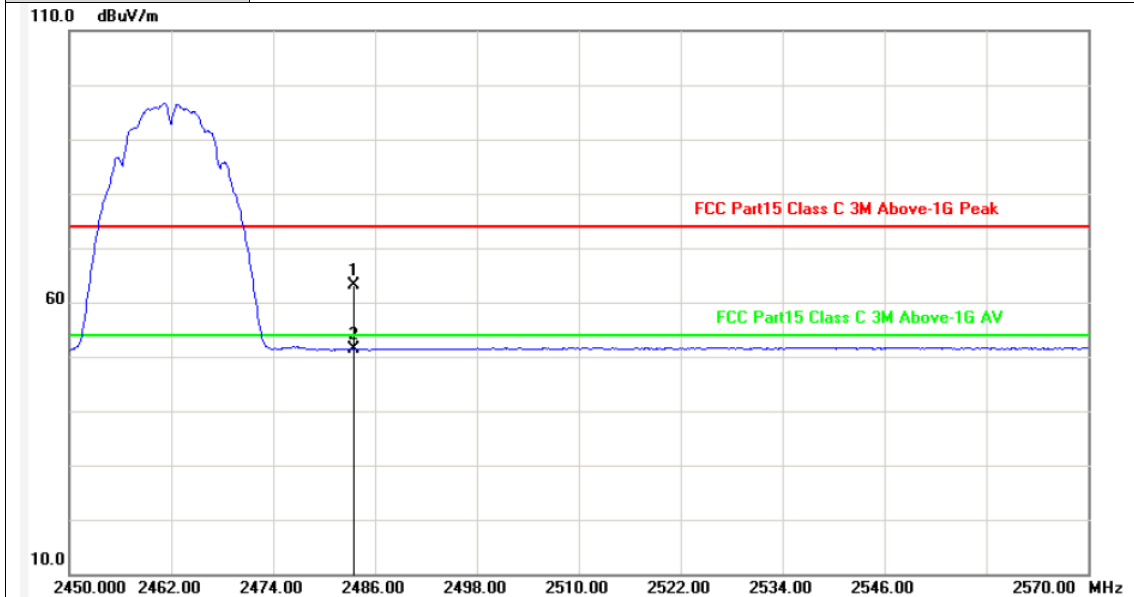


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.67 | 63.17 | 74.00 | -10.83 | peak |
| 2 | 2483.500 | 31.50 | 19.82 | 51.32 | 54.00 | -2.68 | AVG |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|-----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | B Mode 2462 MHz |

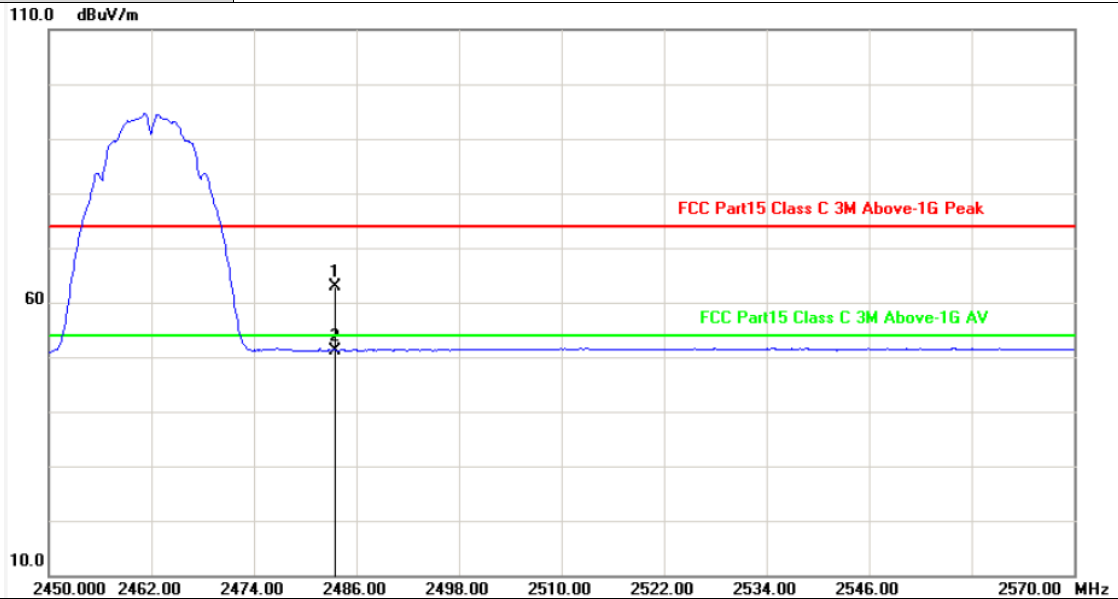


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.47 | 62.97 | 74.00 | -11.03 | peak |
| 2 | 2483.500 | 31.50 | 19.72 | 51.22 | 54.00 | -2.78 | AVG |

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



| | |
|-------------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | G Mode 2412MHz |

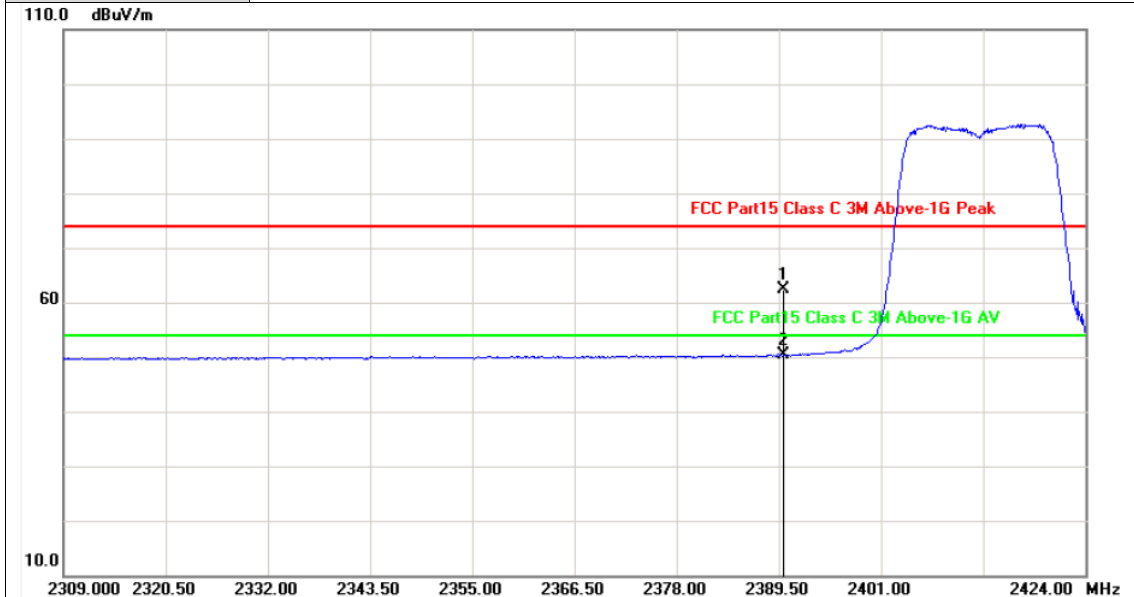


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 31.22 | 62.32 | 74.00 | -11.68 | peak |
| 2 | 2390.000 | 31.10 | 19.23 | 50.33 | 54.00 | -3.67 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | G Mode 2412MHz |

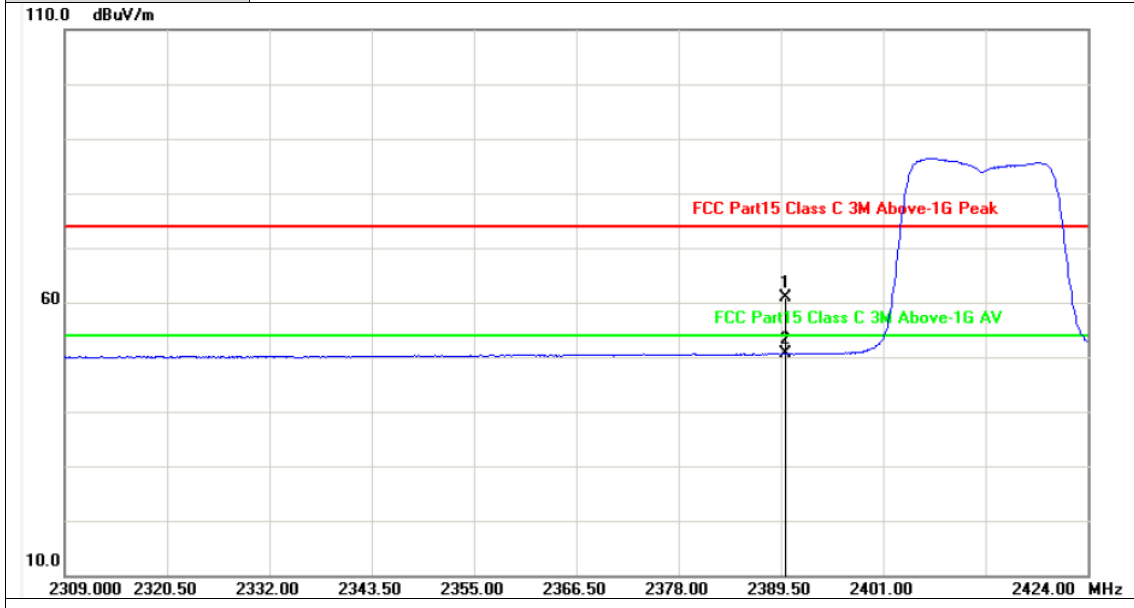


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 29.82 | 60.92 | 74.00 | -13.08 | peak |
| 2 | 2390.000 | 31.10 | 19.48 | 50.58 | 54.00 | -3.42 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Horizontal |
| Test Mode: | G Mode 2462MHz |

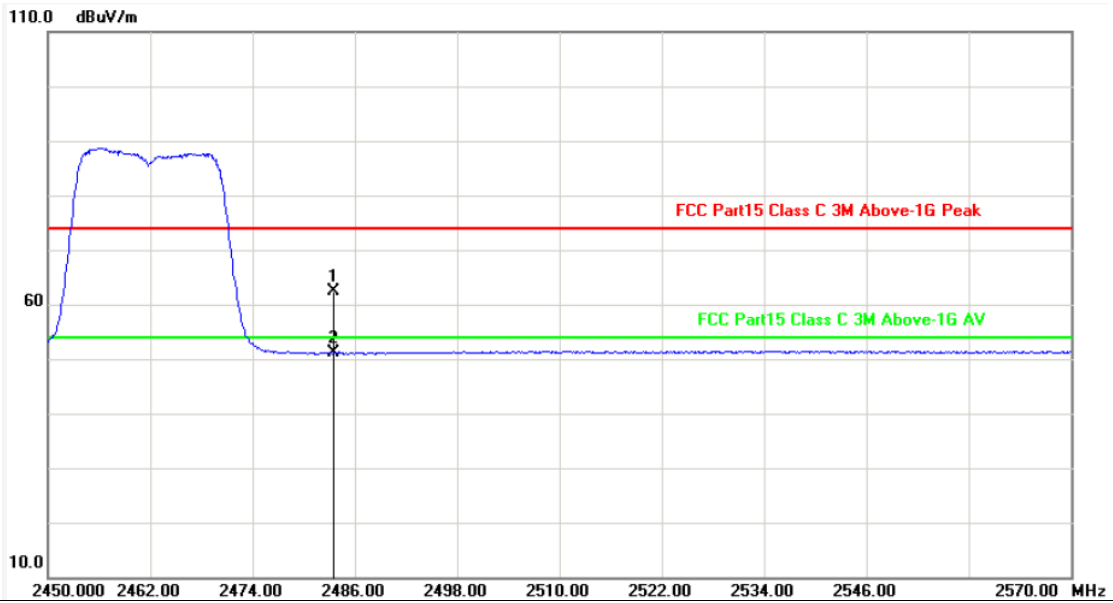


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.00 | 62.50 | 74.00 | -11.50 | peak |
| 2 | 2483.500 | 31.50 | 19.57 | 51.07 | 54.00 | -2.93 | AVG |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|----------------|
| Ant No. | Ant 2 |
| Ant. Pol. | Vertical |
| Test Mode: | G Mode 2462MHz |

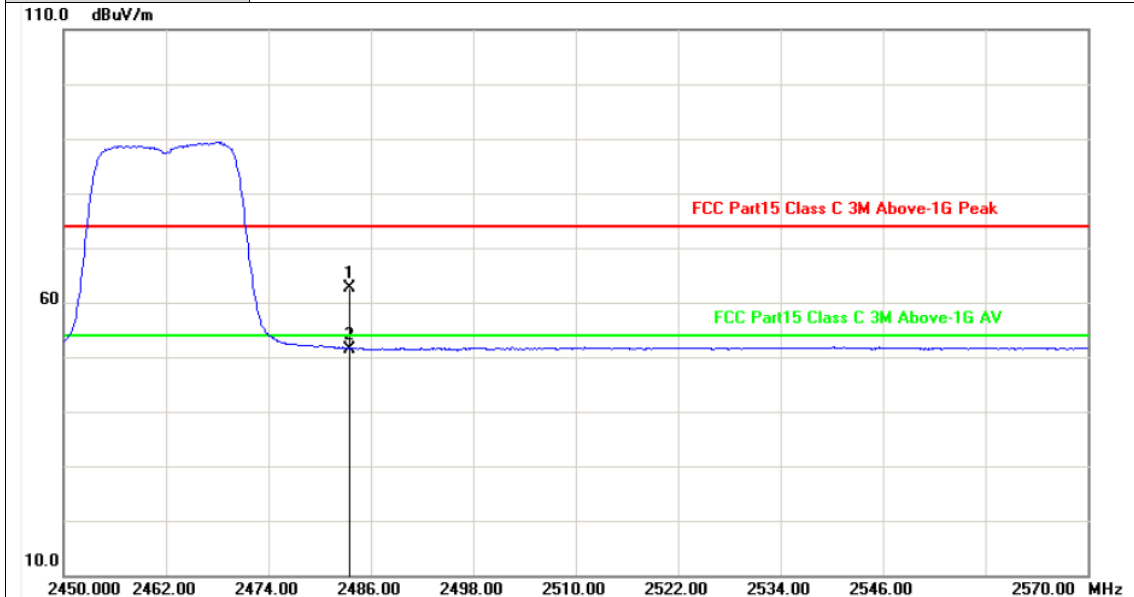


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.11 | 62.61 | 74.00 | -11.39 | peak |
| 2 | 2483.500 | 31.50 | 19.95 | 51.45 | 54.00 | -2.55 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | N(HT20) Mode 2412MHz |

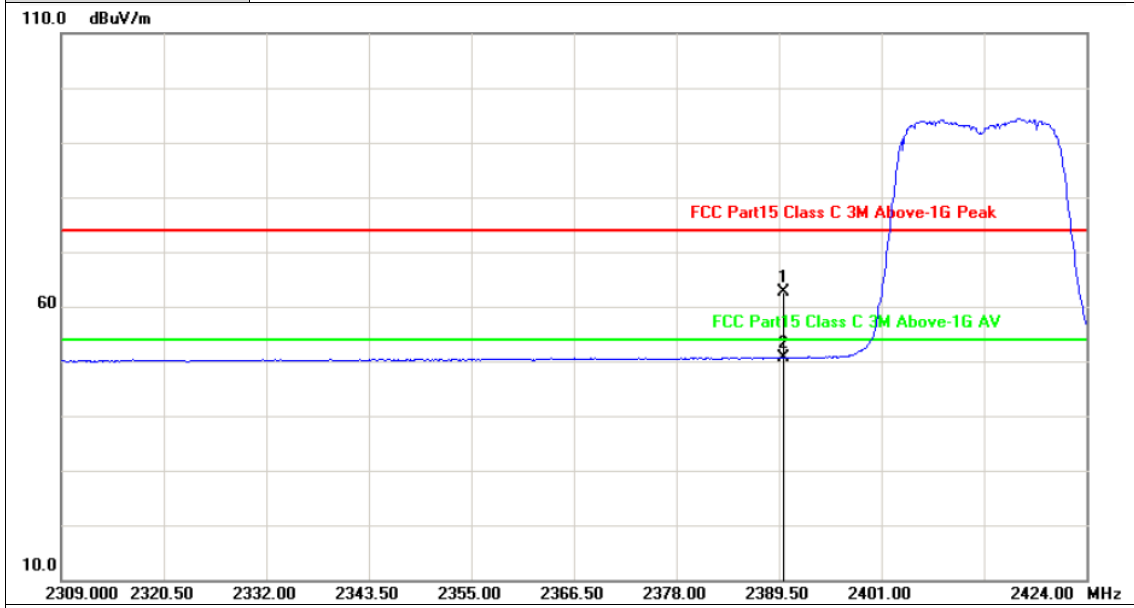


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 31.56 | 62.66 | 74.00 | -11.34 | peak |
| 2 | 2390.000 | 31.10 | 19.51 | 50.61 | 54.00 | -3.39 | AVG |

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | N(HT20) Mode 2412MHz |

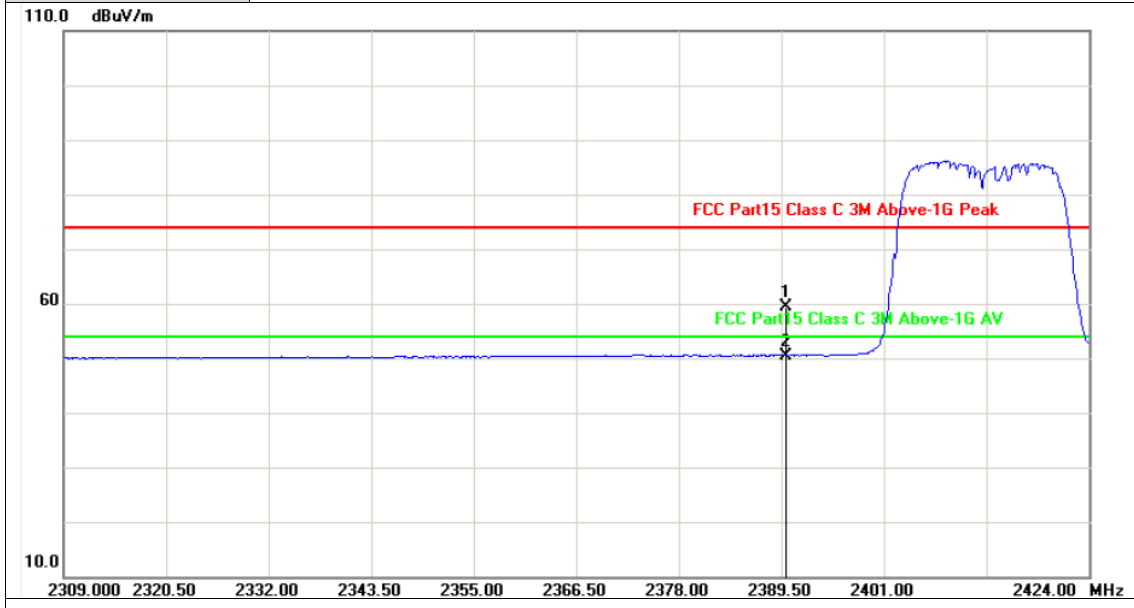


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 28.26 | 59.36 | 74.00 | -14.64 | peak |
| 2 | 2390.000 | 31.10 | 19.39 | 50.49 | 54.00 | -3.51 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | N(HT20) Mode 2462MHz |

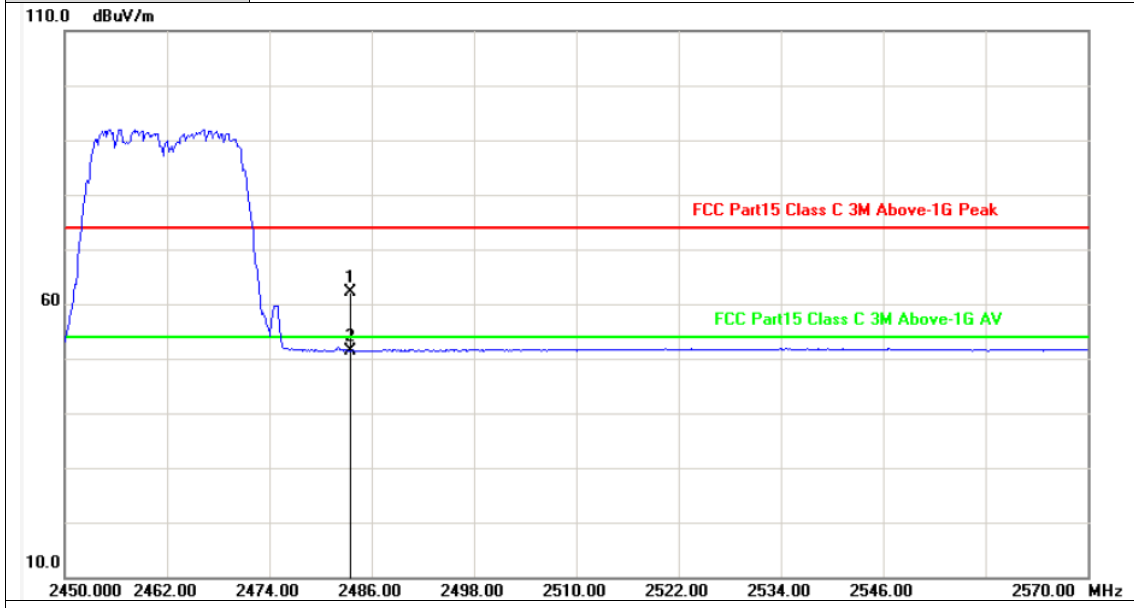


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 30.71 | 62.21 | 74.00 | -11.79 | peak |
| 2 | 2483.500 | 31.50 | 19.93 | 51.43 | 54.00 | -2.57 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | N(HT20) Mode 2462MHz |

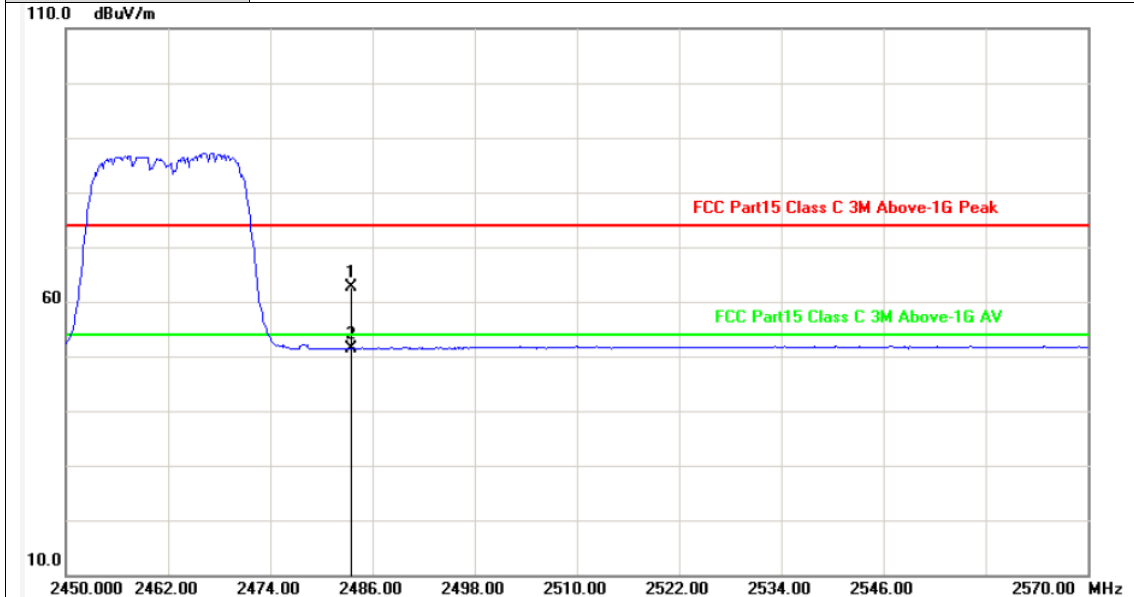


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.24 | 62.74 | 74.00 | -11.26 | peak |
| 2 | 2483.500 | 31.50 | 19.91 | 51.41 | 54.00 | -2.59 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | N(HT40) Mode 2422MHz |

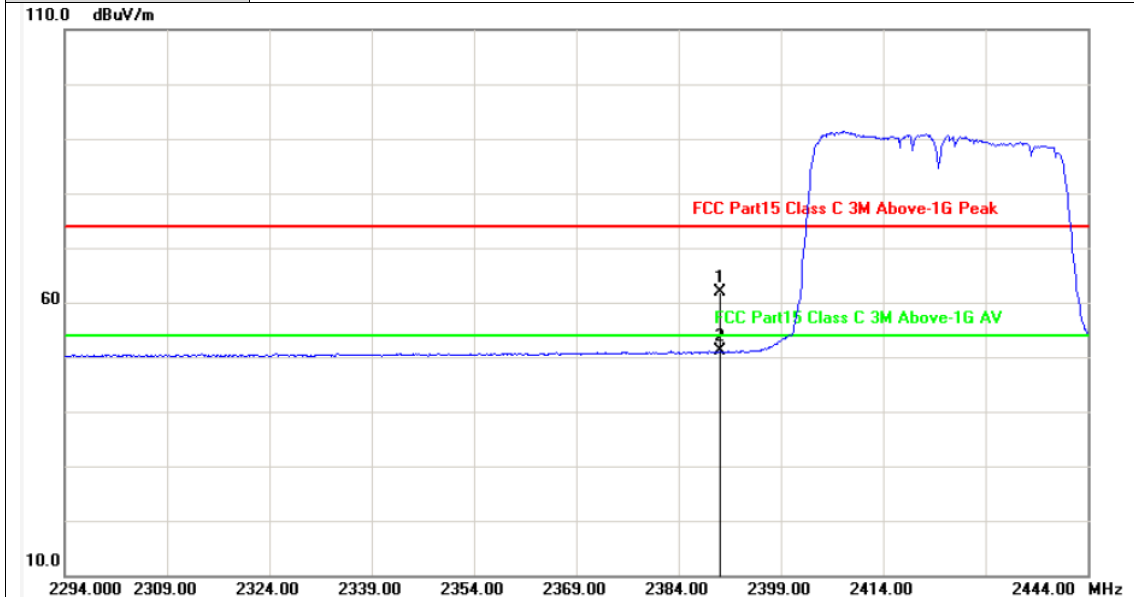


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 30.74 | 61.84 | 74.00 | -12.16 | peak |
| 2 | 2390.000 | 31.10 | 19.91 | 51.01 | 54.00 | -2.99 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | N(HT40) Mode 2422MHz |

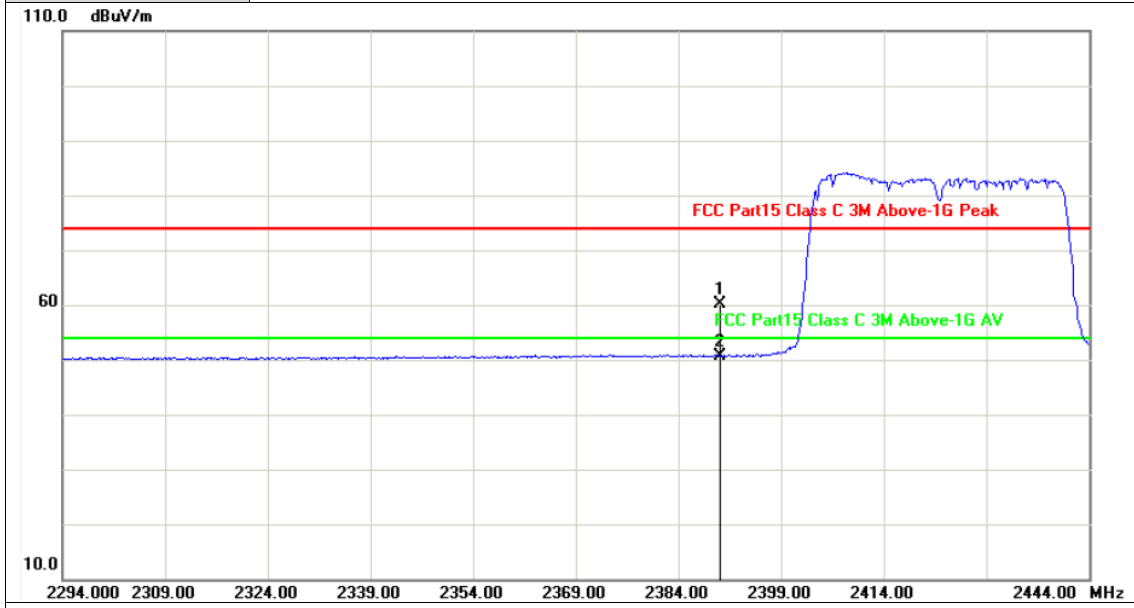


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2390.000 | 31.10 | 29.02 | 60.12 | 74.00 | -13.88 | peak |
| 2 | 2390.000 | 31.10 | 19.62 | 50.72 | 54.00 | -3.28 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Horizontal |
| Test Mode: | N(HT40) Mode 2452MHz |

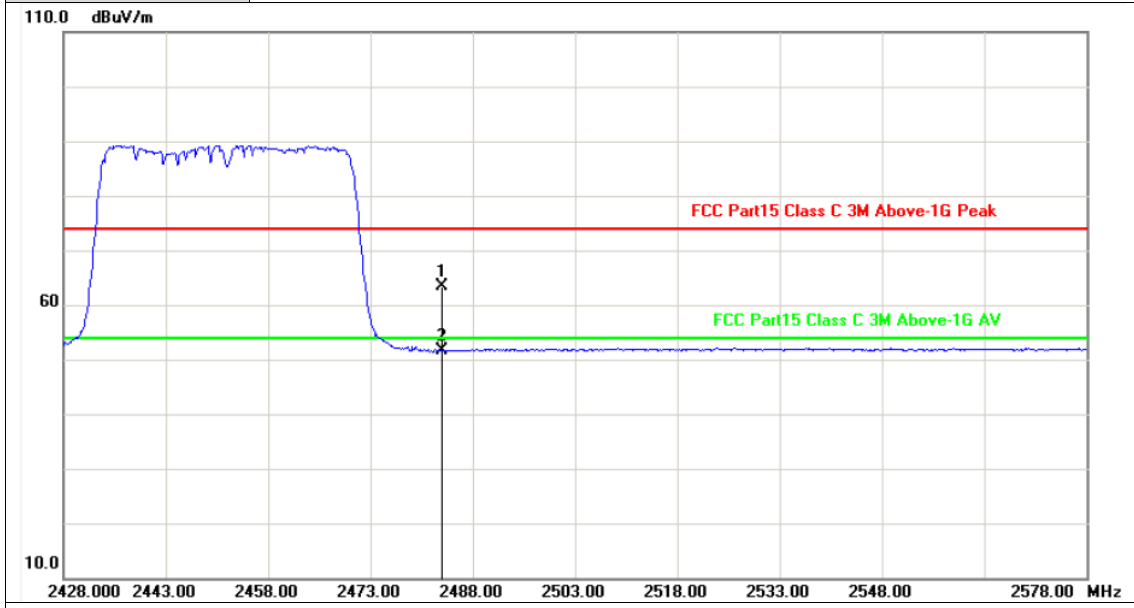


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 31.82 | 63.32 | 74.00 | -10.68 | peak |
| 2 | 2483.500 | 31.50 | 20.08 | 51.58 | 54.00 | -2.42 | AVG |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



| | |
|-------------------|----------------------|
| Ant No. | MIMO |
| Ant. Pol. | Vertical |
| Test Mode: | N(HT40) Mode 2452MHz |

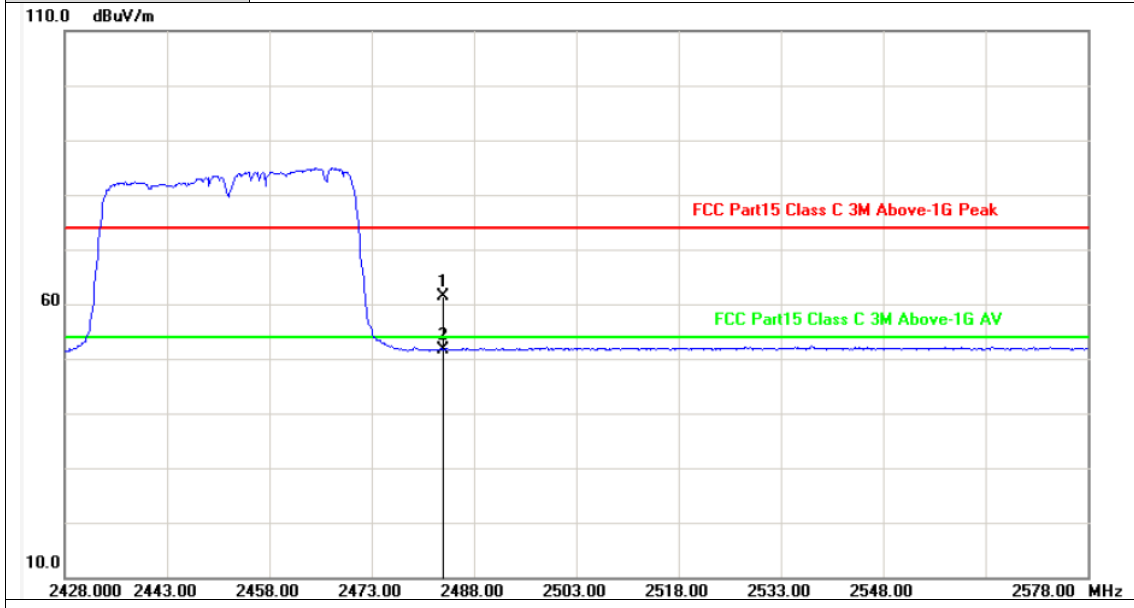

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 31.50 | 29.86 | 61.36 | 74.00 | -12.64 | peak |
| 2 | 2483.500 | 31.50 | 20.09 | 51.59 | 54.00 | -2.41 | AVG |

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value


3.4. DTS Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 5.2 a:

| Test Item | Limit | Frequency Range(MHz) |
|---------------|-----------------------------------|----------------------|
| DTS Bandwidth | ≥ 500 KHz (6dB bandwidth) | 2400~2483.5 |

Test Configuration

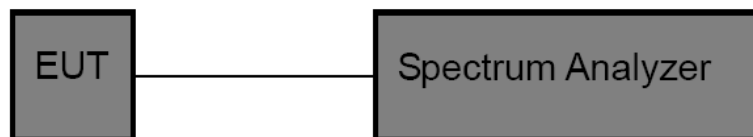

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.4.

**Test Results**

| Test Mode | Antenna | Channel | DTS BW [MHz] | Limit [MHz] | Verdict |
|-----------|---------|---------|--------------|-------------|---------|
| 11B | Ant1 | 2412 | 9.600 | >=0.5 | PASS |
| | Ant2 | 2412 | 9.120 | >=0.5 | PASS |
| | Ant1 | 2437 | 10.080 | >=0.5 | PASS |
| | Ant2 | 2437 | 9.160 | >=0.5 | PASS |
| | Ant1 | 2462 | 10.080 | >=0.5 | PASS |
| | Ant2 | 2462 | 9.600 | >=0.5 | PASS |
| 11G | Ant1 | 2412 | 16.440 | >=0.5 | PASS |
| | Ant2 | 2412 | 16.440 | >=0.5 | PASS |
| | Ant1 | 2437 | 16.400 | >=0.5 | PASS |
| | Ant2 | 2437 | 16.400 | >=0.5 | PASS |
| | Ant1 | 2462 | 16.400 | >=0.5 | PASS |
| | Ant2 | 2462 | 16.400 | >=0.5 | PASS |
| 11N20SISO | Ant1 | 2412 | 17.120 | >=0.5 | PASS |
| | Ant2 | 2412 | 17.160 | >=0.5 | PASS |
| | Ant1 | 2437 | 17.360 | >=0.5 | PASS |
| | Ant2 | 2437 | 17.160 | >=0.5 | PASS |
| | Ant1 | 2462 | 17.160 | >=0.5 | PASS |
| | Ant2 | 2462 | 17.160 | >=0.5 | PASS |
| 11N40SISO | Ant1 | 2422 | 36.240 | >=0.5 | PASS |
| | Ant2 | 2422 | 36.160 | >=0.5 | PASS |
| | Ant1 | 2437 | 36.240 | >=0.5 | PASS |
| | Ant2 | 2437 | 36.480 | >=0.5 | PASS |
| | Ant1 | 2452 | 36.480 | >=0.5 | PASS |
| | Ant2 | 2452 | 36.240 | >=0.5 | PASS |




11B_Ant1_2412

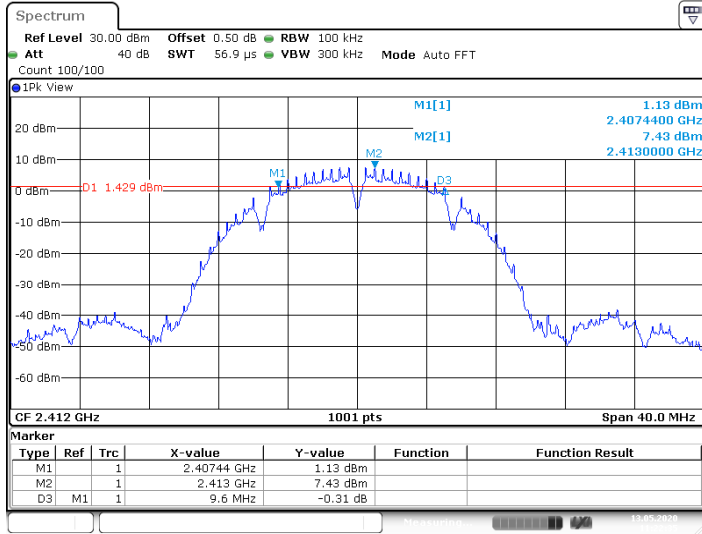


Date: 13.MAY.2020 11:22:35

11B_Ant2_2412

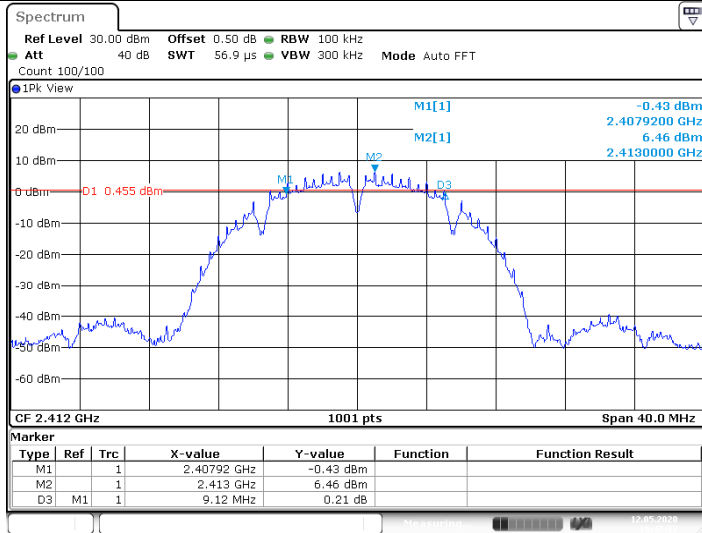

Date: 12.MAY.2020 10:47:57

11B_Ant1_2437

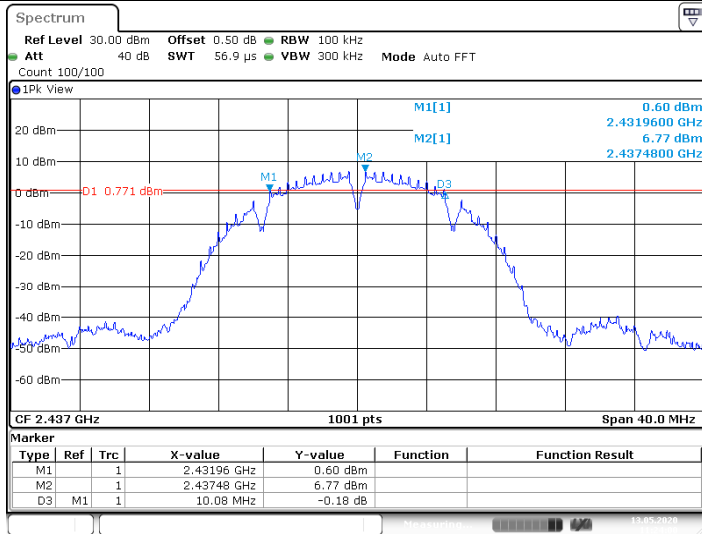

Date: 13.MAY.2020 11:24:00

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11B_Ant2_2437

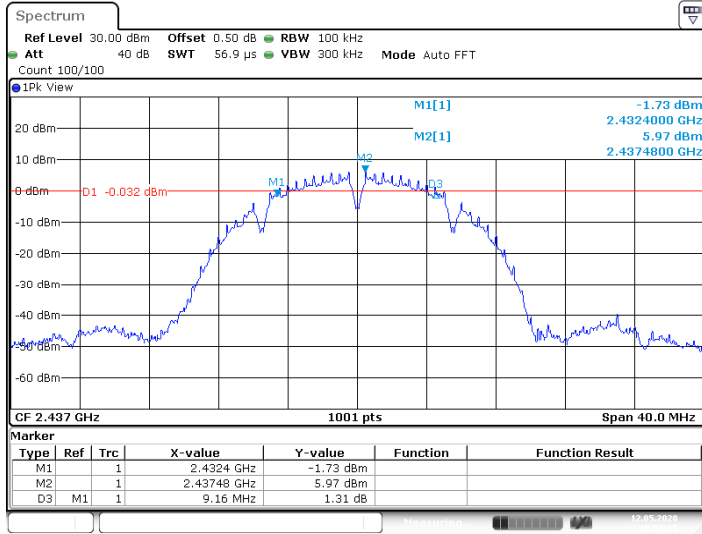


Date: 12.MAY.2020 10:54:15

11B_Ant1_2462

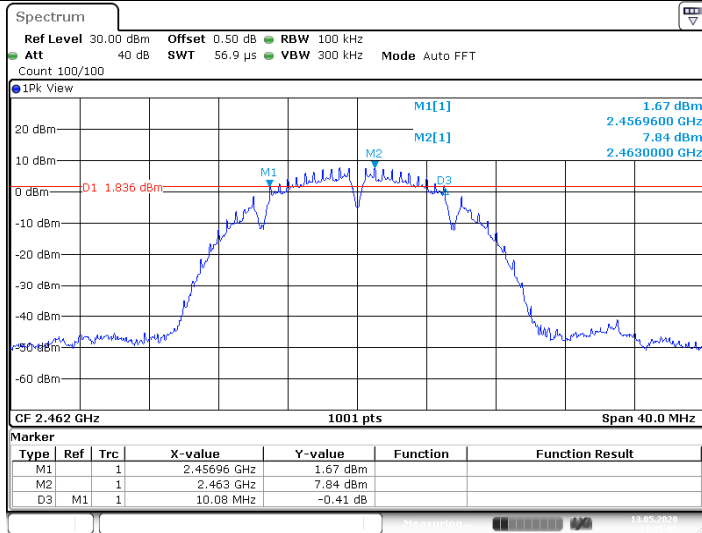

Date: 13.MAY.2020 11:25:06

11B_Ant2_2462

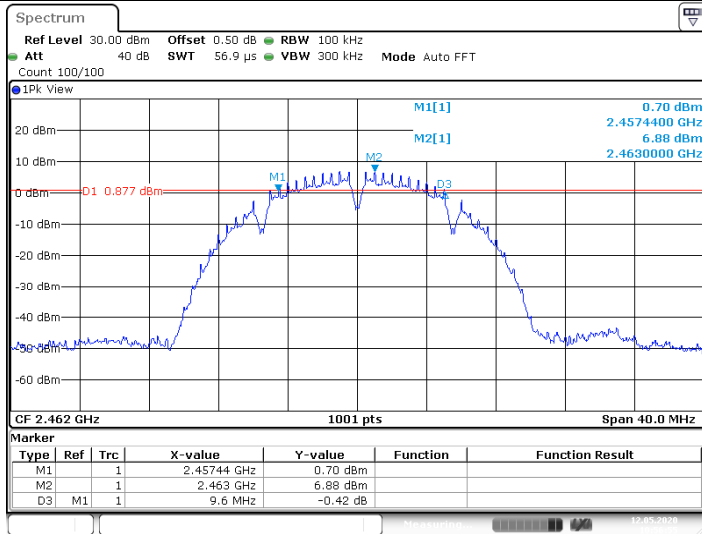

Date: 12.MAY.2020 10:56:55

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn






11G_Ant1_2412

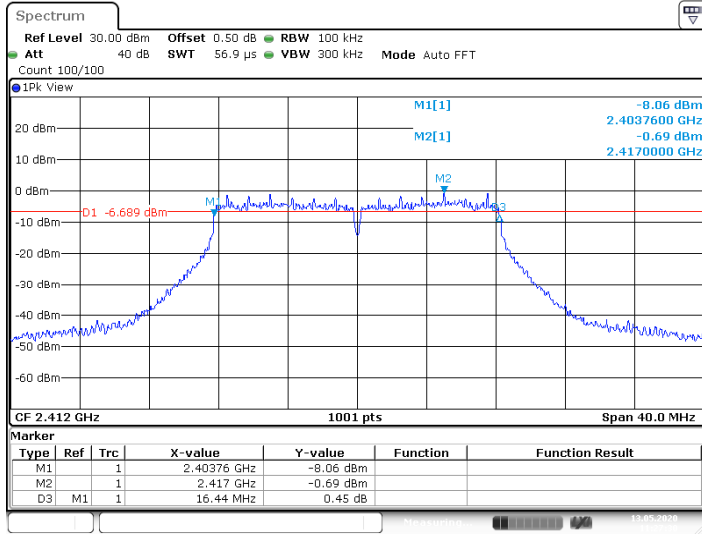


Date: 13.MAY.2020 11:27:30

11G_Ant2_2412

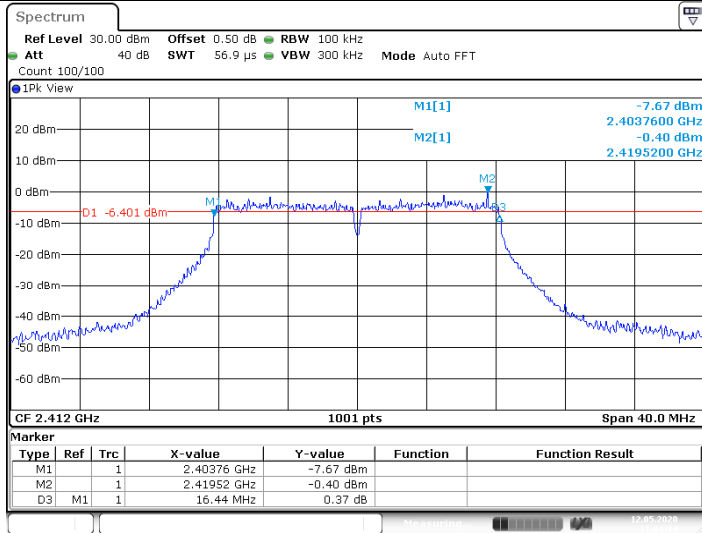

Date: 12.MAY.2020 11:04:34

11G_Ant1_2437

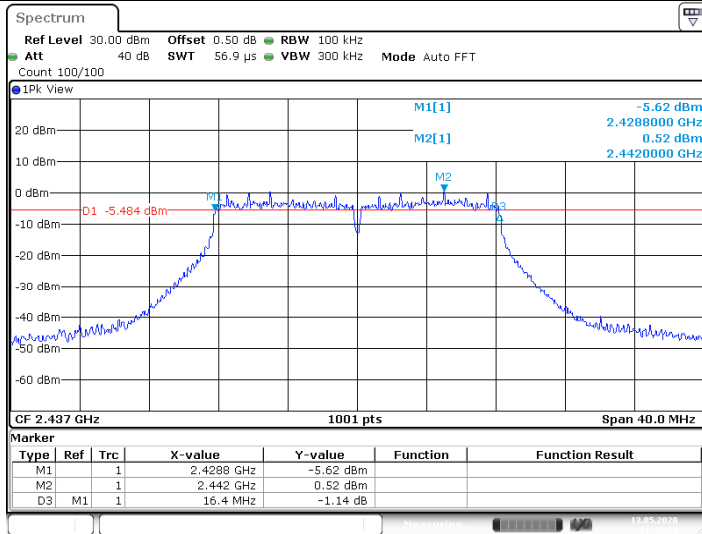

Date: 13.MAY.2020 11:47:34

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11G_Ant2_2437

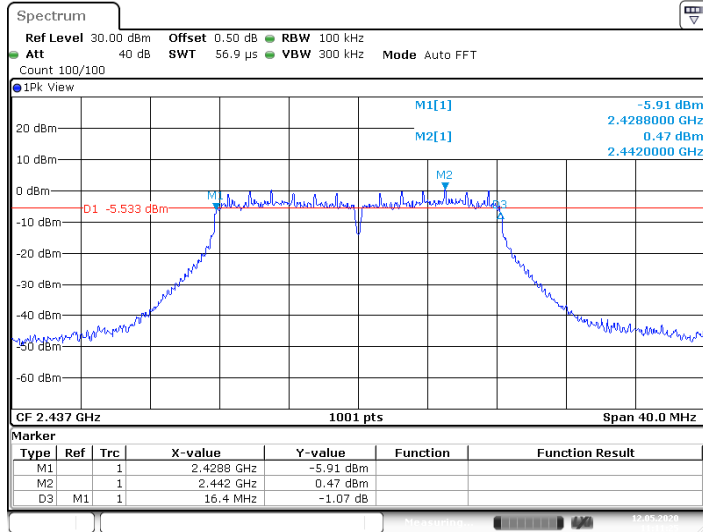


Date: 12.MAY.2020 11:11:25

11G_Ant1_2462

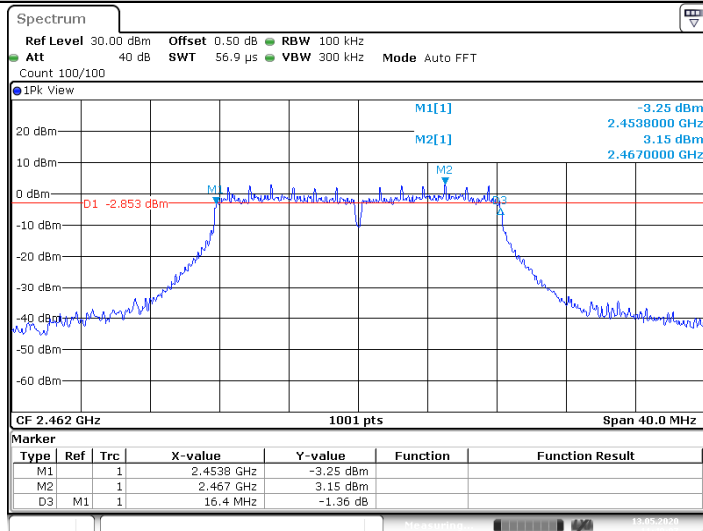

Date: 13.MAY.2020 11:49:07

11G_Ant2_2462

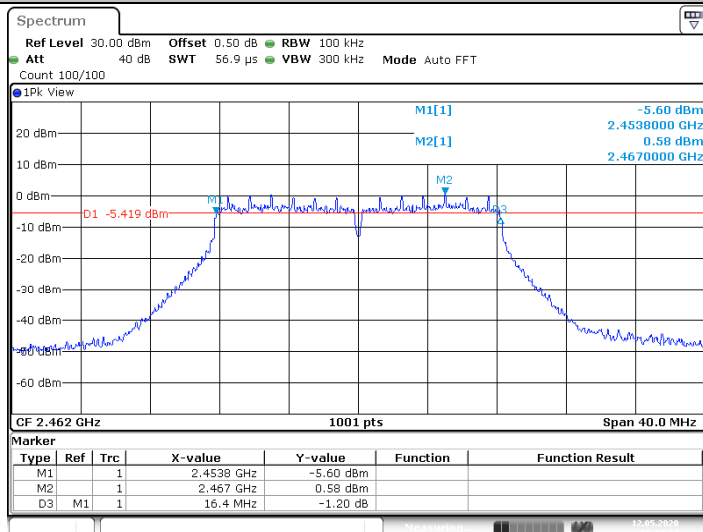

Date: 12.MAY.2020 11:14:14

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant1_2412

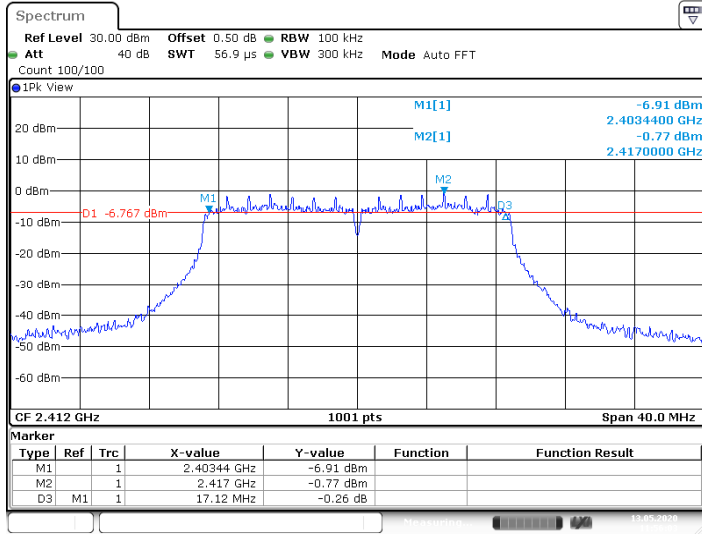


Date: 13.MAY.2020 11:56:02

11N20SISO_Ant2_2412

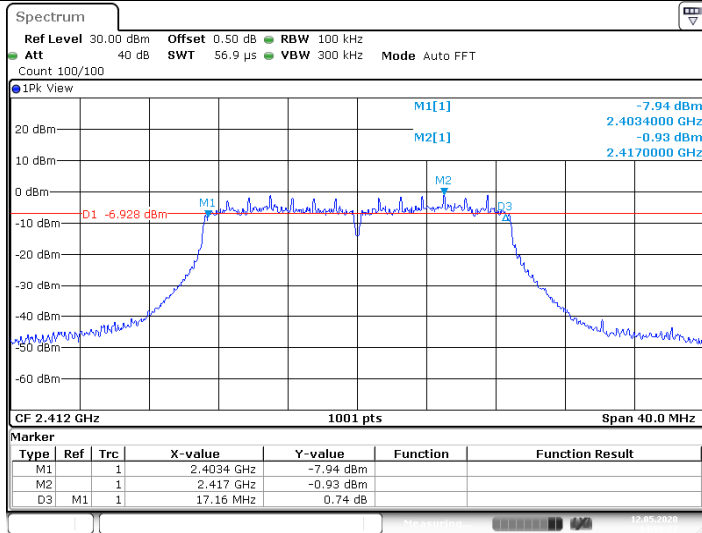

Date: 12.MAY.2020 14:50:27

11N20SISO_Ant1_2437

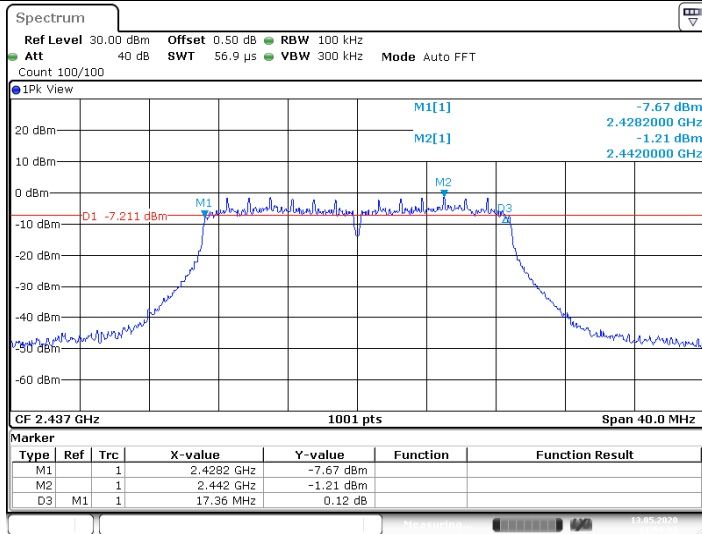

Date: 13.MAY.2020 11:59:02

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant2_2437

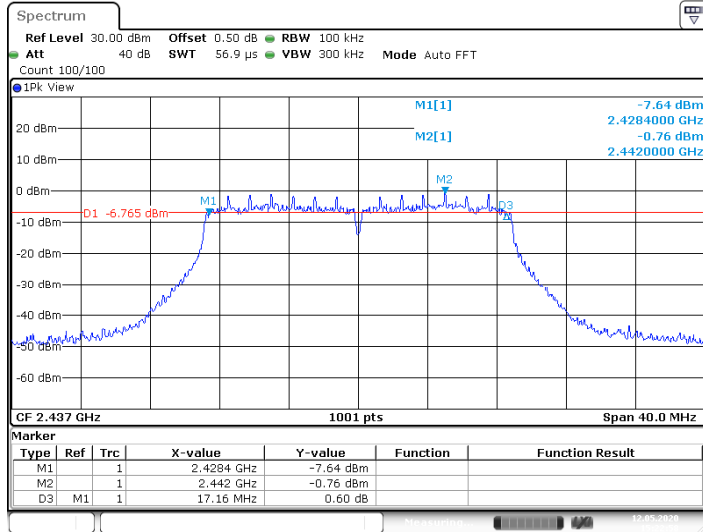


Date: 12.MAY.2020 15:22:58

11N20SISO_Ant1_2462

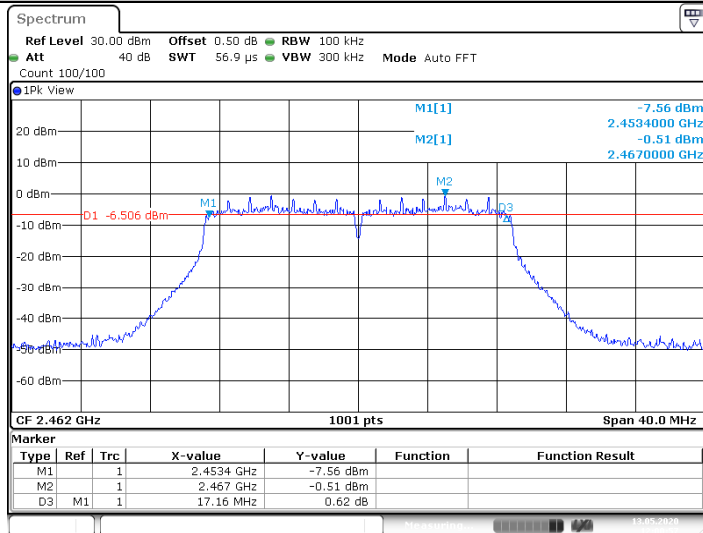

Date: 13.MAY.2020 12:00:58

11N20SISO_Ant2_2462

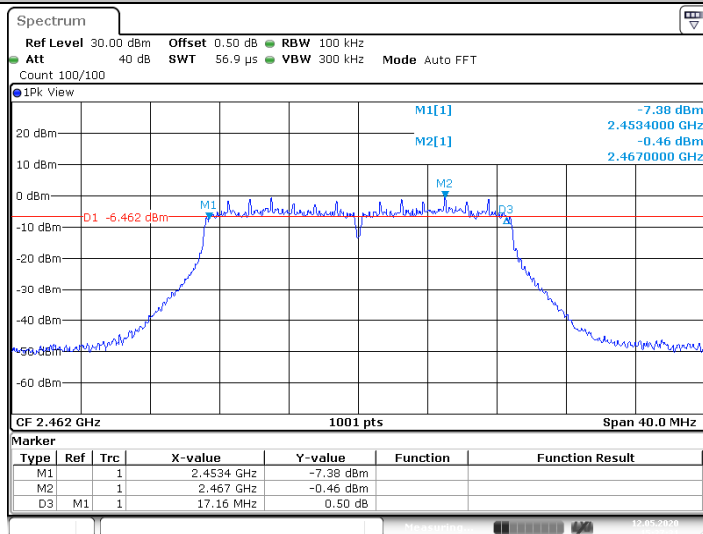

Date: 12.MAY.2020 15:27:31

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N40SISO_Ant1_2422

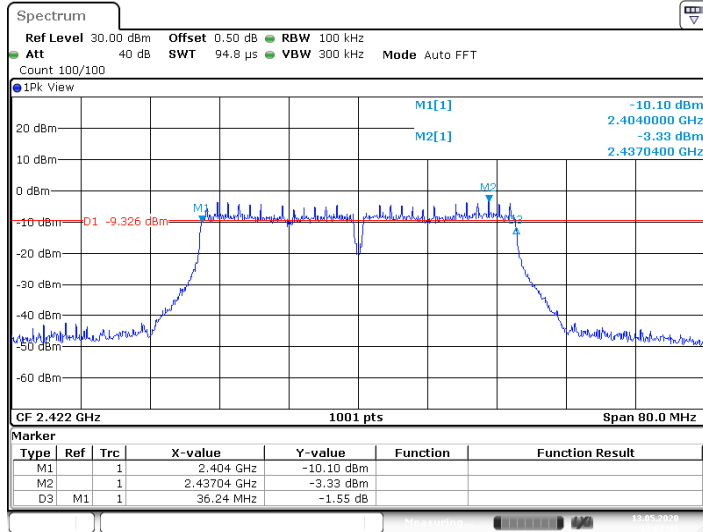


Date: 13.MAY.2020 12:02:40

11N40SISO_Ant2_2422

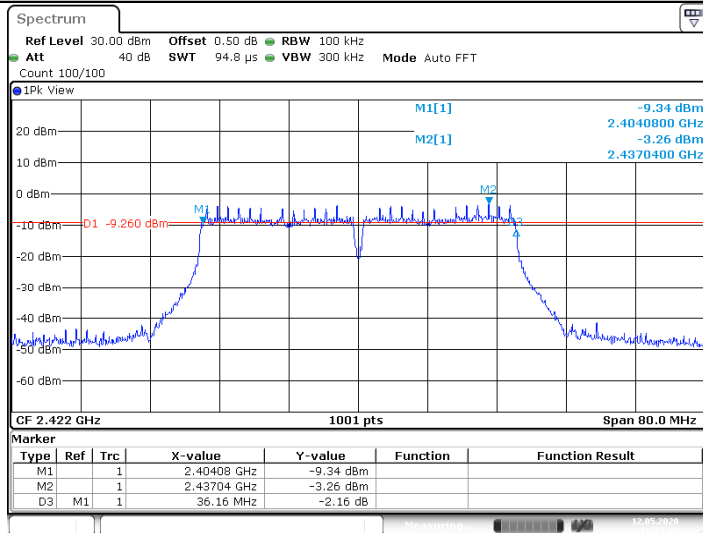

Date: 12.MAY.2020 15:31:37

11N40SISO_Ant1_2437

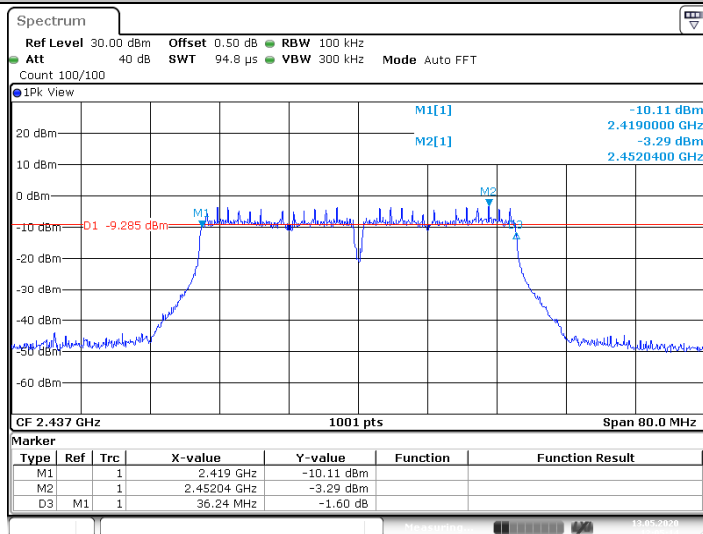

Date: 13.MAY.2020 12:05:14

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N40SISO_Ant2_2437

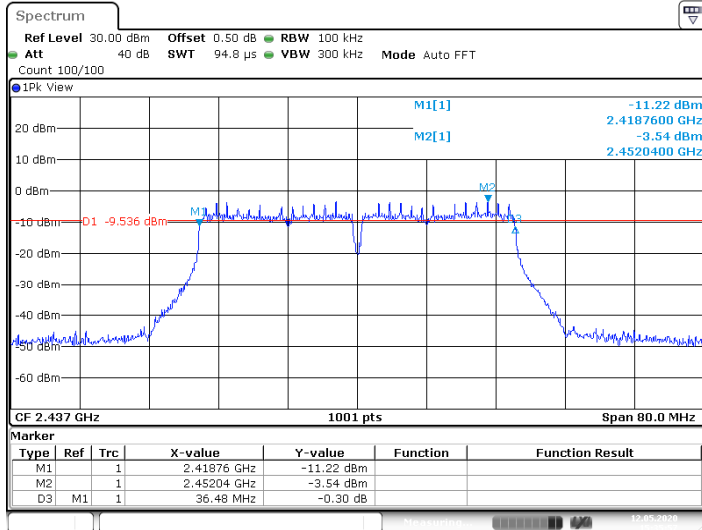


Date: 12.MAY.2020 15:35:16

11N40SISO_Ant1_2452

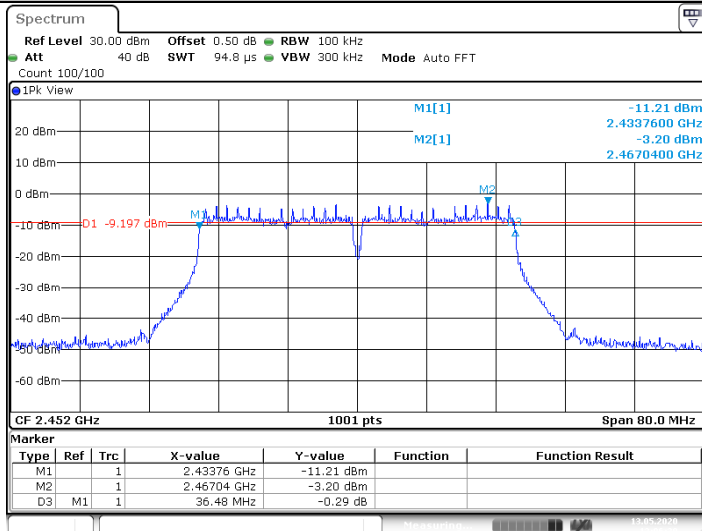

Date: 13.MAY.2020 12:06:29

11N40SISO_Ant2_2452

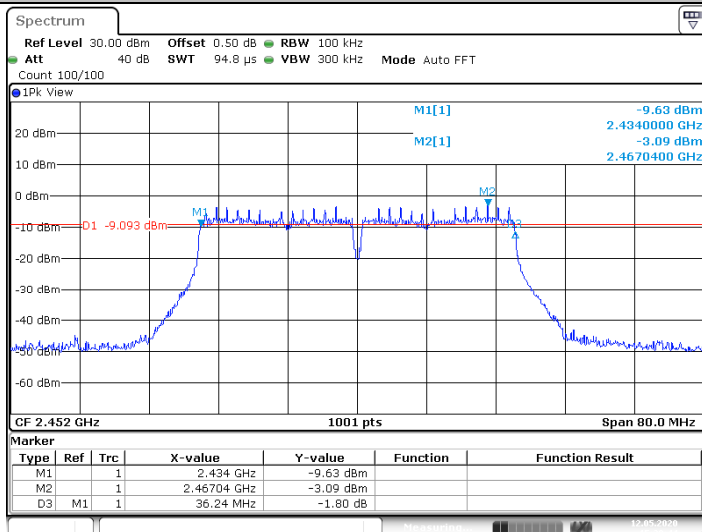

Date: 12.MAY.2020 15:38:45

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.5. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

| Section | Test Item | Limit | Frequency Range(MHz) |
|-------------------------|--------------------------------|-----------------|----------------------|
| CFR 47 FCC 15.247(b)(3) | Maximum conducted output power | 1 Watt or 30dBm | 2400~2483.5 |
| ISED RSS-247 5.4 d | EIRP | 4 Watt or 36dBm | 2400~2483.5 |

Test Configuration

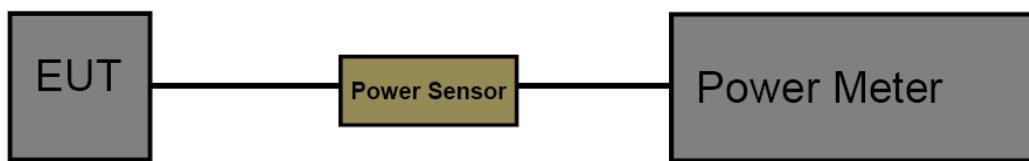

Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
4. Record the measurement data.

Test Mode

Please refer to the clause 2.3

Test Result



| Test Mode | Antenna | Channel | Result [dBm] | Limit [dBm] | Verdict |
|-----------|-------------|---------|--------------|-------------|---------|
| 11B | Ant1 | 2412 | 16.23 | <=30 | PASS |
| | Ant2 | 2412 | 17.06 | <=30 | PASS |
| | Ant1 | 2437 | 16.56 | <=30 | PASS |
| | Ant2 | 2437 | 17.33 | <=30 | PASS |
| | Ant1 | 2462 | 16.70 | <=30 | PASS |
| | Ant2 | 2462 | 17.51 | <=30 | PASS |
| 11G | Ant1 | 2412 | 16.42 | <=30 | PASS |
| | Ant2 | 2412 | 16.51 | <=30 | PASS |
| | Ant1 | 2437 | 16.65 | <=30 | PASS |
| | Ant2 | 2437 | 16.90 | <=30 | PASS |
| | Ant1 | 2462 | 16.77 | <=30 | PASS |
| | Ant2 | 2462 | 17.02 | <=30 | PASS |
| 11N20SISO | Ant1 | 2412 | 15.72 | <=30 | PASS |
| | Ant2 | 2412 | 15.66 | <=30 | PASS |
| | Ant1 | 2437 | 14.53 | <=30 | PASS |
| | Ant2 | 2437 | 14.58 | <=30 | PASS |
| | Ant1 | 2462 | 15.92 | <=30 | PASS |
| | Ant2 | 2462 | 16.09 | <=30 | PASS |
| 11N40SISO | Ant1 | 2422 | 14.46 | <=30 | PASS |
| | Ant2 | 2422 | 14.48 | <=30 | PASS |
| | Ant1 | 2437 | 14.57 | <=30 | PASS |
| | Ant2 | 2437 | 14.63 | <=30 | PASS |
| | Ant1 | 2452 | 14.61 | <=30 | PASS |
| | Ant2 | 2452 | 14.80 | <=30 | PASS |
| 11N20MIMO | Ant1 + Ant2 | 2412 | 18.70 | <=29.48 | PASS |
| | | 2437 | 17.57 | <=29.48 | PASS |
| | | 2462 | 19.00 | <=29.48 | PASS |
| 11N40MIMO | Ant1 + Ant2 | 2422 | 17.50 | <=29.48 | PASS |
| | | 2437 | 17.60 | <=29.48 | PASS |
| | | 2452 | 17.70 | <=29.48 | PASS |

Note: Test results increased RF cable loss by 0.5dB.

$$MIMO = (Ant1 + Ant2) / 2$$

$$\text{The MIMO Directional Gain} = 6.52\text{dBi} > 6\text{dBi. So } P_{out} = P_{limit} - (G_{TX} - 6) = 30 - 0.52 = 29.48\text{dBm}$$




3.6. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

| Test Item | Limit | Frequency Range(MHz) |
|------------------------|--------------------|----------------------|
| Power Spectral Density | 8dBm(in any 3 kHz) | 2400~2483.5 |

Test Configuration

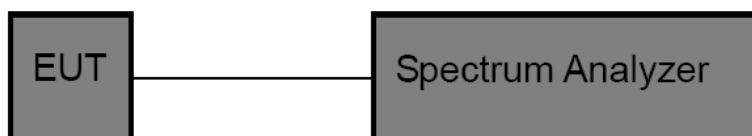

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: 3 kHz
Set the VBW to: 10 kHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3

**Test Result**

| Test Mode | Antenna | Channel | Result [dBm/3kHz] | Limit [dBm/3kHz] | Verdict |
|-----------|-------------|---------|-------------------|------------------|---------|
| 11B | Ant1 | 2412 | -15.47 | <=8 | PASS |
| | Ant2 | 2412 | -18.98 | <=8 | PASS |
| | Ant1 | 2437 | -15.05 | <=8 | PASS |
| | Ant2 | 2437 | -18.55 | <=8 | PASS |
| | Ant1 | 2462 | -14.97 | <=8 | PASS |
| | Ant2 | 2462 | -17.72 | <=8 | PASS |
| 11G | Ant1 | 2412 | -20.53 | <=8 | PASS |
| | Ant2 | 2412 | -22.00 | <=8 | PASS |
| | Ant1 | 2437 | -20.25 | <=8 | PASS |
| | Ant2 | 2437 | -19.71 | <=8 | PASS |
| | Ant1 | 2462 | -13.47 | <=8 | PASS |
| | Ant2 | 2462 | -20.59 | <=8 | PASS |
| 11N20SISO | Ant1 | 2412 | -23.72 | <=8 | PASS |
| | Ant2 | 2412 | -23.54 | <=8 | PASS |
| | Ant1 | 2437 | -23.38 | <=8 | PASS |
| | Ant2 | 2437 | -23.03 | <=8 | PASS |
| | Ant1 | 2462 | -23.37 | <=8 | PASS |
| | Ant2 | 2462 | -22.84 | <=8 | PASS |
| 11N40SISO | Ant1 | 2422 | -24.96 | <=8 | PASS |
| | Ant2 | 2422 | -24.31 | <=8 | PASS |
| | Ant1 | 2437 | -24.19 | <=8 | PASS |
| | Ant2 | 2437 | -24.16 | <=8 | PASS |
| | Ant1 | 2452 | -24.03 | <=8 | PASS |
| | Ant2 | 2452 | -23.25 | <=8 | PASS |
| 11N20MIMO | Ant1 + Ant2 | 2412 | -20.62 | <=7.48 | PASS |
| | | 2437 | -20.19 | <=7.48 | PASS |
| | | 2462 | -20.09 | <=7.48 | PASS |
| 11N40MIMO | Ant1 + Ant2 | 2422 | -21.61 | <=7.48 | PASS |
| | | 2437 | -21.16 | <=7.48 | PASS |
| | | 2452 | -20.61 | <=7.48 | PASS |

Note : Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$


The Duty Cycle Correction Factor is compensated in the graph.

MIMO = $(\text{Ant1} + \text{Ant2})/2$

The MIMO Directional Gain = 6.52 dBi > 6 dBi. So $P_{\text{out}} = P_{\text{limit}} - (G_{\text{TX}} - 6) = 8 - 0.52 = 7.48 \text{ dBm}$




11B_Ant1_2412

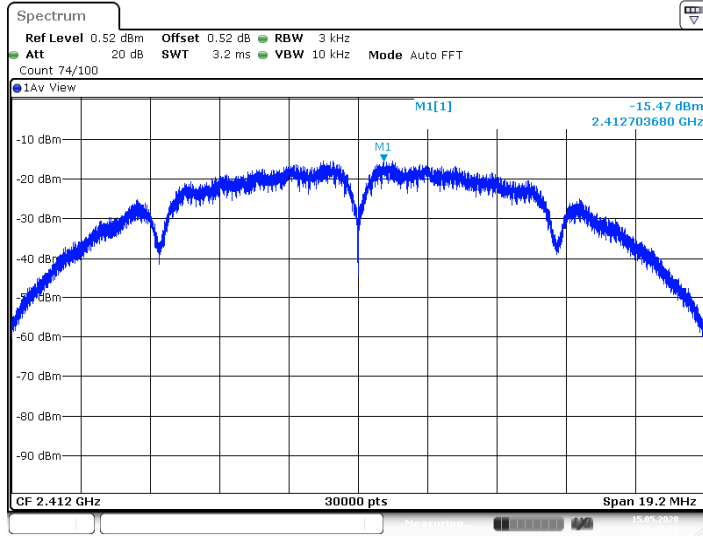


Date: 15.MAY.2020 14:47:58

11B_Ant2_2412

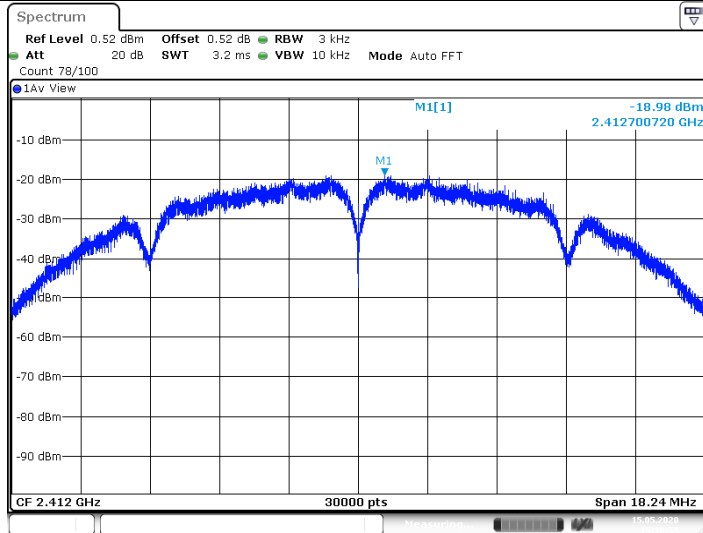

Date: 15.MAY.2020 15:18:51

11B_Ant1_2437

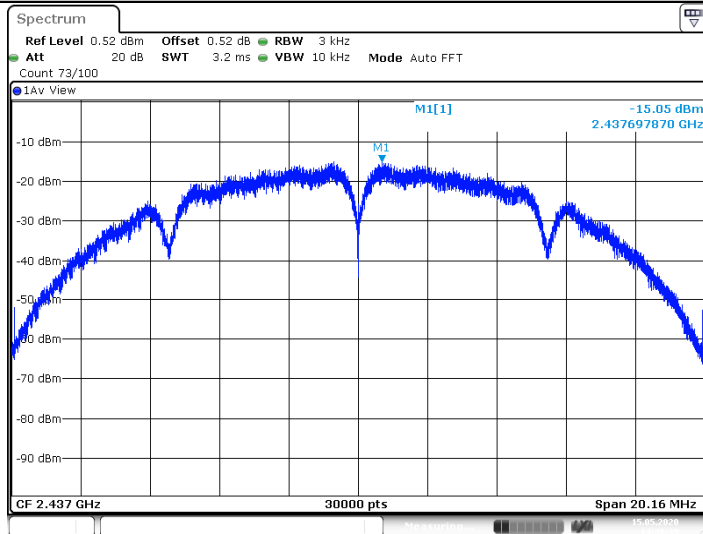

Date: 15.MAY.2020 14:48:39

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11B_Ant2_2437

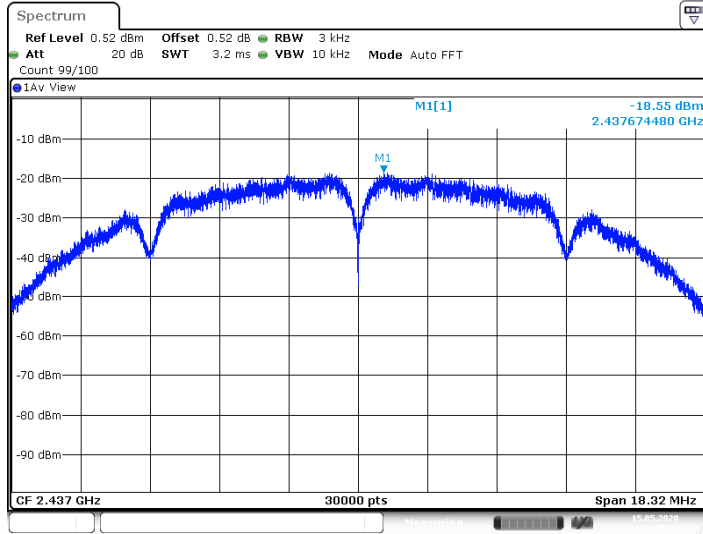


Date: 15.MAY.2020 15:19:32

11B_Ant1_2462

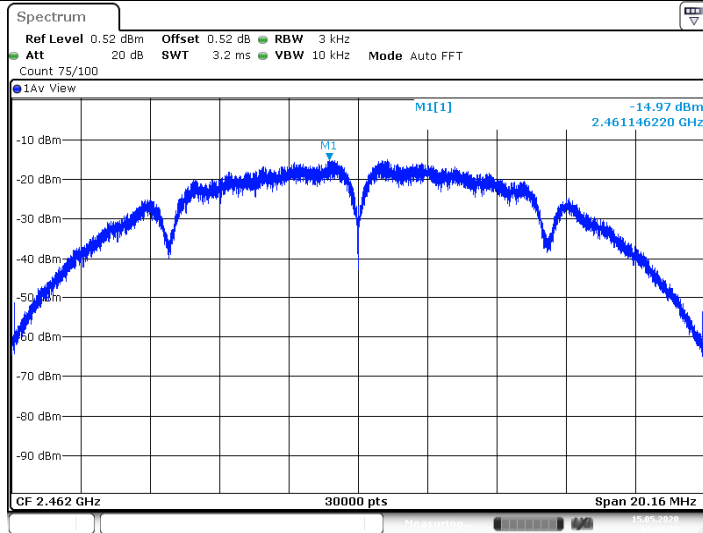

Date: 15.MAY.2020 14:49:22

11B_Ant2_2462

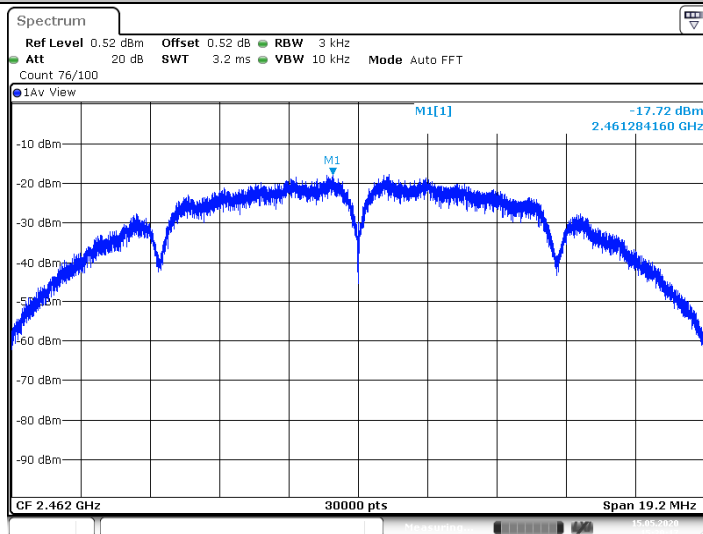

Date: 15.MAY.2020 15:20:16

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn






11G_Ant1_2412

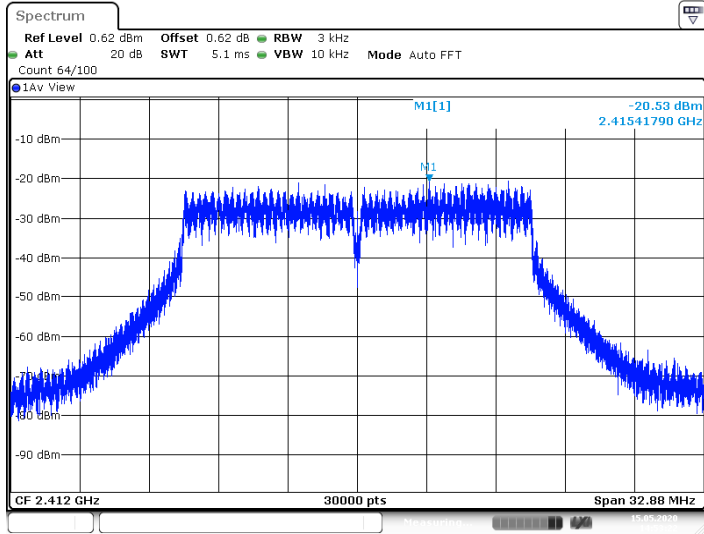


Date: 15.MAY.2020 14:53:21

11G_Ant2_2412

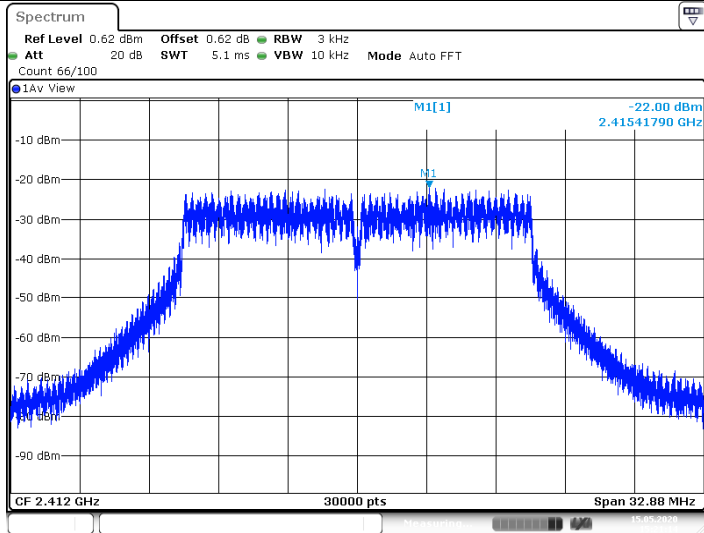

Date: 15.MAY.2020 15:21:14

11G_Ant1_2437

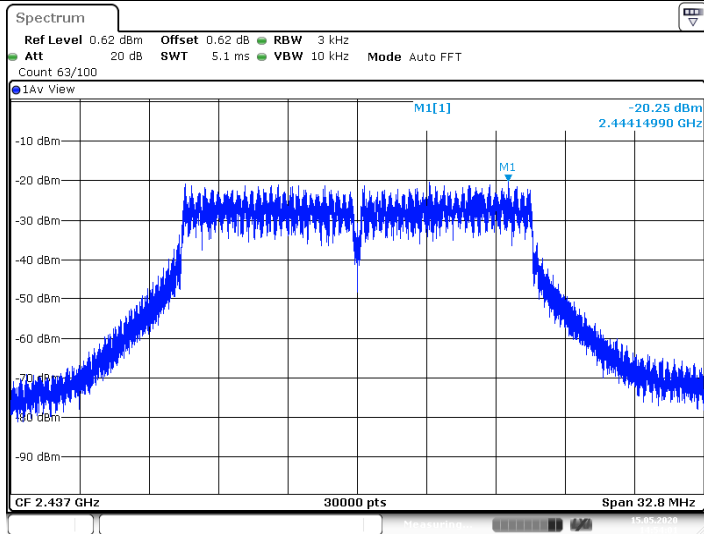

Date: 15.MAY.2020 14:54:01

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




11G_Ant2_2437

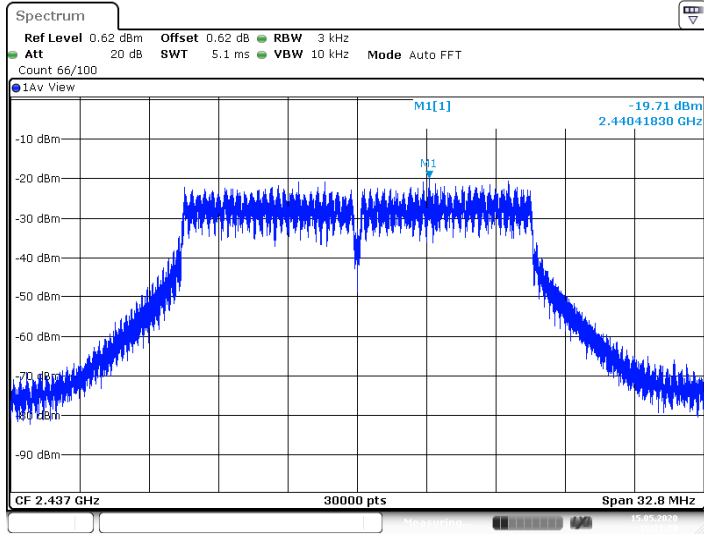


Date: 15.MAY.2020 15:21:50

11G_Ant1_2462

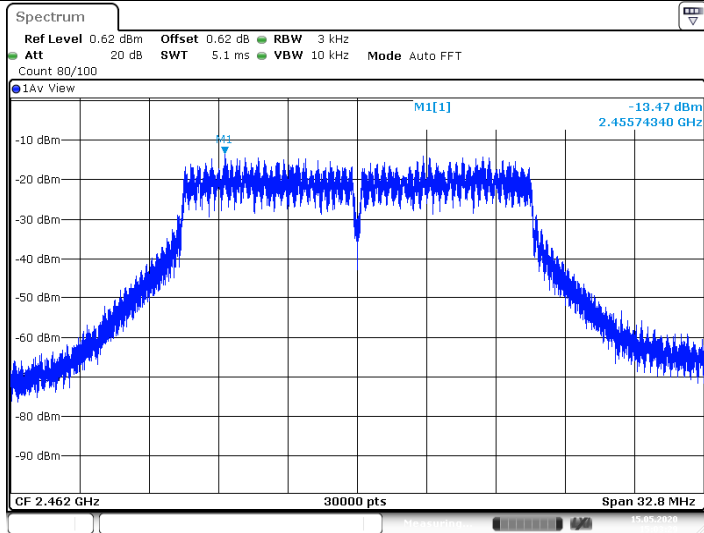

Date: 15.MAY.2020 15:03:29

11G_Ant2_2462

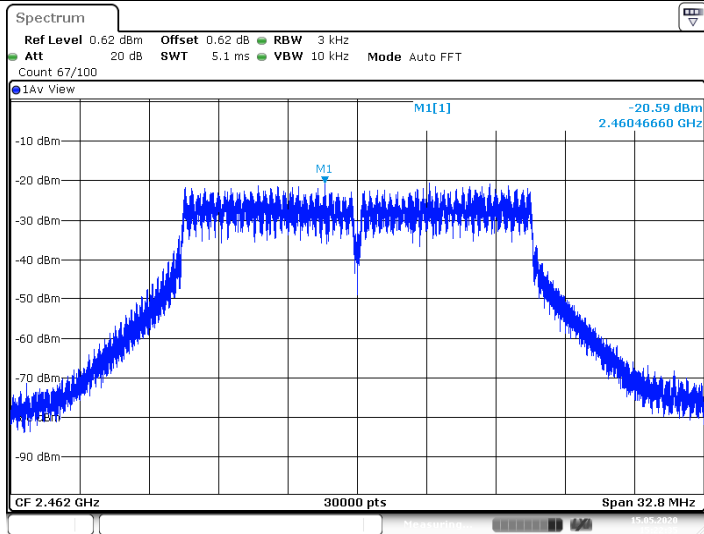

Date: 15.MAY.2020 15:22:35

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant1_2412

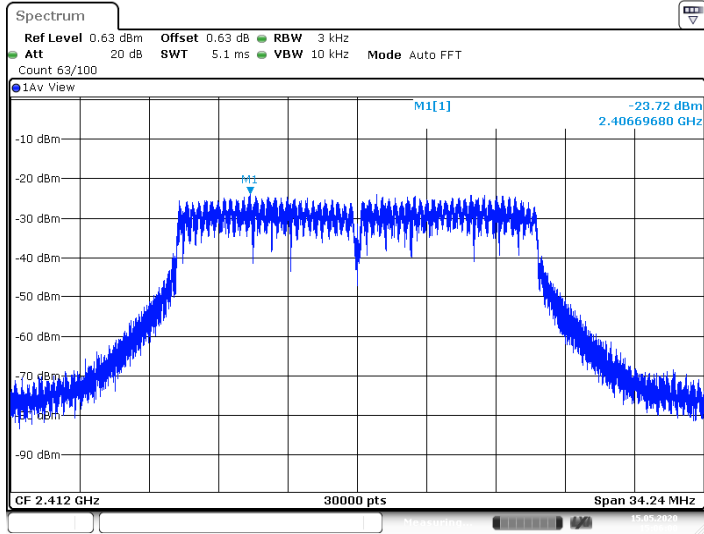


Date: 15.MAY.2020 15:06:00

11N20SISO_Ant2_2412

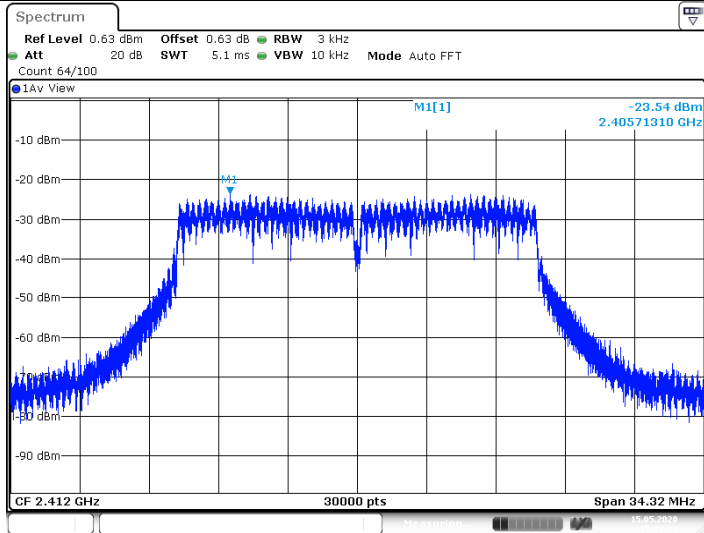

Date: 15.MAY.2020 15:23:24

11N20SISO_Ant1_2437

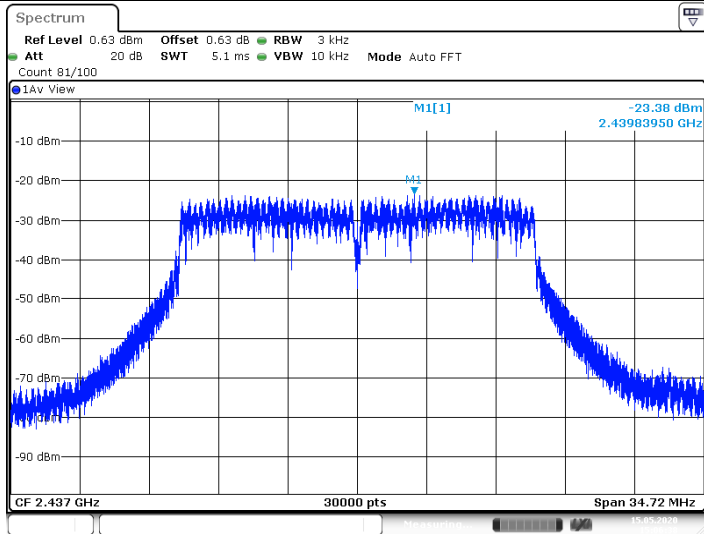

Date: 15.MAY.2020 15:06:38

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant2_2437

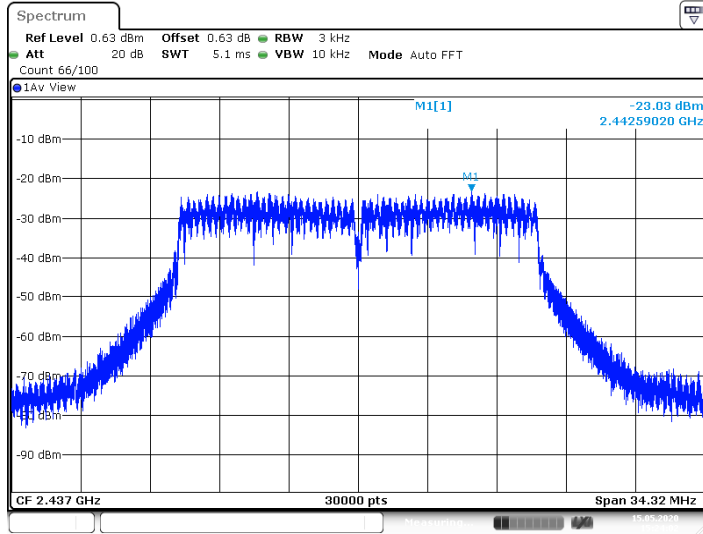


Date: 15.MAY.2020 15:24:03

11N20SISO_Ant1_2462

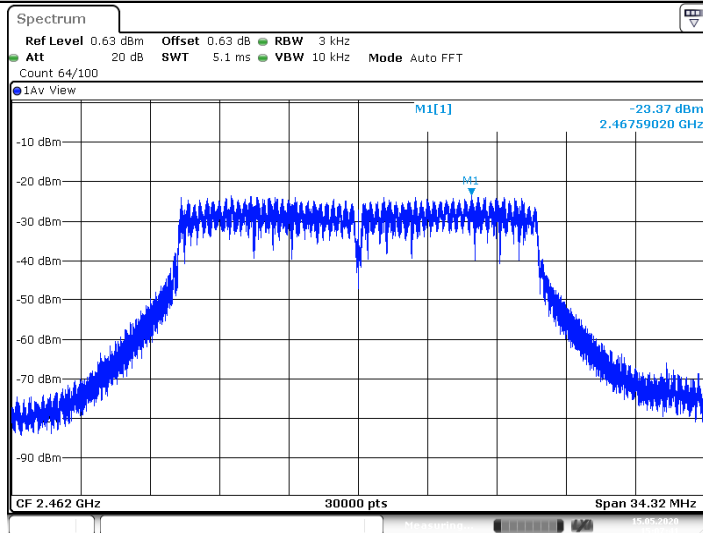

Date: 15.MAY.2020 15:07:41

11N20SISO_Ant2_2462

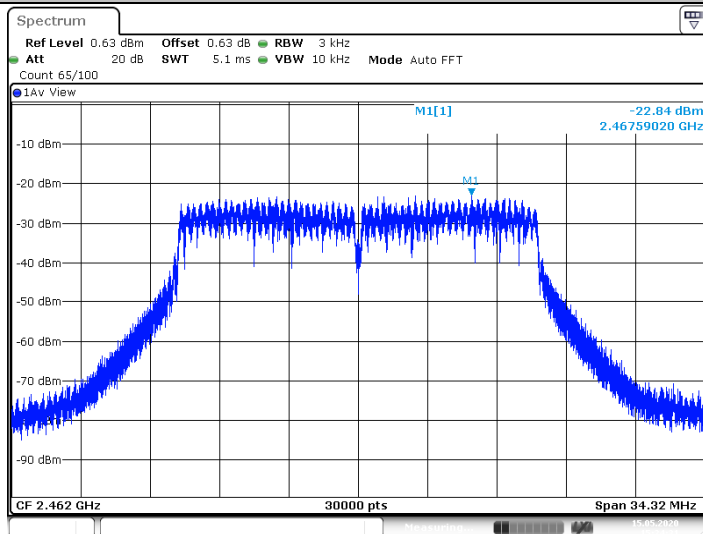

Date: 15.MAY.2020 15:24:32

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




11N40SISO_Ant1_2422

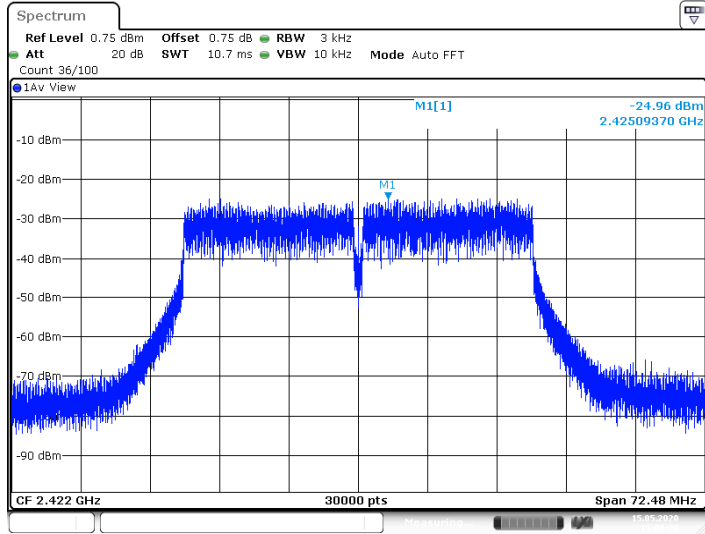


Date: 15.MAY.2020 15:08:30

11N40SISO_Ant2_2422

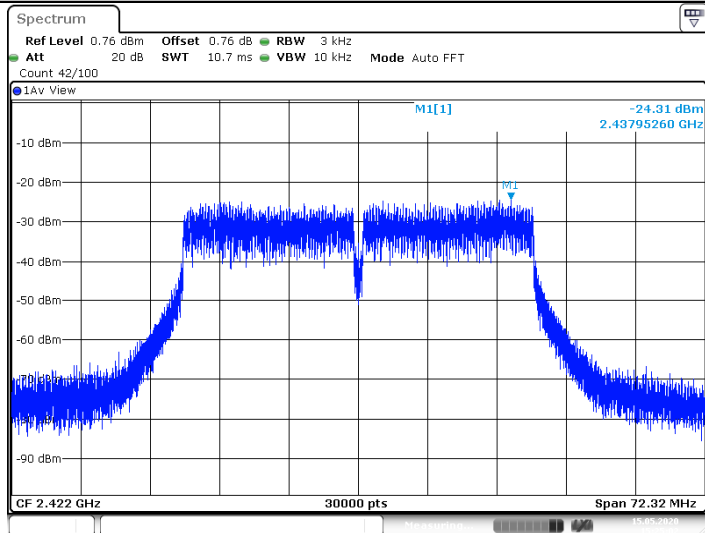

Date: 15.MAY.2020 15:25:02

11N40SISO_Ant1_2437

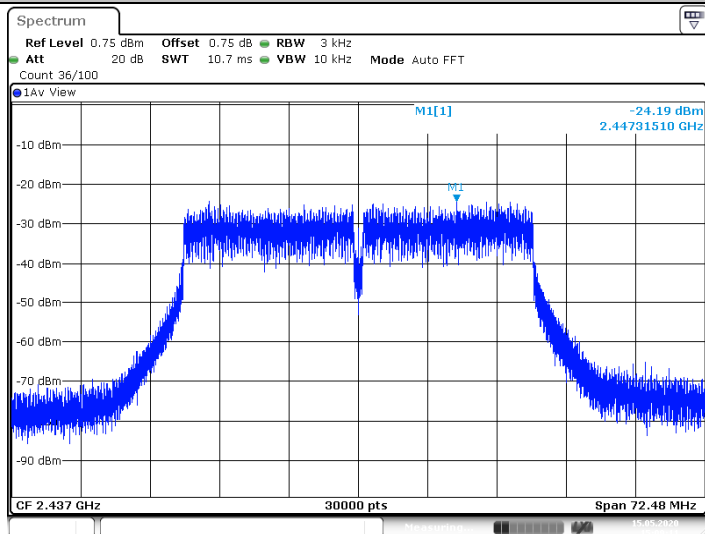

Date: 15.MAY.2020 15:09:11

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N40SISO_Ant2_2437

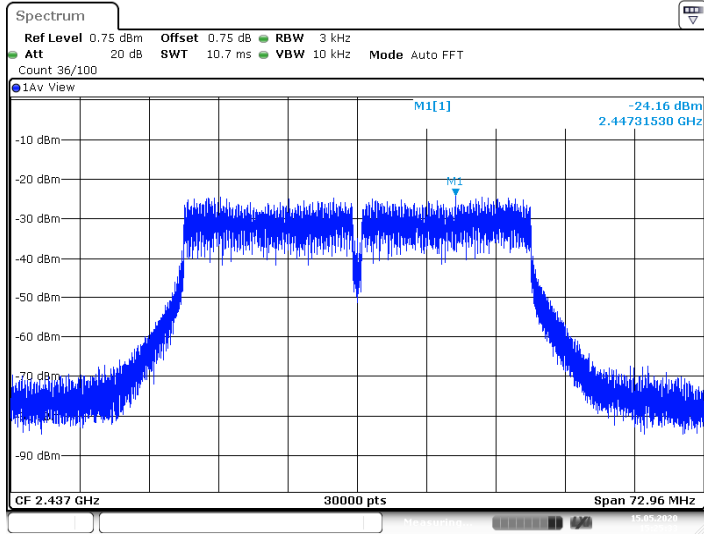


Date: 15.MAY.2020 15:25:34

11N40SISO_Ant1_2452

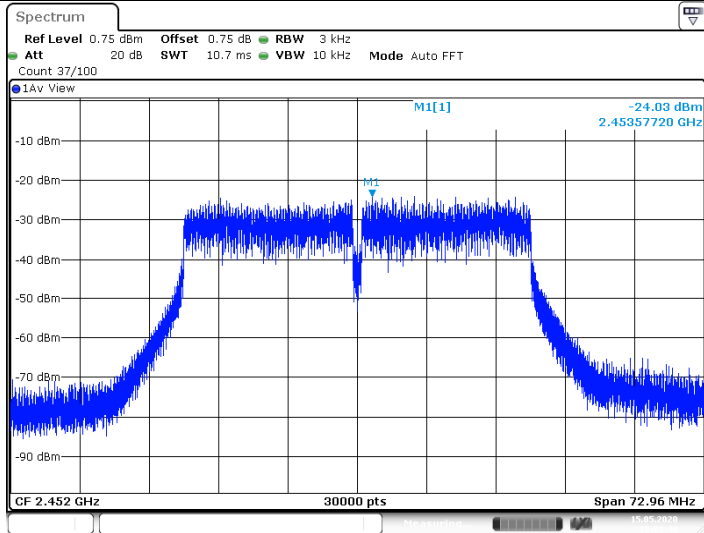

Date: 15.MAY.2020 15:09:40

11N40SISO_Ant2_2452

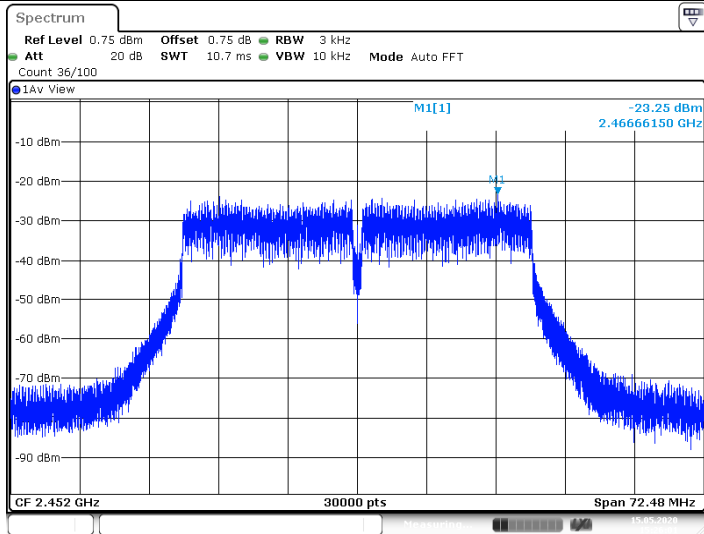

Date: 15.MAY.2020 15:26:01

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3.7. Duty Cycle

Limit

None, for report purposes only.

Test Configuration

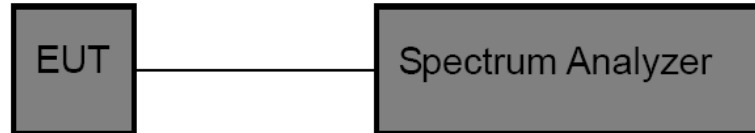

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to DTS channel center frequency.
Set the span to 0Hz
Set the RBW to 10MHz
Set the VBW to 10MHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.3

**Test Result**

| Test Mode | Antenna | Channel | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | 1/T Minimum VBW (kHz) | Final setting For VBW (kHz) |
|-----------|---------|---------|----------------------------|--------------------------|----------------|-----------------------|-----------------------------|
| 11B | Ant1 | 2412 | 12.15 | 12.21 | 99.51 | 0.08 | 0.01 |
| | Ant2 | 2412 | 12.15 | 12.21 | 99.53 | 0.08 | 0.01 |
| | Ant1 | 2437 | 12.15 | 12.21 | 99.53 | 0.08 | 0.01 |
| | Ant2 | 2437 | 12.15 | 12.21 | 99.53 | 0.08 | 0.01 |
| | Ant1 | 2462 | 12.15 | 12.21 | 99.51 | 0.08 | 0.01 |
| | Ant2 | 2462 | 12.15 | 12.21 | 99.53 | 0.08 | 0.01 |
| 11G | Ant1 | 2412 | 2.01 | 2.06 | 97.33 | 0.50 | 0.3 |
| | Ant2 | 2412 | 2.01 | 2.06 | 97.33 | 0.50 | 0.3 |
| | Ant1 | 2437 | 2.01 | 2.06 | 97.33 | 0.50 | 0.3 |
| | Ant2 | 2437 | 2.01 | 2.07 | 97.34 | 0.50 | 0.3 |
| | Ant1 | 2462 | 2.01 | 2.06 | 97.33 | 0.50 | 0.3 |
| | Ant2 | 2462 | 2.01 | 2.06 | 97.33 | 0.50 | 0.3 |
| 11N20SISO | Ant1 | 2412 | 1.88 | 1.93 | 97.15 | 0.53 | 0.3 |
| | Ant2 | 2412 | 1.87 | 1.93 | 97.15 | 0.53 | 0.3 |
| | Ant1 | 2437 | 1.87 | 1.93 | 97.15 | 0.53 | 0.3 |
| | Ant2 | 2437 | 1.87 | 1.93 | 97.15 | 0.53 | 0.3 |
| | Ant1 | 2462 | 1.87 | 1.93 | 97.15 | 0.53 | 0.3 |
| | Ant2 | 2462 | 1.87 | 1.93 | 97.15 | 0.53 | 0.3 |
| 11N40SISO | Ant1 | 2422 | 0.92 | 0.97 | 94.48 | 1.09 | 1 |
| | Ant2 | 2422 | 0.92 | 0.98 | 94.23 | 1.09 | 1 |
| | Ant1 | 2437 | 0.92 | 0.98 | 94.36 | 1.09 | 1 |
| | Ant2 | 2437 | 0.92 | 0.98 | 94.36 | 1.09 | 1 |
| | Ant1 | 2452 | 0.92 | 0.98 | 94.36 | 1.09 | 1 |
| | Ant2 | 2452 | 0.92 | 0.98 | 94.36 | 1.09 | 1 |




11B_Ant1_2412

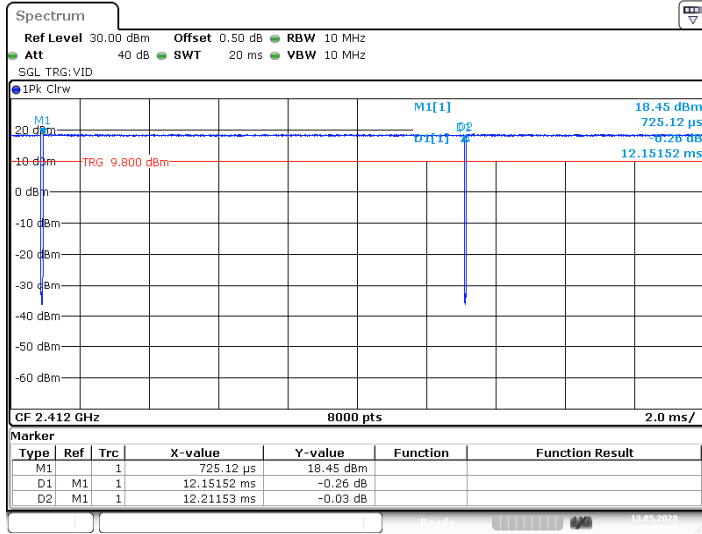


Date: 13.MAY.2020 11:22:09

11B_Ant2_2412

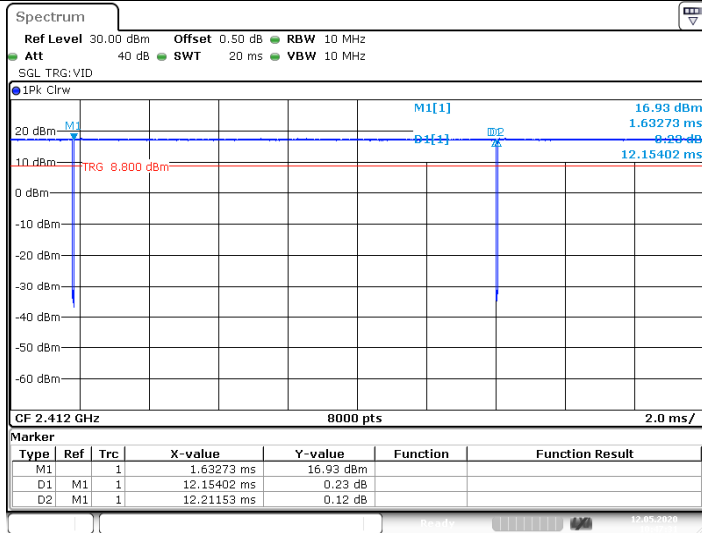

Date: 12.MAY.2020 10:47:31

11B_Ant1_2437

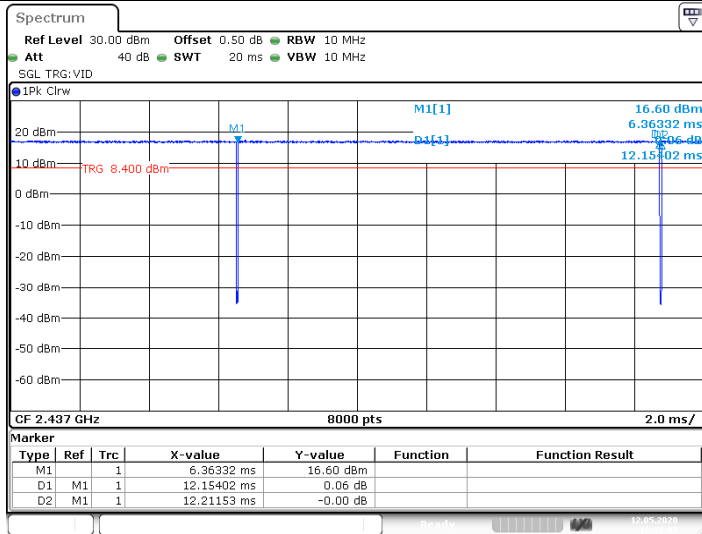

Date: 12.MAY.2020 12:43:07

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11B_Ant2_2437

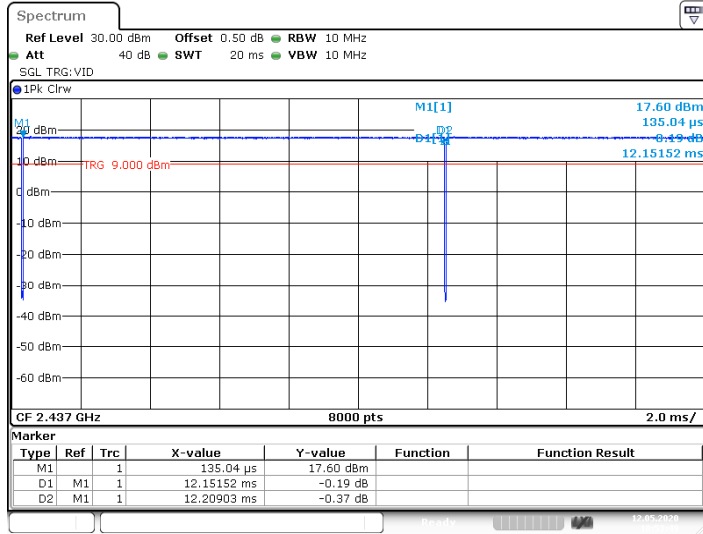


Date: 12.MAY.2020 10:53:49

11B_Ant1_2462

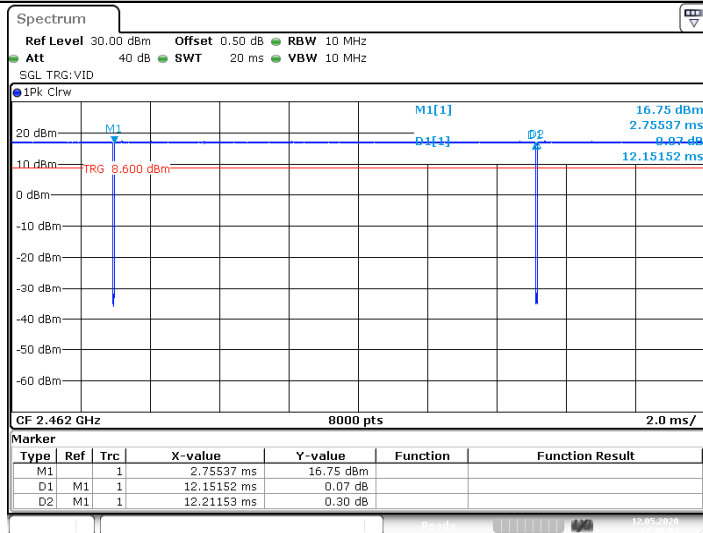

Date: 12.MAY.2020 12:45:54

11B_Ant2_2462

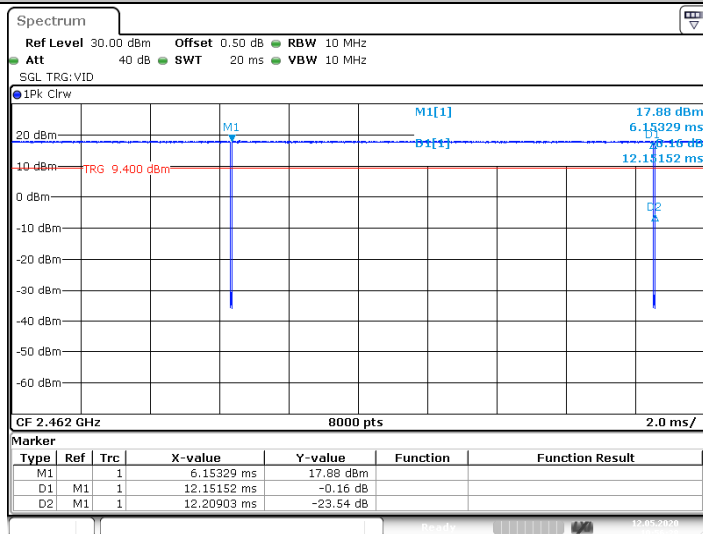

Date: 12.MAY.2020 10:56:29

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11G_Ant1_2412

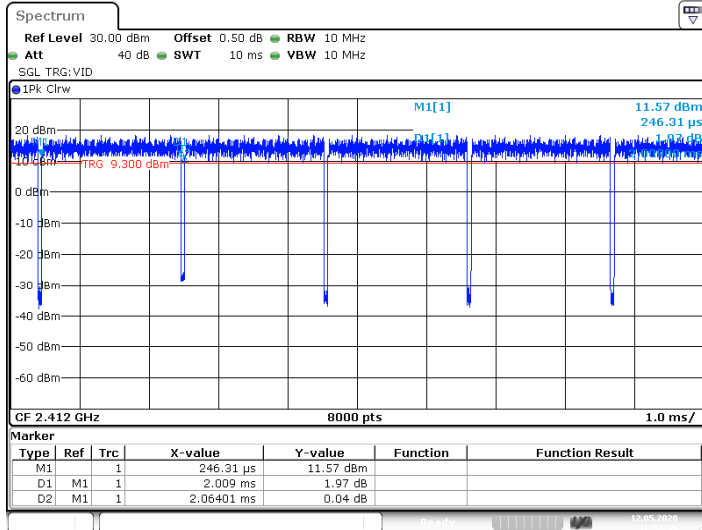


Date: 12.MAY.2020 12:54:38

11G_Ant2_2412

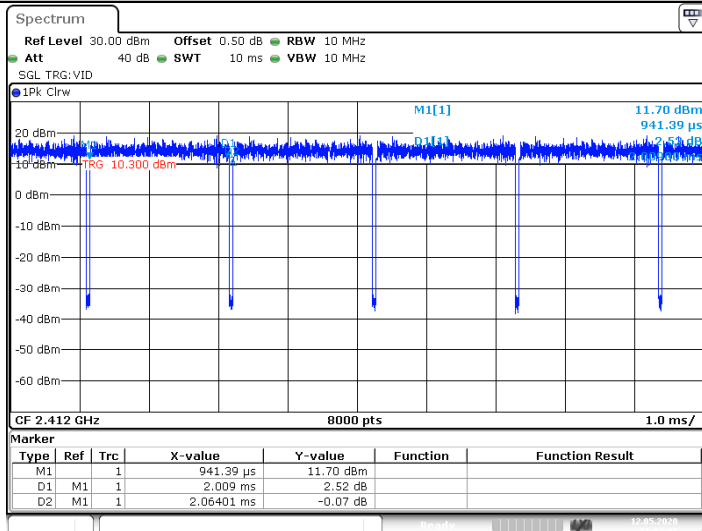

Date: 12.MAY.2020 11:04:07

11G_Ant1_2437

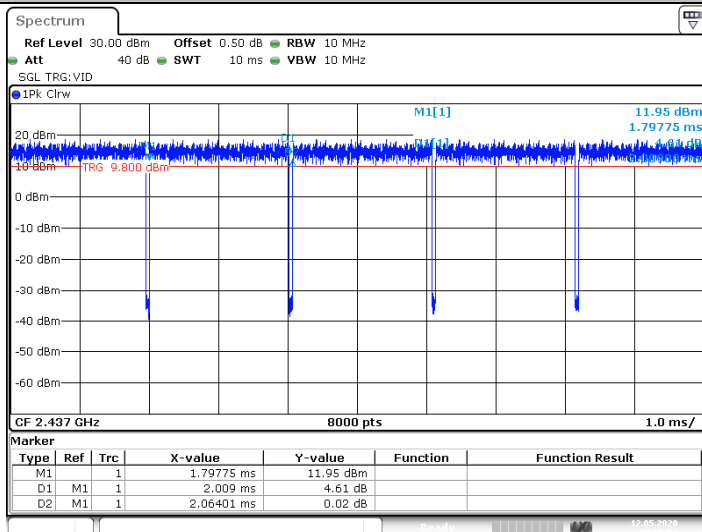

Date: 12.MAY.2020 12:58:53

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11G_Ant2_2437

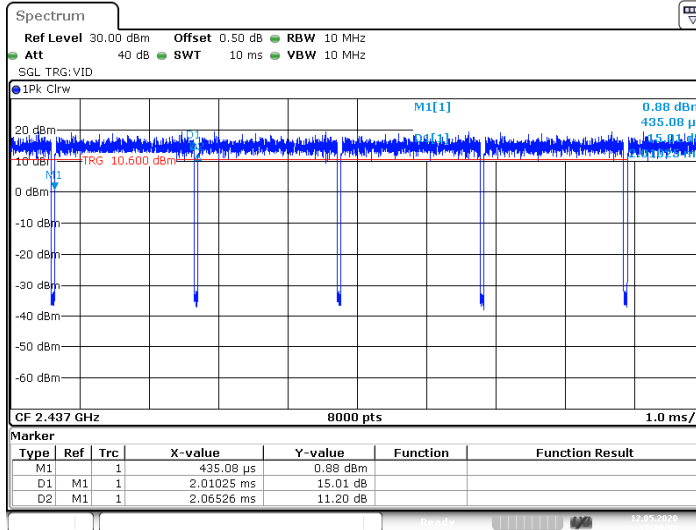


Date: 12.MAY.2020 11:10:58

11G_Ant1_2462

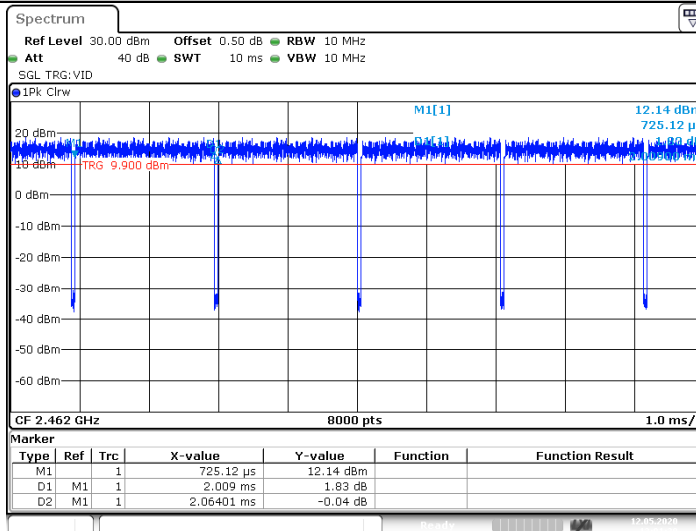

Date: 12.MAY.2020 13:01:30

11G_Ant2_2462

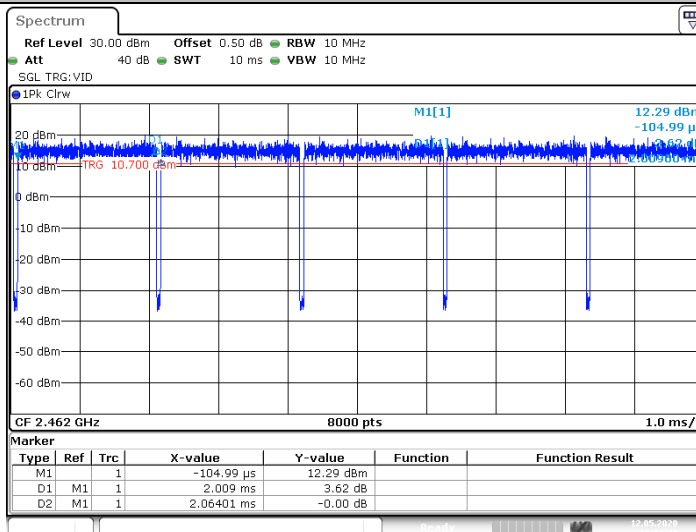

Date: 12.MAY.2020 11:13:47

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant1_2412

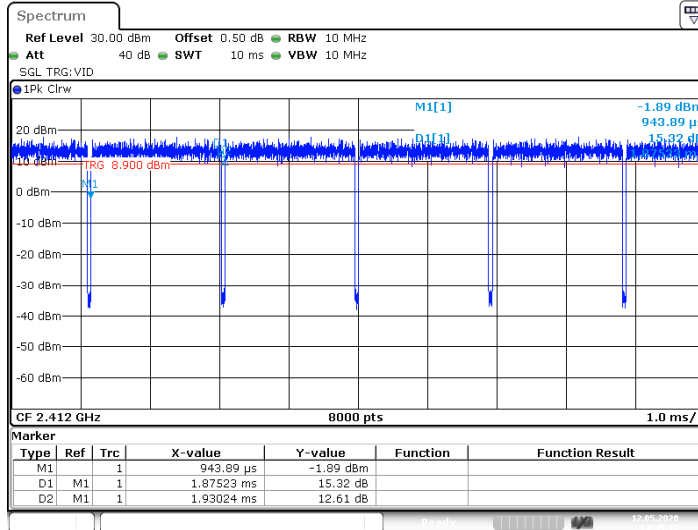


Date: 12.MAY.2020 14:45:16

11N20SISO_Ant2_2412

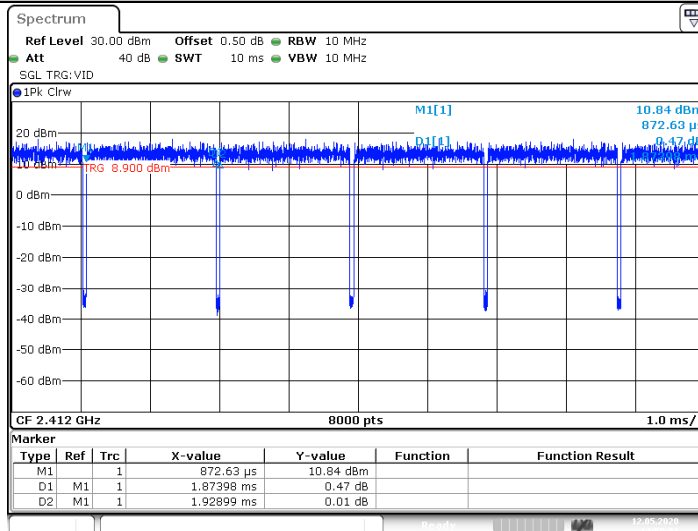

Date: 12.MAY.2020 14:50:01

11N20SISO_Ant1_2437

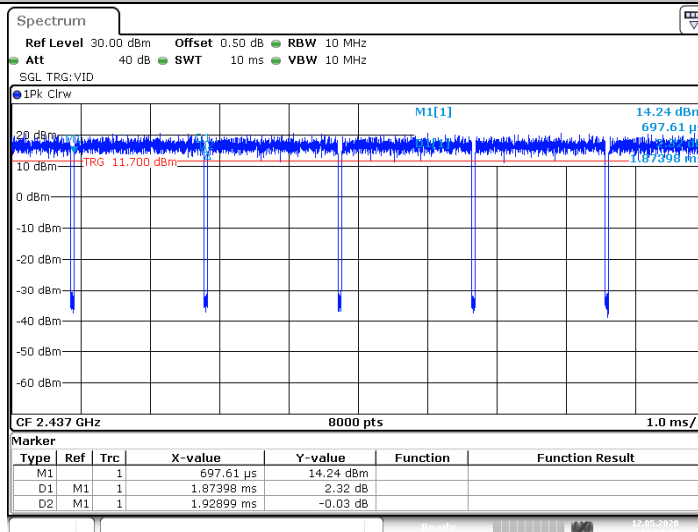

Date: 12.MAY.2020 14:54:15

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N20SISO_Ant2_2437

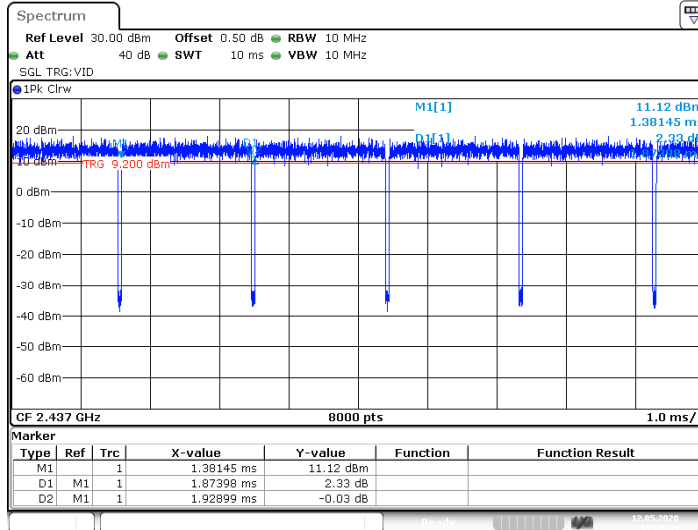


Date: 12.MAY.2020 15:22:31

11N20SISO_Ant1_2462

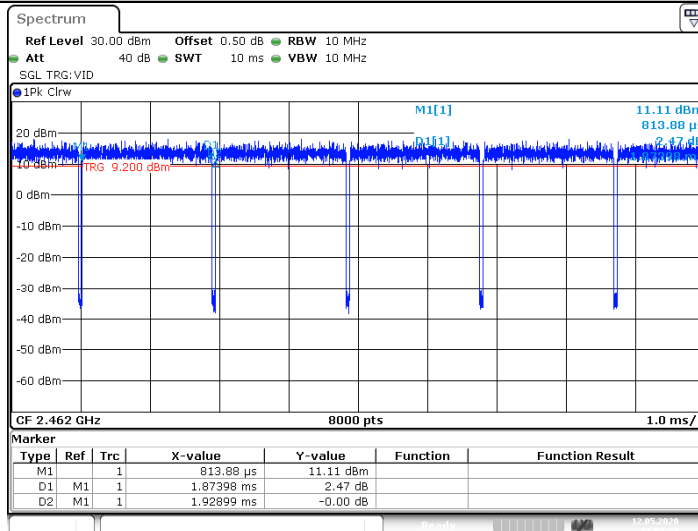

Date: 12.MAY.2020 14:57:56

11N20SISO_Ant2_2462

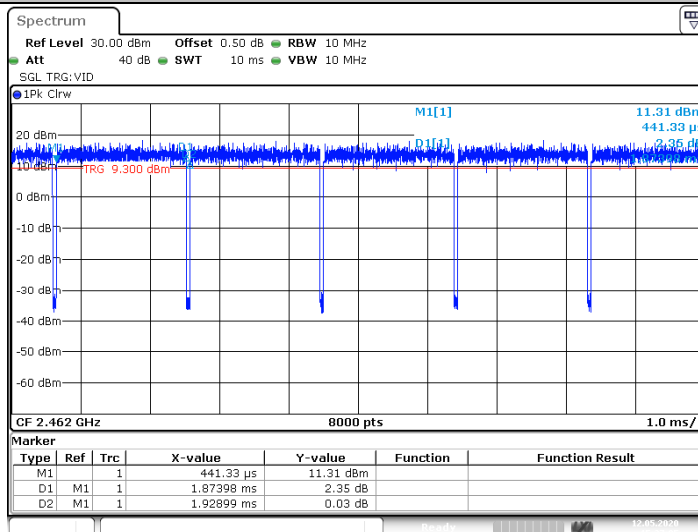

Date: 12.MAY.2020 15:27:05

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N40SISO_Ant1_2422

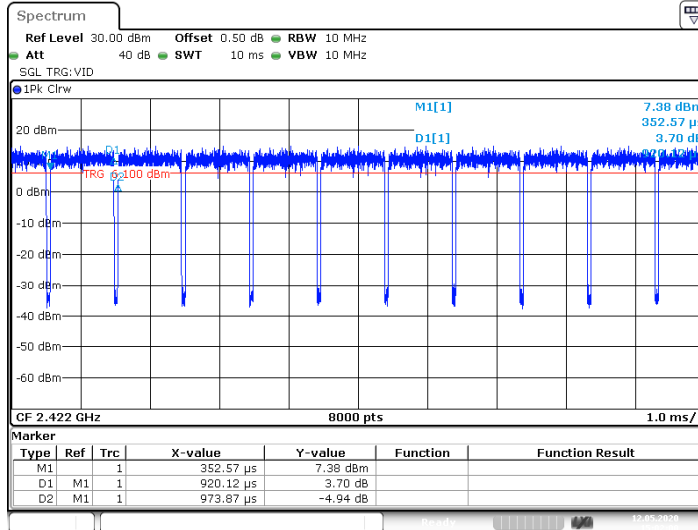


Date: 12.MAY.2020 15:02:00

11N40SISO_Ant2_2422

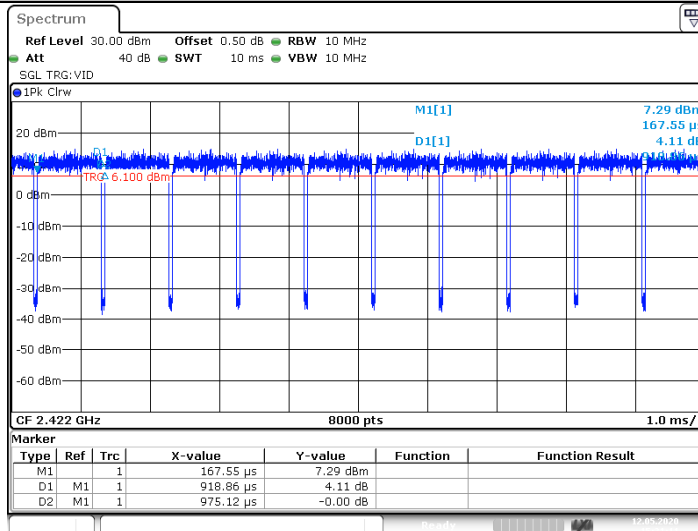

Date: 12.MAY.2020 15:31:11

11N40SISO_Ant1_2437

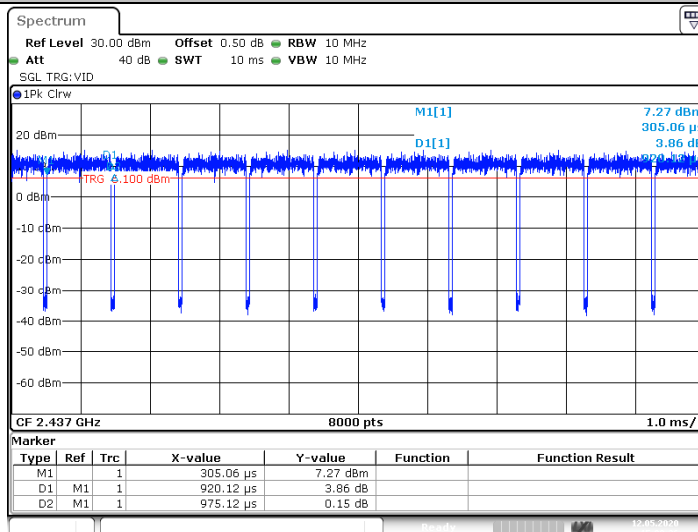

Date: 12.MAY.2020 15:09:25

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




11N40SISO_Ant2_2437

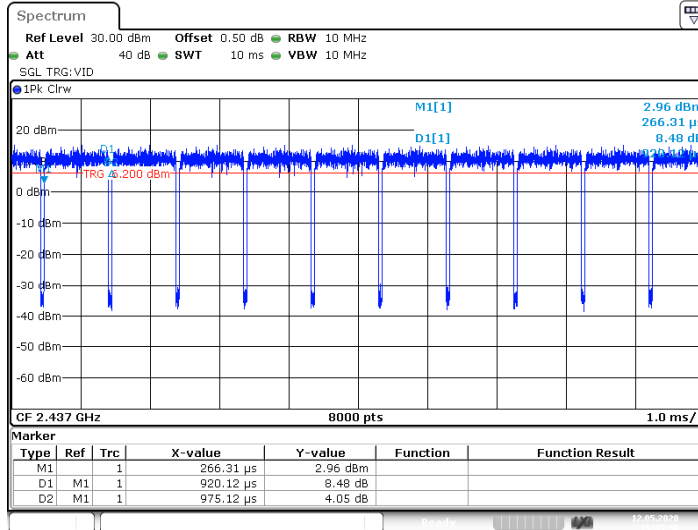


Date: 12.MAY.2020 15:35:30

11N40SISO_Ant1_2452

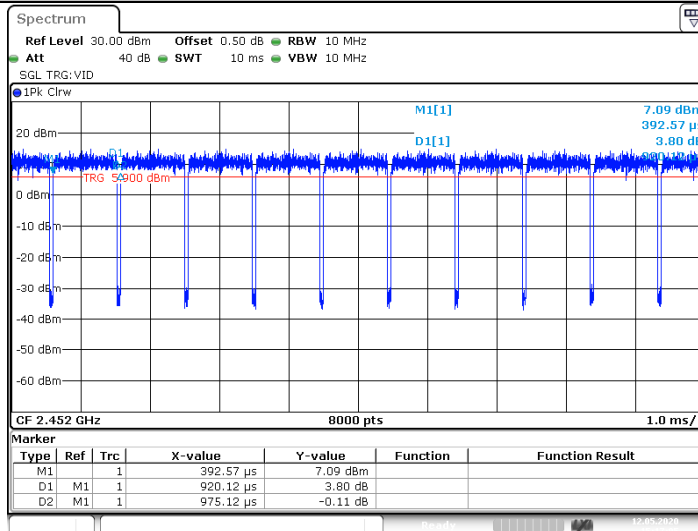

Date: 12.MAY.2020 15:17:04

11N40SISO_Ant2_2452

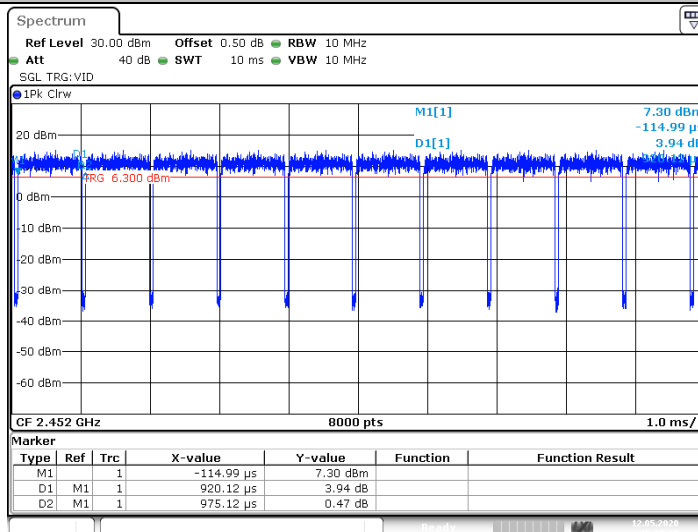

Date: 12.MAY.2020 15:38:18

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



3.8. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the single antenna less than 6dBi, The directional gain of the MIMO antenna greater than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****