


SK-626AG RF2.4GHz Keyboard

SPECIFICATIONS


Part 1.0: General Features

- Full size slim wireless keyboard
- Totally Wireless freedom
- 2.4GHz FSK Autolink technology
- 34 two way R F channels
- Operation distance of 6~10 meters for mouse and keyboard
- Nano receiver for this combo

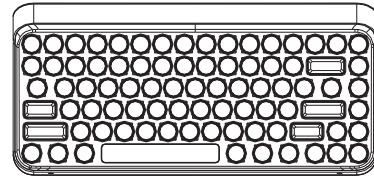


Part 2.0: Physical characteristics

SK-626AG

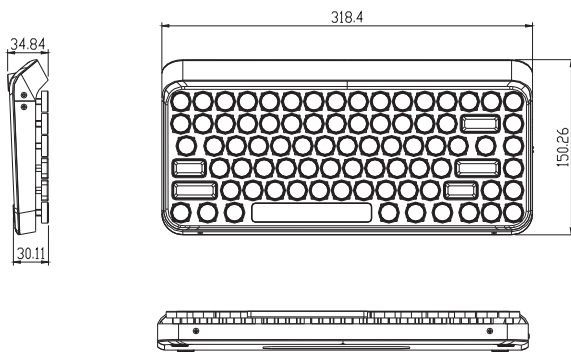

Keyboard



RECEIVER

Part 3.0: Electrical Specification

- Interface : USB 1.1
- Sensor report rate on mouse: 3000 times per second
- Operation angle: 360 degrees
- Operation distance: 6~10 meter for keyboard and mouse
- Receiver power requirement: 5V DC from USB port
- R F frequency: 2.4 Ghz (2.408~2.474 Ghz)
- R F modulation : F S K Auto-Link
- Hopping type : FHSS (frequency hopping spread spectrum)
- R F channel : 34 channels
- R F bandwidth : 2.0mHz
- Speed of transmit: 1M bps
- R F output power : 0dBm
- Receiver of sensitive: -85dBm

Battery

- Battery type: twoAAAalkaline for keyboard
- Battery consumption:
 - keyboard:3.0V
 - Keyboard:Operating Mode: ≤6 mA

Mechanical Performance

Operating force of wheel scrolling	20 ± 10gf
Operating force of keyboard keycaps	60 ± 15gf

Buttons

Keyboard : 86 standard keys,

Weight:

Keyboard: 516.2 ± 5 g (battery included)
Receiver: 2 ± 1 g

Multimedia Hotkeys functions:

- FN+ESC=Media Player
- FN+F1=Play/Pause
- FN+F2=Previous Track
- FN+F3=Next Track
- FN+F4=Volume Up
- FN+F5=Volume Down
- FN+F6=Mute
- FN+F7=Web home
- FN+F8=Search
- FN+F9=M y Favorite
- FN+F10=Email
- FN+F11=Screen Lock
- FN+F12=My computer

Part 4.0: Reliability

- Keyboard Button Switch Activation: 8,000,000 cycle
- Operating temperature: -5 ~ 40 degrees celsius
- Operating humidity: 20% - 90%

Part 5.0 System Requirement

- Windows 2000, Windows xp. Windows ME.
- Windows VISTA, Windows 7/8/10

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.