

ANNEX D TEST DATA

For

Project No.:	8134EU010302W
Client:	Autel Intelligent Technology Corp., Ltd.
Product Description:	ADAS Calibration Frame
Model No.:	IA700
FCC ID:	WQ8-DA2211
Technology:	Bluetooth BDR+EDR
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2023-11-16

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass


1. Duty Cycle



1.1 Ant1



1.1.1 Test Result



Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.884	3.749	76.93	1.14	0.04
		2441	DH5	2.885	3.750	76.93	1.14	0.01
		2480	DH5	2.884	3.749	76.93	1.14	0.04
$\pi/4$ -DQPSK	SISO	2402	2DH5	2.893	3.749	77.17	1.13	0.04
		2441	2DH5	2.893	3.749	77.17	1.13	0.04
		2480	2DH5	2.893	3.749	77.17	1.13	0.04
8DPSK	SISO	2402	3DH5	2.896	3.750	77.23	1.12	0.01
		2441	3DH5	2.895	3.749	77.22	1.12	0.01
		2480	3DH5	2.896	3.749	77.25	1.12	0.03


1.1.2 Test Graph

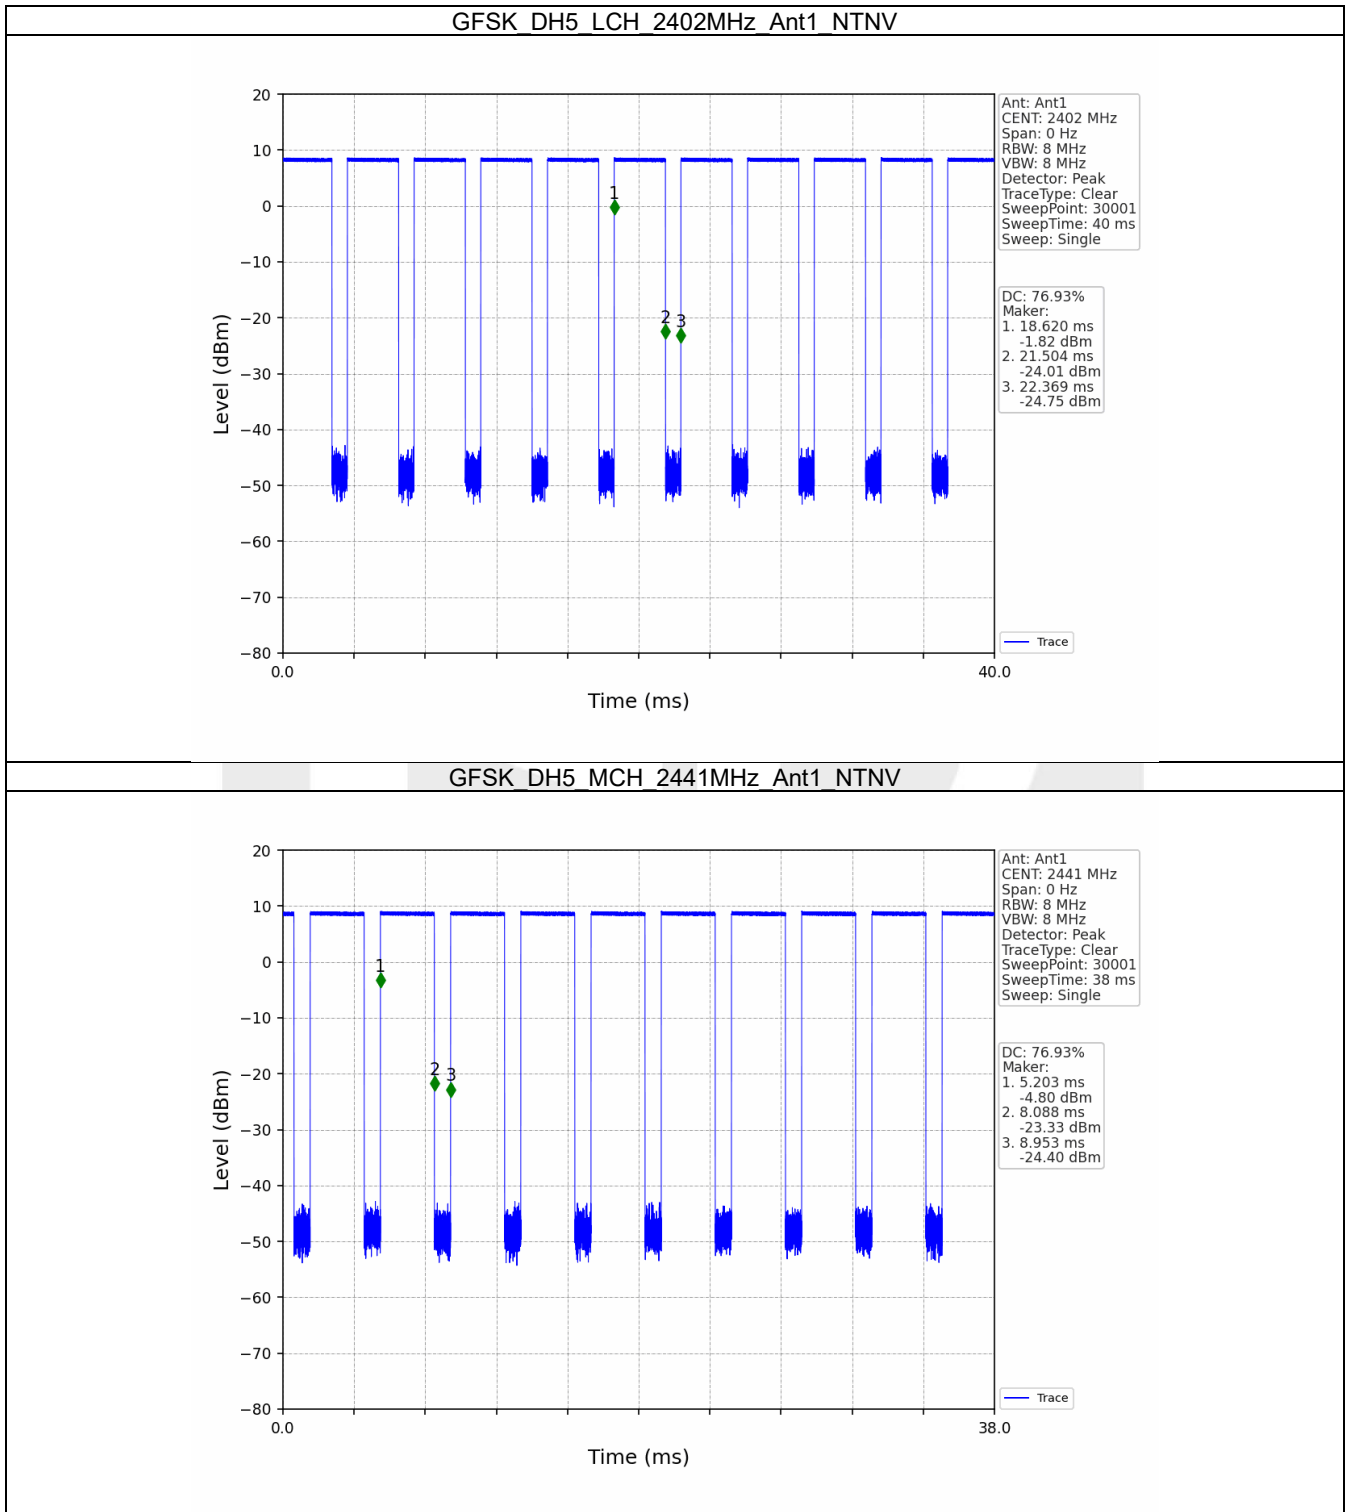

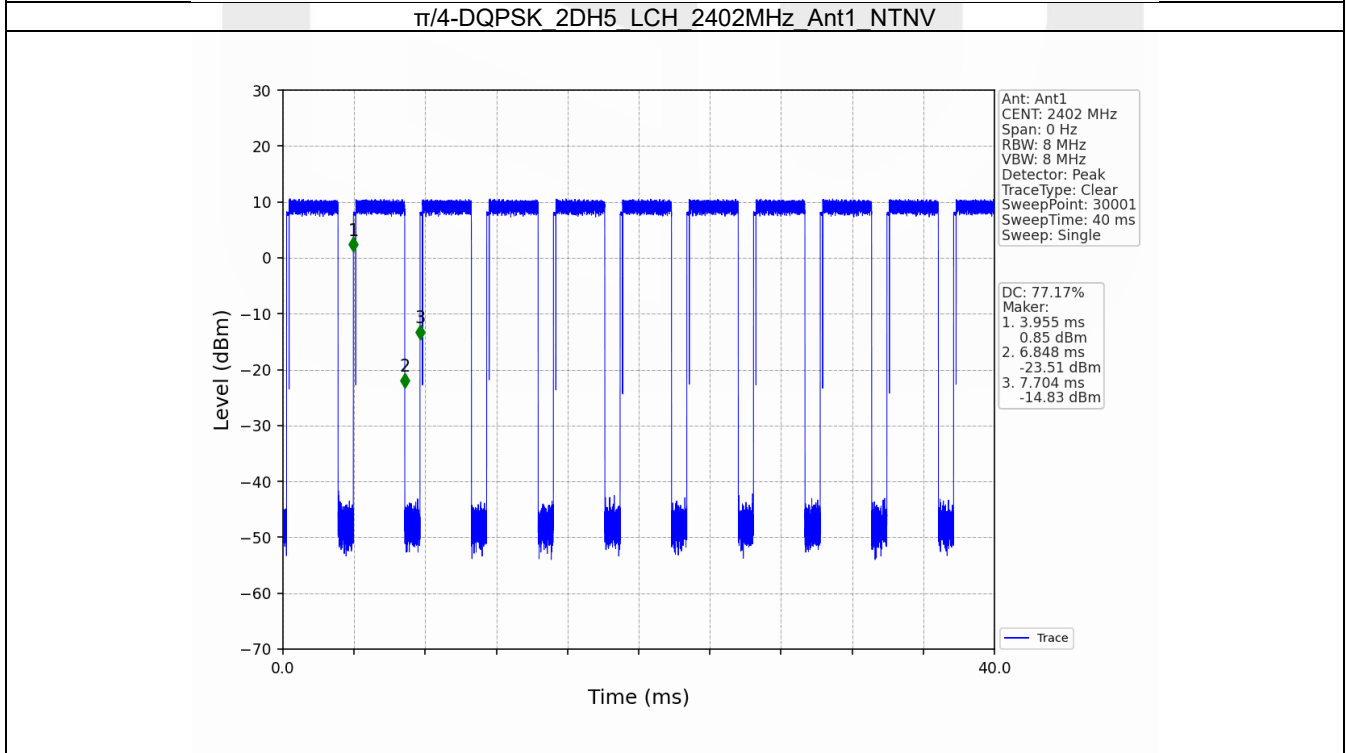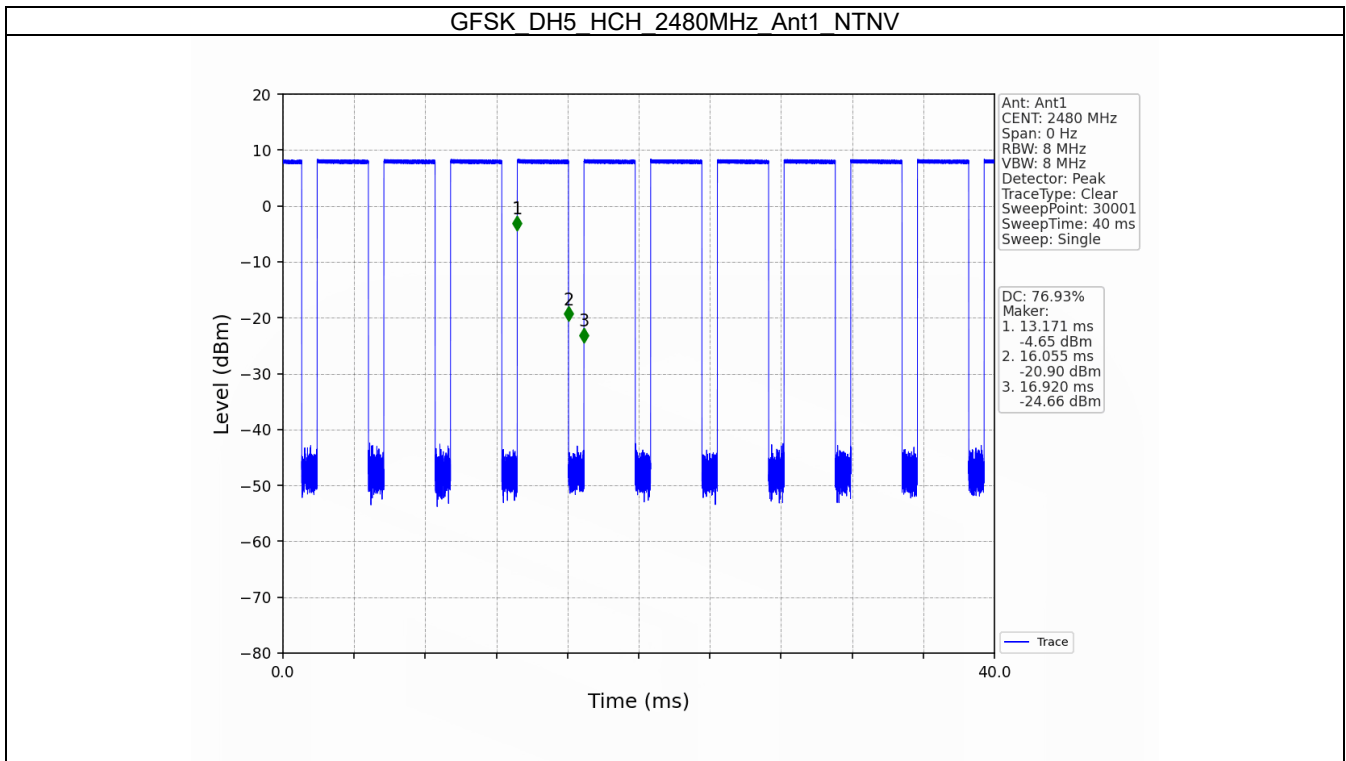

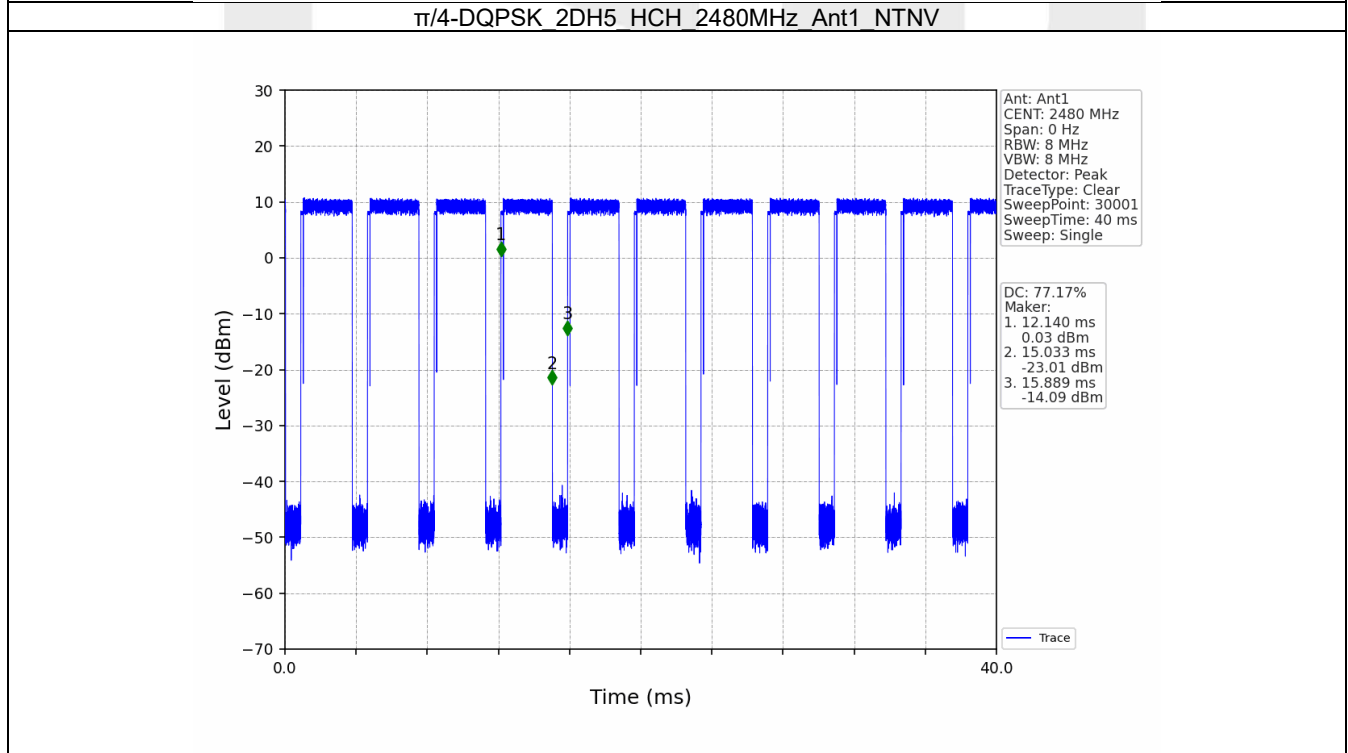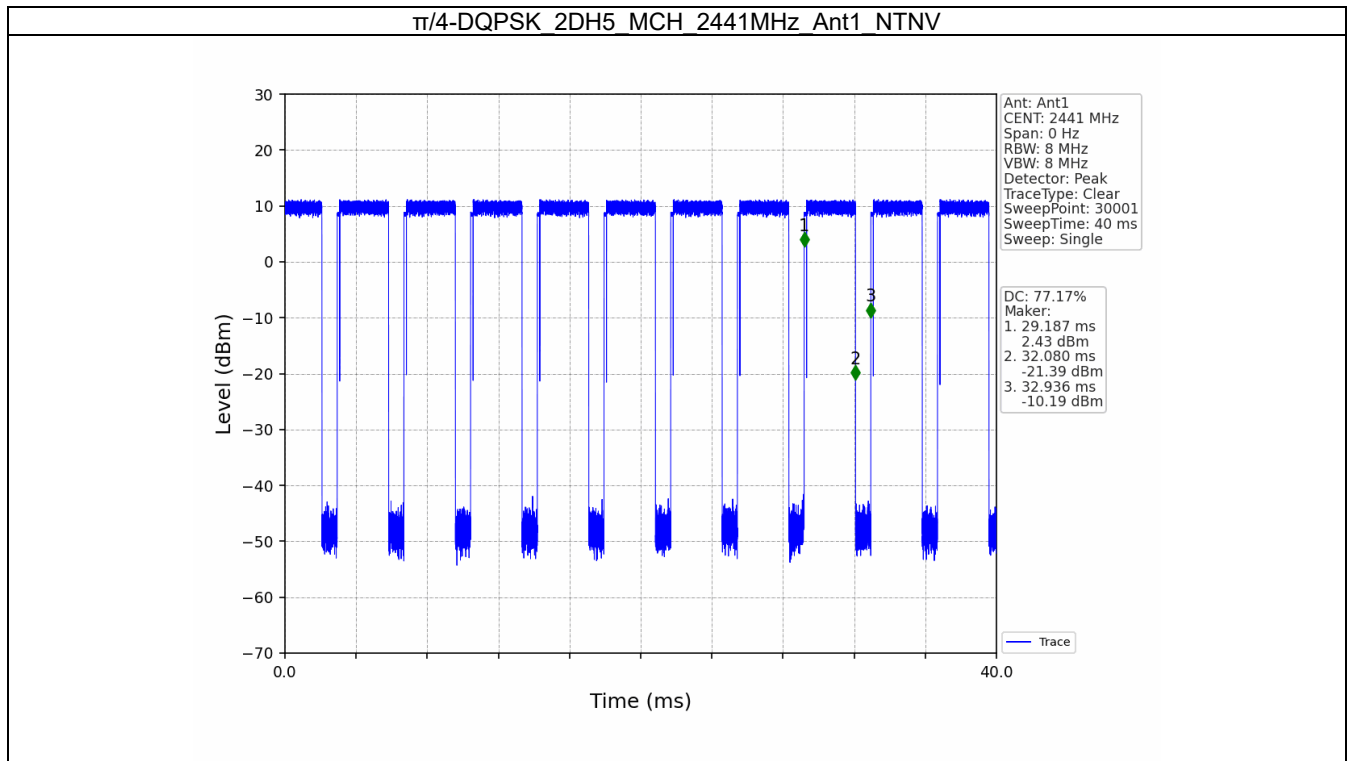

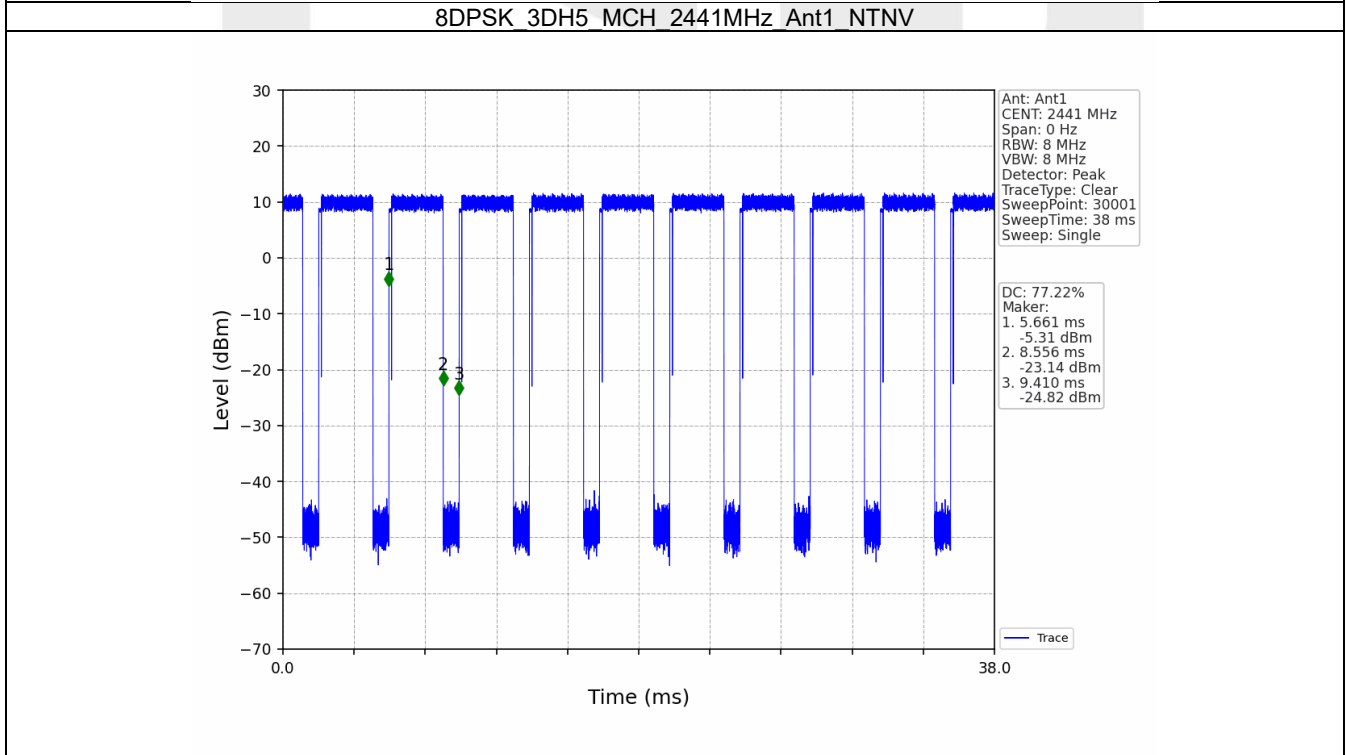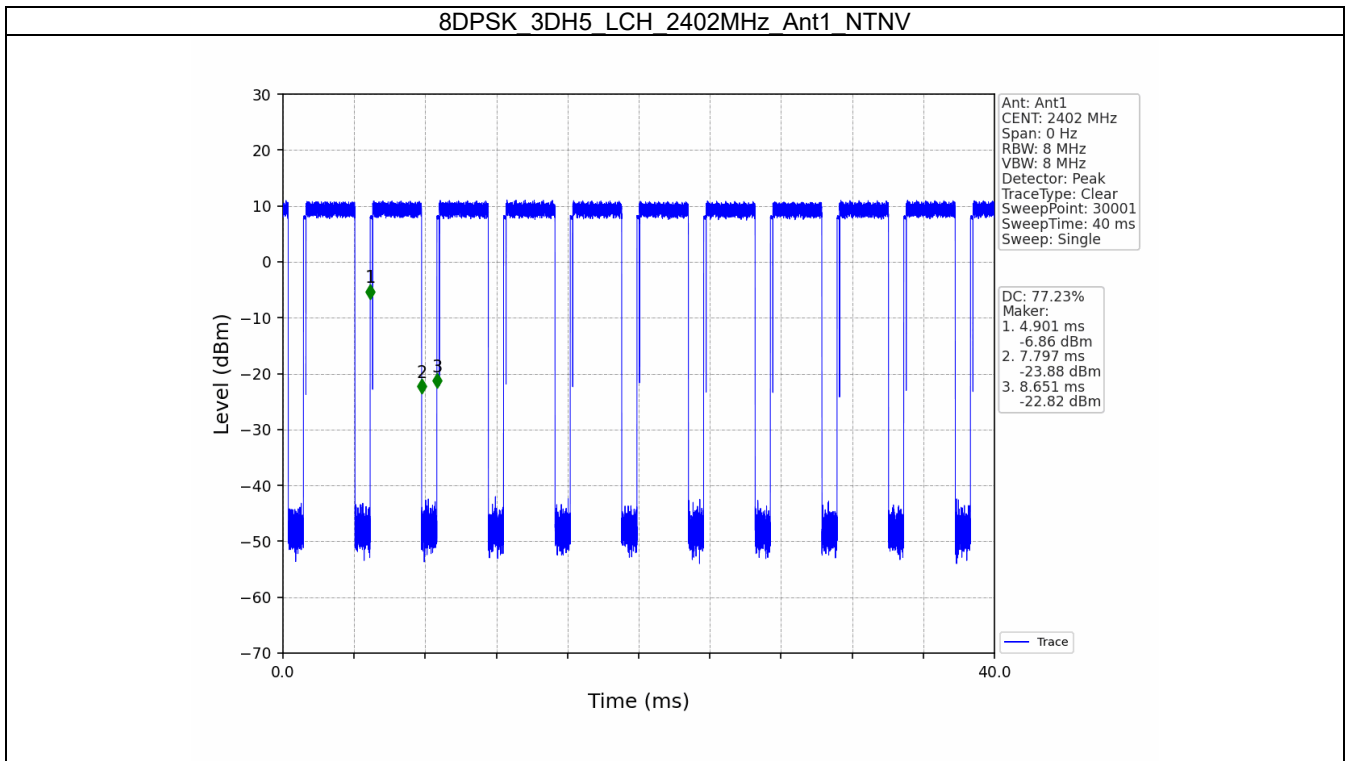

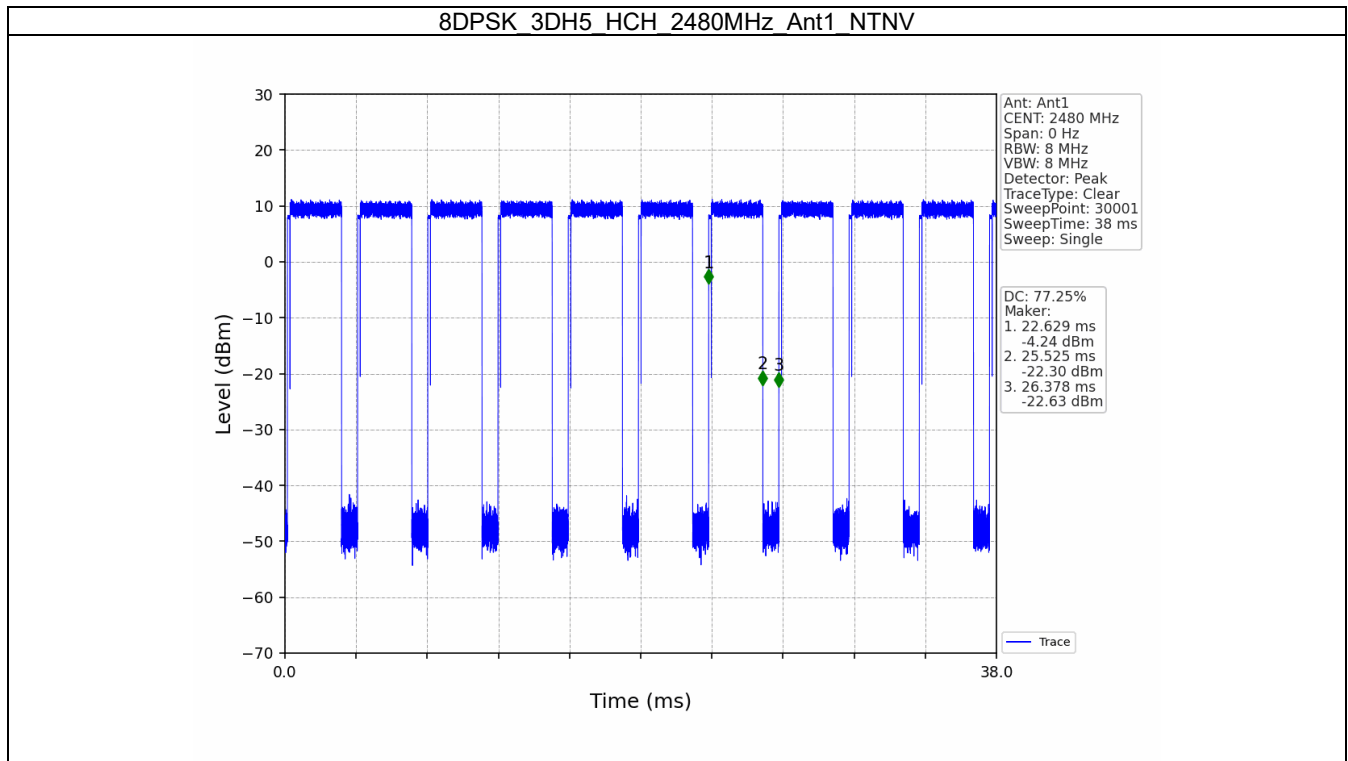


2. Bandwidth



2.1 OBW



2.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.825	Pass
		2441	DH5	1	0.827	Pass
		2480	DH5	1	0.828	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	1.175	Pass
		2441	2DH5	1	1.174	Pass
		2480	2DH5	1	1.177	Pass
8DPSK	SISO	2402	3DH5	1	1.179	Pass
		2441	3DH5	1	1.179	Pass
		2480	3DH5	1	1.181	Pass


2.1.2 Test Graph

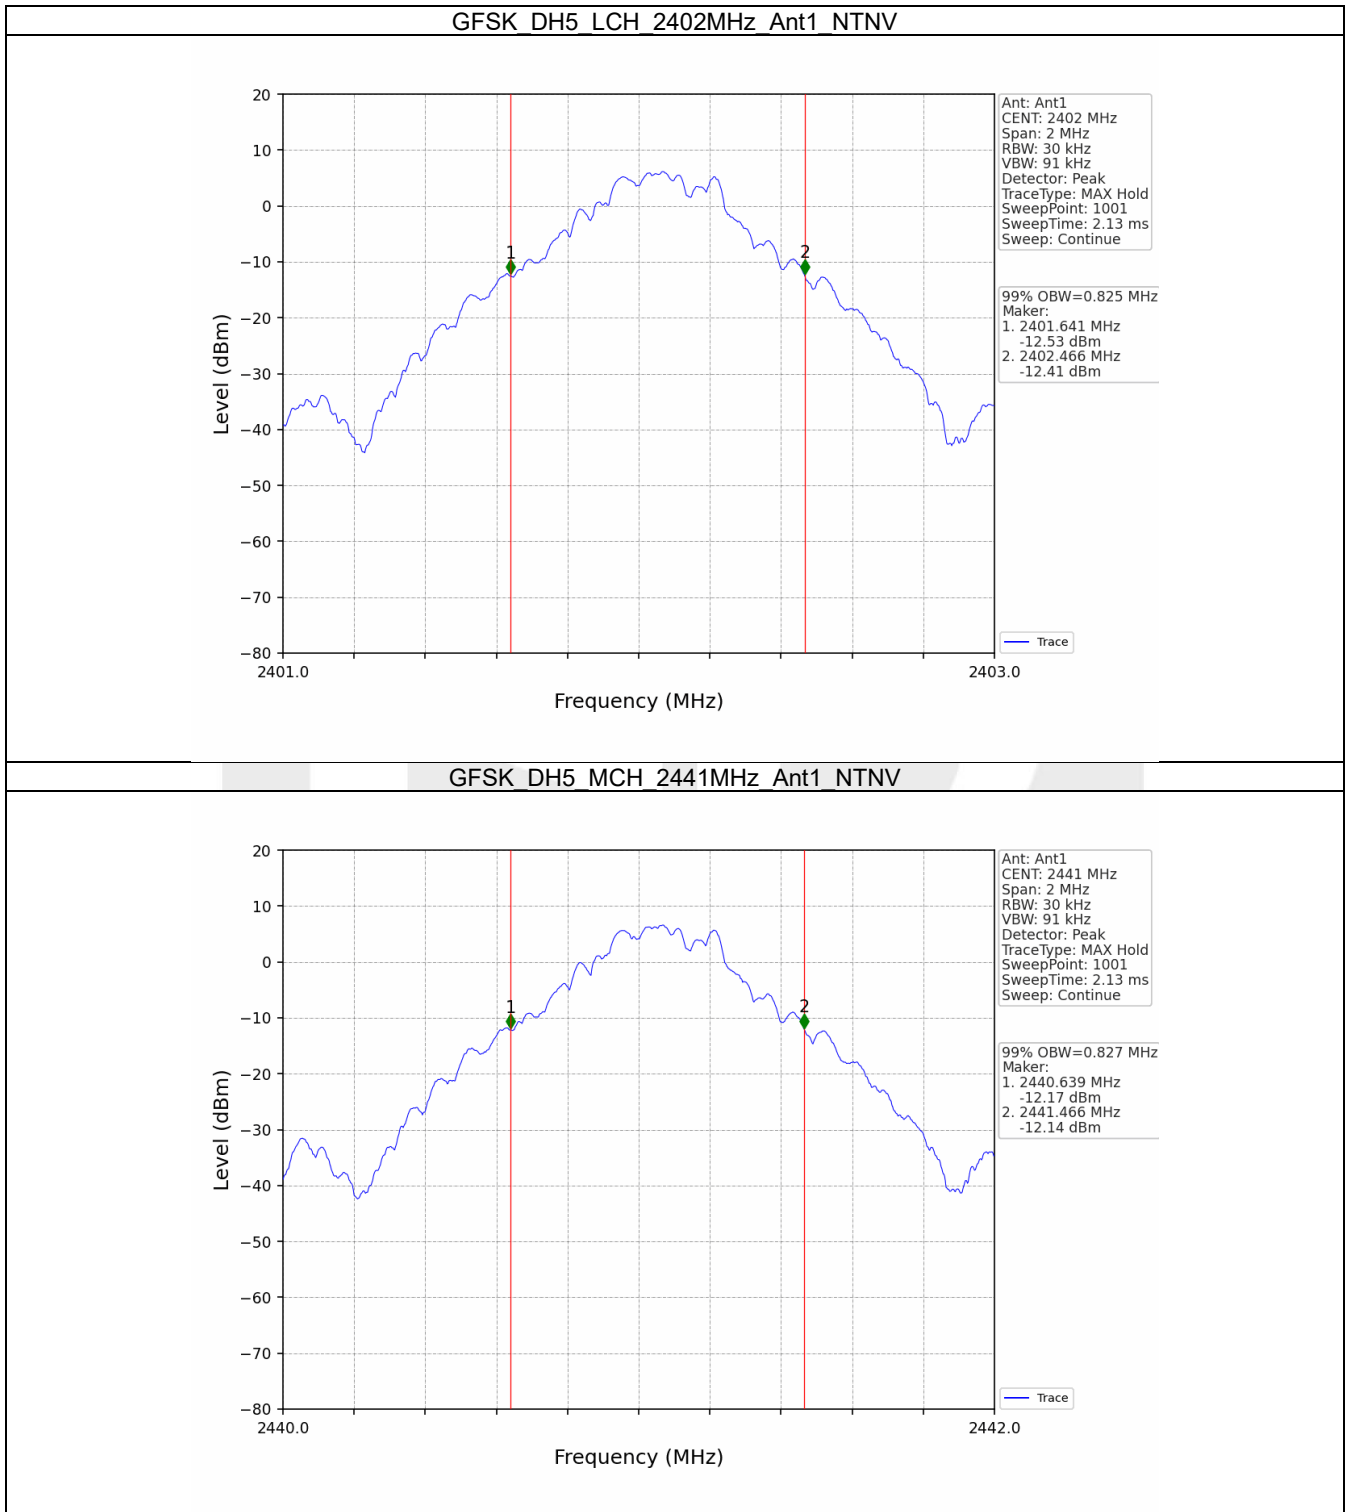

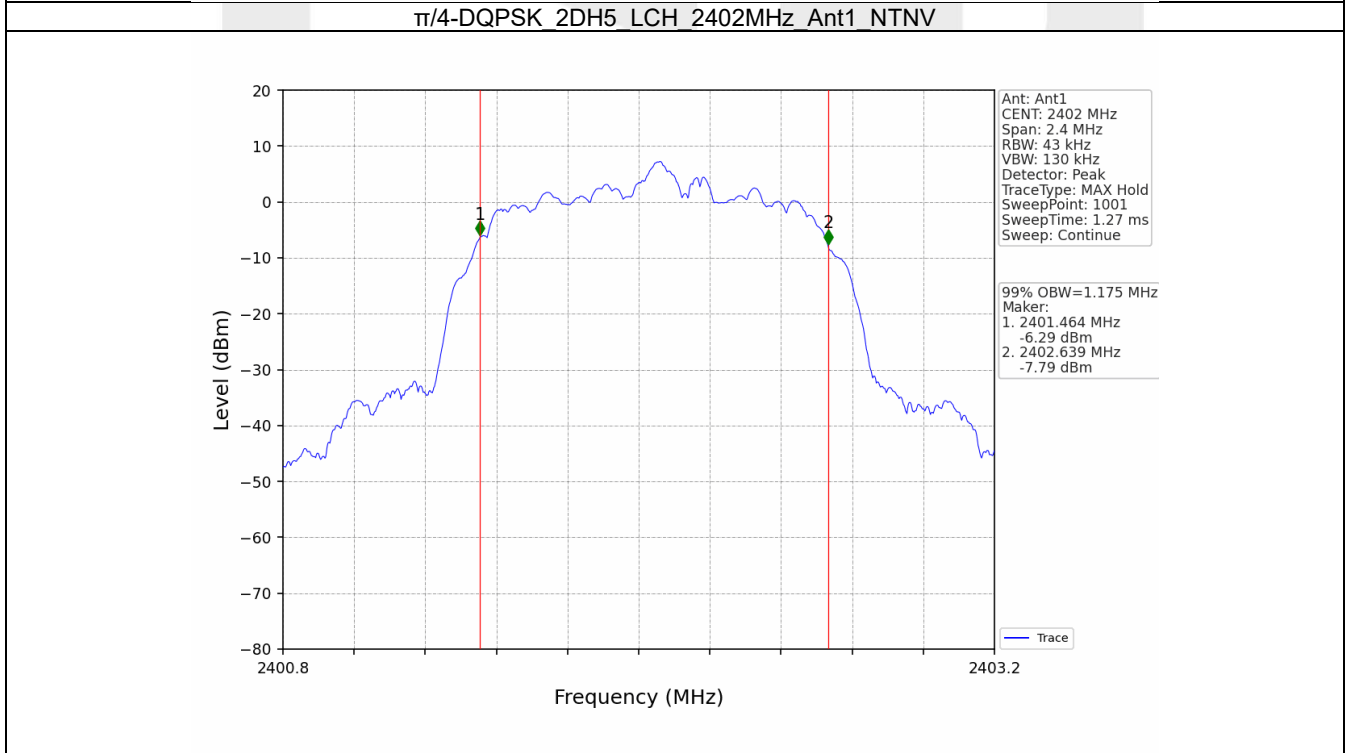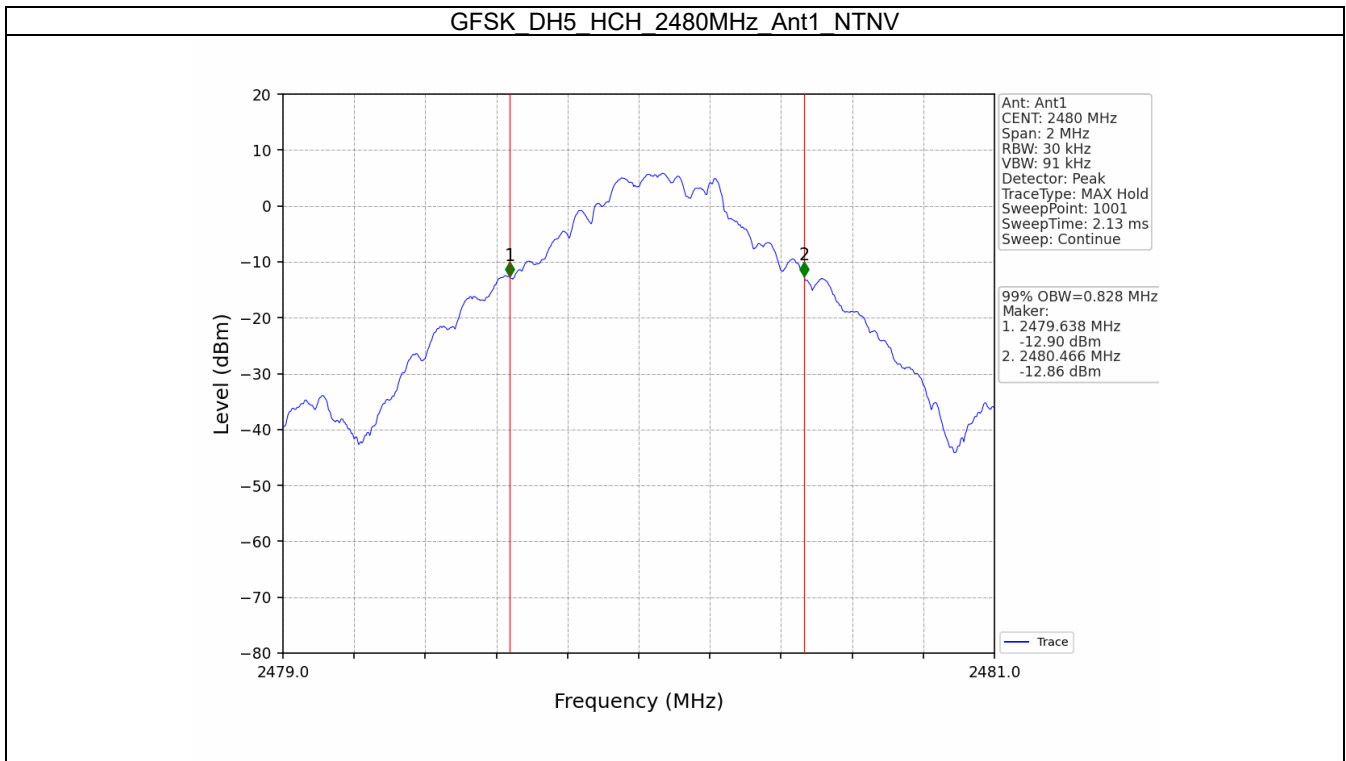

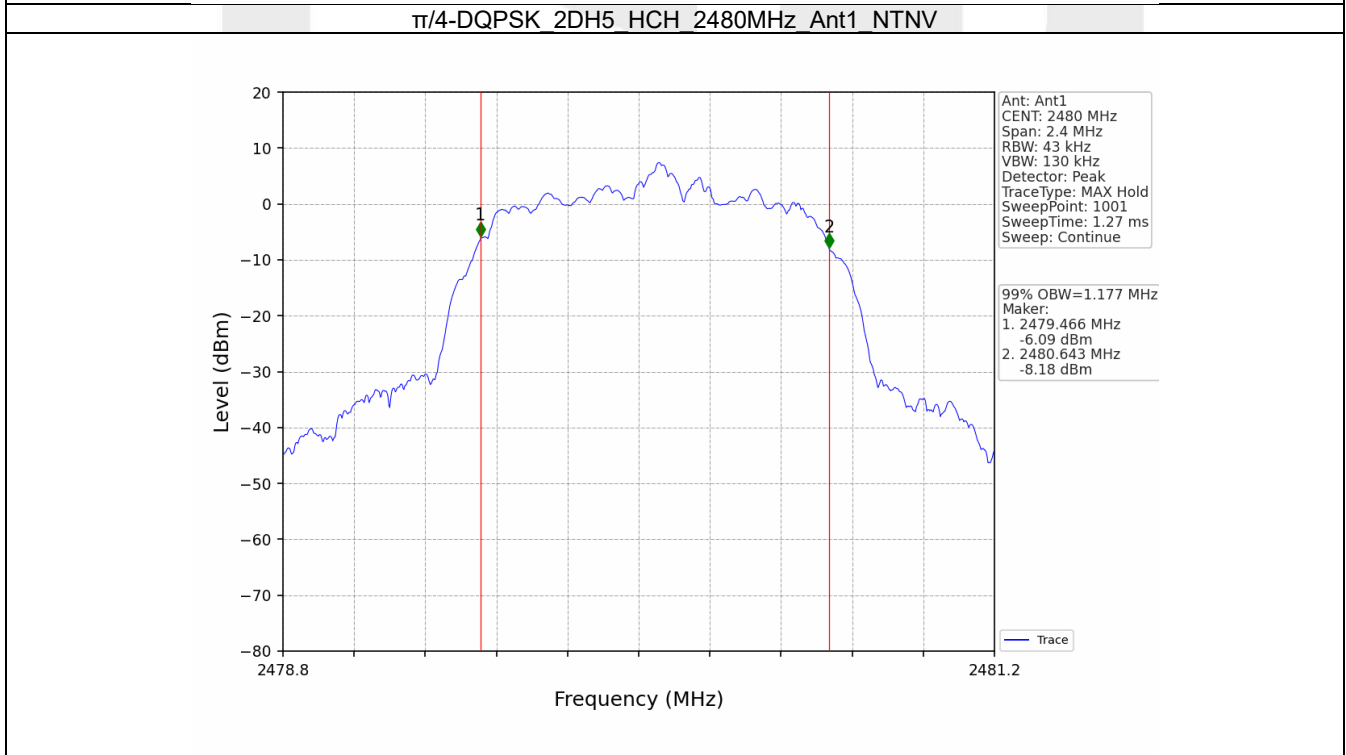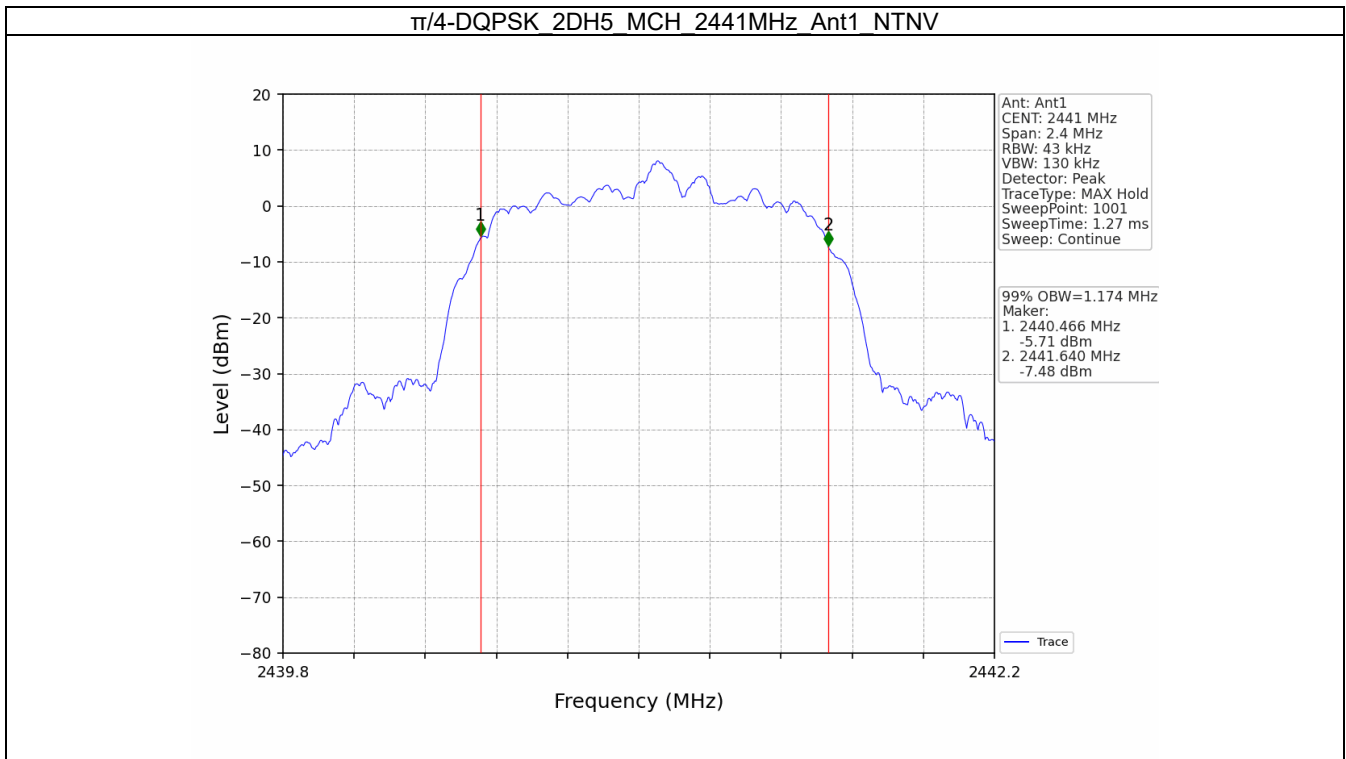

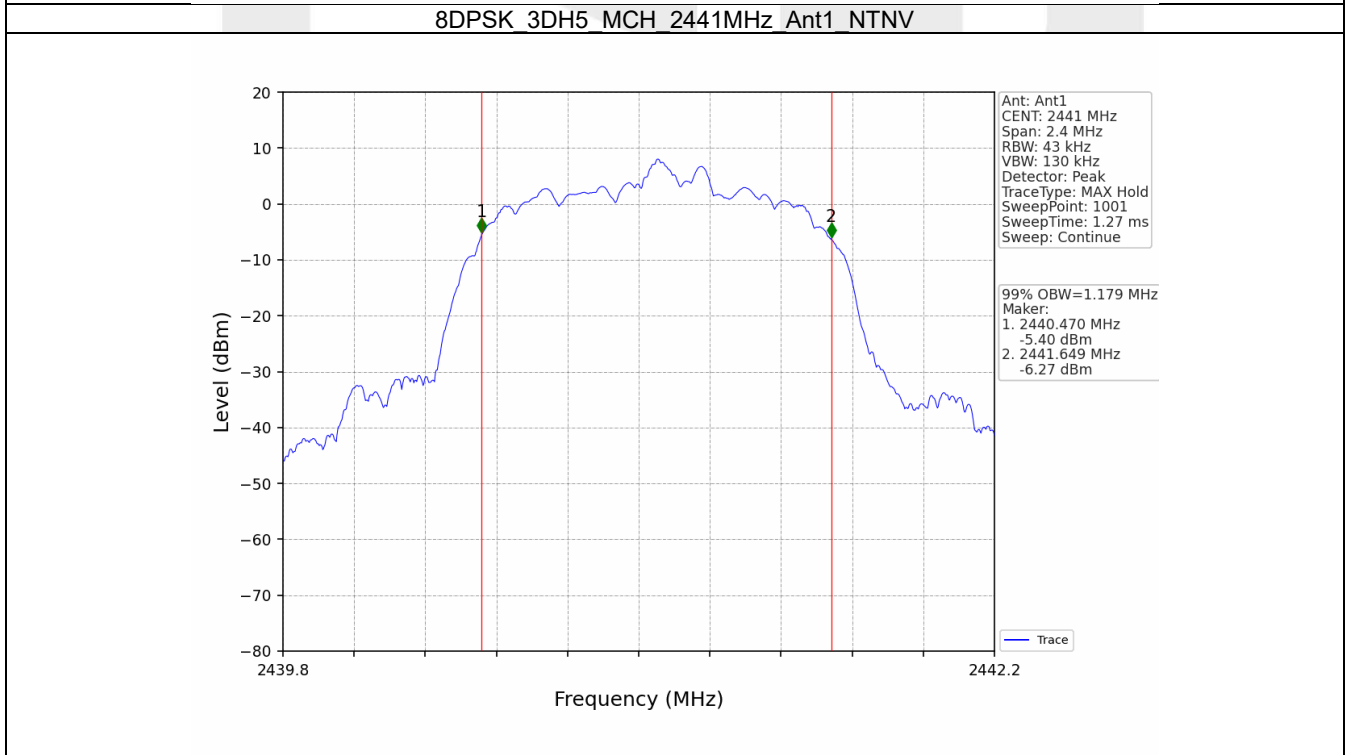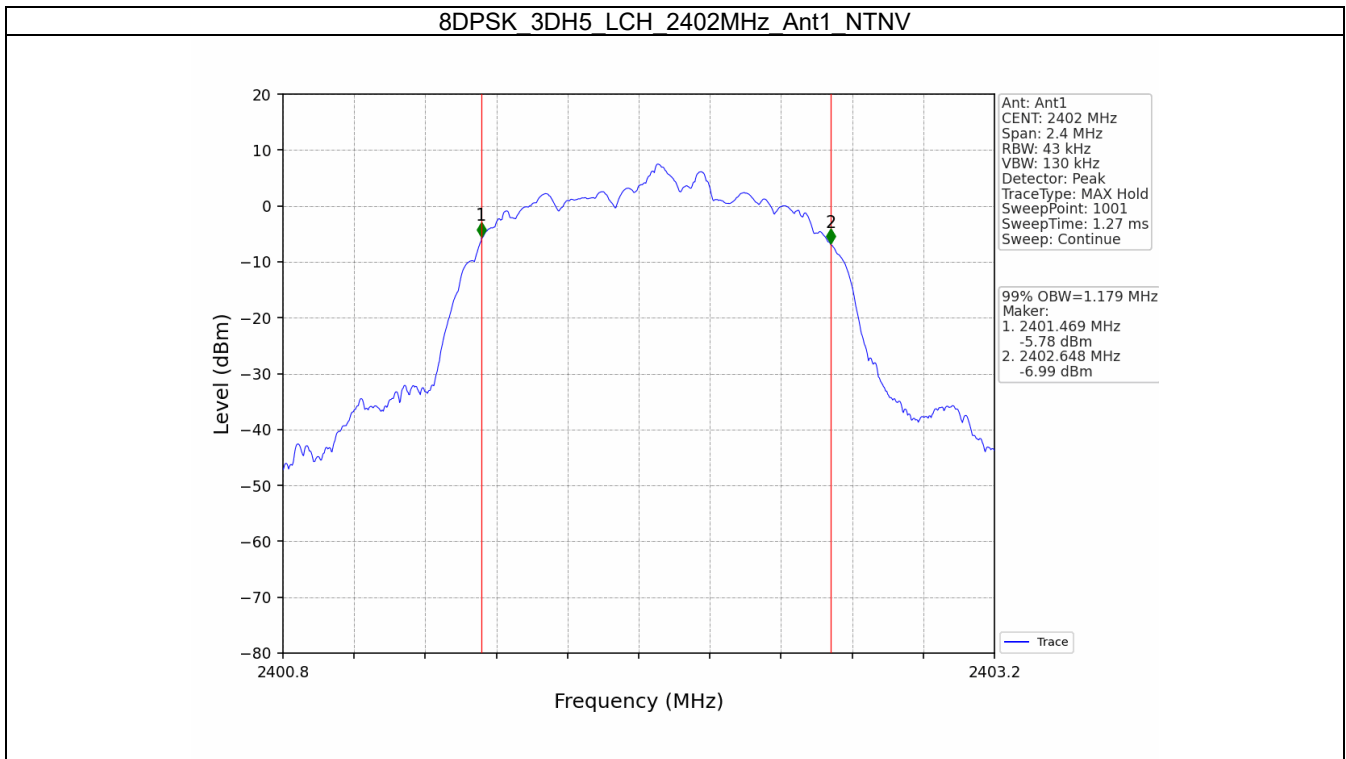

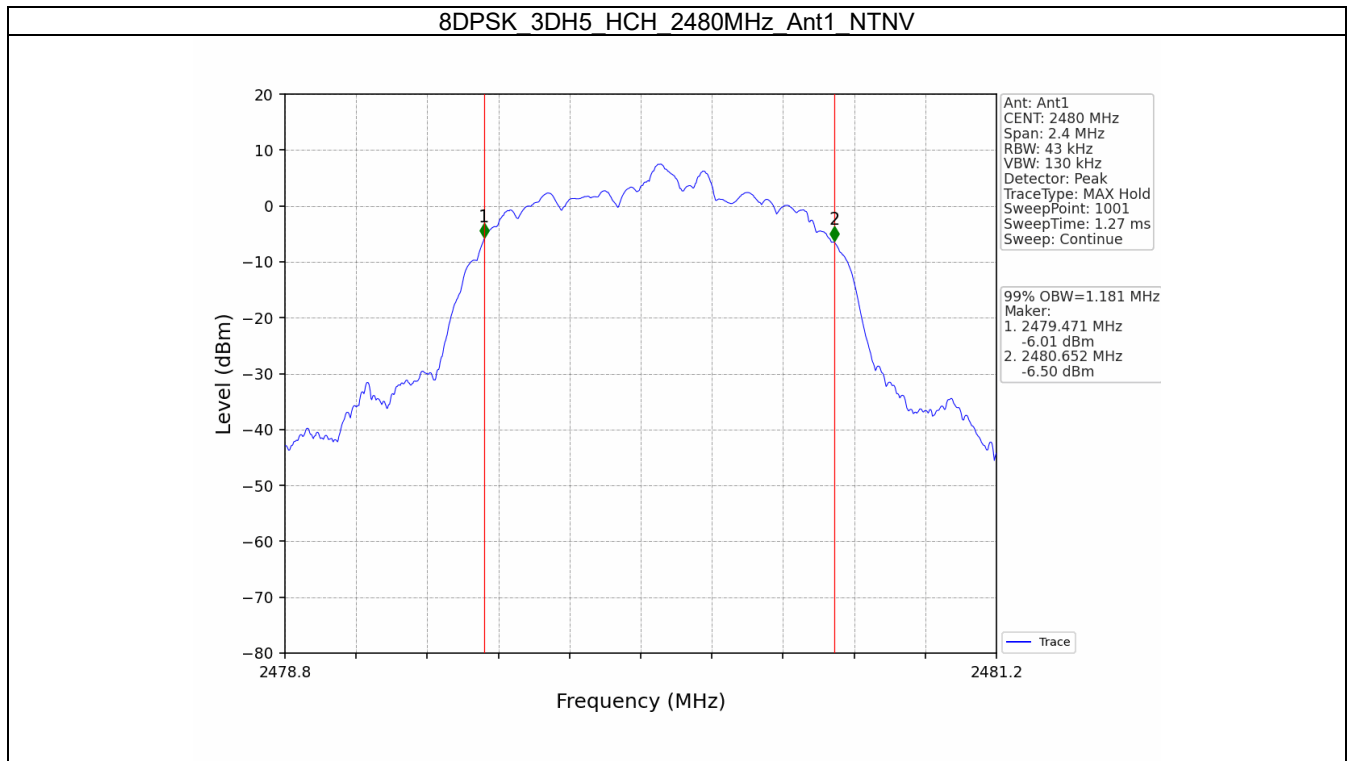




2.2 20dB BW



2.2.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.938	Pass
		2441	DH5	1	0.939	Pass
		2480	DH5	1	0.937	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	1.292	Pass
		2441	2DH5	1	1.292	Pass
		2480	2DH5	1	1.295	Pass
8DPSK	SISO	2402	3DH5	1	1.313	Pass
		2441	3DH5	1	1.308	Pass
		2480	3DH5	1	1.309	Pass


2.2.2 Test Graph

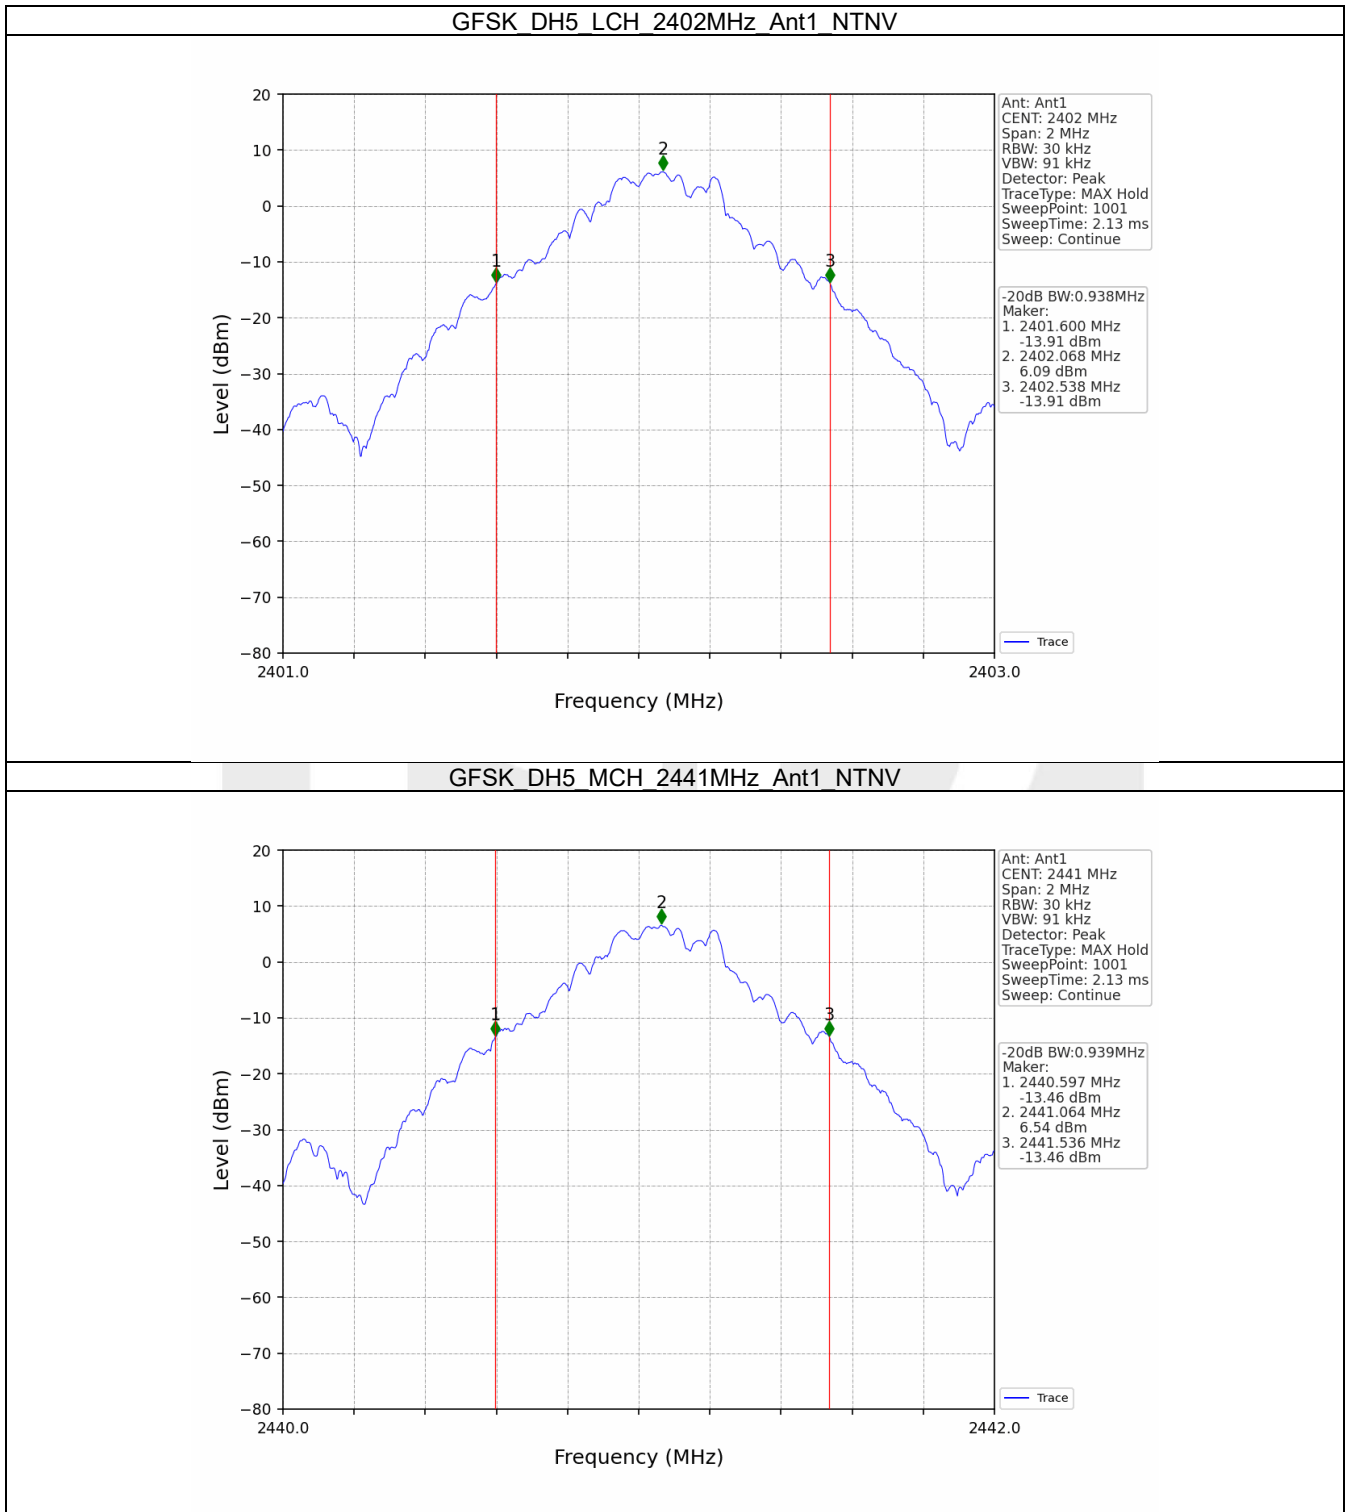

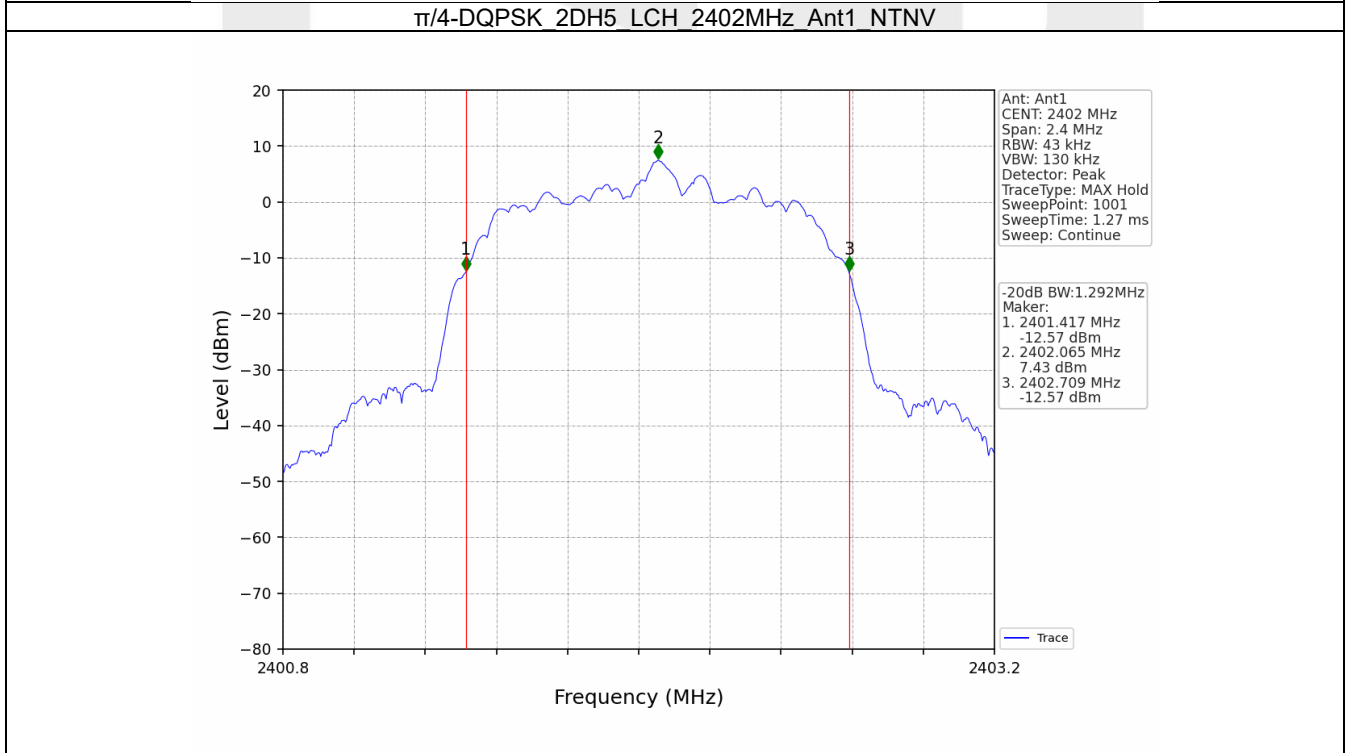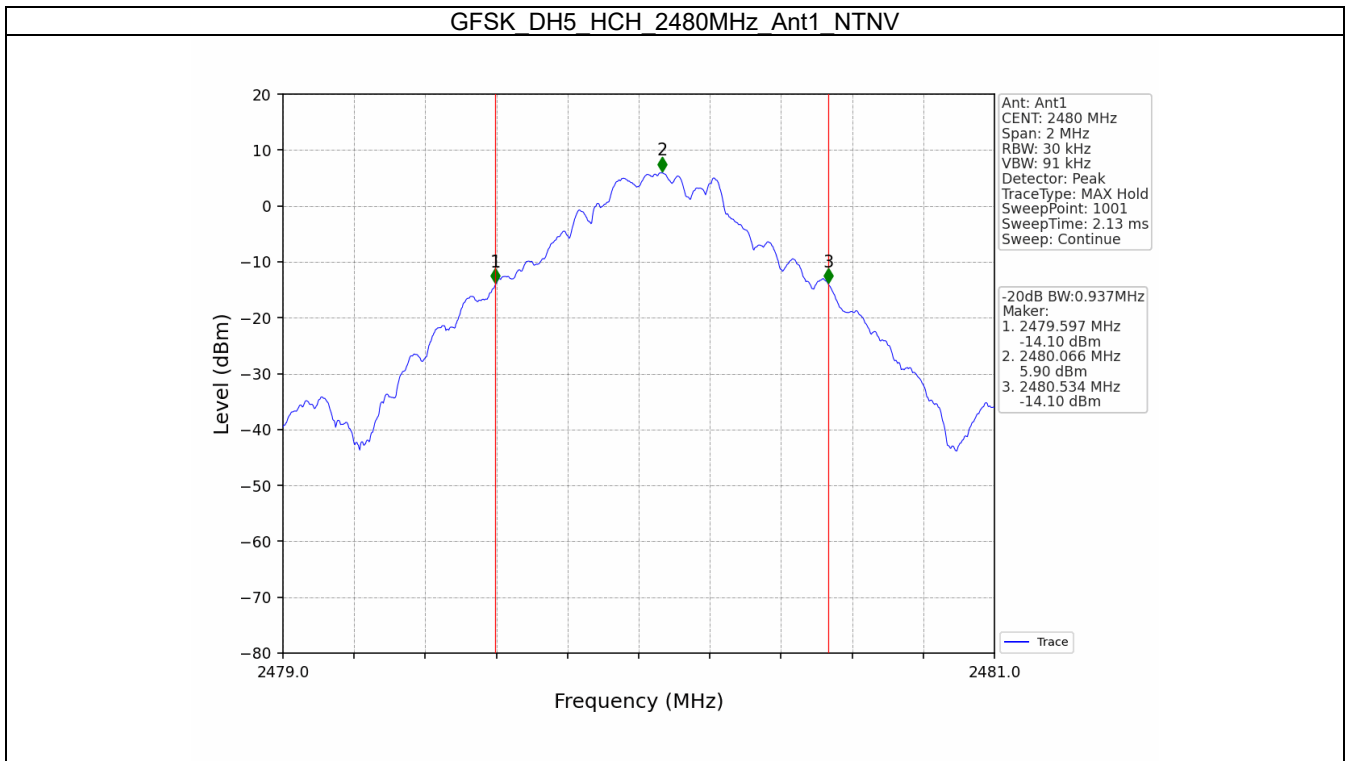

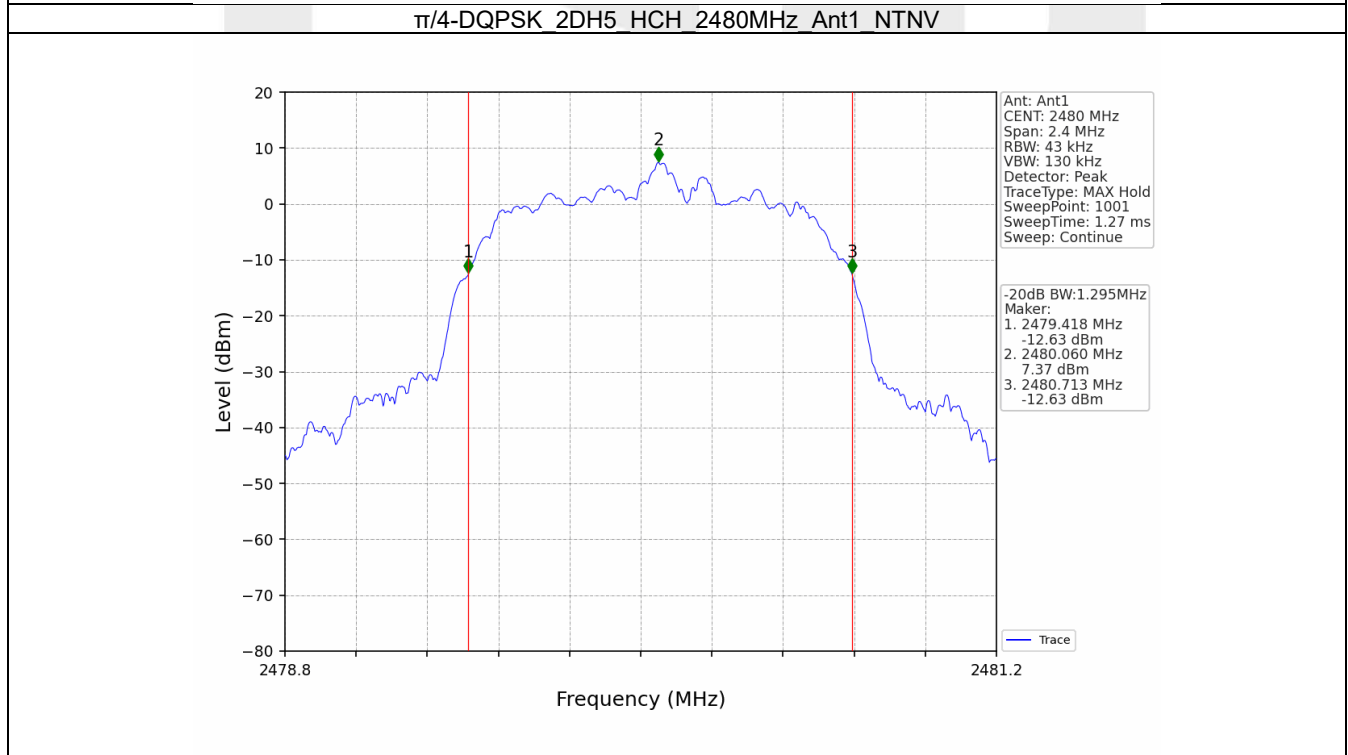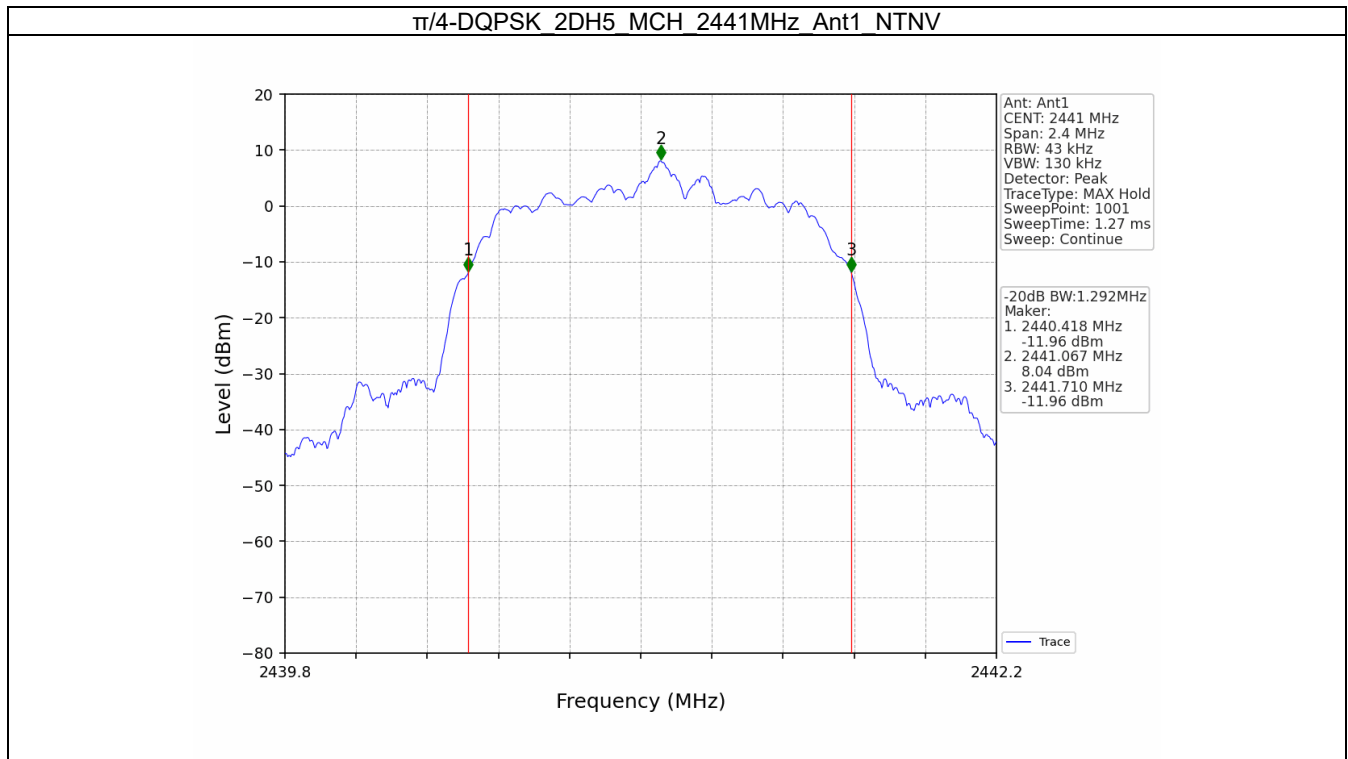

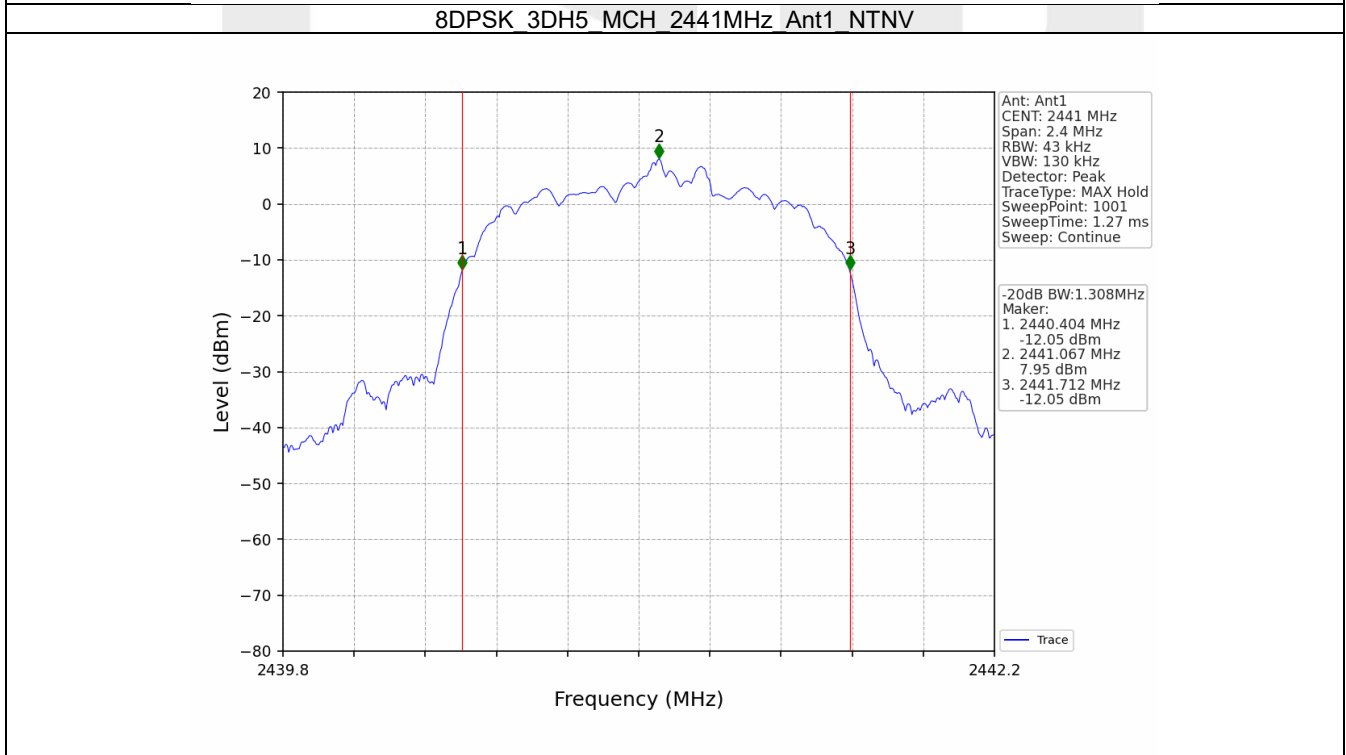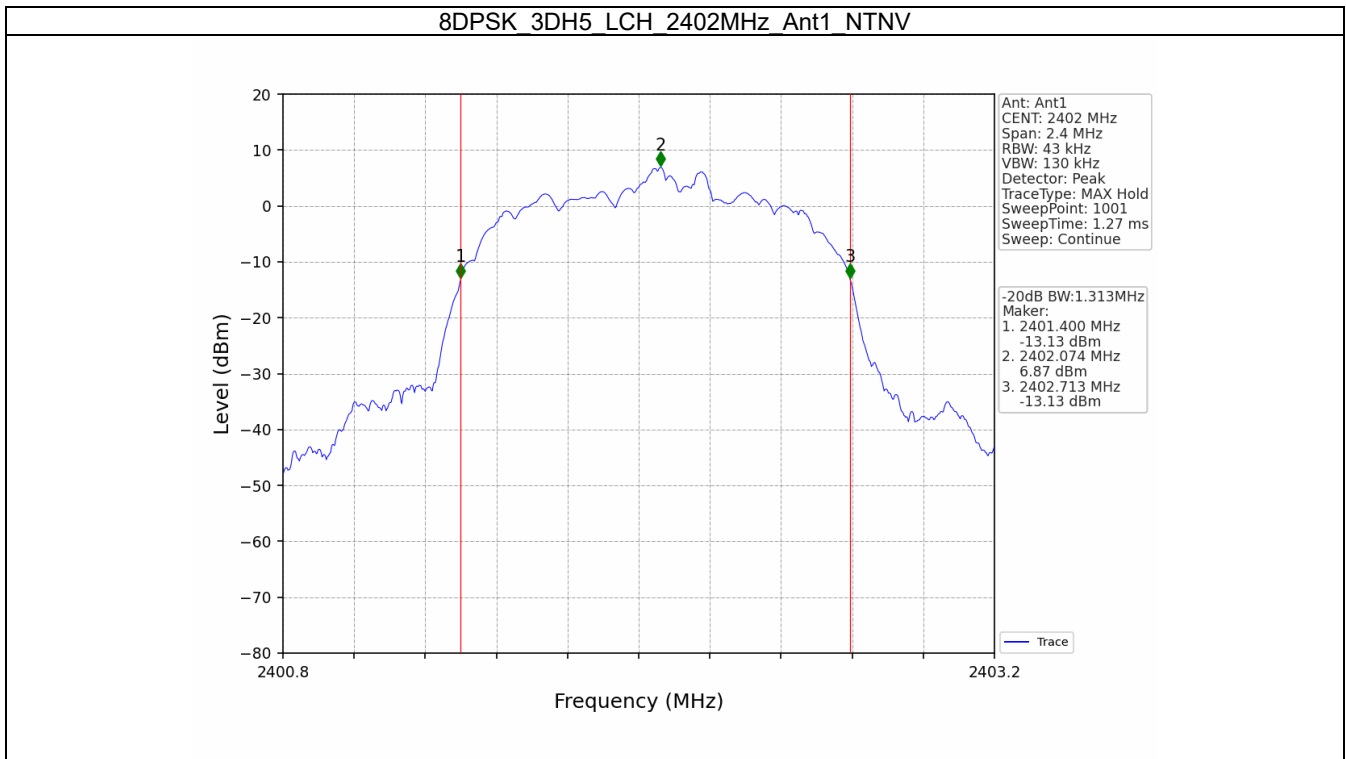

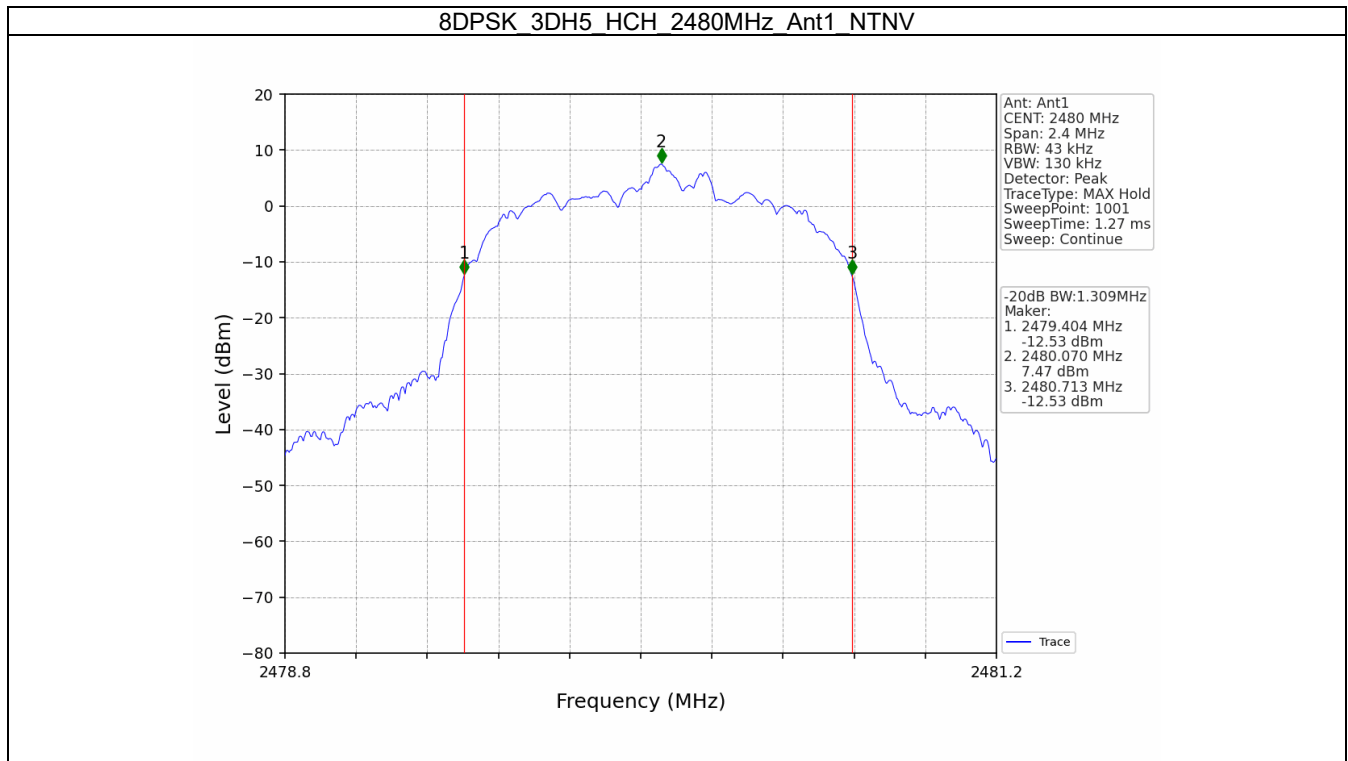

3. Maximum Conducted Output Power


3.1 Power



3.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	8.44	<=30	Pass
		2441	DH5	9.01	<=30	Pass
		2480	DH5	8.33	<=30	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	10.36	<=20.97	Pass
		2441	2DH5	10.98	<=20.97	Pass
		2480	2DH5	10.49	<=20.97	Pass
8DPSK	SISO	2402	3DH5	10.83	<=20.97	Pass
		2441	3DH5	11.39	<=20.97	Pass
		2480	3DH5	10.93	<=20.97	Pass



Note1: Antenna Gain: Ant1: 0.50dBi;


3.1.2 Test Graph

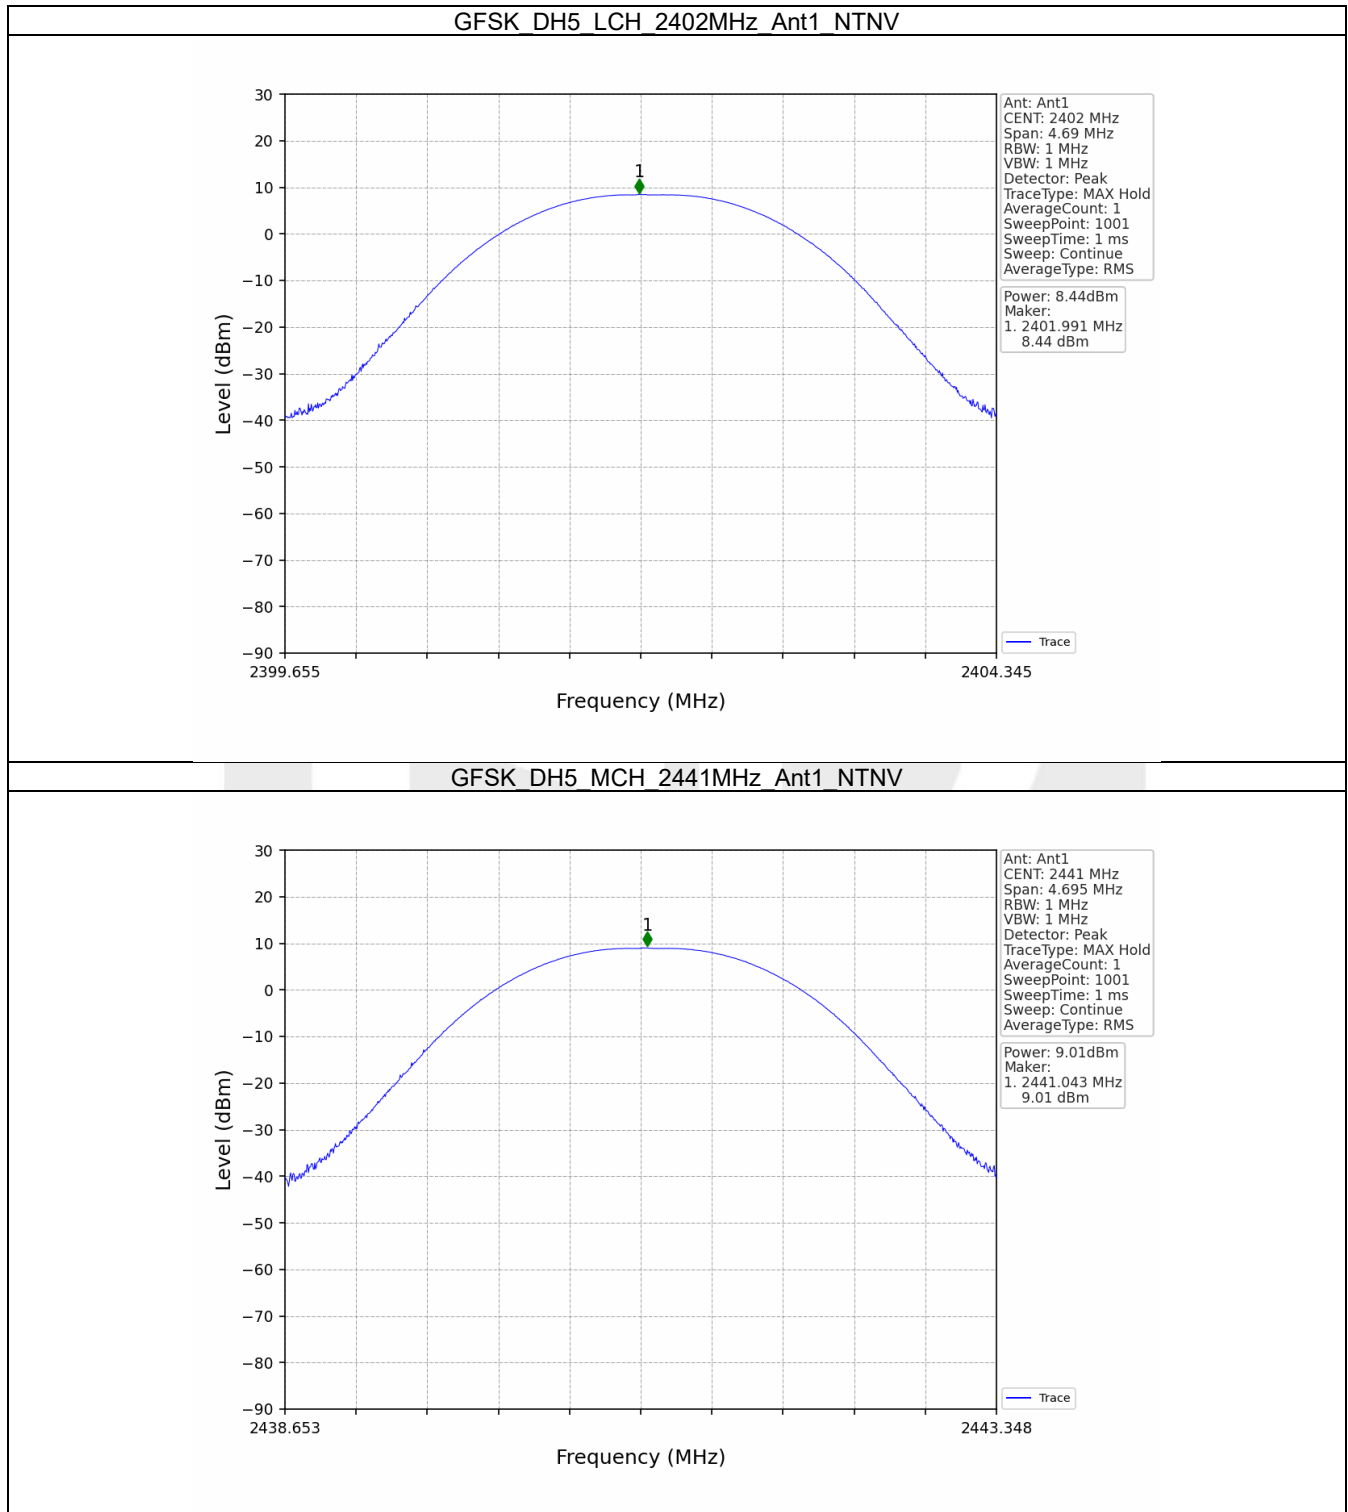

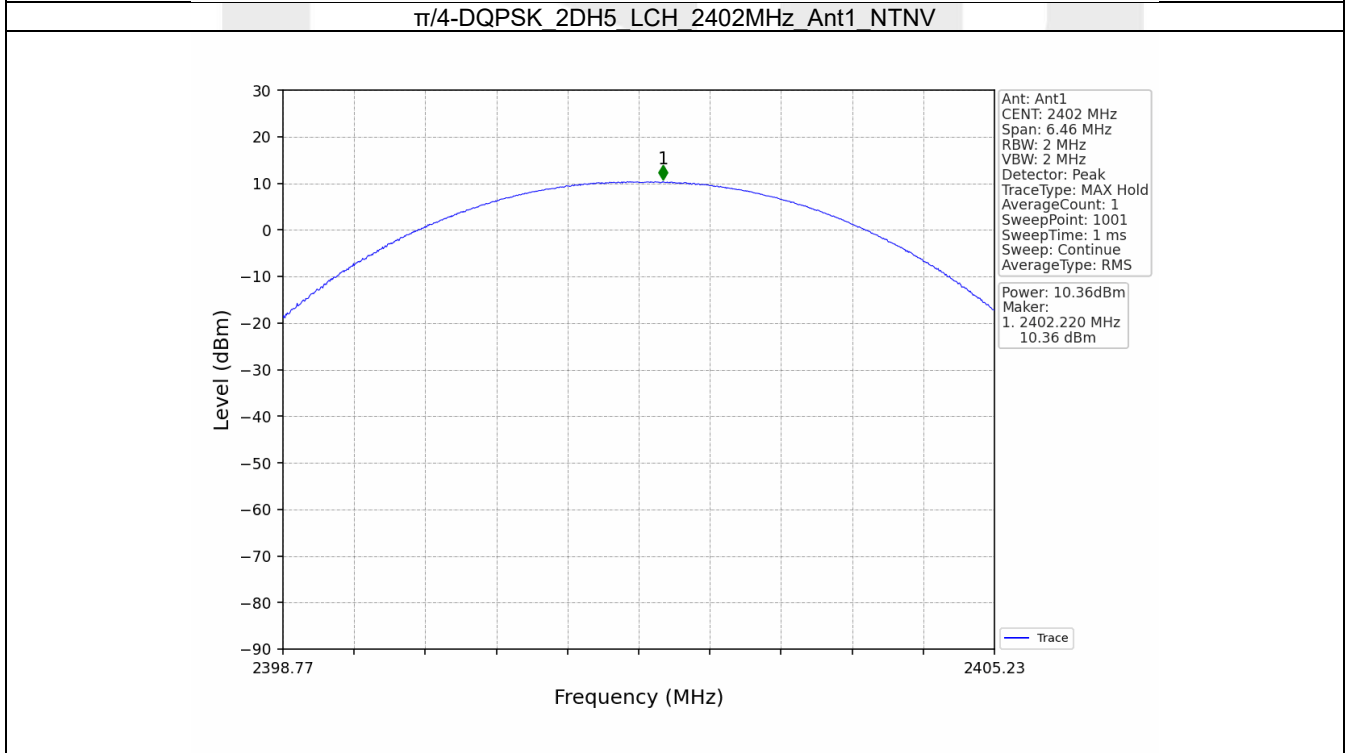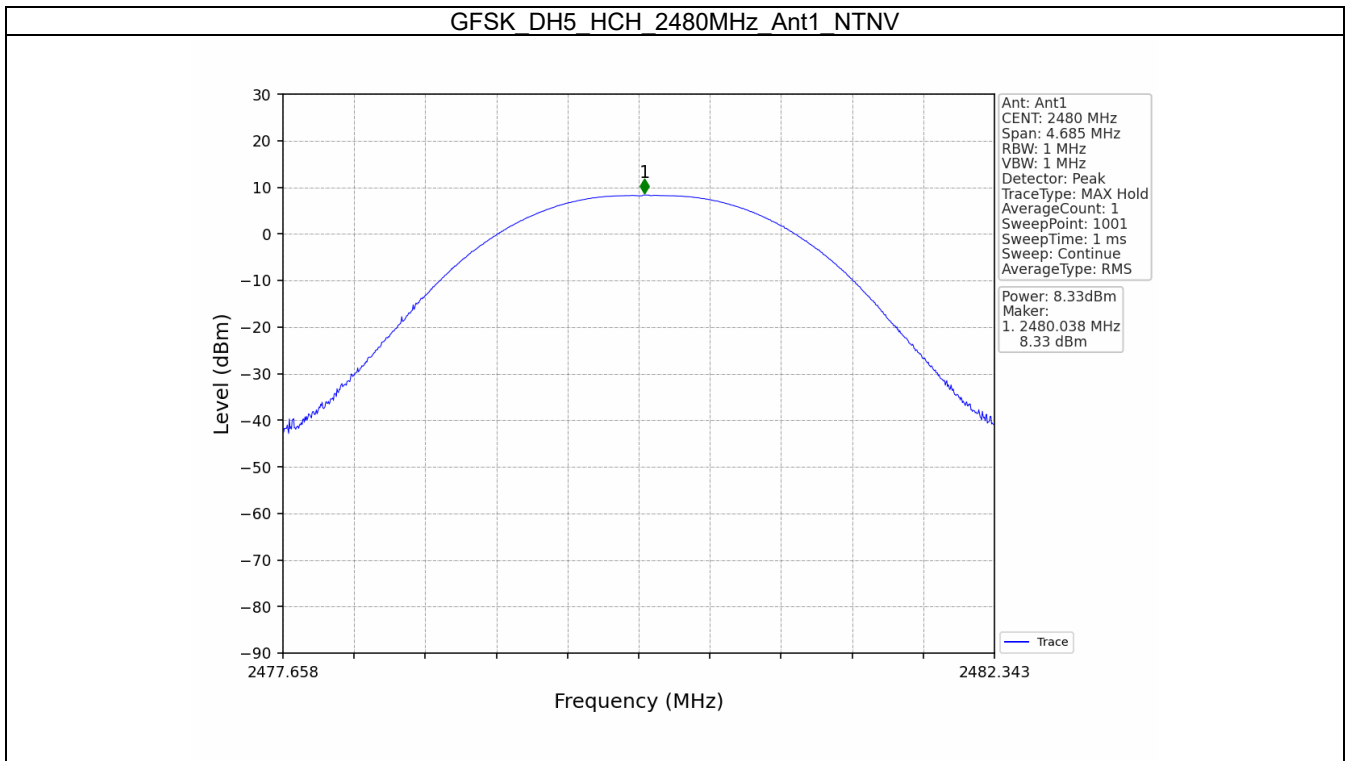

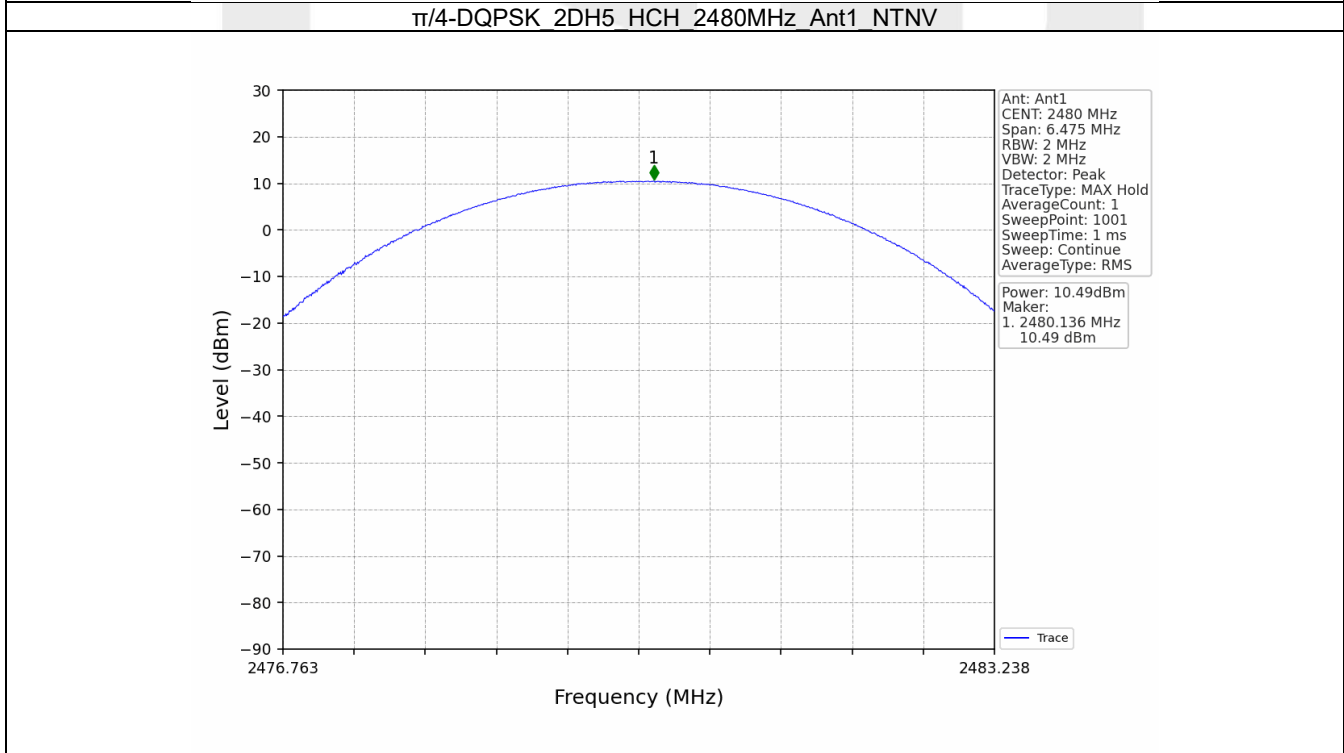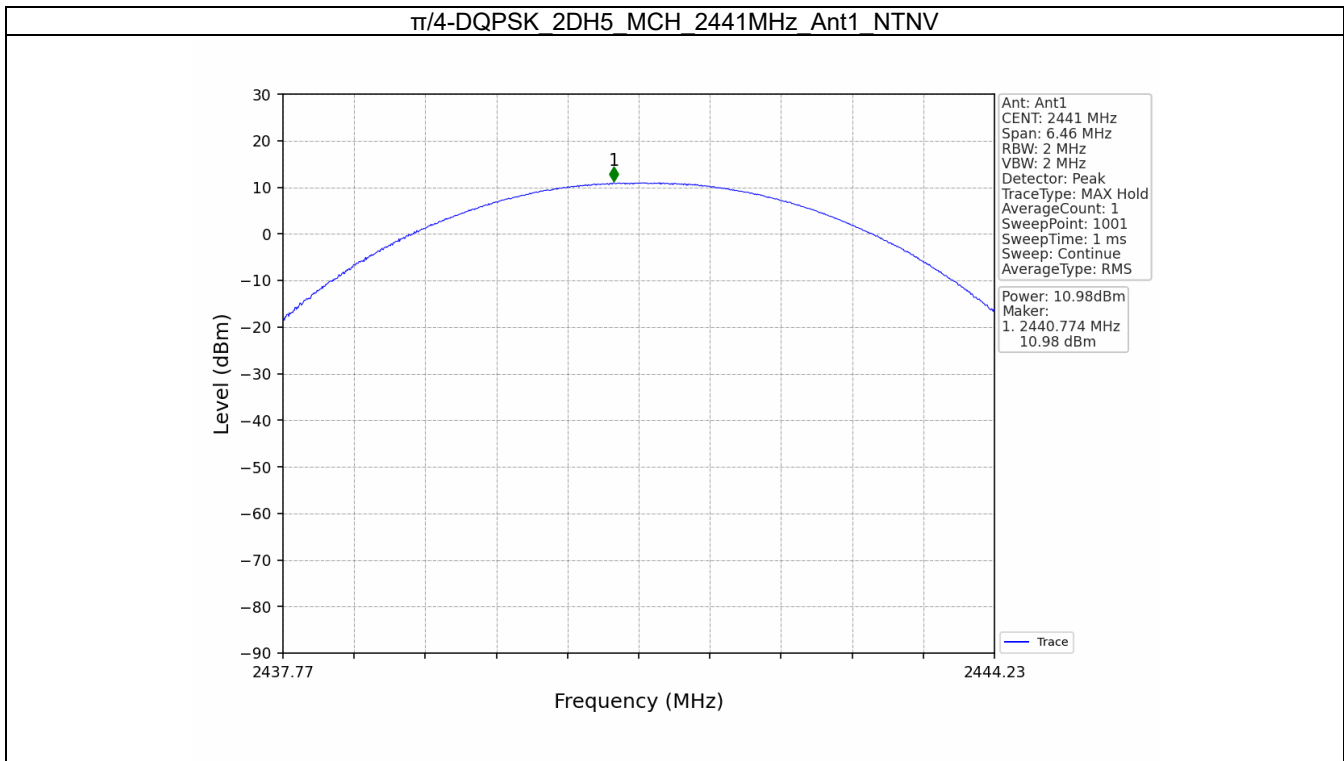

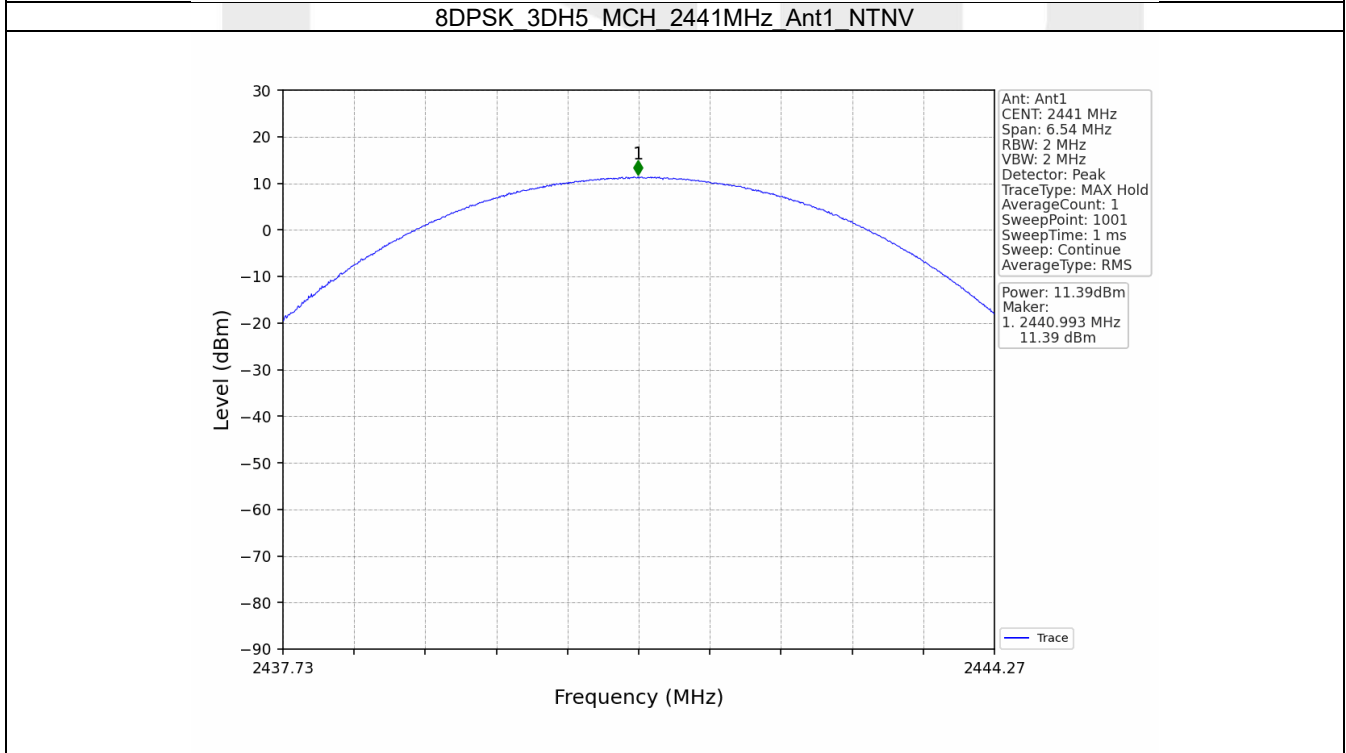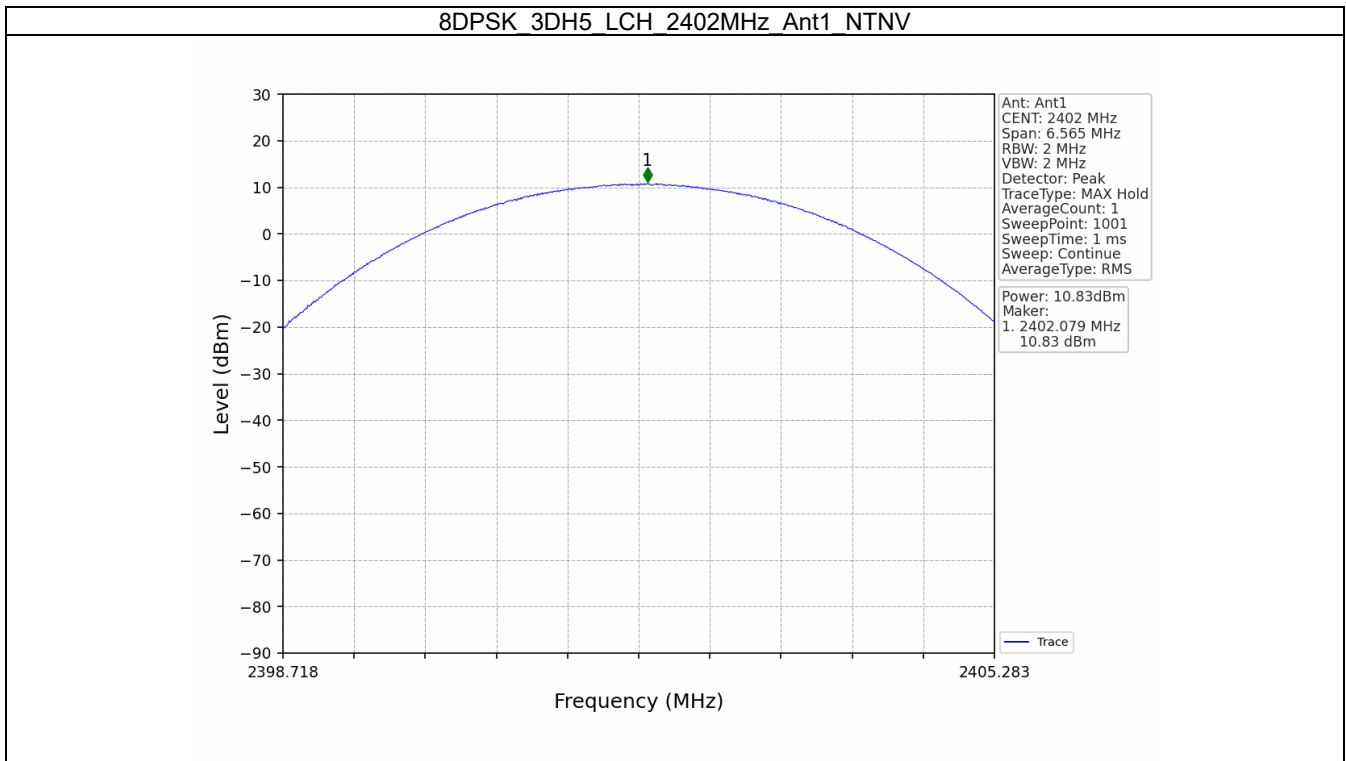

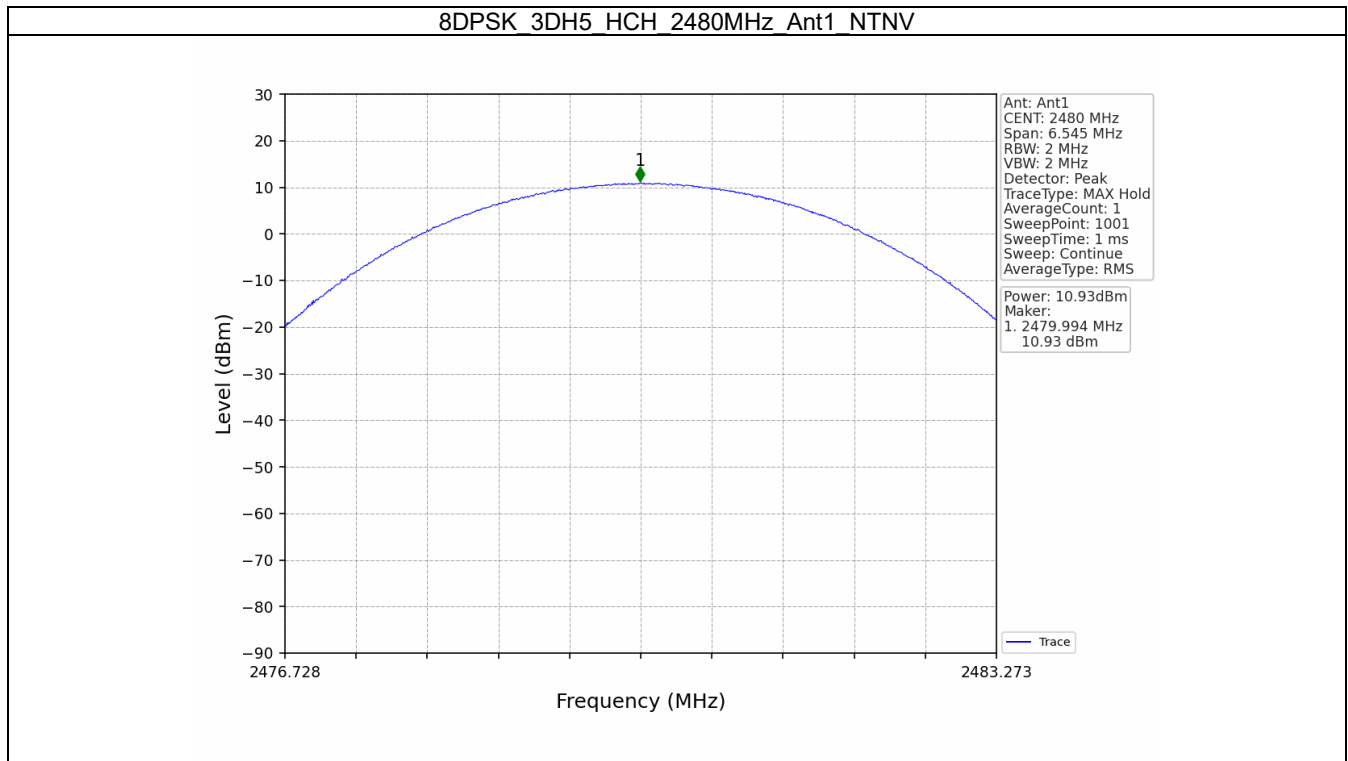


4. Carrier Frequency Separation


4.1 Ant1

4.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.008	0.939	≥ 0.939	Pass
$\pi/4$ -DQPSK	SISO	HOPP	2DH5	1.001	1.295	≥ 0.863	Pass
8DPSK	SISO	HOPP	3DH5	0.953	1.313	≥ 0.875	Pass

4.1.2 Test Graph

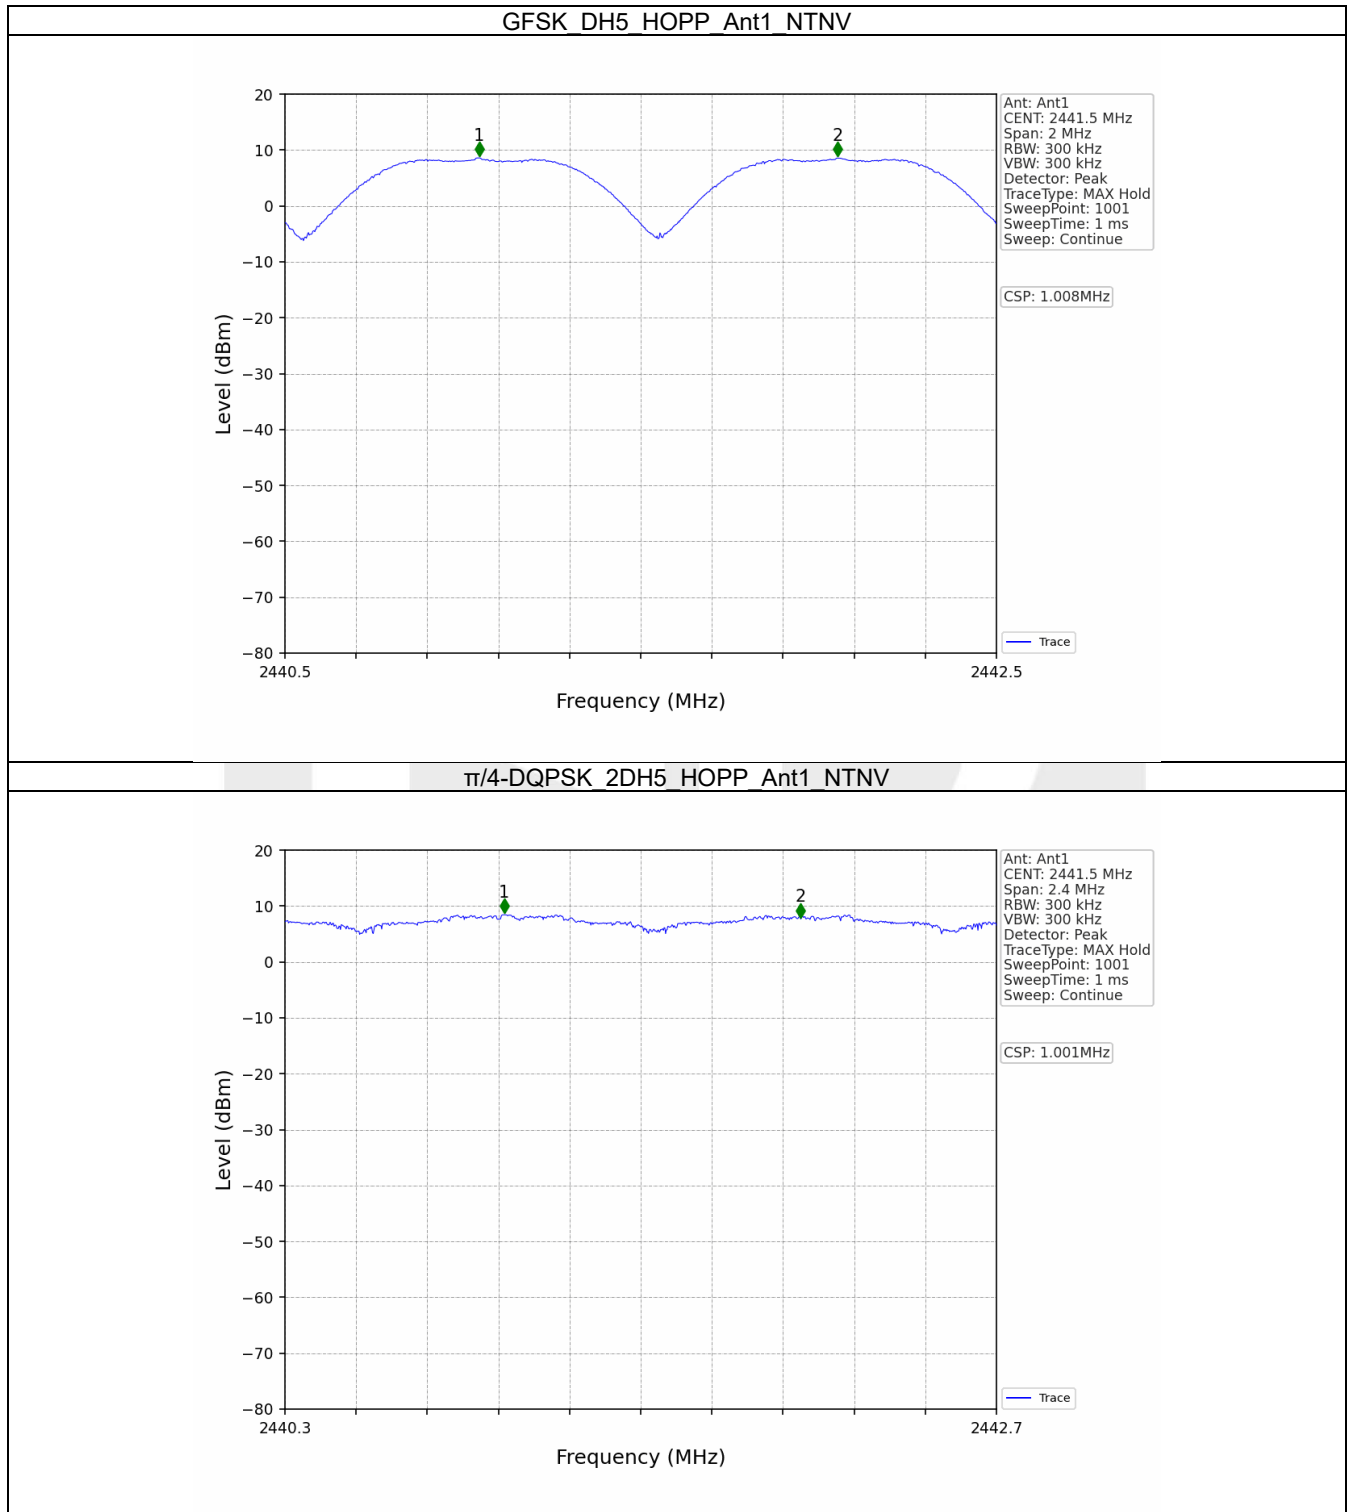

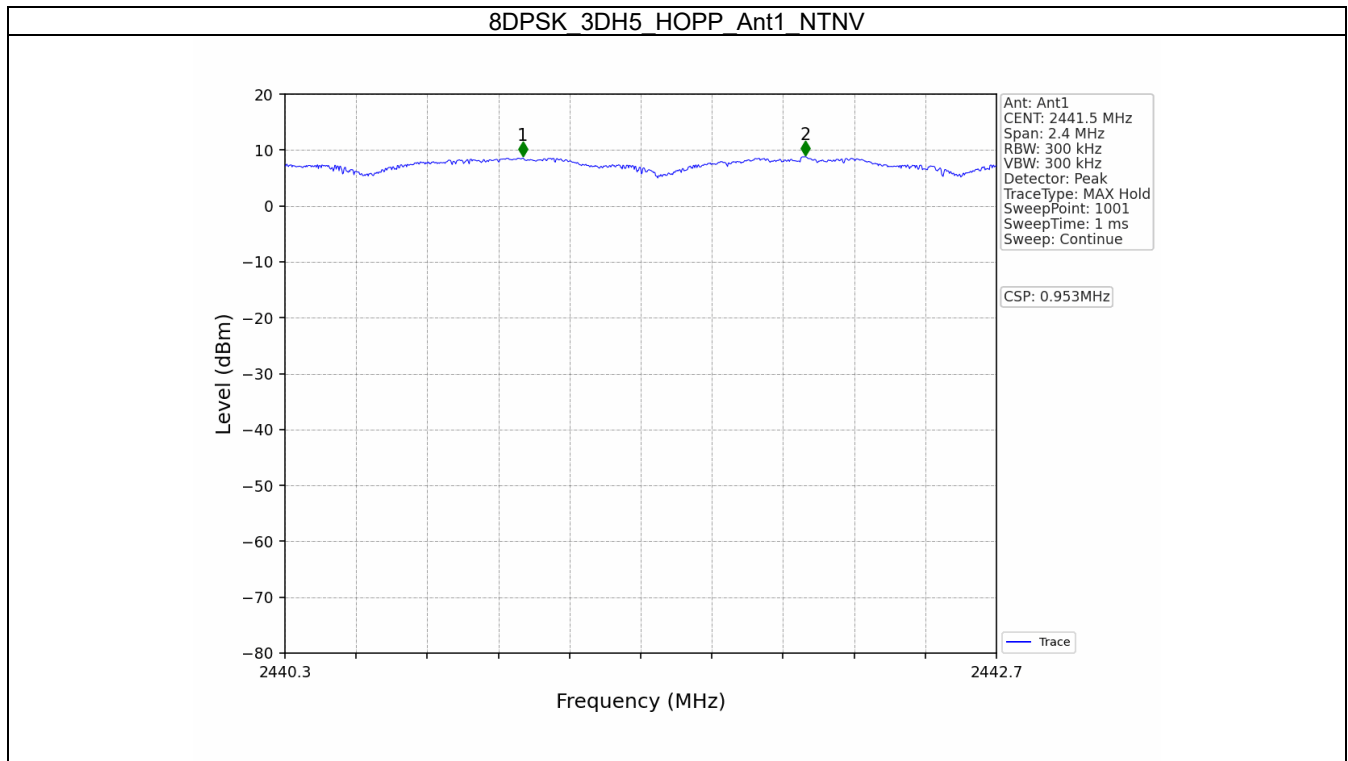


5. Number of Hopping Frequencies


5.1 HoppNum

5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
$\pi/4$ -DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

5.1.2 Test Graph

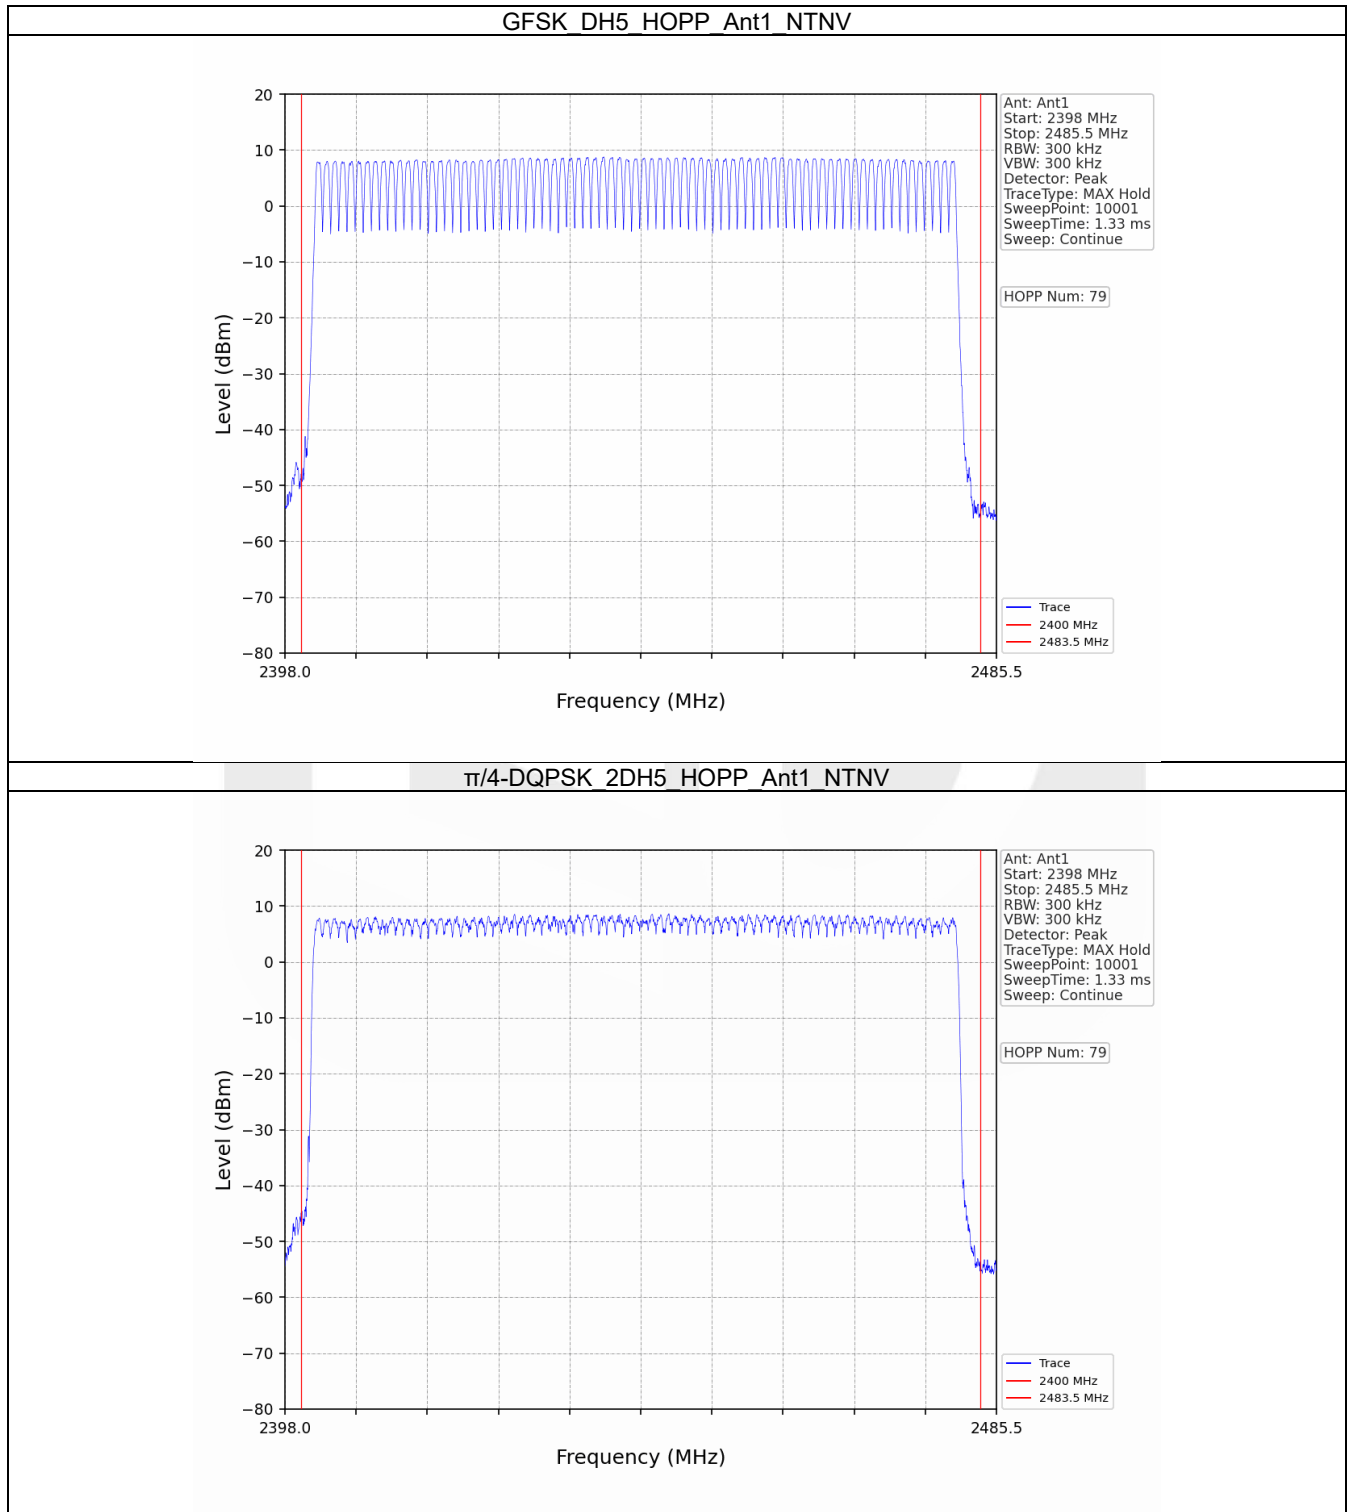

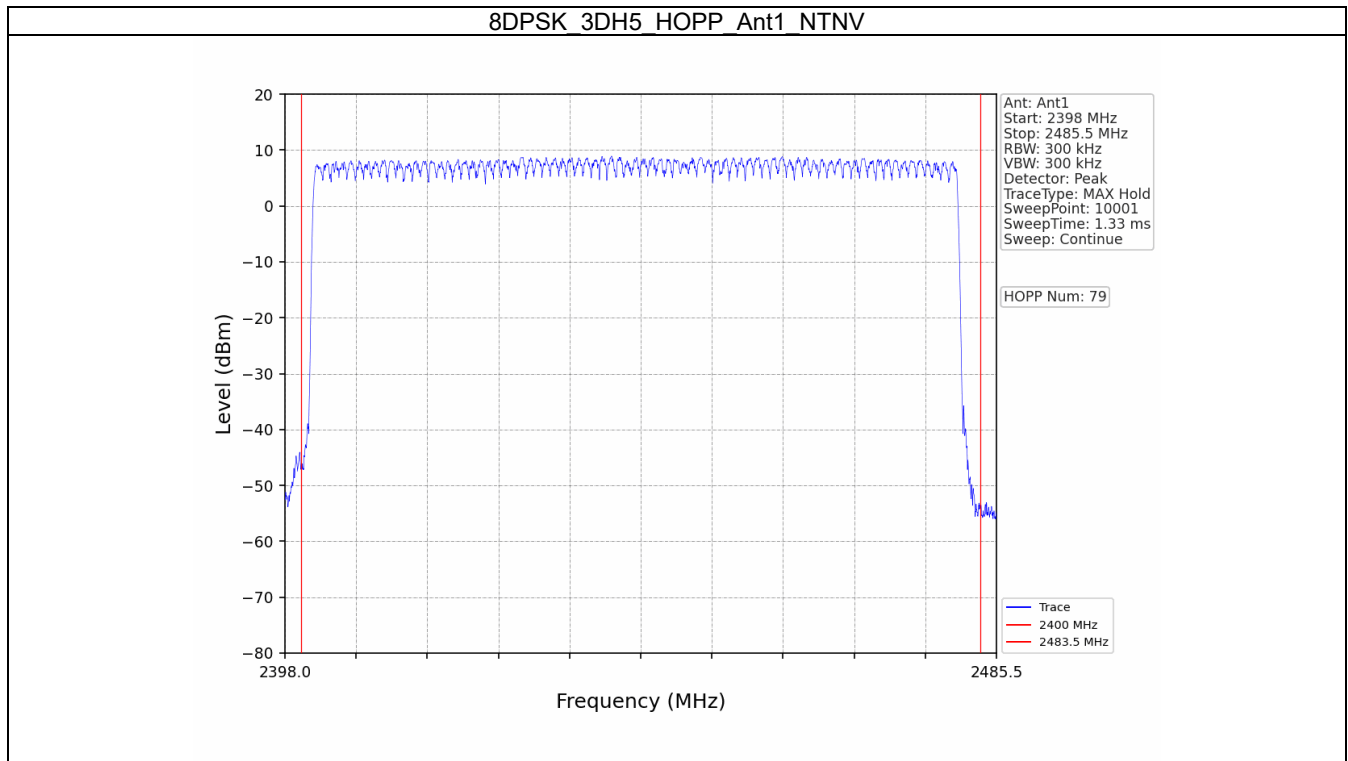


6. Time of Occupancy (Dwell Time)



6.1 Ant1



6.1.1 Test Result



Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	320	122.240	<=400	Pass
			DH3	1.640	31.600	156	255.840	<=400	Pass
			DH5	2.888	31.600	105	303.240	<=400	Pass
π/4-DQPSK	SISO	HOPP	2DH1	0.394	31.600	320	126.080	<=400	Pass
			2DH3	1.646	31.600	164	269.944	<=400	Pass
			2DH5	2.898	31.600	102	295.596	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.398	31.600	320	127.360	<=400	Pass
			3DH3	1.648	31.600	150	247.200	<=400	Pass
			3DH5	2.900	31.600	112	324.800	<=400	Pass



6.1.2 Test Graph


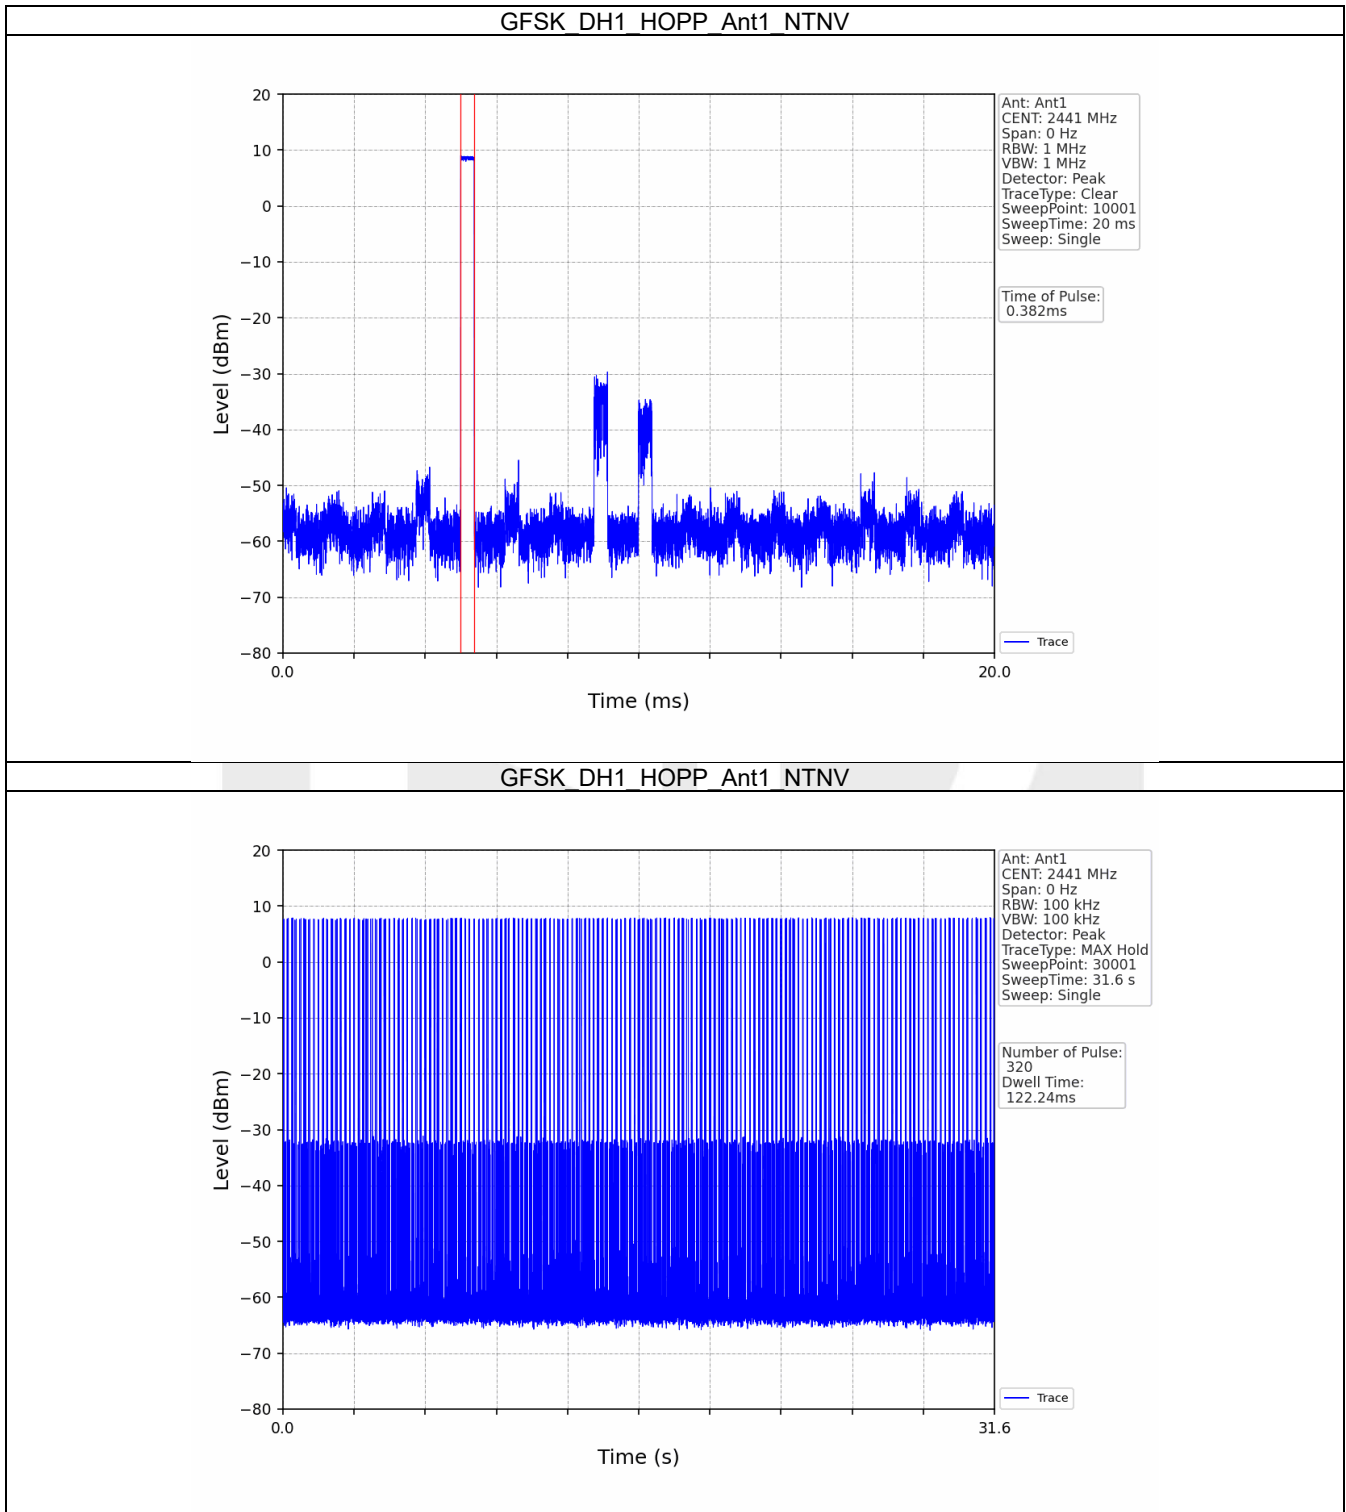


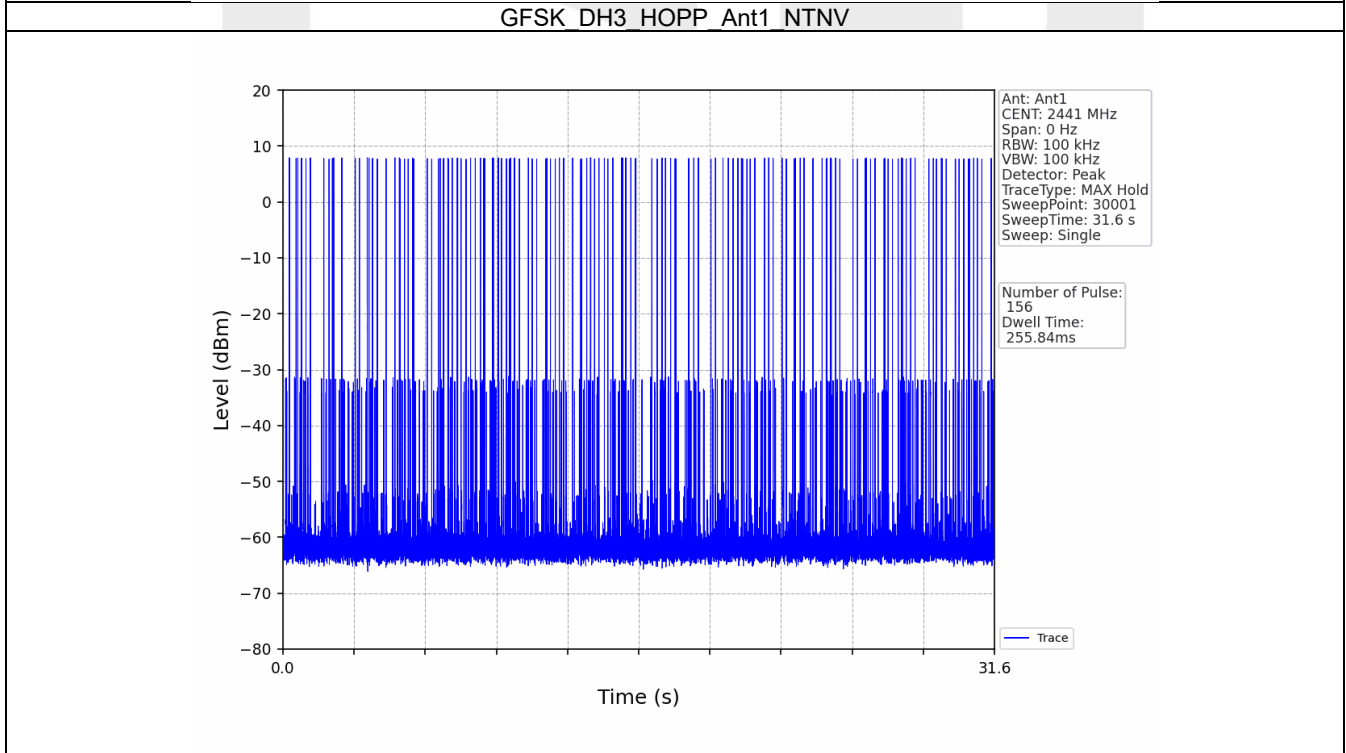
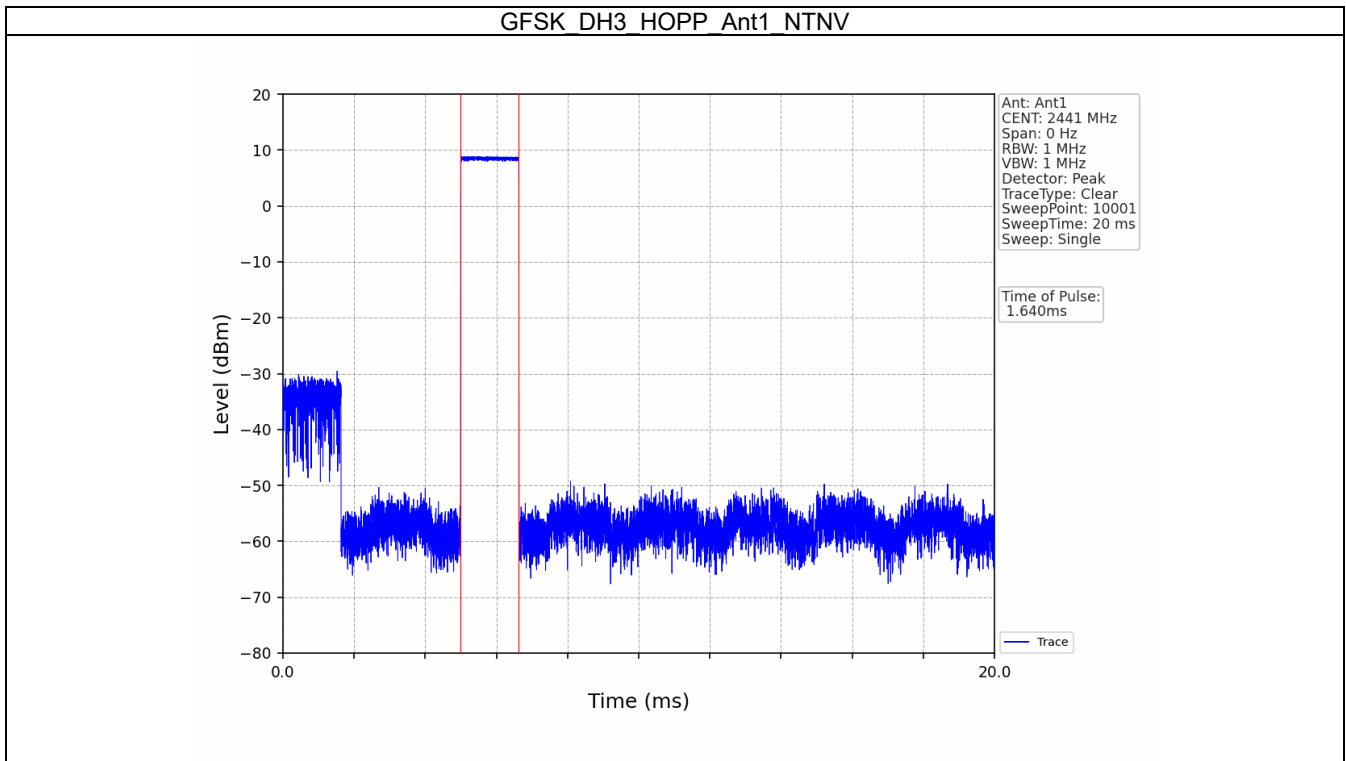


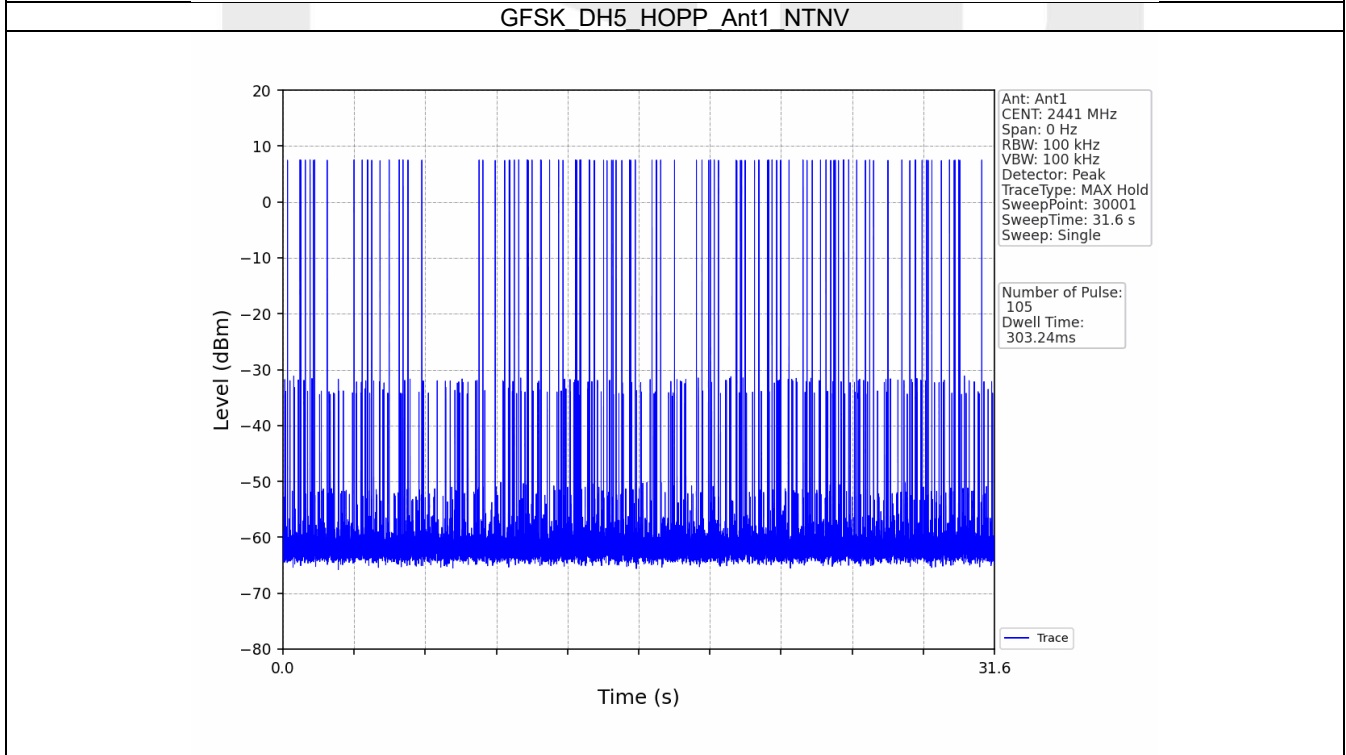
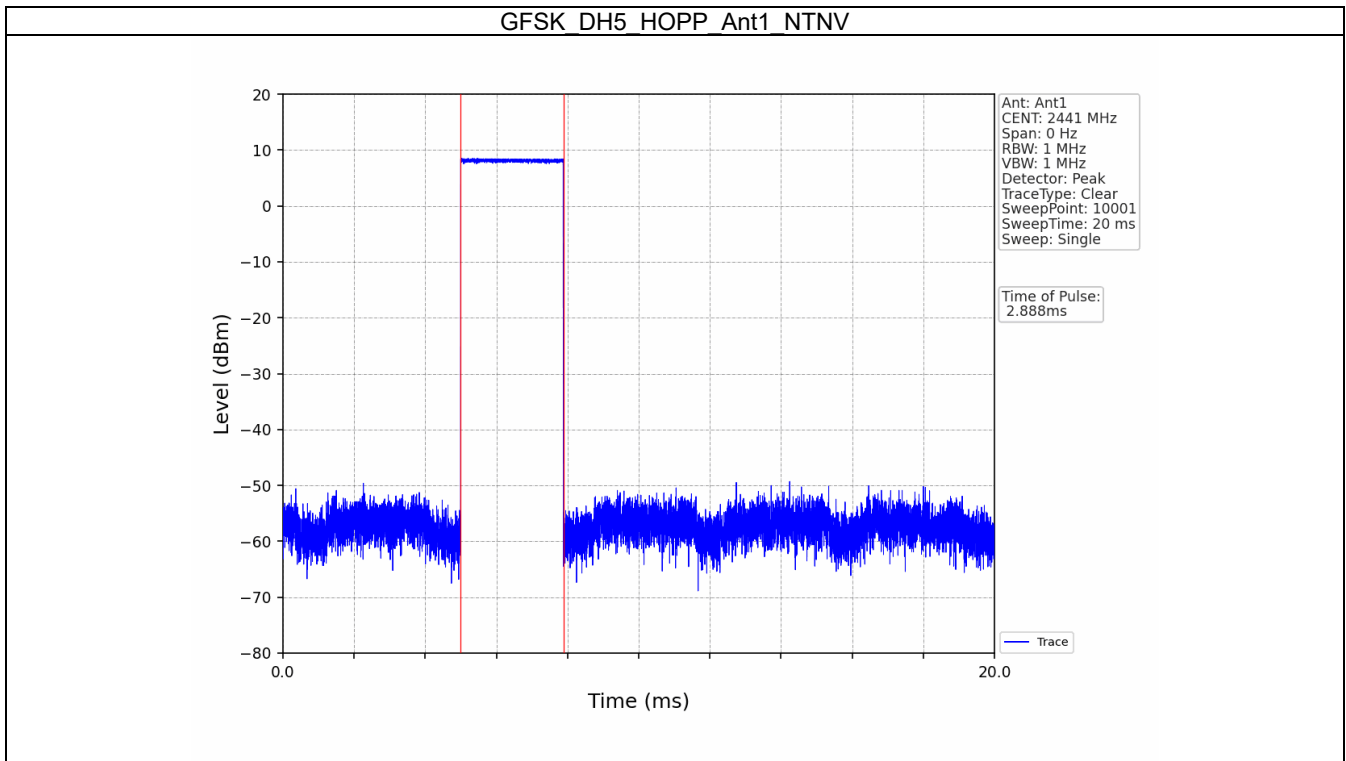


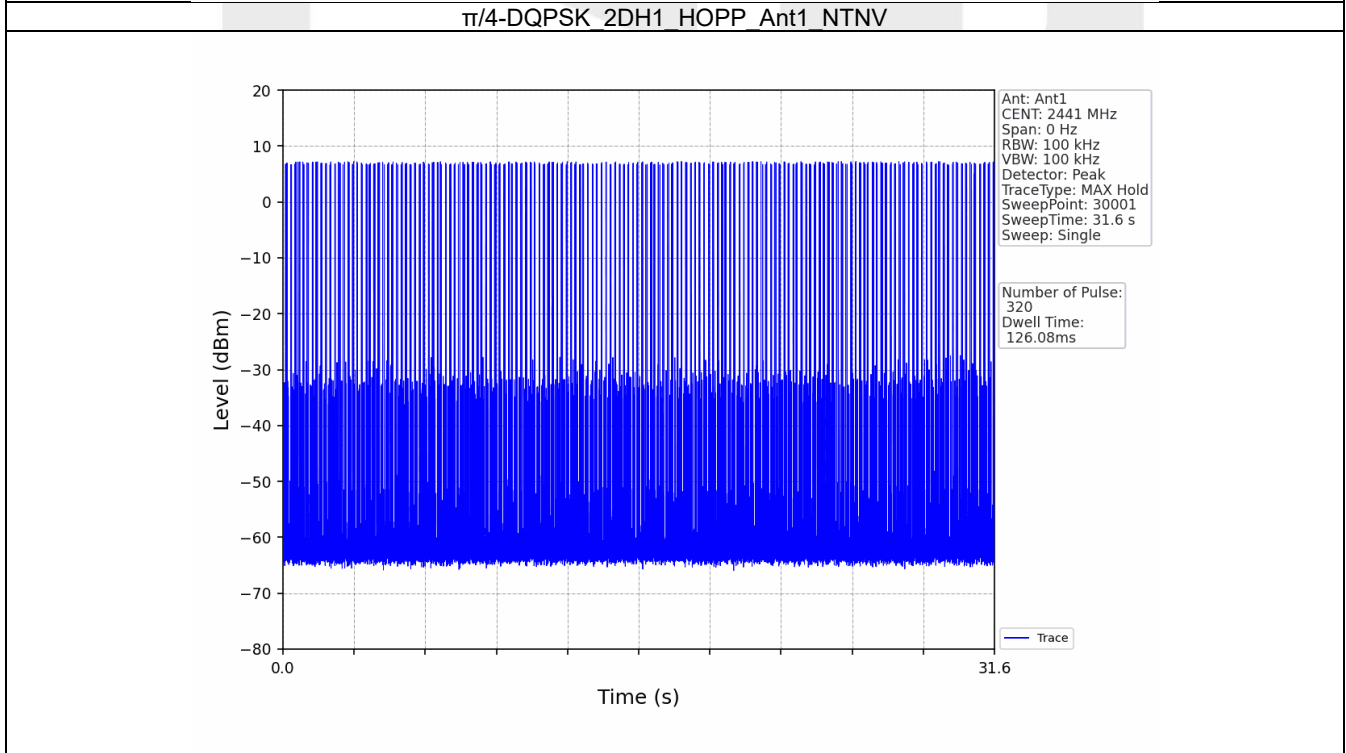
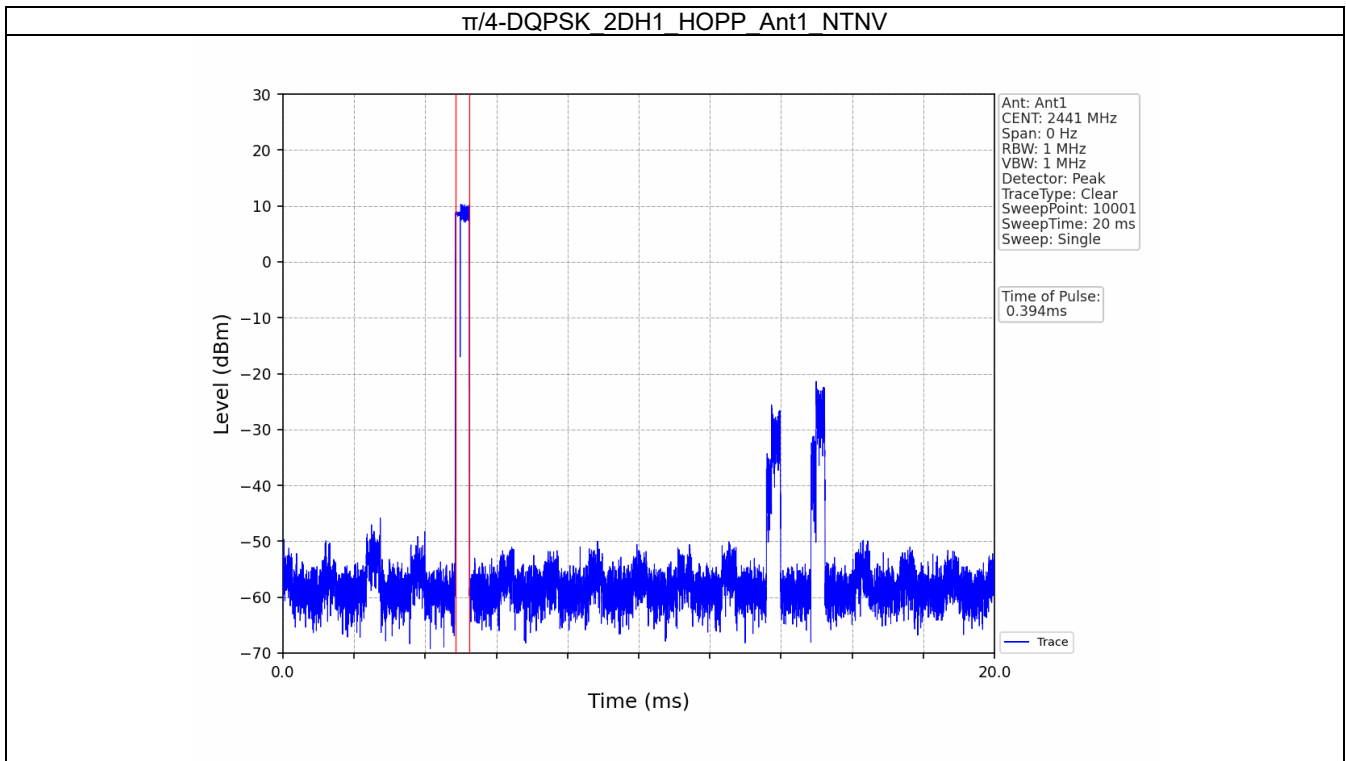


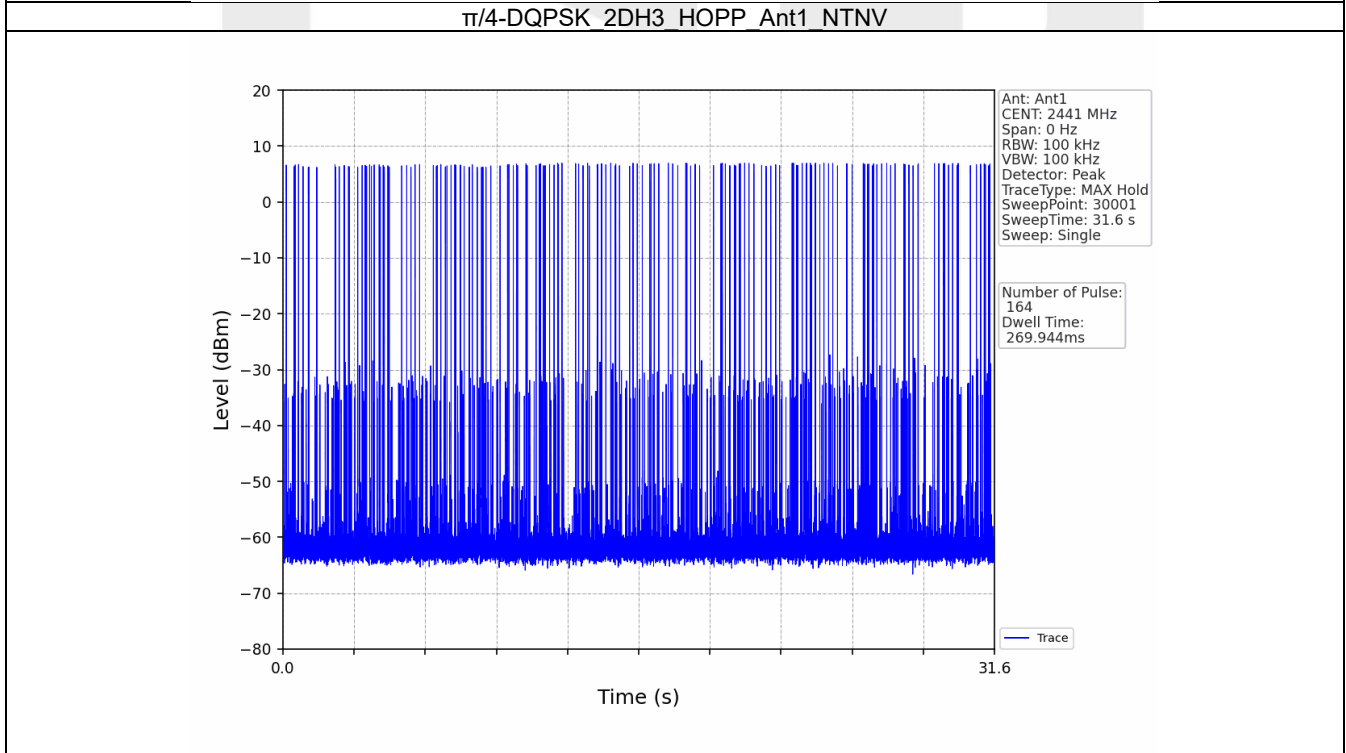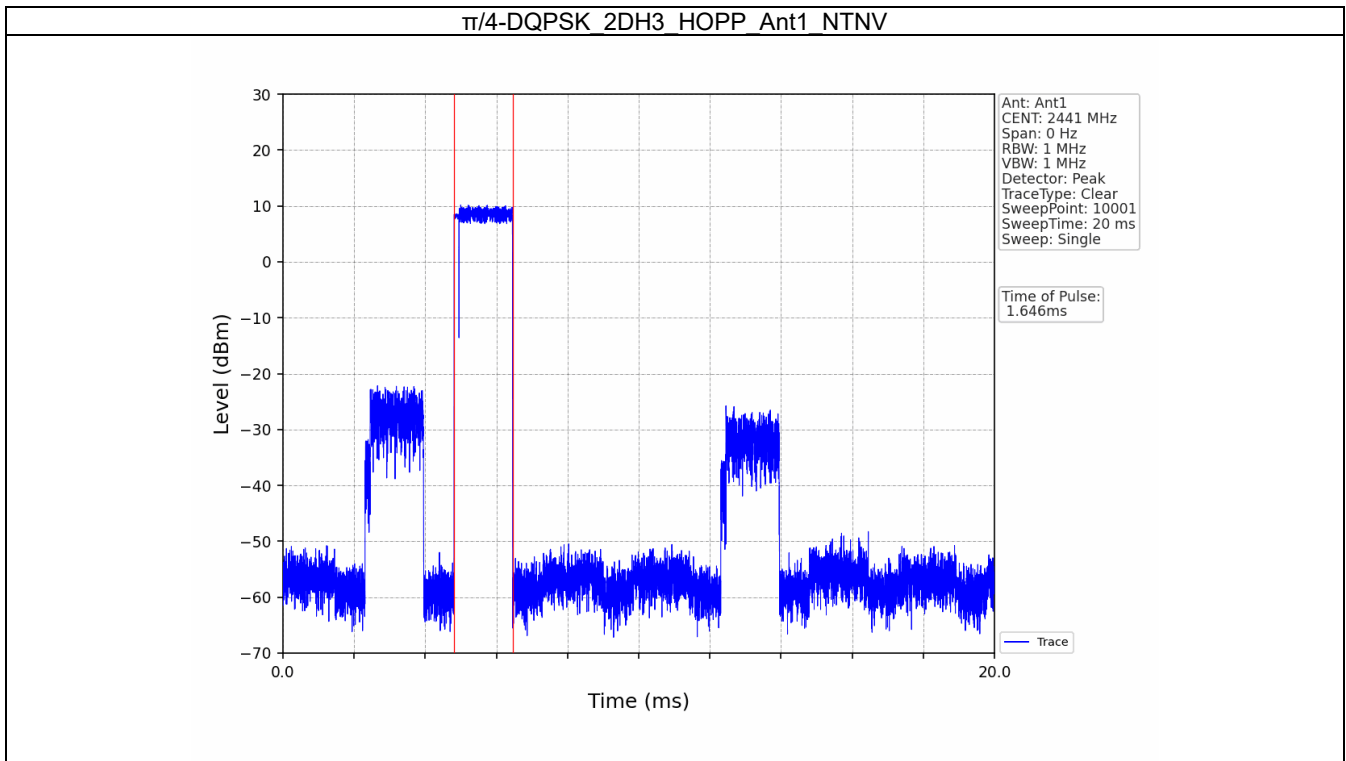

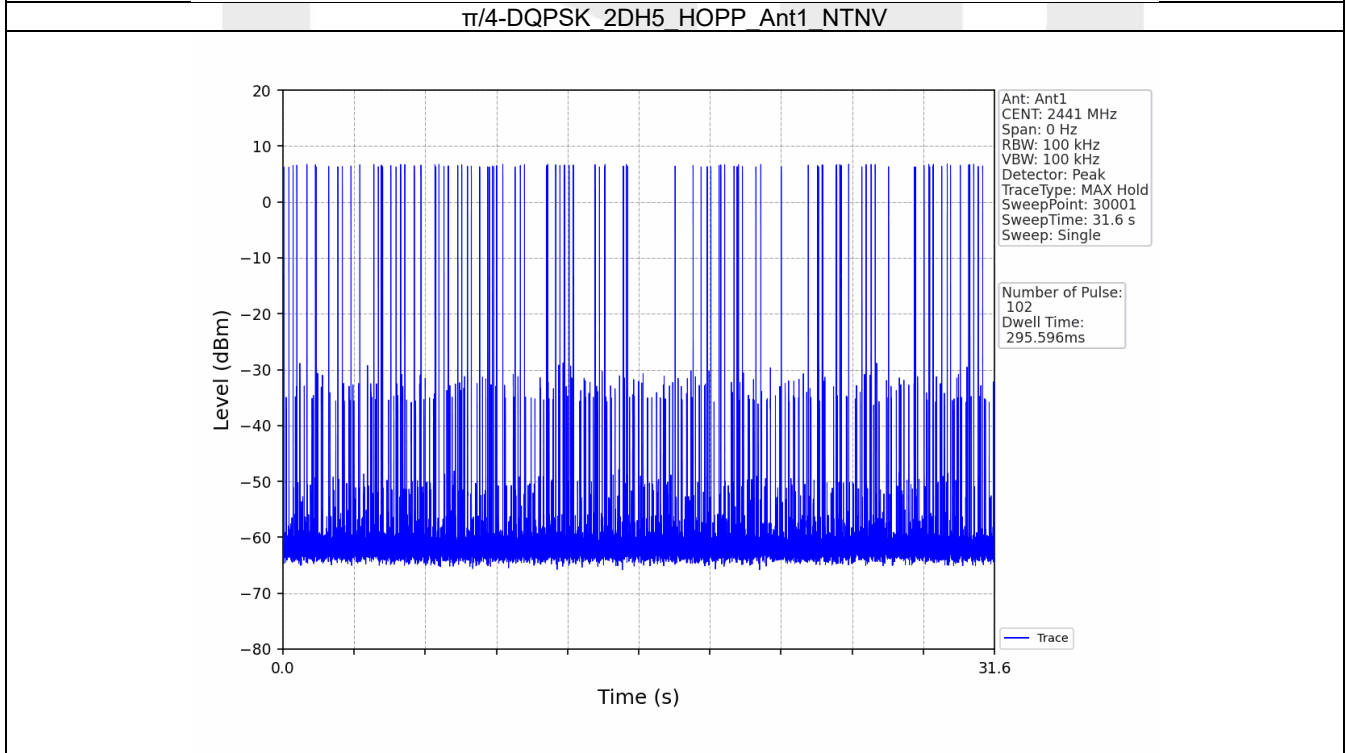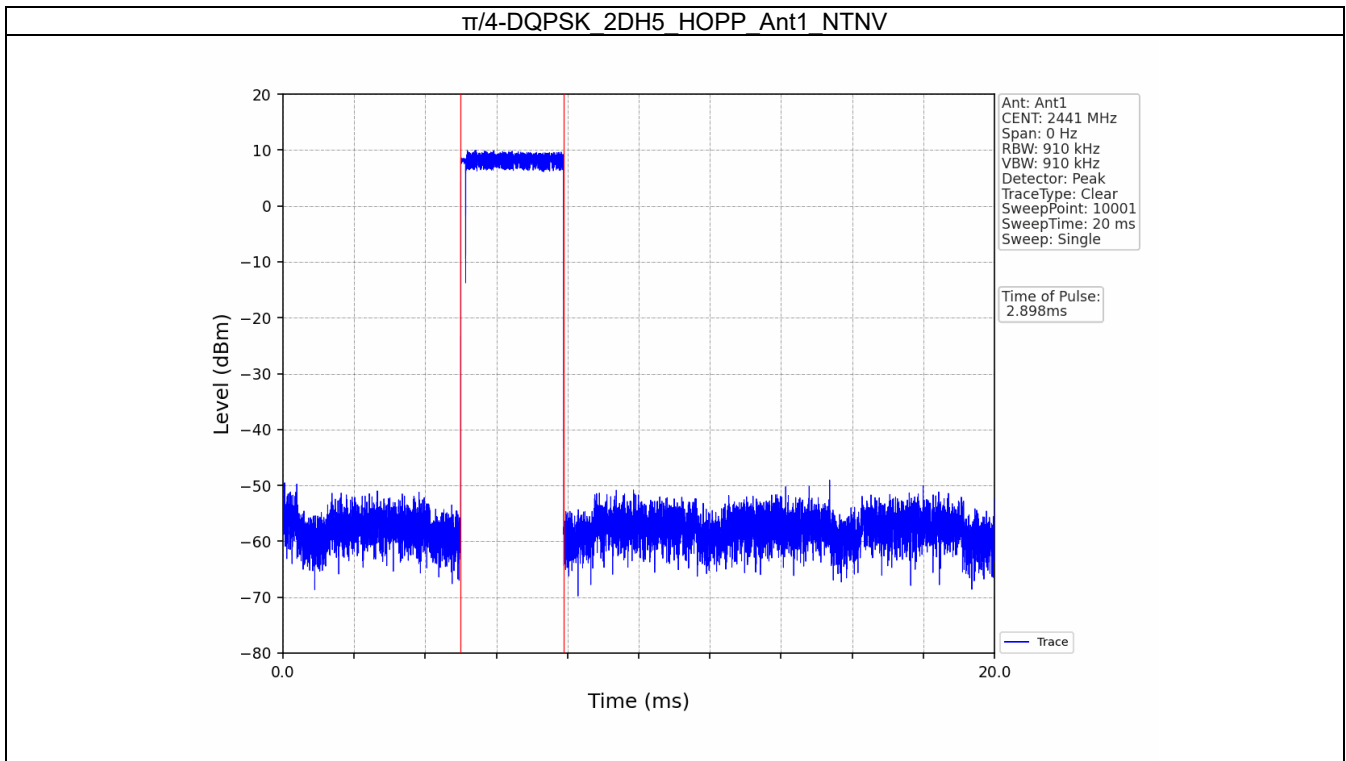

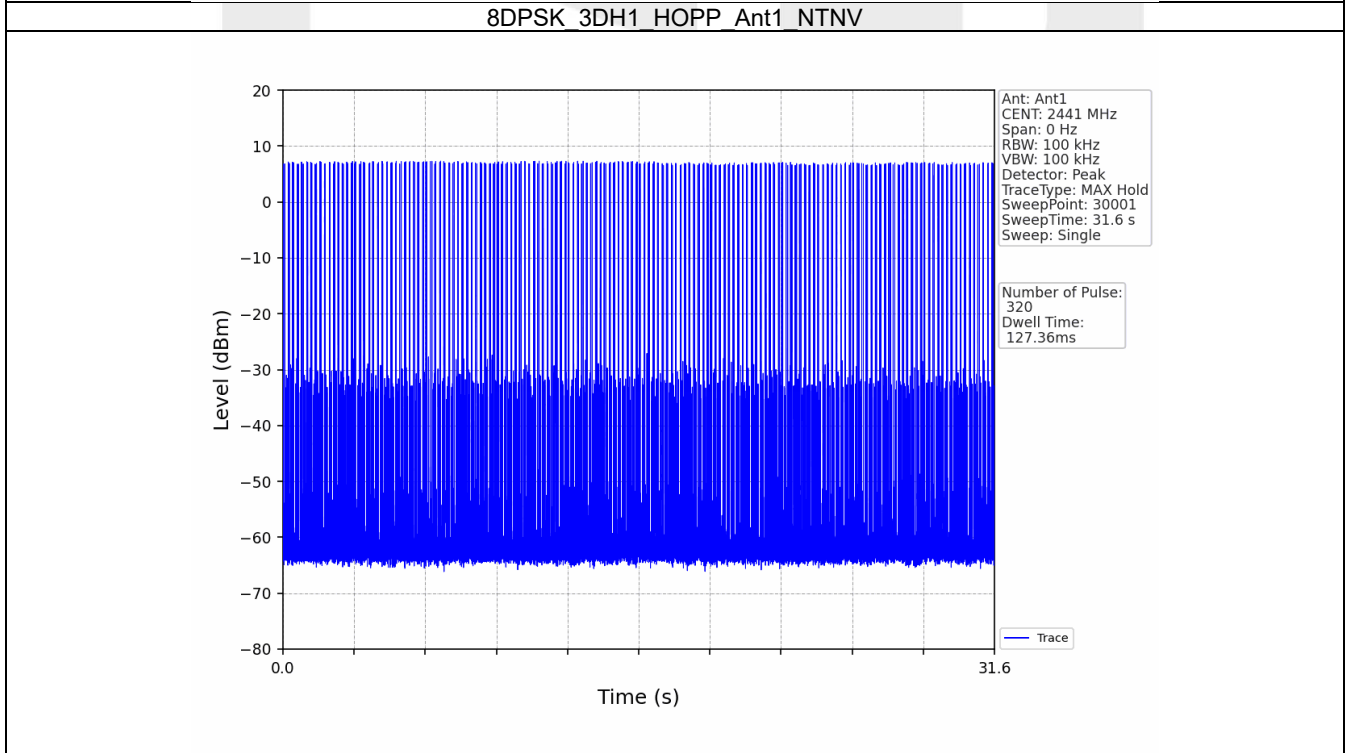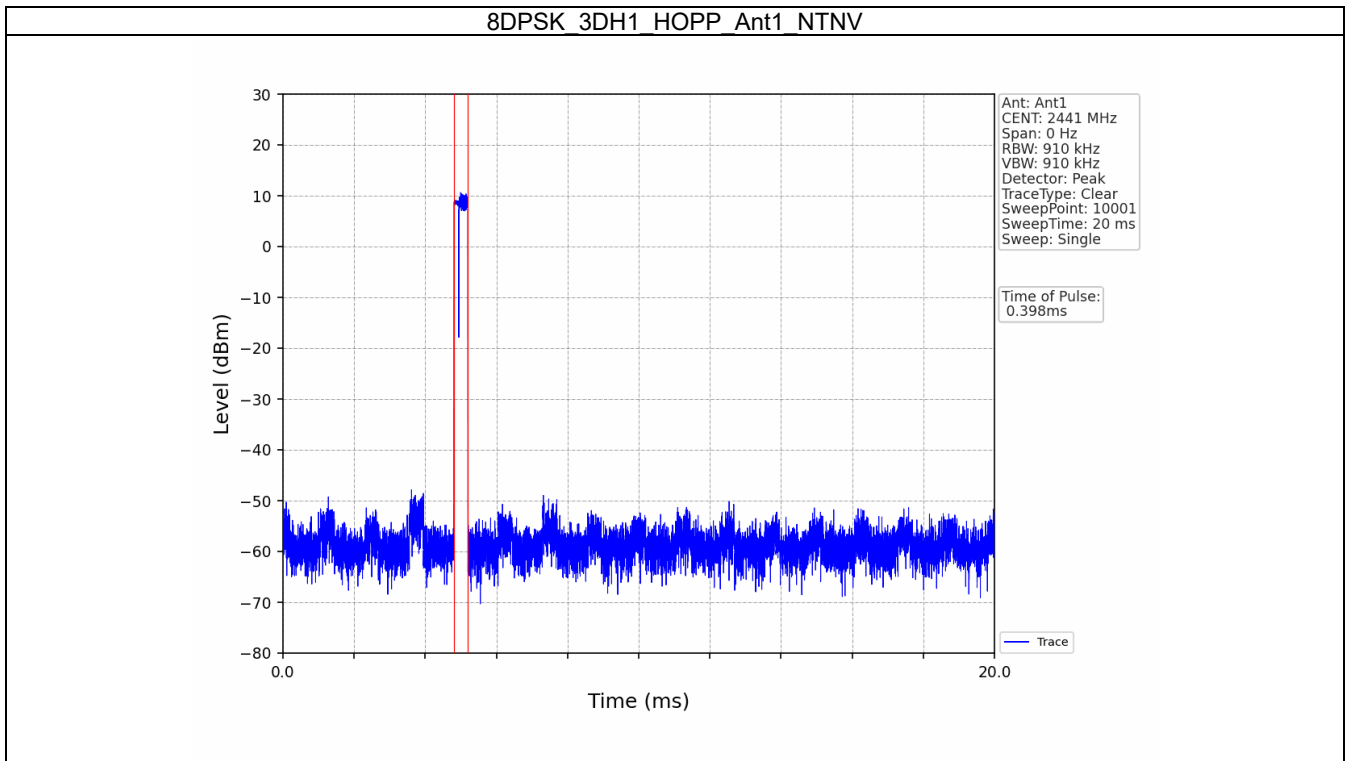

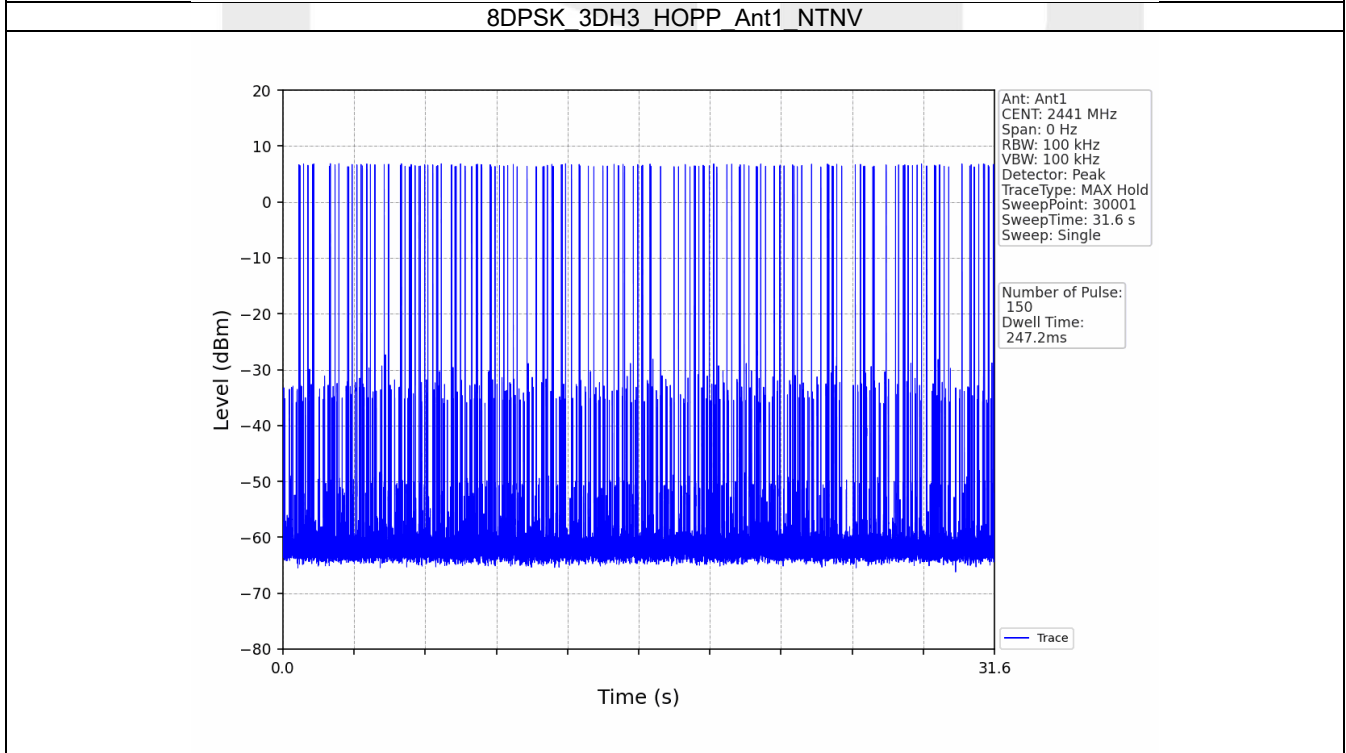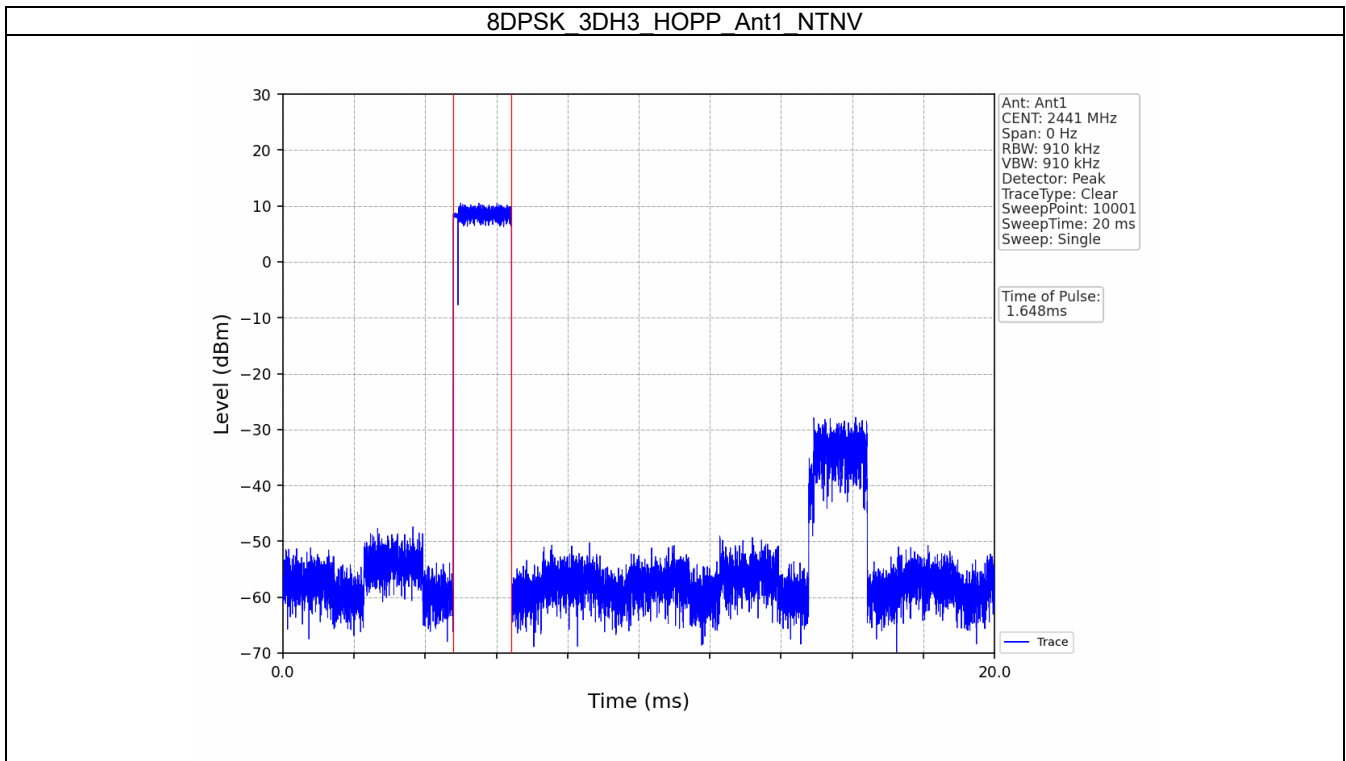

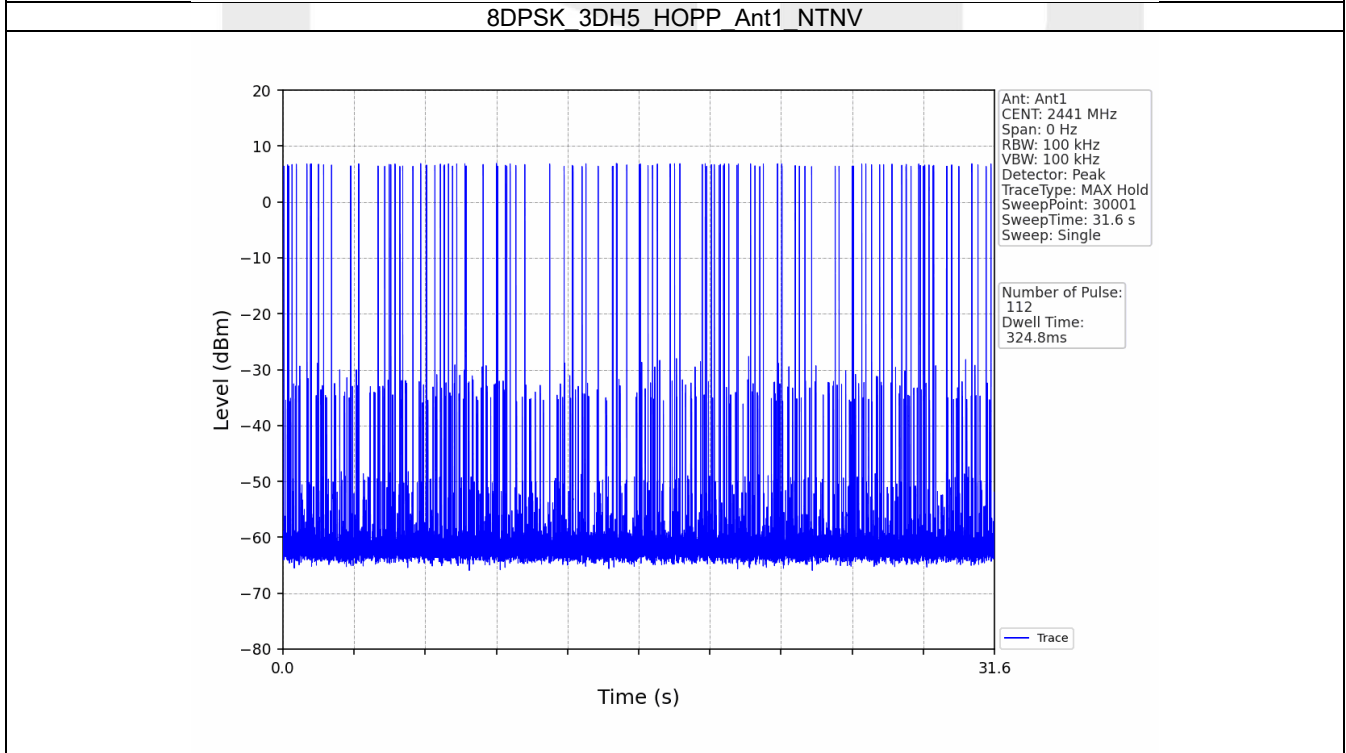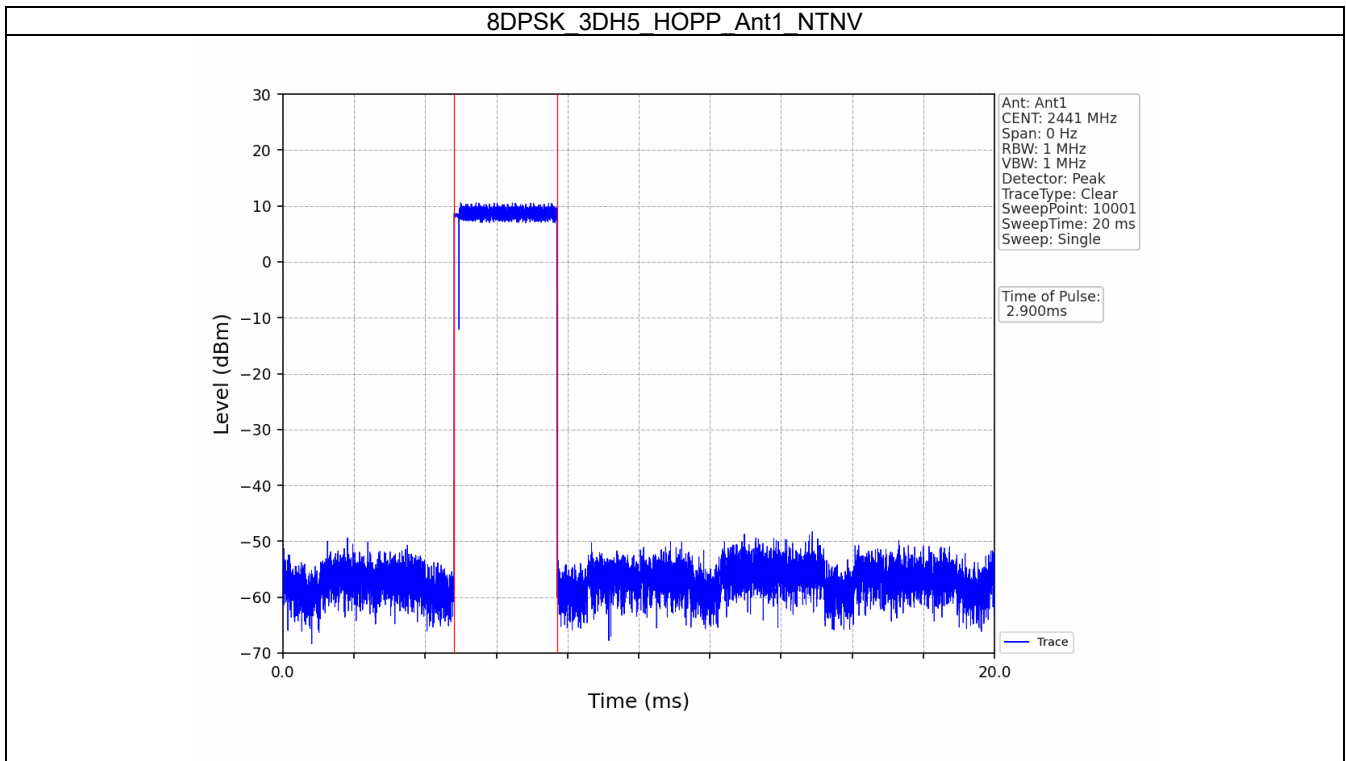

7. Unwanted Emissions In Non-restricted Frequency Bands


7.1 Ref



7.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	8.30
		2441	DH5	1	8.59
		2480	DH5	1	8.15
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	8.12
		2441	2DH5	1	8.66
		2480	2DH5	1	8.13
8DPSK	SISO	2402	3DH5	1	7.89
		2441	3DH5	1	8.61
		2480	3DH5	1	8.05



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.1.2 Test Graph

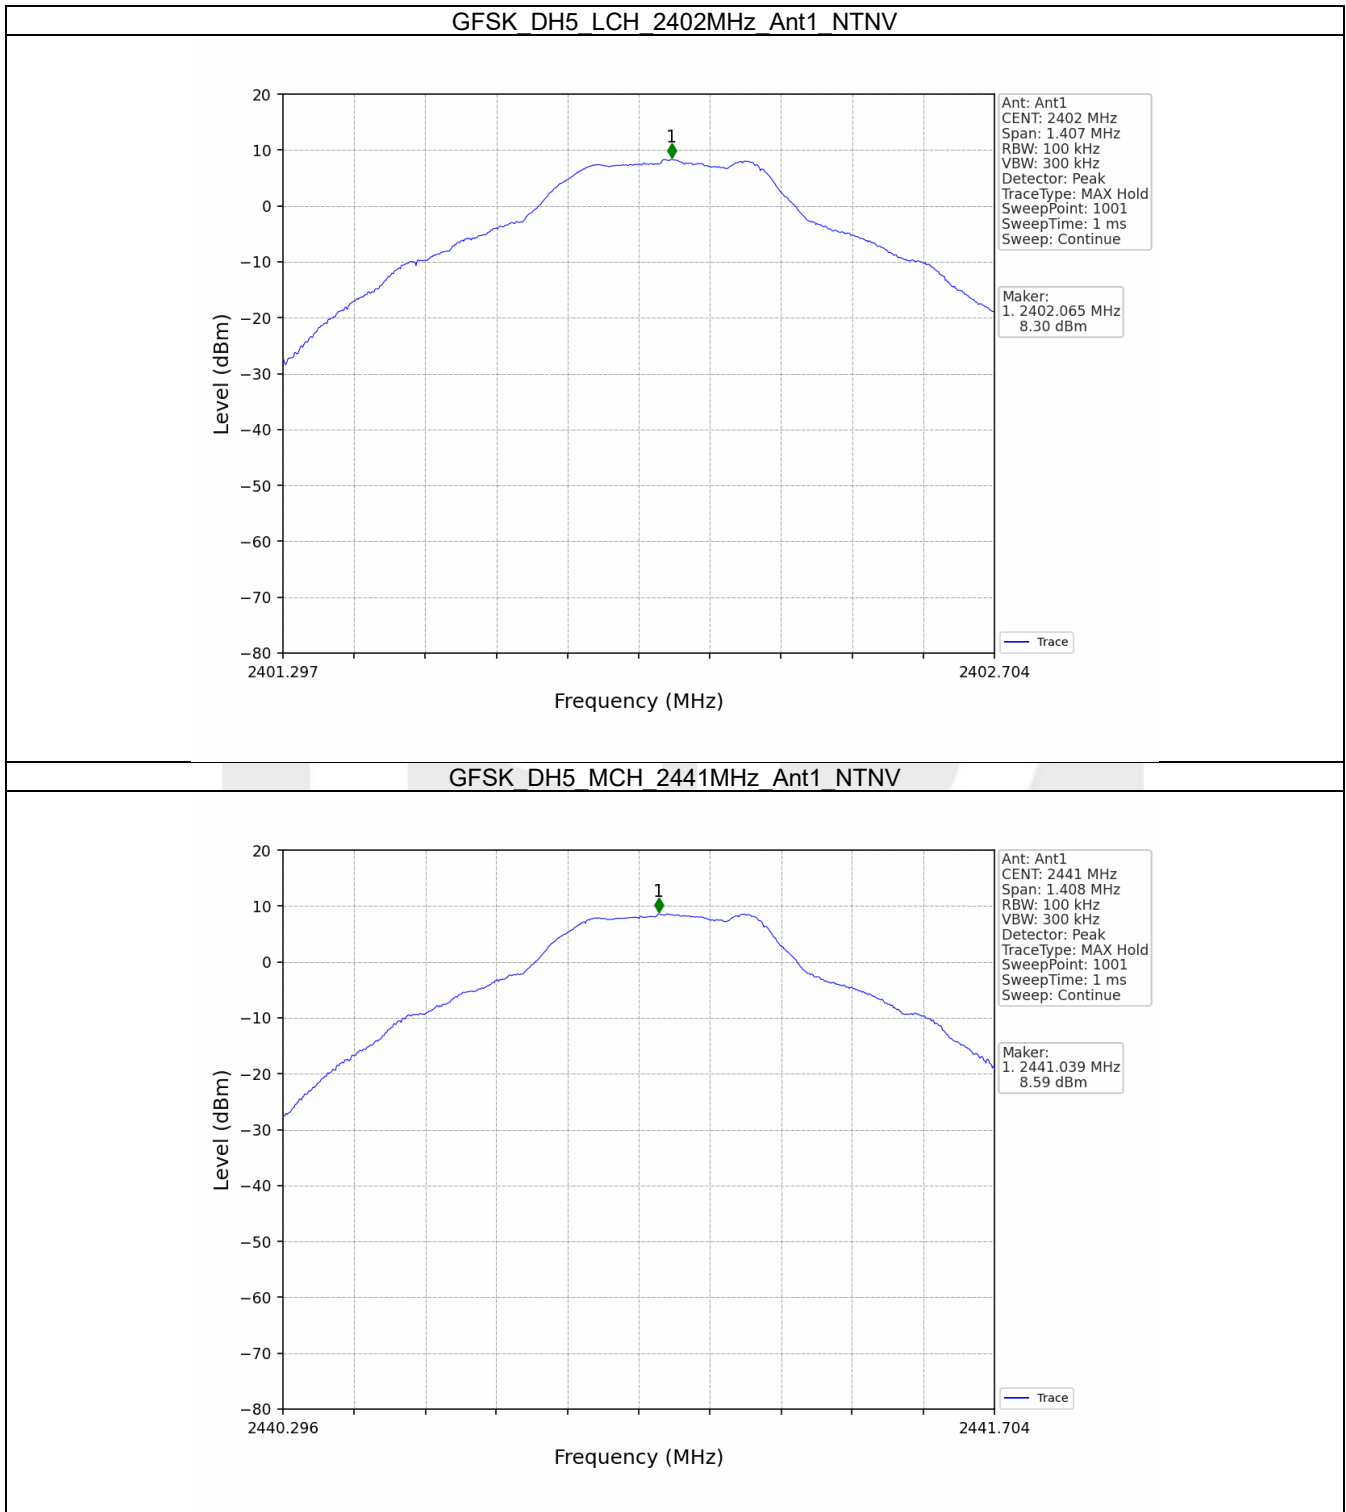

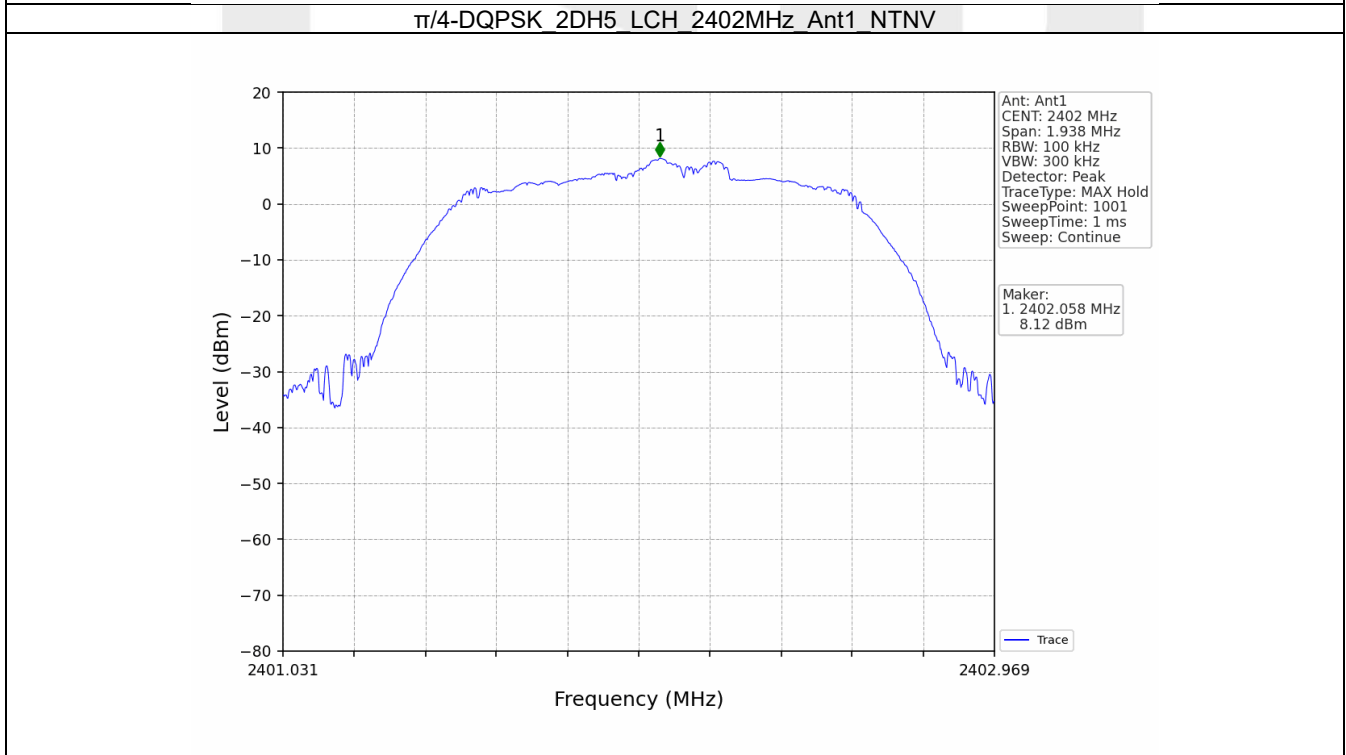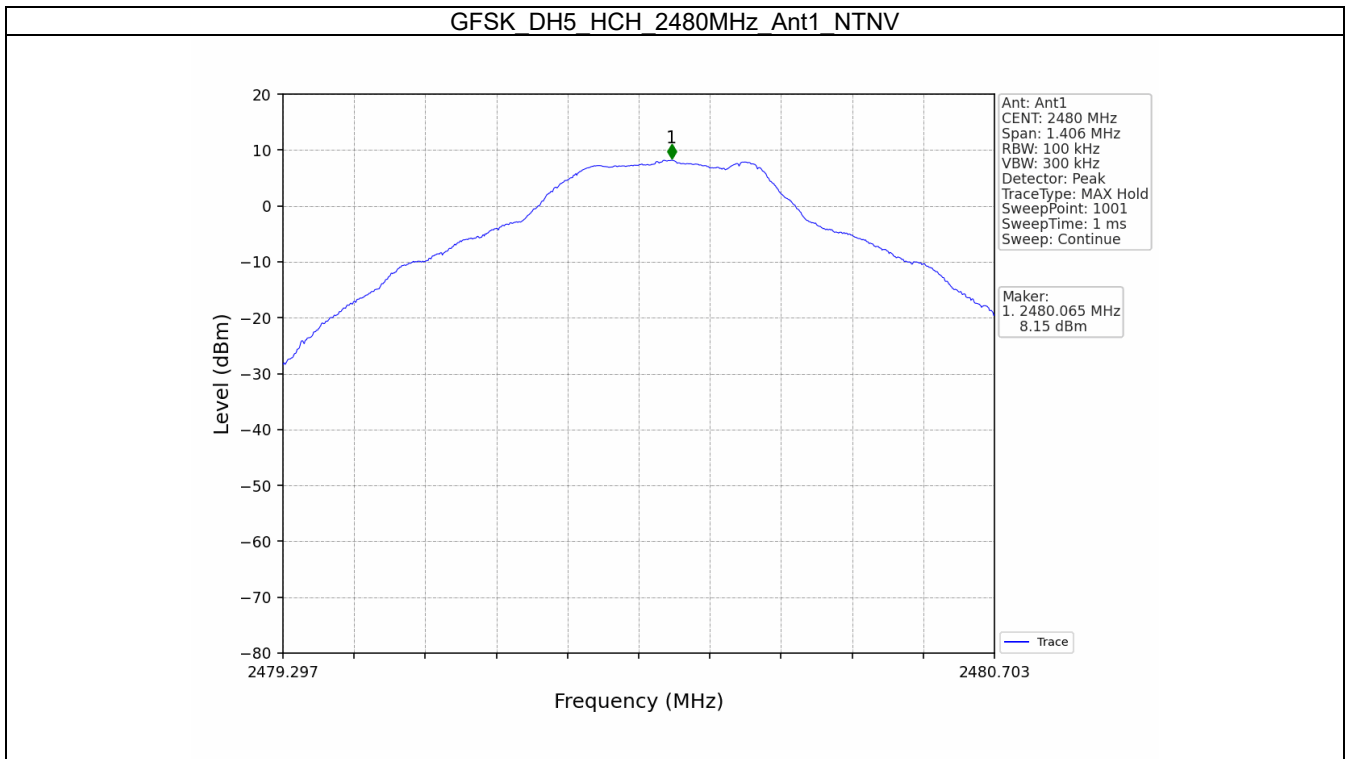

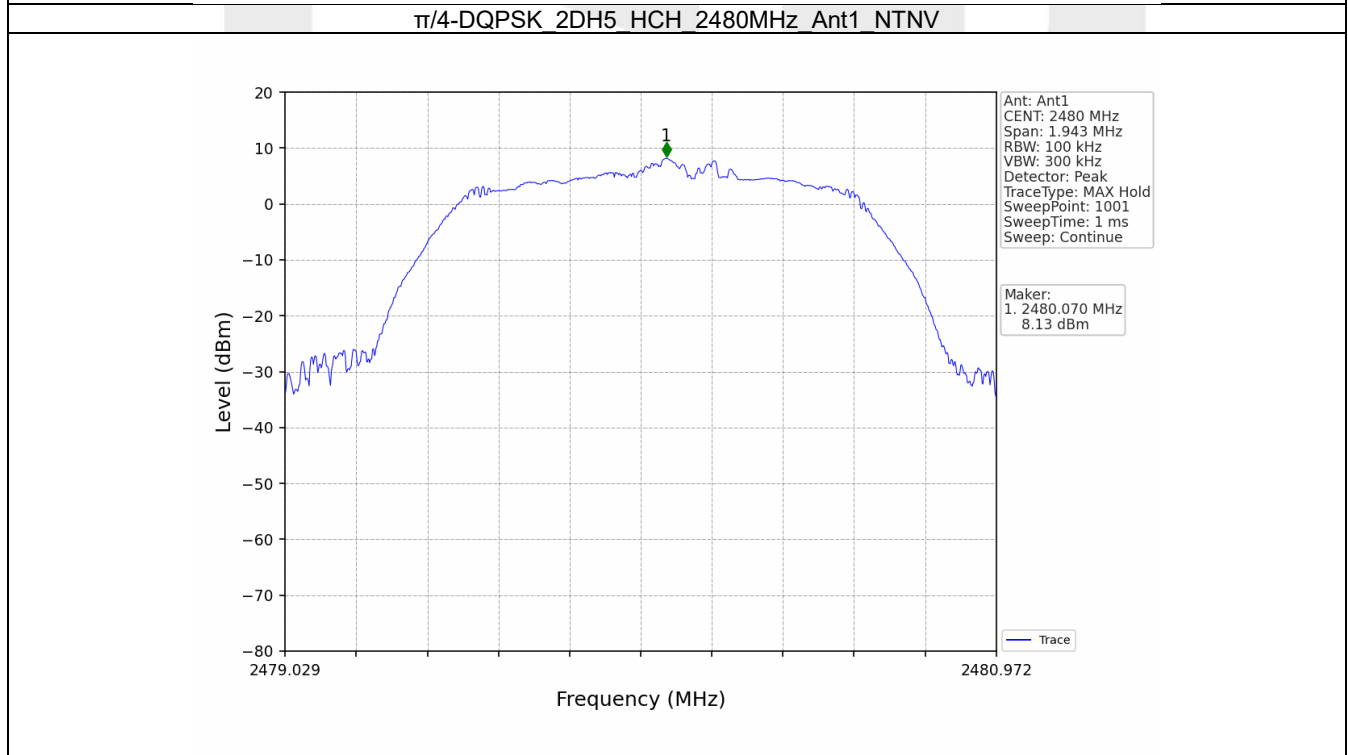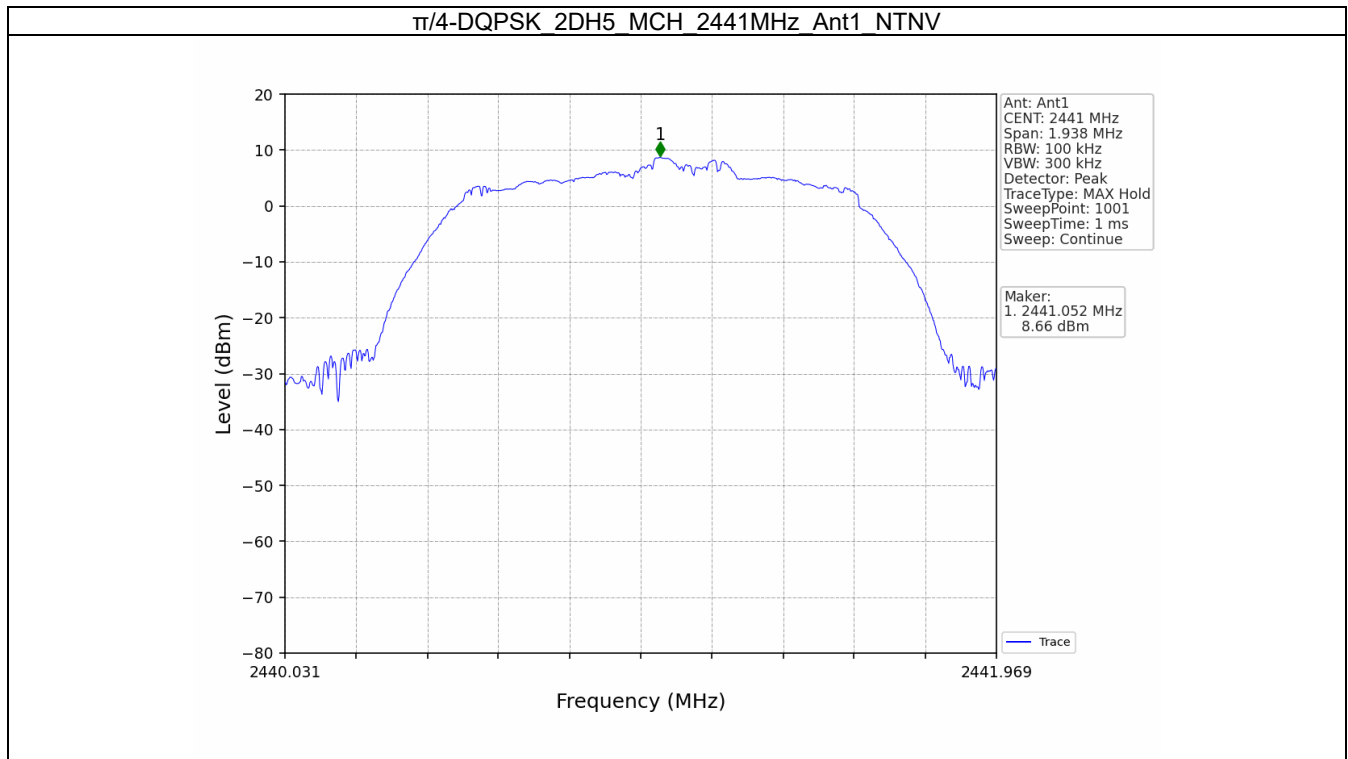

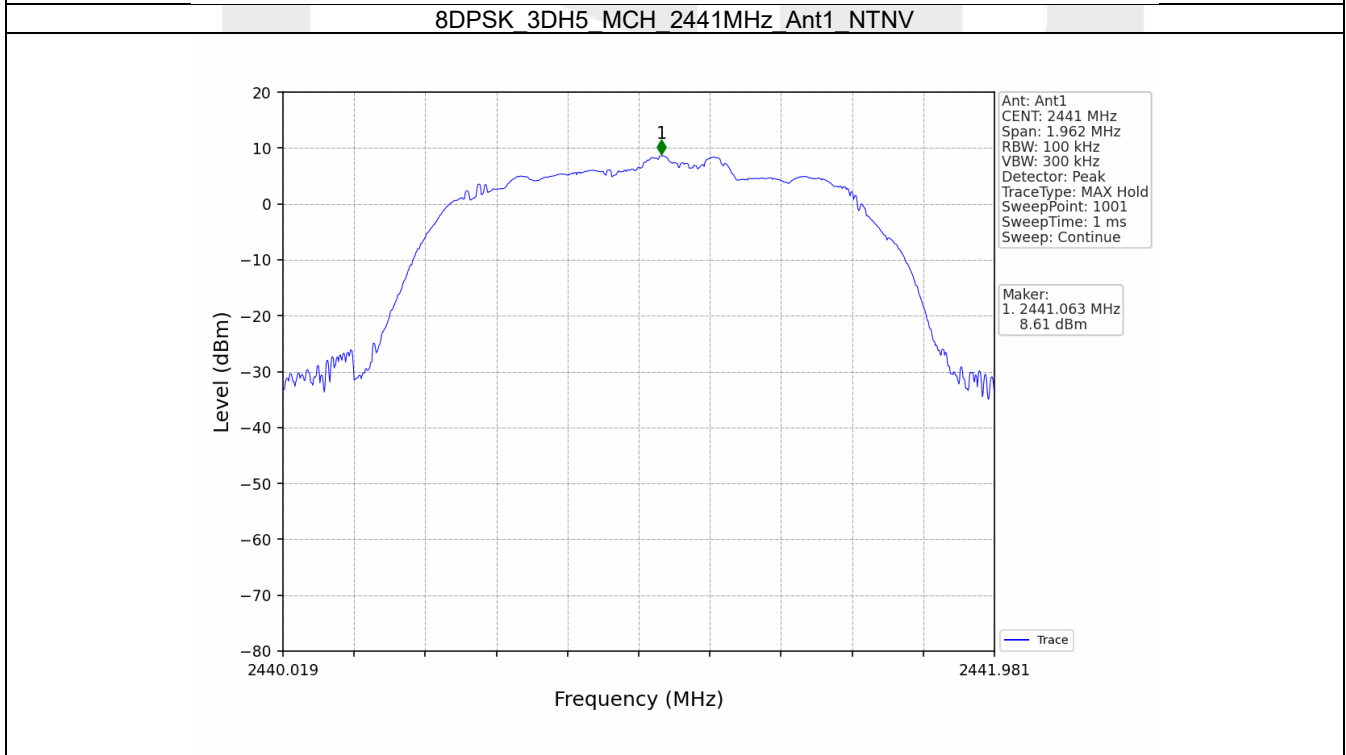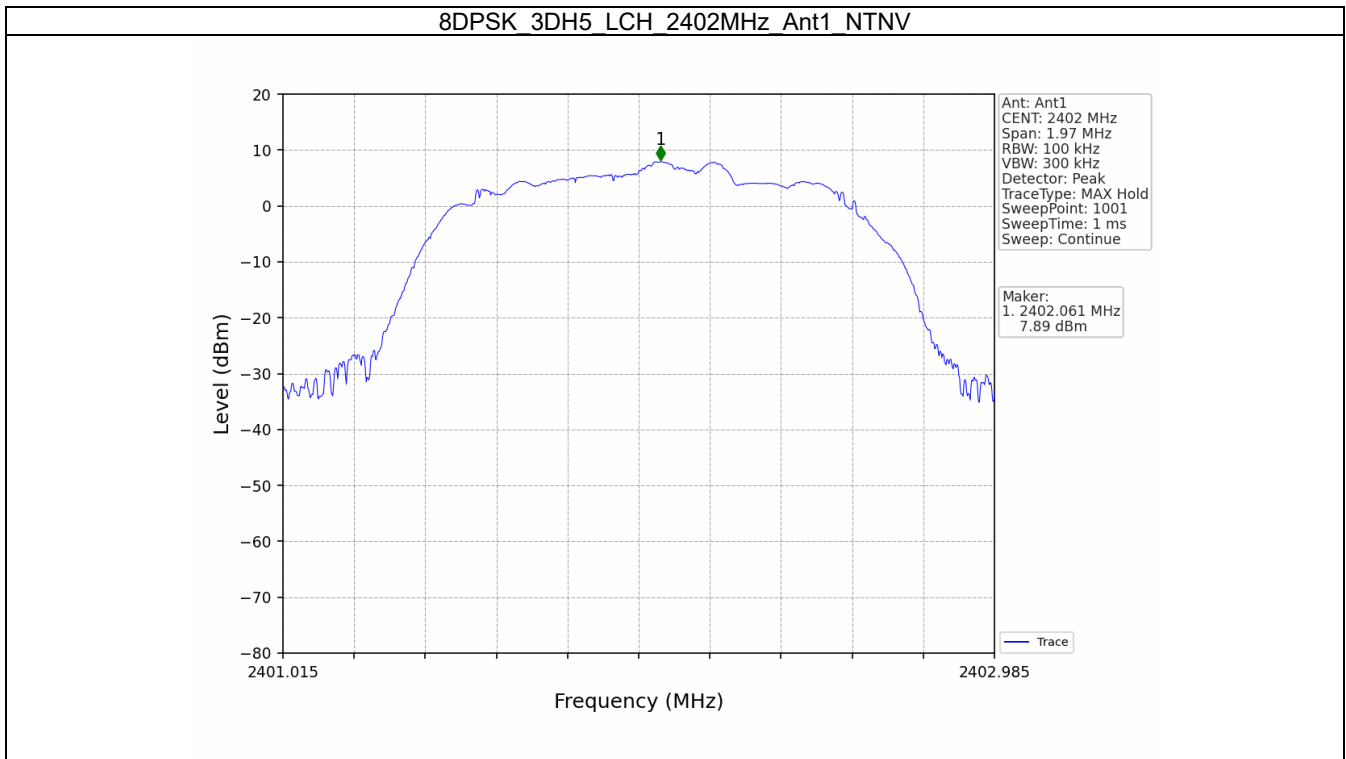

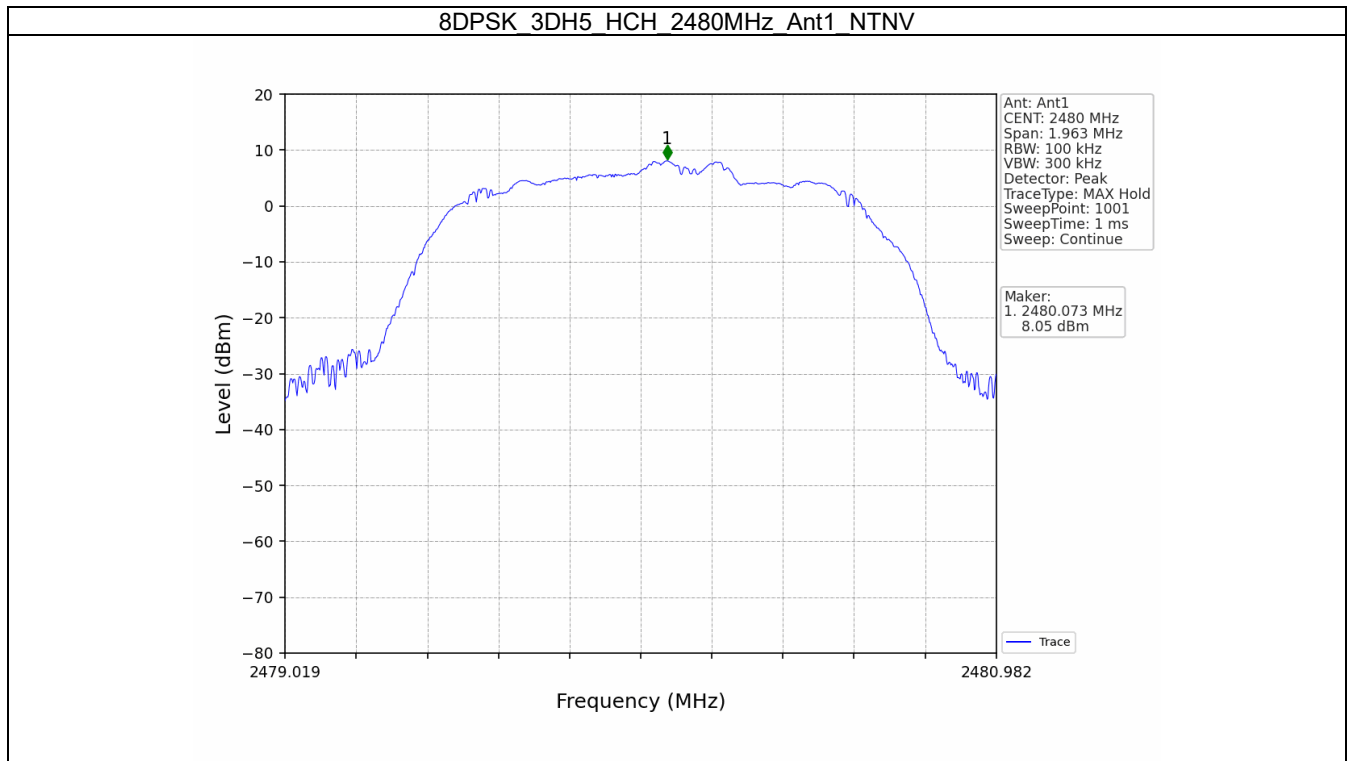


7.2 CSE



7.2.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	8.59	-11.41	Pass
		2441	DH5	1	8.59	-11.41	Pass
		2480	DH5	1	8.59	-11.41	Pass
		HOPP	DH5	1	8.59	-11.41	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	8.66	-11.34	Pass
		2441	2DH5	1	8.66	-11.34	Pass
		2480	2DH5	1	8.66	-11.34	Pass
		HOPP	2DH5	1	8.66	-11.34	Pass
8DPSK	SISO	2402	3DH5	1	8.61	-11.39	Pass
		2441	3DH5	1	8.61	-11.39	Pass
		2480	3DH5	1	8.61	-11.39	Pass
		HOPP	3DH5	1	8.61	-11.39	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.



7.2.2 Test Graph


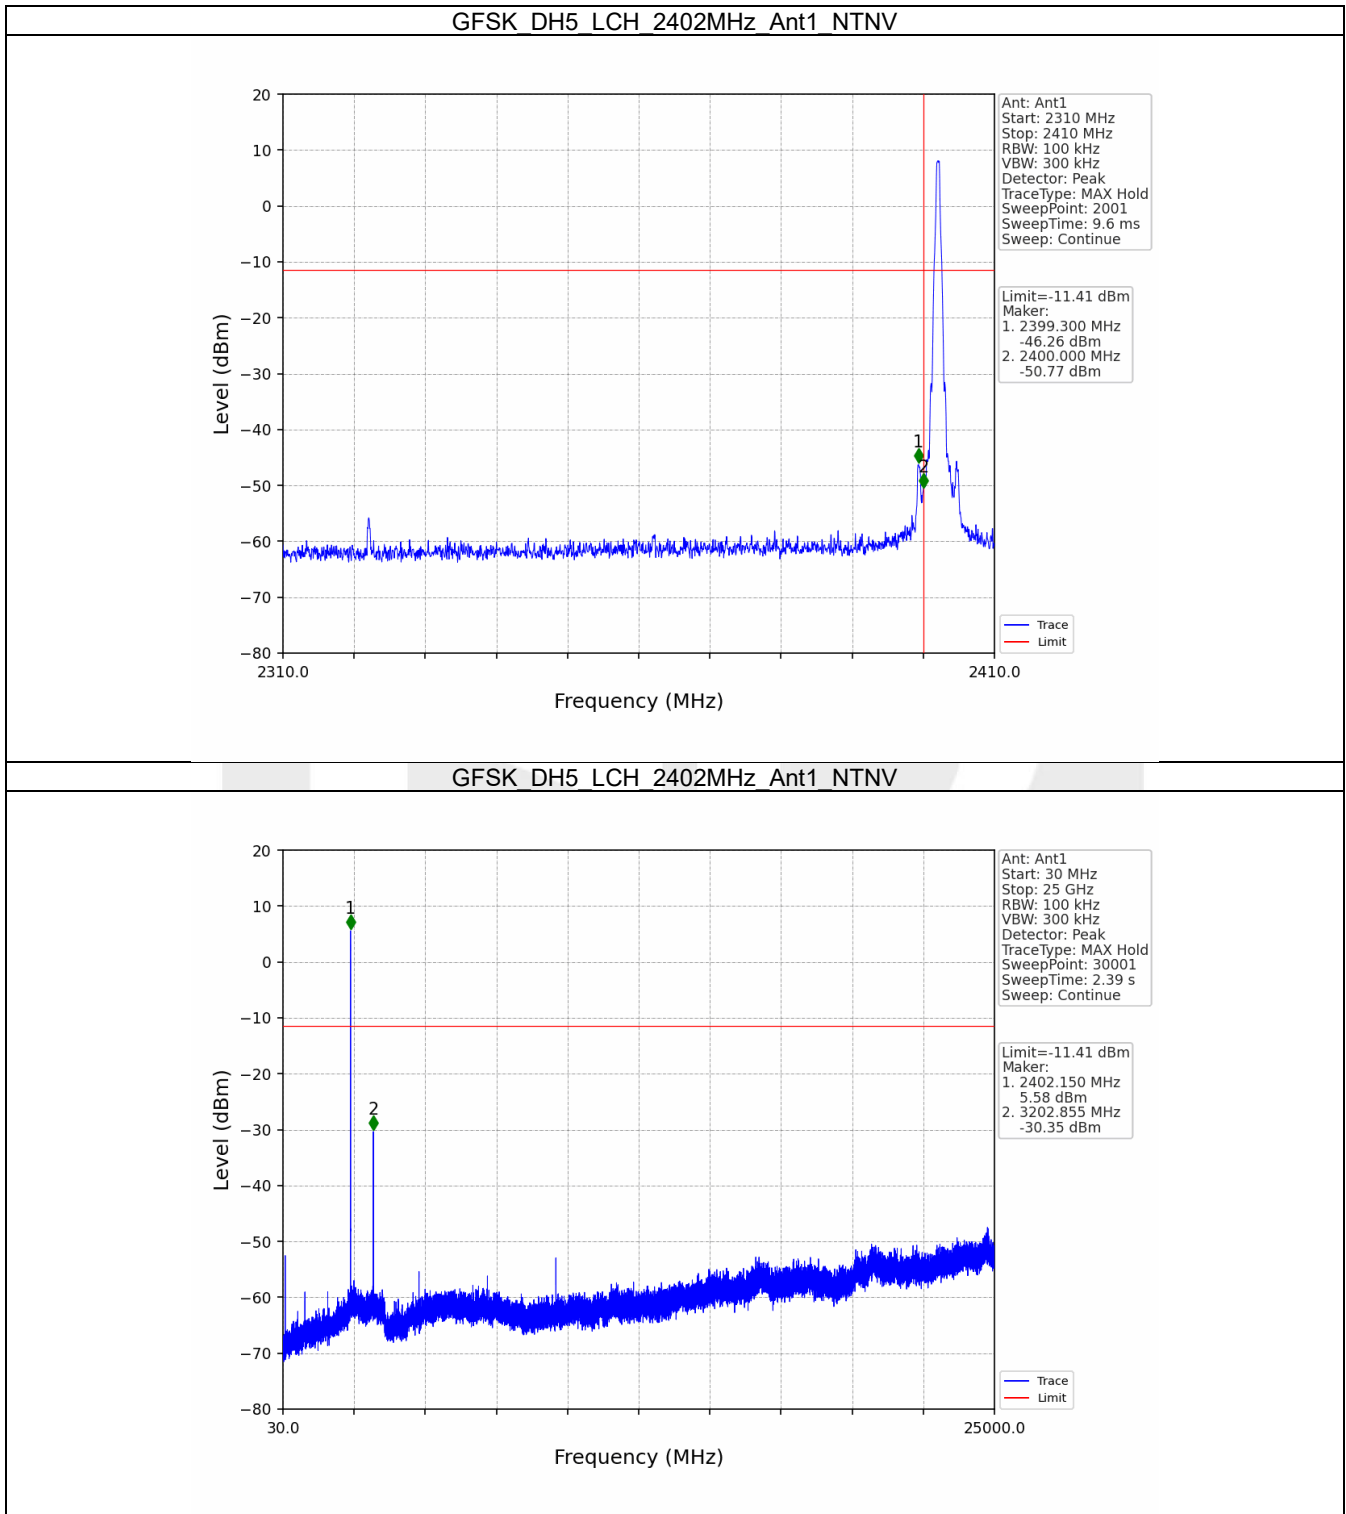


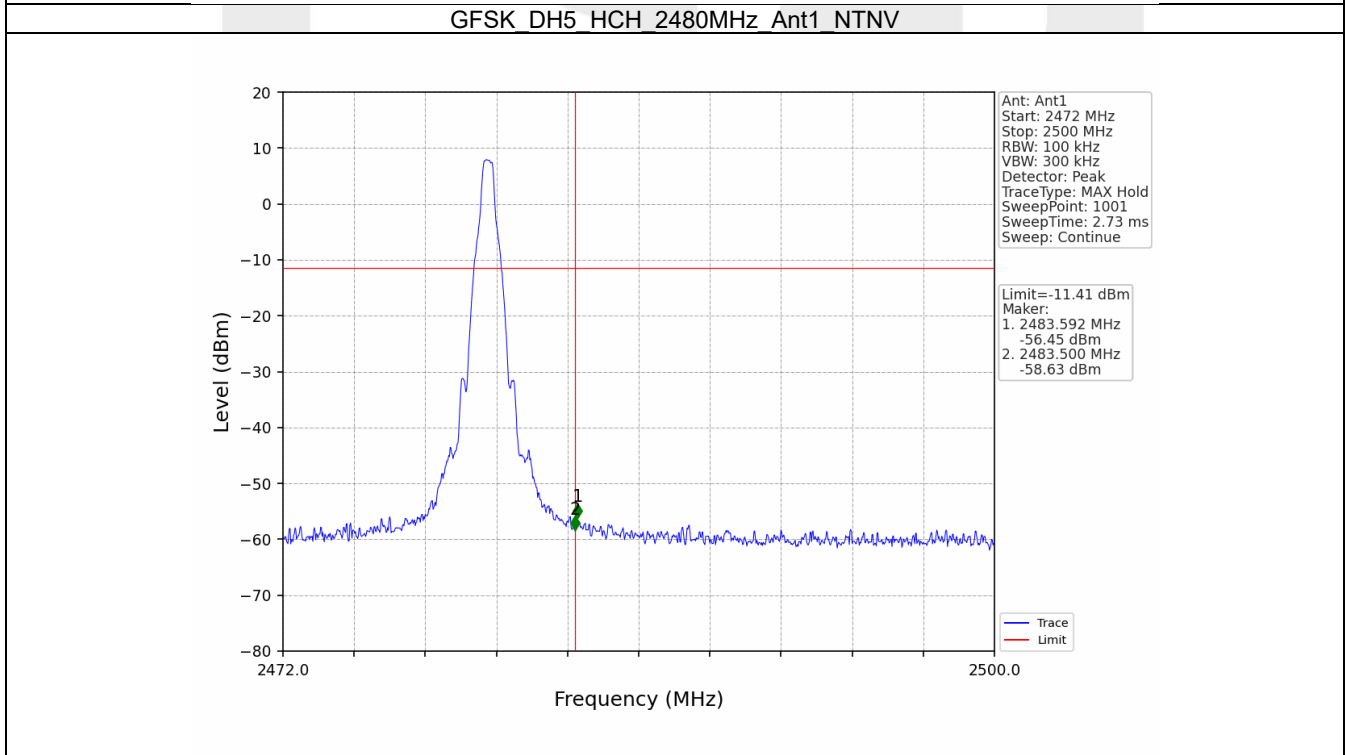
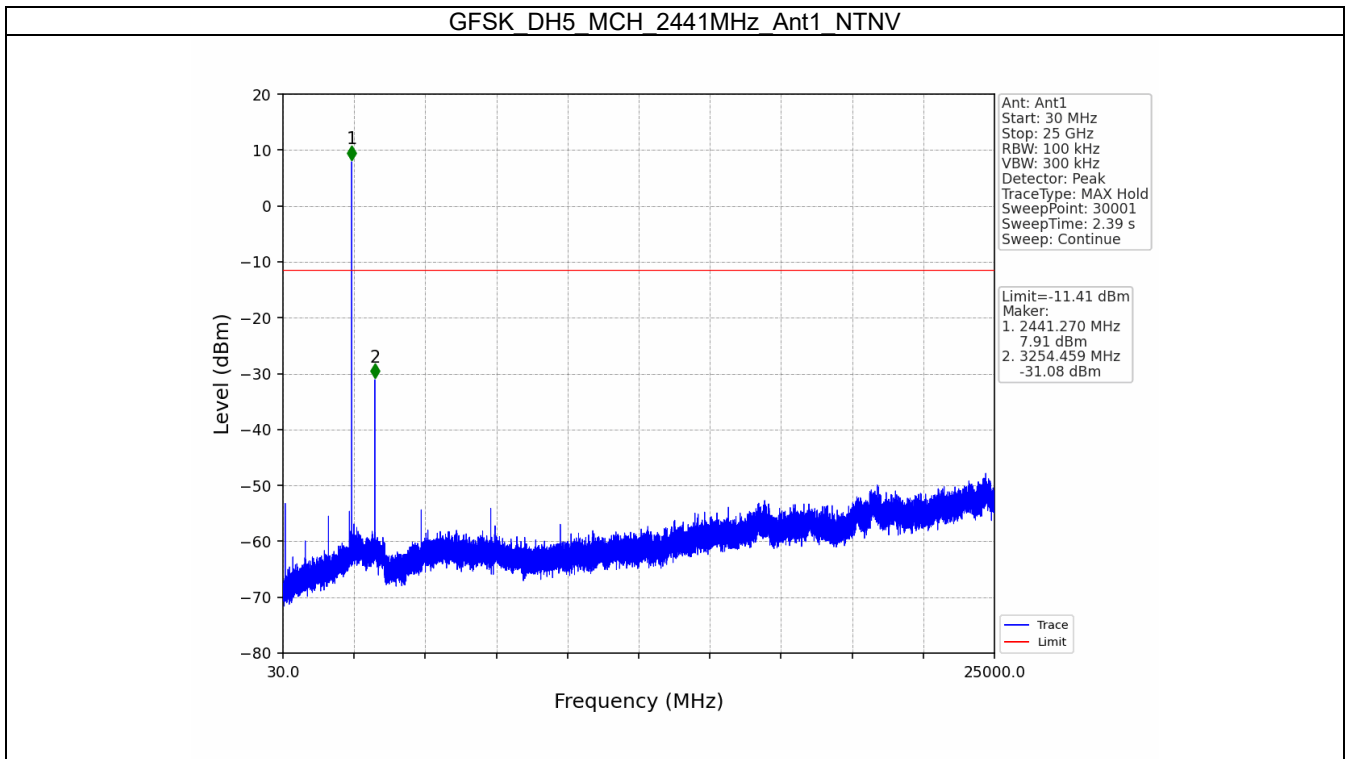


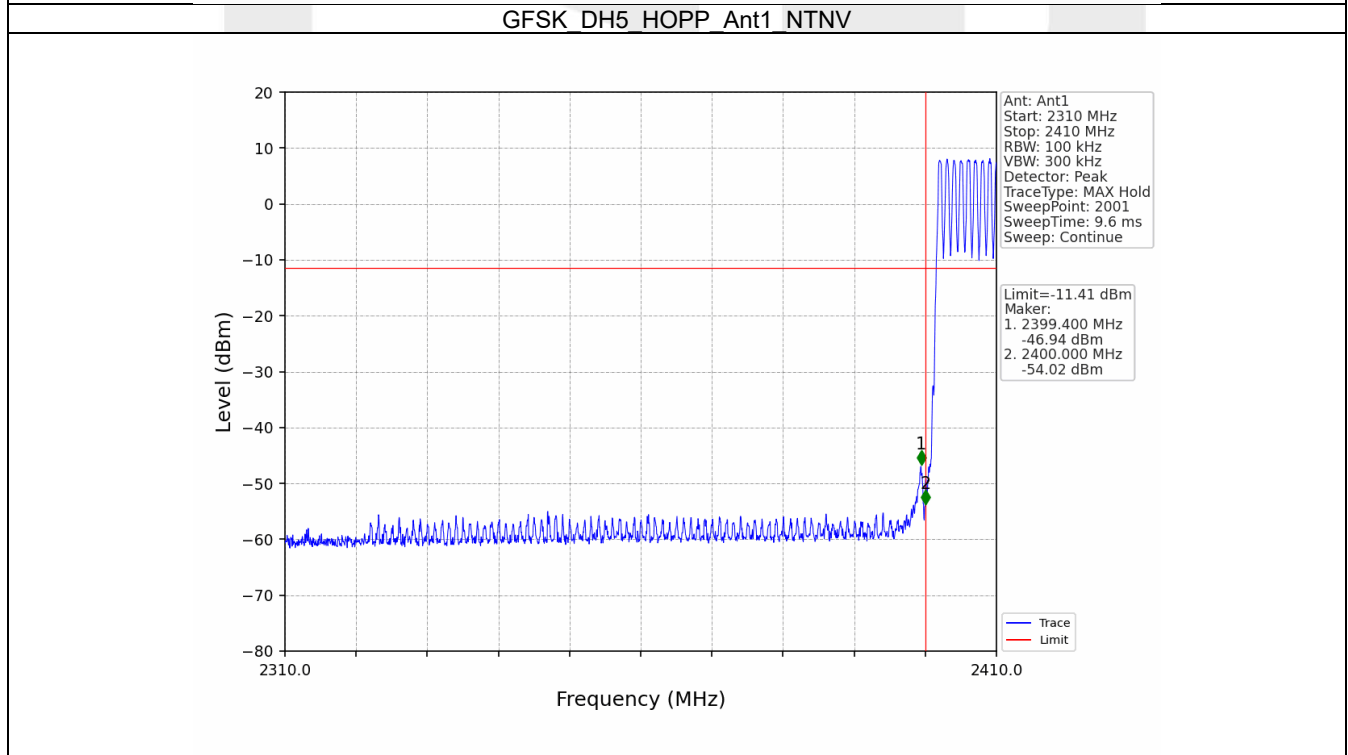
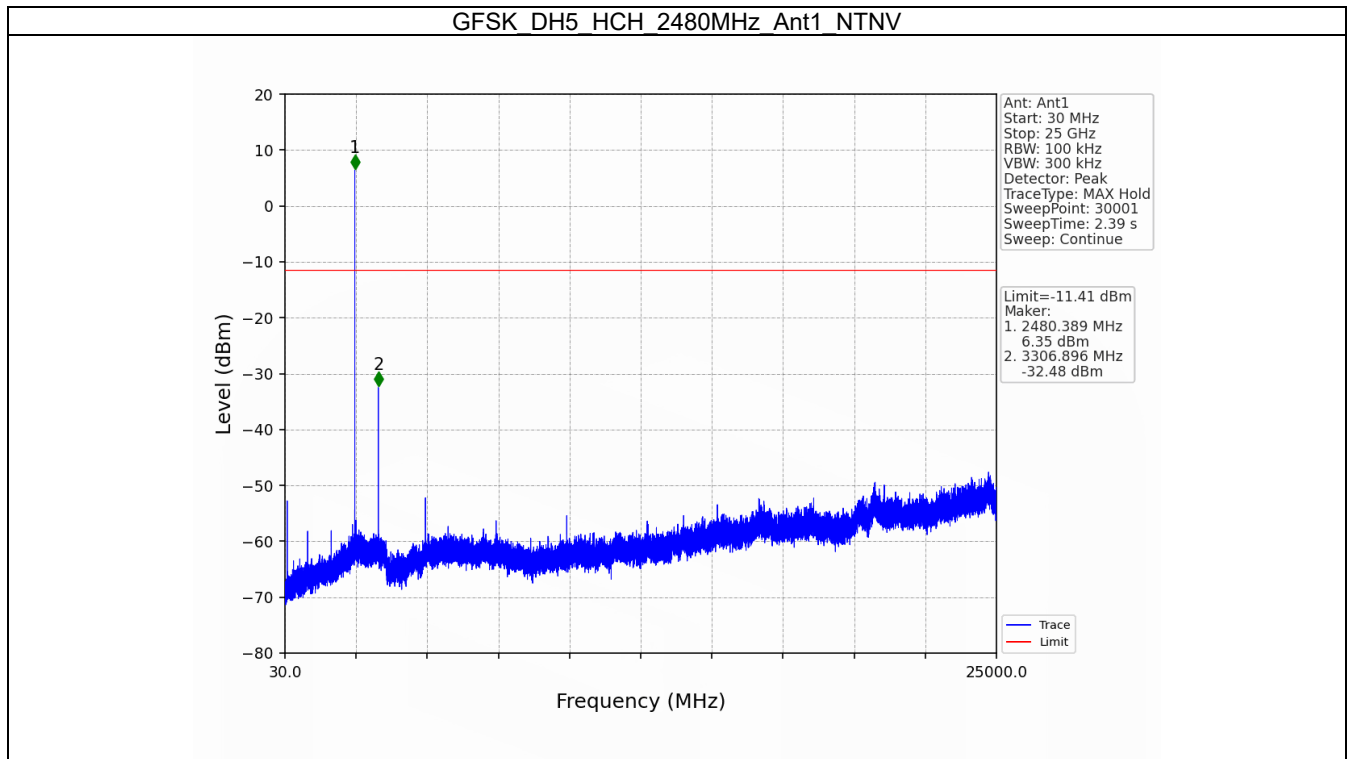


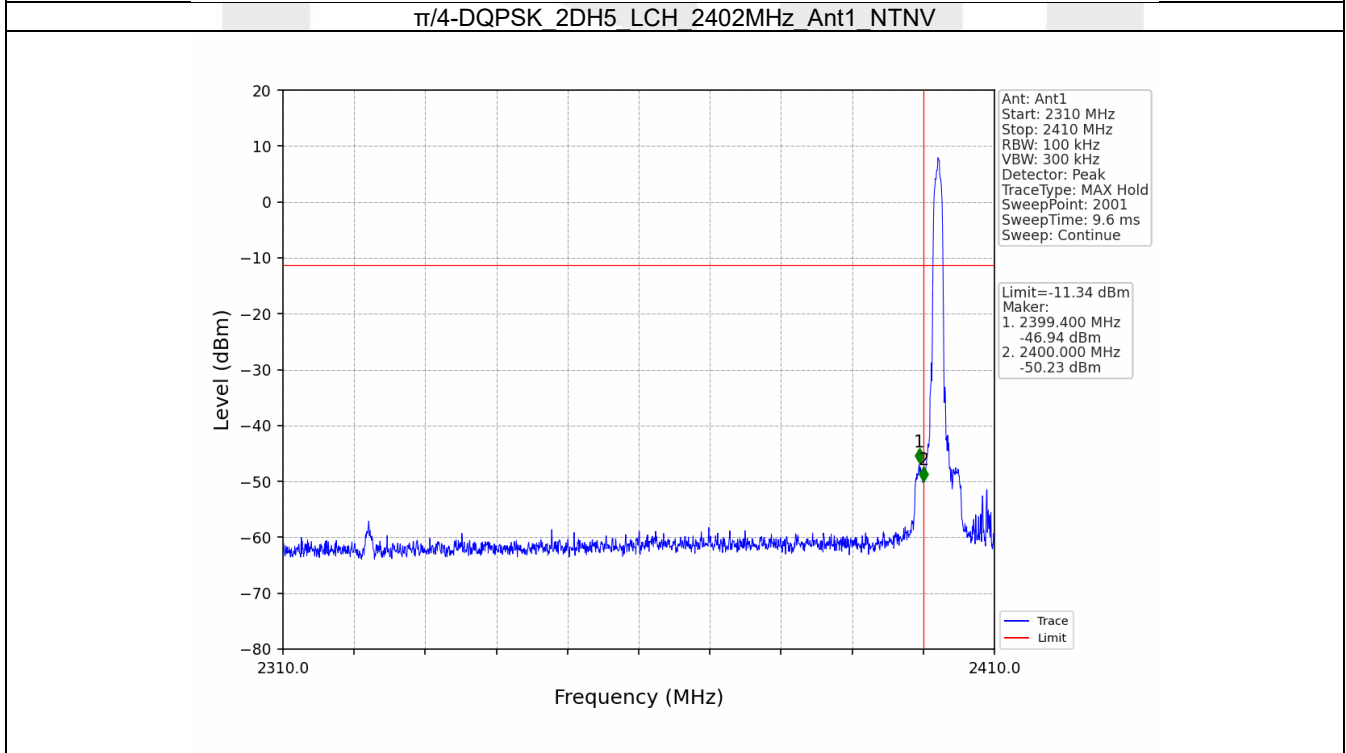
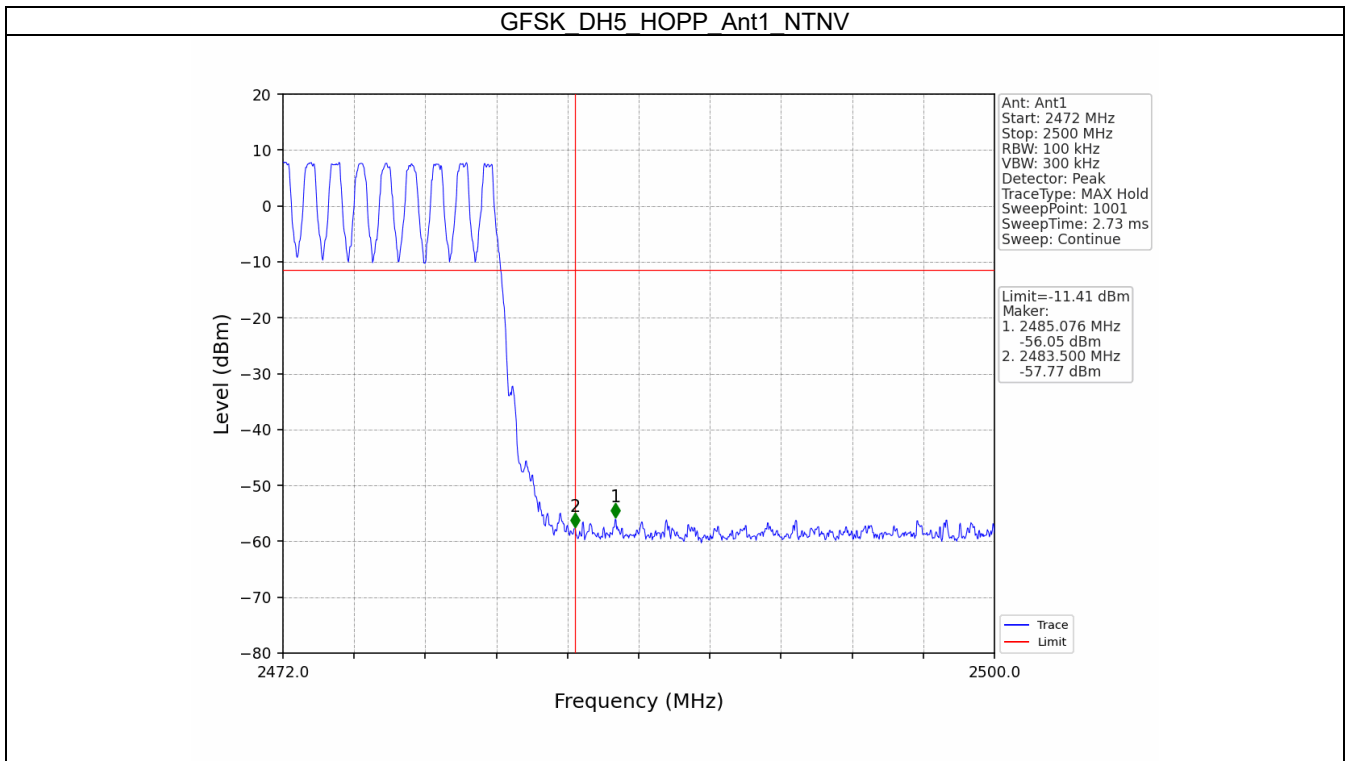


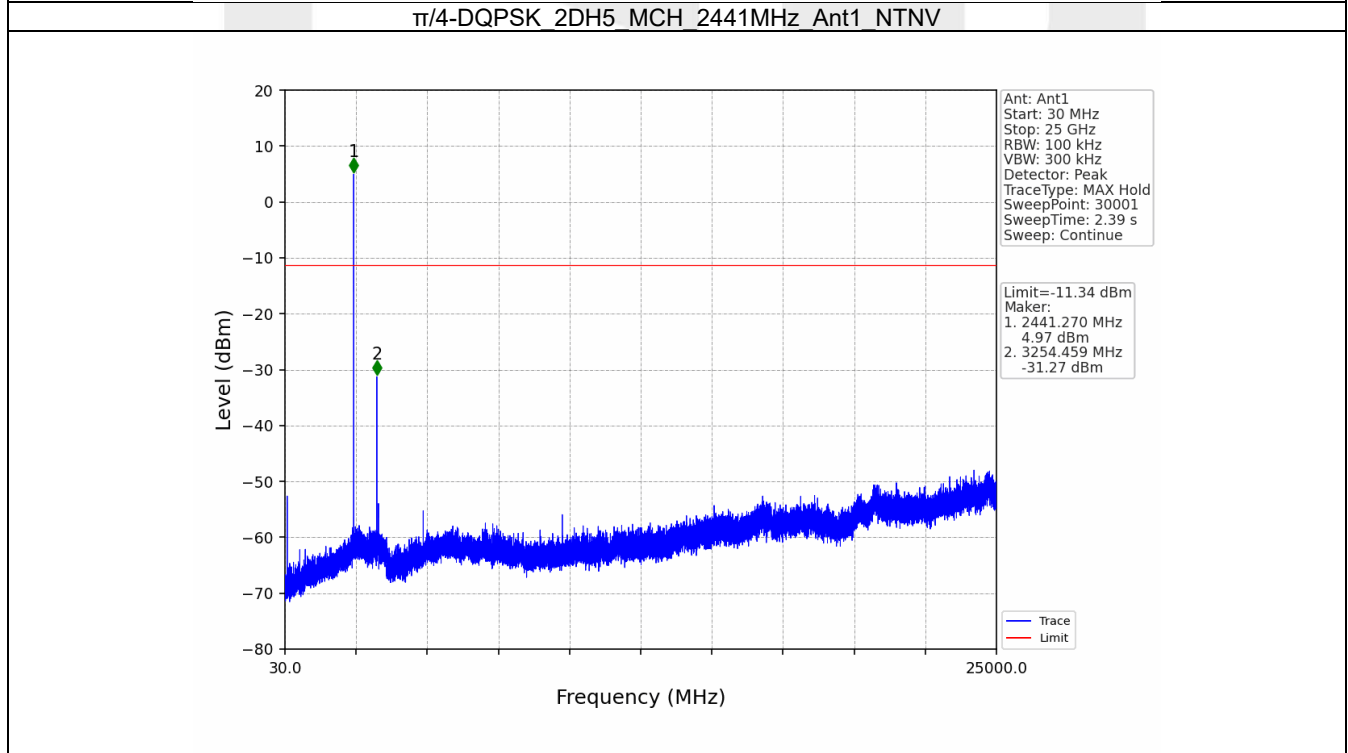
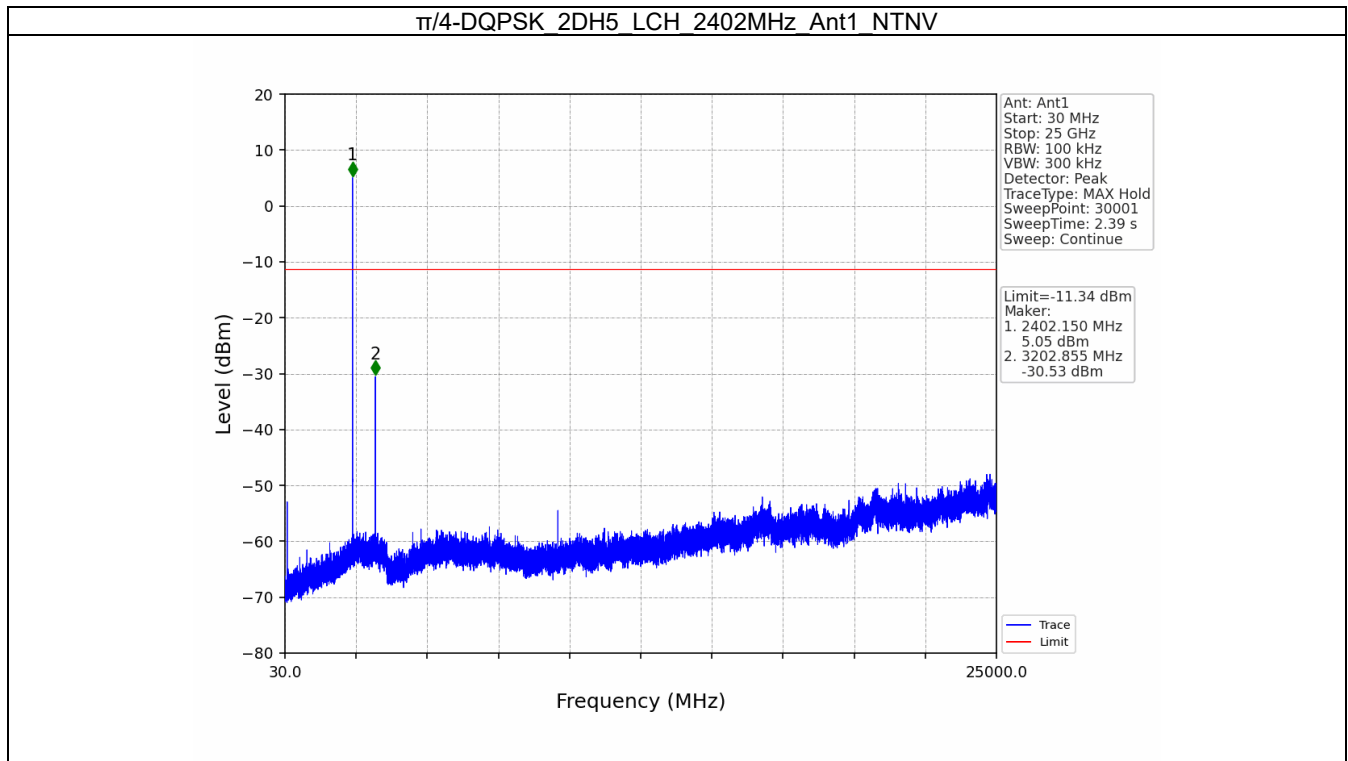


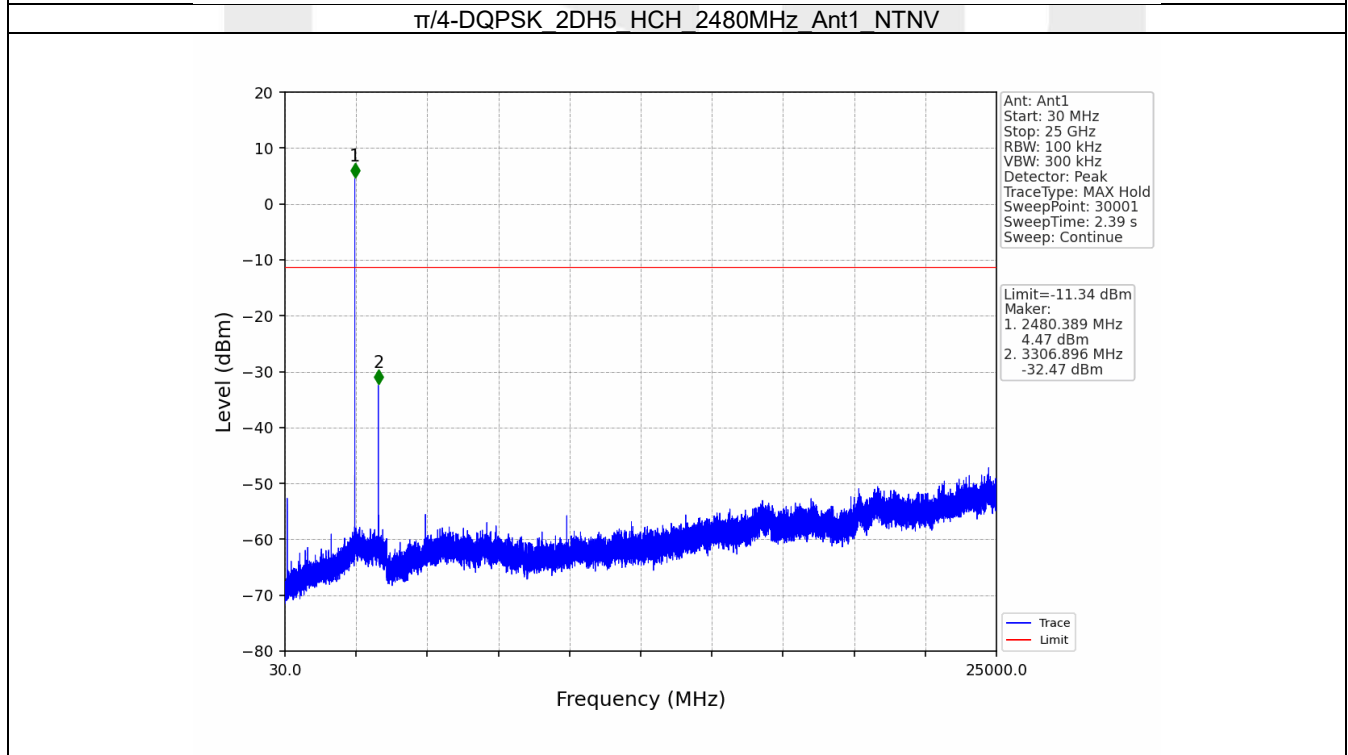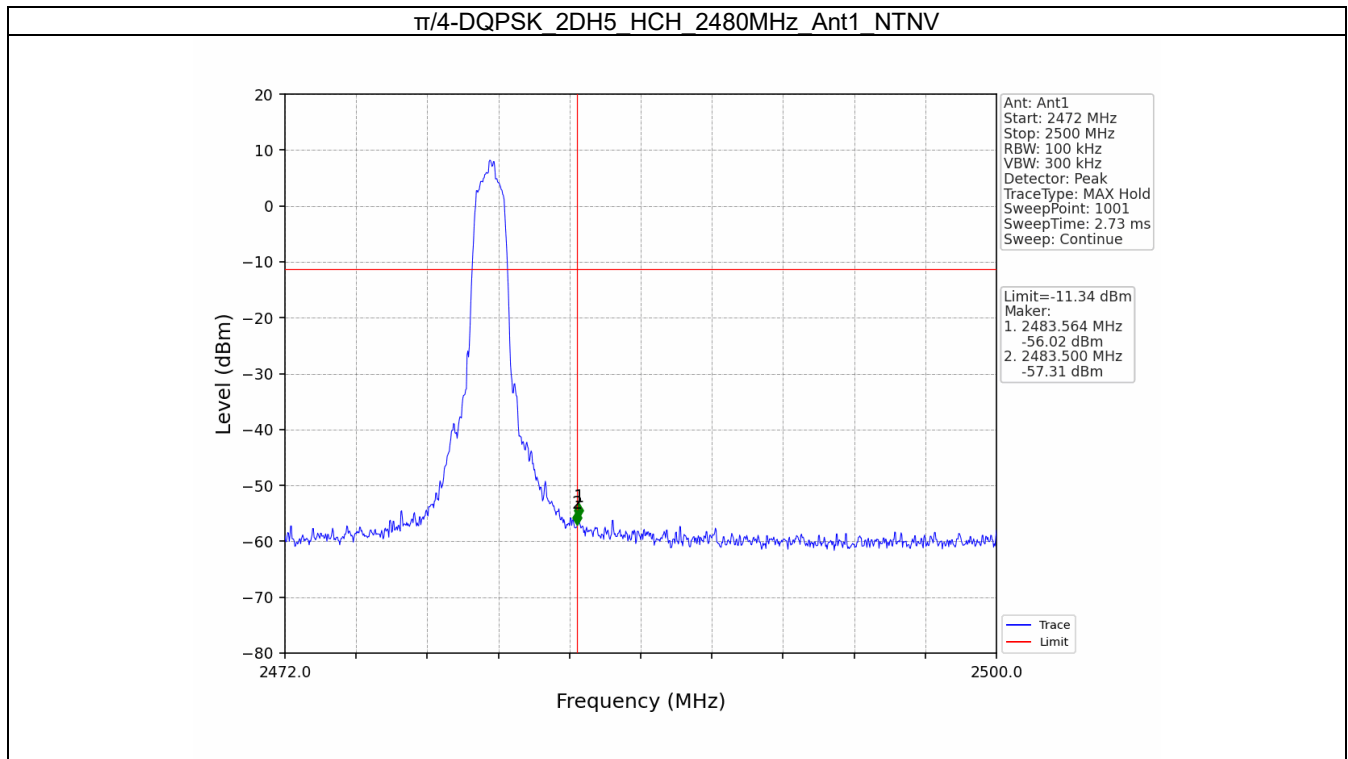


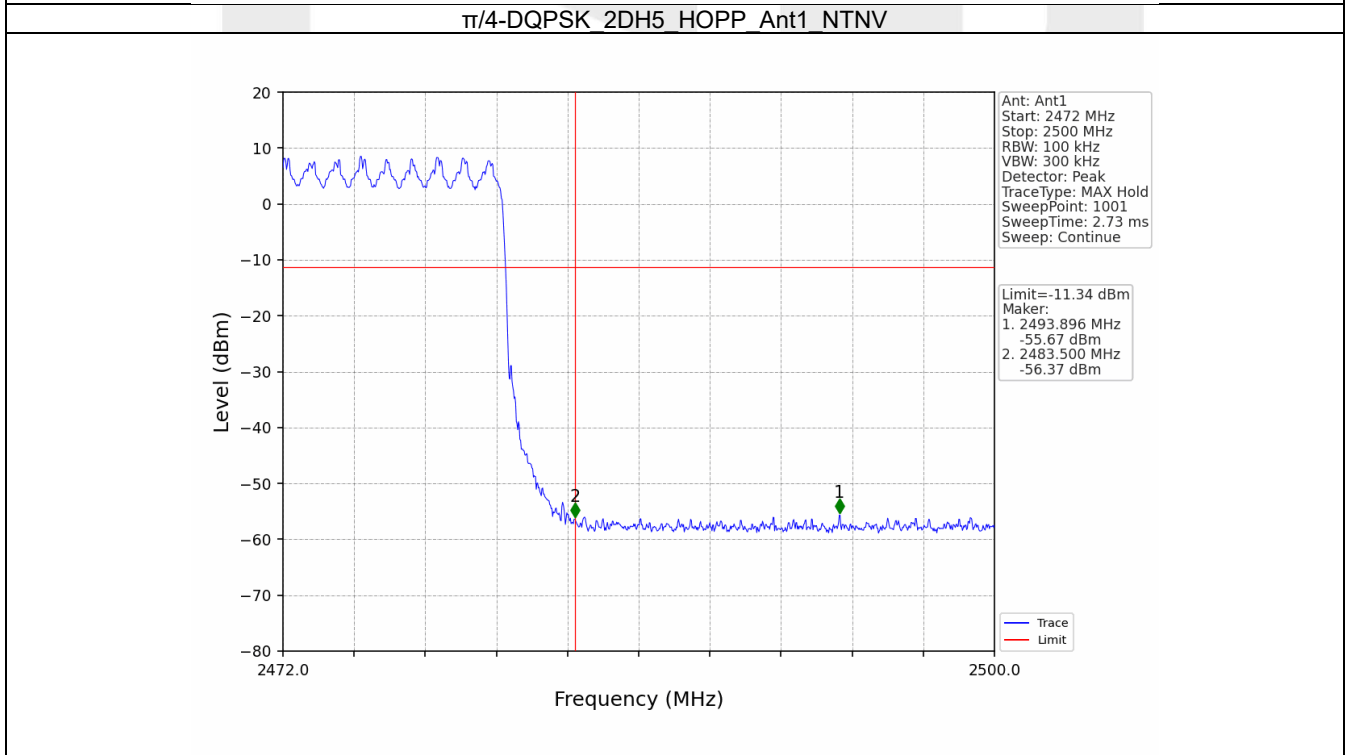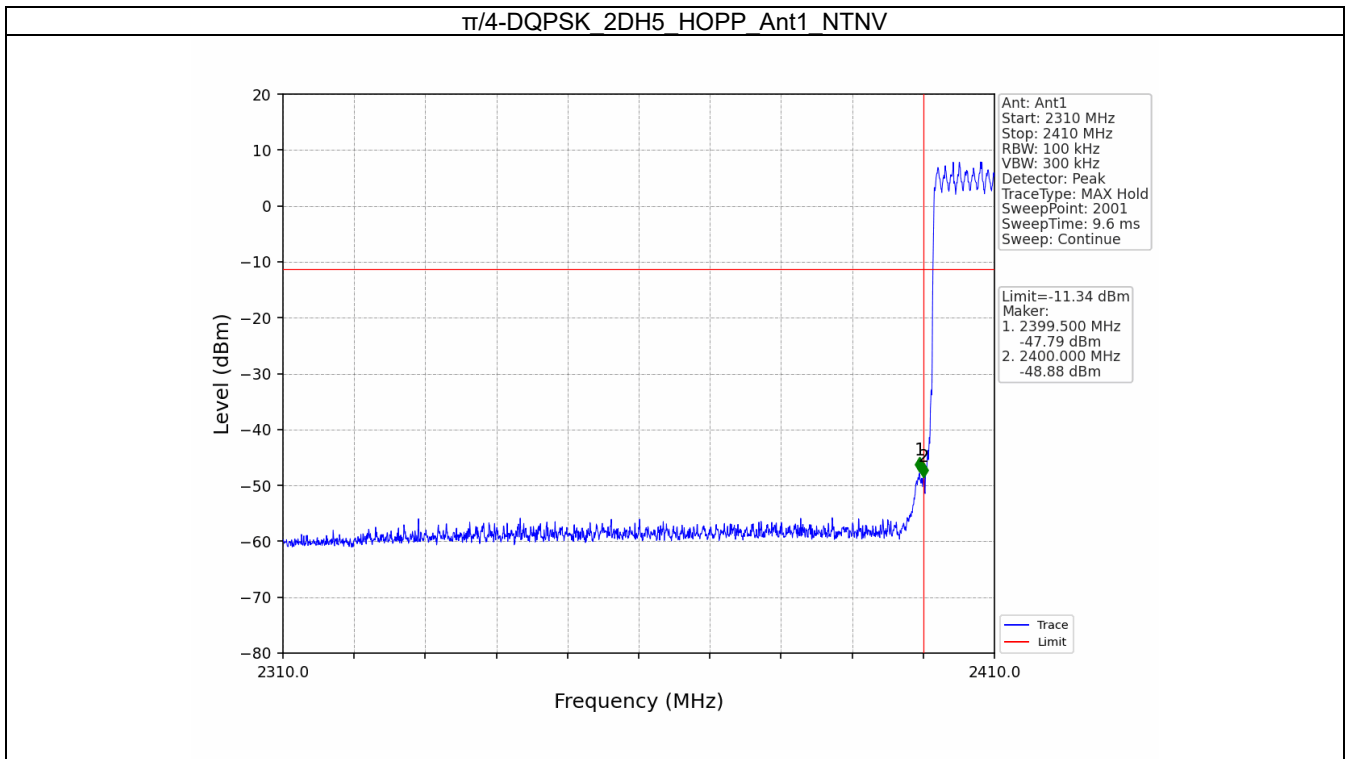

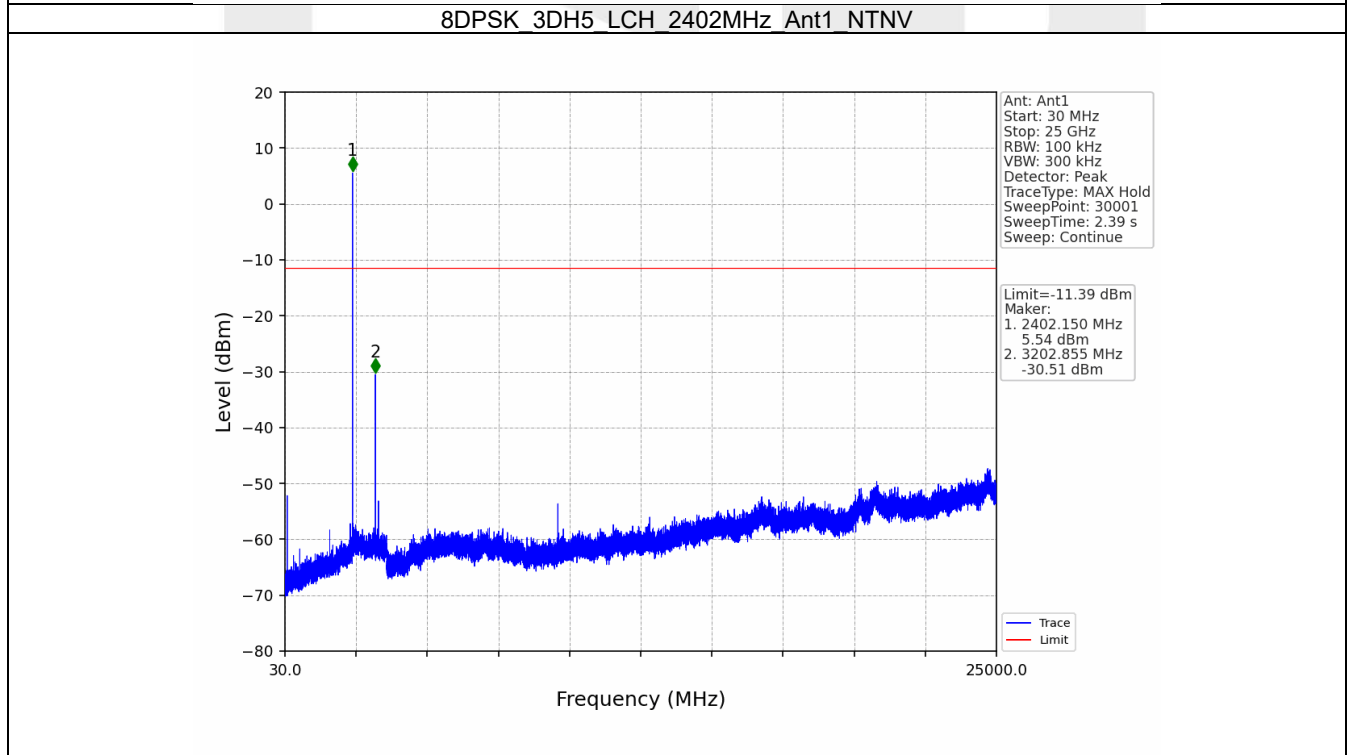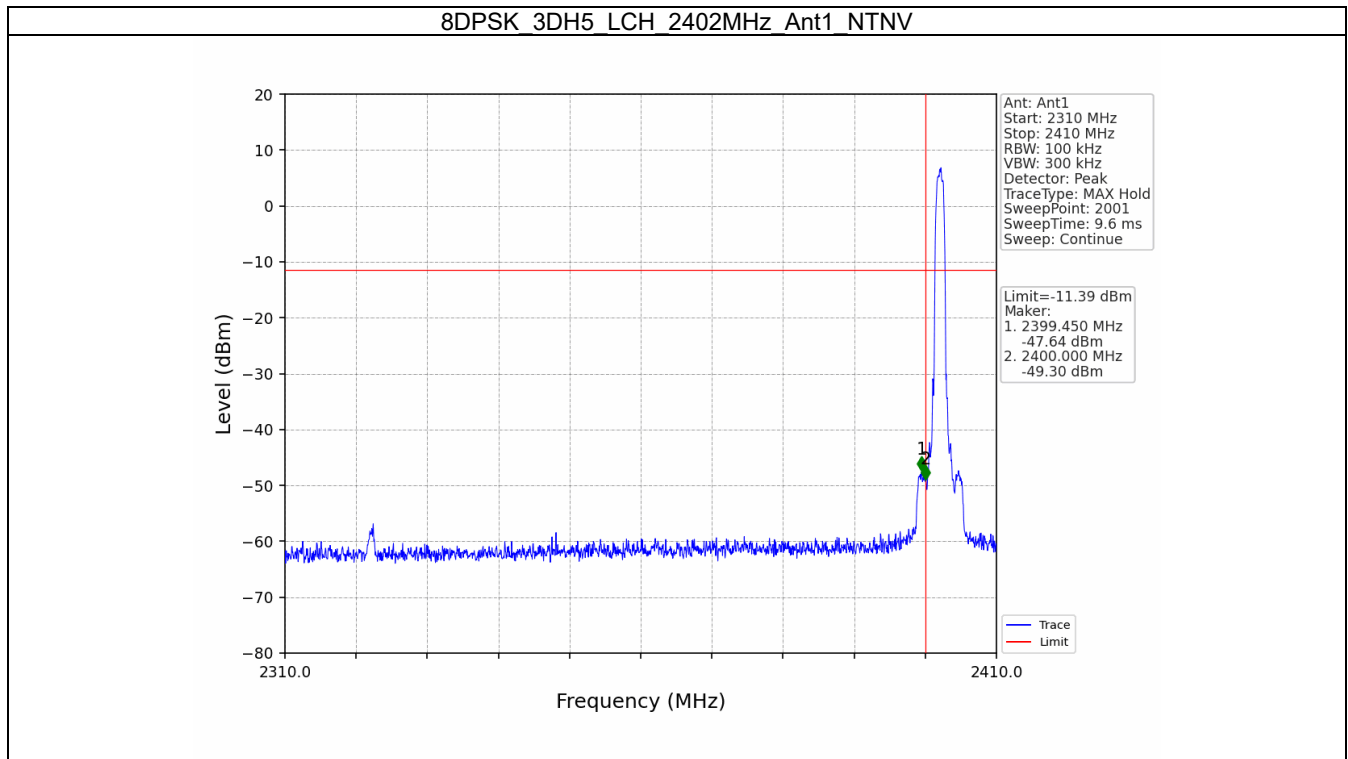

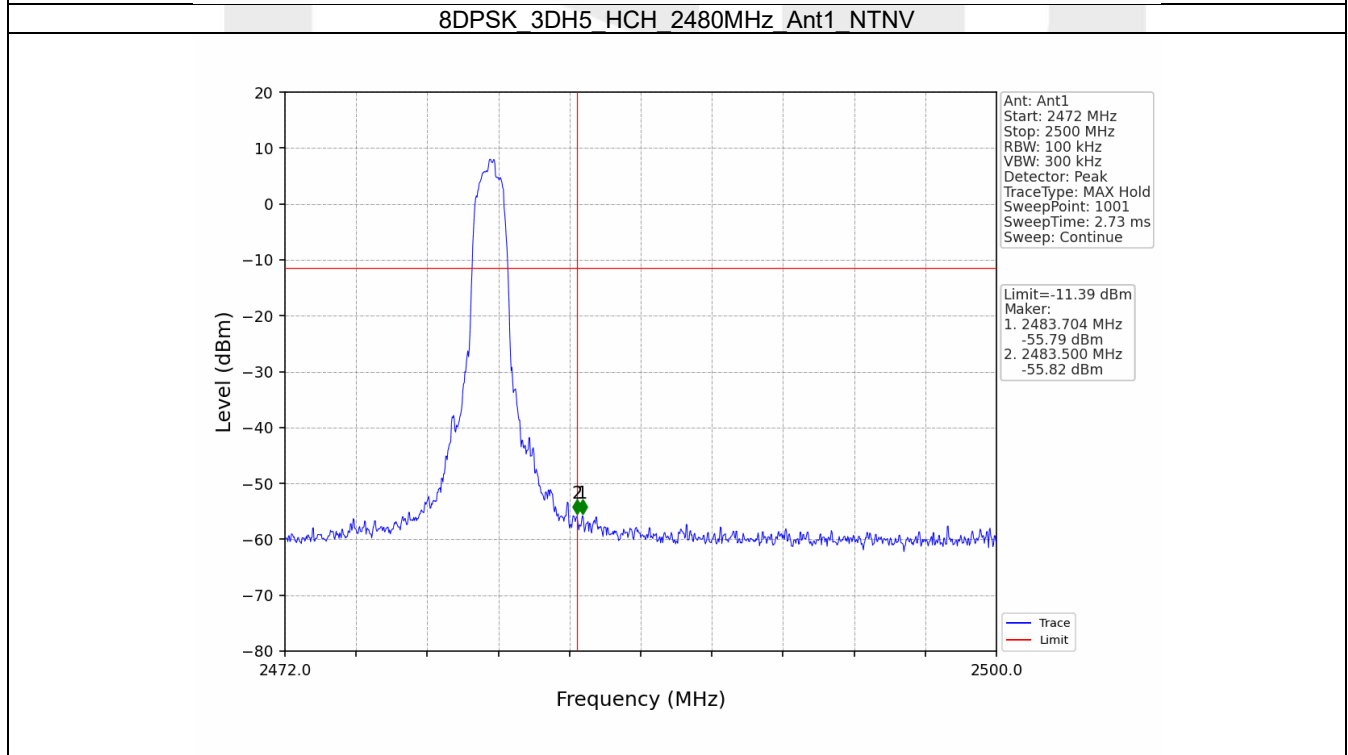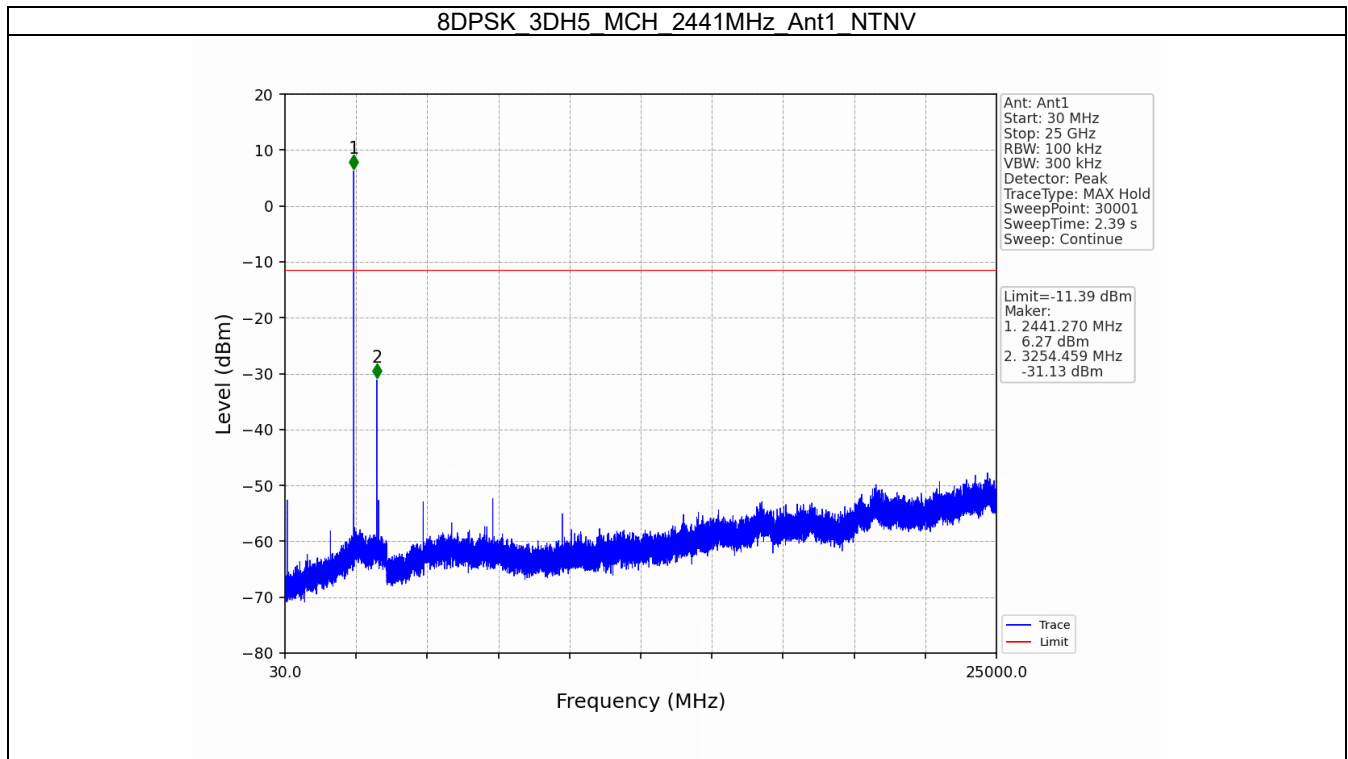

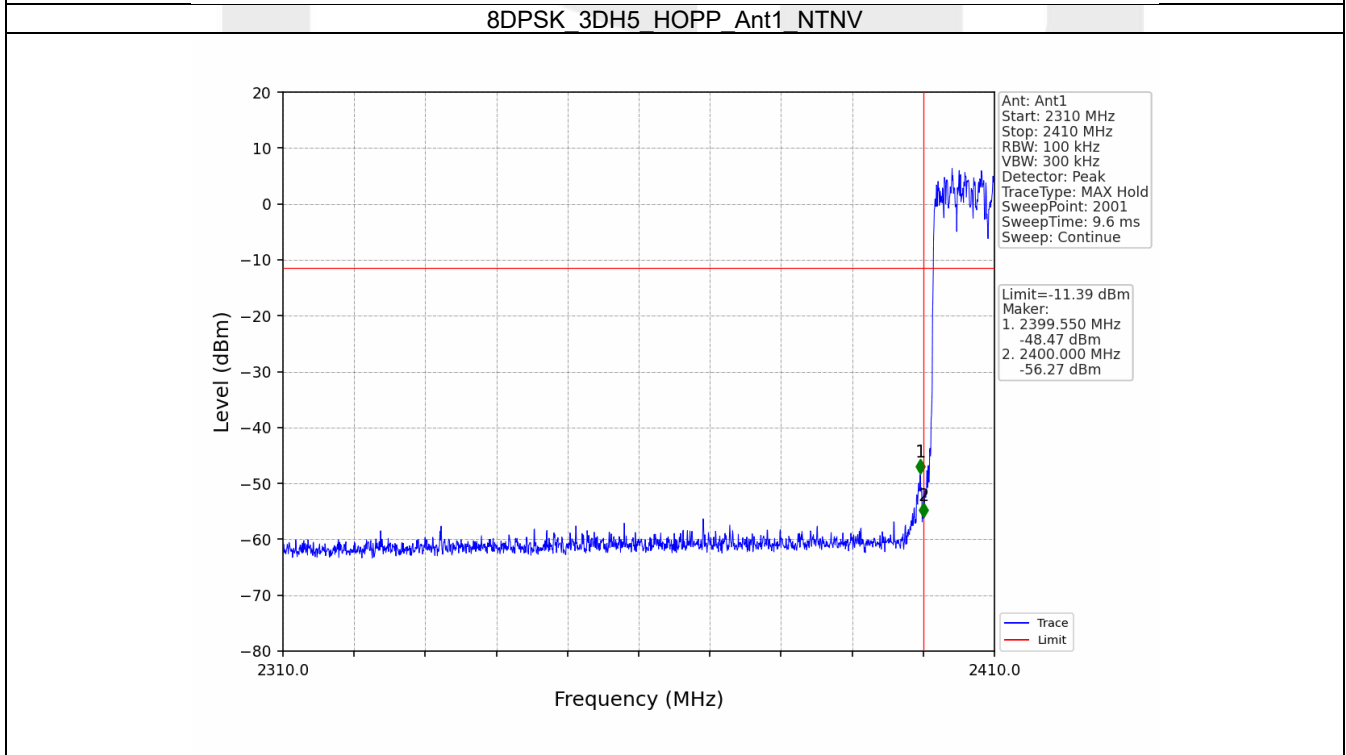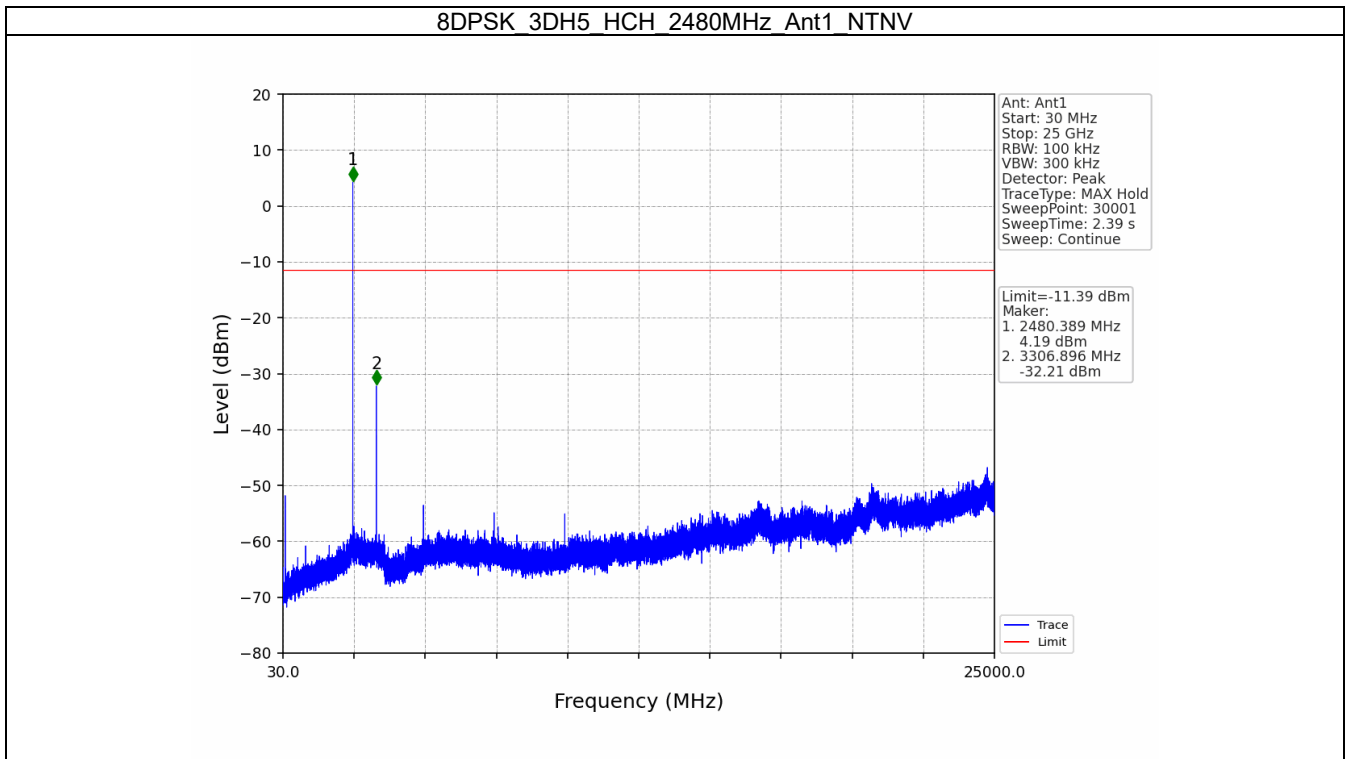

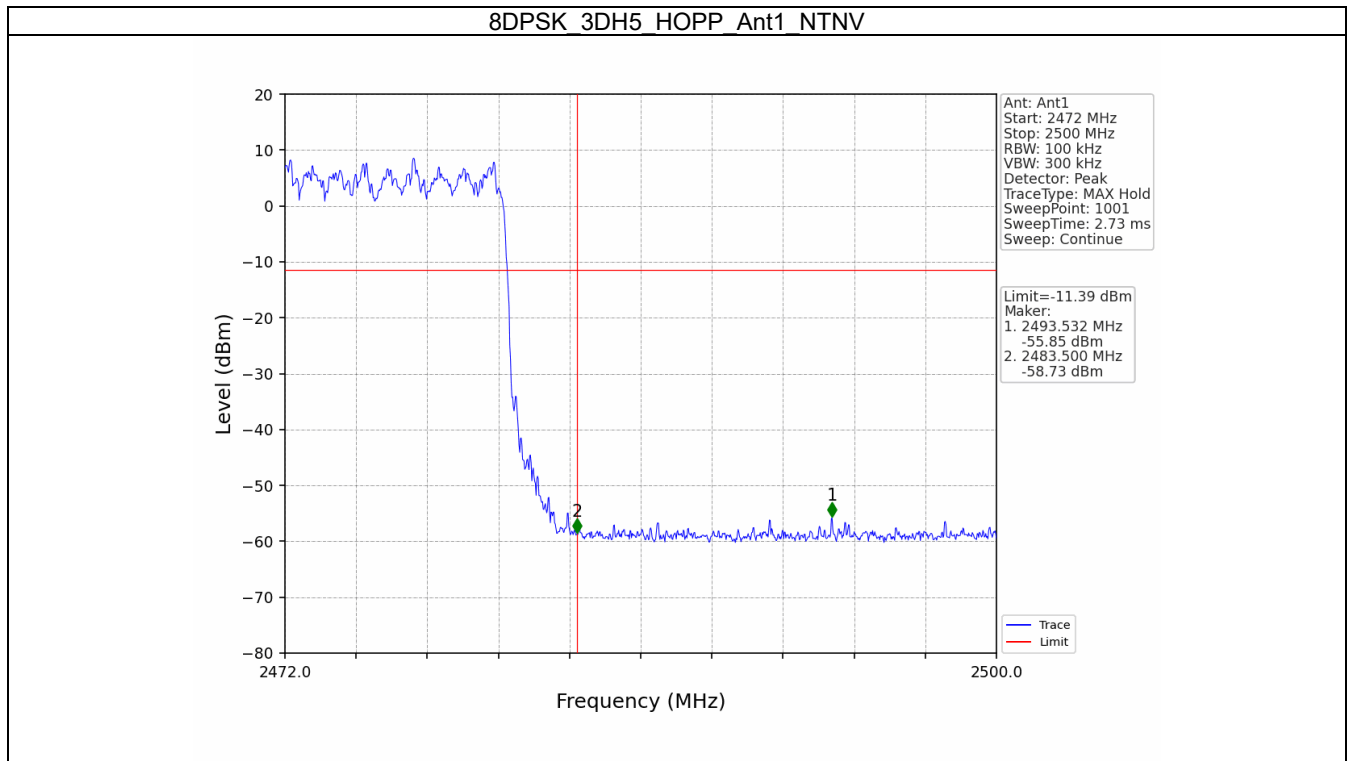

----- End of Report -----