


Product specification

1. Technical indicators of products

Frequency Range (MHz)	2400-2500
Band Width (MHz)	100
Impedance (Q)	50
VSWR	1.91 MAX(2500MHz)
Return Loss (dB)	-15.3
Peak Gain (dBi)	1.78
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp ($^{\circ}$ C)	-20 ~ 65
Storage Temp (C)	-30 ~ 75


2. Product picture

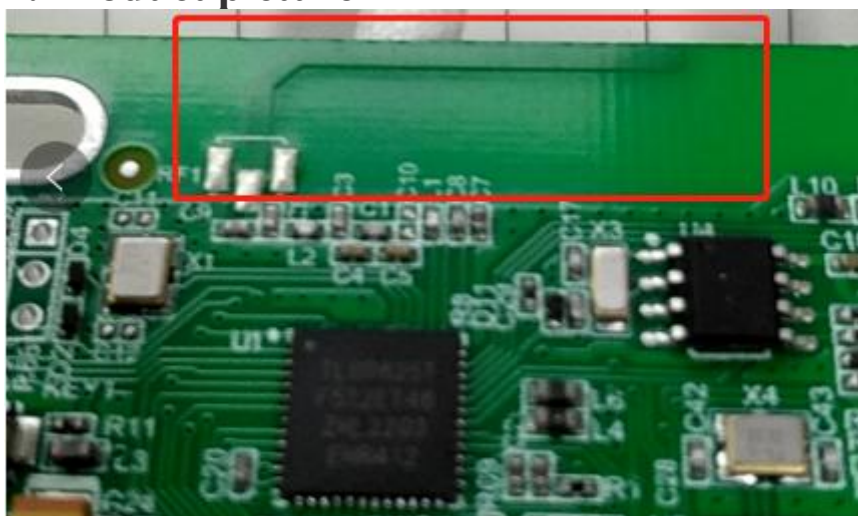




天线增益: 1.78dbi


3. Return Loss

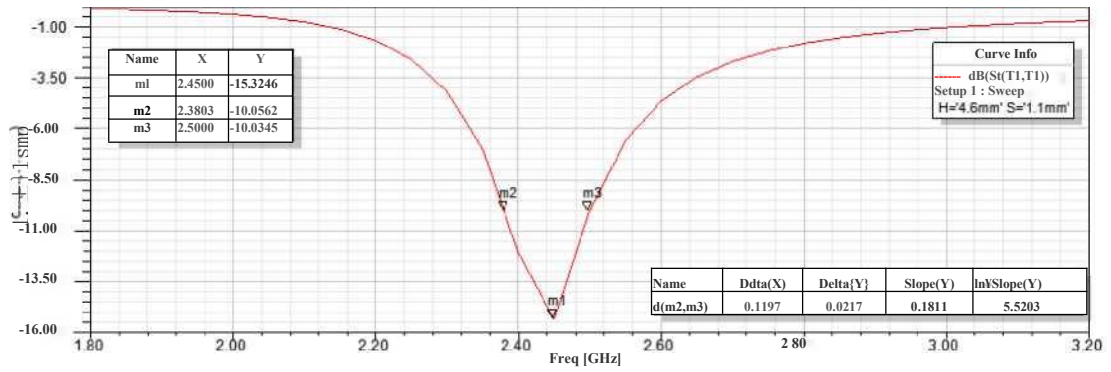

4. VSWR

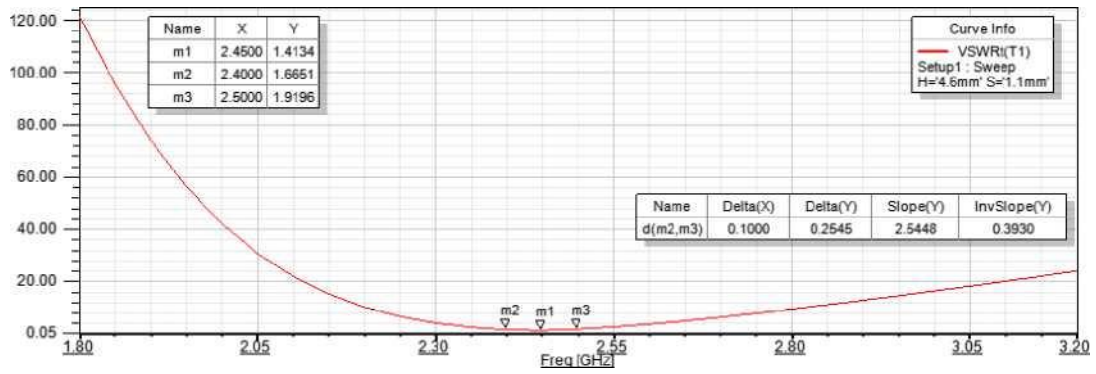

6. 3D gain pattern

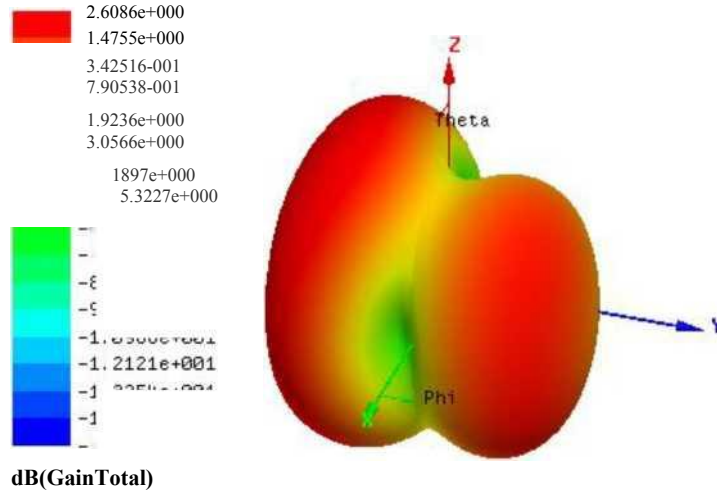


6.4557e+000
7.5888e+000
8.7218e+000
9.8548e+000
1.0988e+001

7. E ,h plan

1.3254e+001
1.4387e+001
1.55206+001

Radiation Pattern 1

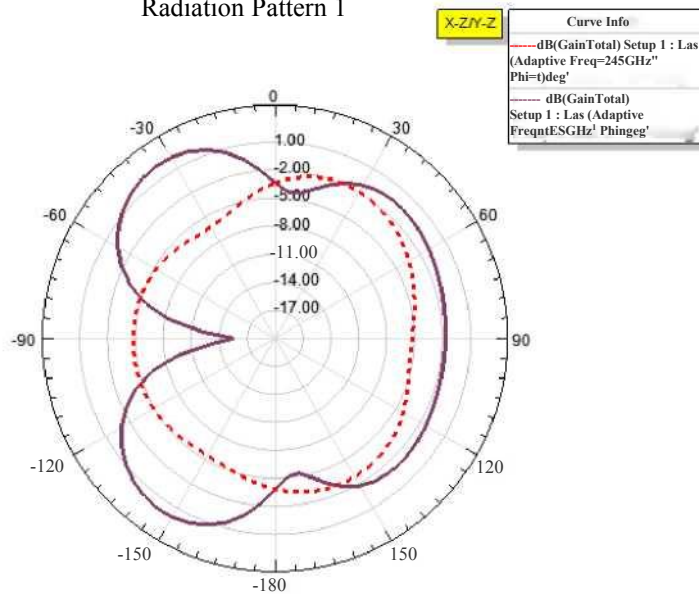

Radiation Pattern 2

