


User Manual
Mono Bluetooth Headset
V50

目录


1.Product Overview.....	3
2.Basic Operation	4
3.Bluetooth Pairing and Connection.....	5
4. Connection with Two devices	6
5. LED Indicator	7
6. Charging	8
7.TTS Tone	9
8.Product Specification.....	10
9. Attentions and Q & A	11

1.Product Overview

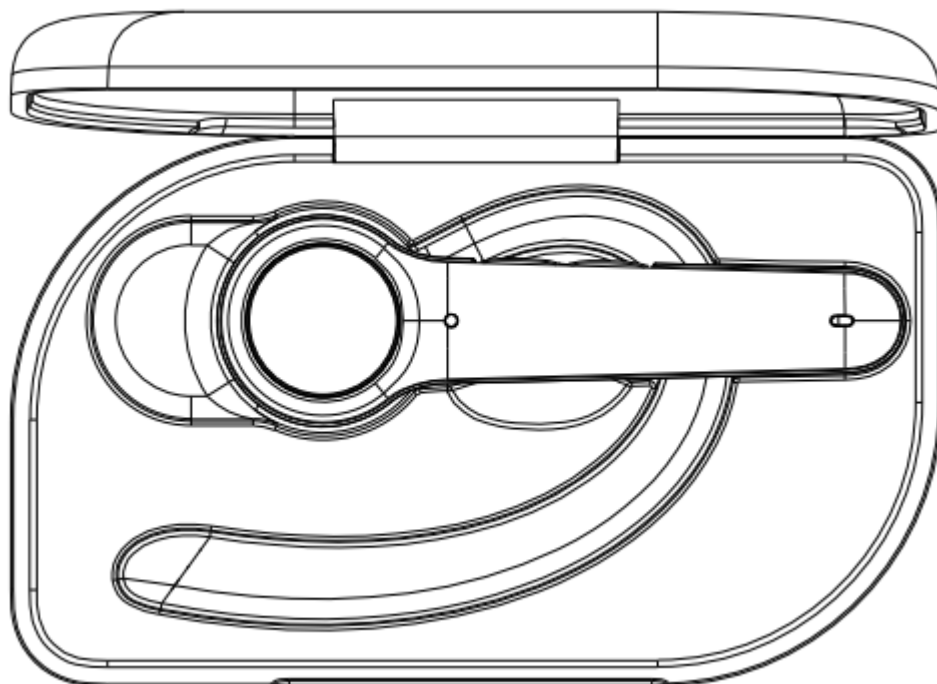

Packing list:

- A. V50 Bluetooth headset x 1
- B. Type_C USB charge cable x 1
- C. Manual x 1

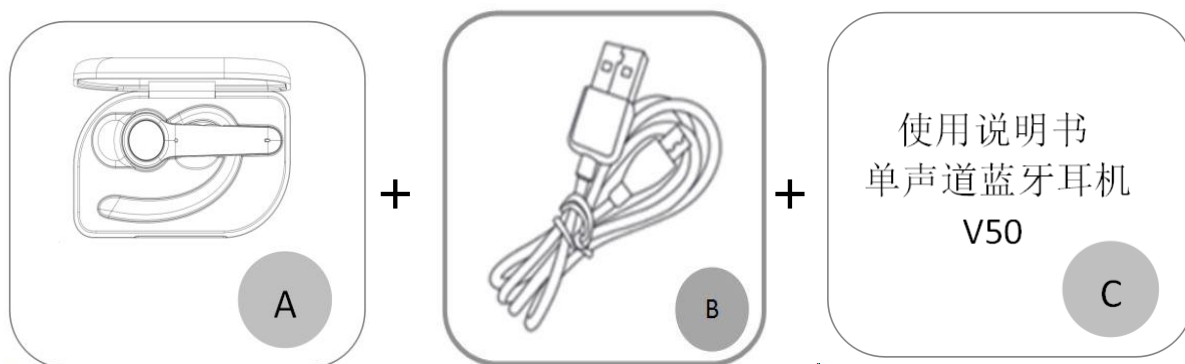

2.Basic Operation

Button	Function	Operation Instruction
MFB	Power On	In off status, long press MFB for 3 seconds to power on. it will automatically enter the pairing status with or without the pairing record
	Power Off	In on status, long press MFB for 5 seconds to power off.
	Enter Pairing Mode	After power on, the red and blue lights flashing alternately into the Bluetooth pairing state (in the unconnected standby state can also be paired); manually disconnect the phone Bluetooth, the headset into the Bluetooth pairing state, the phone searches for the pairing name "V50" click to connect
	Play / Pause	Double click the MFB to play/pause music
	Redial A Call	When the phone is connected to standby or music, triple-click the "MFB" to make the last dialed call.
	Voice Wake up	When connected to standby or music, long press the "MFB" for 1-2 seconds and then release it to start the voice assistant.
	Audio Switch	During a call, long press the MFB for 2 seconds to switch the audio between the phone and the headset.
	Three-way calling function	Call coming during call, short press the MFB to answer the new call and hang up the current call; Call coming during the call, double press the MFB to answer the new call and keep the current call; Call coming during the call, long press volume button for 2 seconds to reject the new call. When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call.
	Answer a call	Connected status,when a call coming, click "MFB" to answer the call
	Hang up a call	When a call,click "MFB"to to hang up
Reject a call	When a call incoming, long press for 1 second to reject a call.	
Volume +	Volume Up	Short press the "Volume Up" button (the loudest beep is "beep").
	Next Song	Long press for 1 second.
Volume -	Volume Down	Short press the "Volume down" button
	Previous Song	Long press for 1 second.
Microphone Mute Button	Microphone Mute	During a call, Long press the volume down for 2 seconds to mute, and long press the volume up to cancel the mute

3. Bluetooth Pairing and Connection

A. In off status, long press MFB for 3 seconds to enter pairing mode with LED Blue & Red flash alternately.


B. Search and click to connect "V50" on your phone Bluetooth lists, LED change to Blue slow flash once after connected, now you can play music from phone to headset.

C. You can press MFB / Volume+ / Volume- / Microphone Mute Button on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous song, volume up and down, microphone mute.



4. Connection with Two devices

- The cell phone connected with V50 is divided into two units, A and B.
- Firstly, connect to A, Long press the MFB of V50 for 3 seconds to turn on the phone, turn on the Bluetooth function of A and search for the device, search for "V50" and click to connect, turn off the Bluetooth function of A after successful connection, V50 re-enter the pairing state.
- Then use B to pair and connect with V50, follow the method of A to pair, after successful pairing, open the Bluetooth function of A and click V50 to connect. (Some phones may have an auto connect function).

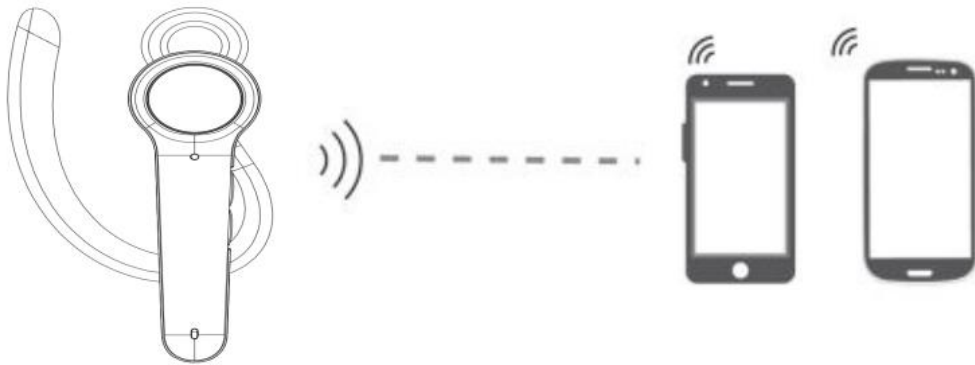

*** Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone. The same operation during talking status.**

5. LED Indicator


Mode	LED Indicator
Power on	Blue LED flash 2 times
Power off	Red LED flash 2 times
Pairing mode	Red & Blue LED flash alternately
Unconnected standby mode	Blue LED flash twice every 5 seconds
Connected standby mode	Blue LED flash once every 10 seconds
Playing Music	LED Blue flash once every 10 seconds
Talking	LED Blue flash once every 10 seconds
Delete pairing record	Blue and Red LED is on for 1 second at the same time
Low battery	Red LED flash
Charging	Solid Red LED
Full charged	Red LED turn off
Charge Base indicator	
Charging base charge	Flashing red LED
Charging base full charge	Red LED always on
Charging base to charge the headset	White LED always on
Charging base low battery alert	Flashing White LED

6. Charging

Please charge the V50 at once when the Red LED flash. Charging time is about 1.5 hours. Solid Red LED turn off when full charged.

Charge Connections

Please connect to the V50 charging port through the Type-C end of Type-C charging cable, USB end to the charger, can be used as car charger, travel charger, computer USB, etc.

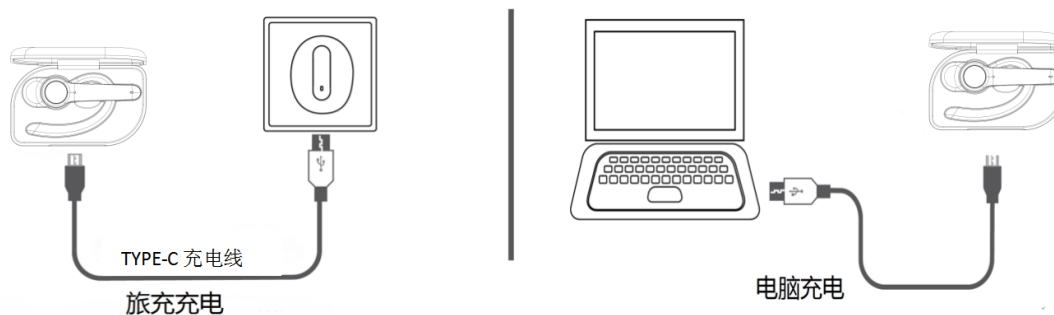

Note:

Please charge the V50 at least one time every 2 months when don't use it.

Charging when power on, it is normal that the charging indicator will be on at the same time as the Bluetooth indicator;

Charging when using headset: When the V50 needs to be used for a long time, due to the limited working time of the built-in battery, it is allowed to connect the charging power supply (DC 5V \geq 500mA, low battery or poor power quality may cause the current sound); Operation: connect the charging power first and then turn on the V50 Please note: it is not recommended to use the headset frequently when charging, otherwise it may affect the life of the battery.

7.TTS Tone

Power on	Power on
Enter pairing mode	Pairing
Pair successfully	Paired
Connect successfully	Your headset is connected
Disconnect	Your headset is disconnected
Power off	Power off
Microphone mute on	mute on
Microphone mute off	mute off

8.Product Specification

Bluetooth Version	V5.0
Bluetooth Chipset	QCC3020
Frequency Range	10M
Bluetooth Protocols	HSP,HFP,AVRCP,A2DP
CODEC Code	SBC,AAC
Battery Type	Charging Case : 600mAh/3.7V Headset : 60mAh/3.7V
Charging Time	Headset/Charging Case : 1.5±0.5 H
Stand-by Time	About 20H
Working Time	Headphone : about 5 hours (70% volume) Use with charging case: about 40 hours (70% volume)
Headset Net Weight	138.8g
Headset Dimension	191.1*78.1*57.1mm

***Actual use time will differ from environment and music**

9. Attentions and Q & A

A. How to reconnect and operation when failed to reconnect?

When V50 connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on. If failed, please pair and connect again. V50 can be reconnect in 10 minutes, will be power off if over 10 minutes. It will have a tone "Your headset is connect" after over operation range disconnect.

B. How to delete paired records?

In pairing mode, long press the MFB and Volume - Button for 5 seconds to clear the pairing record. The indicator Blue and Red LED is on for 1 second at the same time that means the pairing record has been cleared, and the V50 will not connect the connected device. When there are various connection problem, try clearing the pairing record firstly.

C. What's the password for pairing?

Some connection devices require password for pairing, please try 0000 or 8888 or 1111 or 1234.

D. What devices could charge for the headphone?

Any car charger, power bank, PC etc which meet DC 5V, charging current more than 1A could be charge for this item.

E. How to do if have connect issue or dead?

Please try charging reset, operation: press and hold the MFB, plug in charging cable to charging, this will reset the headset to power off, it can be used normally after power on.

F. Power off automatically.

V50 will power off if does not connect any devices for over 5 minutes, or battery voltage is less than 3.1V.

G. Three-way calling function operation

Call coming during call, short press the MFB to answer the new call and hang up the current call;

Call coming during the call, double press the MFB to answer the new call and keep the current call;

Call coming during the call, long press the MFB for 2 seconds to reject the new call.

When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.