

Bluetooth Audio Dongle



Thank you for purchasing TaoTronics SK-BTI-011 Bluetooth Audio Dongle Transmitter. Please read the user manual carefully to understand its features and operation. If in doubt, please email support@taotronics.com with details.

Overview

The SK-BTI-011 is a high definition Bluetooth stereo transmitter, which can make any stereo device a wireless device! It does this by decoding high definition stereo signals into Bluetooth digital signals that transmit to your Bluetooth receiving device. So, you can enjoy all the music from your non-Bluetooth mobile phone, iPod, Kindle Fire and even TV, wirelessly!

This product has a built-in Lithium battery that can last for up to 7 hours on a full charge.

System Requirements

An audio or music playing device with a 3.5mm audio-out jack.

Pair with any Bluetooth stereo receiving devices that support the Bluetooth A2DP profile, such as Bluetooth headsets, speakers, etc.

Package Contents



Specifications

Bluetooth Version	Bluetooth V3.0 Class II
Bluetooth Profile	A2DP, AVRCP
Range	33 feet (in open space)
Charging Power	DC 5V
Charging Type	Universal Micro USB Port
Battery	Rechargeable Li-Polymer battery
Working / Standby Time	6-7 hours working / 140 hours standby
Charging Time	About 2 hours
Dimension (L*W*H)	2.4"*0.87"*0.39" (61*22*10 mm)
Weight	0.03 lbs (13g)


Identification of Parts

① LED indicator

② Power button

③ 3.5mm audio-in plug

④ Micro USB charging port



How to Use


1.Charging

The transmitter can be fully charged in around 2 hours. We recommend charging the unit for least 4 hours before using for the first time.

To charge the transmitter:

- 1) Insert the micro-USB end of the charging cable into the charging port of the transmitter
- 2) Plug the USB end of the charging cable to an USB charging adapter or any active USB port
- 3) The power LED will turn red when charging. It will automatically turn OFF when the transmitter is fully charged.

Note: You can use the BTI-011 while it is charging. The internal circuit is protected from over-charging.

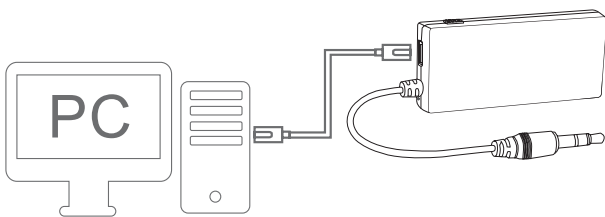

2. Turning the transmitter On/Off

Function	Operation	LED indicator
Turn ON	Press and hold the power button for 3-5 seconds until the LED flashes in blue	The blue LED will be on
Turn OFF	Press and hold the power button for about 3 seconds until the LED flashes in red	The LED will flash in red for three times and then off

3. LED indicator

LED Color	The status of transmitter
Red and blue LEDs flash alternately	Pairing mode
Blue LED flashes twice every 5 seconds	Standby mode
Red LED flashed once every 10 seconds	Bluetooth connection established

4. Bluetooth Pairing

* **Note:** Before pairing, please make sure your Bluetooth receiving devices support Bluetooth A2DP (Advanced Audio Distribution Profile).

In order for your BTI-011 to pair with other Bluetooth device, you must bring the BTI-011 into pairing mode. This is indicated by the LED indicator flashing in red and blue alternatively.

1) Start with BTI-011 turned OFF. Please make sure no other Bluetooth device around is in pairing mode.

- 2) Bring the BTI-011 and your Bluetooth receiving device next to each other or within 3 feet distance.
- 3) Press and hold the power button for about 6-7 seconds or until the LED indicator is blinking in RED and BLUE alternately. You will see the blue light blinking first. Just keep holding the button and the light will soon change to blue and red flashing.
- 4) The BTI-011 is now in pairing mode. Please follow the instruction of your Bluetooth receiving device to bring it into pairing mode and it should automatically pair with the BTI-011 .
- 5) Once successfully paired, the LED indicator will turn RED and then flash once every 10 seconds.

Note:

- If a PIN code is required for pairing, please try the following code: “0000” “1234” ”1111” or “8888”.
- When your device is switched on, it will automatically connect with the

last paired device. To pair it with other devices, first switch off the old paired receiving device and then pair the transmitter to the new device using the same steps listed above.

- The BTI-011 will stay in pairing mode for 2 minutes at most if no pairing device is found. Afterwards, it will go into standby mode until power off.
- The BTI-011 will switch to standby mode if pairing devices is switched off or Bluetooth disconnected.
- The BTI-011 is able to be used while charging.
- When the unit is charging, the RED LED will be lit constantly until charging is over. To avoid confusion when charging and using at the same time, we recommend pair the device first, and then start charging.

5.Reset

Sometimes, the BTI-011 will refuse to pair with other devices even if it is in pairing mode with red and blue light flashing. You will need to reset the transmitter to make it fresh and wanting to pair again.

To reset the transmitter:

- Turn ON the transmitter
- Double press the power button
- Turn OFF the transmitter

You may need to try this a few times if it does not work on your first attempt.

Care and Maintenance

Please read the following recommendations to keep your product running smoothly for a long time to come.

- Keep the transmitter away from heat and humidity.
- Do not put the product under direct sunlight or hot areas. High temperatures will shorten lifespan of the transmitter,

battery and/or the internal circuit board.

- Do not try to take the product apart. It may cause serious damage.
- Do not drop or knock your transmitter on hard surfaces as it damage the interior circuit.
- Do not use chemicals or detergents to clean the product.
- Do not scrape the surface with sharp objects.

Trouble shooting

Q: My transmitter will not switch on.

A: Please recharge it and make sure the BTI-011 has enough battery power. Plug the unit to a charger and see if the LED indicator will become red.

Q: I am having trouble pairing and connecting to my Bluetooth pairing device.

A: Please check the following:

- Please make sure your Bluetooth device support A2DP profile.
- Make sure turn OFF other Bluetooth devices around
- Make sure the BTI-011 and your device are next to each other or within 3 feet
- You must get the BTI-011 into pairing mode with LED indicator flashing in red and blue alternatively
- You may need to clear the memory. Please read 'how to clear memory' for instructions.

Q: After connecting and pairing with my Bluetooth device, I cannot hear any music from my sound system.

A: Please check the following:

- Make sure the transmitter is connected well with the player.
- Make sure the player is playing music and the volume is turned up.

Q: Why can I not pair with my smartphone or iPad?

A: The BTI-011 is a Bluetooth transmitter, NOT a receiver. You must connect the transmitter to a non-Bluetooth audio generating device such as a Kindle Fire, iPod, TV, computer, etc. Then pair it with your Bluetooth headset/speaker.

Note: Due to Bluetooth compression/decompression, there may be a delay in audio/video uses. This is standard among all transmitters.

Q: My device is flashing RED.

A: This means the battery is low and needs to be charged soon.

Q: Can I use my transmitter while it is charging?

A: Yes, we have updated the BTI-011 transmitter since Dec 1st 2013, so now you can use it while charging.

Q: I haven't used the BTI-011 for a while, now the battery is dead. What can I do?

A: If the unit has not been used for more than 21 days, please charge the unit for at least 4 hours as the battery will need a full charge and be aware the LED indicator light may take several hours to show recharging is complete.

Technical Assistance

For technical assistance, please email to SUPPORT@TAOTRONICS.COM with your purchase order number and a detailed description of your issue. We normally respond to enquiries within 24 hours.

For more information, please visit www.TaoTronics.com.

Warranty

This product is covered with TaoTronics parts and labor warranty for **12 months** from date of the original purchase from authorized retailer and distributor. If the device fails due to a manufacturing defect, please contact TaoTronics Support (support@taotronics.com) immediately to launch a warranty claim. We will instruct you on how to return the defective unit back to us for repair and replacement.

The following are excluded from TaoTronics warranty cover:

- Device purchased as 2nd hand, used or from unauthorized sellers
- Damage resulted from misuse and abusive action
- Damage resulted from chemical, fire, radioactive substance, poison, liquid
- Damage resulted from natural disaster
- Damage caused to any 3rd party / person / object and beyond

No return will be accepted without seller authorization.

Statement

We can only provide after sale services for products that are sold by TaoTronics or TaoTronics authorized retailer and distributor. If you have purchased your unit from a different place, please contact the seller for return and warranty issues.

FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.