



BUREAU
VERITAS

Test Report No.: RF140408N042-3



FCC TEST REPORT

(PART 24)

REPORT NO.: RF140408N042-3

MODEL NO.: XP6700

Type Number: L11V011AA

FCC ID: WYPL11V011AA

RECEIVED: Apr. 08, 2014

TESTED: Apr. 08 ~ Jul. 07, 2014

ISSUED: Jul. 08, 2014

APPLICANT: Sonim Technologies, Inc.

ADDRESS: 1825 S. Grant St., Suite 200., San Mateo, CA,
94402

ISSUED BY: Bureau Veritas Shenzhen Co., Ltd. Dongguan
Branch

LAB ADDRESS: No. 34, Chenwulu Section, Guantai Road, Houjie
Town, Dongguan City, Guangdong 523942, China

TEST LOCATION: No. 34, Chenwulu Section, Guantai Road, Houjie
Town, Dongguan City, Guangdong 523942, China

This report should not be used by the client to claim
product certification, approval, or endorsement by A2LA
or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS.....	7
3 GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	10
3.3 DESCRIPTION OF SUPPORT UNITS.....	11
3.4 TEST ITEM AND TEST CONFIGURATION	11
3.5 EUT OPERATING CONDITIONS.....	14
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
4 TEST TYPES AND RESULTS.....	15
4.1 OUTPUT POWER MEASUREMENT	15
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	15
4.1.2 TEST PROCEDURES	15
4.1.3 TEST SETUP.....	16
4.1.4 TEST RESULTS	17
4.2 FREQUENCY STABILITY MEASUREMENT	27
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	27
4.2.2 TEST PROCEDURE.....	27
4.2.3 TEST SETUP.....	27
4.2.4 TEST RESULTS	28
4.3 OCCUPIED BANDWIDTH MEASUREMENT	30
4.3.1 TEST PROCEDURES	30
4.3.2 TEST SETUP.....	30
4.3.3 TEST RESULTS	31
4.4 BAND EDGE MEASUREMENT	39
4.4.1 LIMITS OF BAND EDGE MEASUREMENT.....	39
4.4.2 TEST SETUP	39
4.4.3 TEST PROCEDURES	39
4.4.4 TEST RESULTS	41
4.5 CONDUCTED SPURIOUS EMISSIONS	48
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	48
4.5.2 TEST PROCEDURE.....	48
4.5.3 TEST SETUP	48
4.5.4 TEST RESULTS	49
4.6 RADIATED EMISSION MEASUREMENT.....	54
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	54
4.6.2 TEST PROCEDURES	54
4.6.3 DEVIATION FROM TEST STANDARD	54
4.6.4 TEST SETUP	55
4.6.5 TEST RESULTS	56



4.7 PEAK TO AVERAGE RATIO	66
4.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT.....	66
4.7.2 TEST SETUP.....	66
4.7.3 TEST PROCEDURES	66
4.7.4 TEST RESULTS	67
5 INFORMATION ON THE TESTING LABORATORIES.....	76
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	77



BUREAU
VERITAS

Test Report No.: RF140408N042-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140408N042-3	Original release	Jul. 08, 2014



BUREAU
VERITAS

Test Report No.: RF140408N042-3

1 CERTIFICATION

PRODUCT: LTE Smartphone

MODEL: XP6700

Type Number: L11V011AA

BRAND: Sonim

APPLICANT: Sonim Technologies, Inc.

TESTED: Apr. 08 ~ Jul. 07, 2014

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 24, Subpart E

The above equipment (model: XP6700) has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

TESTED BY

:  , DATE : Jul. 08, 2014

Glyn He/ Project Engineer

APPROVED BY

:  , DATE : Jul. 08, 2014

Sam Tung / Technical Manager

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com

BUREAU
VERITAS

Test Report No.: RF140408N042-3

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent Isotropic Radiated Power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.232(d)	Peak to average ratio	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -11.33dB at 3760MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.67dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GHz	4.36dB
	1GHz ~ 18GHz	3.9dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

BUREAU
VERITAS

Test Report No.: RF140408N042-3

2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	Apr. 29,14	Apr. 28,15
Spectrum Analyzer (10Hz~40GHz)	Rohde&Schwarz	FSV40	101003	Apr. 09,14	Apr. 08,15
Signal Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 25,13	Nov. 24,14
EMI Test Receiver	Rohde&Schwarz	ESVD	ESVS10	May 18,14	May 17,15
Loop antenna (9kHz~30MHz)	Daze	ZN30900A	0708	Nov. 28,13	Nov. 27,14
Bilog Antenna (20MHz~2GHz)	Teseq	CBL 6111D	30643	Jul. 27, 13	Jul. 26, 14
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Oct. 18, 12	Oct. 17, 14
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Feb. 13,14	Feb. 12,15
Signal Amplifier	Agilent	8447D	2944A10488	Jun. 25,14	Jun. 24,15
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 13,14	May 12,15
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,13	Nov. 03,14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 30, 13	Oct. 29, 14
Power Sensor	Anritsu	MA2411B	1126068	Feb. 21,14	Feb. 20,15
Power Meter	Anritsu	ML2495A	1139001	Feb. 21,14	Feb. 20,15
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 19,14	Apr. 18,15
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep. 17,13	Sep. 16,14
Universal Radio Communication Tester	Rohde&Schwarz	CMU 200	123259	Apr. 16,13	Apr. 15,15
RADIO COMMUNICATION ANALYZER	Anritsu	8820C	6201300716	Sep. 26,13	Sep. 26,14
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRT/CHINA and NIM/CHINA.
 2. The test was performed in Dongguan 966 Chamber.
 3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 502831.

BUREAU
VERITAS

Test Report No.: RF140408N042-3

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE Smartphone	
MODEL NO.	XP6700	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (Li-ion battery)	
MODULATION TYPE	GSM, GPRS: GMSK EDGE: GMSK, 8PSK WCDMA : BPSK LTE Band 2: QPSK, 16QAM	
FREQUENCY RANGE	GSM, GPRS, EDGE: 1850.2MHz ~ 1909.8MHz WCDMA: 1852.4MHz ~ 1907.6MHz	
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	GSM: 810mW EDGE: 380mW WCDMA: 470mW	
MAX. EIRP POWER	LTE Band 2 Channel Bandwidth: 1.4MHz	431.52mW
	LTE Band 2 Channel Bandwidth: 3MHz	425.60mW
	LTE Band 2 Channel Bandwidth: 5MHz	429.54mW
	LTE Band 2 Channel Bandwidth: 10MHz	434.51mW
	LTE Band 2 Channel Bandwidth: 15MHz	430.53mW
	LTE Band 2 Channel Bandwidth: 20MHz	484.17mW

BUREAU
VERITAS

Test Report No.: RF140408N042-3

EMISSION DESIGNATOR	GSM	245KGXW
	EDGE	248KG7W
	WCDMA	4M17F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	1M10G7D
	LTE Band 2 Channel Bandwidth: 3MHz	2M70G7D
	LTE Band 2 Channel Bandwidth: 5MHz	4M50G7D
	LTE Band 2 Channel Bandwidth: 10MHz	9M00G7D
	LTE Band 2 Channel Bandwidth: 15MHz	13M6G7D
	LTE Band 2 Channel Bandwidth: 20MHz	18M0G7D
ANTENNA TYPE	Fixed Internal antenna with -0.2dBi gain	
HW VERSION	A	
SW VERSION	6A.0.0-00-4.4.2-10.03.16	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable : Shielded, Detachable, 1.1m Earphone cable: Unshielded, Detachable, 1.2m	

NOTE:

1. The EUT consumes power from the following adapter.

ADAPTER	
BRAND:	Sonim
MODEL:	S11C02
INPUT:	100-240Vac, 50-60Hz, 450mA
OUTPUT:	5Vdc, 2100mA
DC LINE:	N/A

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.




BUREAU
VERITAS


Test Report No.: RF140408N042-3

3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

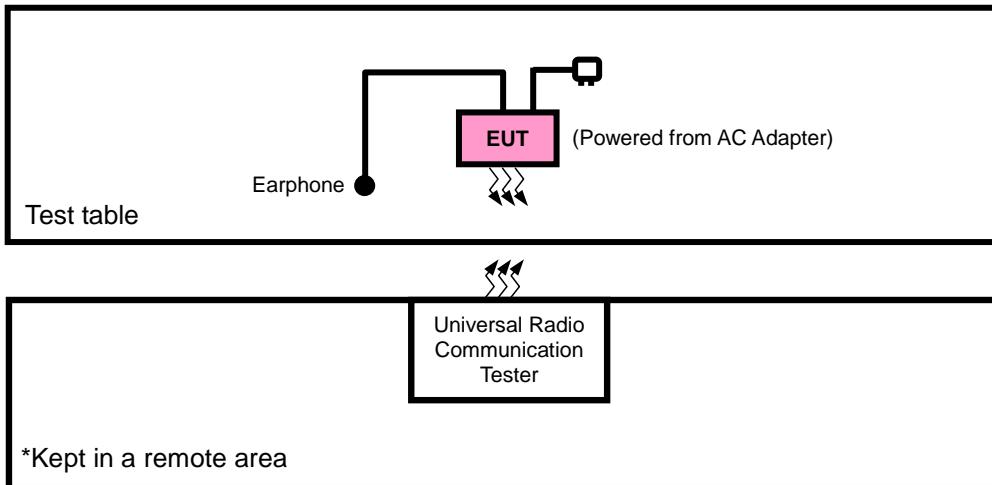

FOR E.I.R.P. TEST

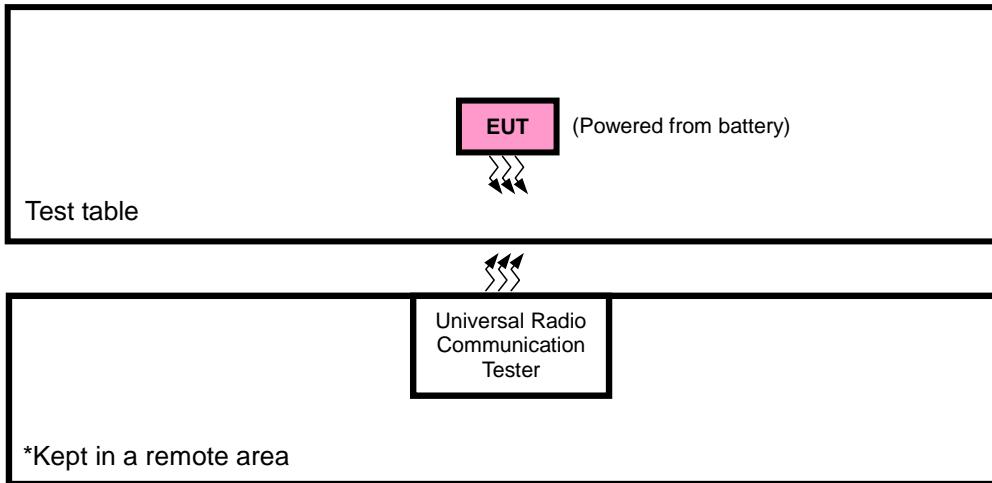



BUREAU
VERITAS

Test Report No.: RF140408N042-3

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NA	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1.	NA

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with GSM ,WCDMA or LTE link
B	EUT + Battery with GSM ,WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GSM, EDGE
B	FREQUENCY STABILITY	512 to 810	661	GSM, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	661	GSM, EDGE
B	BAND EDGE	512 to 810	512, 810	GSM, EDGE
B	CONDUCDETED EMISSION	512 to 810	661	GSM, EDGE
A	RADIATED EMISSION	512 to 810	661	GSM, EDGE

BUREAU
VERITAS

Test Report No.: RF140408N042-3

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9400	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDUCDETED EMISSION	9262 to 9538	9400	WCDMA
A	RADIATED EMISSION	9262 to 9538	9400	WCDMA

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 7 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 99 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset

BUREAU
VERITAS

Test Report No.: RF140408N042-3

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615	3MHz	QPSK	1 RB / 5 RB Offset
			19185	3MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625	5MHz	QPSK	1 RB / 0 RB Offset
			19175	5MHz	QPSK	25 RB / 0 RB Offset
		18650 to 19150	18650	10MHz	QPSK	1 RB / 24 RB Offset
			19150	10MHz	QPSK	50 RB / 0 RB Offset
		18675 to 19125	18675	15MHz	QPSK	1 RB / 0 RB Offset
			19125	15MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700	20MHz	QPSK	1 RB / 74 RB Offset
			19100	20MHz	QPSK	100 RB / 0 RB Offset
B	CONDCUDETED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 7 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 99 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 7 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 99 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	5Vdc from adapter	Blue Zheng
FREQUENCY STABILITY	23deg. C, 61%RH	3.8Vdc from Battery	Venless Long
OCCUPIED BANDWIDTH	23deg. C, 61%RH	3.8Vdc from Battery	Venless Long
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	3.8Vdc from Battery	Venless Long
BAND EDGE	23deg. C, 61%RH	3.8Vdc from Battery	Venless Long
CONDCUDETED EMISSION	23deg. C, 61%RH	3.8Vdc from Battery	Venless Long
RADIATED EMISSION	25deg. C, 57%RH	5Vdc from adapter	Blue Zheng

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656

Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d.
$$\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$$

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




BUREAU
VERITAS

Test Report No.: RF140408N042-3


4.1.3 TEST SETUP

EIRP MEASUREMENT:

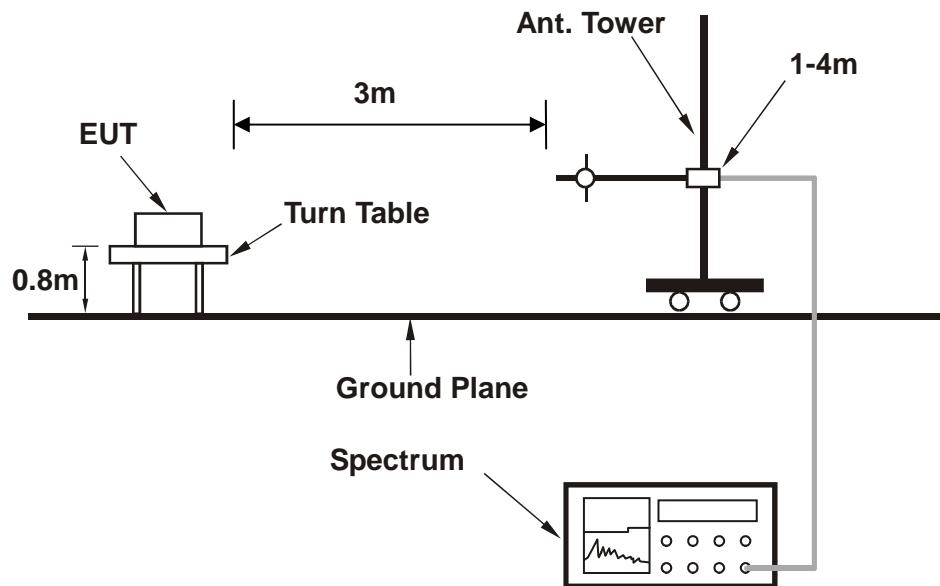

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

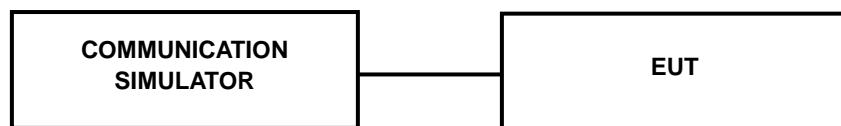

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	30.52	30.27	30.33
GPRS 8	30.45	30.34	30.39
GPRS 10	29.18	29.08	29.07
EDGE 8 (MCS1)	30.51	30.33	30.36
EDGE 10 (MCS1)	29.15	29.09	29.09
EDGE 8 (MCS9)	27.13	27.08	27.22
EDGE 10 (MCS9)	25.68	25.71	25.67

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.64	23.71	23.67
HSPA			
HSDPA Subtest-1	22.69	22.60	22.64
HSDPA Subtest-2	22.58	22.62	22.70
HSDPA Subtest-3	22.21	22.20	22.21
HSDPA Subtest-4	22.19	22.14	22.21
HSUPA Subtest-1	22.50	22.56	22.57
HSUPA Subtest-2	20.60	20.54	20.55
HSUPA Subtest-3	21.43	21.44	21.41
HSUPA Subtest-4	20.55	20.65	20.62
HSUPA Subtest-5	22.72	22.71	22.61
HSPA+			
HSDPA Subtest-1	22.62	22.56	22.58
HSDPA Subtest-2	22.75	22.69	22.71
HSDPA Subtest-3	22.28	22.22	22.24
HSDPA Subtest-4	22.02	21.96	21.98
HSUPA Subtest-1	22.66	22.60	22.62
HSUPA Subtest-2	20.43	20.37	20.39
HSUPA Subtest-3	21.28	21.22	21.24
HSUPA Subtest-4	20.64	20.58	20.60
HSUPA Subtest-5	22.86	22.80	22.82



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	3GPP MPR (dB)
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1908.3 MHz	
1.4MHz	QPSK	1	0	23.78	23.83	23.73	0
		1	2	23.74	23.8	23.67	0
		1	5	23.83	23.85	23.65	0
		3	0	23.78	23.84	23.66	0
		3	1	23.75	23.83	23.67	0
		3	3	23.83	23.8	23.64	0
		6	0	22.9	22.8	22.68	1
	16QAM	1	0	22.91	22.9	22.77	1
		1	2	22.89	22.94	22.7	1
		1	5	22.77	22.98	22.73	1
		3	0	22.8	22.77	22.83	1
		3	1	22.88	22.8	22.84	1
		3	3	22.8	22.8	22.83	1
		6	0	21.95	22.06	21.87	2

BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	3GPP MPR (dB)
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
3 MHz	QPSK	1	0	23.8	23.77	23.78	0
		1	7	23.84	23.79	23.88	0
		1	14	23.86	23.78	23.74	0
		8	0	22.82	22.77	22.89	1
		8	3	22.85	22.7	22.9	1
		8	7	22.88	22.74	22.83	1
		15	0	22.83	22.77	22.8	1
	16QAM	1	0	22.73	22.88	22.79	1
		1	7	22.65	22.72	22.86	1
		1	14	22.68	22.85	22.71	1
		8	0	21.81	21.88	21.93	2
		8	3	21.7	21.8	21.62	2
		8	7	21.83	21.95	21.86	2
		15	0	21.85	21.94	21.95	2
5 MHz	QPSK	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	3GPP MPR (dB)
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
		1	0	23.74	23.82	23.83	0
		1	12	23.79	23.8	23.81	0
		1	24	23.73	23.75	23.7	0
		12	0	22.81	22.8	22.81	1
		12	6	22.82	22.69	22.54	1
	16QAM	12	13	22.81	22.79	22.84	1
		25	0	22.91	22.76	22.87	1
		1	0	22.91	22.8	22.73	1
		1	12	22.79	22.71	22.76	1
		1	24	22.88	22.78	22.72	1
		12	0	21.92	21.95	22.04	2
		12	6	22.01	21.99	21.73	2
		12	13	21.91	22	21.73	2
		25	0	21.98	21.98	22.03	2

BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	3GPP MPR (dB)
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
10 MHz	QPSK	1	0	23.93	23.88	23.96	0
		1	24	23.85	23.78	23.86	0
		1	49	23.77	23.86	23.97	0
		25	0	22.96	22.87	22.6	1
		25	12	22.85	22.78	22.86	1
		25	25	22.87	22.83	22.6	1
		50	0	22.9	22.85	22.68	1
	16QAM	1	0	22.78	22.78	22.8	1
		1	24	22.72	22.74	22.74	1
		1	49	22.67	23	22.82	1
		25	0	22.01	21.96	21.68	2
		25	12	21.93	21.96	21.96	2
		25	25	22.05	21.88	21.86	2
		50	0	21.97	21.91	21.79	2
15 MHz	QPSK	1	0	23.92	23.81	23.89	0
		1	37	23.89	23.8	23.83	0
		1	74	23.78	23.75	23.98	0
		36	0	22.86	22.81	22.9	1
		36	19	22.91	22.87	22.92	1
		36	39	22.82	22.86	22.81	1
		75	0	22.97	22.78	22.81	1
	16QAM	1	0	23.06	22.94	23.04	1
		1	37	22.9	22.96	22.9	1
		1	74	22.9	23.08	23	1
		36	0	21.97	22.05	21.75	2
		36	19	22.06	22.04	21.7	2
		36	39	22.05	22.12	22.1	2
		75	0	22.02	22.05	22.02	2



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	3GPP MPR (dB)
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
20MHz	QPSK	1	0	23.95	24.04	23.78	0
		1	50	23.9	23.96	23.68	0
		1	99	23.85	24.09	24.04	0
		50	0	23.02	22.98	22.84	1
		50	25	23.01	22.96	22.63	1
		50	50	22.96	22.97	22.97	1
		100	0	22.99	22.93	22.73	1
	16QAM	1	0	22.86	22.91	22.95	1
		1	50	22.89	22.94	22.68	1
		1	99	22.99	23.05	22.85	1
		50	0	22.06	22.13	21.86	2
		50	25	22.1	22.13	21.84	2
		50	50	22.15	22.06	21.93	2
		100	0	22.07	22.09	21.82	2

BUREAU
VERITAS

Test Report No.: RF140408N042-3

EIRP POWER (dBm)**GSM**

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(W)	Polarization (H/V)
512	1850.2	-15.25	44.32	29.07	0.81	H
661	1880	-15.60	44.37	28.77	0.75	H
810	1909.2	-15.64	43.28	27.64	0.58	H
512	1850.2	-21.40	46.18	24.78	0.30	V
661	1880	-22.45	45.72	23.27	0.21	V
810	1909.2	-23.14	45.21	22.07	0.16	V

EDGE

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(W)	Polarization (H/V)
512	1850.2	-19.40	44.32	24.92	0.31	H
661	1880	-18.60	44.37	25.77	0.38	H
810	1909.2	-18.75	43.28	24.53	0.28	H
512	1850.2	-24.60	46.18	21.58	0.14	V
661	1880	-23.25	45.72	22.47	0.18	V
810	1909.2	-22.65	45.21	22.56	0.18	V

WCDMA

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(W)	Polarization (H/V)
9262	1852.4	-17.36	43.99	26.63	0.46	H
9400	1880	-17.65	44.37	26.72	0.47	H
9538	1907.6	-18.03	43.4	25.37	0.34	H
9262	1852.4	-25.78	46.33	20.55	0.11	V
9400	1880	-25.40	45.88	20.48	0.11	V
9538	1907.6	-25.95	45.06	19.11	0.08	V

- REMARKS:**
1. EIRP Output Power (dBm) = LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-23.40	43.71	20.31	107.40	H	1
18900	1880.0	-22.80	43.25	20.45	110.92	H	1
19193	1908.3	-21.93	42.98	21.05	127.35	H	1
18607	1850.7	-19.23	45.23	26.00	398.11	V	1
18900	1880.0	-18.76	45.11	26.35	431.52	V	1
19193	1908.3	-18.77	44.48	25.71	372.39	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-24.46	43.71	19.25	84.14	H	1
18900	1880.0	-23.67	43.25	19.58	90.78	H	1
19193	1908.3	-22.85	42.98	20.13	103.04	H	1
18607	1850.7	-20.29	45.23	24.94	311.89	V	1
18900	1880.0	-19.63	45.11	25.48	353.18	V	1
19193	1908.3	-19.69	44.48	24.79	301.30	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-23.39	43.73	20.34	108.14	H	1
18900	1880.0	-22.86	43.25	20.39	109.40	H	1
19185	1908.5	-21.70	42.99	21.29	134.59	H	1
18615	1851.5	-19.22	45.39	26.17	414.00	V	1
18900	1880.0	-18.82	45.11	26.29	425.60	V	1
19185	1908.5	-18.54	44.70	26.16	413.05	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-24.58	43.73	19.15	82.22	H	1
18900	1880.0	-23.93	43.25	19.32	85.51	H	1
19185	1908.5	-22.72	42.99	20.27	106.41	H	1
18615	1851.5	-20.41	45.39	24.98	314.77	V	1
18900	1880.0	-19.89	45.11	25.22	332.66	V	1
19185	1908.5	-19.56	44.70	25.14	326.59	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-23.49	43.90	20.41	109.90	H	1
18900	1880.0	-22.82	43.25	20.43	110.41	H	1
19175	1907.5	-21.75	43.19	21.44	139.32	H	1
18625	1852.5	-19.32	45.36	26.04	401.79	V	1
18900	1880.0	-18.78	45.11	26.33	429.54	V	1
19175	1907.5	-18.59	44.69	26.10	407.38	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-24.32	43.90	19.58	90.78	H	1
18900	1880.0	-23.85	43.25	19.40	87.10	H	1
19175	1907.5	-22.85	43.19	20.34	108.14	H	1
18625	1852.5	-20.15	45.36	25.21	331.89	V	1
18900	1880.0	-19.81	45.11	25.30	338.84	V	1
19175	1907.5	-19.69	44.69	25.00	316.23	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-23.30	43.73	20.43	110.41	H	1
18900	1880.0	-22.77	43.25	20.48	111.69	H	1
19150	1905.0	-21.61	43.34	21.73	148.94	H	1
18650	1855.0	-19.13	45.36	26.23	419.76	V	1
18900	1880.0	-18.73	45.11	26.38	434.51	V	1
19150	1905.0	-18.45	44.60	26.15	412.10	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-24.45	43.73	19.28	84.72	H	1
18900	1880.0	-23.87	43.25	19.38	86.70	H	1
19150	1905.0	-22.78	43.34	20.56	113.76	H	1
18650	1855.0	-20.28	45.36	25.08	322.11	V	1
18900	1880.0	-19.83	45.11	25.28	337.29	V	1
19150	1905.0	-19.62	44.60	24.98	314.77	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-23.45	44.17	20.72	118.03	H	1
18900	1880.0	-22.90	43.25	20.35	108.39	H	1
19125	1902.5	-21.60	43.24	21.64	145.88	H	1
18675	1857.5	-19.28	45.59	26.31	427.56	V	1
18900	1880.0	-18.86	45.11	26.25	421.70	V	1
19125	1902.5	-18.44	44.78	26.34	430.53	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-24.33	44.17	19.84	96.38	H	1
18900	1880.0	-23.57	43.25	19.68	92.90	H	1
19125	1902.5	-22.78	43.24	20.46	111.17	H	1
18675	1857.5	-20.16	45.59	25.43	349.14	V	1
18900	1880.0	-19.53	45.11	25.58	361.41	V	1
19125	1902.5	-19.62	44.78	25.16	328.10	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-23.38	43.91	20.53	112.98	H	1
18900	1880.0	-22.56	43.25	20.69	117.22	H	1
19100	1900.0	-21.54	43.50	21.96	157.04	H	1
18700	1860.0	-19.21	45.51	26.30	426.58	V	1
18900	1880.0	-18.52	45.11	26.59	456.04	V	1
19100	1900.0	-18.38	45.23	26.85	484.17	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-24.24	43.91	19.67	92.68	H	1
18900	1880.0	-23.60	43.25	19.65	92.26	H	1
19100	1900.0	-22.73	43.50	20.77	119.40	H	1
18700	1860.0	-20.07	45.51	25.44	349.95	V	1
18900	1880.0	-19.56	45.11	25.55	358.92	V	1
19100	1900.0	-19.57	45.23	25.66	368.13	V	1

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

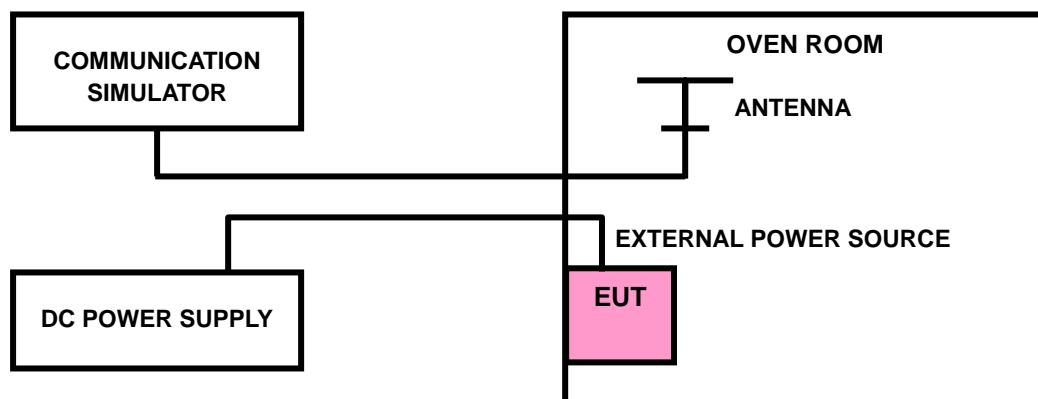



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
3.8	-0.008	-0.008	0.008	2.5
3.5	-0.007	-0.008	0.007	2.5
4.35	-0.006	-0.007	0.006	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (PPM)			LIMIT (PPM)
	GSM	EDGE	WCDMA	
-30	-0.014	-0.013	-0.010	2.5
-20	-0.013	-0.012	-0.008	2.5
-10	-0.012	-0.011	-0.007	2.5
0	-0.010	-0.010	-0.001	2.5
10	-0.009	-0.010	0.005	2.5
20	-0.009	-0.009	0.006	2.5
30	-0.008	-0.008	0.008	2.5
40	-0.007	-0.008	0.008	2.5
50	0.002	0.002	0.009	2.5
60	0.005	0.006	0.009	2.5

BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

AFC FREQUENCY ERROR vs. VOLTAGE							
VOLTAGE (Volts)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.8	-0.010	-0.02	0.02	-0.008	-0.019	0.024	2.5
3.5	-0.008	-0.02	0.02	-0.006	-0.018	0.021	2.5
4.35	-0.008	-0.01	0.01	0.009	-0.016	0.018	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.

AFC FREQUENCY ERROR vs. TEMPERATURE							
TEMP (°C)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	-0.010	-0.011	-0.009	-0.012	-0.002	0.012	2.5
-20	-0.008	-0.008	-0.008	-0.011	-0.004	0.010	2.5
-10	-0.007	-0.007	-0.007	-0.009	-0.005	0.009	2.5
0	-0.006	-0.006	-0.005	-0.007	-0.006	0.008	2.5
10	-0.004	-0.004	0.004	-0.006	-0.005	0.008	2.5
20	-0.003	0.005	0.006	-0.006	-0.007	0.007	2.5
30	-0.003	0.005	0.007	-0.005	-0.004	0.004	2.5
40	-0.007	0.006	0.008	-0.004	-0.009	-0.003	2.5
50	-0.010	0.008	0.008	-0.004	-0.002	-0.005	2.5
60	-0.007	0.008	0.009	-0.003	-0.004	-0.007	2.5



BUREAU
VERITAS


Test Report No.: RF140408N042-3

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

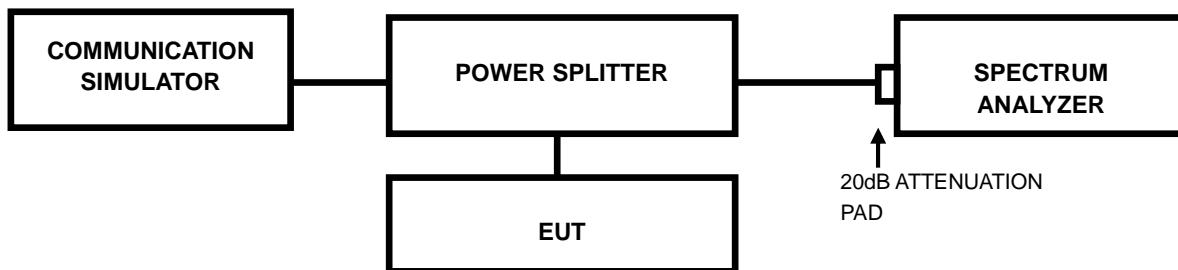


BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		GSM	EDGE			WCDMA	
512	1850.2	243.59	245.19	9262	1852.4	4.17	
661	1880.0	241.99	245.19	9400	1880.0	4.15	
810	1909.8	245.19	248.40	9538	1907.6	4.17	

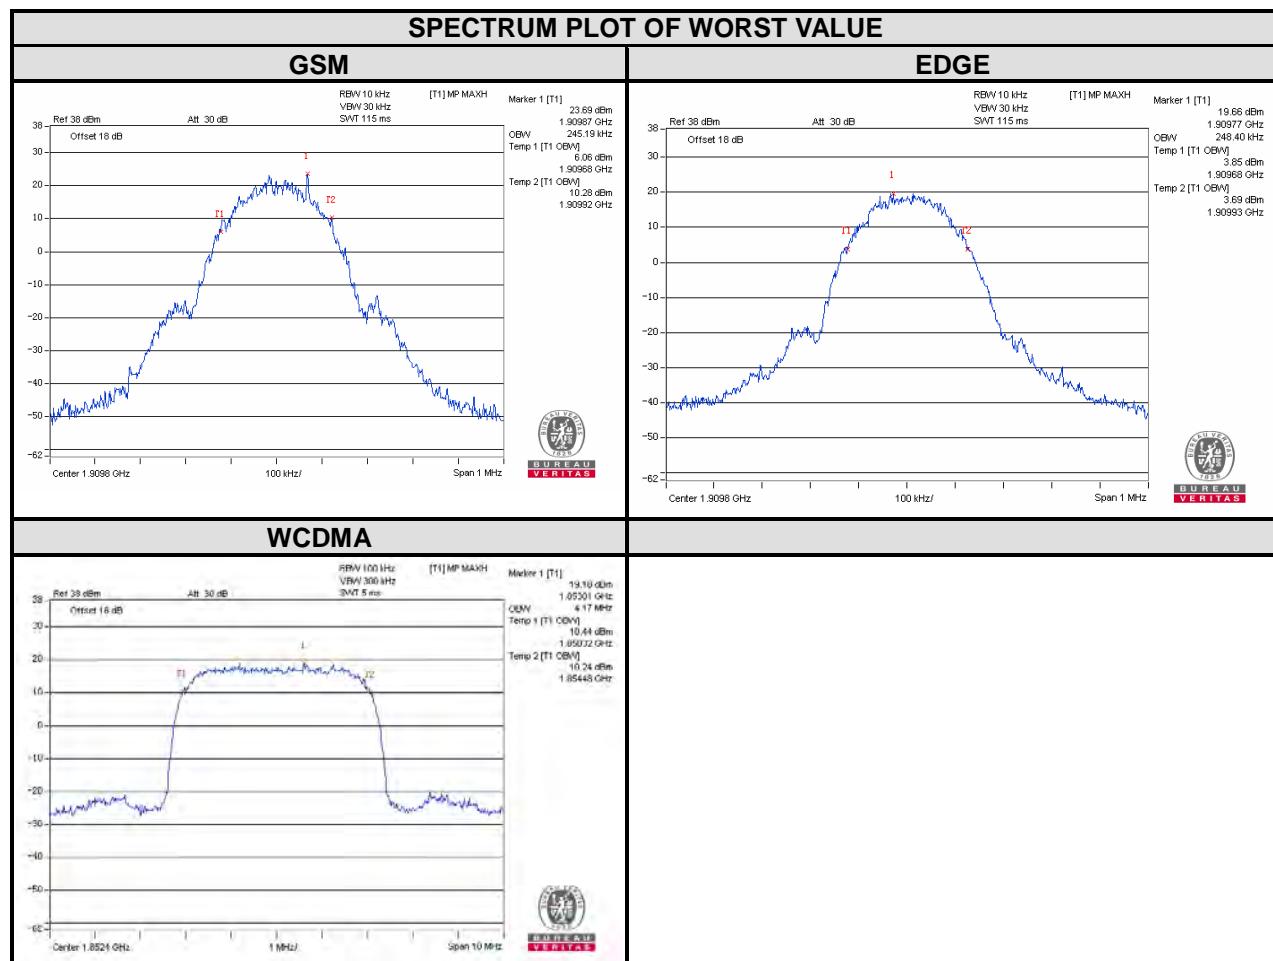

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (MHz)	
		GSM	EDGE			WCDMA	
512	1850.2	316.71	311.33	9262	1852.4	4.67	
661	1880.0	311.14	308.51	9400	1880.0	4.68	
810	1909.8	319.77	319.89	9538	1907.6	4.68	

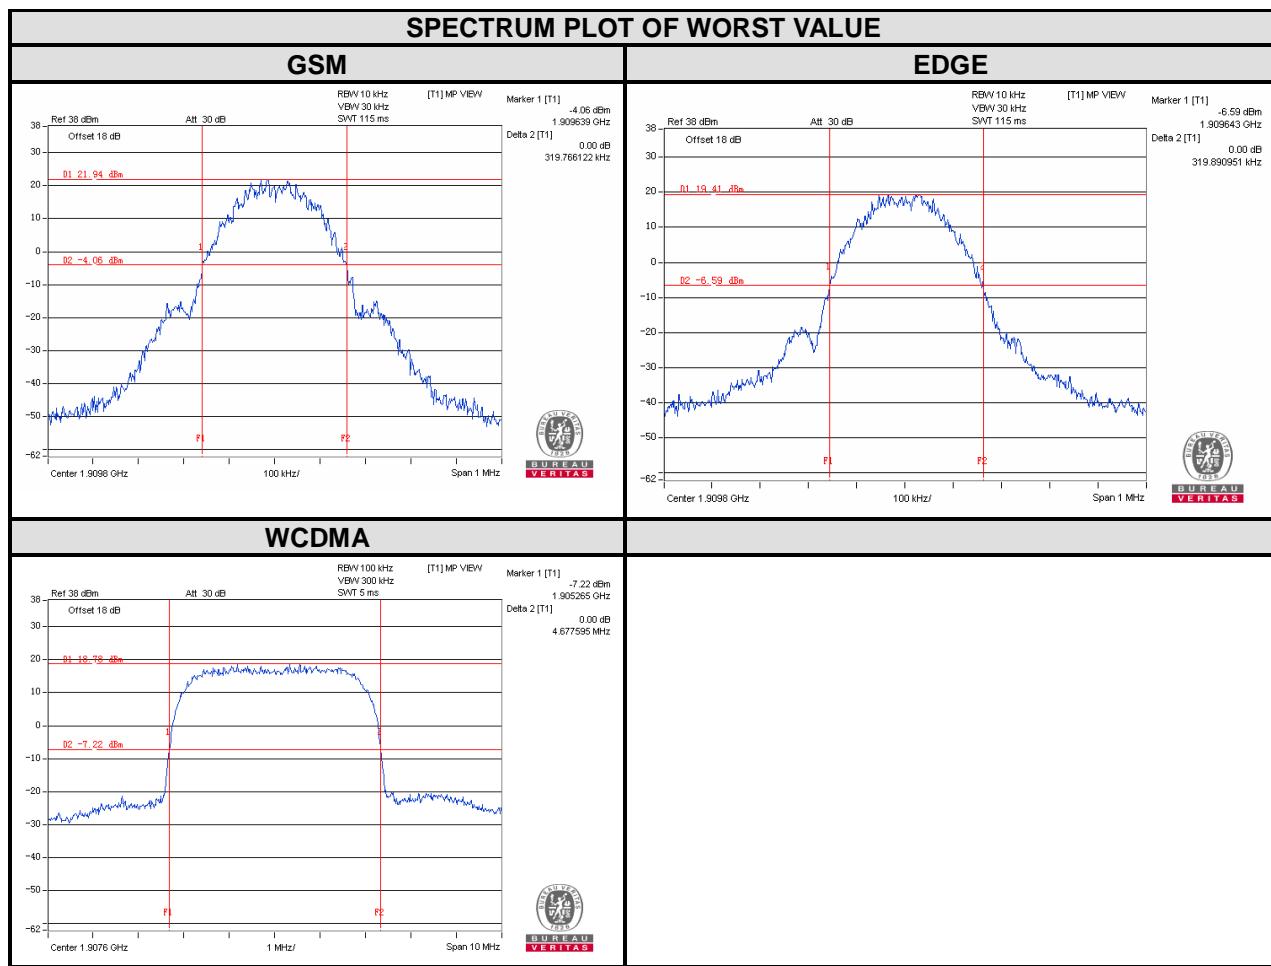

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18650	1855	1.09	1.09	18650	1855	1.29	1.30
18900	1880	1.10	1.10	18900	1880	1.29	1.31
19150	1905	1.09	1.09	19150	1905	1.29	1.30

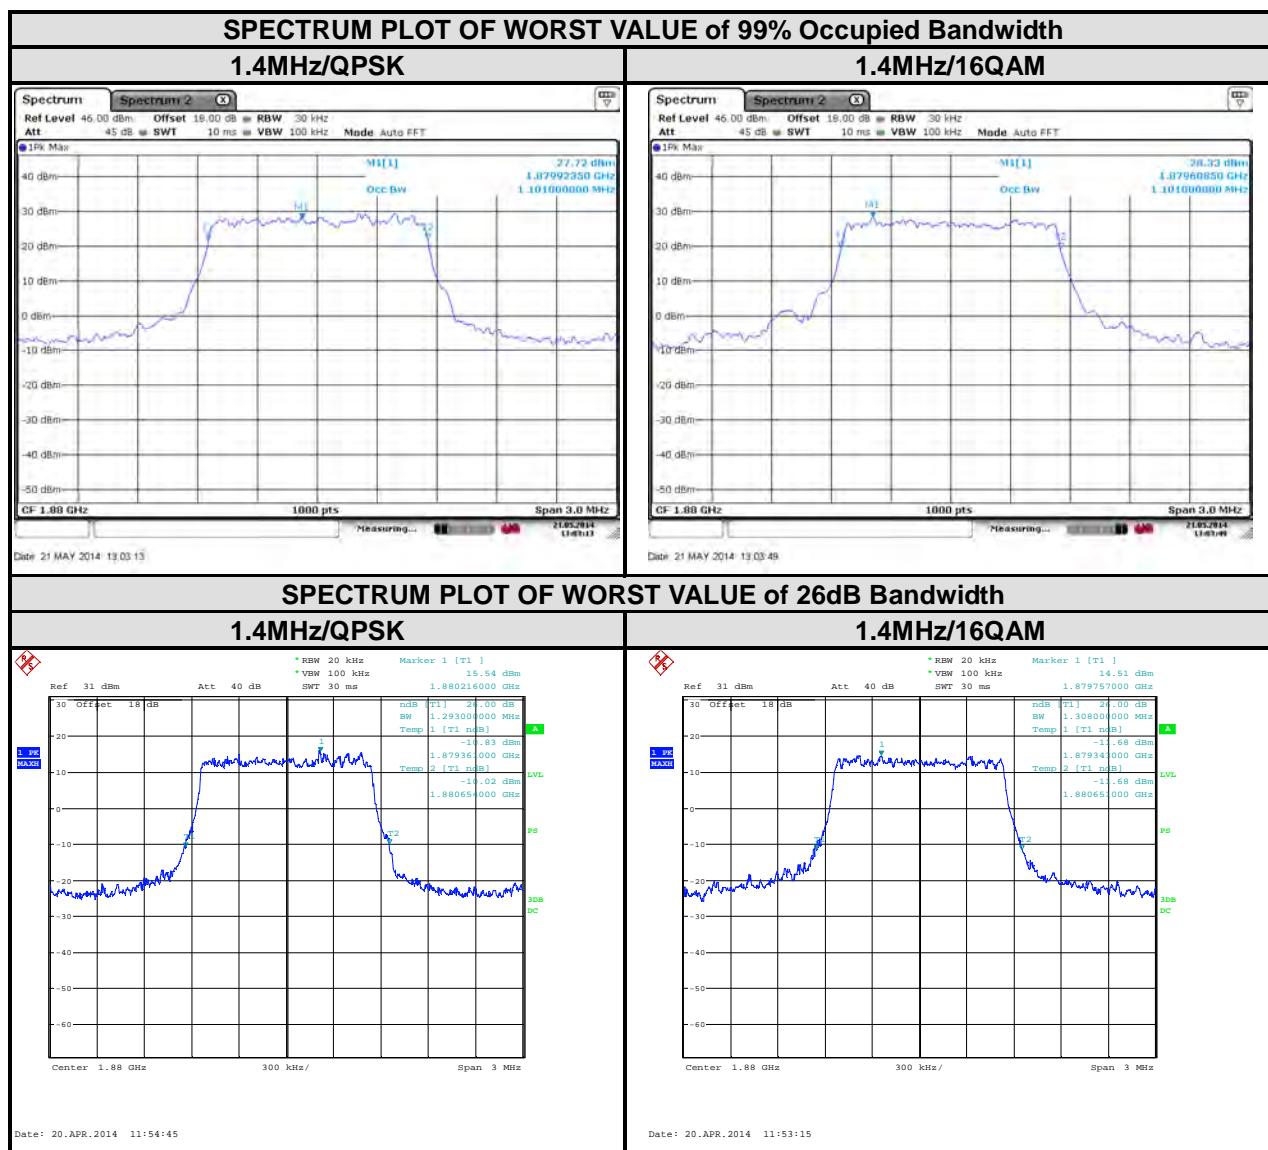

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18615	1851.5	2.70	2.69	18615	1851.5	2.96	2.94
18900	1880	2.70	2.70	18900	1880	2.98	2.93
19185	1908.5	2.69	2.69	19185	1908.5	2.97	2.94

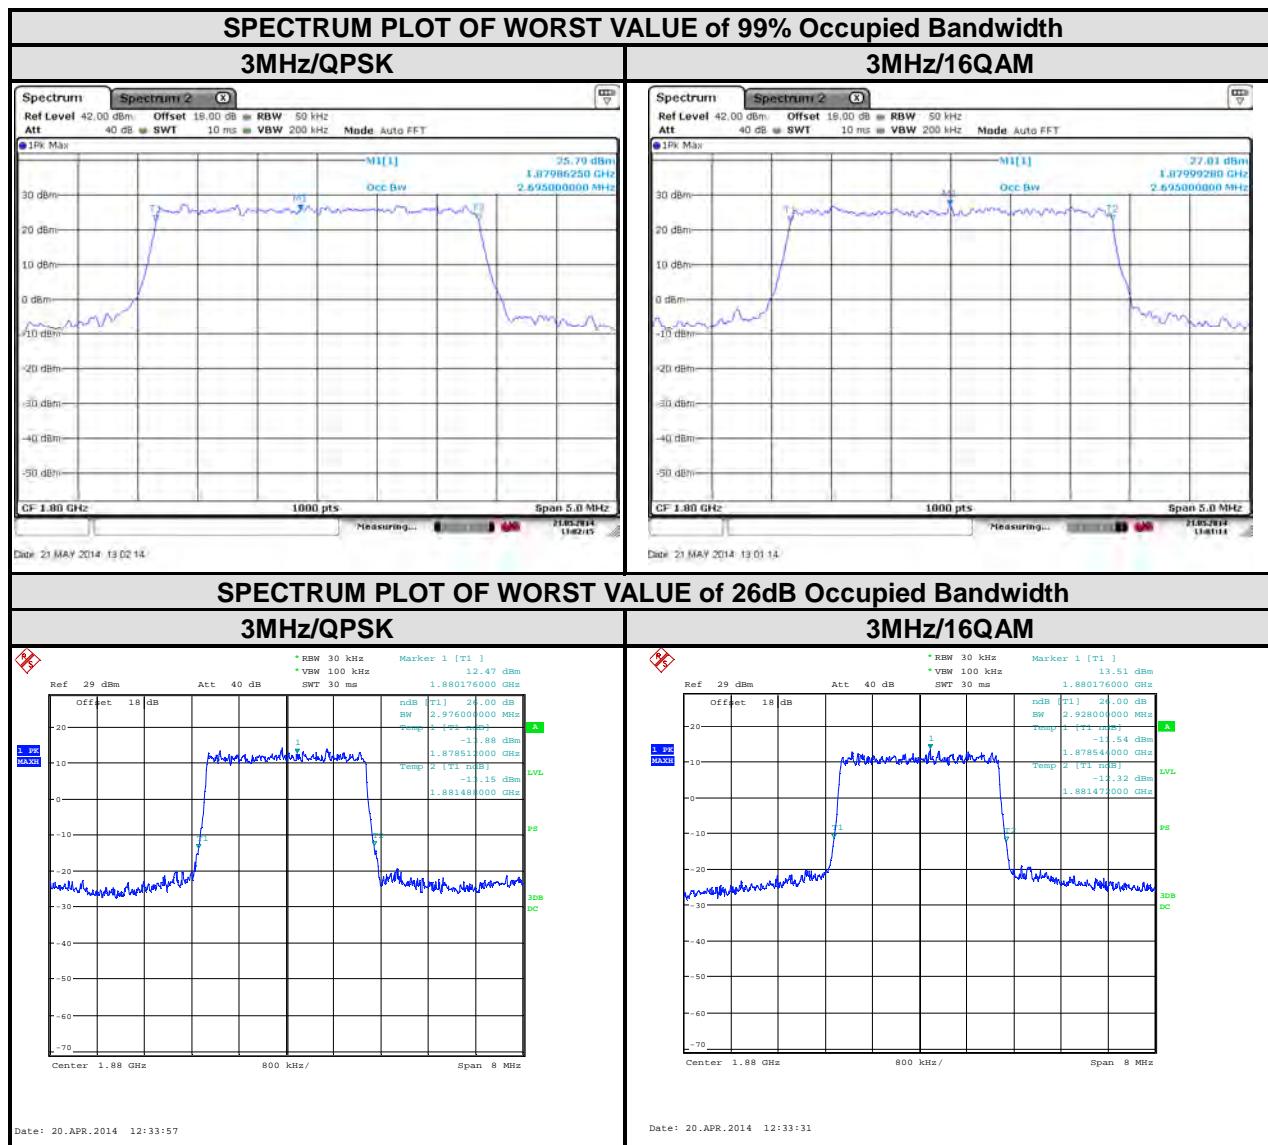

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080


Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.50	4.50	18625	1852.5	4.90	4.90
18900	1880	4.49	4.47	18900	1880	4.93	4.90
19175	1907.5	4.48	4.47	19175	1907.5	4.89	4.89

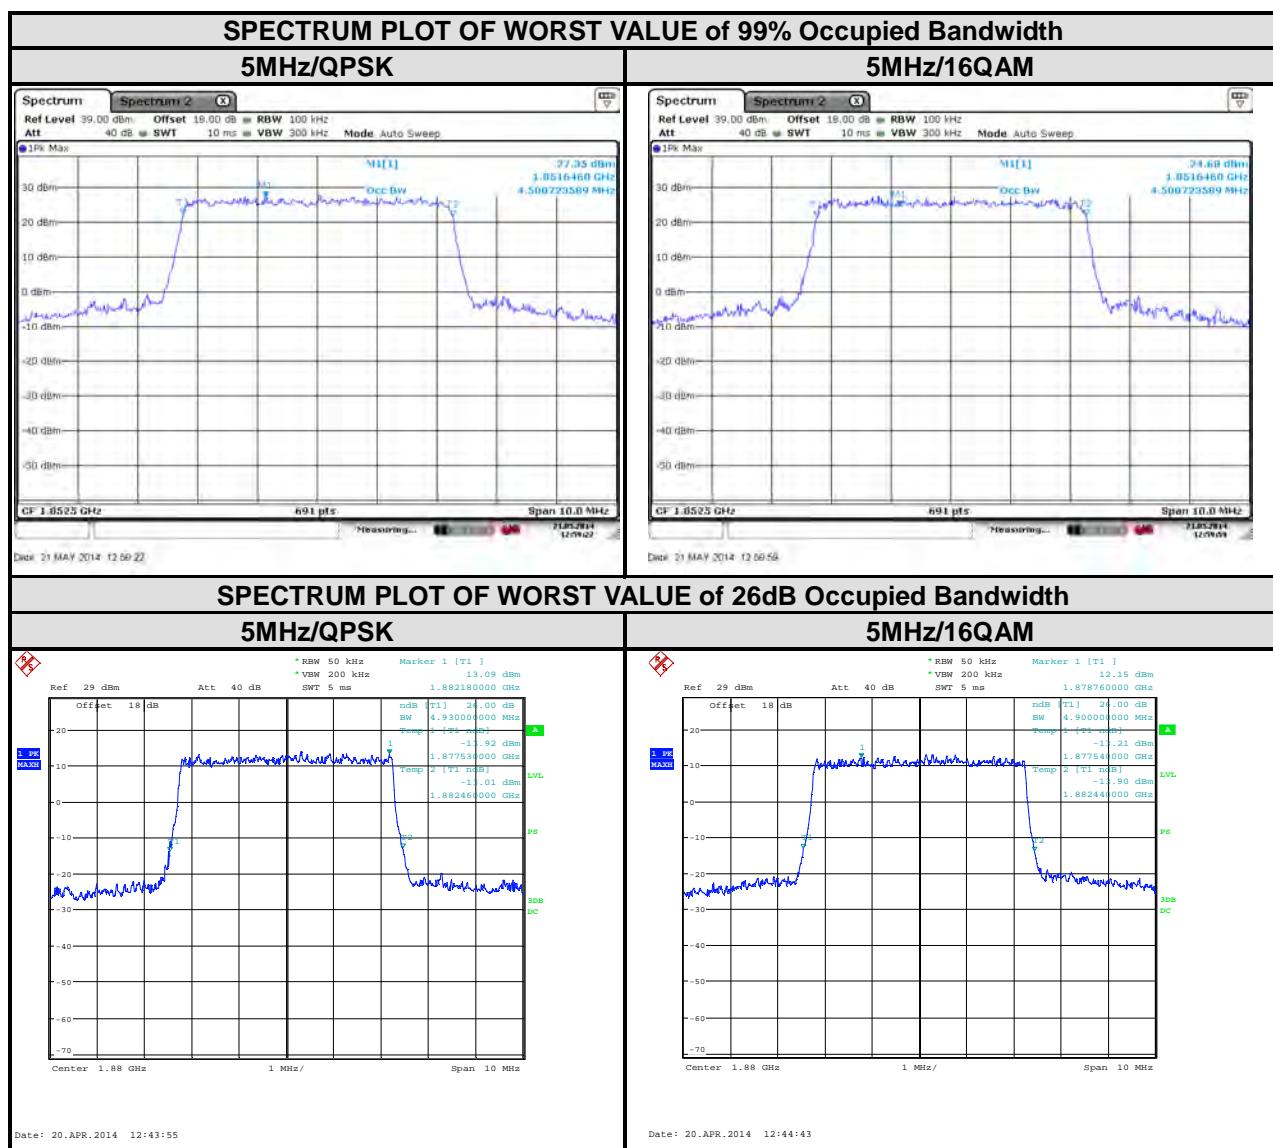

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080


Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18650	1855	8.92	8.94	18650	1855	9.66	9.66
18900	1880	9.00	8.97	18900	1880	9.72	9.72
19150	1905	8.92	8.94	19150	1905	9.72	9.68

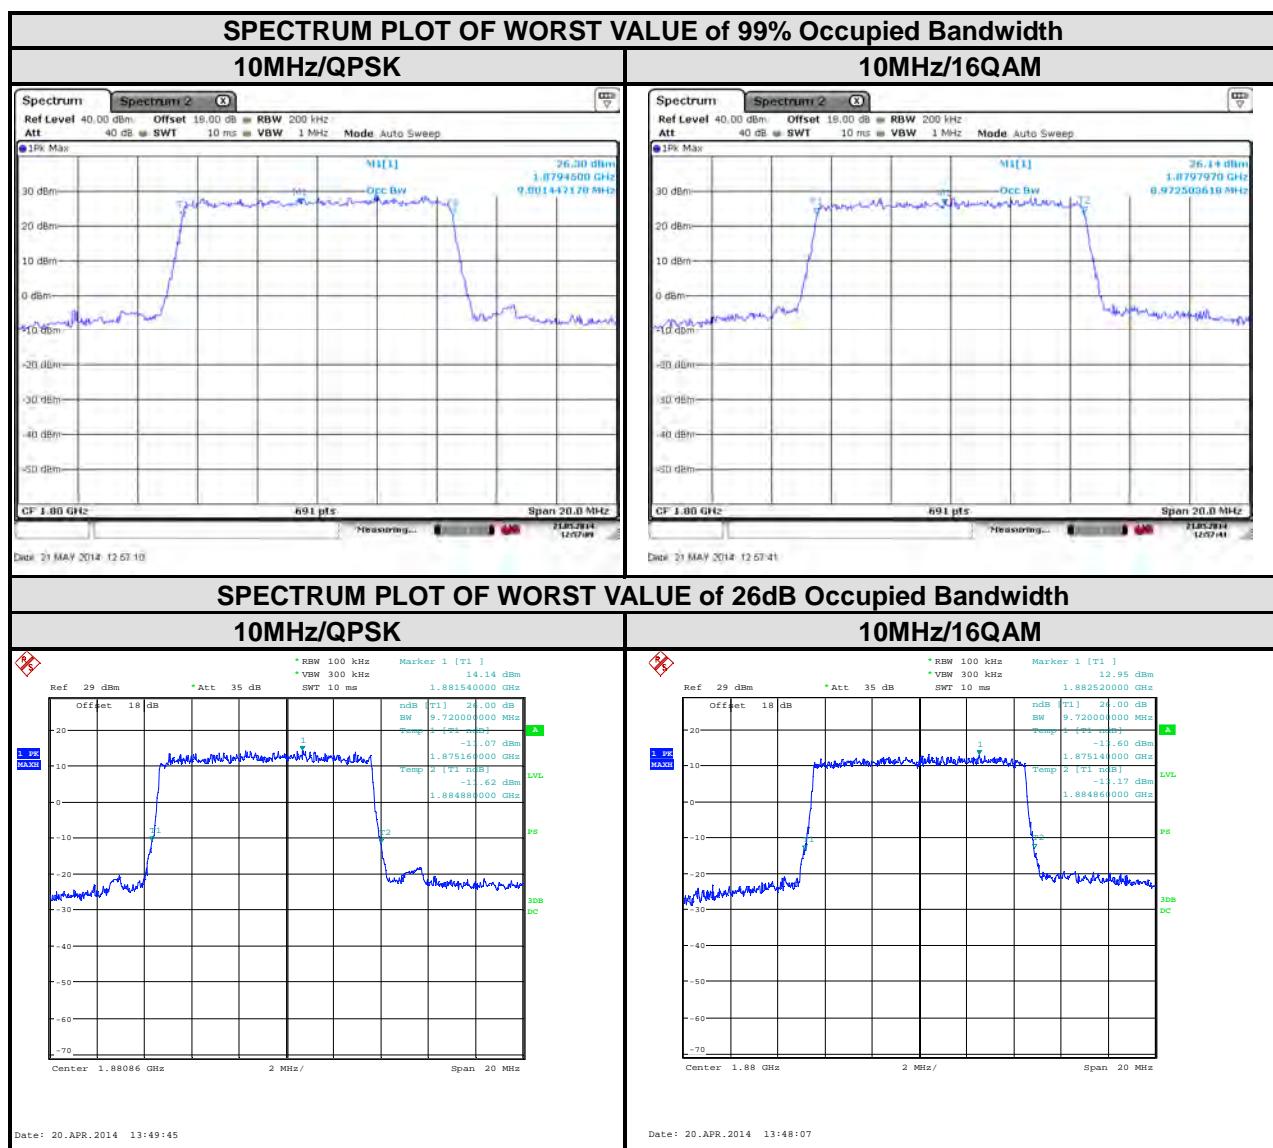

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080


Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 15 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.44	13.44	18675	1857.5	14.58	14.58
18900	1880	13.60	13.60	18900	1880	14.64	14.58
19125	1902.5	13.44	13.44	19125	1902.5	14.58	14.64

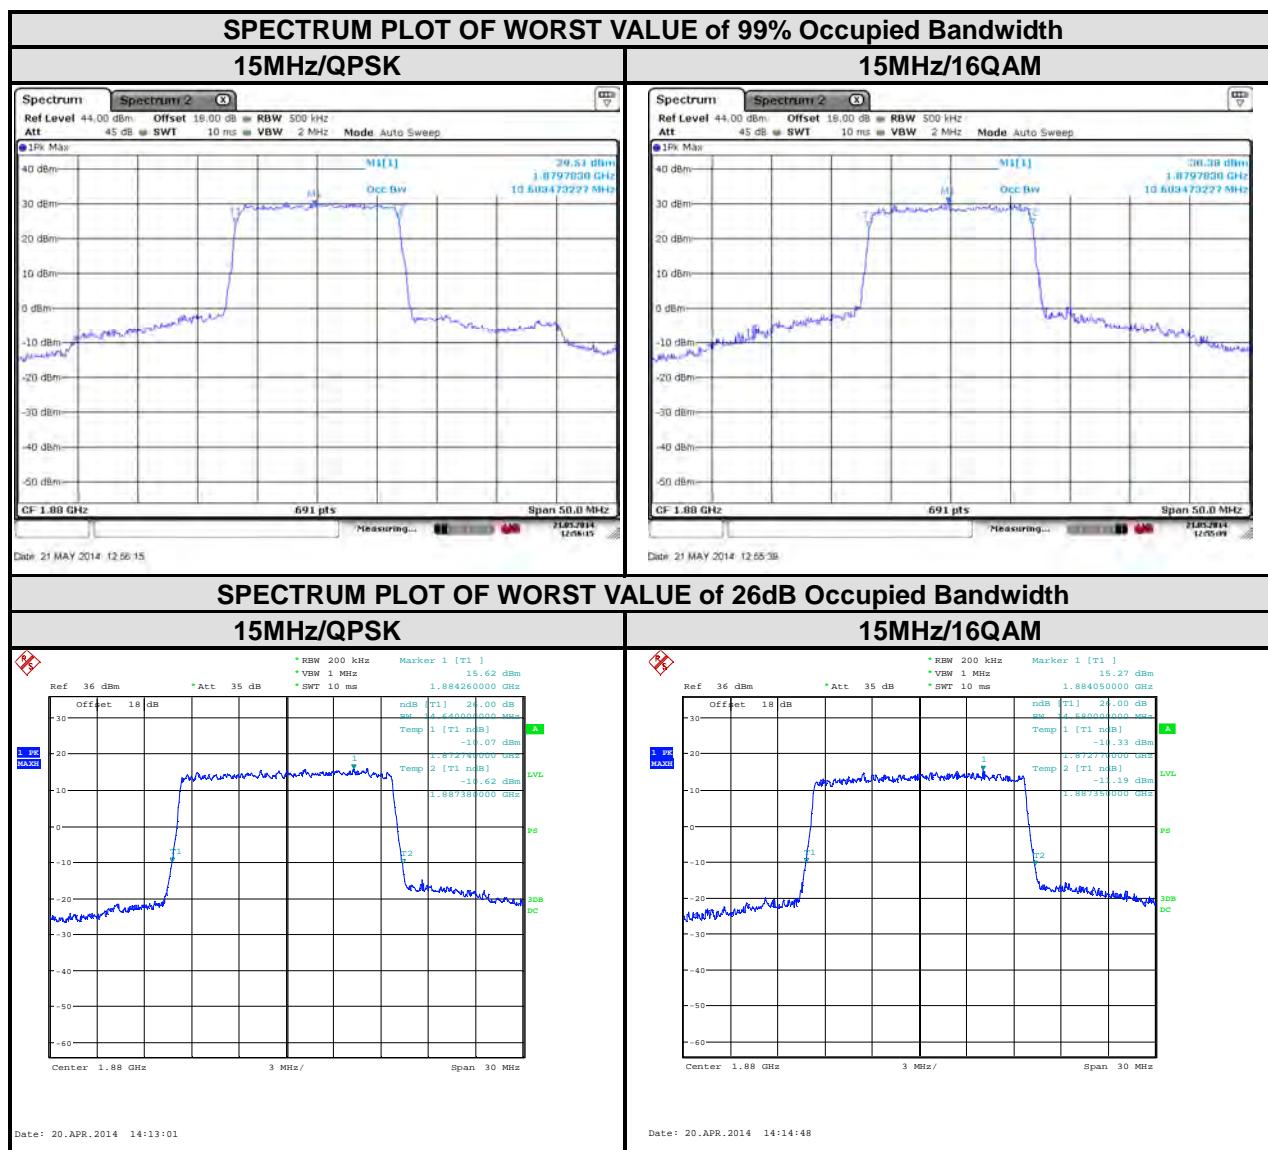

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE band 2							
Channel Bandwidth : 20 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18700	1860	17.04	17.00	18700	1860	19.16	19.20
18900	1880	18.02	17.95	18900	1880	19.15	19.00
19100	1900	17.90	17.95	19100	1900	19.20	19.20

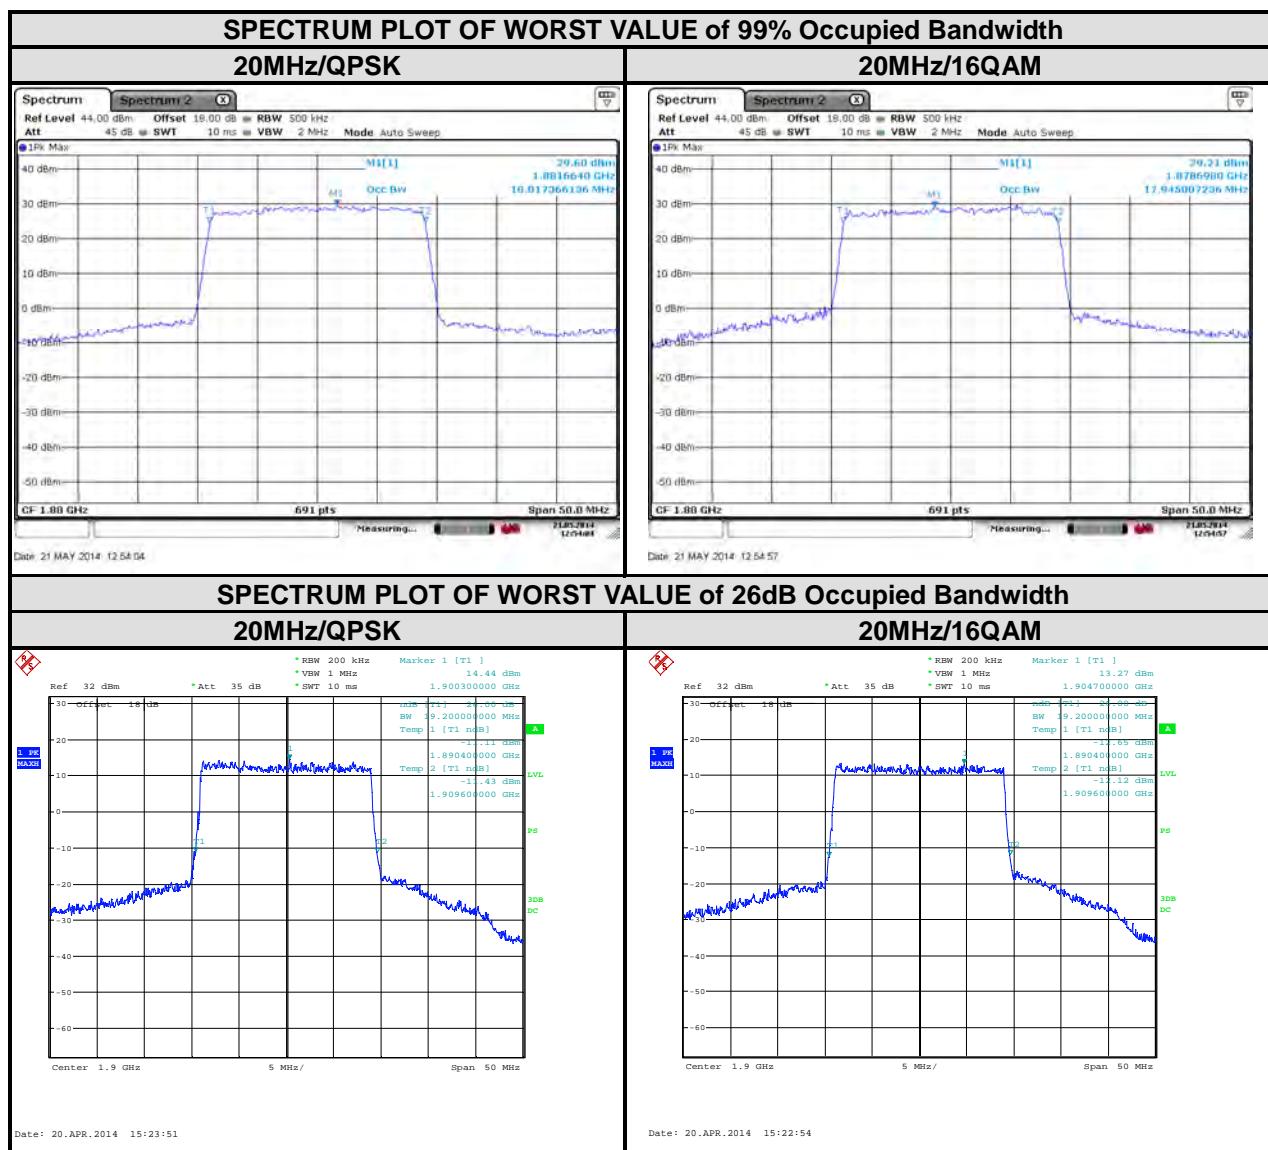

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS


Test Report No.: RF140408N042-3

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST SETUP

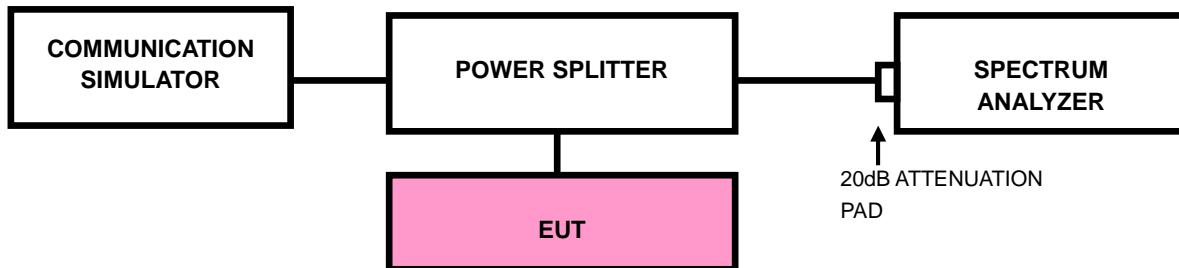

4.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.



Test Report No.: RF140408N042-3

RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)


- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.4.4. TEST RESULTS

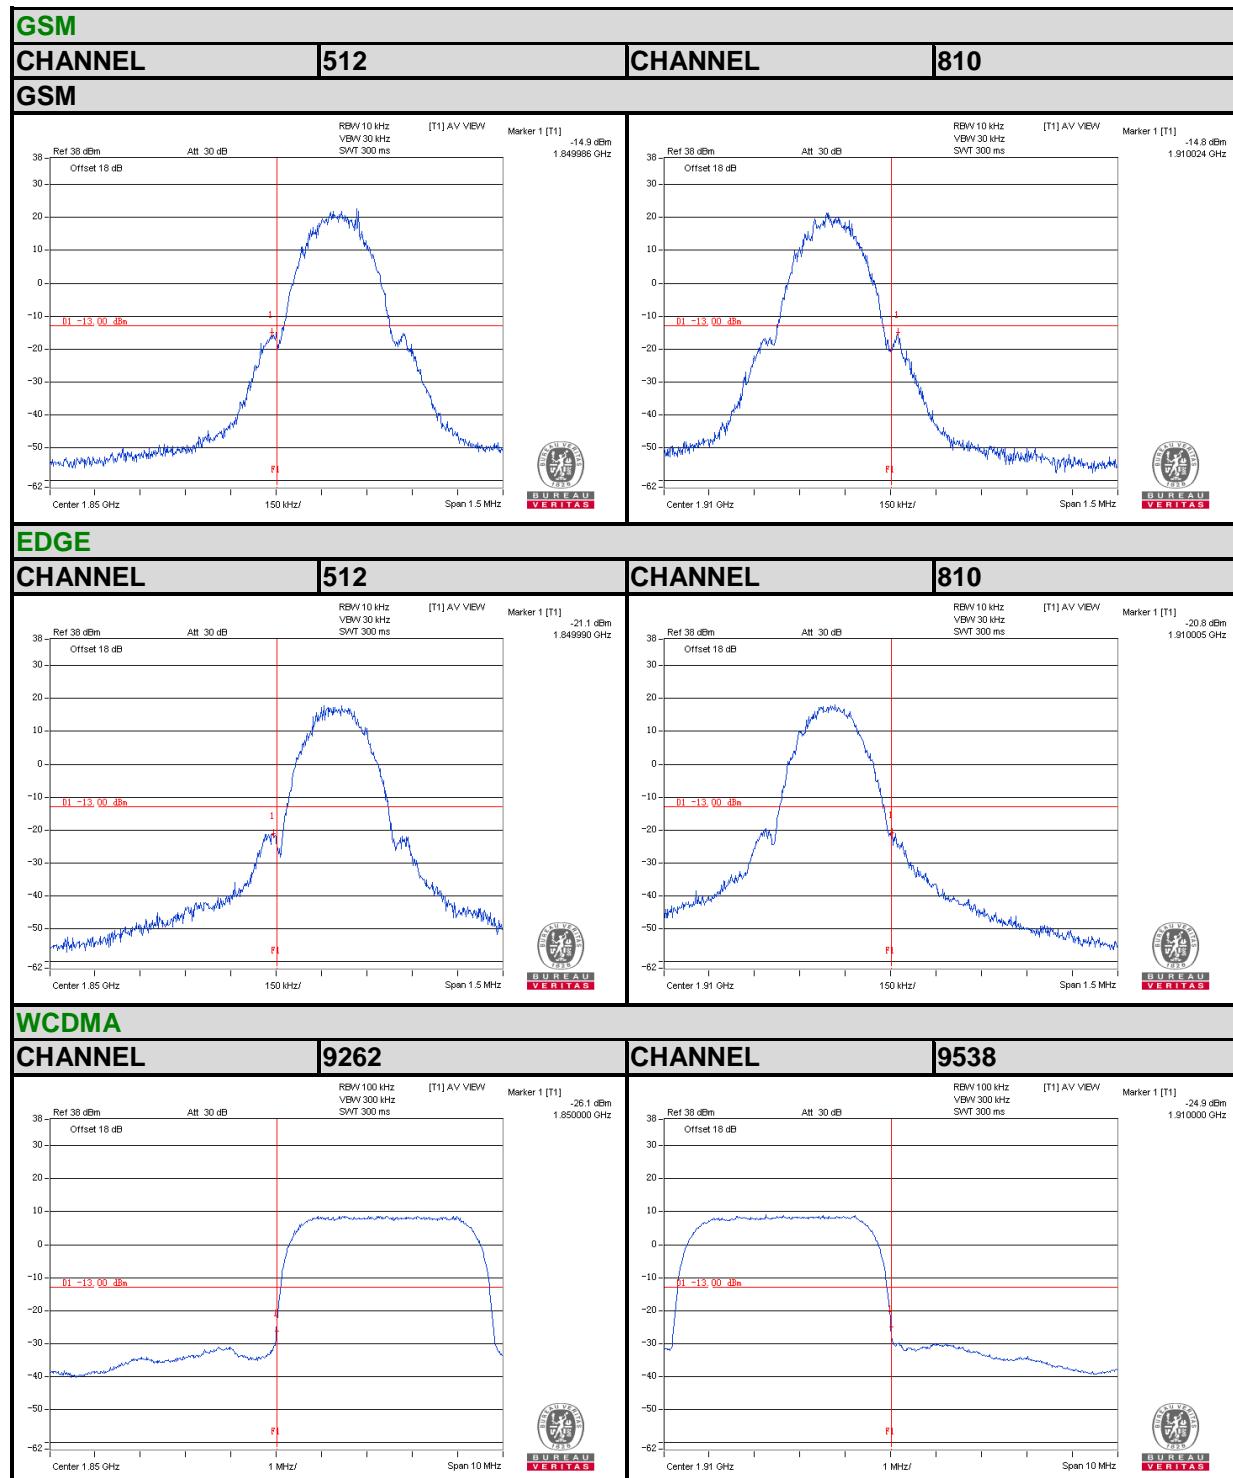

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656

Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 1.4MHz

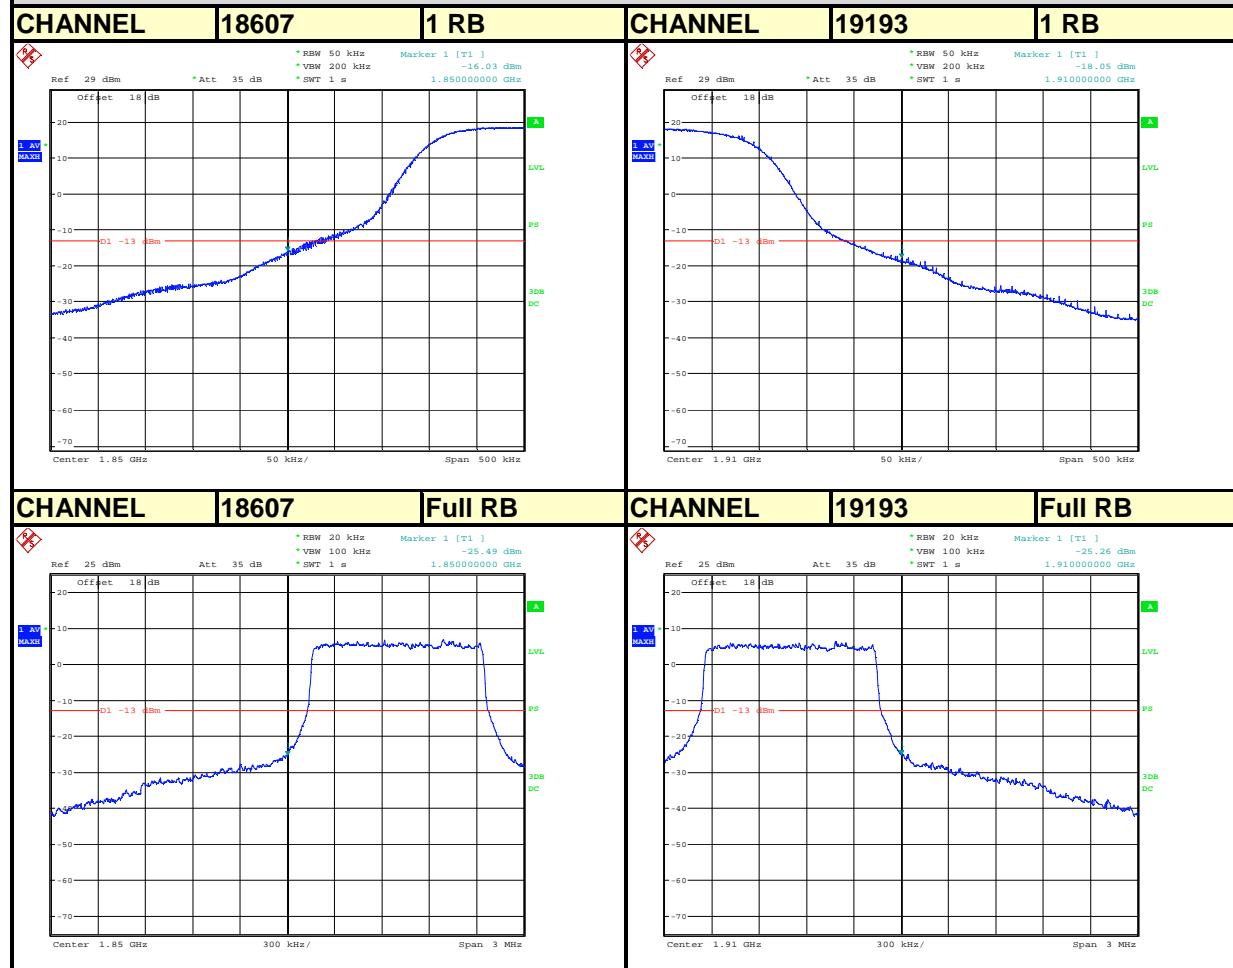

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 3MHz

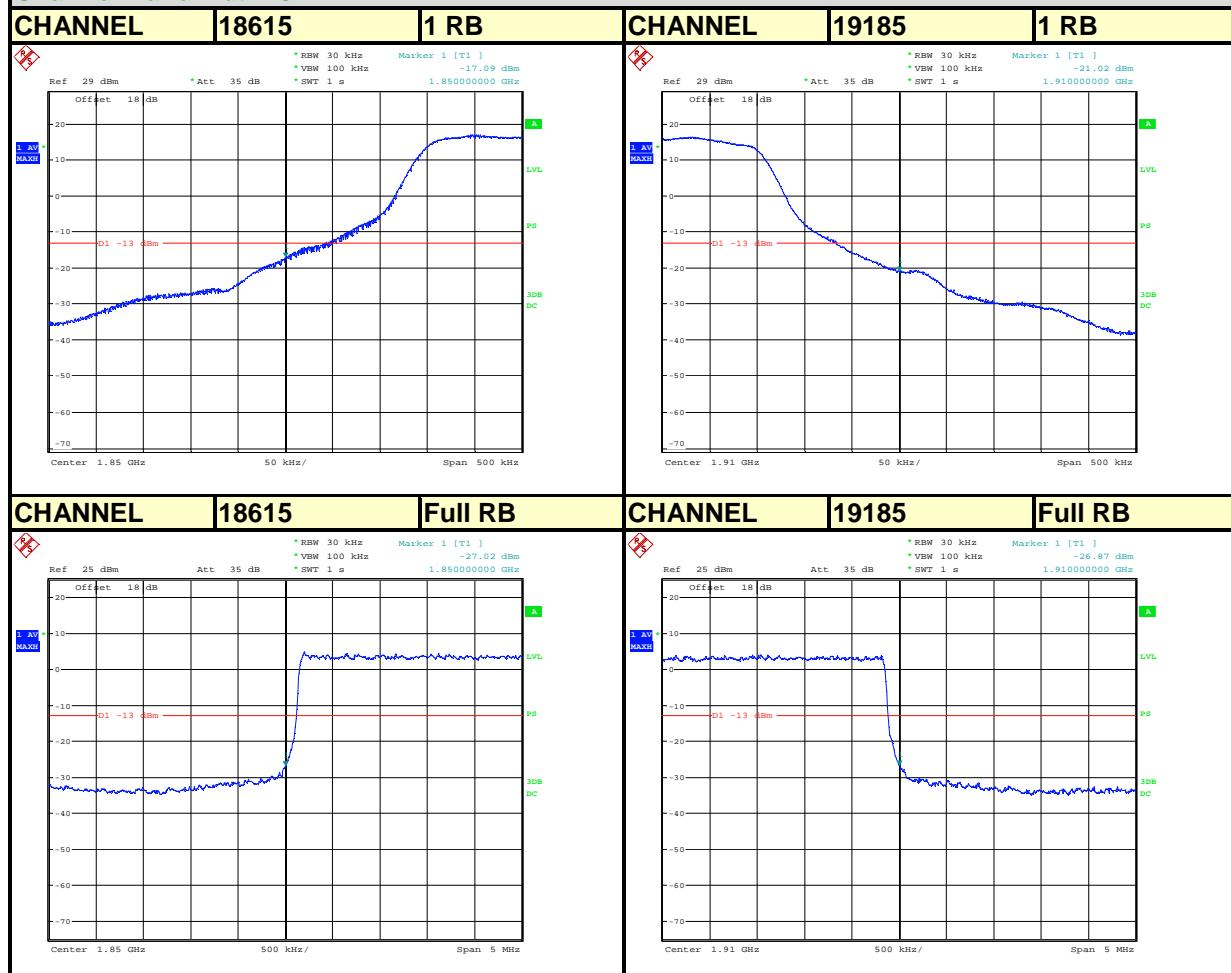

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 5MHz

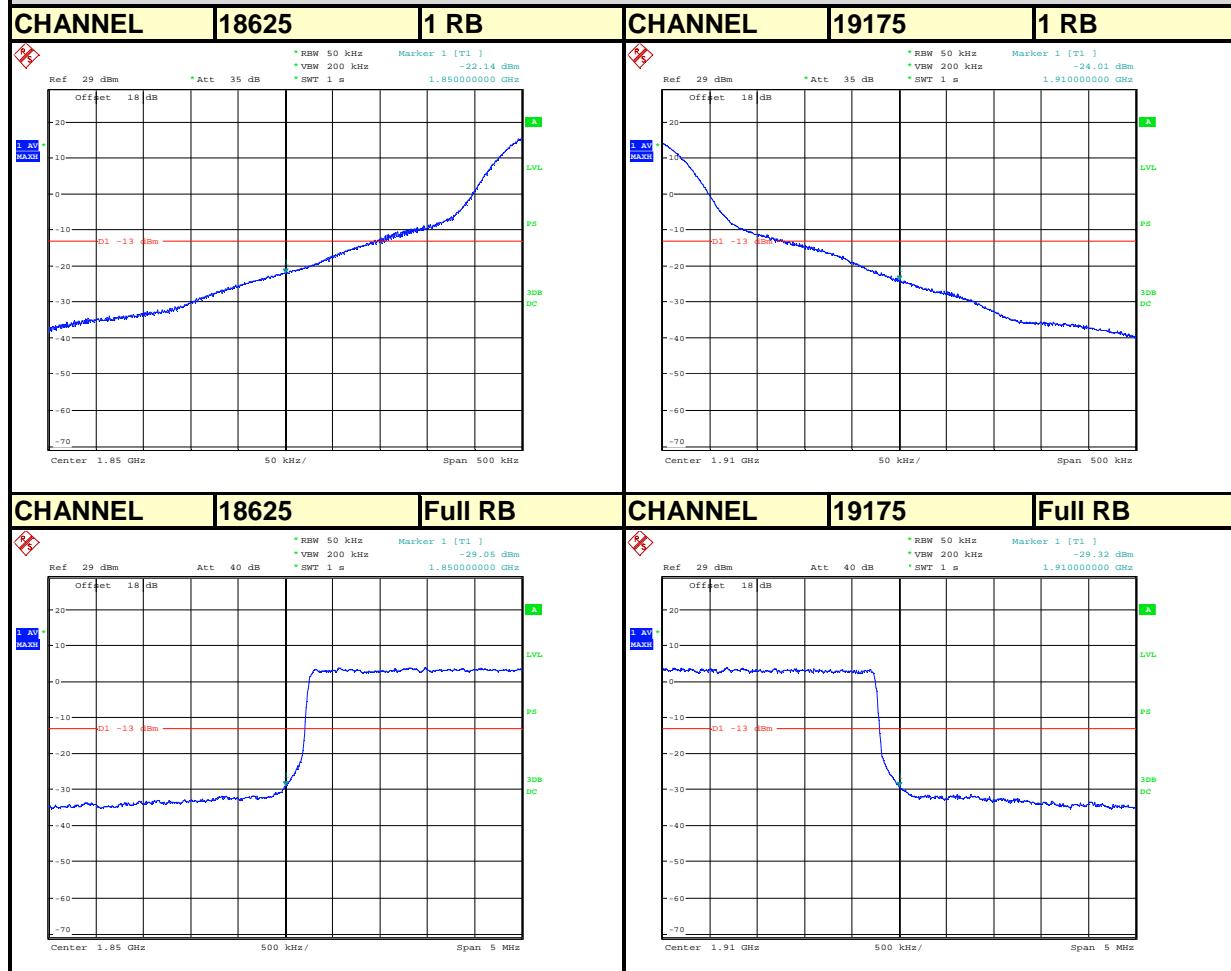

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 10MHz

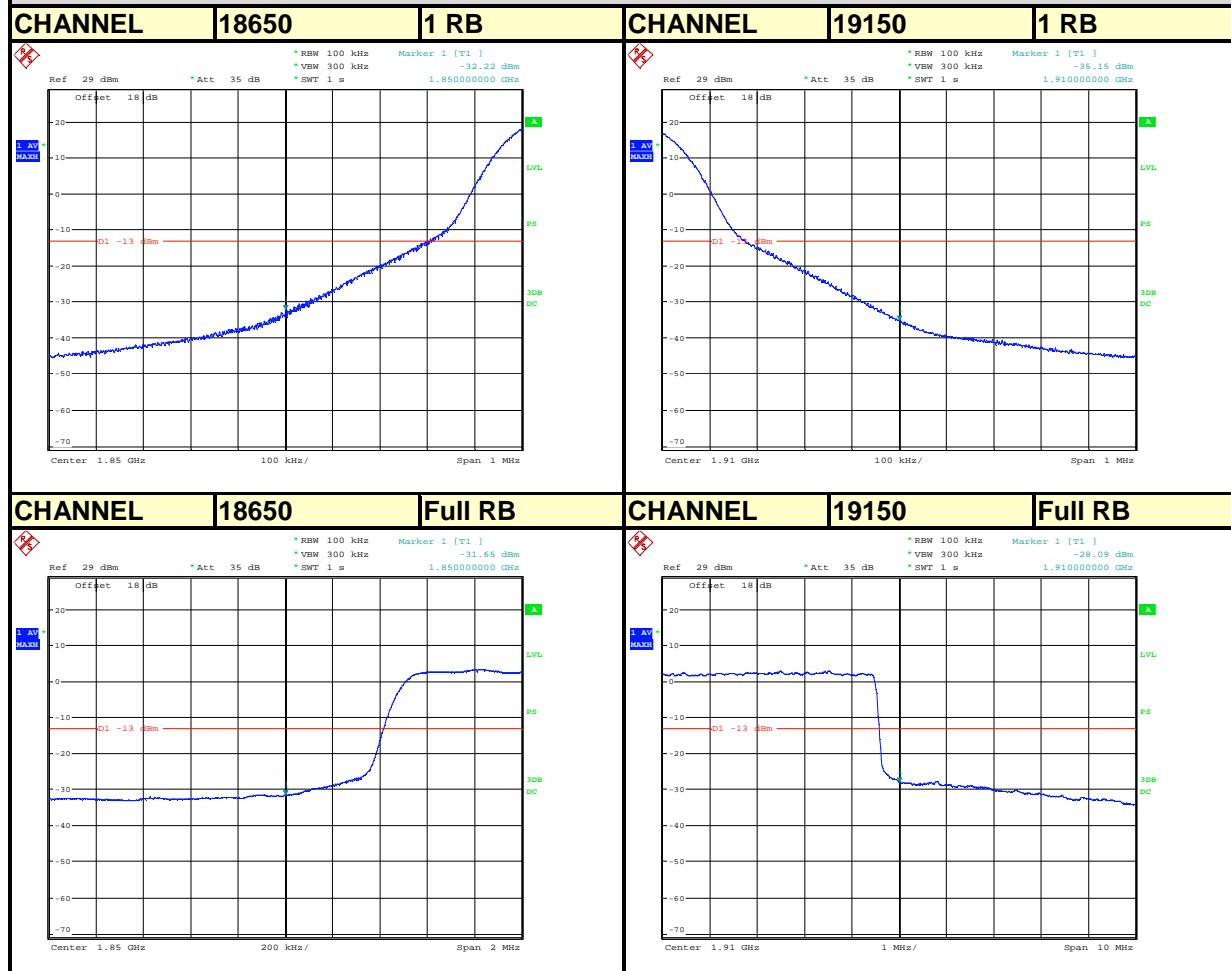

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 15MHz

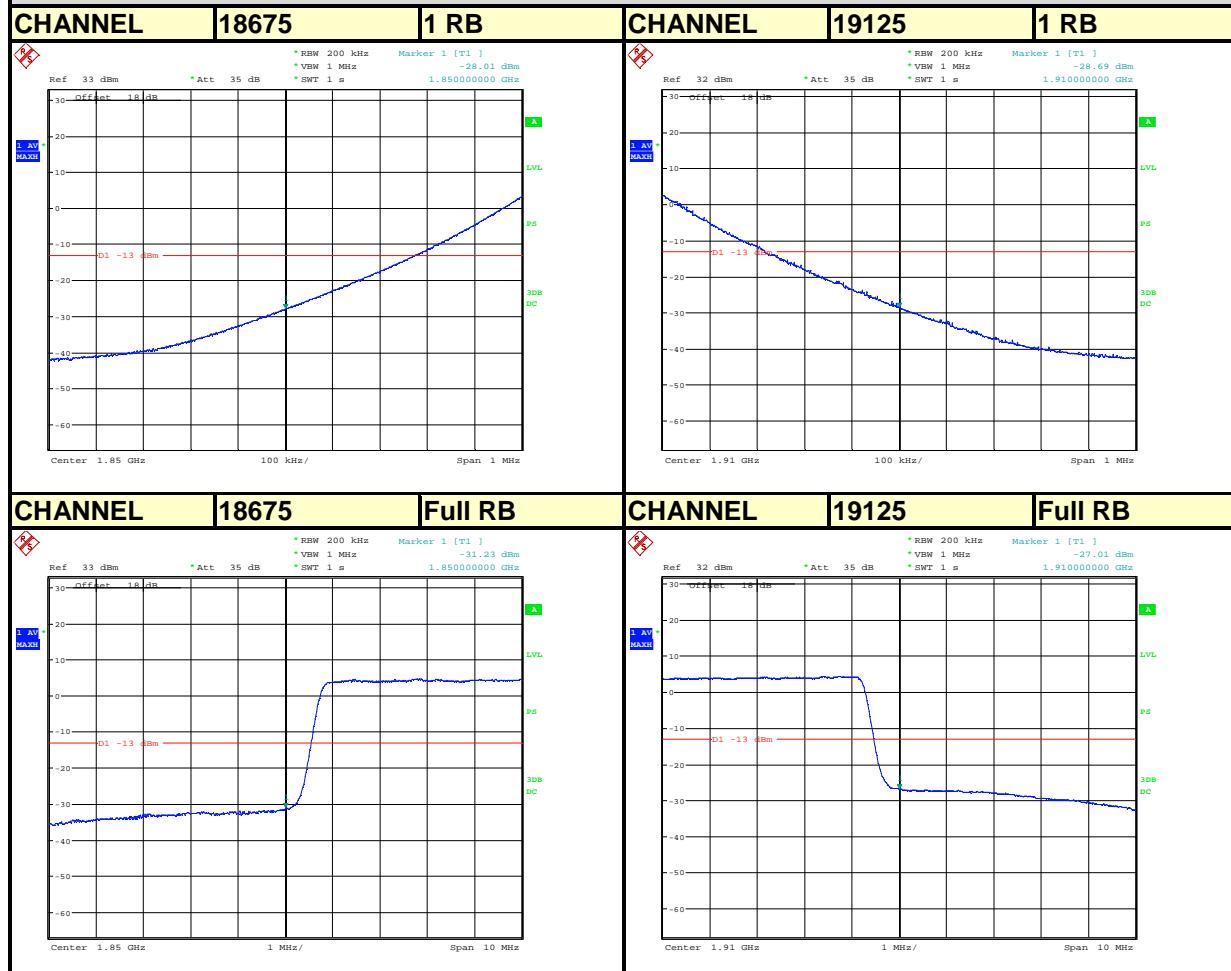

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

Channel Bandwidth: 20MHz

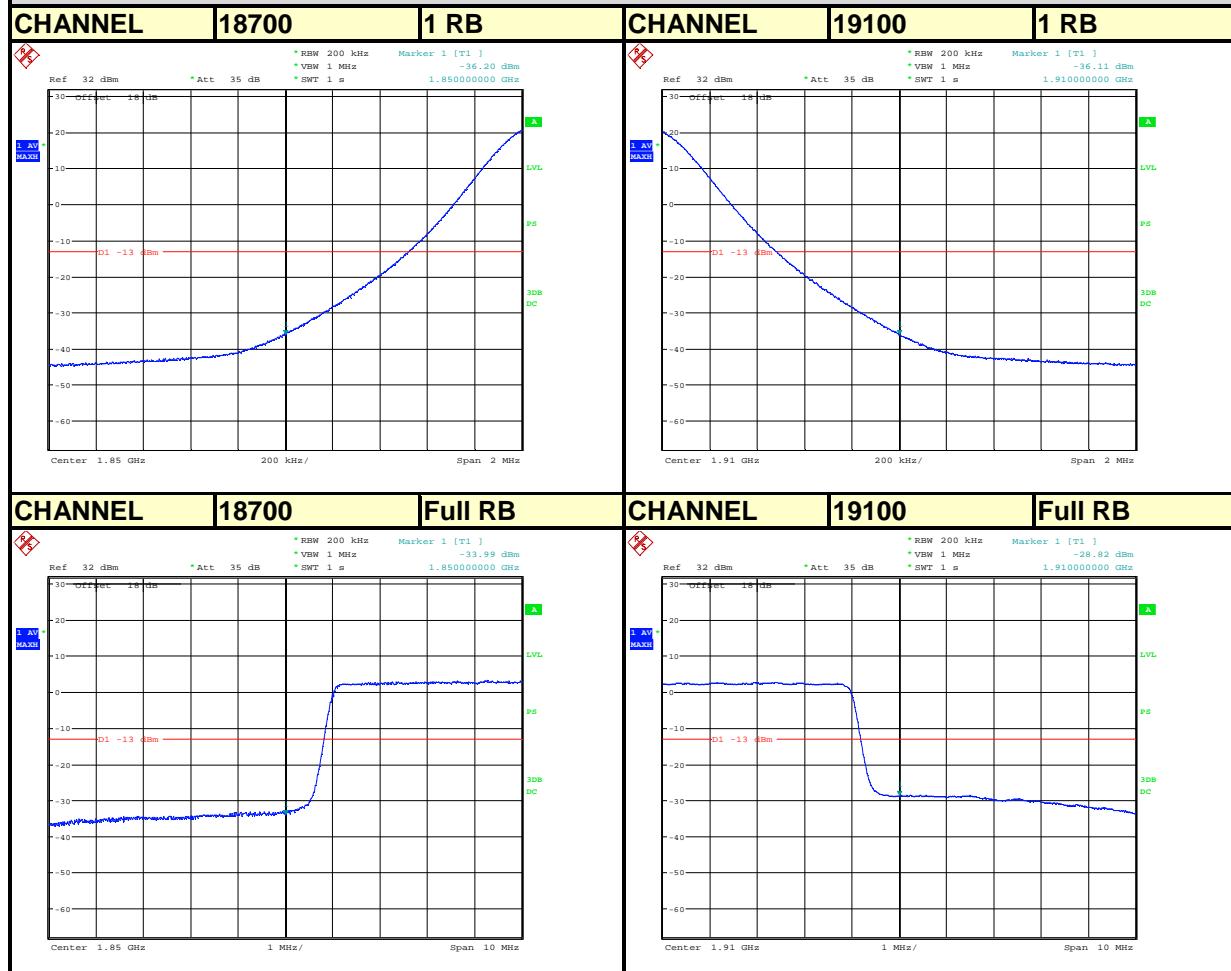

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

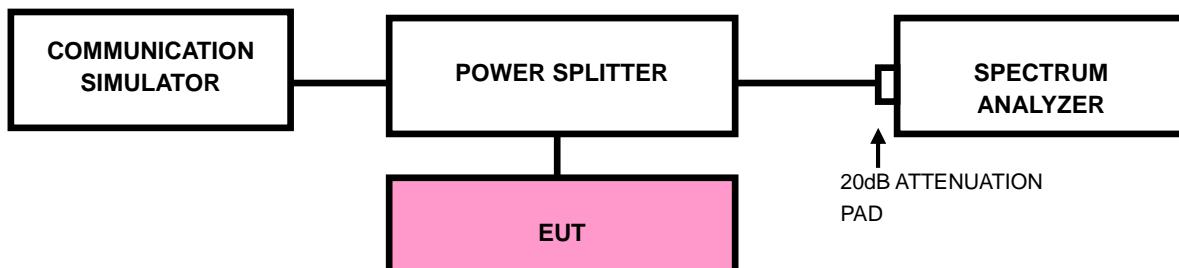




BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.5.4 TEST RESULTS

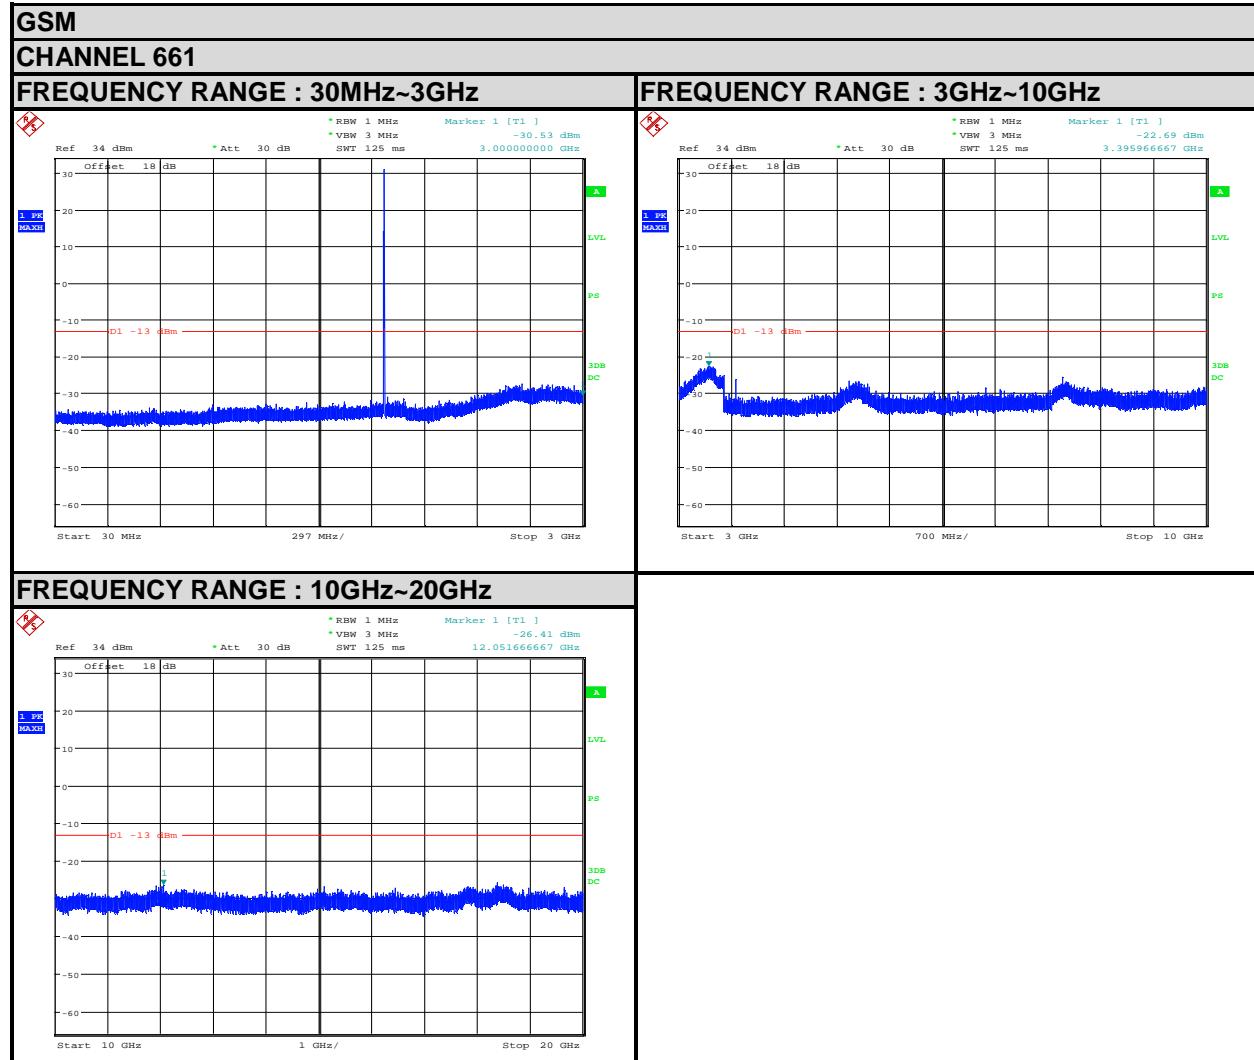

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3


EDGE

CHANNEL 512


FREQUENCY RANGE : 30MHz~3GHz

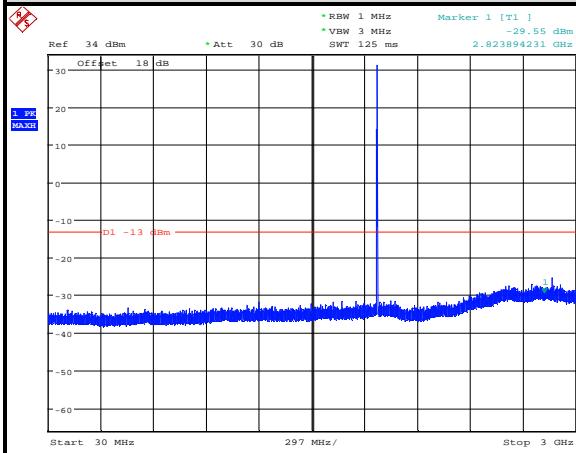

FREQUENCY RANGE : 3GHz~10GHz

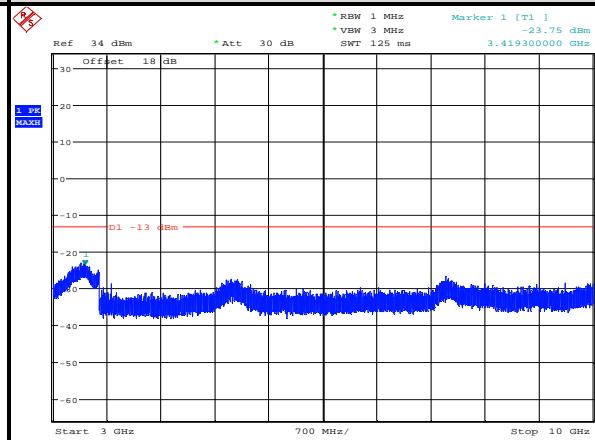

FREQUENCY RANGE : 10GHz~20GHz

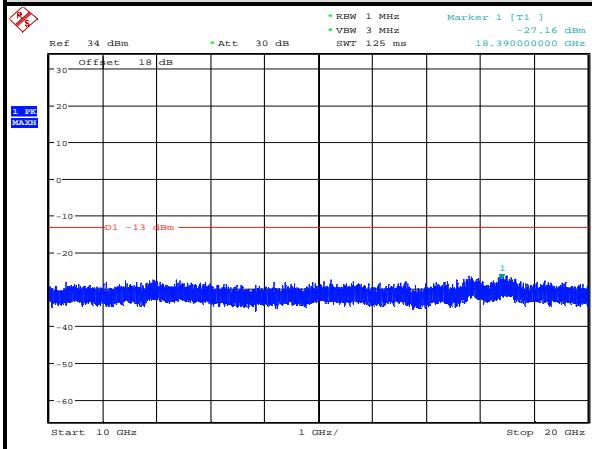

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3


WCDMA

CHANNEL 9400


FREQUENCY RANGE : 30MHz~3GHz

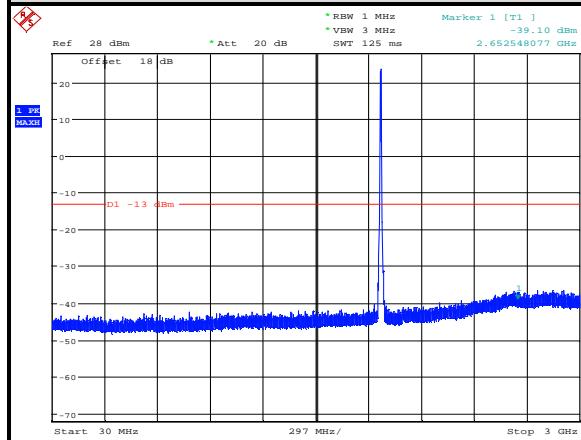

FREQUENCY RANGE : 3GHz~10GHz

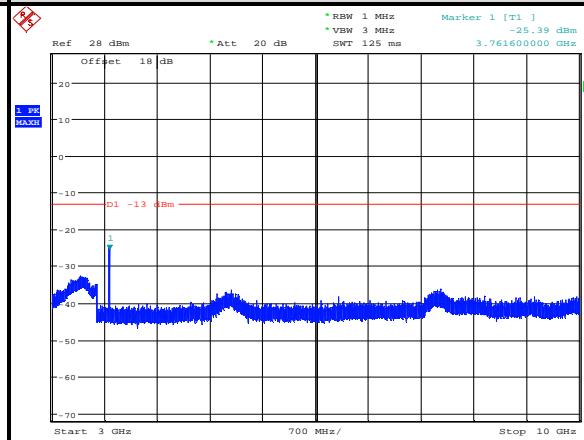

FREQUENCY RANGE : 10GHz~20GHz

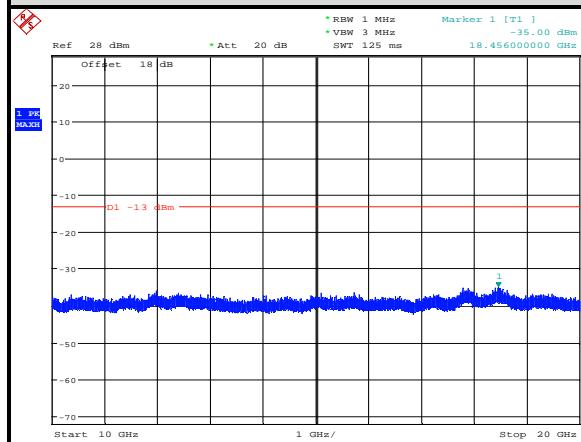

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China



Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3


LTE BAND 2

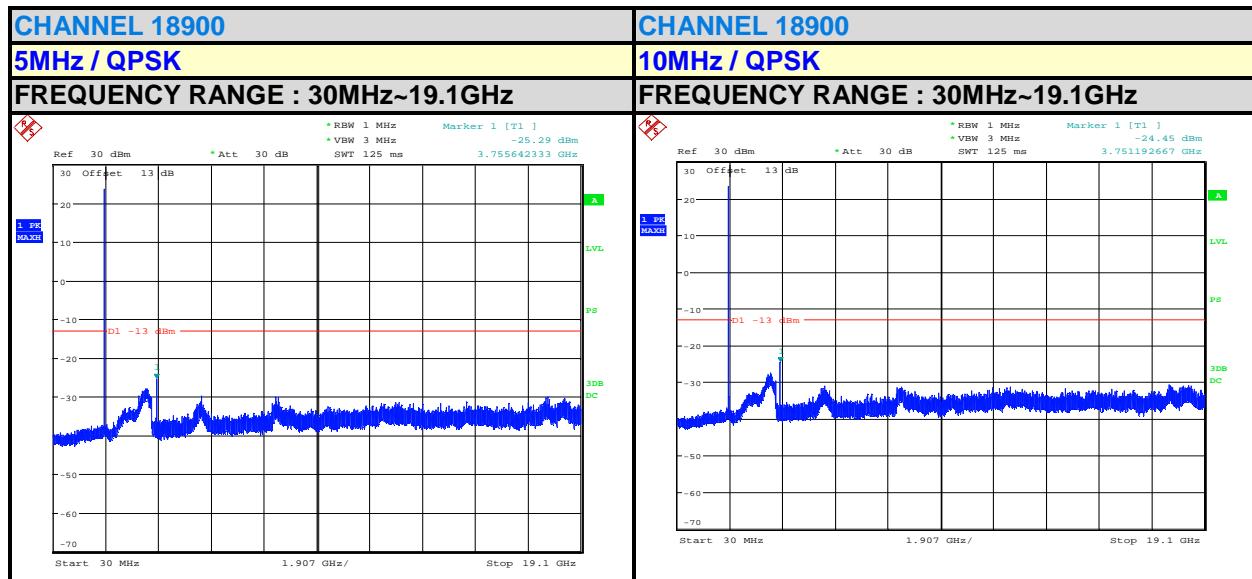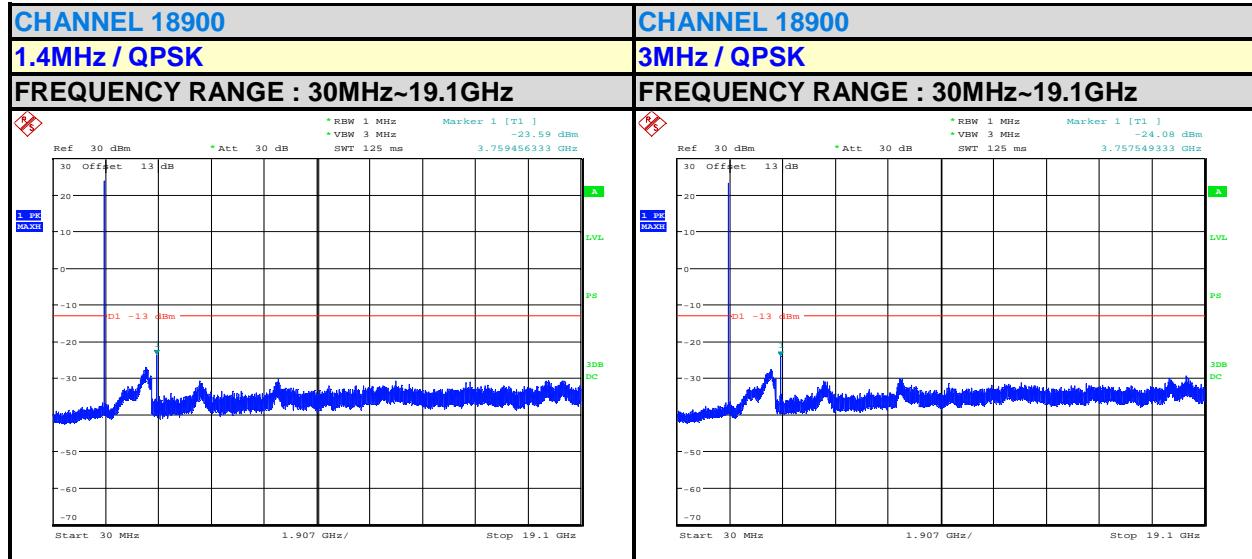



BUREAU
VERITAS

Test Report No.: RF140408N042-3

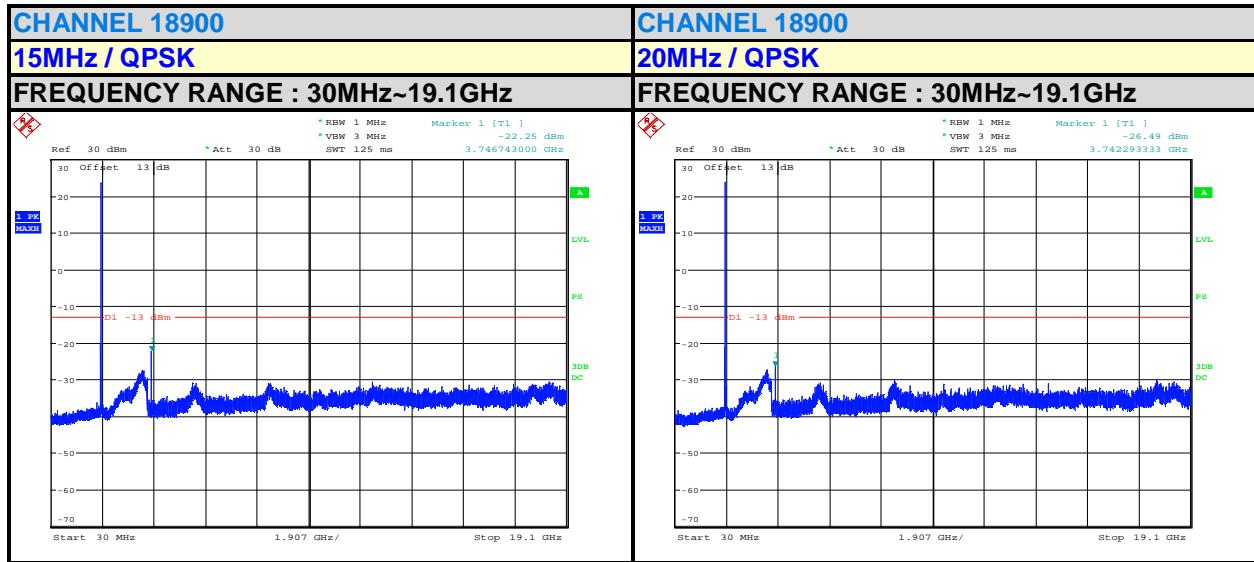

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com



4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD


No deviation



BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.6.4 TEST SETUP

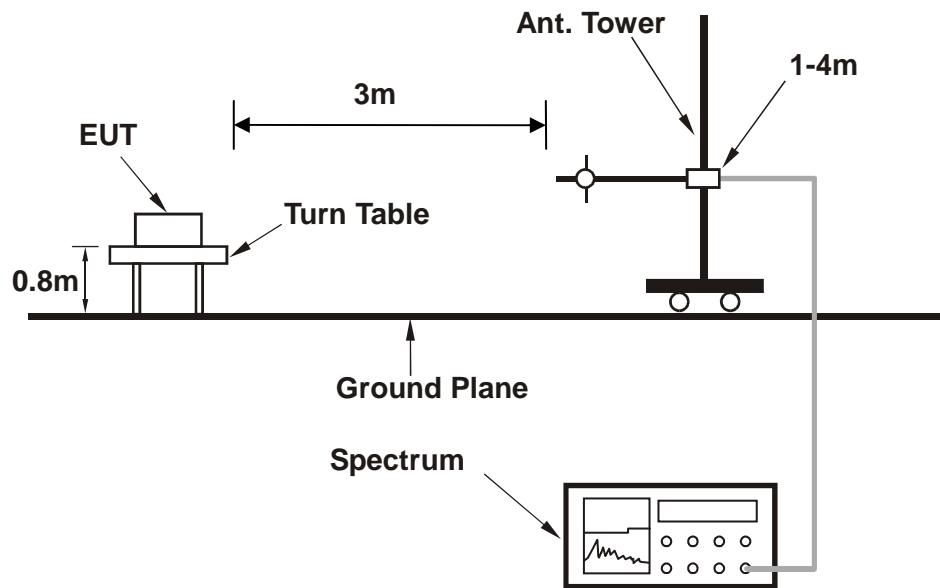

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: RF140408N042-3


4.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : LTE BAND 2

SPURIOUS EMISSION FREQUENCY RANGE	Below 1000MHz	OPERATING CHANNEL	Channel 18900
-----------------------------------	---------------	-------------------	---------------

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
34.85	H	-56.62	-13.00	-43.62
374.35	H	-57.13	-13.00	-44.13
474.58	H	-55.88	-13.00	-42.88
574.82	H	-59.57	-13.00	-46.57
870.67	H	-51.47	-13.00	-38.47
938.57	H	-45.76	-13.00	-32.76

REMARKS: Margin value = Emission level – Limit value.

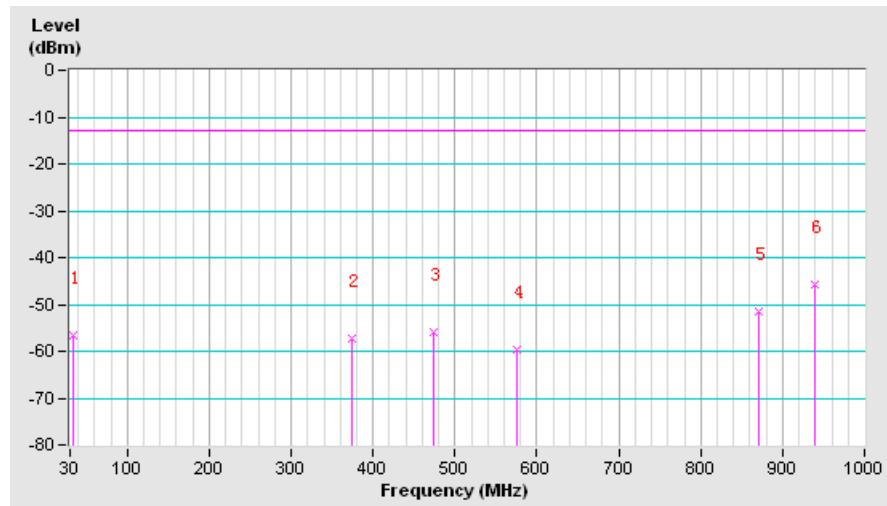




BUREAU
VERITAS

Test Report No.: RF140408N042-3

SPURIOUS EMISSION FREQUENCY RANGE	Below 1000MHz	OPERATING CHANNEL	Channel 18900
--	---------------	--------------------------	---------------

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
31.62	V	-53.94	-13.00	-40.94
60.72	V	-63.00	-13.00	-50.00
374.35	V	-56.38	-13.00	-43.38
474.58	V	-56.30	-13.00	-43.30
875.52	V	-51.83	-13.00	-38.83
953.12	V	-46.41	-13.00	-33.41

REMARKS: Margin value = Emission level – Limit value.

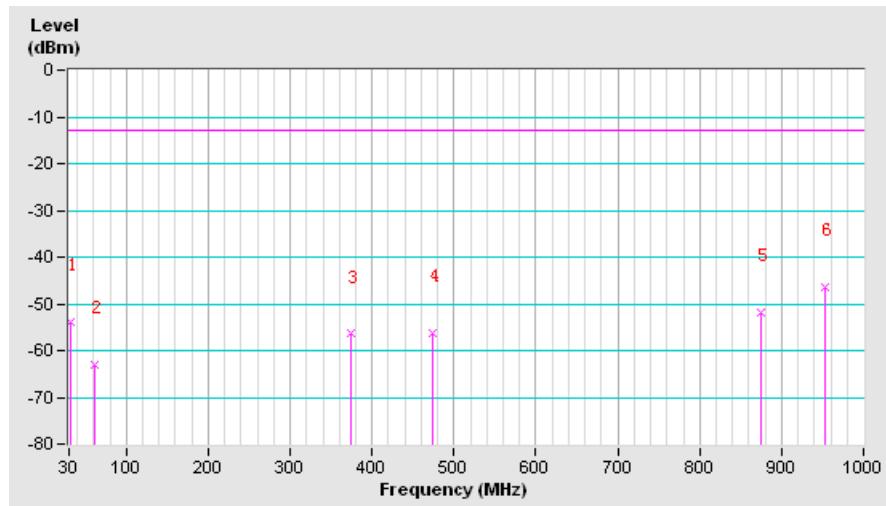

BUREAU
VERITAS

Test Report No.: RF140408N042-3

ABOVE 1GHz DATA

GSM:

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	SPA READING (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-45.12	-13	-32.62	4.07	-28.55
2	5640	-48.35	-13	-31.51	4.81	-26.70
3	7520	-51.42	-13	-32.51	5.48	-27.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	SPA READING (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-43.15	-13	-29.82	4.07	-25.75
2	5640	-47.65	-13	-32.01	4.81	-27.20
3	7520	-52.14	-13	-33.58	5.48	-28.10

REMARKS:

1. EIRP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)

EDGE:

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-45.39	-13	-32.89	4.07	-28.82
2	5640	-48.65	-13	-31.82	4.81	-27.01
3	7520	-53.14	-13	-34.33	5.48	-28.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-44.74	-13	-31.45	4.07	-27.38
2	5640	-46.87	-13	-31.18	4.81	-26.37
3	7520	-49.54	-13	-30.89	5.48	-25.41

REMARKS:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)



BUREAU
VERITAS

Test Report No.: RF140408N042-3

WCDMA:

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	SPA READING (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-46.24	-13	-33.75	4.07	-29.68
2	5640	-49.58	-13	-32.76	4.81	-27.95
3	7520	-52.31	-13	-33.45	5.48	-27.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	SPA READING (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-43.24	-13	-29.92	4.07	-25.85
2	5640	-48.75	-13	-33.18	4.81	-28.37
3	7520	-50.13	-13	-31.50	5.48	-26.02

REMARKS:

1. EIRP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)



BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-45.45	-13	-35.58	2.59	-32.99	-19.99
2	5640	-62.64	-13	-48.60	3.28	-45.32	-32.32
3	7520	-54.42	-13	-38.12	4.51	-33.61	-20.61
4	9400	-56.25	-13	-37.32	4.06	-33.26	-20.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-39.55	-13	-29.02	2.59	-26.43	-13.43
2	5640	-61.76	-13	-48.40	3.28	-45.12	-32.12
3	7520	-52.39	-13	-36.75	4.51	-32.24	-19.24
4	9400	-48.57	-13	-30.95	4.06	-26.89	-13.89

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-47.09	-13	-37.20	2.59	-34.61	-21.61
2	5640	-61.76	-13	-47.70	3.28	-44.42	-31.42
3	7520	-54.86	-13	-38.56	4.51	-34.05	-21.05
4	9400	-56.56	-13	-37.64	4.06	-33.58	-20.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-40.64	-13	-30.12	2.59	-27.53	-14.53
2	5640	-61.68	-13	-48.32	3.28	-45.04	-32.04
3	7520	-51.81	-13	-36.16	4.51	-31.65	-18.65
4	9400	-50.35	-13	-32.73	4.06	-28.67	-15.67

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-49.27	-13	-39.36	2.59	-36.77	-23.77
2	5640	-61.86	-13	-47.81	3.28	-44.53	-31.53
3	7520	-56.42	-13	-40.14	4.51	-35.63	-22.63
4	9400	-59.75	-13	-40.85	4.06	-36.79	-23.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-43	-13	-32.52	2.59	-29.93	-16.93
2	5640	-62.68	-13	-49.33	3.28	-46.05	-33.05
3	7520	-54.43	-13	-38.80	4.51	-34.29	-21.29
4	9400	-51.96	-13	-34.35	4.06	-30.29	-17.29

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-46.99	-13	-37.10	2.59	-34.51	-21.51
2	5640	-62.68	-13	-48.64	3.28	-45.36	-32.36
3	7520	-56.2	-13	-39.92	4.51	-35.41	-22.41
4	9400	-55.04	-13	-36.10	4.06	-32.04	-19.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-51.06	-13	-40.69	2.59	-38.10	-25.10
2	5640	-62.64	-13	-49.29	3.28	-46.01	-33.01
3	7520	-58.83	-13	-43.22	4.51	-38.71	-25.71
4	9400	-60.61	-13	-43.03	4.06	-38.97	-25.97

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-42.15	-13	-32.32	2.59	-29.73	-16.73
2	5640	-62.36	-13	-48.31	3.28	-45.03	-32.03
3	7520	-57.15	-13	-40.88	4.51	-36.37	-23.37
4	9400	-56.12	-13	-37.19	4.06	-33.13	-20.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-37.48	-13	-26.92	2.59	-24.33	-11.33
2	5640	-61.9	-13	-48.54	3.28	-45.26	-32.26
3	7520	-55.41	-13	-39.78	4.51	-35.27	-22.27
4	9400	-48.51	-13	-30.89	4.06	-26.83	-13.83

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	5V DC from adaptor
TESTED BY	Blue Zeng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-43.1	-13	-33.26	2.59	-30.67	-17.67
2	5640	-61.72	-13	-47.66	3.28	-44.38	-31.38
3	7520	-54.58	-13	-38.28	4.51	-33.77	-20.77
4	9400	-50.47	-13	-31.49	4.06	-27.43	-14.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Reading (dBm)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Margin (dB)
1	3760	-38.37	-13	-27.82	2.59	-25.23	-12.23
2	5640	-60.46	-13	-47.10	3.28	-43.82	-30.82
3	7520	-55.24	-13	-39.61	4.51	-35.10	-22.10
4	9400	-51.59	-13	-33.98	4.06	-29.92	-16.92

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



BUREAU
VERITAS


Test Report No.: RF140408N042-3

4.7 PEAK TO AVERAGE RATIO

4.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.7.2 TEST SETUP

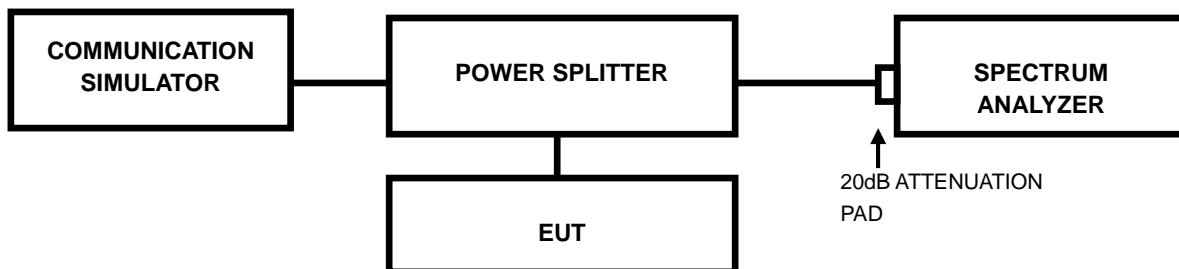

4.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




BUREAU
VERITAS

Test Report No.: RF140408N042-3

4.7.4 TEST RESULTS

GSM

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	7.71

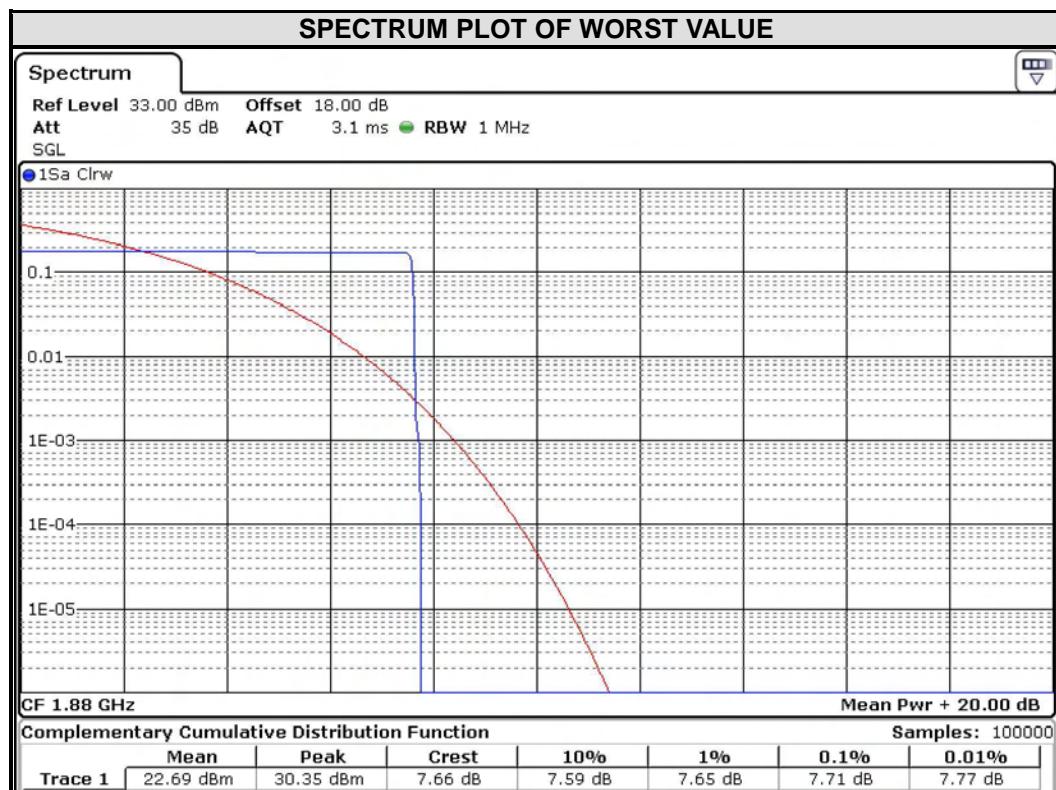




BUREAU
VERITAS

Test Report No.: RF140408N042-3

EDGE

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	10.7

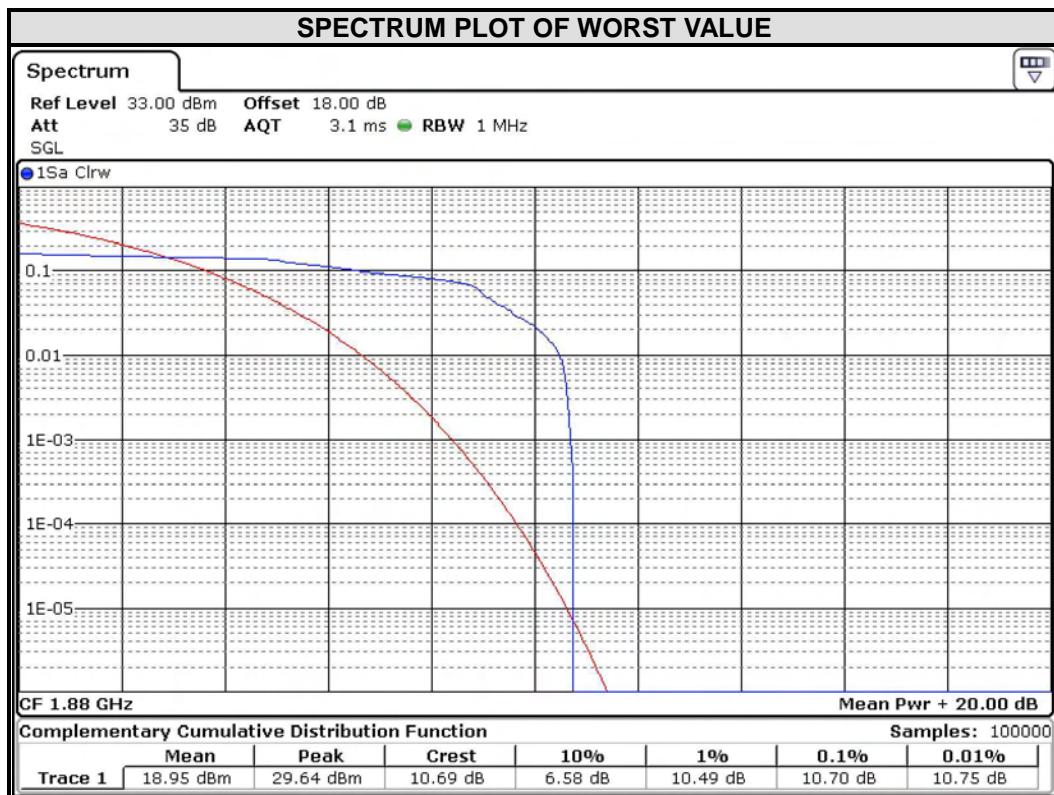

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF140408N042-3

WCDMA

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9400	1880	3.1

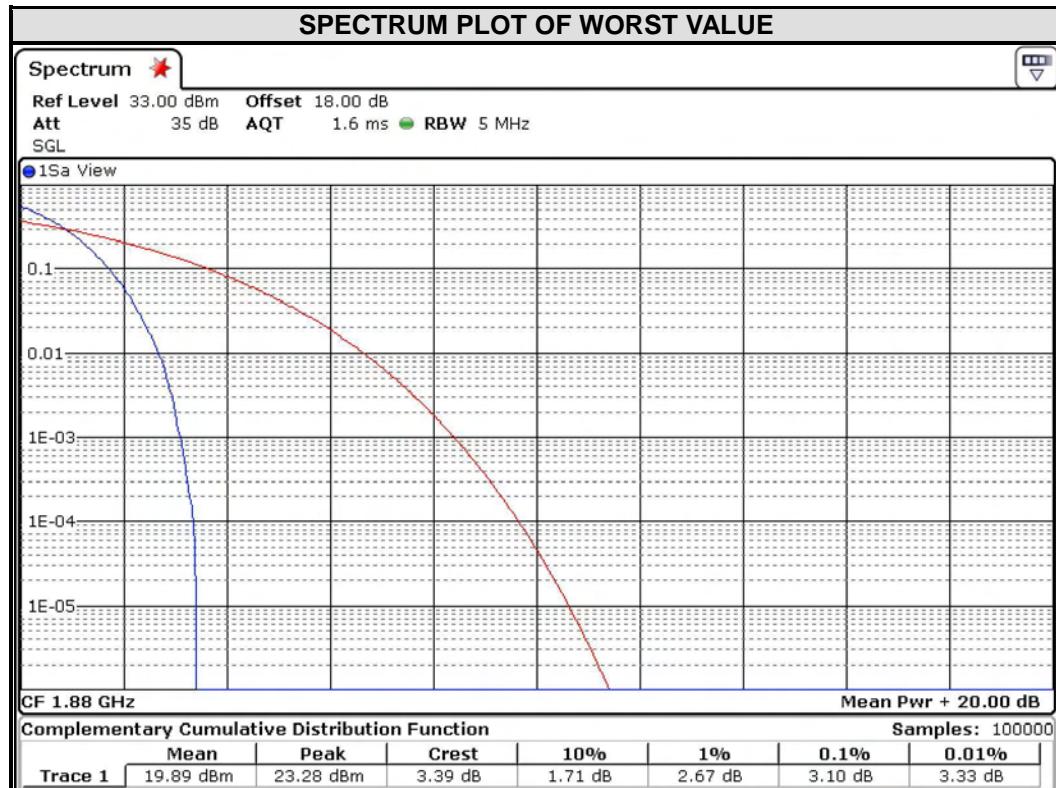




BUREAU
VERITAS

Test Report No.: RF140408N042-3

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18607	1850.7	3.94	4.84
18900	1880	5.07	6.00
19193	1909.3	4.58	5.59

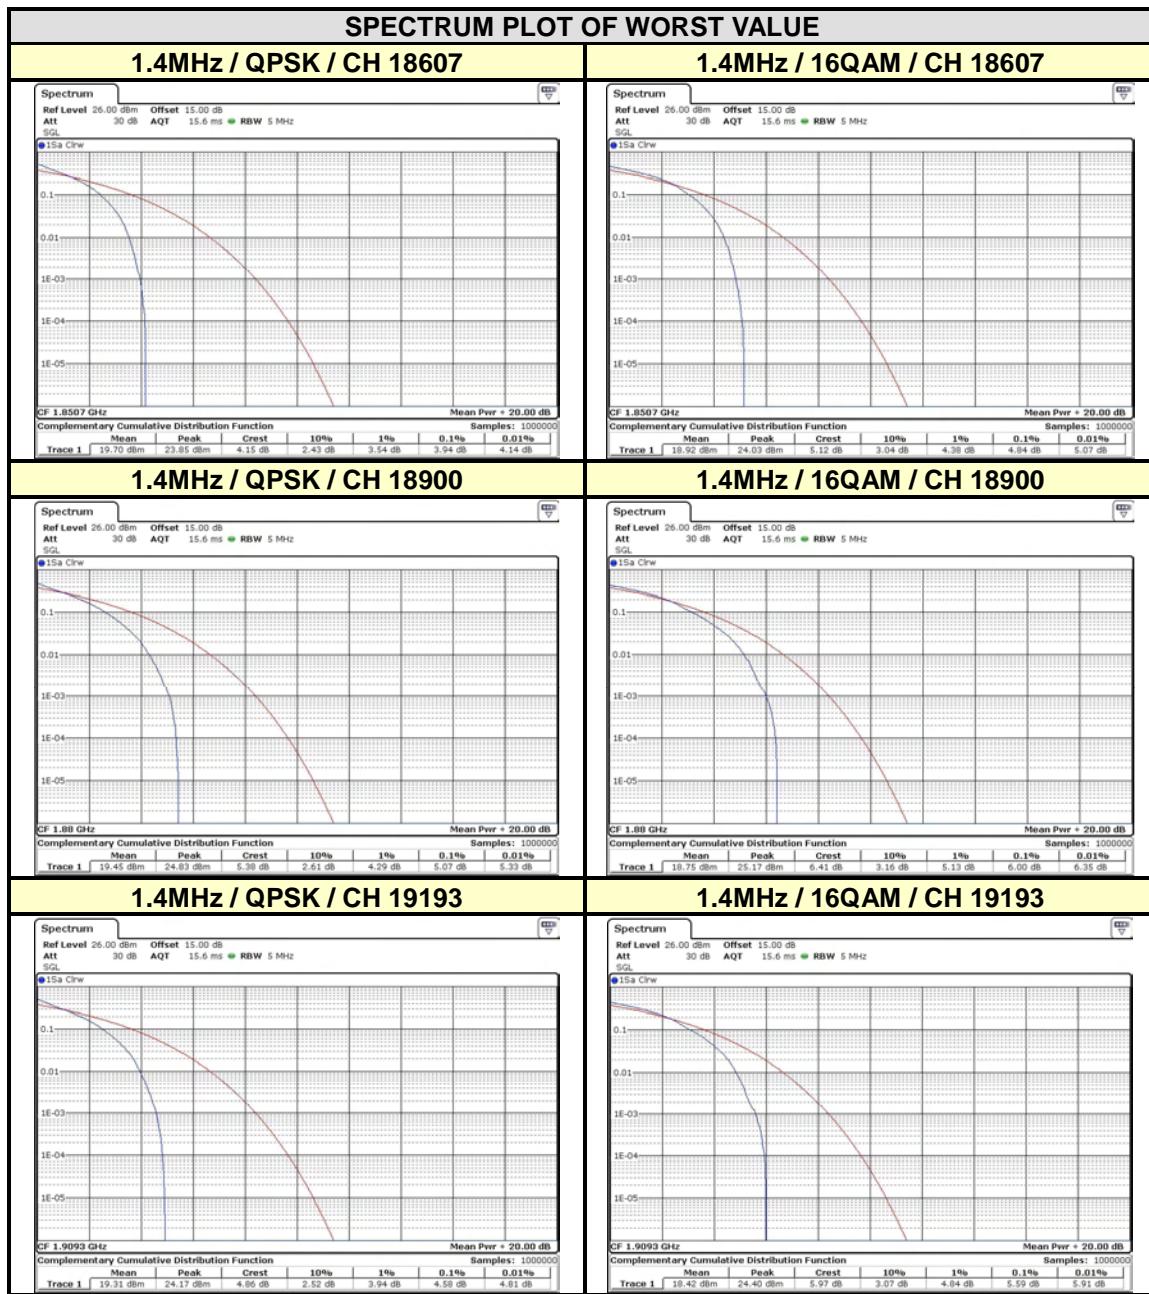

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18615	1851.5	4.96	4.93
18900	1880	5.33	6.09
19185	1908.5	5.04	5.62

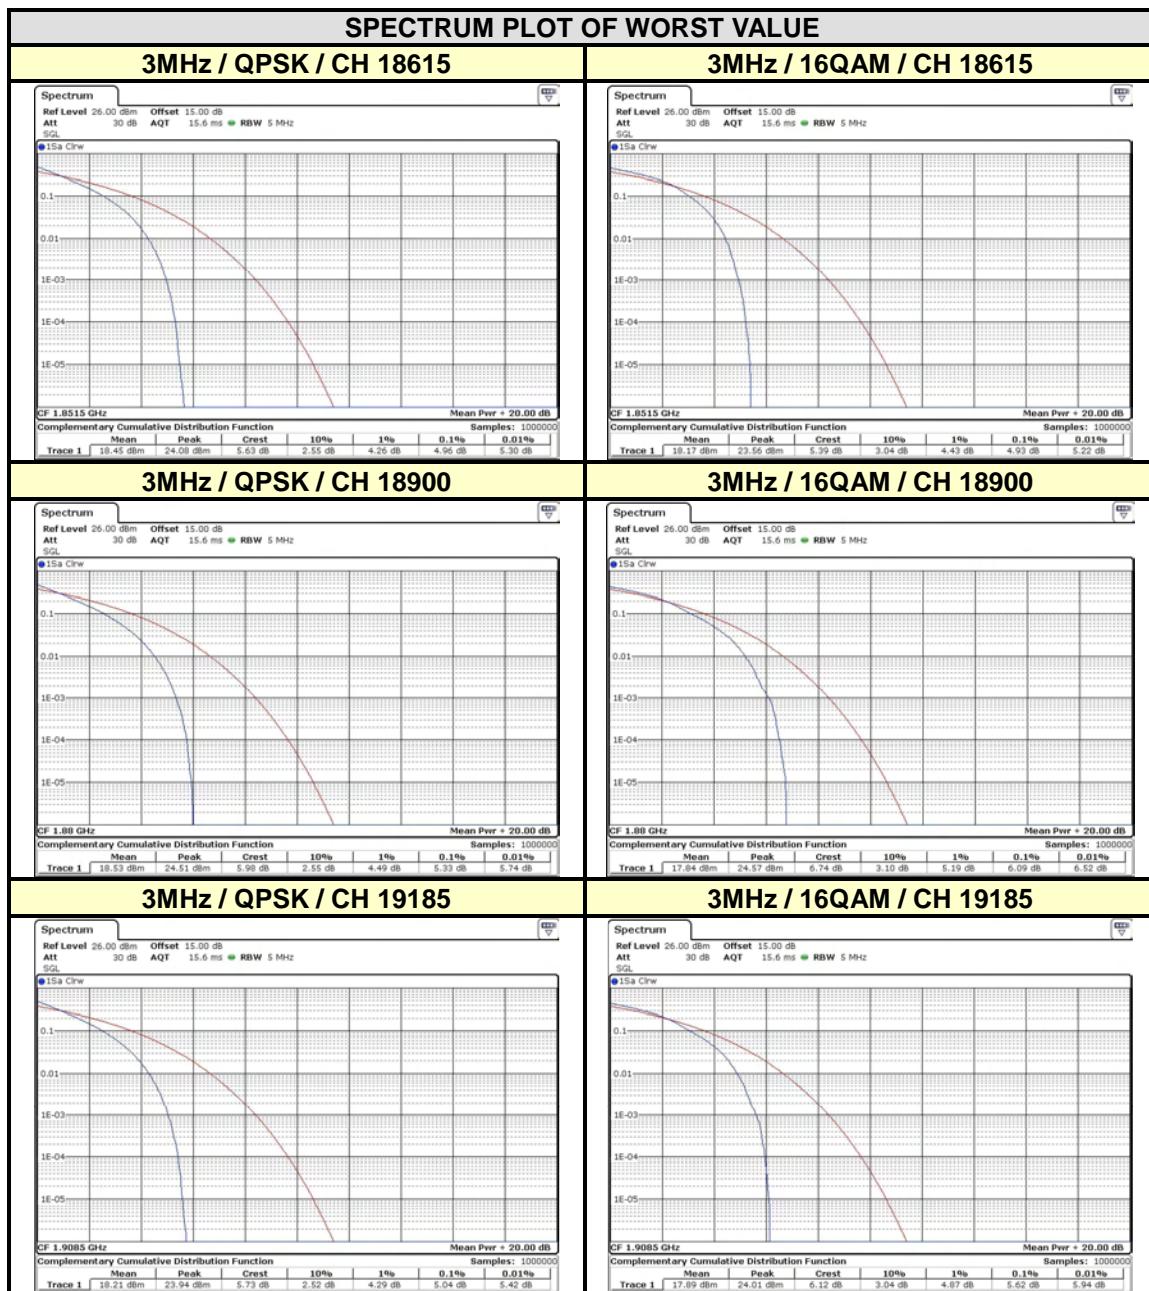

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18625	1852.5	4.09	4.96
18900	1880	4.67	5.45
19175	1907.5	4.99	5.59

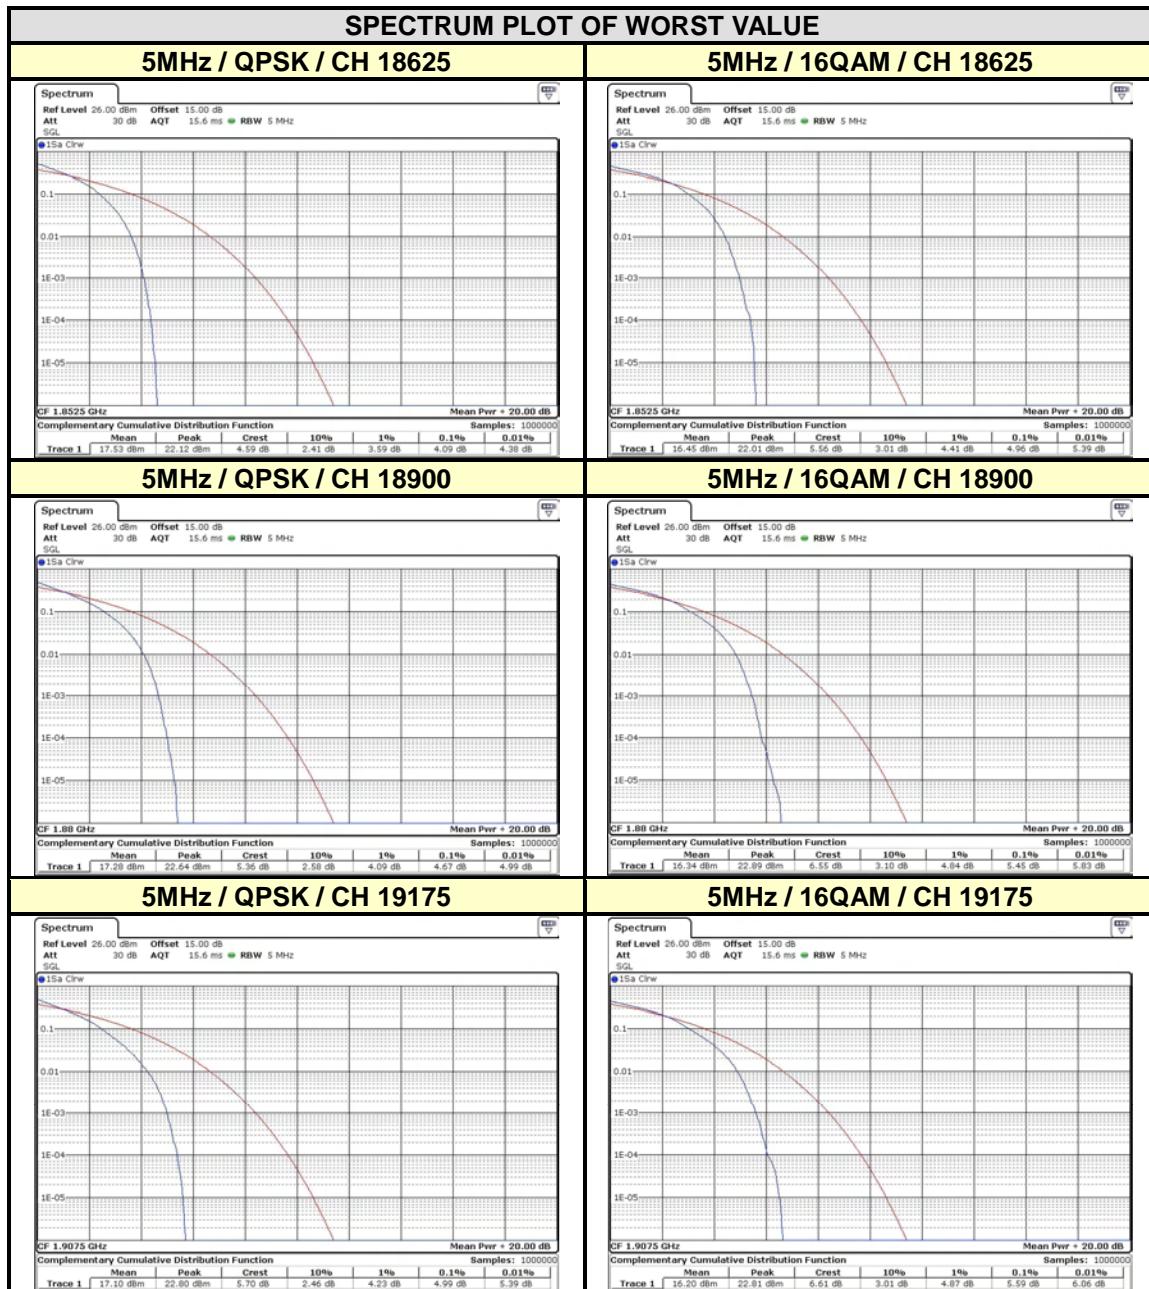

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18650	1855	4.14	5.83
18900	1880	5.42	6.09
19150	1905	5.13	6.12

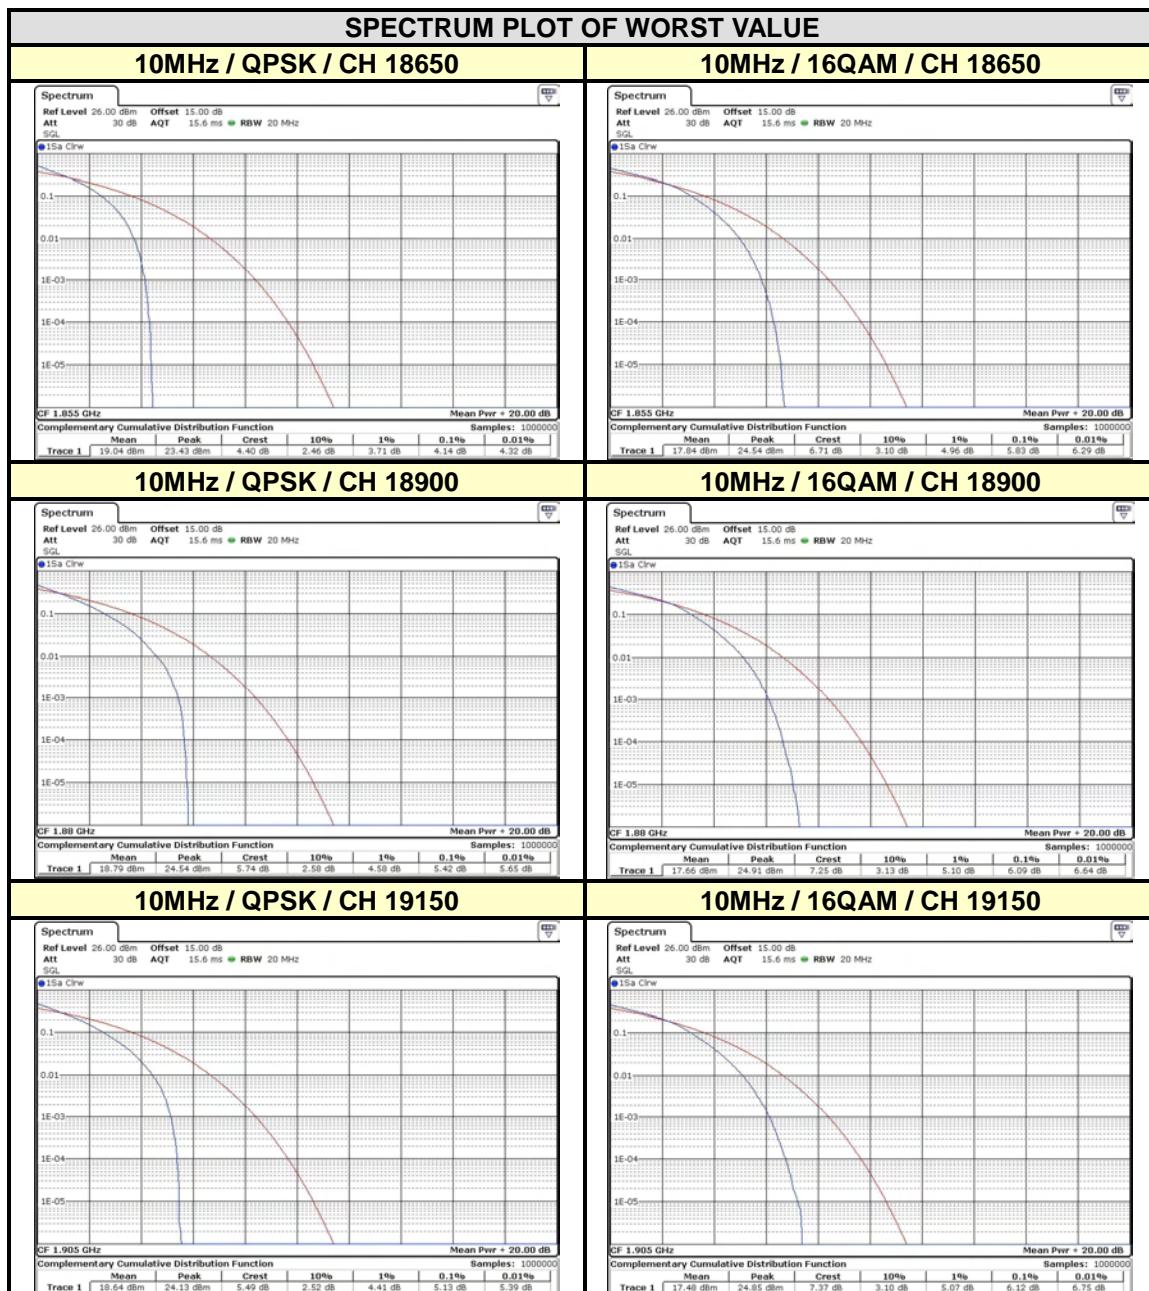

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18675	1857.5	4.78	6.03
18900	1880	4.55	5.71
19125	1902.5	4.70	5.33

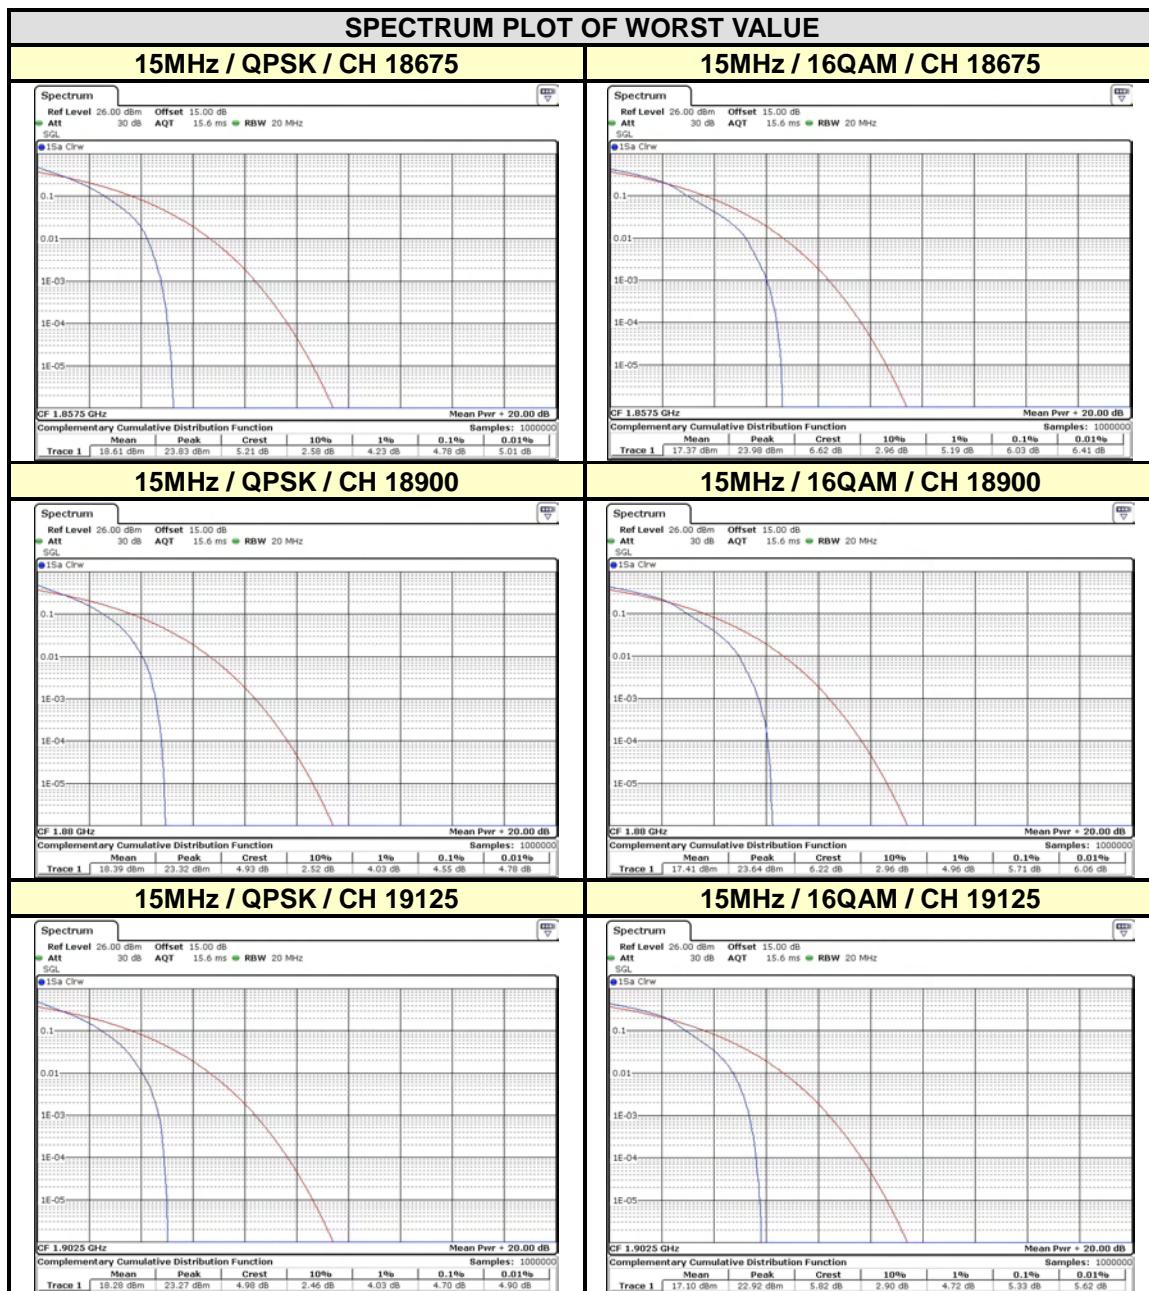

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
18700	1860	4.20	5.16
18900	1880	4.90	6.55
19100	1900	4.90	5.91

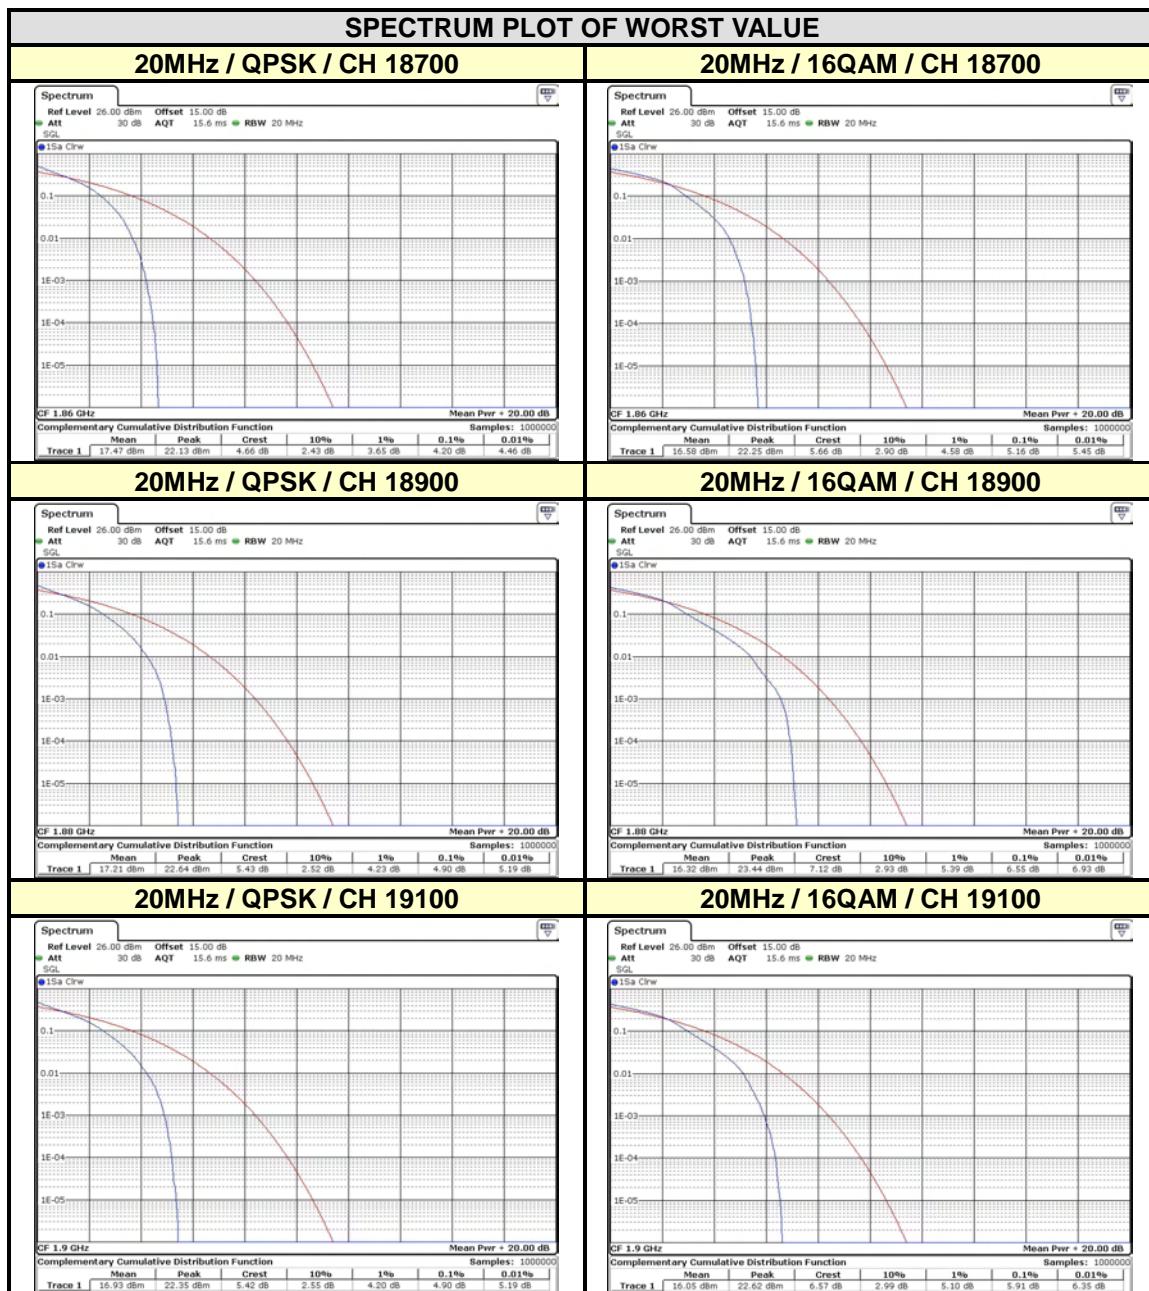

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF140408N042-3

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Dongguan EMC/RF Lab:

Tel: +86-769-85935656

Fax: +86-769-85931080

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



BUREAU
VERITAS

Test Report No.: RF140408N042-3

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---