



Test Report No.: RF180829W002-8



# FCC TEST REPORT (PART 27)

Applicant:	Sonim Technologies, Inc.
Address:	1825 S. Grant St., Suite 200., San Mateo, CA, 94402

Manufacturer or Supplier:	Sonim Technologies (Shenzhen) Limited
Address:	2nd Floor, No. 2 Building Phase B, Daqian Industrial park, Longchang Road, 67 District, Baoan, Shenzhen, P. R. China
Product:	Mobile Phone
Brand Name:	Sonim
Model Name:	XP3800
FCC ID:	WYPPC2223
Date of tests:	Oct. 09, 2018 ~ Dec. 20, 2018

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27, Subpart C, M
- ANSI/TIA/EIA-603-D
- FCC Part 2
- ANSI/TIA/EIA-603-E
- ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
Date: Dec. 21, 2018	Date: Dec. 21, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

1.1 MEASUREMENT UNCERTAINTY ..... 5

1.2 TEST SITE AND INSTRUMENTS ..... 6

**2 GENERAL INFORMATION ..... 7**

2.1 GENERAL DESCRIPTION OF EUT ..... 7

2.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 10

2.3 DESCRIPTION OF SUPPORT UNITS ..... 11

2.4 TEST ITEM AND TEST CONFIGURATION..... 11

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 14

**3 TEST TYPES AND RESULTS ..... 15**

3.1 OUTPUT POWER MEASUREMENT ..... 15

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 15

3.1.2 TEST PROCEDURES ..... 15

3.1.3 TEST SETUP ..... 16

3.1.4 TEST RESULTS..... 17

3.2 FREQUENCY STABILITY MEASUREMENT ..... 33

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 33

3.2.2 TEST PROCEDURE ..... 33

3.2.3 TEST SETUP ..... 33

3.2.4 TEST RESULTS..... 34

3.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 42

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT ..... 42

3.3.2 TEST SETUP ..... 42

3.3.3 TEST PROCEDURES ..... 42

3.3.4 TEST RESULTS..... 43

3.4 PEAK TO AVERAGE RATIO..... 51

3.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 51

3.4.2 TEST SETUP ..... 51

3.4.3 TEST PROCEDURES ..... 51

3.4.4 TEST RESULTS..... 52

3.5 BAND EDGE MEASUREMENT ..... 60

3.5.1 LIMITS OF BAND EDGE MEASUREMENT ..... 60

3.5.2 TEST SETUP ..... 60

3.5.3 TEST PROCEDURES ..... 61

3.5.4 TEST RESULTS..... 62

3.6 CONDUCTED SPURIOUS EMISSIONS..... 70

3.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 70

3.6.2 TEST PROCEDURE ..... 70

3.6.3 TEST SETUP ..... 70

3.6.4 TEST RESULTS..... 71

3.7 RADIATED EMISSION MEASUREMENT ..... 79

3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 79

3.7.2 TEST PROCEDURES ..... 79

3.7.3 DEVIATION FROM TEST STANDARD..... 79

3.7.4 TEST SETUP ..... 80

3.7.5 TEST RESULTS..... 82



**BUREAU  
VERITAS**

**Test Report No.: RF180829W002-8**

<b>4</b>	<b>INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>108</b>
<b>5</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>109</b>



Test Report No.: RF180829W002-8

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180829W002-8	Original release	Dec. 21, 2018

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(h)(2)	Equivalent Isotropically Radiated Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.32dB at 7503.000MHz.

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 16,18	Mar. 15,19
Bilog Antenna 1	ETS-LINDGREN	3143B	00161964	Mar. 15,18	Mar. 14,19
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Mar. 15,18	Mar. 14,19
Horn Antenna 1	ETS-LINDGREN	3117	00168728	Mar. 15,18	Mar. 14,19
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Nov. 30, 18	Nov. 29, 19
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Nov. 21, 18	Nov. 20, 19
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Mar. 02,18	Mar. 01,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	Apr. 21,18	Apr. 20,19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 09,18	Jul. 08,19
Power Meter	Anritsu	ML2495A	1506002	Mar. 02,18	Mar. 01,19
Power Sensor	Anritsu	MA2411B	1339352	Mar. 16,18	Mar. 15,19
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jul. 09,18	Jul. 08,19
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 13,18	Mar. 12,19

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Mobile Phone	
<b>MODEL NAME</b>	XP3800	
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.7Vdc (Li-ion, battery)	
<b>MODULATION TECHNOLOGY</b>	LTE Band 38	QPSK, 16QAM, 64QAM
	LTE Band 41	QPSK, 16QAM, 64QAM
<b>FREQUENCY RANGE</b>	LTE Band 38 Channel Bandwidth: 5MHz	2572.5MHz ~ 2617.5MHz
	LTE Band 38 Channel Bandwidth: 10MHz	2575MHz ~ 2615MHz
	LTE Band 38 Channel Bandwidth: 15MHz	2577.5MHz ~ 2612.5MHz
	LTE Band 38 Channel Bandwidth: 20MHz	2580MHz ~ 2610MHz
	LTE Band 41 Channel Bandwidth: 5MHz	2498.5MHz ~ 2687.5MHz
	LTE Band 41 Channel Bandwidth: 10MHz	2501.0MHz ~ 2685.0MHz
	LTE Band 41 Channel Bandwidth: 15MHz	2503.5MHz ~ 2682.5MHz
	LTE Band 41 Channel Bandwidth: 20MHz	2506.0MHz ~ 2680.0MHz
	<b>EMISSION DESIGNATOR</b>	LTE Band 38 Channel Bandwidth: 5MHz
16QAM: 4M47W7D		
64QAM: 4M47W7D		
LTE Band 38 Channel Bandwidth: 10MHz		QPSK: 8M93G7D
		16QAM: 8M92W7D
		64QAM: 8M95W7D
LTE Band 38 Channel Bandwidth: 15MHz		QPSK: 13M4G7D
		16QAM: 13M4W7D
		64QAM: 13M4W7D
LTE Band 38 Channel Bandwidth: 20MHz		QPSK: 17M8G7D
		16QAM: 17M8W7D
		64QAM: 17M8W7D
LTE Band 41 Channel Bandwidth: 5MHz		QPSK: 4M47G7D
		16QAM: 4M48W7D
		64QAM: 4M47W7D
LTE Band 41 Channel Bandwidth: 10MHz		QPSK: 8M93G7D
		16QAM: 8M91W7D
		64QAM: 8M93W7D

<b>EMISSION DESIGNATOR</b>	LTE Band 41 Channel Bandwidth: 15MHz	QPSK: 13M4G7D
		16QAM: 13M4W7D
		64QAM: 13M4W7D
	LTE Band 41 Channel Bandwidth: 20MHz	QPSK: 17M8G7D
		16QAM: 17M8W7D
		64QAM: 17M8W7D
<b>MAX. EIRP POWER</b>	LTE Band 38 Channel Bandwidth: 5MHz	198mW
	LTE Band 38 Channel Bandwidth: 10MHz	200mW
	LTE Band 38 Channel Bandwidth: 15MHz	197mW
	LTE Band 38 Channel Bandwidth: 20MHz	178mW
	LTE Band 41 Channel Bandwidth: 5MHz	213mW
	LTE Band 41 Channel Bandwidth: 10MHz	216mW
	LTE Band 41 Channel Bandwidth: 15MHz	211mW
	LTE Band 41 Channel Bandwidth: 20MHz	184mW
<b>ANTENNA TYPE</b>	Fixed Internal antenna	
<b>ANTENNA GAIN</b>	2dBi for LTE B38 0dBi for LTE B41	
<b>HW VERSION</b>	DVT2	
<b>SW VERSION</b>	3A.0.0-00-8.1.0-29.09.04	
<b>I/O PORTS</b>	Refer to user's manual	
<b>DATA CABLE</b>	USB cable: non-shielded, detachable, 1.5meter	

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapters:

<b>ADAPTER 1</b>	
<b>BRAND:</b>	Sonim
<b>MODEL:</b>	TUUS050100-K00
<b>INPUT:</b>	AC 100-240V, 200mA
<b>OUTPUT:</b>	DC 5V, 1000mA

<b>ADAPTER 2</b>	
<b>BRAND:</b>	Sonim
<b>MODEL:</b>	AQ05A-050B
<b>INPUT:</b>	AC 100-240V, 200mA
<b>OUTPUT:</b>	DC 5V, 1000mA





Test Report No.: RF180829W002-8


3. The EUT matched the following USB cable:

USB CABLE	
BRAND:	N.A
MODEL:	N.A
SIGNAL LINE:	1.5 METER


4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

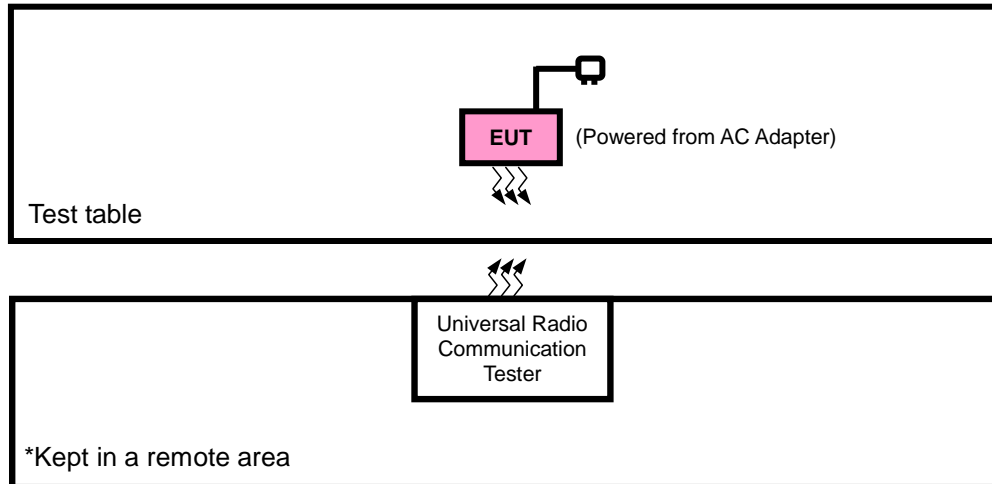

### FOR CONDUCTED & E.I.R.P TEST

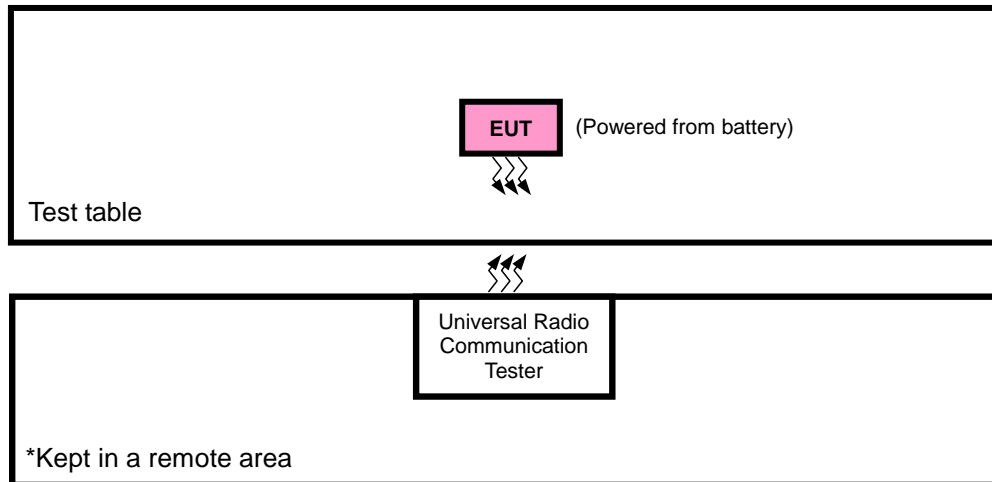

### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + Battery with LTE link

**LTE BAND 38 MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
B	EIRP	3775 to 38225	3775, 38000, 38225	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset		
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		37850 to38150	37850, 38000, 38150	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	3775 to 38225	3775, 38225	5MHz	QPSK	1 RB / 0 RB Offset		
		37800 to 38200	37800, 38200	10MHz	QPSK	1 RB / 0RB Offset		
		37825 to 38175	37825, 38175	15MHz	QPSK	1 RB / 0 RB Offset		
		37850 to38150	37850, 38150	20MHz	QPSK	1 RB / 0 RB Offset		
B	OCCUPIED BANDWIDTH	3775 to 38225	3775, 38000, 38225	5MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset		
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset		
		37850 to38150	37850, 38000, 38150	20MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset		
B	PEAK TO AVERAGE RATIO	3775 to 38225	3775, 38000, 38225	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset		
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		37850 to38150	37850, 38000, 38150	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	BAND EDGE	3775 to 38225	3775	5MHz	QPSK	1 RB / 0 RB Offset		
			38825	5MHz	QPSK	25 RB / 0 RB Offset 1 RB / 24 RB Offset		
		37800 to 38200	37800	10MHz	QPSK	1 RB / 0 RB Offset		
			38200	10MHz	QPSK	50 RB / 0 RB Offset 1 RB / 49 RB Offset		
		37825 to 38175	37825	15MHz	QPSK	1 RB / 0 RB Offset		
			38175	15MHz	QPSK	75 RB / 0 RB Offset 1 RB / 74 RB Offset		
		37850 to38150	37850	20MHz	QPSK	1 RB / 0 RB Offset		
			38150	20MHz	QPSK	100 RB / 0 RB Offset 1 RB / 99 RB Offset		
		B	CONDCUET ED EMISSION	3775 to 38225	3775, 38000, 38225	5MHz	QPSK	1 RB / 0 RB Offset
				37800 to 38200	37800, 38000, 38200	10MHz	QPSK	1 RB / 0RB Offset
				37825 to 38175	37825, 38000, 38175	15MHz	QPSK	1 RB / 0 RB Offset
				37850 to38150	37850, 38000, 38150	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	3775 to 38225	38000	5MHz	QPSK	1 RB / 0 RB Offset		
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK	1 RB / 0RB Offset		
		37825 to 38175	38000	15MHz	QPSK	1 RB / 0 RB Offset		
		37850 to38150	38000	20MHz	QPSK	1 RB / 0 RB Offset		

**LTE BAND 41 MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	39675 to 41565	39675, 41565	5MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10MHz	QPSK	1 RB / 0RB Offset
		39725 to 41515	39725, 41515	15MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
B	BAND EDGE	39675 to 41565	39675	5MHz	QPSK	1 RB / 0 RB Offset
			41565	5MHz	QPSK	25 RB / 0 RB Offset
						1 RB / 24 RB Offset
		39700 to 41540	39700	10MHz	QPSK	25 RB / 0 RB Offset
			41540	10MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
		39725 to 41515	39725	15MHz	QPSK	1 RB / 49 RB Offset
			41515	15MHz	QPSK	50 RB / 0 RB Offset
						1 RB / 0 RB Offset
		39750 to 41490	39750	20MHz	QPSK	75 RB / 0 RB Offset
			41490	20MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
B	CONDCUDET ED EMISSION	39675 to 41565	39675, 40620, 41565	5MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	39675 to 41565	40620	5MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0RB Offset
		39725 to 41515	40620	15MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	40620	20MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: RF180829W002-8

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	24deg. C, 60%RH	3.7Vdc from Battery	Rose Ma
FREQUENCY STABILITY	24deg. C, 61%RH	DC 3.4V/3.7V/4.2V	Rain Wang
OCCUPIED BANDWIDTH	24deg. C, 61%RH	3.7Vdc from Battery	Rain Wang
PEAK TO AVERAGE RATIO	24deg. C, 61%RH	3.7Vdc from Battery	Rain Wang
BAND EDGE	24deg. C, 61%RH	3.7Vdc from Battery	Rain Wang
CONDCUDED EMISSION	24deg. C, 61%RH	3.7Vdc from Battery	Rain Wang
RADIATED EMISSION	24deg. C, 60%RH	DC 5V from adaptor	Rose Ma

## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v03**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

##### 3.1.2 TEST PROCEDURES

###### EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

###### CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

### 3.1.3 TEST SETUP

#### ERP MEASUREMENT:

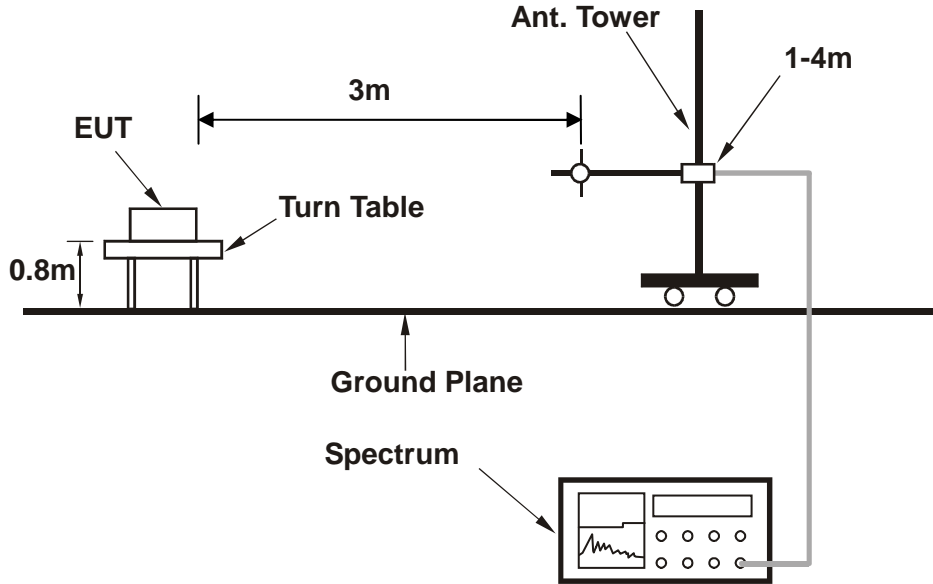


#### EIRP MEASUREMENT:

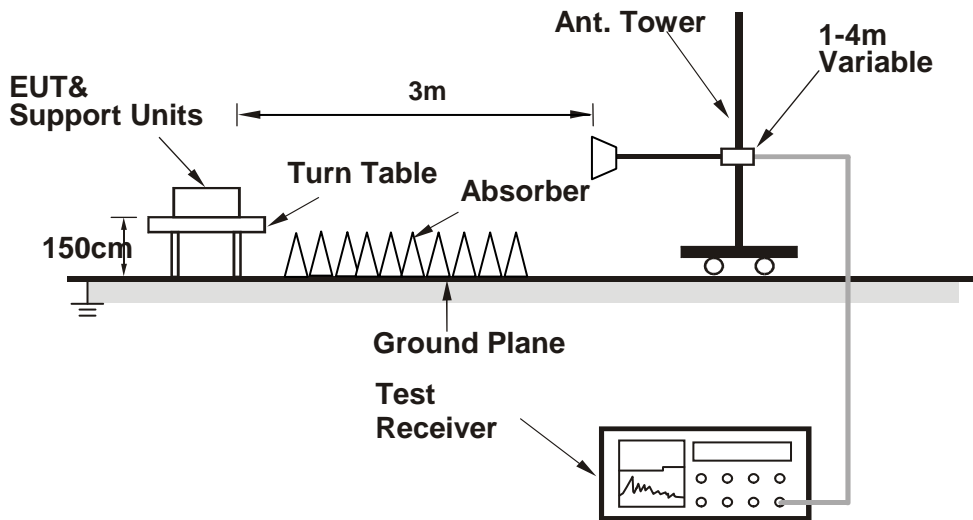

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

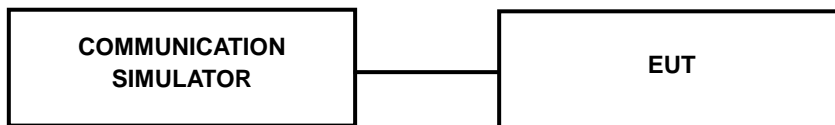

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.1.4 TEST RESULTS

#### AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37775	Mid CH 38000	High CH 38225	3GPP MPR (dB)
				Frequency 2572.5 MHz	Frequency 2595 MHz	Frequency 2617.5MHz	
5MHz	QPSK	1	0	23.13	22.98	22.91	0
		1	12	23.29	23.10	23.07	0
		1	24	23.14	22.98	22.96	0
		12	0	22.50	22.36	22.27	1
		12	6	22.59	22.53	22.40	1
		12	13	22.38	22.24	22.19	1
		25	0	22.44	22.35	22.23	1
	16QAM	1	0	21.89	21.78	21.72	1
		1	12	22.03	21.96	21.84	1
		1	24	22.22	22.03	22.00	1
		12	0	21.33	21.22	21.11	2
		12	6	21.48	21.39	21.26	2
		12	13	21.03	20.92	20.86	2
		25	0	21.31	21.17	21.10	2
	64QAM	1	0	20.95	20.84	20.78	2
		1	12	21.48	21.41	21.28	2
		1	24	21.23	21.17	21.07	2
		12	0	20.85	20.71	20.59	3
		12	6	20.99	20.93	20.83	3
		12	13	20.58	20.44	20.32	3
		25	0	20.85	20.76	20.66	3

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37800	Mid CH 38000	High CH 38200	3GPP MPR (dB)
				Frequency 2575 MHz	Frequency 2595 MHz	Frequency 2615 MHz	
10MHz	QPSK	1	0	23.10	23.01	22.91	0
		1	24	23.29	23.10	23.08	0
		1	49	23.11	23.02	22.92	0
		25	0	22.51	22.35	22.30	1
		25	12	22.65	22.47	22.40	1
		25	25	22.36	22.21	22.18	1
		50	0	22.49	22.35	22.20	1
	16QAM	1	0	21.89	21.75	21.68	1
		1	24	22.08	21.92	21.87	1
		1	49	22.22	22.04	21.97	1
		25	0	21.35	21.20	21.17	2
		25	12	21.52	21.33	21.31	2
		25	25	21.02	20.93	20.83	2
		50	0	21.35	21.16	21.14	2
	64QAM	1	0	20.94	20.85	20.75	2
		1	24	21.53	21.37	21.32	2
		1	49	21.29	21.11	21.04	2
		25	0	20.83	20.68	20.65	3
		25	12	21.06	20.92	20.77	3
		25	25	20.57	20.41	20.34	3
		50	0	20.90	20.72	20.67	3

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37825	Mid CH 38000	High CH 38175	3GPP MPR (dB)
				Frequency 2577.5 MHz	Frequency 2595 MHz	Frequency 2612.5MHz	
15MHz	QPSK	1	0	23.17	23.01	22.88	0
		1	37	23.27	23.15	23.03	0
		1	74	23.17	23.05	22.93	0
		36	0	22.48	22.36	22.31	1
		36	19	22.66	22.52	22.40	1
		36	39	22.34	22.22	22.18	1
		75	0	22.49	22.33	22.25	1
	16QAM	1	0	21.93	21.82	21.68	1
		1	37	22.07	21.93	21.87	1
		1	74	22.18	22.09	21.99	1
		36	0	21.39	21.20	21.18	2
		36	19	21.46	21.37	21.27	2
		36	39	21.07	20.91	20.86	2
		75	0	21.36	21.19	21.07	2
	64QAM	1	0	20.96	20.86	20.76	2
		1	37	21.54	21.36	21.29	2
		1	74	21.25	21.10	21.07	2
		36	0	20.88	20.74	20.59	3
		36	19	21.00	20.86	20.79	3
		36	39	20.60	20.48	20.36	3
		75	0	20.89	20.70	20.68	3

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37850	Mid CH 38000	High CH 38150	3GPP MPR (dB)
				Frequency 2580 MHz	Frequency 2595 MHz	Frequency 2610 MHz	
20MHz	QPSK	1	0	23.18	23.05	22.96	0
		1	50	<b>23.31</b>	23.18	23.09	0
		1	99	23.19	23.06	22.97	0
		50	0	22.54	22.41	22.32	1
		50	25	22.67	22.54	22.45	1
		50	50	22.42	22.29	22.20	1
		100	0	22.50	22.37	22.28	1
	16QAM	1	0	21.96	21.83	21.74	1
		1	50	22.11	21.98	21.89	1
		1	99	22.24	22.11	22.02	1
		50	0	21.41	21.28	21.19	2
		50	25	21.54	21.41	21.32	2
		50	50	21.10	20.97	20.88	2
		100	0	21.37	21.24	21.15	2
	64QAM	1	0	21.02	20.89	20.80	2
		1	50	21.56	21.43	21.34	2
		1	99	21.31	21.18	21.09	2
		50	0	20.89	20.76	20.67	3
		50	25	21.07	20.94	20.85	3
		50	50	20.62	20.49	20.40	3
		100	0	20.91	20.78	20.69	3

LTE Band 41									
BW	Modulation	RB Size	RB Offset	Low CH (39675)	Low CH (40148)	Mid CH (40620)	High CH (41093)	High CH (41565)	3GPP MPR (dB)
				Frequency (2498.5)MHz	Frequency (2545.8)MHz	Frequency (2593)MHz	Frequency (2640.3)MHz	Frequency (2687.5)MHz	
5MHz	QPSK	1	0	25.94	25.92	25.86	25.66	26.00	0
		1	12	26.15	26.13	26.07	25.87	26.21	0
		1	24	25.56	25.54	25.48	25.28	25.62	0
		12	0	25.07	25.05	24.99	24.79	25.13	1
		12	6	25.13	25.11	25.05	24.85	25.19	1
		12	13	25.23	25.21	25.15	24.95	25.29	1
		25	0	25.10	25.08	25.02	24.82	25.16	1
	16QAM	1	0	24.56	24.54	24.48	24.28	24.62	1
		1	12	24.79	24.77	24.71	24.51	24.85	1
		1	24	24.50	24.48	24.42	24.22	24.56	1
		12	0	23.80	23.78	23.72	23.52	23.86	2
		12	6	23.87	23.85	23.79	23.59	23.93	2
		12	13	23.73	23.71	23.65	23.45	23.79	2
		25	0	23.83	23.81	23.75	23.55	23.89	2
	64QAM	1	0	23.48	23.46	23.40	23.20	23.54	2
		1	12	24.15	24.13	24.07	23.87	24.21	2
		1	24	23.44	23.42	23.36	23.16	23.50	2
		12	0	23.20	23.18	23.12	22.92	23.26	3
		12	6	23.28	23.30	23.24	23.04	23.34	3
		12	13	23.17	23.15	23.09	22.89	23.23	3
		25	0	23.28	23.26	23.20	23.00	23.34	3

LTE Band 41									
BW	Modulation	RB Size	RB Offset	Low CH (39700)	Low CH (40160)	Mid CH (40620)	High CH (41080)	High CH (41540)	3GPP MPR (dB)
				Frequency (2501)MHz	Frequency (2547)MHz	Frequency (2593)MHz	Frequency (2639)MHz	Frequency (2685)MHz	
10MHz	QPSK	1	0	25.97	25.95	25.89	25.69	26.03	0
		1	24	26.18	26.16	26.10	25.90	26.24	0
		1	49	25.59	25.57	25.51	25.31	25.65	0
		25	0	25.10	25.08	25.02	24.82	25.16	1
		25	12	25.16	25.14	25.08	24.88	25.22	1
		25	25	25.26	25.24	25.18	24.98	25.32	1
		50	0	25.13	25.11	25.05	24.85	25.19	1
	16QAM	1	0	24.59	24.57	24.51	24.31	24.65	1
		1	24	24.82	24.80	24.74	24.54	24.88	1
		1	49	24.53	24.51	24.45	24.25	24.59	1
		25	0	23.83	23.81	23.75	23.55	23.89	2
		25	12	23.90	23.88	23.82	23.62	23.96	2
		25	25	23.76	23.74	23.68	23.48	23.82	2
		50	0	23.86	23.84	23.78	23.58	23.92	2
	64QAM	1	0	23.53	23.51	23.45	23.25	23.59	2
		1	24	24.20	24.18	24.12	23.92	24.26	2
		1	49	23.49	23.47	23.41	23.21	23.55	2
		25	0	23.25	23.23	23.17	22.97	23.31	3
		25	12	23.33	23.35	23.29	23.09	23.39	3
		25	25	23.22	23.20	23.14	22.94	23.28	3
		50	0	23.33	23.31	23.25	23.05	23.39	3

LTE Band 41									
BW	Modulation	RB Size	RB Offset	Low CH (39725)	Low CH (40173)	Mid CH (40620)	High CH (41068)	High CH (41515)	3GPP MPR (dB)
				Frequency (2503.5)MHz	Frequency (2548.3)MHz	Frequency (2593)MHz	Frequency (2637.8)MHz	Frequency (2682.5)MHz	
15MHz	QPSK	1	0	26.01	25.99	25.93	25.73	26.07	0
		1	37	26.22	26.20	26.14	25.94	26.28	0
		1	74	25.63	25.61	25.55	25.35	25.69	0
		36	0	25.14	25.12	25.06	24.86	25.20	1
		36	19	25.20	25.18	25.12	24.92	25.26	1
		36	39	25.30	25.28	25.22	25.02	25.36	1
		75	0	25.17	25.15	25.09	24.89	25.23	1
	16QAM	1	0	24.63	24.61	24.55	24.35	24.69	1
		1	37	24.86	24.84	24.78	24.58	24.92	1
		1	74	24.57	24.55	24.49	24.29	24.63	1
		36	0	23.87	23.85	23.79	23.59	23.93	2
		36	19	23.94	23.92	23.86	23.66	24.00	2
		36	39	23.80	23.78	23.72	23.52	23.86	2
		75	0	23.90	23.88	23.82	23.62	23.96	2
	64QAM	1	0	23.58	23.56	23.50	23.30	23.64	2
		1	37	24.25	24.23	24.17	23.97	24.31	2
		1	74	23.54	23.52	23.46	23.26	23.60	2
		36	0	23.30	23.28	23.22	23.02	23.36	3
		36	19	23.38	23.40	23.34	23.14	23.44	3
		36	39	23.27	23.25	23.19	22.99	23.33	3
		75	0	23.38	23.36	23.30	23.10	23.44	3

LTE Band 41									
BW	Modulation	RB Size	RB Offset	Low CH (39750)	Low CH (40185)	Mid CH (40620)	High CH (41055)	High CH (41490)	3GPP MPR (dB)
				Frequency (2506)MHz	Frequency (2549.5)MHz	Frequency (2593)MHz	Frequency (2636.5)MHz	Frequency (2680)MHz	
20MHz	QPSK	1	0	26.07	26.05	25.99	25.79	26.13	0
		1	50	26.28	26.26	26.20	26.00	<b>26.34</b>	0
		1	99	25.69	25.67	25.61	25.41	25.75	0
		50	0	25.20	25.18	25.12	24.92	25.26	1
		50	25	25.26	25.24	25.18	24.98	25.32	1
		50	50	25.36	25.34	25.28	25.08	25.42	1
		100	0	25.23	25.21	25.15	24.95	25.29	1
	16QAM	1	0	24.69	24.67	24.61	24.41	24.75	1
		1	50	24.92	24.90	24.84	24.64	24.98	1
		1	99	24.63	24.61	24.55	24.35	24.69	1
		50	0	23.93	23.91	23.85	23.65	23.99	2
		50	25	24.00	23.98	23.92	23.72	24.06	2
		50	50	23.86	23.84	23.78	23.58	23.92	2
		100	0	23.96	23.94	23.88	23.68	24.02	2
	64QAM	1	0	23.63	23.61	23.55	23.35	23.69	2
		1	50	24.30	24.28	24.22	24.02	24.36	2
		1	99	23.59	23.57	23.51	23.31	23.65	2
		50	0	23.35	23.33	23.27	23.07	23.41	3
		50	25	23.43	23.45	23.39	23.19	23.49	3
		50	50	23.32	23.30	23.24	23.04	23.38	3
		100	0	23.43	23.41	23.35	23.15	23.49	3



**EIRP**

**LTE BAND 38**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37775	2572.5	-23.87	45.91	22.04	159.96	H	2
38000	2595.0	-23.08	46.04	22.96	<b>197.70</b>	H	2
38225	2617.5	-23.53	46.23	22.70	186.21	H	2
37775	2572.5	-34.55	46.92	12.37	17.26	V	2
38000	2595.0	-34.83	47.10	12.27	16.87	V	2
38225	2617.5	-35.16	47.26	12.10	16.22	V	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37775	2572.5	-24.70	45.91	21.21	132.13	H	2
38000	2595.0	-24.10	46.04	21.94	156.31	H	2
38225	2617.5	-24.63	46.23	21.60	144.54	H	2
37775	2572.5	-35.38	46.92	11.54	14.26	V	2
38000	2595.0	-35.85	47.10	11.25	13.34	V	2
38225	2617.5	-36.26	47.26	11.00	12.59	V	2

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37775	2572.5	-25.87	45.91	20.04	100.93	H	2
38000	2595.0	-25.08	46.04	20.96	124.74	H	2
38225	2617.5	-25.53	46.23	20.70	117.49	H	2
37775	2572.5	-34.55	46.92	12.37	17.26	V	2
38000	2595.0	-34.83	47.10	12.27	16.87	V	2
38225	2617.5	-35.16	47.26	12.10	16.22	V	2

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37800	2575.0	-23.68	45.96	22.28	169.04	H	2
38000	2595.0	-23.02	46.04	23.02	<b>200.45</b>	H	2
38200	2615.0	-23.40	46.18	22.78	189.67	H	2
37800	2575.0	-34.36	46.99	12.63	18.32	V	2
38000	2595.0	-34.77	47.10	12.33	17.10	V	2
38200	2615.0	-35.03	47.21	12.18	16.52	V	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37800	2575.0	-24.83	45.96	21.13	129.72	H	2
38000	2595.0	-24.12	46.04	21.92	155.60	H	2
38200	2615.0	-24.56	46.18	21.62	145.21	H	2
37800	2575.0	-35.51	46.99	11.48	14.06	V	2
38000	2595.0	-35.87	47.10	11.23	13.27	V	2
38200	2615.0	-36.19	47.21	11.02	12.65	V	2

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37800	2575.0	-25.68	45.96	20.28	106.66	H	2
38000	2595.0	-25.02	46.04	21.02	126.47	H	2
38200	2615.0	-25.40	46.18	20.78	119.67	H	2
37800	2575.0	-34.36	46.99	12.63	18.32	V	2
38000	2595.0	-34.77	47.10	12.33	17.10	V	2
38200	2615.0	-35.03	47.21	12.18	16.52	V	2

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37825	2577.5	-23.69	46.01	22.32	170.61	H	2
38000	2595.0	-23.09	46.04	22.95	<b>197.24</b>	H	2
38175	2612.5	-23.47	46.14	22.67	184.93	H	2
37825	2577.5	-34.37	47.03	12.66	18.45	V	2
38000	2595.0	-34.84	47.10	12.26	16.83	V	2
38175	2612.5	-35.10	47.17	12.07	16.11	V	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37825	2577.5	-24.55	46.01	21.46	139.96	H	2
38000	2595.0	-23.96	46.04	22.08	161.44	H	2
38175	2612.5	-24.32	46.14	21.82	152.05	H	2
37825	2577.5	-35.23	47.03	11.80	15.14	V	2
38000	2595.0	-35.71	47.10	11.39	13.77	V	2
38175	2612.5	-35.95	47.17	11.22	13.24	V	2

**CHANNEL BANDWIDTH: 15MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37825	2577.5	-25.69	46.01	20.32	107.65	H	2
38000	2595.0	-25.09	46.04	20.95	124.45	H	2
38175	2612.5	-25.47	46.14	20.67	116.68	H	2
37825	2577.5	-34.37	47.03	12.66	18.45	V	2
38000	2595.0	-34.84	47.10	12.26	16.83	V	2
38175	2612.5	-35.10	47.17	12.07	16.11	V	2

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37850	2580.0	-24.27	46.05	21.78	150.66	H	2
38000	2595.0	-23.54	46.04	22.50	<b>177.83</b>	H	2
38150	2610.0	-24.05	46.11	22.06	160.69	H	2
37850	2580.0	-34.95	47.07	12.12	16.29	V	2
38000	2595.0	-35.29	47.10	11.81	15.17	V	2
38150	2610.0	-35.68	47.13	11.45	13.96	V	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37850	2580.0	-25.20	46.05	20.85	121.62	H	2
38000	2595.0	-24.61	46.04	21.43	139.00	H	2
38150	2610.0	-24.88	46.11	21.23	132.74	H	2
37850	2580.0	-35.88	47.07	11.19	13.15	V	2
38000	2595.0	-36.36	47.10	10.74	11.86	V	2
38150	2610.0	-36.51	47.13	10.62	11.53	V	2

**CHANNEL BANDWIDTH: 20MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37850	2580.0	-26.27	46.05	19.78	95.06	H	2
38000	2595.0	-25.54	46.04	20.50	112.20	H	2
38150	2610.0	-26.05	46.11	20.06	101.39	H	2
37850	2580.0	-34.95	47.07	12.12	16.29	V	2
38000	2595.0	-35.29	47.10	11.81	15.17	V	2
38150	2610.0	-35.68	47.13	11.45	13.96	V	2

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

**LTE BAND 41**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39675	2498.5	-23.49	45.69	22.20	165.96	H	2
40620	2593.0	-23.90	46.07	22.17	164.82	H	2
41565	2687.5	-23.20	46.49	23.29	<b>213.30</b>	H	2
39675	2498.5	-34.27	46.76	12.49	17.74	V	2
40620	2593.0	-34.41	47.13	12.72	18.71	V	2
41565	2687.5	-34.60	47.60	13.00	19.95	V	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39675	2498.5	-24.32	45.69	21.37	137.09	H	2
40620	2593.0	-24.92	46.07	21.15	130.32	H	2
41565	2687.5	-24.30	46.49	22.19	165.58	H	2
39675	2498.5	-35.10	46.76	11.66	14.66	V	2
40620	2593.0	-35.43	47.13	11.70	14.79	V	2
41565	2687.5	-35.70	47.60	11.90	15.49	V	2

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39675	2498.5	-25.27	45.69	20.42	110.15	H	2
40620	2593.0	-25.69	46.07	20.38	109.14	H	2
41565	2687.5	-24.96	46.49	21.53	142.23	H	2
39675	2498.5	-34.27	46.76	12.49	17.74	V	2
40620	2593.0	-34.41	47.13	12.72	18.71	V	2
41565	2687.5	-34.60	47.60	13.00	19.95	V	2

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39700	2501.0	-23.30	45.71	22.41	174.18	H	2
40620	2593.0	-23.84	46.07	22.23	167.11	H	2
41540	2685.0	-23.07	46.42	23.35	<b>216.27</b>	H	2
39700	2501.0	-34.08	46.78	12.70	18.62	V	2
40620	2593.0	-34.35	47.13	12.78	18.97	V	2
41540	2685.0	-34.47	47.56	13.09	20.37	V	2

**CHANNEL BANDWIDTH: 10Mz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39700	2501.0	-24.45	45.71	21.26	133.66	H	2
40620	2593.0	-24.94	46.07	21.13	129.72	H	2
41540	2685.0	-24.23	46.42	22.19	165.58	H	2
39700	2501.0	-35.23	46.78	11.55	14.29	V	2
40620	2593.0	-35.45	47.13	11.68	14.72	V	2
41540	2685.0	-35.63	47.56	11.93	15.60	V	2

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39700	2501.0	-25.08	45.71	20.63	115.61	H	2
40620	2593.0	-25.63	46.07	20.44	110.66	H	2
41540	2685.0	-24.83	46.42	21.59	144.21	H	2
39700	2501.0	-34.08	46.78	12.70	18.62	V	2
40620	2593.0	-34.35	47.13	12.78	18.97	V	2
41540	2685.0	-34.47	47.56	13.09	20.37	V	2

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39725	2503.5	-23.31	45.74	22.43	174.98	H	2
40620	2593.0	-23.91	46.07	22.16	164.44	H	2
41515	2682.5	-23.14	46.39	23.25	<b>211.35</b>	H	2
39725	2503.5	-34.09	46.78	12.69	18.58	V	2
40620	2593.0	-34.42	47.13	12.71	18.66	V	2
41515	2682.5	-34.54	47.41	12.87	19.36	V	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39725	2503.5	-24.17	45.74	21.57	143.55	H	2
40620	2593.0	-24.78	46.07	21.29	134.59	H	2
41515	2682.5	-23.99	46.39	22.40	173.78	H	2
39725	2503.5	-34.95	46.78	11.83	15.24	V	2
40620	2593.0	-35.29	47.13	11.84	15.28	V	2
41515	2682.5	-35.39	47.41	12.02	15.92	V	2

**CHANNEL BANDWIDTH: 15MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39725	2503.5	-25.09	45.74	20.65	116.14	H	2
40620	2593.0	-25.70	46.07	20.37	108.89	H	2
41515	2682.5	-24.90	46.39	21.49	140.93	H	2
39725	2503.5	-34.09	46.78	12.69	18.58	V	2
40620	2593.0	-34.42	47.13	12.71	18.66	V	2
41515	2682.5	-34.54	47.41	12.87	19.36	V	2

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39750	2506.0	-23.89	45.76	21.87	153.82	H	2
40620	2593.0	-24.36	46.07	21.71	148.25	H	2
41490	2680.0	-23.72	46.36	22.64	<b>183.65</b>	H	2
39750	2506.0	-34.67	46.80	12.13	16.33	V	2
40620	2593.0	-34.87	47.13	12.26	16.83	V	2
41490	2680.0	-35.12	47.39	12.27	16.87	V	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39750	2506.0	-24.82	45.76	20.94	124.17	H	2
40620	2593.0	-25.43	46.07	20.64	115.88	H	2
41490	2680.0	-24.55	46.36	21.81	151.71	H	2
39750	2506.0	-35.60	46.80	11.20	13.18	V	2
40620	2593.0	-35.94	47.13	11.19	13.15	V	2
41490	2680.0	-35.95	47.39	11.44	13.93	V	2

**CHANNEL BANDWIDTH: 20MHz 64QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
39750	2506.0	-25.67	45.76	20.09	102.09	H	2
40620	2593.0	-26.15	46.07	19.92	98.17	H	2
41490	2680.0	-25.48	46.36	20.88	122.46	H	2
39750	2506.0	-34.67	46.80	12.13	16.33	V	2
40620	2593.0	-34.87	47.13	12.26	16.83	V	2
41490	2680.0	-35.12	47.39	12.27	16.87	V	2

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 3.2.3 TEST SETUP

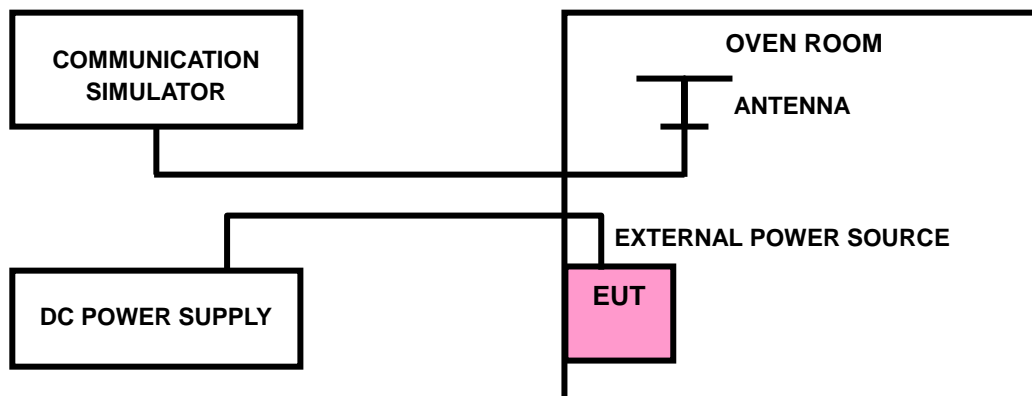

### 3.2.4 TEST RESULTS

#### LTE BAND 38

#### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0006	2.5
3.4	-0.0007	-0.0006	2.5
4.2	0.0006	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

#### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0038	-0.0038	2.5
-20	-0.0033	-0.0033	2.5
-10	-0.0029	-0.0029	2.5
0	-0.0025	-0.0025	2.5
10	-0.0021	-0.0021	2.5
20	-0.0018	-0.0016	2.5
30	-0.0013	-0.0013	2.5
40	-0.0007	-0.0007	2.5
50	-0.0002	-0.0002	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0007	2.5
3.4	-0.0006	-0.0007	2.5
4.2	0.0006	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0040	-0.0040	2.5
-20	-0.0034	-0.0034	2.5
-10	-0.0027	-0.0027	2.5
0	-0.0022	-0.0023	2.5
10	-0.0018	-0.0018	2.5
20	-0.0014	-0.0014	2.5
30	-0.0009	-0.0009	2.5
40	-0.0007	-0.0007	2.5
50	-0.0004	-0.0004	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0006	2.5
3.4	-0.0007	-0.0006	2.5
4.2	0.0005	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0041	-0.0041	2.5
-20	-0.0037	-0.0038	2.5
-10	-0.0030	-0.0030	2.5
0	-0.0026	-0.0026	2.5
10	-0.0022	-0.0022	2.5
20	-0.0018	-0.0018	2.5
30	-0.0011	-0.0012	2.5
40	-0.0006	-0.0006	2.5
50	-0.0002	-0.0002	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0005	0.0005	2.5
3.4	-0.0005	-0.0007	2.5
4.2	0.0004	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0042	-0.0041	2.5
-20	-0.0039	-0.0040	2.5
-10	-0.0033	-0.0034	2.5
0	-0.0030	-0.0030	2.5
10	-0.0022	-0.0022	2.5
20	-0.0017	-0.0017	2.5
30	-0.0014	-0.0014	2.5
40	-0.0009	-0.0010	2.5
50	-0.0004	-0.0004	2.5

**LTE BAND 41**

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0005	0.0005	2.5
3.4	-0.0007	-0.0006	2.5
4.2	0.0006	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0038	-0.0038	2.5
-20	-0.0033	-0.0033	2.5
-10	-0.0029	-0.0029	2.5
0	-0.0026	-0.0026	2.5
10	-0.0021	-0.0021	2.5
20	-0.0017	-0.0017	2.5
30	-0.0013	-0.0013	2.5
40	-0.0007	-0.0007	2.5
50	-0.0002	-0.0002	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0006	2.5
3.4	-0.0006	-0.0007	2.5
4.2	0.0006	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	0.0006	0.0006	2.5
-20	-0.0006	-0.0007	2.5
-10	0.0006	0.0005	2.5
0	0.0006	0.0006	2.5
10	-0.0006	-0.0007	2.5
20	0.0006	0.0005	2.5
30	0.0006	0.0006	2.5
40	-0.0006	-0.0007	2.5
50	0.0006	0.0005	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0005	2.5
3.4	-0.0007	-0.0006	2.5
4.2	0.0005	0.0004	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0040	-0.0041	2.5
-20	-0.0037	-0.0037	2.5
-10	-0.0029	-0.0030	2.5
0	-0.0027	-0.0027	2.5
10	-0.0020	-0.0021	2.5
20	-0.0016	-0.0017	2.5
30	-0.0010	-0.0010	2.5
40	-0.0006	-0.0006	2.5
50	-0.0002	-0.0002	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.7	0.0006	0.0005	2.5
3.4	-0.0005	-0.0006	2.5
4.2	0.0004	0.0005	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**


TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0040	-0.0041	2.5
-20	-0.0039	-0.0040	2.5
-10	-0.0035	-0.0035	2.5
0	-0.0029	-0.0030	2.5
10	-0.0022	-0.0022	2.5
20	-0.0017	-0.0017	2.5
30	-0.0013	-0.0013	2.5
40	-0.0009	-0.0009	2.5
50	-0.0003	-0.0003	2.5

### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

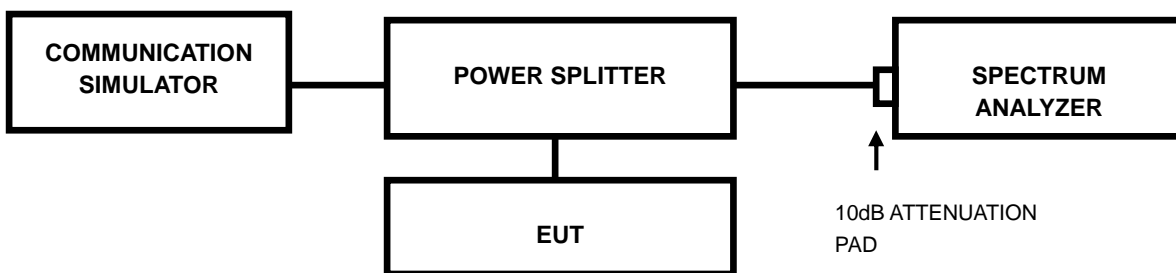

#### 3.3.3 TEST PROCEDURES


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 3.3.4 TEST RESULTS

LTE BAND 38				
CHANNEL BANDWIDTH: 5MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
37775	2572.5	4.47	4.47	4.47
38000	2595	4.47	4.47	4.47
38225	2617.5	4.47	4.47	4.47



LTE BAND 38				
CHANNEL BANDWIDTH: 10MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
37800	2575	8.93	8.92	8.95
38000	2595	8.93	8.92	8.95
38200	2615	8.93	8.91	8.95

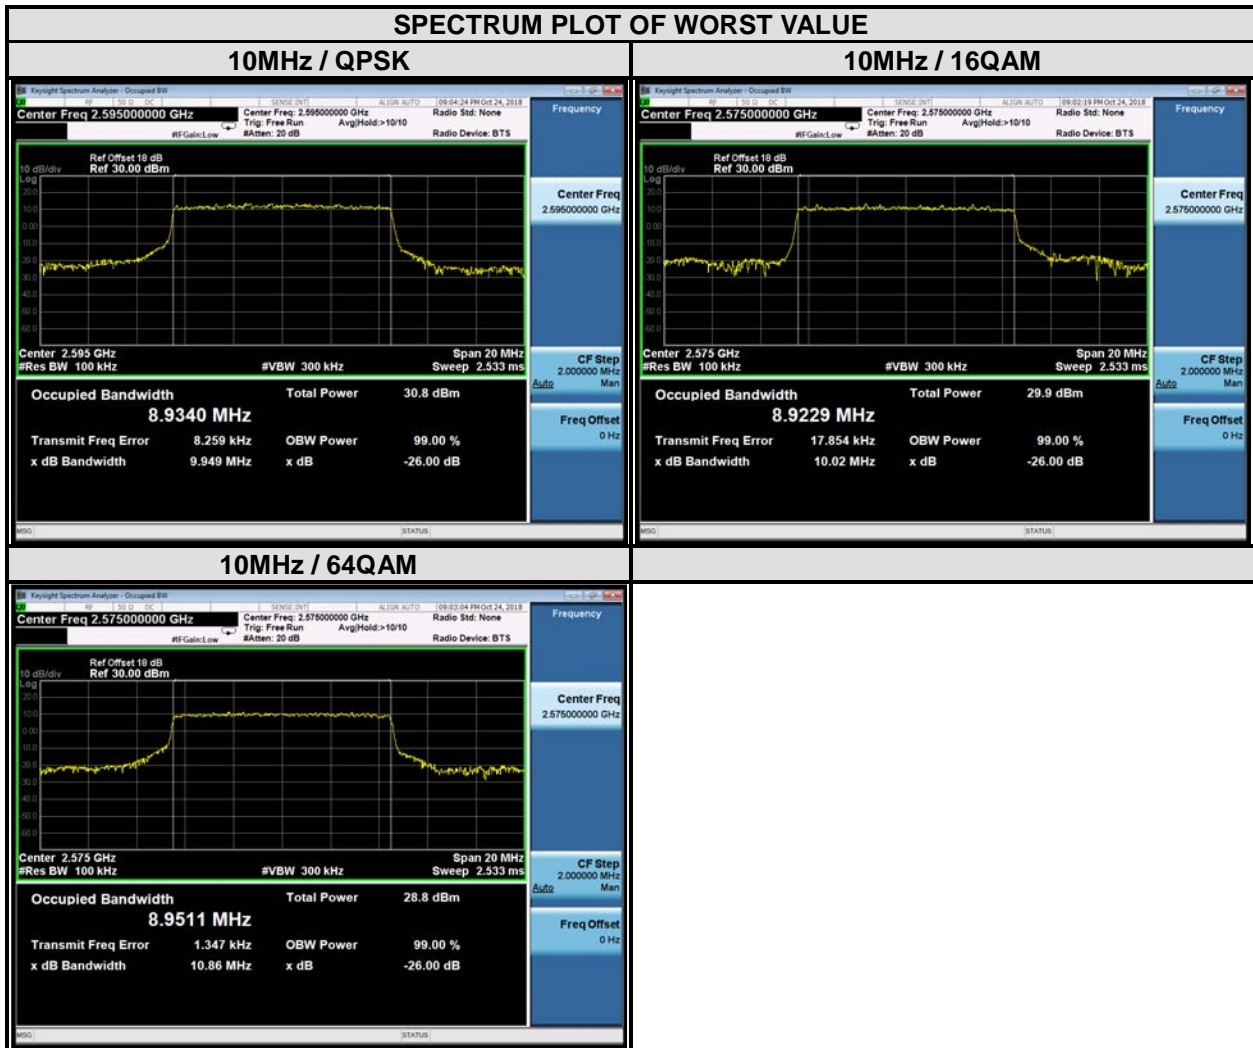

LTE BAND 38				
CHANNEL BANDWIDTH: 15MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
37825	2577.5	13.44	13.42	13.41
38000	2595	13.43	13.40	13.40
38175	2612.5	13.42	13.40	13.41




LTE BAND 38				
CHANNEL BANDWIDTH: 20MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
37850	2580	17.84	17.85	17.83
38000	2595	17.82	17.84	17.83
38150	2610	17.83	17.84	17.82



LTE BAND 41				
CHANNEL BANDWIDTH: 5MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
39675	2498.5	4.47	4.47	4.47
40620	2593.0	4.47	4.48	4.47
41565	2687.5	4.47	4.48	4.46




LTE BAND 41				
CHANNEL BANDWIDTH: 10MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
39700	2501.0	8.93	8.91	8.92
40620	2593.0	8.93	8.91	8.93
41540	2685.0	8.92	8.91	8.92

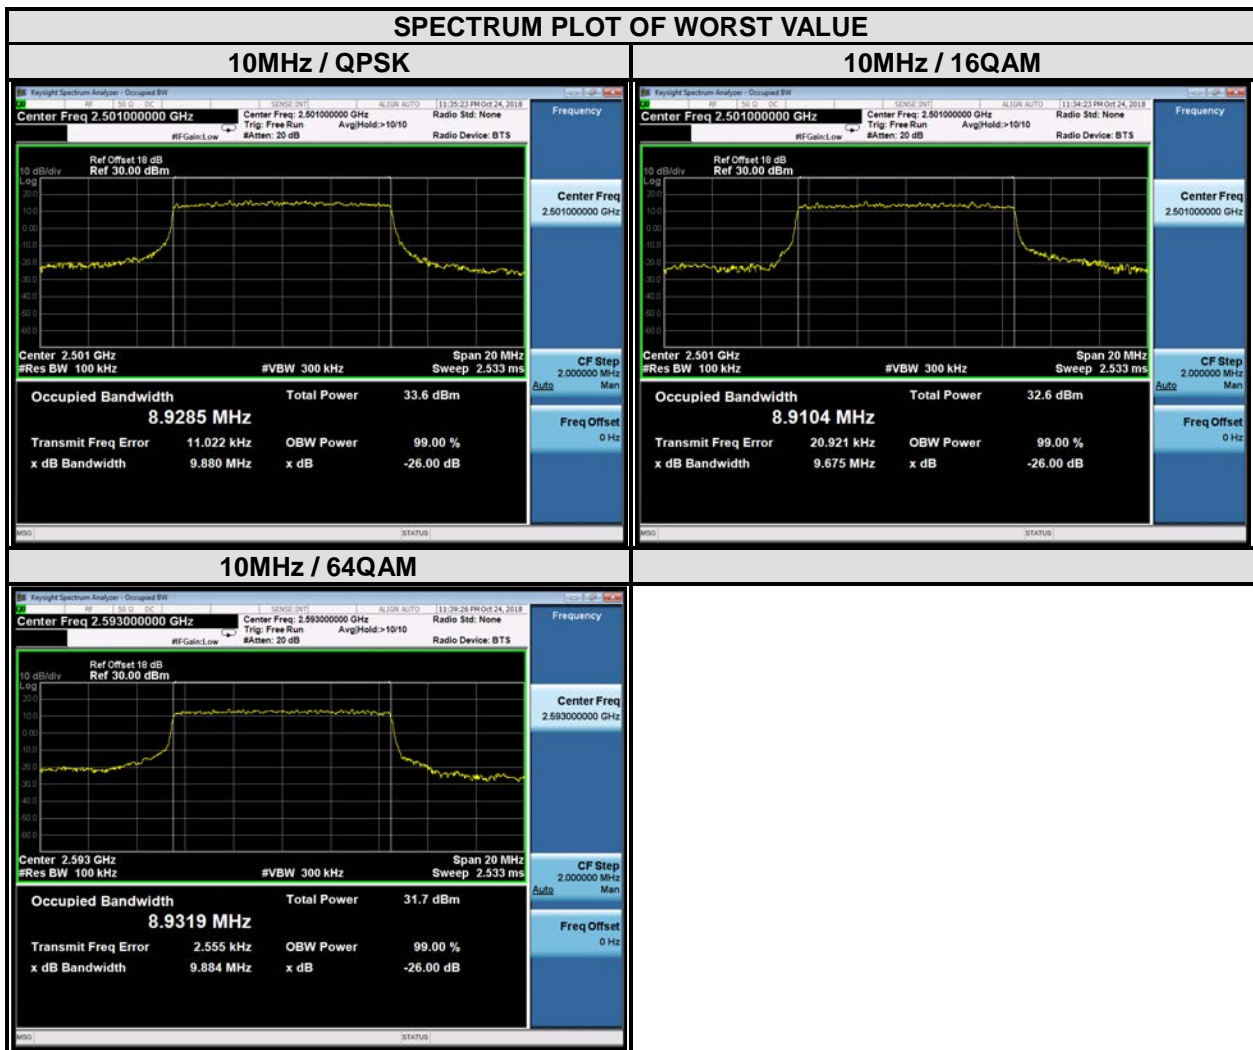




LTE BAND 41				
CHANNEL BANDWIDTH: 15MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
39725	2503.5	13.41	13.39	13.38
40620	2593.0	13.42	13.39	13.40
41515	2682.5	13.41	13.39	13.38

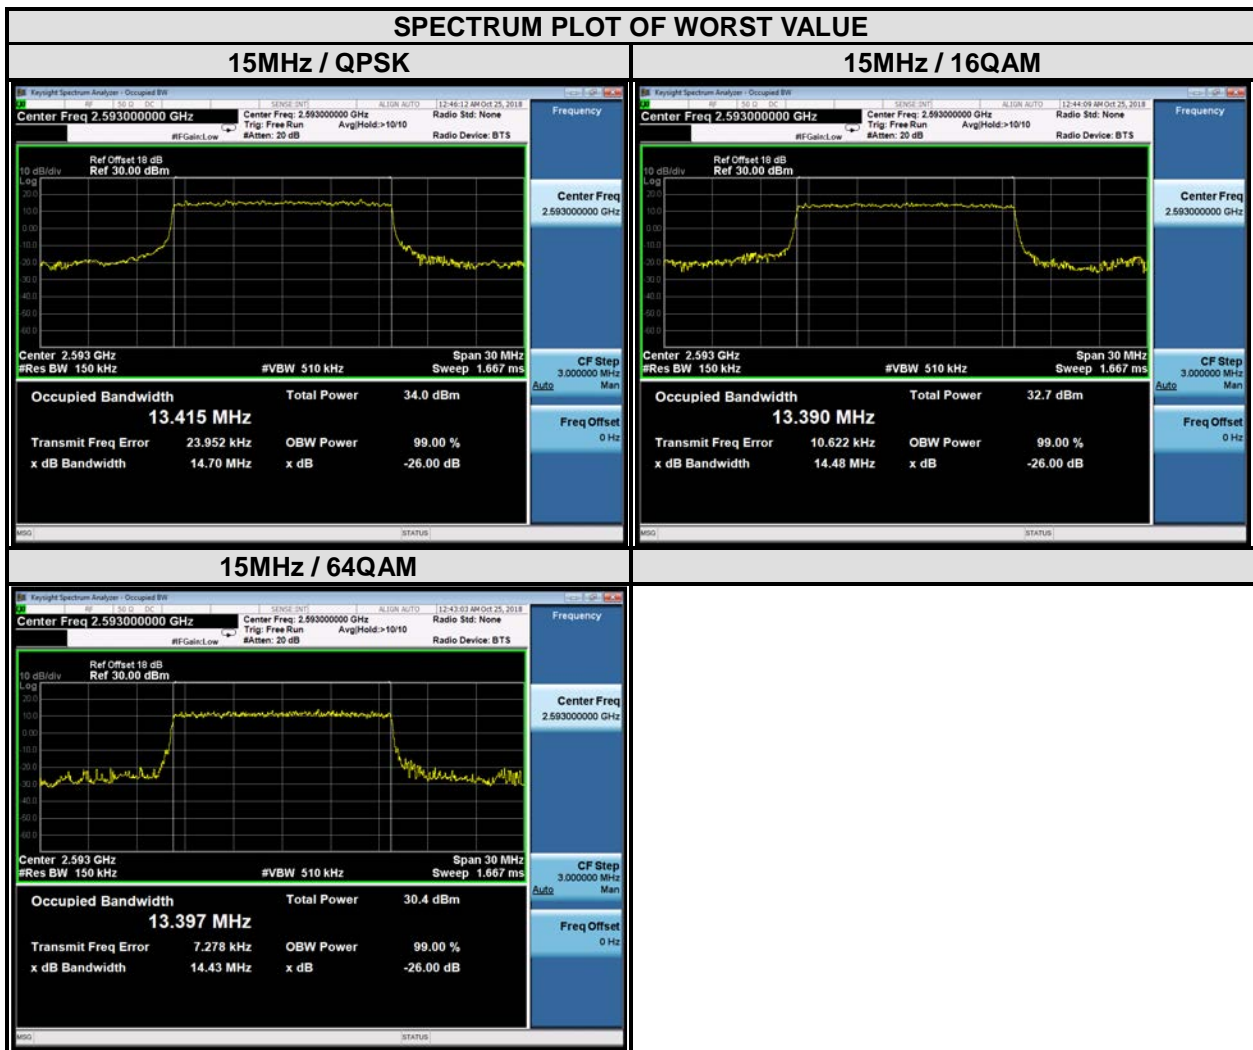

LTE BAND 41				
CHANNEL BANDWIDTH: 20MHZ				
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		QPSK	16QAM	64QAM
39750	2506.0	17.79	17.80	17.80
40620	2593.0	17.80	17.80	17.79
41490	2680.0	17.80	17.79	17.79

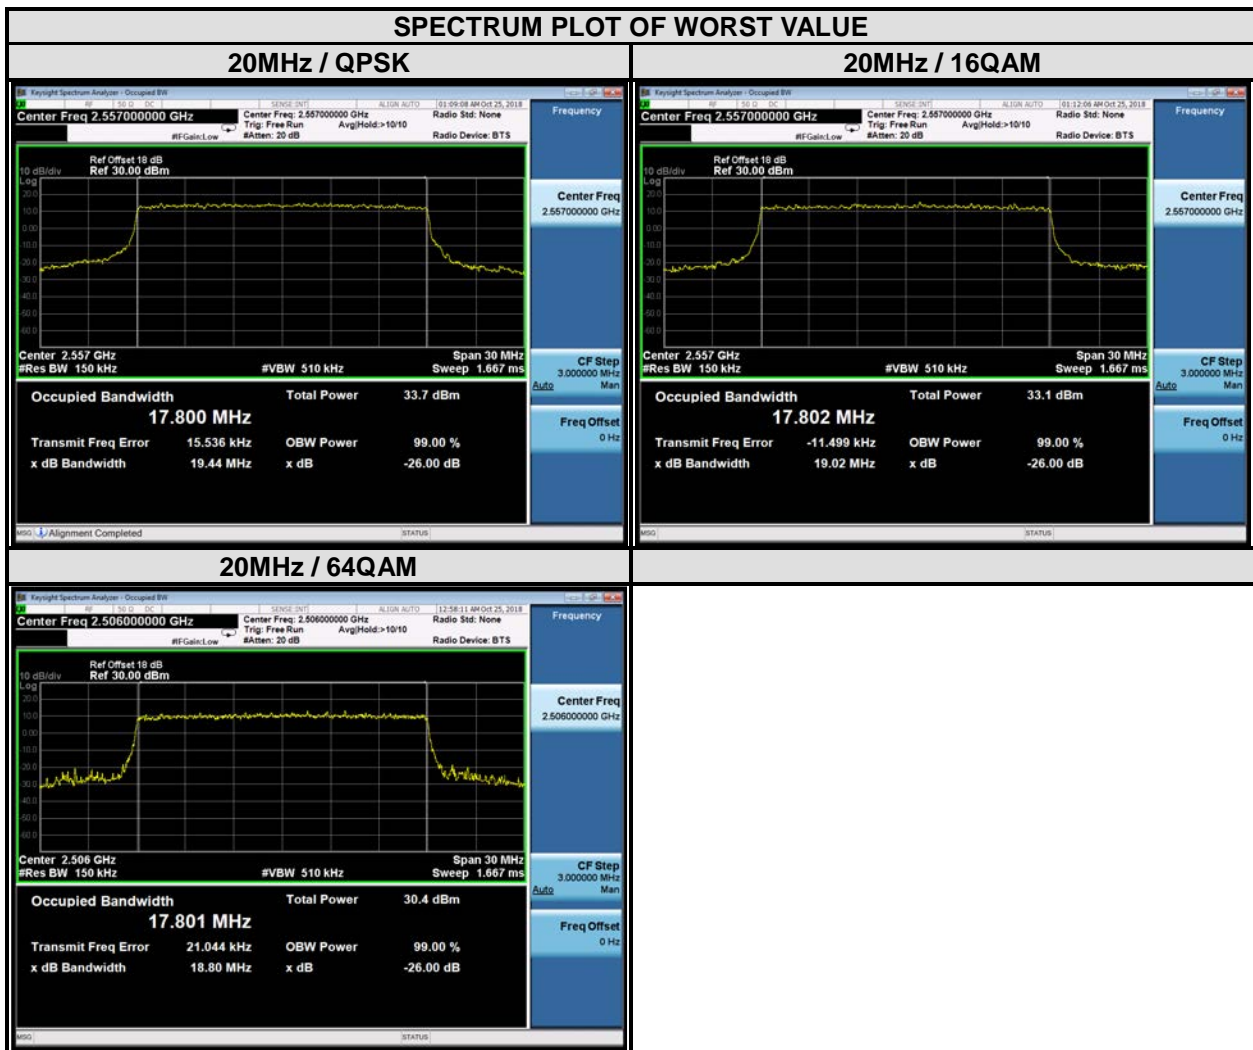


### 3.4 PEAK TO AVERAGE RATIO

#### 3.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.4.2 TEST SETUP

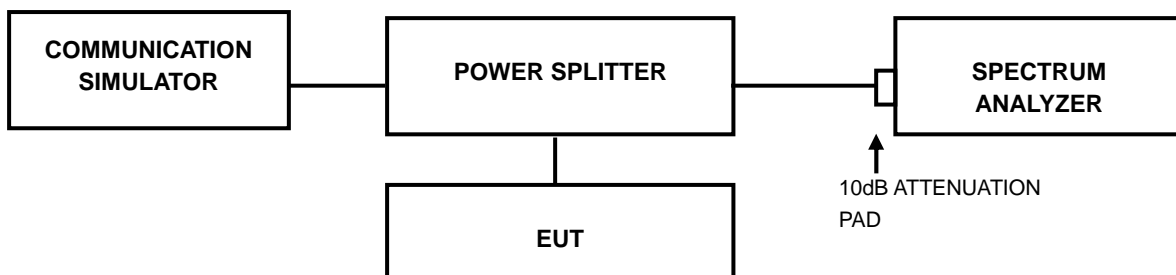


#### 3.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

### 3.4.4 TEST RESULTS

#### LTE BAND 38


CHANNEL BANDWIDTH: 5MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
37775	2572.5	4.80	5.42	5.92
38000	2595	5.07	5.44	5.71
38225	2617.5	5.26	5.45	5.45

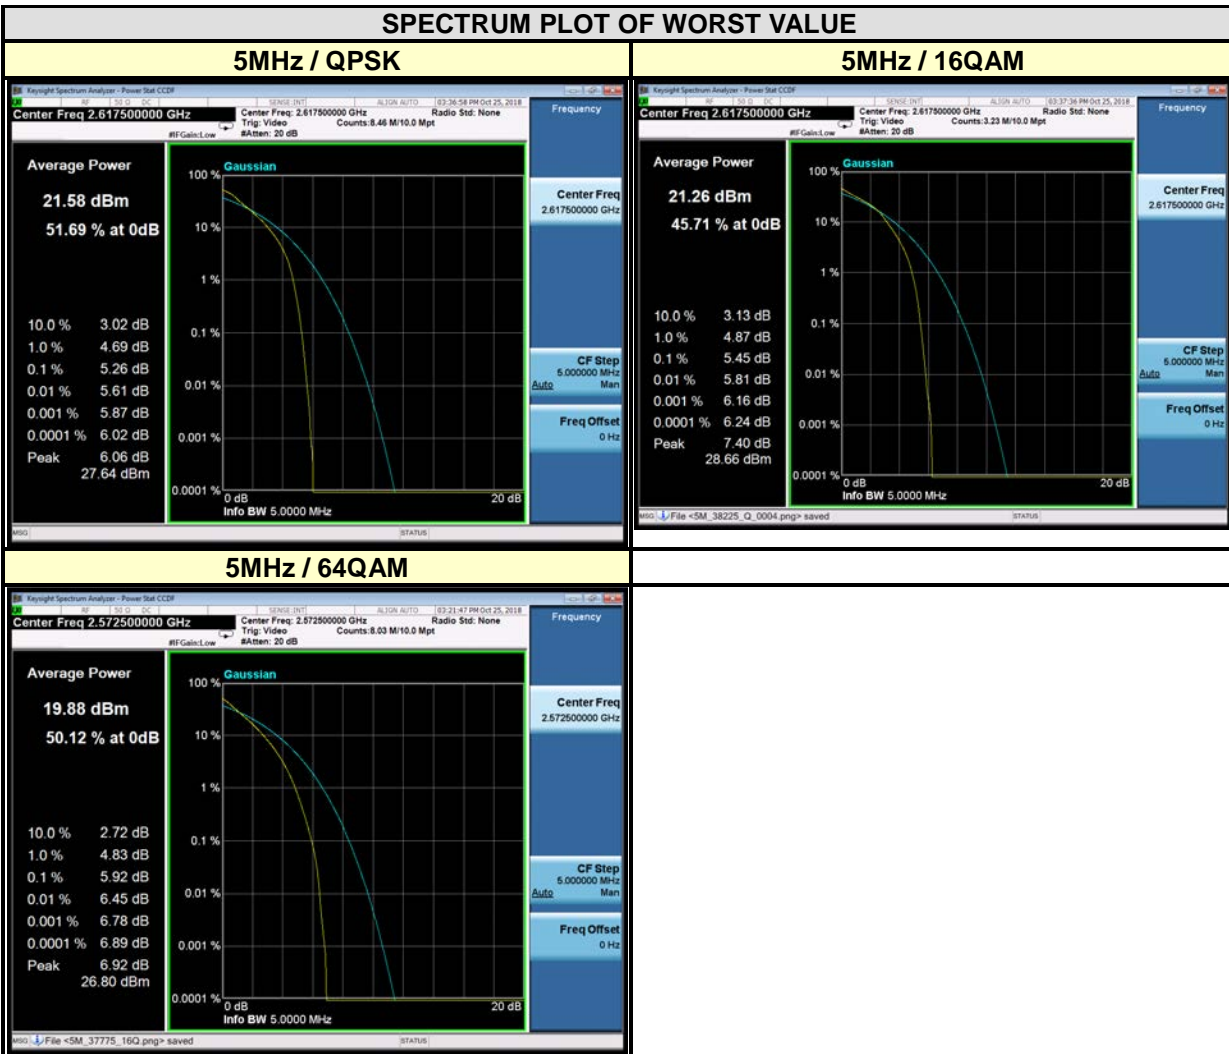


CHANNEL BANDWIDTH: 10MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
37800	2575	4.38	5.30	6.34
38000	2595	4.23	5.10	5.20
38200	2615	5.24	6.30	4.90



CHANNEL BANDWIDTH: 15MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
37825	2577.5	4.41	5.24	5.32
38000	2595	4.24	5.08	5.33
38175	2612.5	4.43	5.32	5.04

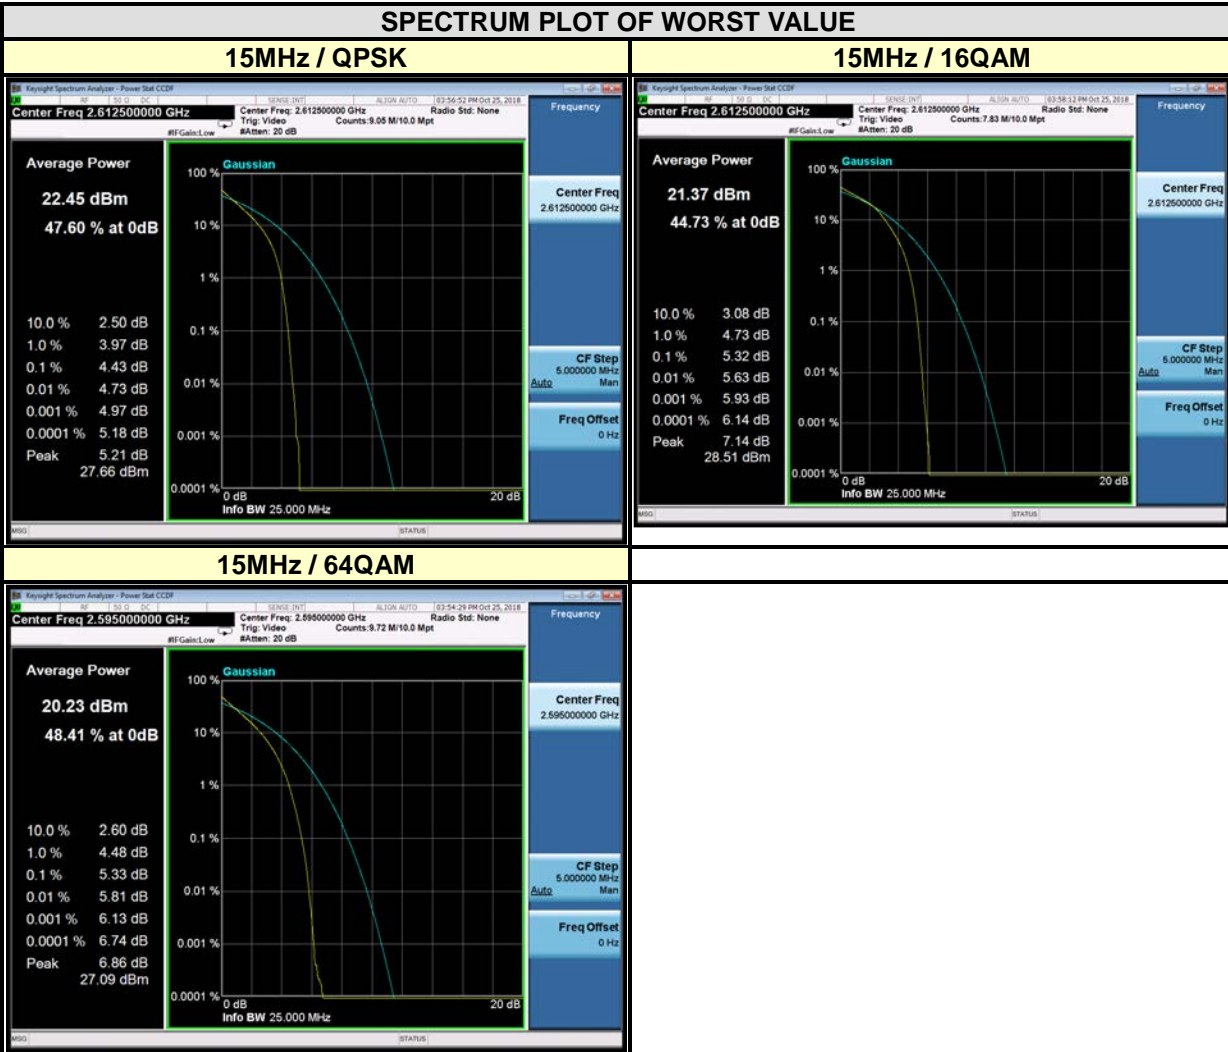


CHANNEL BANDWIDTH: 20MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
37850	2580	4.65	5.30	5.30
38000	2595	4.72	5.43	5.42
38150	2610	7.95	7.00	6.94

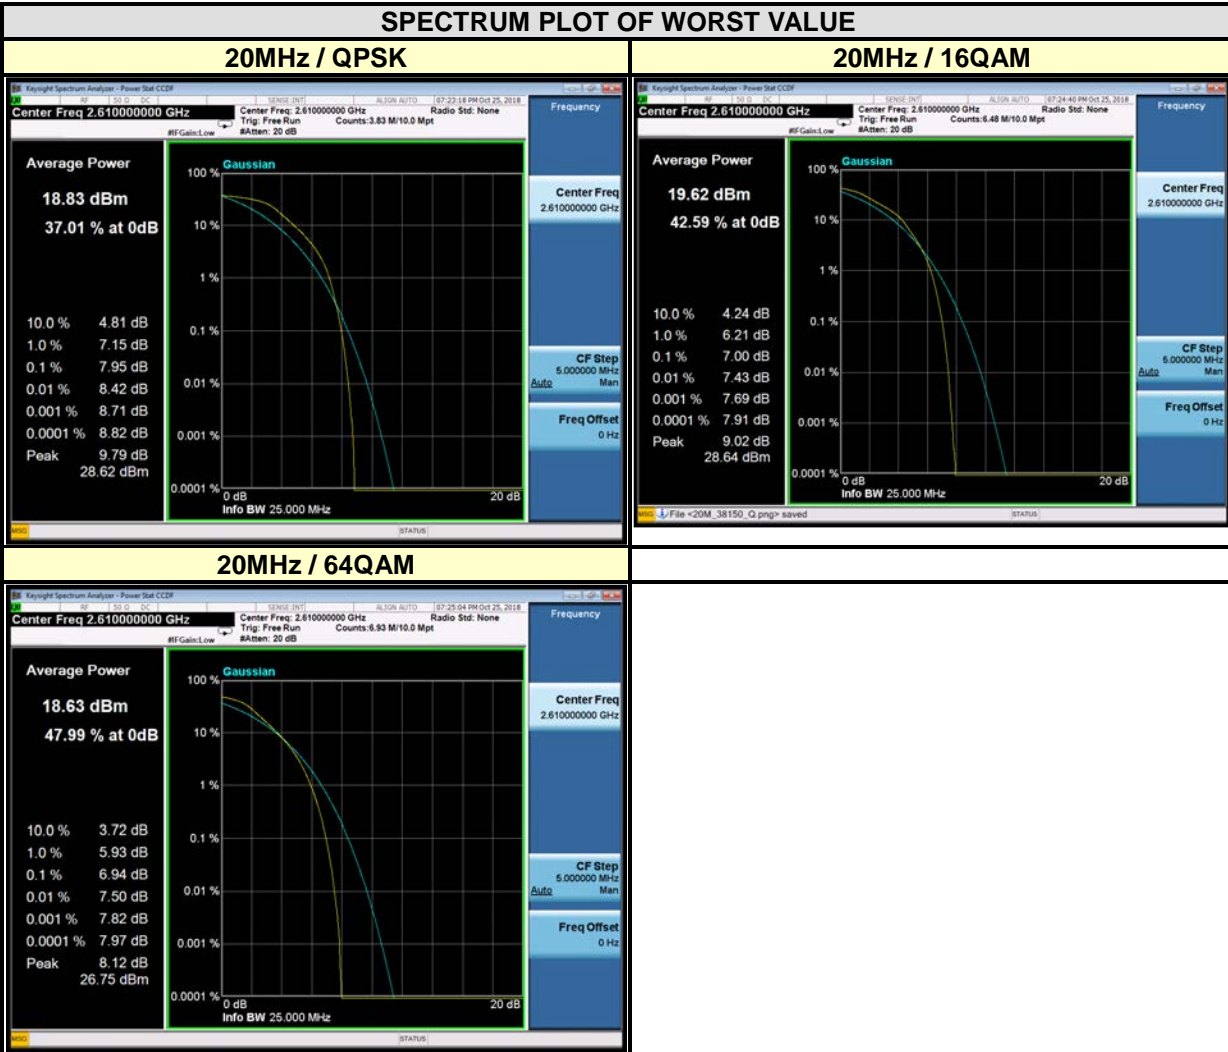


**LTE BAND 41**

CHANNEL BANDWIDTH: 5MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
39675	2498.5	4.88	5.62	6.25
40620	2593.0	4.95	5.38	6.25
41565	2687.5	5.00	5.29	6.27

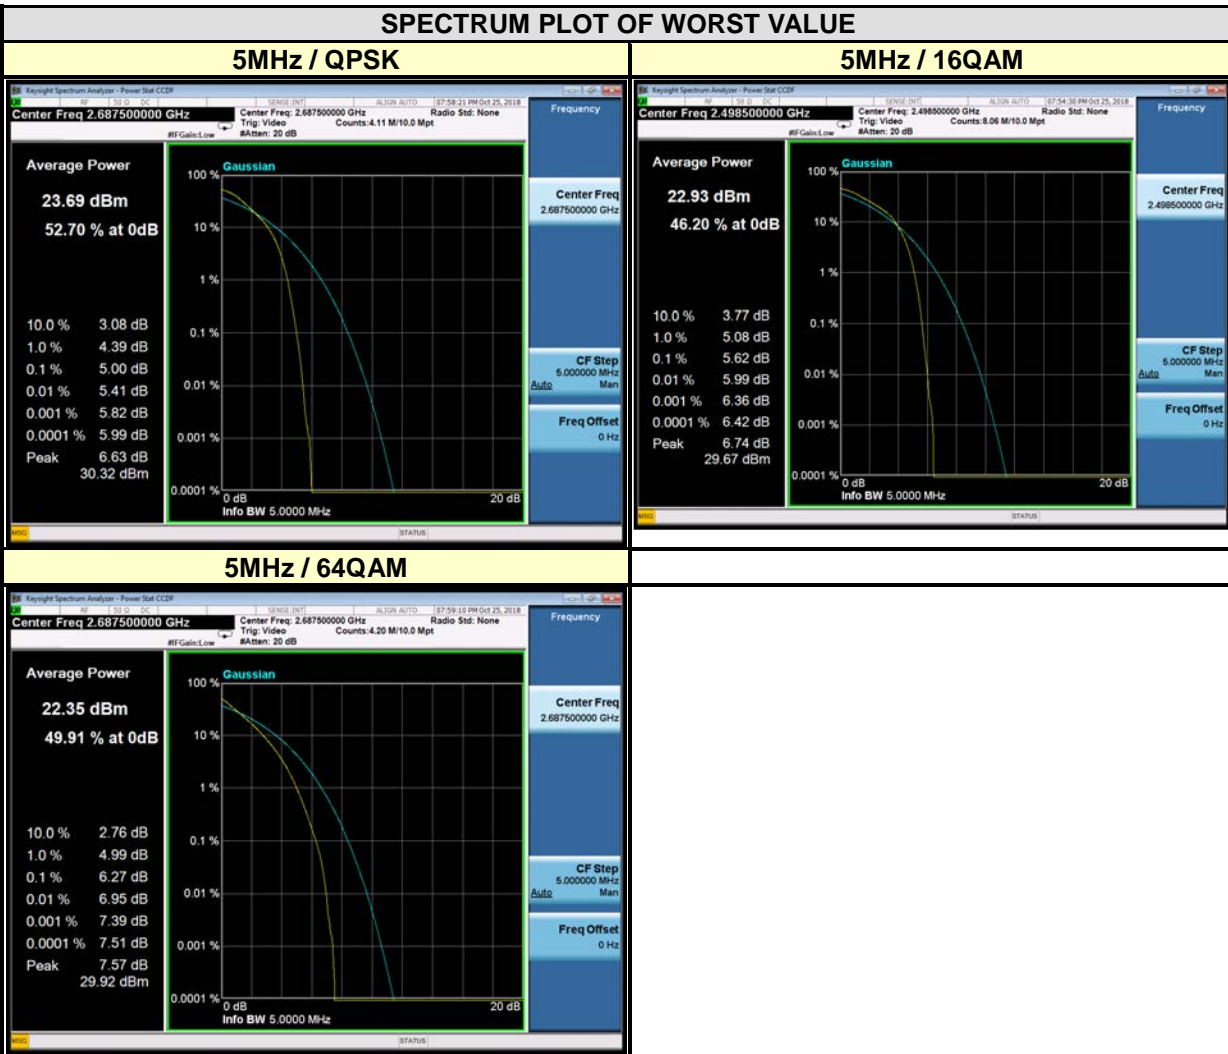





CHANNEL BANDWIDTH: 10MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
39700	2501.0	5.50	6.33	5.23
40620	2593.0	5.66	6.29	5.34
41540	2685.0	5.47	6.59	5.19

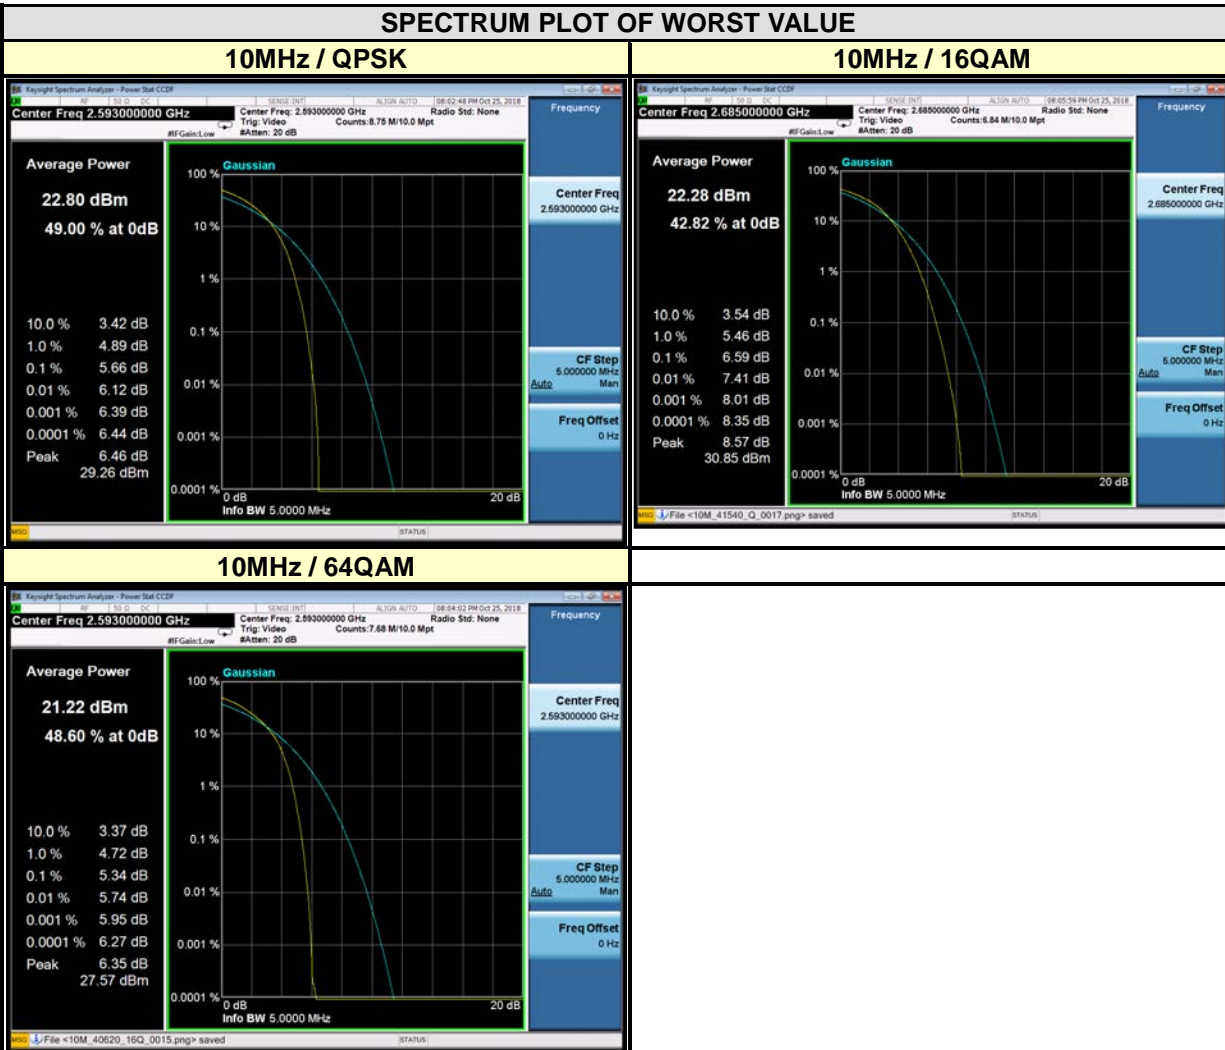

CHANNEL BANDWIDTH: 15MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
39725	2503.5	6.46	7.14	6.31
40620	2593.0	6.48	7.17	6.34
41515	2682.5	6.53	7.16	6.27

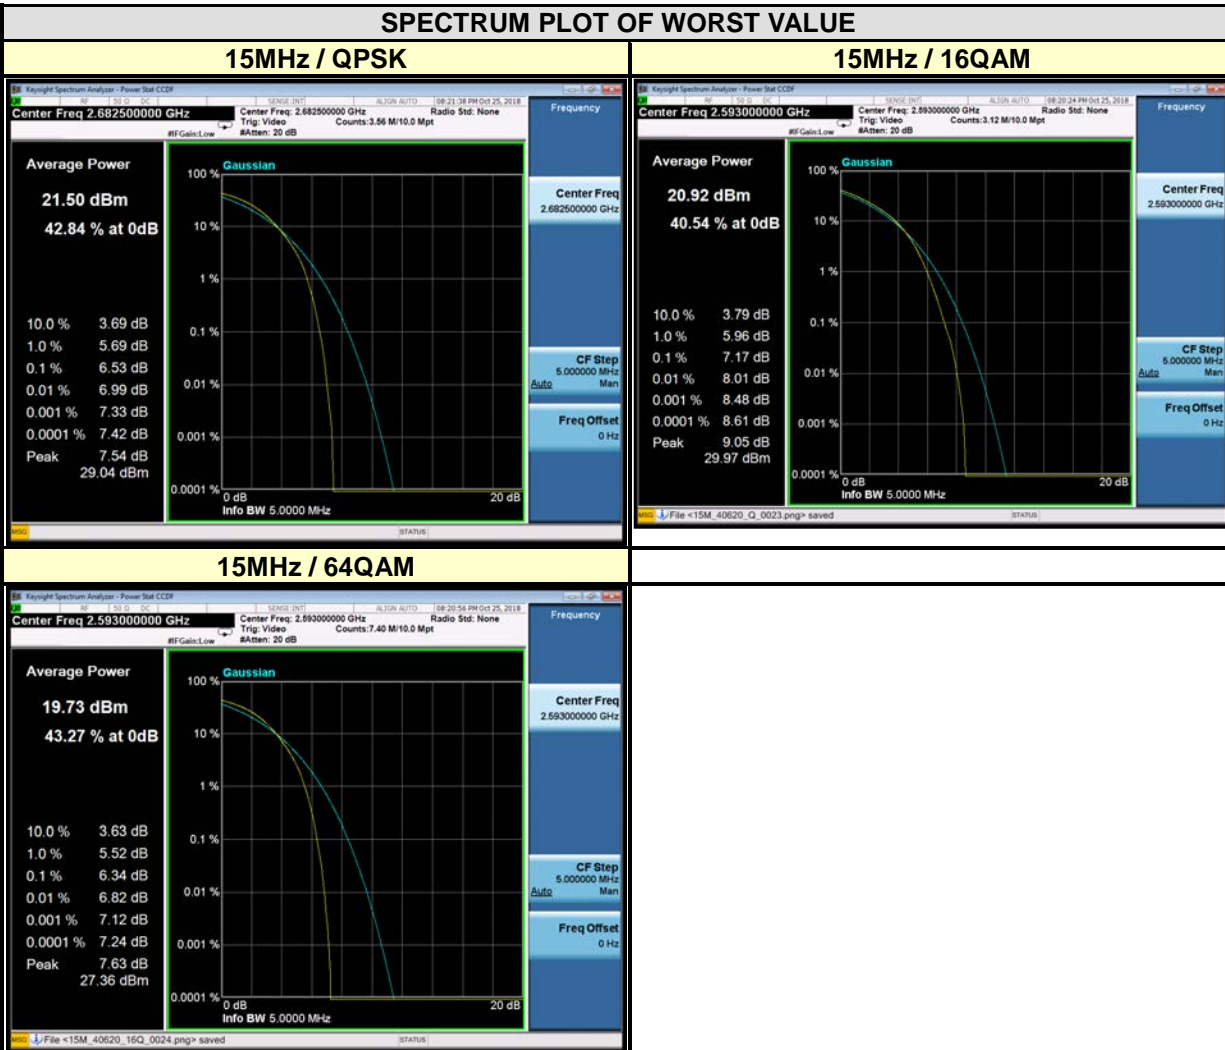

CHANNEL BANDWIDTH: 20MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
39725	2503.5	7.00	7.33	7.03
40620	2593.0	7.07	7.45	6.77
41515	2682.5	6.85	7.48	6.85

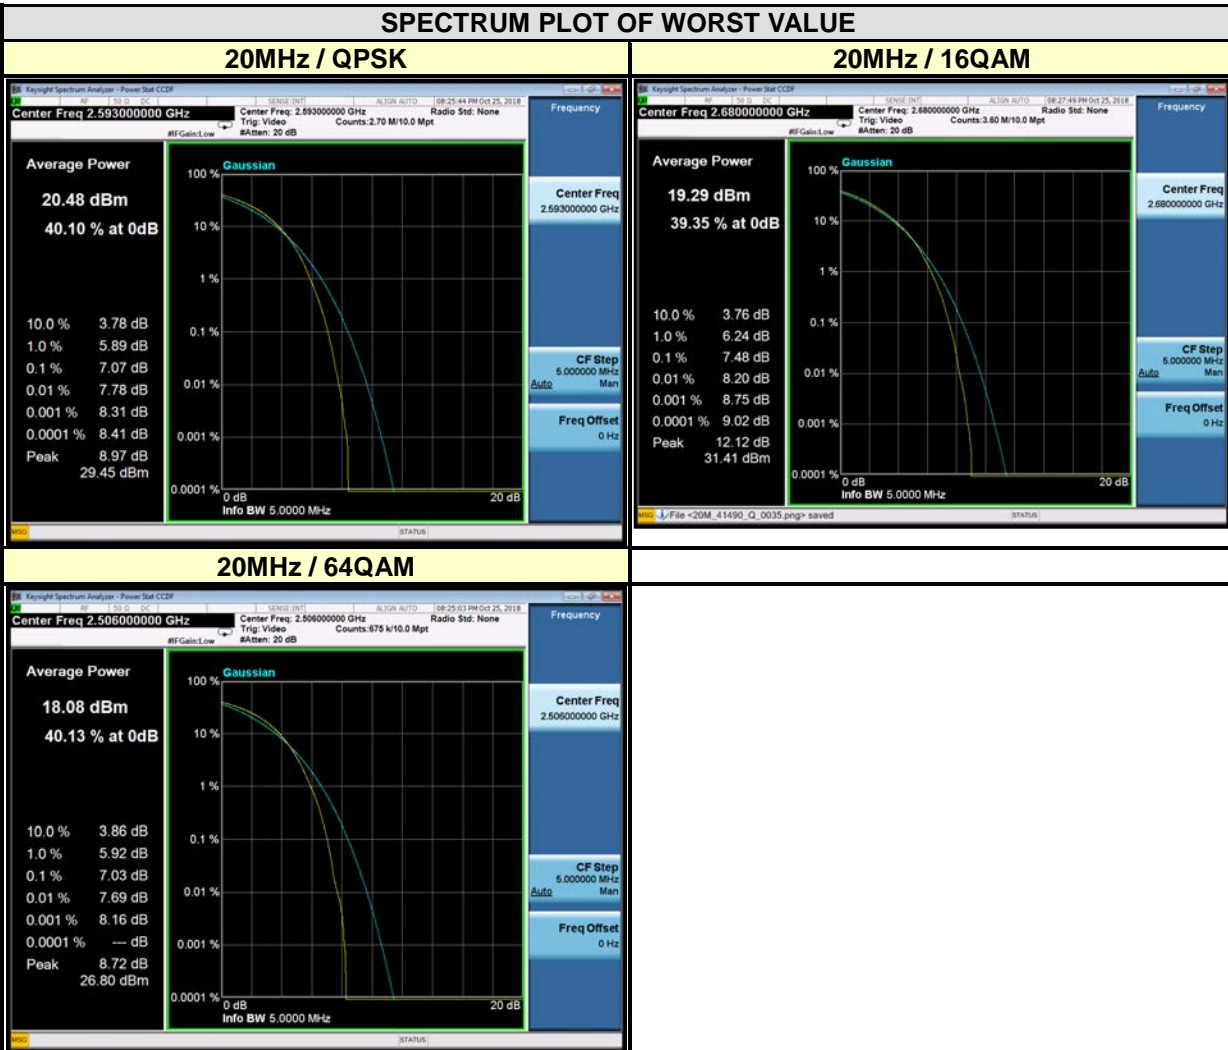


### 3.5 BAND EDGE MEASUREMENT

#### 3.5.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.


#### 3.5.2 TEST SETUP

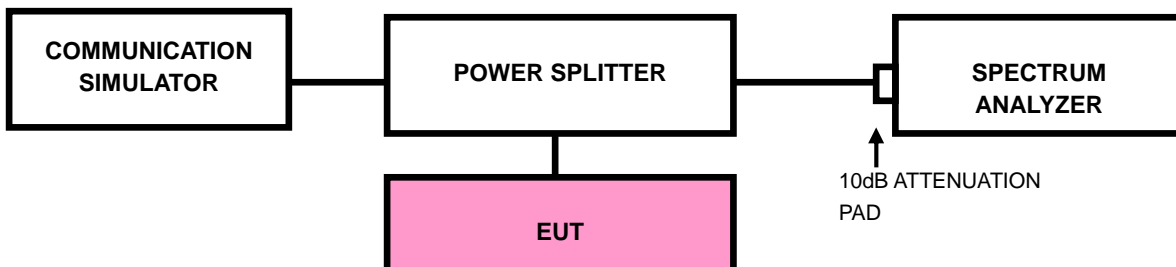



### 3.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 35MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (Channel bandwidth 5MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 50MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz (Channel bandwidth 10MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 60MHz. RBW of the spectrum is 300kHz and VBW of the spectrum is 1MHz (Channel bandwidth 15MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 80MHz. RBW of the spectrum is 500kHz and VBW of the spectrum is 2MHz (Channel bandwidth 20MHz).
- g. Record the max trace plot into the test report.


### 3.5.4 TEST RESULTS

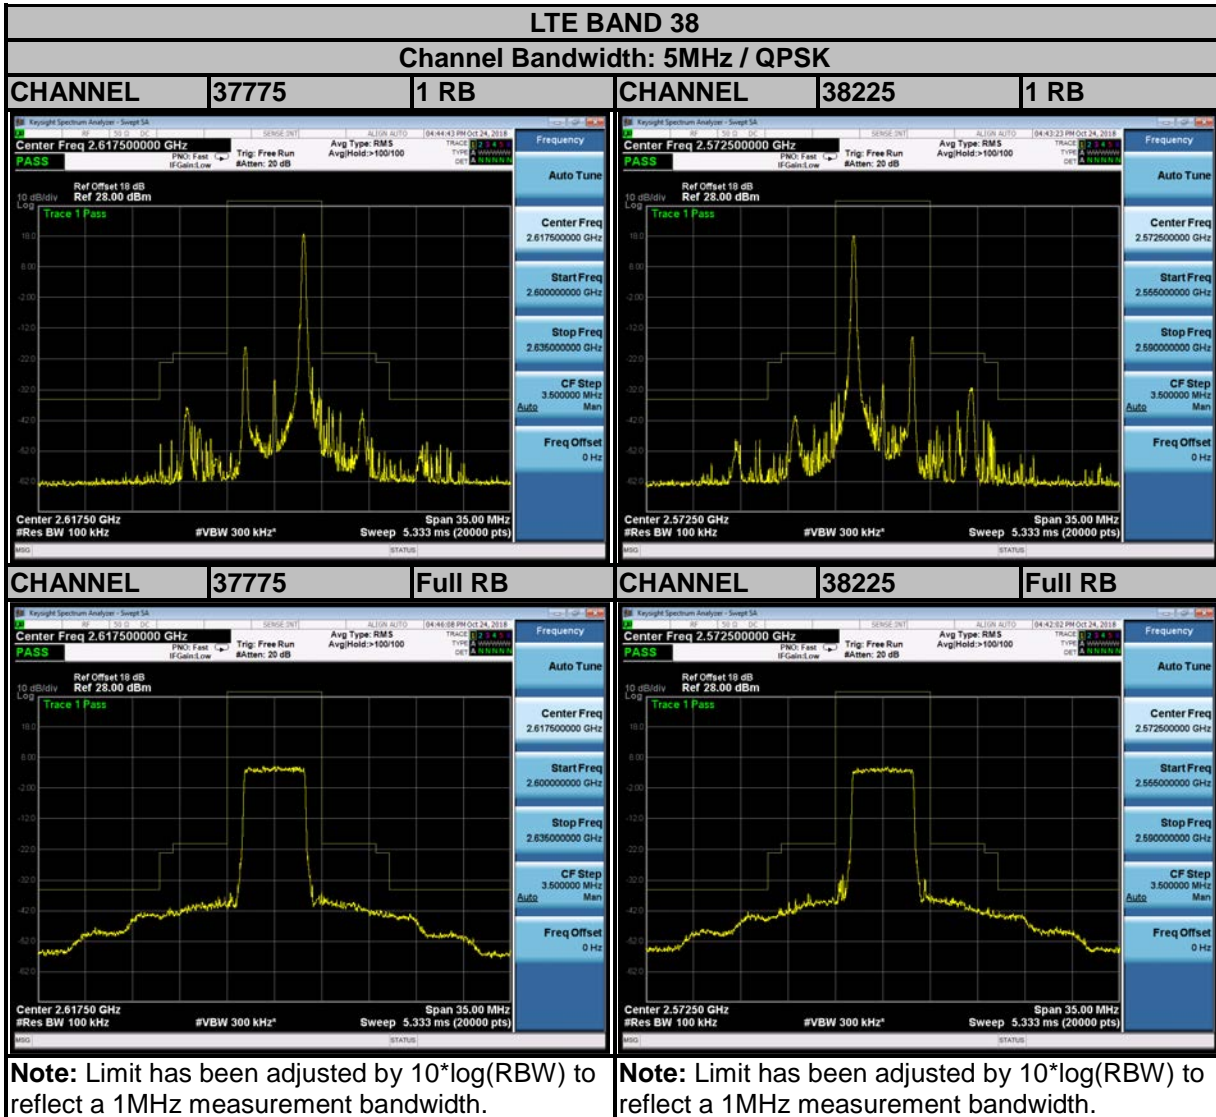


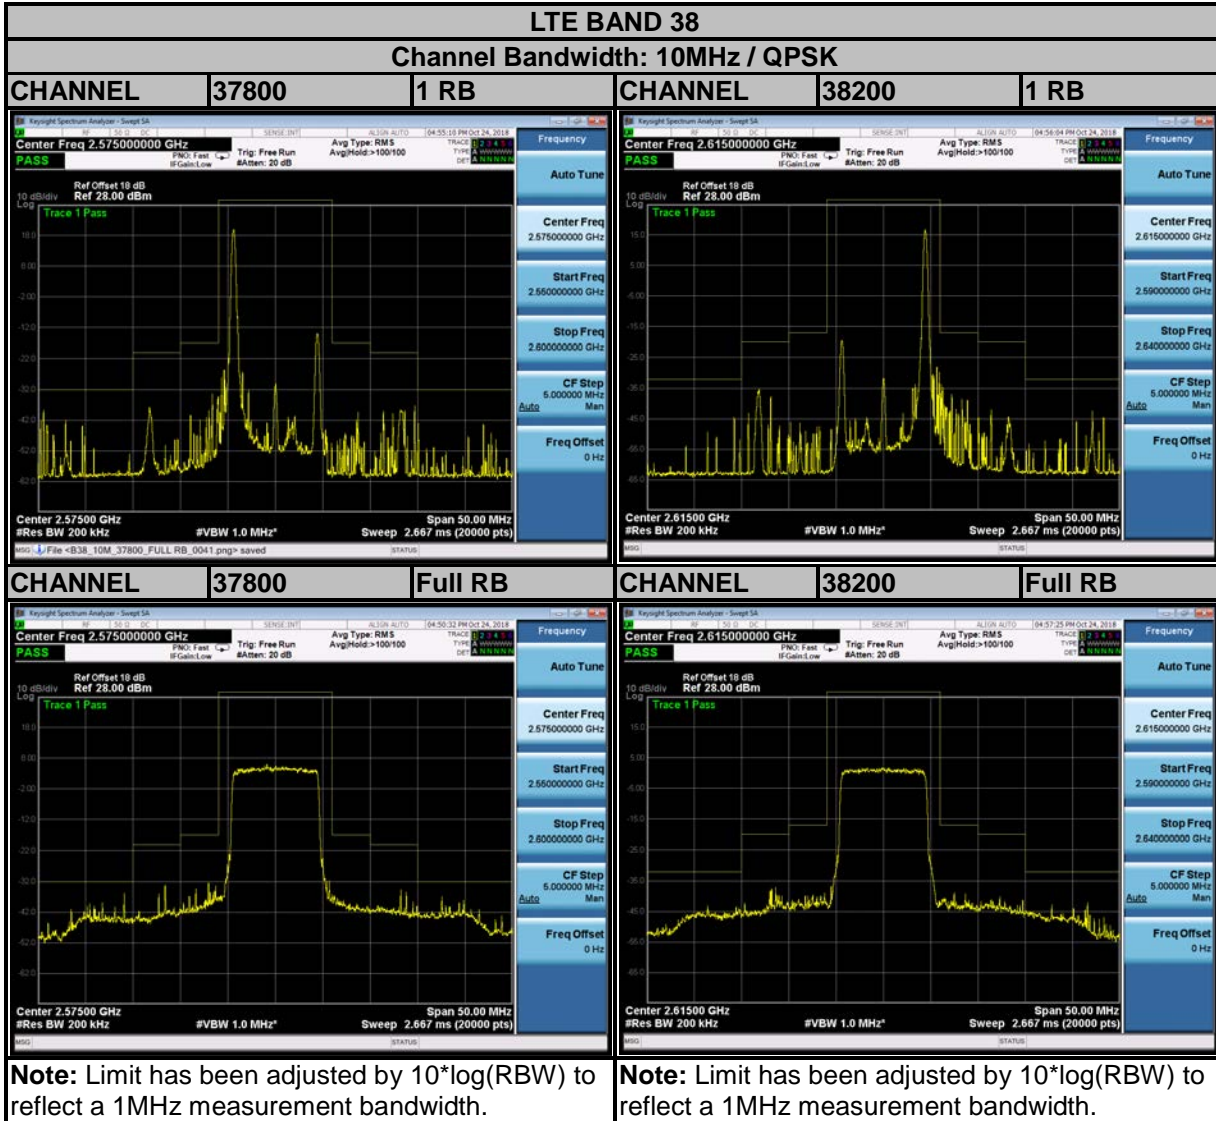


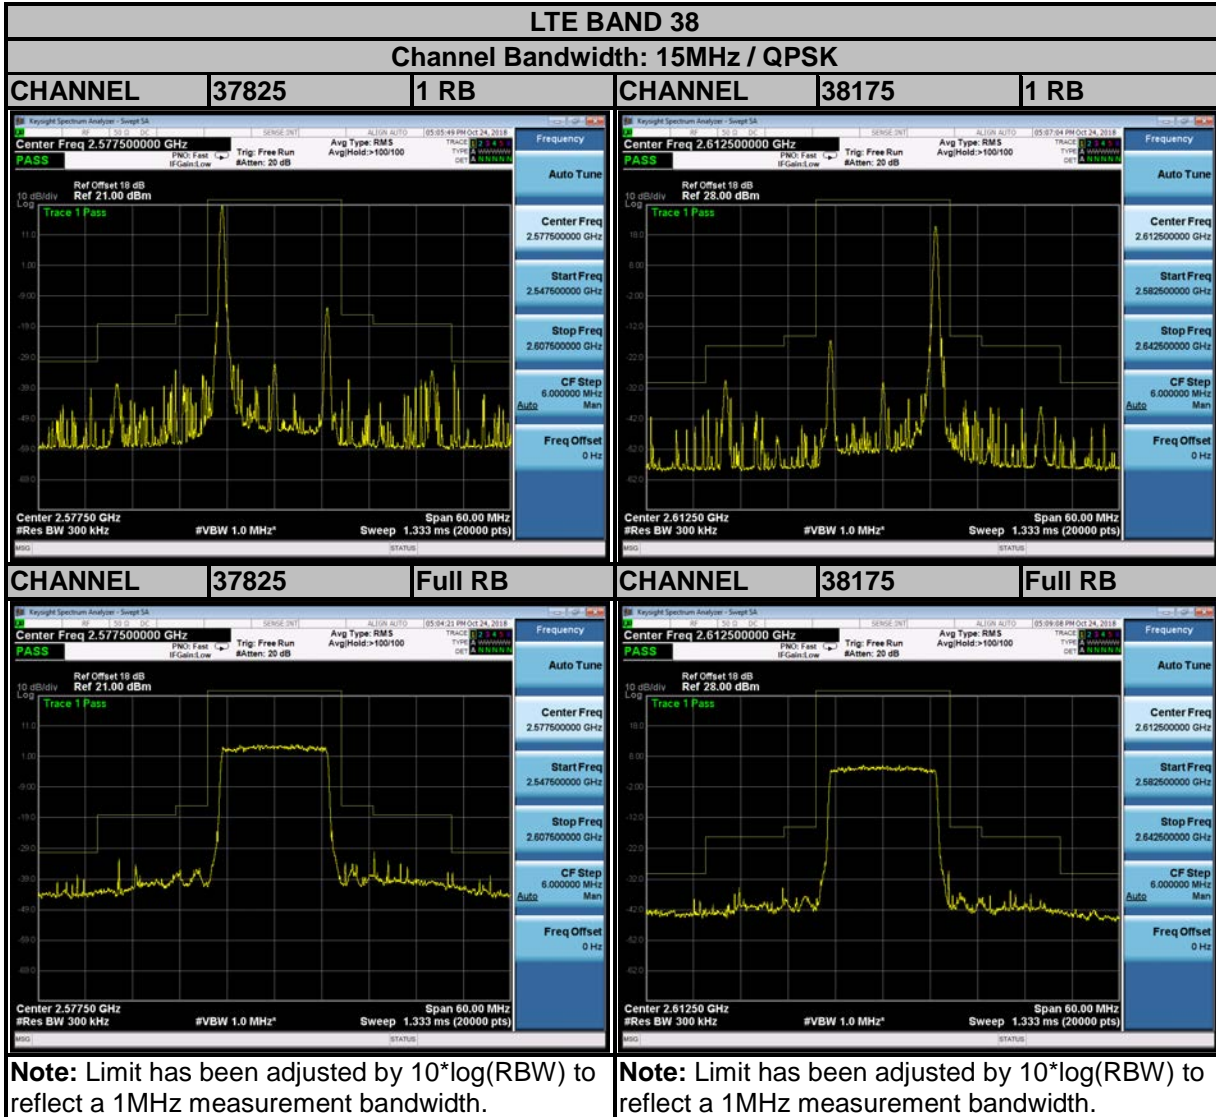





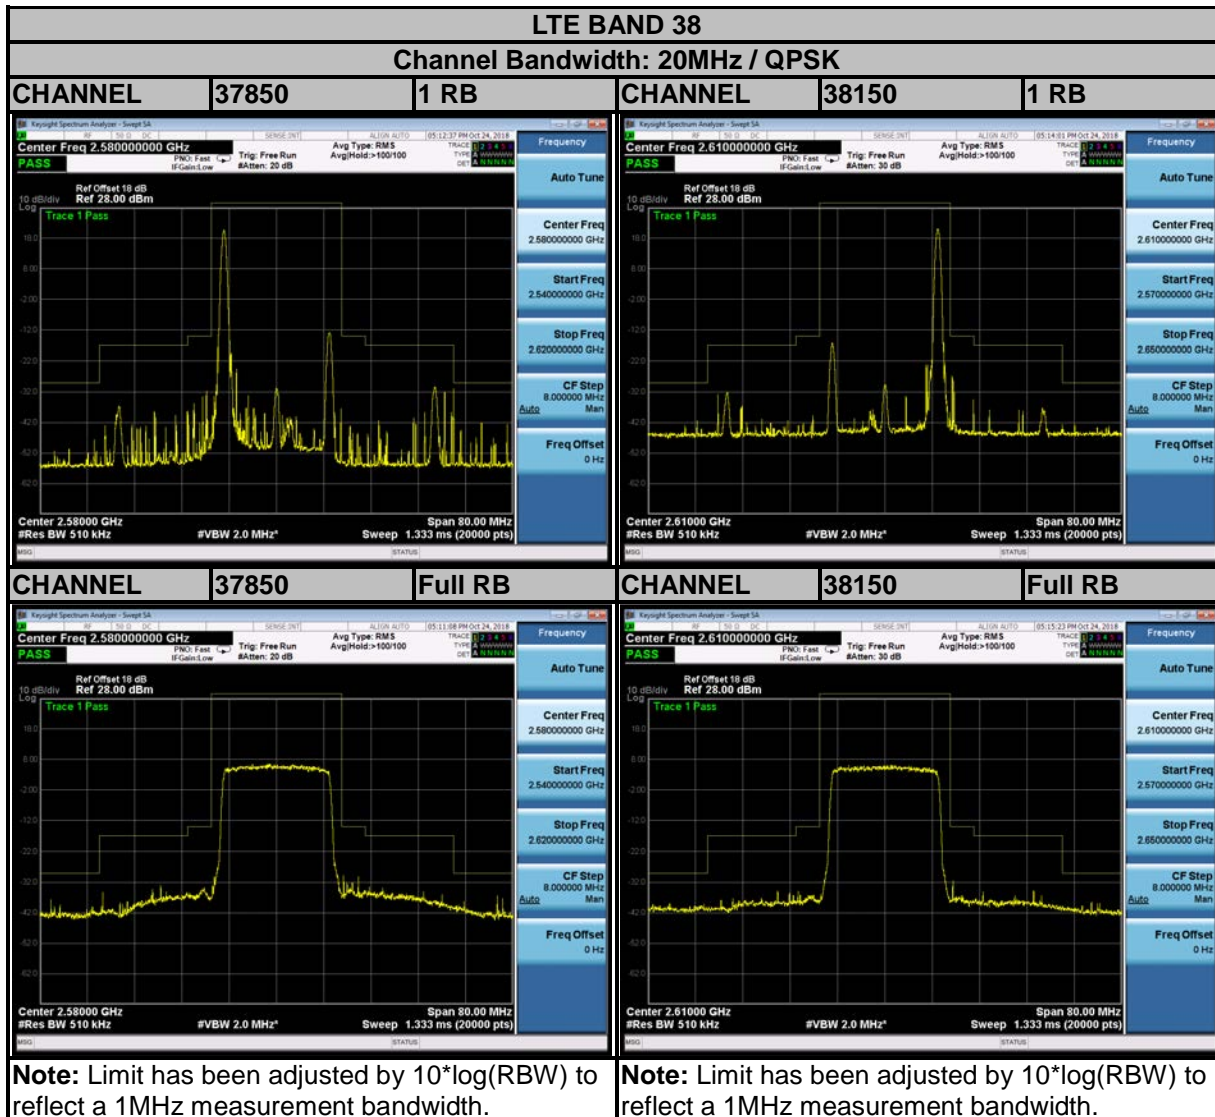

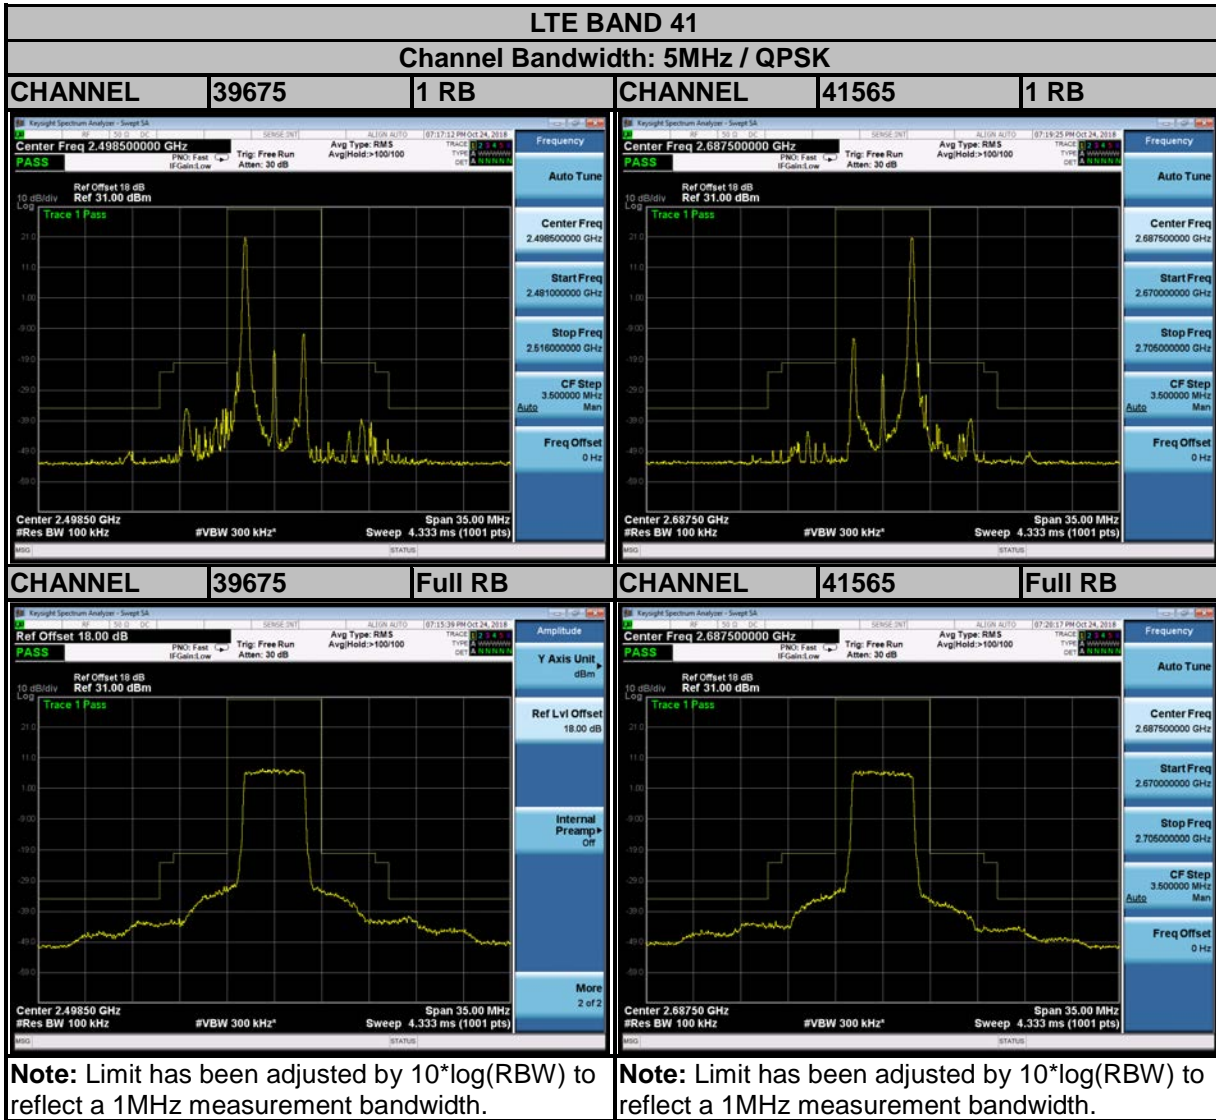

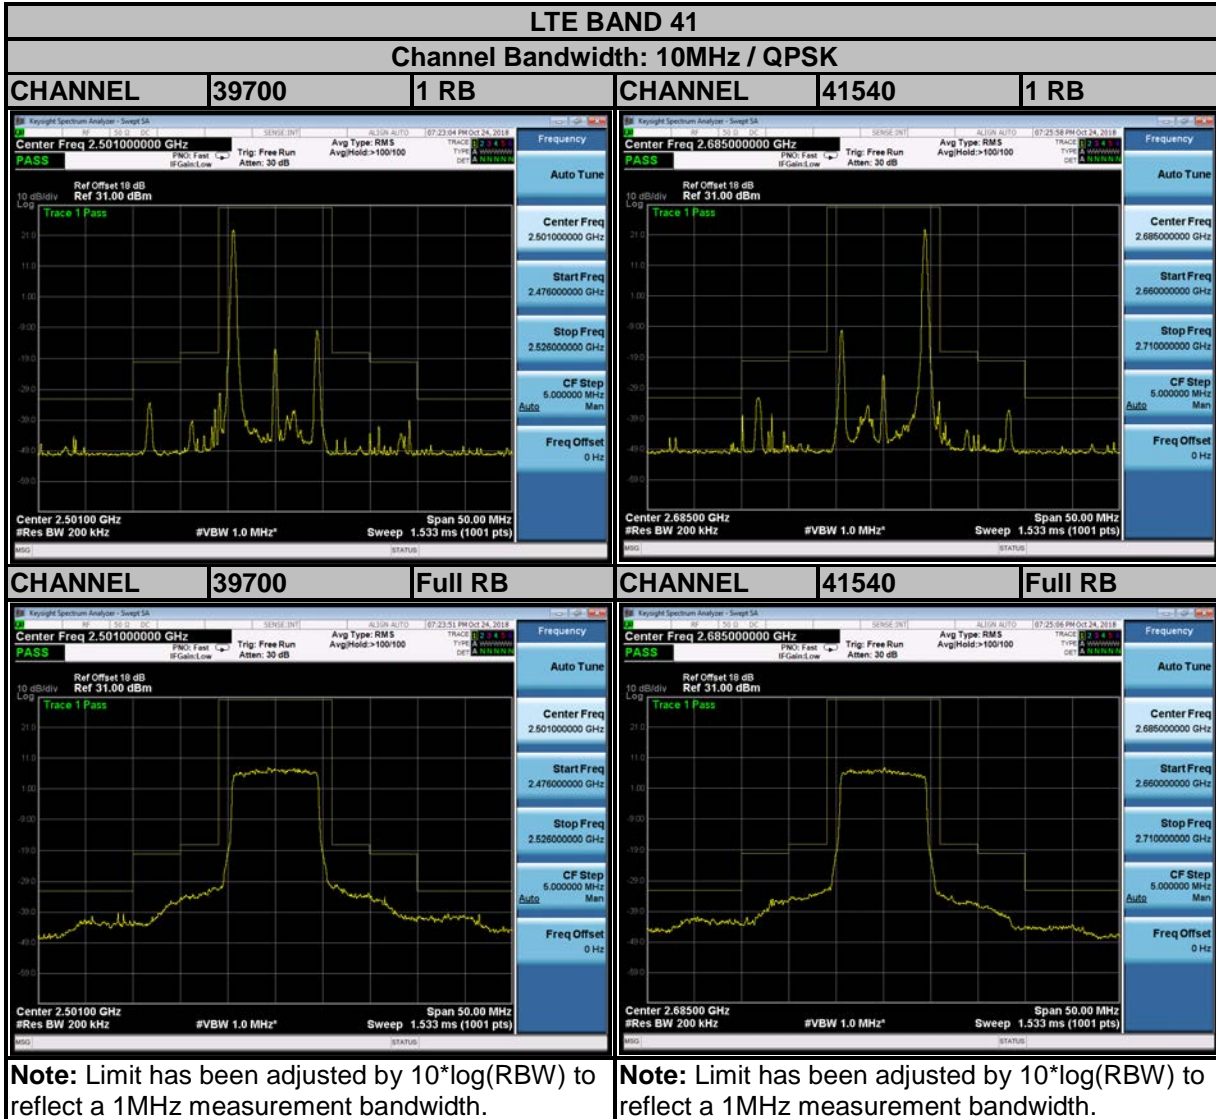

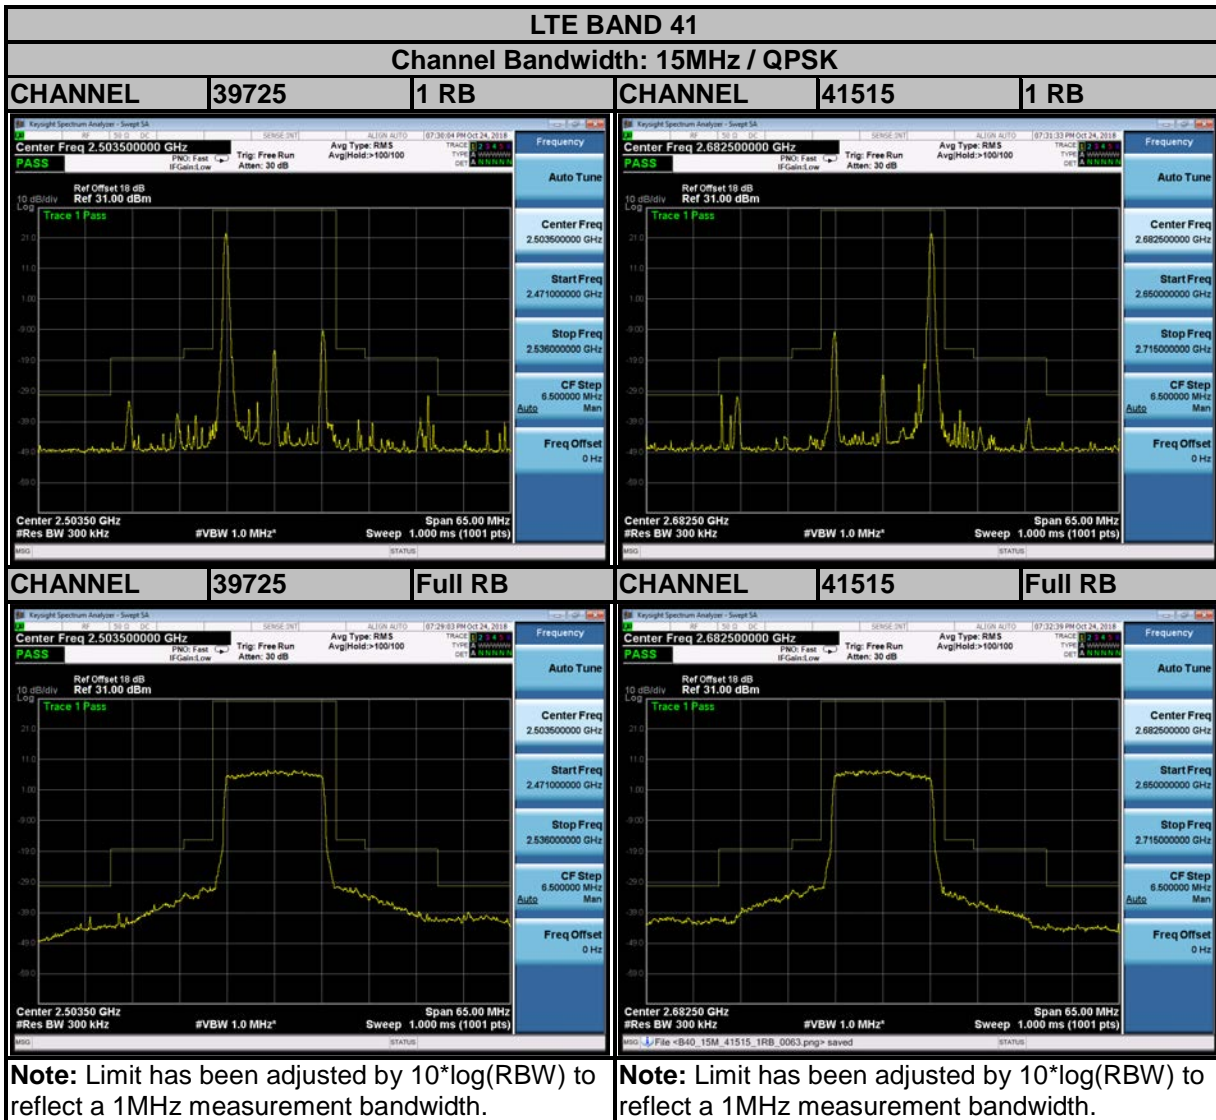

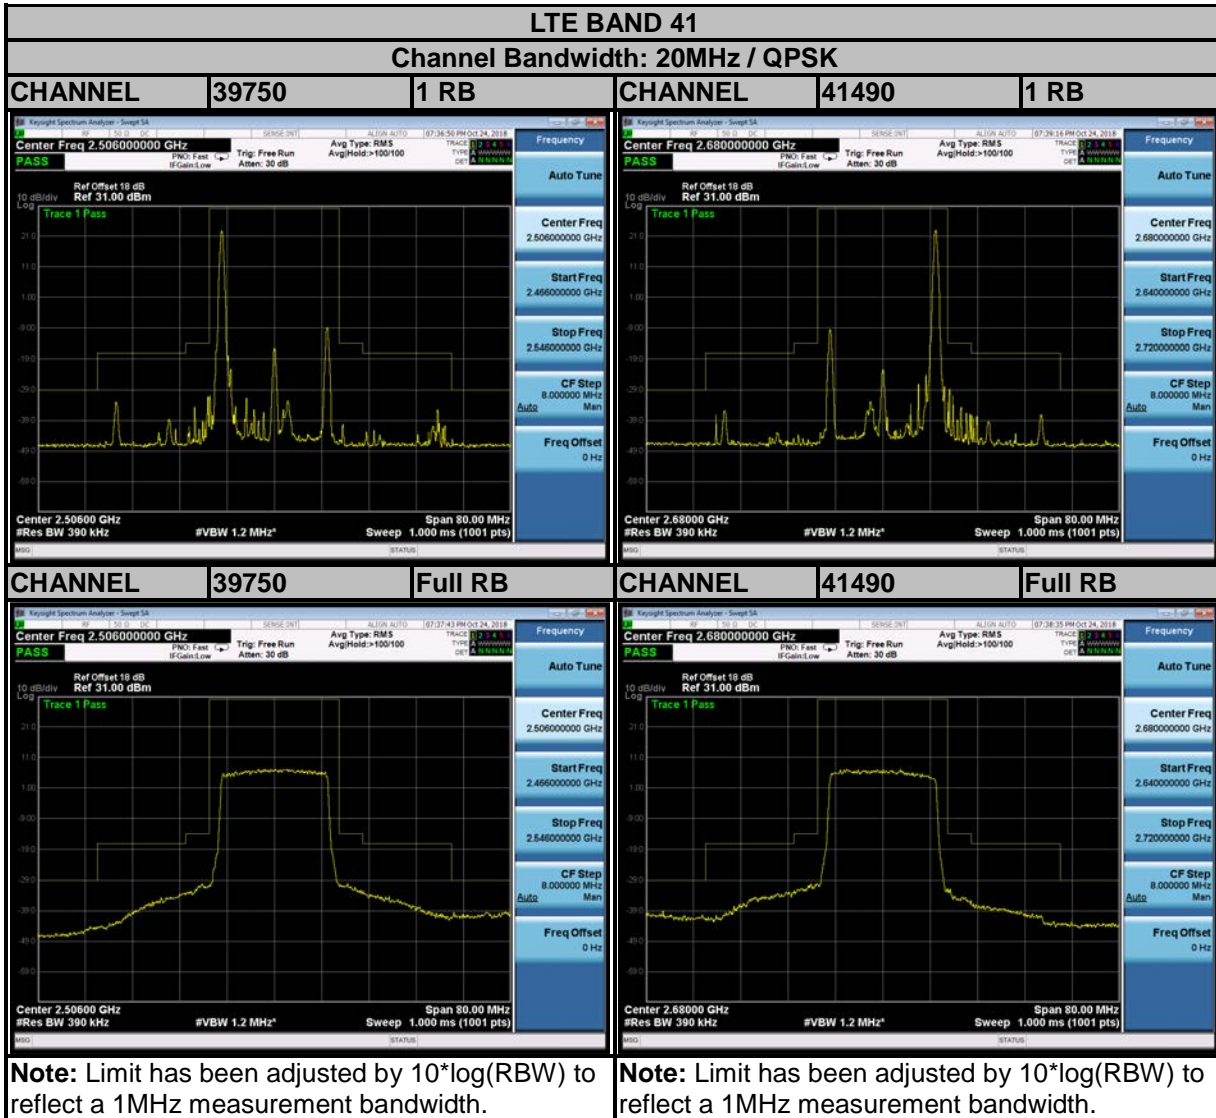

### 3.6 CONDUCTED SPURIOUS EMISSIONS


#### 3.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -25dBm.

#### 3.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz~27GHz for LTE Band38/ LTE Band 41. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

#### 3.6.3 TEST SETUP

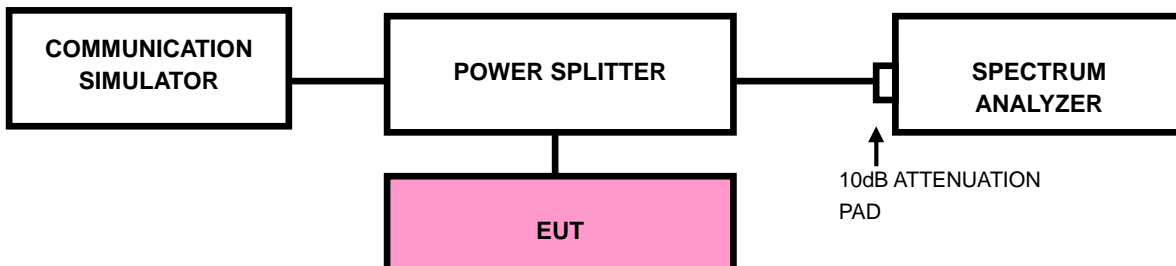



BUREAU VERITAS

Test Report No.: RF180829W002-8


### 3.6.4 TEST RESULTS

#### LTE BAND 38

#### 5MHz / QPSK


#### CHANNEL 37775

FREQUENCY RANG2E : 30MHz~26.2GHz

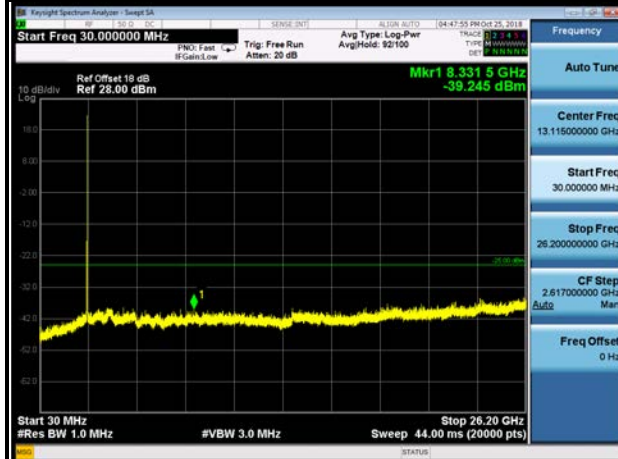



#### CHANNEL 38000


FREQUENCY RANGE : 30MHz~26.2GHz

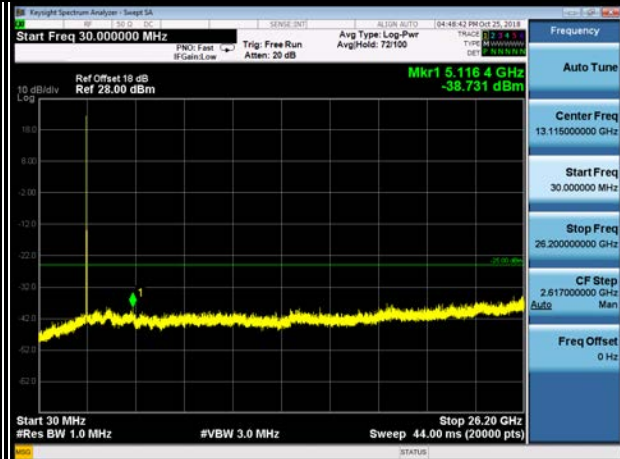


#### CHANNEL 38225


FREQUENCY RANGE : 30MHz~26.2GHz

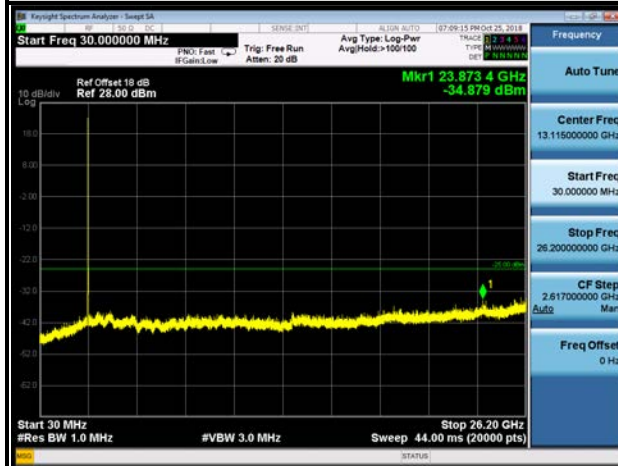

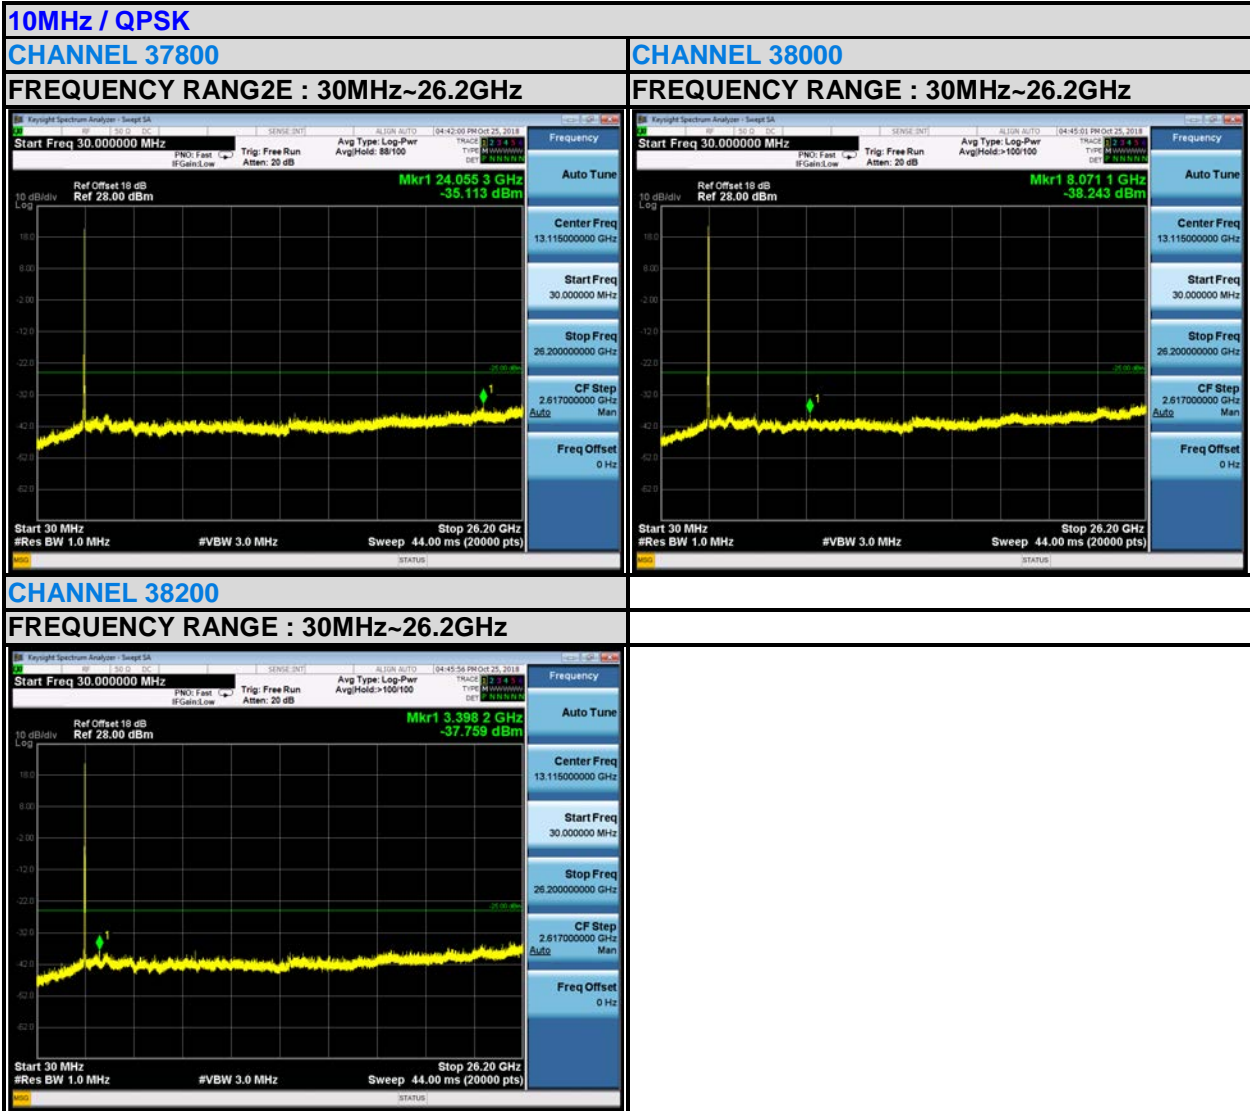



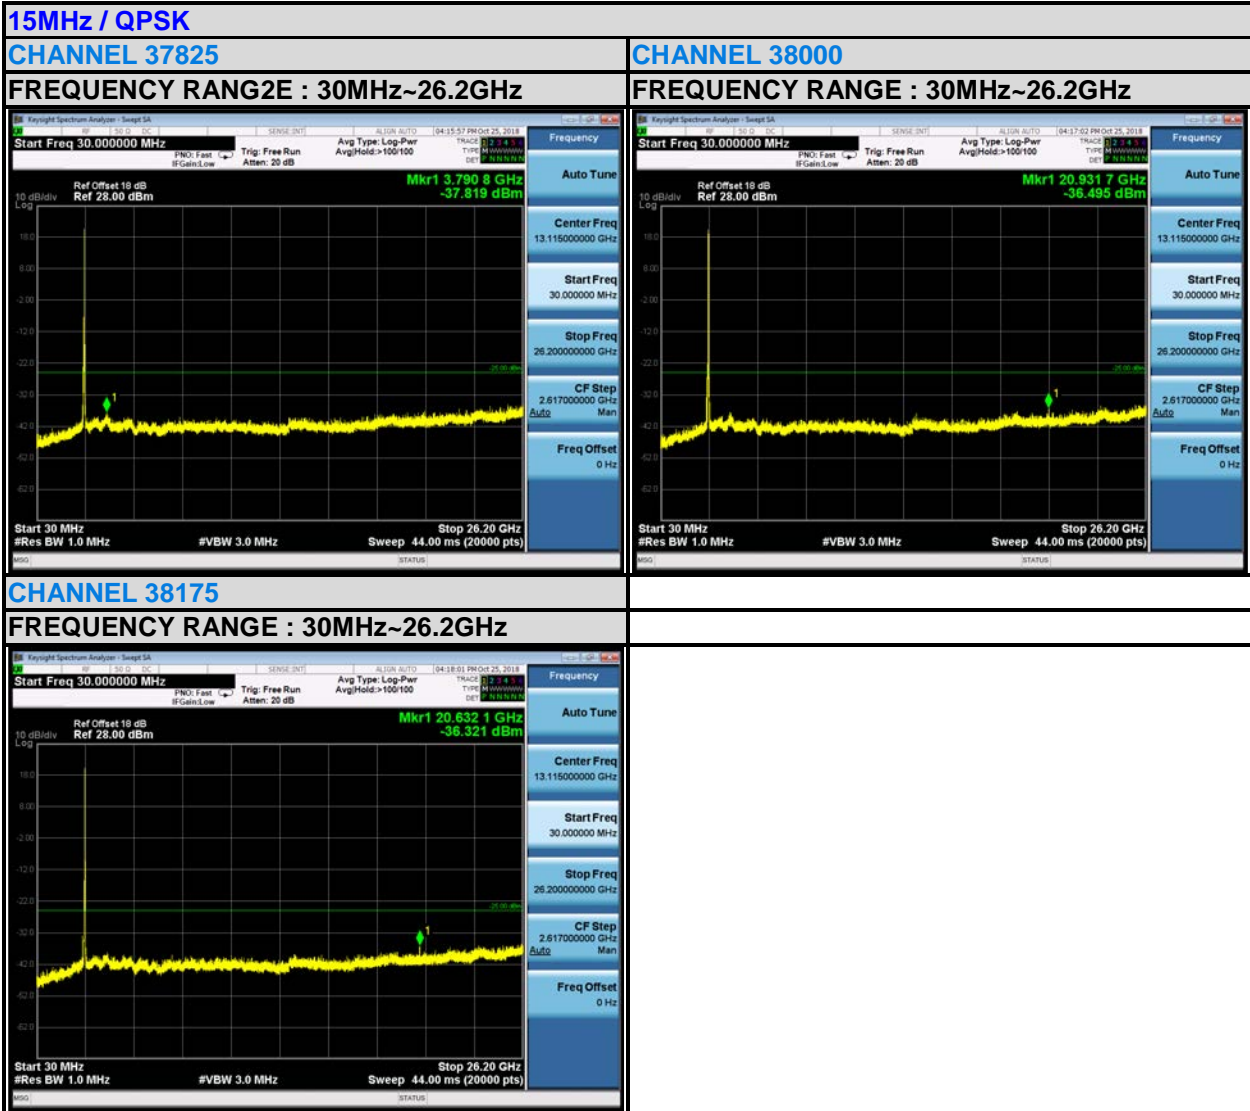

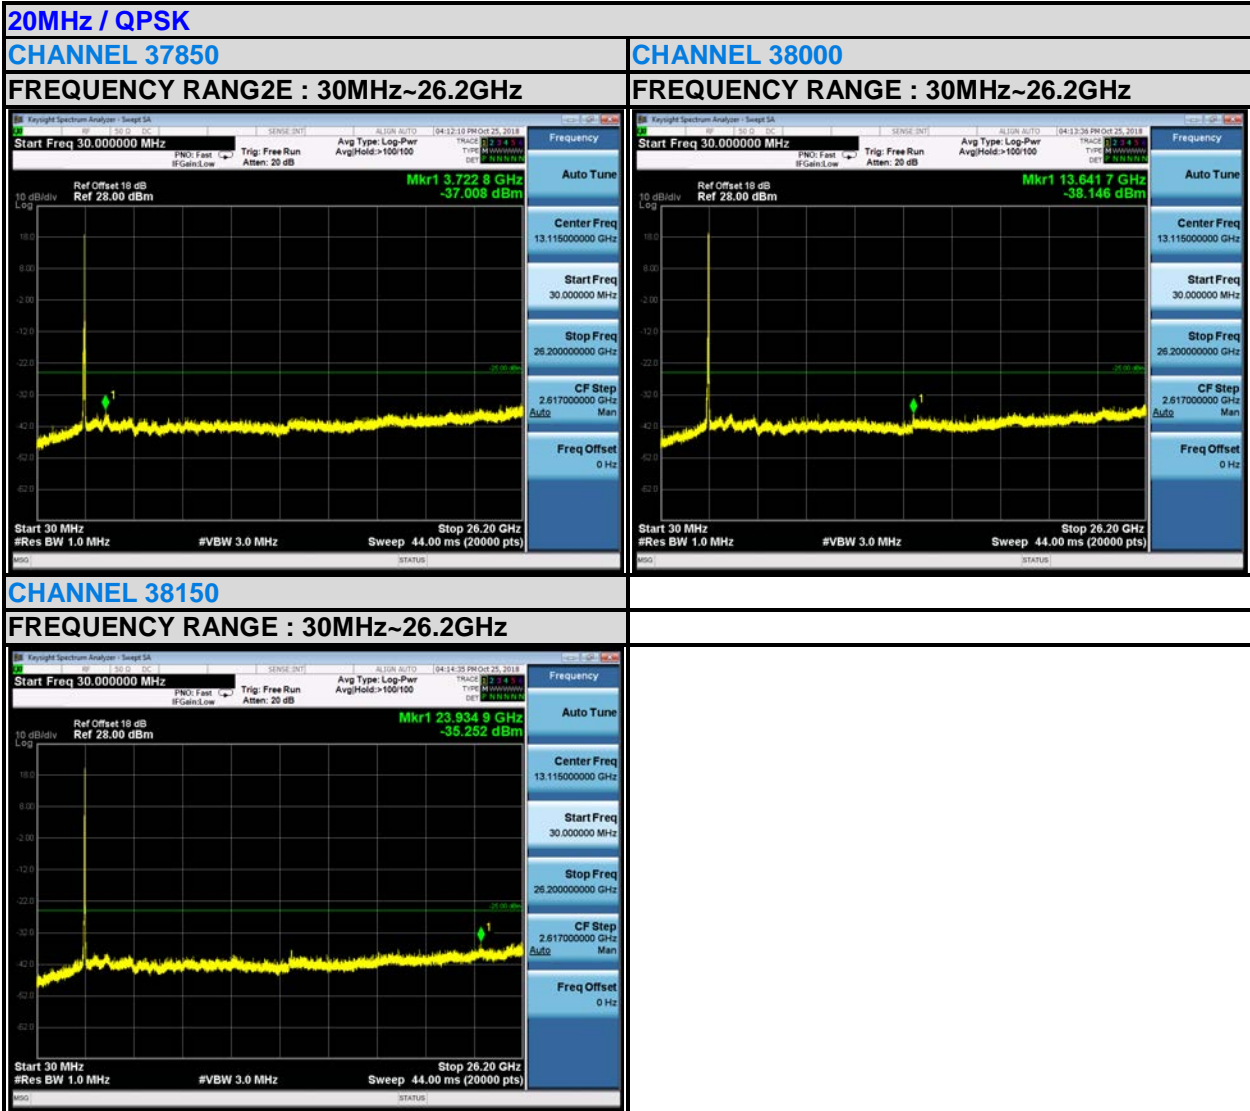




LTE BAND 41

5MHz / QPSK


CHANNEL 39675

FREQUENCY RANG2E : 30MHz~25.7GHz

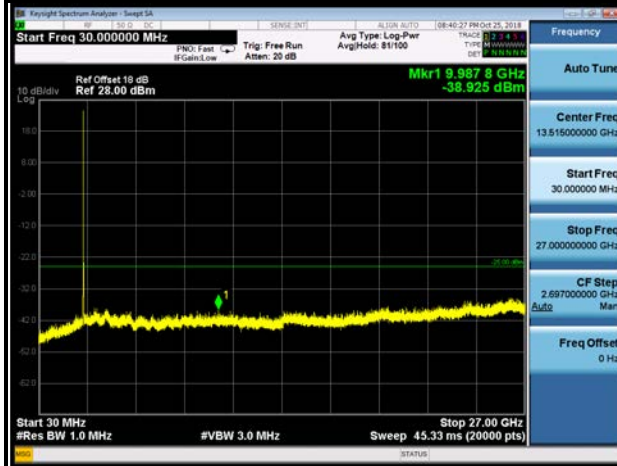



CHANNEL 40620


FREQUENCY RANGE : 30MHz~25.7GHz

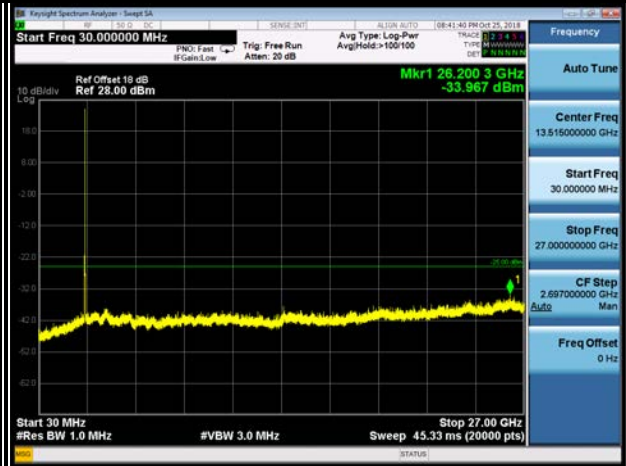



CHANNEL 41565

FREQUENCY RANGE : 30MHz~25.7GHz

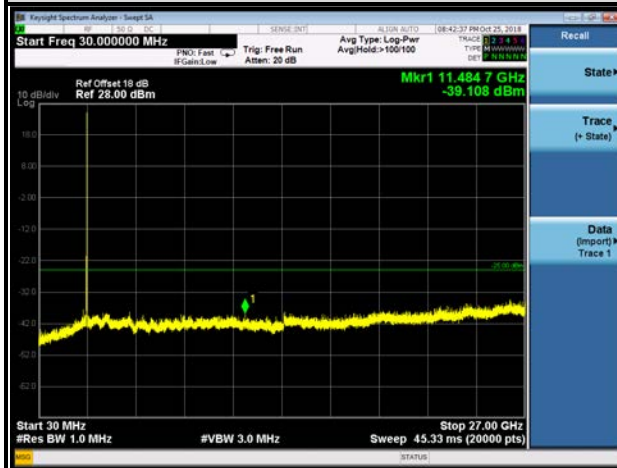

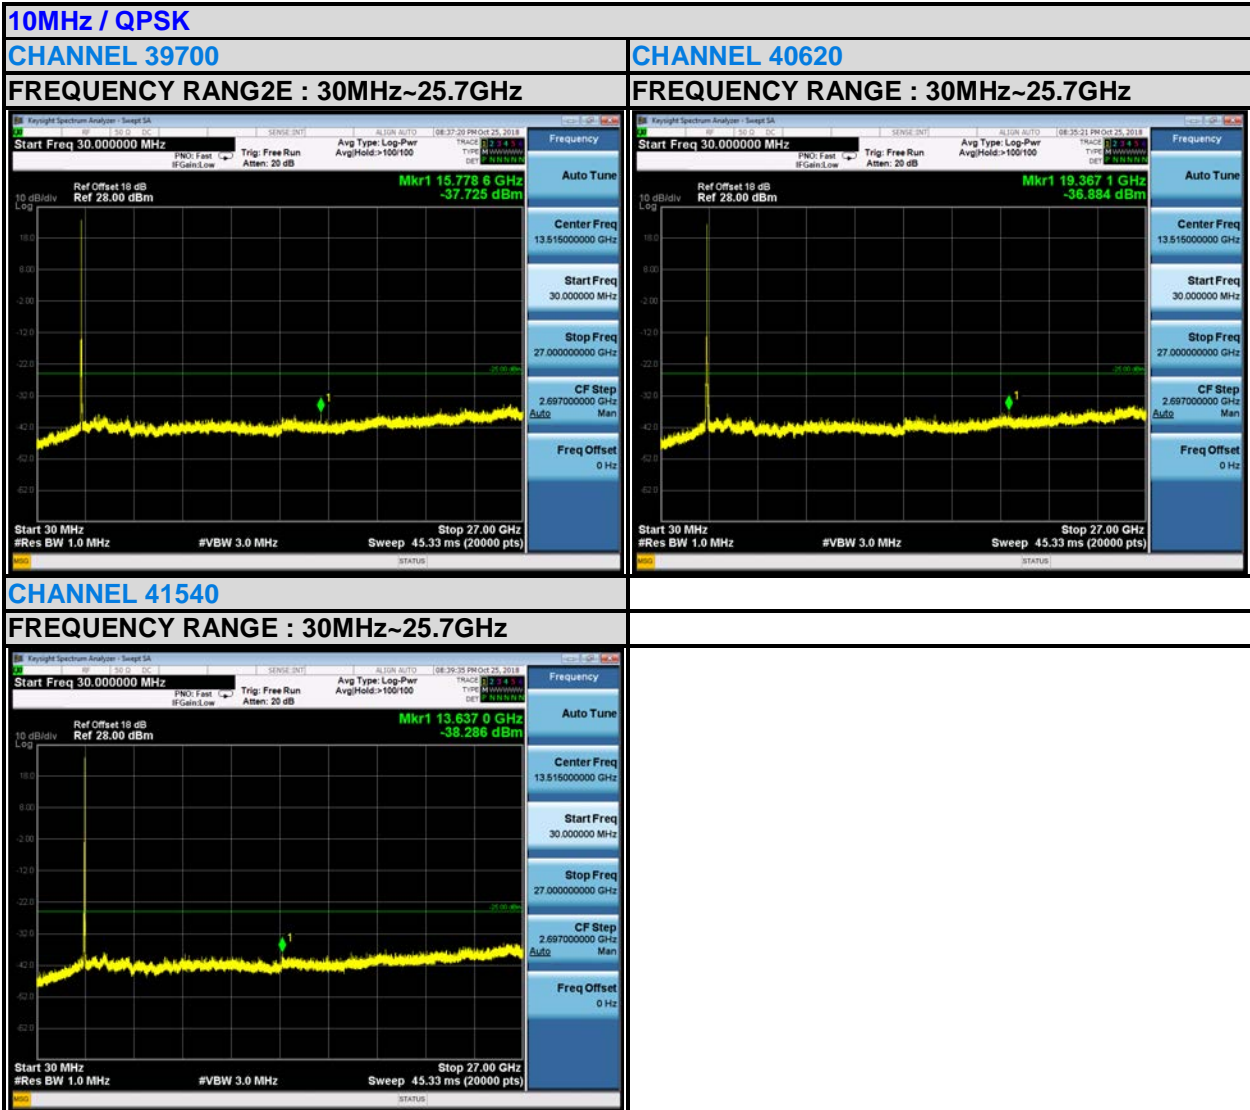

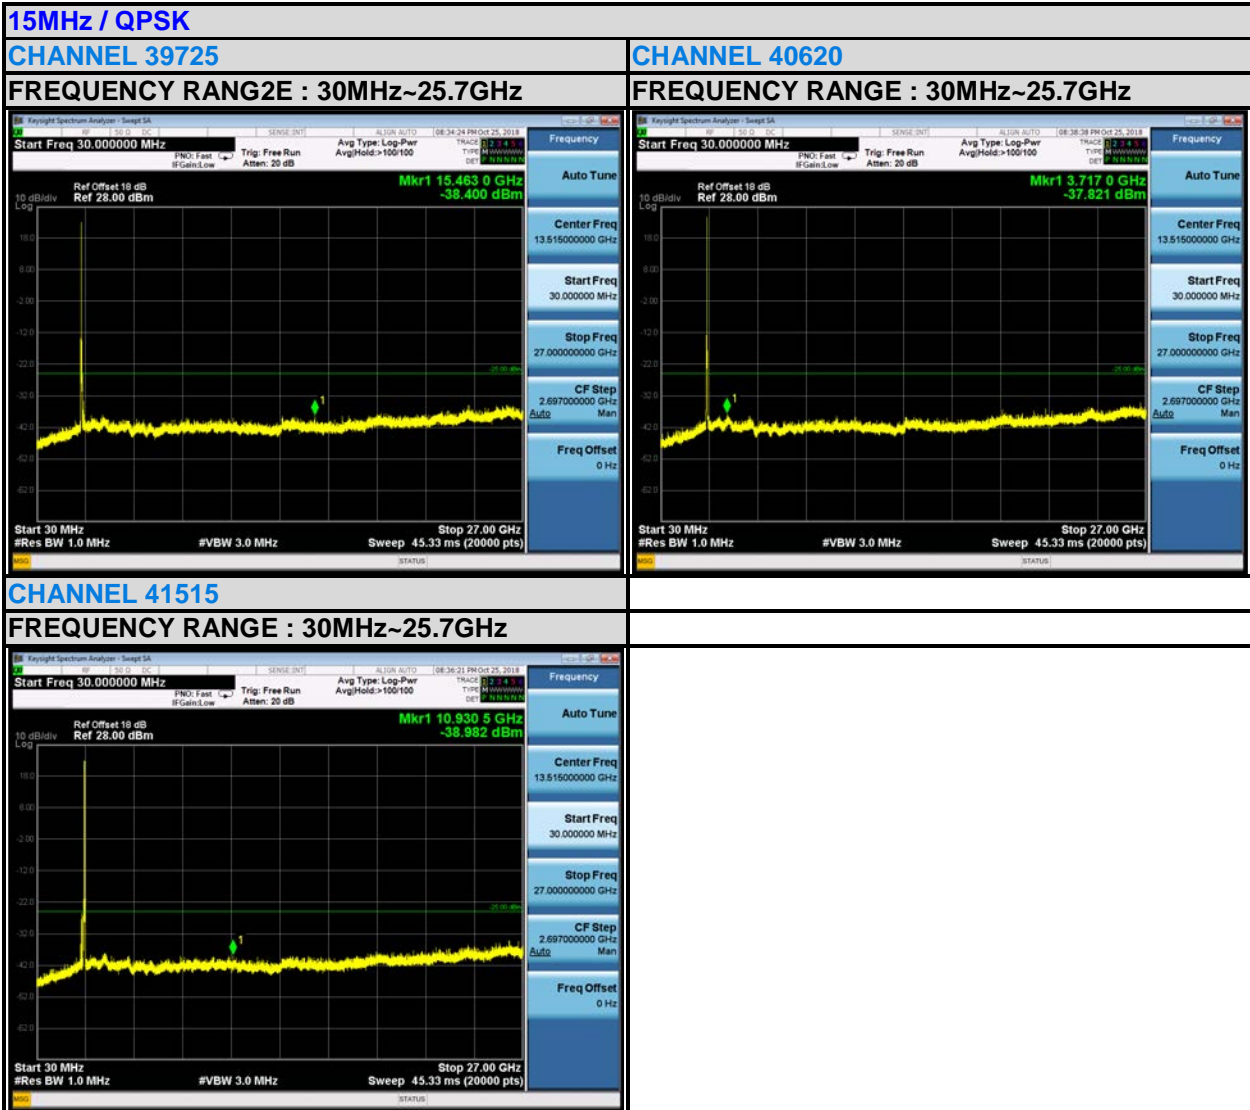

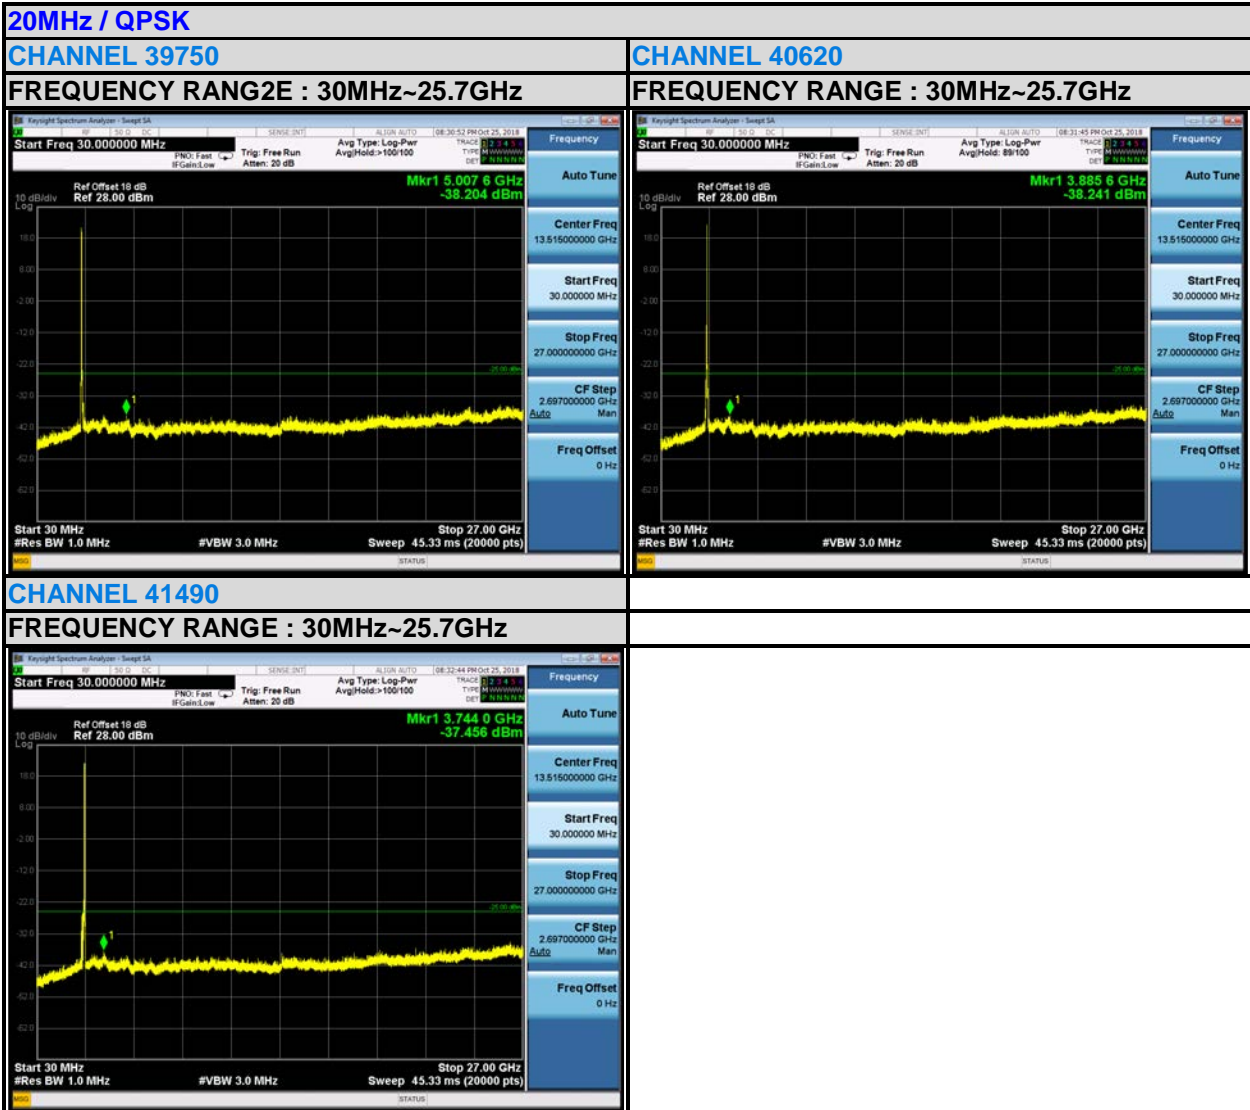

### 3.7 RADIATED EMISSION MEASUREMENT

#### 3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -25dBm.

#### 3.7.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$ .


**NOTE:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

#### 3.7.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.7.4 TEST SETUP

<Below 30MHz>

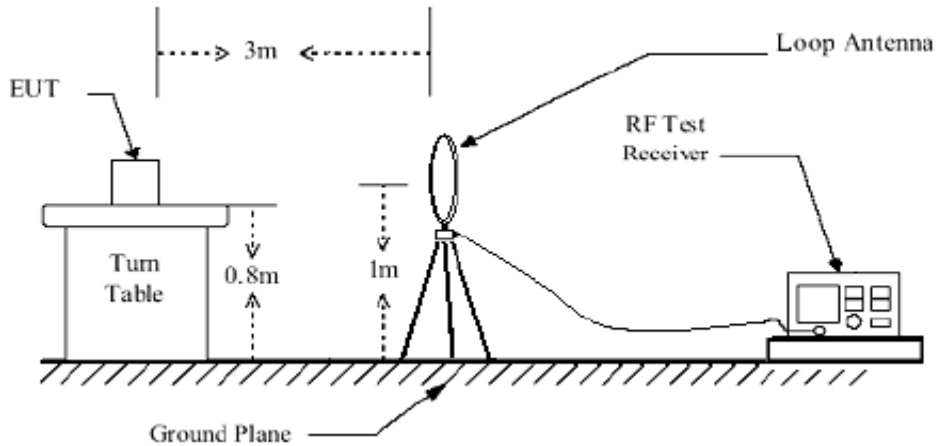


< Frequency Range 30MHz~1GHz >

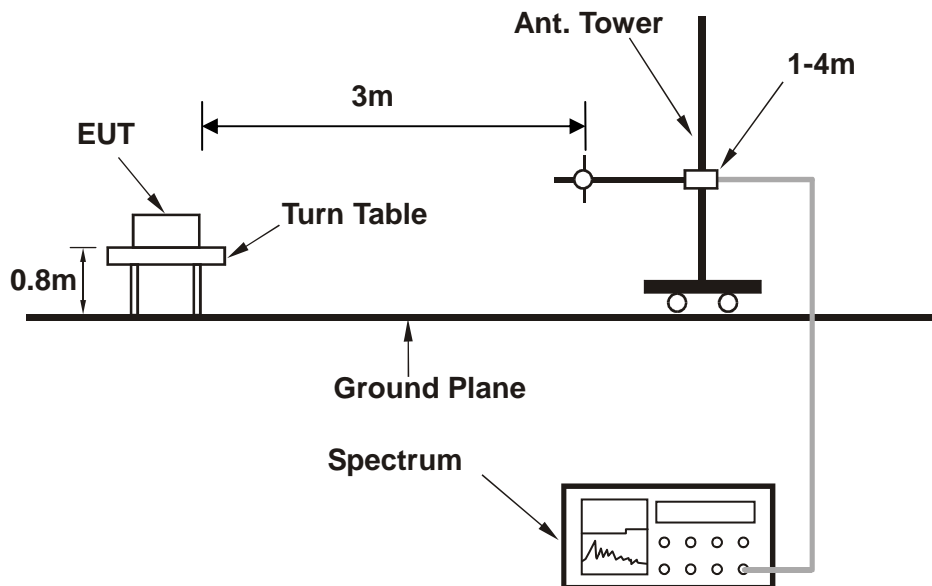



< Frequency Range above 1GHz >

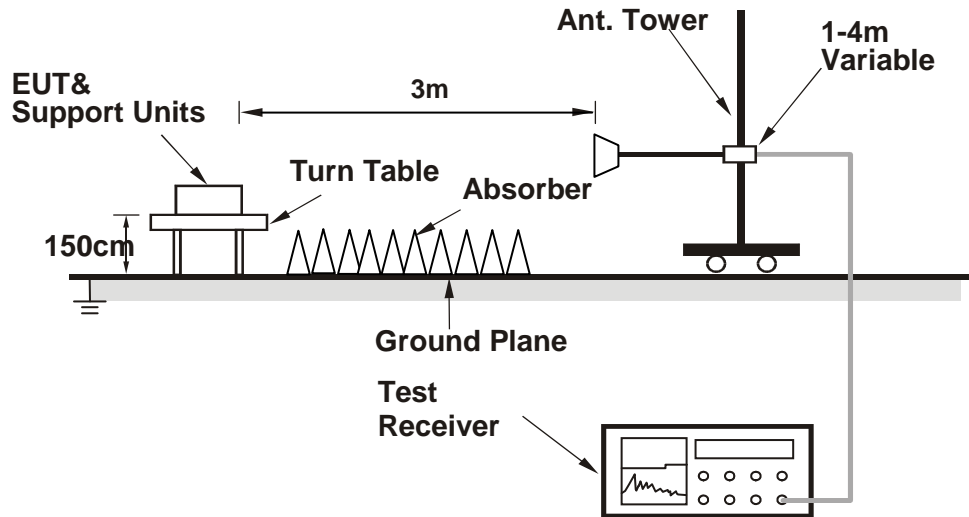

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.7.5 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA


**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**

**LTE Band 41:**

<b>MODE</b>	TX channel 40620	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	56.890	-41.51	-37.54	-25.00	-16.51	-3.97	Peak	Horizontal
2		85.460	-44.02	-35.61	-25.00	-19.02	-8.41	Peak	Horizontal
3		175.590	-52.50	-34.58	-25.00	-27.50	-17.92	Peak	Horizontal
4		255.160	-62.27	-46.25	-25.00	-37.27	-16.02	Peak	Horizontal
5		316.570	-58.54	-45.29	-25.00	-33.54	-13.25	Peak	Horizontal
6		421.510	-60.09	-49.65	-25.00	-35.09	-10.44	Peak	Horizontal

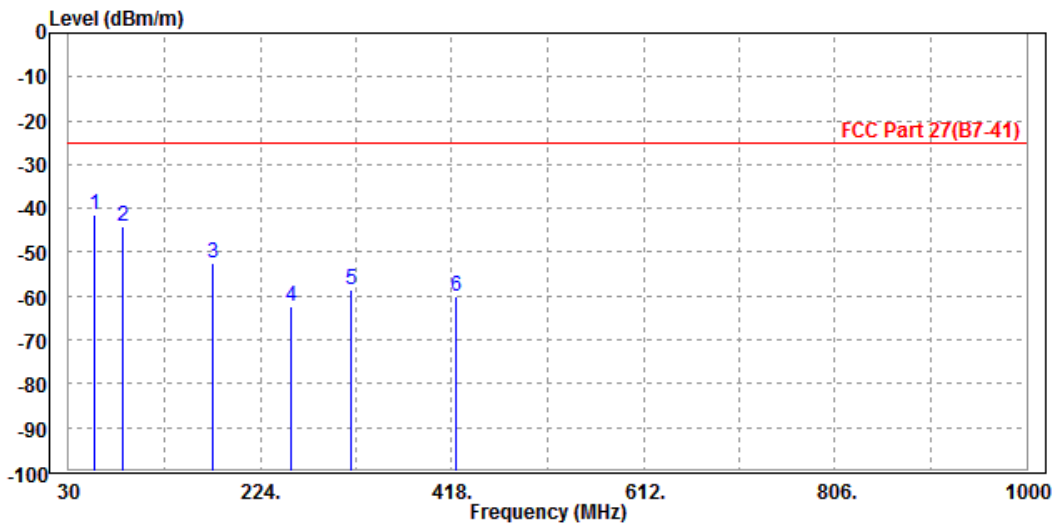




**Test Report No.: RF180829W002-8**

<b>MODE</b>	TX channel 40620	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	54.210	-43.16	-35.22	-25.00	-18.16	-7.94	Peak	Vertical
2	102.310	-56.36	-45.38	-25.00	-31.36	-10.98	Peak	Vertical
3	145.620	-57.02	-41.05	-25.00	-32.02	-15.97	Peak	Vertical
4	214.230	-56.57	-45.68	-25.00	-31.57	-10.89	Peak	Vertical
5	341.120	-54.00	-42.85	-25.00	-29.00	-11.15	Peak	Vertical
6	426.560	-58.55	-48.59	-25.00	-33.55	-9.96	Peak	Vertical

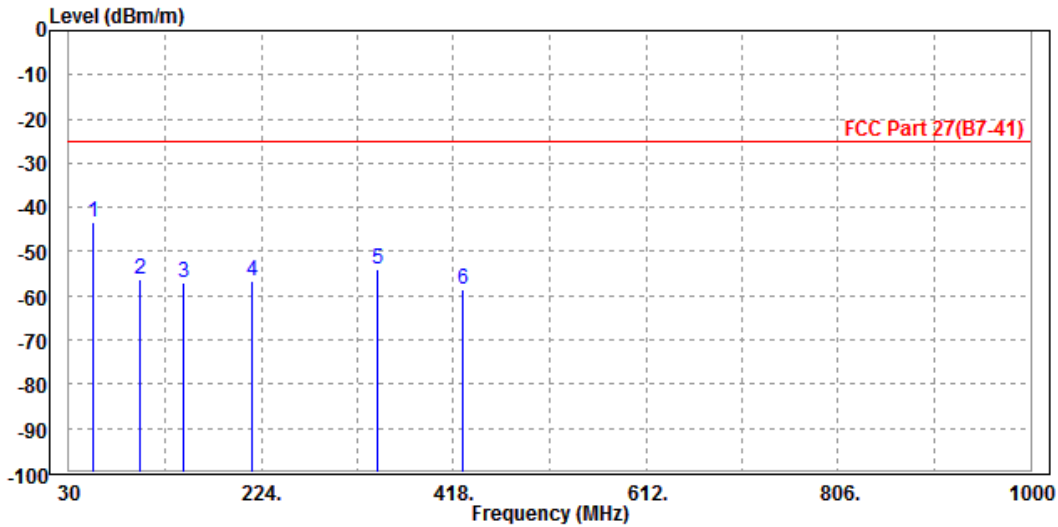



BUREAU VERITAS

Test Report No.: RF180829W002-8

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE Band 38

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.96	-52.55	-13.00	-30.96	8.59	Peak	Horizontal
2 PP	7785.000	-39.72	-53.46	-13.00	-26.72	13.74	Peak	Horizontal

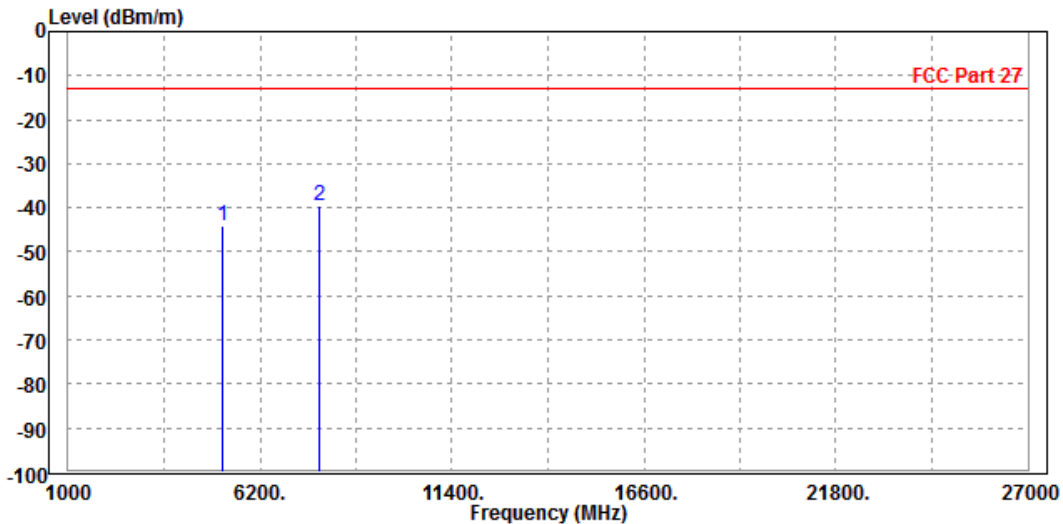




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-44.48	-52.46	-13.00	-31.48	7.98	Peak	Vertical
2 PP	7785.000	-40.70	-54.00	-13.00	-27.70	13.30	Peak	Vertical

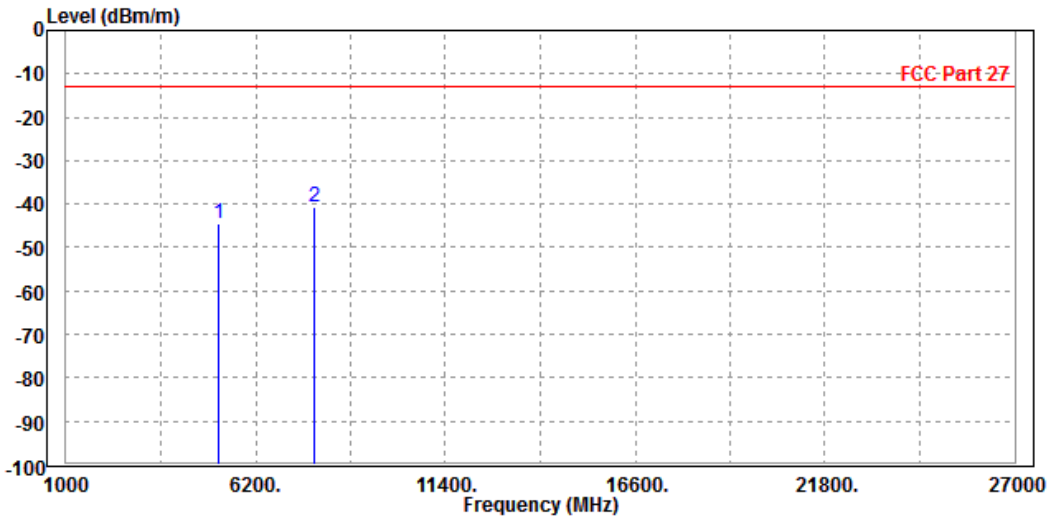




Test Report No.: RF180829W002-8

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 37800

MODE	TX channel 37800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5160.000	-41.15	-49.71	-13.00	-28.15	8.56	Peak	Horizontal
2 PP	7725.000	-38.71	-52.36	-13.00	-25.71	13.65	Peak	Horizontal

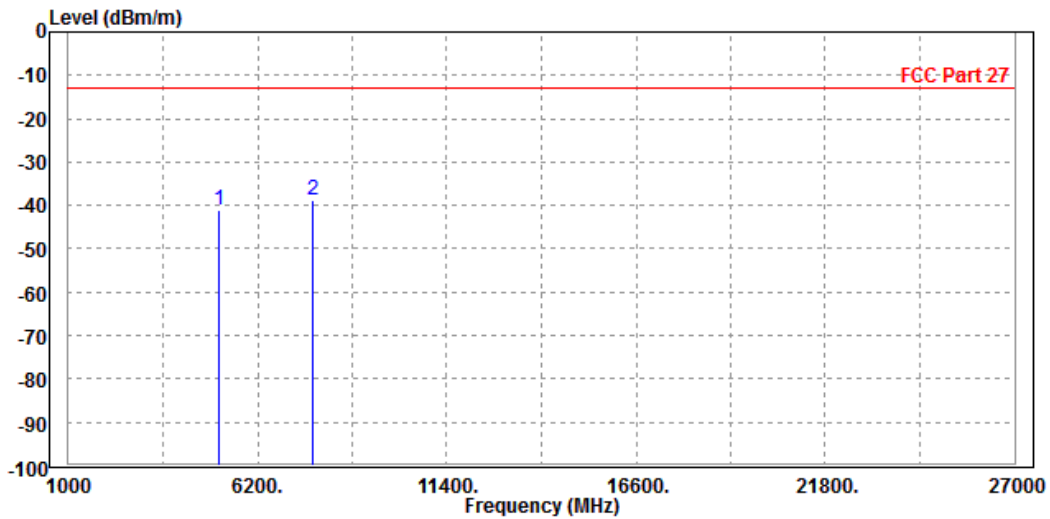




Test Report No.: RF180829W002-8

MODE	TX channel 37800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5160.000	-42.66	-50.64	-13.00	-29.66	7.98	Peak	Vertical
2	PP 7725.000	-39.05	-52.25	-13.00	-26.05	13.20	Peak	Vertical

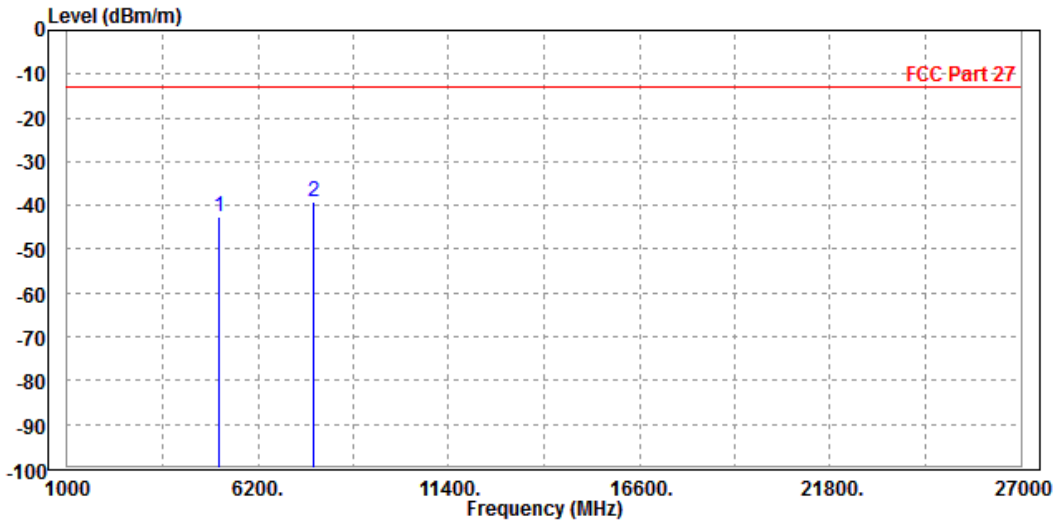




Test Report No.: RF180829W002-8

CH 38000

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-44.08	-52.67	-13.00	-31.08	8.59	Peak	Horizontal
2	PP 7785.000	-39.75	-53.49	-13.00	-26.75	13.74	Peak	Horizontal

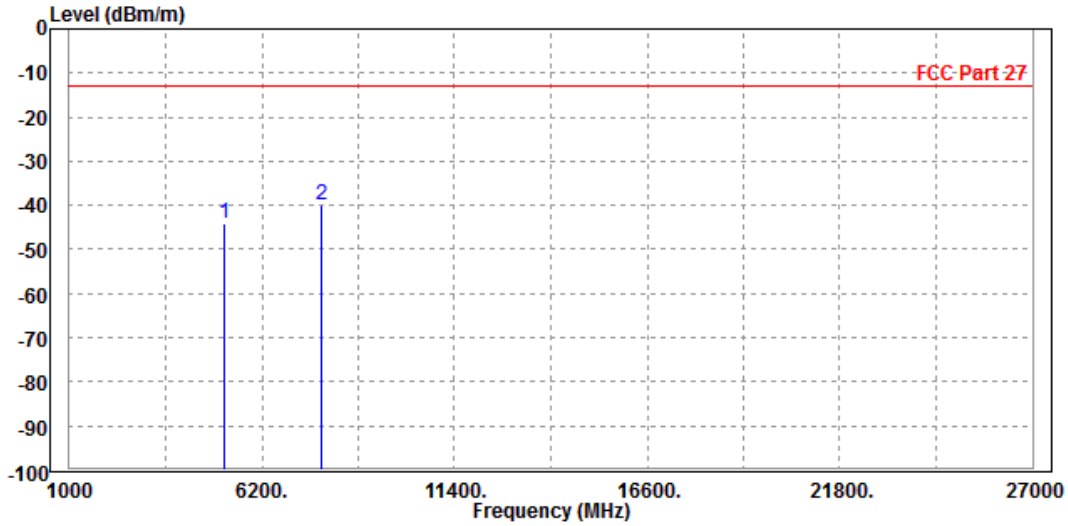






Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-45.28	-53.26	-13.00	-32.28	7.98	Peak	Vertical
2	PP 7785.000	-40.31	-53.61	-13.00	-27.31	13.30	Peak	Vertical

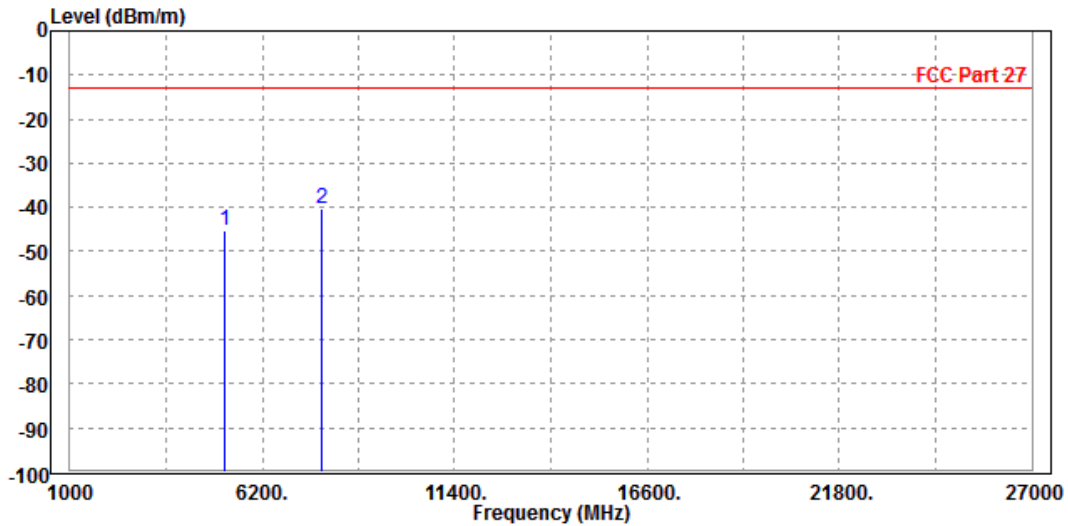




Test Report No.: RF180829W002-8

CH 38200

MODE	TX channel 38200	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5238.000	-39.92	-48.57	-13.00	-26.92	8.65	Peak	Horizontal
2 PP	7845.000	-37.34	-51.16	-13.00	-24.34	13.82	Peak	Horizontal

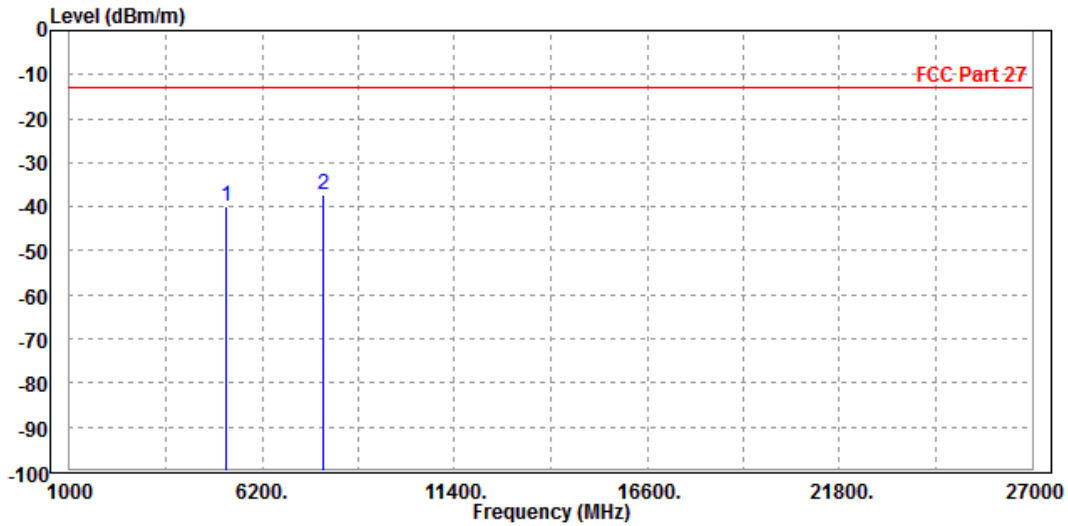




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 38200	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5238.000	-44.73	-52.71	-13.00	-31.73	7.98	Peak	Vertical
2	PP 7845.000	-40.81	-54.22	-13.00	-27.81	13.41	Peak	Vertical

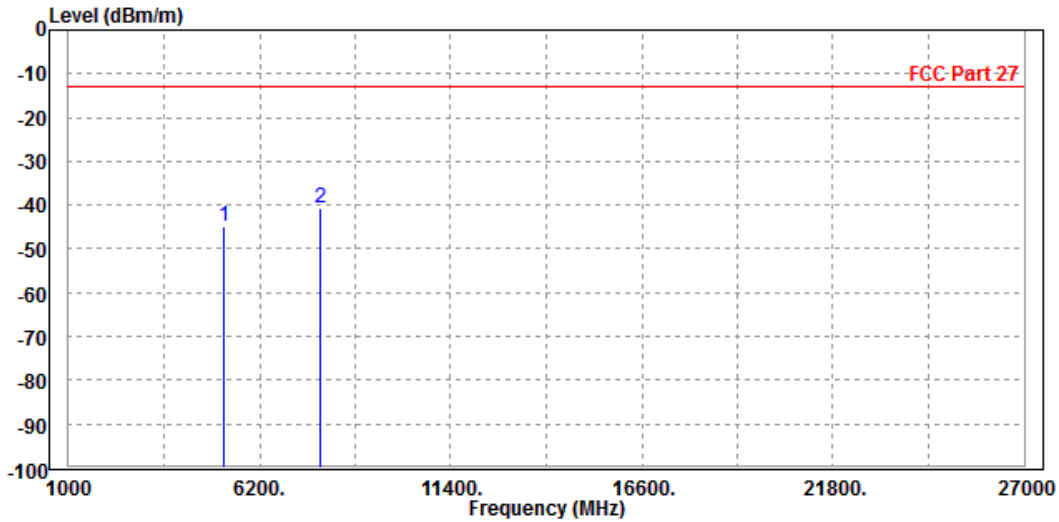




Test Report No.: RF180829W002-8

**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-42.82	-51.41	-13.00	-29.82	8.59	Peak	Horizontal
2	PP 7785.000	-41.05	-54.79	-13.00	-28.05	13.74	Peak	Horizontal

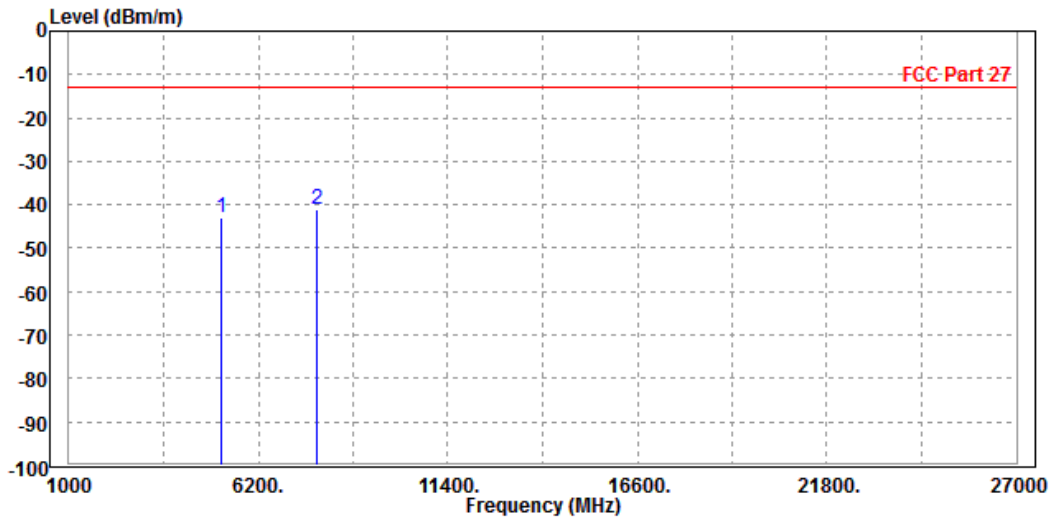




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.23	-51.21	-13.00	-30.23	7.98	Peak	Vertical
2 PP	7785.000	-39.15	-52.45	-13.00	-26.15	13.30	Peak	Vertical

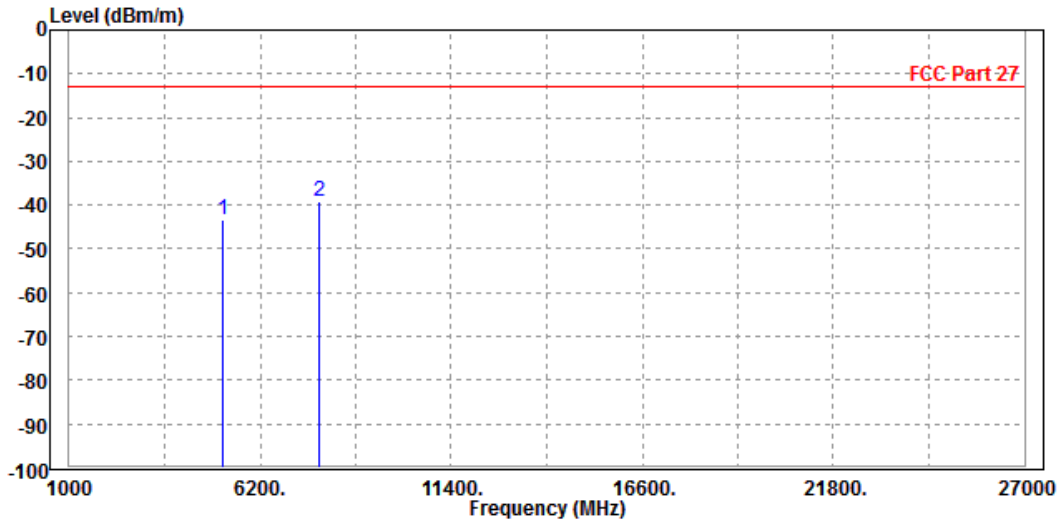




Test Report No.: RF180829W002-8

**CHANNEL BANDWIDTH: 20MHz / QPSK**

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.58	-52.17	-13.00	-30.58	8.59	Peak	Horizontal
2	PP 7785.000	-39.52	-53.26	-13.00	-26.52	13.74	Peak	Horizontal

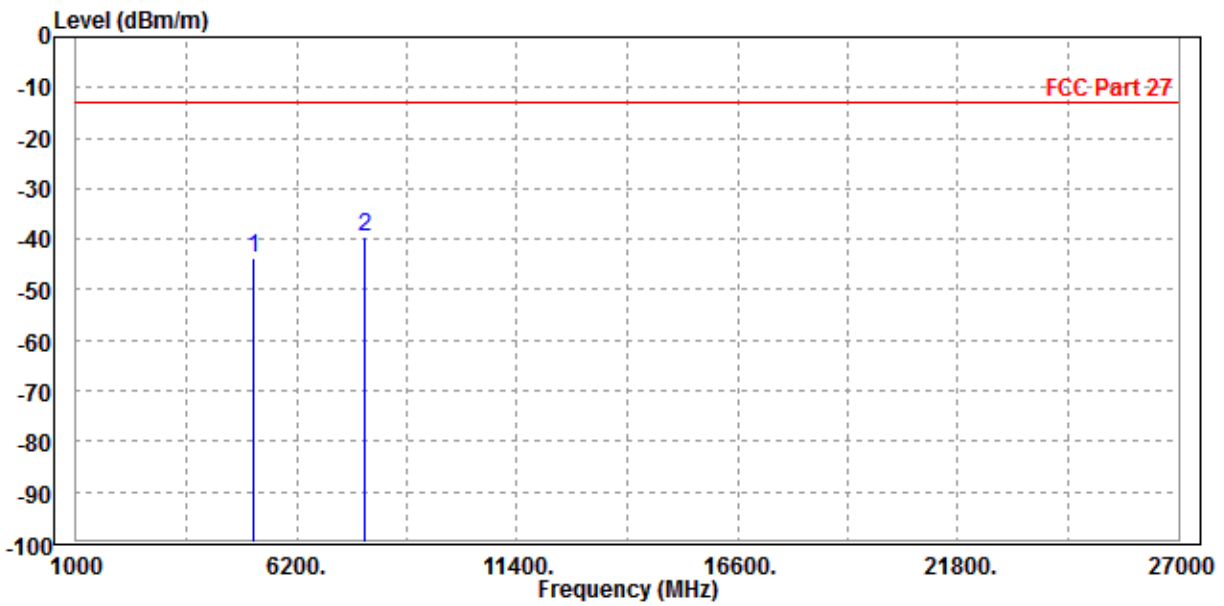




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 38000	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-41.47	-49.45	-13.00	-28.47	7.98	Peak	Vertical
2 PP	7785.000	-38.28	-51.58	-13.00	-25.28	13.30	Peak	Vertical

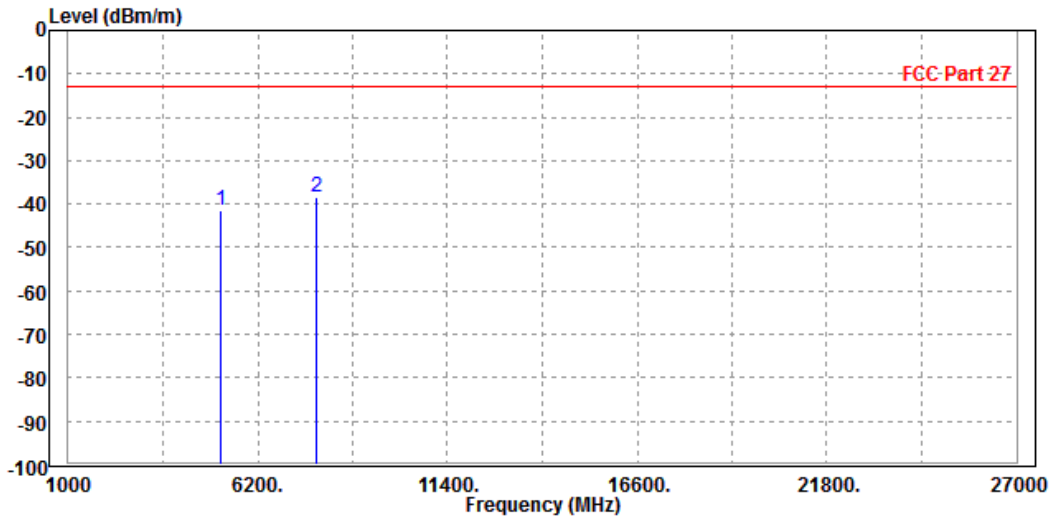




BUREAU VERITAS

Test Report No.: RF180829W002-8

LTE Band 41  
CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.70	-52.29	-25.00	-18.70	8.59	Peak	Horizontal
2	PP 7779.000	-40.56	-54.29	-25.00	-15.56	13.73	Peak	Horizontal

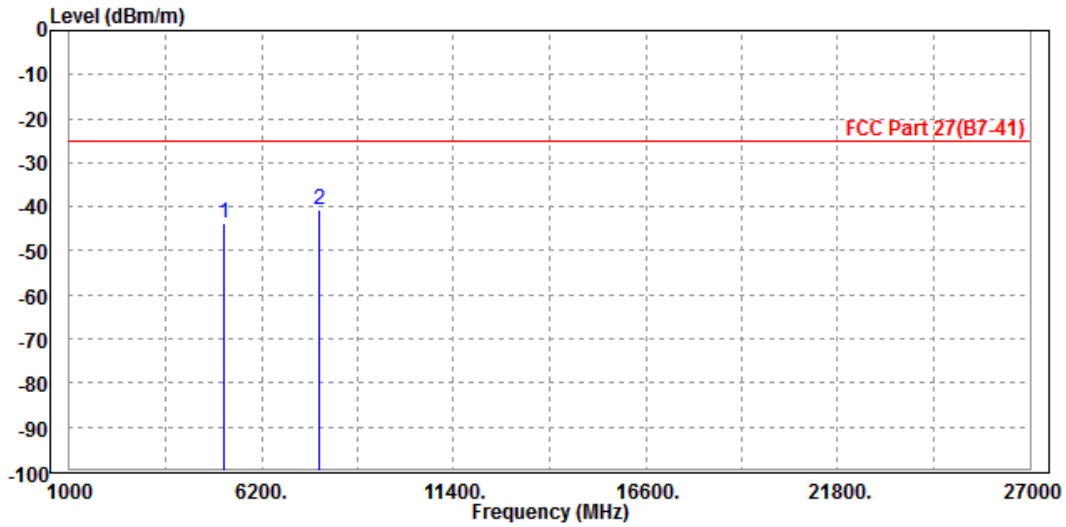






Test Report No.: RF180829W002-8

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-44.86	-52.84	-25.00	-19.86	7.98	Peak	Vertical
2 PP	7779.000	-41.92	-55.21	-25.00	-16.92	13.29	Peak	Vertical

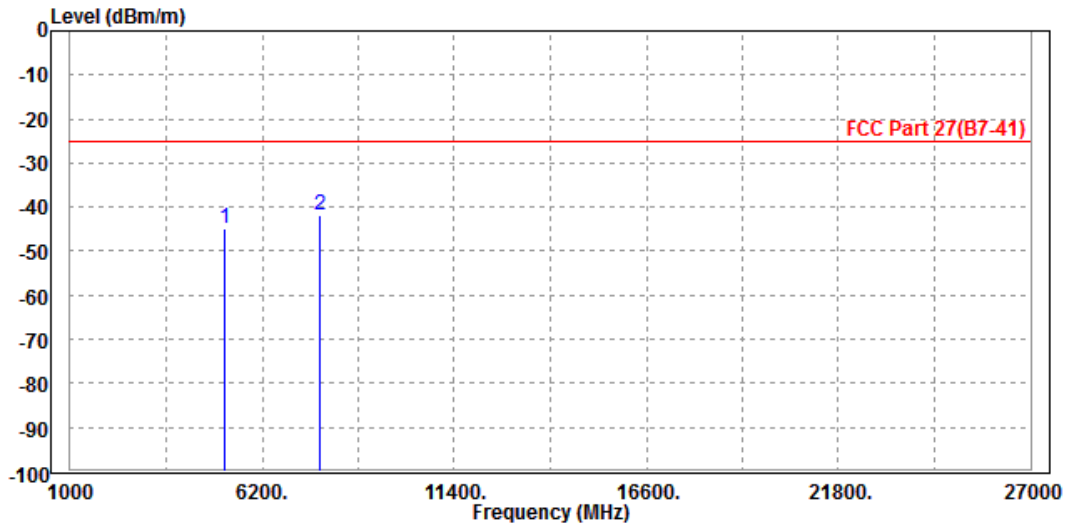




Test Report No.: RF180829W002-8

CHANNEL BANDWIDTH: 10MHz / QPSK

CH39700

MODE	TX channel 39700	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5004.000	-41.47	-49.85	-25.00	-16.47	8.38	Peak	Horizontal
2 PP	7503.000	-38.32	-51.66	-25.00	-13.32	13.34	Peak	Horizontal

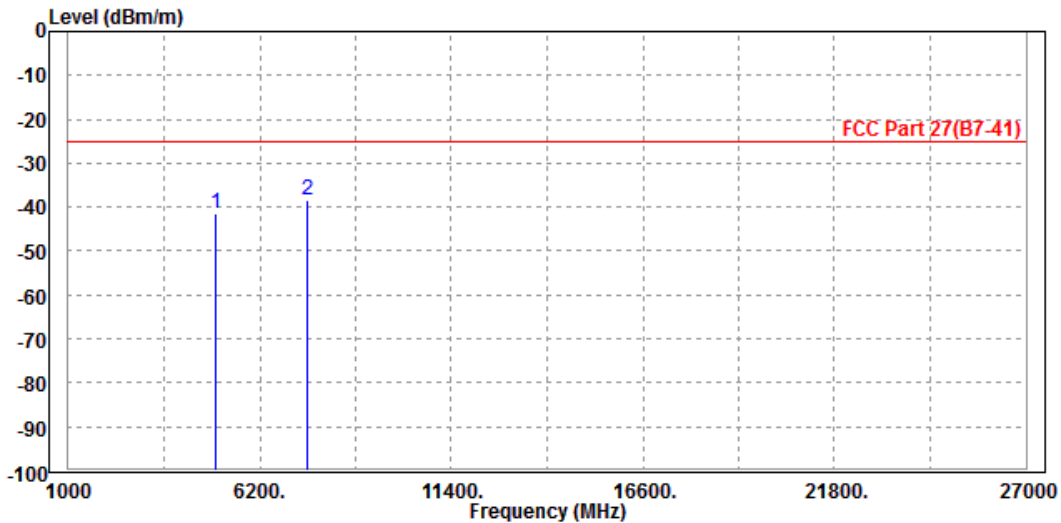




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 39700	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5004.000	-41.64	-49.63	-25.00	-16.64	7.99	Peak	Vertical
2	PP 7503.000	-38.70	-51.51	-25.00	-13.70	12.81	Peak	Vertical

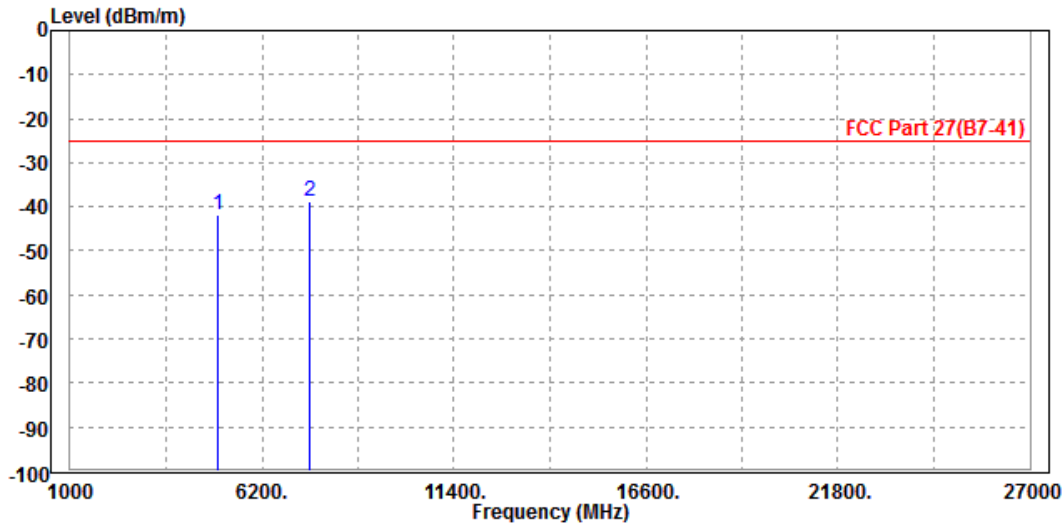




Test Report No.: RF180829W002-8

CH40620

<b>MODE</b>	TX channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.09	-51.68	-25.00	-18.09	8.59	Peak	Horizontal
2 PP	7779.000	-40.14	-53.87	-25.00	-15.14	13.73	Peak	Horizontal

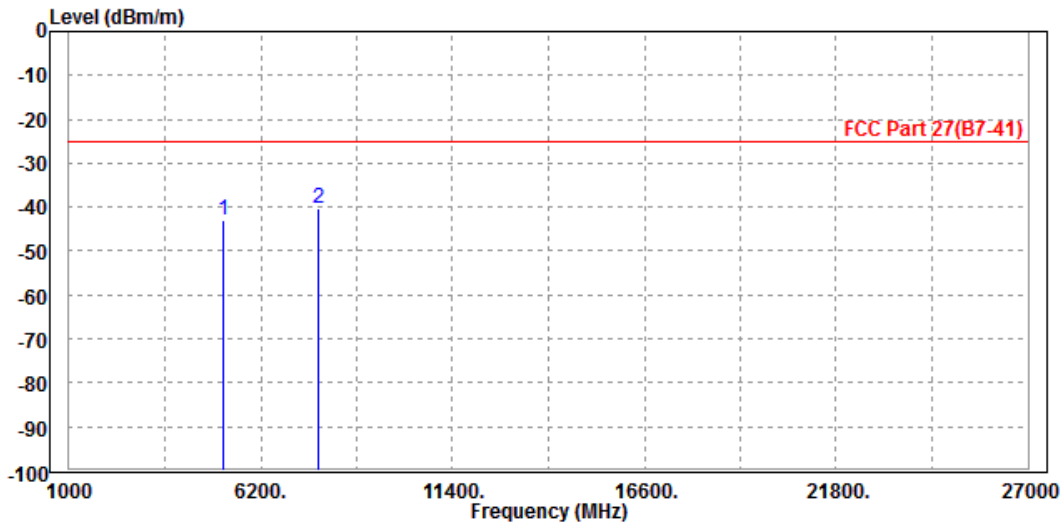




Test Report No.: RF180829W002-8

<b>MODE</b>	TX channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-44.83	-52.81	-25.00	-19.83	7.98	Peak	Vertical
2	PP 7779.000	-41.50	-54.79	-25.00	-16.50	13.29	Peak	Vertical

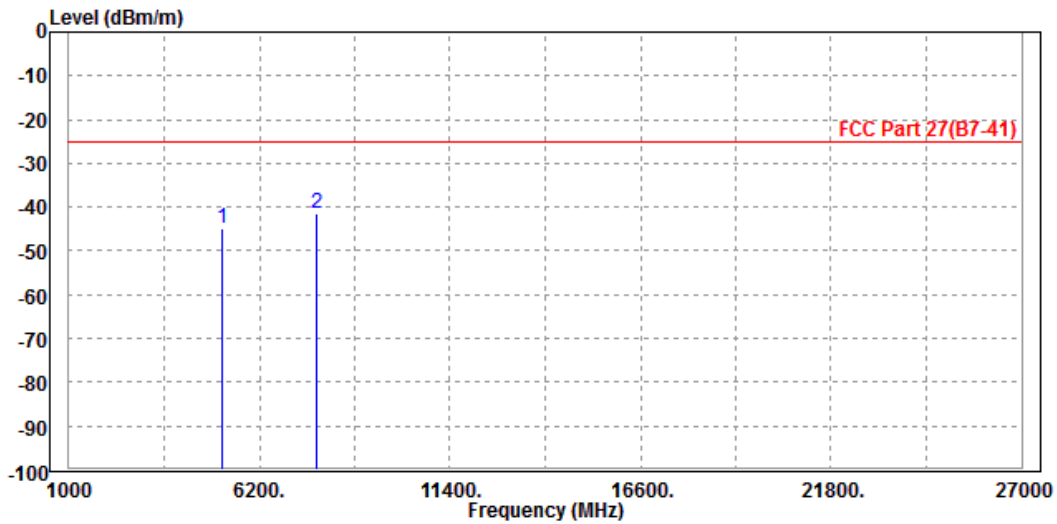




Test Report No.: RF180829W002-8

CH41540

<b>MODE</b>	TX channel 41540	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5368.000	-42.55	-51.36	-25.00	-17.55	8.81	Peak	Horizontal
2	PP 8055.000	-39.04	-53.25	-25.00	-14.04	14.21	Peak	Horizontal

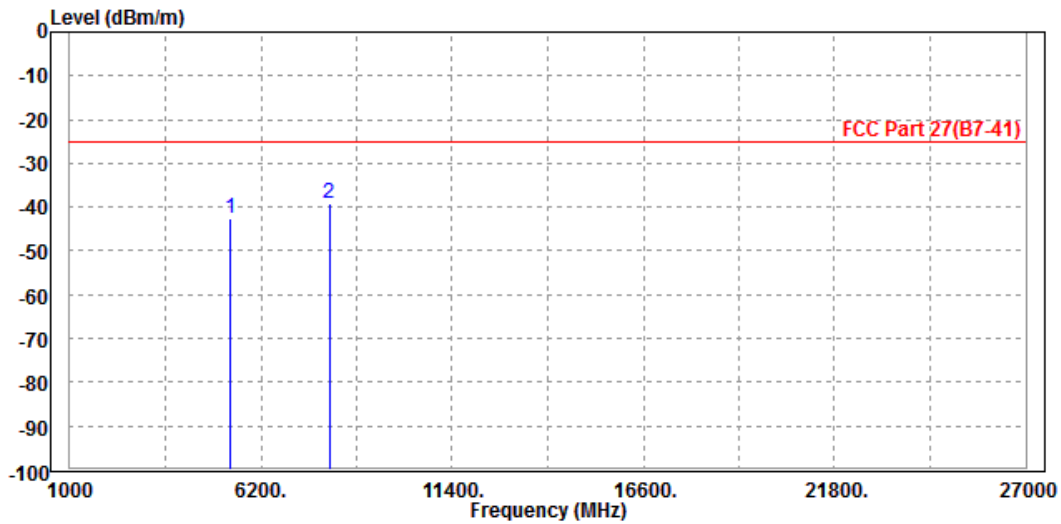




Test Report No.: RF180829W002-8

MODE	TX channel 41540	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5368.000	-41.21	-49.19	-25.00	-16.21	7.98	Peak	Vertical
2 PP	8055.000	-38.81	-52.63	-25.00	-13.81	13.82	Peak	Vertical

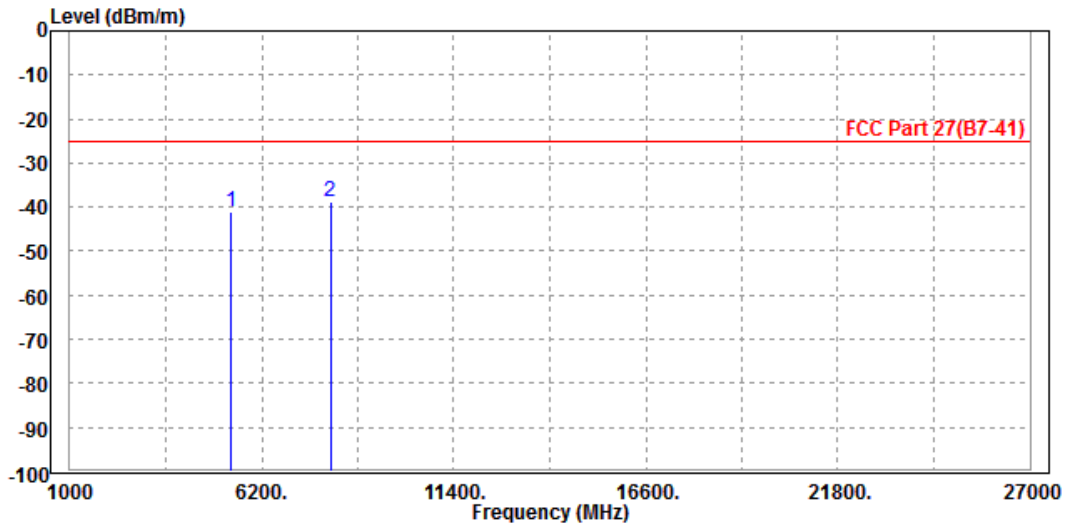




Test Report No.: RF180829W002-8

**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 40620	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-43.66	-52.25	-25.00	-18.66	8.59	Peak	Horizontal
2	PP 7779.000	-40.45	-54.18	-25.00	-15.45	13.73	Peak	Horizontal

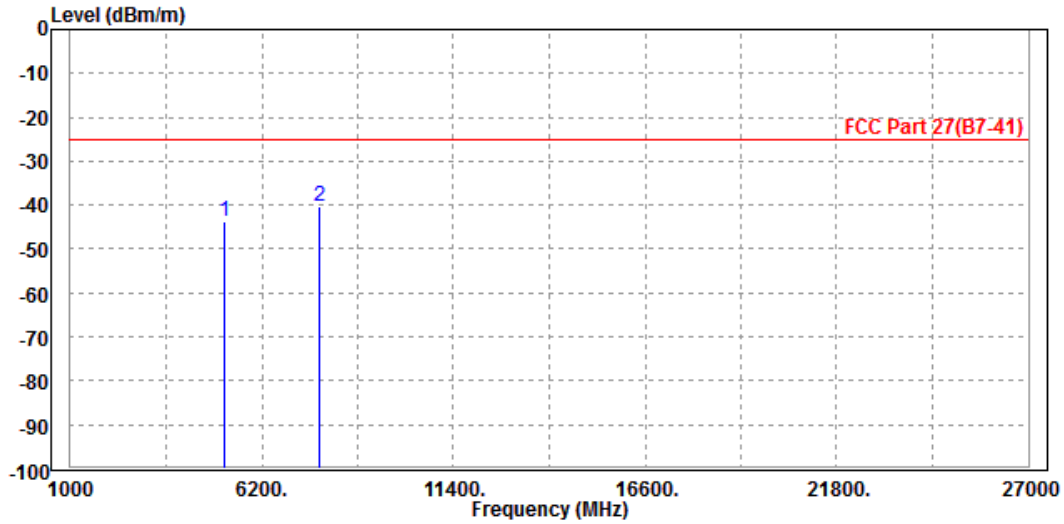






Test Report No.: RF180829W002-8

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-45.66	-53.64	-25.00	-20.66	7.98	Peak	Vertical
2 PP	7779.000	-41.26	-54.55	-25.00	-16.26	13.29	Peak	Vertical

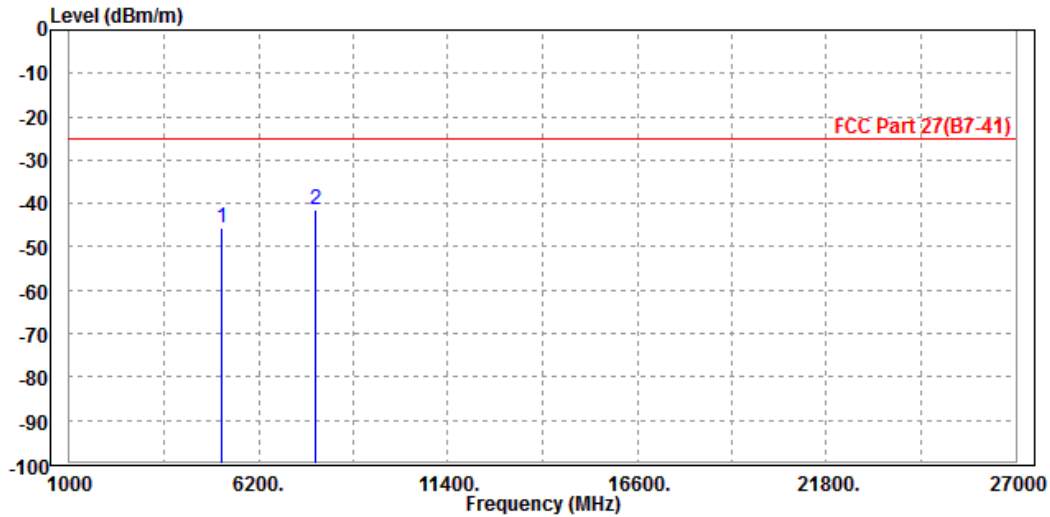




Test Report No.: RF180829W002-8

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-44.08	-52.67	-25.00	-19.08	8.59	Peak	Horizontal
2	PP 7779.000	-40.08	-53.81	-25.00	-15.08	13.73	Peak	Horizontal

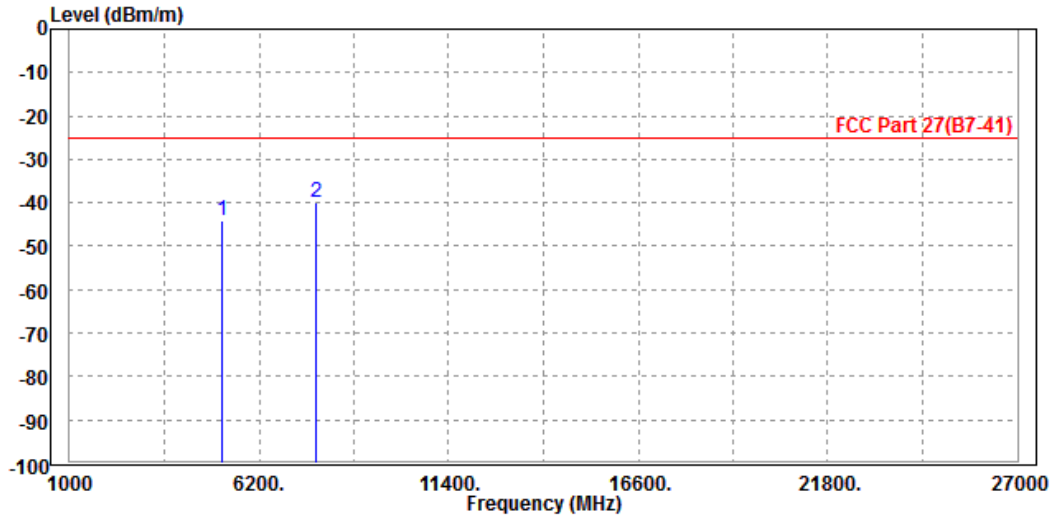




Test Report No.: RF180829W002-8

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-42.44	-50.42	-25.00	-17.44	7.98	Peak	Vertical
2 PP	7779.000	-40.19	-53.48	-25.00	-15.19	13.29	Peak	Vertical

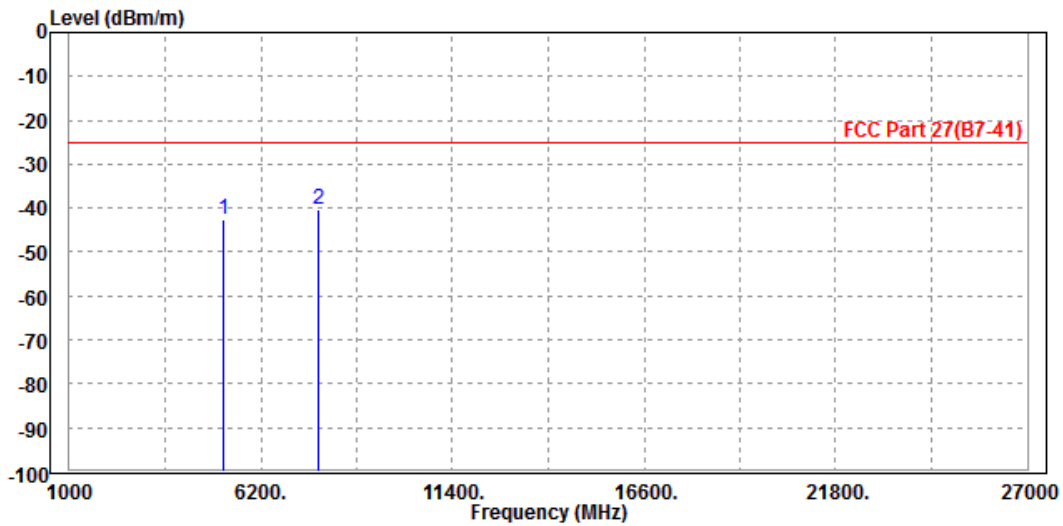



Test Report No.: RF180829W002-8

#### 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF180829W002-8

## 5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---