

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-harmonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th harmonic.

Approved by (name / position & signature)

José Manuel Gómez Galván
EMC Consumer & RF
Lab. Manager

Modulation: BTLE 5.4 (GFSK 1 Mbit/s)

MIMO Mode: SISO

Results

No spurious frequencies detected at less than 20dBm below the limit.


Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

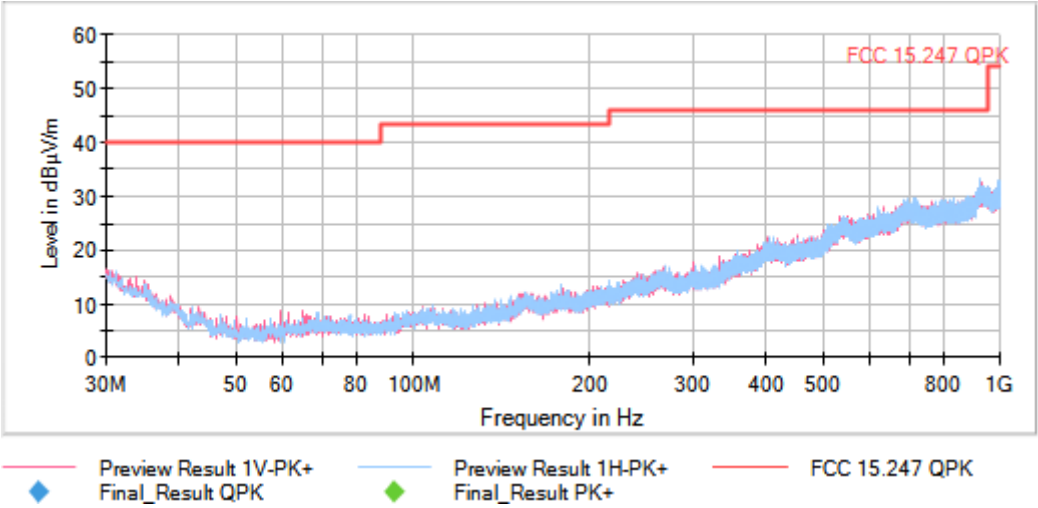


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

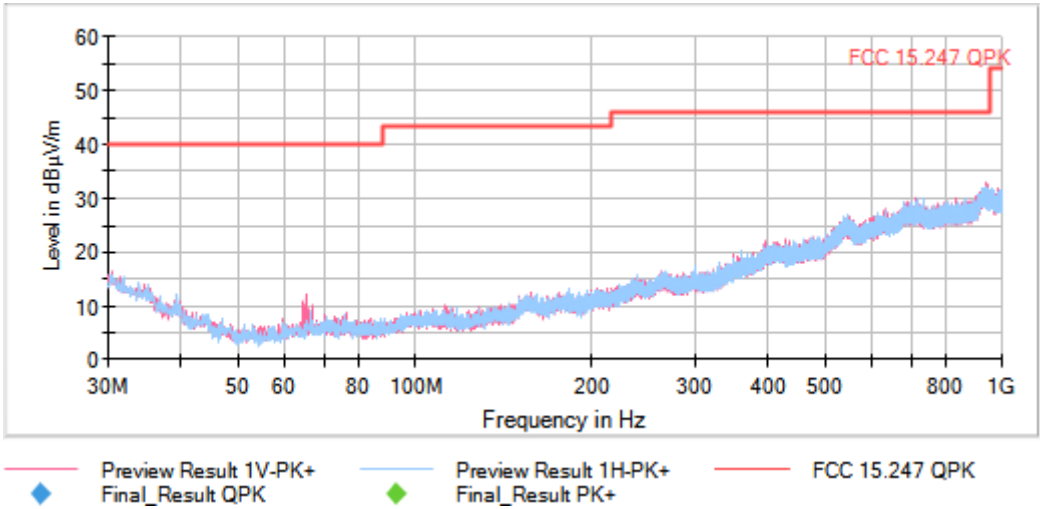


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

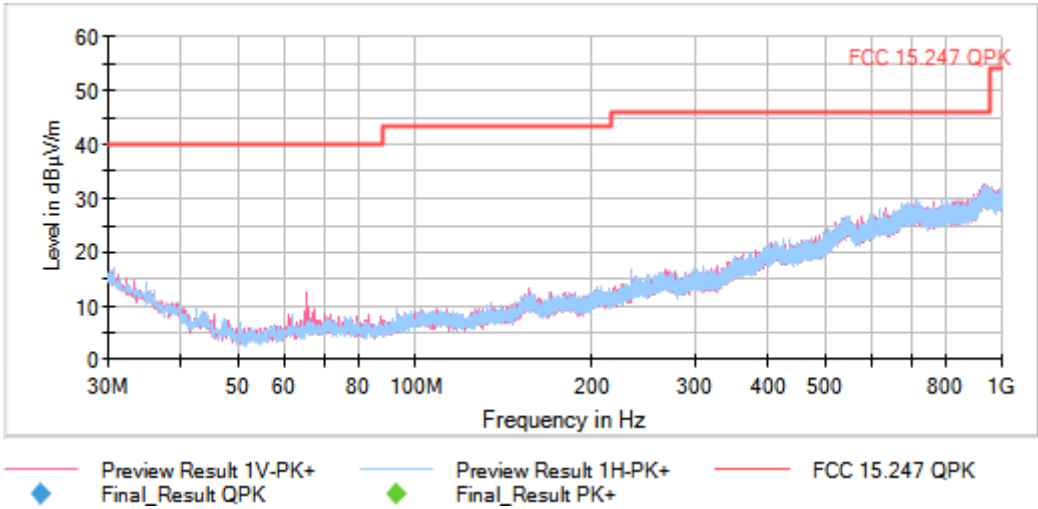


Tables:


Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

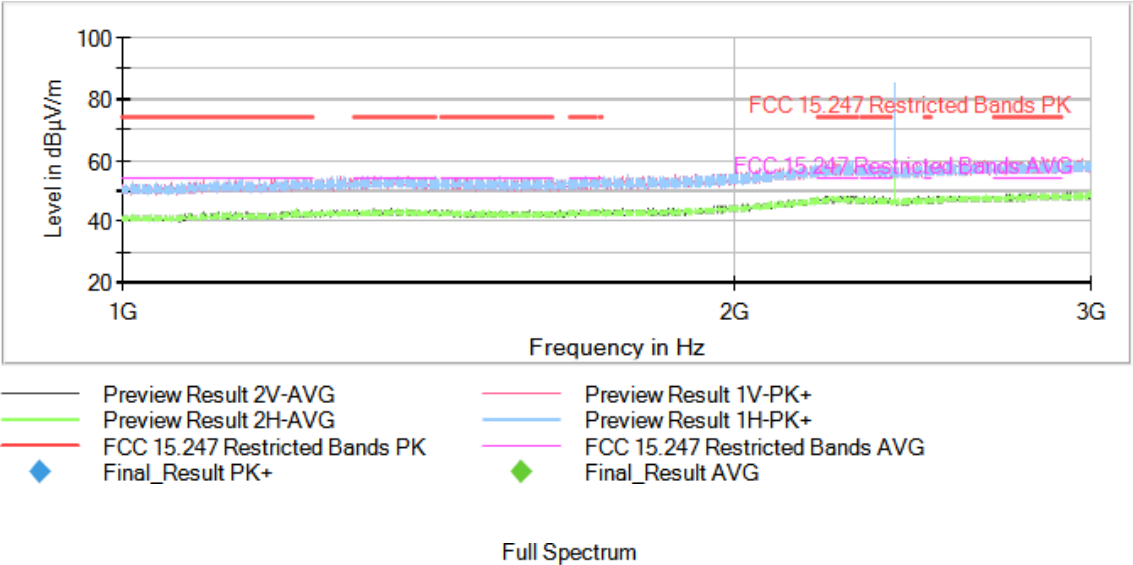

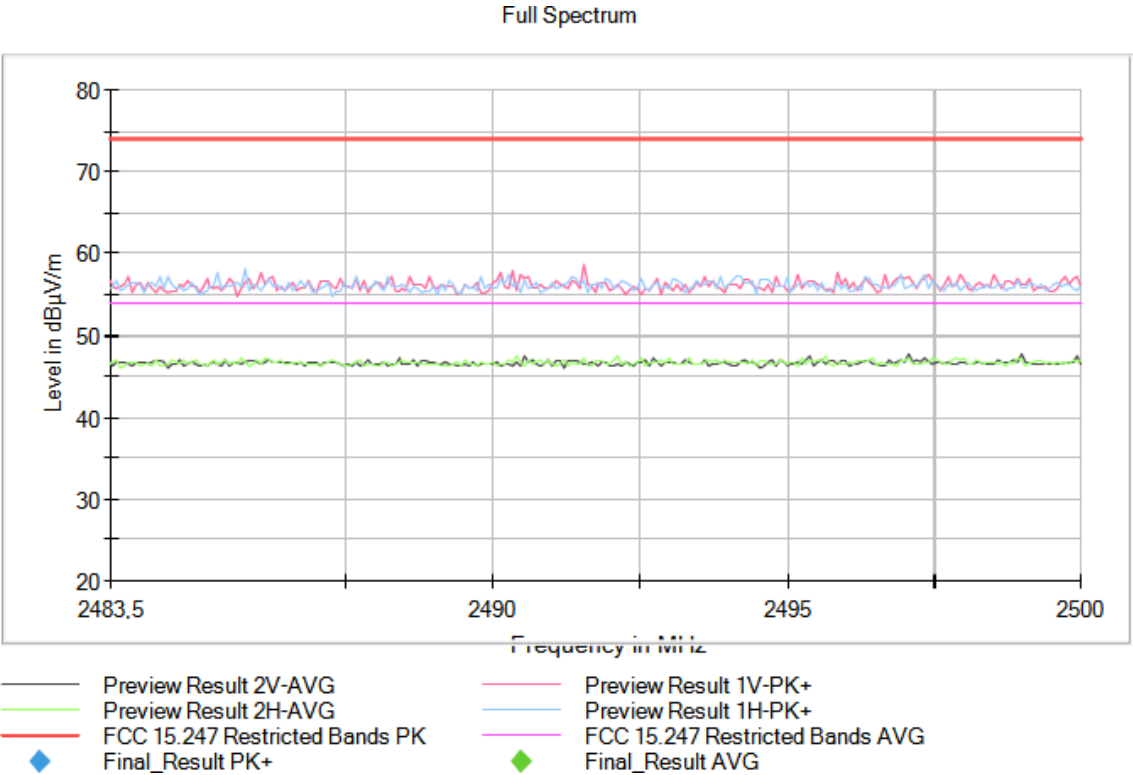


Tables:
Spectrum Analyzer Parameters



	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

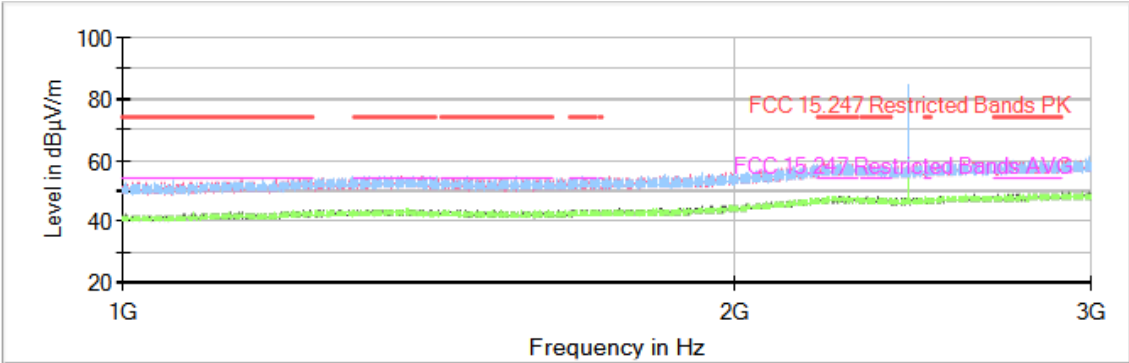

Full Spectrum

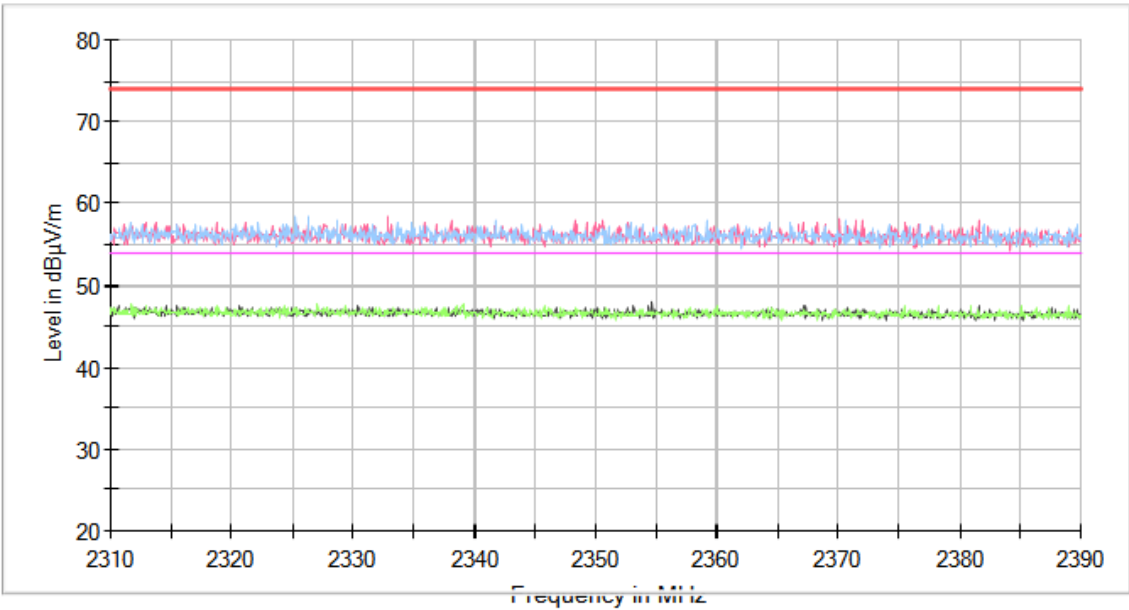

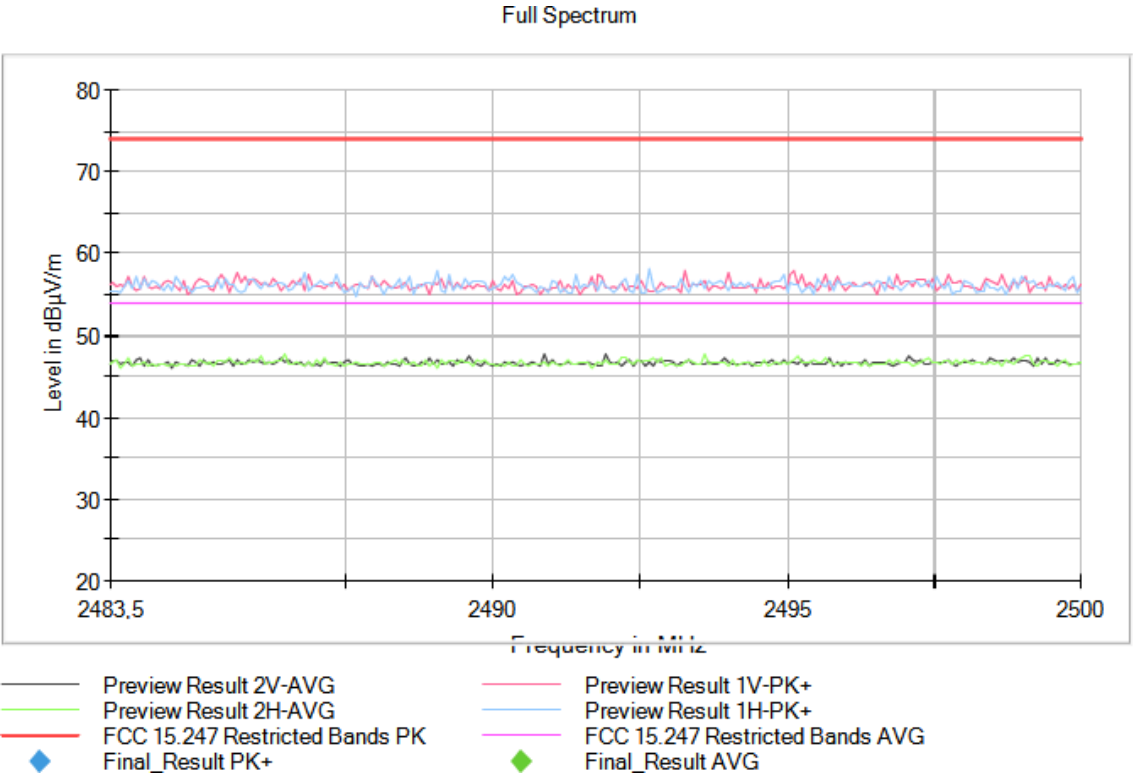


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

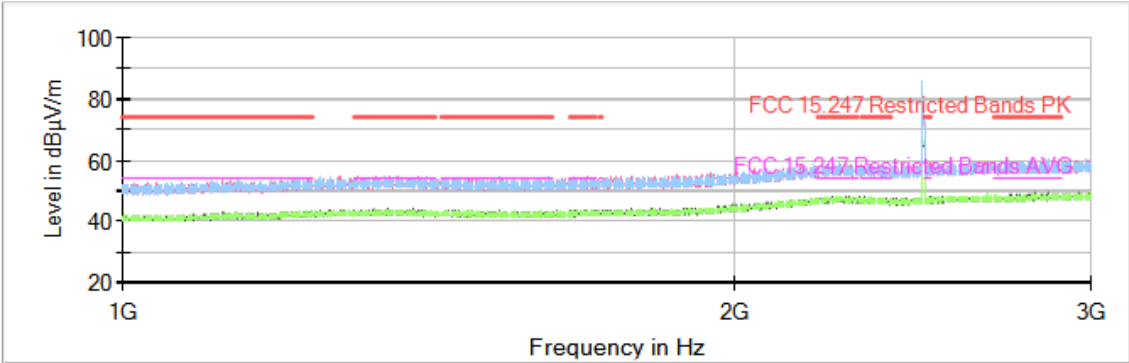

Full Spectrum

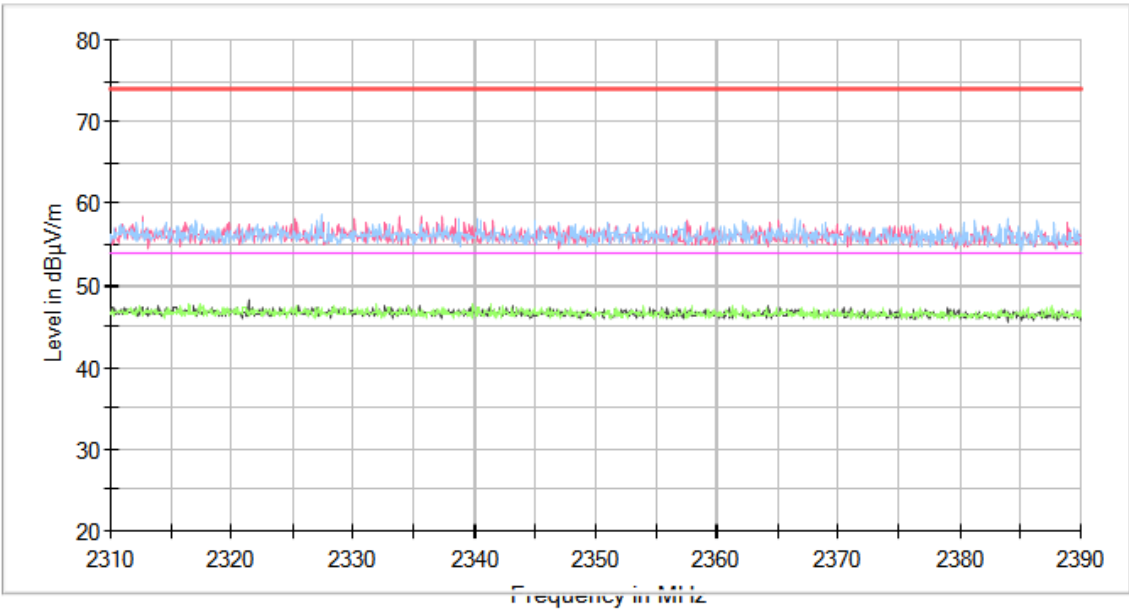

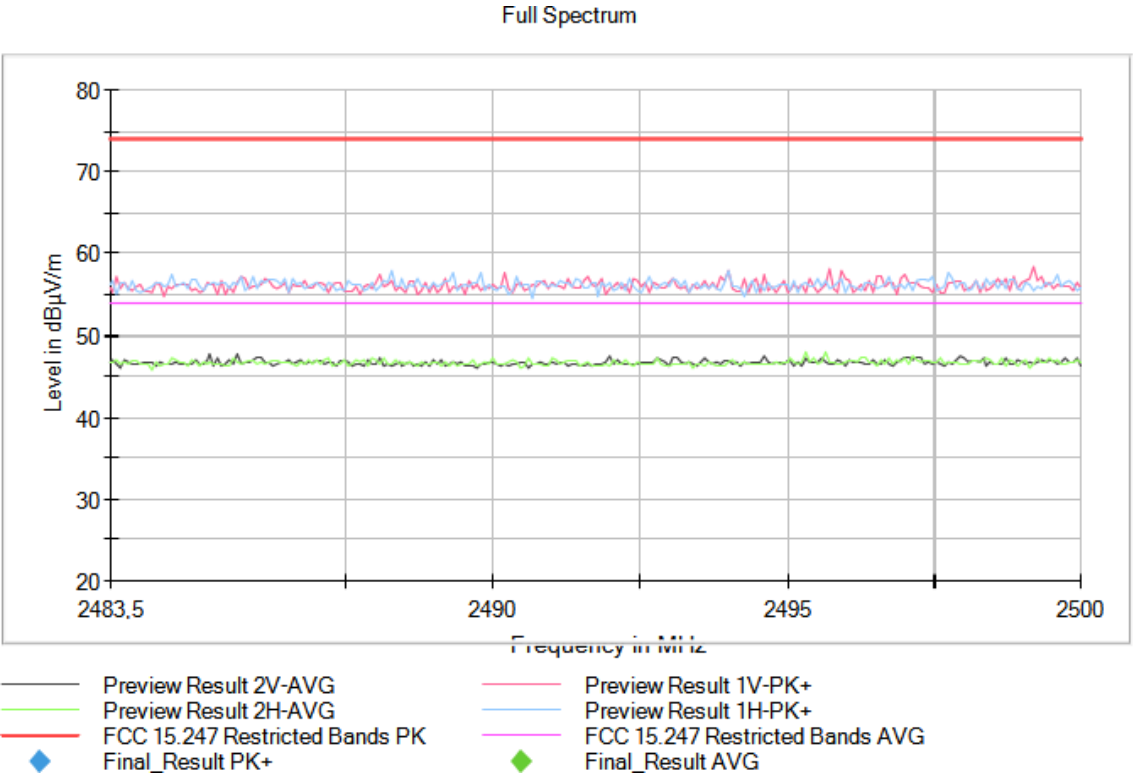


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

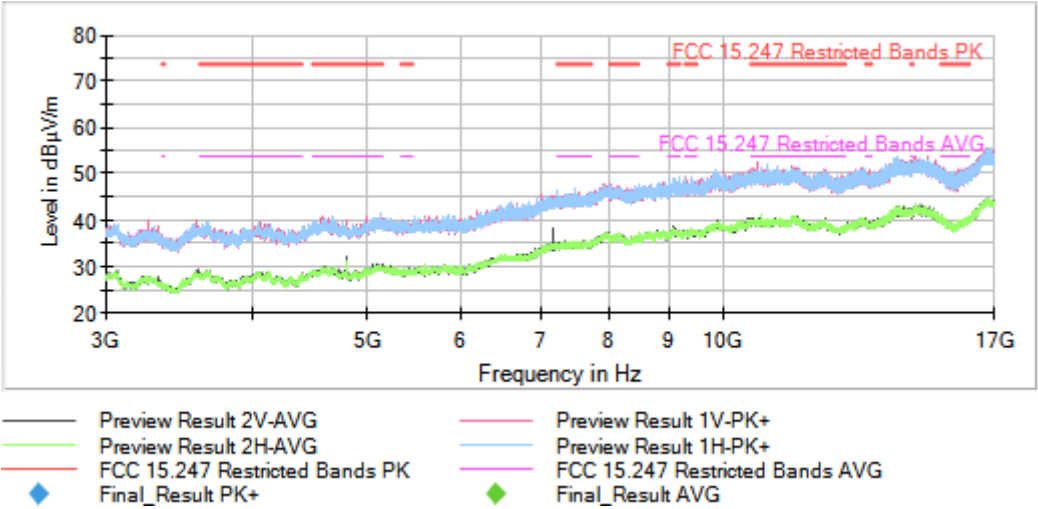


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

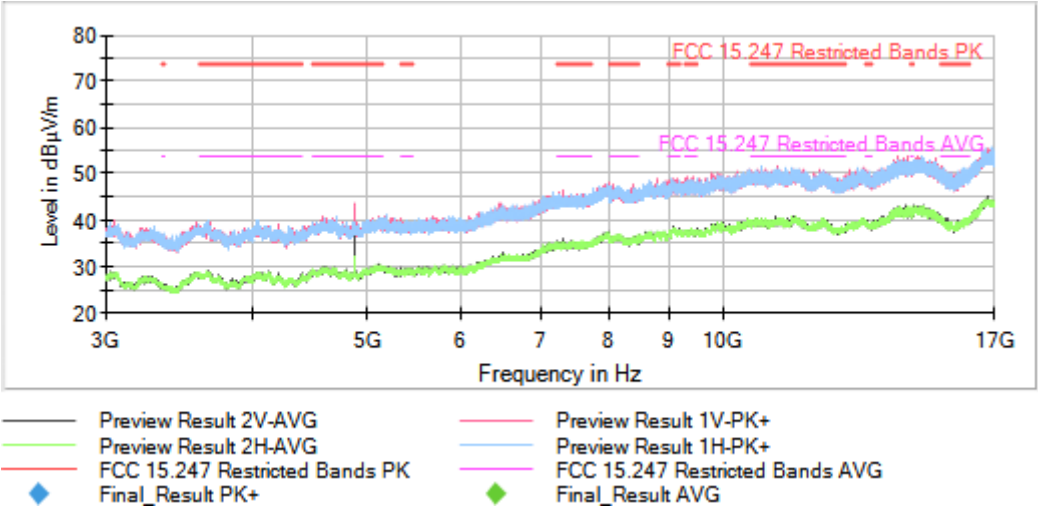


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

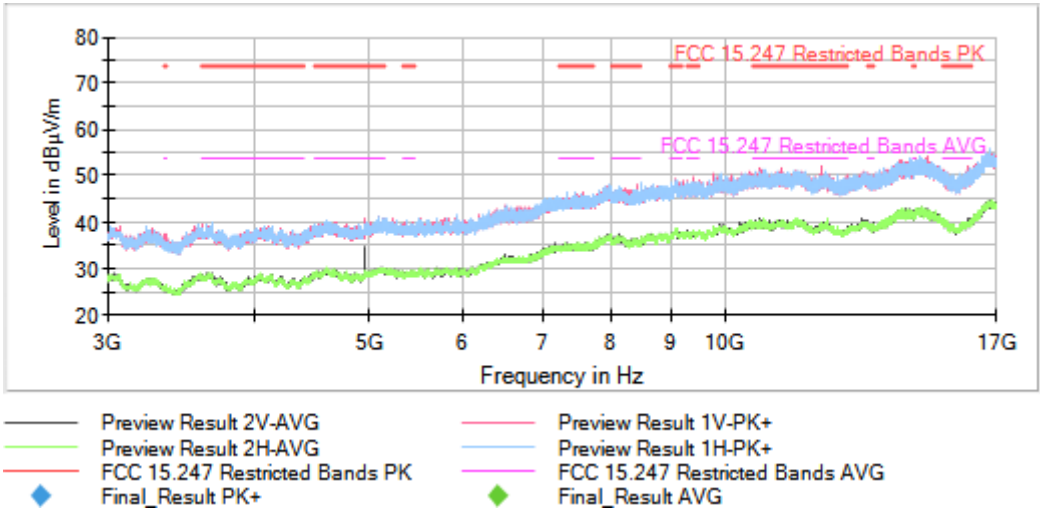


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

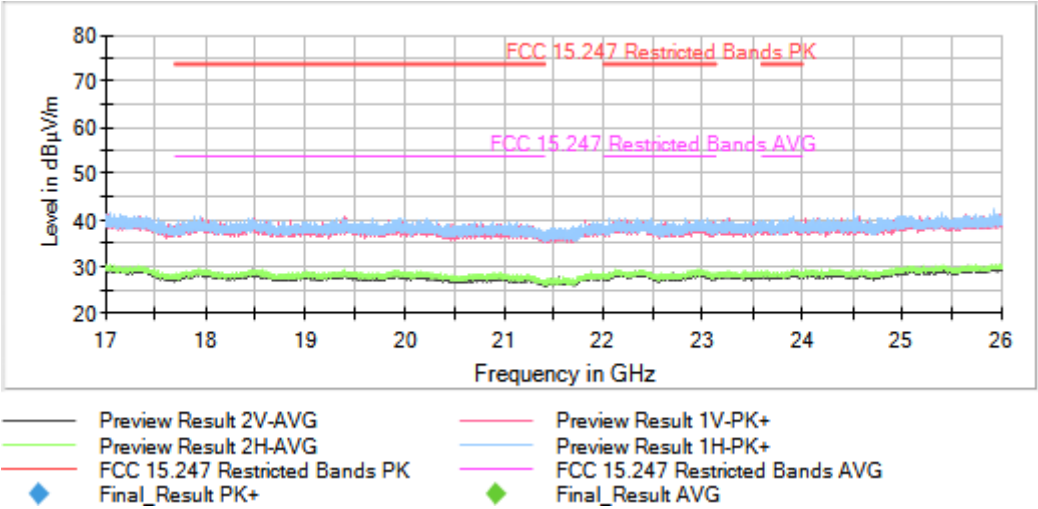


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

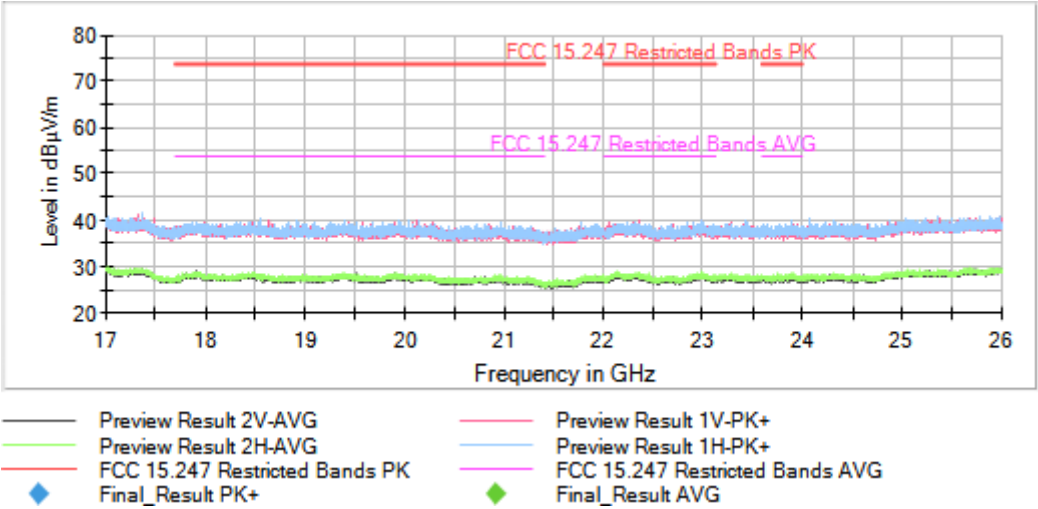


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 1 Mbit/s)
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

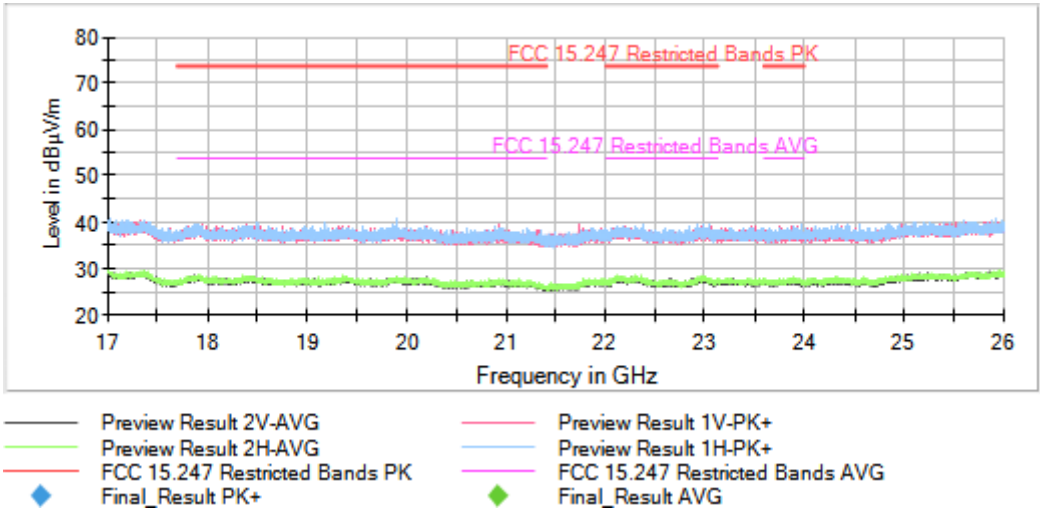

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: BTLE 5.4 (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

No spurious frequencies detected at less than 20dBm below the limit.


Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2404.00000 MIMO Mode = SISO

Images:

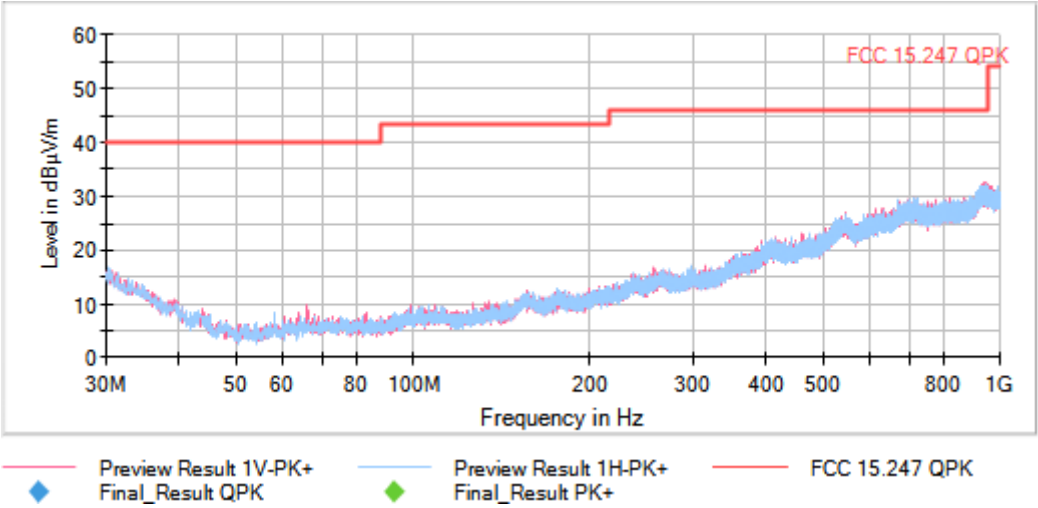


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

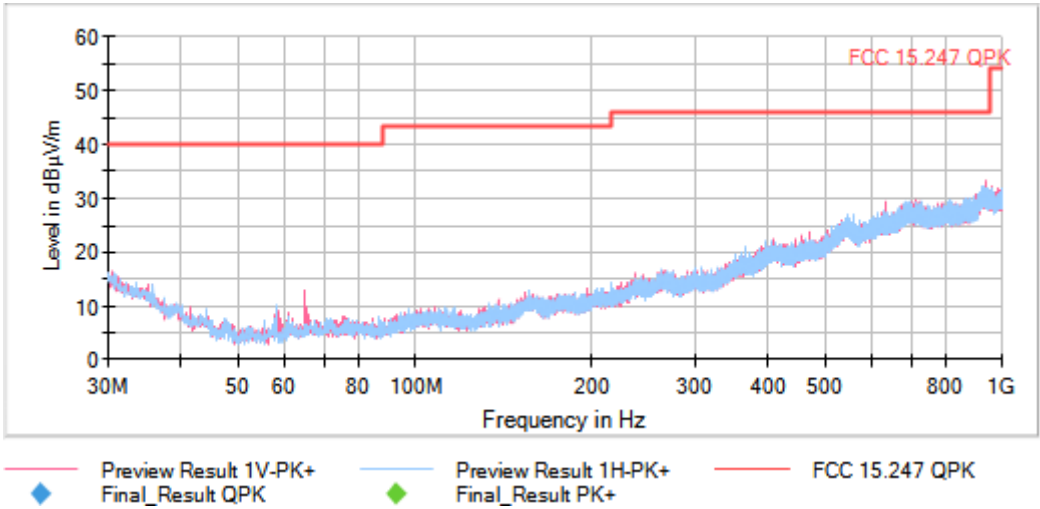


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2478.00000 MIMO Mode = SISO

Images:

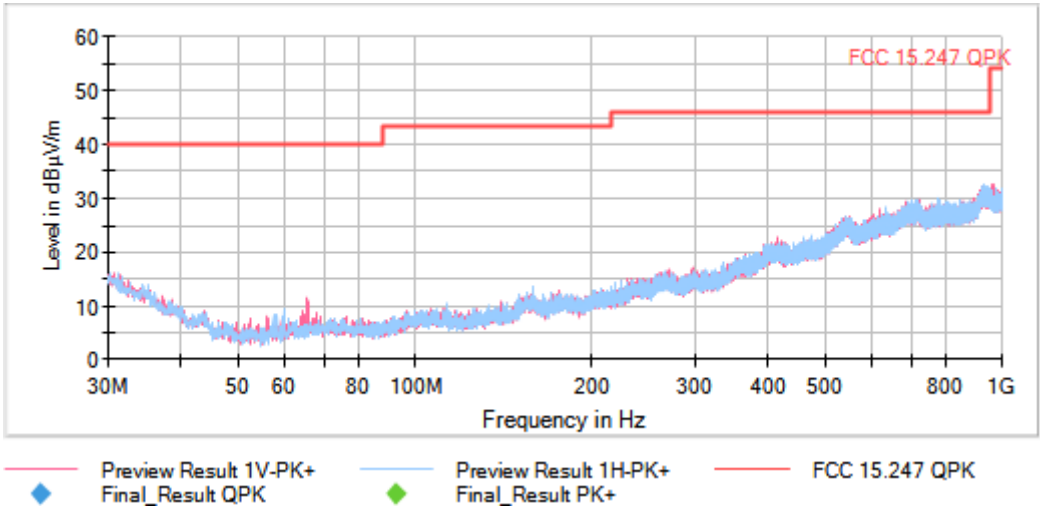



Tables:


Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2404.00000 MIMO Mode = SISO

Images:

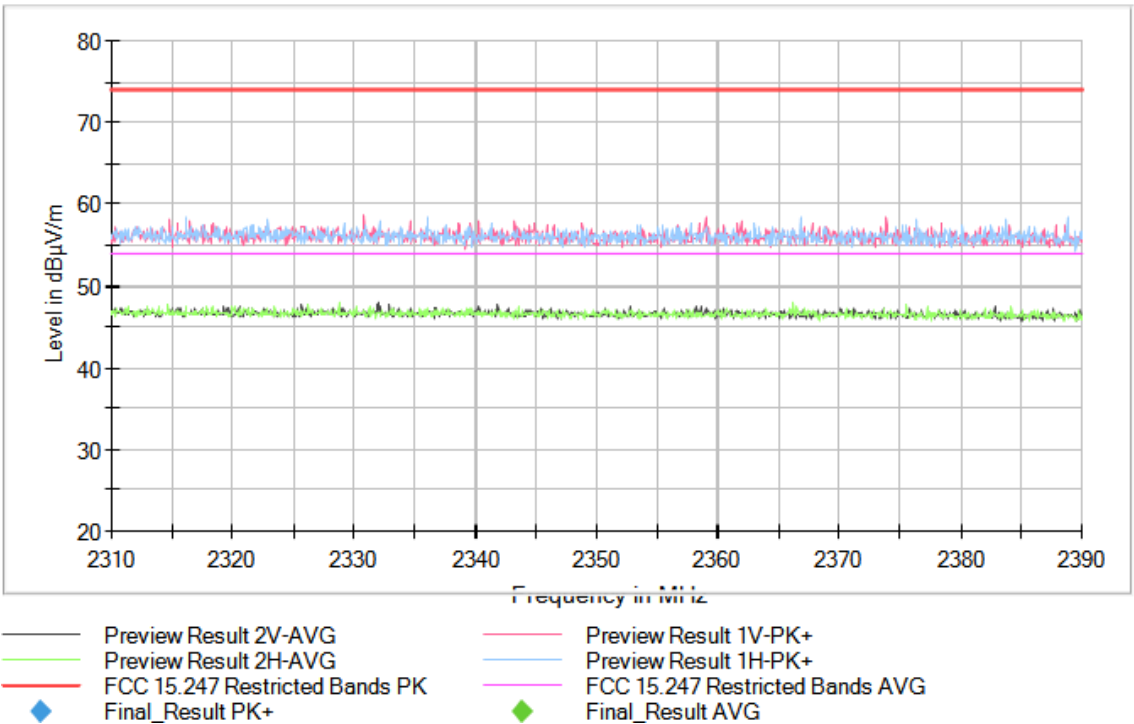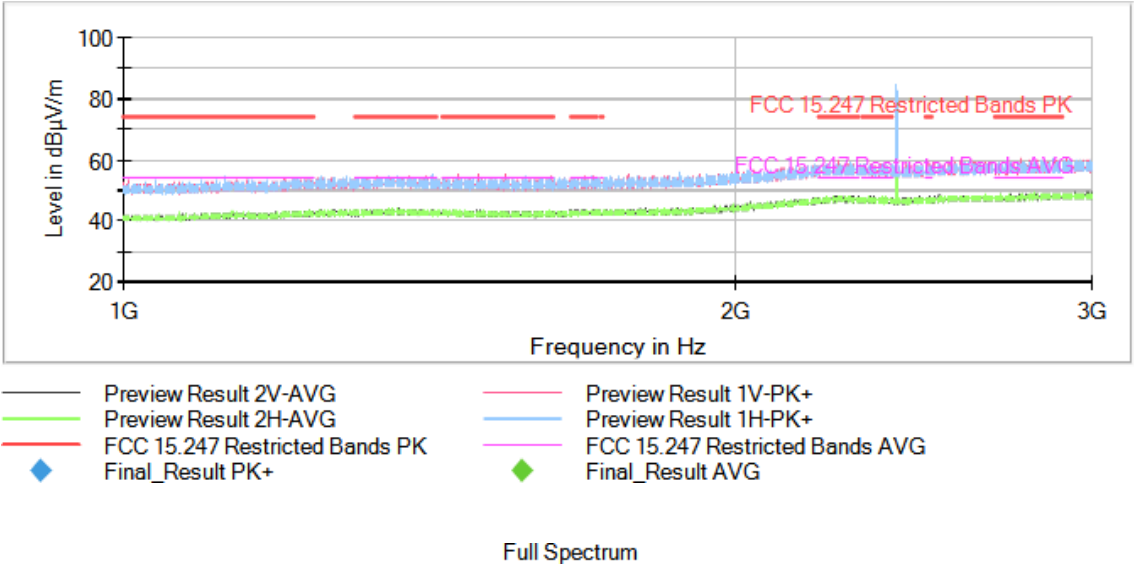

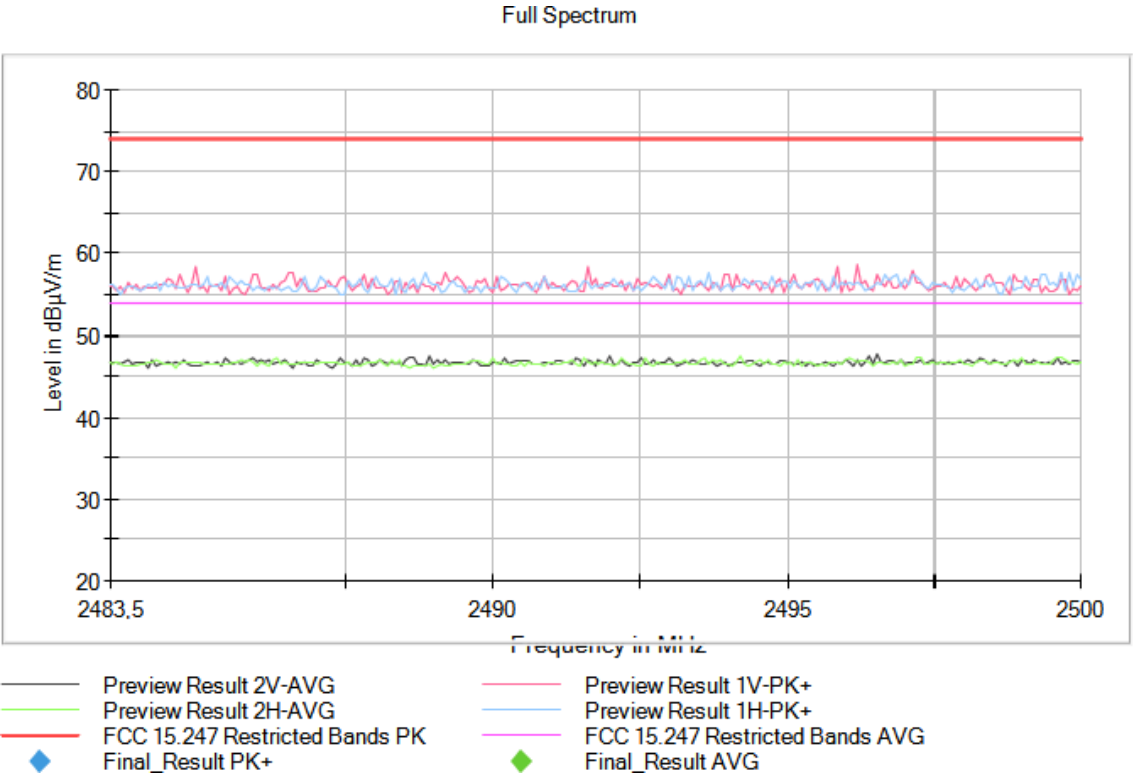


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

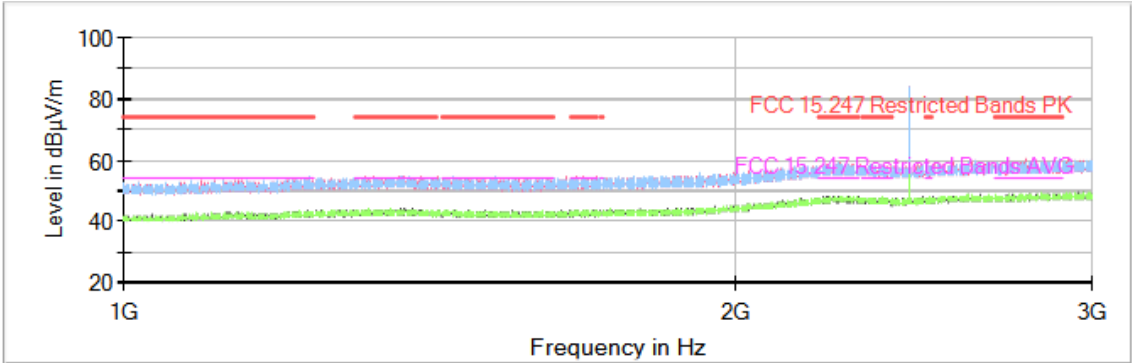

Full Spectrum

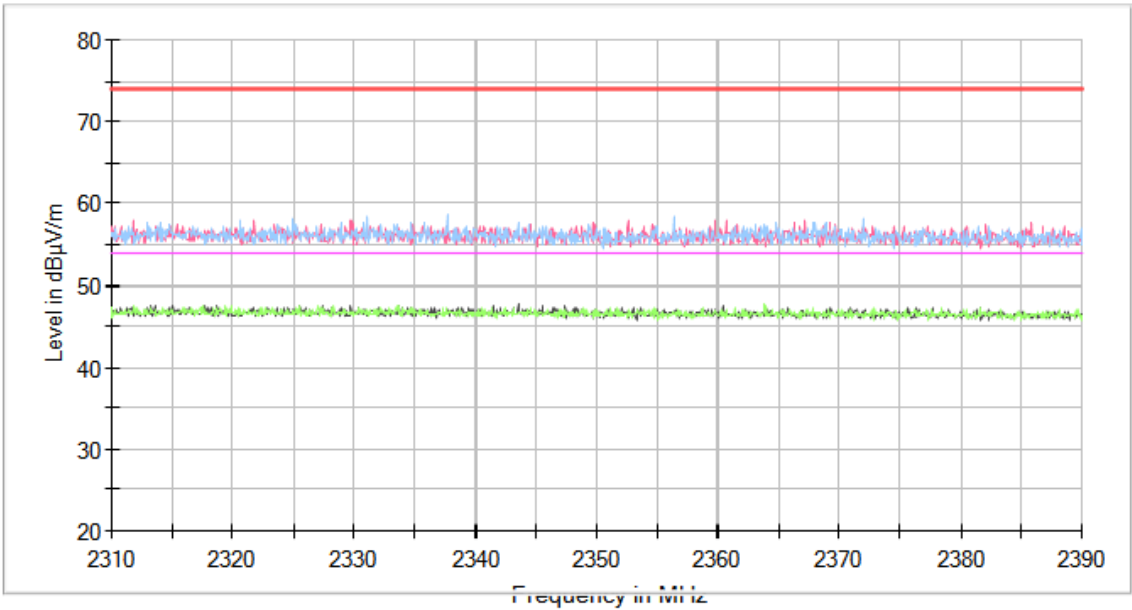




Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2478.00000 MIMO Mode = SISO

Images:

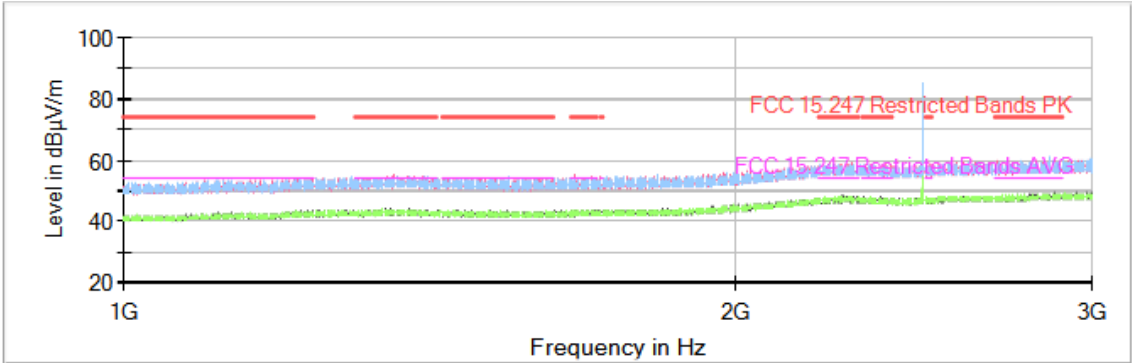

Full Spectrum

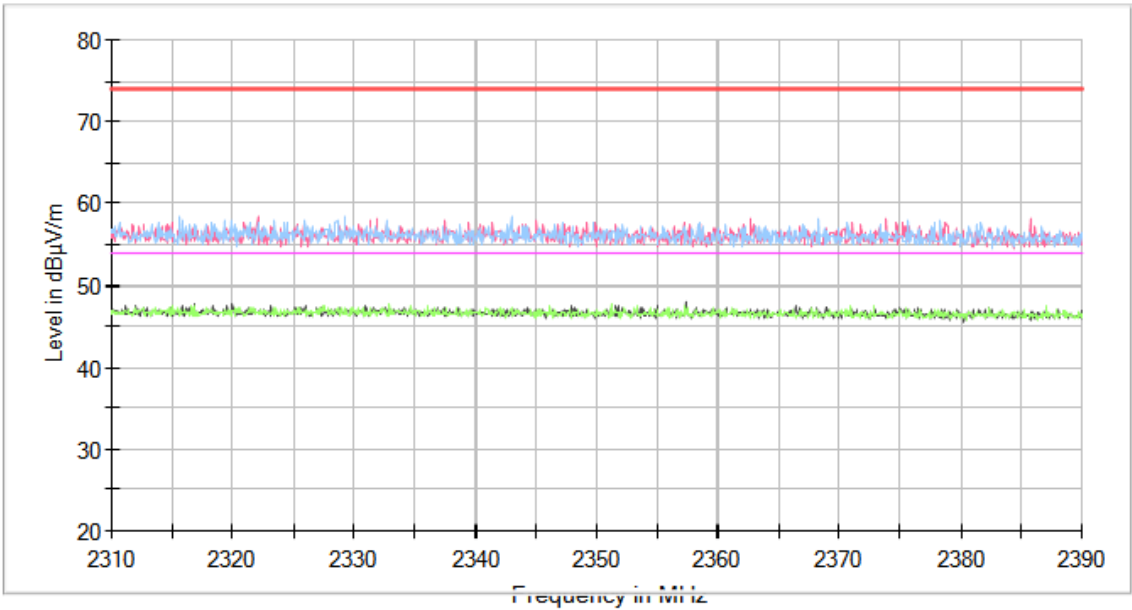

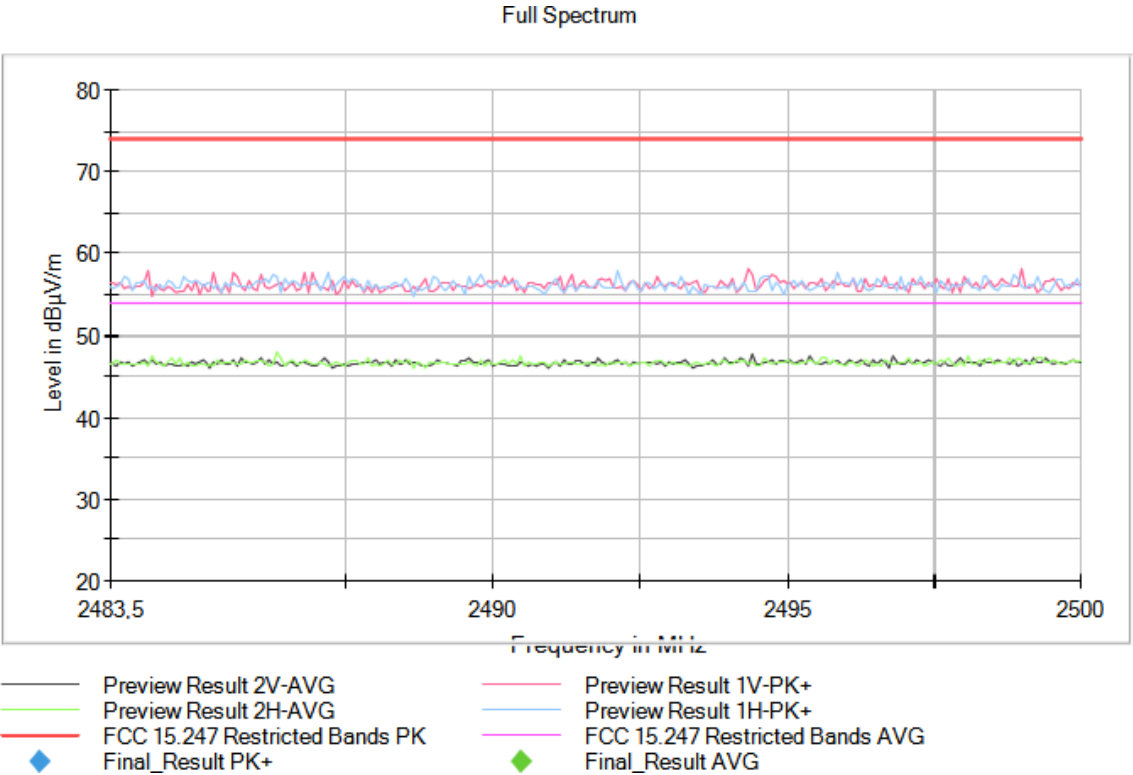


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2404.00000 MIMO Mode = SISO

Images:

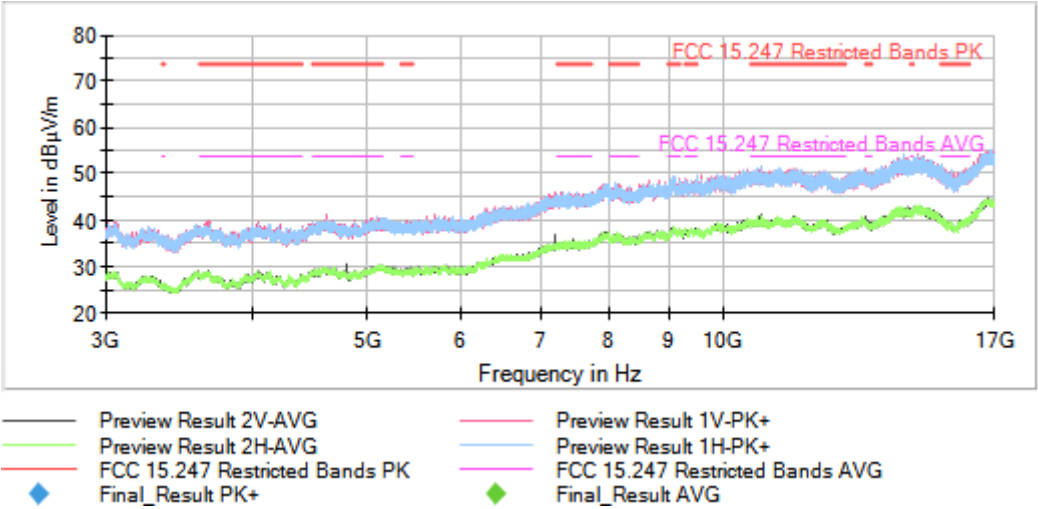


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

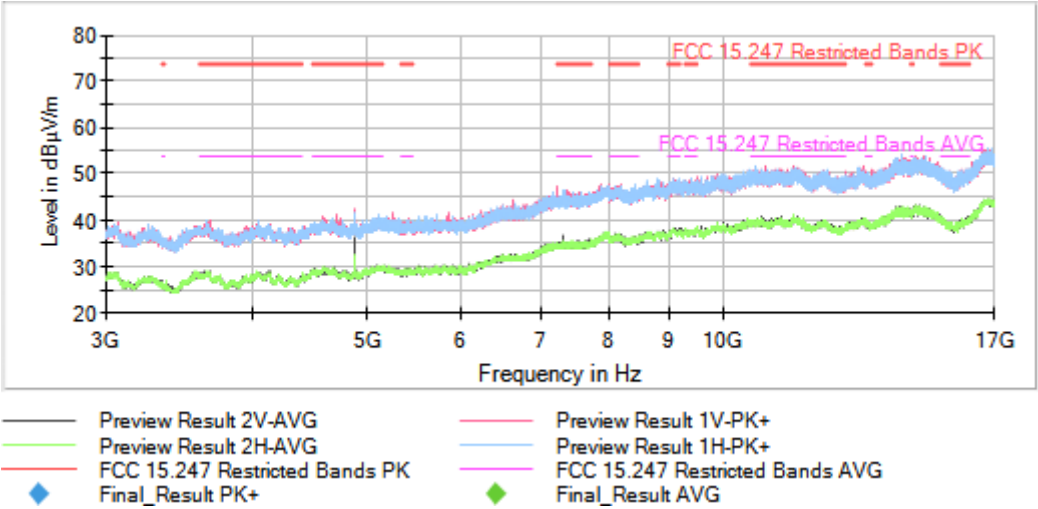


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2478.00000 MIMO Mode = SISO

Images:

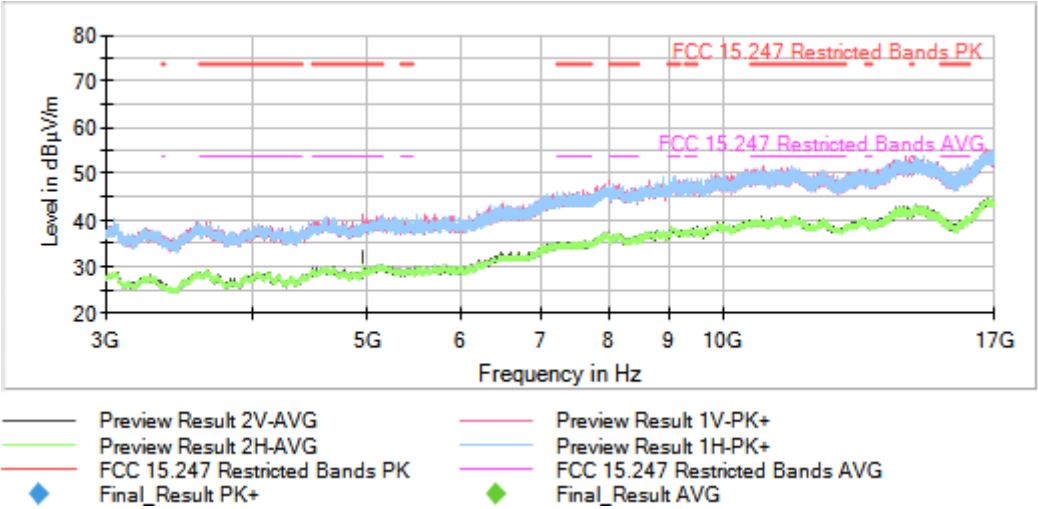


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2404.00000 MIMO Mode = SISO

Images:

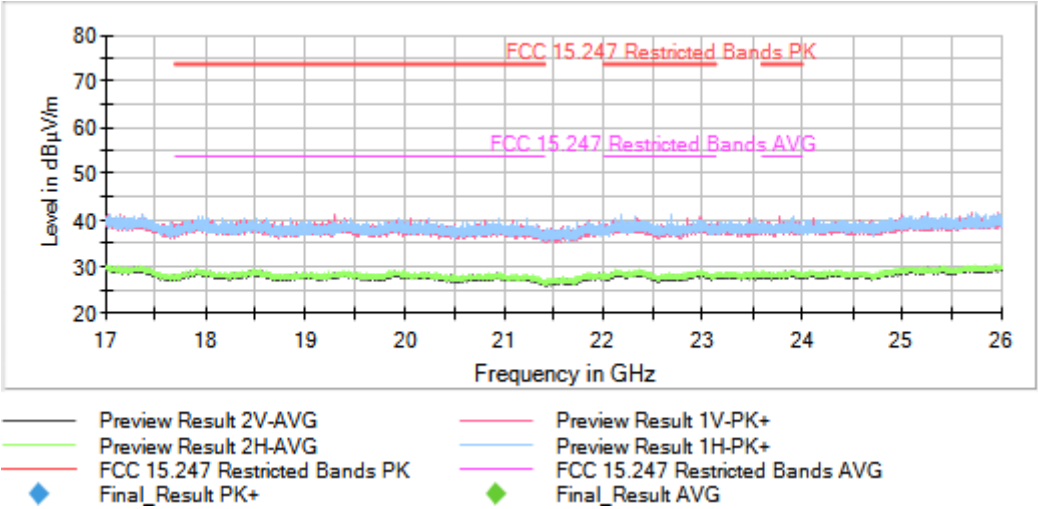


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

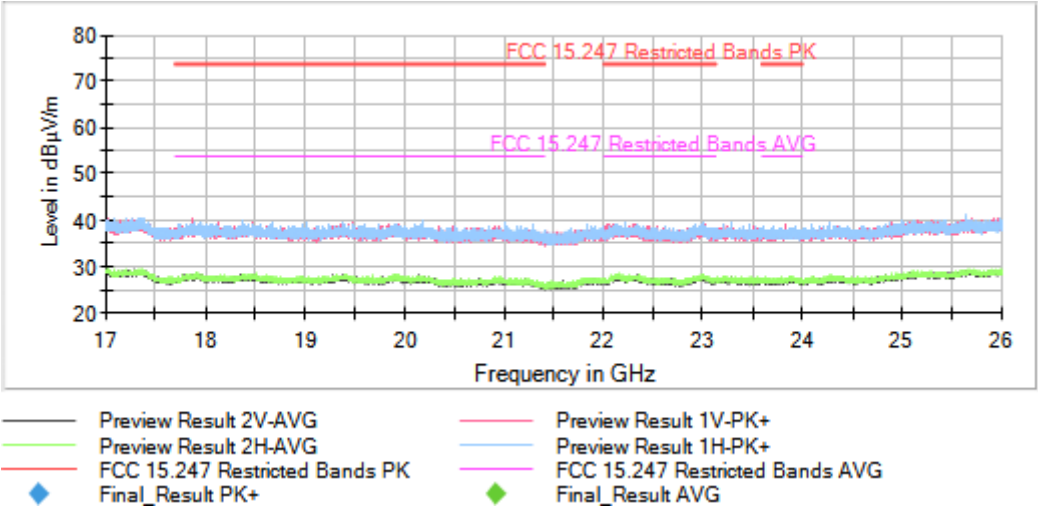


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = BTLE 5.4 (GFSK 2 Mbit/s)
Frequency MHz = 2478.00000 MIMO Mode = SISO

Images:

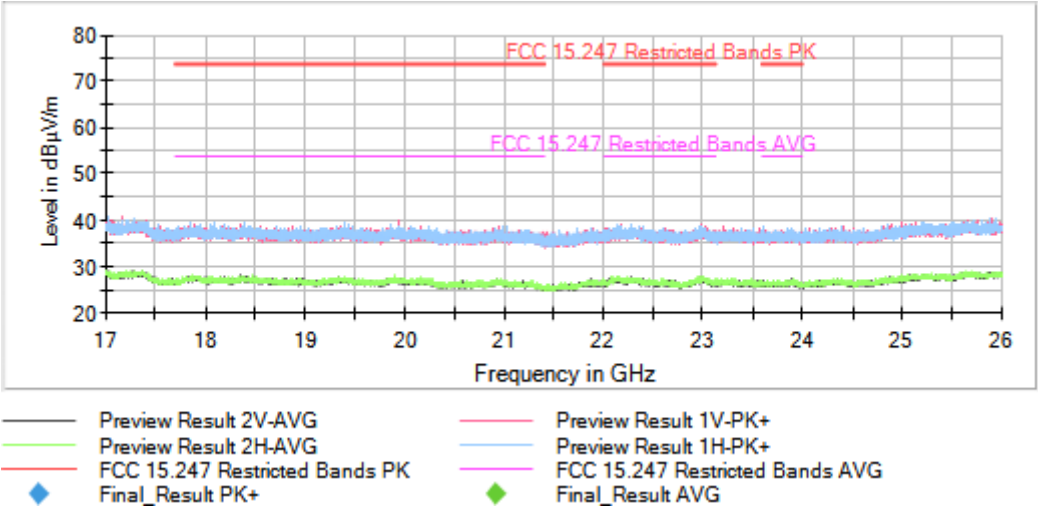

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: Proximity

MIMO Mode: SISO

Results

No spurious frequencies detected at less than 20dBm below the limit.


Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1] Modulation = Proximity
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

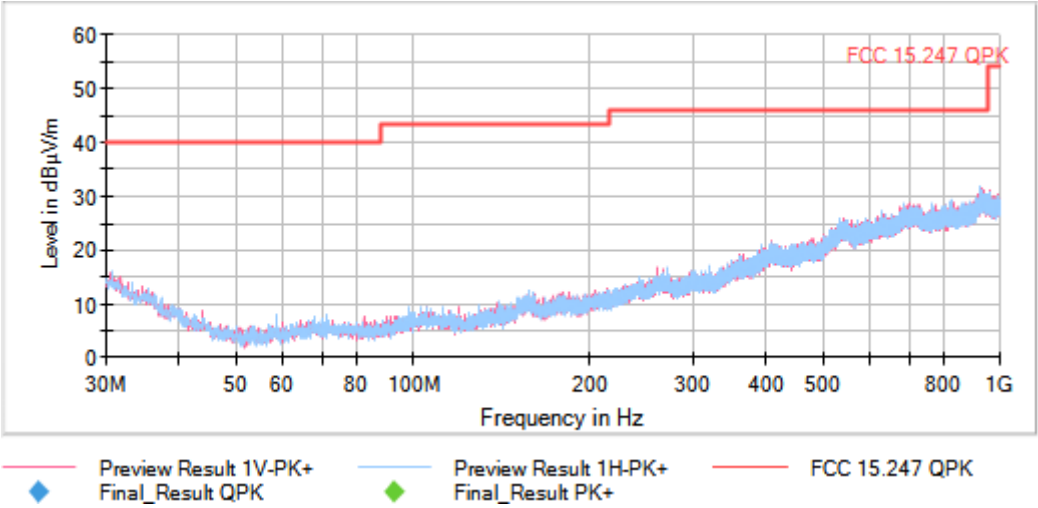


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = Proximity
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

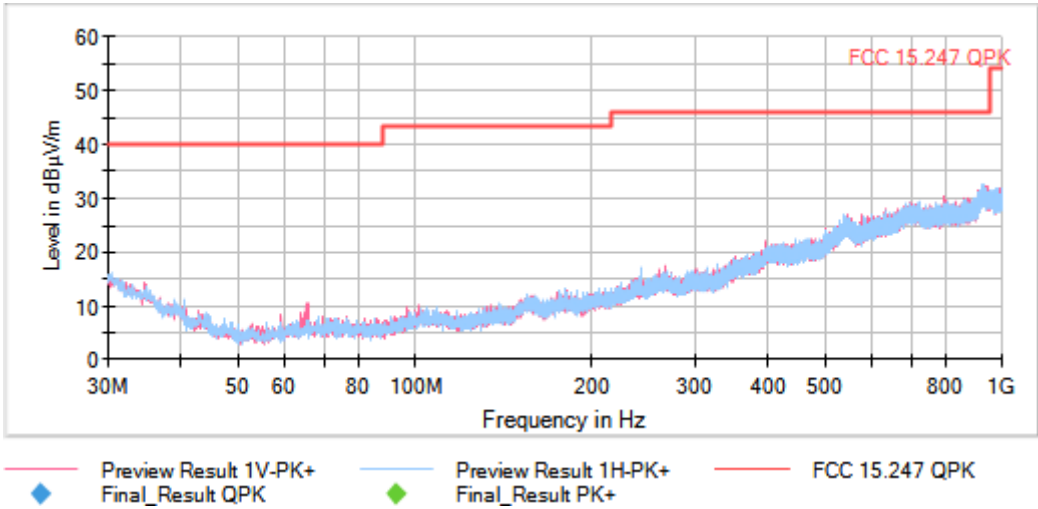


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [0.03, 1] Modulation = Proximity
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

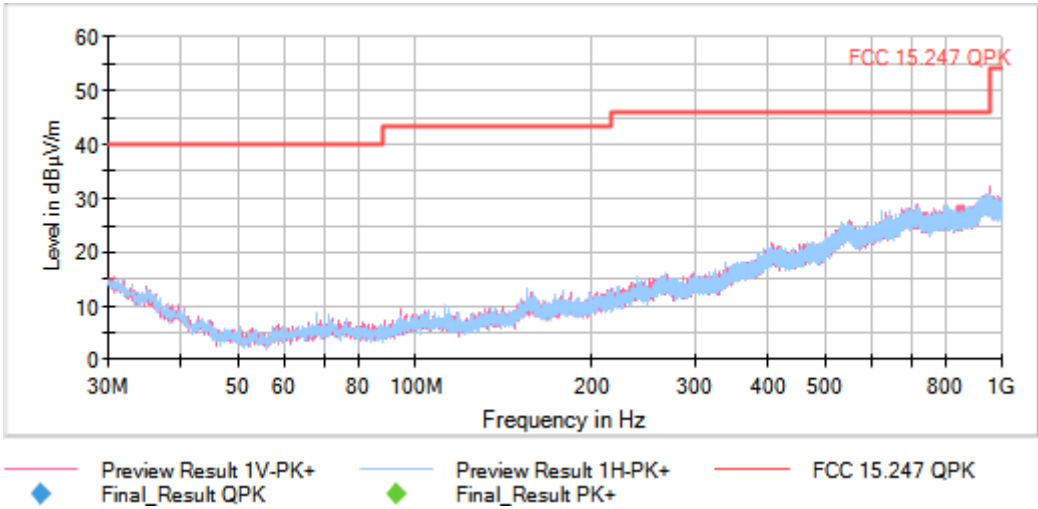


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESR 7]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3] Modulation = Proximity
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

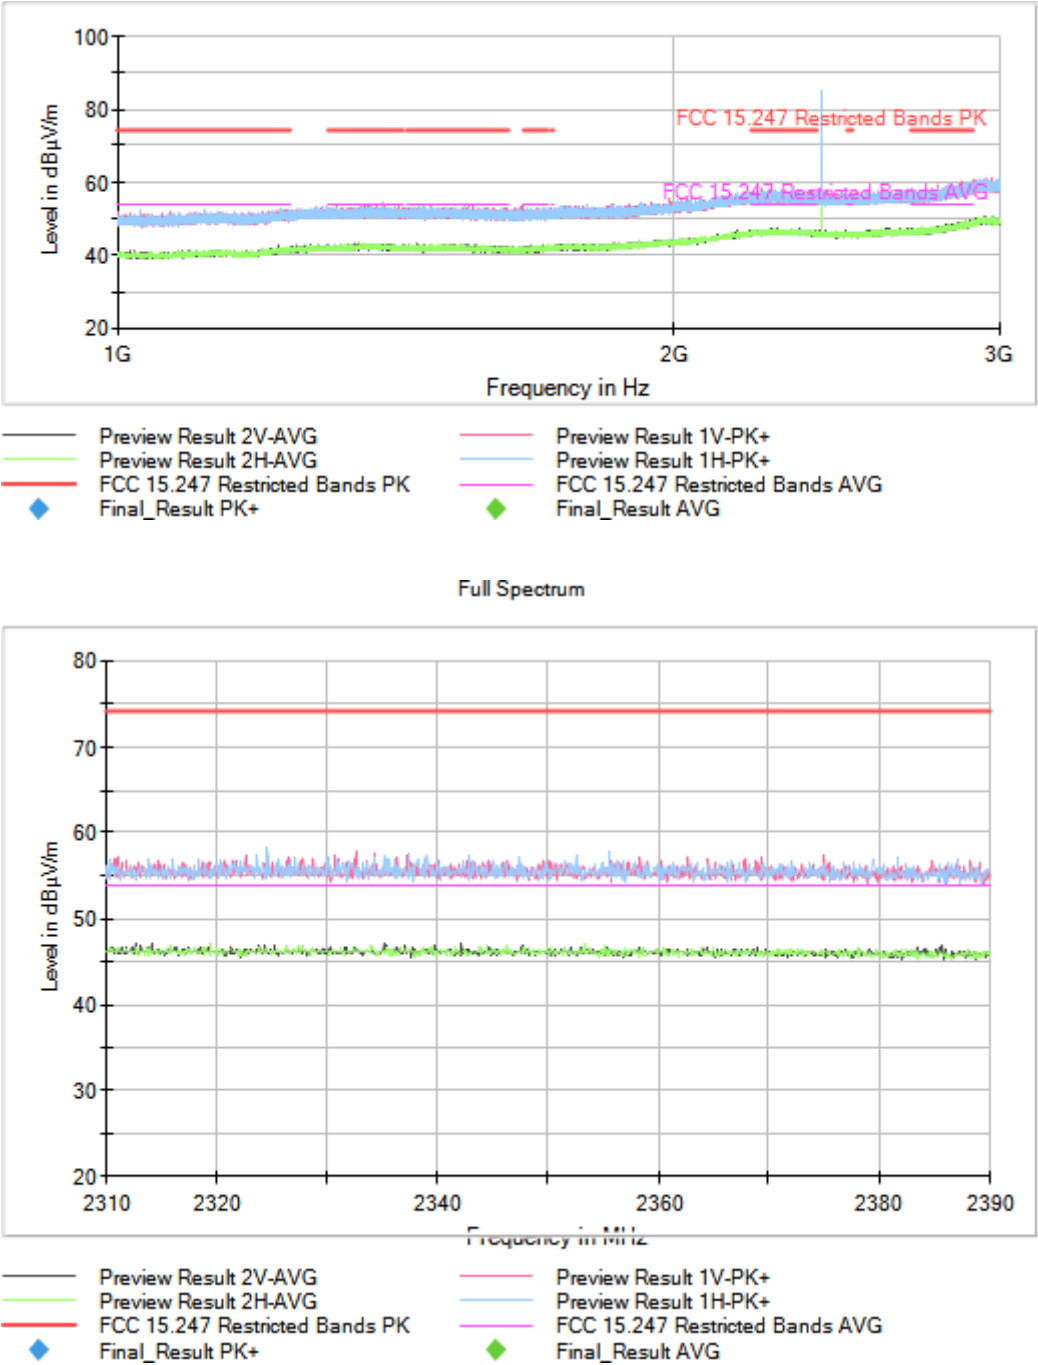




Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Modulation = Proximity
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

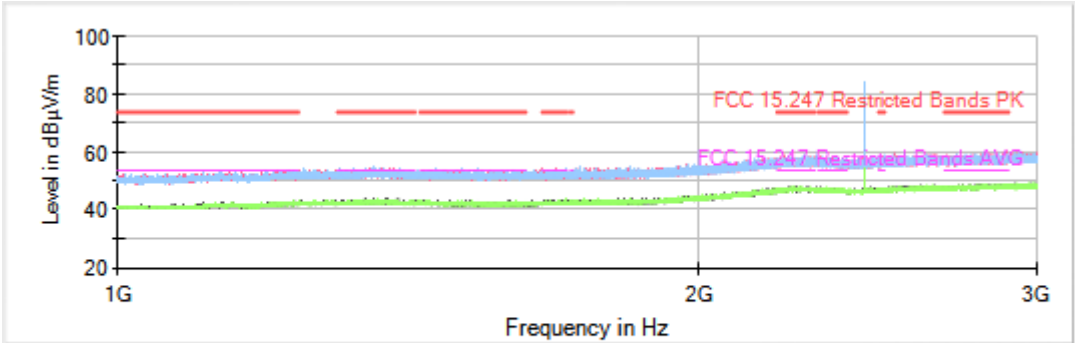

Full Spectrum

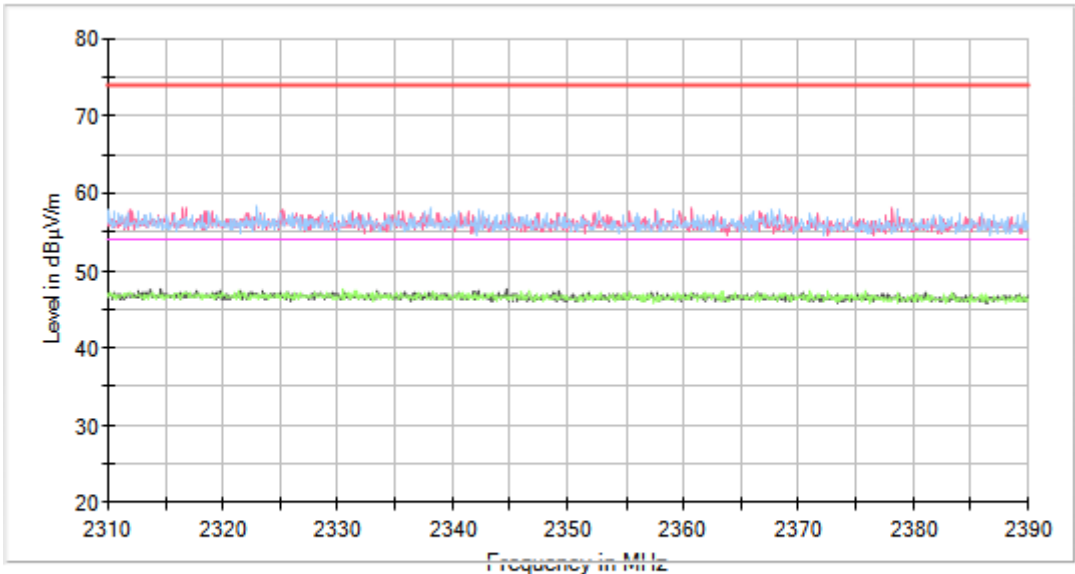

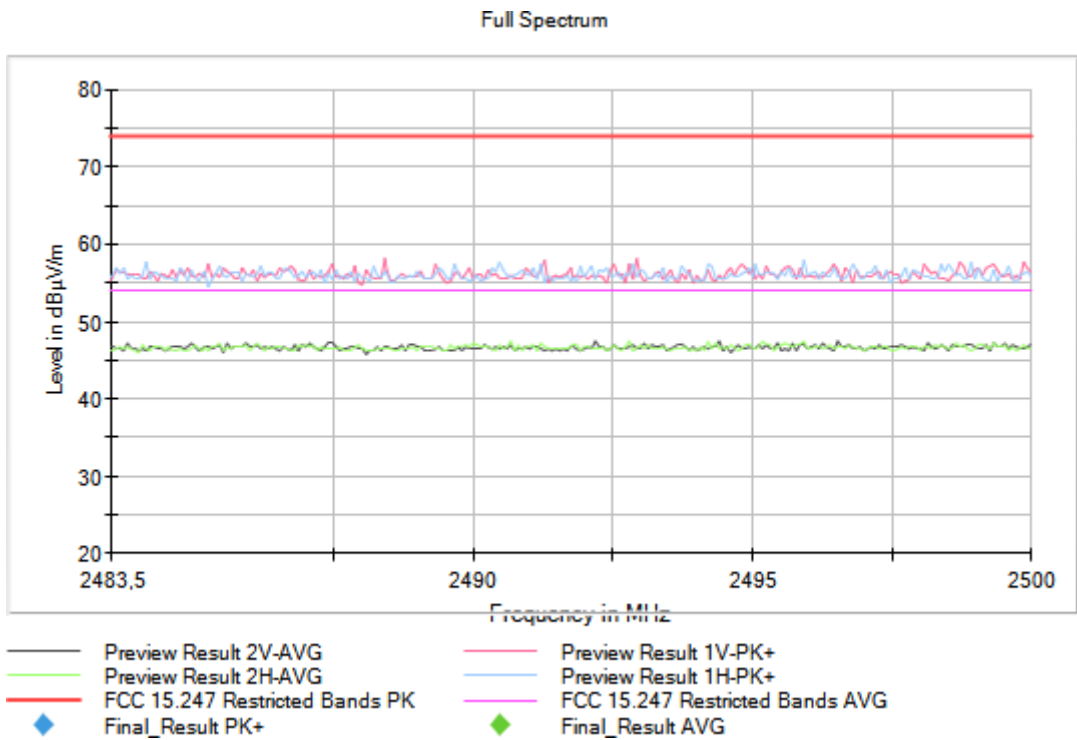

Tables:


Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3] Modulation = Proximity

Frequency MHz = 2480.00000 MIMO Mode = SISO


Images:

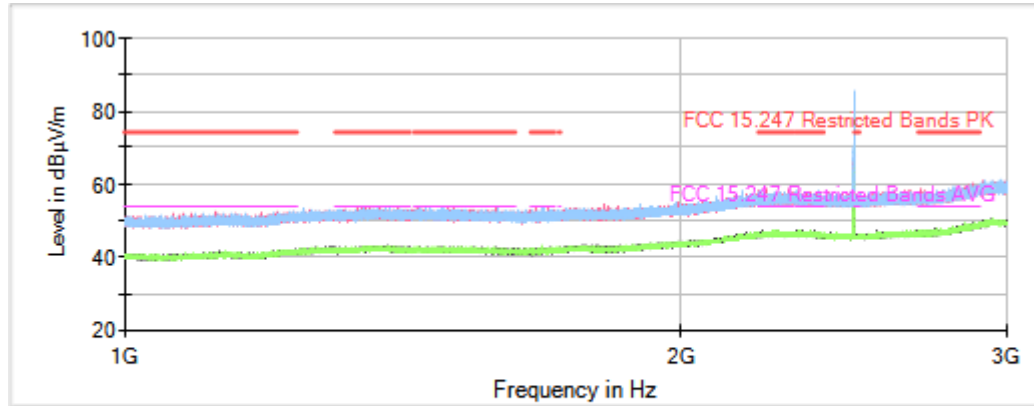

Preview Result 2V-AVG
 Preview Result 2H-AVG
 FCC 15.247 Restricted Bands PK
 Final_Result PK+


Preview Result 1V-PK+
 Preview Result 1H-PK+
 FCC 15.247 Restricted Bands AVG
 Final_Result AVG

Full Spectrum

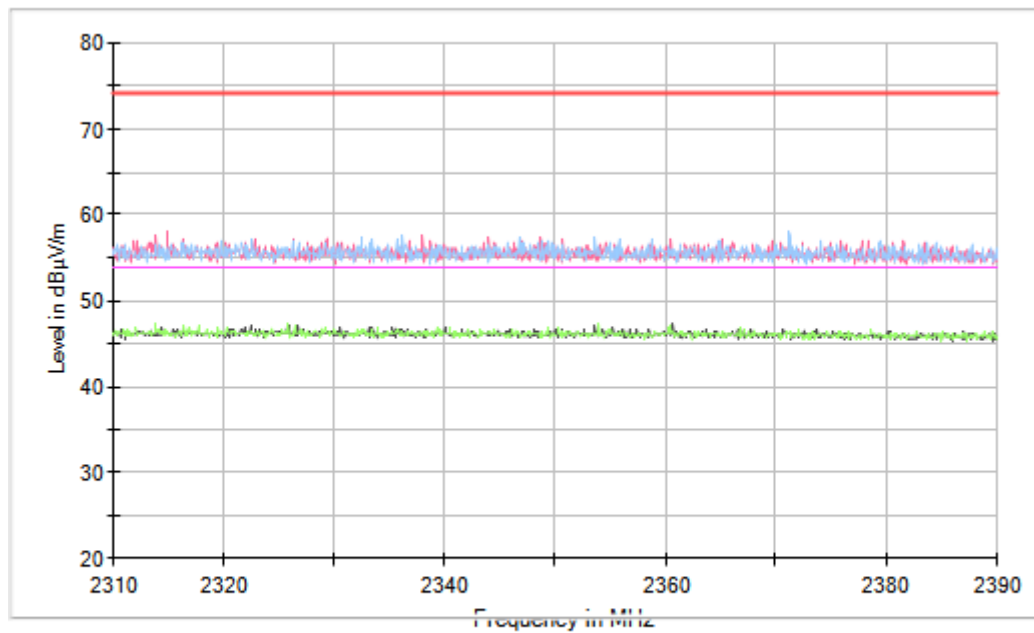

Preview Result 2V-AVG
 Preview Result 2H-AVG
 FCC 15.247 Restricted Bands PK
 Final_Result PK+

Preview Result 1V-PK+
 Preview Result 1H-PK+
 FCC 15.247 Restricted Bands AVG
 Final_Result AVG

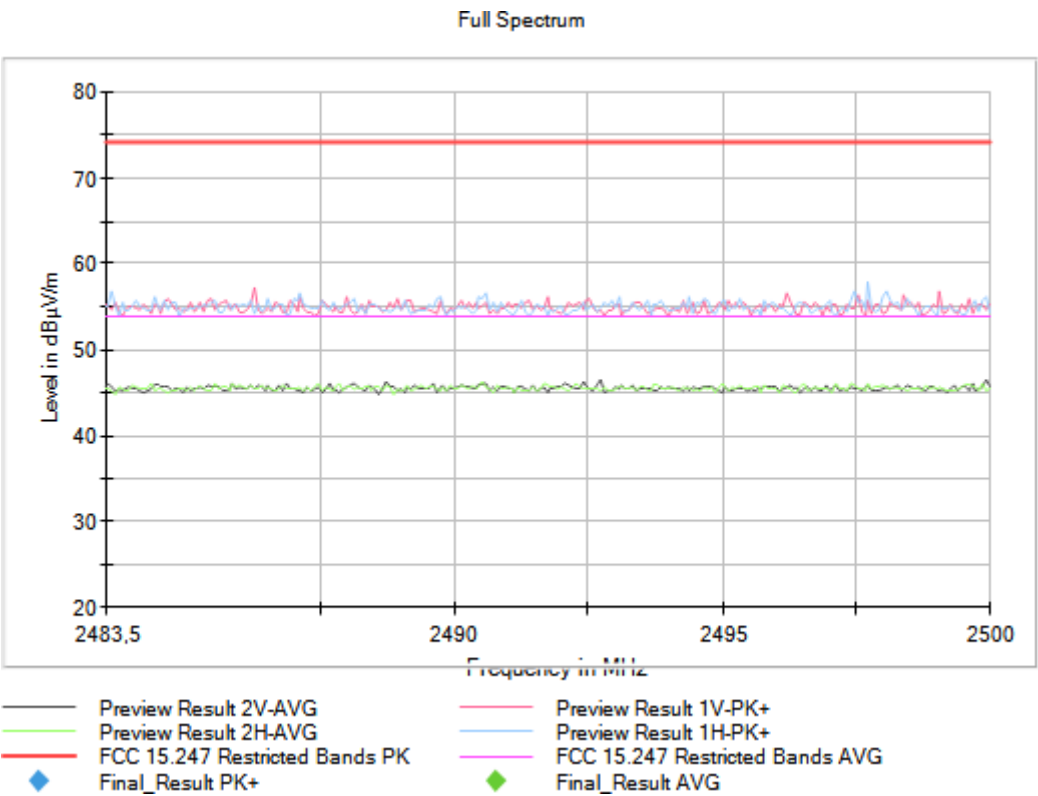


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = Proximity
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

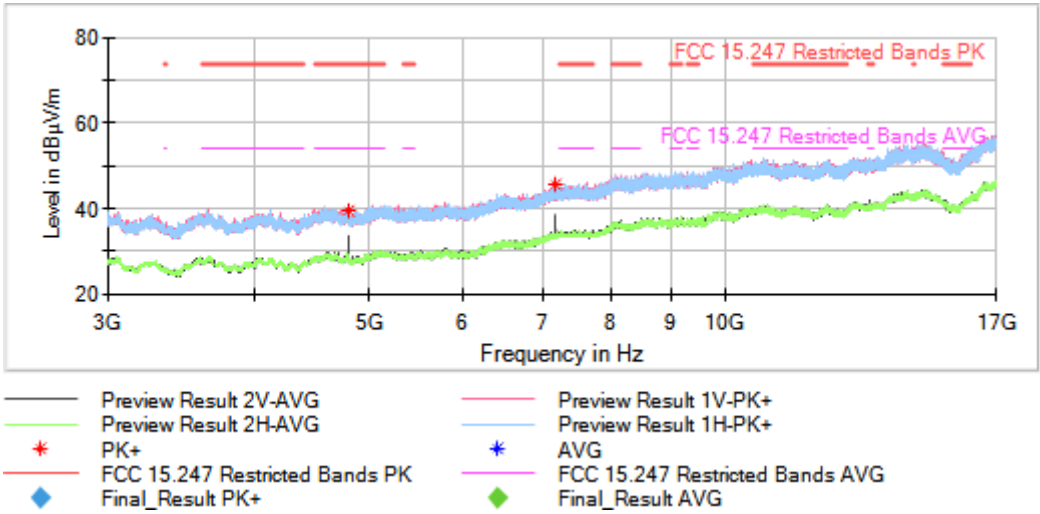


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = Proximity
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

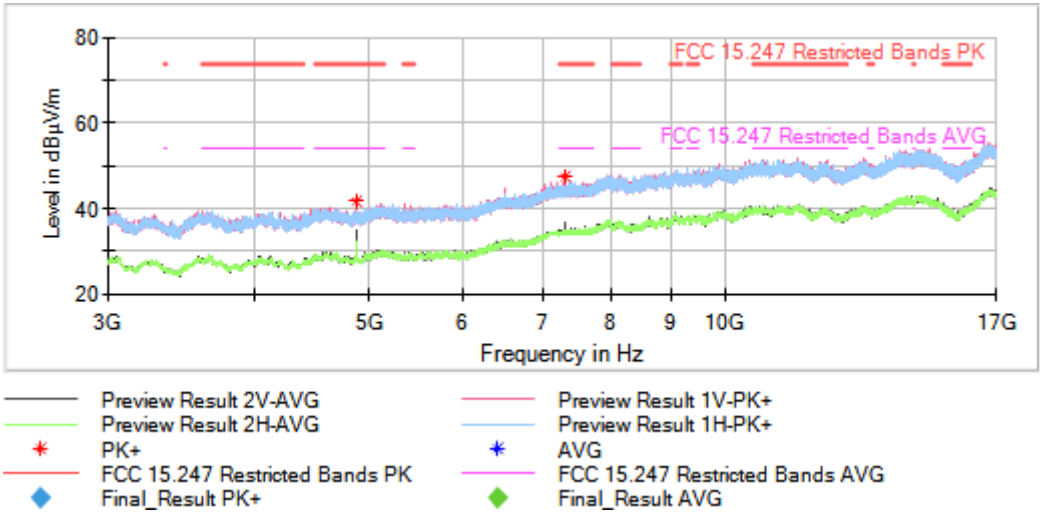


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSW 50]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Modulation = Proximity
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

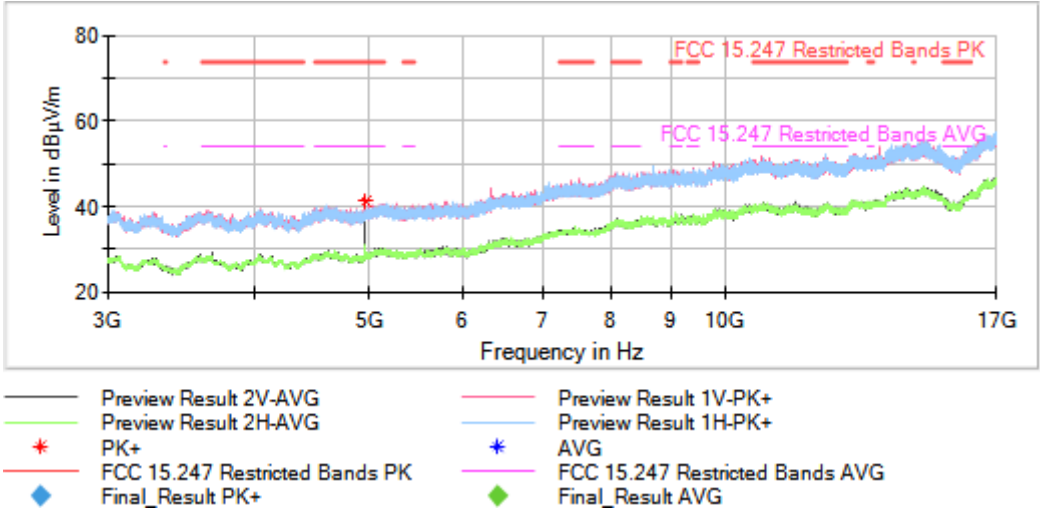


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = Proximity
Frequency MHz = 2402.00000 MIMO Mode = SISO

Images:

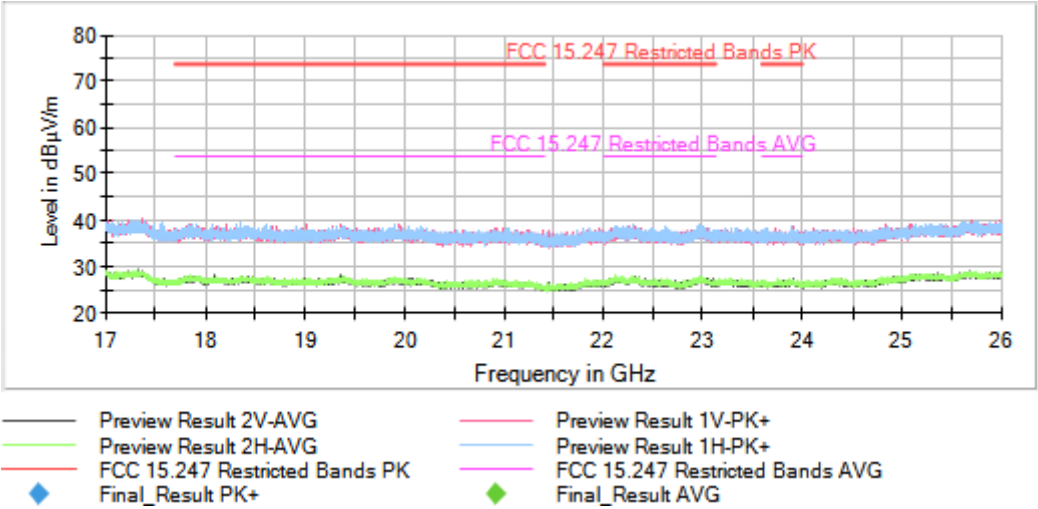


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = Proximity
Frequency MHz = 2440.00000 MIMO Mode = SISO

Images:

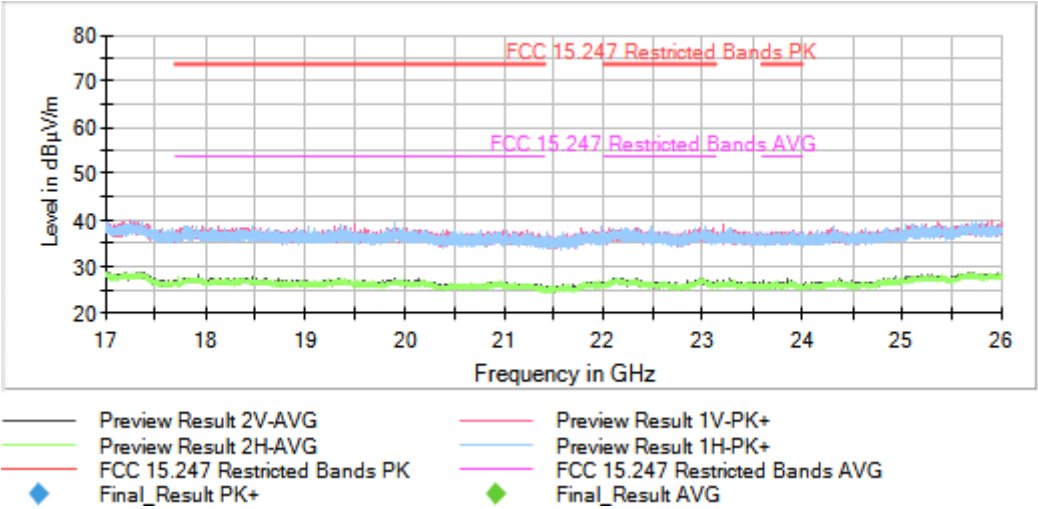


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26] Modulation = Proximity
Frequency MHz = 2480.00000 MIMO Mode = SISO

Images:

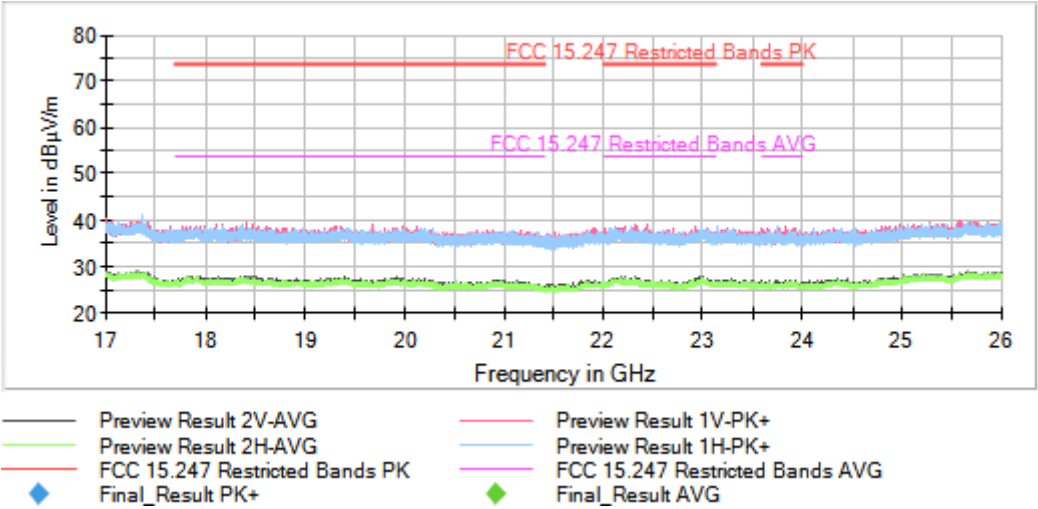

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 26]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB