



Occupied Bandwidth

Channel



15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM



Lowest

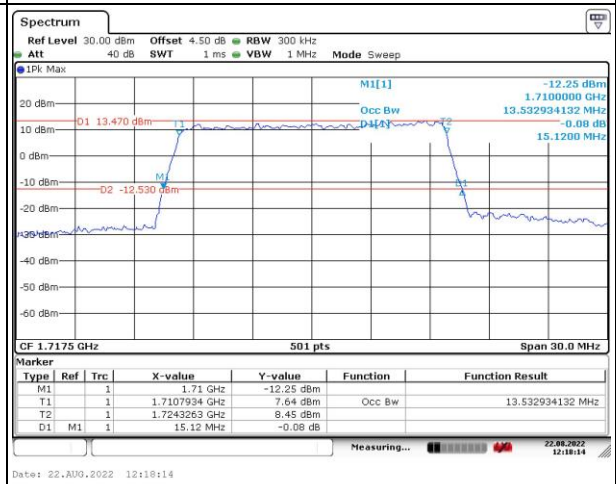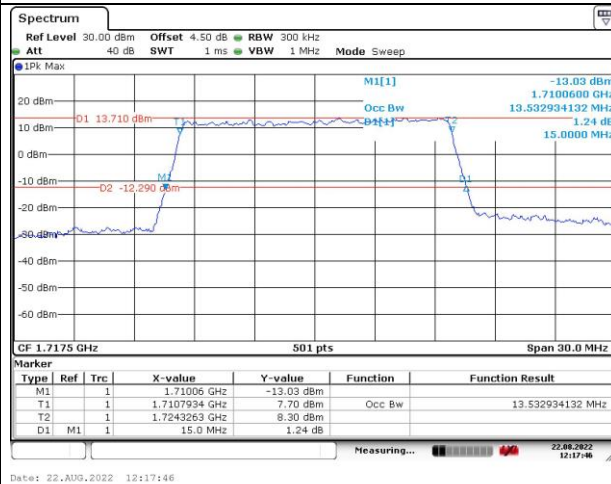

Middle

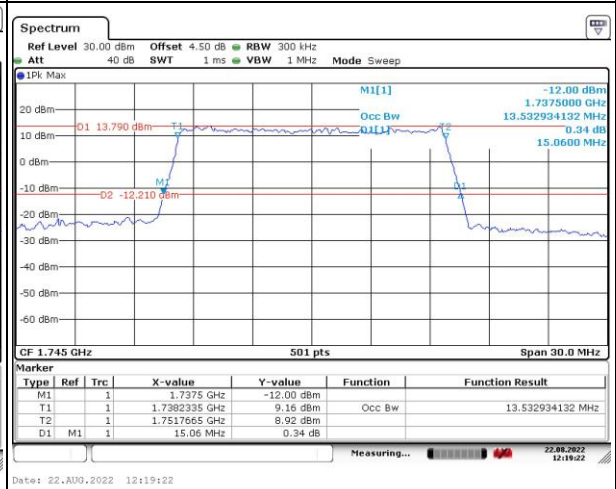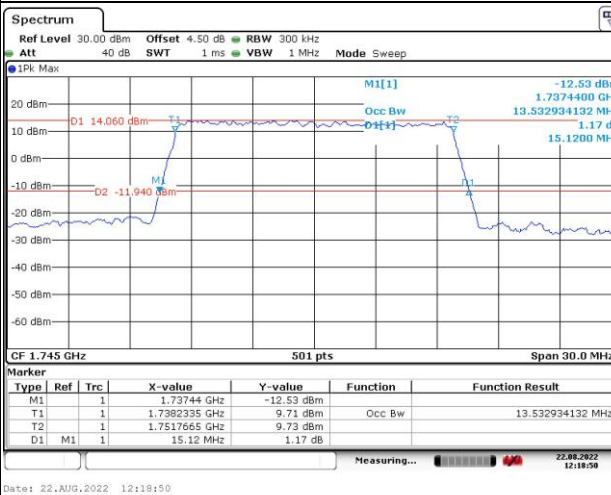

Highest

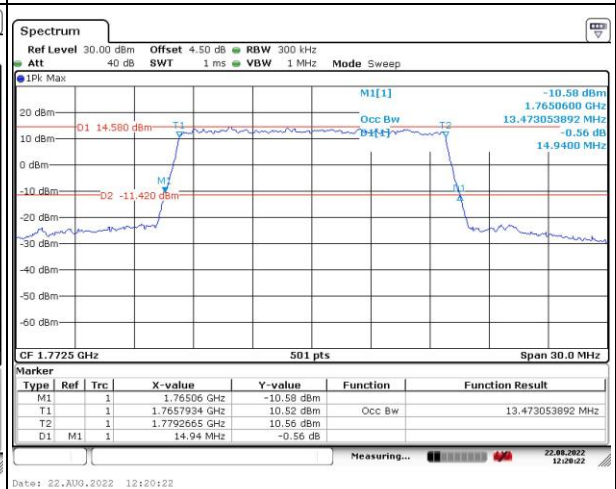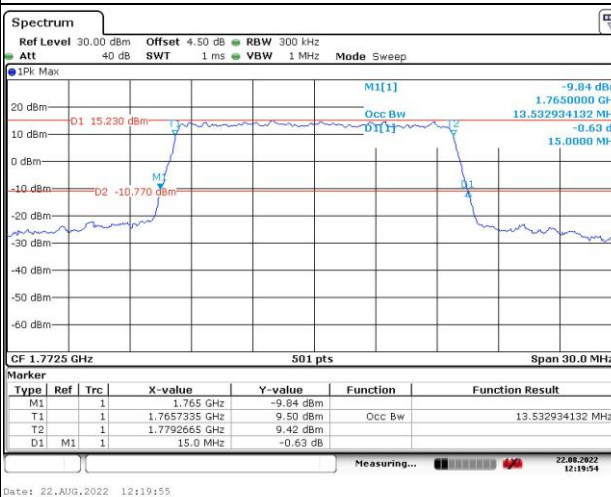



Occupied Bandwidth

Channel



20MHz Bandwidth QPSK

20MHz Bandwidth 16QAM



Lowest

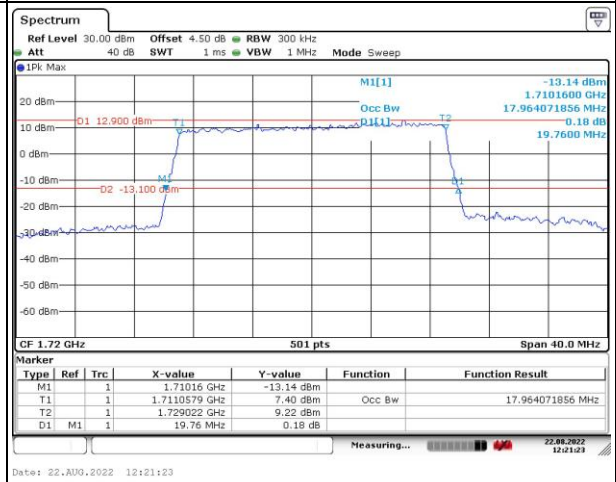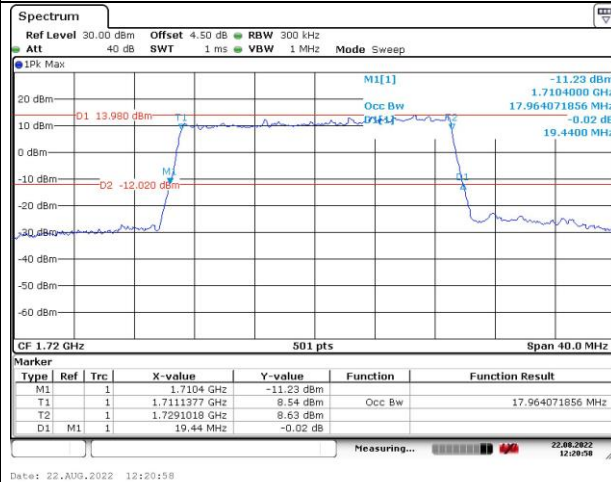

Middle

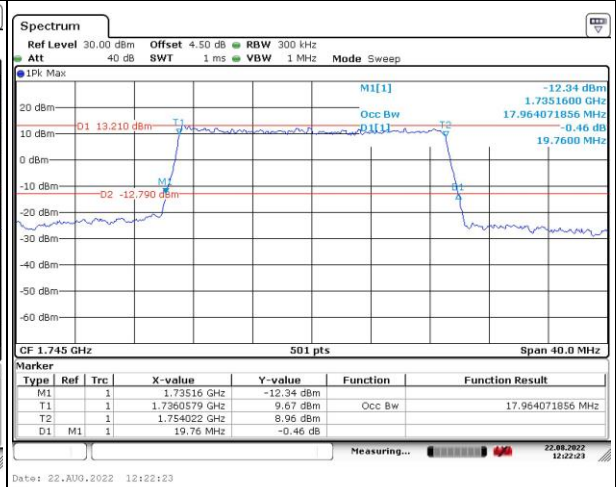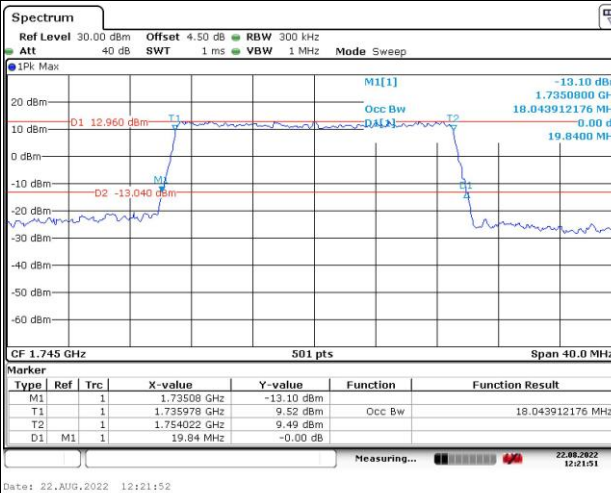

Highest

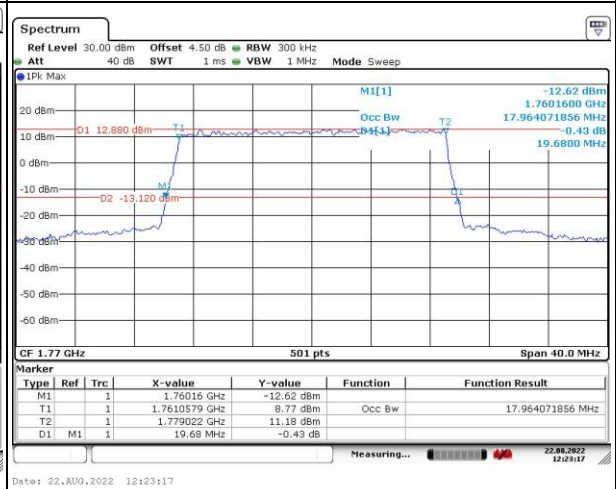
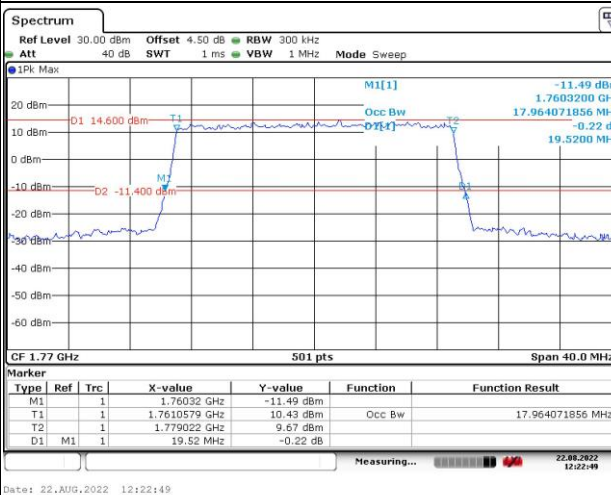


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

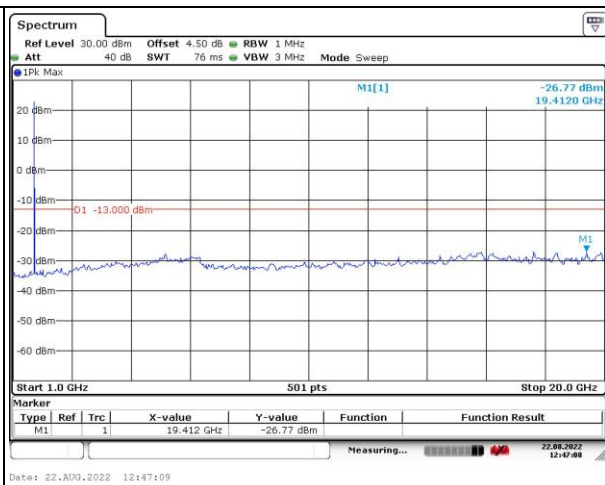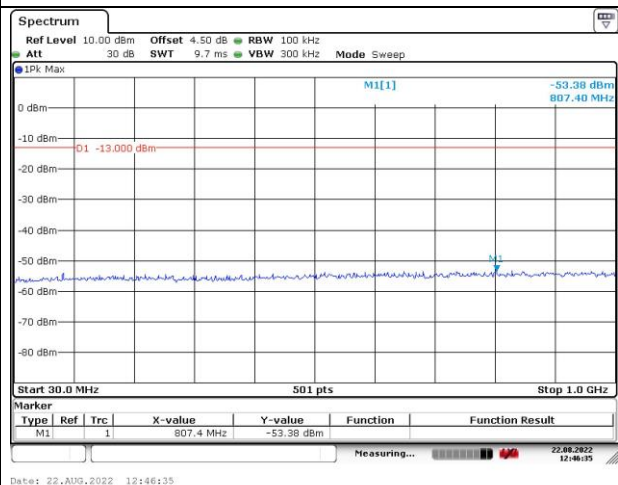

Middle

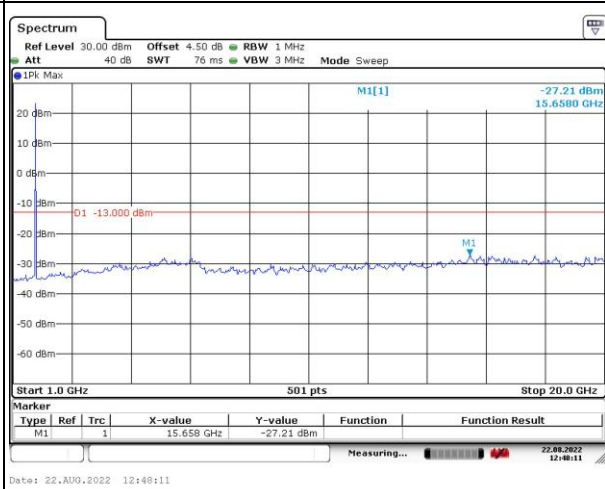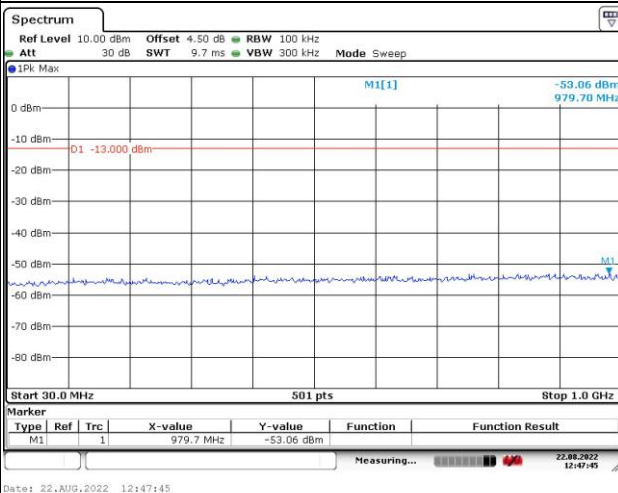

Highest

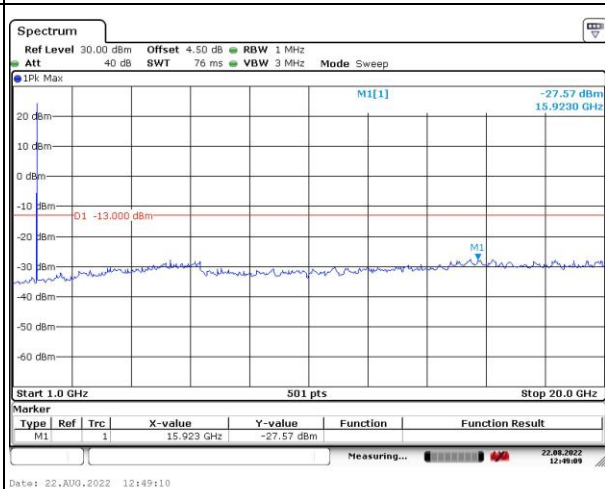
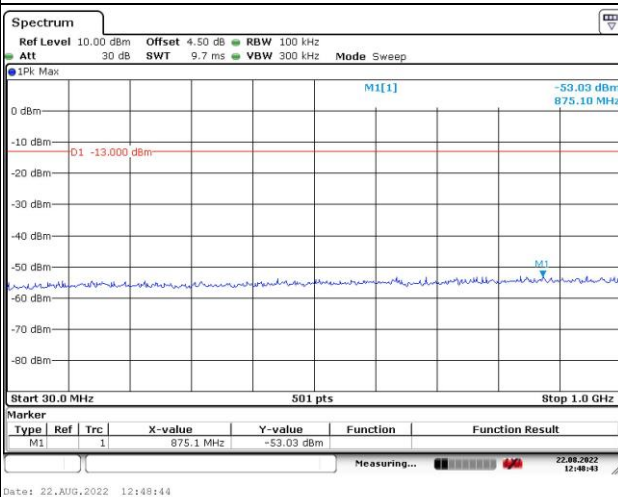


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

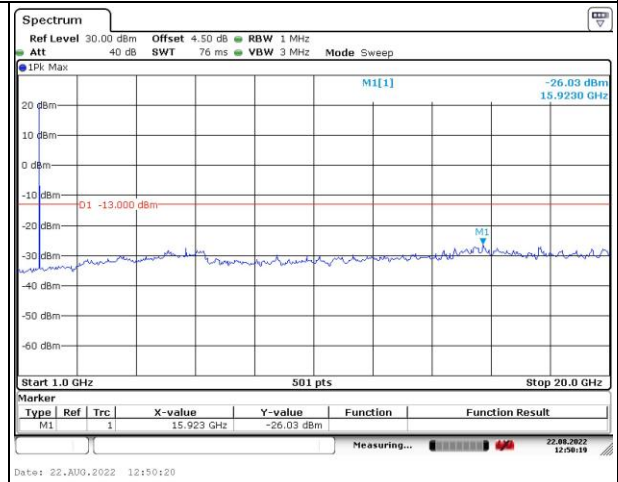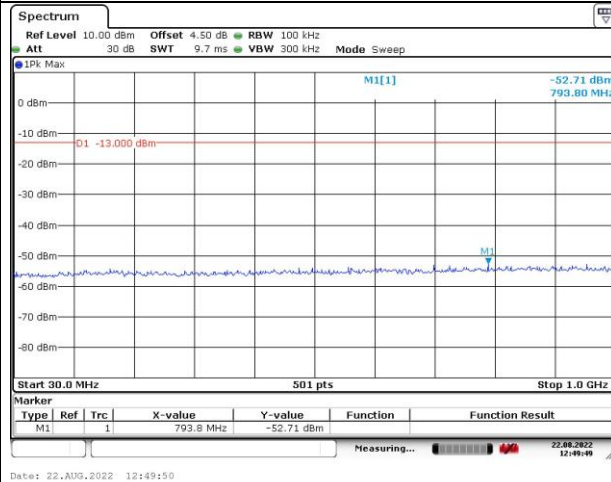

Middle

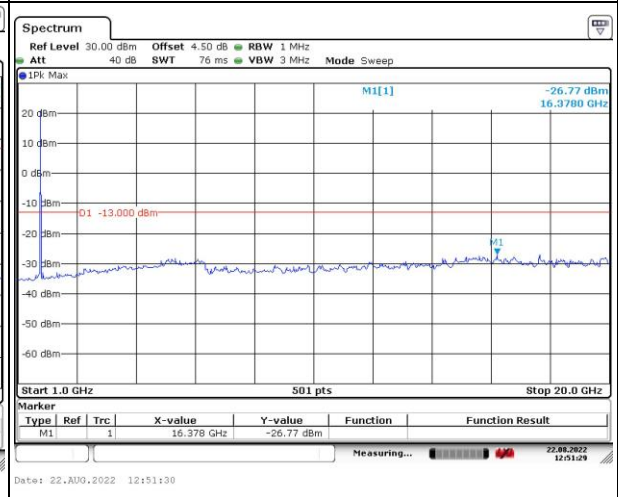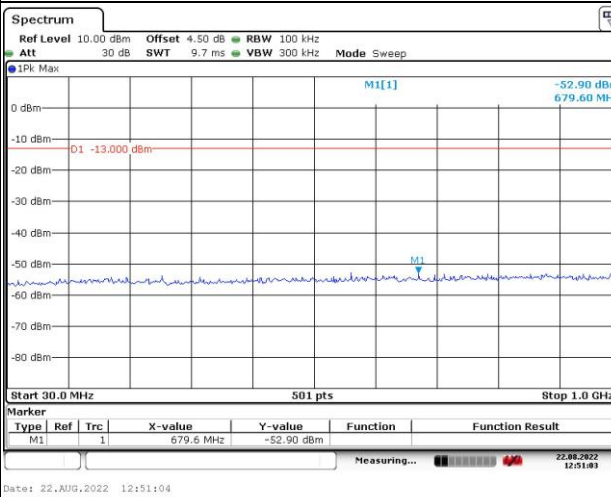

Highest

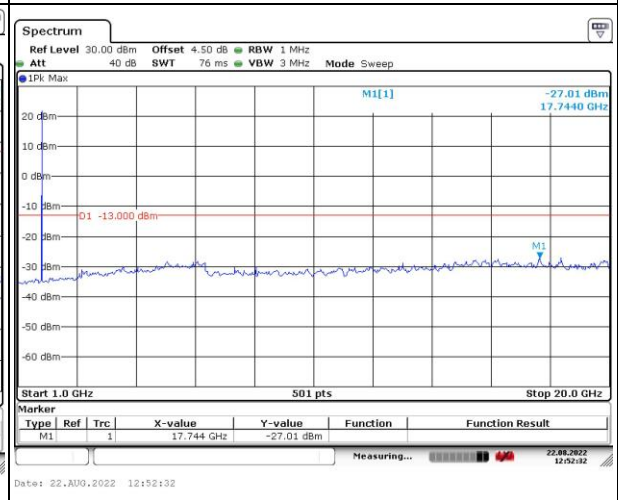
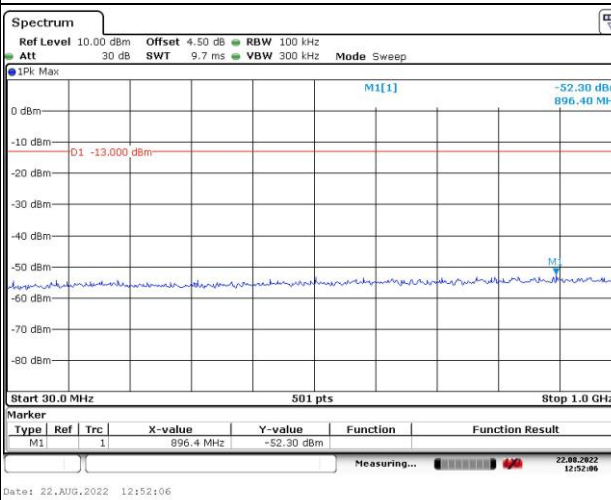


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

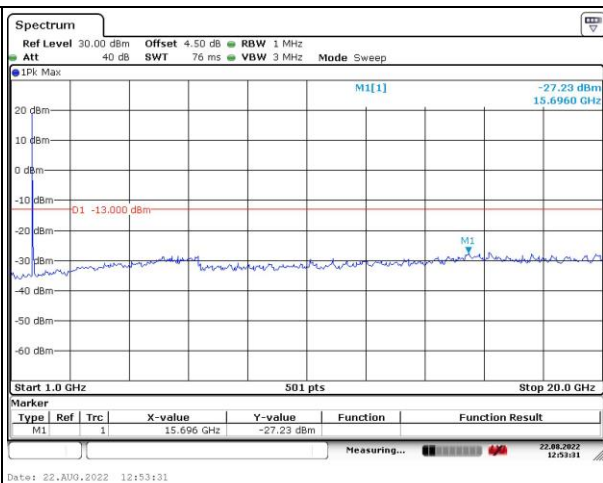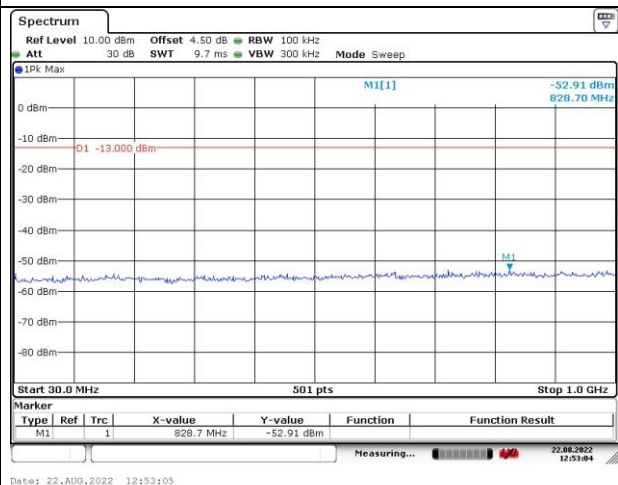

Middle

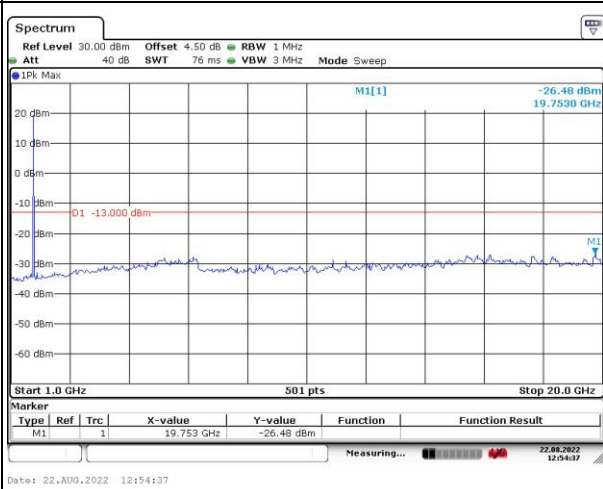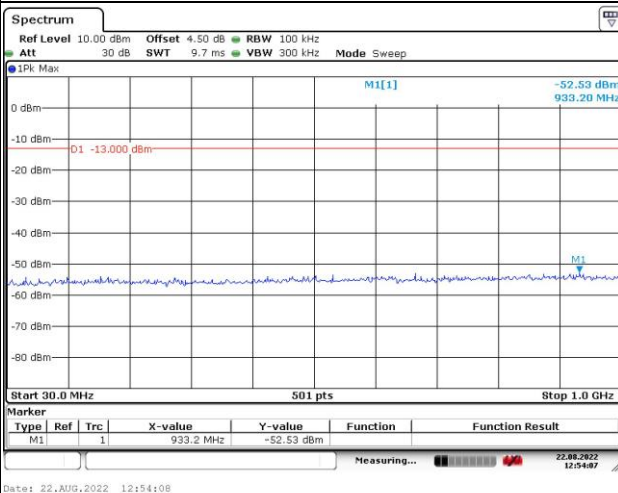

Highest

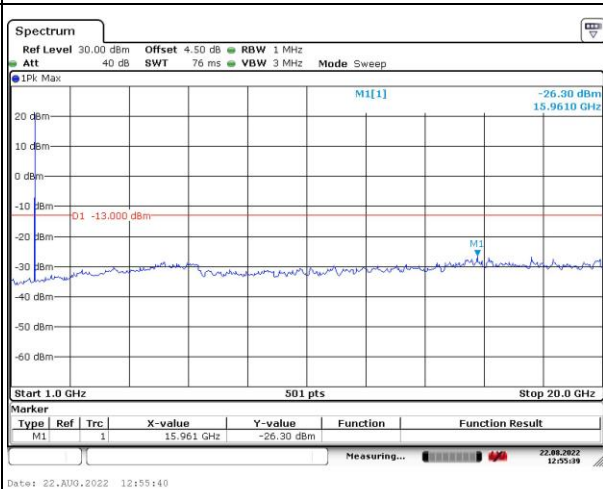
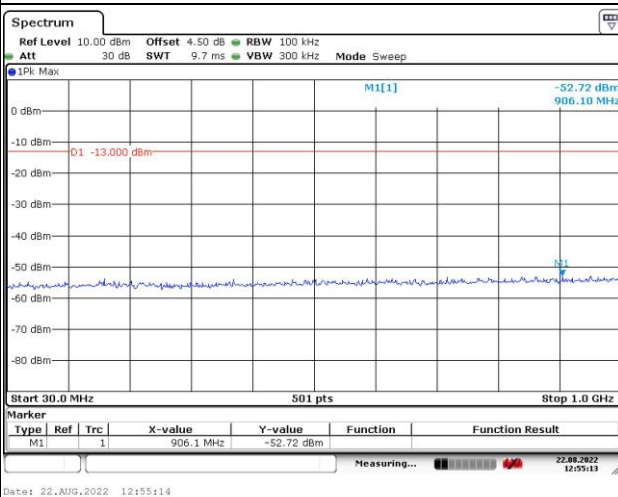


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

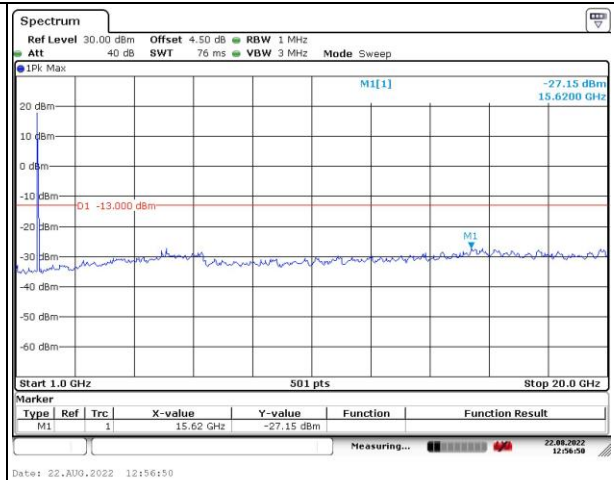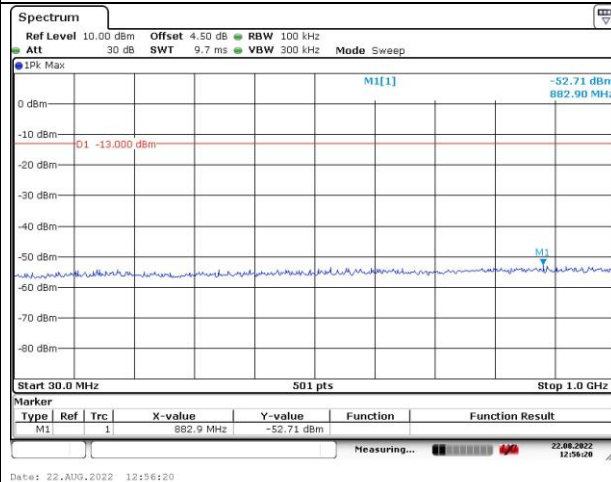

Middle

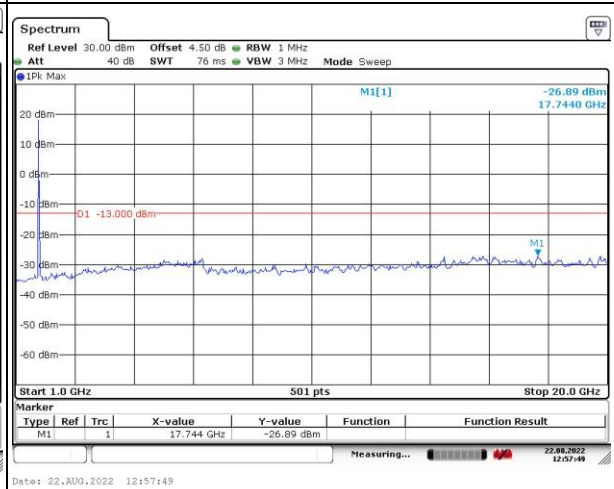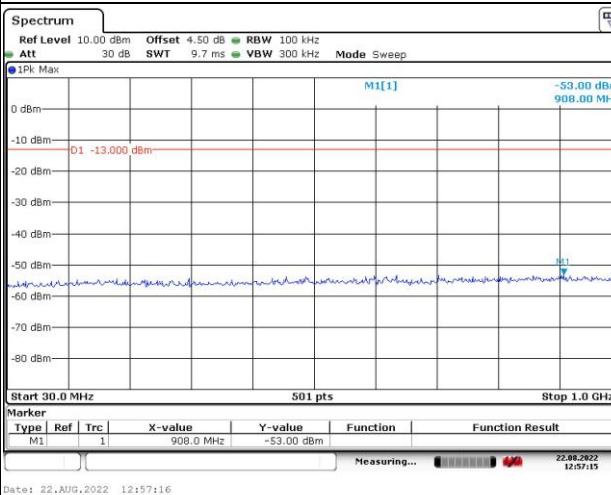

Highest

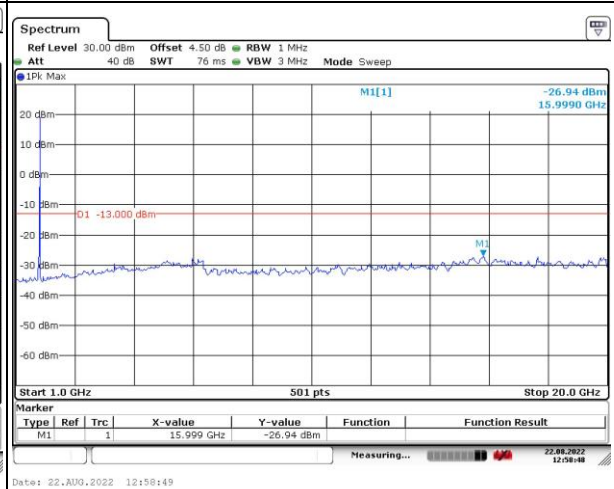
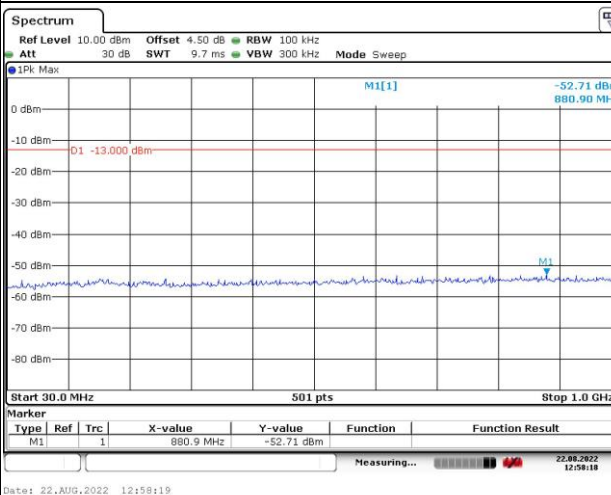


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

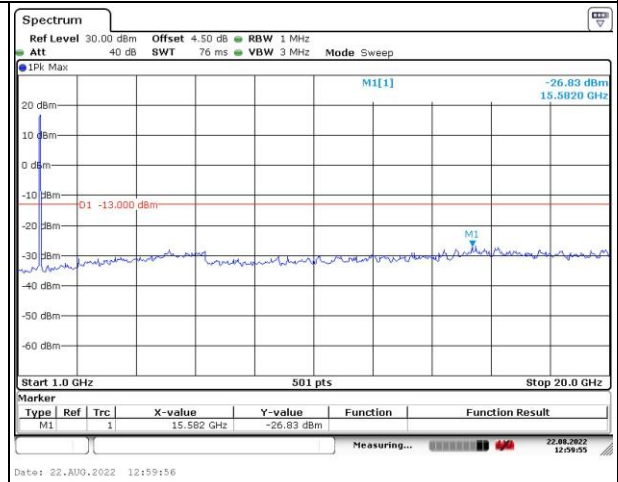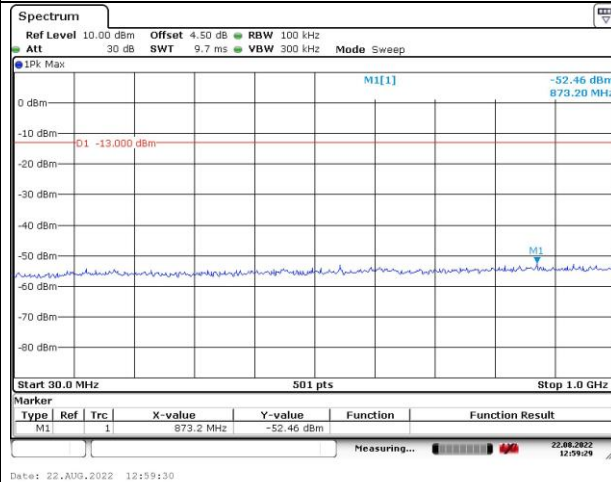

Middle

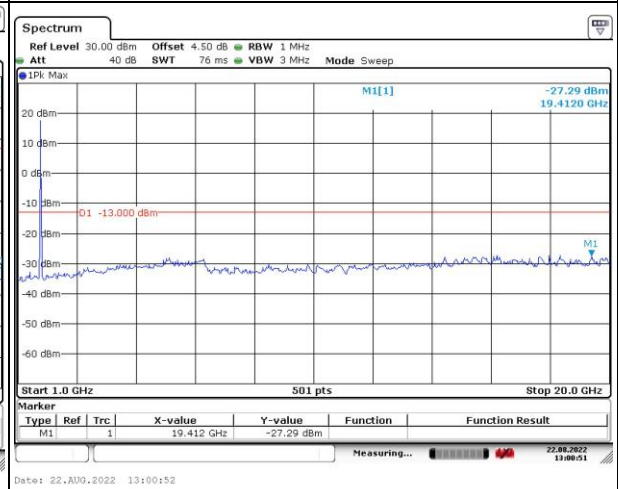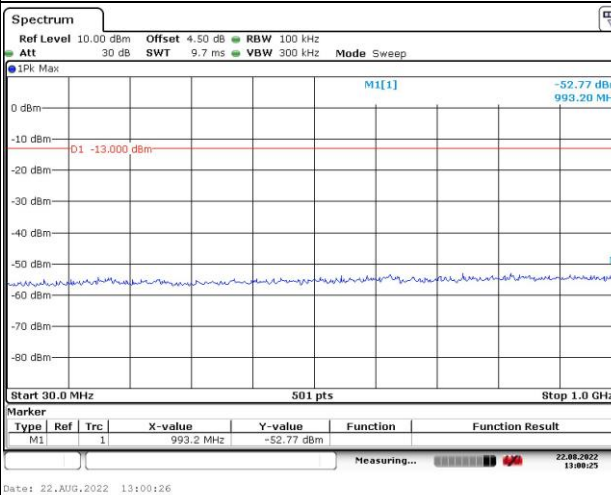

Highest

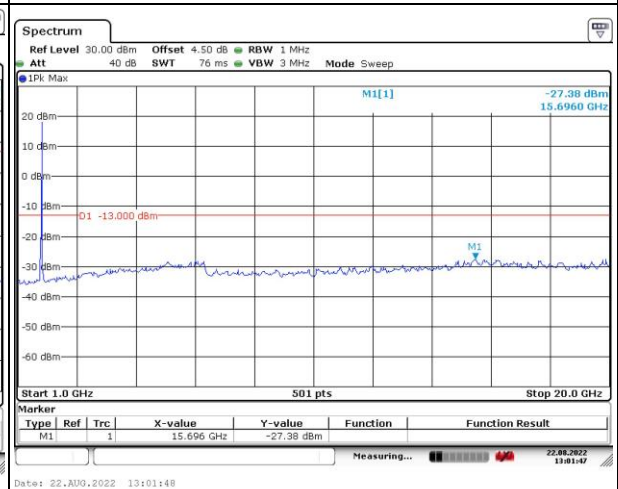
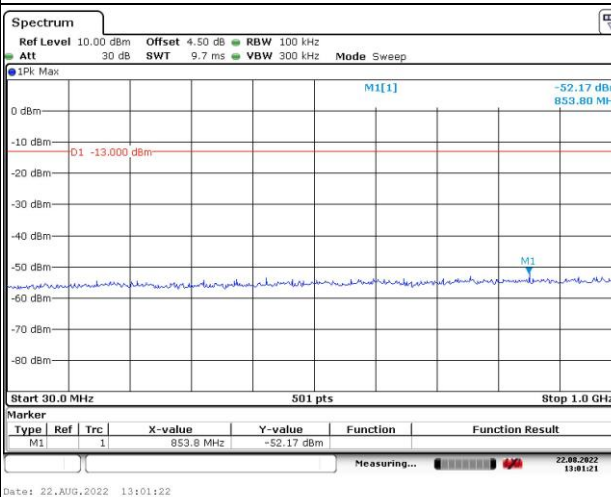


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

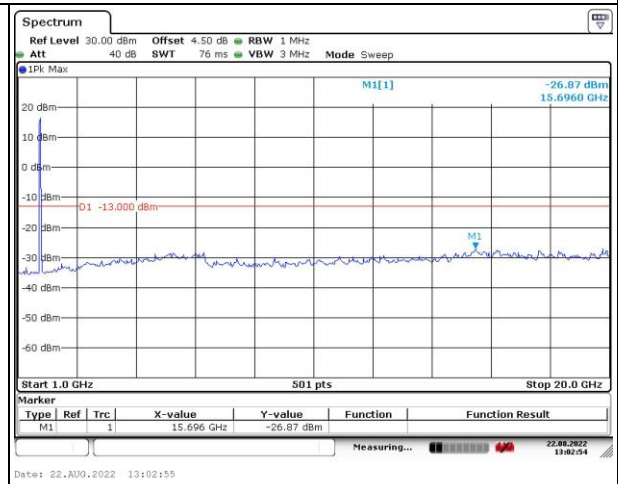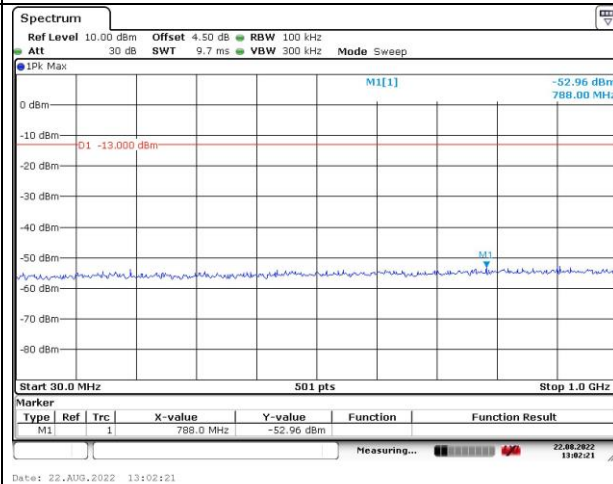


Middle

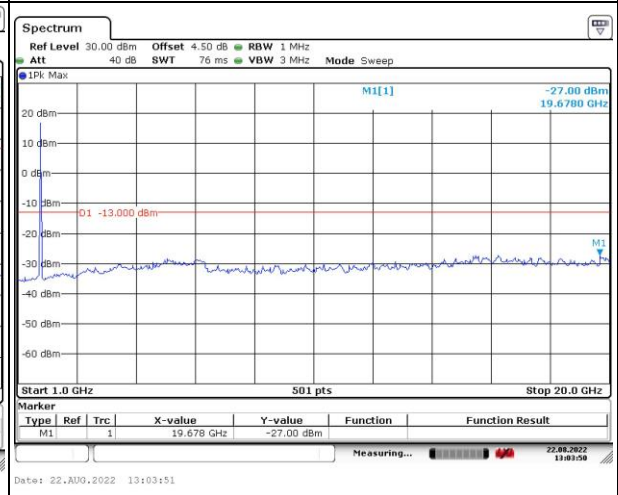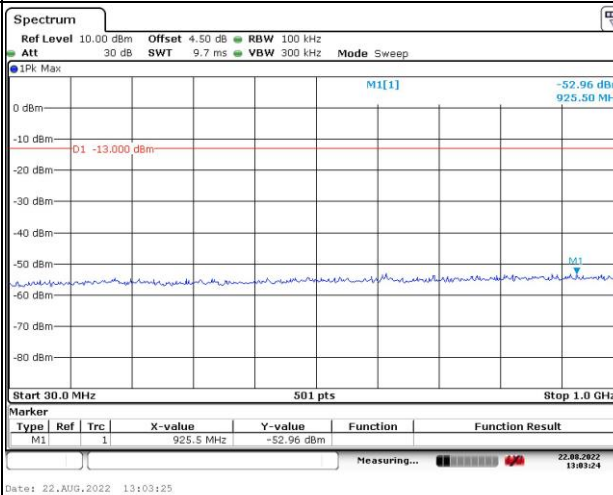


Highest

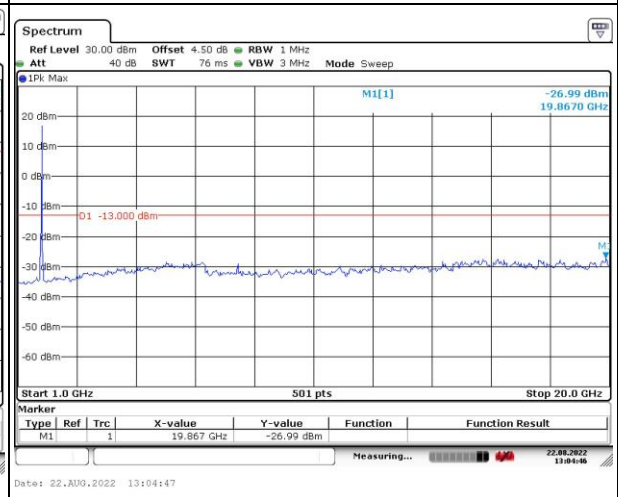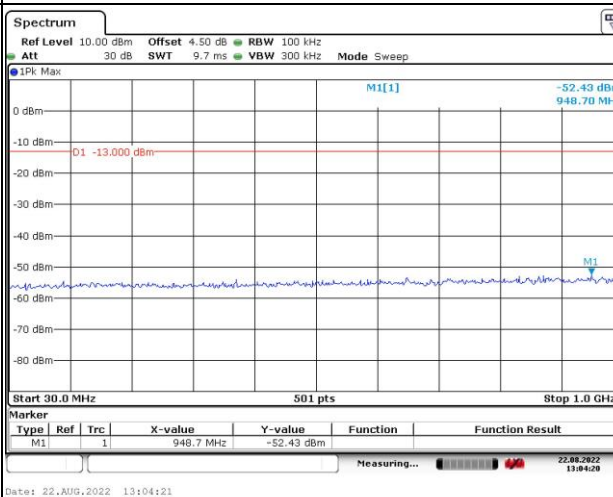


Out of band emission, Band Edge

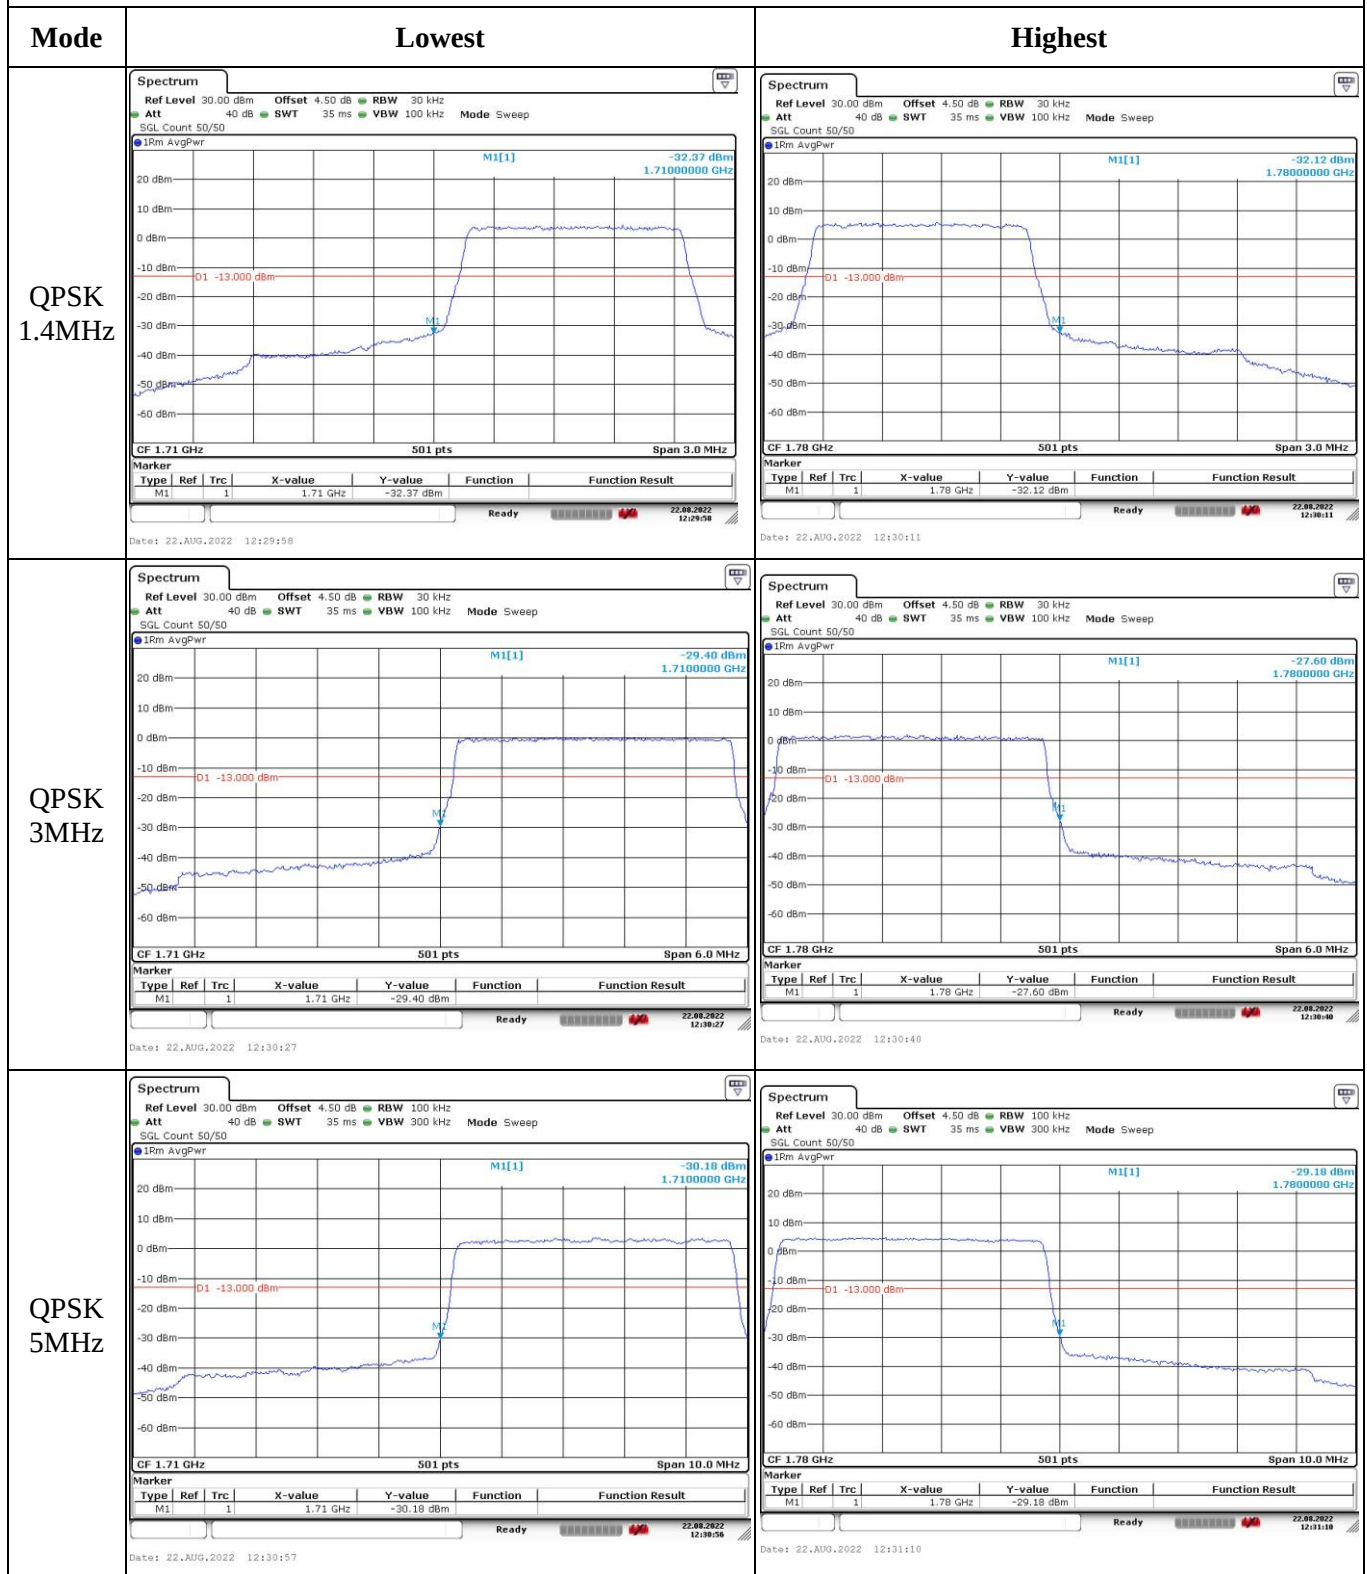


Out of band emission, Band Edge

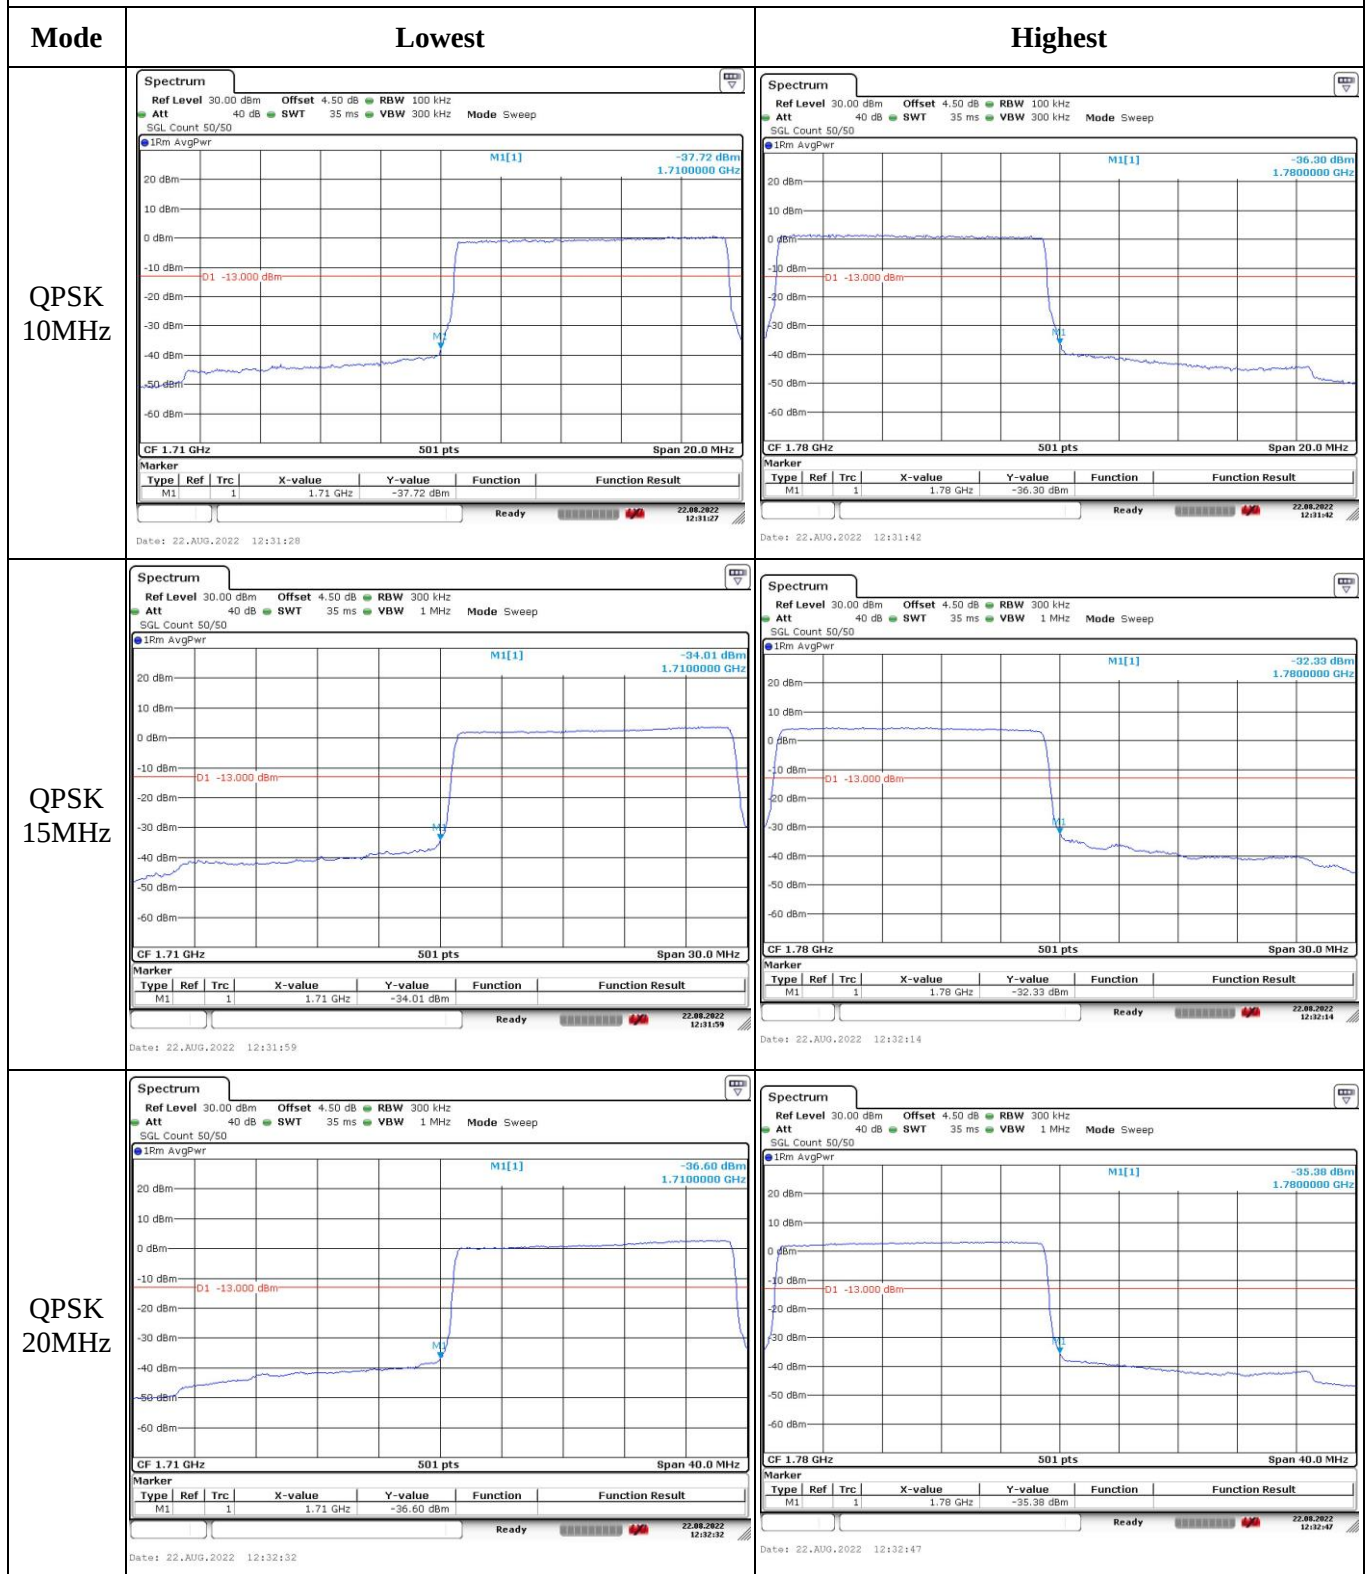

Out of band emission, Band Edge

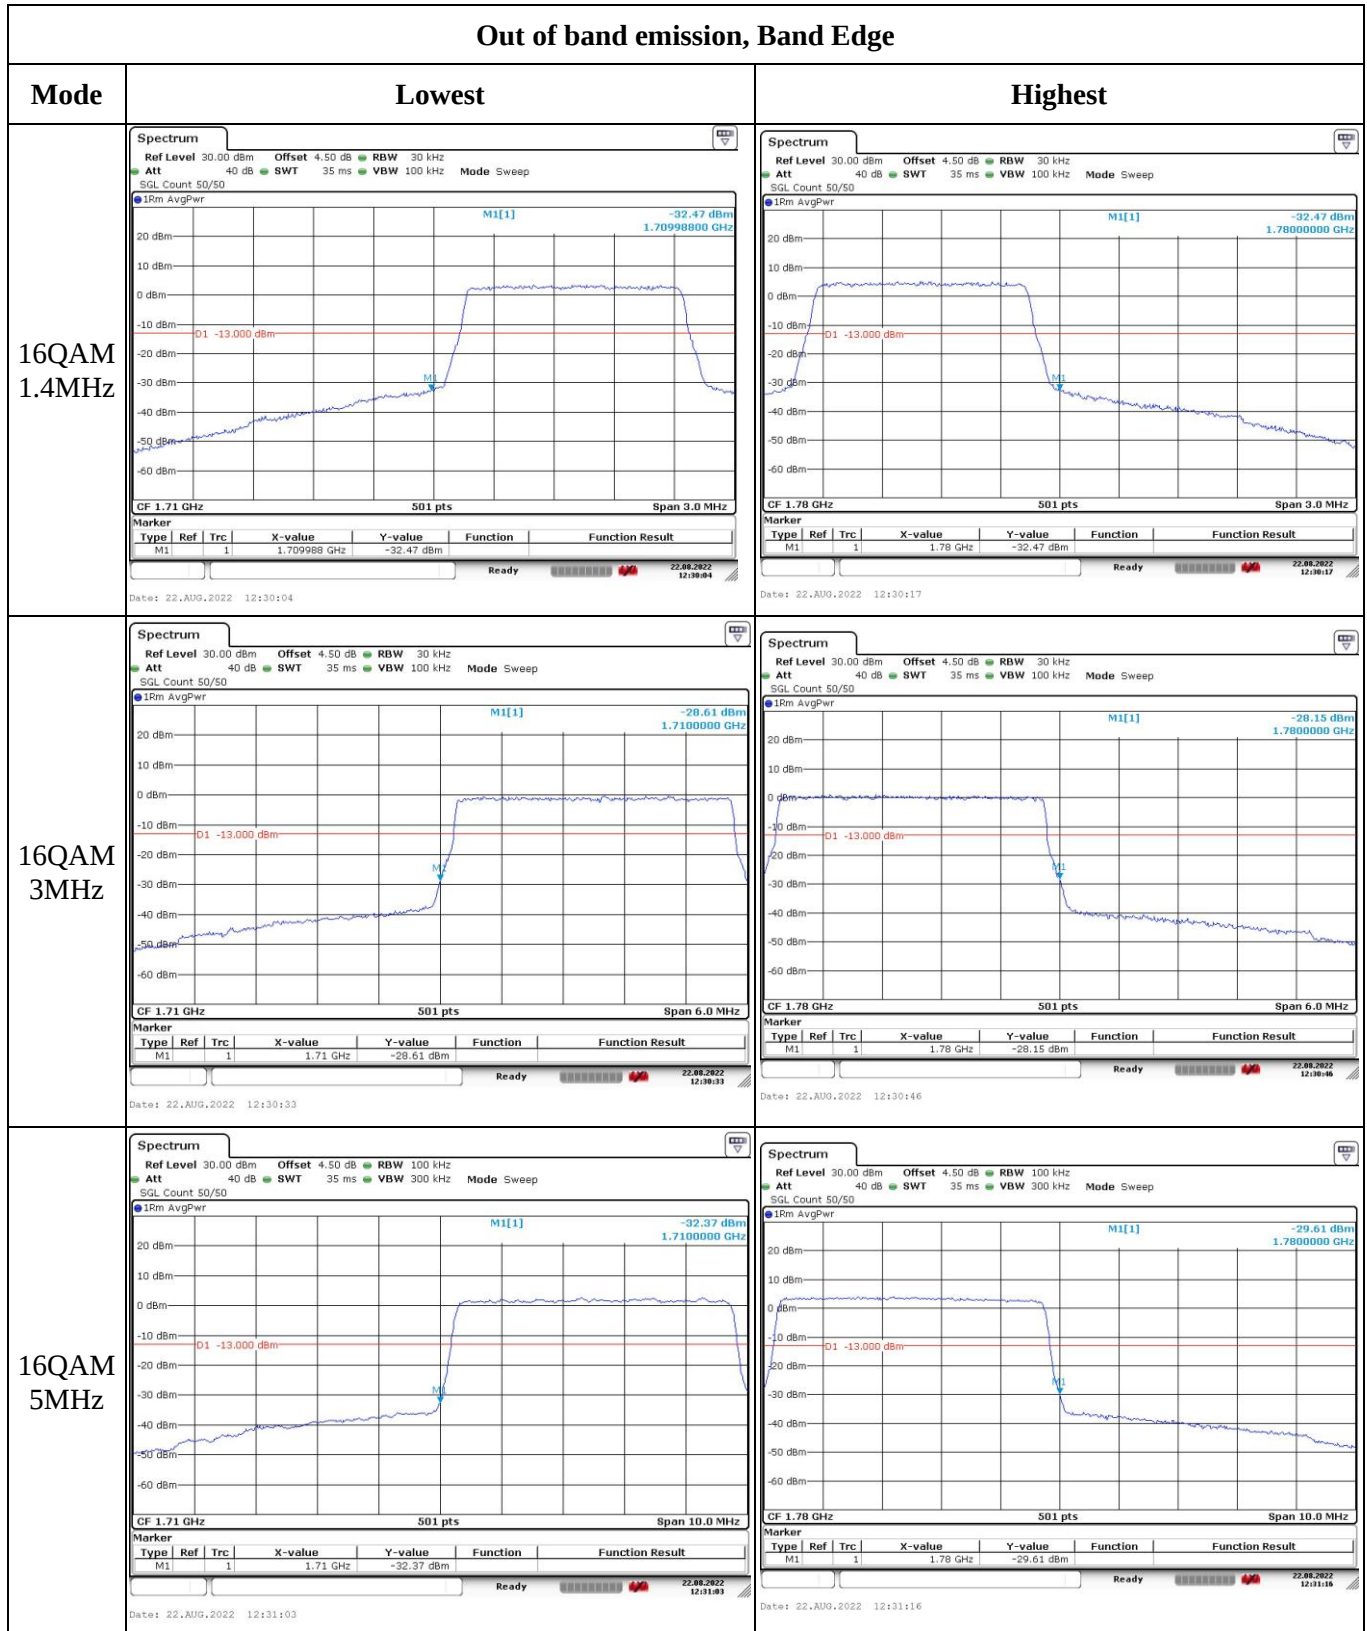

Out of band emission, Band Edge

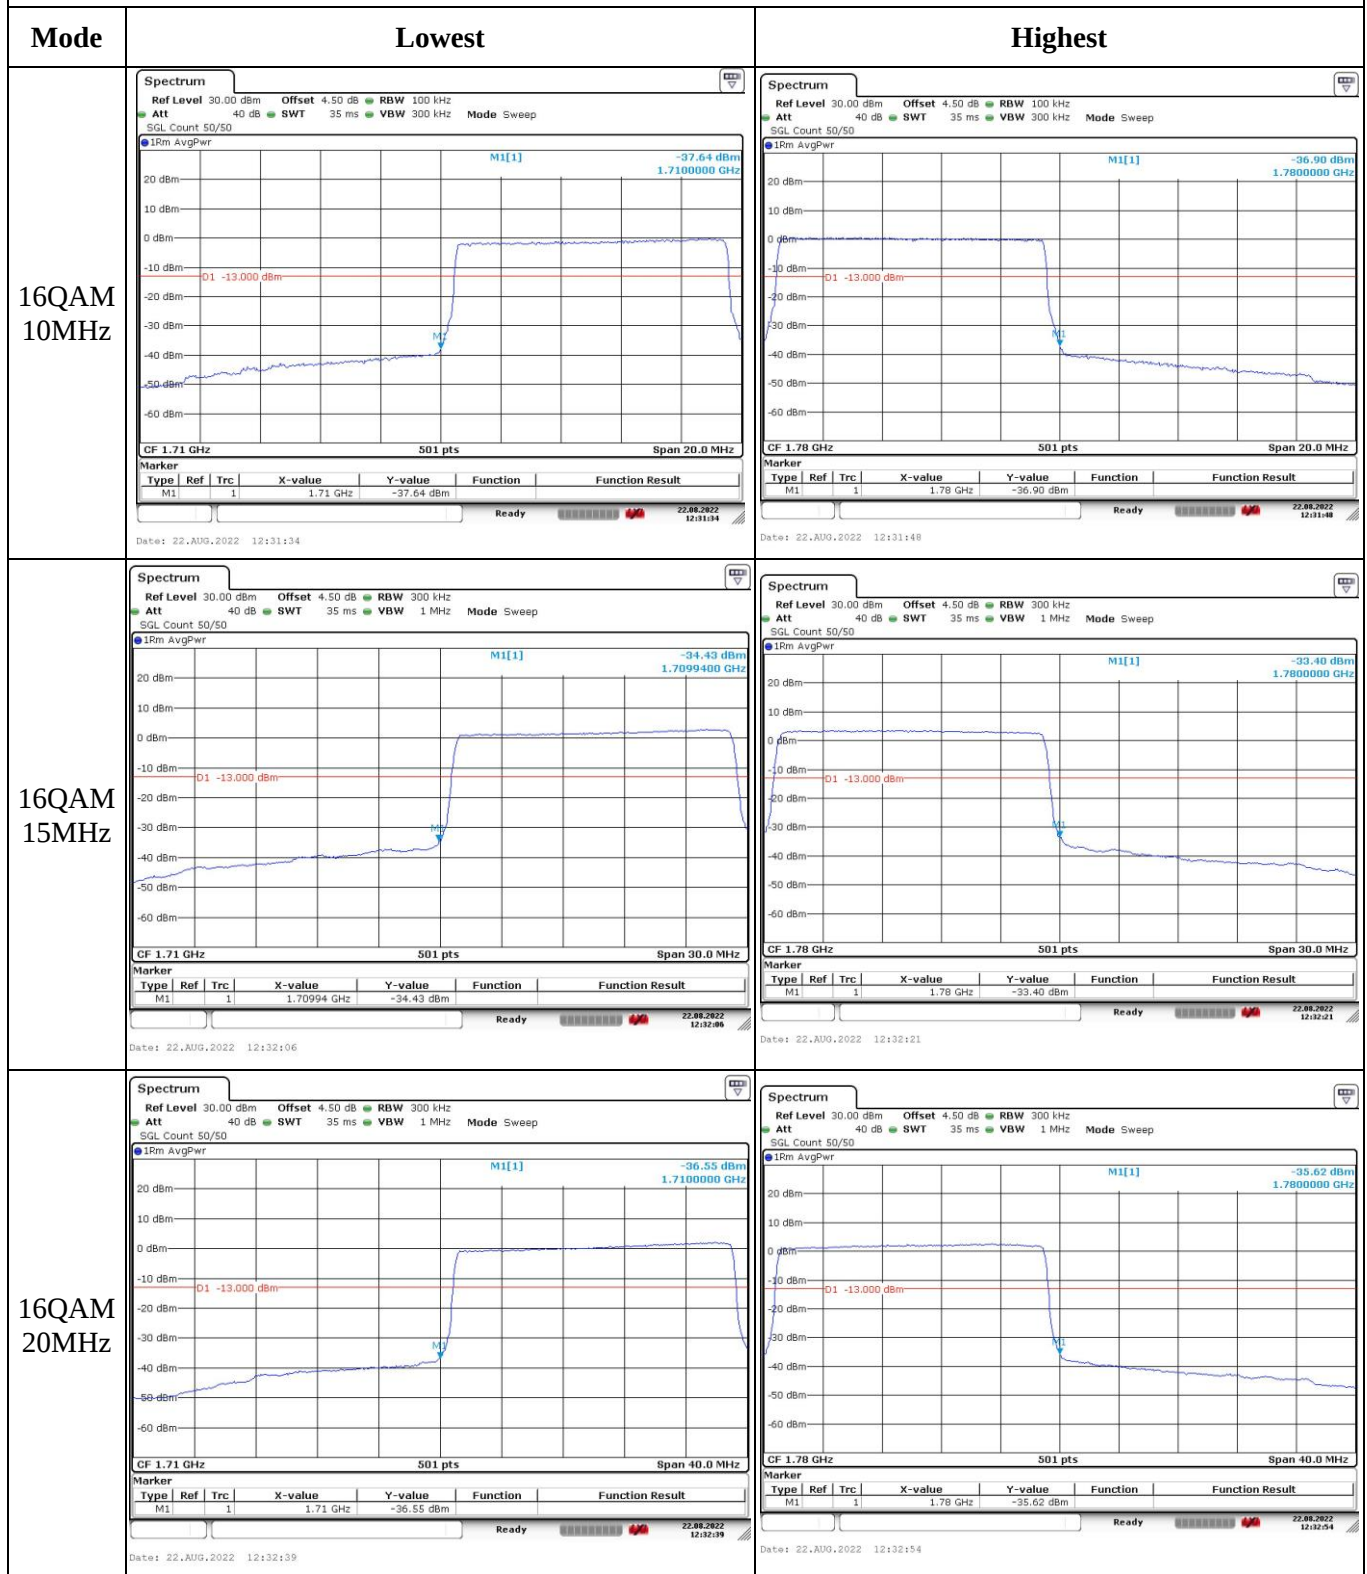

4.11 Radiated Spurious Emissions

Serial Number:	CR22080020-RF-S1	Test Date:	2022-08-24~2022-08-29
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.2~26.6	Relative Humidity: (%)	53~59	ATM Pressure: (kPa)	99.8~100.4
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022-07-17	2023-07-16
Agilent	Signal Generator	E8247C	MY43321352	2022-04-01	2023-03-31
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022-08-07	2023-08-06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2024-10-17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022-07-17	2023-07-16
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021-02-05	2024-02-04
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2024-02-04
PASTERNAK	Horn Antenna	PE9850/2F-20	072002	2021-02-05	2024-02-04

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.26 figure 5, the worst orientation was photographed and it's data was recorded.

Cellular Band (PART 22H)**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
83.13	H	34.51	-76.29	0.00	0.17	-76.46	-13.00	63.46
47.96	V	42.10	-57.12	-16.90	0.12	-74.14	-13.00	61.14
1648.40	H	43.38	-60.95	8.68	0.80	-53.07	-13.00	40.07
1648.40	V	43.95	-60.46	8.68	0.80	-52.58	-13.00	39.58
2472.60	H	47.72	-53.06	9.38	1.00	-44.68	-13.00	31.68
2472.60	V	45.34	-55.39	9.38	1.00	-47.01	-13.00	34.01
3296.80	H	37.98	-58.70	10.32	1.15	-49.53	-13.00	36.53
3296.80	V	39.78	-56.66	10.32	1.15	-47.49	-13.00	34.49
GSM 850 Frequency:836.6MHz								
82.26	H	33.98	-76.53	0.00	0.16	-76.69	-13.00	63.69
47.96	V	41.17	-58.05	-16.90	0.12	-75.07	-13.00	62.07
1673.20	H	42.48	-61.83	8.71	0.85	-53.97	-13.00	40.97
1673.20	V	46.63	-57.78	8.71	0.85	-49.92	-13.00	36.92
2509.80	H	45.64	-54.97	9.42	1.01	-46.56	-13.00	33.56
2509.80	V	47.67	-52.95	9.42	1.01	-44.54	-13.00	31.54
3346.40	H	39.95	-57.22	10.34	1.16	-48.04	-13.00	35.04
3346.40	V	38.10	-58.93	10.34	1.16	-49.75	-13.00	36.75
GSM 850 Frequency:848.8MHz								
82.84	H	34.72	-75.98	0.00	0.17	-76.15	-13.00	63.15
67.37	V	38.68	-64.82	-6.39	0.15	-71.36	-13.00	58.36
1697.60	H	42.61	-61.68	8.74	0.90	-53.84	-13.00	40.84
1697.60	V	43.02	-61.40	8.74	0.90	-53.56	-13.00	40.56
2546.40	H	43.68	-56.65	9.47	1.01	-48.19	-13.00	35.19
2546.40	V	51.01	-49.27	9.47	1.01	-40.81	-13.00	27.81
3395.20	H	35.39	-62.30	10.36	1.19	-53.13	-13.00	40.13
3395.20	V	40.73	-56.93	10.36	1.19	-47.76	-13.00	34.76

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
296.50	H	32.29	-78.51	0.00	0.33	-78.84	-13.00	65.84
41.42	V	37.93	-53.73	-24.53	0.12	-78.38	-13.00	65.38
1652.80	H	35.72	-68.61	8.68	0.81	-60.74	-13.00	47.74
1652.80	V	35.44	-68.97	8.68	0.81	-61.10	-13.00	48.10
2479.20	H	50.26	-50.50	9.39	1.01	-42.12	-13.00	29.12
2479.20	V	44.39	-56.34	9.39	1.01	-47.96	-13.00	34.96
3305.60	H	44.43	-52.30	10.32	1.15	-43.13	-13.00	30.13
3305.60	V	45.89	-50.61	10.32	1.15	-41.44	-13.00	28.44
WCDMA Band 5 Frequency:836.6MHz								
190.10	H	31.94	-80.75	0.00	0.26	-81.01	-13.00	68.01
82.55	V	37.85	-70.92	0.00	0.17	-71.09	-13.00	58.09
1673.20	H	35.15	-69.16	8.71	0.85	-61.30	-13.00	48.30
1673.20	V	35.47	-68.94	8.71	0.85	-61.08	-13.00	48.08
2509.80	H	49.93	-50.68	9.42	1.01	-42.27	-13.00	29.27
2509.80	V	44.98	-55.64	9.42	1.01	-47.23	-13.00	34.23
3346.40	H	47.80	-49.37	10.34	1.16	-40.19	-13.00	27.19
3346.40	V	47.67	-49.36	10.34	1.16	-40.18	-13.00	27.18
WCDMA Band 5 Frequency:846.6MHz								
172.87	H	31.78	-80.39	0.00	0.24	-80.63	-13.00	67.63
41.70	V	37.20	-54.82	-24.16	0.12	-79.10	-13.00	66.10
1693.20	H	35.36	-68.94	8.73	0.89	-61.10	-13.00	48.10
1693.20	V	35.17	-69.25	8.73	0.89	-61.41	-13.00	48.41
2539.80	H	45.57	-54.81	9.46	1.01	-46.36	-13.00	33.36
2539.80	V	42.41	-57.93	9.46	1.01	-49.48	-13.00	36.48
3386.40	H	45.93	-51.66	10.35	1.18	-42.49	-13.00	29.49
3386.40	V	47.25	-50.29	10.35	1.18	-41.12	-13.00	28.12

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 1900 Frequency:1850.2MHz								
82.93	H	33.99	-76.74	0.00	0.17	-76.91	-13.00	63.91
47.99	V	41.68	-57.57	-16.87	0.12	-74.56	-13.00	61.56
3700.40	H	38.45	-58.87	10.60	1.25	-49.52	-13.00	36.52
3700.40	V	38.75	-58.55	10.60	1.25	-49.20	-13.00	36.20
5550.60	H	49.59	-43.67	11.44	1.49	-33.72	-13.00	20.72
5550.60	V	45.57	-47.53	11.44	1.49	-37.58	-13.00	24.58
GSM 1900 Frequency:1880MHz								
82.93	H	34.14	-76.59	0.00	0.17	-76.76	-13.00	63.76
47.99	V	40.08	-59.17	-16.87	0.12	-76.16	-13.00	63.16
3760.00	H	36.86	-59.55	10.66	1.24	-50.13	-13.00	37.13
3760.00	V	38.56	-57.73	10.66	1.24	-48.31	-13.00	35.31
5640.00	H	49.28	-44.17	11.33	1.54	-34.38	-13.00	21.38
5640.00	V	47.59	-45.74	11.33	1.54	-35.95	-13.00	22.95
GSM 1900 Frequency:1909.8MHz								
82.64	H	35.29	-75.35	0.00	0.17	-75.52	-13.00	62.52
47.99	V	40.68	-58.57	-16.87	0.12	-75.56	-13.00	62.56
3819.60	H	37.95	-57.91	10.72	1.29	-48.48	-13.00	35.48
3819.60	V	36.46	-59.26	10.72	1.29	-49.83	-13.00	36.83
5729.40	H	48.20	-45.28	11.22	1.59	-35.65	-13.00	22.65
5729.40	V	48.14	-45.22	11.22	1.59	-35.59	-13.00	22.59

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II, Frequency:1852.4 MHz								
721.72	H	32.62	-71.49	0.00	0.50	-71.99	-13.00	58.99
41.54	V	38.40	-53.42	-24.37	0.12	-77.91	-13.00	64.91
3704.80	H	43.81	-53.45	10.60	1.25	-44.10	-13.00	31.10
3704.80	V	37.42	-59.81	10.60	1.25	-50.46	-13.00	37.46
5557.20	H	42.08	-51.20	11.43	1.49	-41.26	-13.00	28.26
5557.20	V	42.94	-50.19	11.43	1.49	-40.25	-13.00	27.25
WCDMA Band II, Frequency:1880 MHz								
890.72	H	33.04	-66.54	0.00	0.64	-67.18	-13.00	54.18
30.53	V	37.71	-42.74	-26.06	0.10	-68.90	-13.00	55.90
3760.00	H	43.62	-52.79	10.66	1.24	-43.37	-13.00	30.37
3760.00	V	40.32	-55.97	10.66	1.24	-46.55	-13.00	33.55
5640.00	H	36.29	-57.16	11.33	1.54	-47.37	-13.00	34.37
5640.00	V	39.10	-54.23	11.33	1.54	-44.44	-13.00	31.44
WCDMA Band II, Frequency:1907.6MHz								
701.76	H	32.89	-71.68	0.00	0.55	-72.23	-13.00	59.23
82.85	V	36.80	-71.99	0.00	0.17	-72.16	-13.00	59.16
3815.20	H	44.27	-51.58	10.72	1.29	-42.15	-13.00	29.15
3815.20	V	38.47	-57.22	10.72	1.29	-47.79	-13.00	34.79
5722.80	H	41.47	-52.02	11.23	1.58	-42.37	-13.00	29.37
5722.80	V	39.74	-53.61	11.23	1.58	-43.96	-13.00	30.96

AWS Band(Part 27)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band IV, Frequency:1712.4 MHz								
782.34	H	32.71	-70.02	0.00	0.55	-70.57	-13.00	57.57
81.97	V	36.60	-72.13	0.00	0.16	-72.29	-13.00	59.29
3424.80	H	35.12	-62.65	10.37	1.17	-53.45	-13.00	40.45
3424.80	V	35.80	-61.94	10.37	1.17	-52.74	-13.00	39.74
5137.20	H	38.45	-55.17	11.28	1.46	-45.35	-13.00	32.35
5137.20	V	35.75	-57.75	11.28	1.46	-47.93	-13.00	34.93
WCDMA Band IV, Frequency:1732.6 MHz								
647.45	H	32.83	-71.89	0.00	0.52	-72.41	-13.00	59.41
42.13	V	38.65	-53.93	-23.59	0.12	-77.64	-13.00	64.64
3465.20	H	36.61	-61.20	10.39	1.15	-51.96	-13.00	38.96
3465.20	V	35.78	-61.99	10.39	1.15	-52.75	-13.00	39.75
5197.80	H	39.05	-55.08	11.32	1.44	-45.20	-13.00	32.20
5197.80	V	38.71	-55.27	11.32	1.44	-45.39	-13.00	32.39
WCDMA Band IV, Frequency:1752.6MHz								
467.40	H	32.51	-75.12	0.00	0.42	-75.54	-13.00	62.54
47.95	V	36.99	-62.22	-16.91	0.12	-79.25	-13.00	66.25
3505.20	H	35.63	-62.20	10.41	1.18	-52.97	-13.00	39.97
3505.20	V	35.71	-62.06	10.41	1.18	-52.83	-13.00	39.83
5257.80	H	40.39	-53.34	11.35	1.47	-43.46	-13.00	30.46
5257.80	V	38.48	-55.03	11.35	1.47	-45.15	-13.00	32.15

LTE Bands:
(The Worst modulation and bandwidth was below)

LTE Band 2 (30MHz-20GHz):

EYE Band 2 (50MHz - 20GHz).								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1850.7 MHz								
82.64	H	32.44	-78.20	0.00	0.17	-78.37	-13.00	65.37
92.36	V	37.01	-71.78	0.00	0.18	-71.96	-13.00	58.96
3701.40	H	43.17	-54.14	10.60	1.25	-44.79	-13.00	31.79
3701.40	V	39.52	-57.77	10.60	1.25	-48.42	-13.00	35.42
5552.10	H	38.03	-55.24	11.44	1.49	-45.29	-13.00	32.29
5552.10	V	37.19	-55.91	11.44	1.49	-45.96	-13.00	32.96
QPSK, Frequency: 1880 MHz								
232.50	H	33.28	-78.97	0.00	0.29	-79.26	-13.00	66.26
41.40	V	36.21	-55.42	-24.55	0.12	-80.09	-13.00	67.09
3760.00	H	43.50	-52.91	10.66	1.24	-43.49	-13.00	30.49
3760.00	V	39.07	-57.22	10.66	1.24	-47.80	-13.00	34.80
5640.00	H	39.97	-53.48	11.33	1.54	-43.69	-13.00	30.69
5640.00	V	36.17	-57.16	11.33	1.54	-47.37	-13.00	34.37
QPSK, Frequency: 1909.3 MHz								
400.78	H	32.49	-76.70	0.00	0.40	-77.10	-13.00	64.10
41.56	V	38.12	-53.72	-24.34	0.12	-78.18	-13.00	65.18
3818.60	H	46.97	-48.89	10.72	1.29	-39.46	-13.00	26.46
3818.60	V	40.07	-55.64	10.72	1.29	-46.21	-13.00	33.21
5727.90	H	37.28	-56.20	11.23	1.59	-46.56	-13.00	33.56
5727.90	V	36.91	-56.45	11.23	1.59	-46.81	-13.00	33.81

LTE Band 4 (30MHz-20GHz):

LTE Band 4 (50MHz 20GHz).								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1710.7 MHz								
452.98	H	32.37	-75.59	0.00	0.42	-76.01	-13.00	63.01
42.11	V	36.77	-55.78	-23.61	0.12	-79.51	-13.00	66.51
3421.40	H	35.67	-62.09	10.37	1.17	-52.89	-13.00	39.89
3421.40	V	36.02	-61.71	10.37	1.17	-52.51	-13.00	39.51
5132.10	H	36.10	-57.47	11.28	1.47	-47.66	-13.00	34.66
5132.10	V	35.89	-57.57	11.28	1.47	-47.76	-13.00	34.76
QPSK,Frequency:1732.5 MHz								
520.81	H	32.48	-73.95	0.00	0.41	-74.36	-13.00	61.36
46.96	V	37.22	-61.01	-17.88	0.12	-79.01	-13.00	66.01
3465.00	H	35.82	-61.99	10.39	1.15	-52.75	-13.00	39.75
3465.00	V	35.09	-62.68	10.39	1.15	-53.44	-13.00	40.44
5197.50	H	37.32	-56.81	11.32	1.44	-46.93	-13.00	33.93
5197.50	V	36.21	-57.77	11.32	1.44	-47.89	-13.00	34.89
QPSK,Frequency:1752.6MHz								
872.57	H	32.02	-68.11	0.00	0.59	-68.70	-13.00	55.70
80.87	V	36.19	-72.46	0.00	0.16	-72.62	-13.00	59.62
3505.20	H	35.68	-62.15	10.41	1.18	-52.92	-13.00	39.92
3505.20	V	36.03	-61.74	10.41	1.18	-52.51	-13.00	39.51
5257.80	H	39.15	-54.58	11.35	1.47	-44.70	-13.00	31.70
5257.80	V	36.84	-56.67	11.35	1.47	-46.79	-13.00	33.79

LTE Band 5(30MHz-10GHz):

LTE Band 5 (30MHz 10GHz).								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 824.7 MHz								
82.54	H	32.80	-77.81	0.00	0.17	-77.98	-13.00	64.98
40.25	V	37.41	-52.73	-26.07	0.11	-78.91	-13.00	65.91
1649.40	H	35.47	-68.86	8.68	0.80	-60.98	-13.00	47.98
1649.40	V	34.89	-69.52	8.68	0.80	-61.64	-13.00	48.64
2474.10	H	53.41	-47.37	9.38	1.00	-38.99	-13.00	25.99
2474.10	V	49.11	-51.62	9.38	1.00	-43.24	-13.00	30.24
3298.80	H	47.84	-48.84	10.32	1.15	-39.67	-13.00	26.67
3298.80	V	49.19	-47.25	10.32	1.15	-38.08	-13.00	25.08
QPSK, Frequency: 836.5 MHz								
510.20	H	32.60	-74.05	0.00	0.45	-74.50	-13.00	61.50
44.55	V	37.68	-58.04	-20.39	0.12	-78.55	-13.00	65.55
1673.00	H	35.25	-69.06	8.71	0.85	-61.20	-13.00	48.20
1673.00	V	35.68	-68.73	8.71	0.85	-60.87	-13.00	47.87
2509.50	H	54.98	-45.63	9.42	1.01	-37.22	-13.00	24.22
2509.50	V	49.73	-50.89	9.42	1.01	-42.48	-13.00	29.48
3346.00	H	51.14	-46.02	10.34	1.16	-36.84	-13.00	23.84
3346.00	V	53.24	-43.78	10.34	1.16	-34.60	-13.00	21.60
QPSK, Frequency: 848.3 MHz								
40.82	H	33.18	-52.52	-25.32	0.12	-77.96	-13.00	64.96
47.79	V	36.89	-62.16	-17.07	0.12	-79.35	-13.00	66.35
1696.60	H	35.68	-68.61	8.74	0.89	-60.76	-13.00	47.76
1696.60	V	35.17	-69.25	8.74	0.89	-61.40	-13.00	48.40
2544.90	H	50.33	-50.01	9.47	1.01	-41.55	-13.00	28.55
2544.90	V	45.84	-54.46	9.47	1.01	-46.00	-13.00	33.00
3393.20	H	49.12	-48.55	10.36	1.19	-39.38	-13.00	26.38
3393.20	V	51.07	-46.56	10.36	1.19	-37.39	-13.00	24.39

LTE Band 7 (30MHz-26.5GHz):

EYE Bank 7 (CONV 25.5GHz)								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2502.5 MHz								
590.58	H	33.02	-71.98	0.00	0.48	-72.46	-25.00	47.46
67.31	V	35.55	-67.97	-6.43	0.15	-74.55	-25.00	49.55
5005.00	H	38.13	-54.83	11.20	1.47	-45.10	-25.00	20.10
5005.00	V	35.71	-57.11	11.20	1.47	-47.38	-25.00	22.38
7507.50	H	36.56	-53.23	10.90	1.95	-44.28	-25.00	19.28
7507.50	V	35.11	-55.18	10.90	1.95	-46.23	-25.00	21.23
QPSK, Frequency:2535 MHz								
193.28	H	33.10	-79.66	0.00	0.26	-79.92	-25.00	54.92
82.81	V	35.89	-72.90	0.00	0.17	-73.07	-25.00	48.07
5070.00	H	35.41	-57.78	11.24	1.47	-48.01	-25.00	23.01
5070.00	V	34.73	-58.36	11.24	1.47	-48.59	-25.00	23.59
7605.00	H	34.55	-54.92	10.88	2.01	-46.05	-25.00	21.05
7605.00	V	33.89	-56.30	10.88	2.01	-47.43	-25.00	22.43
QPSK, Frequency: 2567.5 MHz								
452.98	H	33.08	-74.88	0.00	0.42	-75.30	-25.00	50.30
44.05	V	38.87	-56.20	-21.05	0.12	-77.37	-25.00	52.37
5135.00	H	36.36	-57.24	11.28	1.47	-47.43	-25.00	22.43
5135.00	V	35.04	-58.45	11.28	1.47	-48.64	-25.00	23.64
7702.50	H	39.91	-49.61	10.86	1.97	-40.72	-25.00	15.72
7702.50	V	36.84	-53.34	10.86	1.97	-44.45	-25.00	19.45

LTE Band 66(30MHz-20GHz):

EYE Data Co(SCHMIL 2GBHz)								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1710.7 MHz								
490.77	H	33.44	-73.64	0.00	0.44	-74.08	-13.00	61.08
45.99	V	36.27	-61.01	-18.83	0.12	-79.96	-13.00	66.96
3421.40	H	34.56	-63.20	10.37	1.17	-54.00	-13.00	41.00
3421.40	V	35.12	-62.61	10.37	1.17	-53.41	-13.00	40.41
5132.10	H	36.87	-56.70	11.28	1.47	-46.89	-13.00	33.89
5132.10	V	37.97	-55.49	11.28	1.47	-45.68	-13.00	32.68
QPSK, Frequency:1745 MHz								
490.77	H	32.39	-74.69	0.00	0.44	-75.13	-13.00	62.13
67.31	V	34.94	-68.58	-6.43	0.15	-75.16	-13.00	62.16
3490.00	H	35.70	-62.14	10.40	1.17	-52.91	-13.00	39.91
3490.00	V	35.82	-61.96	10.40	1.17	-52.73	-13.00	39.73
5235.00	H	37.62	-56.28	11.34	1.46	-46.40	-13.00	33.40
5235.00	V	38.20	-55.51	11.34	1.46	-45.63	-13.00	32.63
QPSK, Frequency: 1779.3 MHz								
668.11	H	33.09	-71.58	0.00	0.50	-72.08	-13.00	59.08
42.11	V	36.41	-56.14	-23.61	0.12	-79.87	-13.00	66.87
3558.60	H	39.18	-58.49	10.46	1.22	-49.25	-13.00	36.25
3558.60	V	36.24	-61.33	10.46	1.22	-52.09	-13.00	39.09
5337.90	H	38.63	-54.84	11.40	1.47	-44.91	-13.00	31.91
5337.90	V	38.16	-55.17	11.40	1.47	-45.24	-13.00	32.24

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

==== END OF REPORT =====