

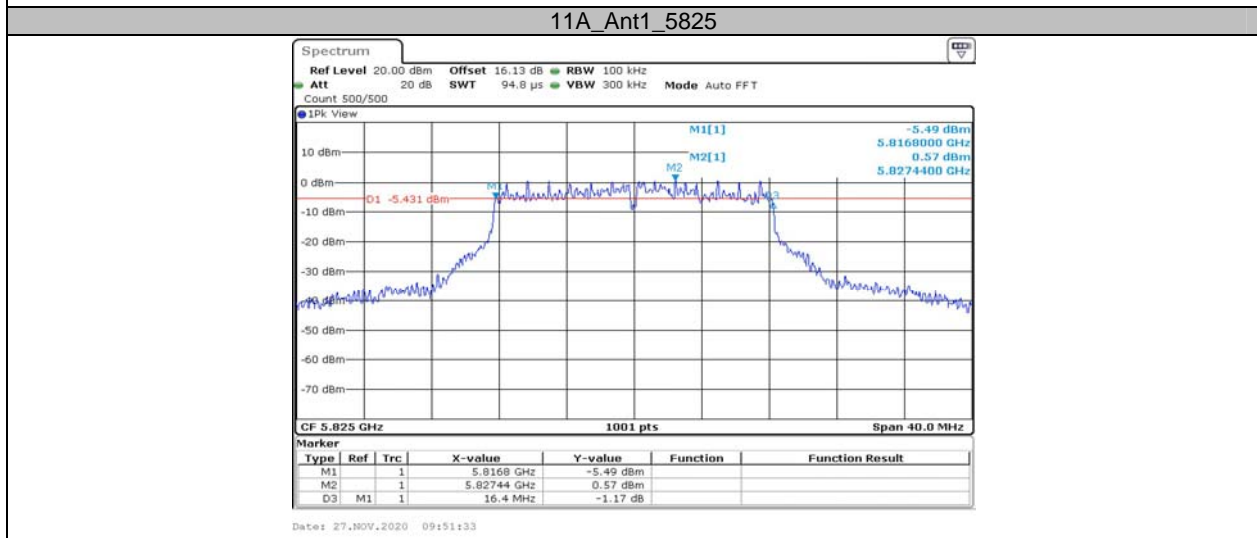
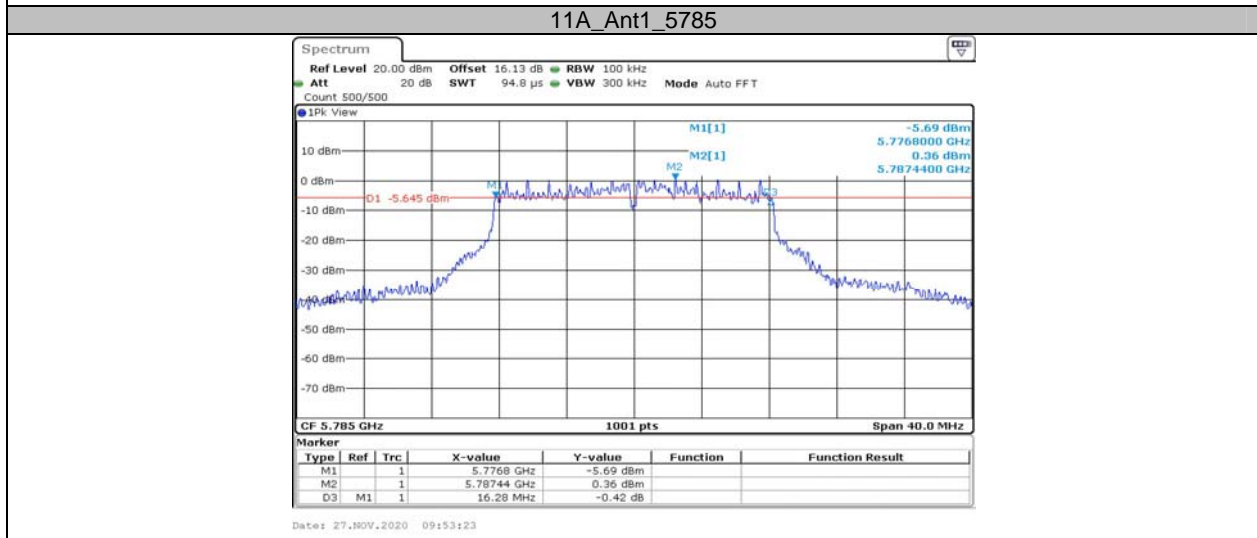
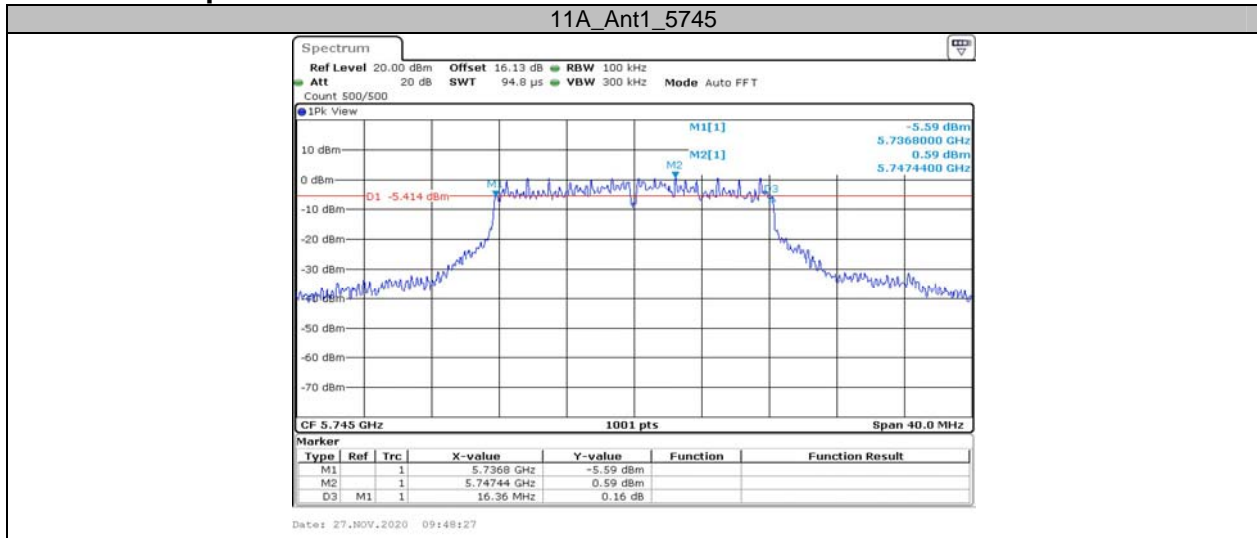





**Appendix A3: Min emission bandwidth
Test Result**




TestMode	Antenna	Channel	6db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.360	0.5	PASS
		5785	16.280	0.5	PASS
		5825	16.400	0.5	PASS
11N20SISO	Ant1	5745	17.720	0.5	PASS
		5785	17.760	0.5	PASS
		5825	17.760	0.5	PASS
11N40SISO	Ant1	5755	36.560	0.5	PASS
		5795	36.560	0.5	PASS
11AC20SISO	Ant1	5745	17.720	0.5	PASS
		5785	17.720	0.5	PASS
		5825	17.760	0.5	PASS
11AC40SISO	Ant1	5755	36.560	0.5	PASS
		5795	36.560	0.5	PASS
11AC80SISO	Ant1	5775	75.520	0.5	PASS



Test Graphs

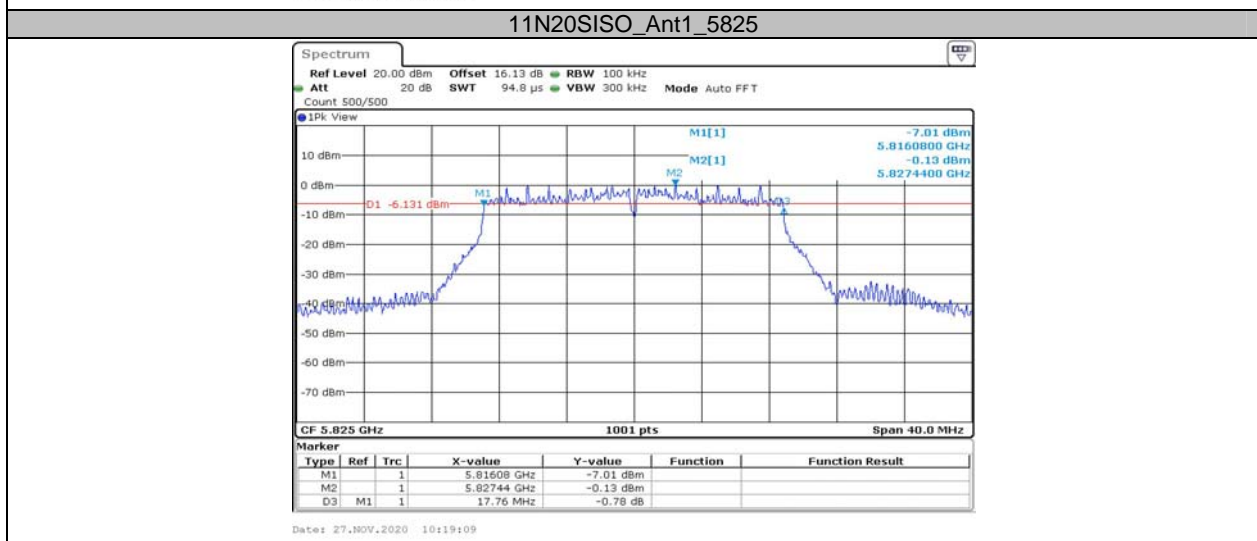

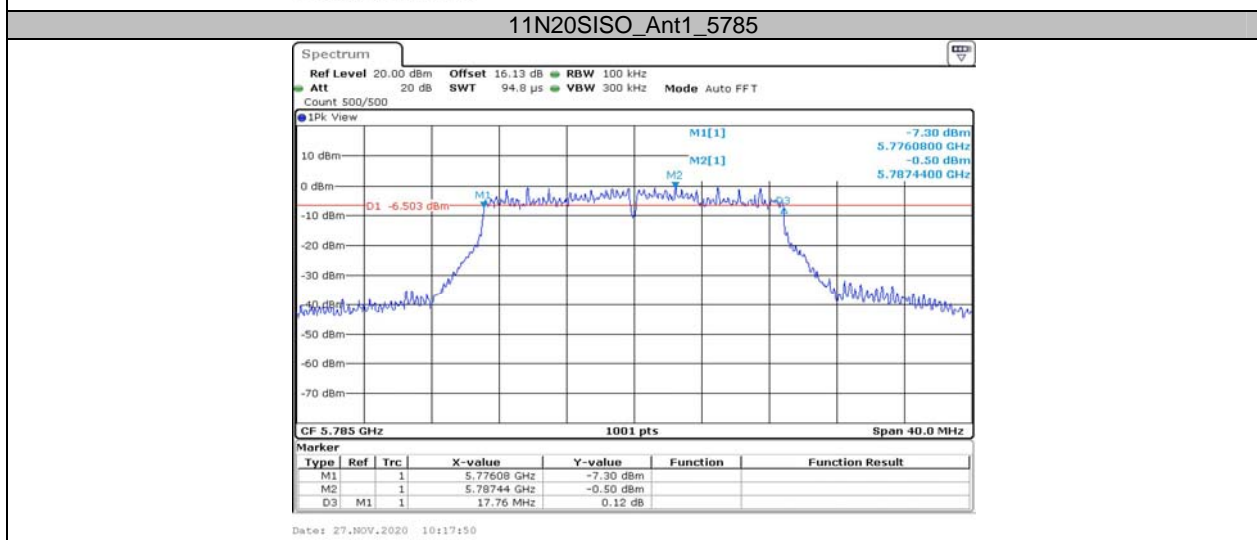

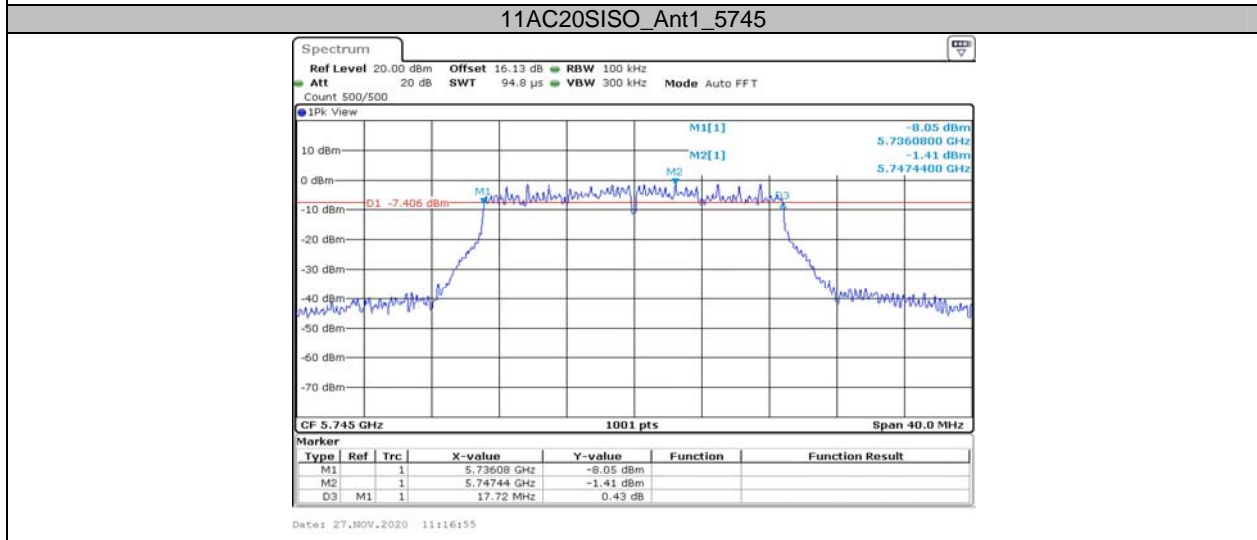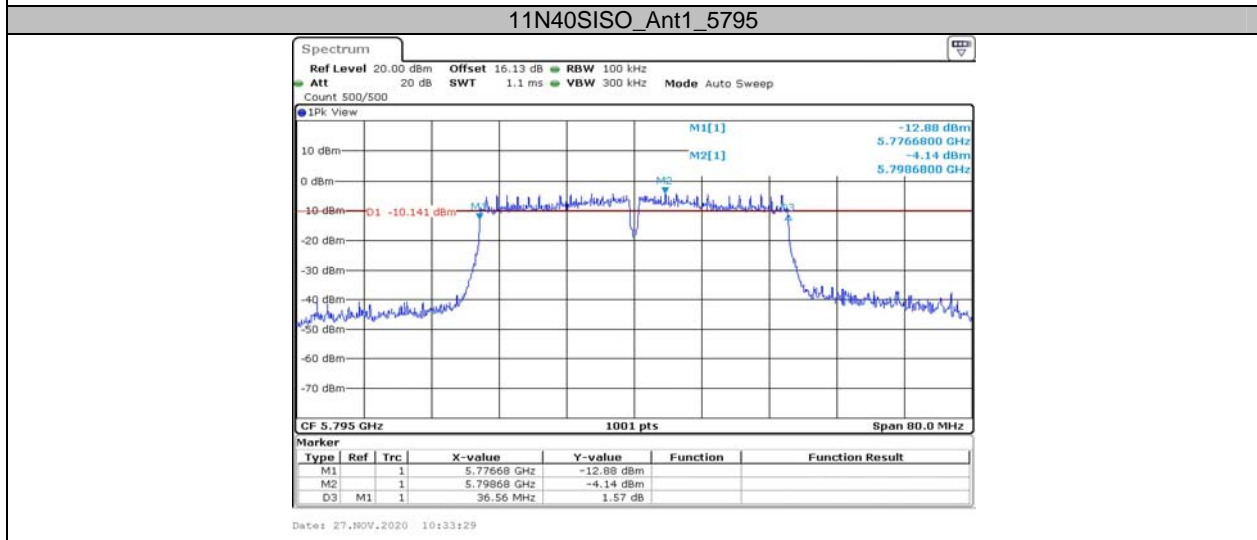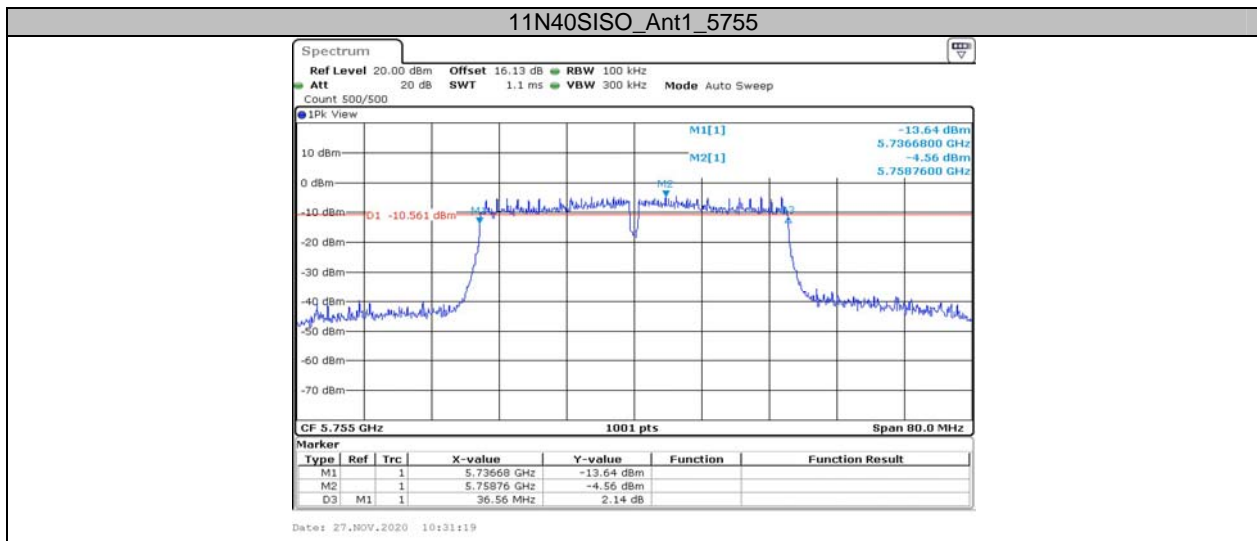

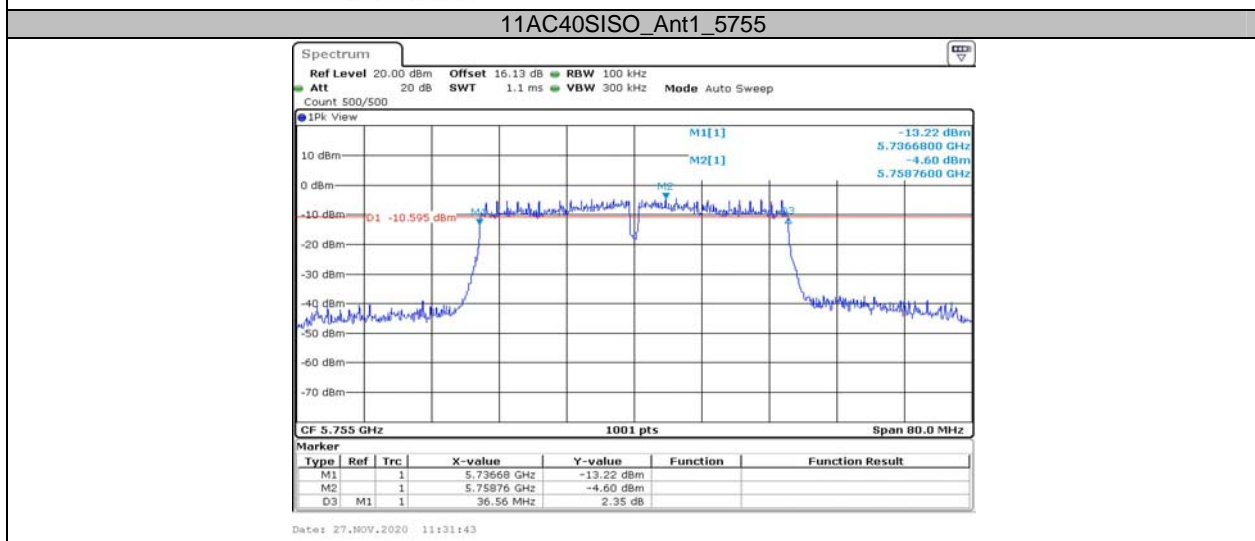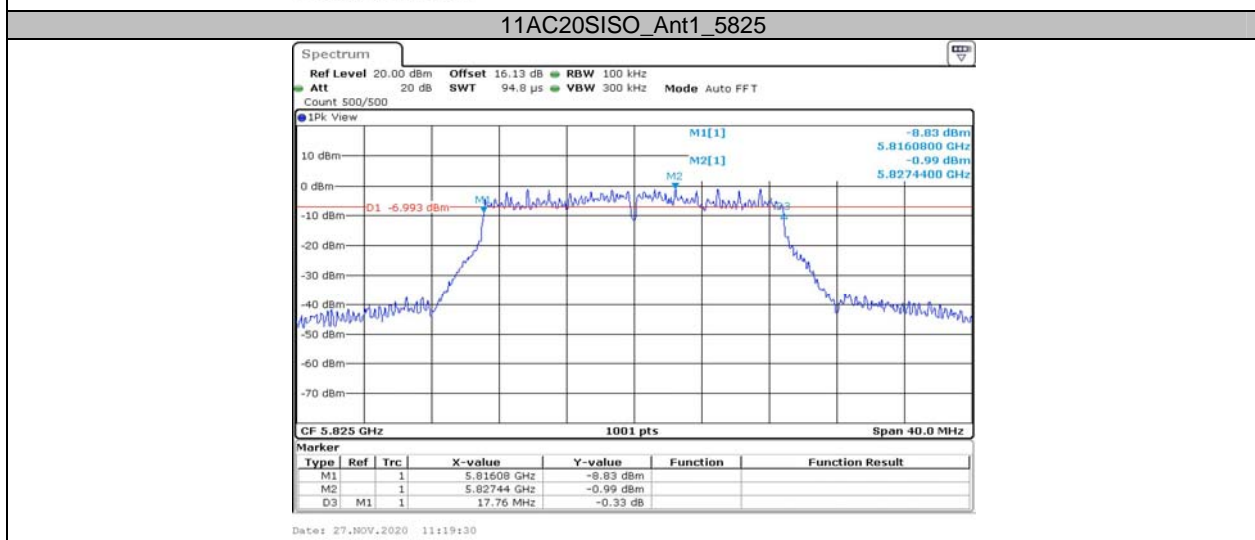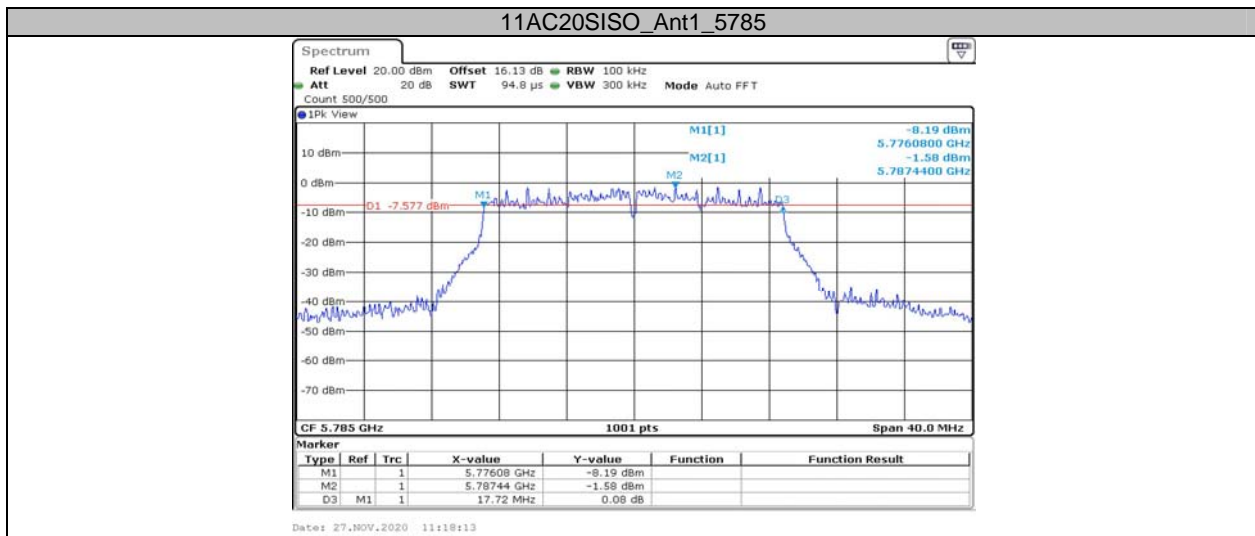

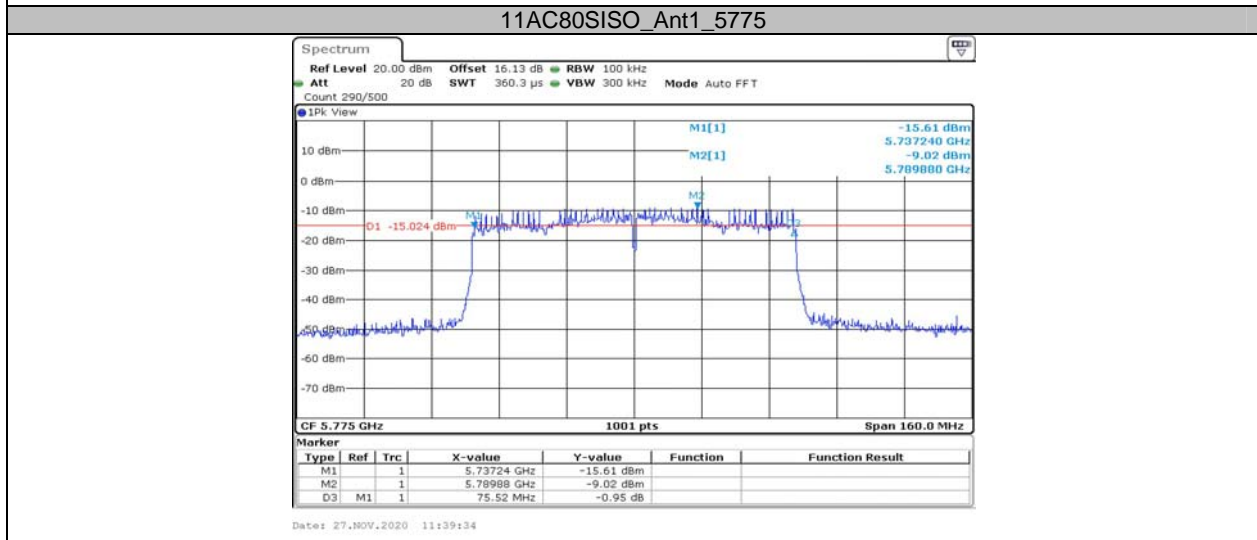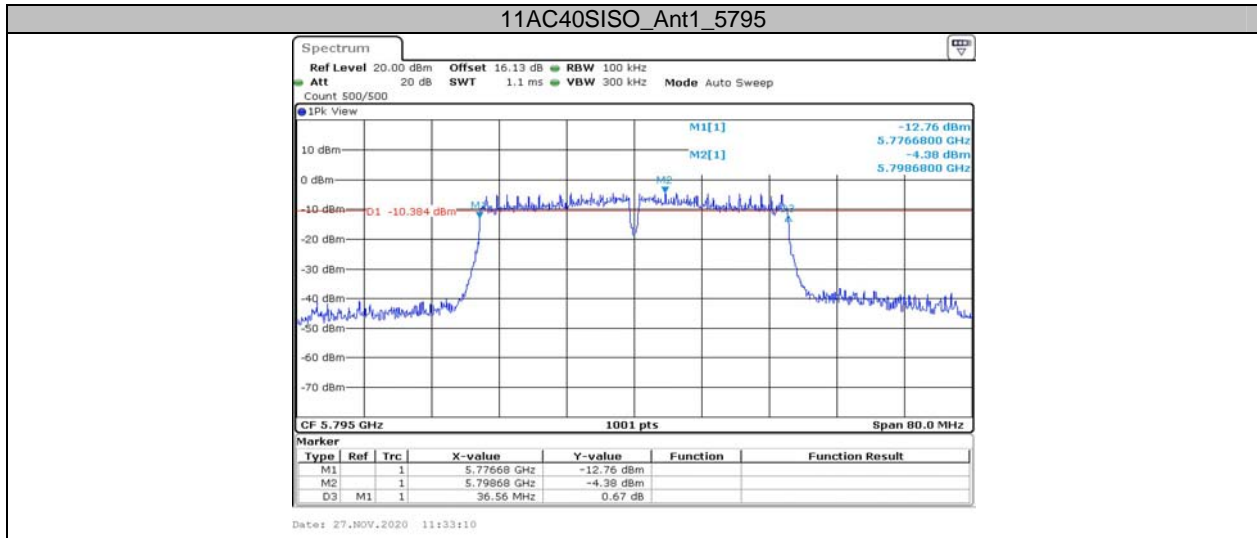

**Appendix B: Maximum conducted output power
Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	12.98	<=23.98	PASS
		5200	13.13	<=23.98	PASS
		5240	12.73	<=23.98	PASS
		5260	14.40	<=23.98	PASS
		5280	13.63	<=23.98	PASS
		5320	13.17	<=23.98	PASS
		5500	12.14	<=23.98	PASS
		5580	12.02	<=23.98	PASS
		5700	12.26	<=23.98	PASS
		5745	12.80	<=30	PASS
		5785	12.41	<=30	PASS
5825	12.79	<=30	PASS		
11N20SISO	Ant1	5180	13.78	<=23.98	PASS
		5200	13.72	<=23.98	PASS
		5240	12.72	<=23.98	PASS
		5260	13.82	<=23.98	PASS
		5280	12.83	<=23.98	PASS
		5320	12.17	<=23.98	PASS
		5500	11.07	<=23.98	PASS
		5580	10.98	<=23.98	PASS
		5700	11.01	<=23.98	PASS
		5745	11.97	<=30	PASS
		5785	11.41	<=30	PASS
5825	11.47	<=30	PASS		
11N40SISO	Ant1	5190	12.56	<=23.98	PASS
		5230	12.27	<=23.98	PASS
		5270	11.78	<=23.98	PASS
		5310	10.83	<=23.98	PASS
		5510	9.71	<=23.98	PASS
		5550	9.44	<=23.98	PASS
		5670	9.99	<=23.98	PASS
		5755	10.49	<=30	PASS
5795	10.02	<=30	PASS		
11AC20SISO	Ant1	5180	11.93	<=23.98	PASS
		5200	11.74	<=23.98	PASS
		5240	11.70	<=23.98	PASS
		5260	12.48	<=23.98	PASS
		5280	11.85	<=23.98	PASS
		5320	11.26	<=23.98	PASS
		5500	10.05	<=23.98	PASS
		5580	10.06	<=23.98	PASS
		5700	10.35	<=23.98	PASS
		5745	10.75	<=30	PASS
		5785	10.25	<=30	PASS
5825	10.61	<=30	PASS		
11AC40SISO	Ant1	5190	12.98	<=23.98	PASS
		5230	12.31	<=23.98	PASS
		5270	11.97	<=23.98	PASS
		5310	10.80	<=23.98	PASS
		5510	9.88	<=23.98	PASS
		5550	-10.08	<=23.98	PASS
		5670	9.99	<=23.98	PASS
		5755	10.81	<=30	PASS
5795	10.03	<=30	PASS		
11AC80SISO	Ant1	5210	12.47	<=23.98	PASS

		5290	10.32	<=23.98	PASS
		5530	9.68	<=23.98	PASS
		5610	9.31	<=23.98	PASS
		5775	10.18	<=30	PASS

**Appendix C: Maximum power spectral density
Test Result**


TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	9.37	<=11	PASS
		5200	9.24	<=11	PASS
		5240	9.12	<=11	PASS
		5260	10.48	<=11	PASS
		5280	10.29	<=11	PASS
		5320	9.28	<=11	PASS
		5500	9.11	<=11	PASS
		5580	8.37	<=11	PASS
		5700	8.70	<=11	PASS
		5745	7.47	<=30	PASS
		5785	6.71	<=30	PASS
11N20SISO	Ant1	5180	9.59	<=11	PASS
		5200	9.57	<=11	PASS
		5240	9.35	<=11	PASS
		5260	9.79	<=11	PASS
		5280	9.7	<=11	PASS
		5320	8.85	<=11	PASS
		5500	8.27	<=11	PASS
		5580	7.46	<=11	PASS
		5700	8.62	<=11	PASS
		5745	7.12	<=30	PASS
		5785	6.35	<=30	PASS
11N40SISO	Ant1	5190	7.2	<=11	PASS
		5230	7.3	<=11	PASS
		5270	6.89	<=11	PASS
		5310	5.13	<=11	PASS
		5510	4.53	<=11	PASS
		5550	3.55	<=11	PASS
		5670	5.1	<=11	PASS
		5755	3.61	<=30	PASS
11AC20SISO	Ant1	5795	3.05	<=30	PASS
		5180	8.79	<=11	PASS
		5200	8.7	<=11	PASS
		5240	9.11	<=11	PASS
		5260	9.77	<=11	PASS
		5280	9.51	<=11	PASS
		5320	8.24	<=11	PASS
		5500	7.77	<=11	PASS
		5580	7.71	<=11	PASS
		5700	7.77	<=11	PASS
		5745	6.47	<=30	PASS
11AC40SISO	Ant1	5785	6.61	<=30	PASS
		5825	7.44	<=30	PASS
		5190	7.53	<=11	PASS
		5230	7	<=11	PASS
		5270	7.43	<=11	PASS
		5310	5.54	<=11	PASS
		5510	5.24	<=11	PASS
		5550	5.59	<=11	PASS
11AC80SISO	Ant1	5670	5.03	<=11	PASS
		5755	4.81	<=30	PASS
		5795	3.69	<=30	PASS
		5210	5.17	<=11	PASS




		5290	4.29	<=11	PASS
		5530	4.35	<=11	PASS
		5610	2.96	<=11	PASS
		5775	1	<=30	PASS




Note: 1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2. The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

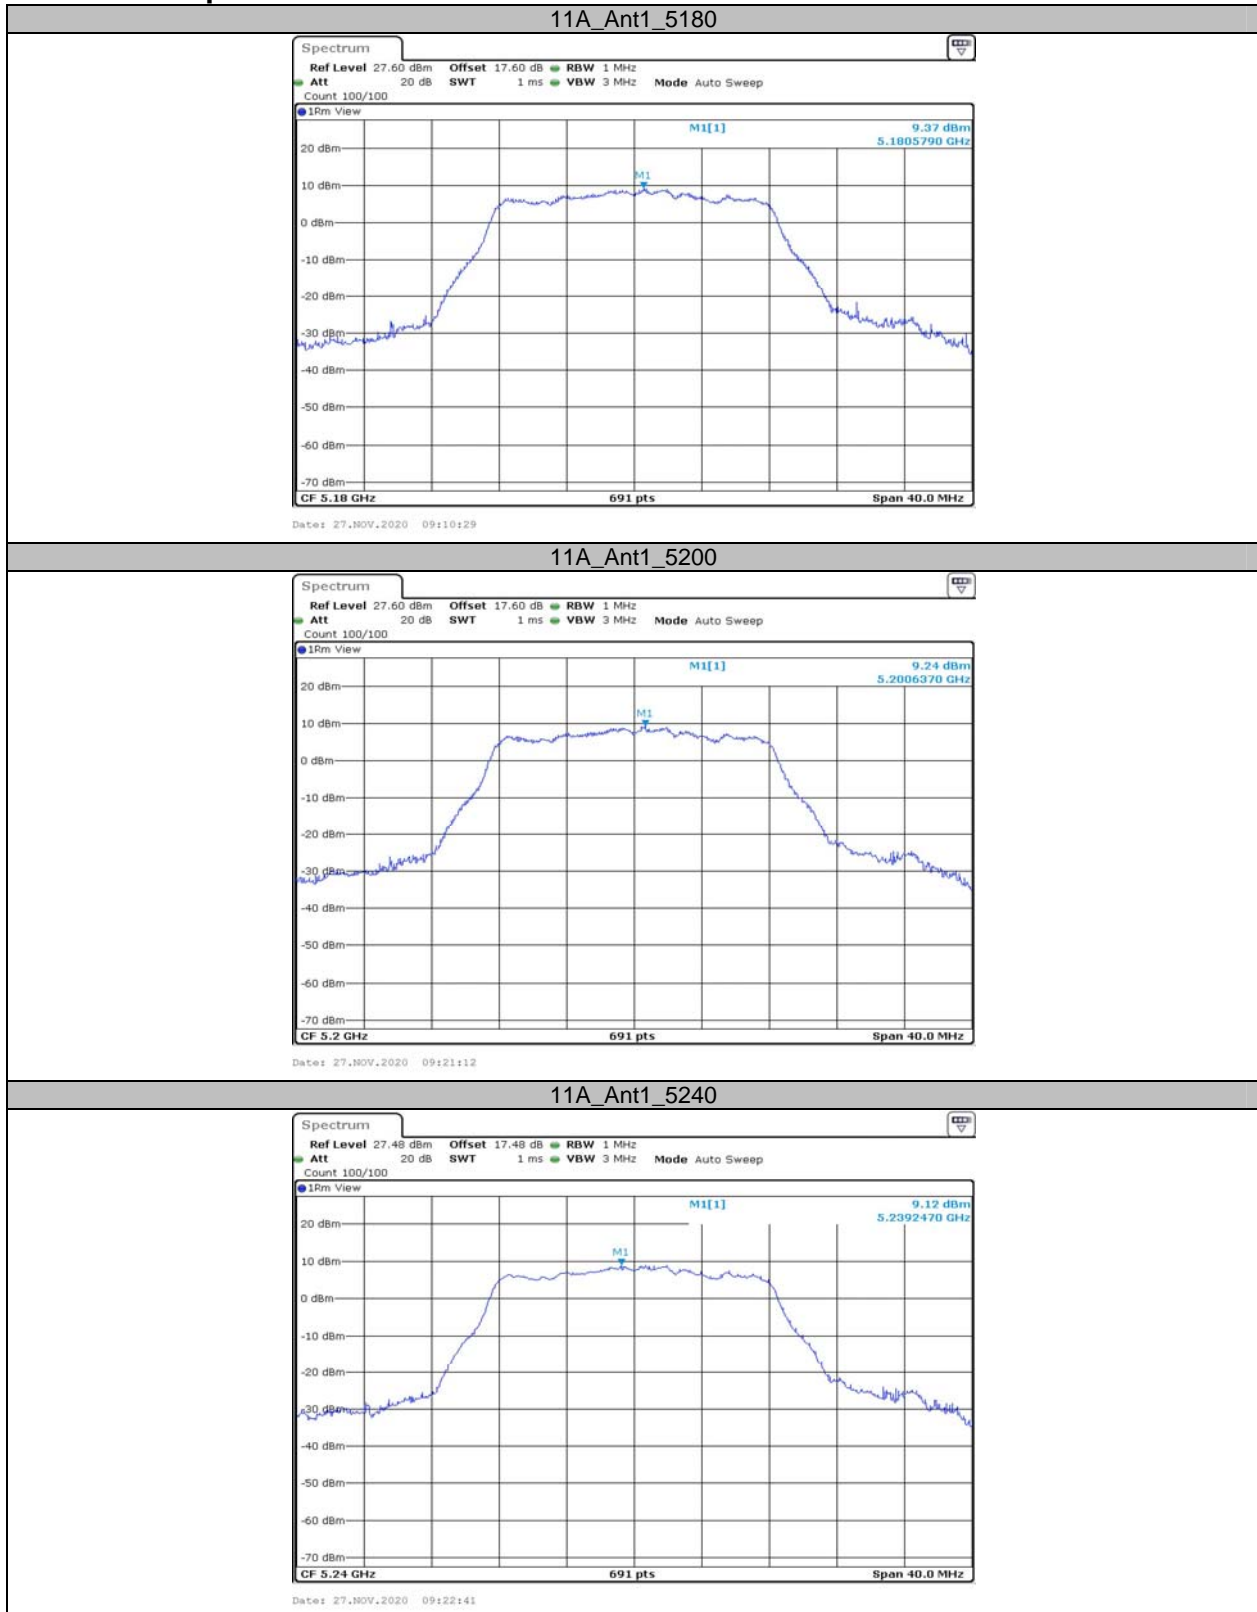

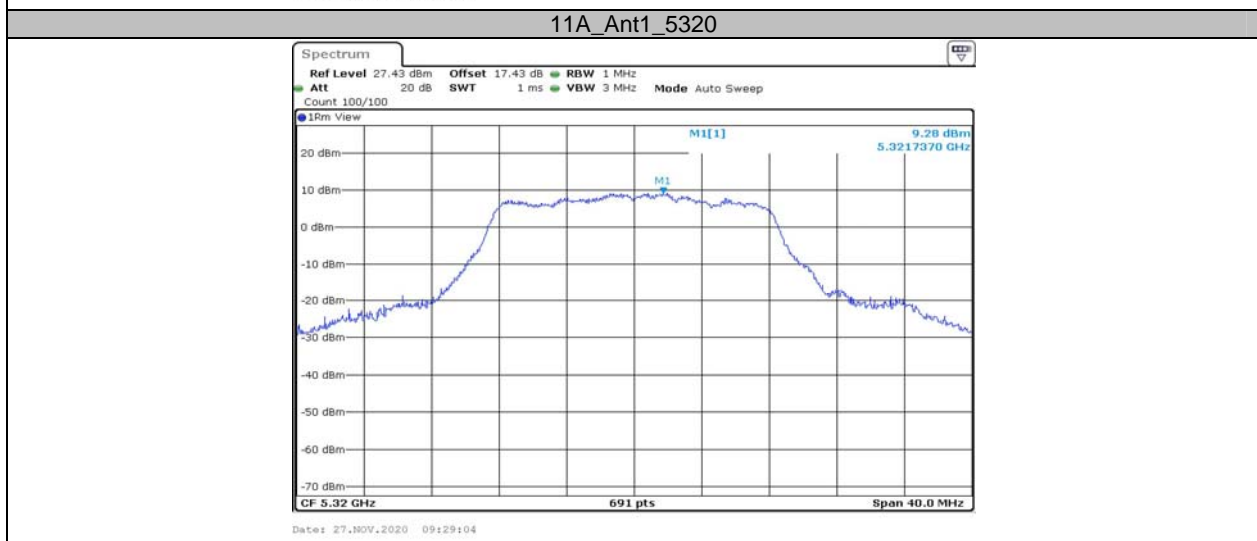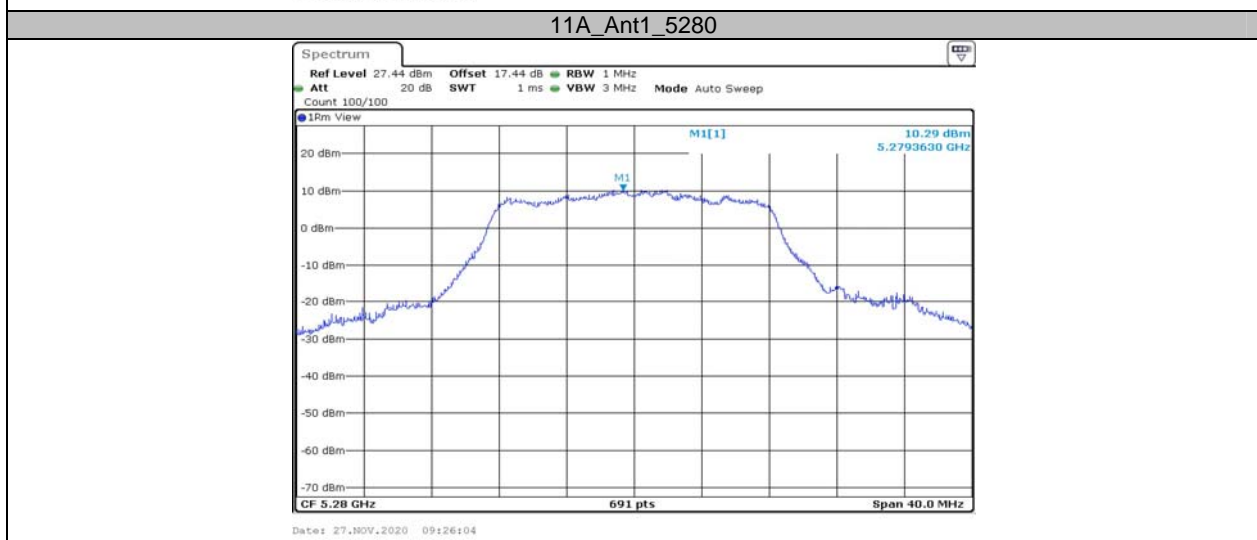
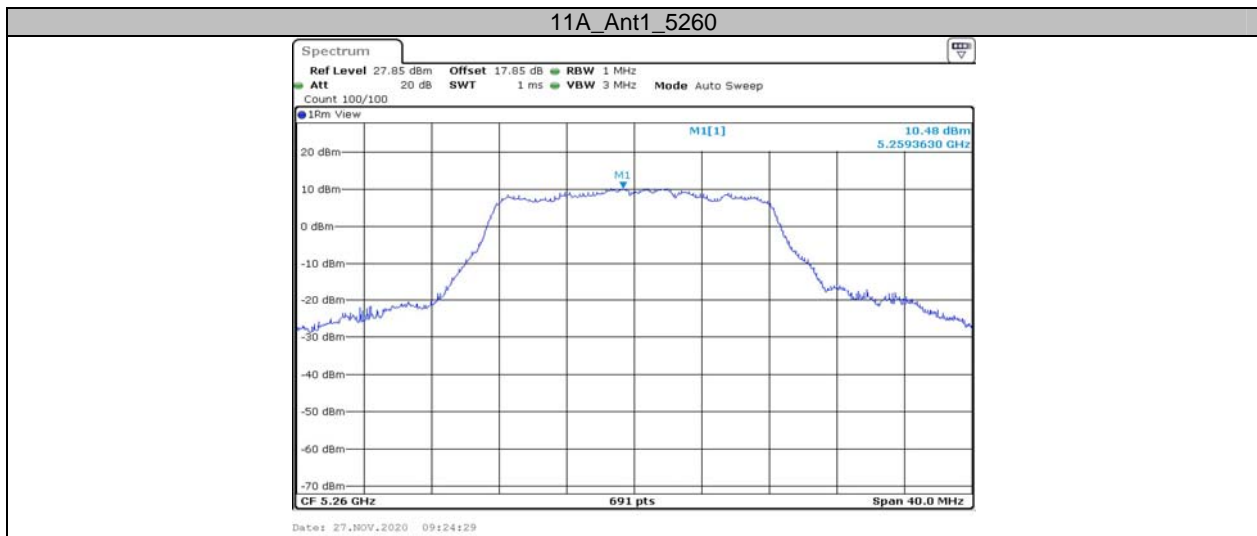


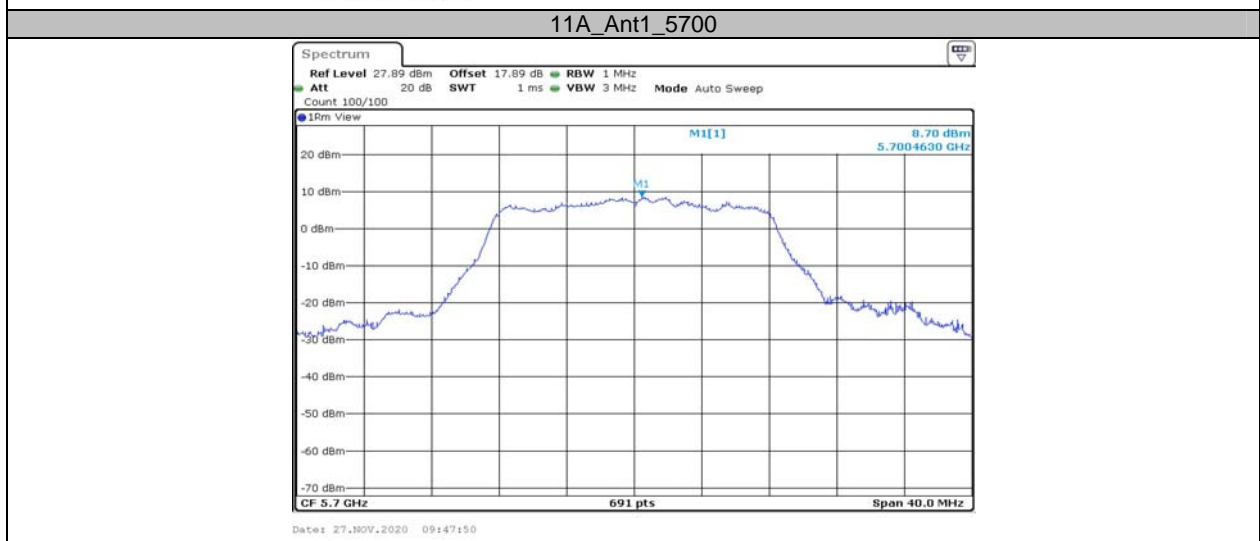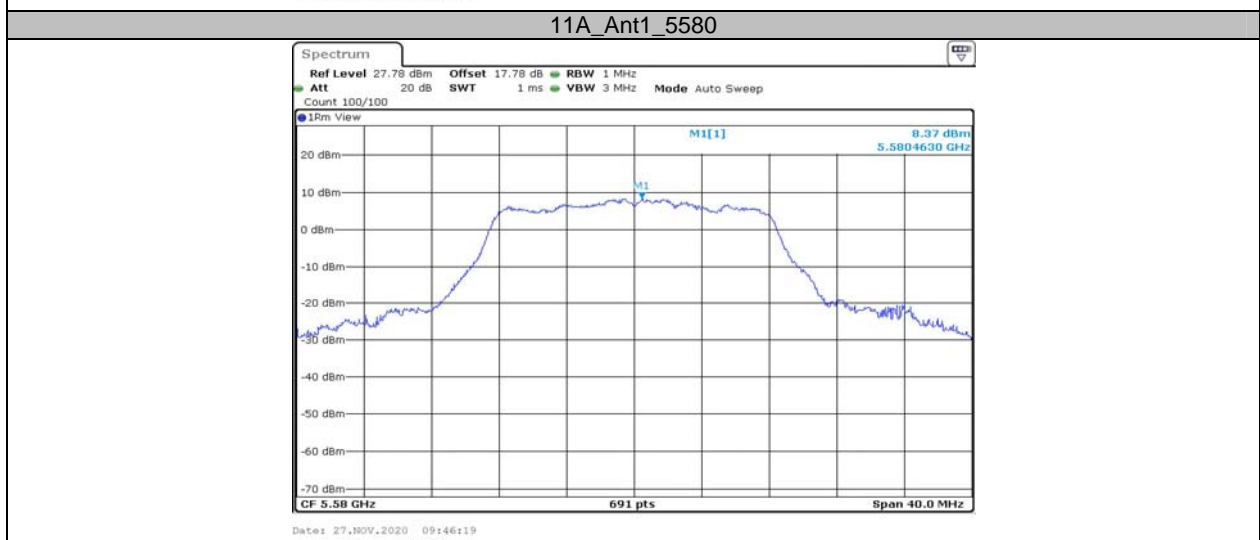
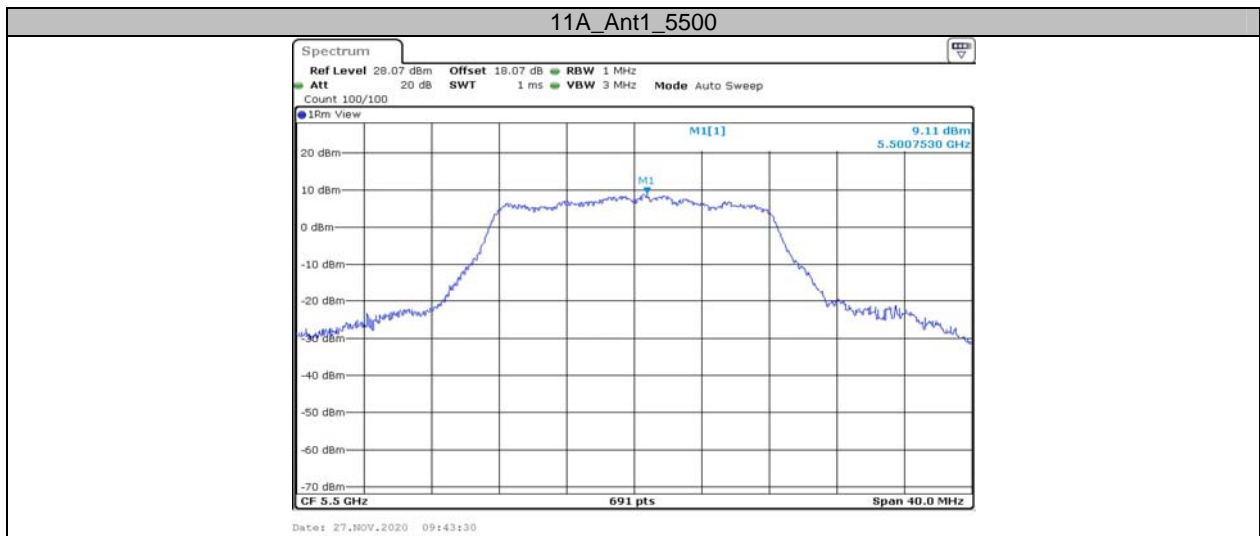


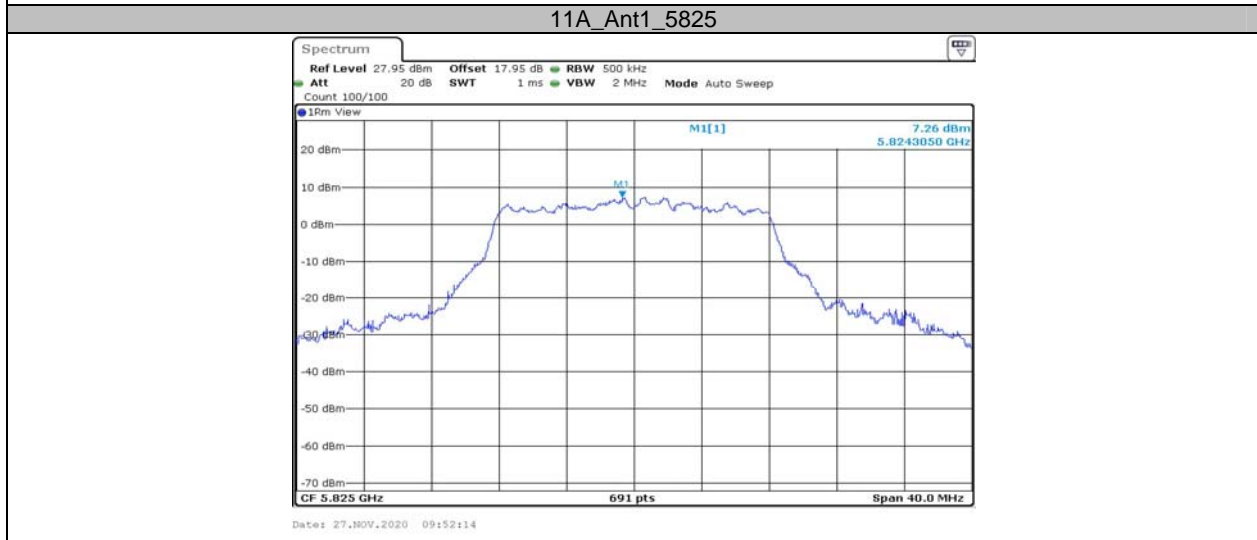









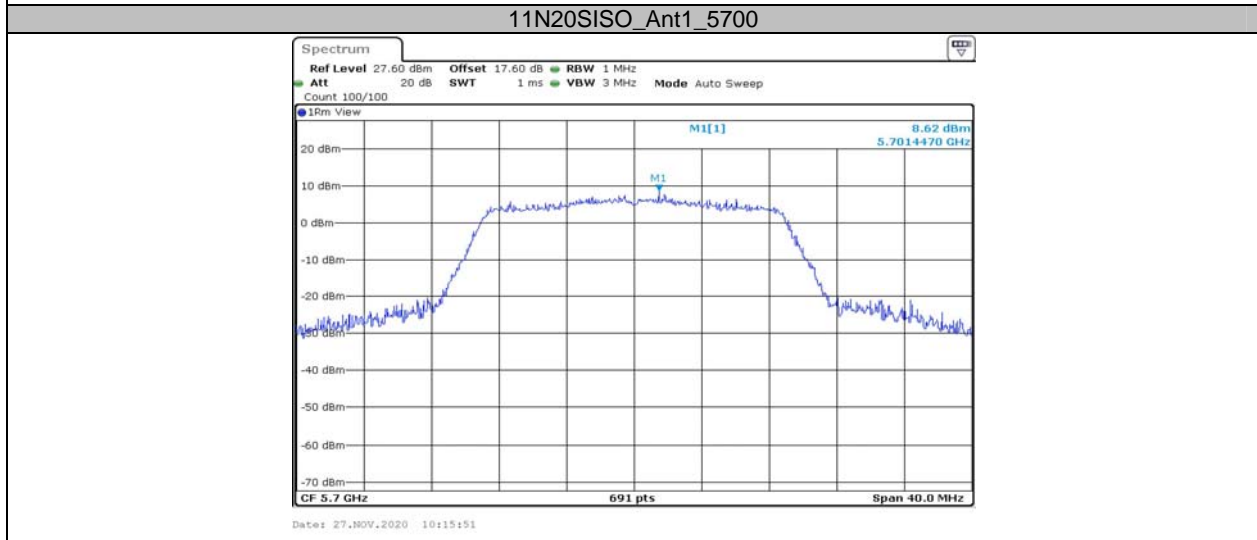
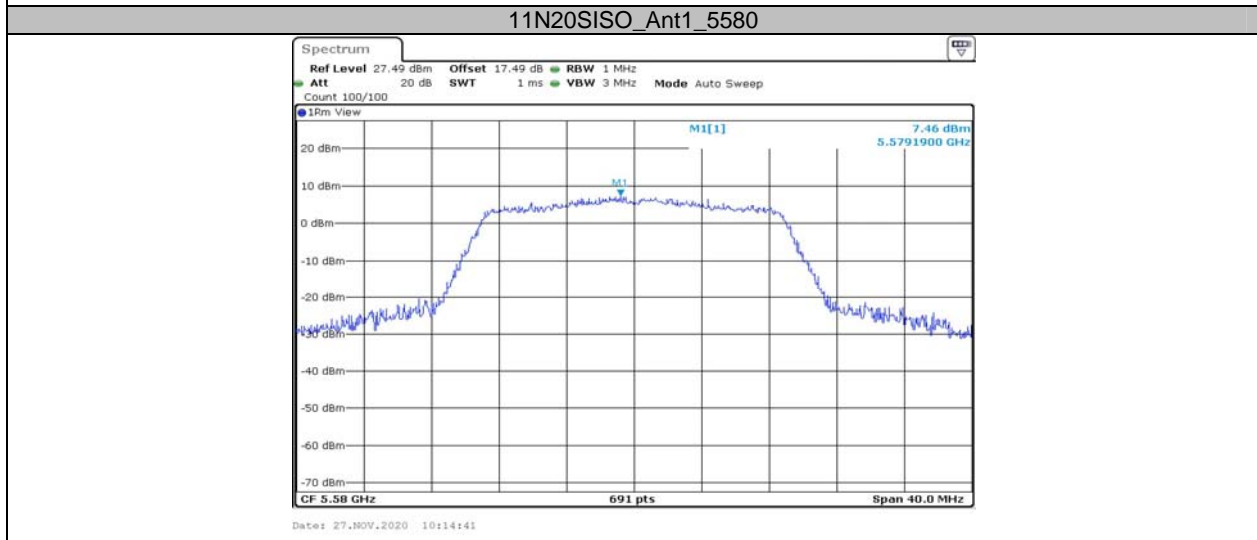



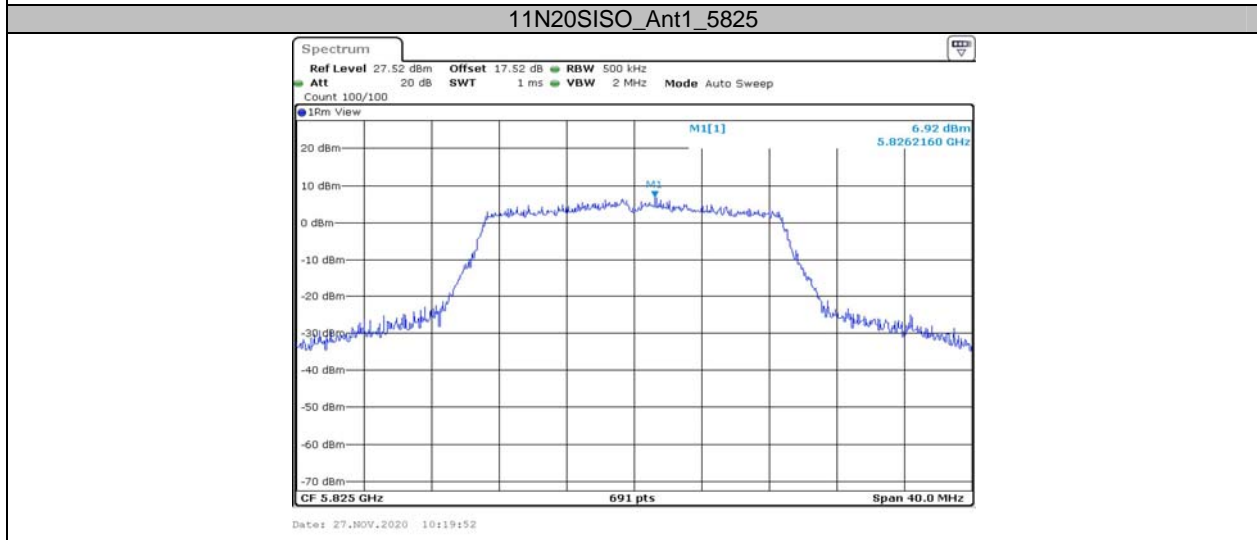
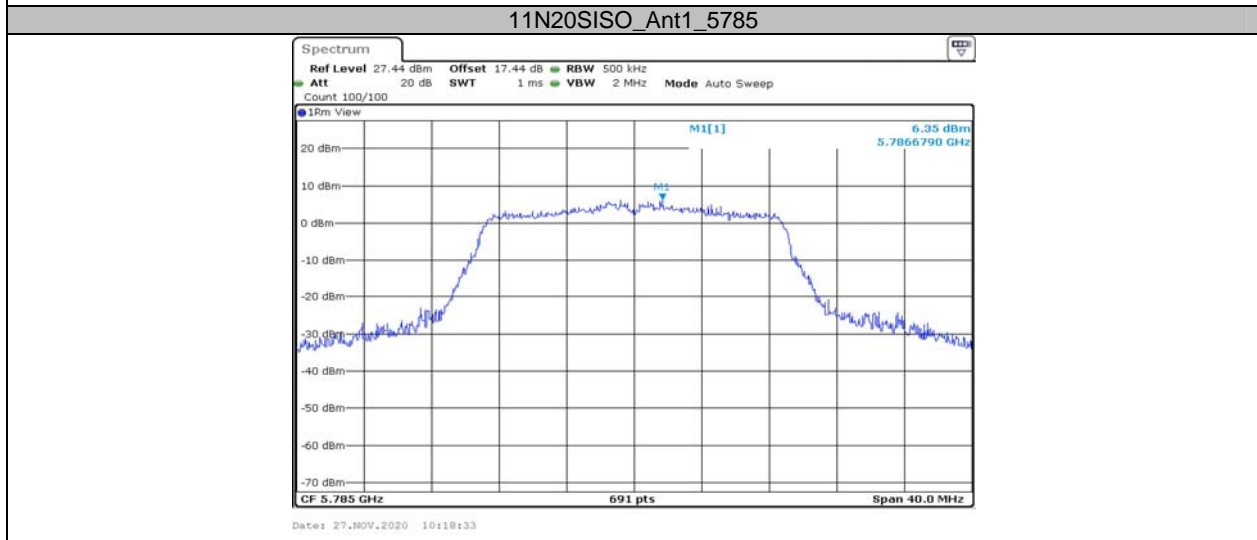








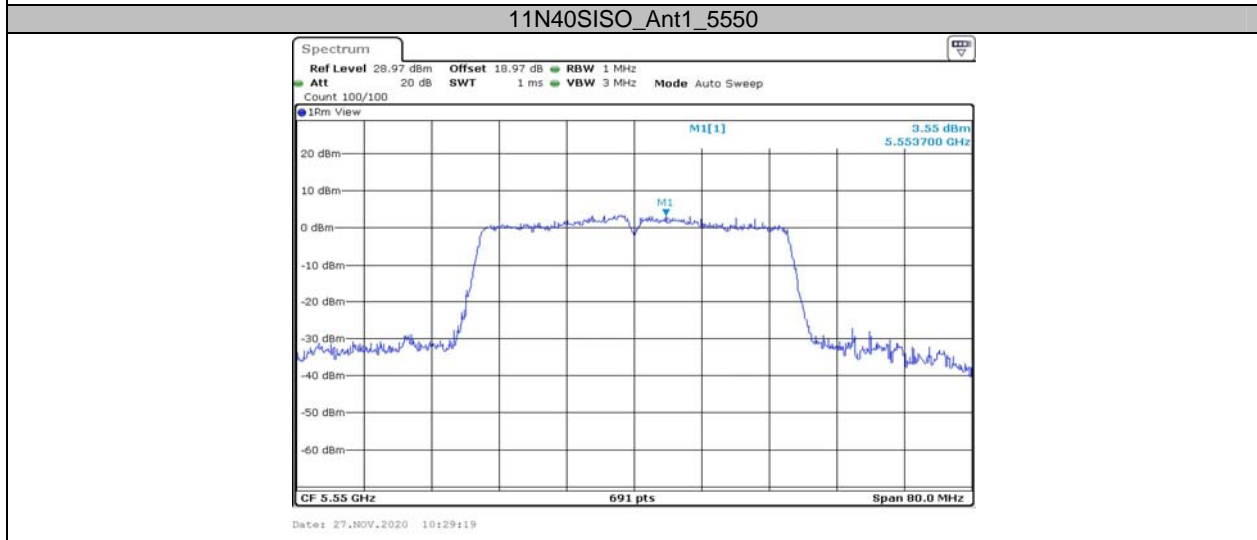
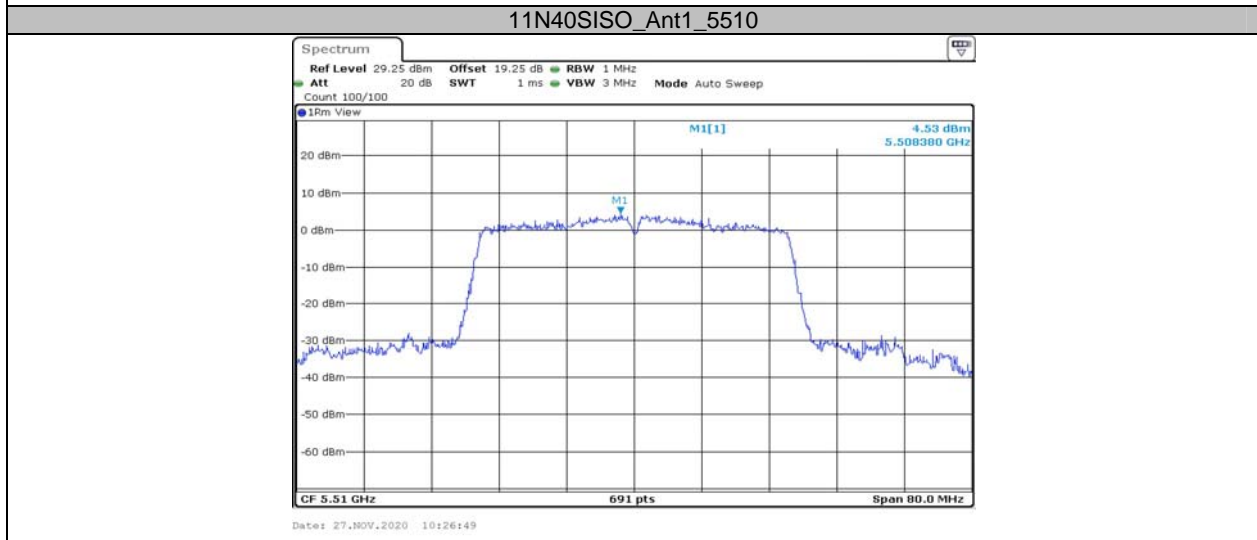




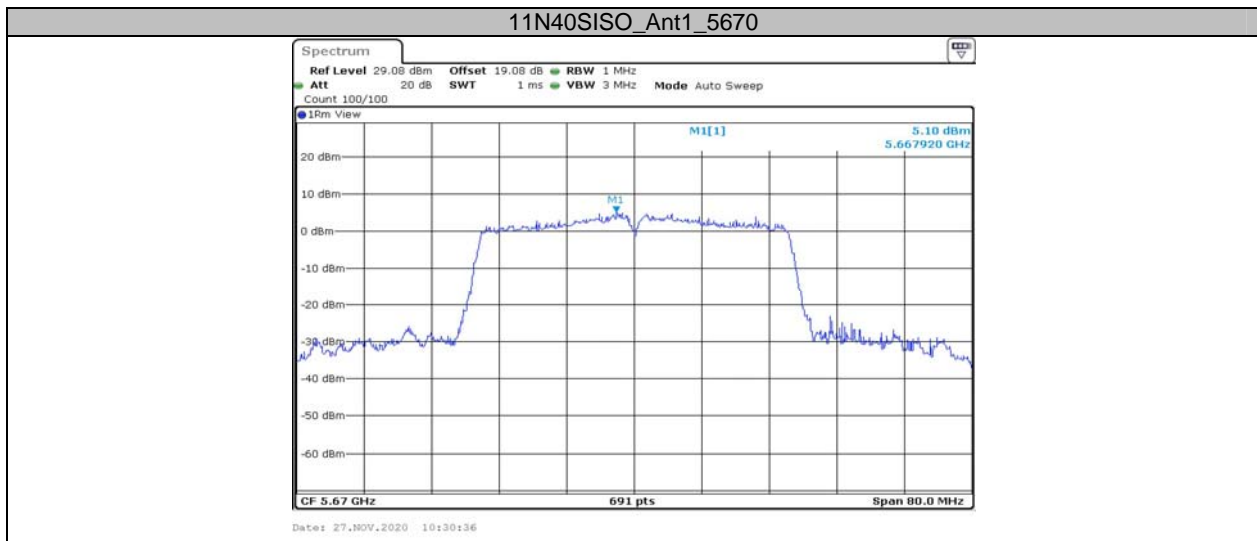


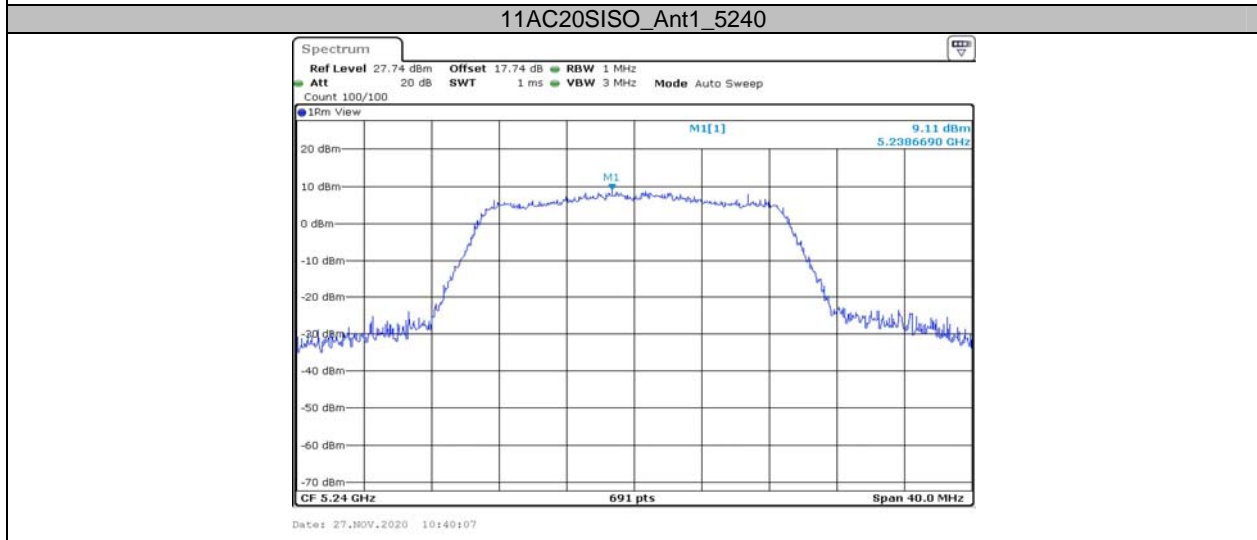
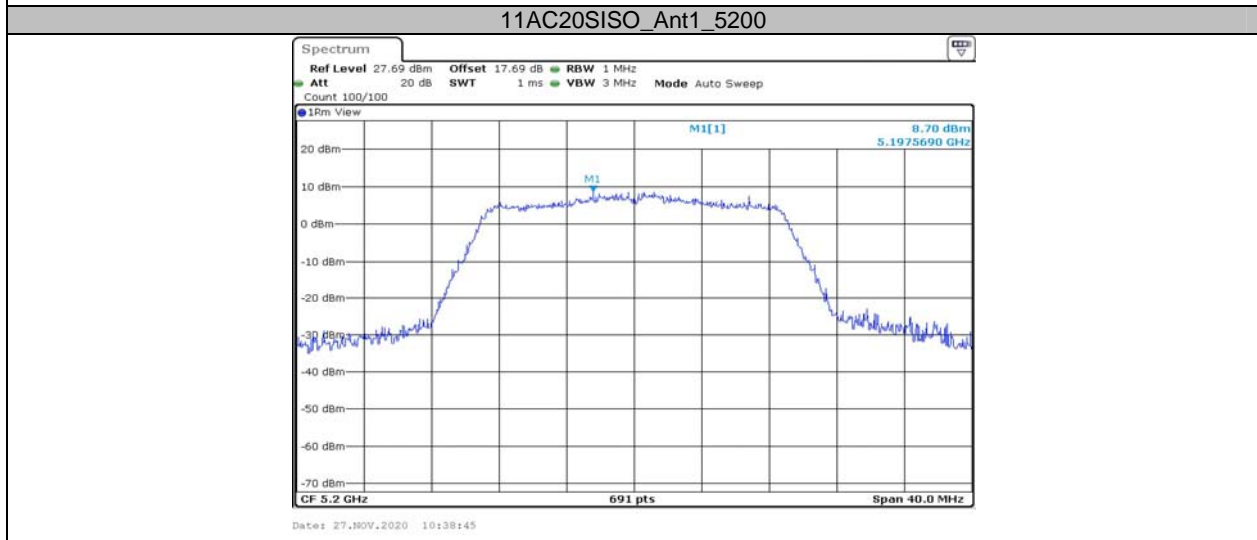
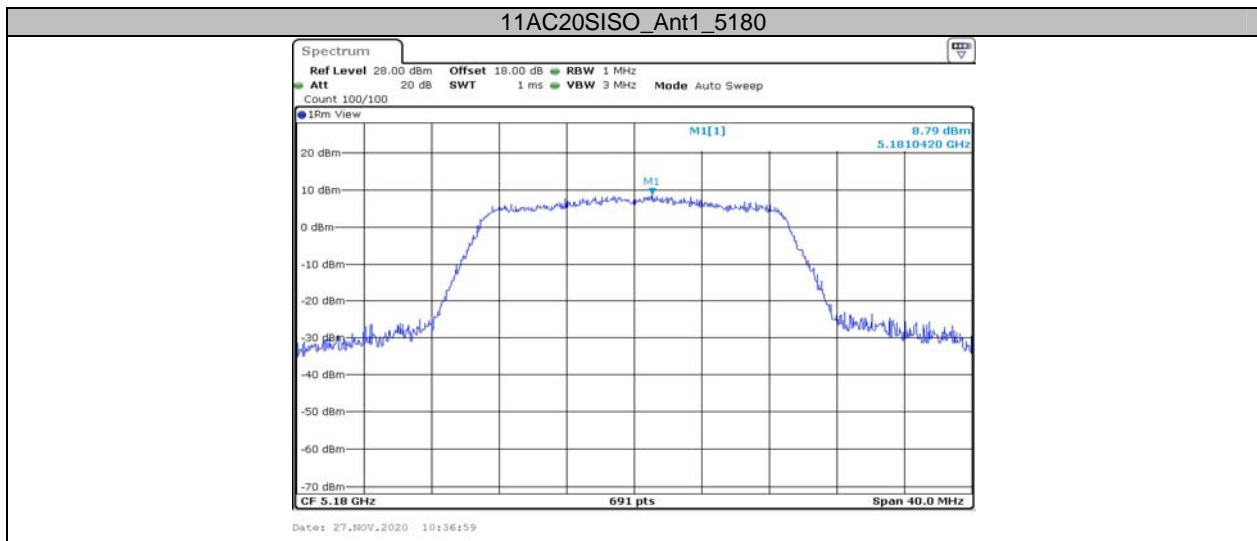


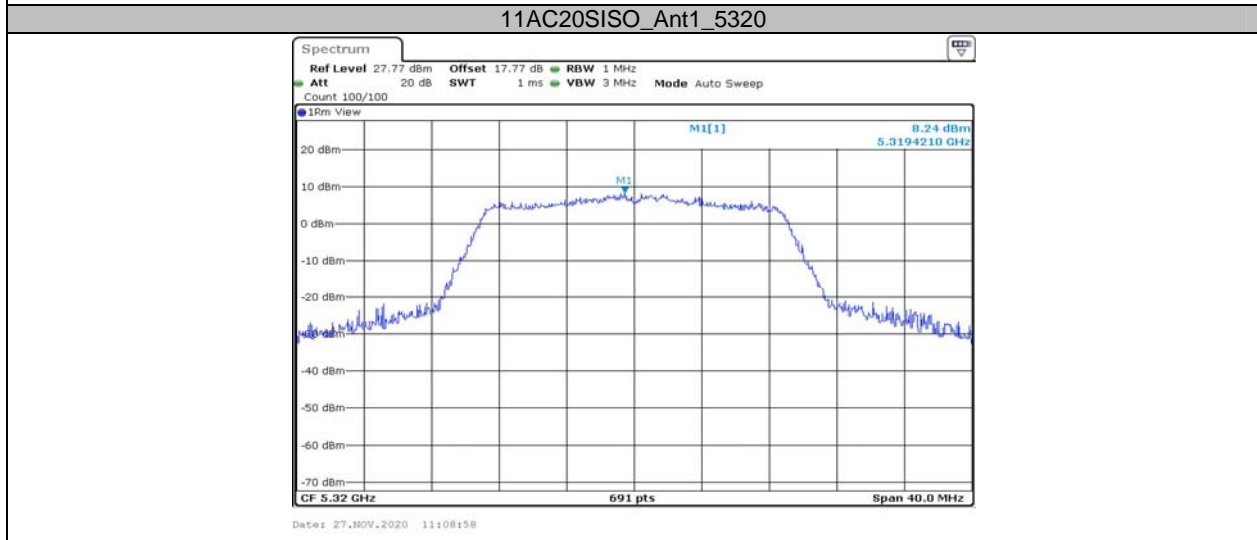
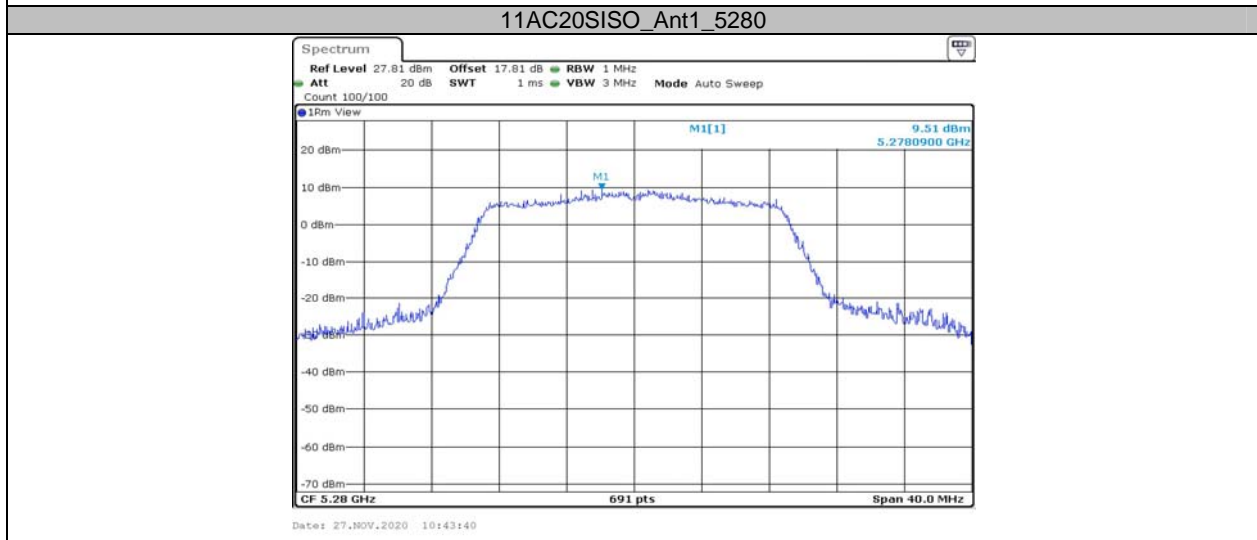
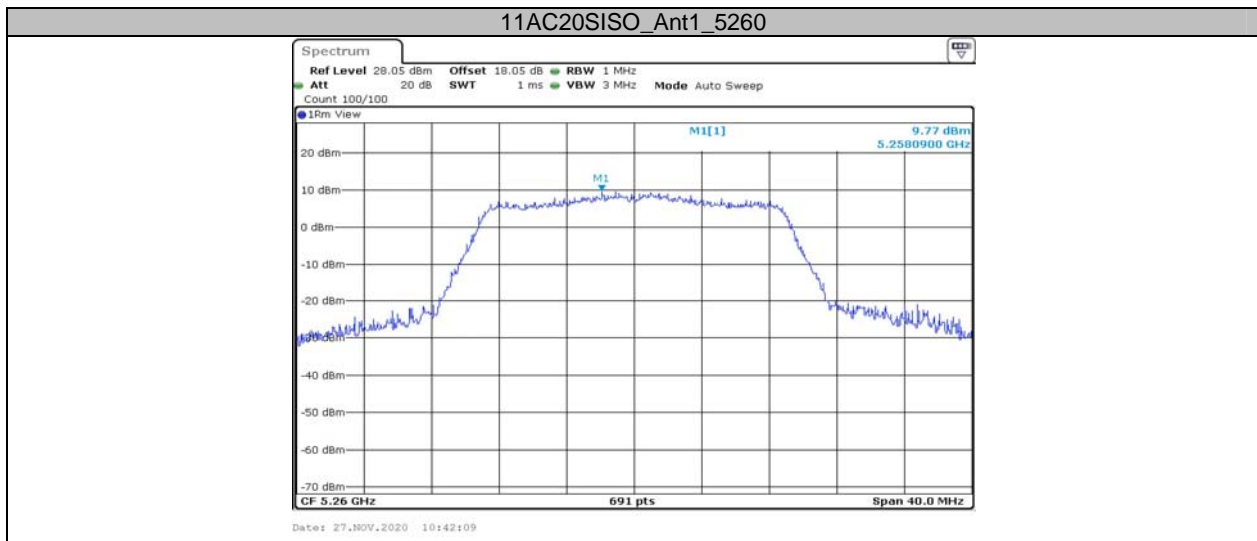


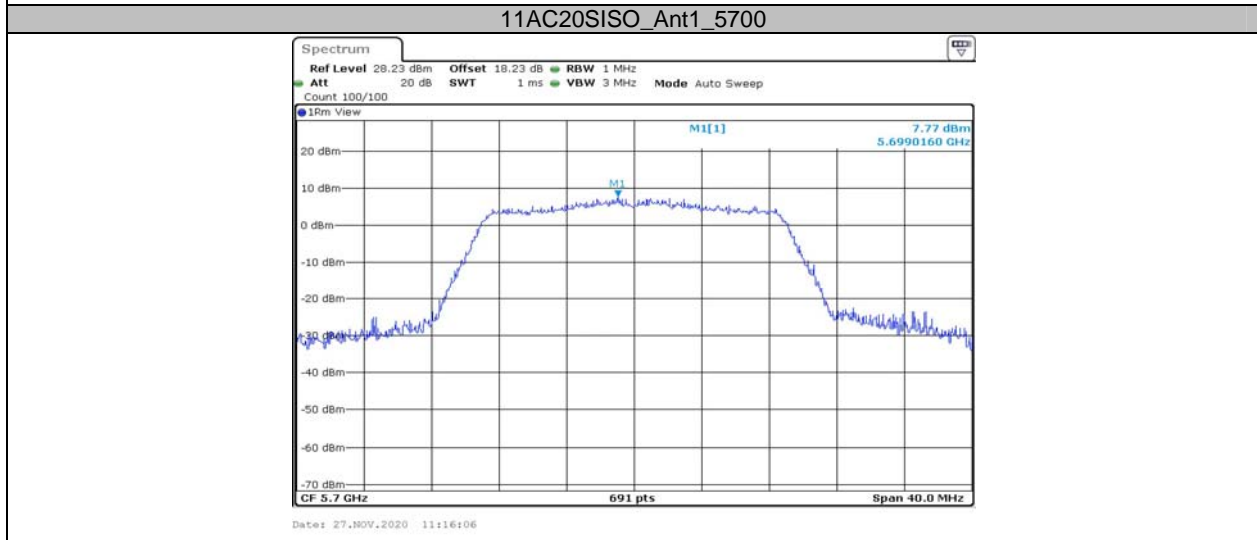
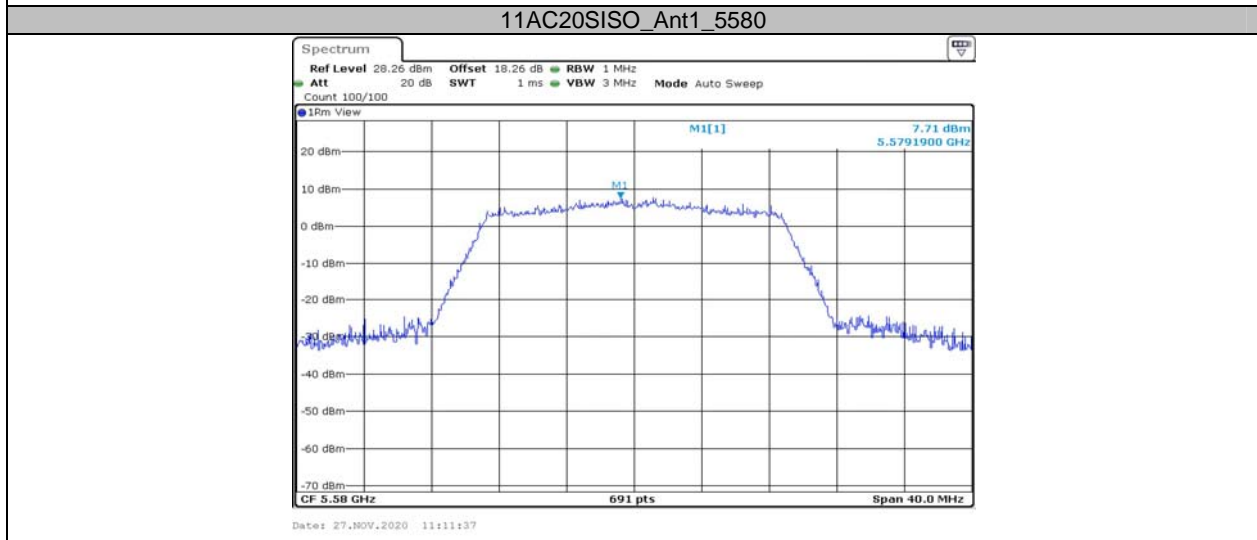
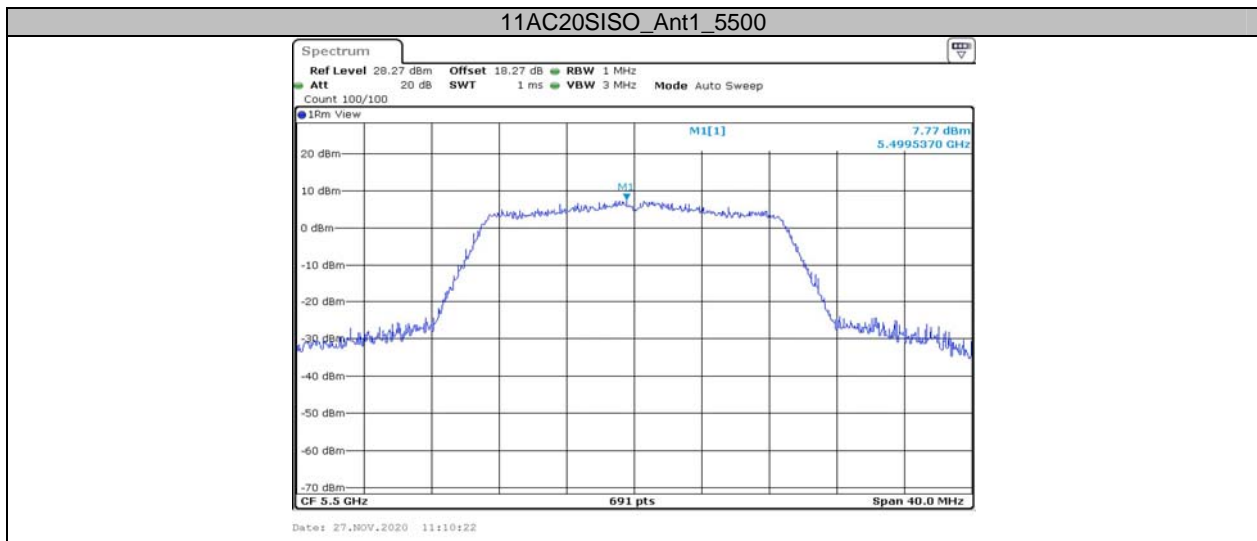


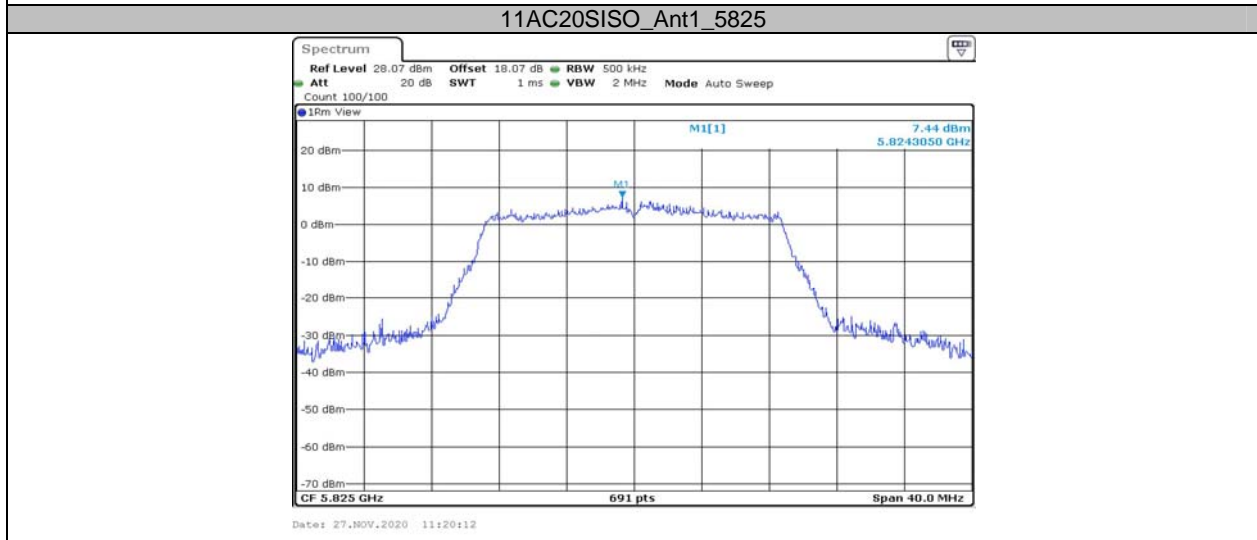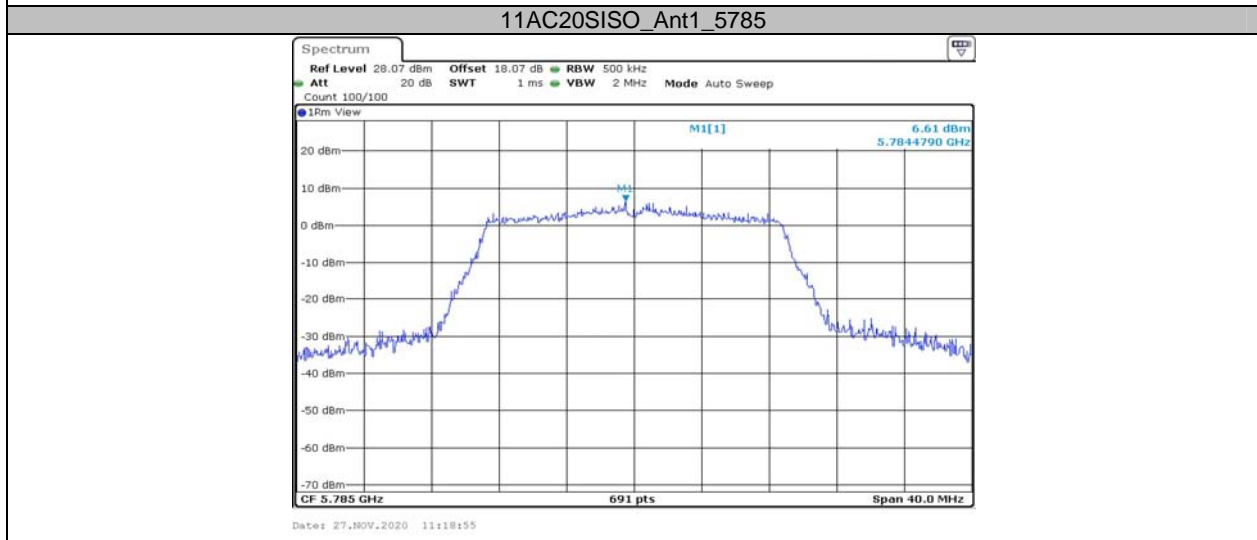
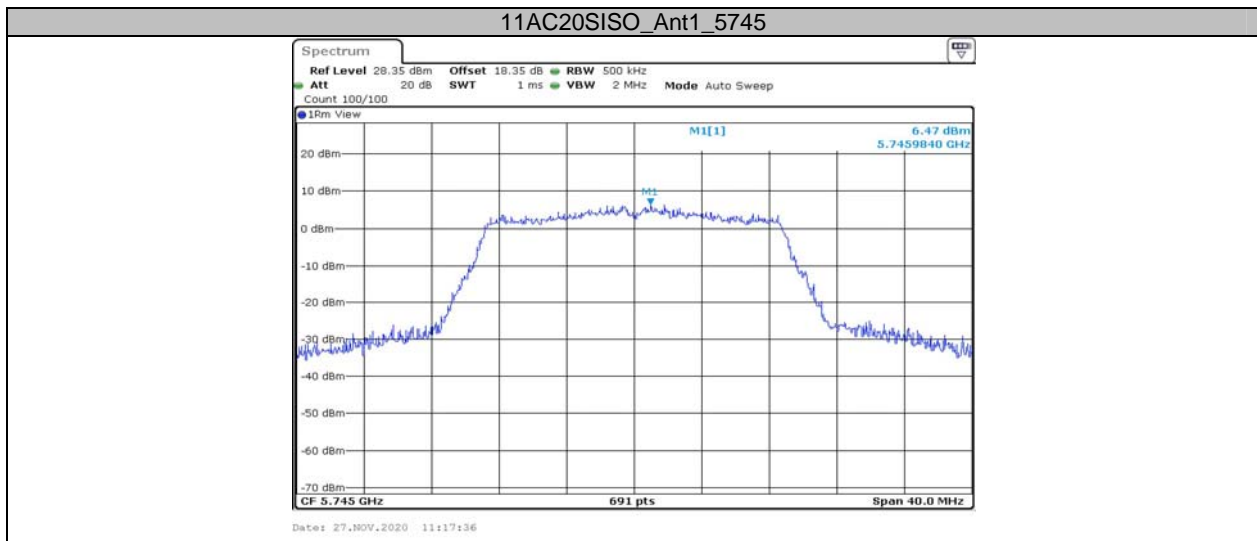


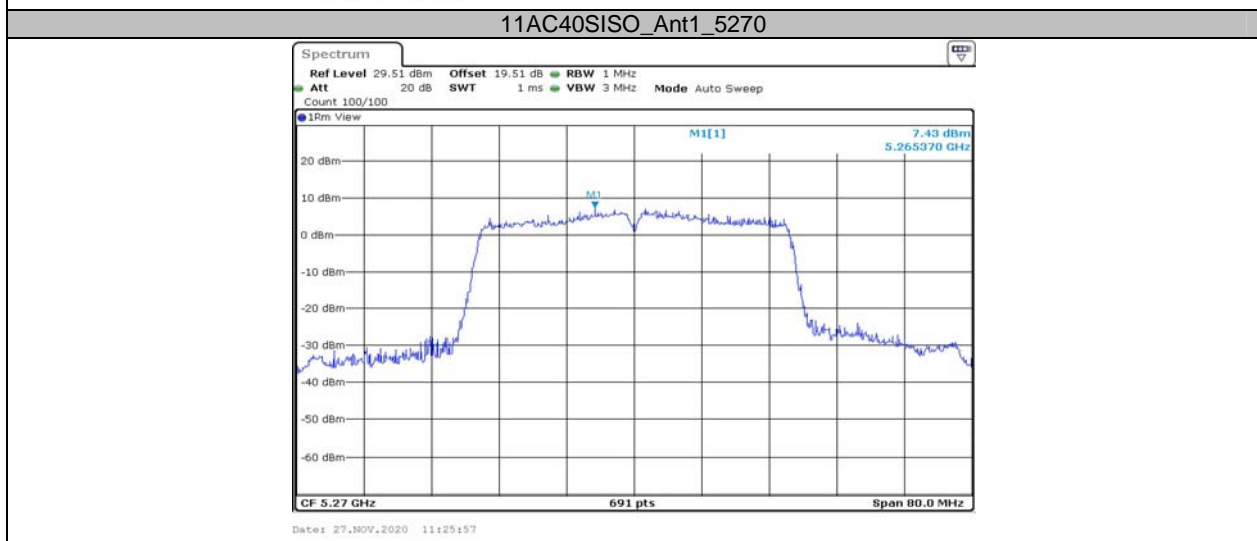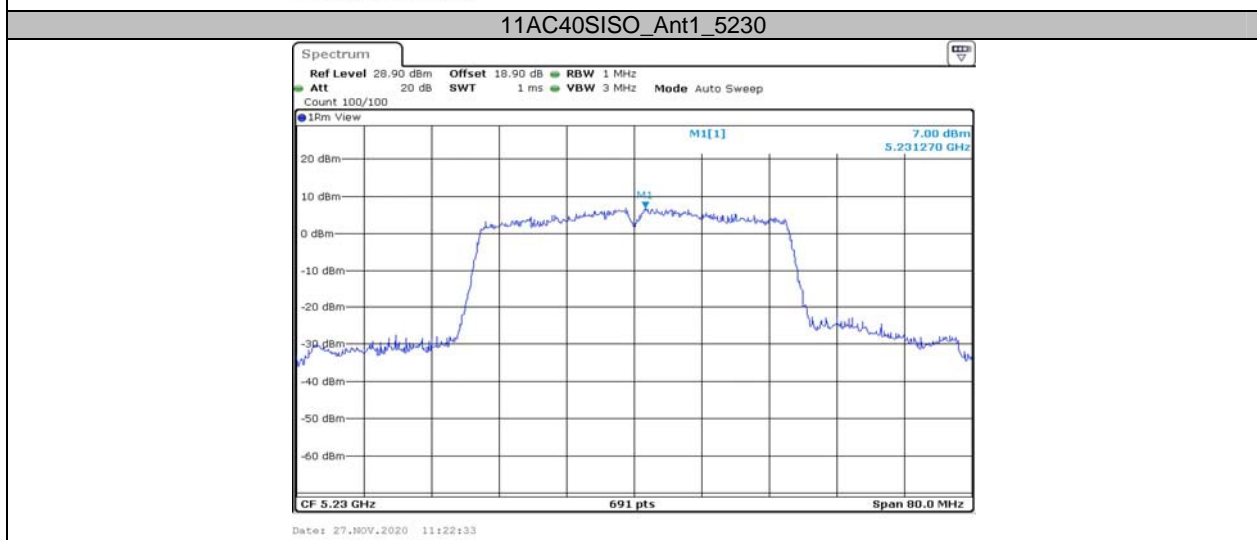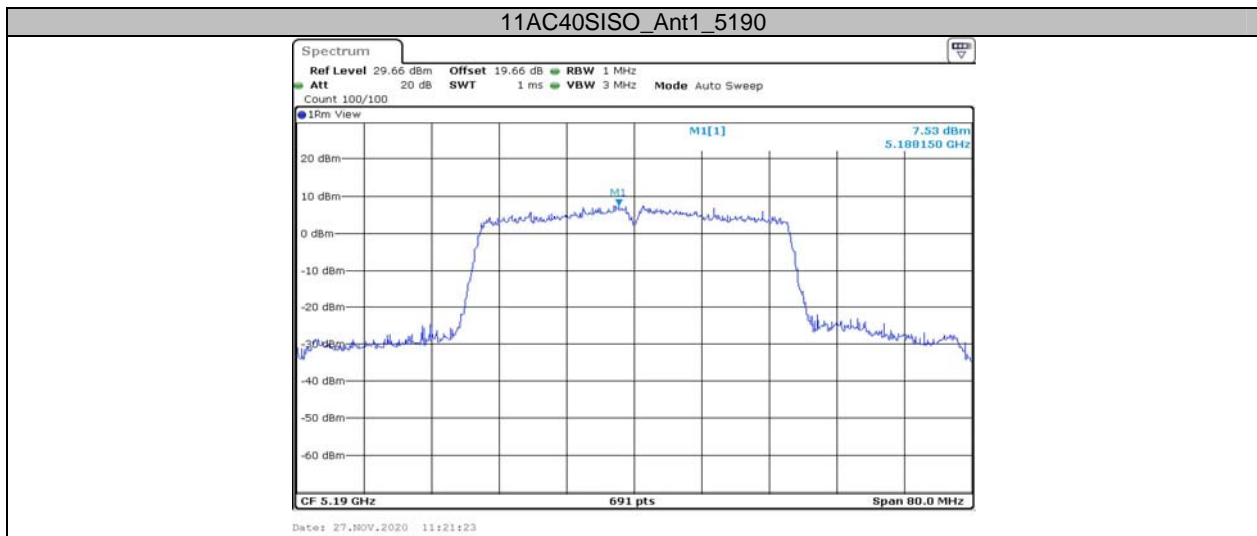

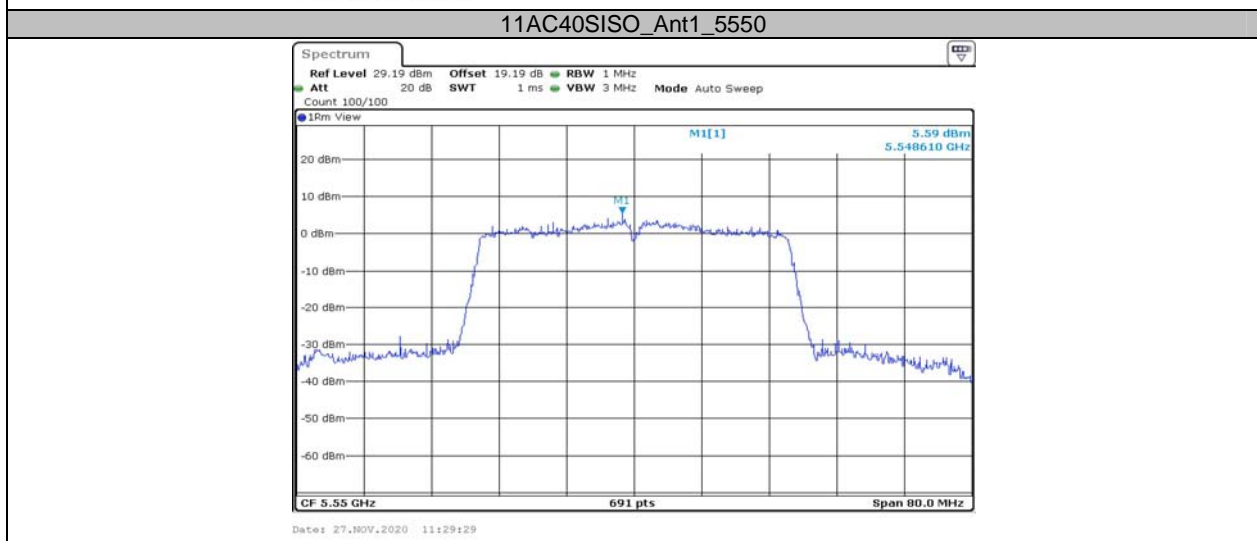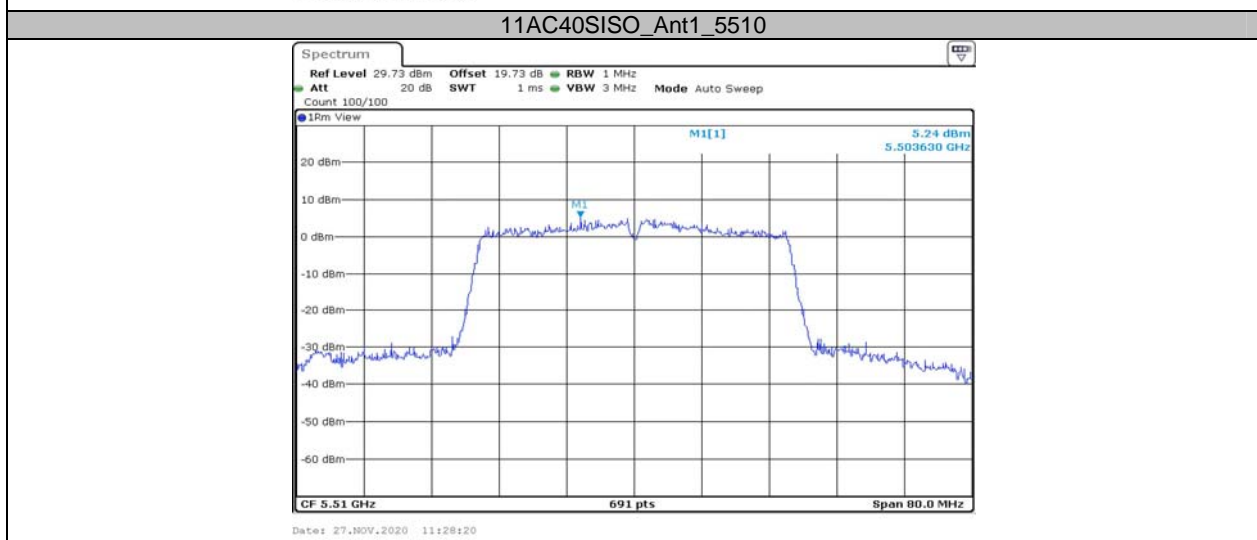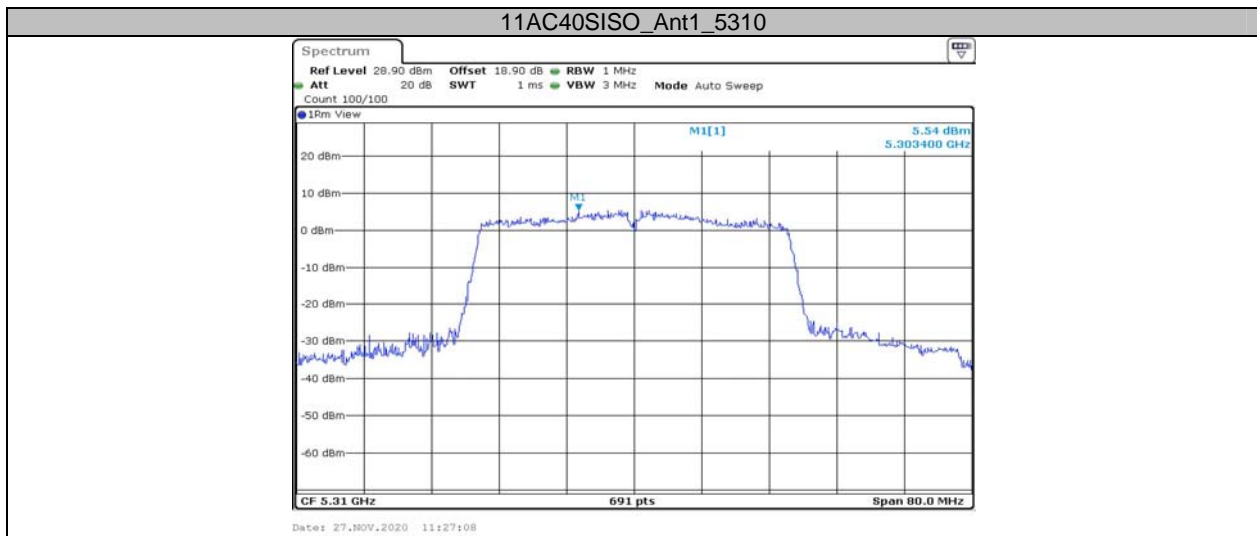

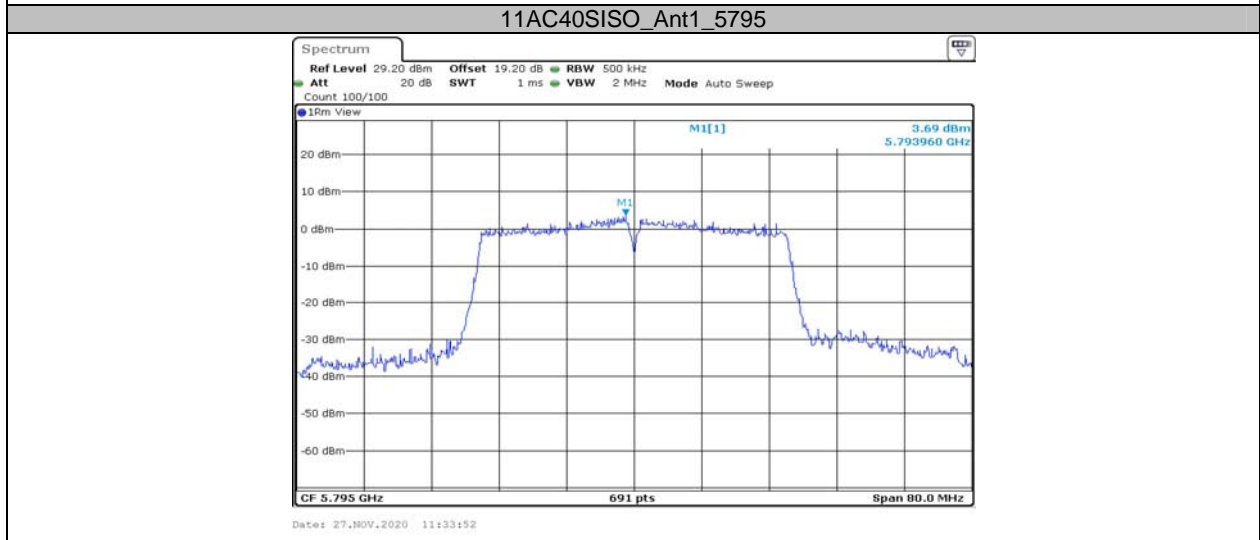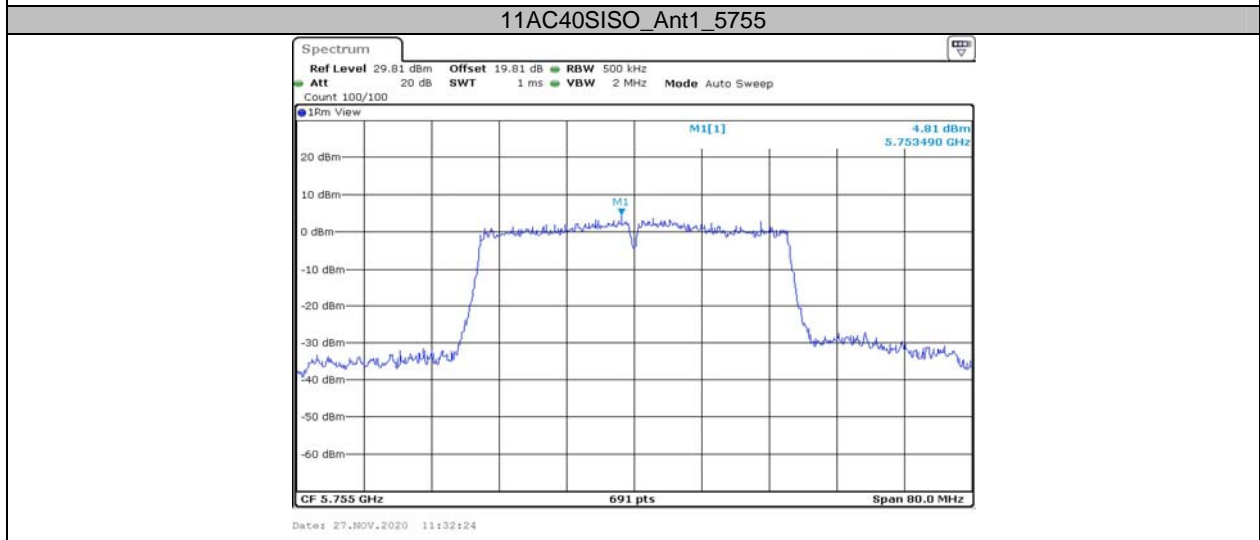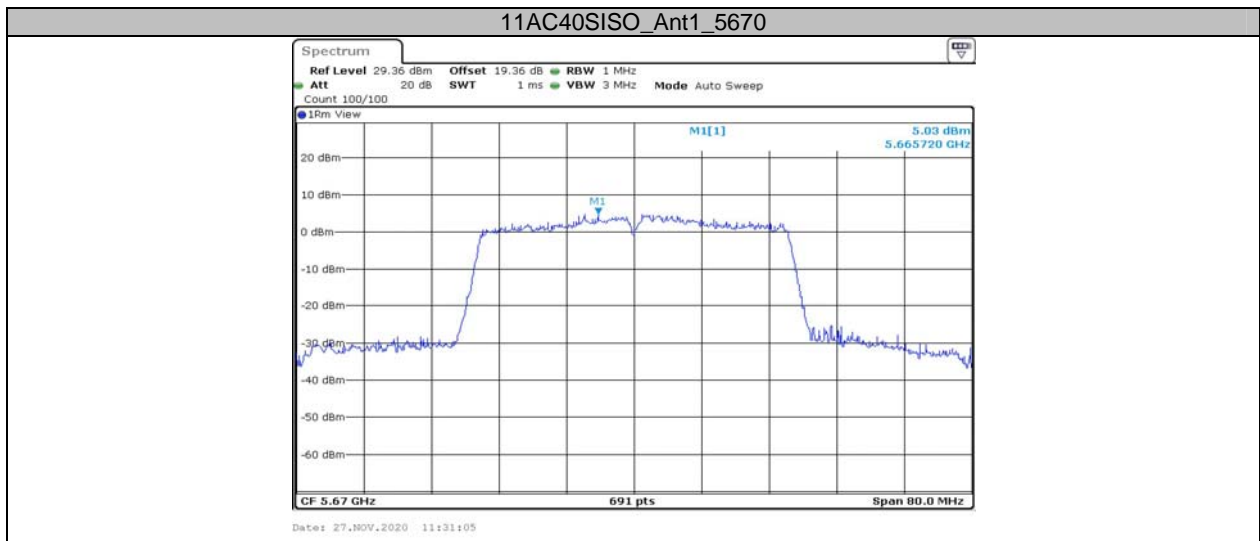

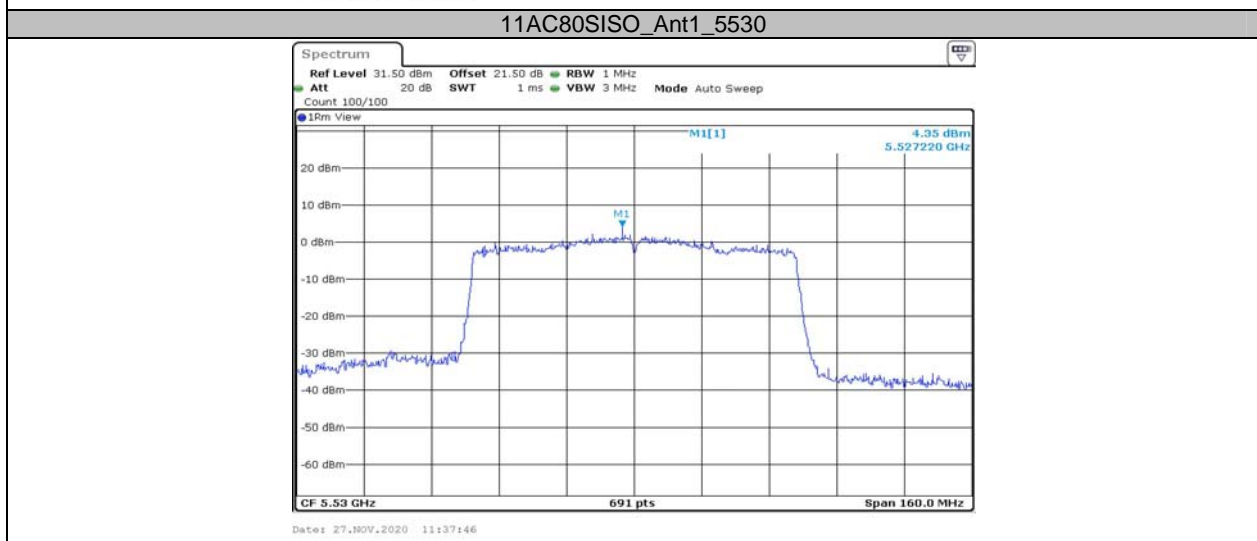
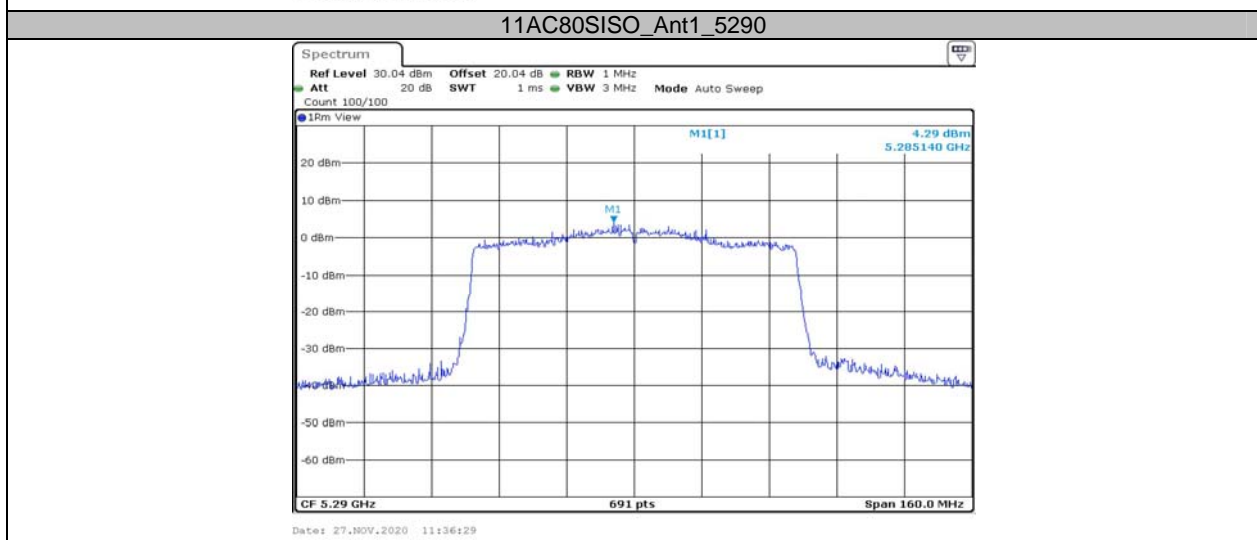
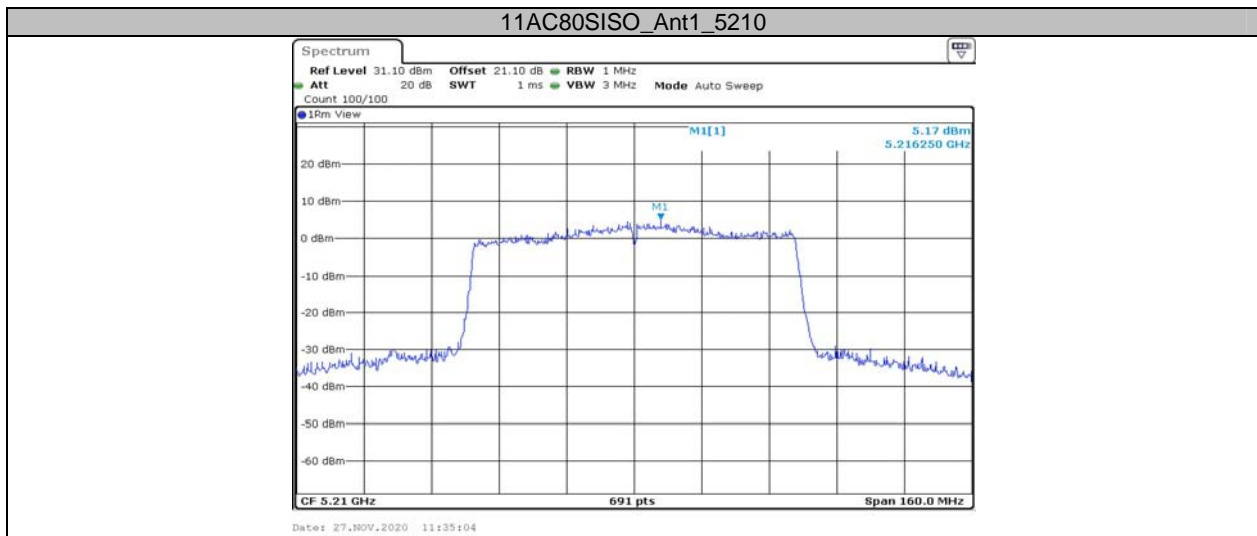



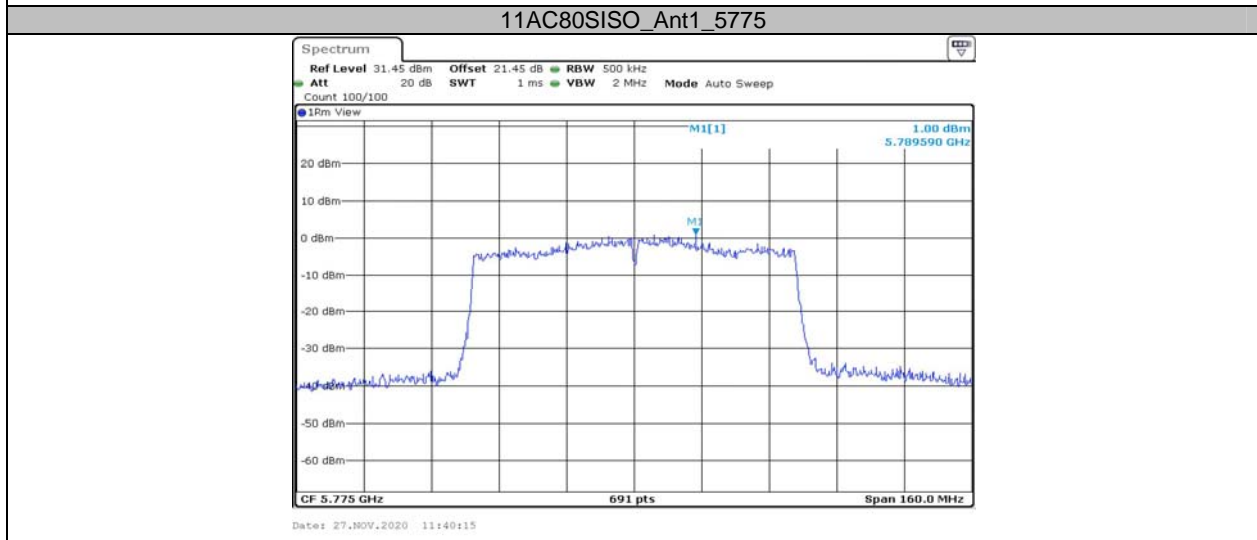
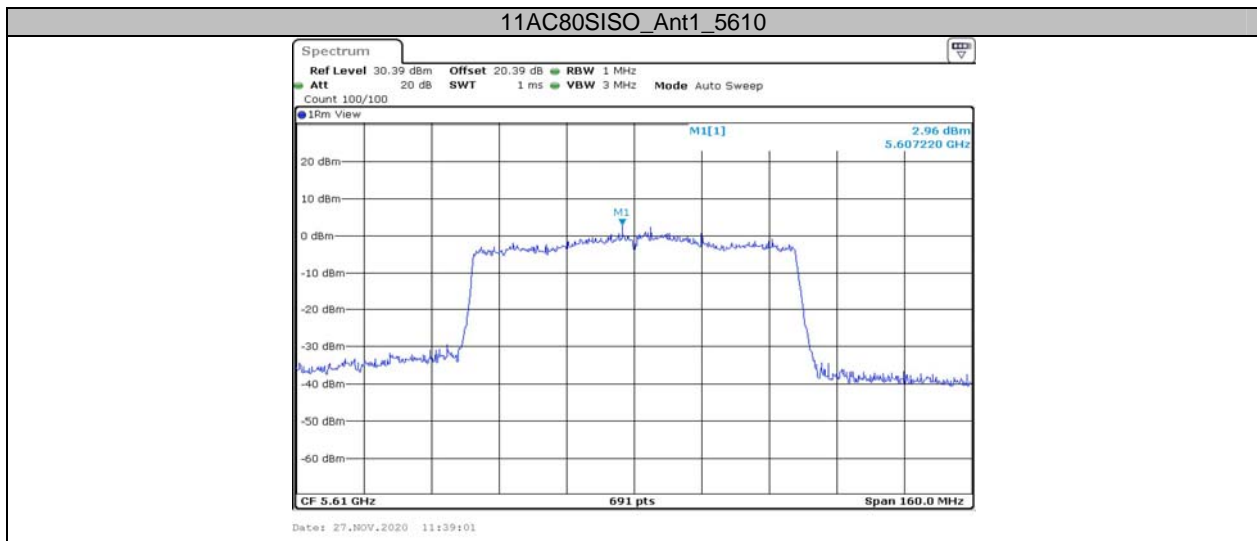





Appendix D: Duty Cycle Test Result




TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	0.23	0.35	65.71
		5260	0.22	0.35	62.86
		5500	0.22	0.35	62.86
		5745	0.23	0.35	65.71
11N20SISO	Ant1	5180	0.15	0.22	68.18
		5260	0.14	0.22	63.64
		5500	0.15	0.22	68.18
		5745	0.15	0.22	68.18
11N40SISO	Ant1	5190	0.11	0.23	47.83
		5270	0.11	0.23	47.83
		5510	0.11	0.23	47.83
		5755	0.11	0.23	47.83
11AC20SISO	Ant1	5180	0.18	0.30	60.00
		5260	0.18	0.30	60.00
		5500	0.18	0.30	60.00
		5745	0.18	0.30	60.00
11AC40SISO	Ant1	5190	0.09	0.22	40.91
		5270	0.09	0.21	42.86
		5510	0.09	0.21	42.86
		5755	0.09	0.21	42.86
11AC80SISO	Ant1	5210	0.05	0.17	29.41
		5290	0.04	0.15	26.67
		5530	0.05	0.17	29.41
		5775	0.05	0.17	29.41




Test Graphs

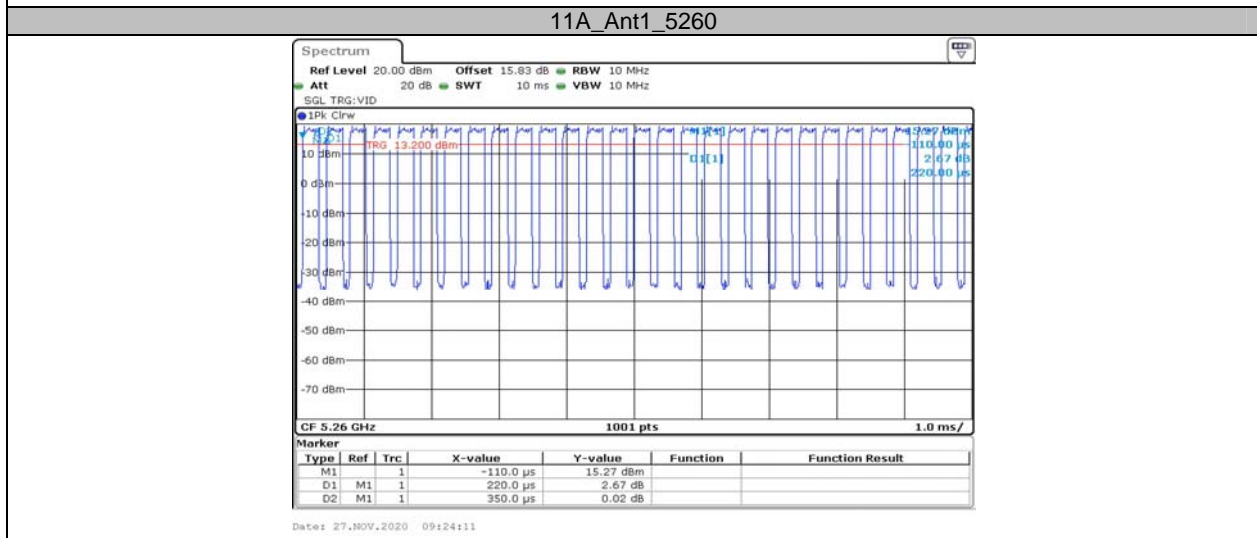
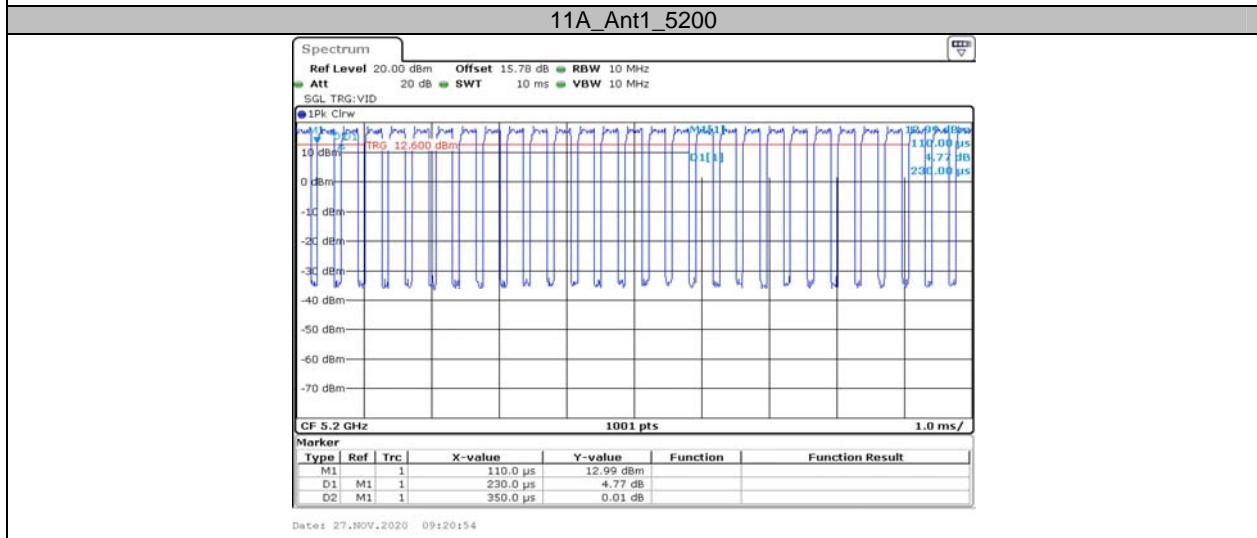
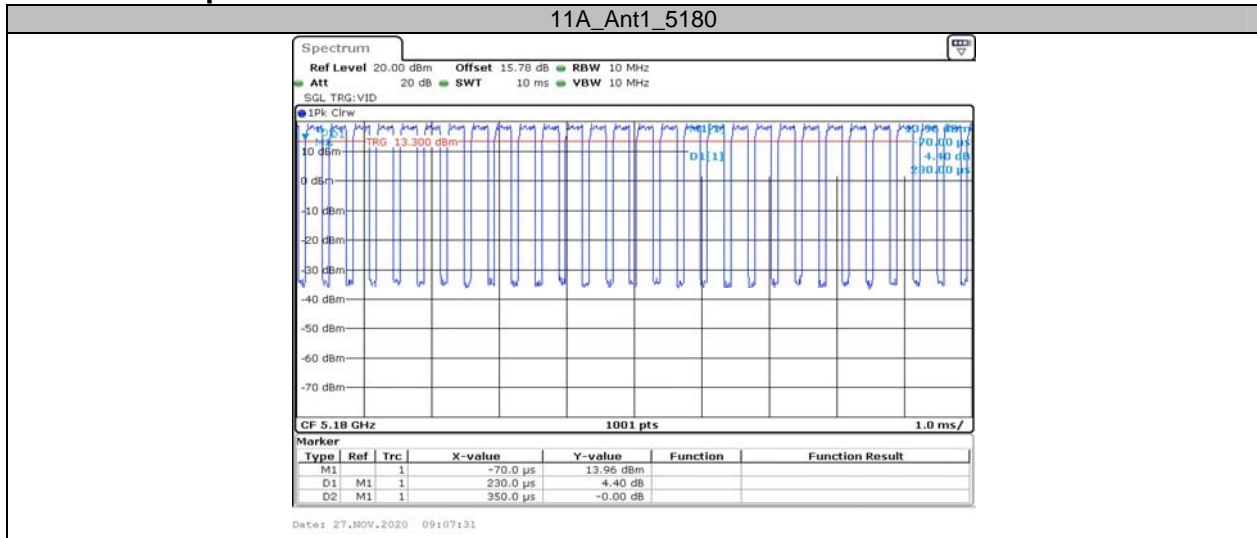


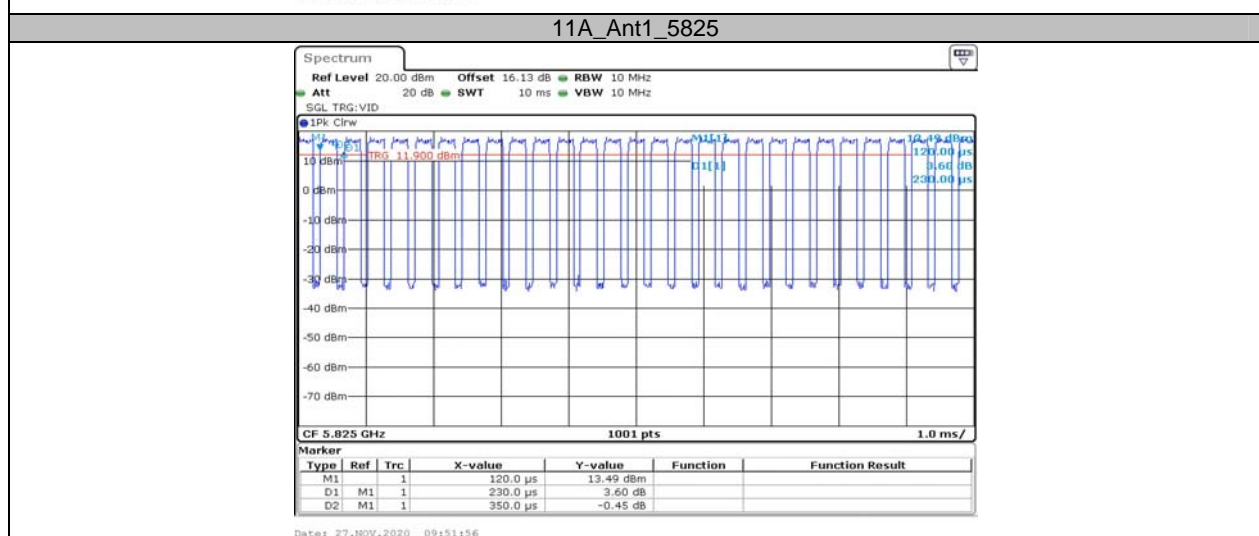
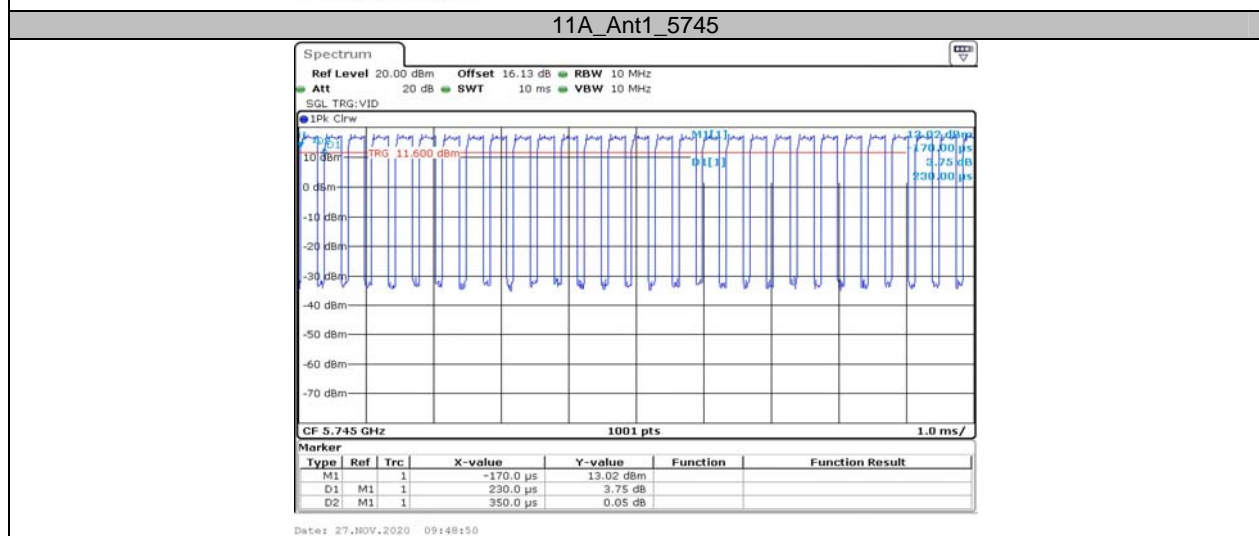
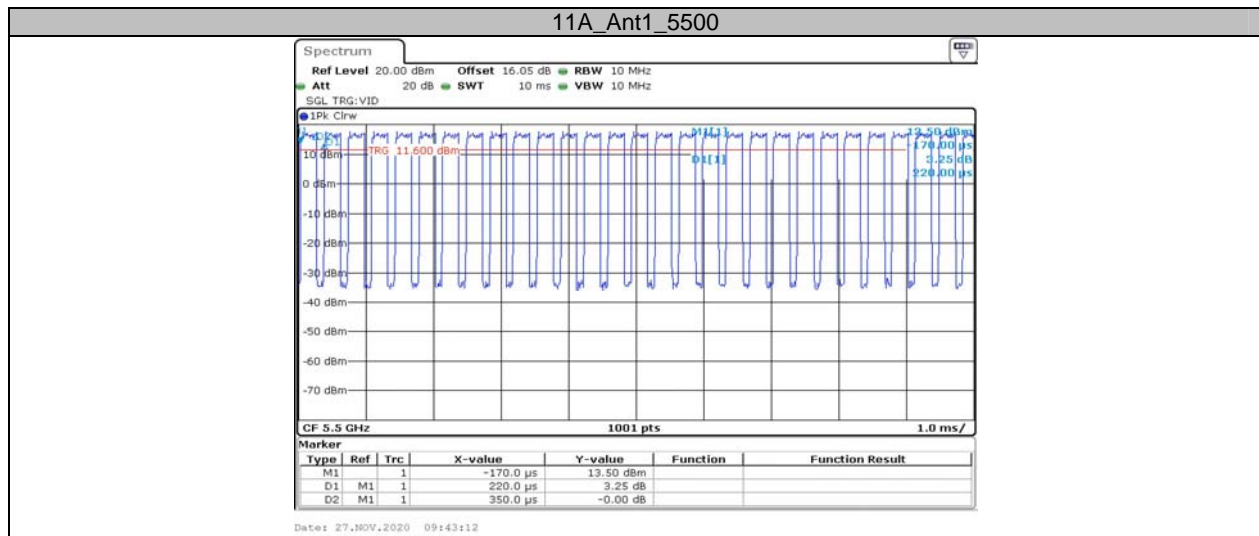


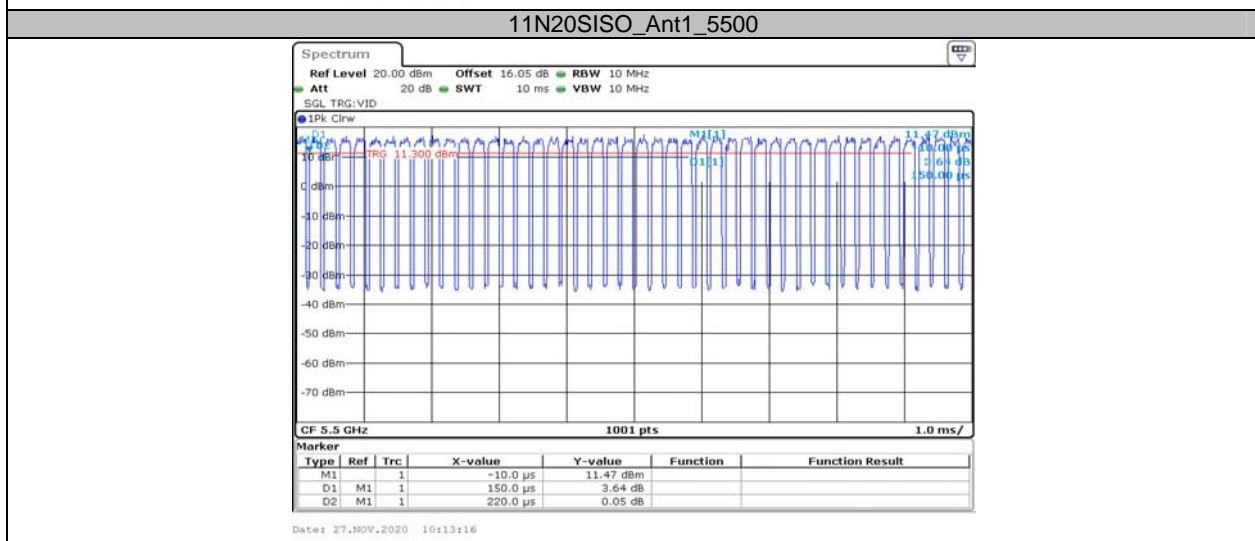
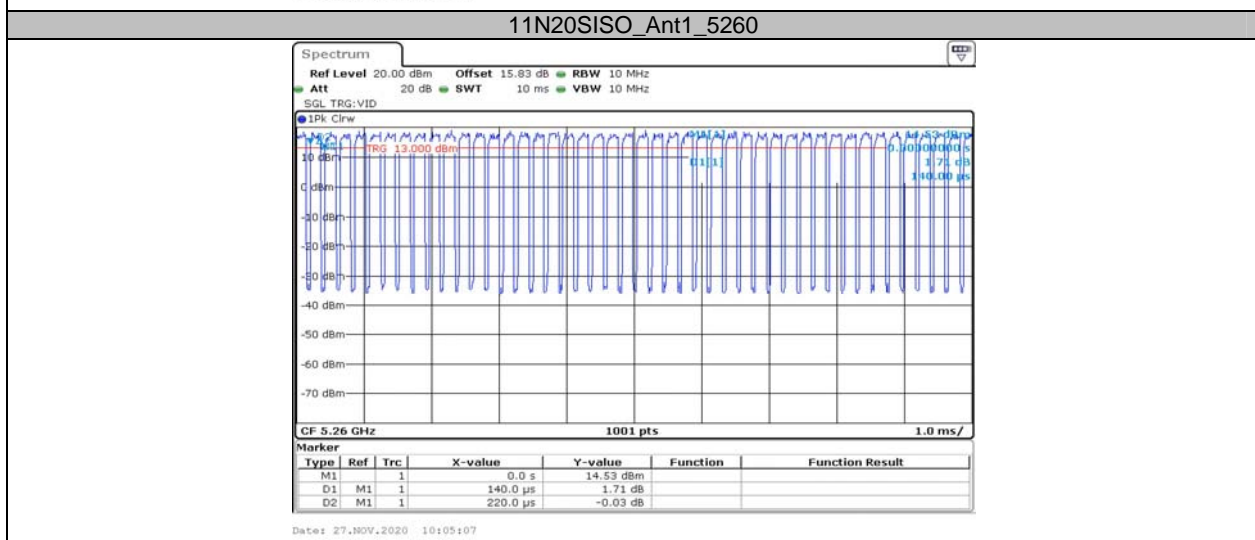
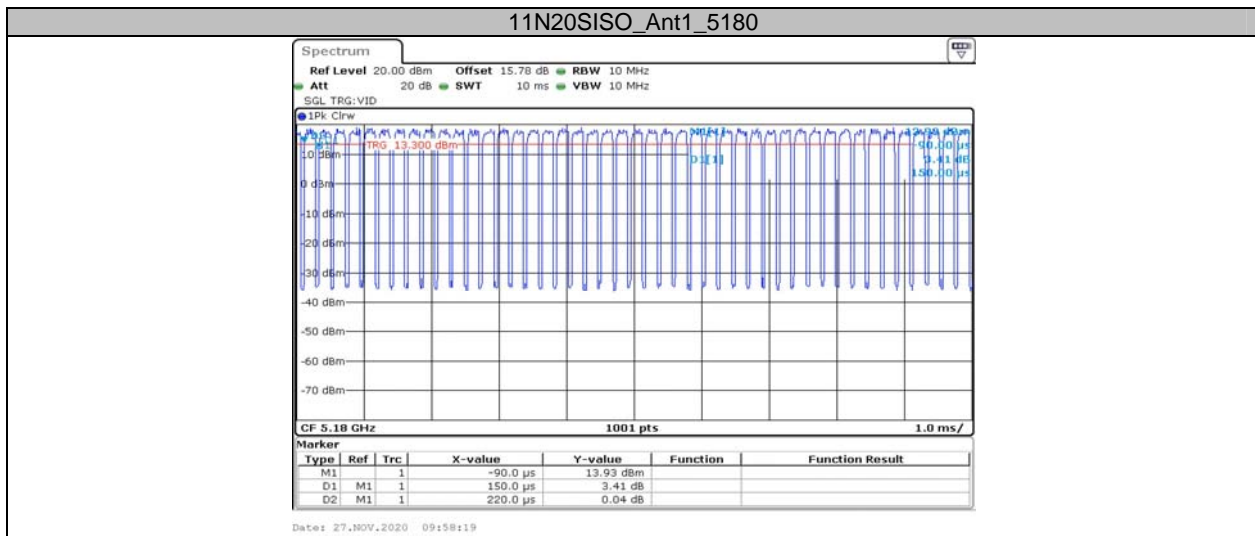


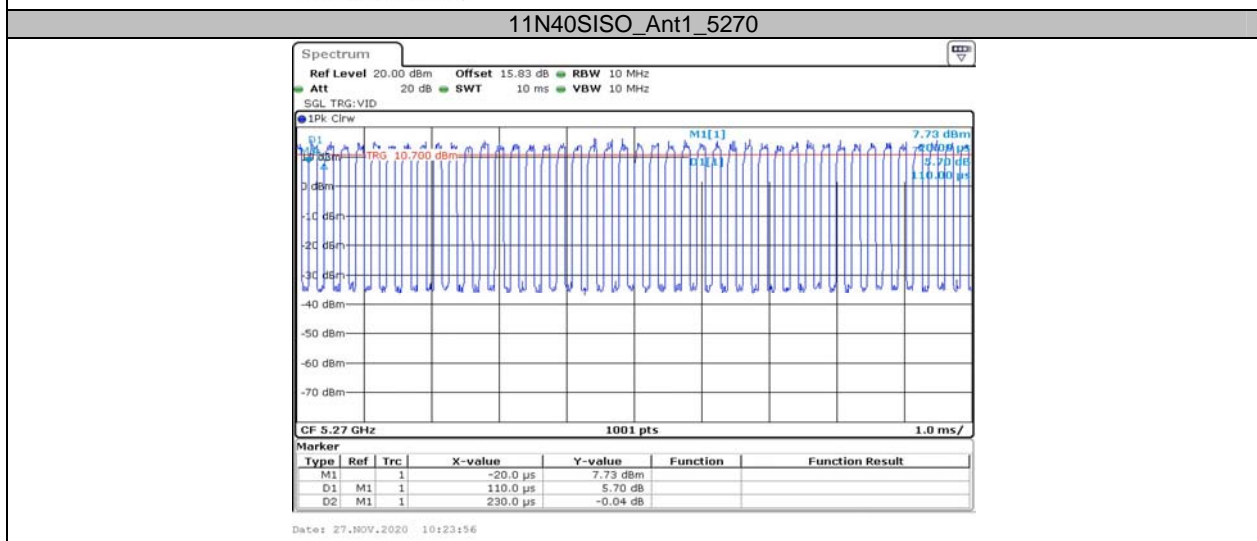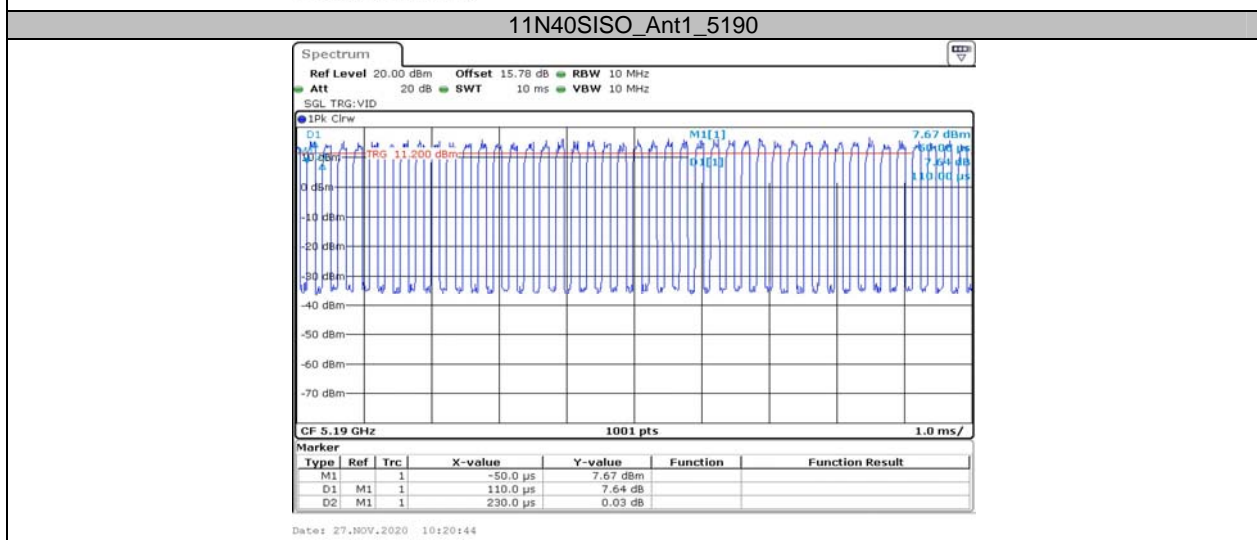
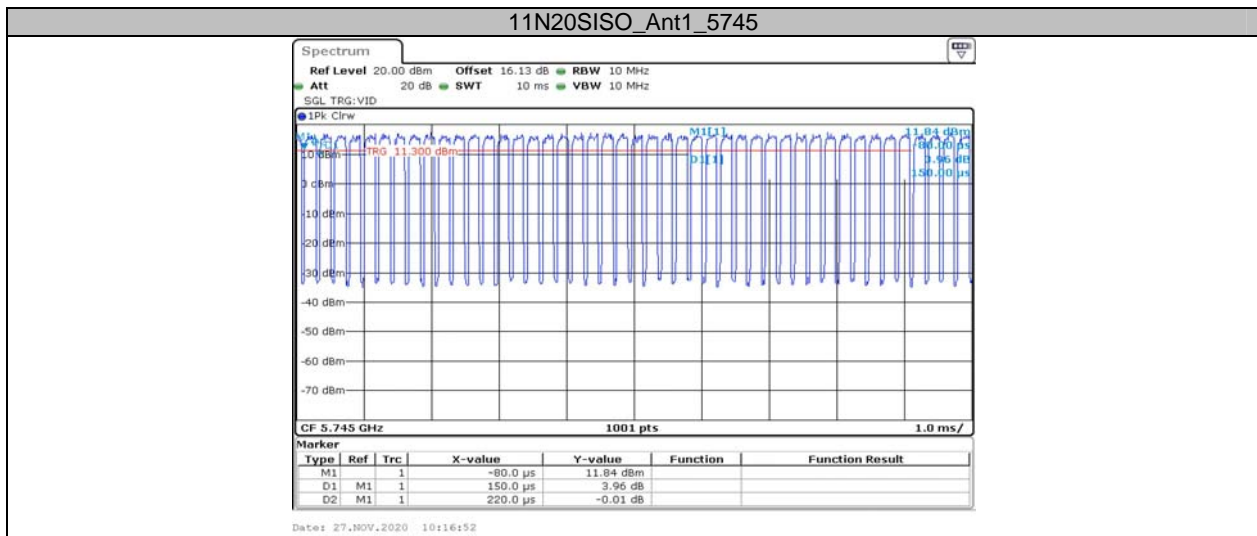


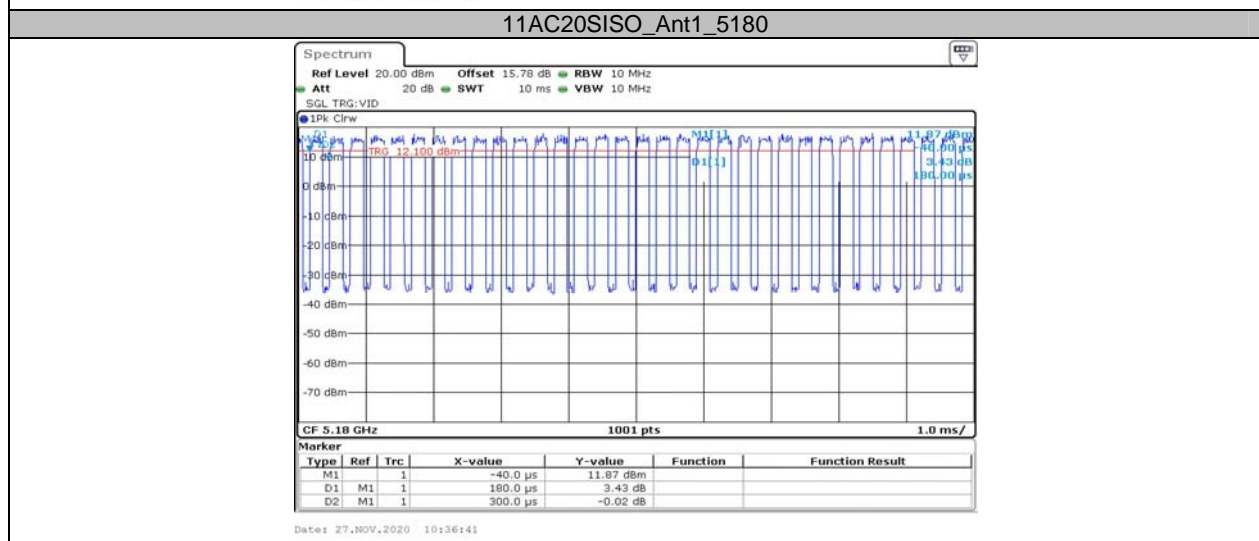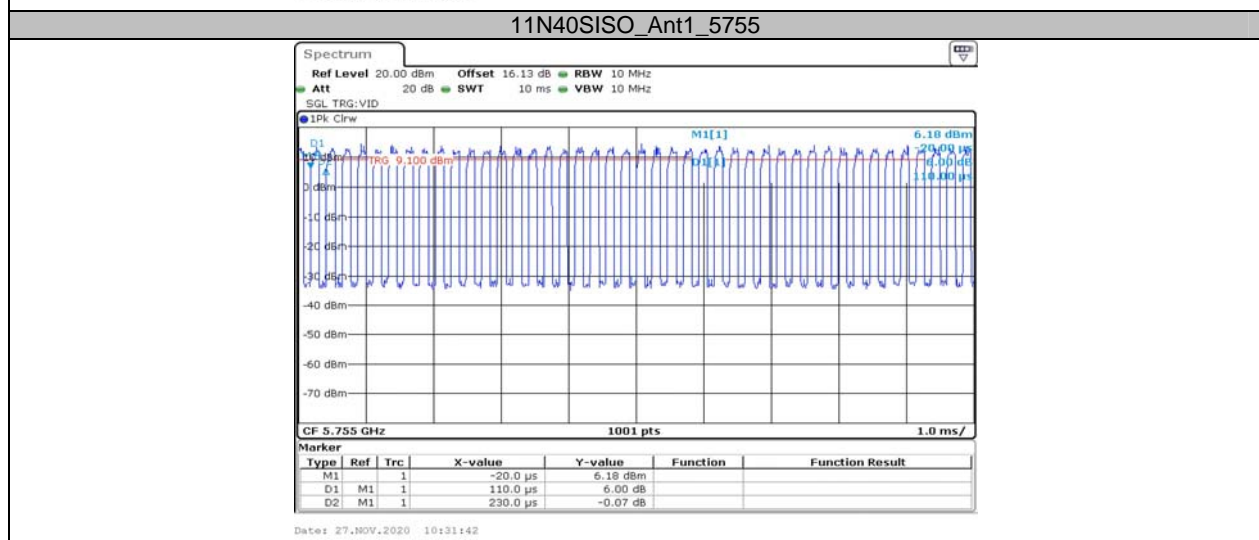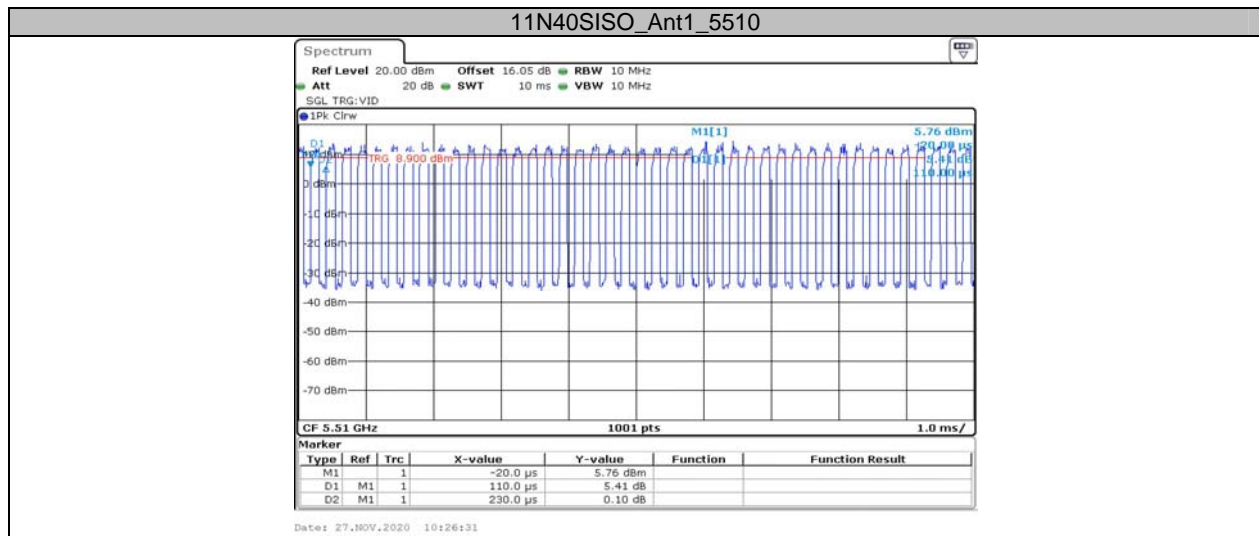

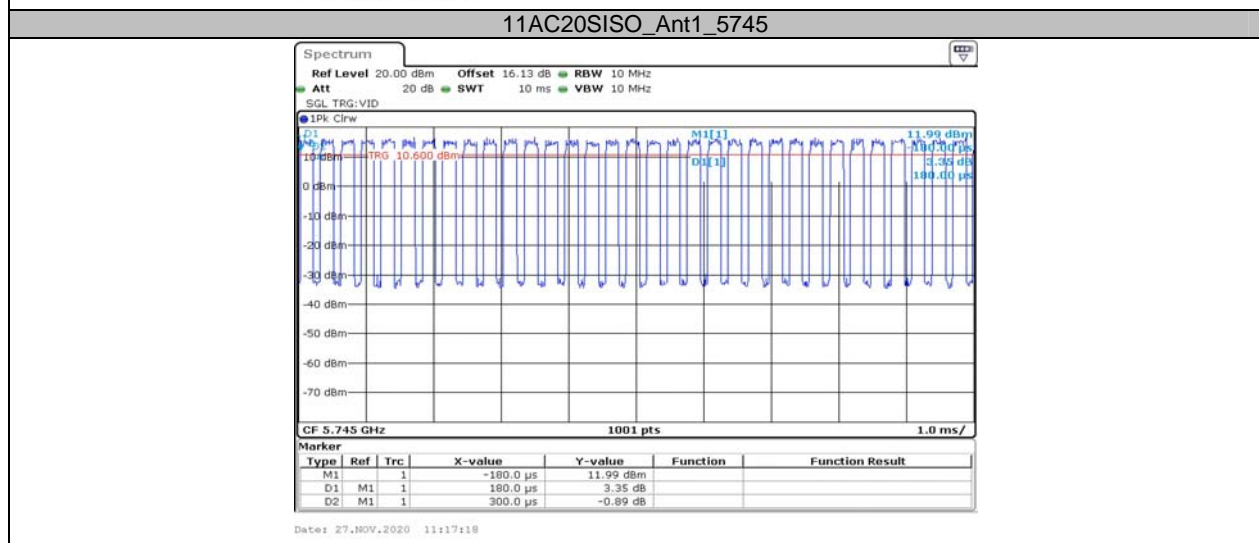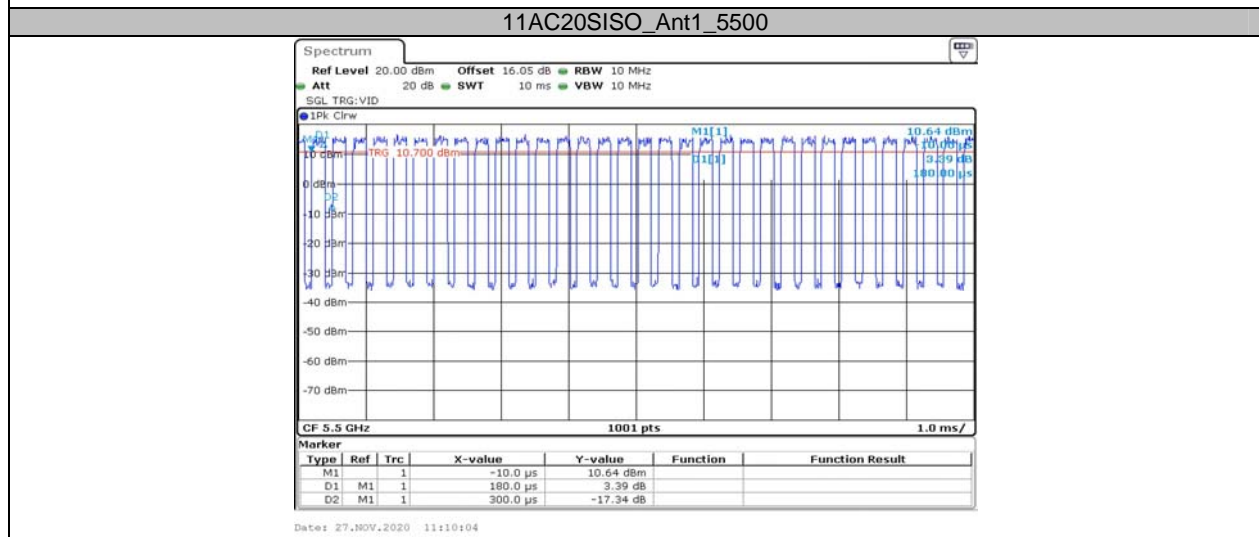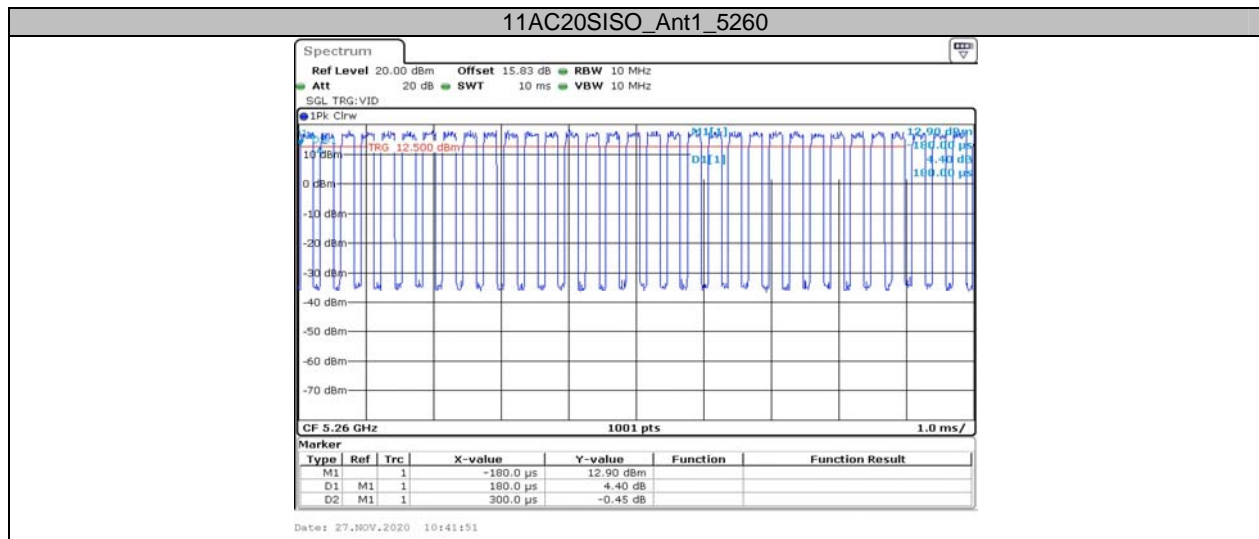

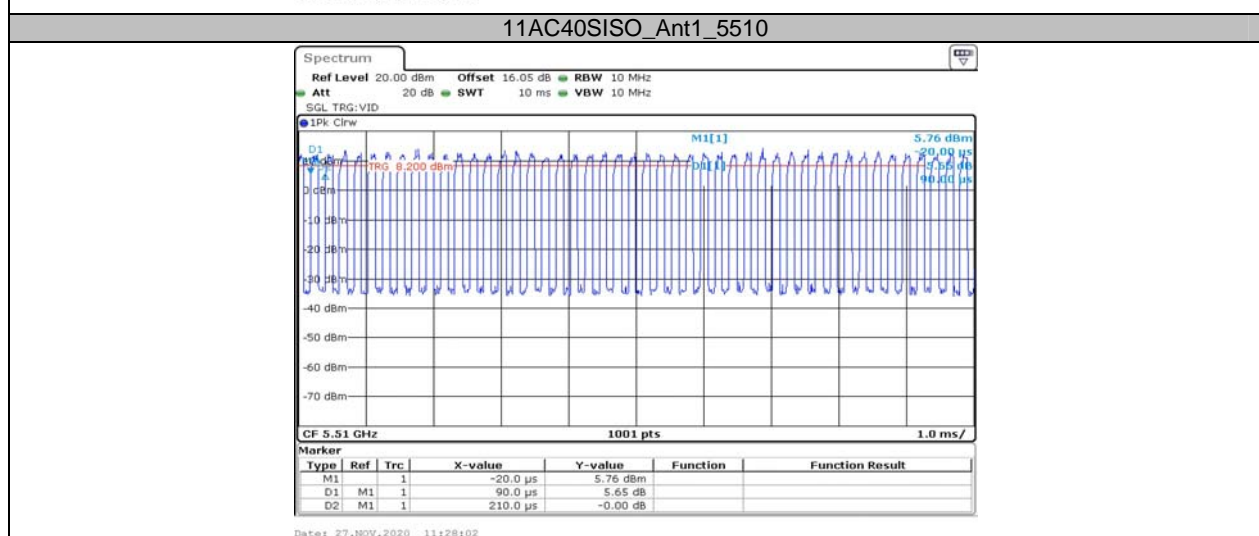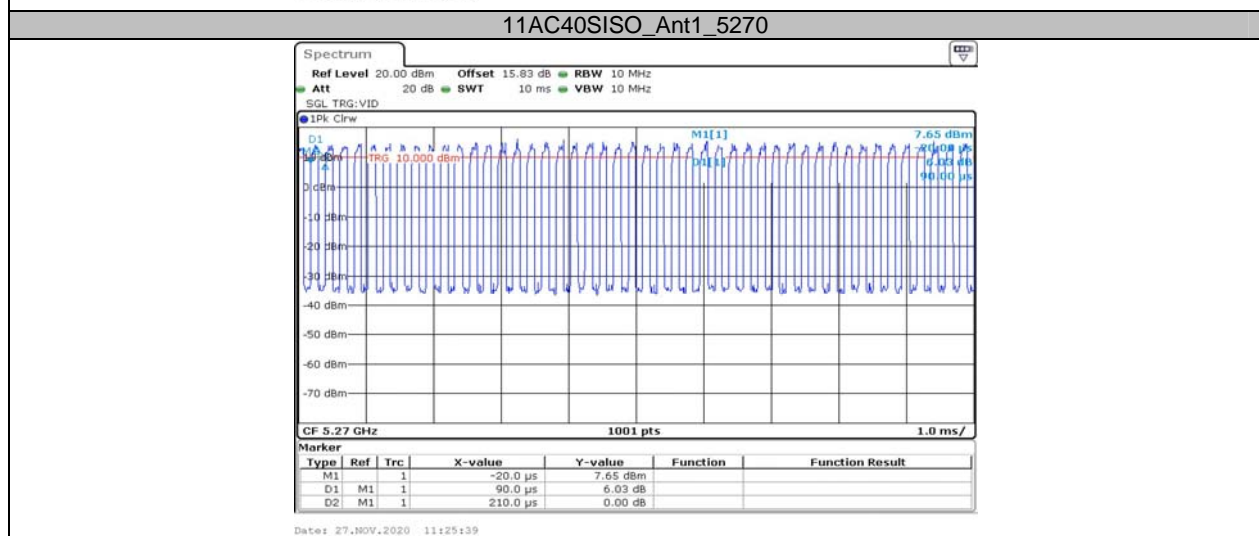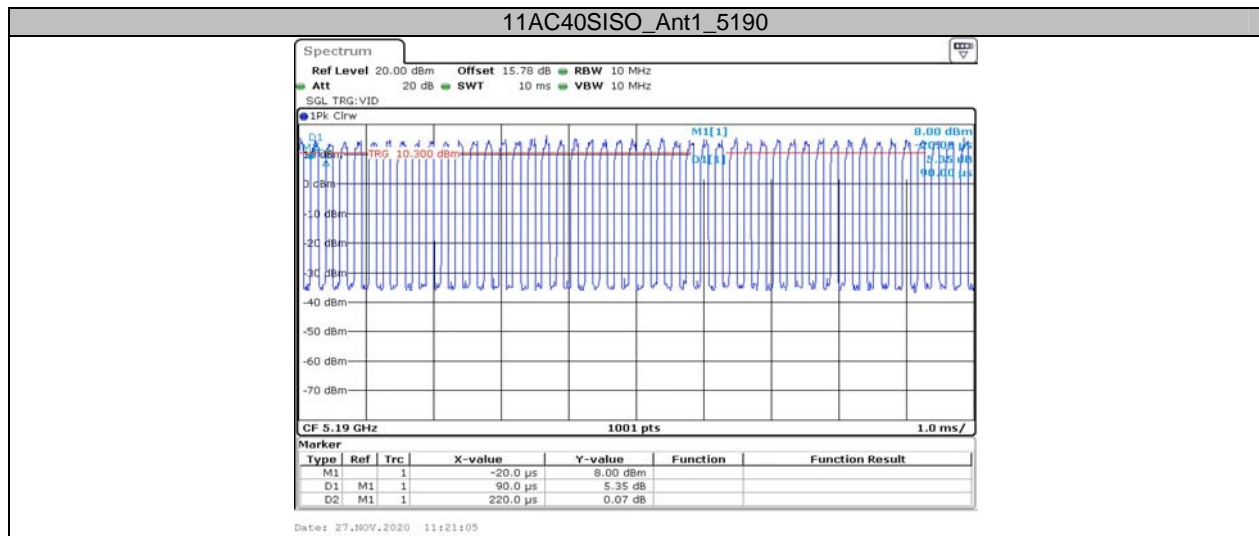

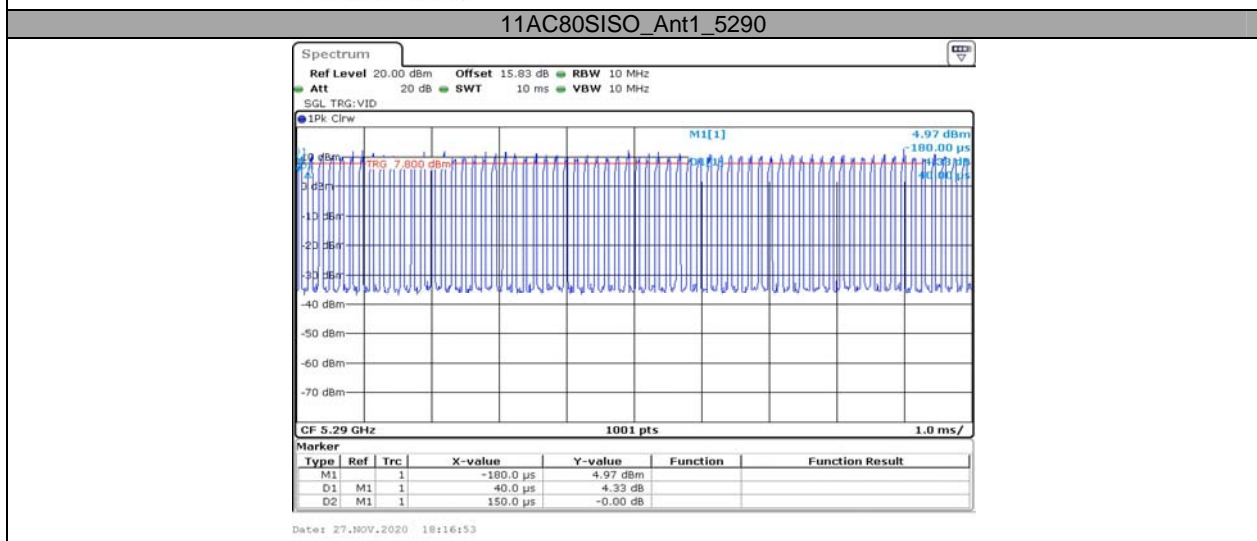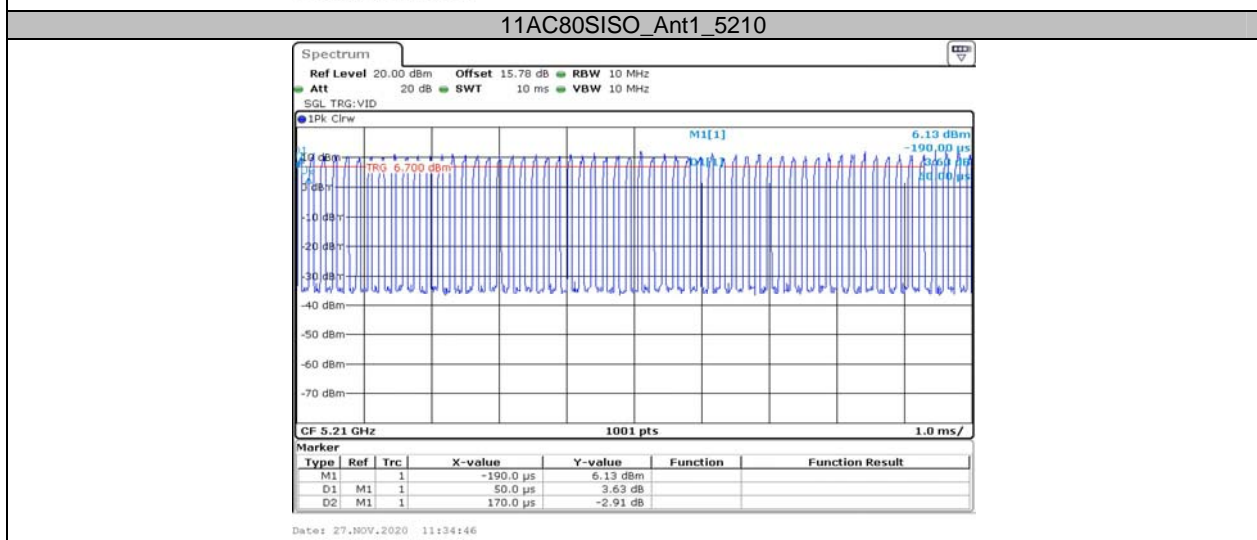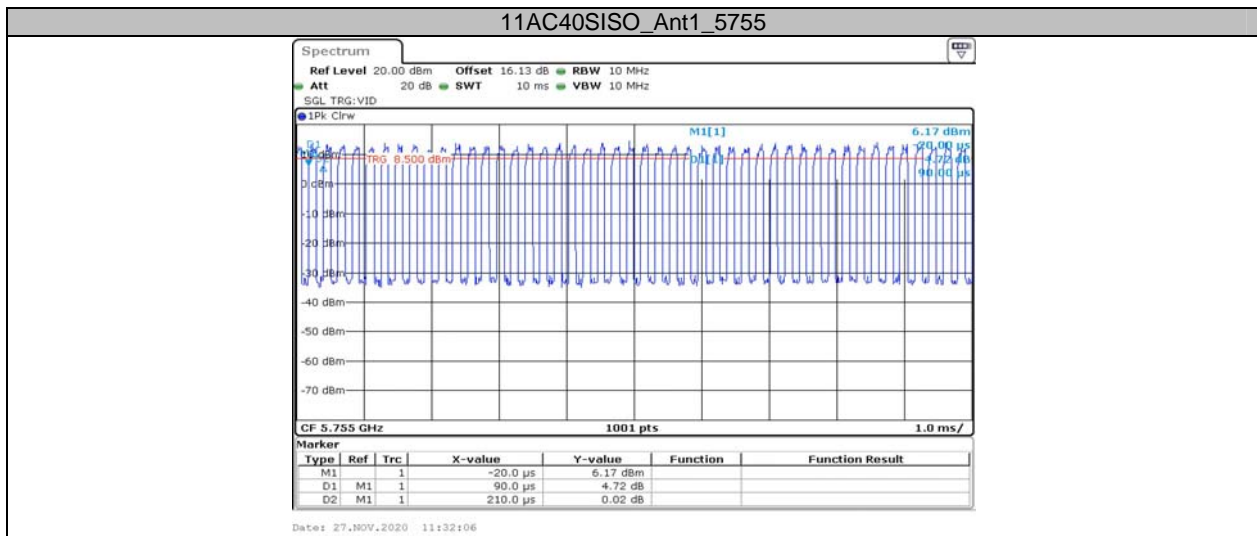

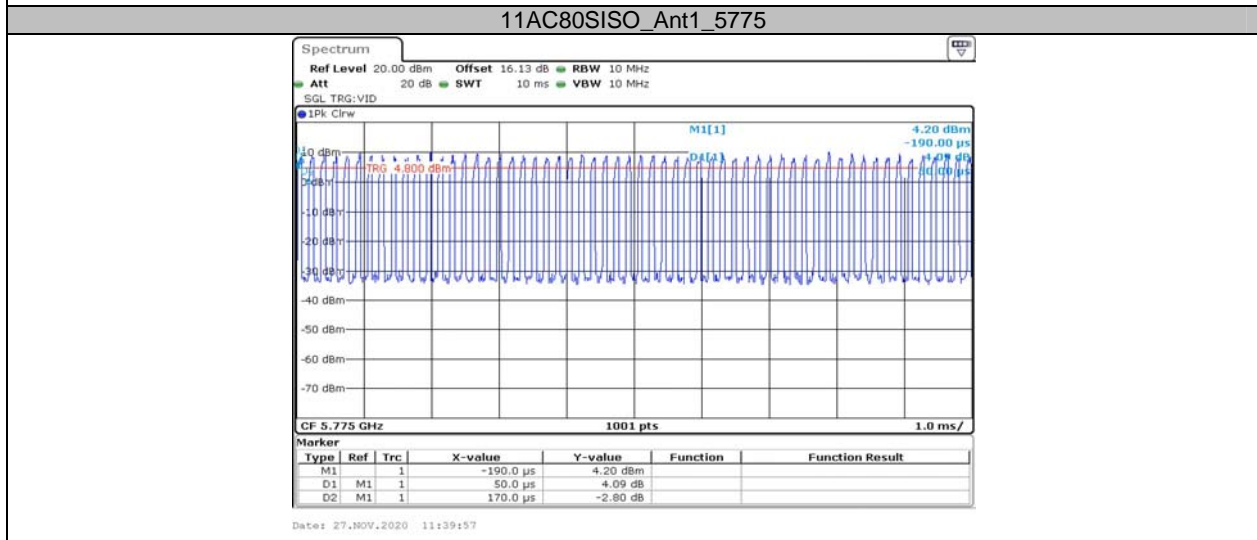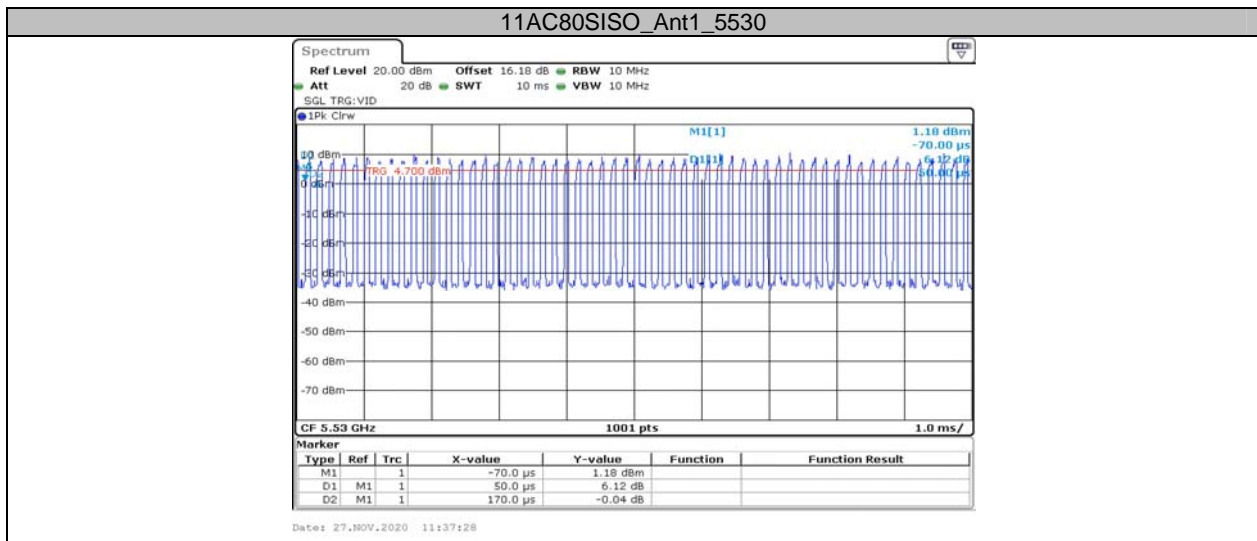

******* END OF REPORT *******