

# FCC TEST REPORT (PART 24)

**REPORT NO.:** RF121126N003-1  
**MODEL NO.:** Ex-Handy 08 .3 - A  
**FCC ID:** XAM500045GR01  
**RECEIVED:** Nov. 28, 2012  
**TESTED:** Nov. 28 ~ Mar. 12, 2013  
**ISSUED:** Mar. 13, 2013

**APPLICANT:** ecom instruments GmbH

**ADDRESS:** Industriestraße 2, 97959 Assamstadt, Germany

**ISSUED BY:** Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

**LAB ADDRESS:** No. 34, Chenwulu Section, Guantai Road, Houjie  
Town, Dongguan City, Guangdong 523942, China

**TEST LOCATION:** No. 34, Chenwulu Section, Guantai Road, Houjie  
Town, Dongguan City, Guangdong 523942, China

This report should not be used by the client to claim  
product certification, approval, or endorsement by A2LA  
or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
1 CERTIFICATION.....	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY .....	6
3 GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.3 DESCRIPTION OF SUPPORT UNITS.....	10
3.4 TEST ITEM AND TEST CONFIGURATION .....	11
3.5 EUT OPERATING CONDITIONS.....	12
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
4 TEST TYPES AND RESULTS.....	13
4.1 OUTPUT POWER MEASUREMENT .....	13
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT.....	13
4.1.2 TEST PROCEDURES.....	13
4.1.3 TEST SETUP .....	14
4.1.4 TEST RESULTS.....	15
4.2 FREQUENCY STABILITY MEASUREMENT .....	17
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	17
4.2.2 TEST PROCEDURE .....	17
4.2.3 TEST SETUP.....	17
4.2.4 TEST RESULTS.....	18
4.3 OCCUPIED BANDWIDTH MEASUREMENT.....	19
4.3.1 TEST PROCEDURES.....	19
4.3.2 TEST SETUP .....	19
4.4 BAND EDGE MEASUREMENT .....	21
4.4.1 LIMITS OF BAND EDGE MEASUREMENT.....	21
4.4.2 TEST SETUP .....	21
4.4.3 TEST PROCEDURES.....	21
4.4.4. TEST RESULTS .....	22
4.5 CONDUCTED SPURIOUS EMISSIONS.....	23
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	23
4.5.2 TEST PROCEDURE .....	23
4.5.3 TEST SETUP .....	23
4.6 RADIATED EMISSION MEASUREMENT.....	27
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	27
4.6.2 TEST PROCEDURES.....	27
4.6.3 DEVIATION FROM TEST STANDARD .....	27



4.6.4	TEST SETUP .....	28
4.6.5	TEST RESULTS.....	29
4.7.	PEAK TO AVERAGE RATIO MEASUREMENT .....	31
4.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....	31
4.7.2	TEST SETUP .....	31
4.7.3	TEST PROCEDURES.....	31
4.7.4	TEST RESULTS.....	32
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	33
6	INFORMATION ON THE TESTING LABORATORIES.....	34
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	35



**BUREAU**  
**VERITAS**

Test Report No.: RF121126N003-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF121126N003-2	Original release	Mar.13, 2013



## 1 CERTIFICATION

**PRODUCT:** GSM/WCDMA Mobile Phone

**MODEL:** See section 3.1

**BRAND:** ecom

**APPLICANT:** ecom instruments GmbH

**TESTED:** Nov. 28 ~ Mar. 12, 2013

**TEST SAMPLE:** Production Unit

**STANDARDS:** FCC Part 24, Subpart E

The above equipment (model: Ex-Handy 08 .3 – A & Ex-HSPA 08 .3 – A) have been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**TESTED BY** :  , **DATE** : Mar. 13, 2013  
Kent Liu / Project Engineer

**APPROVED BY** :  , **DATE** : Mar. 13, 2013  
Sam Tung / Technical Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent Isotropic Radiated Power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.94dB
Radiated emissions	30MHz ~ 1GHz	3.64dB
	1GHz ~ 18GHz	2.2dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY46180622	May 02, 12	May 01, 13
Test Receiver ROHDE & SCHWARZ	ESVD	841431/004	May 15,12	May 14,13
Bilog Antenna TESEQ	CBL 6111D	27089	July 16,12	July 15,13
Horn Antenna EMCO	3117	00062558	Oct.18,12	Oct.17,13
10m Semi-anechoic Chamber ETS-LINDGREN	21.4m*12.1m*8.8m	NSEMC006	Mar. 24,12	Mar. 23,13
Signal Amplifier EMCI	EMC330	980095	Nov 02,12	Nov 01,13
Signal Amplifier SONOMA	310N	186955	Mar. 14,12	Mar. 13,13
Signal Amplifier HP	8449B	3008A00409	May 31,12	May 30,13
Spectrum Analyzer Agilent	E7405A	MY45118807	May 15,12	May 14,13
Digital Multimeter FLUKE	15B	A1220010DG	Oct .31,12	Oct. 30,13
Power Meter Anritsu	ML2495A	1139001	Nov. 05,12	Nov. 04,13
Universal Radio Communication Tester Rohde & Schwarz	CMU 200	123259	Apr 16,12	Apr 15,13
Test software ADT	ADT_Radiated_V7. 6.15	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.
  2. The test was performed in Dongguan Chamber 10m.
  3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	GSM/WCDMA Mobile Phone
<b>MODEL NO.</b>	Ex-Handy 08 .3 – A, Ex-HSPA 08 .3 – A
<b>TYPE NUMBER</b>	P35F009AB
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.7Vdc (battery)
<b>MODULATION TYPE</b>	<b>GSM, GPRS:</b> GMSK <b>EDGE:</b> 8PSK <b>WCDMA :</b> BPSK
<b>FREQUENCY RANGE</b>	<b>GSM, GPRS, EDGE:</b> 1850.2MHz ~ 1909.8MHz <b>WCDMA:</b> 1852.4MHz ~ 1907.6MHz
<b>MAX. EIRP POWER</b>	GSM: 1.04Watts EDGE: 0.65Watts WCDMA: 0.45Watts
<b>POWER CLASS</b>	4
<b>ANTENNA TYPE</b>	Fixed Internal antenna with 0 dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB Cable: Shielded, Detachable, 1.1m, with Safety box; Earphone Cable: Unshielded, Detachable, 1.5m

**NOTE:**

1. There are Bluetooth, GSM, WCDMA technology used for the EUT.
2. The EUT has several models as the following:

Model Name	Type	Battery & Cover	Software difference				Colors
			Camera*	LWP*	PTT*	ATT*	
Ex-Handy 08 .0 – A	Z1	Ex-BPH-08HC or Ex-BPH-08SC Battery	No	No	No	No	Black and Yellow
Ex-Handy 08 .1 – A			No	Yes	No	No	Yellow, colored keys
Ex-Handy 08 .2 – A			Yes	No	No	No	Black and Yellow
Ex-Handy 08 .3 – A			Yes	Yes	No	No	Yellow, colored keys
Ex-Handy 08 .4 – A			No	No	Yes	No	Black and Yellow
Ex-Handy 08 .5 – A			Yes	No	Yes	No	Black and Yellow
Ex-Handy 08 .4 – ATT		Ex-BPH-08HC	No	No	Yes	Yes	Black and Yellow
Ex-Handy 08 .5 – ATT			Yes	No	Yes	Yes	Black and Yellow
Ex-HSPA 08 .0 – A	Z2	Ex-BPH 28 Battery + Normal cover or NFC cover	No	No	No	No	Black
Ex-HSPA 08 .1 – A			No	Yes	No	No	Yellow, colored keys
Ex-HSPA 08 .2 – A			Yes	No	No	No	Black
Ex-HSPA 08 .3 – A			Yes	Yes	No	No	Yellow, colored keys
Ex-HSPA 08 .4 – A			No	No	Yes	No	Black
Ex-HSPA 08 .5 – A			Yes	No	Yes	No	Black



\***Camera:** The camera application.

\***LWP:** Lone worker protection mobile application.

\***PTT:** Push to talk application.

\***ATT:** SW customizations for carrier AT&T, Firmware change from MTK's generic implementation to ADAPT implementation.

<b>The HW difference between Z1/Z2 Type</b>	
Rear housing difference	
Foolproof to prevent misuse of regular battery on Z1 phones	
Cavity width is smaller in Z2 to make the regular battery stay put	
Z1 and Z2 use different battery and cover, please refer the above table in Note 2	

According to the differences described in the above tables, models EX-HANDY 08 .3 - A and EX-HSPA 08. 3 - A are selected for the main test models, and full tests for the model EX-HANDY 08. 3 - A, partial tests for the model EX-HSPA 08. 3 - A.

3. The EUT was powered by the following adapter:

<b>ADAPTER</b>	
BRAND:	Sonim
MODEL:	3202
INPUT:	AC 100-240V, 50/60Hz, 150mA
OUTPUT:	DC 5V, 700mA
DC LINE:	Shielded, Detachable, 1.1m, with Safety box

4. The EUT was powered by the following Battery:

<b>BATTERY 1</b>	
BRAND:	ECOM
MODEL:	EX-BPH-08HC
OUTPUT:	3.7 VDC, 1960 mAh
<b>BATTERY 2</b>	
BRAND:	ECOM
MODEL:	EX-BPH-08SC
OUTPUT:	3.7 VDC, 1280 mAh
<b>BATTERY 3</b>	
BRAND:	Sonim
MODEL:	EX-BPH 28
OUTPUT:	3.7 VDC, 1950 mAh


5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

6. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

#### FOR RADIATION EMISSION TEST

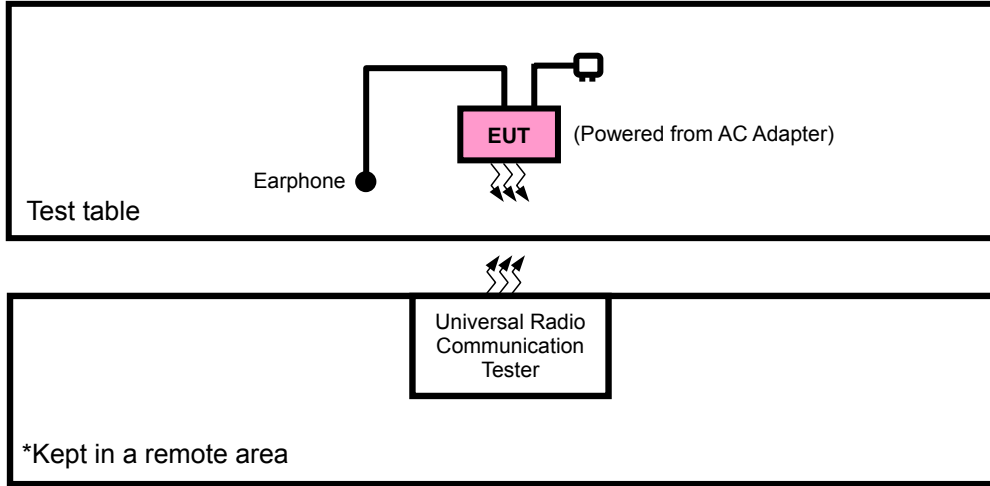

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	5P2PM2X	12400120329	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1.	AC Line :Unshielded, Detachable,1.5m;DC Line: Unshielded, Undetachable,1.8m;



### 3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-axis for ERP and for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODEL	EUT CONFIGURE MODE	DESCRIPTION
EX-HANDY 08 .3 - A	A	EUT + Battery 1 + USB cable + Earphone with 2/3G link
EX-HANDY 08 .3 - A	B	EUT + Battery 2 + USB cable + Earphone with 2/3G link
EX-HANDY 08 .3 - A	C	EUT + Adapter + USB cable+ Earphone with 2/3G link (with battery 2)
EX-HANDY 08 .3 - A	D	EUT + USB cable + Notebook + Earphone with 2/3G link (with battery 2)
Ex-HSPA 08 .3 - A	E	EUT + Adapter + USB cable+ Earphone with 2/3G link (with battery 3 + Normal cover)
Ex-HSPA 08 .3 - A	F	EUT + Adapter + USB cable+ Earphone with 2/3G link (with battery 3 + NFC cover)

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
C	EIRP	512 to 810	512, 661, 810	GSM, EDGE
C	FREQUENCY STABILITY	512 to 810	661	GSM, EDGE
C	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, GPRS, EDGE
C	BAND EDGE	512 to 810	512, 810	GSM, GPRS, EDGE
C	CONDCUDED EMISSION	512 to 810	512, 661, 810	GSM
A,B,C,D,E,F	RADIATED EMISSION	512 to 810	661	GSM, EDGE

#### WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
C	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
C	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
C	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
C	BAND EDGE	9262 to 9538	9262, 9538	WCDMA, HSDPA, HSUPA
C	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A,B,C,D,E,F	RADIATED EMISSION	9262 to 9538	9400	WCDMA



**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	22deg. C, 62%RH	3.7Vdc from Battery	Venless Long
FREQUENCY STABILITY	22deg. C, 62%RH	3.7Vdc from Battery	Venless Long
OCCUPIED BANDWIDTH	22deg. C, 62%RH	3.7Vdc from Battery	Venless Long
BAND EDGE	22deg. C, 62%RH	3.7Vdc from Battery	Venless Long
CONDCUDED EMISSION	22deg. C, 62%RH	5Vdc from adapter	Venless Long
RADIATED EMISSION	25deg. C, 60%RH	5Vdc from adapter	Venless Long

**3.5 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**ANSI/TIA/EIA-603-C 2004**

**NOTE:** All test items have been performed and recorded as per the above standards.



## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

#### 4.1.2 TEST PROCEDURES

##### EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$


##### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




### 4.1.3 TEST SETUP

#### EIRP MEASUREMENT:

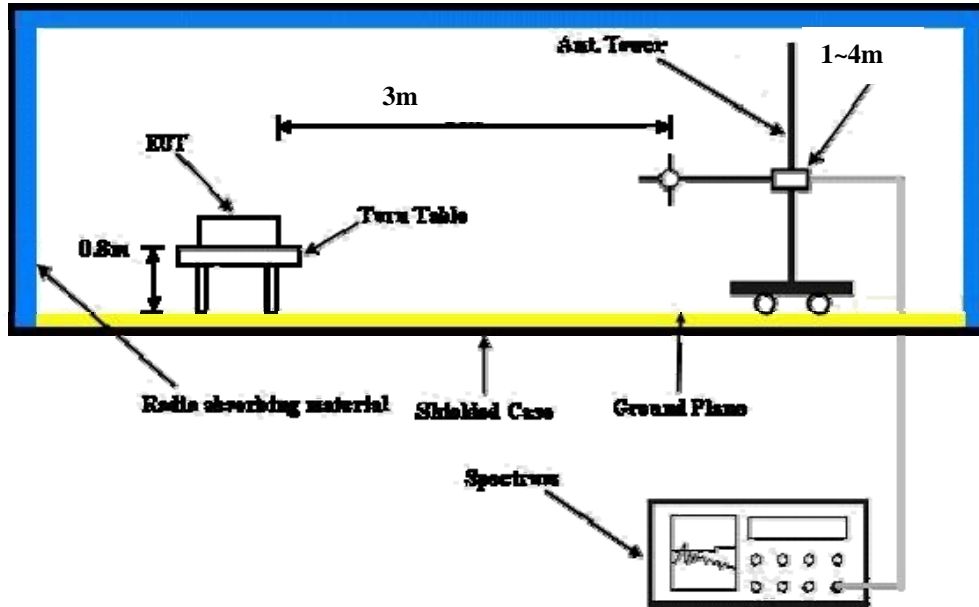

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

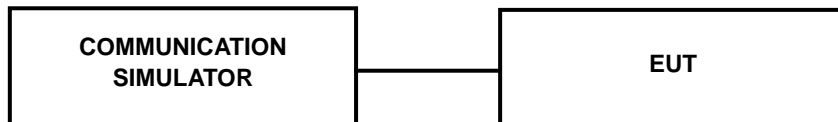

For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.1.4 TEST RESULTS

##### CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	30.02	30.06	30.11
GPRS 8	30.02	30.09	30.10
GPRS 10	29.11	29.18	29.23
EDGE 8 (MCS1)	30.01	30.10	30.09
EDGE 10 (MCS1)	29.13	29.20	29.22
EDGE 8 (MCS9)	27.09	26.67	26.11
EDGE 10 (MCS9)	25.97	25.50	24.80

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.90	23.50	23.02
HSDPA Subtest-1	23.89	23.22	22.84
HSDPA Subtest-2	23.48	23.02	22.42
HSDPA Subtest-3	23.45	23.09	22.55
HSDPA Subtest-4	23.43	23.01	22.38
HSUPA Subtest-1	21.23	20.90	20.64
HSUPA Subtest-2	21.85	21.37	20.84
HSUPA Subtest-3	21.42	21.05	20.76
HSUPA Subtest-4	21.95	21.45	20.93
HSUPA Subtest-5	21.78	21.21	20.88



EIRP POWER (dBm)

GSM 1900_Class8 (Horizontal)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	-14.79	44.32	29.53	0.90
661	1880	-14.19	44.37	30.18	1.04
810	1909.8	-14.08	43.28	29.20	0.83
GSM 1900_Class8 (Vertical)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	-18.54	46.18	27.64	0.58
661	1880	-18.19	45.72	27.53	0.57
810	1909.8	-17.98	45.21	27.23	0.53

EDGE 1900 (1 Uplink) (Horizontal)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	-16.55	44.32	27.77	0.60
661	1880.0	-16.23	44.37	28.14	0.65
810	1909.8	-16.03	43.28	27.25	0.53
EDGE 1900 (1 Uplink) (Vertical)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	-20.21	46.18	25.97	0.40
661	1880.0	-20.67	45.72	25.05	0.32
810	1909.8	-19.76	45.21	25.45	0.35

WCDMA Band II _RMC 12.2K (Horizontal)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-19.14	44.32	25.18	0.33
9400	1880.00	-18.57	44.37	25.80	0.38
9538	1907.60	-18.23	43.28	25.05	0.32
WCDMA Band II _RMC 12.2K (Vertical)					
CHANNEL NO.	FREQUENCY (MHz)	SPA Reading (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-19.67	46.18	26.51	0.45
9400	1880.00	-19.48	45.72	26.24	0.42
9538	1907.60	-19.34	45.21	25.87	0.39

**REMARKS:** 1. EIRP Output Power (dBm) = SPA Reading (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss





## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

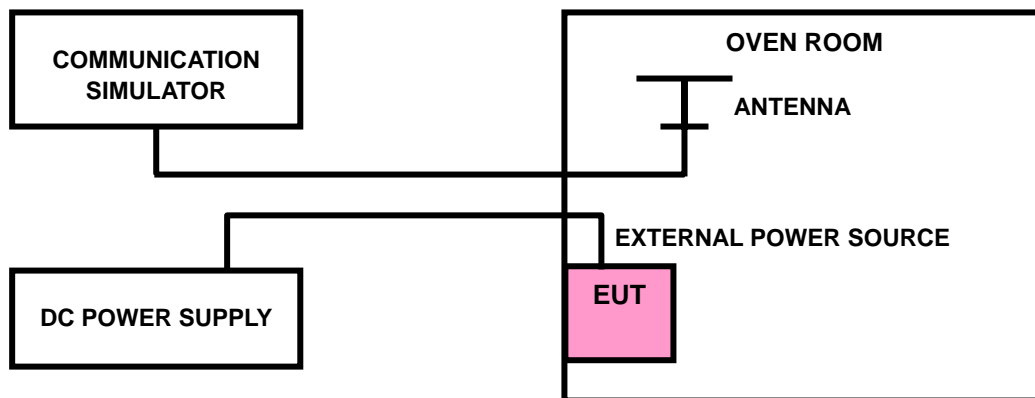



#### 4.2.4 TEST RESULTS

##### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
4.2	-0.01	-0.02	-0.01	2.5
3.4	-0.01	-0.01	-0.01	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

##### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
40	-0.02	-0.01	-0.02	2.5
30	-0.02	-0.01	-0.01	2.5
20	-0.01	-0.02	-0.02	2.5
10	-0.02	-0.01	-0.02	2.5
0	-0.02	-0.01	-0.01	2.5
-10	-0.01	-0.02	-0.02	2.5
-20	-0.02	-0.01	-0.02	2.5




### 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


#### 4.3.2 TEST SETUP

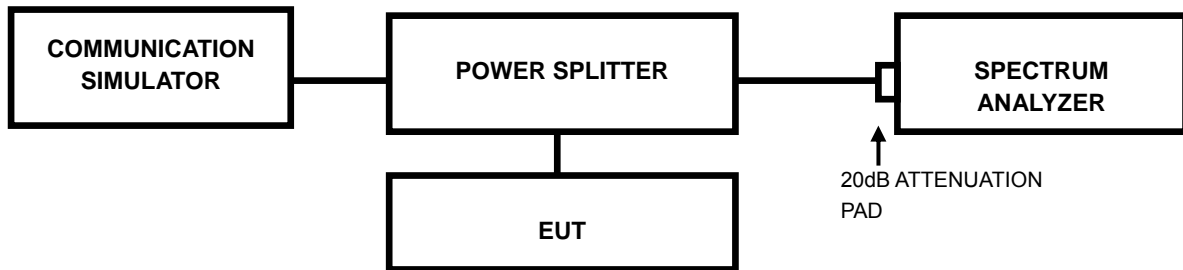



### 4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
		GSM	EDGE			WCDMA
512	1850.2	244.755	244.755	9262	1852.4	4.155
661	1880.0	245.754	245.754	9400	1880.0	4.155
810	1909.8	243.756	244.755	9538	1907.6	4.155

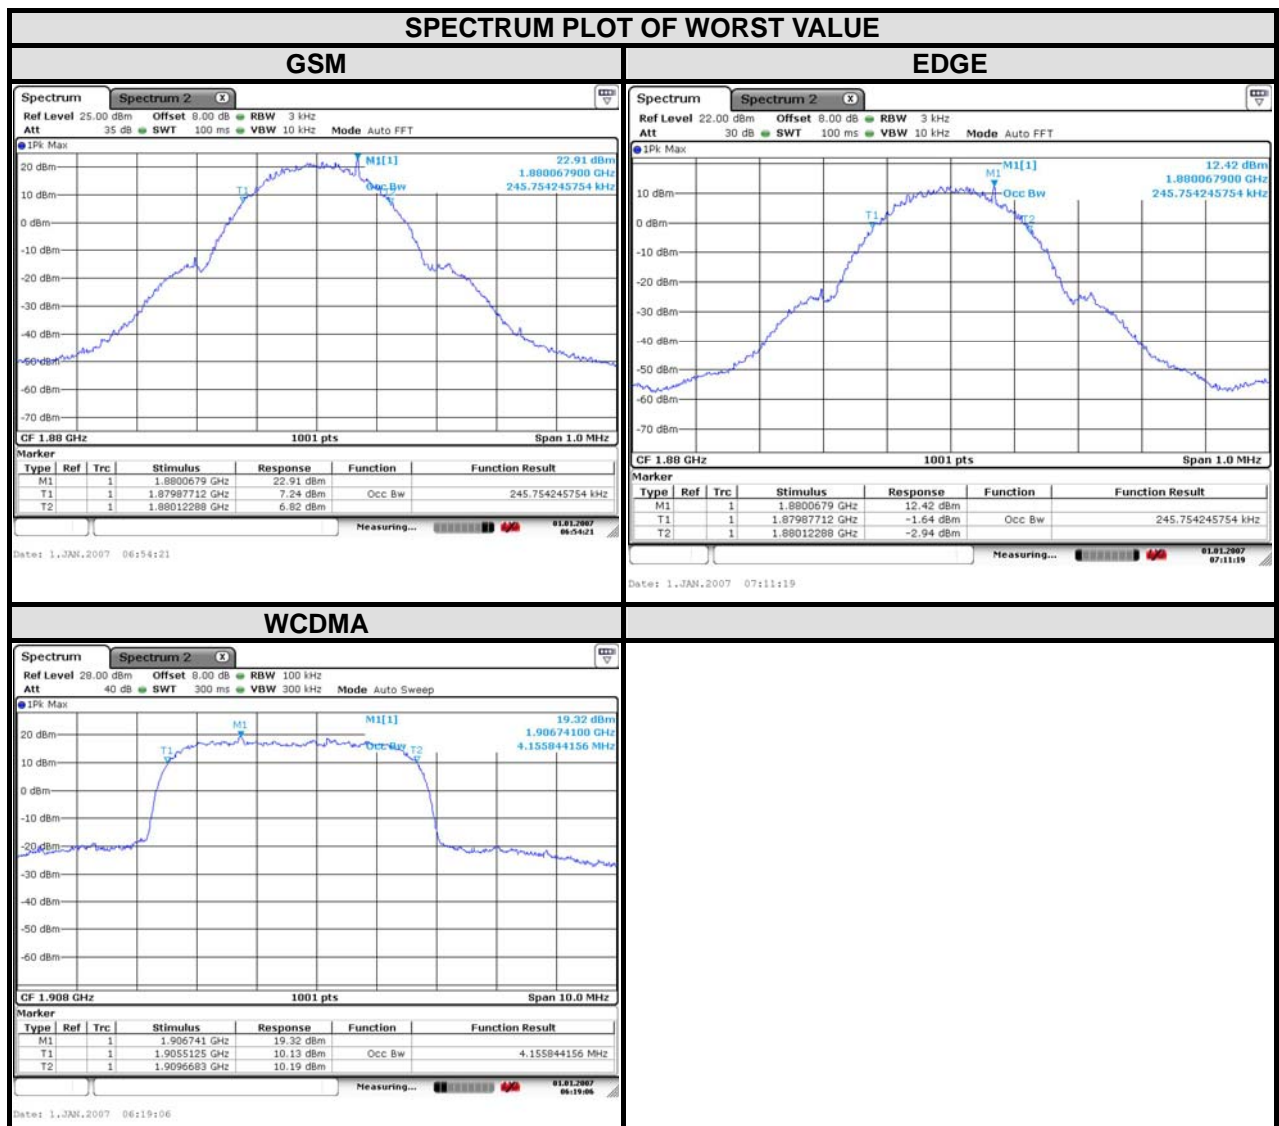


## 4.4 BAND EDGE MEASUREMENT

### 4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.4.2 TEST SETUP

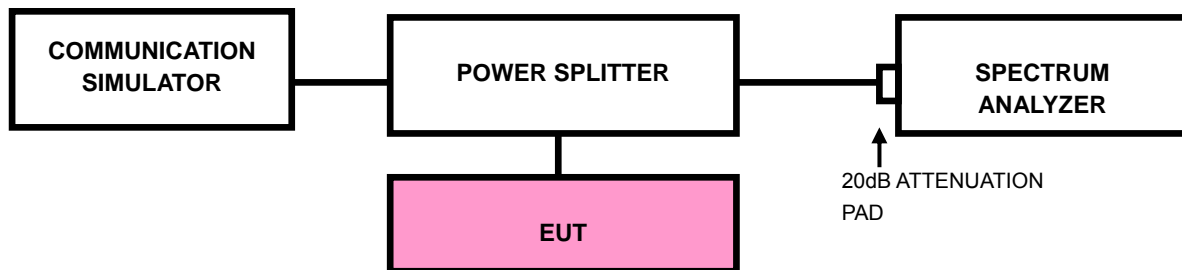


### 4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/ EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- Record the max trace plot into the test report.



4.4.4. TEST RESULTS

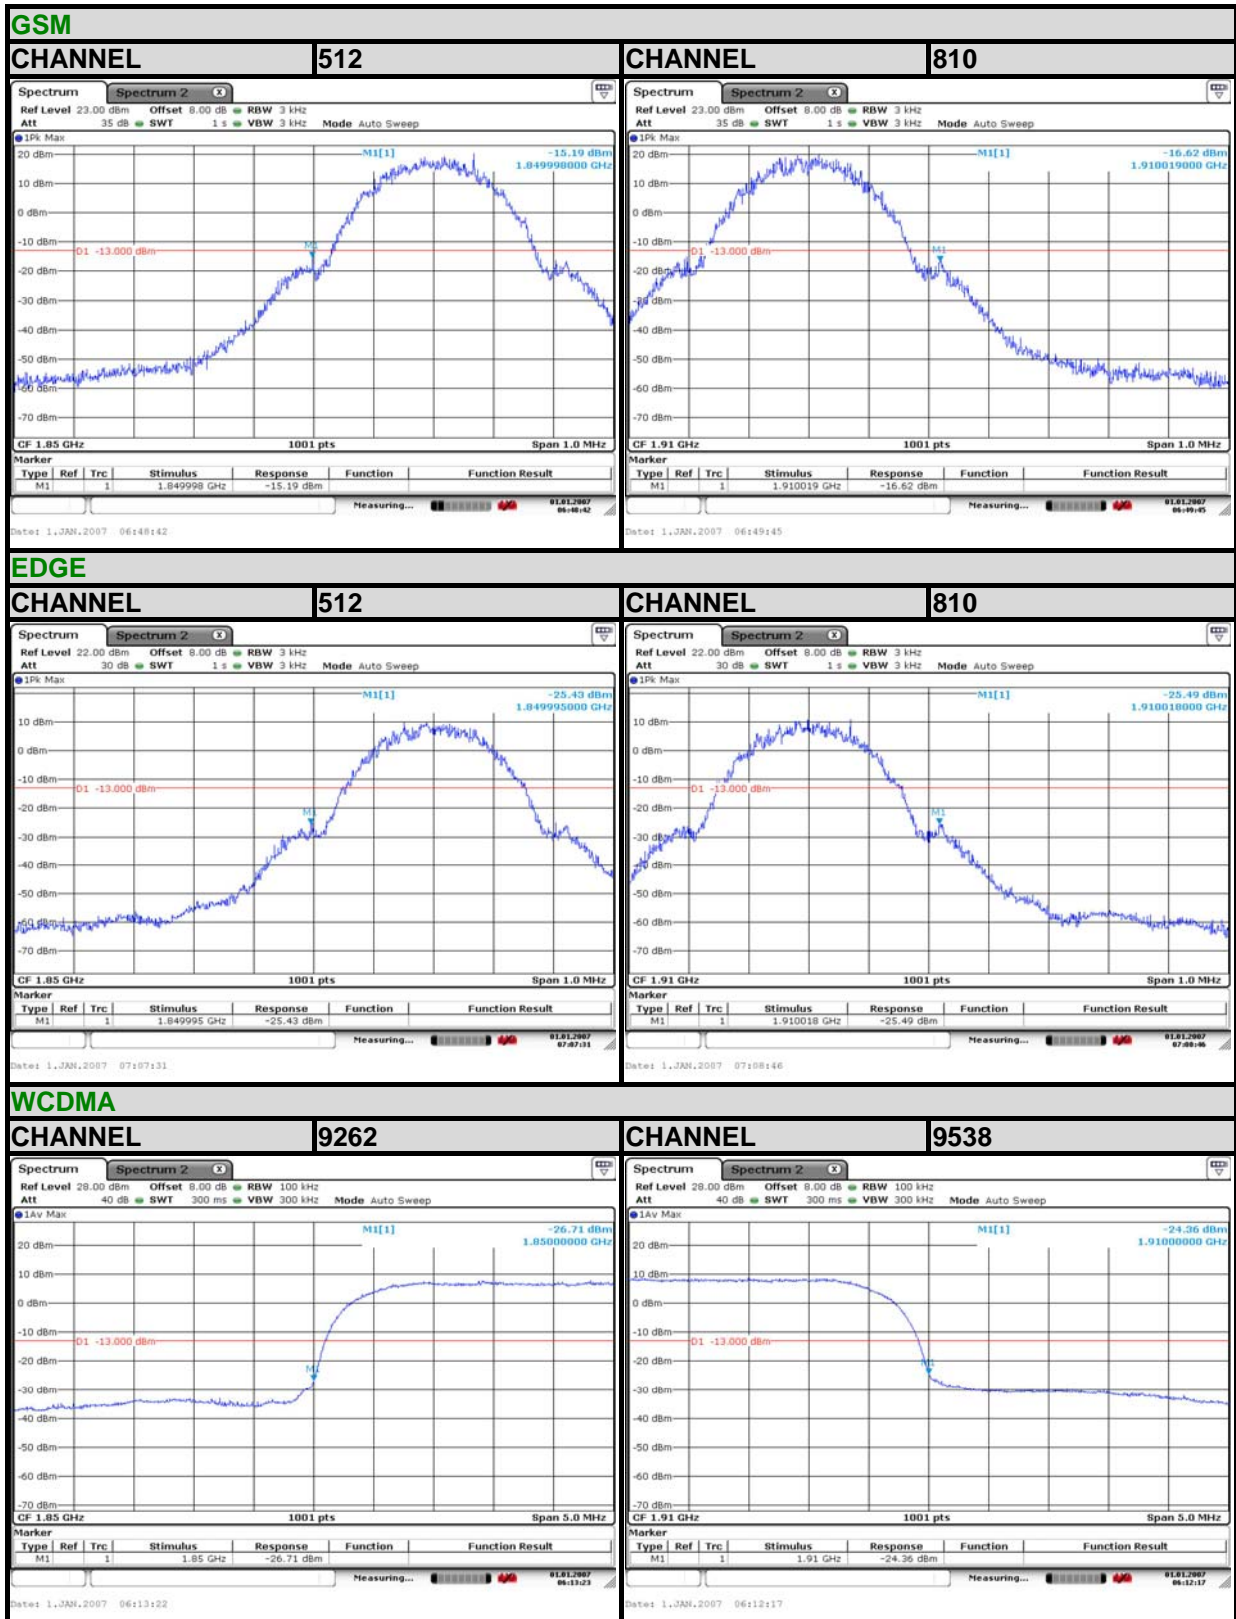

## 4.5 CONDUCTED SPURIOUS EMISSIONS


### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.5.2 TEST PROCEDURE


- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

### 4.5.3 TEST SETUP

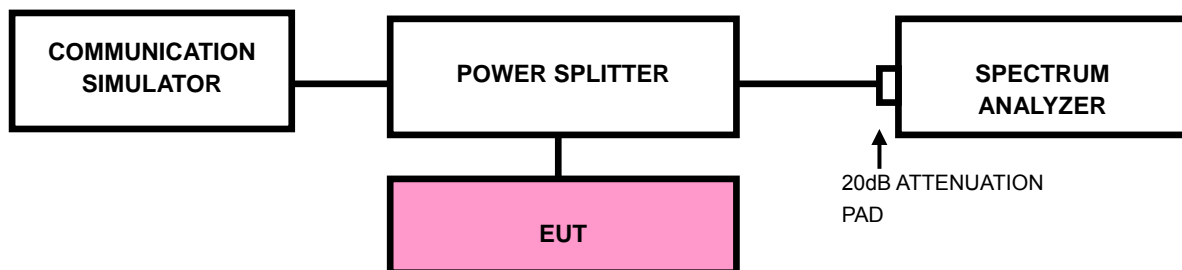



### 4.5.4 TEST RESULTS

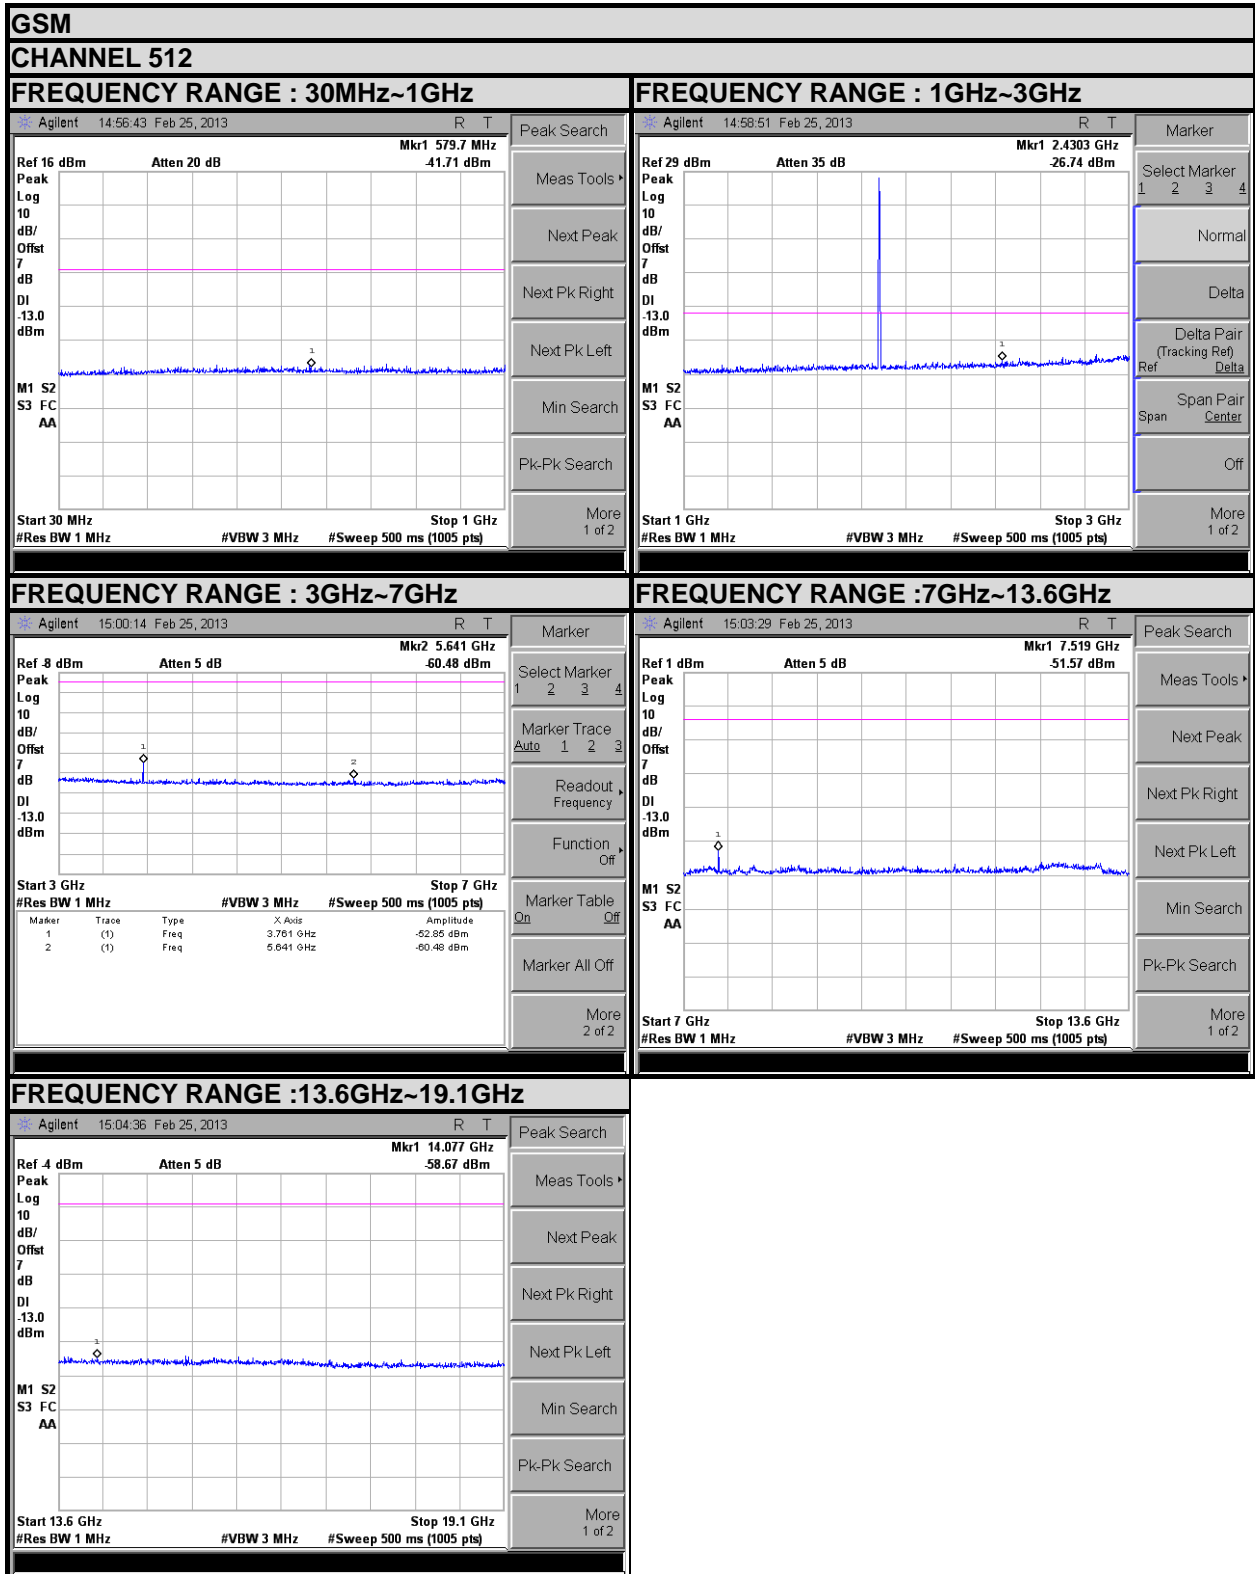






BUREAU VERITAS

Test Report No.: RF121126N003-2

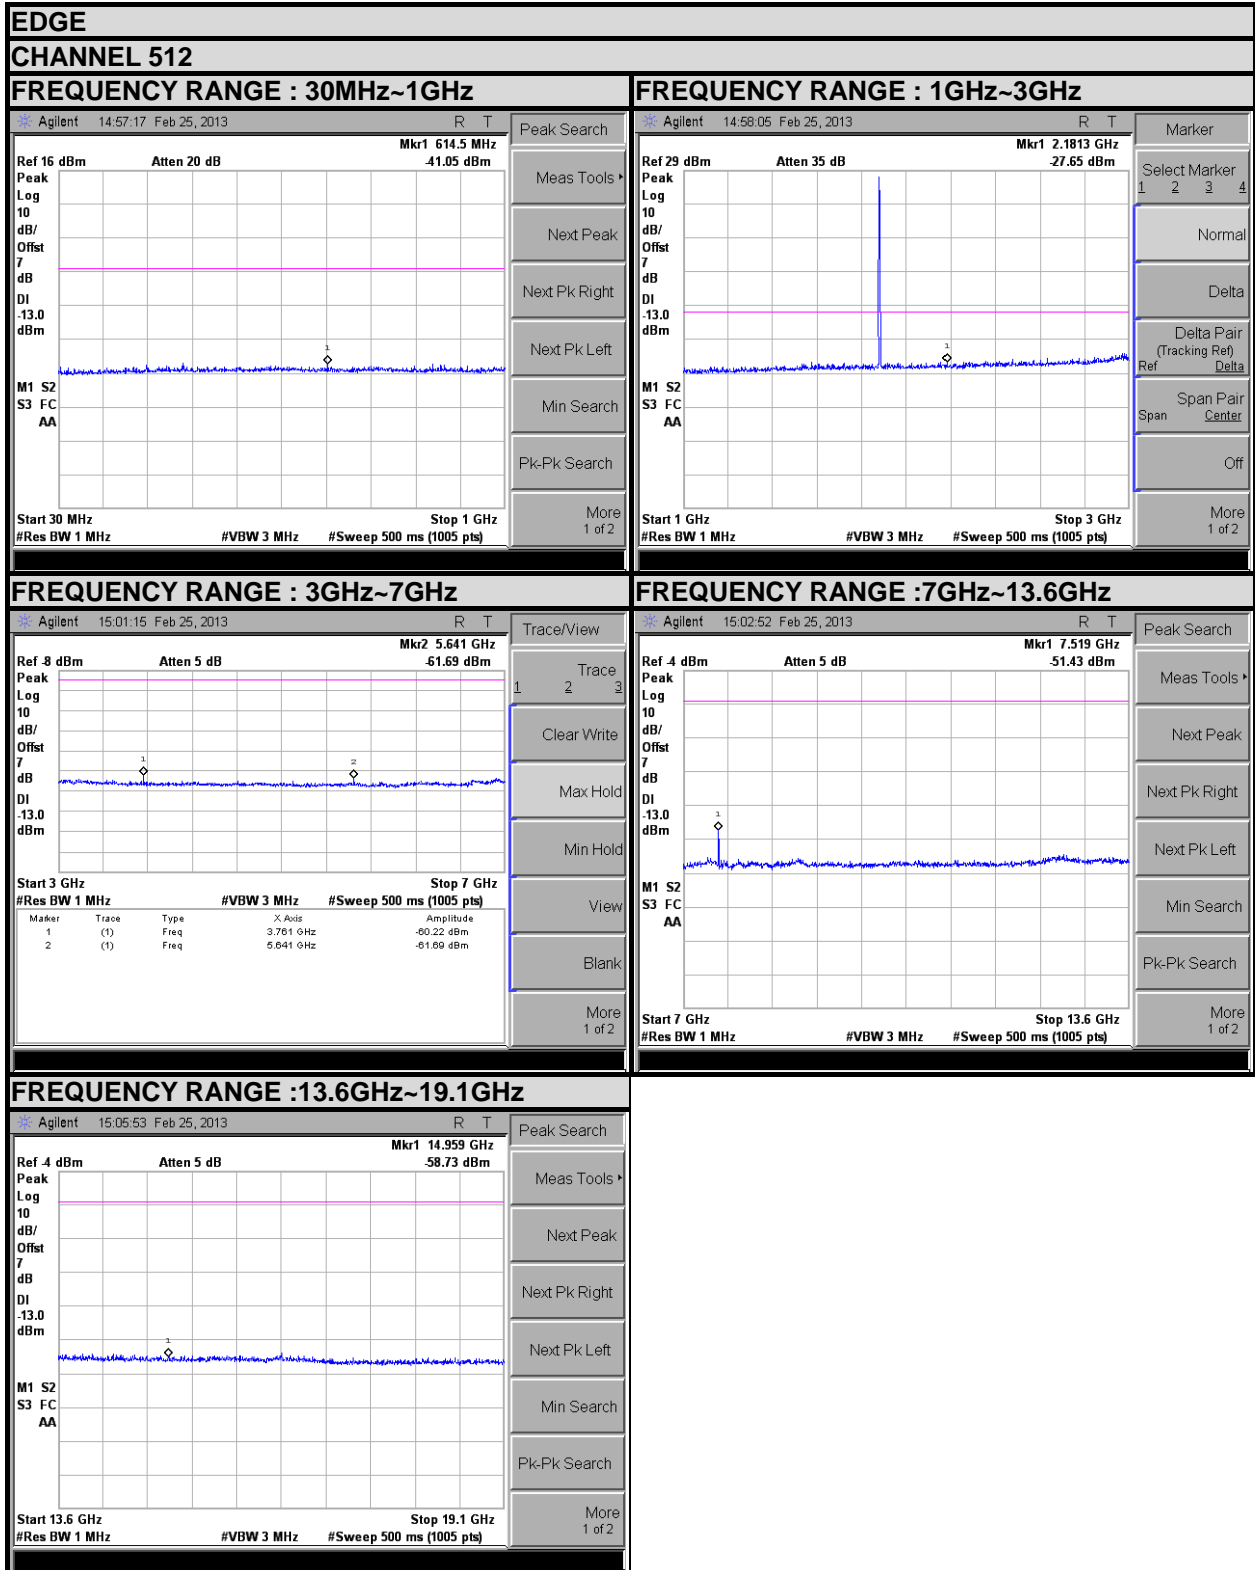

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF121126N003-2

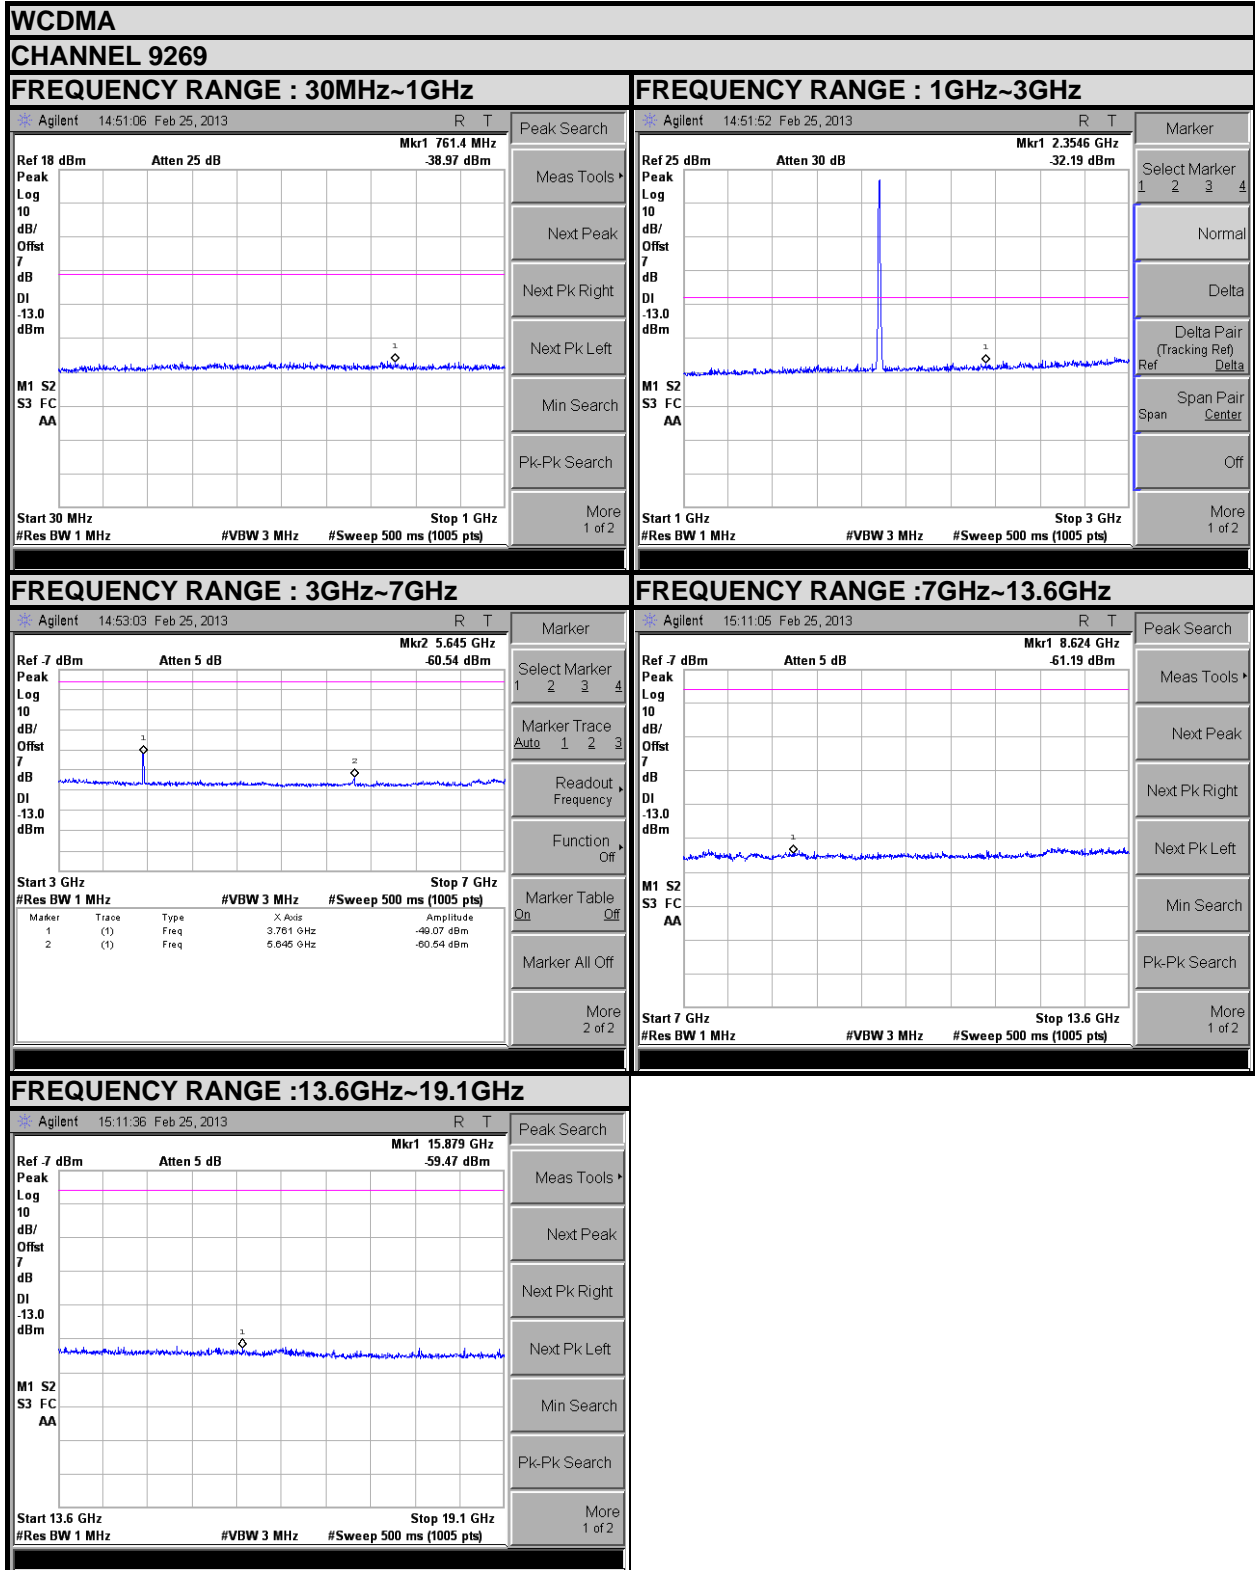

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

## 4.6 RADIATED EMISSION MEASUREMENT

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.6.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.4 TEST SETUP

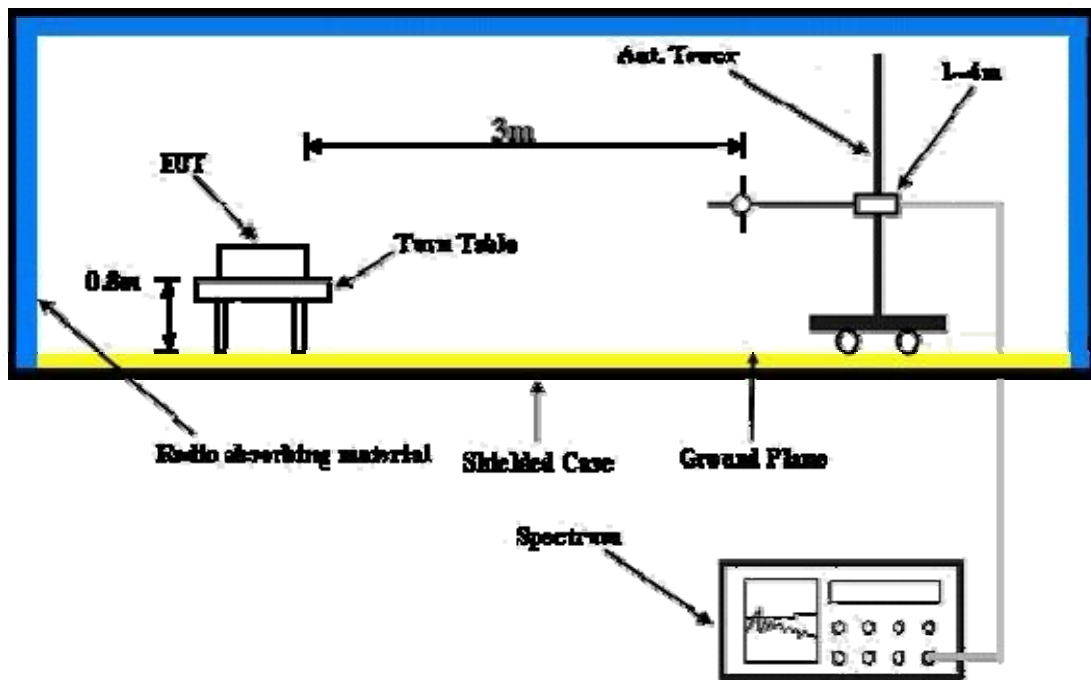

For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.6.5 TEST RESULTS

GSM:

FREQUENCY RANGE	Below 1000MHz	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH	TESTED BY	Venless Long

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-59.87	-13	-47.54	4.07	-43.47
2	5640	-66.31	-13	-49.78	4.81	-44.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-55.12	-13	-42.08	4.07	-38.01
2	5640	-59.31	-13	-44.42	4.81	-39.61

REMARKS:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)

EDGE:

FREQUENCY RANGE	Below 1000MHz	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH	TESTED BY	Venless Long

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-61.23	-13	-48.91	4.07	-44.84
2	5640	-67.22	-13	-50.71	4.81	-45.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-56.78	-13	-43.77	4.07	-39.70
2	5640	-60.16	-13	-45.32	4.81	-40.51

REMARKS:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)



**WCDMA:**

<b>FREQUENCY RANGE</b>	Below 1000MHz	<b>INPUT POWER</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH	<b>TESTED BY</b>	Venless Long

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-64.53	-13	-52.25	4.07	-48.18
2	5640	-68.2	-13	-51.71	4.81	-46.90
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)
1	3760	-64.56	-13	-51.74	4.07	-47.67
2	5640	-59.26	-13	-44.36	4.81	-39.55

**REMARKS:**

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB)




## 4.7 PEAK TO AVERAGE RATIO

### 4.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.7.2 TEST SETUP

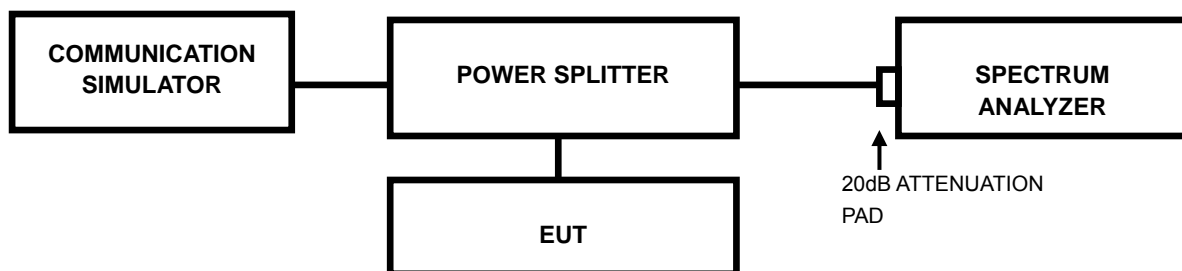

### 4.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 4.7.4 TEST RESULTS

##### GSM

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)

SPECTRUM PLOT OF WORST VALUE

##### EDGE

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)

SPECTRUM PLOT OF WORST VALUE

##### WCDMA

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)

SPECTRUM PLOT OF WORST VALUE





## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Dongguan EMC/RF Lab:**

Tel: +86-769-85935656

Fax: +86-769-85931080

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## 7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---