



Test Report No.: RF141006N0105-5



# FCC TEST REPORT (PART 27)

**Product:** LTE Smartphone  
**Model No.:** Smart-Ex 01  
**FCC ID:** XAM500055GR04  
**Applicant:** ecom instruments GmbH  
**Address:** Industriestraße. 2, 97959 Assamstadt, Germany  
**Manufacturer:** ecom instruments GmbH  
**Address:** Industriestraße. 2, 97959 Assamstadt, Germany  
**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch  
**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China  
**TEL:** +86 769 8593 5656  
**FAX:** +86 769 8593 1080  
**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)  
**Report No.:** RF141006N005-5  
**Received Date:** Oct. 06, 2014  
**Test Date:** Oct. 06, 2014 ~ Nov. 11, 2014  
**Issued Date:** Nov. 13, 2014

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



# TABLE OF CONTENTS

- RELEASE CONTROL RECORD ..... 4**
- 1 CERTIFICATION ..... 5**
- 2 SUMMARY OF TEST RESULTS ..... 6**
  - 2.1 MEASUREMENT UNCERTAINTY ..... 6
  - 2.2 TEST SITE AND INSTRUMENTS ..... 7
- 3 GENERAL INFORMATION..... 8**
  - 3.1 GENERAL DESCRIPTION OF EUT ..... 8
  - 3.2 CONFIGURATION OF SYSTEM UNDER TEST .....11
  - 3.3 DESCRIPTION OF SUPPORT UNITS ..... 12
  - 3.4 DESCRIPTION OF TEST MODES ..... 12
  - 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 17
- 4 TEST TYPES AND RESULTS ..... 18**
  - 4.1 OUTPUT POWER MEASUREMENT ..... 18
    - 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 18
    - 4.1.2 TEST PROCEDURES ..... 18
    - 4.1.3 TEST SETUP ..... 19
    - 4.1.4 TEST RESULTS ..... 20
  - 4.2 FREQUENCY STABILITY MEASUREMENT ..... 39
    - 4.2.1 LIMITS OF FREQUENCY STABILIIY MEASUREMENT ..... 39
    - 4.2.2 TEST PROCEDURE ..... 39
    - 4.2.3 TEST SETUP ..... 39
    - 4.2.4 TEST RESULTS ..... 40
  - 4.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 43
    - 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT ..... 43
    - 4.3.2 TEST SETUP ..... 43
    - 4.3.3 TEST PROCEDURES ..... 43
    - 4.3.4 TEST RESULTS ..... 44
  - 4.4 PEAK TO AVERAGE RATIO ..... 50
    - 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 50
    - 4.4.2 TEST SETUP ..... 50
    - 4.4.3 TEST PROCEDURES ..... 50
    - 4.4.4 TEST RESULTS ..... 51
  - 4.5 BAND EDGE MEASUREMENT ..... 63
    - 4.5.1 LIMITS OF BAND EDGE MEASUREMENT ..... 63
    - 4.5.2 TEST SETUP ..... 63
    - 4.5.3 TEST PROCEDURES ..... 63
    - 4.5.4 TEST RESULTS ..... 65
  - 4.6 CONDUCTED SPURIOUS EMISSIONS ..... 77
    - 4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 77
    - 4.6.2 TEST PROCEDURE ..... 77
    - 4.6.3 TEST SETUP ..... 77
    - 4.6.4 TEST RESULTS ..... 78
  - 4.7 RADIATED EMISSION MEASUREMENT ..... 81
    - 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 81
    - 4.7.2 TEST PROCEDURES ..... 81
    - 4.7.3 DEVIATION FROM TEST STANDARD ..... 81
    - 4.7.4 TEST SETUP ..... 82



**Test Report No.: RF141006N0105-5**

|       |  |     |
|-------|--|-----|
| 4.7.5 | TEST RESULTS .....   | 83  |
| 5     | INFORMATION ON THE TESTING LABORATORIES .....  | 101 |
| 6     | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB ..... | 102 |



Test Report No.: RF141006N0105-5

## RELEASE CONTROL RECORD

| ISSUE NO.      | REASON FOR CHANGE | DATE ISSUED   |
|----------------|-------------------|---------------|
| RF141006N005-5 | Original release  | Nov. 13, 2014 |



Test Report No.: RF141006N0105-5

## 1 CERTIFICATION

**PRODUCT:** LTE Smartphone

**BRAND:** ecom MOBILE SAFETY

**MODEL NO.:** Smart-Ex 01

**APPLICANT:** ecom instruments GmbH

**TESTED:** Oct. 06, 2014 ~ Nov. 11, 2014


**TEST SAMPLE:** Identical Prototype

**TEST STANDARDS:** **FCC Part 27, Subpart C, L**

**FCC Part 2**

ANSI C63.4-2003

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**TESTED BY :**  , **DATE :** Nov. 13, 2014  
Glyn He/ Project Engineer

**APPROVED BY :**  , **DATE :** Nov. 13, 2014  
Sam Tung / Technical Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 27 & Part 2 |                              |        |   |
|--|------------------------------|--------|---|
| STANDARD SECTION                       | TEST TYPE AND LIMIT          | RESULT | REMARK  |
| 2.1046<br>27.50(d)(4)                  | Maximum Peak Output Power    | PASS   | Meet the requirement of limit.  |
| 2.1055<br>27.54                        | Frequency Stability          | PASS   | Meet the requirement of limit.  |
| 2.1049<br>27.53(h)                     | Occupied Bandwidth           | PASS   | Meet the requirement of limit.  |
| 27.50(d)(5)                            | Peak to average ratio        | PASS   | Meet the requirement of limit.  |
| 27.53(h)                               | Band Edge Measurements       | PASS   | Meet the requirement of limit.  |
| 2.1051<br>27.53(h)                     | Conducted Spurious Emissions | PASS   | Meet the requirement of limit.  |
| 2.1053<br>27.53(h)                     | Radiated Spurious Emissions  | PASS   | Meet the requirement of limit.<br>Minimum passing margin is<br>-34.81dB at 6930MHz. |

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT         | FREQUENCY     | UNCERTAINTY |
|---------------------|---------------|-------------|
| Conducted emissions | 9kHz~30MHz    | 2.66dB      |
| Radiated emissions  | 9KHz ~ 30MHz  | 2.74dB      |
|                     | 30MHz ~ 1GMHz | 3.55dB      |
|                     | 1GHz ~ 18GHz  | 4.84dB      |
|                     | 18GHz ~ 40GHz | 1.94dB      |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Test Report No.: RF141006N0105-5

## 2.2 TEST SITE AND INSTRUMENTS

| Equipment                        | Manufacturer  | Model No.                | Serial No.  | Last Cal.   | Next Cal.   |
|----------------------------------|---------------|--------------------------|-------------|-------------|-------------|
| Spectrum Analyzer                | Agilent       | E7405A                   | MY45118807  | May 13,14   | May 12,15   |
| Spectrum Analyzer (10Hz-40GHz)   | Rohde&Schwarz | FSV40                    | 101003      | Apr. 09,14  | Apr. 08,15  |
| Signal Analyzer                  | Rohde&Schwarz | FSV7                     | 102331      | Nov. 25,13  | Nov. 24,14  |
| EMI Test Receiver                | Rohde&Schwarz | ESU 26                   | 100005      | May 13,14   | May 12,15   |
| Loop antenna (9kHz-30MHz)        | Daze          | ZN30900A                 | 0708        | Dec. 05,13  | Dec. 05,14  |
| Bilog Antenna                    | Teseq         | CBL 6111D                | 27089       | Jun. 27, 14 | Jun. 26, 15 |
| Horn Antenna (1GHz -18GHz)       | ETS -Lindgren | 3117                     | 00062558    | May 30,14   | May 29,16   |
| Horn Antenna (15GHz-40GHz)       | SCHWARZBECK   | BBHA 9170                | BBHA9170242 | Feb. 13,14  | Feb. 12,17  |
| Signal Amplifier                 | Agilent       | 8447D                    | 2944A10488  | Jun. 25,14  | Jun. 24,15  |
| Pre-Amplifier (100MHz-26.5GHz)   | Agilent       | 8449B                    | 3008A00409  | May 13,14   | May 12,15   |
| Pre-Amplifier (18GHz-40GHz)      | EMCI          | EMC 184045               | 980102      | Nov. 03,14  | Nov. 02,15  |
| Digital Multimeter               | FLUKE         | 15B                      | A1220010DG  | Oct. 29, 14 | Oct. 28, 15 |
| Peak and Avg Power Sensor        | Anritsu       | MA2411B                  | 1126068     | Feb. 21,14  | Feb. 20,15  |
| Power Meter                      | Anritsu       | ML2495A                  | 1139001     | Feb. 21,14  | Feb. 20,15  |
| 3m Semi-anechoic Chamber         | ETS-LINDGREN  | 9m*6m*6m                 | NSEMC003    | Apr. 19,14  | Apr. 18,15  |
| Humid & Temp Programmable Tester | Haida         | HD-2257                  | 110807201   | Sep.04,14   | Sep. 03,15  |
| Signal Generator                 | Agilent       | N5183A                   | MY50140980  | Nov. 03,14  | Nov. 02,15  |
| ESG Vector Signal Generator      | Agilent       | E4438C                   | MY49072505  | Mar.14, 14  | Mar.13, 15  |
| Test Software                    | ADT           | ADT_Radiated_V7.6.15.9.2 | N/A         | N/A         | N/A         |
| BLUETOOTH TESTER                 | Rohde&Schwarz | CBT32                    | 100811      | Sep. 04,14  | Sep. 03,15  |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in Dongguan 966 Chamber.
  3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 502831.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|  |  |   |                |
|--|--|---|----------------|
| <b>PRODUCT</b>                                 | LTE Smartphone   |   |                |
| <b>MODEL NO.</b>                               | Smart-Ex 01  |   |                |
| <b>TYPE NUMBER</b>                             | L12V012BB, L12V012AB, L13V012AB                        |   |                |
| <b>POWER SUPPLY</b>                            | 5.0Vdc (adapter or host equipment)<br>3.7Vdc (battery) |   |                |
| <b>MODULATION TECHNOLOGY</b>                   | <b>LTE Band 4</b>                                      | QPSK, 16QAM                                     |                |
|  | <b>LTE Band 12</b>                                     | QPSK, 16QAM                                     |                |
|  | <b>LTE Band 17</b>                                     | QPSK, 16QAM                                     |                |
| <b>FREQUENCY RANGE</b>                         | <b>LTE Band 4<br/>Channel Bandwidth: 1.4MHz</b>        | 1710.7MHz ~ 1754.3MHz                           |                |
|  | <b>LTE Band 4<br/>Channel Bandwidth: 3MHz</b>          | 1711.5MHz ~ 1753.5MHz                           |                |
|  | <b>LTE Band 4<br/>Channel Bandwidth: 5MHz</b>          | 1712.5MHz ~ 1752.5MHz                           |                |
|  | <b>LTE Band 4<br/>Channel Bandwidth: 10MHz</b>         | 1715.0MHz ~ 1750.0MHz                           |                |
|  | <b>LTE Band 4<br/>Channel Bandwidth: 15MHz</b>         | 1717.5MHz ~ 1747.5MHz                           |                |
|  | <b>LTE Band 4<br/>Channel Bandwidth: 20MHz</b>         | 1720.0MHz ~ 1745.0MHz                           |                |
|  | <b>LTE Band 12<br/>Channel Bandwidth: 1.4MHz</b>       | 699.7MHz ~ 715.3MHz                             |                |
|  | <b>LTE Band 12<br/>Channel Bandwidth: 3MHz</b>         | 700.5MHz ~ 714.5MHz                             |                |
|  | <b>LTE Band 12<br/>Channel Bandwidth: 5MHz</b>         | 701.5MHz ~ 713.5MHz                             |                |
|  | <b>LTE Band 12<br/>Channel Bandwidth: 10MHz</b>        | 704.0MHz ~ 711.0MHz                             |                |
|  | <b>LTE Band 17<br/>Channel Bandwidth: 5MHz</b>         | 706.5MHz ~ 713.5MHz                             |                |
|  | <b>LTE Band 17<br/>Channel Bandwidth: 10MHz</b>        | 709.0MHz ~ 711.0MHz                             |                |
|  | <b>EMISSION DESIGNATOR</b>                             | <b>LTE Band 4<br/>Channel Bandwidth: 1.4MHz</b> | QPSK: 1M09G7D  |
|  |  |   | 16QAM: 1M09W7D |
| <b>LTE Band 4<br/>Channel Bandwidth: 3MHz</b>  |  | QPSK: 2M69G7D                                   |                |
|  |  | 16QAM: 2M68W7D                                  |                |
| <b>LTE Band 4<br/>Channel Bandwidth: 5MHz</b>  |  | QPSK: 4M49G7D                                   |                |
|  |  | 16QAM: 4M47W7D                                  |                |
| <b>LTE Band 4<br/>Channel Bandwidth: 10MHz</b> |  | QPSK: 9M70G7D                                   |                |
|  |  | 16QAM: 8M94W7D                                  |                |





Test Report No.: RF141006N0105-5

|  |  |   |
|--|--|---|
| <b>EMISSION DESIGNATOR</b>               | LTE Band 4<br>Channel Bandwidth: 15MHz   | QPSK: 13M4G7D<br>16QAM: 13M4W7D         |
|  | LTE Band 4<br>Channel Bandwidth: 20MHz   | QPSK: 17M9G7D<br>16QAM: 17M8W7D         |
|  | LTE Band 12<br>Channel Bandwidth: 1.4MHz | QPSK: 1M09G7D<br>16QAM: 1M09W7D         |
|  | LTE Band 12<br>Channel Bandwidth: 3MHz   | QPSK: 2M69G7D<br>16QAM: 2M69W7D         |
|  | LTE Band 12<br>Channel Bandwidth: 5MHz   | QPSK: 4M49G7D<br>16QAM: 4M47W7D         |
|  | LTE Band 12<br>Channel Bandwidth: 10MHz  | QPSK: 8M94G7D<br>16QAM: 8M97W7D         |
|  | LTE Band 17<br>Channel Bandwidth: 5MHz   | QPSK: 4M52G7D<br>16QAM: 4M52W7D         |
|  | LTE Band 17<br>Channel Bandwidth: 10MHz  | QPSK: 8M94G7D<br>16QAM: 8M94W7D         |
|  | <b>MAX. ERP/EIRP POWER</b>               | LTE Band 4<br>Channel Bandwidth: 1.4MHz |
| LTE Band 4<br>Channel Bandwidth: 3MHz    |  | 340mW                                   |
| LTE Band 4<br>Channel Bandwidth: 5MHz    |  | 337mW                                   |
| LTE Band 4<br>Channel Bandwidth: 10MHz   |  | 311mW                                   |
| LTE Band 4<br>Channel Bandwidth: 15MHz   |  | 274mW                                   |
| LTE Band 4<br>Channel Bandwidth: 20MHz   |  | 319mW                                   |
| LTE Band 12<br>Channel Bandwidth: 1.4MHz |  | 289mW                                   |
| LTE Band 12<br>Channel Bandwidth: 3MHz   |  | 318mW                                   |
| LTE Band 12<br>Channel Bandwidth: 5MHz   |  | 300mW                                   |
| LTE Band 12<br>Channel Bandwidth: 10MHz  |  | 289mW                                   |
| LTE Band 17<br>Channel Bandwidth: 5MHz   |  | 113mW                                   |
| LTE Band 17<br>Channel Bandwidth: 10MHz  |  | 110mW                                   |

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



|                     |                          |  |
|---------------------|--------------------------|--|
| <b>ANTENNA TYPE</b> | <b>LTE Band 4</b>        | Fixed Internal antenna with 2dBi gain  |
|                     | <b>LTE Band 12</b>       | Fixed Internal antenna with -1dBi gain |
|                     | <b>LTE Band 17</b>       | Fixed Internal antenna with -1dBi gain |
| <b>HW VERSION</b>   | A                        |  |
| <b>SW VERSION</b>   | 7A.1.0-01-4.4.2-16.02.11 |  |
| <b>I/O PORTS</b>    | Refer to user's manual   |  |
| <b>DATA CABLE</b>   | See note 3               |  |

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

| <b>ADAPTER</b> |                    |
|----------------|--------------------|
| <b>BRAND:</b>  | Sonim              |
| <b>MODEL:</b>  | S11C02             |
| <b>INPUT:</b>  | AC 100-240V, 450mA |
| <b>OUTPUT:</b> | DC 5V, 2100mA      |


- The EUT matched the following USB cable:

| <b>USB CABLE</b>    |                    |
|---------------------|--------------------|
| <b>BRAND:</b>       | ecom MOBILE SAFETY |
| <b>MODEL:</b>       | Safety Box SB S01  |
| <b>SIGNAL LINE:</b> | 1.1 METER          |


- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

#### FOR RADIATION EMISSION TEST

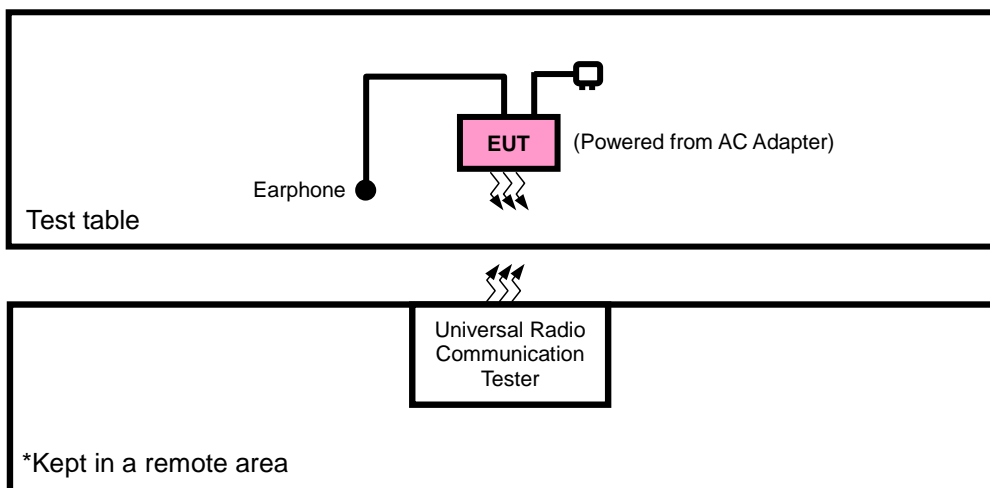

#### FOR E.R.P./E.I.R.P TEST

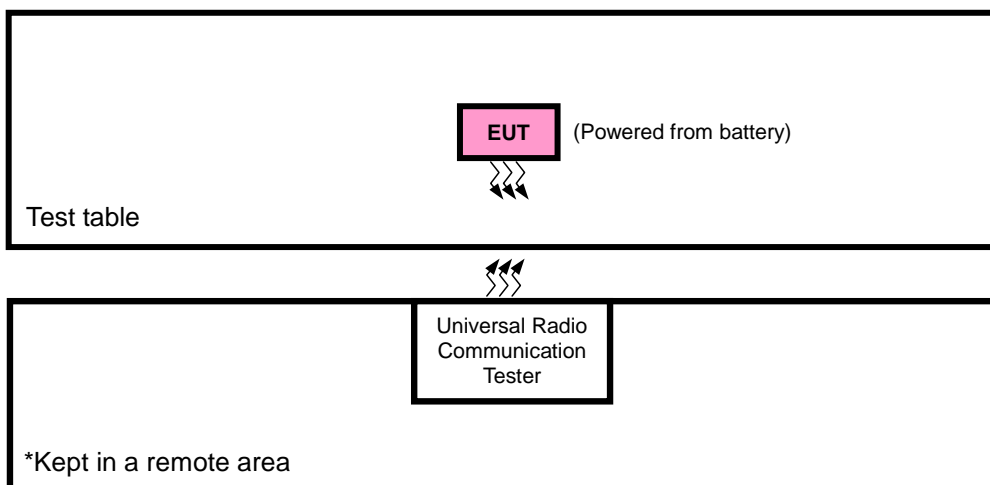



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT   | BRAND    | MODEL NO.  | SERIAL NO. | FCC ID |
|-----|-----------|----------|------------|------------|--------|
| 1   | DC source | LONG WEI | PS-6403D   | 010934269  | N/A    |
| 2   | PC        | HP       | A6608CN    | 3CR83825X3 | N/A    |
| 3   | Earphone  | Minami   | ME-816B5-E | N/A        | N/A    |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1   | DC Line: Unshielded, Detachable 1.0m                |
| 2   | AC Line: Unshielded, Detachable 1.5m                |
| 3   | DC Line: Unshielded, Detachable 1.2m                |

**NOTE:**

- 1. All power cords of the above support units are non shielded (1.8m).

### 3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for ERP/EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE MODE | DESCRIPTION                            |
|--------------------|--|
| A                  | EUT + Adapter + Earphone with LTE link |
| B                  | EUT + Battery + Earphone with LTE link |



Test Report No.: RF141006N0105-5

LTE BAND 4

| EUT CONFIGURE MODE | TEST ITEM             | AVAILABLE CHANNEL | TESTED CHANNEL      | CHANNEL BANDWIDTH | MODULATION  | MODE                                       |
|--------------------|-----------------------|-------------------|---------------------|-------------------|-------------|--|
| B                  | EIRP                  | 19957 to 20393    | 19957, 20175, 20393 | 1.4MHz            | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 19965 to 20385    | 19965, 20175, 20385 | 3MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 19975 to 20375    | 19975, 20175, 20375 | 5MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20000 to 20350    | 20000, 20175, 20350 | 10MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20025 to 20325    | 20025, 20175, 20325 | 15MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20050 to 20300    | 20050, 20175, 20300 | 20MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
| B                  | FREQUENCY STABILITY   | 19957 to 20393    | 20175               | 1.4MHz            | QPSK        | 1 RB / 0 RB Offset                         |
|                    |                       | 19965 to 20385    | 20175               | 3MHz              | QPSK        | 1 RB / 0 RB Offset                         |
|                    |                       | 19975 to 20375    | 20175               | 5MHz              | QPSK        | 1 RB / 0 RB Offset                         |
|                    |                       | 20000 to 20350    | 20175               | 10MHz             | QPSK        | 1 RB / 0 RB Offset                         |
|                    |                       | 20025 to 20325    | 20175               | 15MHz             | QPSK        | 1 RB / 0 RB Offset                         |
|                    |                       | 20050 to 20300    | 20175               | 20MHz             | QPSK        | 1 RB / 0 RB Offset                         |
| B                  | OCCUPIED BANDWIDTH    | 19957 to 20393    | 19957, 20175, 20393 | 1.4MHz            | QPSK, 16QAM | 6 RB / 0 RB Offset                         |
|                    |                       | 19965 to 20385    | 19965, 20175, 20385 | 3MHz              | QPSK, 16QAM | 15 RB / 0 RB Offset                        |
|                    |                       | 19975 to 20375    | 19975, 20175, 20375 | 5MHz              | QPSK, 16QAM | 25 RB / 0 RB Offset                        |
|                    |                       | 20000 to 20350    | 20000, 20175, 20350 | 10MHz             | QPSK, 16QAM | 50 RB / 0 RB Offset                        |
|                    |                       | 20025 to 20325    | 20025, 20175, 20325 | 15MHz             | QPSK, 16QAM | 75 RB / 0 RB Offset                        |
|                    |                       | 20050 to 20300    | 20050, 20175, 20300 | 20MHz             | QPSK, 16QAM | 100 RB / 0 RB Offset                       |
| B                  | PEAK TO AVERAGE RATIO | 19957 to 20393    | 19957, 20175, 20393 | 1.4MHz            | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 19965 to 20385    | 19965, 20175, 20385 | 3MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 19975 to 20375    | 19975, 20175, 20375 | 5MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20000 to 20350    | 20000, 20175, 20350 | 10MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20025 to 20325    | 20025, 20175, 20325 | 15MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
|                    |                       | 20050 to 20300    | 20050, 20175, 20300 | 20MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |
| B                  | BAND EDGE             | 19957 to 20393    | 19957               | 1.4MHz            | QPSK        | 1 RB / 0 RB Offset<br>6 RB / 0 RB Offset   |
|                    |                       |                   | 20393               | 1.4MHz            | QPSK        | 1 RB / 5 RB Offset<br>6 RB / 0 RB Offset   |
|                    |                       | 19965 to 20385    | 19965               | 3MHz              | QPSK        | 1 RB / 0 RB Offset<br>15 RB / 0 RB Offset  |
|                    |                       |                   | 20385               | 3MHz              | QPSK        | 1 RB / 14 RB Offset<br>15 RB / 0 RB Offset |
|                    |                       | 19975 to 20375    | 19975               | 5MHz              | QPSK        | 1 RB / 0 RB Offset<br>25 RB / 0 RB Offset  |
|                    |                       |                   | 20375               | 5MHz              | QPSK        | 1 RB / 24 RB Offset<br>25 RB / 0 RB Offset |
|                    |                       | 20000 to 20350    | 20000               | 10MHz             | QPSK        | 1 RB / 0 RB Offset<br>50 RB / 0 RB Offset  |
|                    |                       |                   | 20350               | 10MHz             | QPSK        | 1 RB / 49 RB Offset<br>50 RB / 0 RB Offset |



Test Report No.: RF141006N0105-5

|   |                      |                |       |        |      |                      |
|---|----------------------|----------------|-------|--------|------|----------------------|
| B | BAND EDGE            | 20025 to 20325 | 20025 | 15MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      |                | 20325 | 15MHz  | QPSK | 75 RB / 0 RB Offset  |
|   |                      | 20050 to 20300 | 20050 | 20MHz  | QPSK | 1 RB / 74 RB Offset  |
|   |                      |                | 20300 | 20MHz  | QPSK | 75 RB / 0 RB Offset  |
|   |                      | 19957 to 20393 | 20050 | 20MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      |                | 20300 | 20MHz  | QPSK | 100 RB / 0 RB Offset |
| B | CONDCUDETED EMISSION | 19957 to 20393 | 20175 | 1.4MHz | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 19965 to 20385 | 20175 | 3MHz   | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 19975 to 20375 | 20175 | 5MHz   | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20000 to 20350 | 20175 | 10MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20025 to 20325 | 20175 | 15MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20050 to 20300 | 20175 | 20MHz  | QPSK | 1 RB / 0 RB Offset   |
| A | RADIATED EMISSION    | 19957 to 20393 | 20175 | 1.4MHz | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 19965 to 20385 | 20175 | 3MHz   | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 19975 to 20375 | 20175 | 5MHz   | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20000 to 20350 | 20175 | 10MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20025 to 20325 | 20175 | 15MHz  | QPSK | 1 RB / 0 RB Offset   |
|   |                      | 20050 to 20300 | 20175 | 20MHz  | QPSK | 1 RB / 0 RB Offset   |

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



**LTE BAND 12**

| EUT CONFIGURE MODE | TEST ITEM             | AVAILABLE CHANNEL | TESTED CHANNEL      | CHANNEL BANDWIDTH | MODULATION  | MODE                                       |      |                    |
|--------------------|-----------------------|-------------------|---------------------|-------------------|-------------|--|------|--------------------|
| B                  | ERP                   | 23017 to 23173    | 23017, 23095, 23173 | 1.4MHz            | QPSK,16QAM  | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23025 to 23165    | 23025, 23095, 23165 | 3MHz              | QPSK,16QAM  | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23035 to 23155    | 23035, 23095, 23155 | 5MHz              | QPSK,16QAM  | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23060 to 23130    | 23060, 23095, 23130 | 10MHz             | QPSK,16QAM  | 1 RB / 0 RB Offset                         |      |                    |
| B                  | FREQUENCY STABILITY   | 23017 to 23173    | 23095               | 1.4MHz            | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23025 to 23165    | 23095               | 3MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23035 to 23155    | 23095               | 5MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23060 to 23130    | 23095               | 10MHz             | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
| B                  | OCCUPIED BANDWIDTH    | 23017 to 23173    | 23017, 23095, 23173 | 1.4MHz            | QPSK,16QAM  | 6 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23025 to 23165    | 23025, 23095, 23165 | 3MHz              | QPSK,16QAM  | 15 RB / 0 RB Offset                        |      |                    |
|                    |                       | 23035 to 23155    | 23035, 23095, 23155 | 5MHz              | QPSK,16QAM  | 25 RB / 0 RB Offset                        |      |                    |
|                    |                       | 23060 to 23130    | 23060, 23095, 23130 | 10MHz             | QPSK,16QAM  | 50 RB / 0 RB Offset                        |      |                    |
| B                  | PEAK TO AVERAGE RATIO | 23017 to 23173    | 23017, 23095, 23173 | 1.4MHz            | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23025 to 23165    | 23025, 23095, 23165 | 3MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23035 to 23155    | 23035, 23095, 23155 | 5MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23060 to 23130    | 23060, 23095, 23130 | 10MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
| B                  | BAND EDGE             | 23017 to 23173    | 23017               | 1.4MHz            | QPSK        | 1 RB / 0 RB Offset<br>6 RB / 0 RB Offset   |      |                    |
|                    |                       |                   | 23173               | 1.4MHz            | QPSK        | 1 RB / 5 RB Offset<br>6 RB / 0 RB Offset   |      |                    |
|                    |                       | 23025 to 23165    | 23025               | 3MHz              | QPSK        | 1 RB / 0 RB Offset<br>15 RB / 0 RB Offset  |      |                    |
|                    |                       |                   | 23165               | 3MHz              | QPSK        | 1 RB / 14 RB Offset<br>15 RB / 0 RB Offset |      |                    |
|                    |                       | 23035 to 23155    | 23035               | 5MHz              | QPSK        | 1 RB / 0 RB Offset<br>25 RB / 0 RB Offset  |      |                    |
|                    |                       |                   | 23155               | 5MHz              | QPSK        | 1 RB / 24 RB Offset<br>25 RB / 0 RB Offset |      |                    |
|                    |                       | 23060 to 23130    | 23060               | 10MHz             | QPSK        | 1 RB / 0 RB Offset<br>50 RB / 0 RB Offset  |      |                    |
|                    |                       |                   | 23130               | 10MHz             | QPSK        | 1 RB / 49 RB Offset<br>50 RB / 0 RB Offset |      |                    |
|                    |                       | B                 | CONDCUETED EMISSION | 23017 to 23173    | 23095       | 1.4MHz                                     | QPSK | 1 RB / 0 RB Offset |
|                    |                       |                   |                     | 23025 to 23165    | 23095       | 3MHz                                       | QPSK | 1 RB / 0 RB Offset |
|                    |                       |                   |                     | 23035 to 23155    | 23095       | 5MHz                                       | QPSK | 1 RB / 0 RB Offset |
|                    |                       |                   |                     | 23060 to 23130    | 23095       | 10MHz                                      | QPSK | 1 RB / 0 RB Offset |
| A                  | RADIATED EMISSION     | 23017 to 23173    | 23095               | 1.4MHz            | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23025 to 23165    | 23095               | 3MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23035 to 23155    | 23095               | 5MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23060 to 23130    | 23095               | 10MHz             | QPSK        | 1 RB / 0 RB Offset                         |      |                    |

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: RF141006N0105-5

**LTE BAND 17**

| EUT CONFIGURE MODE | TEST ITEM             | AVAILABLE CHANNEL | TESTED CHANNEL      | CHANNEL BANDWIDTH | MODULATION  | MODE                                       |      |                    |
|--------------------|-----------------------|-------------------|---------------------|-------------------|-------------|--|------|--------------------|
| B                  | ERP                   | 23755 to 23825    | 23755, 23790, 23825 | 5MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23780 to 23800    | 23780, 23790, 23800 | 10MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
| B                  | FREQUENCY STABILITY   | 23755 to 23825    | 23790               | 5MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23780 to 23800    | 23790               | 10MHz             | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
| B                  | OCCUPIED BANDWIDTH    | 23755 to 23825    | 23755, 23790, 23825 | 5MHz              | QPSK, 16QAM | 25 RB / 0 RB Offset                        |      |                    |
|                    |                       | 23780 to 23800    | 23780, 23790, 23800 | 10MHz             | QPSK, 16QAM | 50 RB / 0 RB Offset                        |      |                    |
| B                  | PEAK TO AVERAGE RATIO | 23755 to 23825    | 23755, 23790, 23825 | 5MHz              | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23780 to 23800    | 23780, 23790, 23800 | 10MHz             | QPSK, 16QAM | 1 RB / 0 RB Offset                         |      |                    |
| B                  | BAND EDGE             | 23755 to 23825    | 23755               | 5MHz              | QPSK        | 1 RB / 0 RB Offset<br>25 RB / 0 RB Offset  |      |                    |
|                    |                       |                   | 23825               | 5MHz              | QPSK        | 1 RB / 24 RB Offset<br>25 RB / 0 RB Offset |      |                    |
|                    |                       | 23780 to 23800    | 23780               | 10MHz             | QPSK        | 1 RB / 0 RB Offset<br>50 RB / 0 RB Offset  |      |                    |
|                    |                       |                   | 23800               | 10MHz             | QPSK        | 1 RB / 49 RB Offset<br>50 RB / 0 RB Offset |      |                    |
|                    |                       | B                 | CONDCUDED EMISSION  | 23755 to 23825    | 23790       | 5MHz                                       | QPSK | 1 RB / 0 RB Offset |
|                    |                       |                   |                     | 23780 to 23800    | 23790       | 10MHz                                      | QPSK | 1 RB / 0 RB Offset |
| A                  | RADIATED EMISSION     | 23755 to 23825    | 23790               | 5MHz              | QPSK        | 1 RB / 0 RB Offset                         |      |                    |
|                    |                       | 23780 to 23800    | 23790               | 10MHz             | QPSK        | 1 RB / 0 RB Offset                         |      |                    |

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**TEST CONDITION:**

| TEST ITEM             | ENVIRONMENTAL CONDITIONS | INPUT POWER         | TESTED BY   |
|-----------------------|--------------------------|---------------------|-------------|
| EIRP(ERP)             | 24deg. C, 60%RH          | 3.7Vdc from Battery | Blue Zheng  |
| FREQUENCY STABILITY   | 24deg. C, 61%RH          | 3.7Vdc from Battery | Yuqiang Yin |
| OCCUPIED BANDWIDTH    | 24deg. C, 61%RH          | 3.7Vdc from Battery | Yuqiang Yin |
| PEAK TO AVERAGE RATIO | 24deg. C, 61%RH          | 3.7Vdc from Battery | Yuqiang Yin |
| BAND EDGE             | 24deg. C, 61%RH          | 3.7Vdc from Battery | Yuqiang Yin |
| CONDCUDED EMISSION    | 24deg. C, 61%RH          | 3.7Vdc from Battery | Yuqiang Yin |
| RADIATED EMISSION     | 24deg. C, 60%RH          | 5Vdc from adapter   | Blue Zheng  |





Test Report No.: RF141006N0105-5

### 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**ANSI/TIA/EIA-603-C 2004**

**NOTE:** All test items have been performed and recorded as per the above standards.



## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 699-716 MHz band are limited to 3 watts ERP.

#### 4.1.2 TEST PROCEDURES

##### EIRP / ERP MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RBW and VBW is 10MHz for LTE.
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e.  $E.R.P = E.I.R.P - 2.15 \text{ dB}$

##### CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


### 4.1.3 TEST SETUP

#### EIRP / ERP MEASUREMENT:

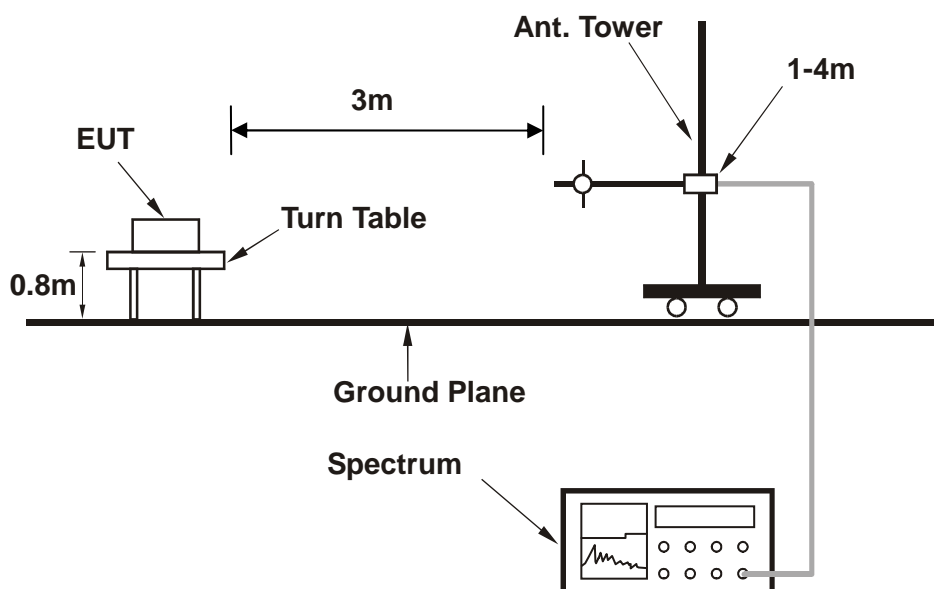

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

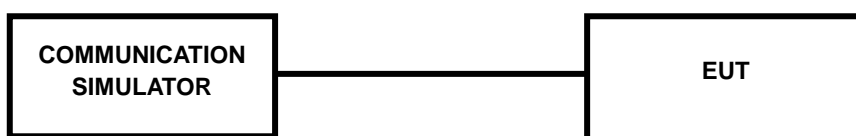

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 TEST RESULTS

##### AVERAGE CONDUCTED OUTPUT POWER (dBm)

| LTE Band 4 |            |         |           |                         |                         |                         |     |
|------------|------------|---------|-----------|-------------------------|-------------------------|-------------------------|-----|
| BW         | Modulation | RB Size | RB Offset | Low CH<br>19957         | Mid CH<br>20175         | High CH<br>20393        | MPR |
|            |            |         |           | Frequency<br>1710.7 MHz | Frequency<br>1732.5 MHz | Frequency<br>1754.3 MHz |     |
| 1.4MHz     | QPSK       | 1       | 0         | 22.8                    | <b>22.97</b>            | 22.84                   | 0   |
|            |            | 1       | 2         | 22.75                   | 22.81                   | 22.76                   | 0   |
|            |            | 1       | 5         | 22.74                   | 22.8                    | 22.74                   | 0   |
|            |            | 3       | 0         | 22.78                   | <b>22.95</b>            | 22.82                   | 0   |
|            |            | 3       | 1         | 22.73                   | 22.79                   | 22.74                   | 0   |
|            |            | 3       | 3         | 22.72                   | 22.78                   | 22.72                   | 0   |
|            |            | 6       | 0         | 21.81                   | <b>21.98</b>            | 21.85                   | 1   |
|            | 16QAM      | 1       | 0         | 21.78                   | <b>21.95</b>            | 21.82                   | 1   |
|            |            | 1       | 2         | 21.76                   | 21.93                   | 21.8                    | 1   |
|            |            | 1       | 5         | 21.74                   | 21.91                   | 21.78                   | 1   |
|            |            | 3       | 0         | 21.72                   | <b>21.89</b>            | 21.76                   | 1   |
|            |            | 3       | 1         | 21.7                    | 21.87                   | 21.74                   | 1   |
|            |            | 3       | 3         | 21.68                   | 21.85                   | 21.72                   | 1   |
|            |            | 6       | 0         | 20.82                   | <b>20.99</b>            | 20.86                   | 2   |



Test Report No.: RF141006N0105-5

| LTE Band 4 |            |         |           |                         |                         |                         |     |
|------------|------------|---------|-----------|-------------------------|-------------------------|-------------------------|-----|
| BW         | Modulation | RB Size | RB Offset | Low CH<br>19965         | Mid CH<br>20175         | High CH<br>20385        | MPR |
|            |            |         |           | Frequency<br>1711.5 MHz | Frequency<br>1732.5 MHz | Frequency<br>1753.5 MHz |     |
| 3 MHz      | QPSK       | 1       | 0         | 22.9                    | <b>23.07</b>            | 22.94                   | 0   |
|            |            | 1       | 7         | 22.85                   | 22.91                   | 22.86                   | 0   |
|            |            | 1       | 14        | 22.84                   | 22.9                    | 22.84                   | 0   |
|            |            | 8       | 0         | 21.92                   | <b>22</b>               | 21.93                   | 1   |
|            |            | 8       | 3         | 21.9                    | 21.95                   | 21.92                   | 1   |
|            |            | 8       | 7         | 21.88                   | 21.92                   | 21.91                   | 1   |
|            |            | 15      | 0         | 21.89                   | <b>21.98</b>            | 21.92                   | 1   |
|            | 16QAM      | 1       | 0         | 21.87                   | <b>22.04</b>            | 21.91                   | 1   |
|            |            | 1       | 7         | 21.82                   | 21.88                   | 21.83                   | 1   |
|            |            | 1       | 14        | 21.81                   | 21.87                   | 21.81                   | 1   |
|            |            | 8       | 0         | 20.93                   | <b>21.1</b>             | 20.97                   | 2   |
|            |            | 8       | 3         | 20.88                   | 20.94                   | 20.89                   | 2   |
|            |            | 8       | 7         | 20.87                   | 20.93                   | 20.87                   | 2   |
|            |            | 15      | 0         | 20.87                   | <b>20.93</b>            | 20.88                   | 2   |
| BW         | Modulation | RB Size | RB Offset | Low CH<br>19975         | Mid CH<br>20175         | High CH<br>20375        | MPR |
|            |            |         |           | Frequency<br>1712.5 MHz | Frequency<br>1732.5 MHz | Frequency<br>1752.5 MHz |     |
| 5 MHz      | QPSK       | 1       | 0         | 22.98                   | <b>23.15</b>            | 23.02                   | 0   |
|            |            | 1       | 12        | 22.93                   | 22.99                   | 22.94                   | 0   |
|            |            | 1       | 24        | 22.92                   | 22.98                   | 22.92                   | 0   |
|            |            | 12      | 0         | 22                      | <b>22.08</b>            | 22.01                   | 1   |
|            |            | 12      | 6         | 21.98                   | 22.03                   | 22                      | 1   |
|            |            | 12      | 13        | 21.96                   | 22                      | 21.99                   | 1   |
|            |            | 25      | 0         | 21.97                   | <b>22.06</b>            | 22                      | 1   |
|            | 16QAM      | 1       | 0         | 21.95                   | <b>22.12</b>            | 21.99                   | 1   |
|            |            | 1       | 12        | 21.9                    | 21.96                   | 21.91                   | 1   |
|            |            | 1       | 24        | 21.89                   | 21.95                   | 21.89                   | 1   |
|            |            | 12      | 0         | 21.01                   | <b>21.18</b>            | 21.05                   | 2   |
|            |            | 12      | 6         | 20.96                   | 21.02                   | 20.97                   | 2   |
|            |            | 12      | 13        | 20.95                   | 21.01                   | 20.95                   | 2   |
|            |            | 6       | 0         | 20.95                   | <b>21.01</b>            | 20.96                   | 2   |



Test Report No.: RF141006N0105-5

| LTE Band 4 |            |         |           |                         |                         |                         |     |
|------------|------------|---------|-----------|-------------------------|-------------------------|-------------------------|-----|
| BW         | Modulation | RB Size | RB Offset | Low CH<br>20000         | Mid CH<br>20175         | High CH<br>20350        | MPR |
|            |            |         |           | Frequency<br>1715 MHz   | Frequency<br>1732.5 MHz | Frequency<br>1750 MHz   |     |
| 10 MHz     | QPSK       | 1       | 0         | 23.04                   | <b>23.21</b>            | 23.08                   | 0   |
|            |            | 1       | 24        | 22.99                   | 23.05                   | 23                      | 0   |
|            |            | 1       | 49        | 22.98                   | 23.04                   | 22.98                   | 0   |
|            |            | 25      | 0         | 22.06                   | <b>22.14</b>            | 22.07                   | 1   |
|            |            | 25      | 12        | 22.04                   | 22.09                   | 22.06                   | 1   |
|            |            | 25      | 25        | 22.02                   | 22.06                   | 22.05                   | 1   |
|            |            | 50      | 0         | 22.03                   | <b>22.12</b>            | 22.06                   | 1   |
|            | 16QAM      | 1       | 0         | 22.01                   | <b>22.18</b>            | 22.05                   | 1   |
|            |            | 1       | 24        | 21.96                   | 22.02                   | 21.97                   | 1   |
|            |            | 1       | 49        | 21.95                   | 22.01                   | 21.95                   | 1   |
|            |            | 25      | 0         | 21.07                   | <b>21.24</b>            | 21.11                   | 2   |
|            |            | 25      | 12        | 21.02                   | 21.08                   | 21.03                   | 2   |
|            |            | 25      | 25        | 21.01                   | 21.07                   | 21.01                   | 2   |
|            |            | 50      | 0         | 21.01                   | <b>21.07</b>            | 21.02                   | 2   |
| BW         | Modulation | RB Size | RB Offset | Low CH<br>20025         | Mid CH<br>20175         | High CH<br>20325        | MPR |
|            |            |         |           | Frequency<br>1717.5 MHz | Frequency<br>1732.5 MHz | Frequency<br>1747.5 MHz |     |
| 15 MHz     | QPSK       | 1       | 0         | 23.08                   | <b>23.25</b>            | 23.12                   | 0   |
|            |            | 1       | 37        | 23.03                   | 23.09                   | 23.04                   | 0   |
|            |            | 1       | 74        | 23.02                   | 23.08                   | 23.02                   | 0   |
|            |            | 36      | 0         | 22.1                    | <b>22.18</b>            | 22.11                   | 1   |
|            |            | 36      | 19        | 22.08                   | 22.13                   | 22.1                    | 1   |
|            |            | 36      | 39        | 22.06                   | 22.1                    | 22.09                   | 1   |
|            |            | 75      | 0         | 22.07                   | <b>22.16</b>            | 22.1                    | 1   |
|            | 16QAM      | 1       | 0         | 22.05                   | <b>22.22</b>            | 22.09                   | 1   |
|            |            | 1       | 37        | 22                      | 22.06                   | 22.01                   | 1   |
|            |            | 1       | 74        | 21.99                   | 22.05                   | 21.99                   | 1   |
|            |            | 36      | 0         | 21.11                   | <b>21.28</b>            | 21.15                   | 2   |
|            |            | 36      | 19        | 21.06                   | 21.12                   | 21.07                   | 2   |
|            |            | 36      | 39        | 21.05                   | 21.11                   | 21.05                   | 2   |
|            |            | 75      | 0         | 21.05                   | <b>21.11</b>            | 21.06                   | 2   |



Test Report No.: RF141006N0105-5

| LTE Band 4 |            |         |           |                       |                         |                       |     |
|------------|------------|---------|-----------|-----------------------|-------------------------|-----------------------|-----|
| BW         | Modulation | RB Size | RB Offset | Low CH<br>20050       | Mid CH<br>20175         | High CH<br>20300      | MPR |
|            |            |         |           | Frequency<br>1720 MHz | Frequency<br>1732.5 MHz | Frequency<br>1745 MHz |     |
| 20MHz      | QPSK       | 1       | 0         | 23.1                  | <b>23.27</b>            | 23.14                 | 0   |
|            |            | 1       | 50        | 23.05                 | 23.11                   | 23.06                 | 0   |
|            |            | 1       | 99        | 23.04                 | 23.1                    | 23.04                 | 0   |
|            |            | 50      | 0         | 22.12                 | <b>22.2</b>             | 22.13                 | 1   |
|            |            | 50      | 25        | 22.1                  | 22.15                   | 22.12                 | 1   |
|            |            | 50      | 50        | 22.08                 | 22.12                   | 22.11                 | 1   |
|            |            | 100     | 0         | 22.09                 | <b>22.18</b>            | 22.12                 | 1   |
|            | 16QAM      | 1       | 0         | 22.07                 | <b>22.24</b>            | 22.11                 | 1   |
|            |            | 1       | 50        | 22.02                 | 22.08                   | 22.03                 | 1   |
|            |            | 1       | 99        | 22.01                 | 22.07                   | 22.01                 | 1   |
|            |            | 50      | 0         | 21.13                 | <b>21.3</b>             | 21.17                 | 2   |
|            |            | 50      | 25        | 21.08                 | 21.14                   | 21.09                 | 2   |
|            |            | 50      | 50        | 21.07                 | 21.13                   | 21.07                 | 2   |
|            |            | 100     | 0         | 21.07                 | <b>21.13</b>            | 21.08                 | 2   |



Test Report No.: RF141006N0105-5

| LTE Band 12 |            |         |           |                     |                     |                     |     |
|-------------|------------|---------|-----------|---------------------|---------------------|---------------------|-----|
| BW          | Modulation | RB Size | RB Offset | Low CH 23017        | Mid CH 23095        | High CH 23173       | MPR |
|             |            |         |           | Frequency 699.7 MHz | Frequency 707.5 MHz | Frequency 715.3 MHz |     |
| 1.4 MHz     | QPSK       | 1       | 0         | 23.29               | <b>23.47</b>        | 23.22               | 0   |
|             |            | 1       | 2         | 23.24               | 23.25               | 23.41               | 0   |
|             |            | 1       | 5         | 23.39               | 23.29               | 23.34               | 0   |
|             |            | 3       | 0         | 23.25               | <b>23.36</b>        | 23.34               | 0   |
|             |            | 3       | 1         | 23.33               | 23.3                | 23.35               | 0   |
|             |            | 3       | 3         | 23.31               | 23.18               | 23.29               | 0   |
|             |            | 6       | 0         | 22.35               | <b>22.38</b>        | 22.27               | 1   |
|             | 16QAM      | 1       | 0         | 22.25               | <b>22.43</b>        | 22.18               | 1   |
|             |            | 1       | 2         | 22.2                | 22.21               | 22.37               | 1   |
|             |            | 1       | 5         | 22.35               | 22.25               | 22.3                | 1   |
|             |            | 3       | 0         | 22.21               | <b>22.32</b>        | 22.3                | 1   |
|             |            | 3       | 1         | 22.29               | 22.26               | 22.31               | 1   |
|             |            | 3       | 3         | 22.27               | 22.14               | 22.25               | 1   |
|             |            | 6       | 0         | 21.31               | <b>21.34</b>        | 21.23               | 2   |
| BW          | Modulation | RB Size | RB Offset | Low CH 23025        | Mid CH 23095        | High CH 23165       | MPR |
|             |            |         |           | Frequency 700.5 MHz | Frequency 707.5 MHz | Frequency 714.5 MHz |     |
| 3 MHz       | QPSK       | 1       | 0         | 23.34               | <b>23.52</b>        | 23.27               | 0   |
|             |            | 1       | 7         | 23.29               | 23.3                | 23.46               | 0   |
|             |            | 1       | 14        | 23.44               | 23.34               | 23.39               | 0   |
|             |            | 8       | 0         | 22.3                | <b>22.41</b>        | 22.39               | 1   |
|             |            | 8       | 3         | 22.38               | 22.35               | 22.4                | 1   |
|             |            | 8       | 7         | 22.36               | 22.23               | 22.34               | 1   |
|             |            | 15      | 0         | 22.4                | <b>22.43</b>        | 22.32               | 1   |
|             | 16QAM      | 1       | 0         | 22.3                | <b>22.48</b>        | 22.23               | 1   |
|             |            | 1       | 7         | 22.25               | 22.26               | 22.42               | 1   |
|             |            | 1       | 14        | 22.4                | 22.3                | 22.35               | 1   |
|             |            | 8       | 0         | 21.26               | <b>21.37</b>        | 21.35               | 2   |
|             |            | 8       | 3         | 21.34               | 21.31               | 21.36               | 2   |
|             |            | 8       | 7         | 21.32               | 21.19               | 21.3                | 2   |
|             |            | 15      | 0         | 21.36               | <b>21.39</b>        | 21.28               | 2   |





Test Report No.: RF141006N0105-5

| LTE Band 12 |            |         |           |                        |                        |                        |     |
|-------------|------------|---------|-----------|------------------------|------------------------|------------------------|-----|
| BW          | Modulation | RB Size | RB Offset | Low CH<br>23035        | Mid CH<br>23095        | High CH<br>23155       | MPR |
|             |            |         |           | Frequency<br>701.5 MHz | Frequency<br>707.5 MHz | Frequency<br>713.5 MHz |     |
| 5 MHz       | QPSK       | 1       | 0         | 23.4                   | <b>23.58</b>           | 23.33                  | 0   |
|             |            | 1       | 12        | 23.35                  | 23.36                  | 23.52                  | 0   |
|             |            | 1       | 24        | 23.5                   | 23.4                   | 23.45                  | 0   |
|             |            | 12      | 0         | 22.36                  | <b>22.47</b>           | 22.45                  | 1   |
|             |            | 12      | 6         | 22.44                  | 22.41                  | 22.46                  | 1   |
|             |            | 12      | 13        | 22.42                  | 22.29                  | 22.4                   | 1   |
|             |            | 25      | 0         | 22.46                  | <b>22.49</b>           | 22.38                  | 1   |
|             | 16QAM      | 1       | 0         | 22.36                  | <b>22.54</b>           | 22.29                  | 1   |
|             |            | 1       | 12        | 22.31                  | 22.32                  | 22.48                  | 1   |
|             |            | 1       | 24        | 22.46                  | 22.36                  | 22.41                  | 1   |
|             |            | 12      | 0         | 21.32                  | <b>21.43</b>           | 21.41                  | 2   |
|             |            | 12      | 6         | 21.4                   | 21.37                  | 21.42                  | 2   |
|             |            | 12      | 13        | 21.38                  | 21.25                  | 21.36                  | 2   |
|             |            | 25      | 0         | 21.42                  | <b>21.45</b>           | 21.34                  | 2   |
| BW          | Modulation | RB Size | RB Offset | Low CH<br>23060        | Mid CH<br>23095        | High CH<br>23130       | MPR |
|             |            |         |           | Frequency<br>704 MHz   | Frequency<br>707.5 MHz | Frequency<br>711 MHz   |     |
| 10 MHz      | QPSK       | 1       | 0         | 23.44                  | <b>23.62</b>           | 23.37                  | 0   |
|             |            | 1       | 24        | 23.39                  | 23.4                   | 23.56                  | 0   |
|             |            | 1       | 49        | 23.54                  | 23.44                  | 23.49                  | 0   |
|             |            | 25      | 0         | 22.4                   | <b>22.51</b>           | 22.49                  | 1   |
|             |            | 25      | 12        | 22.48                  | 22.45                  | 22.5                   | 1   |
|             |            | 25      | 25        | 22.46                  | 22.33                  | 22.44                  | 1   |
|             |            | 50      | 0         | 22.5                   | <b>22.53</b>           | 22.42                  | 1   |
|             | 16QAM      | 1       | 0         | 22.4                   | <b>22.58</b>           | 22.33                  | 1   |
|             |            | 1       | 24        | 22.35                  | 22.36                  | 22.52                  | 1   |
|             |            | 1       | 49        | 22.5                   | 22.4                   | 22.45                  | 1   |
|             |            | 25      | 0         | 21.36                  | <b>21.47</b>           | 21.45                  | 2   |
|             |            | 25      | 12        | 21.44                  | 21.41                  | 21.46                  | 2   |
|             |            | 25      | 25        | 21.42                  | 21.29                  | 21.4                   | 2   |
|             |            | 50      | 0         | 21.46                  | <b>21.49</b>           | 21.38                  | 2   |



Test Report No.: RF141006N0105-5

| LTE Band 17 |            |         |           |                        |                      |                        |     |
|-------------|------------|---------|-----------|------------------------|----------------------|------------------------|-----|
| BW          | Modulation | RB Size | RB Offset | Low CH<br>23755        | Mid CH<br>23790      | High CH<br>23825       | MPR |
|             |            |         |           | Frequency<br>706.5 MHz | Frequency<br>710 MHz | Frequency<br>713.5 MHz |     |
| 5 MHz       | QPSK       | 1       | 0         | <b>23.8</b>            | 23.69                | 23.78                  | 0   |
|             |            | 1       | 12        | 23.72                  | 23.65                | 23.77                  | 0   |
|             |            | 1       | 24        | 23.68                  | 23.63                | 23.73                  | 0   |
|             |            | 12      | 0         | <b>22.82</b>           | 22.78                | 22.81                  | 1   |
|             |            | 12      | 6         | 22.75                  | 22.75                | 22.73                  | 1   |
|             |            | 12      | 13        | 22.69                  | 22.72                | 22.66                  | 1   |
|             |            | 25      | 0         | <b>22.85</b>           | 22.81                | 22.82                  | 1   |
|             | 16QAM      | 1       | 0         | <b>22.82</b>           | 22.71                | 22.8                   | 1   |
|             |            | 1       | 12        | 22.74                  | 22.67                | 22.79                  | 1   |
|             |            | 1       | 24        | 22.7                   | 22.65                | 22.75                  | 1   |
|             |            | 12      | 0         | <b>21.84</b>           | 21.8                 | 21.83                  | 2   |
|             |            | 12      | 6         | 21.77                  | 21.77                | 21.75                  | 2   |
|             |            | 12      | 13        | 21.71                  | 21.74                | 21.68                  | 2   |
|             |            | 25      | 0         | <b>21.87</b>           | 21.83                | 21.84                  | 2   |
| BW          | Modulation | RB Size | RB Offset | Low CH<br>23780        | Mid CH<br>23790      | High CH<br>23800       | MPR |
|             |            |         |           | Frequency<br>709 MHz   | Frequency<br>710 MHz | Frequency<br>711 MHz   |     |
| 10 MHz      | QPSK       | 1       | 0         | <b>23.82</b>           | 23.71                | 23.8                   | 0   |
|             |            | 1       | 24        | 23.74                  | 23.67                | 23.79                  | 0   |
|             |            | 1       | 49        | 23.7                   | 23.65                | 23.75                  | 0   |
|             |            | 25      | 0         | <b>22.84</b>           | 22.8                 | 22.83                  | 1   |
|             |            | 25      | 12        | 22.77                  | 22.77                | 22.75                  | 1   |
|             |            | 25      | 25        | 22.71                  | 22.74                | 22.68                  | 1   |
|             |            | 50      | 0         | <b>22.87</b>           | 22.83                | 22.84                  | 1   |
|             | 16QAM      | 1       | 0         | <b>22.84</b>           | 22.73                | 22.82                  | 1   |
|             |            | 1       | 24        | 22.76                  | 22.69                | 22.81                  | 1   |
|             |            | 1       | 49        | 22.72                  | 22.67                | 22.77                  | 1   |
|             |            | 25      | 0         | <b>21.86</b>           | 21.82                | 21.85                  | 2   |
|             |            | 25      | 12        | 21.79                  | 21.79                | 21.77                  | 2   |
|             |            | 25      | 25        | 21.73                  | 21.76                | 21.7                   | 2   |
|             |            | 50      | 0         | <b>21.89</b>           | 21.85                | 21.86                  | 2   |



Test Report No.: RF141006N0105-5

EIRP

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 19957   | 1710.7          | -22.68    | 41.17                 | 18.49     | 70.63         | H                  | 1         |
| 20175   | 1732.5          | -22.82    | 41.96                 | 19.14     | 82.04         | H                  | 1         |
| 20393   | 1754.3          | -22.98    | 42.79                 | 19.81     | 95.72         | H                  | 1         |
| 19957   | 1710.7          | -20.87    | 44.07                 | 23.20     | 208.93        | V                  | 1         |
| 20175   | 1732.5          | -20.96    | 44.76                 | 23.80     | 239.88        | V                  | 1         |
| 20393   | 1754.3          | -20.04    | 45.53                 | 25.49     | <b>354.00</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 1.4MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 19957   | 1710.7          | -23.14    | 41.17                 | 18.03     | 63.53    | H                  | 1         |
| 20175   | 1732.5          | -23.24    | 41.96                 | 18.72     | 74.47    | H                  | 1         |
| 20393   | 1754.3          | -23.54    | 42.79                 | 19.25     | 84.14    | H                  | 1         |
| 19957   | 1710.7          | -20.54    | 44.07                 | 23.53     | 225.42   | V                  | 1         |
| 20175   | 1732.5          | -20.65    | 44.76                 | 24.11     | 257.63   | V                  | 1         |
| 20393   | 1754.3          | -20.71    | 45.53                 | 24.82     | 303.39   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



Test Report No.: RF141006N0105-5

LTE BAND 4

CHANNEL BANDWIDTH: 3MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 19965   | 1711.5          | -23.47    | 41.22                 | 17.75     | 59.57         | H                  | 1         |
| 20175   | 1732.5          | -23.78    | 41.96                 | 18.18     | 65.77         | H                  | 1         |
| 20385   | 1753.5          | -23.69    | 42.64                 | 18.95     | 78.52         | H                  | 1         |
| 19965   | 1711.5          | -20.74    | 44.19                 | 23.45     | 221.31        | V                  | 1         |
| 20175   | 1732.5          | -20.69    | 44.76                 | 24.07     | 255.27        | V                  | 1         |
| 20385   | 1753.5          | -20.49    | 45.80                 | 25.31     | <b>339.63</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 3MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 19965   | 1711.5          | -22.28    | 41.22                 | 18.94     | 78.34    | H                  | 1         |
| 20175   | 1732.5          | -24.38    | 41.96                 | 17.58     | 57.28    | H                  | 1         |
| 20385   | 1753.5          | -22.52    | 42.64                 | 20.12     | 102.80   | H                  | 1         |
| 19965   | 1711.5          | -20.35    | 44.19                 | 23.84     | 242.10   | V                  | 1         |
| 20175   | 1732.5          | -20.41    | 44.76                 | 24.35     | 272.27   | V                  | 1         |
| 20385   | 1753.5          | -20.53    | 45.80                 | 25.27     | 336.51   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



Test Report No.: RF141006N0105-5

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 19975   | 1712.5          | -23.45    | 41.07                 | 17.62     | 57.81         | H                  | 1         |
| 20175   | 1732.5          | -23.87    | 41.96                 | 18.09     | 64.42         | H                  | 1         |
| 20375   | 1752.5          | -23.65    | 42.60                 | 18.95     | 78.52         | H                  | 1         |
| 19975   | 1712.5          | -20.14    | 44.27                 | 24.13     | 258.82        | V                  | 1         |
| 20175   | 1732.5          | -20.32    | 44.76                 | 24.44     | 277.97        | V                  | 1         |
| 20375   | 1752.5          | -20.55    | 45.83                 | 25.28     | <b>337.29</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 5MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 19975   | 1712.5          | -23.47    | 41.07                 | 17.60     | 57.54    | H                  | 1         |
| 20175   | 1732.5          | -23.22    | 41.96                 | 18.74     | 74.82    | H                  | 1         |
| 20375   | 1752.5          | -23.57    | 42.60                 | 19.03     | 79.98    | H                  | 1         |
| 19975   | 1712.5          | -20.14    | 44.27                 | 24.13     | 258.82   | V                  | 1         |
| 20175   | 1732.5          | -20.75    | 44.76                 | 24.01     | 251.77   | V                  | 1         |
| 20375   | 1752.5          | -20.65    | 45.83                 | 25.18     | 329.61   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



Test Report No.: RF141006N0105-5

LTE BAND 4

CHANNEL BANDWIDTH: 10MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 20000   | 1715.0          | -23.47    | 41.01                 | 17.54     | 56.75         | H                  | 1         |
| 20175   | 1732.5          | -23.25    | 41.96                 | 18.71     | 74.30         | H                  | 1         |
| 20350   | 1750.0          | -23.22    | 42.32                 | 19.10     | 81.28         | H                  | 1         |
| 20000   | 1715.0          | -20.14    | 44.36                 | 24.22     | 264.24        | V                  | 1         |
| 20175   | 1732.5          | -20.68    | 44.76                 | 24.08     | 255.86        | V                  | 1         |
| 20350   | 1750.0          | -20.32    | 45.25                 | 24.93     | <b>311.17</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 10MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 20000   | 1715.0          | -23.47    | 41.01                 | 17.54     | 56.75    | H                  | 1         |
| 20175   | 1732.5          | -23.38    | 41.96                 | 18.58     | 72.11    | H                  | 1         |
| 20350   | 1750.0          | -23.96    | 42.32                 | 18.36     | 68.55    | H                  | 1         |
| 20000   | 1715.0          | -20.47    | 44.36                 | 23.89     | 244.91   | V                  | 1         |
| 20175   | 1732.5          | -20.25    | 44.76                 | 24.51     | 282.49   | V                  | 1         |
| 20350   | 1750.0          | -20.87    | 45.25                 | 24.38     | 274.16   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



Test Report No.: RF141006N0105-5

LTE BAND 4

CHANNEL BANDWIDTH: 15MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 20025   | 1717.5          | -23.87    | 41.22                 | 17.35     | 54.33         | H                  | 1         |
| 20175   | 1732.5          | -23.54    | 41.96                 | 18.42     | 69.50         | H                  | 1         |
| 20325   | 1747.5          | -23.33    | 41.70                 | 18.37     | 68.71         | H                  | 1         |
| 20025   | 1717.5          | -20.38    | 44.51                 | 24.13     | 258.82        | V                  | 1         |
| 20175   | 1732.5          | -20.47    | 44.76                 | 24.29     | 268.53        | V                  | 1         |
| 20325   | 1747.5          | -20.19    | 44.57                 | 24.38     | <b>274.16</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 15MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 20025   | 1717.5          | -23.57    | 41.22                 | 17.65     | 58.21    | H                  | 1         |
| 20175   | 1732.5          | -23.22    | 41.96                 | 18.74     | 74.82    | H                  | 1         |
| 20325   | 1747.5          | -23.96    | 41.70                 | 17.74     | 59.43    | H                  | 1         |
| 20025   | 1717.5          | -20.65    | 44.51                 | 23.86     | 243.22   | V                  | 1         |
| 20175   | 1732.5          | -20.78    | 44.76                 | 23.98     | 250.03   | V                  | 1         |
| 20325   | 1747.5          | -20.68    | 44.57                 | 23.89     | 244.91   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)



Test Report No.: RF141006N0105-5

LTE BAND 4

CHANNEL BANDWIDTH: 20MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW)      | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 20050   | 1720.0          | -23.85    | 41.22                 | 17.37     | 54.58         | H                  | 1         |
| 20175   | 1732.5          | -23.70    | 41.96                 | 18.26     | 66.99         | H                  | 1         |
| 20300   | 1745.0          | -23.90    | 42.56                 | 18.66     | 73.45         | H                  | 1         |
| 20050   | 1720.0          | -20.48    | 44.59                 | 24.11     | 257.63        | V                  | 1         |
| 20175   | 1732.5          | -20.94    | 44.76                 | 23.82     | 240.99        | V                  | 1         |
| 20300   | 1745.0          | -20.16    | 45.20                 | 25.04     | <b>319.15</b> | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 20MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 20050   | 1720.0          | -23.44    | 41.22                 | 17.78     | 59.98    | H                  | 1         |
| 20175   | 1732.5          | -23.54    | 41.96                 | 18.42     | 69.50    | H                  | 1         |
| 20300   | 1745.0          | -23.95    | 42.56                 | 18.61     | 72.61    | H                  | 1         |
| 20050   | 1720.0          | -20.47    | 44.59                 | 24.12     | 258.23   | V                  | 1         |
| 20175   | 1732.5          | -20.15    | 44.76                 | 24.61     | 289.07   | V                  | 1         |
| 20300   | 1745.0          | -20.56    | 45.20                 | 24.64     | 291.07   | V                  | 1         |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)





Test Report No.: RF141006N0105-5

ERP

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23017   | 699.7           | -6.36     | 32.68                 | 24.17    | 261.22        | H                  | 3         |
| 23095   | 707.5           | -6.65     | 33.41                 | 24.61    | <b>289.07</b> | H                  | 3         |
| 23173   | 715.3           | -6.78     | 33.18                 | 24.25    | 266.07        | H                  | 3         |
| 23017   | 699.7           | -11.98    | 34.9                  | 20.77    | 119.40        | V                  | 3         |
| 23095   | 707.5           | -11.74    | 35.33                 | 21.44    | 139.32        | V                  | 3         |
| 23173   | 715.3           | -11.65    | 35.35                 | 21.55    | 142.89        | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 1.4MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23017   | 699.7           | -7.88     | 32.68                 | 22.65    | 184.08  | H                  | 3         |
| 23095   | 707.5           | -7.65     | 33.41                 | 23.61    | 229.61  | H                  | 3         |
| 23173   | 715.3           | -7.16     | 33.18                 | 23.87    | 243.78  | H                  | 3         |
| 23017   | 699.7           | -11.98    | 34.9                  | 20.77    | 119.40  | V                  | 3         |
| 23095   | 707.5           | -11.49    | 35.33                 | 21.69    | 147.57  | V                  | 3         |
| 23173   | 715.3           | -11.47    | 35.35                 | 21.73    | 148.94  | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.



Test Report No.: RF141006N0105-5

LTE BAND 12

CHANNEL BANDWIDTH: 3MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23025   | 700.5           | -6.85     | 33.15                 | 24.15    | 260.02        | H                  | 3         |
| 23095   | 707.5           | -6.68     | 33.41                 | 24.58    | 287.08        | H                  | 3         |
| 23165   | 714.5           | -6.26     | 33.44                 | 25.03    | <b>318.42</b> | H                  | 3         |
| 23025   | 700.5           | -11.58    | 35.46                 | 21.73    | 148.94        | V                  | 3         |
| 23095   | 707.5           | -11.98    | 35.33                 | 21.20    | 131.83        | V                  | 3         |
| 23165   | 714.5           | -11.75    | 35.99                 | 22.09    | 161.81        | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 3MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23025   | 700.5           | -7.44     | 33.15                 | 23.56    | 226.99  | H                  | 3         |
| 23095   | 707.5           | -7.66     | 33.41                 | 23.60    | 229.09  | H                  | 3         |
| 23165   | 714.5           | -7.65     | 33.44                 | 23.64    | 231.21  | H                  | 3         |
| 23025   | 700.5           | -11.87    | 35.46                 | 21.44    | 139.32  | V                  | 3         |
| 23095   | 707.5           | -11.48    | 35.33                 | 21.70    | 147.91  | V                  | 3         |
| 23165   | 714.5           | -11.95    | 35.99                 | 21.89    | 154.53  | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.



Test Report No.: RF141006N0105-5

LTE BAND 12

CHANNEL BANDWIDTH: 5MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23035   | 701.5           | -6.74     | 33.41                 | 24.52    | 283.14        | H                  | 3         |
| 23095   | 707.5           | -6.49     | 33.41                 | 24.77    | <b>299.92</b> | H                  | 3         |
| 23155   | 713.5           | -6.98     | 33.36                 | 24.23    | 264.85        | H                  | 3         |
| 23035   | 701.5           | -11.87    | 35.31                 | 21.29    | 134.59        | V                  | 3         |
| 23095   | 707.5           | -11.46    | 35.33                 | 21.72    | 148.59        | V                  | 3         |
| 23155   | 713.5           | -11.65    | 35.84                 | 22.04    | 159.96        | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 5MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23035   | 701.5           | -7.89     | 33.41                 | 23.37    | 217.27  | H                  | 3         |
| 23095   | 707.5           | -7.26     | 33.41                 | 24.00    | 251.19  | H                  | 3         |
| 23155   | 713.5           | -7.65     | 33.36                 | 23.56    | 226.99  | H                  | 3         |
| 23035   | 701.5           | -11.85    | 35.31                 | 21.31    | 135.21  | V                  | 3         |
| 23095   | 707.5           | -11.47    | 35.33                 | 21.71    | 148.25  | V                  | 3         |
| 23155   | 713.5           | -11.98    | 35.84                 | 21.71    | 148.25  | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.



Test Report No.: RF141006N0105-5

LTE BAND 12

CHANNEL BANDWIDTH: 10MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23060   | 704.0           | -6.98     | 32.9                  | 23.77    | 238.23        | H                  | 3         |
| 23095   | 707.5           | -6.65     | 33.41                 | 24.61    | <b>289.00</b> | H                  | 3         |
| 23130   | 711.0           | -6.75     | 33.33                 | 24.43    | 277.33        | H                  | 3         |
| 23060   | 704.0           | -11.98    | 35.71                 | 21.58    | 143.88        | V                  | 3         |
| 23095   | 707.5           | -11.52    | 35.33                 | 21.66    | 146.55        | V                  | 3         |
| 23130   | 711.0           | -11.49    | 36.15                 | 22.51    | 178.24        | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 10MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23060   | 704.0           | -7.65     | 32.9                  | 23.10    | 204.17  | H                  | 3         |
| 23095   | 707.5           | -7.01     | 33.41                 | 24.25    | 265.95  | H                  | 3         |
| 23130   | 711.0           | -7.48     | 33.33                 | 23.70    | 234.42  | H                  | 3         |
| 23060   | 704.0           | -11.98    | 35.71                 | 21.58    | 143.88  | V                  | 3         |
| 23095   | 707.5           | -11.76    | 35.33                 | 21.42    | 138.68  | V                  | 3         |
| 23130   | 711.0           | -11.59    | 36.15                 | 22.41    | 174.18  | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.



Test Report No.: RF141006N0105-5

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23755   | 706.5           | -10.56    | 33.14                 | 20.43    | 110.41        | H                  | 3         |
| 23790   | 710.0           | -10.48    | 33.16                 | 20.53    | <b>112.98</b> | H                  | 3         |
| 23825   | 713.5           | -10.75    | 33.12                 | 20.22    | 105.20        | H                  | 3         |
| 23755   | 706.5           | -16.66    | 35.04                 | 16.23    | 41.98         | V                  | 3         |
| 23790   | 710.0           | -16.74    | 35.12                 | 16.23    | 41.98         | V                  | 3         |
| 23825   | 713.5           | -16.58    | 35.14                 | 16.41    | 43.75         | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 5MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23755   | 706.5           | -10.76    | 33.14                 | 20.23    | 105.44  | H                  | 3         |
| 23790   | 710.0           | -10.66    | 33.16                 | 20.35    | 108.39  | H                  | 3         |
| 23825   | 713.5           | -10.83    | 33.12                 | 20.14    | 103.28  | H                  | 3         |
| 23755   | 706.5           | -16.78    | 35.04                 | 16.11    | 40.83   | V                  | 3         |
| 23790   | 710.0           | -16.96    | 35.12                 | 16.01    | 39.90   | V                  | 3         |
| 23825   | 713.5           | -16.85    | 35.14                 | 16.14    | 41.11   | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.



Test Report No.: RF141006N0105-5

LTE BAND 17

CHANNEL BANDWIDTH: 10MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 23780   | 709.0           | -10.47    | 33.04                 | 20.42    | 110.15        | H                  | 3         |
| 23790   | 710.0           | -10.58    | 33.16                 | 20.43    | <b>110.41</b> | H                  | 3         |
| 23800   | 711.0           | -10.95    | 33.37                 | 20.27    | 106.41        | H                  | 3         |
| 23780   | 709.0           | -16.65    | 35.17                 | 16.37    | 43.35         | V                  | 3         |
| 23790   | 710.0           | -16.40    | 35.12                 | 16.57    | 45.39         | V                  | 3         |
| 23800   | 711.0           | -16.74    | 35.31                 | 16.42    | 43.85         | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

CHANNEL BANDWIDTH: 10MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 23780   | 709.0           | -10.47    | 33.04                 | 20.42    | 110.15  | H                  | 3         |
| 23790   | 710.0           | -10.97    | 33.16                 | 20.04    | 100.93  | H                  | 3         |
| 23800   | 711.0           | -10.98    | 33.37                 | 20.24    | 105.68  | H                  | 3         |
| 23780   | 709.0           | -16.85    | 35.17                 | 16.17    | 41.40   | V                  | 3         |
| 23790   | 710.0           | -16.67    | 35.12                 | 16.30    | 42.66   | V                  | 3         |
| 23800   | 711.0           | -16.59    | 35.31                 | 16.57    | 45.39   | V                  | 3         |

NOTE: ERP (dBm) = LVL (dBm) + Correction Factor (dB)-2.15dB.

## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

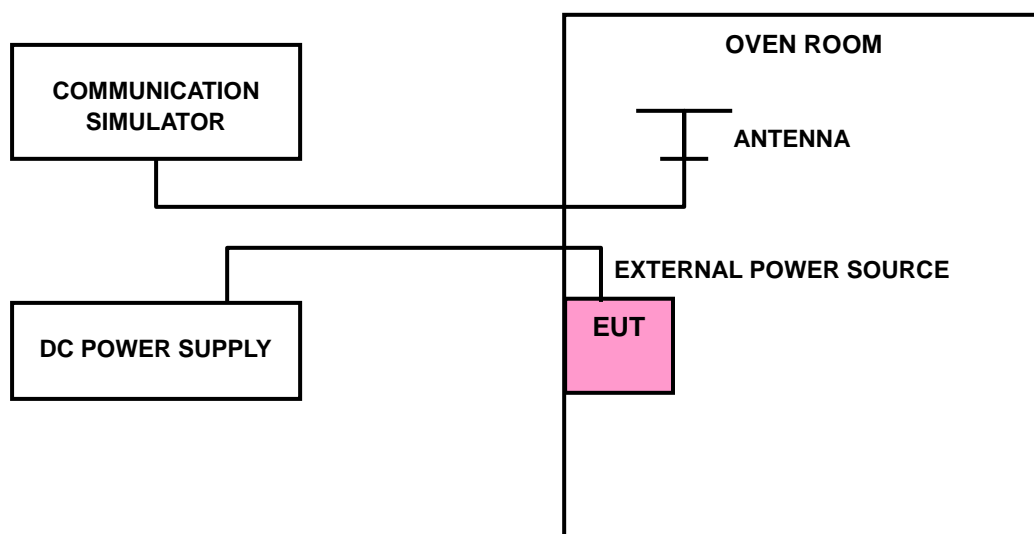

#### 4.2.4 TEST RESULTS

##### LTE BAND 4

| AFC FREQUENCY ERROR vs. VOLTAGE |                       |        |        |        |       |        |             |
|---------------------------------|-----------------------|--------|--------|--------|-------|--------|-------------|
| VOLTAGE (Volts)                 | FREQUENCY ERROR (ppm) |        |        |        |       |        | LIMIT (ppm) |
|                                 | 1.4MHz                | 3MHz   | 5MHz   | 10MHz  | 15MHz | 20MHz  |             |
| 3.8                             | 0.010                 | -0.009 | -0.006 | -0.005 | 0.009 | -0.007 | 2.5         |
| 3.5                             | 0.008                 | -0.005 | -0.005 | -0.003 | 0.008 | -0.006 | 2.5         |
| 4.35                            | 0.008                 | -0.004 | -0.002 | -0.005 | 0.008 | -0.005 | 2.5         |

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.

| AFC FREQUENCY ERROR vs. TEMPERATURE |                       |       |       |        |        |        |             |
|-------------------------------------|-----------------------|-------|-------|--------|--------|--------|-------------|
| TEMP. (°C)                          | FREQUENCY ERROR (ppm) |       |       |        |        |        | LIMIT (ppm) |
|                                     | 1.4MHz                | 3MHz  | 5MHz  | 10MHz  | 15MHz  | 20MHz  |             |
| -30                                 | 0.010                 | 0.012 | 0.013 | 0.009  | 0.011  | 0.010  | 2.5         |
| -20                                 | 0.008                 | 0.009 | 0.012 | 0.008  | 0.009  | 0.009  | 2.5         |
| -10                                 | 0.007                 | 0.008 | 0.009 | 0.007  | 0.007  | 0.007  | 2.5         |
| 0                                   | 0.006                 | 0.008 | 0.009 | 0.005  | 0.005  | 0.006  | 2.5         |
| 10                                  | 0.005                 | 0.006 | 0.008 | -0.002 | 0.005  | 0.005  | 2.5         |
| 20                                  | 0.005                 | 0.005 | 0.007 | -0.005 | 0.005  | 0.004  | 2.5         |
| 30                                  | 0.005                 | 0.003 | 0.004 | -0.004 | 0.004  | -0.003 | 2.5         |
| 40                                  | 0.006                 | 0.005 | 0.006 | -0.005 | -0.003 | -0.004 | 2.5         |
| 50                                  | 0.007                 | 0.007 | 0.008 | -0.006 | -0.004 | -0.005 | 2.5         |
| 60                                  | 0.008                 | 0.008 | 0.009 | -0.008 | -0.005 | -0.007 | 2.5         |





Test Report No.: RF141006N0105-5

**LTE BAND 12**

| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) |       |       |        | LIMIT (ppm) |
|-----------------|-----------------------|-------|-------|--------|-------------|
|                 | 1.4MHz                | 3MHz  | 5MHz  | 10MHz  |             |
| 3.8             | 0.018                 | 0.012 | 0.008 | -0.014 | 2.5         |
| 3.5             | 0.021                 | 0.013 | 0.006 | -0.015 | 2.5         |
| 4.35            | 0.019                 | 0.011 | 0.007 | -0.017 | 2.5         |

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.

| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) |        |        |        | LIMIT (ppm) |
|-----------------|-----------------------|--------|--------|--------|-------------|
|                 | 1.4MHz                | 3MHz   | 5MHz   | 10MHz  |             |
| -30             | 0.027                 | 0.023  | 0.015  | -0.023 | 2.5         |
| -20             | 0.026                 | 0.020  | 0.012  | -0.020 | 2.5         |
| -10             | 0.023                 | 0.017  | 0.010  | -0.019 | 2.5         |
| 0               | 0.020                 | 0.015  | 0.009  | -0.015 | 2.5         |
| 10              | 0.019                 | 0.012  | 0.009  | -0.013 | 2.5         |
| 20              | 0.018                 | 0.009  | 0.009  | -0.012 | 2.5         |
| 30              | 0.014                 | 0.009  | 0.008  | -0.011 | 2.5         |
| 40              | 0.012                 | -0.008 | -0.005 | -0.012 | 2.5         |
| 50              | -0.009                | -0.012 | -0.010 | -0.014 | 2.5         |
| 60              | -0.012                | -0.015 | -0.012 | -0.012 | 2.5         |



Test Report No.: RF141006N0105-5

### LTE BAND 17

| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) |       | LIMIT (ppm) |
|-----------------|-----------------------|-------|-------------|
|                 | 5MHz                  | 10MHz |             |
| 3.8             | 0.021                 | 0.022 | 2.5         |
| 3.5             | 0.005                 | 0.015 | 2.5         |
| 4.35            | 0.003                 | 0.019 | 2.5         |

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.


| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) |       | LIMIT (ppm) |
|-----------------|-----------------------|-------|-------------|
|                 | 5MHz                  | 10MHz |             |
| -30             | 0.026                 | 0.029 | 2.5         |
| -20             | 0.024                 | 0.026 | 2.5         |
| -10             | 0.023                 | 0.023 | 2.5         |
| 0               | 0.019                 | 0.022 | 2.5         |
| 10              | 0.018                 | 0.022 | 2.5         |
| 20              | 0.015                 | 0.021 | 2.5         |
| 30              | 0.009                 | 0.019 | 2.5         |
| 40              | 0.005                 | 0.018 | 2.5         |
| 50              | 0.010                 | 0.013 | 2.5         |
| 60              | 0.014                 | 0.008 | 2.5         |

### 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 4.3.2 TEST SETUP

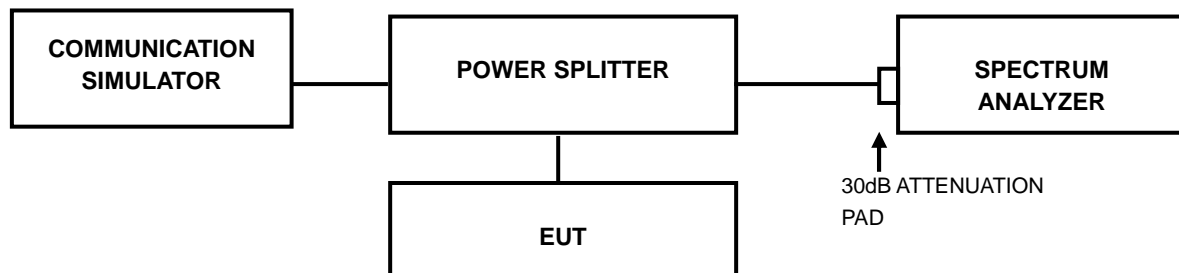

#### 4.3.3 TEST PROCEDURES


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



### 4.3.4 TEST RESULTS

#### LTE BAND 4


| CHANNEL BANDWIDTH: 1.4MHz |                 |                              |       | CHANNEL BANDWIDTH: 3MHz |                 |                              |       |
|---------------------------|-----------------|------------------------------|-------|-------------------------|-----------------|------------------------------|-------|
| CHANNEL                   | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       | CHANNEL                 | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       |
|                           |                 | QPSK                         | 16QAM |                         |                 | QPSK                         | 16QAM |
| 19957                     | 1710.7          | 1.09                         | 1.09  | 19965                   | 1711.5          | 2.68                         | 2.68  |
| 20175                     | 1732.5          | 1.08                         | 1.09  | 20175                   | 1732.5          | 2.68                         | 2.68  |
| 20393                     | 1754.3          | 1.08                         | 1.09  | 20385                   | 1753.5          | 2.69                         | 2.68  |

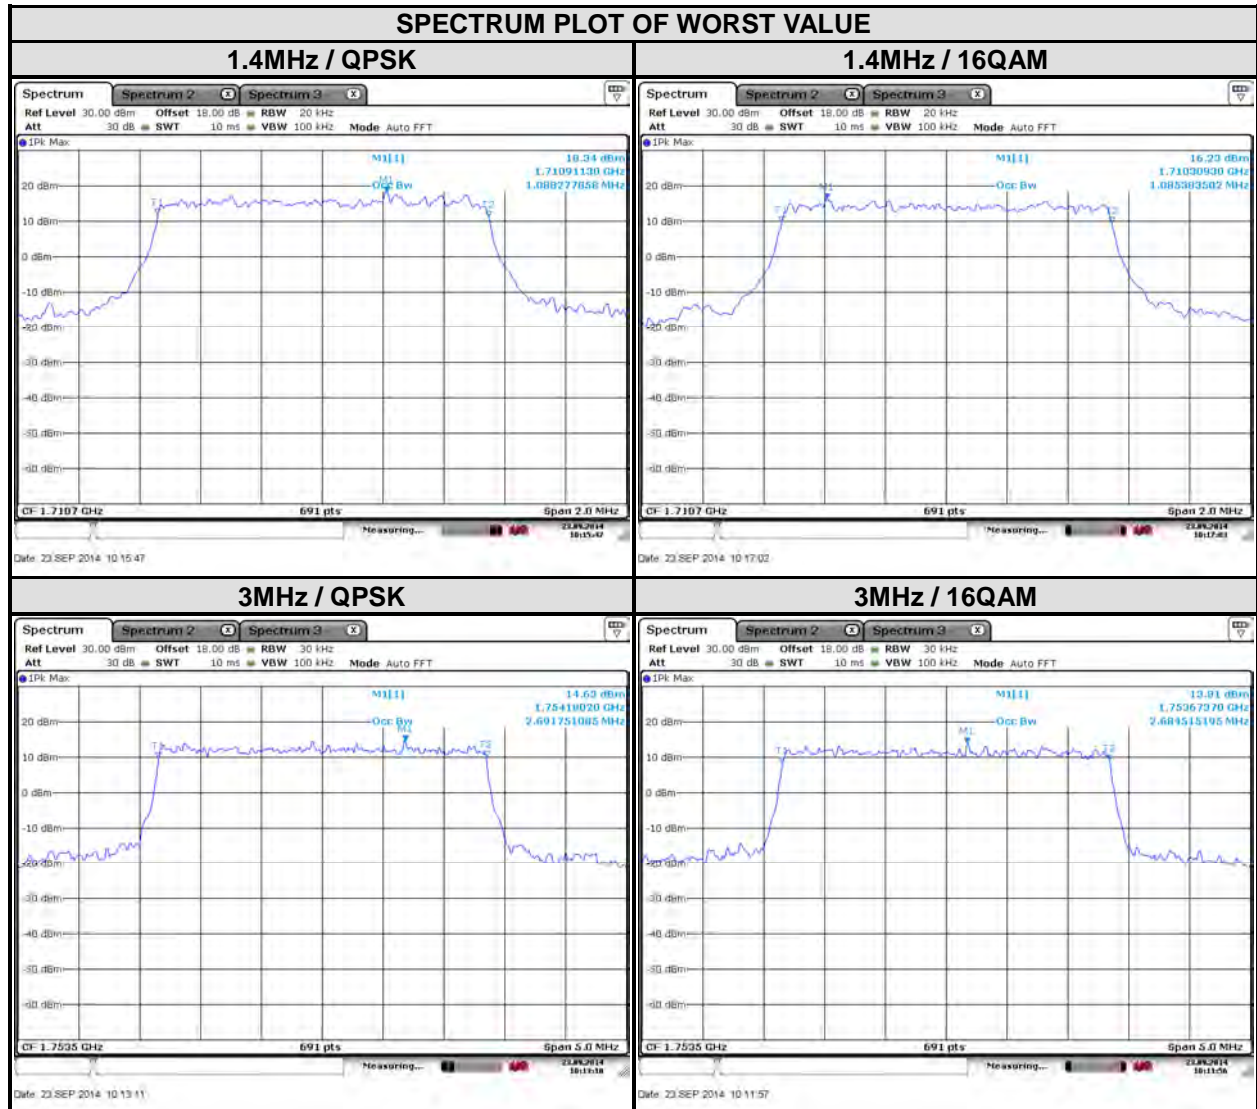



LTE BAND 4


| CHANNEL BANDWIDTH: 5MHz |                 |                              |       | CHANNEL BANDWIDTH: 10MHz |                 |                              |       |
|-------------------------|-----------------|------------------------------|-------|--------------------------|-----------------|------------------------------|-------|
| CHANNEL                 | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       | CHANNEL                  | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       |
|                         |                 | QPSK                         | 16QAM |                          |                 | QPSK                         | 16QAM |
| 19975                   | 1712.5          | 4.49                         | 4.47  | 20000                    | 1715            | 9.70                         | 8.94  |
| 20175                   | 1732.5          | 4.49                         | 4.47  | 20175                    | 1732.5          | 8.94                         | 8.94  |
| 20375                   | 1752.5          | 4.49                         | 4.47  | 20350                    | 1750            | 8.94                         | 8.94  |

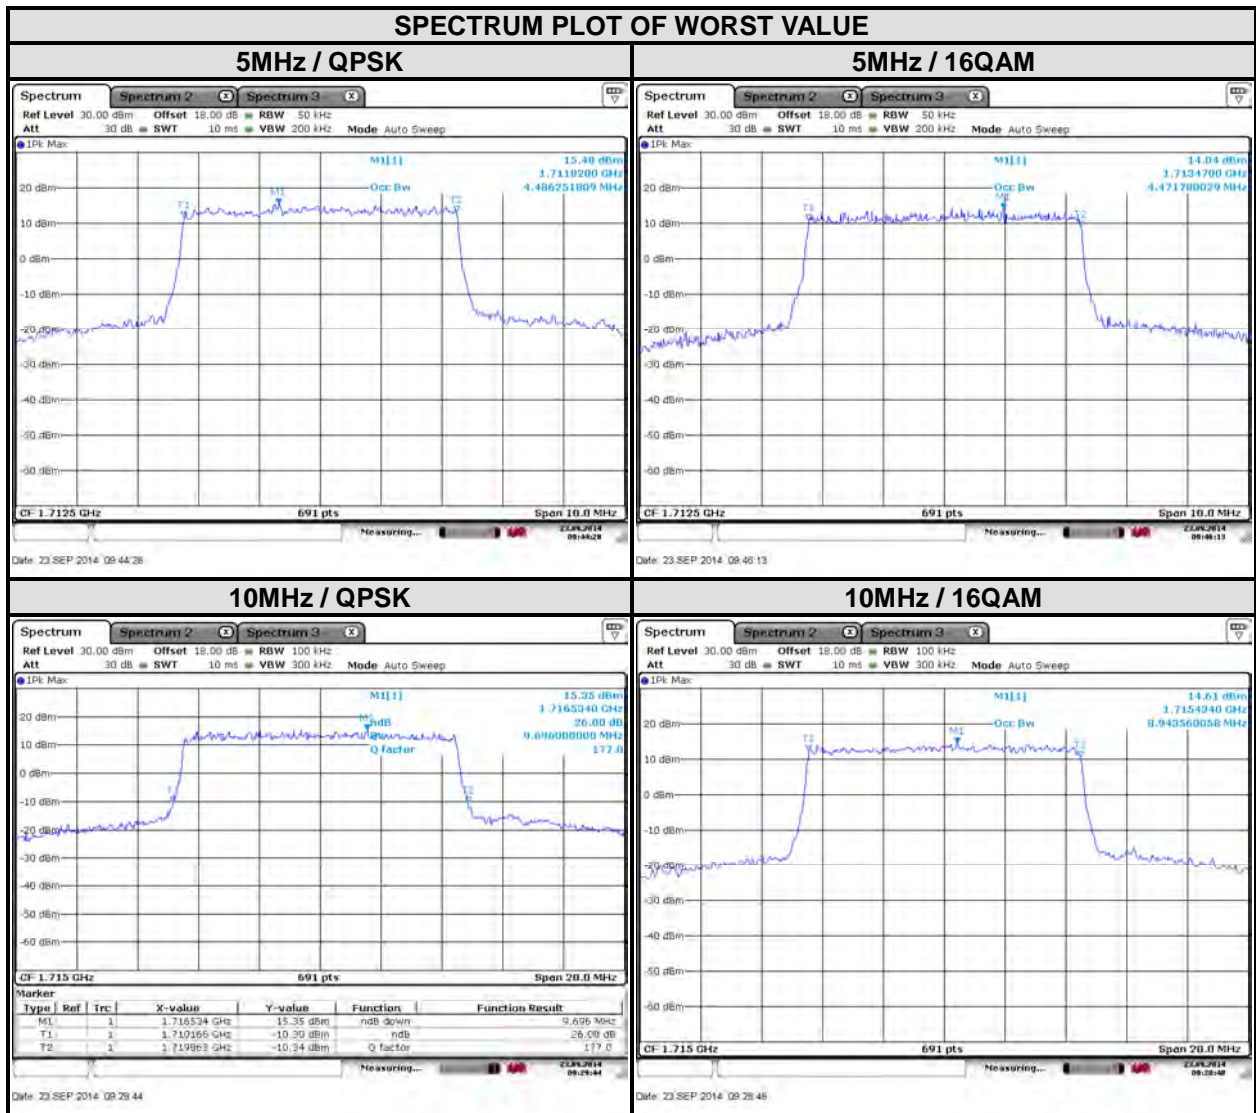



LTE BAND 4

| CHANNEL BANDWIDTH: 15MHz |                 |                              |       | CHANNEL BANDWIDTH: 20MHz |                 |                              |       |
|--------------------------|-----------------|------------------------------|-------|--------------------------|-----------------|------------------------------|-------|
| CHANNEL                  | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |       | CHANNEL                  | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |       |
|                          |                 | QPSK                         | 16QAM |                          |                 | QPSK                         | 16QAM |
| 20025                    | 1717.5          | 13.42                        | 13.37 | 20050                    | 1720            | 17.83                        | 17.77 |
| 20175                    | 1732.5          | 13.42                        | 13.42 | 20175                    | 1732.5          | 17.89                        | 17.83 |
| 20325                    | 1747.5          | 13.37                        | 13.37 | 20300                    | 1745            | 17.83                        | 17.83 |

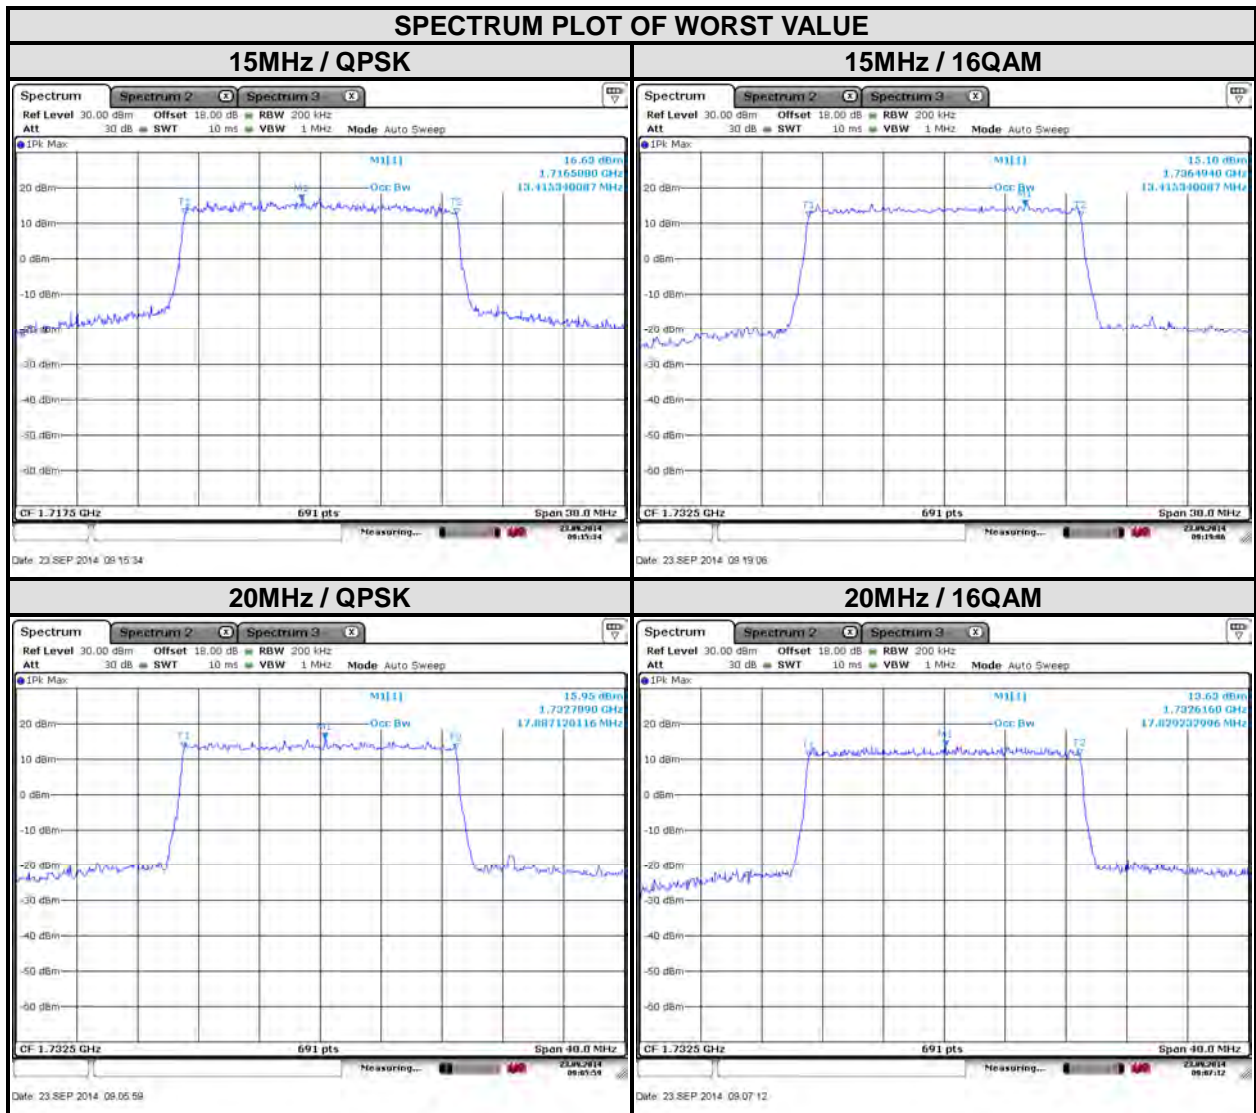




Test Report No.: RF141006N0105-5

LTE BAND 12

| CHANNEL BANDWIDTH: 1.4MHz |                 |                              |       | CHANNEL BANDWIDTH: 3MHz |                 |                              |       |
|---------------------------|-----------------|------------------------------|-------|-------------------------|-----------------|------------------------------|-------|
| CHANNEL                   | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |       | CHANNEL                 | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |       |
|                           |                 | QPSK                         | 16QAM |                         |                 | QPSK                         | 16QAM |
| 23017                     | 699.7           | 1.09                         | 1.08  | 23025                   | 700.5           | 2.69                         | 2.69  |
| 23095                     | 707.5           | 1.09                         | 1.09  | 23095                   | 707.5           | 2.68                         | 2.68  |
| 23173                     | 715.3           | 1.09                         | 1.09  | 23165                   | 714.5           | 2.68                         | 2.68  |

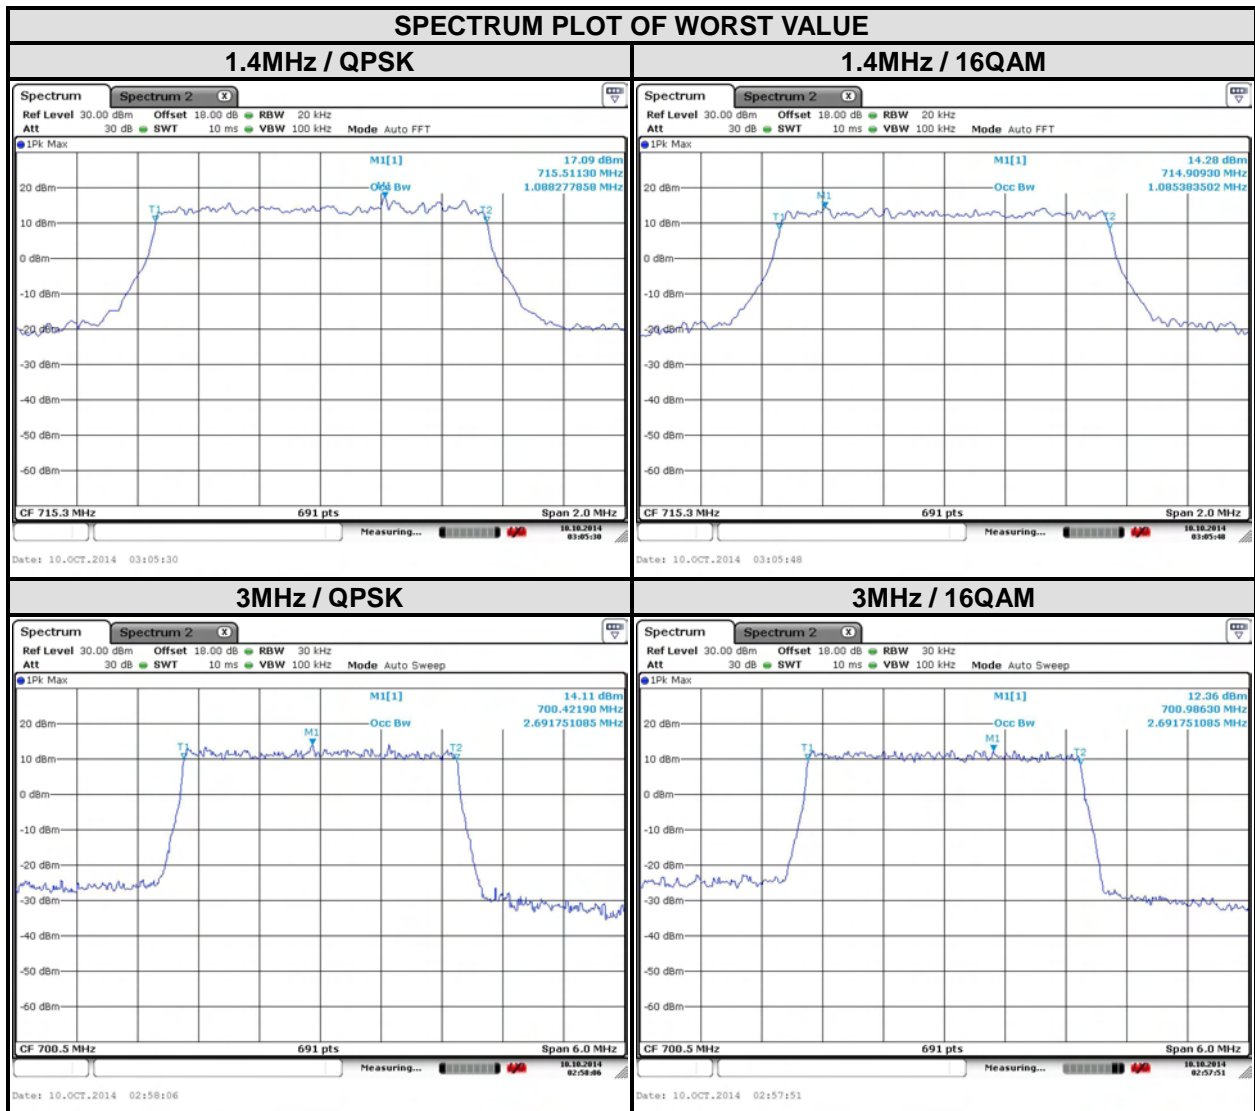

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



Test Report No.: RF141006N0105-5

LTE BAND 12

| CHANNEL BANDWIDTH: 5MHz |                 |                              |       | CHANNEL BANDWIDTH: 10MHz |                 |                              |       |
|-------------------------|-----------------|------------------------------|-------|--------------------------|-----------------|------------------------------|-------|
| CHANNEL                 | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       | CHANNEL                  | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       |
|                         |                 | QPSK                         | 16QAM |                          |                 | QPSK                         | 16QAM |
| 23035                   | 701.5           | 4.49                         | 4.47  | 23060                    | 704             | 8.94                         | 8.97  |
| 23095                   | 707.5           | 4.47                         | 4.46  | 23095                    | 707.5           | 8.91                         | 8.94  |
| 23155                   | 713.5           | 4.49                         | 4.47  | 23130                    | 711             | 8.94                         | 8.94  |

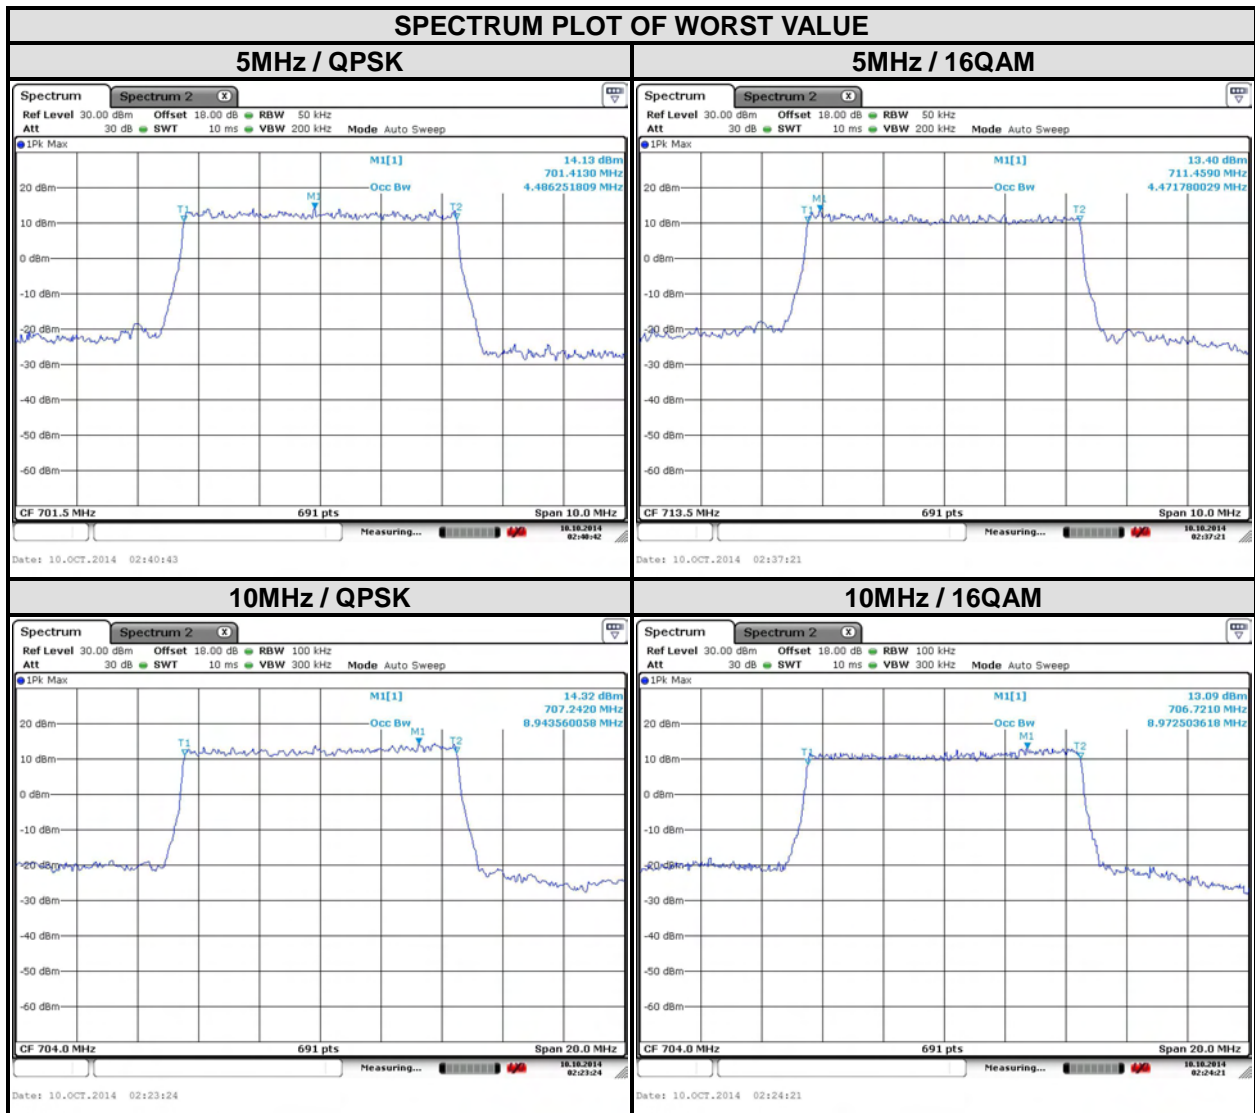

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)






Test Report No.: RF141006N0105-5

LTE BAND 17

| CHANNEL BANDWIDTH: 5MHz |                 |                              |       | CHANNEL BANDWIDTH: 10MHz |                 |                              |       |
|-------------------------|-----------------|------------------------------|-------|--------------------------|-----------------|------------------------------|-------|
| CHANNEL                 | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       | CHANNEL                  | Frequency (MHz) | 99% OCCUPIED Bandwidth (MHz) |       |
|                         |                 | QPSK                         | 16QAM |                          |                 | QPSK                         | 16QAM |
| 23755                   | 706.5           | 4.52                         | 4.50  | 23780                    | 709             | 8.89                         | 8.89  |
| 23790                   | 710             | 4.50                         | 4.49  | 23790                    | 710             | 8.94                         | 8.91  |
| 23825                   | 713.5           | 4.52                         | 4.52  | 23800                    | 711             | 8.91                         | 8.94  |

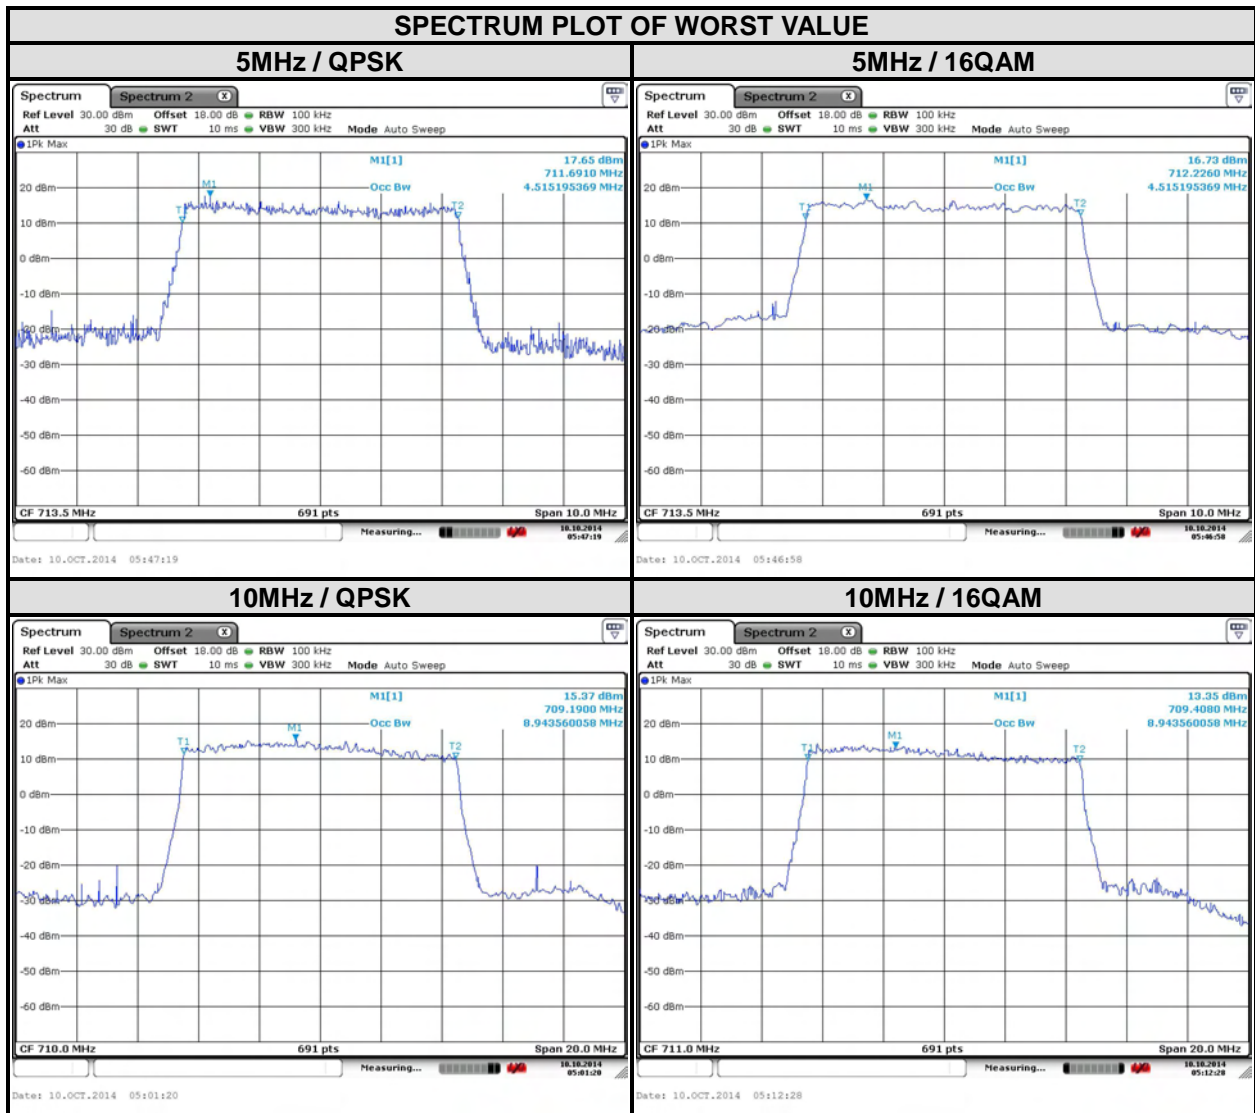

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

## 4.4 PEAK TO AVERAGE RATIO

### 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.4.2 TEST SETUP

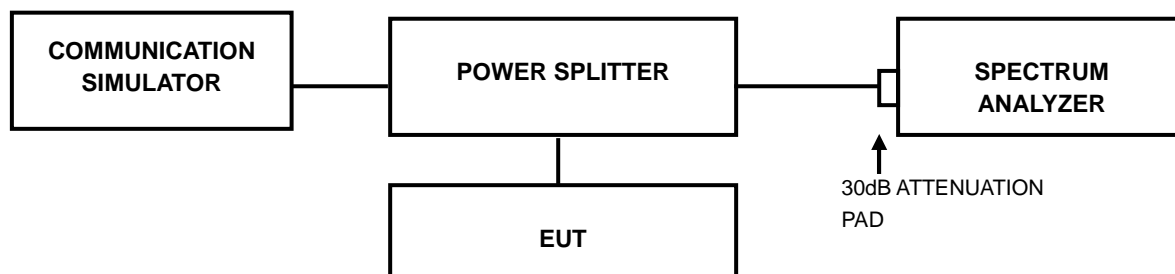

### 4.4.3 TEST PROCEDURES


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



### 4.4.4 TEST RESULTS

#### LTE BAND 4

| CHANNEL BANDWIDTH: 1.4MHz |                 |                            |       |
|---------------------------|-----------------|----------------------------|-------|
| CHANNEL                   | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |       |
|                           |                 | QPSK                       | 16QAM |
| 19957                     | 1710.7          | 3.39                       | 4.93  |
| 20175                     | 1732.5          | 4.46                       | 5.30  |
| 20393                     | 1754.3          | 3.57                       | 4.09  |

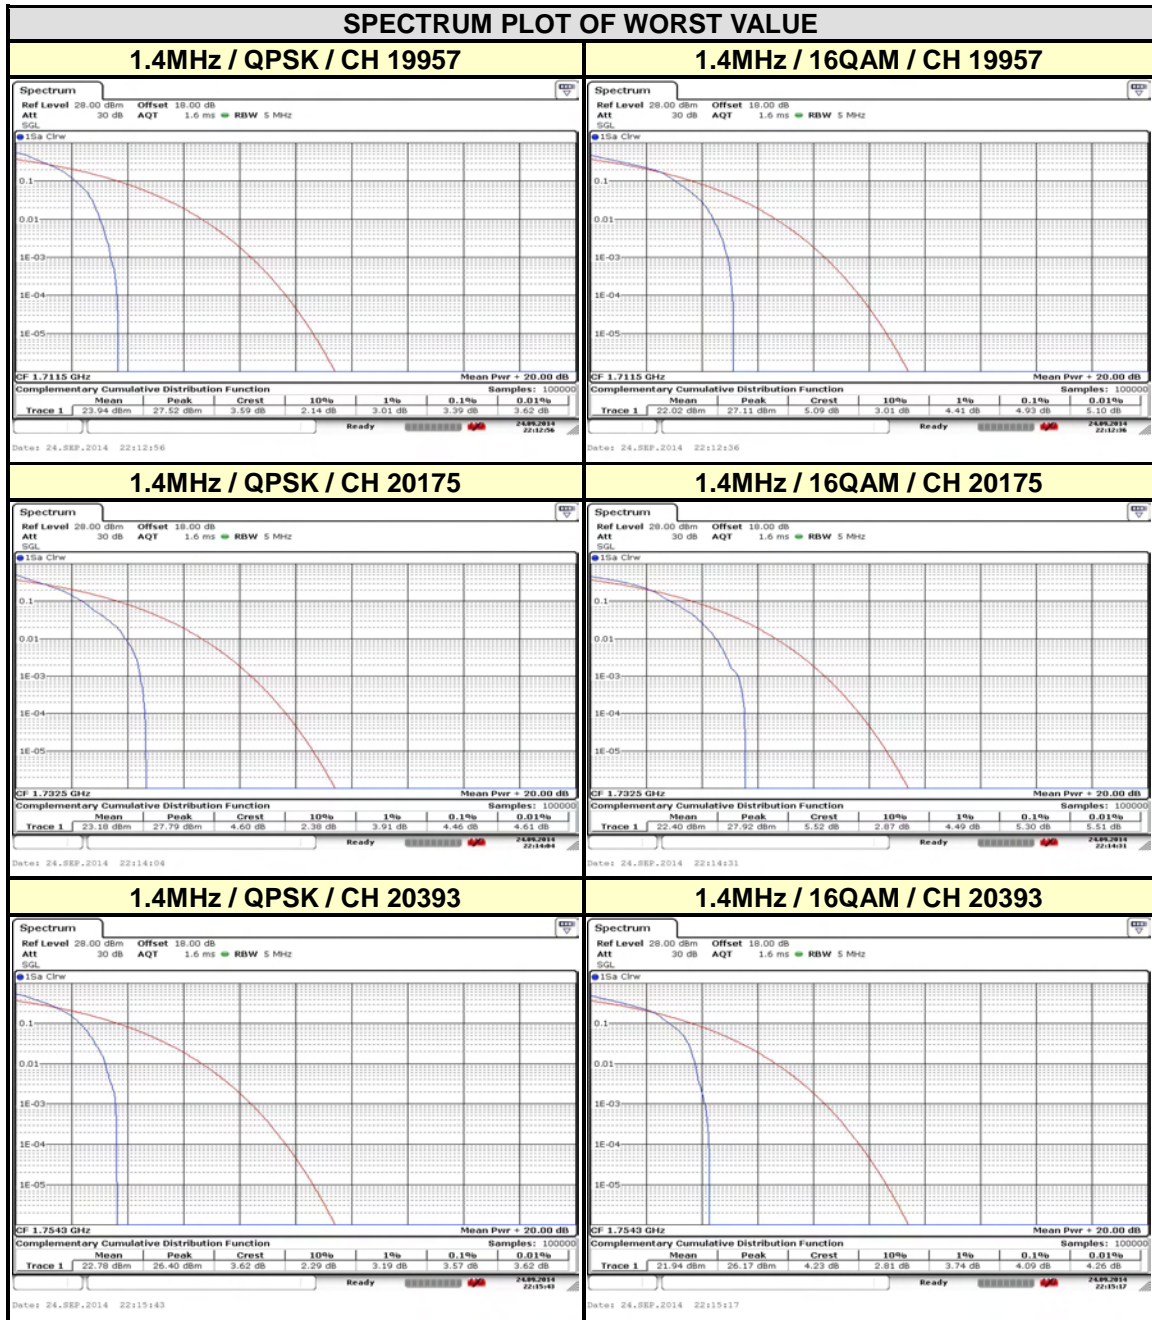




Test Report No.: RF141006N0105-5

LTE BAND 4

| CHANNEL BANDWIDTH: 3MHZ |                 |                            |       |
|-------------------------|-----------------|----------------------------|-------|
| CHANNEL                 | FREQUENCY (MHZ) | PEAK TO AVERAGE RATIO (DB) |       |
|                         |                 | QPSK                       | 16QAM |
| 19965                   | 1711.5          | 4.17                       | 4.55  |
| 20175                   | 1732.5          | 4.78                       | 5.10  |
| 20385                   | 1753.5          | 3.57                       | 4.38  |

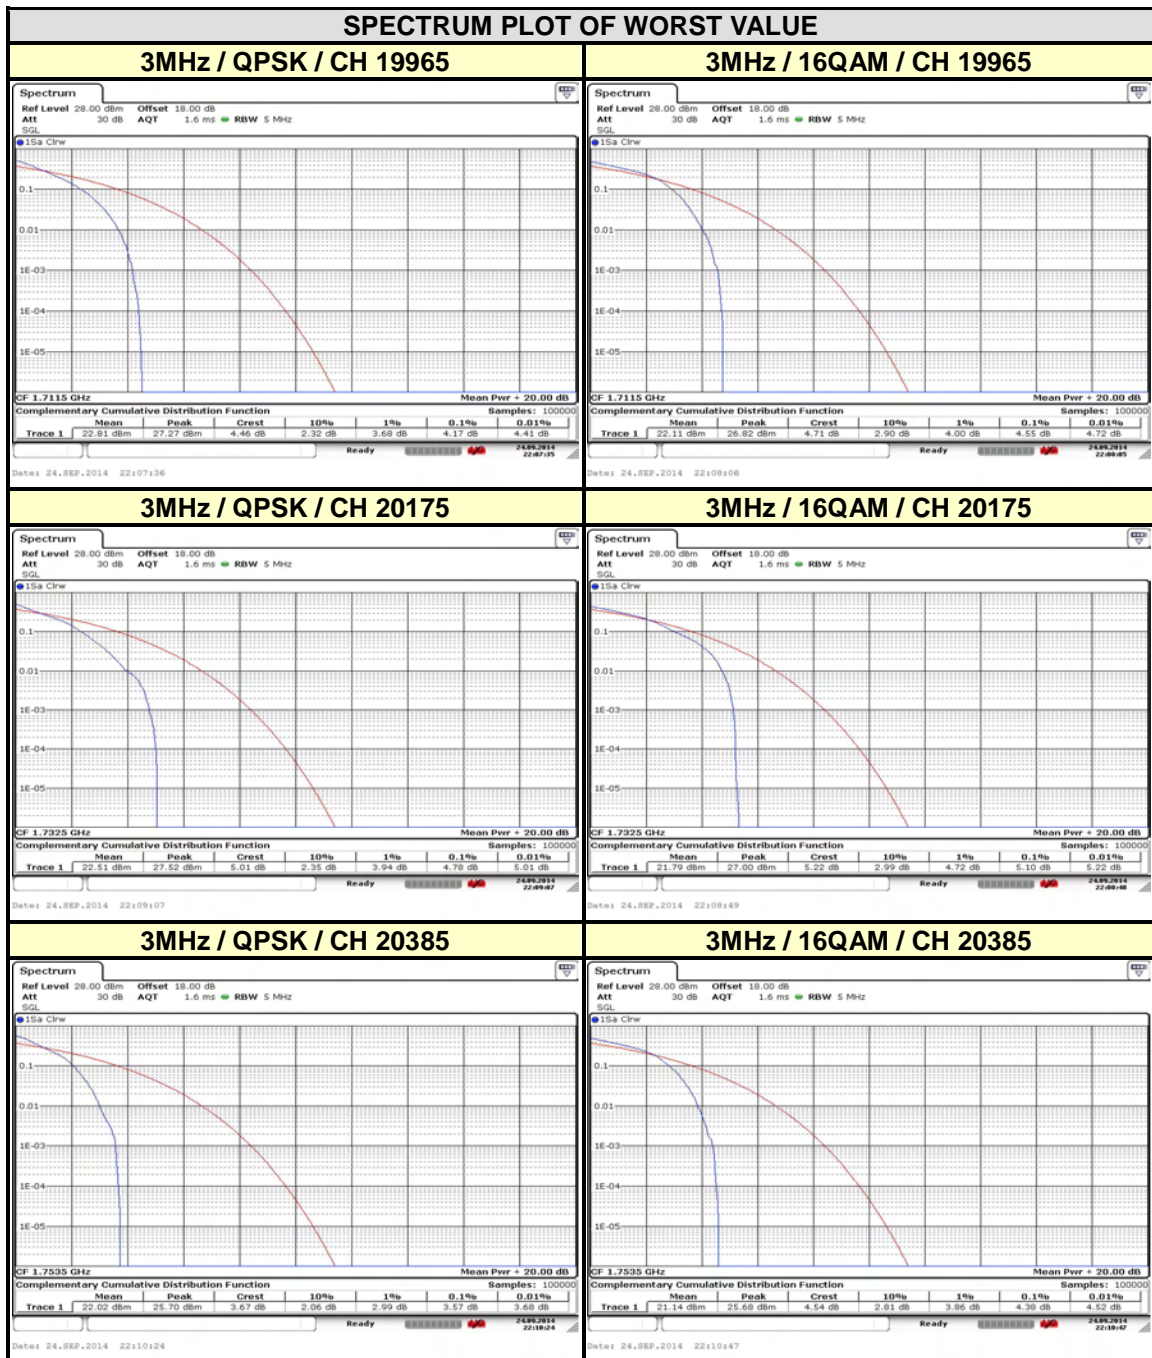




Test Report No.: RF141006N0105-5

LTE BAND 4

| CHANNEL BANDWIDTH: 5MHZ |                 |                            |       |
|-------------------------|-----------------|----------------------------|-------|
| CHANNEL                 | FREQUENCY (MHZ) | PEAK TO AVERAGE RATIO (DB) |       |
|                         |                 | QPSK                       | 16QAM |
| 19975                   | 1712.5          | 3.42                       | 4.43  |
| 20175                   | 1732.5          | 4.29                       | 5.10  |
| 20375                   | 1752.5          | 3.59                       | 4.43  |

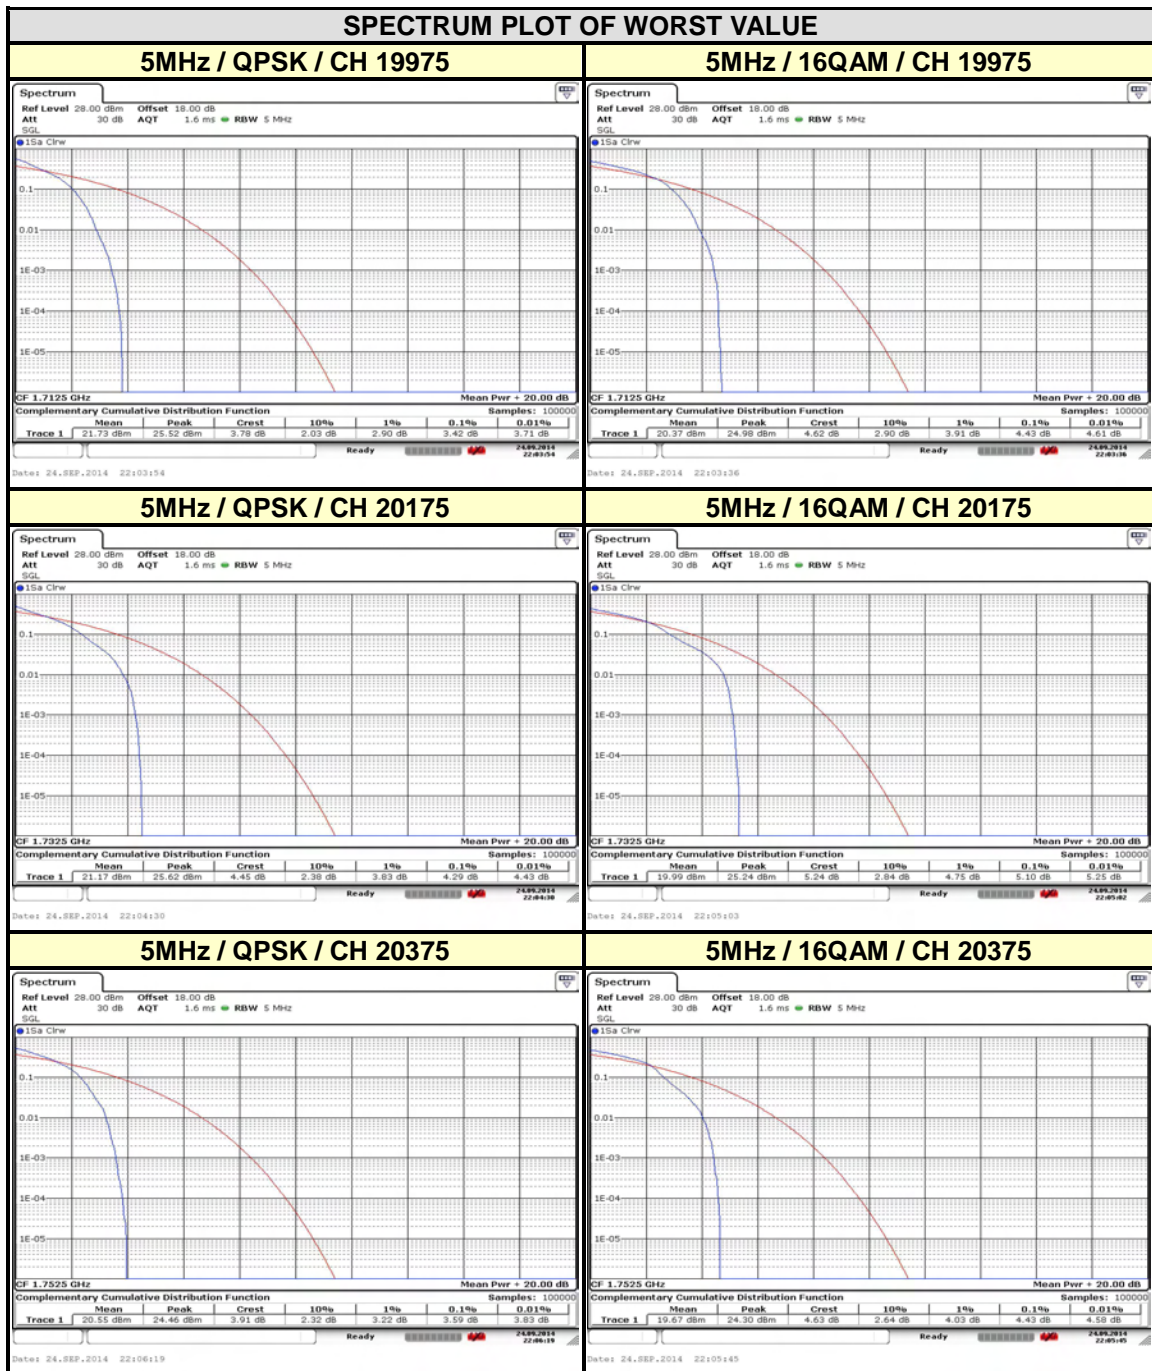

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



Test Report No.: RF141006N0105-5

LTE BAND 4

| CHANNEL BANDWIDTH: 10MHZ |                 |                            |       |
|--------------------------|-----------------|----------------------------|-------|
| CHANNEL                  | FREQUENCY (MHZ) | PEAK TO AVERAGE RATIO (DB) |       |
|                          |                 | QPSK                       | 16QAM |
| 20000                    | 1715            | 3.51                       | 4.23  |
| 20175                    | 1732.5          | 4.38                       | 4.84  |
| 20350                    | 1750            | 3.80                       | 4.12  |

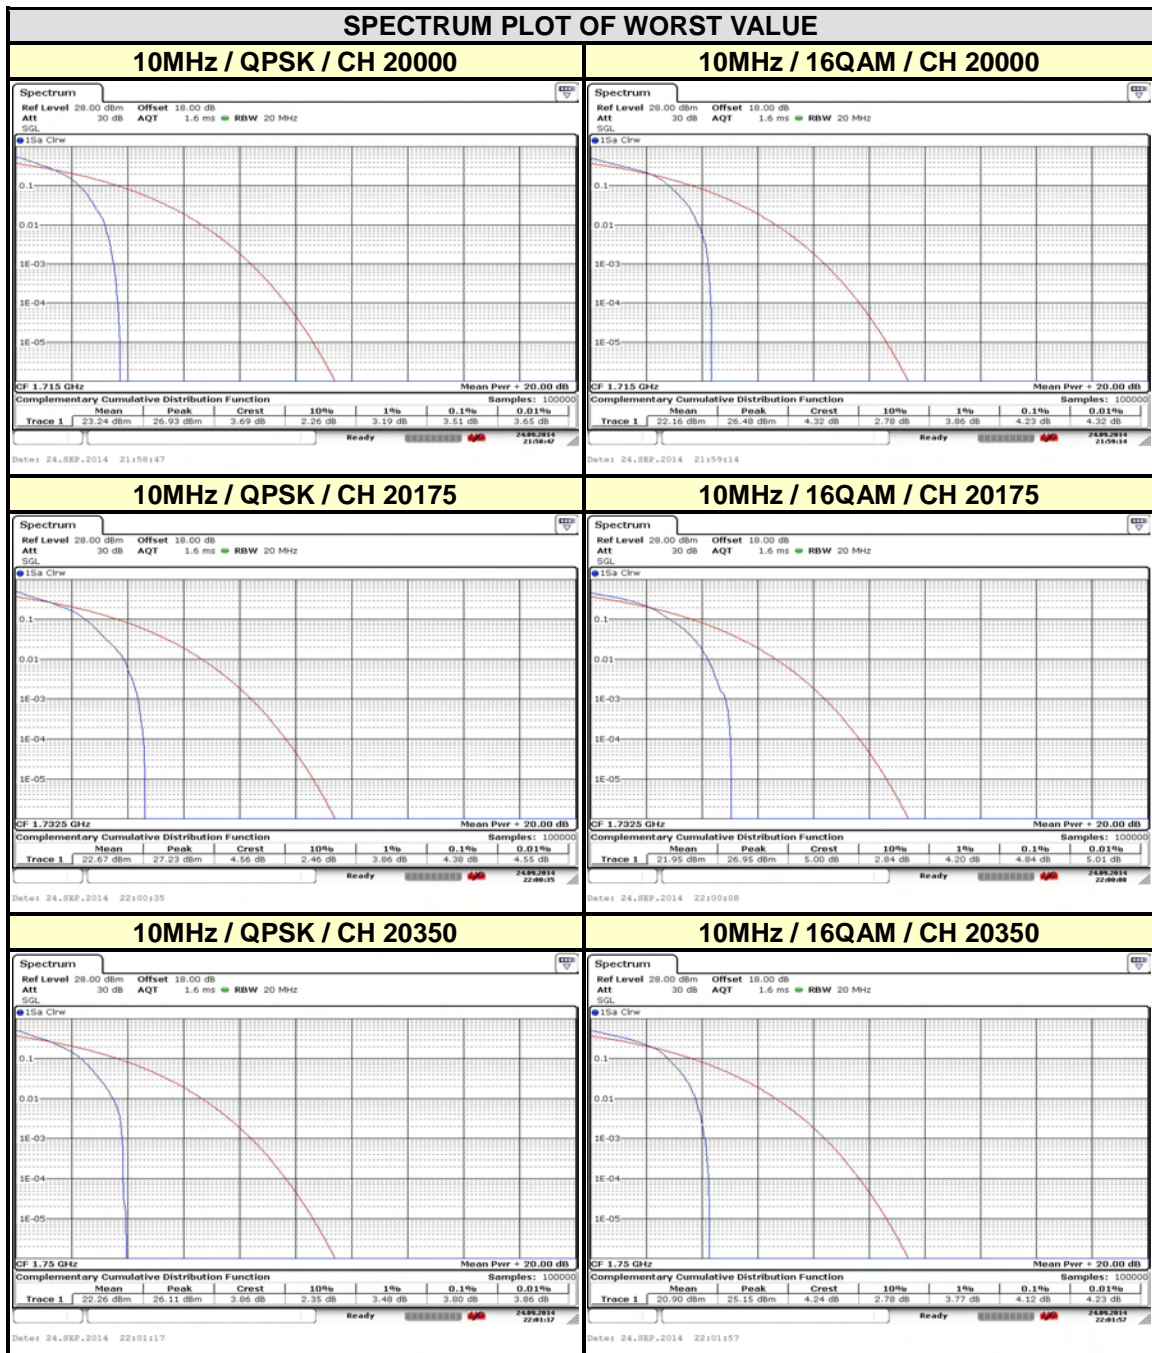

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



Test Report No.: RF141006N0105-5

LTE BAND 4

| CHANNEL BANDWIDTH: 15MHZ |                 |                            |       |
|--------------------------|-----------------|----------------------------|-------|
| CHANNEL                  | FREQUENCY (MHZ) | PEAK TO AVERAGE RATIO (DB) |       |
|                          |                 | QPSK                       | 16QAM |
| 20025                    | 1717.5          | 3.68                       | 4.35  |
| 20175                    | 1732.5          | 4.14                       | 4.75  |
| 20325                    | 1747.5          | 4.32                       | 5.77  |

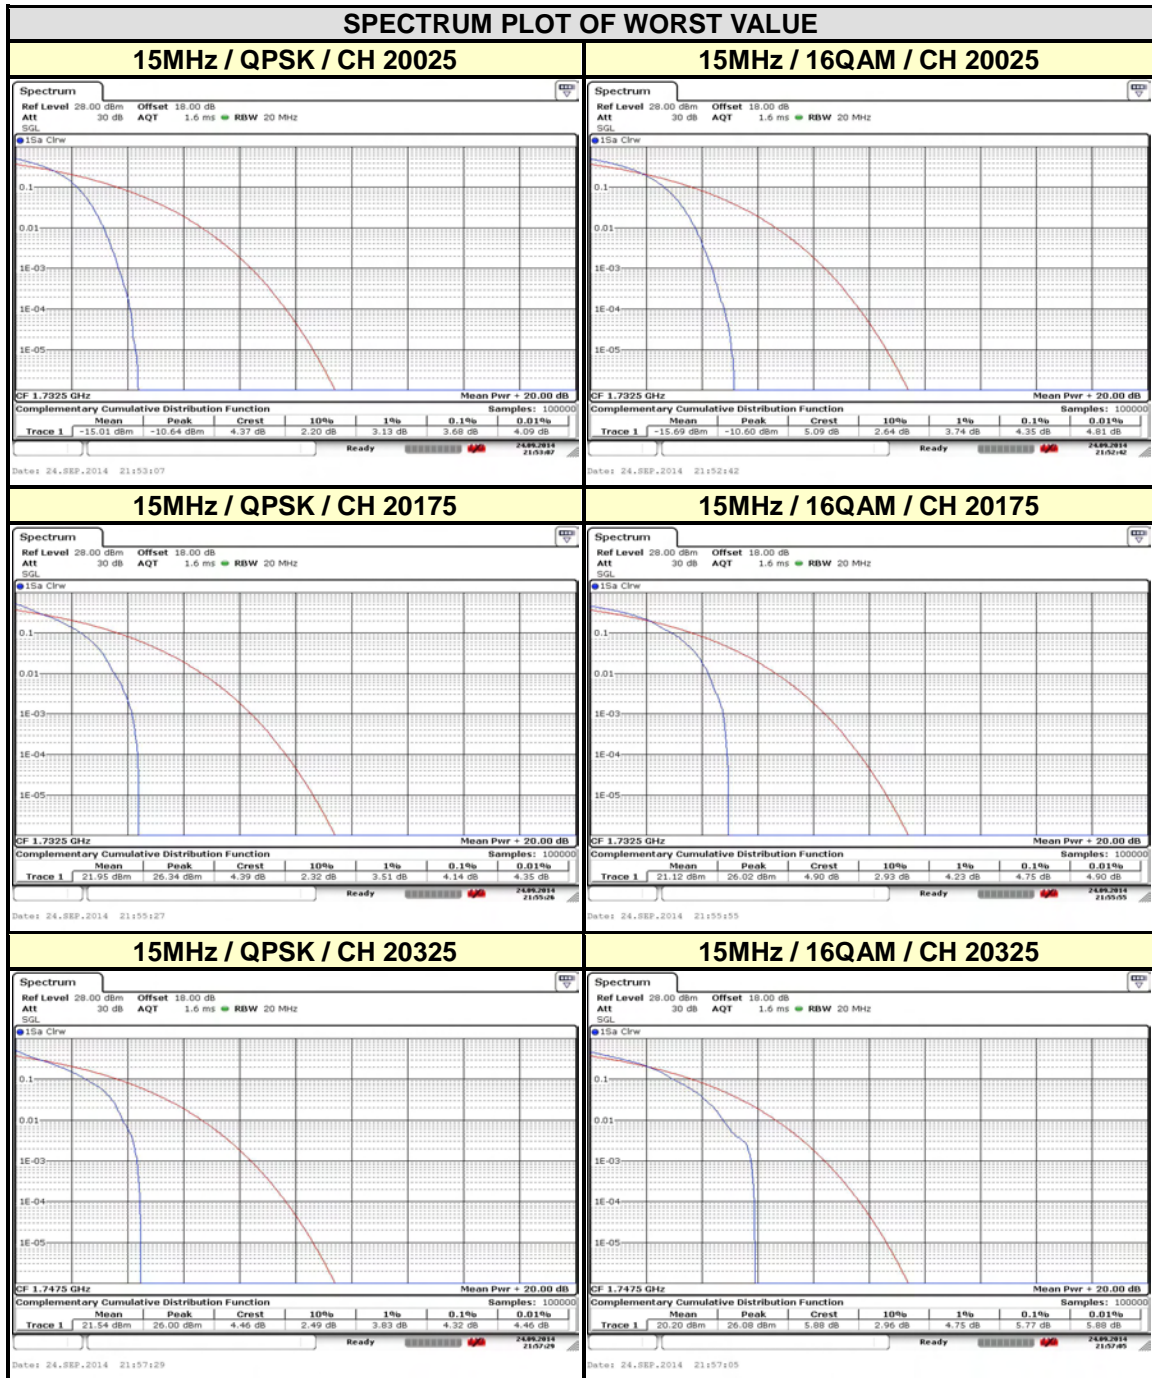

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)