

TEST REPORT

Product : NAVIGATION MULTIMEDIA RECEIVER
Trade mark : Stinger
Model/Type reference : UN1810, UN1810X, UN1810OE,
UN1810XOE, UN1810M, UN1810PS
Serial Number : N/A
Report Number : EED32L00178102
FCC ID : XBDUN1810
Date of Issue : Aug. 07, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

AAMP of Florida, Inc. dba AAMP Global
15500 Lightwave Drive, Suite 202 Clearwater, FL 33760

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay Zheng

Jay Zheng

Compiled by:

Alex Wu

Alex Wu

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Kevin Yang

Kevin Yang

Date:

Aug. 07, 2019

Check No.: 3096368058



2 Version

Version No.	Date	Description
00	Aug. 07, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: UN1810, UN1810X, UN1810OE, UN1810XOE, UN1810M, UN1810PS

Only the model UN1810 was tested, Software, mechanical and package is a bit different, the main hardware is the same 10inch. Details as below:

They are place holders in the event we have customers that need different kitting. In all cases the same radio / package would be sold as is, the different part number would indicate additional items kitting with the radio.

UN1810X would be the same product but includes the optional iGO Navigation card that is normally sold separate.

UN1810OE would be the same product but sold with a vehicle specific mounting kit not the universal bracket.

UN1810XOE would be the same product and include the iGO Navigation card with a vehicle specific mounting kit

UN1810M would be the same product but sold with marine mounting hardware and cover system.

UN1810PS would be the same product but sold with powe ƒ sports type mounting and cover system.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth.....	14
Appendix B): Carrier Frequency Separation.....	18
Appendix C): Dwell Time.....	22
Appendix D): Hopping Channel Number.....	26
Appendix E): Conducted Peak Output Power.....	28
Appendix F): Band-edge for RF Conducted Emissions.....	32
Appendix G): RF Conducted Spurious Emissions.....	37
Appendix H): Pseudorandom Frequency Hopping Sequence.....	47
Appendix I): Antenna Requirement.....	48
Appendix J): Restricted bands around fundamental frequency (Radiated).....	49
Appendix K): Radiated Spurious Emissions.....	74
PHOTOGRAPHS OF TEST SETUP	85
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	87

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

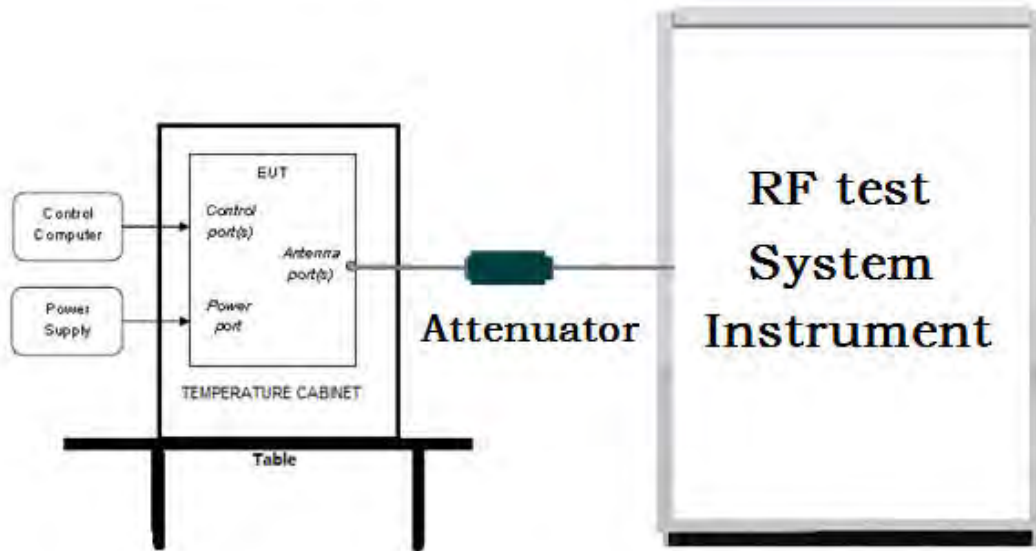

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

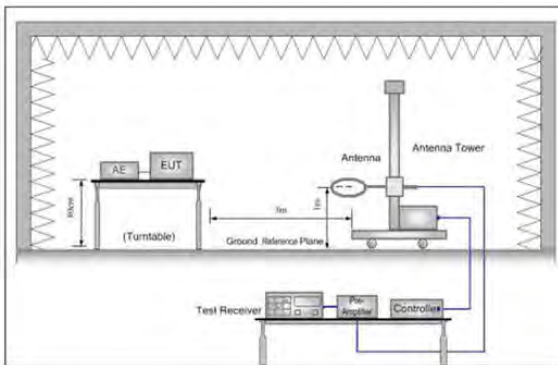


Figure 1. Below 30MHz

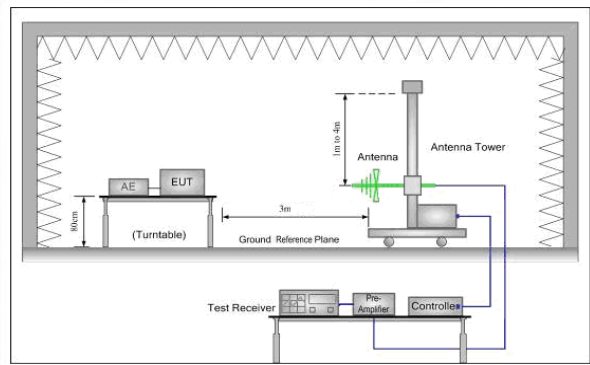


Figure 2. 30MHz to 1GHz


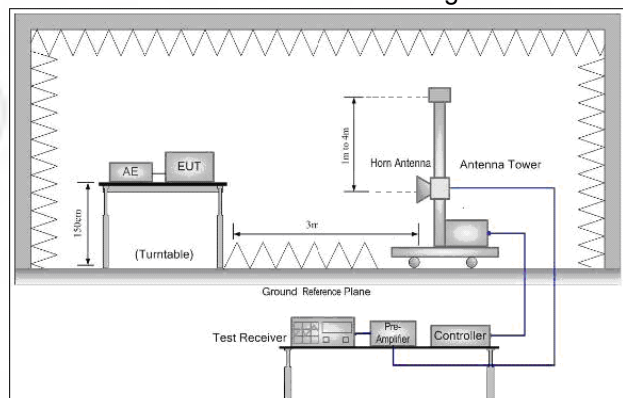


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup
Conducted Emissions setup

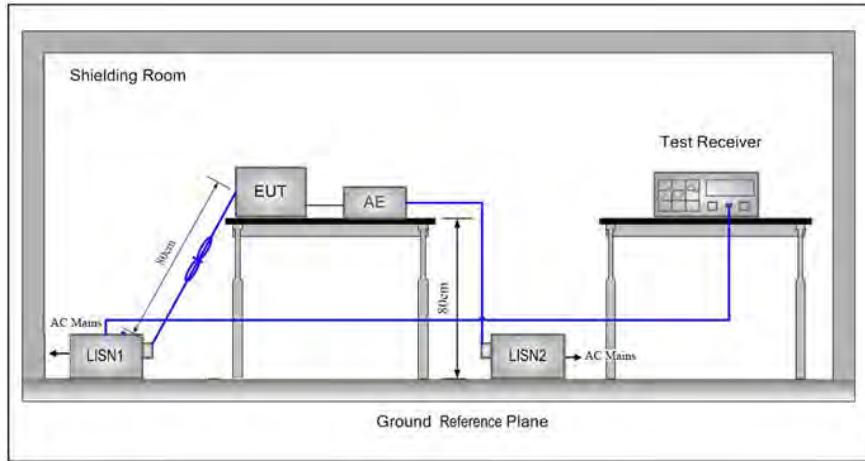

5.2 Test Environment

Operating Environment:	
Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).

6 General Information

6.1 Client Information

Applicant:	AAMP of Florida, Inc. dba AAMP Global
Address of Applicant:	15500 Lightwave Drive, Suite 202 Clearwater, FL 33760
Manufacturer:	SKYPINE ELECTRONICS (SHEN ZHEN) CO.,LTD.
Address of Manufacturer:	A1,A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China
Factory:	SKYPINE ELECTRONICS (SHEN ZHEN) CO.,LTD.
Address of Factory:	A1,A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

6.2 General Description of EUT

Product Name:	NAVIGATION MULTIMEDIA RECEIVER
Model No.(EUT):	UN1810, UN1810X, UN1810OE, UN1810XOE, UN1810M, UN1810PS
Trade mark:	Stinger
EUT Supports Radios application:	BT 4.2 Dual mode, 2402-2480MHz
Power Supply:	DC 12V
Sample Received Date:	Jul. 04, 2019
Sample tested Date:	Jul. 04, 2019 to Aug. 07, 2019

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Hardware Version:	N/A
Software Version:	N/A
Test Power Grade:	DH5:52/52/36 2DH5:50 3DH5:50
Test Software of EUT:	BlueTest 3 (manufacturer declare)
Antenna Type:	internal antenna
Antenna Gain:	0dBi
Test Voltage:	DC 12V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-28-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-22-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-617	11-04-2018	11-03-2019
Microwave Preamplifier	Agilent	8449B	3008A024 25	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 1869	04-25-2018	04-23-2021
Horn Antenna	ETS- LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.604 2	07-26-2019	07-24-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B- 076	04-25-2018	04-25-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-26-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Receiver	R&S	ESCI7	100938- 003	11-23-2018	11-22-2019
Multi device Controller	maturio	NCD/070/107 11112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095 744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401 106	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
High-pass filter	Sinoscite	FL3CX03WVG 18NM12- 0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO- TRONICS	SPA-F- 63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 9CL12-0395- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 8CL12-0393- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 4CL12-0396- 002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 3CL12-0394- 001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-17-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-23-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-23-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-23-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-08-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-20-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-06-2020
Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	05-01-2019	04-30-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-28-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-15-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-08-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


Test Results List:


Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)




Appendix A): 20dB Occupied Bandwidth Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9456	0.87344	PASS
GFSK	MCH	0.9433	0.85832	PASS
GFSK	HCH	0.9469	0.86133	PASS
$\pi/4$ DQPSK	LCH	1.227	1.1668	PASS
$\pi/4$ DQPSK	MCH	1.229	1.1625	PASS
$\pi/4$ DQPSK	HCH	1.231	1.1638	PASS
8DPSK	LCH	1.260	1.1574	PASS
8DPSK	MCH	1.260	1.1549	PASS
8DPSK	HCH	1.263	1.1562	PASS

Test Graph

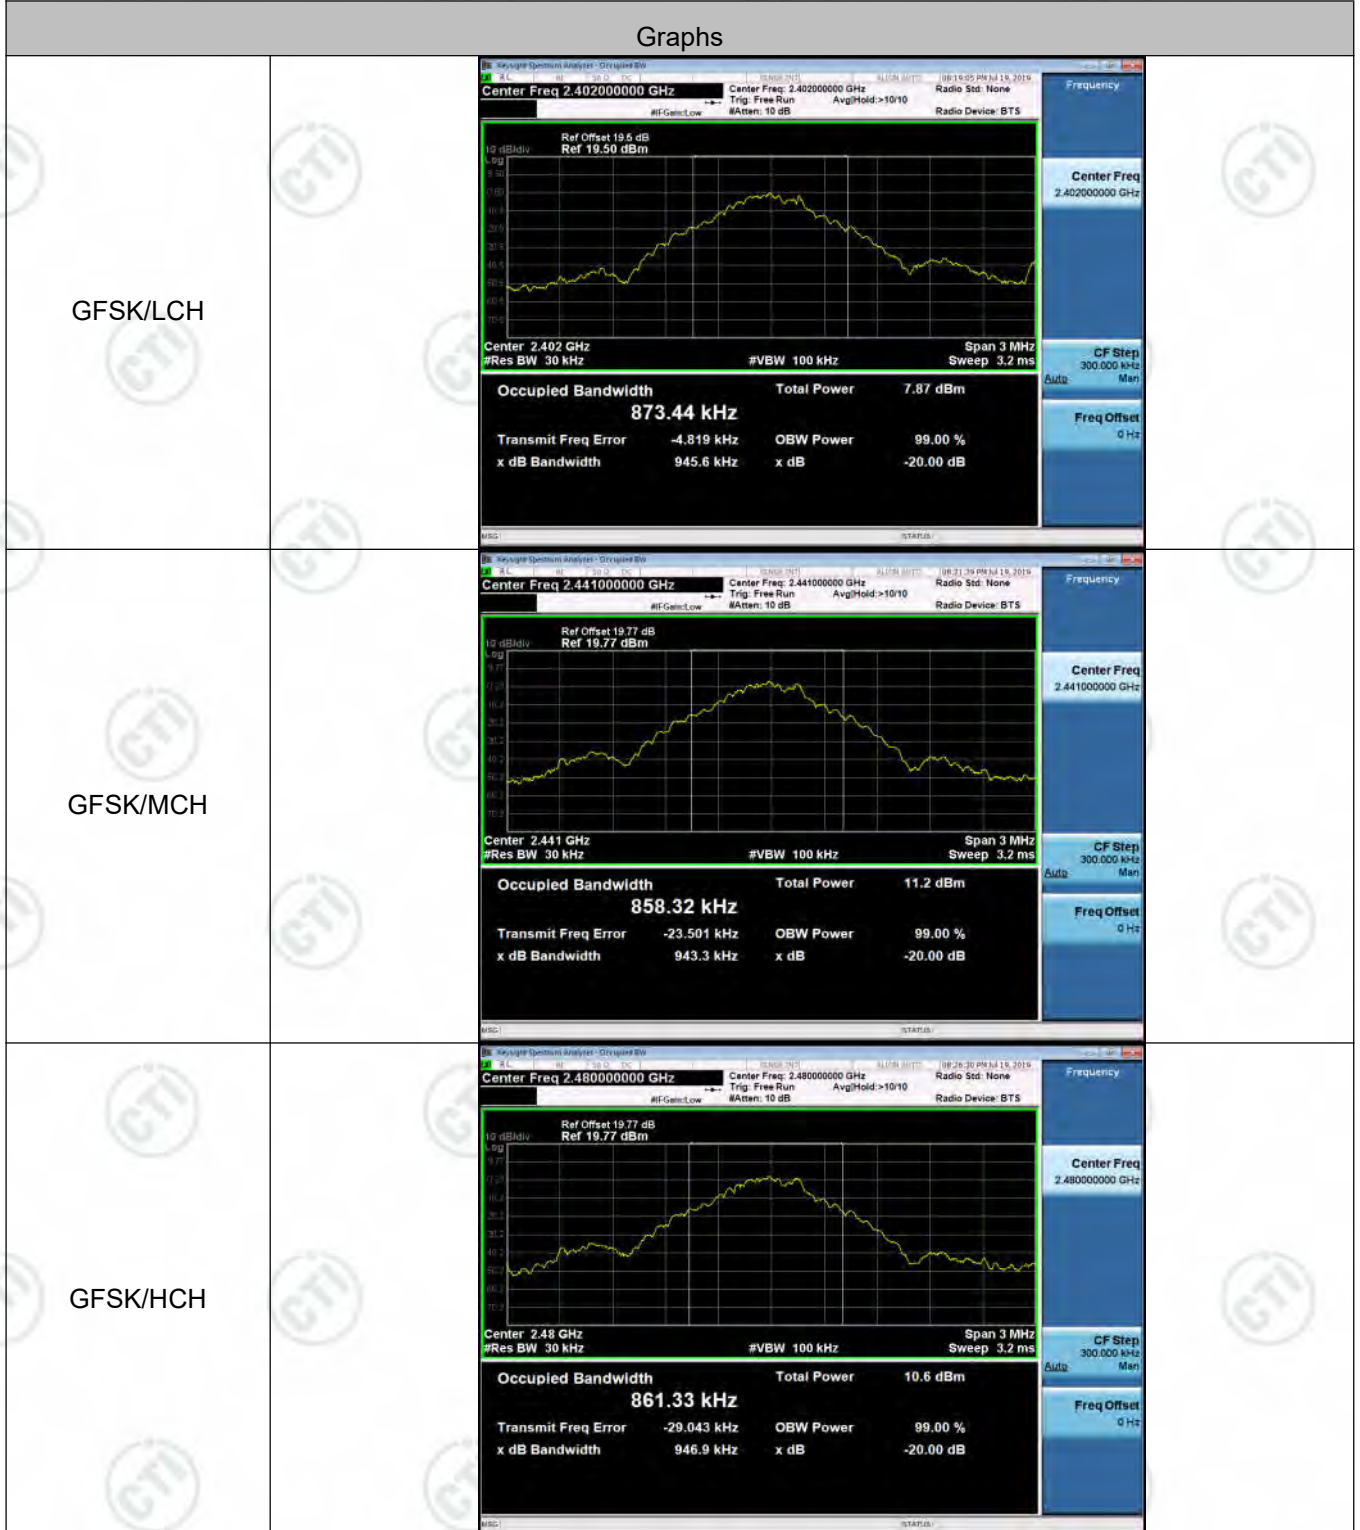
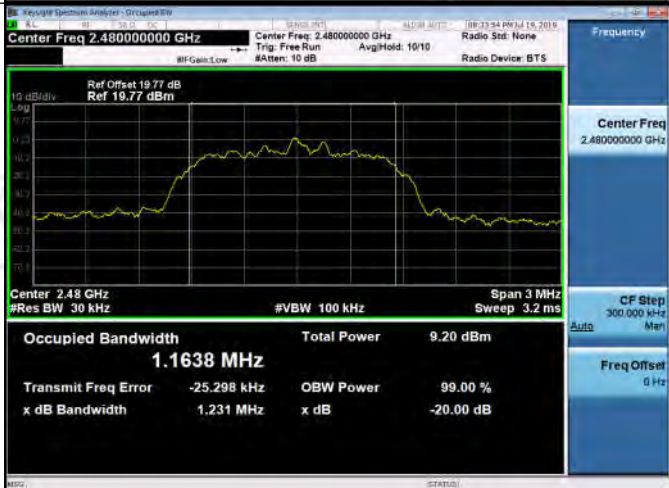
<p>$\pi/4$DQPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Stat: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1668 MHz Total Power 3.71 dBm</p> <p>Transmit Freq Error -24.391 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.227 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Stat: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1625 MHz Total Power 7.92 dBm</p> <p>Transmit Freq Error -25.346 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.229 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Stat: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1638 MHz Total Power 9.20 dBm</p> <p>Transmit Freq Error -25.298 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.231 MHz x dB -20.00 dB</p>
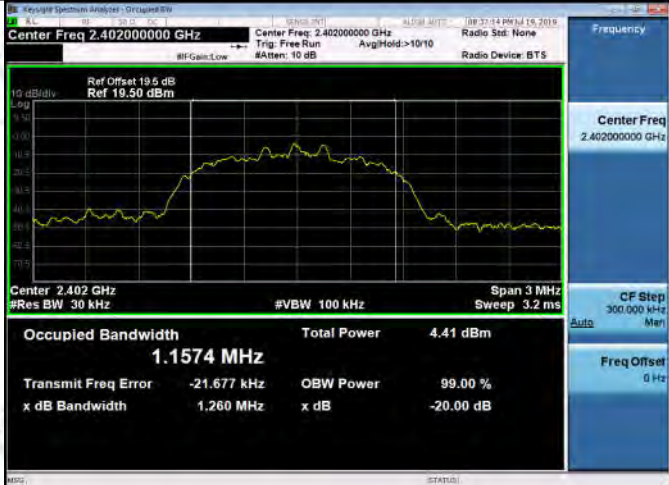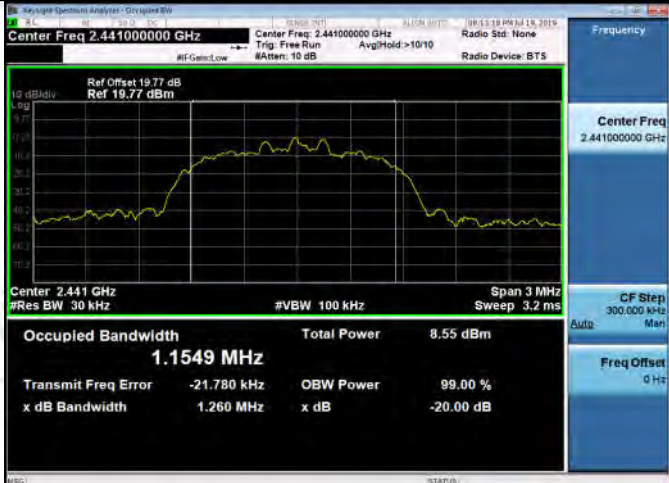
<p>8DPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1574 MHz Total Power 4.41 dBm</p> <p>Transmit Freq Error -21.677 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.260 MHz x dB -20.00 dB</p>
<p>8DPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1549 MHz Total Power 8.55 dBm</p> <p>Transmit Freq Error -21.780 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.260 MHz x dB -20.00 dB</p>
<p>8DPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1562 MHz Total Power 9.83 dBm</p> <p>Transmit Freq Error -21.787 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.263 MHz x dB -20.00 dB</p>




Appendix B): Carrier Frequency Separation




Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.020	PASS
GFSK	MCH	0.966	PASS
GFSK	HCH	0.982	PASS
$\pi/4$ DQPSK	LCH	1.054	PASS
$\pi/4$ DQPSK	MCH	0.900	PASS
$\pi/4$ DQPSK	HCH	1.394	PASS
8DPSK	LCH	0.982	PASS
8DPSK	MCH	1.074	PASS
8DPSK	HCH	1.012	PASS

Test Graph

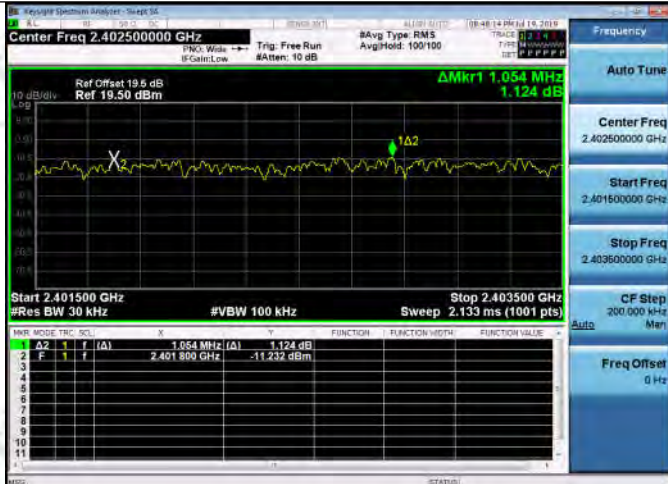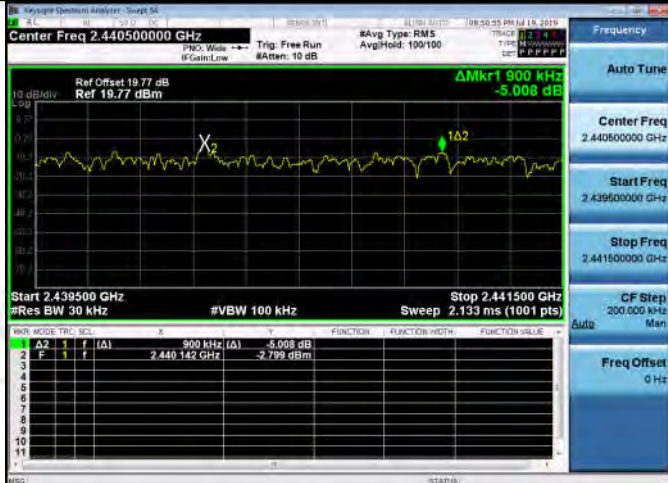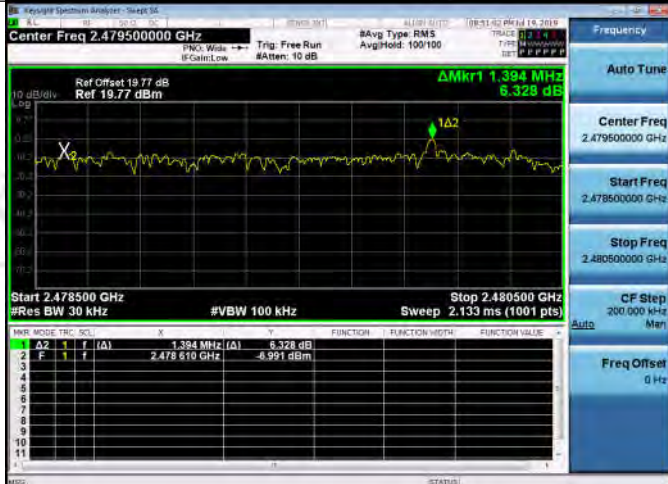

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	
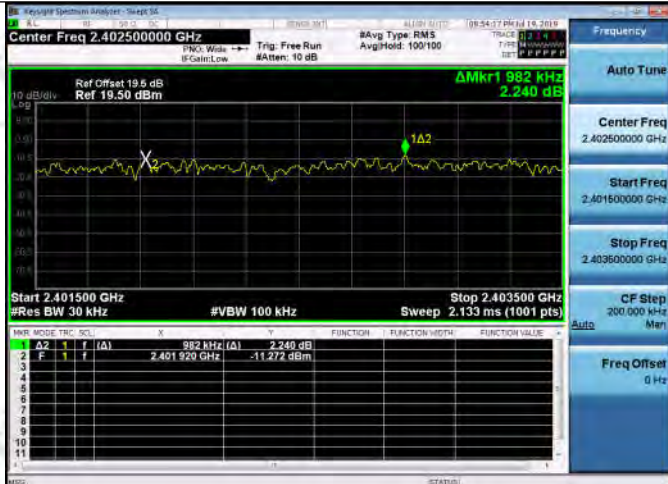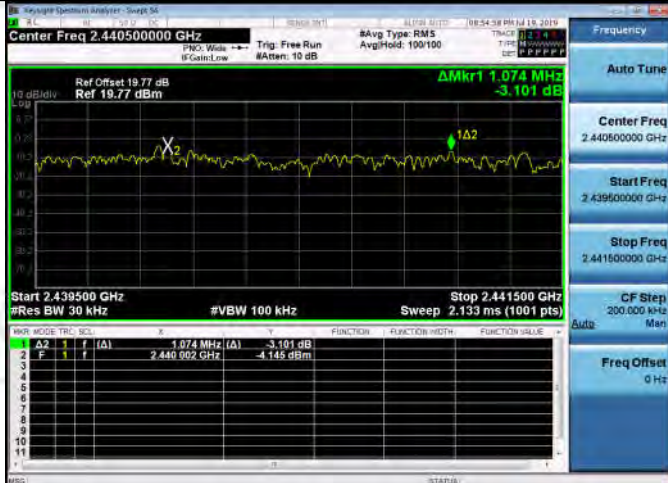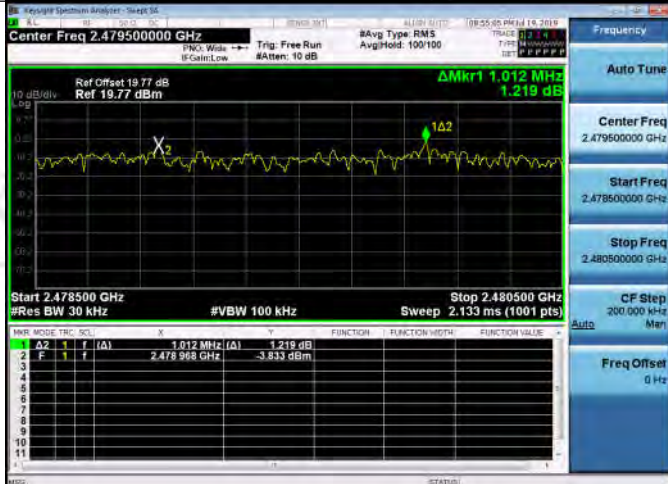
<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	

Appendix C): Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.4066	320	0.13	0.33	PASS
GFSK	DH1	MCH	0.407867	320	0.131	0.33	PASS
GFSK	DH1	HCH	0.40787	320	0.131	0.33	PASS
GFSK	DH3	LCH	1.66314	160	0.266	0.67	PASS
GFSK	DH3	MCH	1.6644	160	0.266	0.67	PASS
GFSK	DH3	HCH	1.663133	160	0.266	0.67	PASS
GFSK	DH5	LCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	MCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	HCH	2.8888	106.7	0.308	0.77	PASS

Test Graph





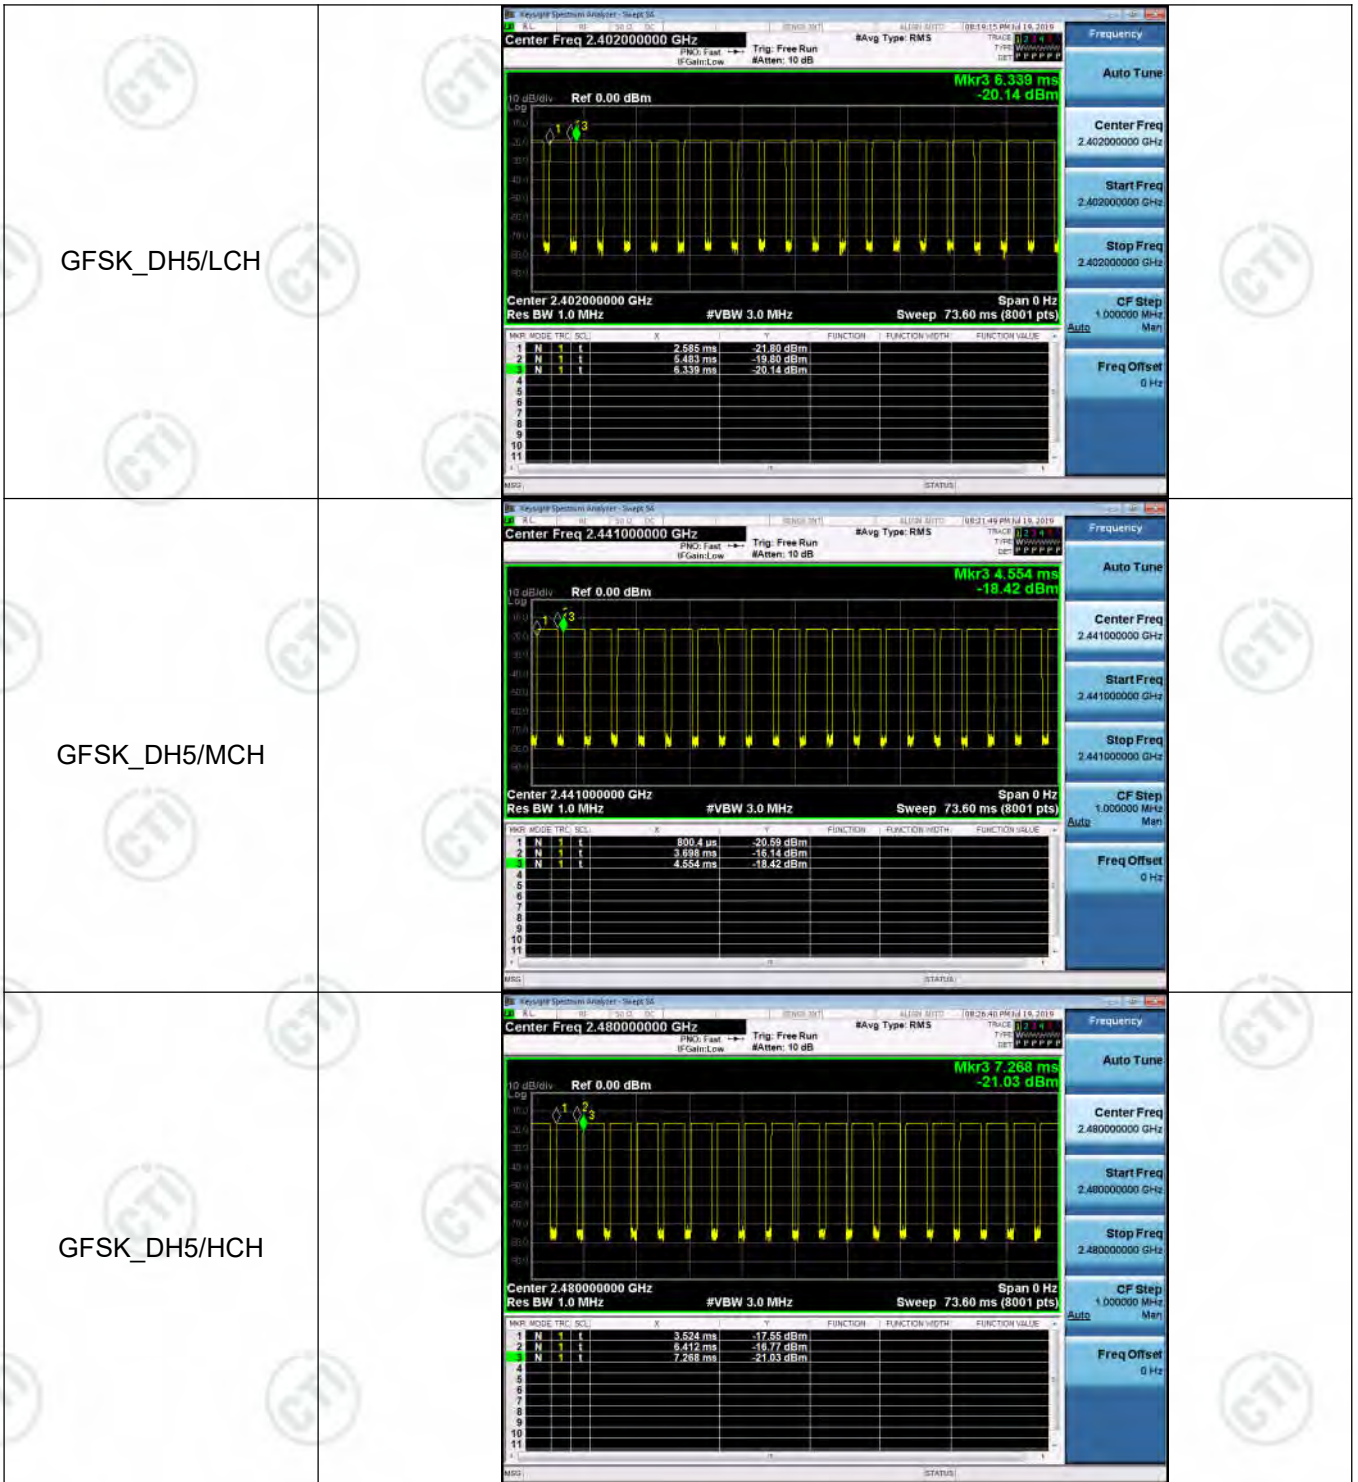


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

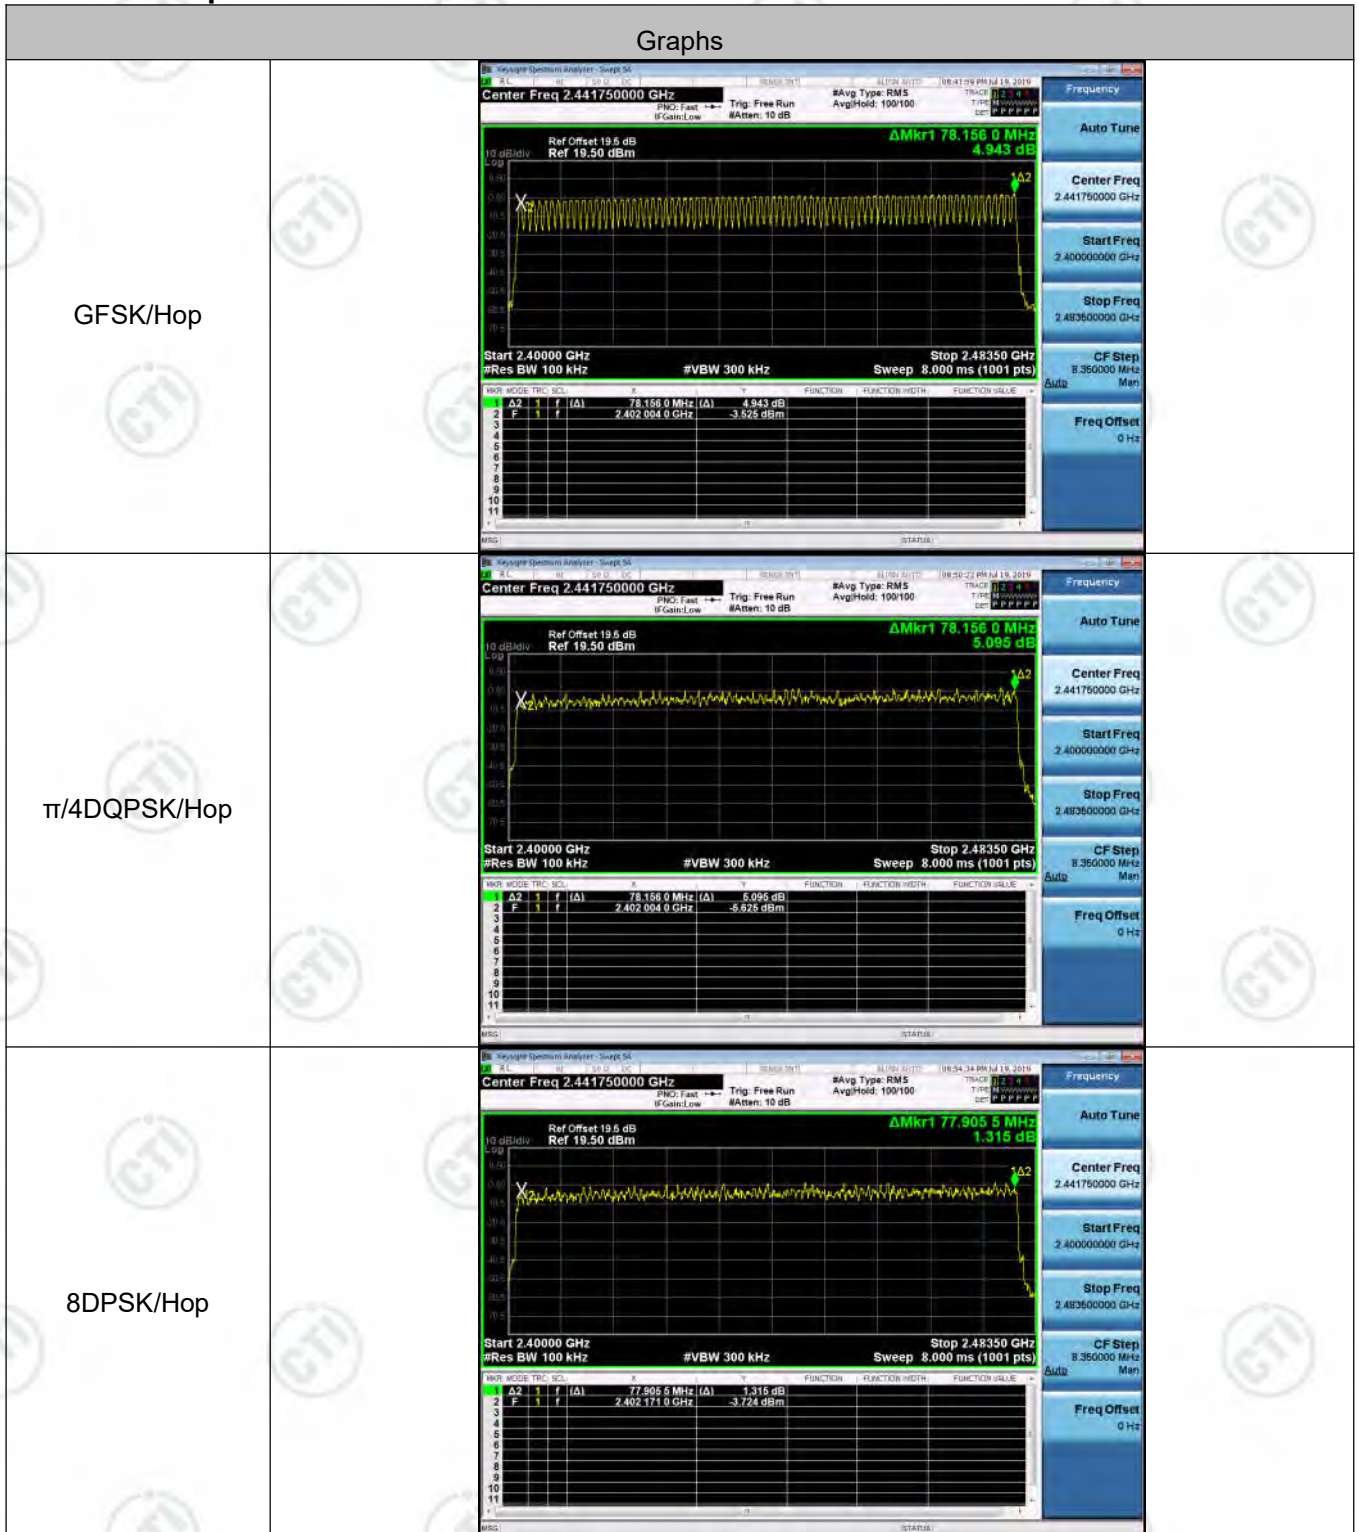





Appendix E): Conducted Peak Output Power


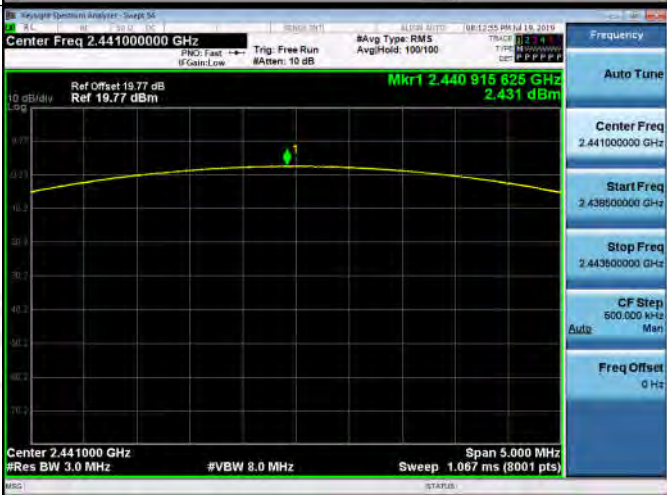
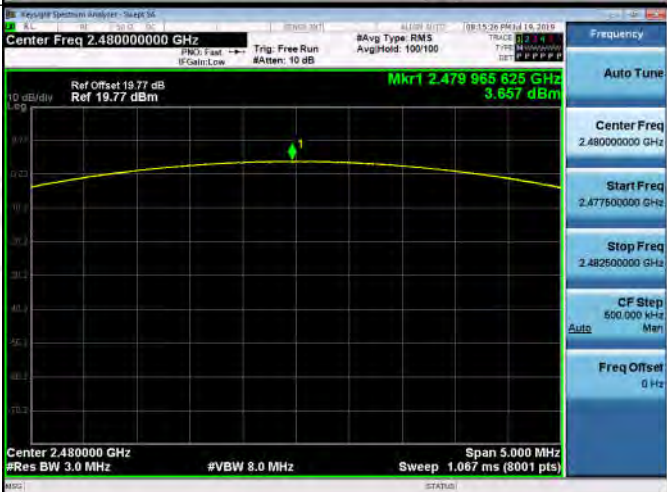
Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.732	PASS
GFSK	MCH	3.870	PASS
GFSK	HCH	3.424	PASS
$\pi/4$ DQPSK	LCH	-1.914	PASS
$\pi/4$ DQPSK	MCH	2.089	PASS
$\pi/4$ DQPSK	HCH	3.321	PASS
8DPSK	LCH	-1.479	PASS
8DPSK	MCH	2.431	PASS
8DPSK	HCH	3.657	PASS

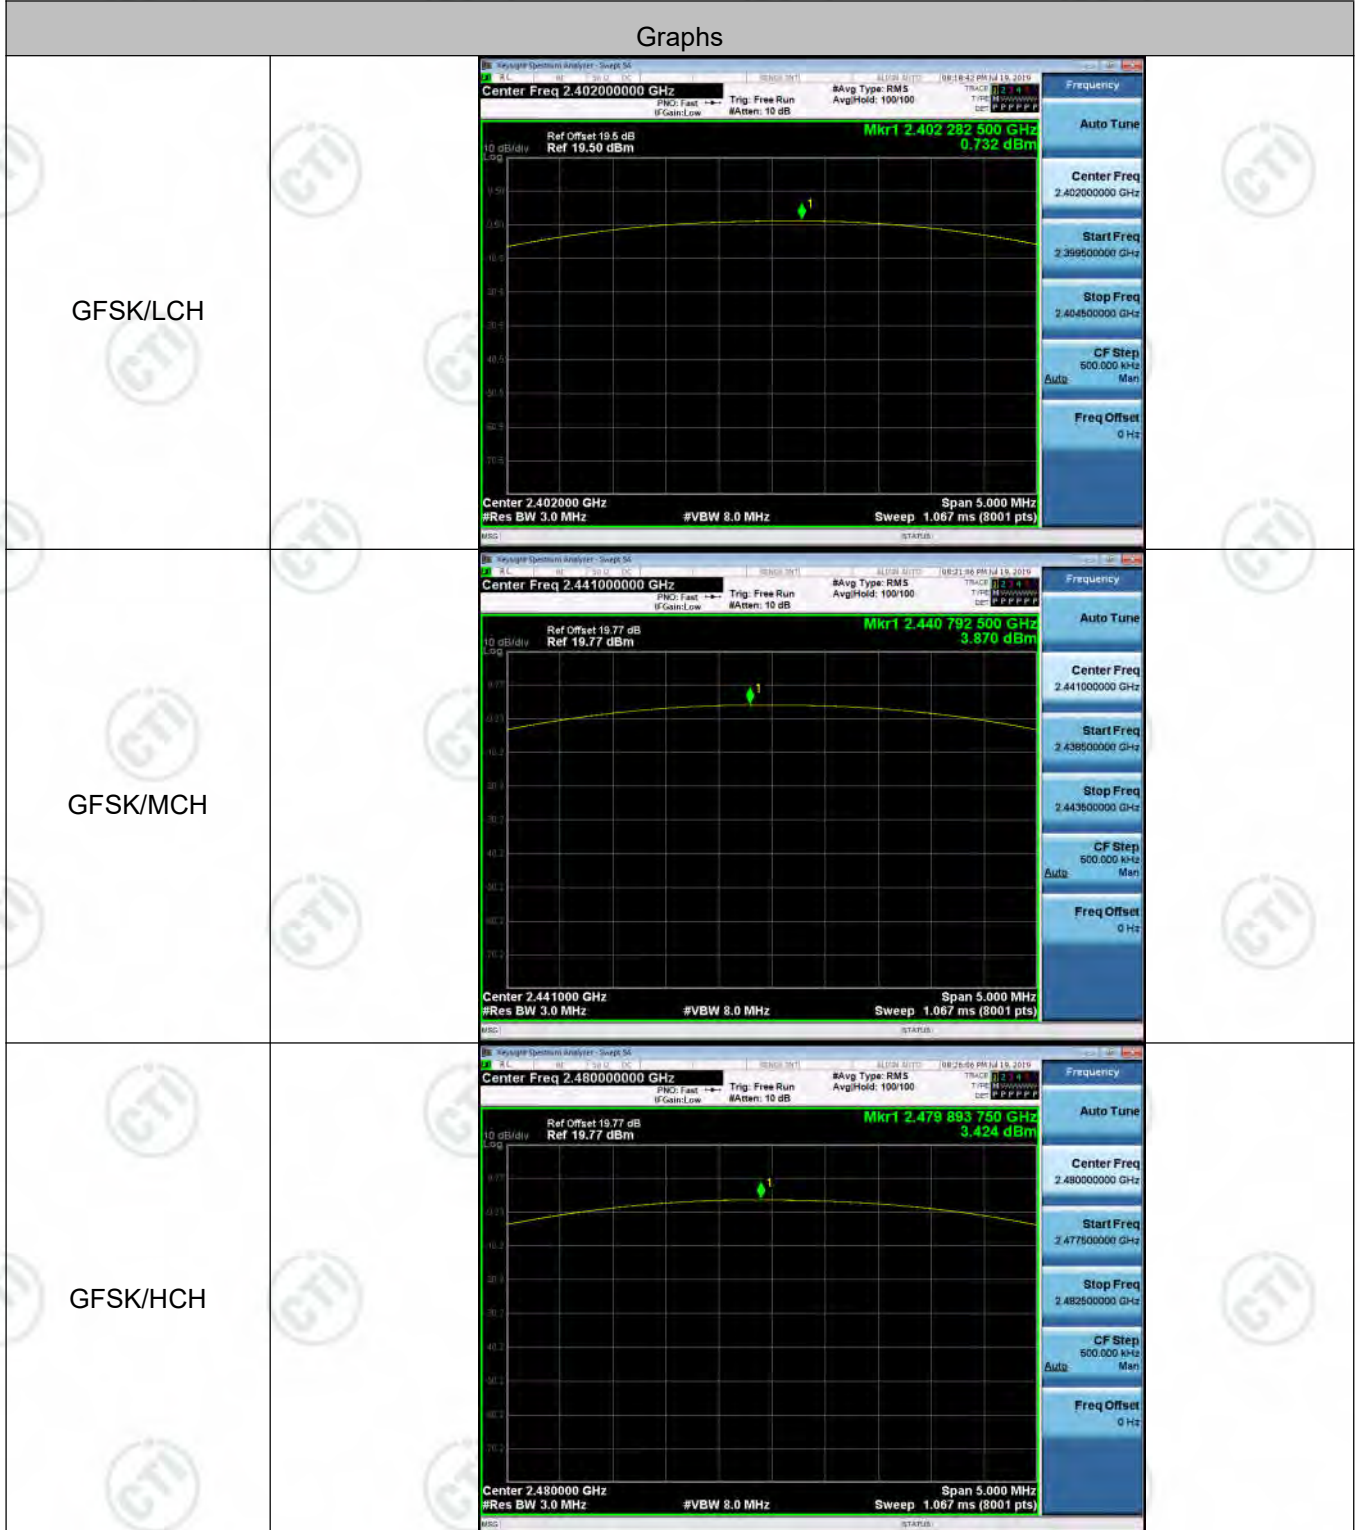Test Graph

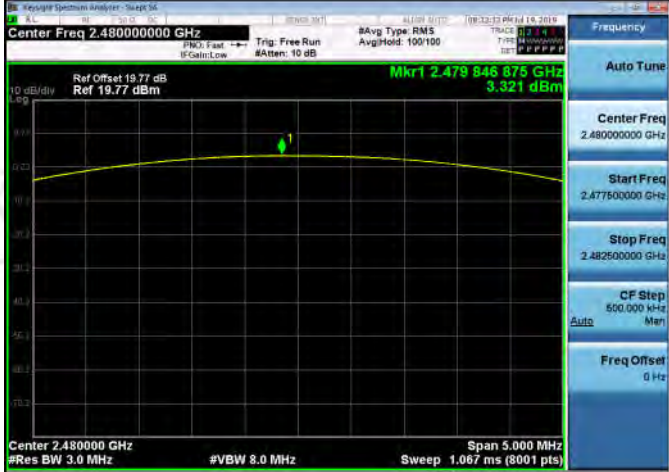

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	


<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	


Appendix F): Band-edge for RF Conducted Emissions


Result Table


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	0.512	Off	-60.213	-19.49	PASS
			-1.745	On	-58.889	-21.75	PASS
GFSK	HCH	2480	3.069	Off	-58.385	-16.93	PASS
			1.719	On	-55.576	-18.28	PASS
π/4DQPSK	LCH	2402	-3.549	Off	-59.939	-23.55	PASS
			-2.092	On	-56.668	-22.09	PASS
π/4DQPSK	HCH	2480	1.813	Off	-57.087	-18.19	PASS
			1.718	On	-49.359	-18.28	PASS
8DPSK	LCH	2402	-3.505	Off	-60.859	-23.51	PASS
			-1.768	On	-55.954	-21.77	PASS
8DPSK	HCH	2480	1.903	Off	-58.009	-18.1	PASS
			1.202	On	-51.272	-18.8	PASS

Test Graph

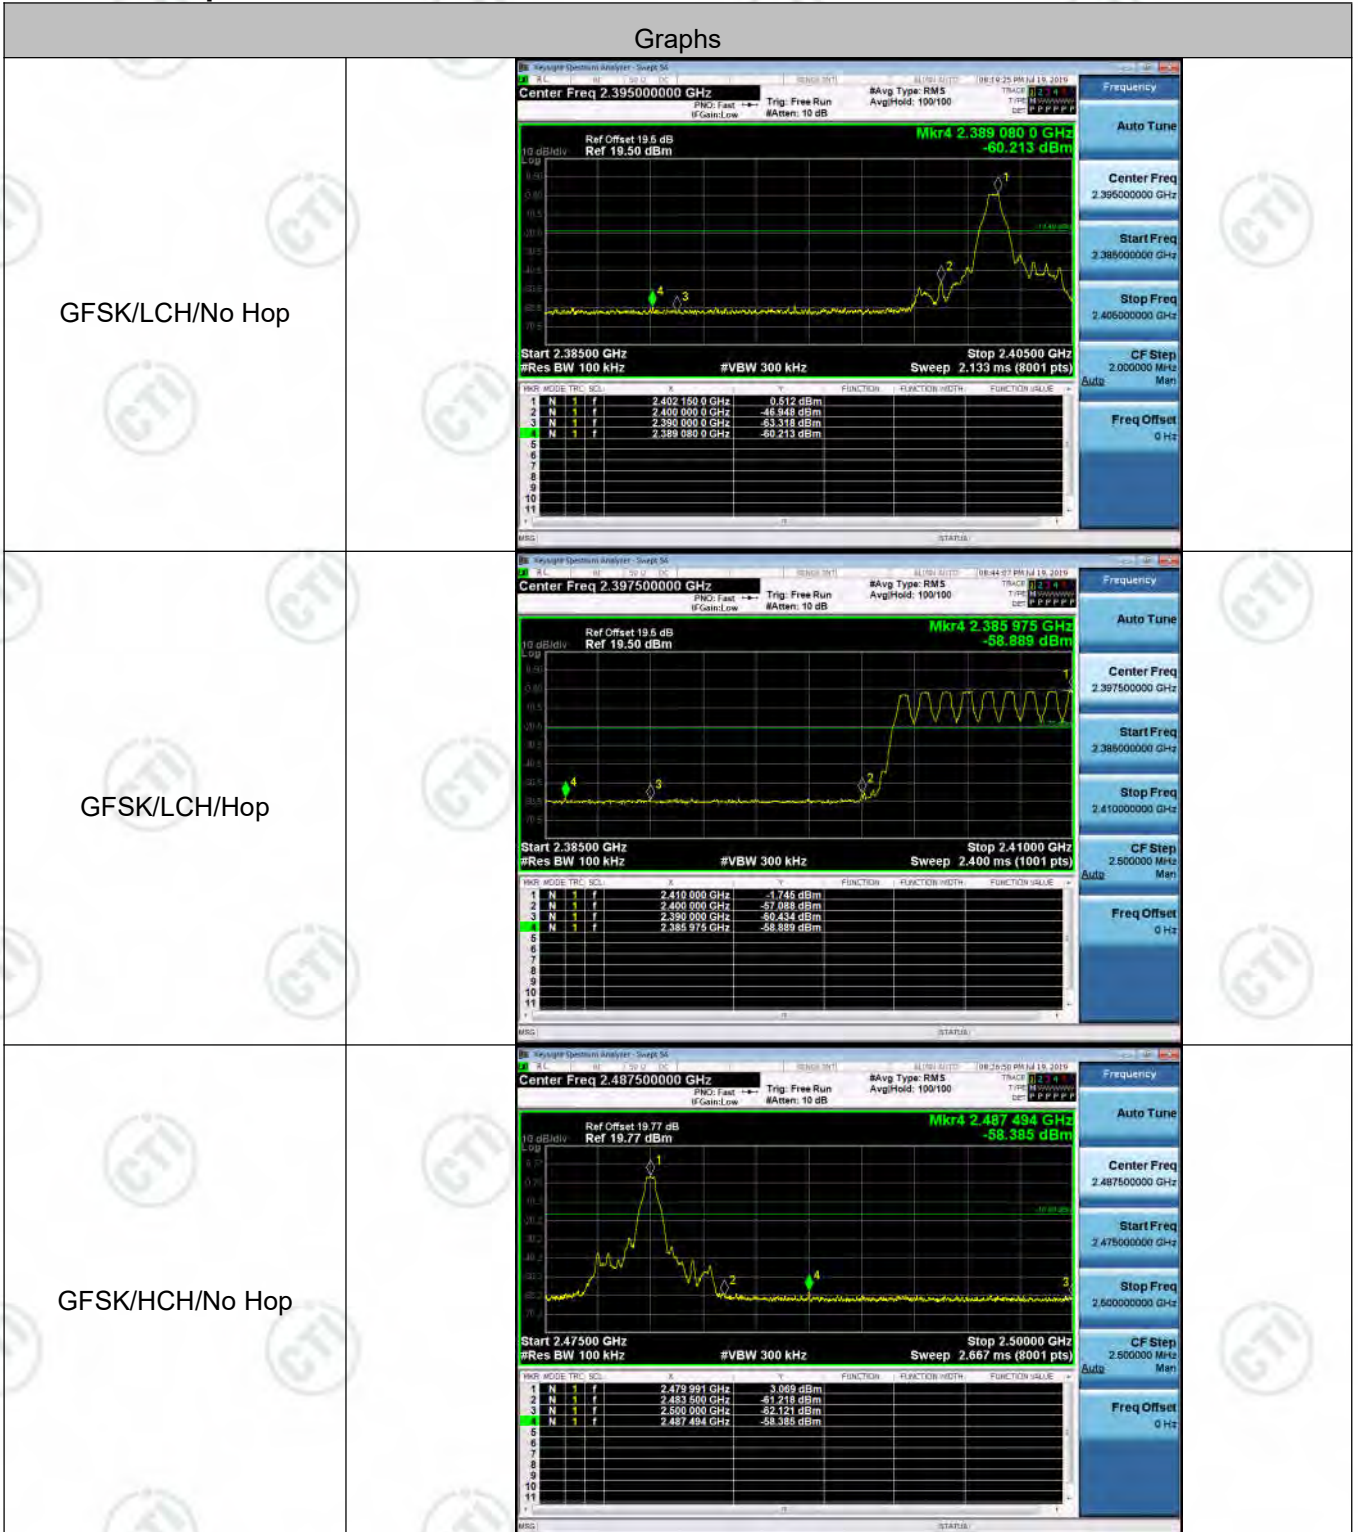

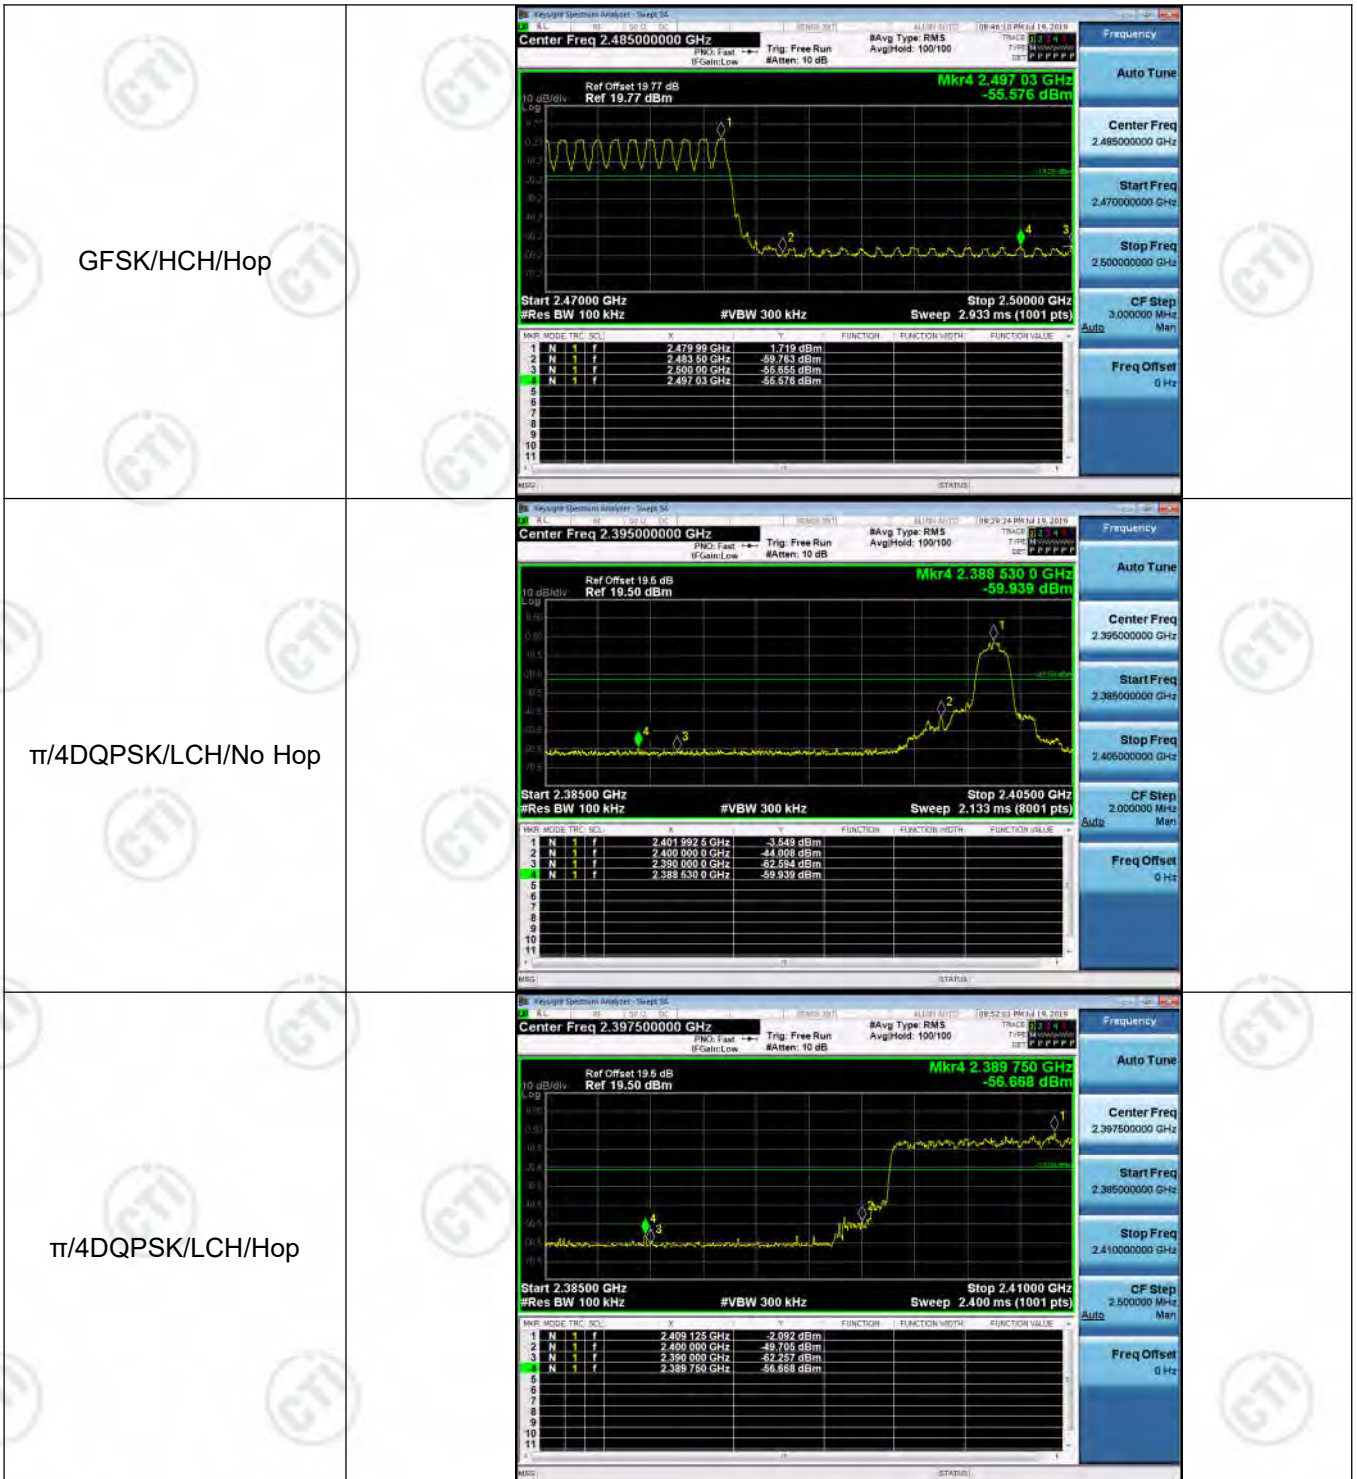

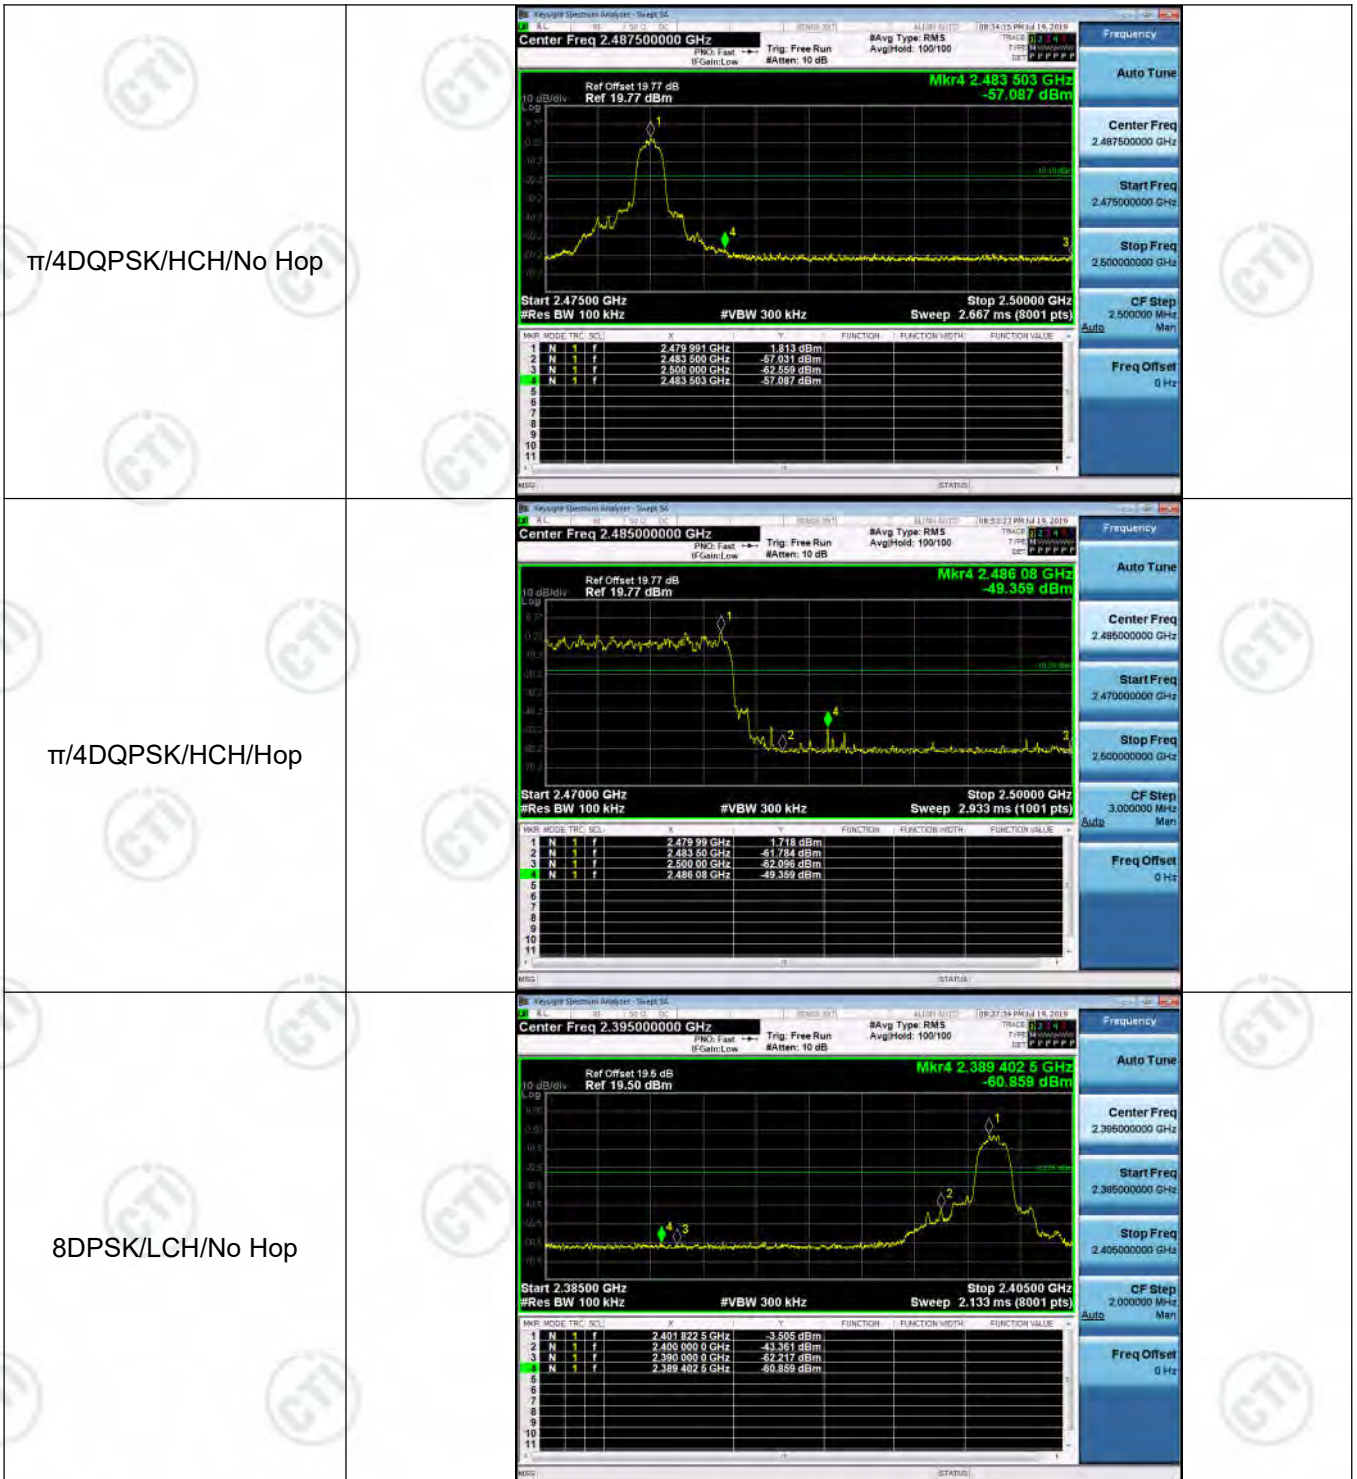

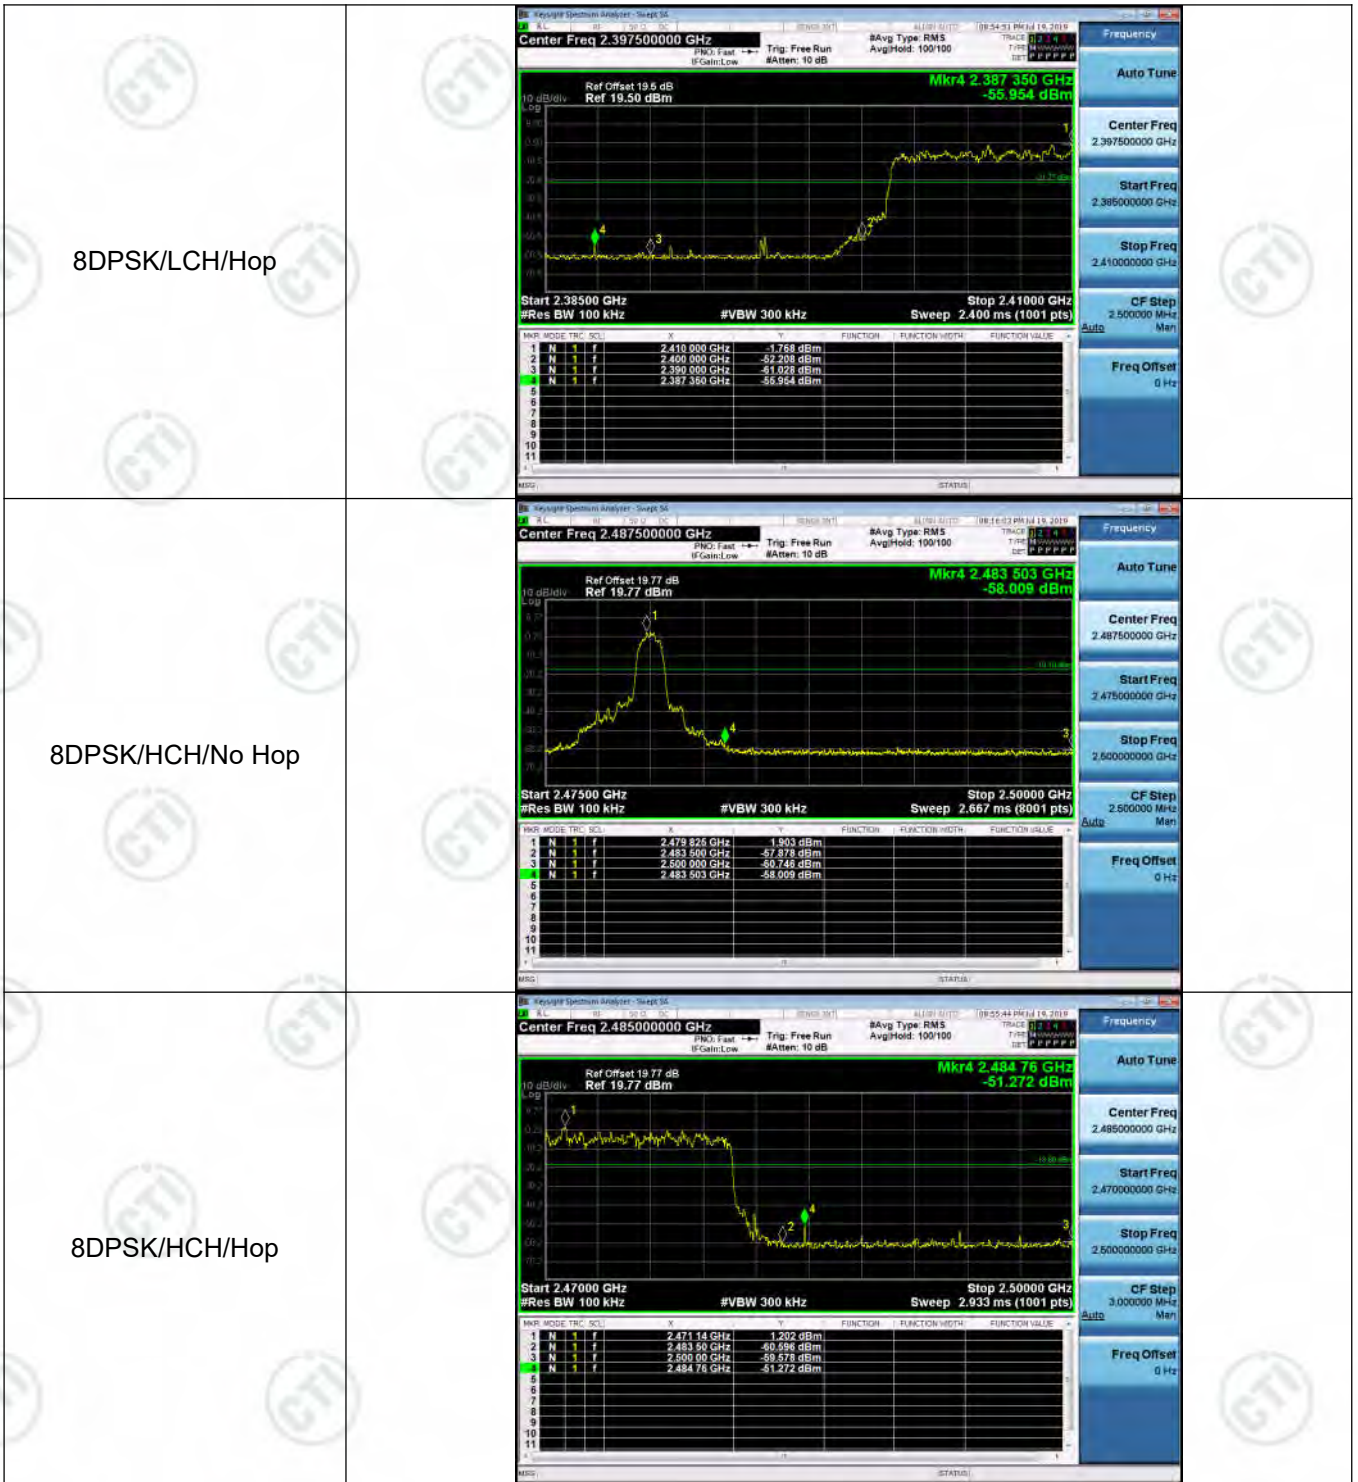


Appendix G): RF Conducted Spurious Emissions

Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	0.476	<Limit	PASS
GFSK	MCH	3.625	<Limit	PASS
GFSK	HCH	2.964	<Limit	PASS
$\pi/4$ DQPSK	LCH	-3.698	<Limit	PASS
$\pi/4$ DQPSK	MCH	0.479	<Limit	PASS
$\pi/4$ DQPSK	HCH	1.138	<Limit	PASS
8DPSK	LCH	-3.505	<Limit	PASS
8DPSK	MCH	0.592	<Limit	PASS
8DPSK	HCH	1.69	<Limit	PASS

Test Graph



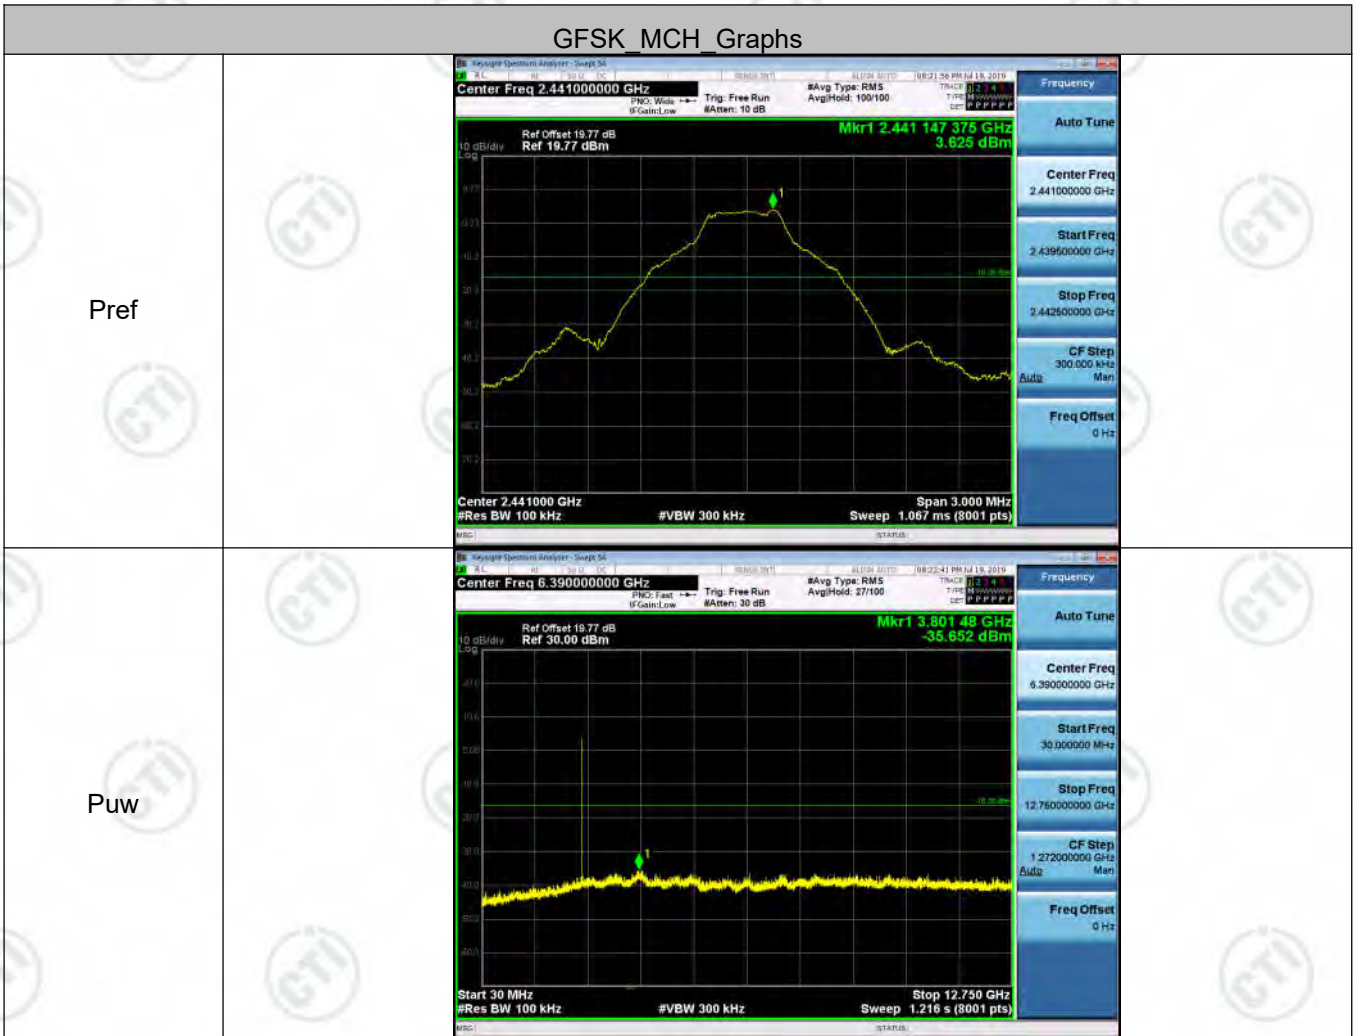















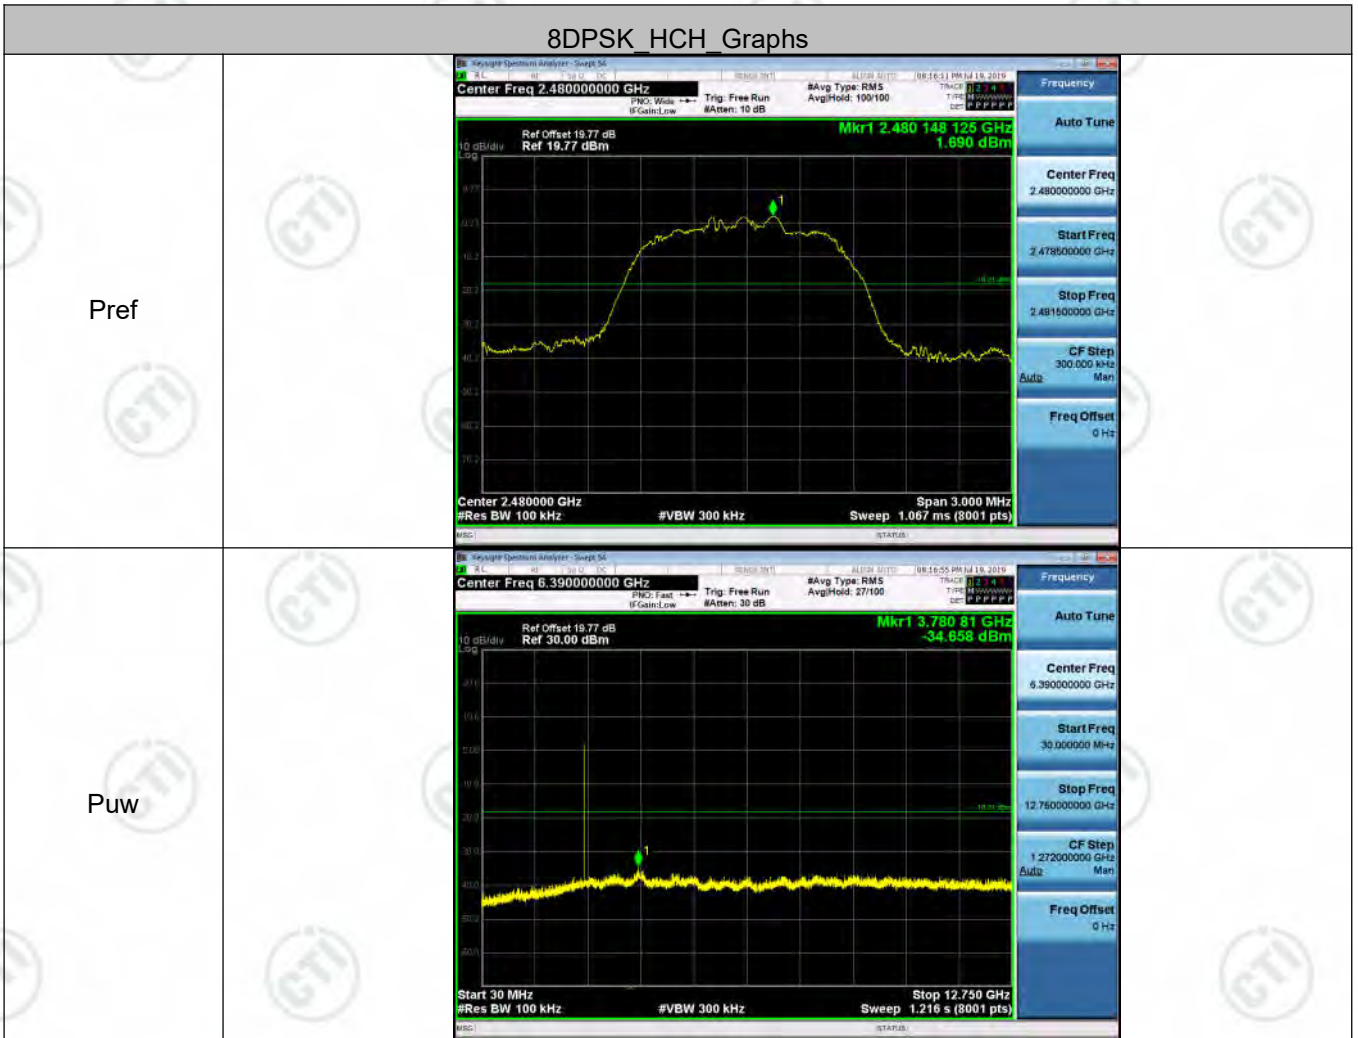


Appendix H): Pseudorandom Frequency Hopping Sequence

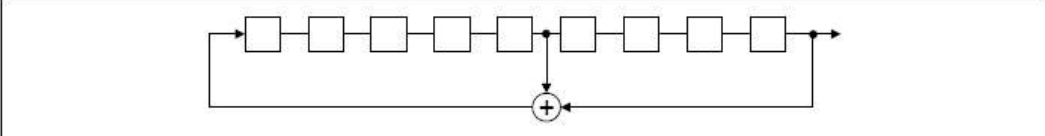Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
<p>EUT Pseudorandom Frequency Hopping Sequence</p>	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

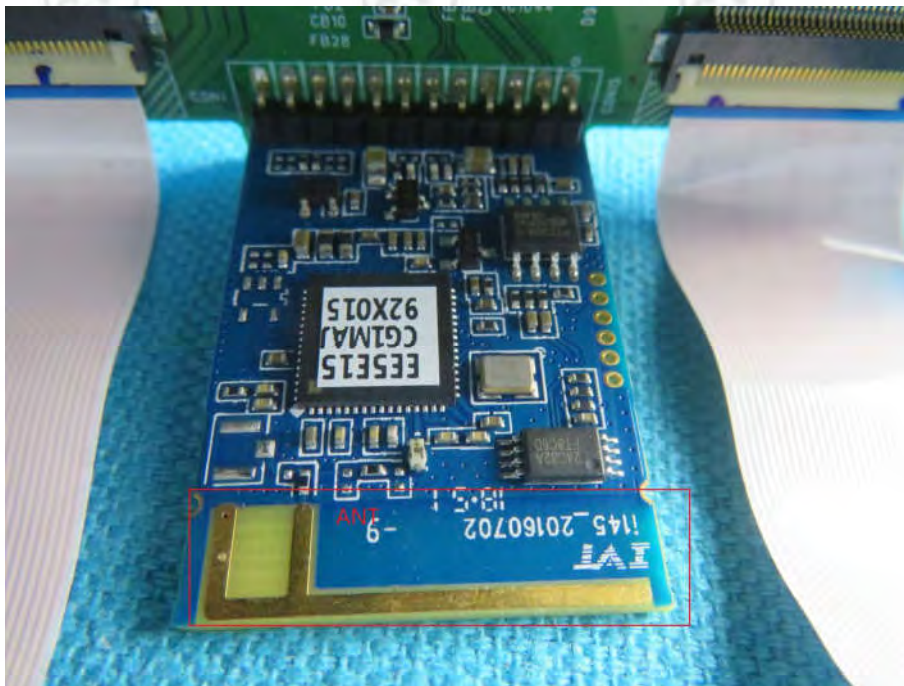


Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

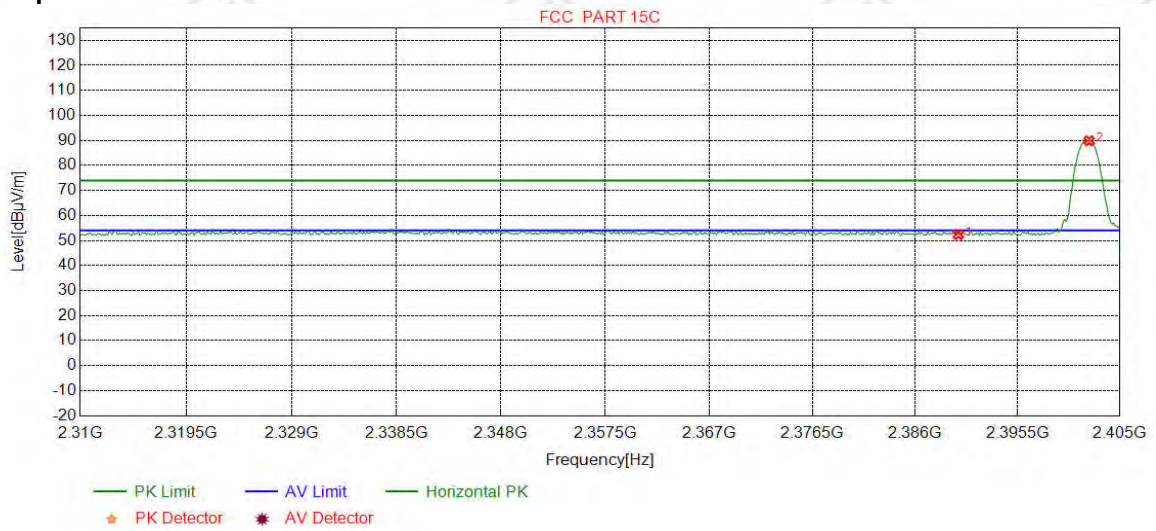

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.23	52.41	74.00	21.59	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	86.70	89.84	74.00	-15.84	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

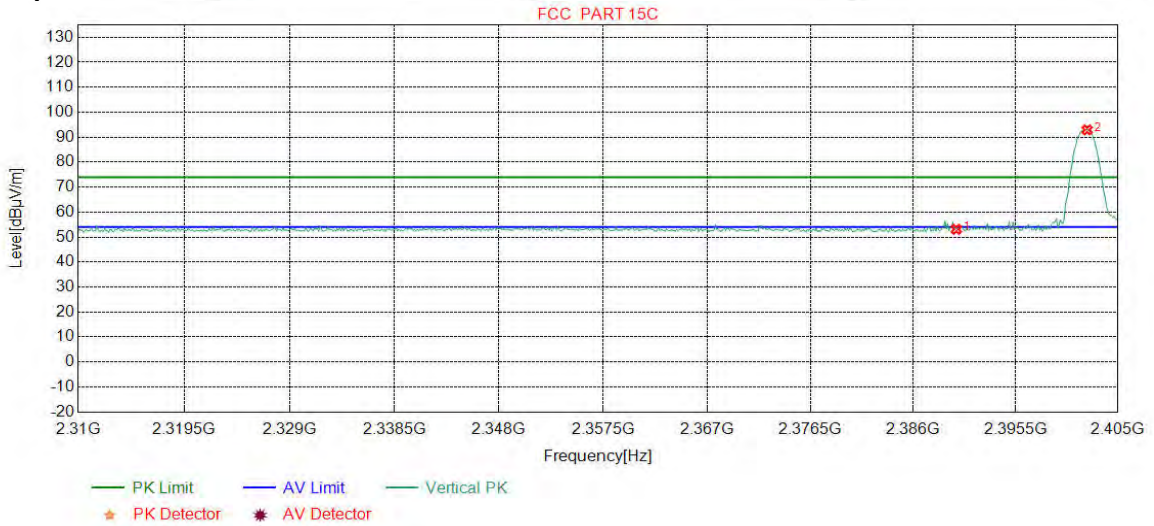

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.92	53.10	74.00	20.90	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	89.77	92.91	74.00	-18.91	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

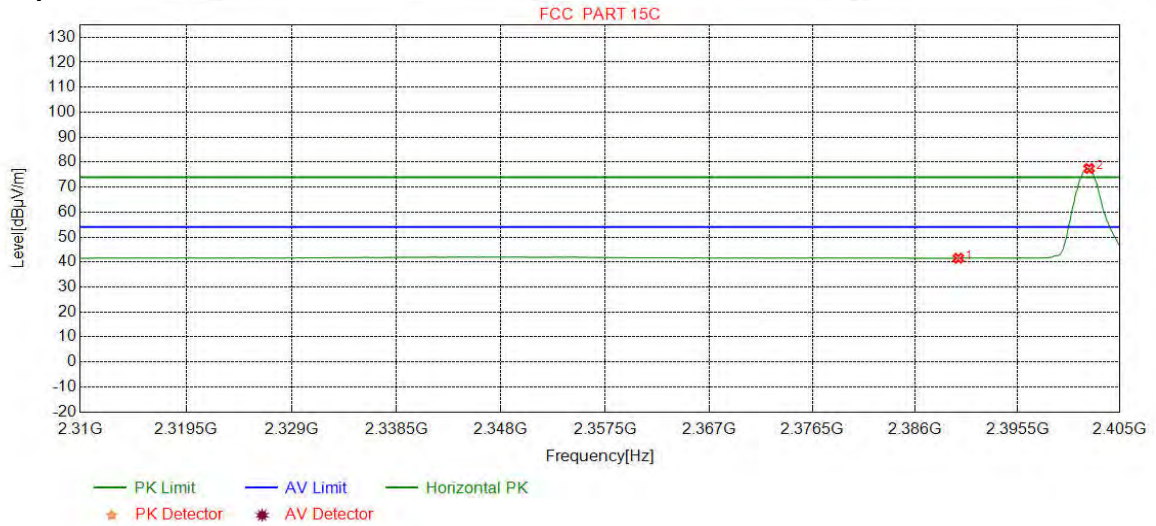

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.35	41.53	54.00	12.47	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	74.31	77.45	54.00	-23.45	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

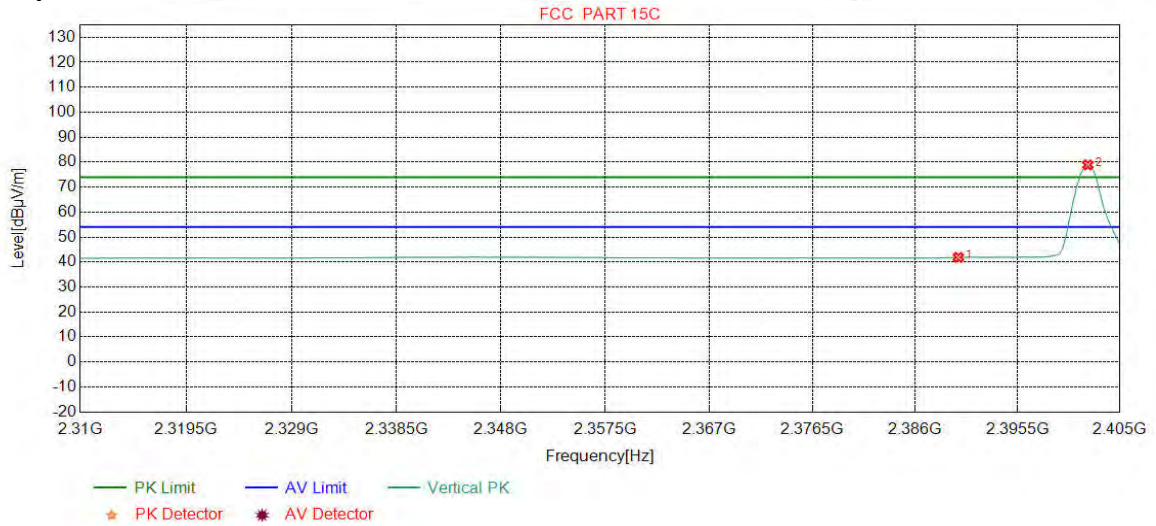

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.69	41.87	54.00	12.13	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	75.77	78.91	54.00	-24.91	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

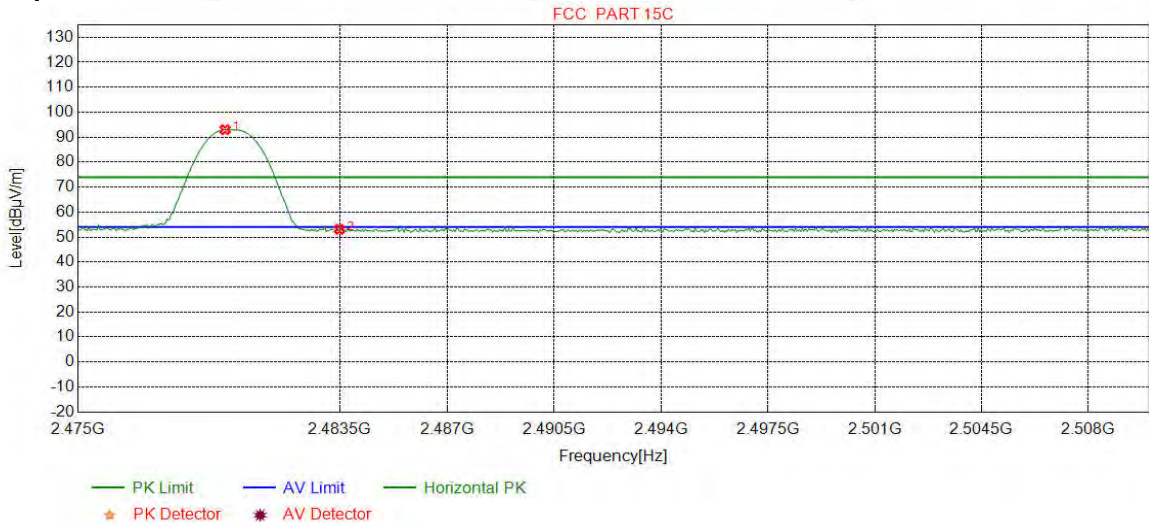

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.7747	32.37	13.39	-42.39	89.63	93.00	74.00	-19.00	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.72	53.08	74.00	20.92	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

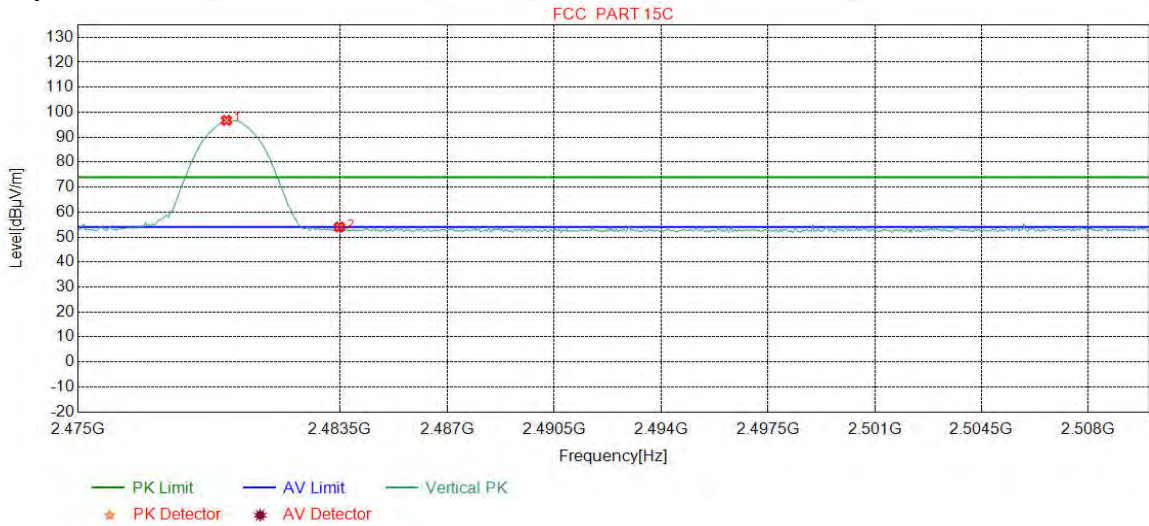

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	93.36	96.73	74.00	-22.73	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	50.67	54.03	74.00	19.97	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

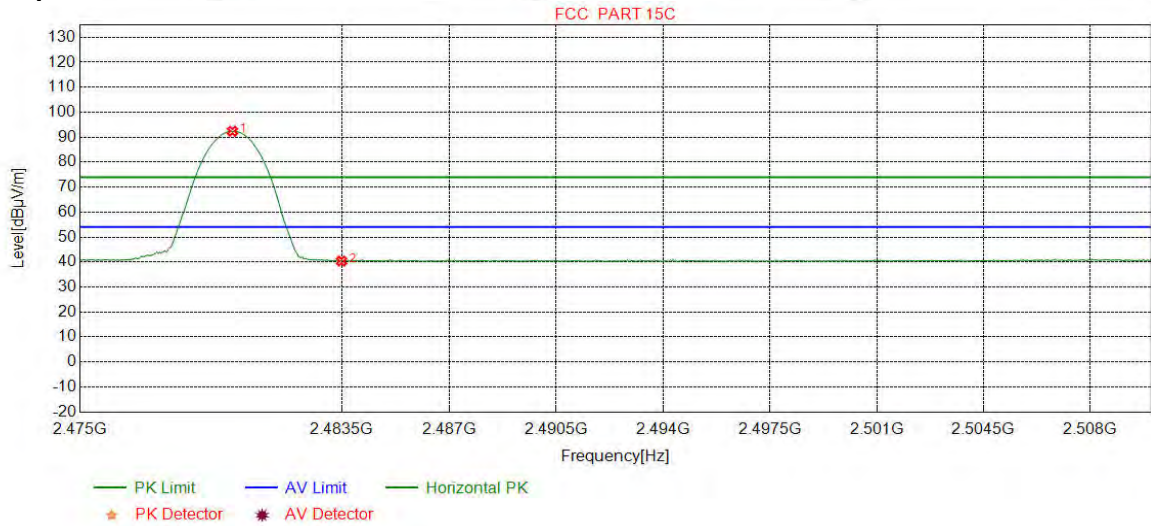

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9499	32.37	13.39	-42.39	89.01	92.38	54.00	-38.38	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.04	40.40	54.00	13.60	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

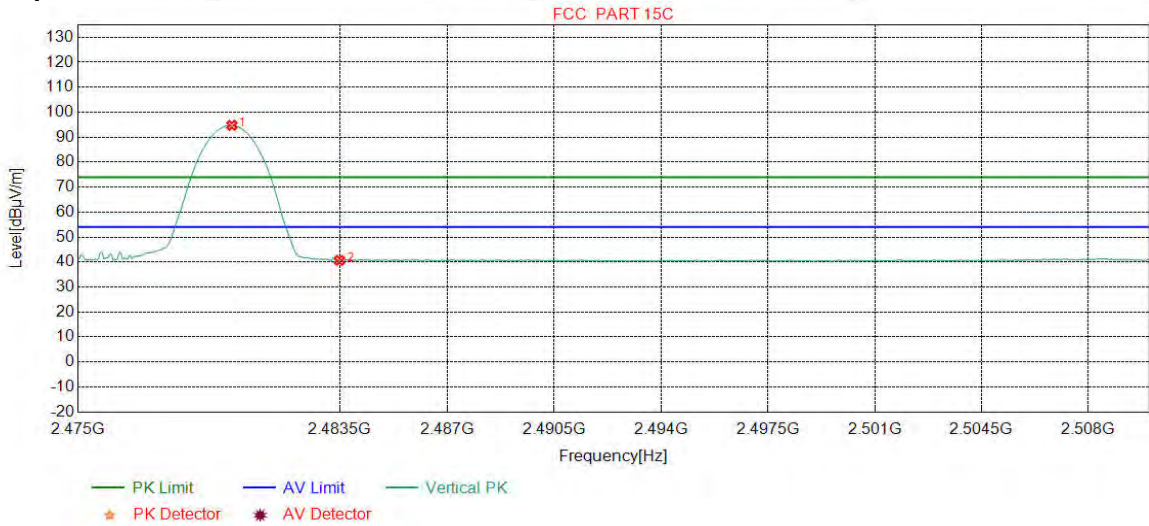

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	91.38	94.75	54.00	-40.75	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.30	40.66	54.00	13.34	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

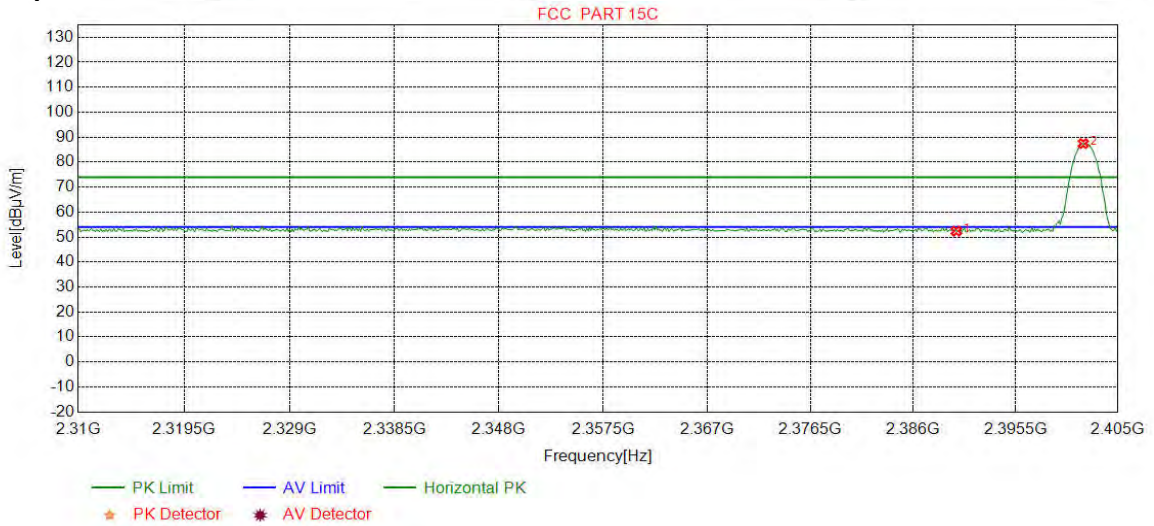

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.20	52.38	74.00	21.62	Pass	Horizontal
2	2401.7897	32.26	13.31	-42.43	84.30	87.44	74.00	-13.44	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

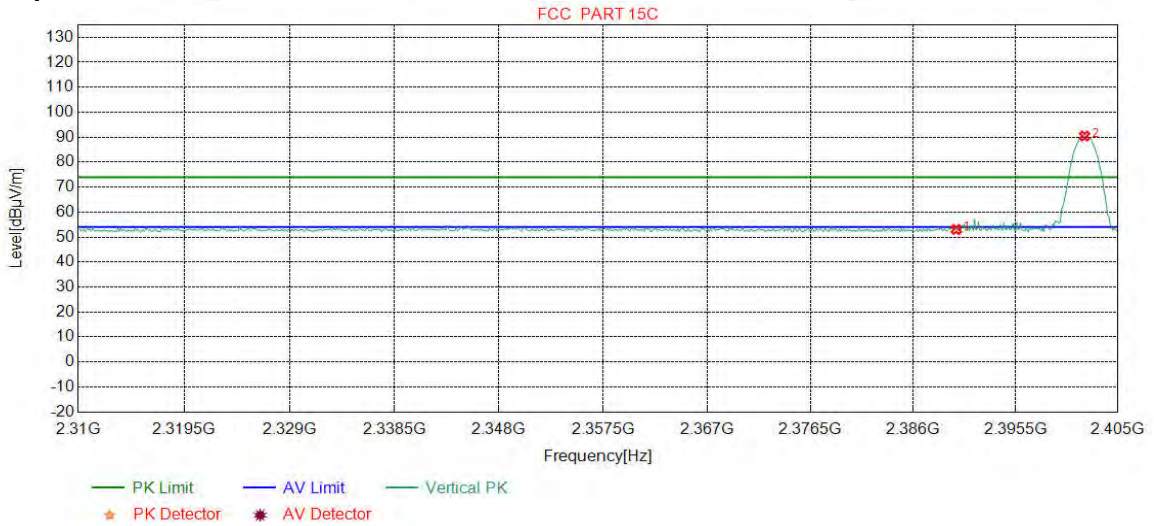

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.86	53.04	74.00	20.96	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	87.32	90.46	74.00	-16.46	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

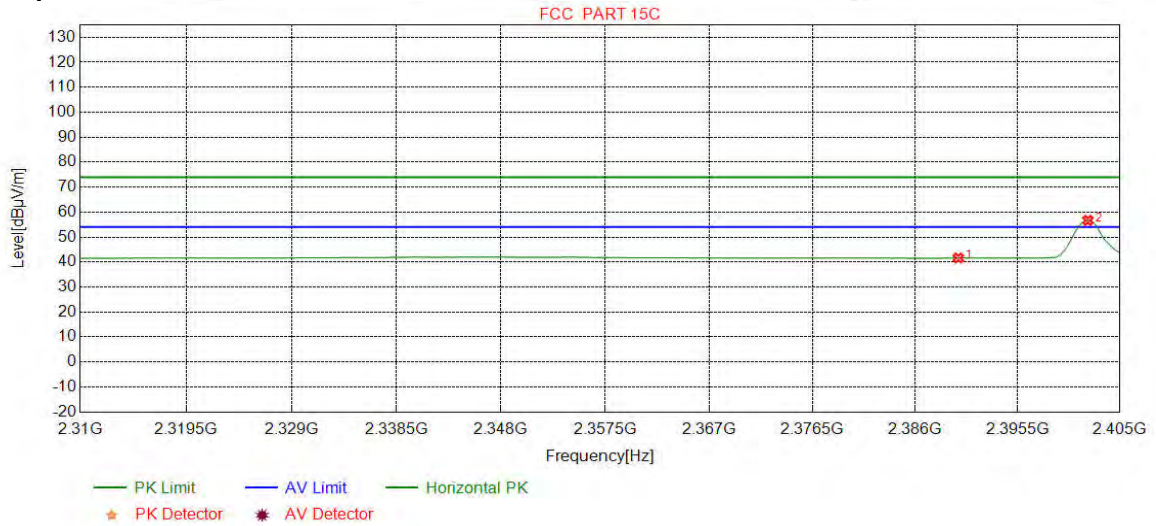

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.44	41.62	54.00	12.38	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	53.53	56.67	54.00	-2.67	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

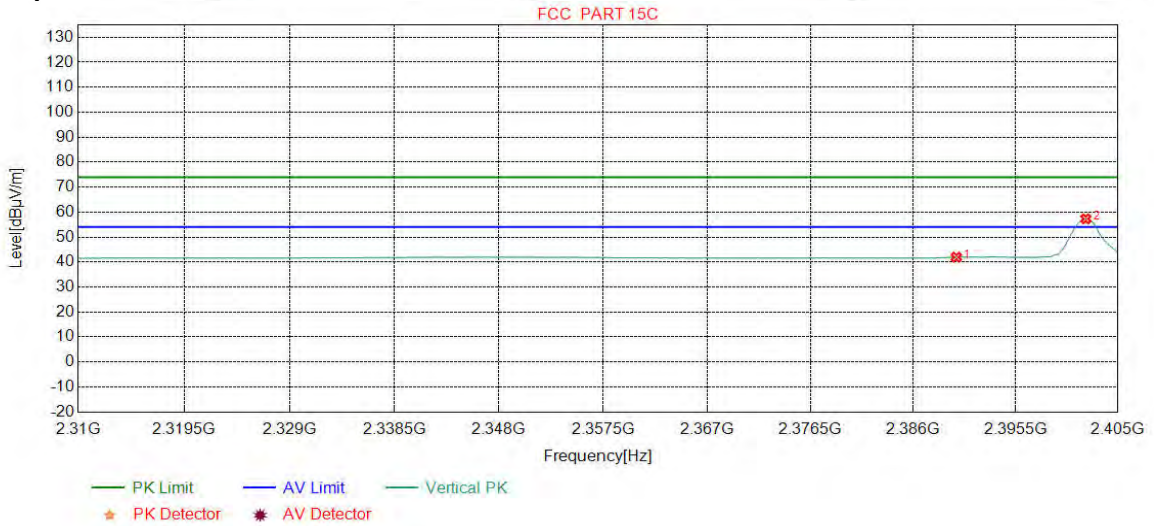

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.76	41.94	54.00	12.06	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	54.16	57.30	54.00	-3.30	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

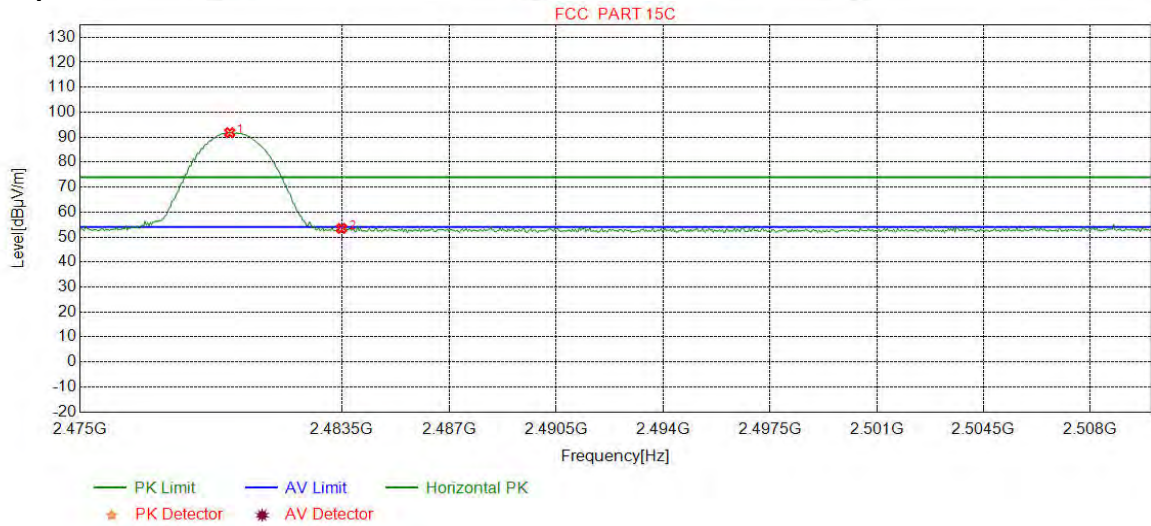

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8623	32.37	13.39	-42.39	88.43	91.80	74.00	-17.80	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	50.10	53.46	74.00	20.54	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

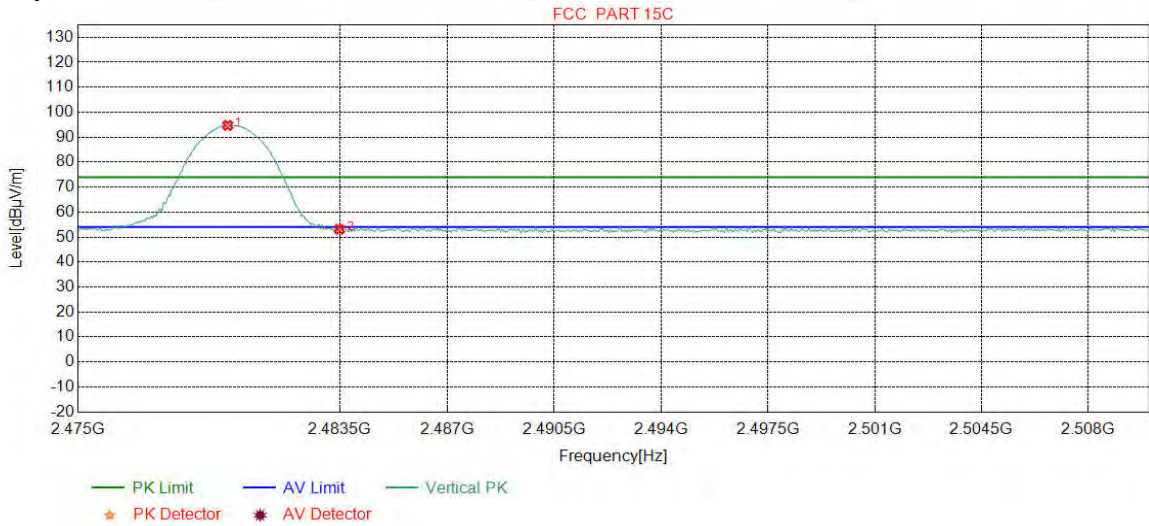

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8623	32.37	13.39	-42.39	91.34	94.71	74.00	-20.71	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.72	53.08	74.00	20.92	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

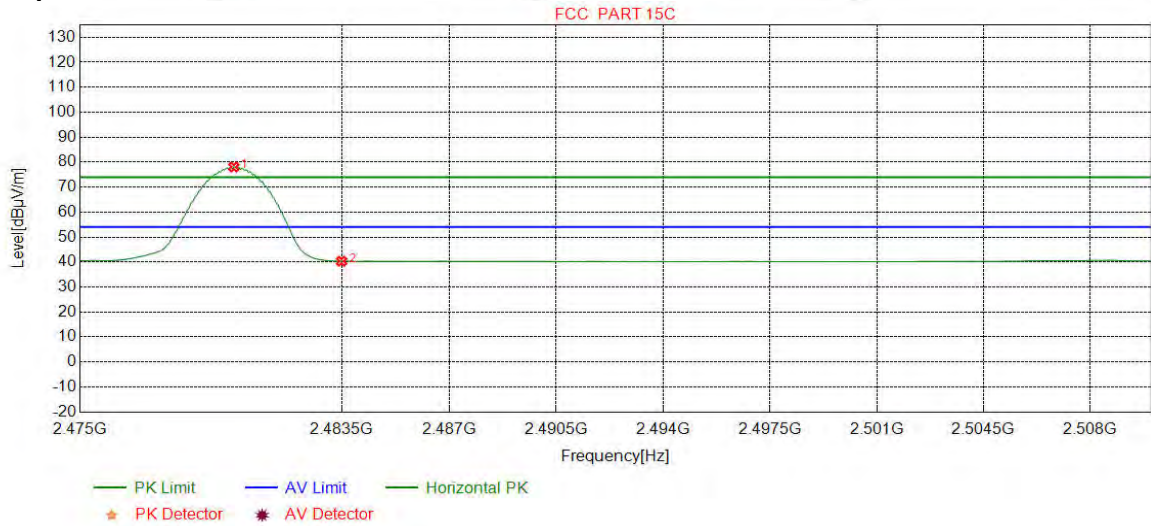

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	74.68	78.05	54.00	-24.05	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.97	40.33	54.00	13.67	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

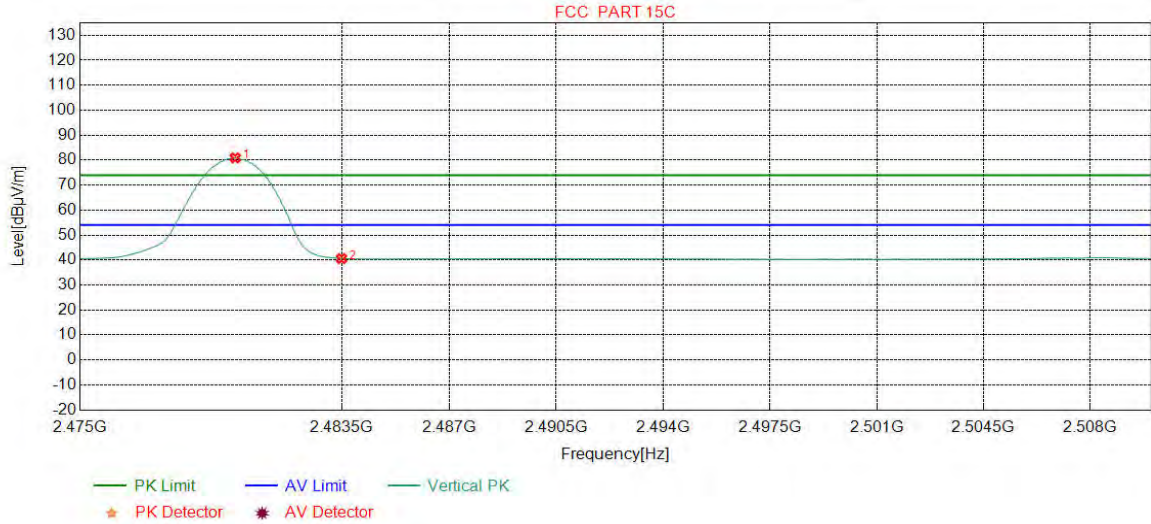

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	77.55	80.92	54.00	-26.92	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.21	40.57	54.00	13.43	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

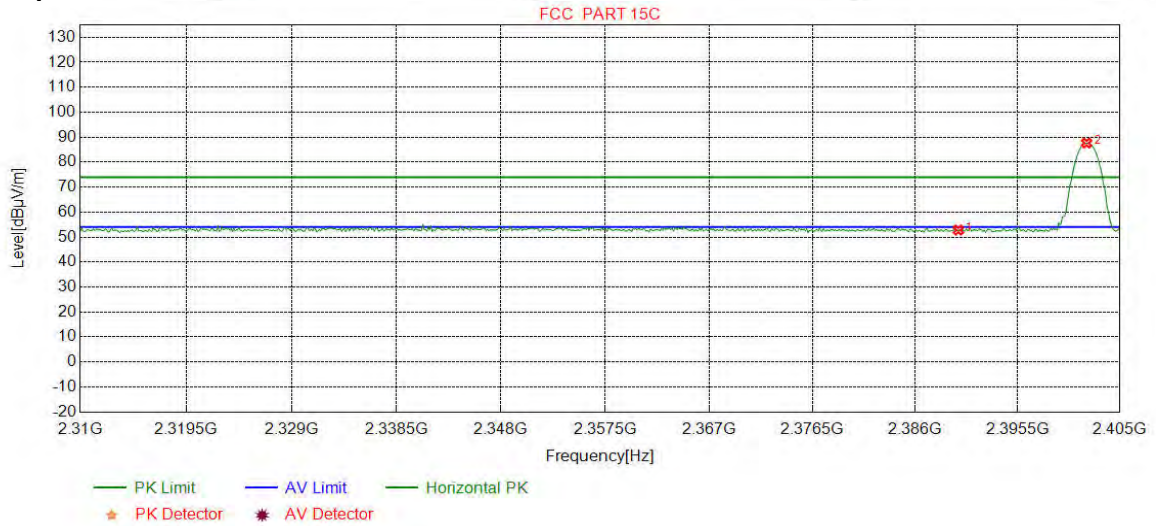

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.62	52.80	74.00	21.20	Pass	Horizontal
2	2401.9086	32.26	13.31	-42.43	84.49	87.63	74.00	-13.63	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

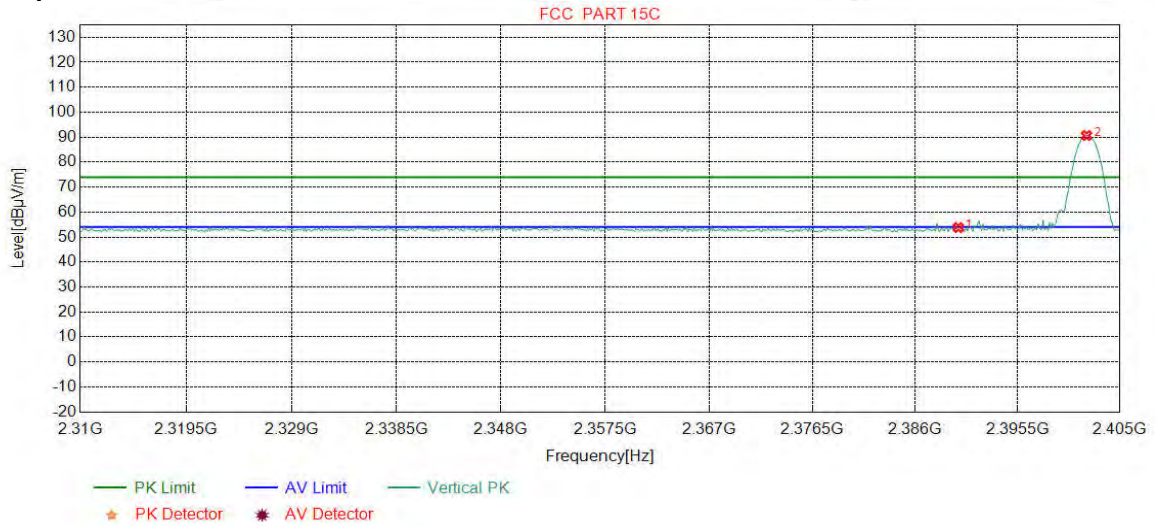

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.63	53.81	74.00	20.19	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	87.53	90.67	74.00	-16.67	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

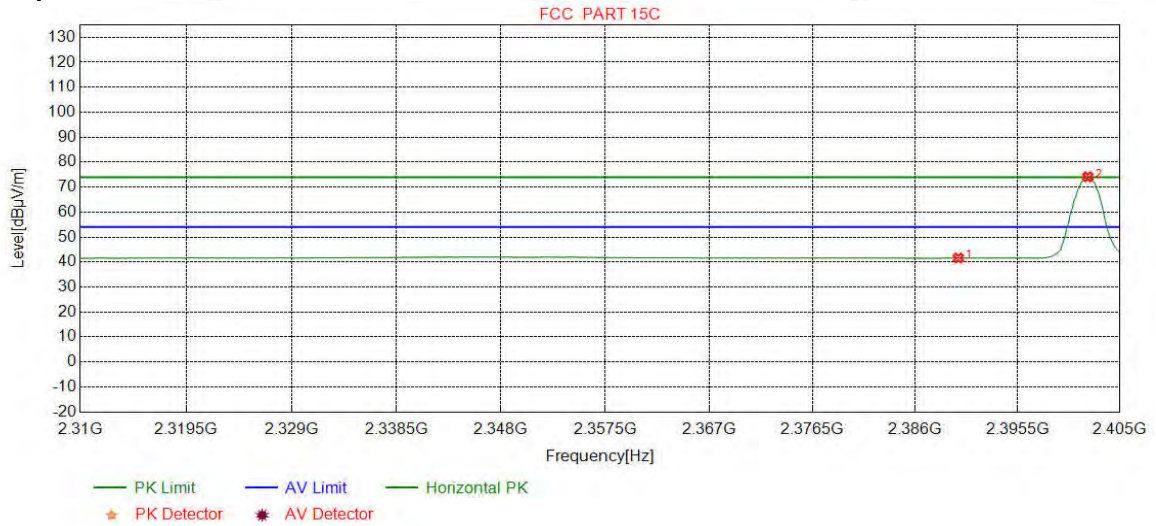

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.43	41.61	54.00	12.39	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	70.98	74.12	54.00	-20.12	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

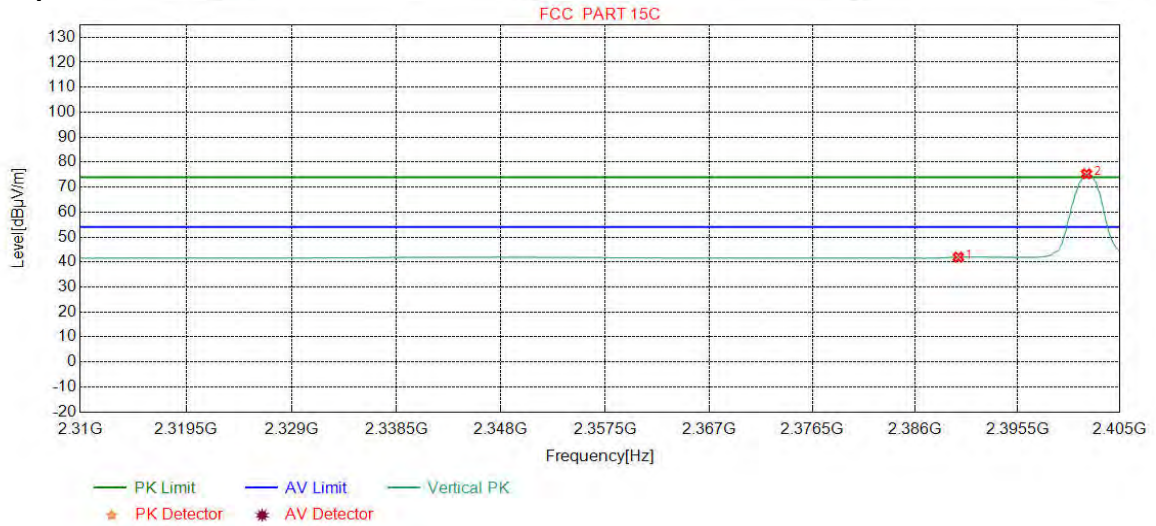

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.75	41.93	54.00	12.07	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	72.17	75.31	54.00	-21.31	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

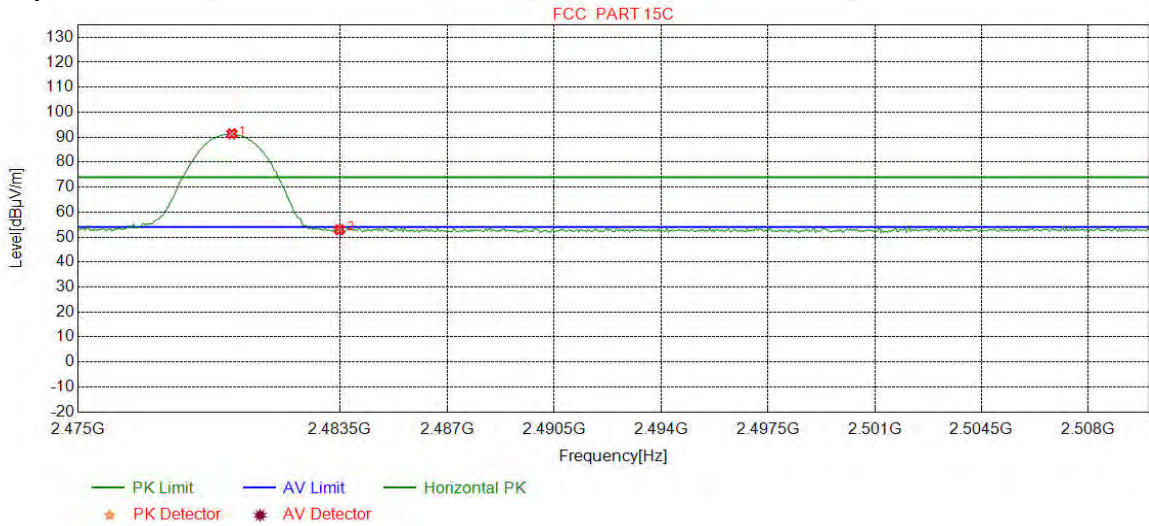

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	87.98	91.35	74.00	-17.35	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.58	52.94	74.00	21.06	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

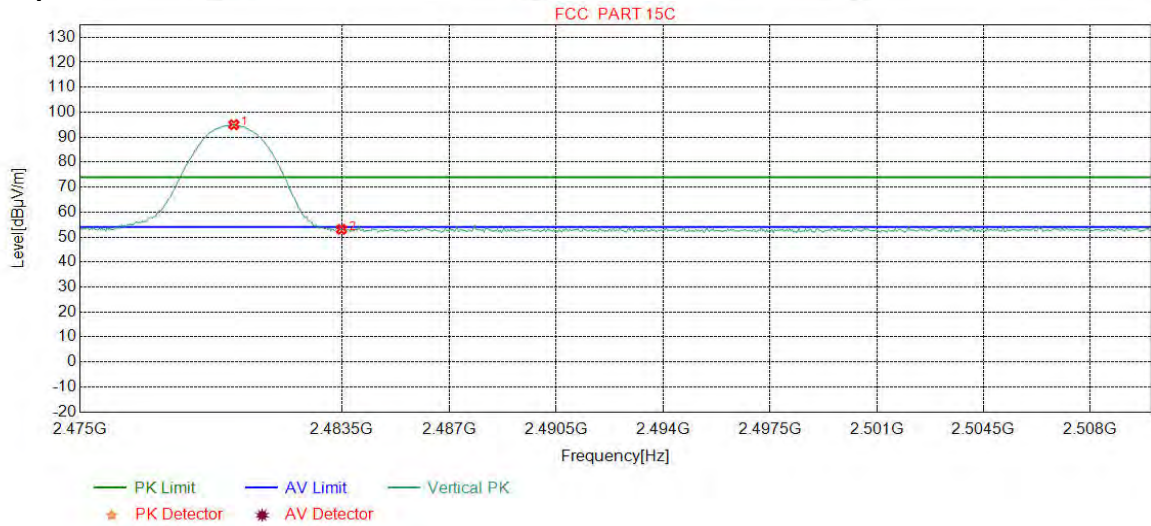

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	91.62	94.99	74.00	-20.99	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.71	53.07	74.00	20.93	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

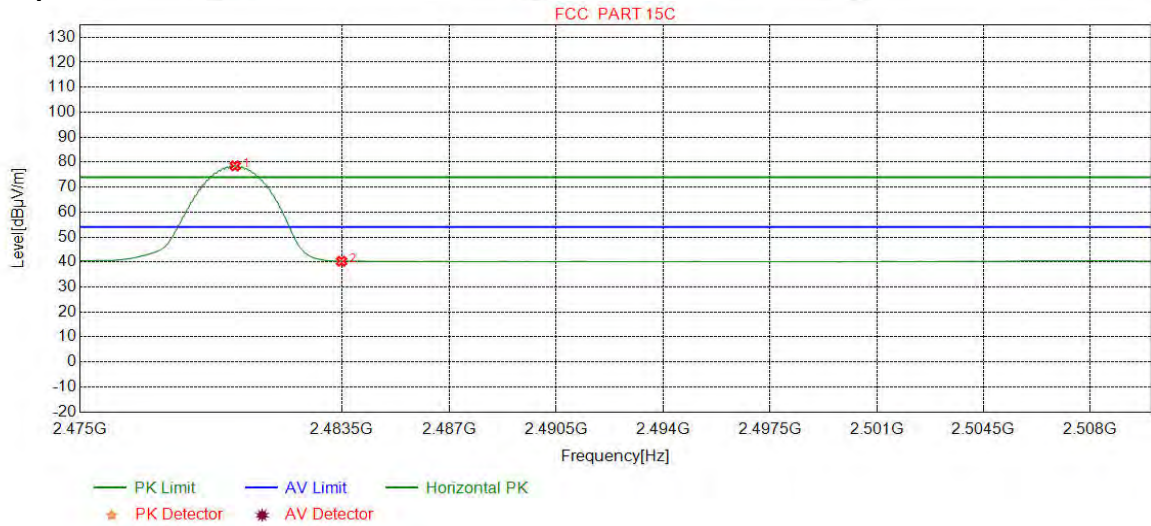

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	75.12	78.49	54.00	-24.49	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.95	40.31	54.00	13.69	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

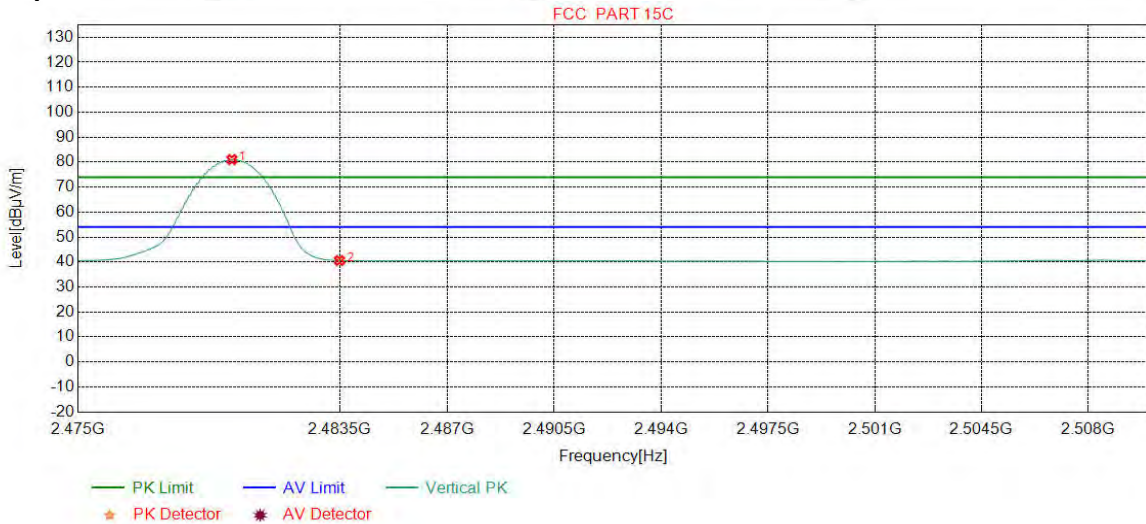

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	77.67	81.04	54.00	-27.04	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.23	40.59	54.00	13.41	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix K): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
<p>Below 1GHz test procedure as below:</p> <p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>Above 1GHz test procedure as below:</p> <p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:		GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	79.4749	7.20	1.04	-32.07	57.99	34.16	40.00	5.84	Pass	H
2	96.0636	10.37	1.13	-32.07	53.10	32.53	43.50	10.97	Pass	H
3	120.1220	9.18	1.30	-32.07	57.90	36.31	43.50	7.19	Pass	H
4	350.0350	14.30	2.23	-31.87	57.40	42.06	46.00	3.94	Pass	H
5	819.1739	21.13	3.44	-31.94	48.57	41.20	46.00	4.80	Pass	H
6	896.0056	22.05	3.59	-31.59	49.37	43.42	46.00	2.58	Pass	H
7	56.0956	12.22	0.85	-32.06	49.38	30.39	40.00	9.61	Pass	V
8	63.3713	10.72	0.91	-32.04	48.32	27.91	40.00	12.09	Pass	V
9	208.8859	11.13	1.71	-31.94	48.07	28.97	43.50	14.53	Pass	V
10	350.0350	14.30	2.23	-31.87	47.23	31.89	46.00	14.11	Pass	V
11	819.1739	21.13	3.44	-31.94	48.38	41.01	46.00	4.99	Pass	V
12	892.9983	22.02	3.59	-31.62	43.96	37.95	46.00	8.05	Pass	V

Mode:		GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	50.5661	13.11	0.80	-32.11	54.22	36.02	40.00	3.98	Pass	H
2	69.9680	9.01	0.95	-32.05	56.20	34.11	40.00	5.89	Pass	H
3	83.9374	8.01	1.06	-32.09	53.92	30.90	40.00	9.10	Pass	H
4	132.0542	7.60	1.34	-32.01	59.21	36.14	43.50	7.36	Pass	H
5	350.0350	14.30	2.23	-31.87	57.31	41.97	46.00	4.03	Pass	H
6	819.1739	21.13	3.44	-31.94	48.37	41.00	46.00	5.00	Pass	H
7	38.9249	11.96	0.70	-32.11	51.24	31.79	40.00	8.21	Pass	V
8	65.6026	10.14	0.92	-32.04	56.61	35.63	40.00	4.37	Pass	V
9	108.1898	10.92	1.23	-32.07	49.10	29.18	43.50	14.32	Pass	V
10	208.8859	11.13	1.71	-31.94	48.23	29.13	43.50	14.37	Pass	V
11	350.0350	14.30	2.23	-31.87	47.40	32.06	46.00	13.94	Pass	V
12	819.1739	21.13	3.44	-31.94	49.16	41.79	46.00	4.21	Pass	V

Mode:		GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	56.8717	12.10	0.86	-32.06	51.72	32.62	40.00	7.38	Pass	H
2	108.0928	10.92	1.23	-32.07	57.99	38.07	43.50	5.43	Pass	H
3	131.7632	7.61	1.34	-32.01	56.76	33.70	43.50	9.80	Pass	H
4	350.0350	14.30	2.23	-31.87	57.60	42.26	46.00	3.74	Pass	H
5	665.6076	19.52	3.08	-32.05	42.65	33.20	46.00	12.80	Pass	H
6	819.1739	21.13	3.44	-31.94	49.05	41.68	46.00	4.32	Pass	H
7	48.2378	13.20	0.78	-32.12	41.36	23.22	40.00	16.78	Pass	V
8	72.0052	8.62	0.97	-32.05	57.34	34.88	40.00	5.12	Pass	V
9	107.8018	10.92	1.22	-32.06	45.35	25.43	43.50	18.07	Pass	V
10	208.8859	11.13	1.71	-31.94	47.97	28.87	43.50	14.63	Pass	V
11	350.0350	14.30	2.23	-31.87	47.28	31.94	46.00	14.06	Pass	V
12	819.1739	21.13	3.44	-31.94	48.86	41.49	46.00	4.51	Pass	V

Mode:		π /4DQPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	44.4544	13.10	0.75	-32.12	54.93	36.66	40.00	3.34	Pass	H
2	58.0358	11.91	0.88	-32.06	55.93	36.66	40.00	3.34	Pass	H
3	67.7368	9.59	0.94	-32.05	57.42	35.90	40.00	4.10	Pass	H
4	96.0636	10.37	1.13	-32.07	54.63	34.06	43.50	9.44	Pass	H
5	350.0350	14.30	2.23	-31.87	57.34	42.00	46.00	4.00	Pass	H
6	819.1739	21.13	3.44	-31.94	49.13	41.76	46.00	4.24	Pass	H
7	48.4318	13.20	0.78	-32.11	49.74	31.61	40.00	8.39	Pass	V
8	61.3341	11.25	0.91	-32.04	56.47	36.59	40.00	3.41	Pass	V
9	208.8859	11.13	1.71	-31.94	49.20	30.10	43.50	13.40	Pass	V
10	350.0350	14.30	2.23	-31.87	47.78	32.44	46.00	13.56	Pass	V
11	665.6076	19.52	3.08	-32.05	38.01	28.56	46.00	17.44	Pass	V
12	819.1739	21.13	3.44	-31.94	48.34	40.97	46.00	5.03	Pass	V

Mode:		π/4DQPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	42.2232	12.70	0.73	-32.11	49.72	31.04	40.00	8.96	Pass	H
2	72.0052	8.62	0.97	-32.05	56.70	34.24	40.00	5.76	Pass	H
3	95.9666	10.35	1.13	-32.07	53.29	32.70	43.50	10.80	Pass	H
4	207.4307	11.09	1.71	-31.95	52.33	33.18	43.50	10.32	Pass	H
5	350.0350	14.30	2.23	-31.87	57.49	42.15	46.00	3.85	Pass	H
6	819.1739	21.13	3.44	-31.94	50.22	42.85	46.00	3.15	Pass	H
7	46.2976	13.20	0.76	-32.11	50.97	32.82	40.00	7.18	Pass	V
8	62.4012	10.98	0.91	-32.05	56.83	36.67	40.00	3.33	Pass	V
9	208.8859	11.13	1.71	-31.94	48.53	29.43	43.50	14.07	Pass	V
10	350.0350	14.30	2.23	-31.87	47.35	32.01	46.00	13.99	Pass	V
11	665.6076	19.52	3.08	-32.05	37.07	27.62	46.00	18.38	Pass	V
12	819.1739	21.13	3.44	-31.94	48.13	40.76	46.00	5.24	Pass	V

Mode:		π/4DQPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	58.5209	11.84	0.88	-32.05	51.41	32.08	40.00	7.92	Pass	H
2	83.9374	8.01	1.06	-32.09	53.97	30.95	40.00	9.05	Pass	H
3	119.9280	9.21	1.30	-32.07	52.97	31.41	43.50	12.09	Pass	H
4	350.0350	14.30	2.23	-31.87	57.28	41.94	46.00	4.06	Pass	H
5	665.6076	19.52	3.08	-32.05	43.44	33.99	46.00	12.01	Pass	H
6	819.1739	21.13	3.44	-31.94	48.39	41.02	46.00	4.98	Pass	H
7	47.5588	13.20	0.78	-32.12	51.56	33.42	40.00	6.58	Pass	V
8	51.8272	12.91	0.81	-32.10	49.21	30.83	40.00	9.17	Pass	V
9	208.8859	11.13	1.71	-31.94	48.19	29.09	43.50	14.41	Pass	V
10	350.0350	14.30	2.23	-31.87	47.72	32.38	46.00	13.62	Pass	V
11	649.9890	19.40	3.10	-32.07	38.17	28.60	46.00	17.40	Pass	V
12	819.1739	21.13	3.44	-31.94	48.14	40.77	46.00	5.23	Pass	V

Mode:		8DPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	55.9016	12.26	0.85	-32.08	49.40	30.43	40.00	9.57	Pass	H
2	69.8710	9.03	0.95	-32.05	55.26	33.19	40.00	6.81	Pass	H
3	83.7434	7.96	1.05	-32.07	55.59	32.53	40.00	7.47	Pass	H
4	250.0180	12.20	1.88	-31.90	49.82	32.00	46.00	14.00	Pass	H
5	350.0350	14.30	2.23	-31.87	57.30	41.96	46.00	4.04	Pass	H
6	819.1739	21.13	3.44	-31.94	48.19	40.82	46.00	5.18	Pass	H
7	44.2604	13.07	0.75	-32.12	54.19	35.89	40.00	4.11	Pass	V
8	47.4617	13.20	0.77	-32.11	54.08	35.94	40.00	4.06	Pass	V
9	55.0285	12.40	0.84	-32.08	52.94	34.10	40.00	5.90	Pass	V
10	208.8859	11.13	1.71	-31.94	49.26	30.16	43.50	13.34	Pass	V
11	350.0350	14.30	2.23	-31.87	47.39	32.05	46.00	13.95	Pass	V
12	819.1739	21.13	3.44	-31.94	48.07	40.70	46.00	5.30	Pass	V

Mode:		8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	43.1933	12.87	0.74	-32.11	55.51	37.01	40.00	2.99	Pass	H
2	55.9016	12.26	0.85	-32.08	55.81	36.84	40.00	3.16	Pass	H
3	119.8310	9.23	1.30	-32.07	55.61	34.07	43.50	9.43	Pass	H
4	350.0350	14.30	2.23	-31.87	57.37	42.03	46.00	3.97	Pass	H
5	665.6076	19.52	3.08	-32.05	43.82	34.37	46.00	11.63	Pass	H
6	819.1739	21.13	3.44	-31.94	48.17	40.80	46.00	5.20	Pass	H
7	47.4617	13.20	0.77	-32.11	54.27	36.13	40.00	3.87	Pass	V
8	58.0358	11.91	0.88	-32.06	54.95	35.68	40.00	4.32	Pass	V
9	84.0344	8.03	1.06	-32.08	53.92	30.93	40.00	9.07	Pass	V
10	350.0350	14.30	2.23	-31.87	47.55	32.21	46.00	13.79	Pass	V
11	649.9890	19.40	3.10	-32.07	38.60	29.03	46.00	16.97	Pass	V
12	819.1739	21.13	3.44	-31.94	48.01	40.64	46.00	5.36	Pass	V

Mode:		8DPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	57.0657	12.07	0.86	-32.06	56.44	37.31	40.00	2.69	Pass	H
2	68.8039	9.31	0.94	-32.04	55.60	33.81	40.00	6.19	Pass	H
3	132.0542	7.60	1.34	-32.01	58.87	35.80	43.50	7.70	Pass	H
4	350.0350	14.30	2.23	-31.87	57.34	42.00	46.00	4.00	Pass	H
5	665.6076	19.52	3.08	-32.05	43.47	34.02	46.00	11.98	Pass	H
6	819.1739	21.13	3.44	-31.94	48.53	41.16	46.00	4.84	Pass	H
7	41.1561	12.51	0.73	-32.12	47.75	28.87	40.00	11.13	Pass	V
8	60.2670	11.53	0.90	-32.04	52.51	32.90	40.00	7.10	Pass	V
9	108.0928	10.92	1.23	-32.07	45.82	25.90	43.50	17.60	Pass	V
10	208.8859	11.13	1.71	-31.94	48.63	29.53	43.50	13.97	Pass	V
11	350.0350	14.30	2.23	-31.87	47.47	32.13	46.00	13.87	Pass	V
12	819.1739	21.13	3.44	-31.94	47.76	40.39	46.00	5.61	Pass	V

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2000.1000	31.70	3.47	-42.61	57.52	50.08	74.00	23.92	Pass	H	PK
2	2401.9402	32.26	3.92	-42.43	57.10	50.85	74.00	23.15	Pass	H	PK
3	4000.0667	33.80	4.33	-40.78	49.23	46.58	74.00	27.42	Pass	H	PK
4	4804.1203	34.50	4.55	-40.66	54.56	52.95	74.00	21.05	Pass	H	PK
5	7179.2786	36.28	5.77	-41.04	46.37	47.38	74.00	26.62	Pass	H	PK
6	10418.494	38.39	7.13	-41.05	45.75	50.22	74.00	23.78	Pass	H	PK
7	1600.0600	29.06	3.07	-42.90	59.89	49.12	74.00	24.88	Pass	V	PK
8	2557.9558	32.49	4.09	-42.35	57.80	52.03	74.00	21.97	Pass	V	PK
9	4804.1203	34.50	4.55	-40.66	48.37	46.76	74.00	27.24	Pass	V	PK
10	7198.2799	36.30	5.82	-41.03	46.86	47.95	74.00	26.05	Pass	V	PK
11	10642.509	38.53	7.00	-41.17	45.91	50.27	74.00	23.73	Pass	V	PK
12	12401.626	39.54	7.85	-41.12	45.85	52.12	74.00	21.88	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1992.4993	31.65	3.46	-42.61	59.78	52.28	74.00	21.72	Pass	H	PK
2	2441.1441	32.32	3.96	-42.41	59.52	53.39	74.00	20.61	Pass	H	PK
3	4882.1255	34.50	4.81	-40.60	53.81	52.52	74.00	21.48	Pass	H	PK
4	8250.3500	36.50	6.21	-40.78	47.90	49.83	74.00	24.17	Pass	H	PK
5	11007.533	38.60	7.59	-41.10	46.31	51.40	74.00	22.60	Pass	H	PK
6	12966.664	39.60	8.19	-41.69	46.02	52.12	74.00	21.88	Pass	H	PK
7	1599.4599	29.06	3.07	-42.90	59.94	49.17	74.00	24.83	Pass	V	PK
8	2195.7196	31.97	3.65	-42.52	58.99	52.09	74.00	21.91	Pass	V	PK
9	3188.0125	33.28	4.63	-42.01	52.32	48.22	74.00	25.78	Pass	V	PK
10	4882.1255	34.50	4.81	-40.60	50.63	49.34	74.00	24.66	Pass	V	PK
11	5601.1734	35.16	5.09	-40.73	50.69	50.21	74.00	23.79	Pass	V	PK
12	13047.669	39.58	8.18	-41.68	46.43	52.51	74.00	21.49	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1794.6795	30.34	3.31	-42.70	60.47	51.42	74.00	22.58	Pass	H	PK
2	1990.6991	31.64	3.46	-42.62	60.70	53.18	74.00	20.82	Pass	H	PK
3	2479.7480	32.37	4.01	-42.40	57.63	51.61	74.00	22.39	Pass	H	PK
4	3200.0133	33.28	4.65	-42.00	53.43	49.36	74.00	24.64	Pass	H	PK
5	4960.1307	34.50	4.82	-40.53	54.26	53.05	74.00	20.95	Pass	H	PK
6	12238.615	39.44	7.70	-41.15	46.24	52.23	74.00	21.77	Pass	H	PK
7	1598.4598	29.05	3.07	-42.90	58.85	48.07	74.00	25.93	Pass	V	PK
8	2199.5200	31.98	3.65	-42.52	59.63	52.74	74.00	21.26	Pass	V	PK
9	2479.7480	32.37	4.01	-42.40	60.00	53.98	74.00	20.02	Pass	V	PK
10	3194.0129	33.28	4.64	-42.01	53.08	48.99	74.00	25.01	Pass	V	PK
11	5599.1733	35.16	5.09	-40.73	49.95	49.47	74.00	24.53	Pass	V	PK
12	8232.3488	36.49	6.26	-40.79	46.85	48.81	74.00	25.19	Pass	V	PK

Mode:			π /4DQPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1791.8792	30.33	3.31	-42.71	59.02	49.95	74.00	24.05	Pass	H	PK
2	1995.2995	31.67	3.47	-42.62	59.88	52.40	74.00	21.60	Pass	H	PK
3	2896.5897	33.03	4.37	-42.17	52.49	47.72	74.00	26.28	Pass	H	PK
4	4804.1203	34.50	4.55	-40.66	50.46	48.85	74.00	25.15	Pass	H	PK
5	6495.2330	35.90	5.47	-41.19	45.83	46.01	74.00	27.99	Pass	H	PK
6	12281.618	39.47	7.72	-41.15	45.90	51.94	74.00	22.06	Pass	H	PK
7	1597.8598	29.05	3.07	-42.90	58.02	47.24	74.00	26.76	Pass	V	PK
8	1880.8881	30.91	3.40	-42.66	57.54	49.19	74.00	24.81	Pass	V	PK
9	2593.5594	32.55	4.10	-42.34	55.39	49.70	74.00	24.30	Pass	V	PK
10	3199.0133	33.28	4.65	-42.00	53.40	49.33	74.00	24.67	Pass	V	PK
11	5601.1734	35.16	5.09	-40.73	48.32	47.84	74.00	26.16	Pass	V	PK
12	13670.711	39.50	8.22	-41.20	46.42	52.94	74.00	21.06	Pass	V	PK

Mode:			π/4DQPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1795.4795	30.35	3.31	-42.71	59.10	50.05	74.00	23.95	Pass	H	PK
2	1995.8996	31.67	3.47	-42.61	60.96	53.49	74.00	20.51	Pass	H	PK
3	2887.3887	33.02	4.34	-42.18	52.42	47.60	74.00	26.40	Pass	H	PK
4	4882.1255	34.50	4.81	-40.60	53.88	52.59	74.00	21.41	Pass	H	PK
5	7640.3094	36.54	6.14	-40.83	47.53	49.38	74.00	24.62	Pass	H	PK
6	10290.486	38.21	6.85	-40.85	45.35	49.56	74.00	24.44	Pass	H	PK
7	1596.8597	29.04	3.07	-42.90	59.25	48.46	74.00	25.54	Pass	V	PK
8	2864.9865	32.98	4.27	-42.18	52.89	47.96	74.00	26.04	Pass	V	PK
9	4881.1254	34.50	4.80	-40.59	50.74	49.45	74.00	24.55	Pass	V	PK
10	7768.3179	36.49	6.19	-40.89	46.98	48.77	74.00	25.23	Pass	V	PK
11	9563.4376	37.63	6.74	-40.80	44.95	48.52	74.00	25.48	Pass	V	PK
12	12416.627	39.55	7.79	-41.12	45.63	51.85	74.00	22.15	Pass	V	PK

Mode:			π/4DQPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1794.0794	30.34	3.31	-42.71	54.32	45.26	74.00	28.74	Pass	H	PK
2	1990.0990	31.63	3.46	-42.61	59.65	52.13	74.00	21.87	Pass	H	PK
3	2479.9480	32.37	4.01	-42.40	54.82	48.80	74.00	25.20	Pass	H	PK
4	3999.0666	33.80	4.33	-40.78	47.46	44.81	74.00	29.19	Pass	H	PK
5	5952.1968	35.72	5.32	-41.04	46.10	46.10	74.00	27.90	Pass	H	PK
6	11649.576	39.02	7.44	-41.33	46.60	51.73	74.00	22.27	Pass	H	PK
7	1399.2399	28.30	2.90	-42.68	58.02	46.54	74.00	27.46	Pass	V	PK
8	2195.9196	31.97	3.65	-42.52	59.52	52.62	74.00	21.38	Pass	V	PK
9	5531.1687	35.05	5.16	-40.67	46.44	45.98	74.00	28.02	Pass	V	PK
10	8155.3437	36.46	6.41	-40.86	46.21	48.22	74.00	25.78	Pass	V	PK
11	12393.626	39.54	7.83	-41.12	45.62	51.87	74.00	22.13	Pass	V	PK
12	15989.866	41.88	10.16	-43.37	45.17	53.84	74.00	20.16	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1996.2996	31.68	3.47	-42.62	58.33	50.86	74.00	23.14	Pass	H	PK
2	2402.3402	32.26	3.92	-42.43	54.05	47.80	74.00	26.20	Pass	H	PK
3	3200.0133	33.28	4.65	-42.00	53.30	49.23	74.00	24.77	Pass	H	PK
4	4804.1203	34.50	4.55	-40.66	51.75	50.14	74.00	23.86	Pass	H	PK
5	5601.1734	35.16	5.09	-40.73	51.53	51.05	74.00	22.95	Pass	H	PK
6	8118.3412	36.45	6.26	-40.90	46.51	48.32	74.00	25.68	Pass	H	PK
7	1596.8597	29.04	3.07	-42.90	60.41	49.62	74.00	24.38	Pass	V	PK
8	2196.1196	31.97	3.65	-42.52	59.71	52.81	74.00	21.19	Pass	V	PK
9	2557.7558	32.49	4.09	-42.35	56.08	50.31	74.00	23.69	Pass	V	PK
10	5599.1733	35.16	5.09	-40.73	51.06	50.58	74.00	23.42	Pass	V	PK
11	8110.3407	36.44	6.21	-40.89	46.68	48.44	74.00	25.56	Pass	V	PK
12	11300.553	38.78	7.34	-41.27	45.87	50.72	74.00	23.28	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1792.6793	30.33	3.31	-42.71	57.31	48.24	74.00	25.76	Pass	H	PK
2	1992.2992	31.65	3.46	-42.61	59.70	52.20	74.00	21.80	Pass	H	PK
3	2440.7441	32.32	3.96	-42.42	57.16	51.02	74.00	22.98	Pass	H	PK
4	5599.1733	35.16	5.09	-40.73	54.38	53.90	74.00	20.10	Pass	H	PK
5	8182.3455	36.47	6.38	-40.84	46.61	48.62	74.00	25.38	Pass	H	PK
6	11779.585	39.12	7.46	-41.28	46.09	51.39	74.00	22.61	Pass	H	PK
7	1203.4203	28.10	2.66	-42.88	56.11	43.99	74.00	30.01	Pass	V	PK
8	1398.0398	28.30	2.90	-42.69	57.78	46.29	74.00	27.71	Pass	V	PK
9	1594.4594	29.02	3.07	-42.89	58.52	47.72	74.00	26.28	Pass	V	PK
10	2200.1200	31.98	3.65	-42.52	57.99	51.10	74.00	22.90	Pass	V	PK
11	2599.9600	32.56	4.10	-42.34	56.13	50.45	74.00	23.55	Pass	V	PK
12	3195.0130	33.28	4.64	-42.00	52.67	48.59	74.00	25.41	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1596.6597	29.04	3.07	-42.90	54.84	44.05	74.00	29.95	Pass	H	PK
2	1796.4796	30.36	3.31	-42.71	58.23	49.19	74.00	24.81	Pass	H	PK
3	1999.7000	31.70	3.47	-42.61	59.18	51.74	74.00	22.26	Pass	H	PK
4	2479.9480	32.37	4.01	-42.40	55.48	49.46	74.00	24.54	Pass	H	PK
5	4960.1307	34.50	4.82	-40.53	51.56	50.35	74.00	23.65	Pass	H	PK
6	12359.624	39.52	7.69	-41.13	45.76	51.84	74.00	22.16	Pass	H	PK
7	1399.2399	28.30	2.90	-42.68	57.17	45.69	74.00	28.31	Pass	V	PK
8	1600.4600	29.06	3.07	-42.90	59.80	49.03	74.00	24.97	Pass	V	PK
9	2193.3193	31.97	3.65	-42.52	57.07	50.17	74.00	23.83	Pass	V	PK
10	8164.3443	36.47	6.40	-40.86	46.68	48.69	74.00	25.31	Pass	V	PK
11	11785.585	39.13	7.46	-41.28	46.44	51.75	74.00	22.25	Pass	V	PK
12	14233.748	39.93	8.61	-41.74	46.62	53.42	74.00	20.58	Pass	V	PK

Note:

- 1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.
- 2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.
- 3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading - Correct Factor
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- 4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: UN1810



Radiated spurious emission Test Setup-1(30MHz-1GHz)



Radiated spurious emission Test Setup-2(Below 1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32L00178101 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.