

TEST REPORT

Product : NAVIGATION MULTIMEDIA
: RECEIVER
Trade mark : Stinger
Model/Type reference : UN1880, UN1880X
Serial Number : N/A
Report Number : EED32K00161902
FCC ID : XBDUN1880
Date of Issue : Jul. 26, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

AAMP of Florida, Inc. dba AAMP Global
15500 Lightwave Dr. Suite 202, Clearwater, FL 33760

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom - chen

Tom chen (Test Project)

Compiled by:

Max Liang

Max Liang (Project Engineer)

Reviewed by:

Kevin Yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Jul. 26, 2018

Check No.:3096305697



2 Version

Version No.	Date	Description
00	Jul. 26, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

N/A: The power supply of the tested sample is DC 12V in the vehicle, therefore it is not applicable.

Model No.: UN1880, UN1880X

Only the model of UN1880 is tested, since their electrical circuit design, layout, components used and internal wiring are identical, the shape and the material are identical, only the outer decoration is different.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): 20dB Occupied Bandwidth.....	13
Appendix B): Carrier Frequency Separation.....	17
Appendix C): Dwell Time.....	21
Appendix D): Hopping Channel Number.....	25
Appendix E): Conducted Peak Output Power.....	27
Appendix F): Band-edge for RF Conducted Emissions.....	31
Appendix G): RF Conducted Spurious Emissions.....	36
Appendix H): Pseudorandom Frequency Hopping Sequence.....	43
Appendix I): Antenna Requirement.....	44
Appendix J): Restricted bands around fundamental frequency (Radiated).....	45
Appendix K): Radiated Spurious Emissions.....	53
PHOTOGRAPHS OF TEST SETUP	61
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	63

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

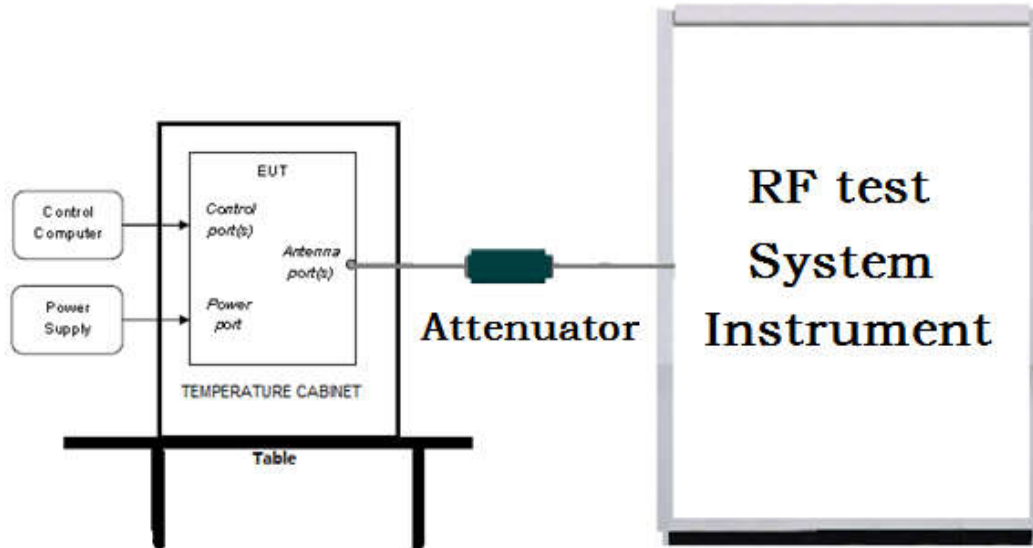

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

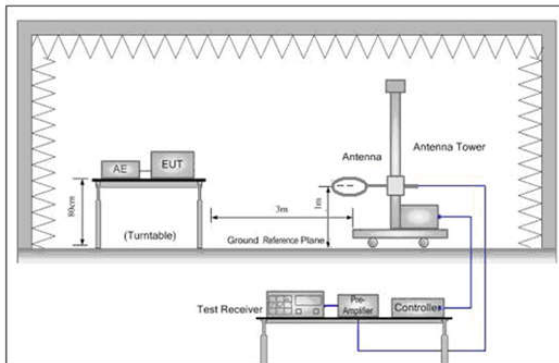


Figure 1. Below 30MHz

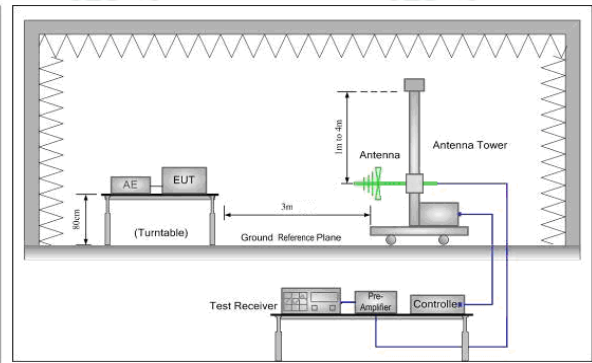


Figure 2. 30MHz to 1GHz


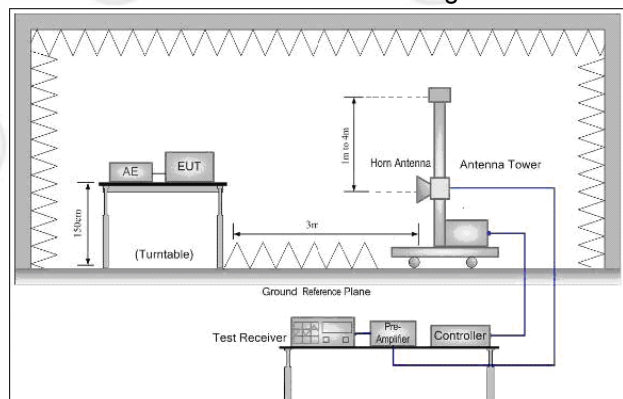


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup Conducted Emissions setup

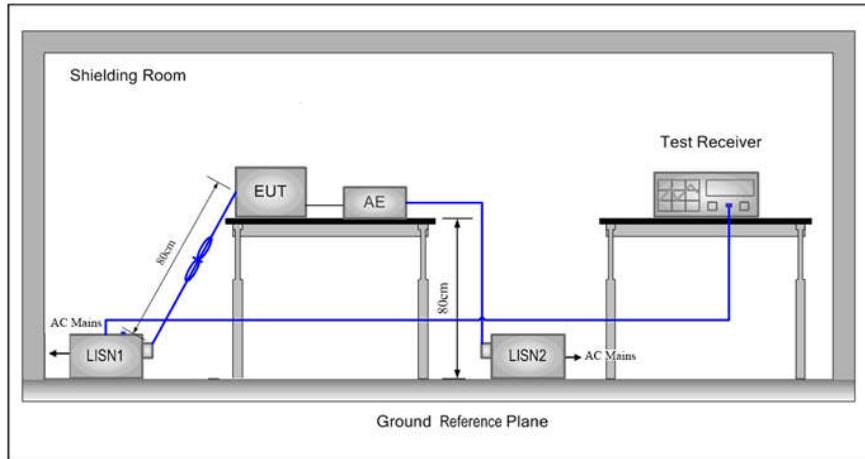

5.2 Test Environment

Operating Environment:	
Temperature:	25.9 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	1.852	2.542	2.997

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	-0.852	0.342	0.790

Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	0.425	1.000	1.116

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	AAMP of Florida, Inc. dba AAMP Global
Address of Applicant:	15500 Lightwave Dr. Suite 202, Clearwater, FL 33760
Manufacturer:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address of Manufacturer:	A1 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China
Factory:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address of Factory:	A1 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

6.2 General Description of EUT

Product Name:	NAVIGATION MULTIMEDIA RECEIVER
Model No.(EUT):	UN1880, UN1880X
Test Model No.:	UN1880
Trade mark:	Stinger
EUT Supports Radios application:	4.2 BT Dual mode, 2402-2480MHz
Power Supply:	Supply by DC 12V
Sample Received Date:	Jun. 25, 2018
Sample tested Date:	Jun. 25, 2018 to Jul. 25, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Firmware version:	AJ0107(manufacturer declare)
Hardware version:	R1(manufacturer declare)
Antenna Type:	2.4GHz Inverted-F Antenna
Antenna Gain:	0dBi
Test Voltage:	AC 120V, 60Hz

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz

8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9 x 10 ⁻⁸
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
power meter & power sensor	R&S	OSP120	101374	04-11-2018	04-10-2019
RF control unit	JS Tonscend	JS0806-2	2015860006	03-13-2018	03-12-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Belida	TT-512	A19	01-24-2018	01-23-2019
LISN	R&S	ENV216	100098	05-11-2018	05-10-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	06-05-2018	06-04-2019
Microwave Preamplifier	Tonscend	EMC051845SE	980380	01-19-2018	01-18-2019
Horn Antenna	ETS-LINDGREN	3117	00057407	07-12-2015 07-10-2018	07-10-2018 07-08-2021
Double Ridge Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-07-2015 06-05-2018	06-05-2018 06-03-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
High-pass filter	Sinoscite	FL3CX03WG18NM1 2-0398-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09CL12 -0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08CL12 -0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04CL12 -0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03CL12 -0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth

Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9475	0.87290	PASS	Peak detector
GFSK	MCH	0.9435	0.86033	PASS	
GFSK	HCH	0.9438	0.85964	PASS	
$\pi/4$ DQPSK	LCH	1.228	1.1650	PASS	
$\pi/4$ DQPSK	MCH	1.228	1.1632	PASS	
$\pi/4$ DQPSK	HCH	1.227	1.1626	PASS	
8DPSK	LCH	1.261	1.1571	PASS	
8DPSK	MCH	1.265	1.1590	PASS	
8DPSK	HCH	1.269	1.1589	PASS	

Test Graph

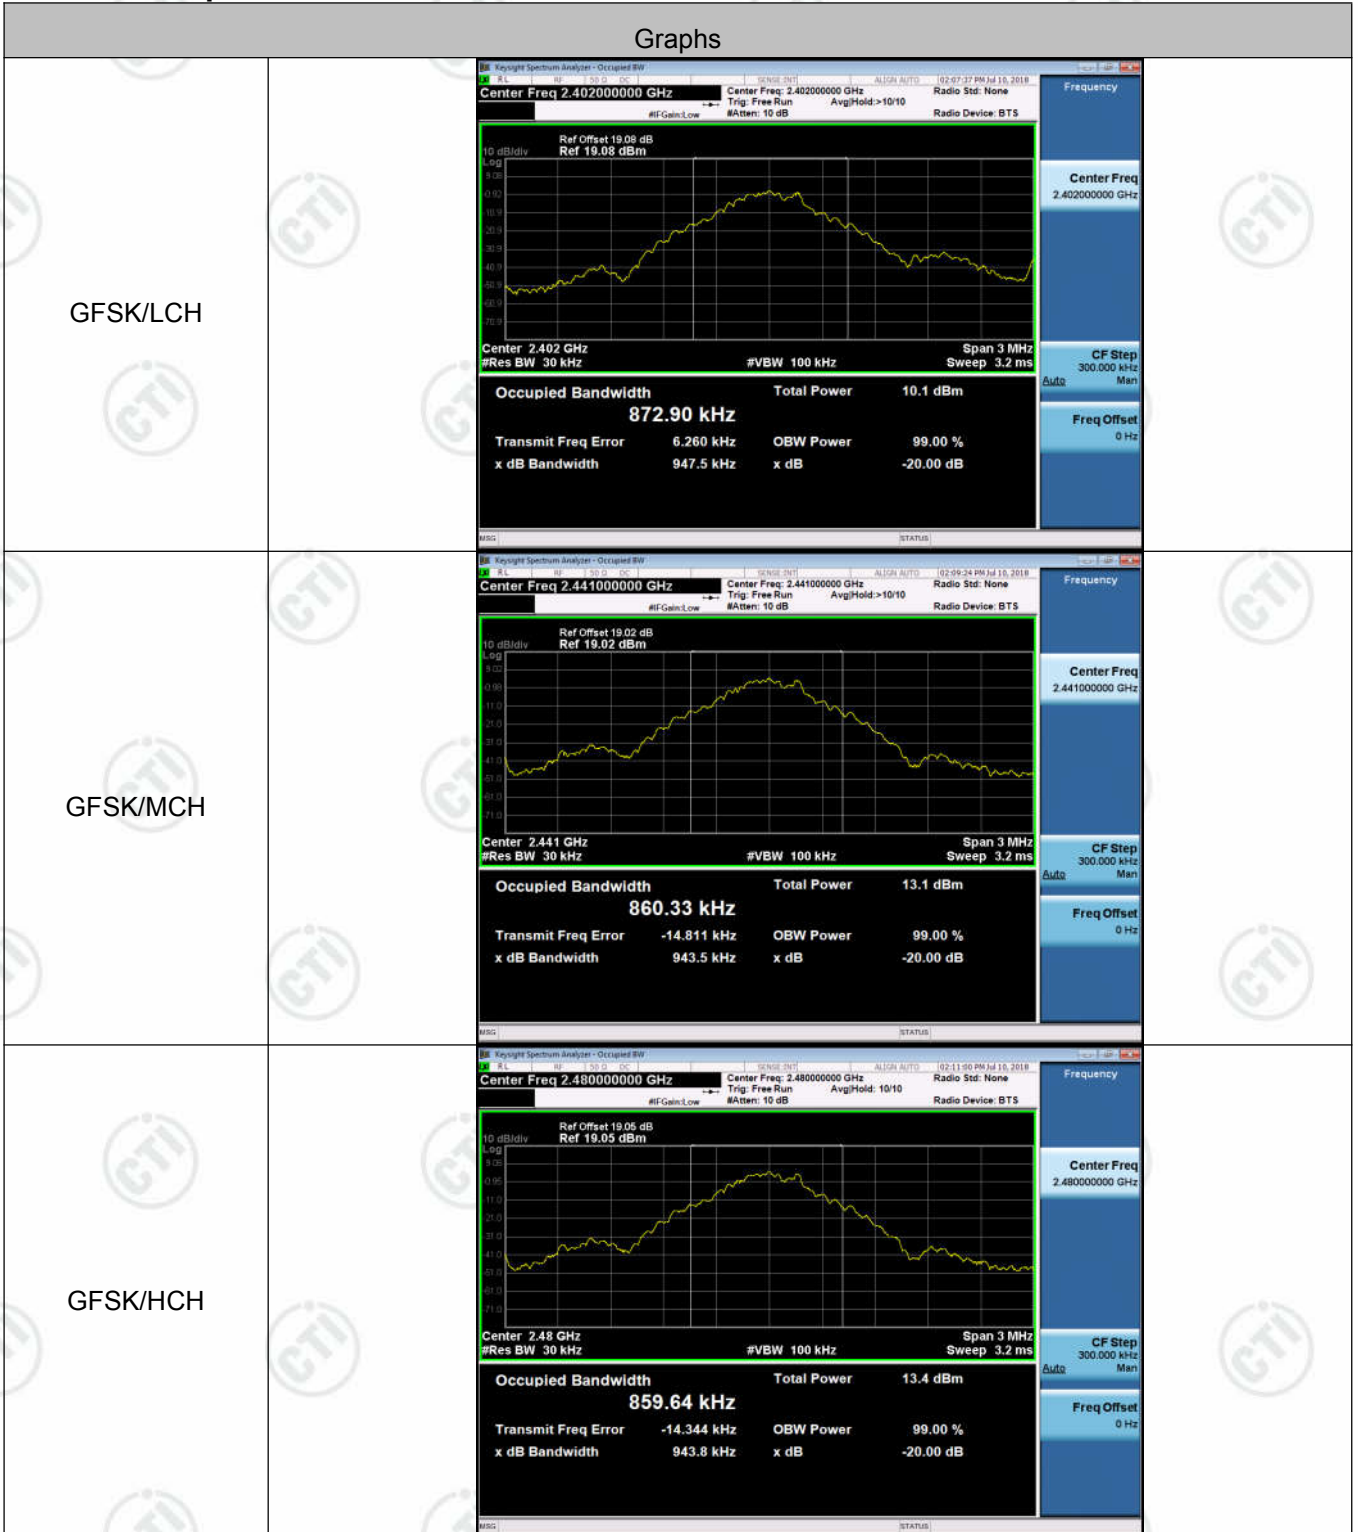

<p>$\pi/4$DQPSK/LCH</p>	<p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.48 dBm</td> </tr> <tr> <td colspan="3">1.1650 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-16.349 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.228 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	6.48 dBm	1.1650 MHz			Transmit Freq Error	-16.349 kHz	OBW Power 99.00 %	x dB Bandwidth	1.228 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	6.48 dBm											
1.1650 MHz													
Transmit Freq Error	-16.349 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.228 MHz	x dB -20.00 dB											
<p>$\pi/4$DQPSK/MCH</p>	<p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.84 dBm</td> </tr> <tr> <td colspan="3">1.1632 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-15.288 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.228 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.84 dBm	1.1632 MHz			Transmit Freq Error	-15.288 kHz	OBW Power 99.00 %	x dB Bandwidth	1.228 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	9.84 dBm											
1.1632 MHz													
Transmit Freq Error	-15.288 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.228 MHz	x dB -20.00 dB											
<p>$\pi/4$DQPSK/HCH</p>	<p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.4 dBm</td> </tr> <tr> <td colspan="3">1.1626 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-15.262 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.227 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.4 dBm	1.1626 MHz			Transmit Freq Error	-15.262 kHz	OBW Power 99.00 %	x dB Bandwidth	1.227 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	10.4 dBm											
1.1626 MHz													
Transmit Freq Error	-15.262 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.227 MHz	x dB -20.00 dB											

<p>8DPSK/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth: 1.1571 MHz Total Power: 7.08 dBm</p> <p>Transmit Freq Error: -12.986 kHz x dB Bandwidth: 1.261 MHz</p> <p>OBW Power: 99.00 % x dB: -20.00 dB</p>
<p>8DPSK/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth: 1.1590 MHz Total Power: 10.3 dBm</p> <p>Transmit Freq Error: -11.741 kHz x dB Bandwidth: 1.265 MHz</p> <p>OBW Power: 99.00 % x dB: -20.00 dB</p>
<p>8DPSK/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.06 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth: 1.1589 MHz Total Power: 10.8 dBm</p> <p>Transmit Freq Error: -12.336 kHz x dB Bandwidth: 1.269 MHz</p> <p>OBW Power: 99.00 % x dB: -20.00 dB</p>

Appendix B): Carrier Frequency Separation


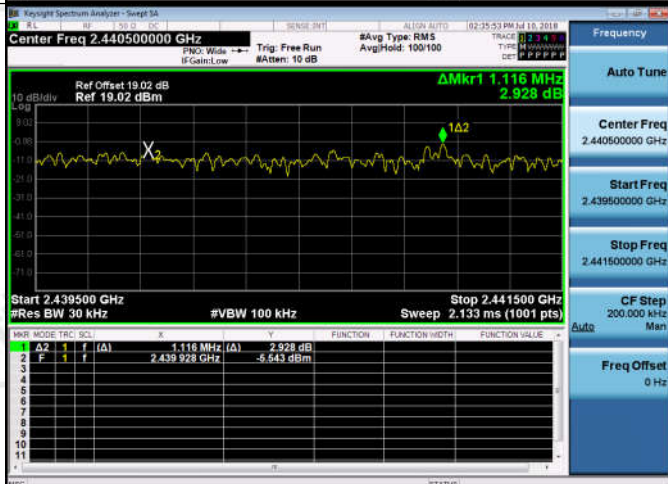
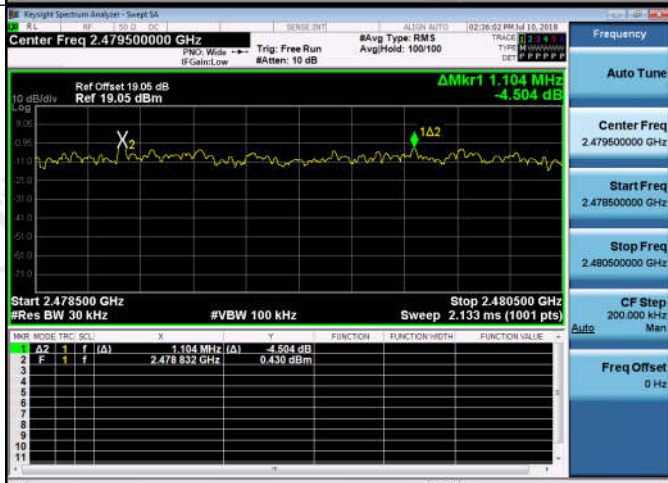
Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.008	PASS
GFSK	MCH	0.972	PASS
GFSK	HCH	0.992	PASS
$\pi/4$ DQPSK	LCH	1.146	PASS
$\pi/4$ DQPSK	MCH	1.166	PASS
$\pi/4$ DQPSK	HCH	1.106	PASS
8DPSK	LCH	0.980	PASS
8DPSK	MCH	1.116	PASS
8DPSK	HCH	1.104	PASS

Test Graph



<p>$\pi/4$DQPSK/LCH</p>	<p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>ΔMkr1 1.146 MHz 2.164 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>f</td> <td>f</td> <td>1.146 MHz (Δ)</td> <td>2.164 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.401 864 GHz</td> <td>-9.340 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ Z	f	f	1.146 MHz (Δ)	2.164 dB				2	F	f	f	2.401 864 GHz	-9.340 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ Z	f	f	1.146 MHz (Δ)	2.164 dB																							
2	F	f	f	2.401 864 GHz	-9.340 dBm																							
<p>$\pi/4$DQPSK/MCH</p>	<p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>ΔMkr1 1.166 MHz 3.888 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>f</td> <td>f</td> <td>1.166 MHz (Δ)</td> <td>3.888 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.439 812 GHz</td> <td>-5.201 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ Z	f	f	1.166 MHz (Δ)	3.888 dB				2	F	f	f	2.439 812 GHz	-5.201 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ Z	f	f	1.166 MHz (Δ)	3.888 dB																							
2	F	f	f	2.439 812 GHz	-5.201 dBm																							
<p>$\pi/4$DQPSK/HCH</p>	<p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>ΔMkr1 1.106 MHz -0.240 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>f</td> <td>f</td> <td>1.106 MHz (Δ)</td> <td>-0.240 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.478 860 GHz</td> <td>-5.163 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ Z	f	f	1.106 MHz (Δ)	-0.240 dB				2	F	f	f	2.478 860 GHz	-5.163 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ Z	f	f	1.106 MHz (Δ)	-0.240 dB																							
2	F	f	f	2.478 860 GHz	-5.163 dBm																							


<p>8DPSK/LCH</p>	 <table border="1" data-bbox="638 604 1197 761"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>980 kHz (Δ)</td> <td>0.477 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 010 GHz</td> <td>-3.182 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	980 kHz (Δ)	0.477 dB			2	F	1	f		2.402 010 GHz	-3.182 dBm		
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	980 kHz (Δ)	0.477 dB																						
2	F	1	f		2.402 010 GHz	-3.182 dBm																						
<p>8DPSK/MCH</p>	 <table border="1" data-bbox="638 1097 1197 1254"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.116 MHz (Δ)</td> <td>2.928 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.439 929 GHz</td> <td>-5.643 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.116 MHz (Δ)	2.928 dB			2	F	1	f		2.439 929 GHz	-5.643 dBm		
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.116 MHz (Δ)	2.928 dB																						
2	F	1	f		2.439 929 GHz	-5.643 dBm																						
<p>8DPSK/HCH</p>	 <table border="1" data-bbox="638 1590 1197 1747"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.104 MHz (Δ)</td> <td>-4.504 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478 832 GHz</td> <td>0.430 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.104 MHz (Δ)	-4.504 dB			2	F	1	f		2.478 832 GHz	0.430 dBm		
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.104 MHz (Δ)	-4.504 dB																						
2	F	1	f		2.478 832 GHz	0.430 dBm																						


Appendix C): Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.40787	320	0.131	0.33	PASS
GFSK	DH1	MCH	0.4091333	320	0.131	0.33	PASS
GFSK	DH1	HCH	0.409133	320	0.131	0.33	PASS
GFSK	DH3	LCH	1.664397	160	0.266	0.67	PASS
GFSK	DH3	MCH	1.665663	160	0.267	0.67	PASS
GFSK	DH3	HCH	1.6644	160	0.266	0.67	PASS
GFSK	DH5	LCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	MCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	HCH	2.898	106.7	0.309	0.77	PASS

Test Graph

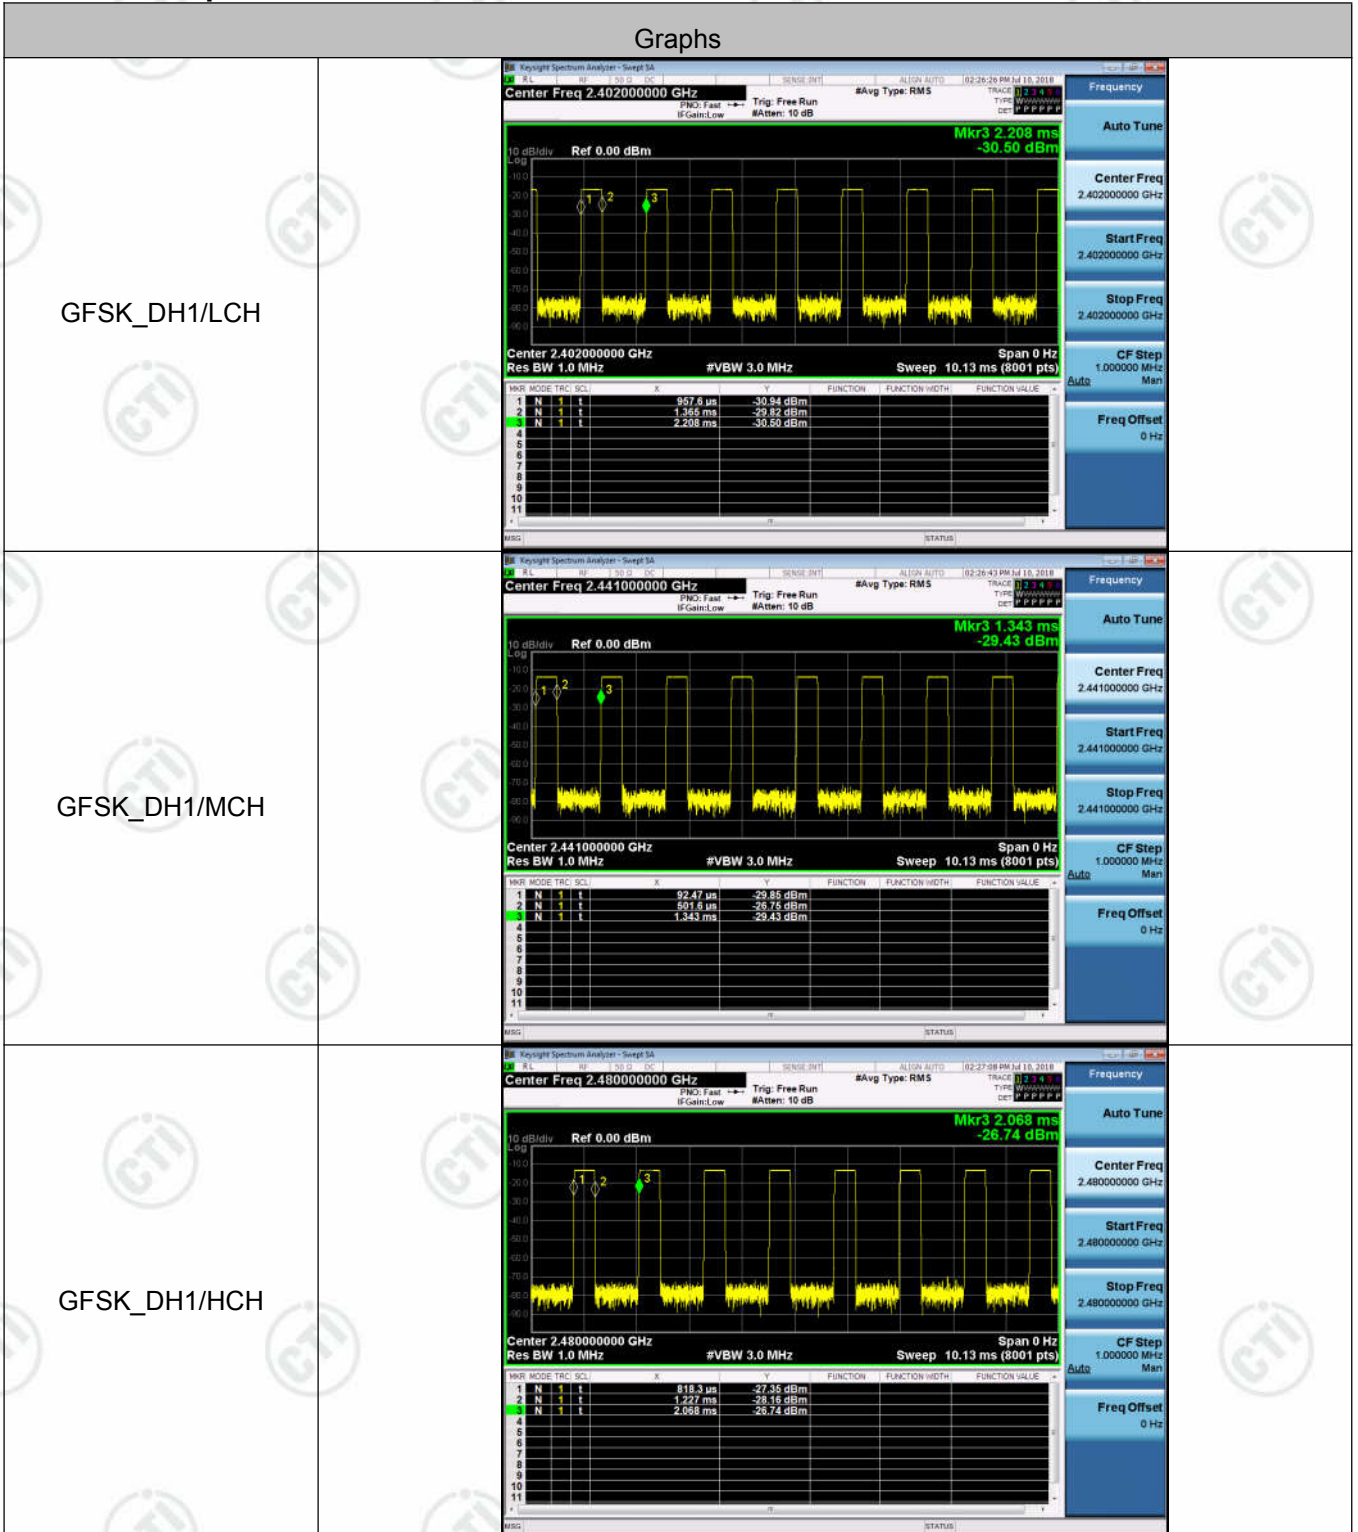

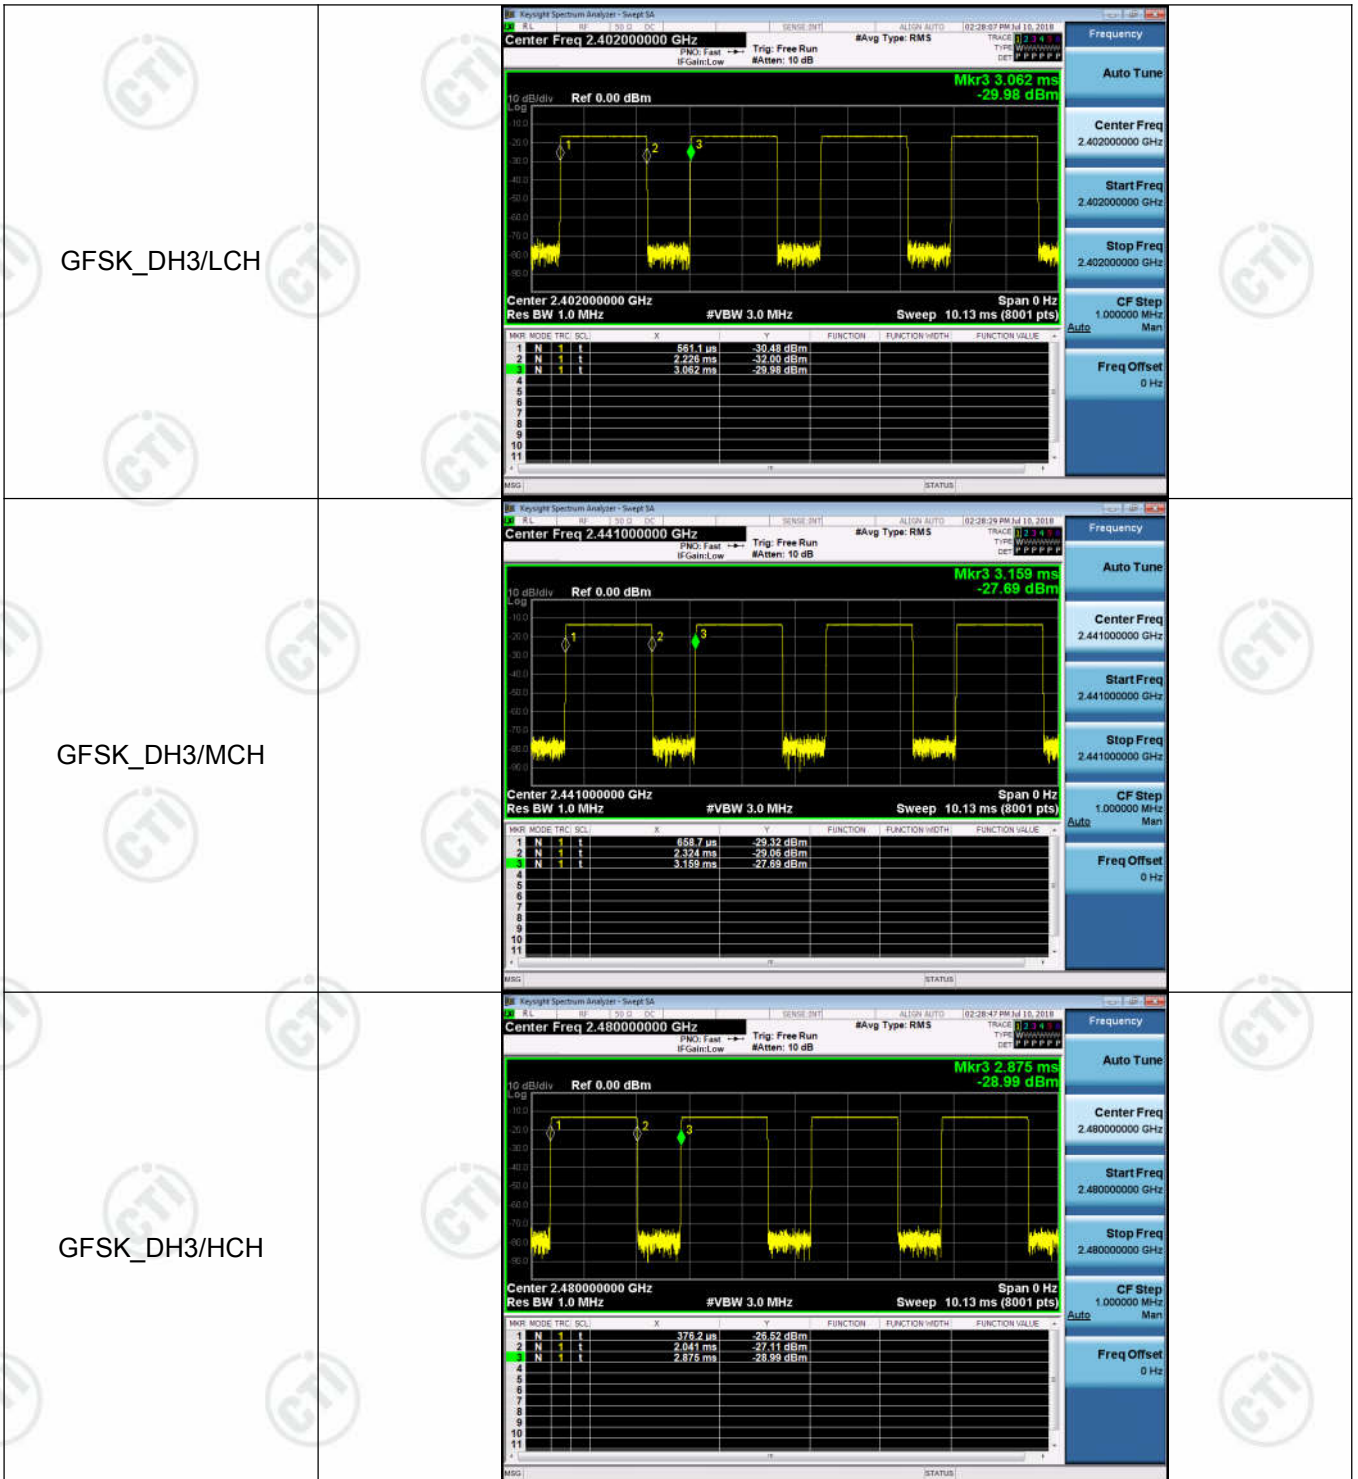

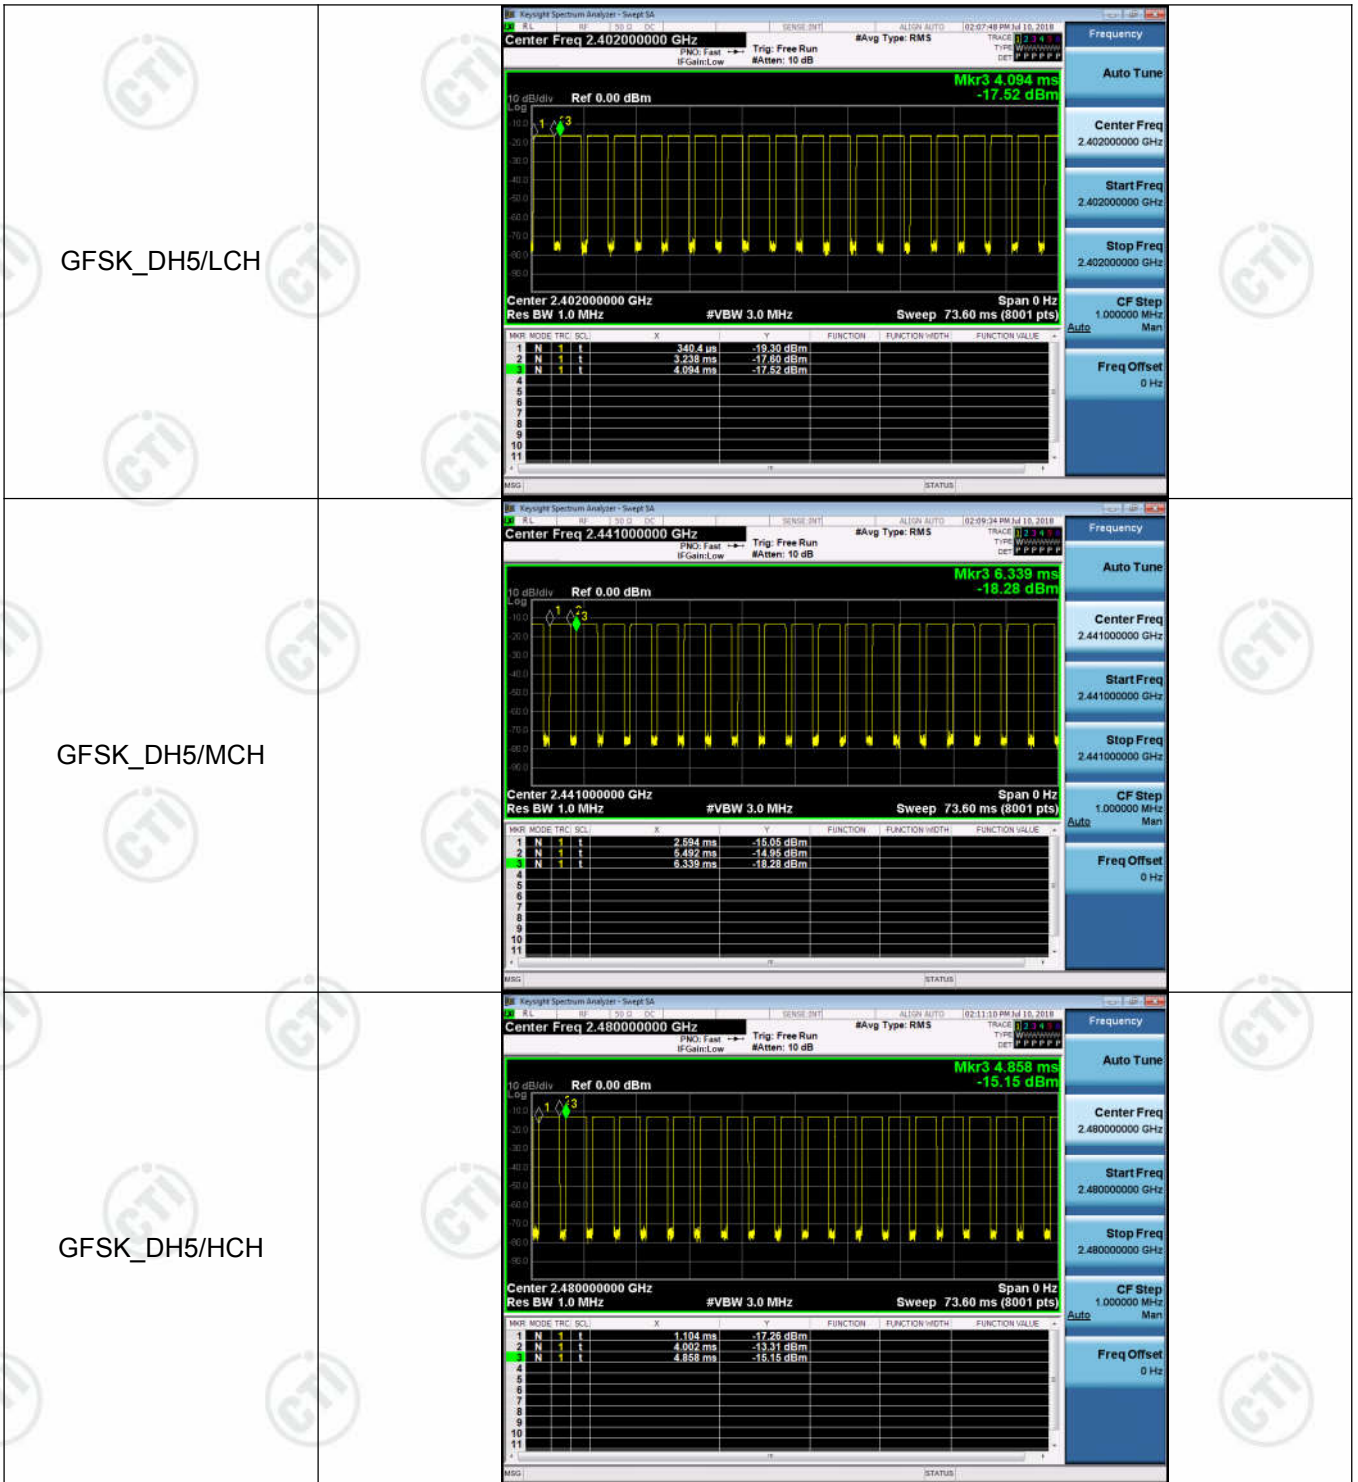


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

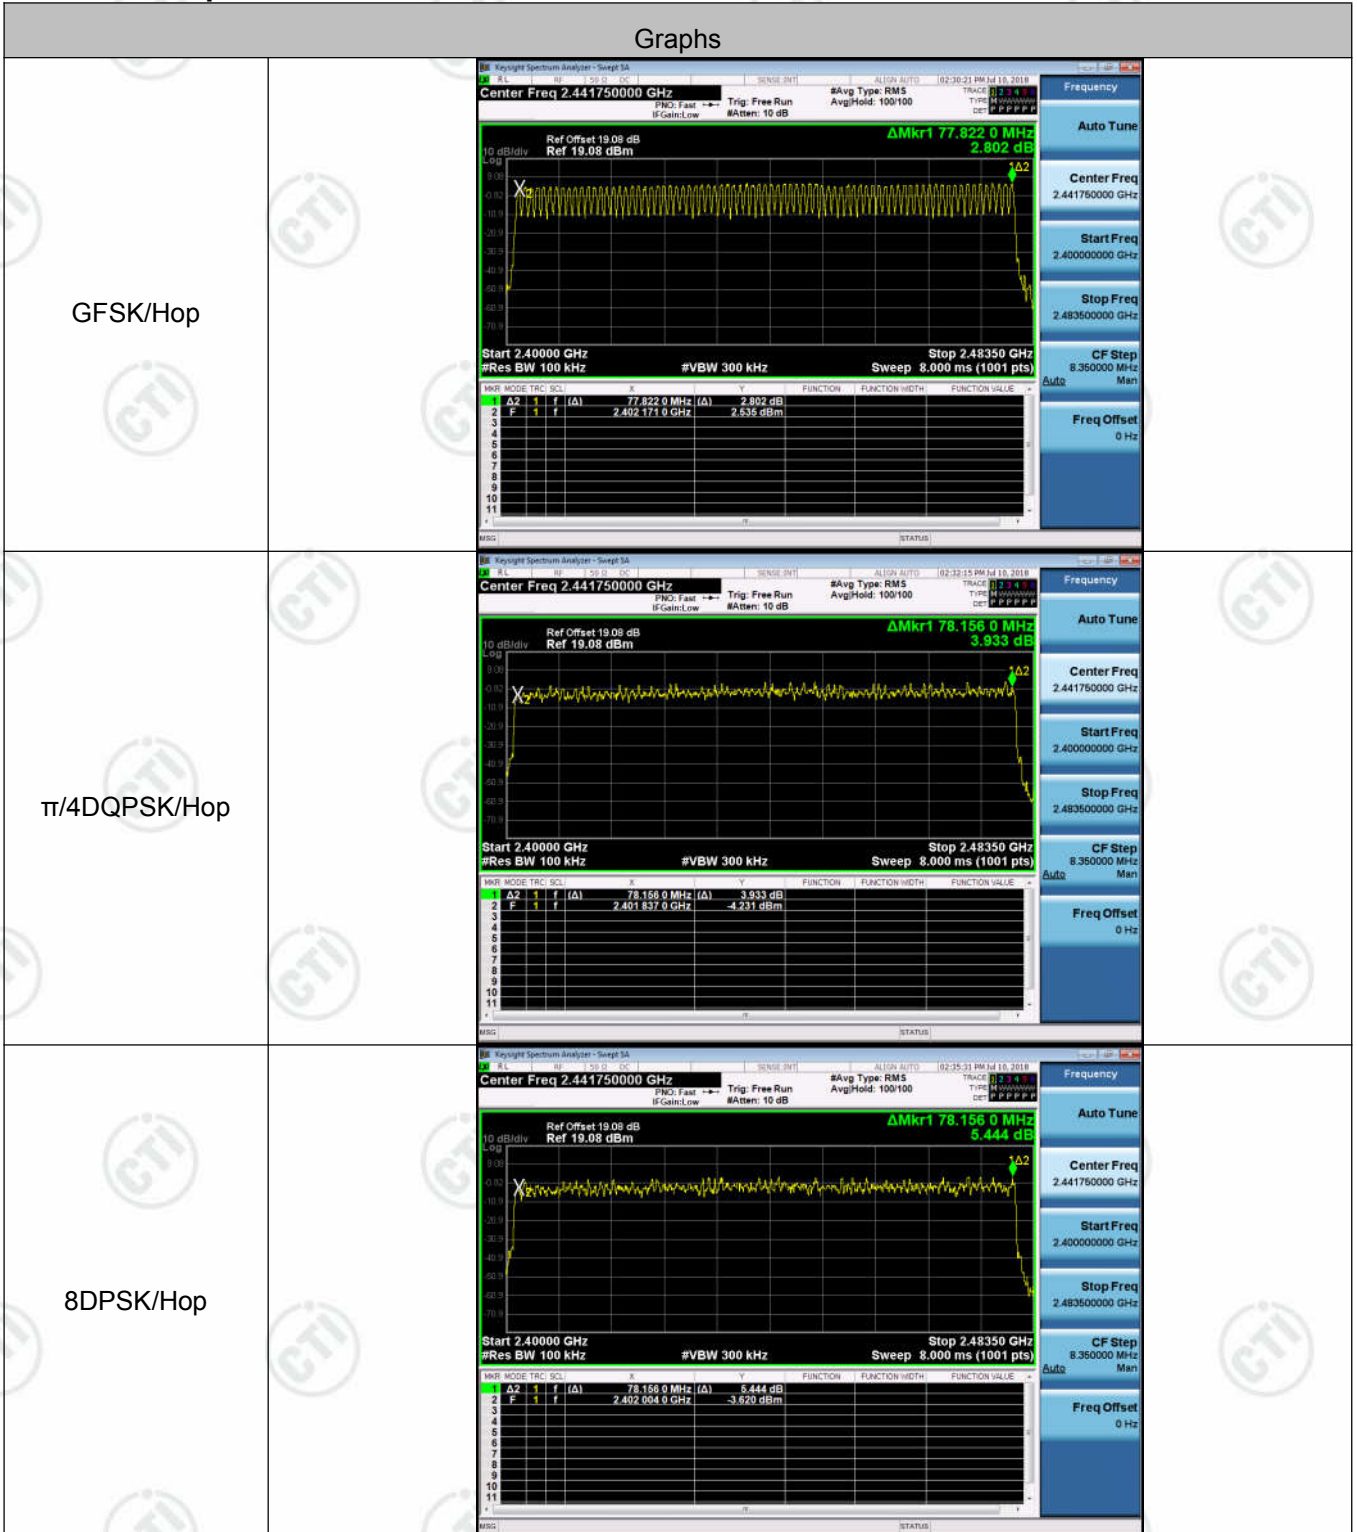




Appendix E): Conducted Peak Output Power




Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	2.997	PASS
GFSK	MCH	5.731	PASS
GFSK	HCH	6.048	PASS
$\pi/4$ DQPSK	LCH	0.790	PASS
$\pi/4$ DQPSK	MCH	3.996	PASS
$\pi/4$ DQPSK	HCH	4.459	PASS
8DPSK	LCH	1.116	PASS
8DPSK	MCH	4.350	PASS
8DPSK	HCH	4.727	PASS

Test Graph

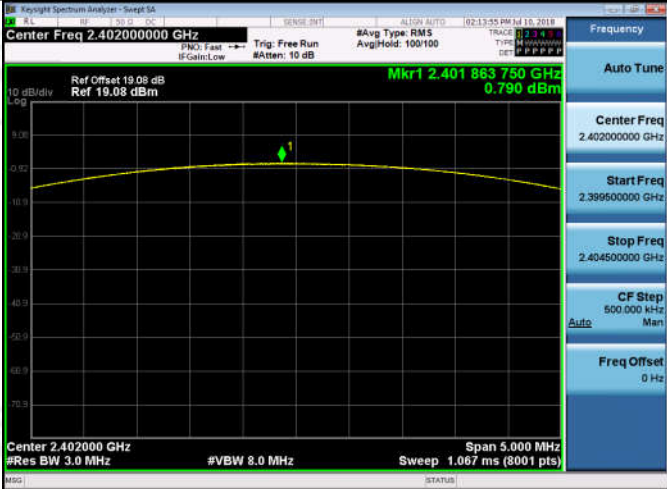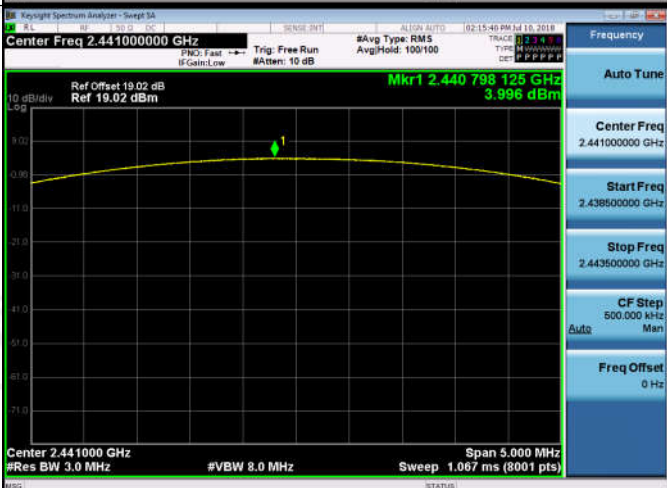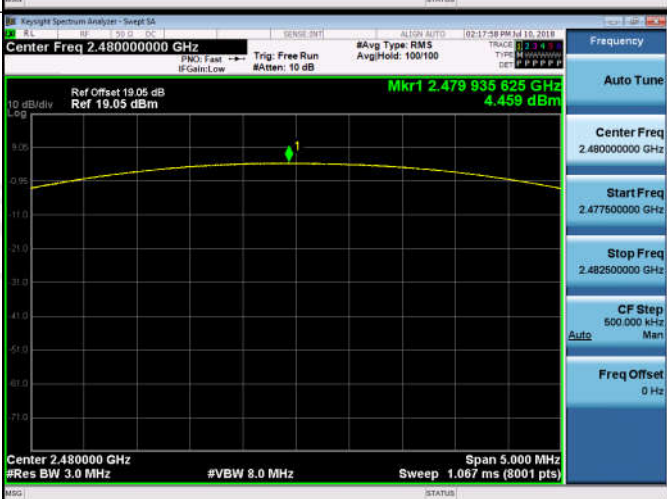

<p>$\pi/4$DQPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Mkr1 2.401 863 750 GHz 0.790 dBm Ref Offset 19.08 dB Ref 19.08 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Mkr1 2.440 798 125 GHz 3.996 dBm Ref Offset 19.02 dB Ref 19.02 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Mkr1 2.479 935 625 GHz 4.459 dBm Ref Offset 19.05 dB Ref 19.05 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>

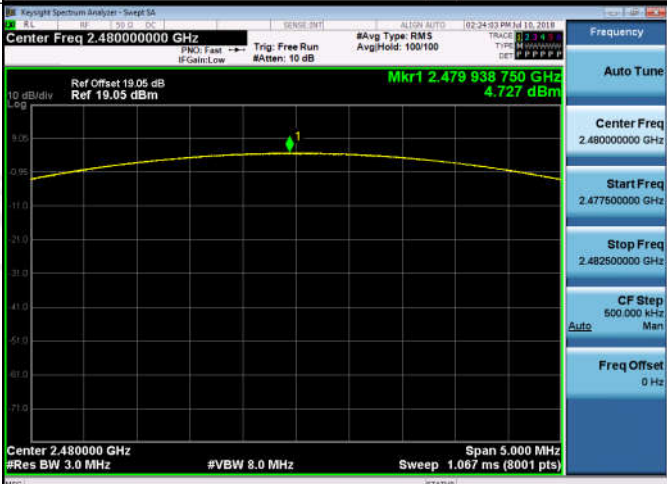
<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	

Appendix F): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	2.702	Off	-60.024	-17.3	PASS
			3.989	On	-58.463	-16.01	PASS
GFSK	HCH	2480	5.827	Off	-55.660	-14.17	PASS
			5.560	On	-54.064	-14.44	PASS
$\pi/4$ DQPSK	LCH	2402	-0.910	Off	-61.217	-20.91	PASS
			0.412	On	-60.345	-19.59	PASS
$\pi/4$ DQPSK	HCH	2480	2.874	Off	-58.239	-17.13	PASS
			2.365	On	-57.092	-17.64	PASS
8DPSK	LCH	2402	-0.862	Off	-60.646	-20.86	PASS
			0.540	On	-60.360	-19.46	PASS
8DPSK	HCH	2480	2.924	Off	-56.498	-17.08	PASS
			2.875	On	-56.836	-17.13	PASS

Test Graph

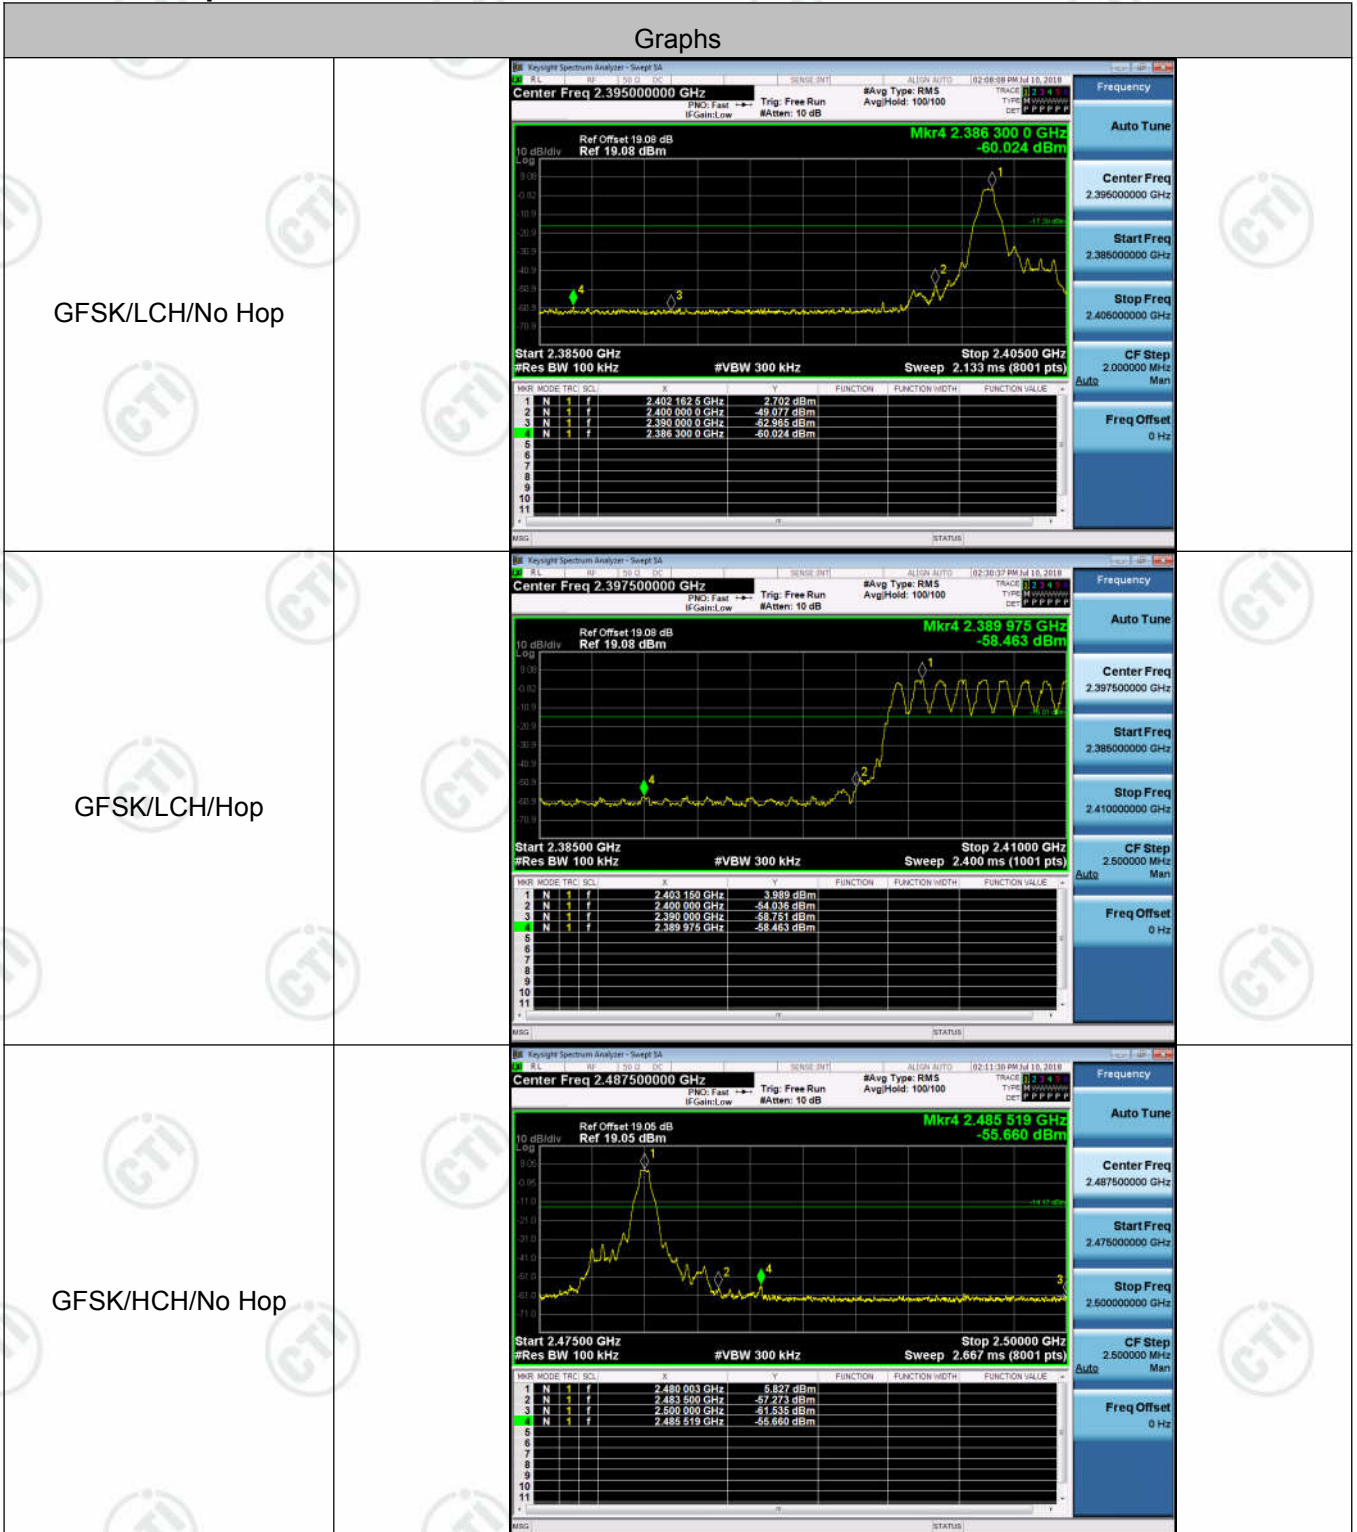



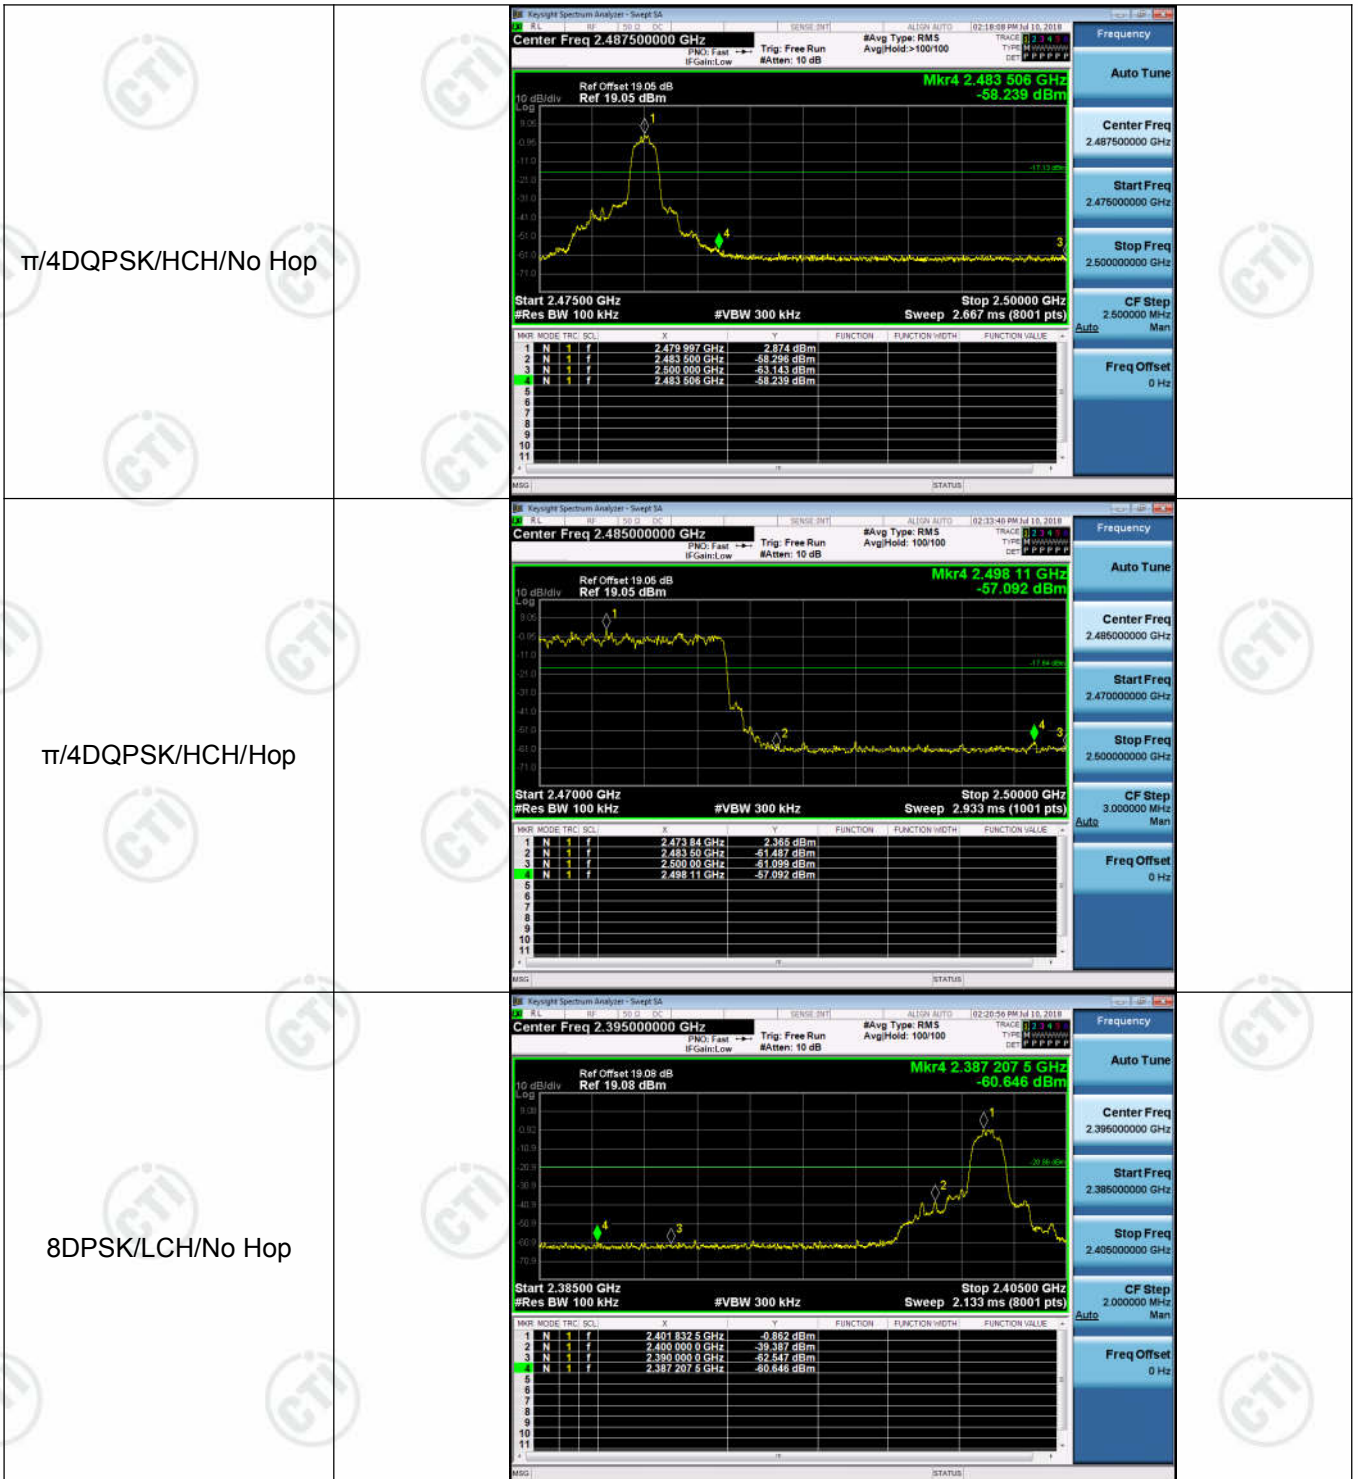








Appendix G): RF Conducted Spurious Emissions



Result Table




Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	2.468	<Limit	PASS
GFSK	MCH	5.399	<Limit	PASS
GFSK	HCH	5.772	<Limit	PASS
$\pi/4$ DQPSK	LCH	-0.959	<ALimit	PASS
$\pi/4$ DQPSK	MCH	2.363	<Limit	PASS
$\pi/4$ DQPSK	HCH	2.825	<Limit	PASS
8DPSK	LCH	-0.98	<Limit	PASS
8DPSK	MCH	2.443	<Limit	PASS
8DPSK	HCH	2.91	<Limit	PASS

Test Graph

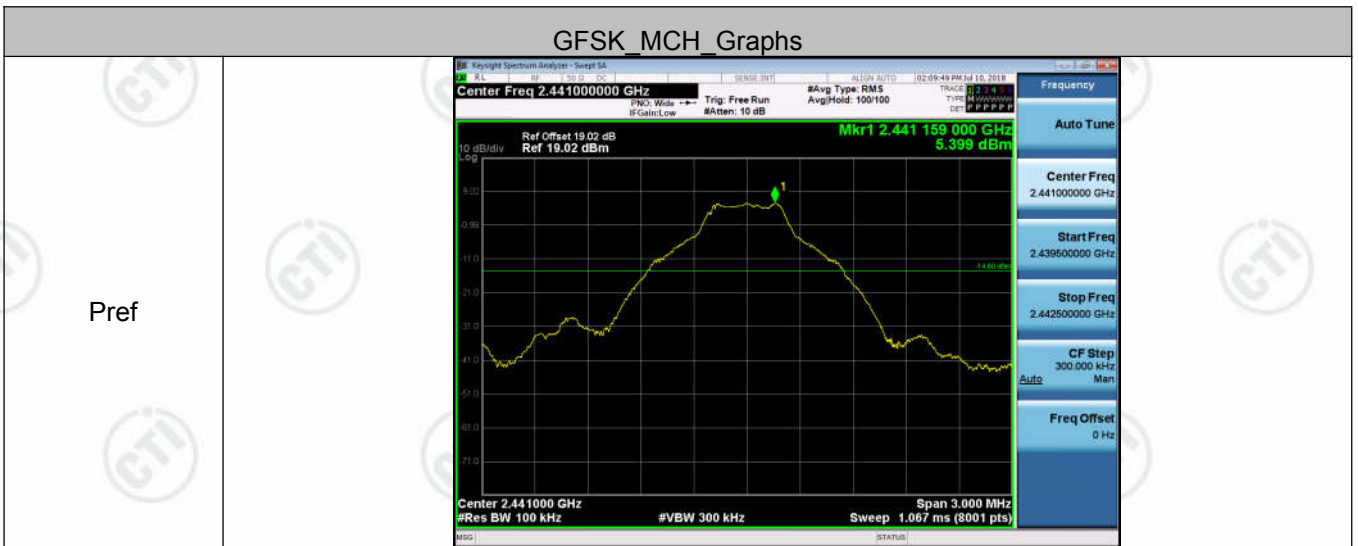
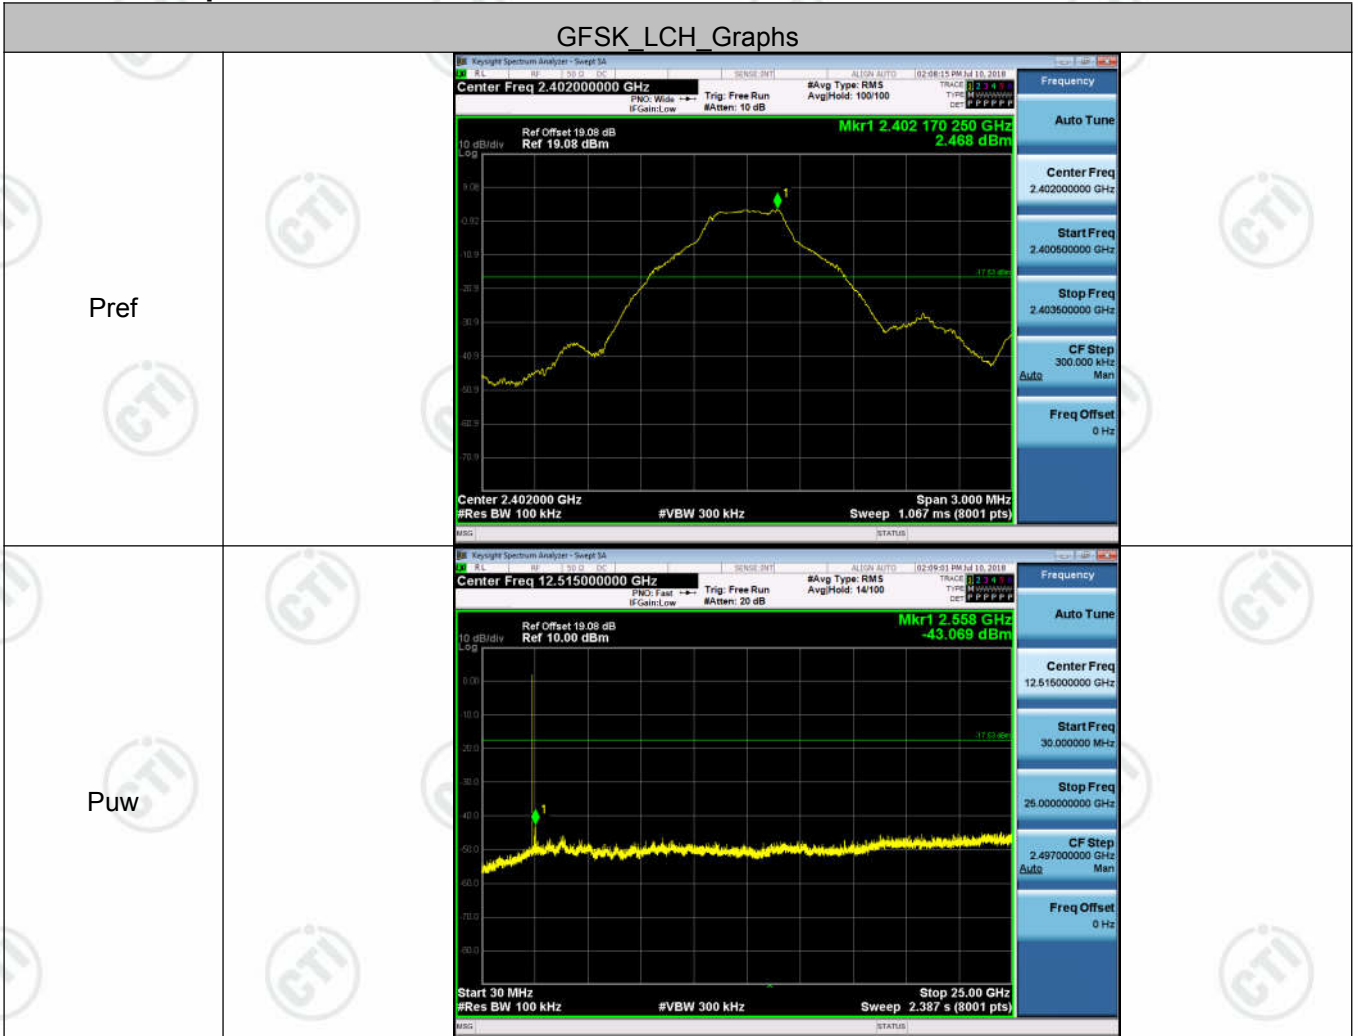


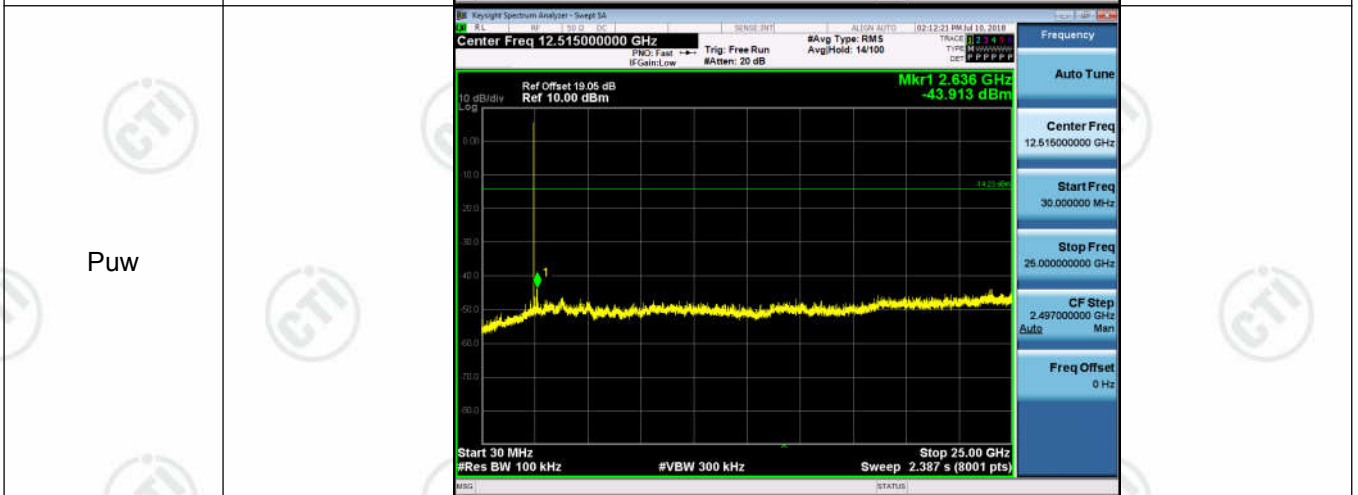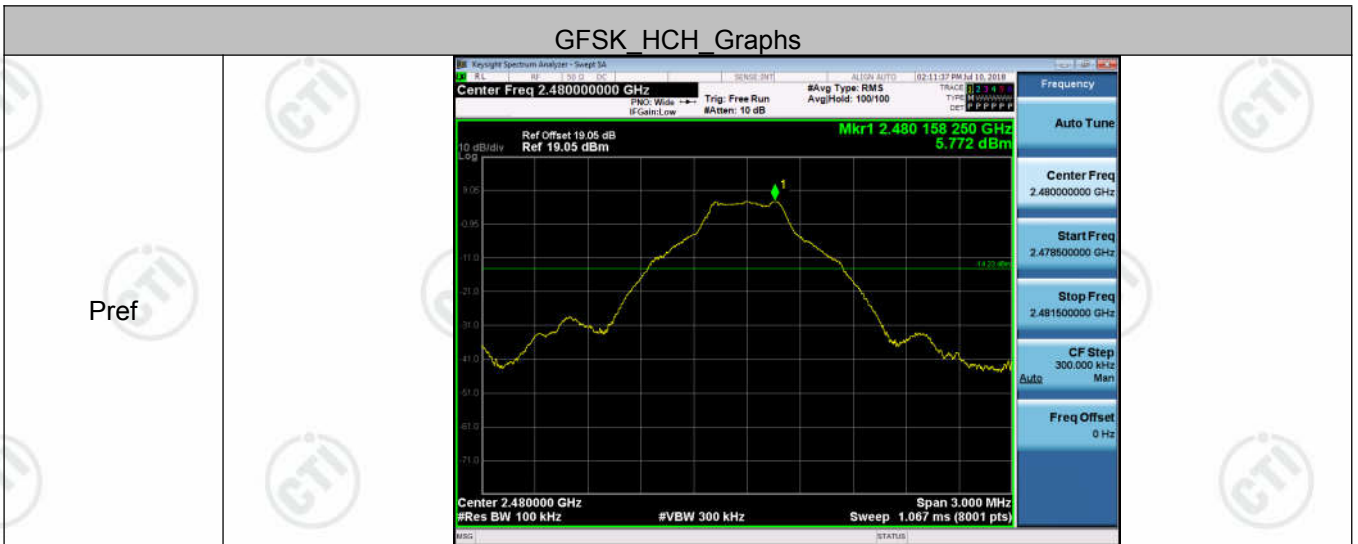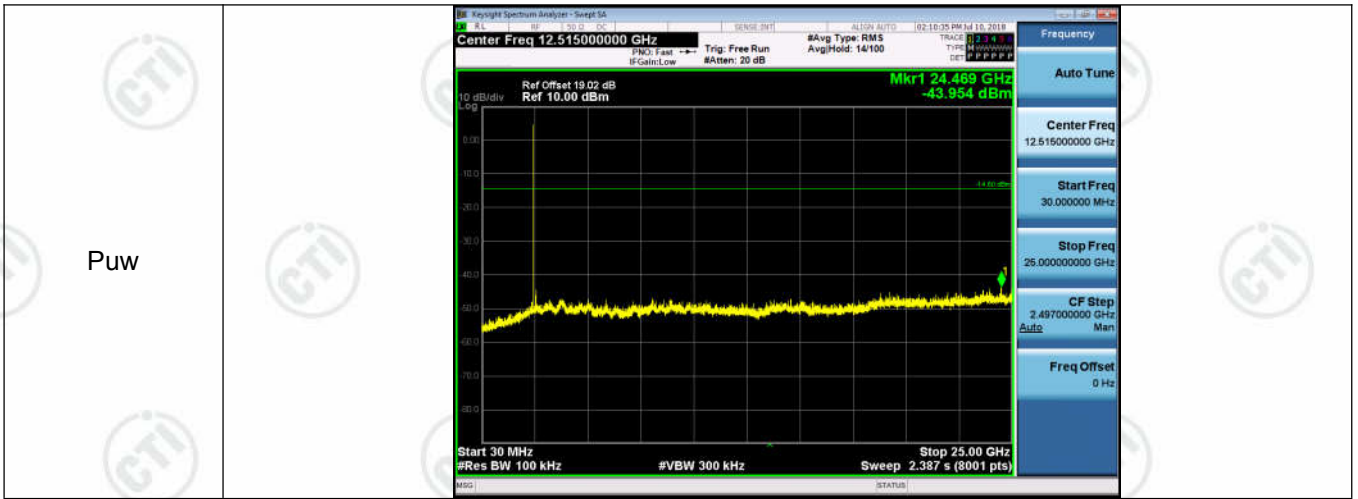

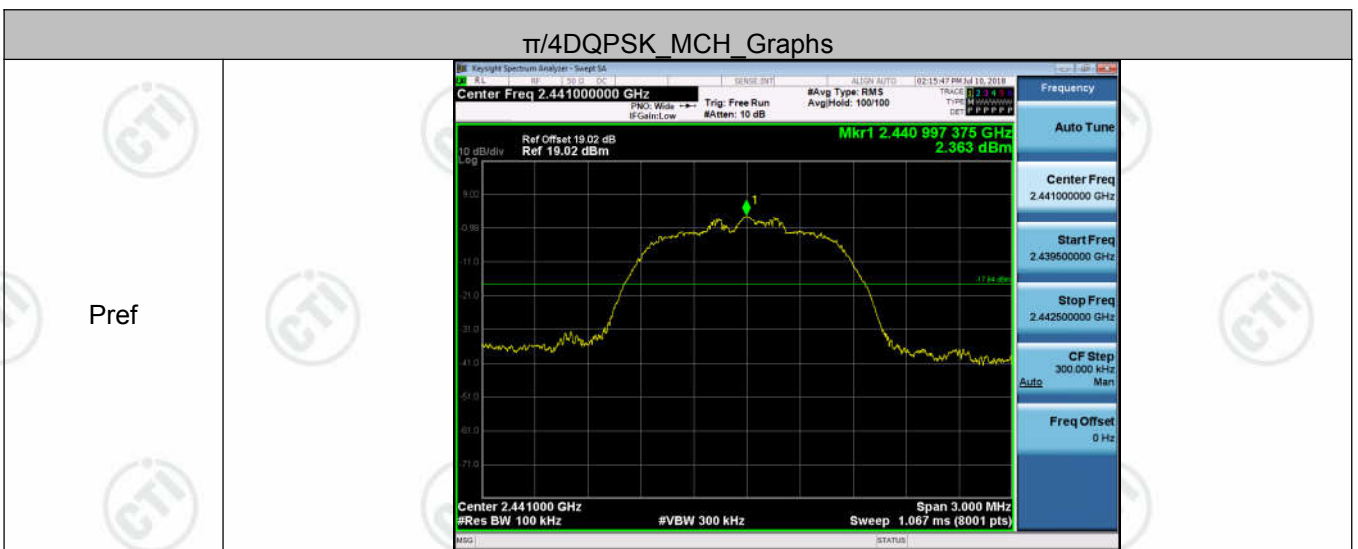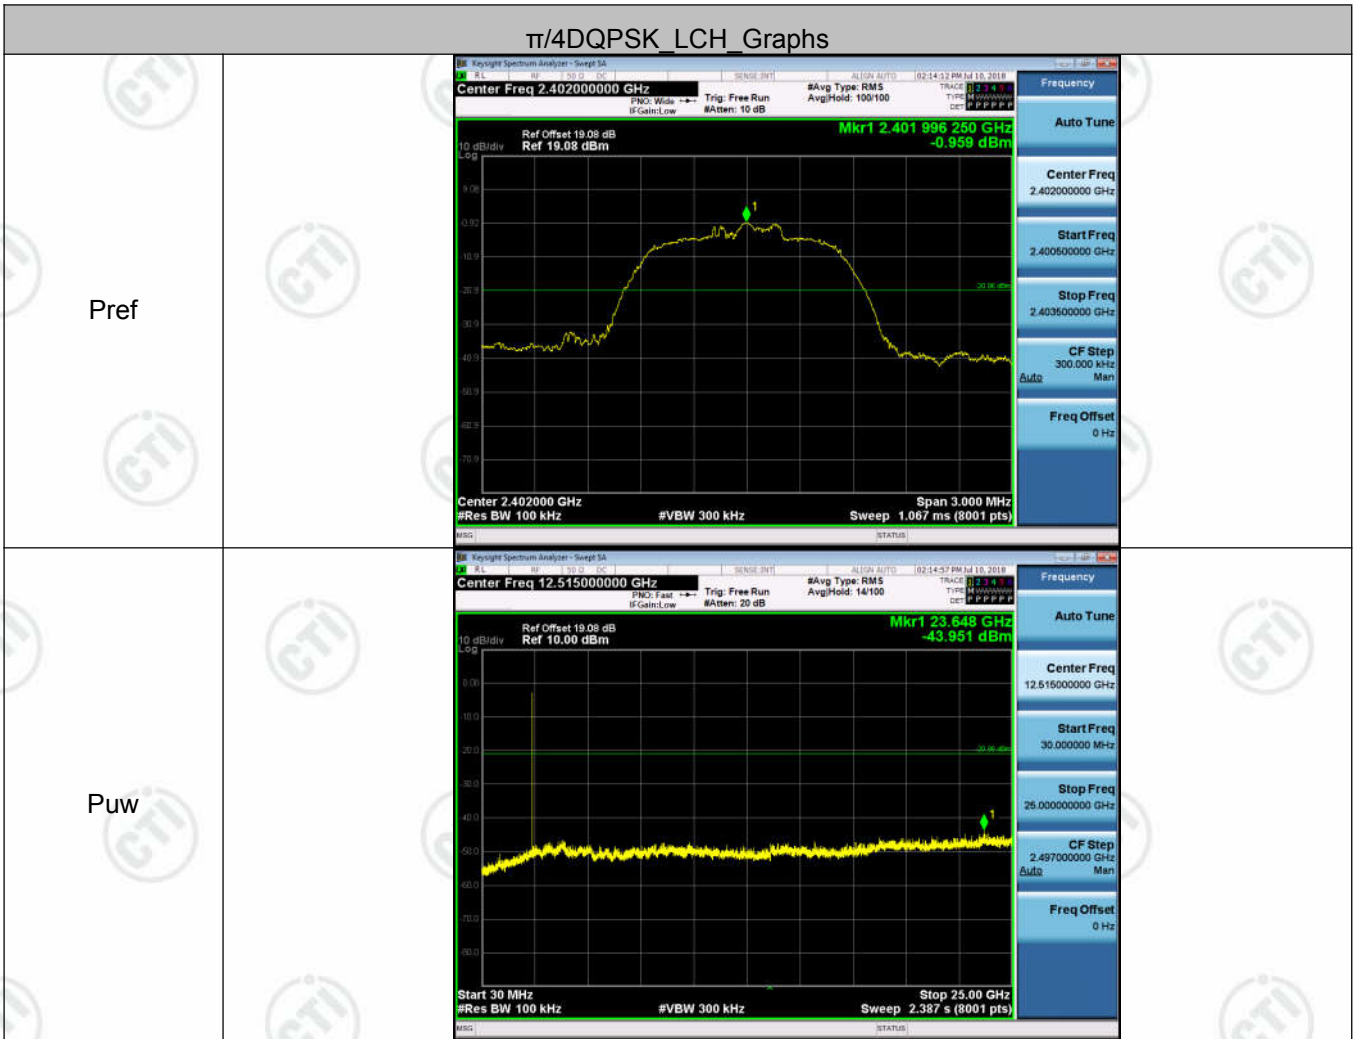

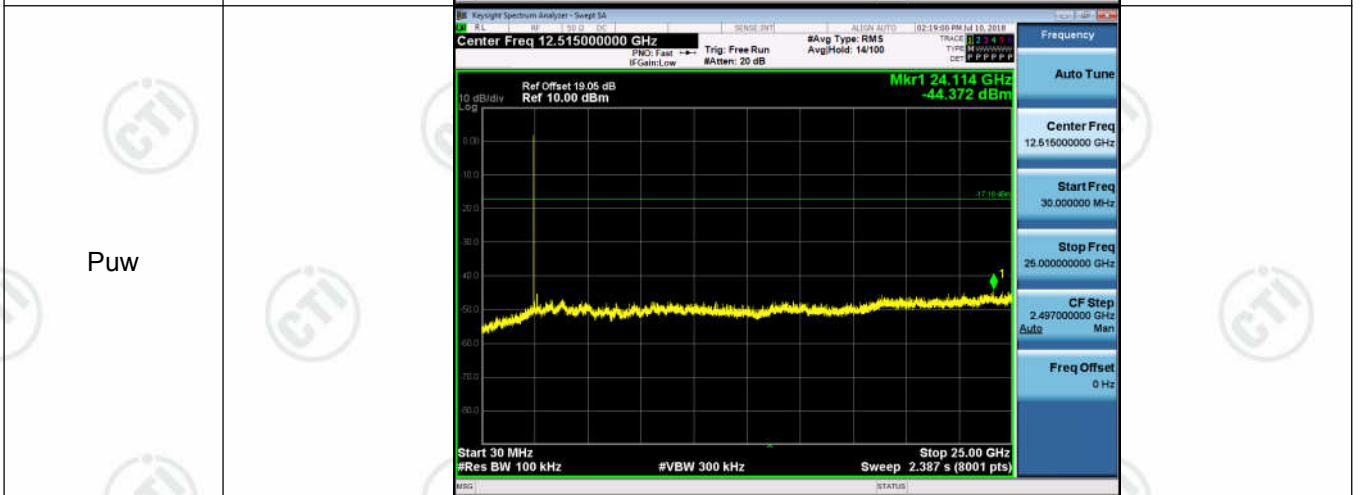
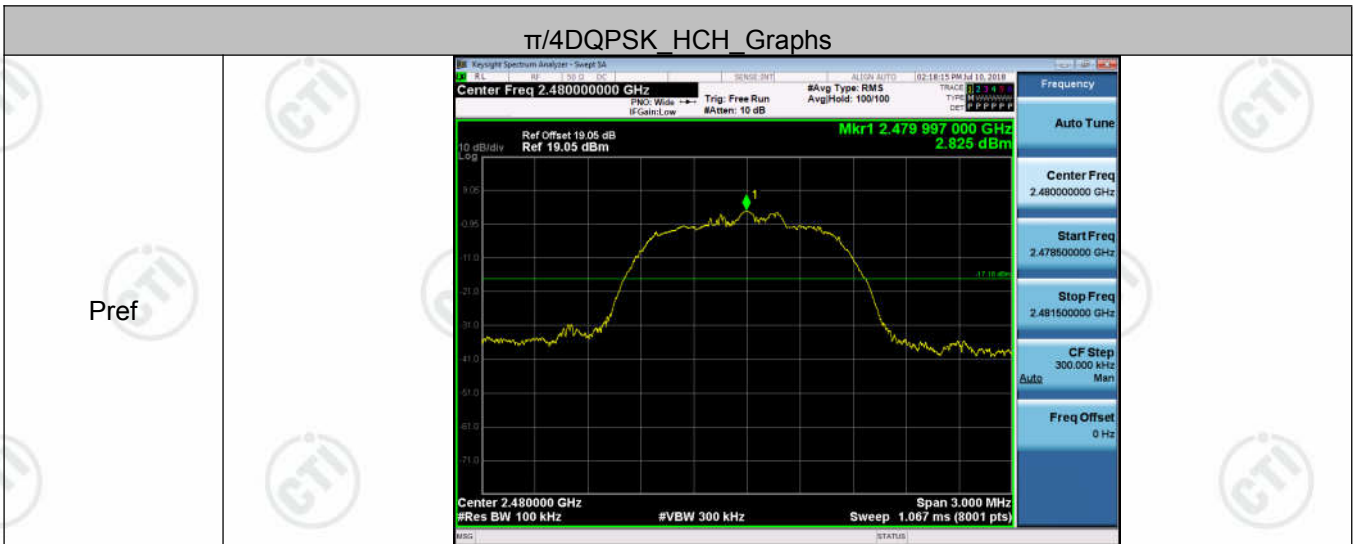
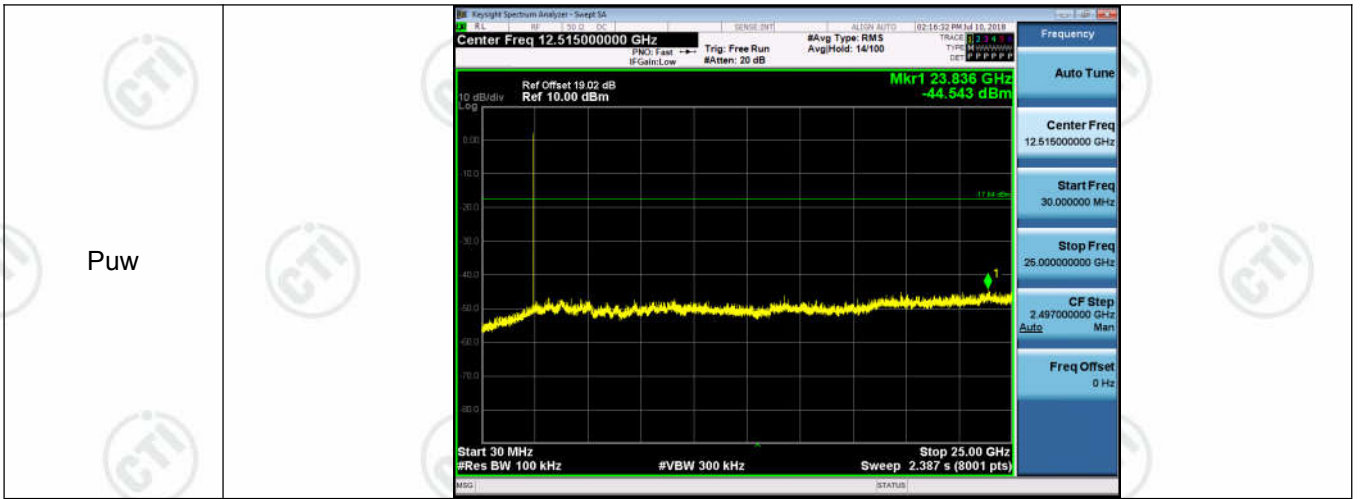


8DPSK_LCH_Graphs

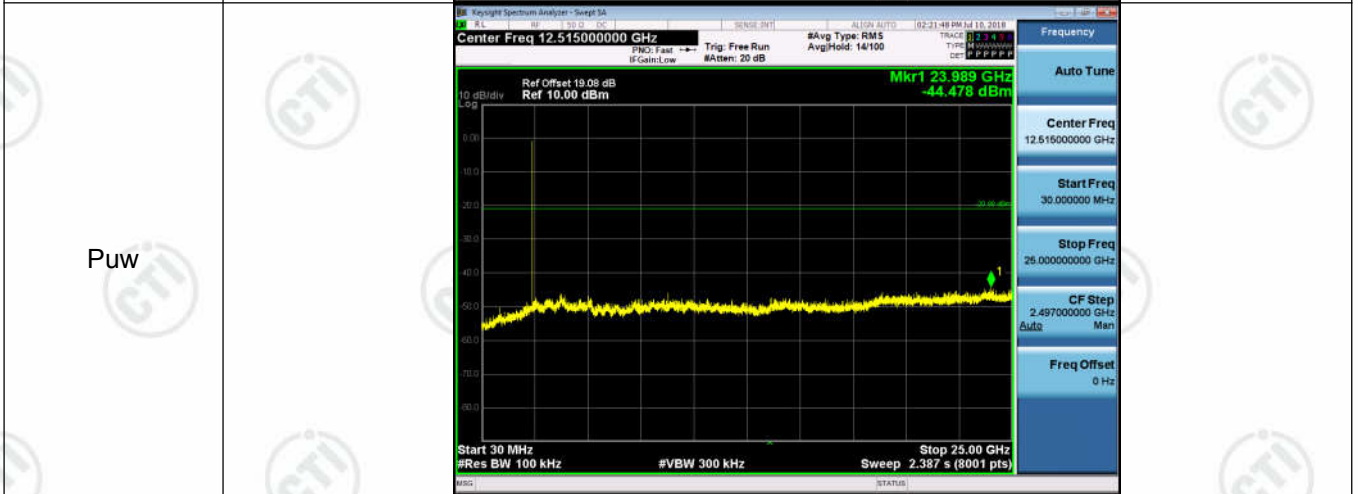
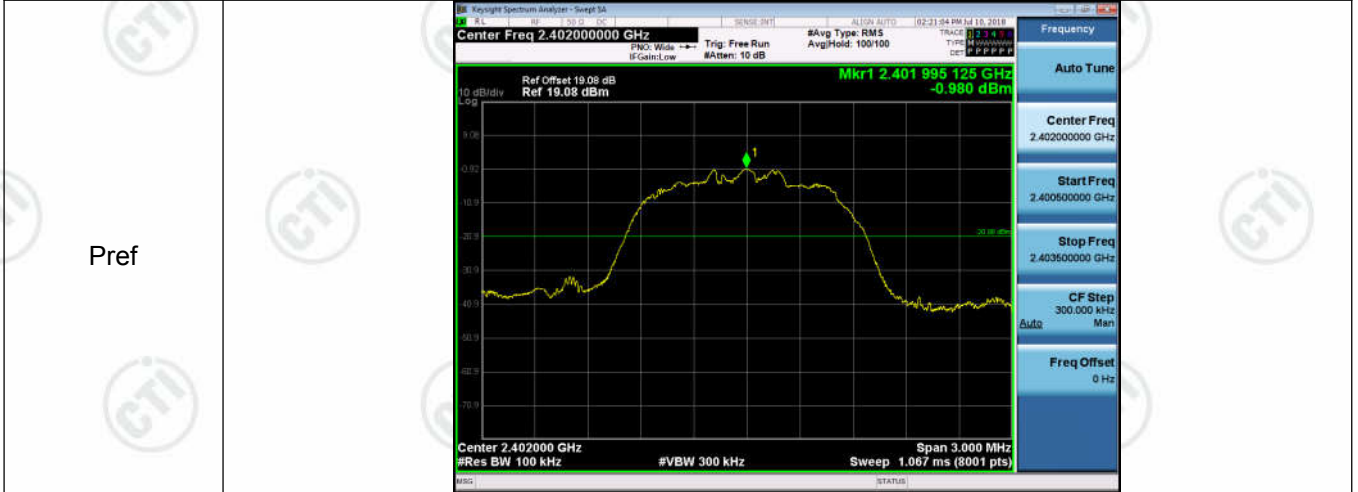


8DPSK_MCH_Graphs



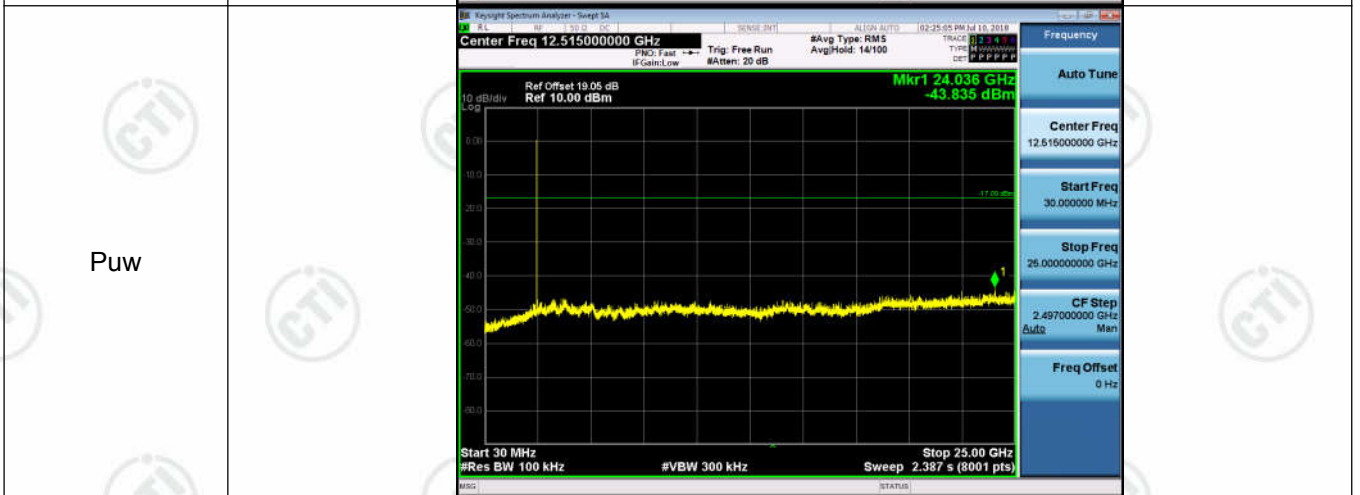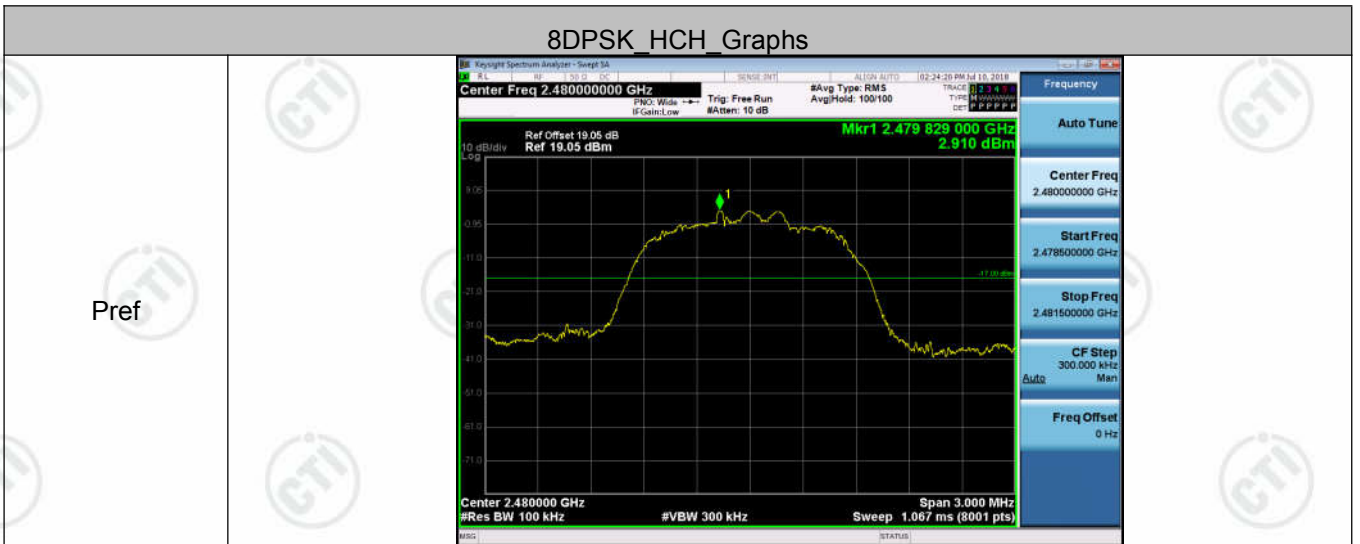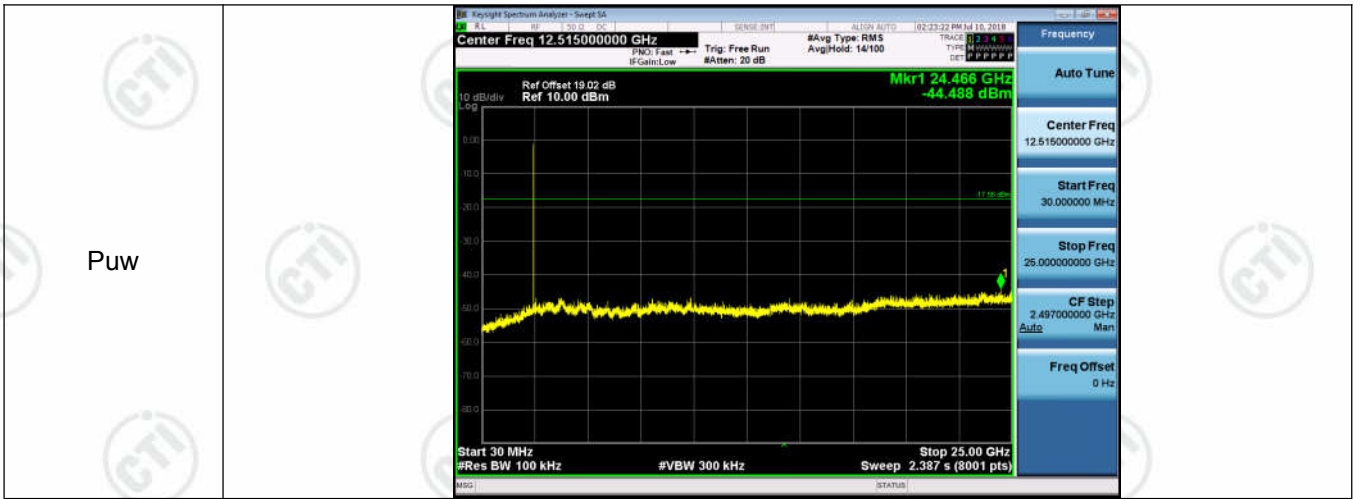

Appendix H): Pseudorandom Frequency Hopping Sequence

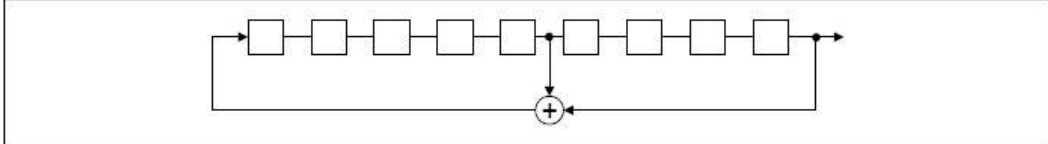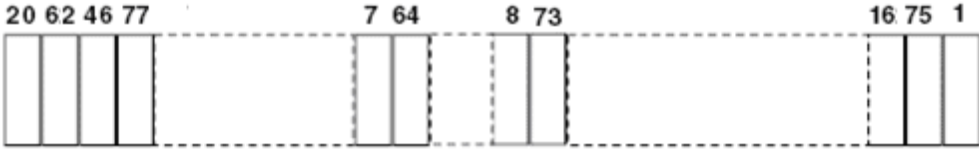Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p>	
<ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is 2.4GHz Inverted-F Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

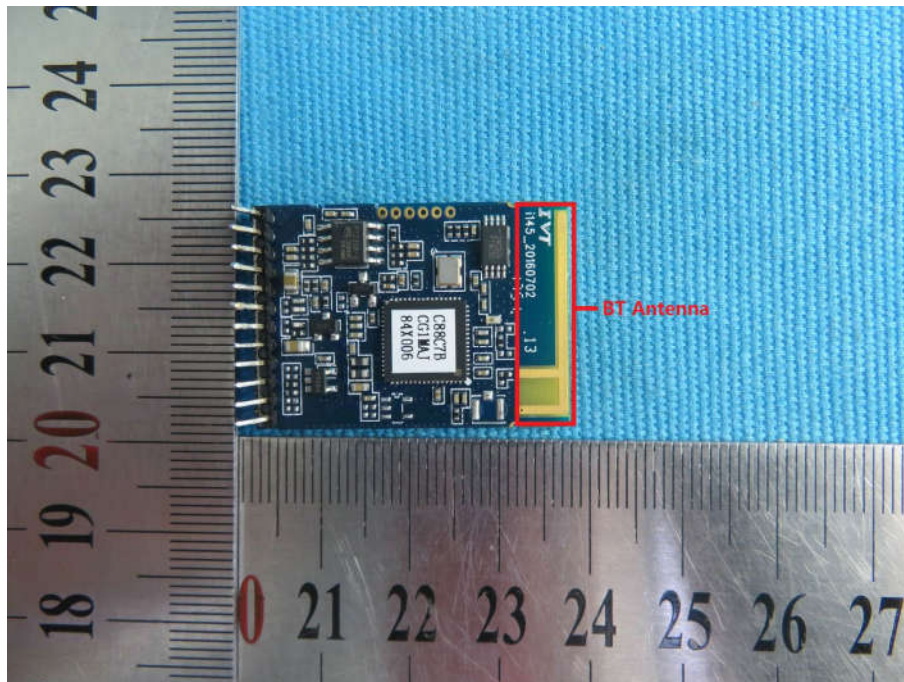


Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dB μ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		


Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

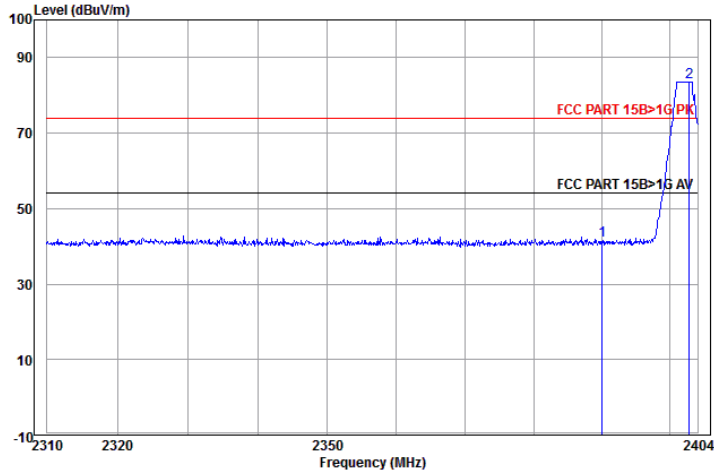


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	49.92	41.49	74.00	-32.51	Horizontal Peak
2 pp	2402.754	32.56	3.08	44.04	91.99	83.59	74.00	9.59	Horizontal Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

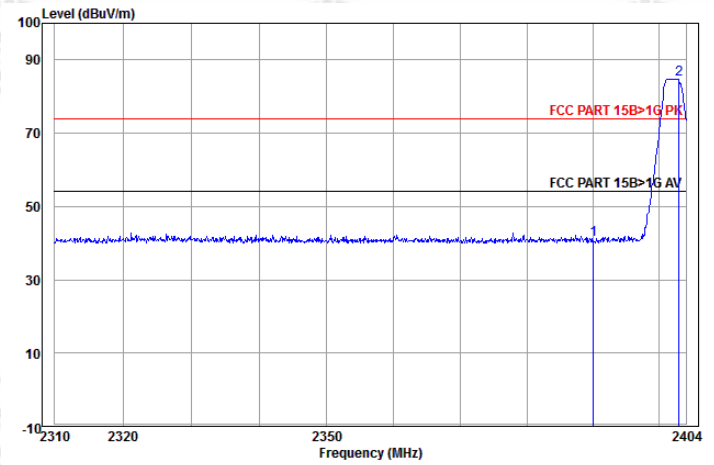


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	49.24	40.81	74.00	-33.19	Vertical Peak
2 pp	2402.946	32.56	3.08	44.04	92.99	84.59	74.00	10.59	Vertical Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

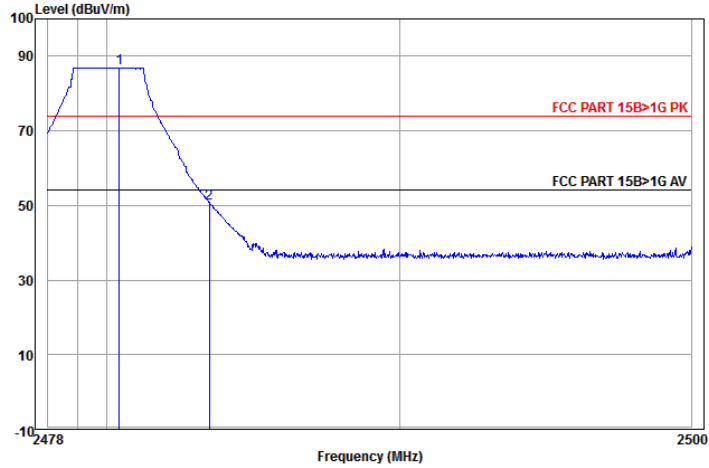


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.432	32.71	3.12	44.14	95.00	86.69	74.00	12.69	Horizontal	Peak
2	2483.500	32.71	3.12	44.14	58.93	50.62	74.00	-23.38	Horizontal	Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

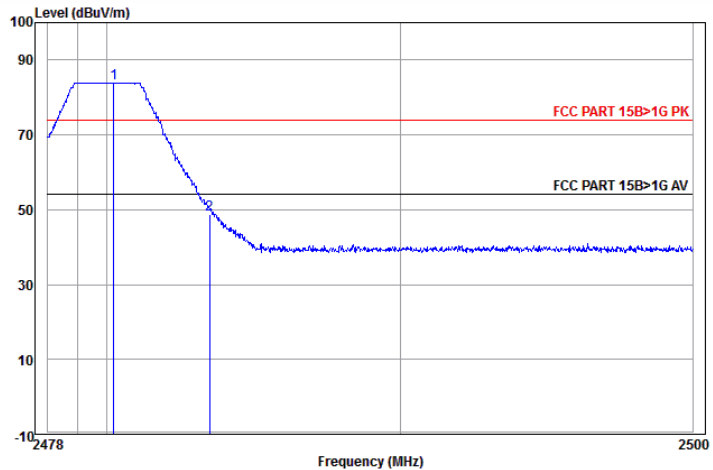


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.235	32.71	3.12	44.14	92.00	83.69	74.00	9.69	Vertical	Peak
2	2483.500	32.71	3.12	44.14	57.12	48.81	74.00	-25.19	Vertical	Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

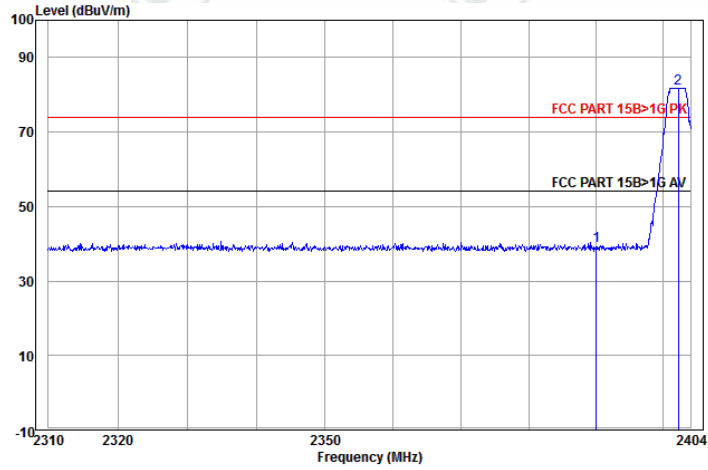


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	48.00	39.57	74.00	-34.43	Horizontal Peak
2 pp	2402.179	32.56	3.07	44.04	90.00	81.59	74.00	7.59	Horizontal Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

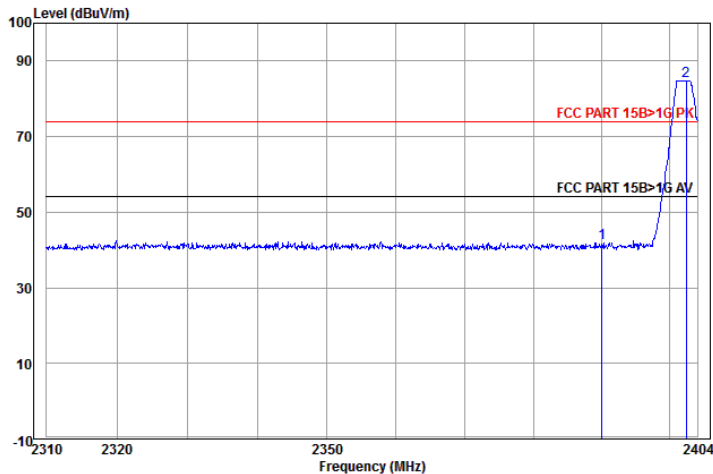


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	50.21	41.78	74.00	-32.22	Vertical Peak
2 pp	2402.370	32.56	3.08	44.04	92.99	84.59	74.00	10.59	Vertical Peak

Worse case mode:	π/4DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

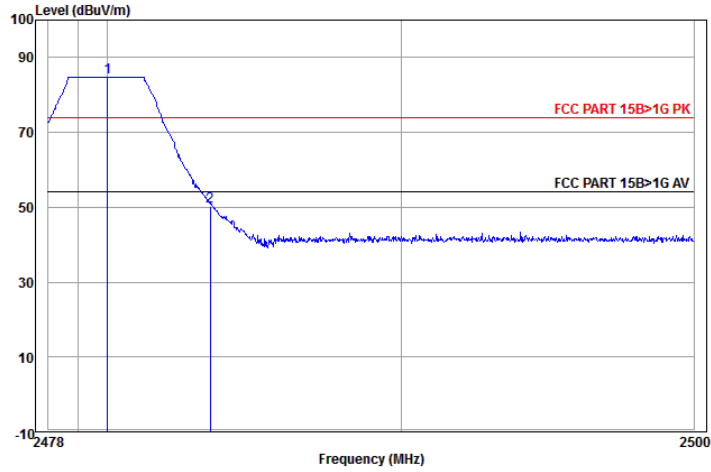


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.016	32.71	3.12	44.14	93.00	84.69	74.00	10.69	Horizontal Peak
2	2483.500	32.71	3.12	44.14	58.57	50.26	74.00	-23.74	Horizontal Peak

Worse case mode:	π/4DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

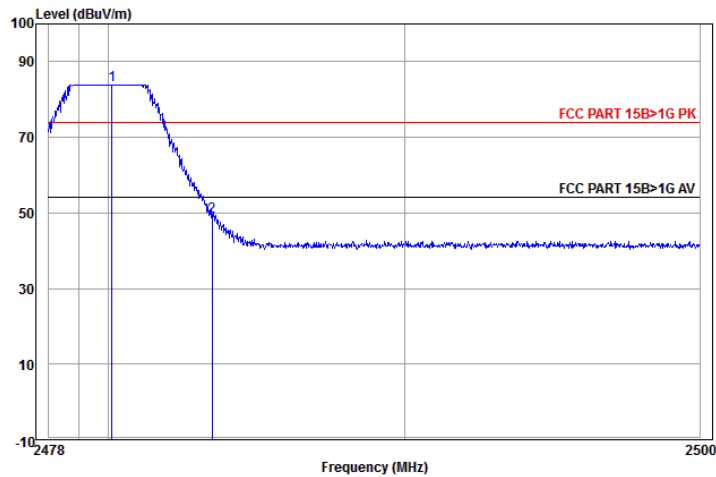


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.125	32.71	3.12	44.14	92.00	83.69	74.00	9.69	Vertical Peak
2	2483.500	32.71	3.12	44.14	57.22	48.91	74.00	-25.09	Vertical Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

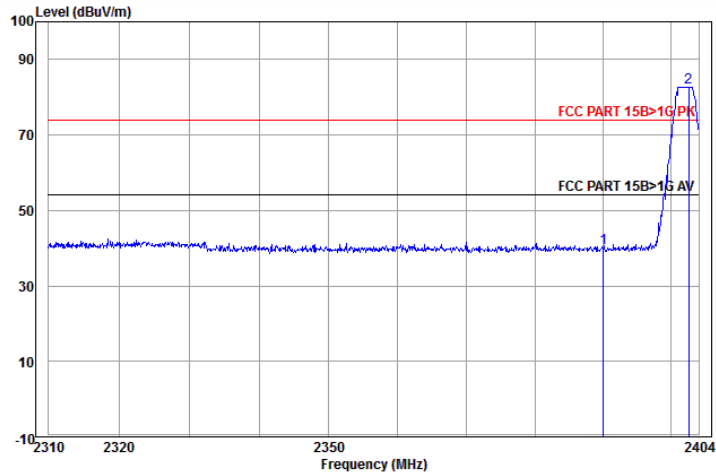


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	48.49	40.06	74.00	-33.94	Horizontal Peak
2 pp	2402.562	32.56	3.08	44.04	90.99	82.59	74.00	8.59	Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

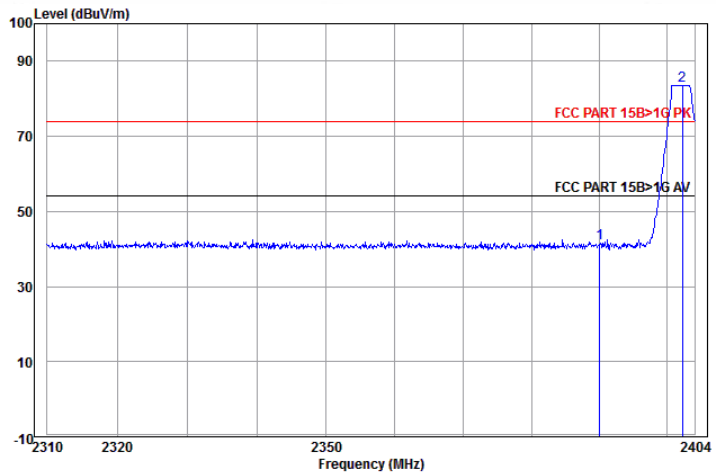


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	49.88	41.45	74.00	-32.55	Vertical Peak
2 pp	2402.179	32.56	3.07	44.04	92.00	83.59	74.00	9.59	Vertical Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

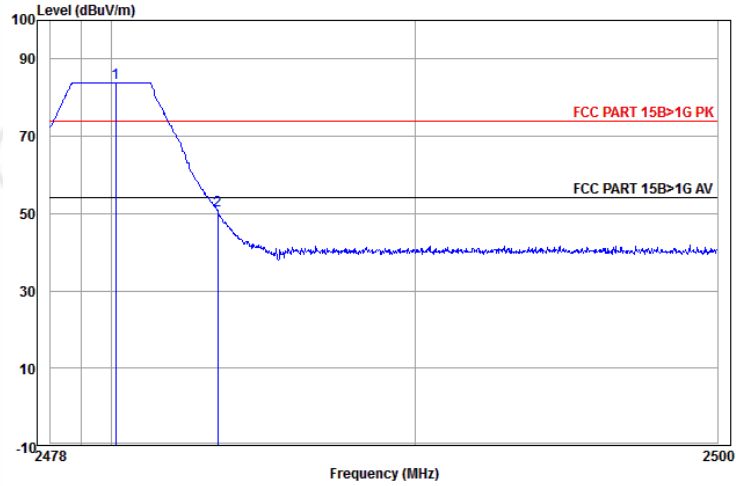

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.147	32.71	3.12	44.14	92.00	83.69	74.00	9.69	Horizontal Peak
2	2483.500	32.71	3.12	44.14	59.23	50.92	74.00	-23.08	Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

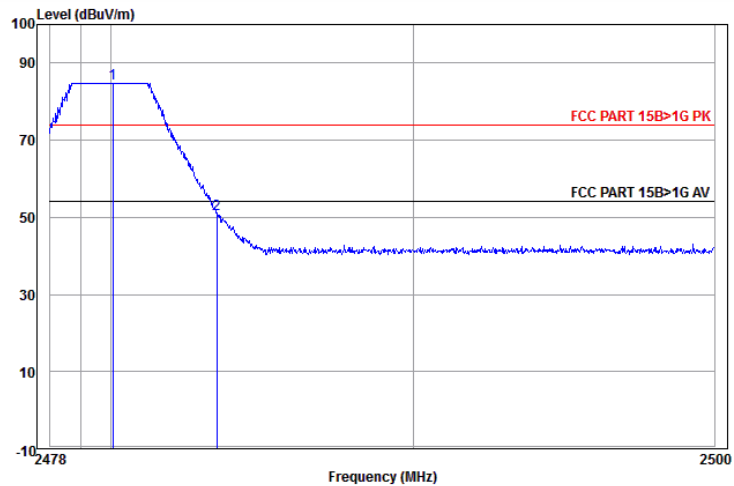

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.060	32.71	3.12	44.14	93.00	84.69	74.00	10.69	Vertical Peak
2	2483.500	32.71	3.12	44.14	59.13	50.82	74.00	-23.18	Vertical Peak

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix K): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**


30MHz~1GHz (QP)		
Test mode:	Transmitting	Horizontal

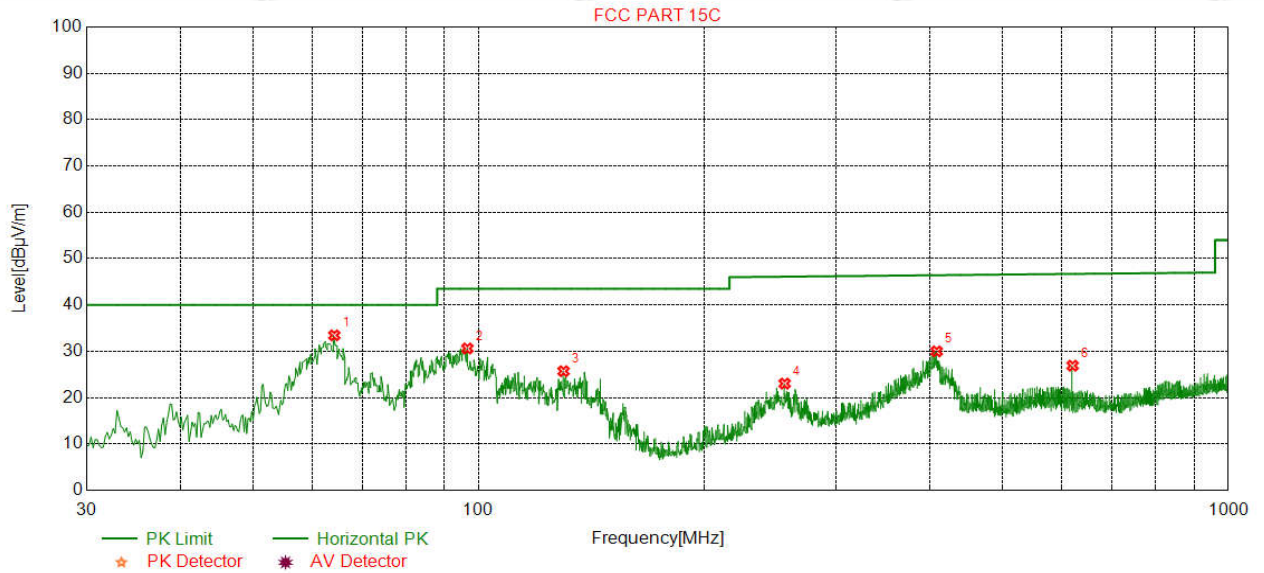

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity	Remark
1	64.1508	54.06	33.45	-20.61	40.00	6.55	Horizontal	QP
2	96.5553	51.10	30.61	-20.49	43.50	12.89	Horizontal	QP
3	129.7359	48.66	25.71	-22.95	43.50	17.79	Horizontal	QP
4	255.8612	40.69	23.03	-17.66	46.00	22.97	Horizontal	QP
5	408.1816	43.87	29.99	-13.88	46.00	16.01	Horizontal	QP
6	619.6839	36.76	26.90	-9.86	46.00	19.10	Horizontal	QP

Test mode:	Transmitting	Vertical
------------	--------------	----------

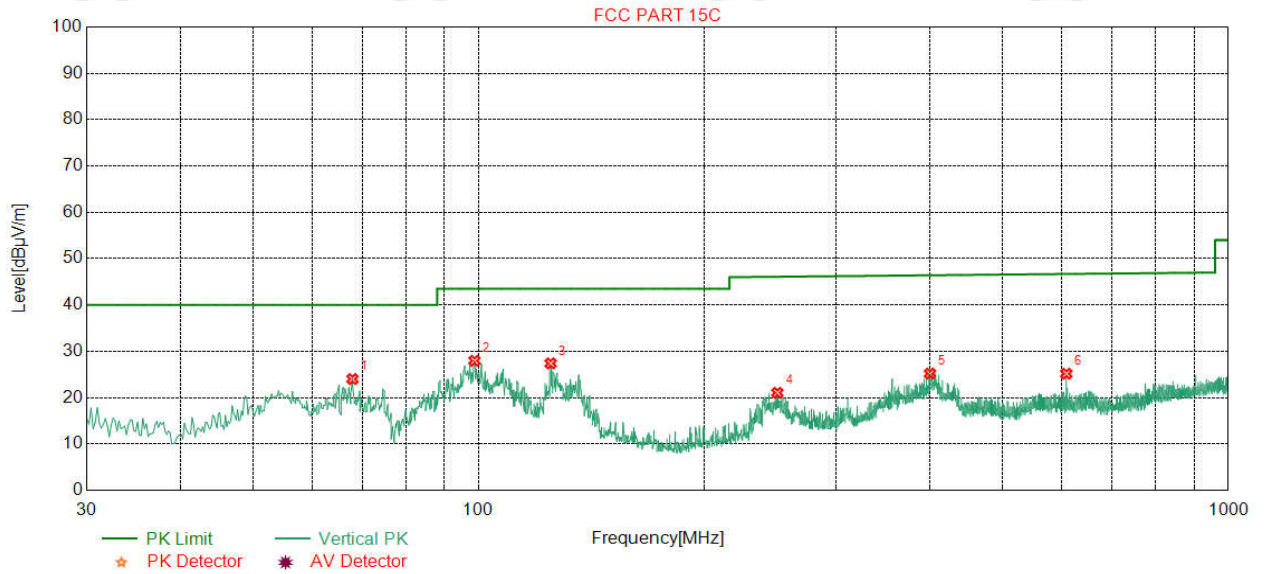

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity	Remark
1	67.8376	45.57	24.02	-21.55	40.00	15.98	Vertical	QP
2	98.6897	48.08	27.96	-20.12	43.50	15.54	Vertical	QP
3	124.6909	49.63	27.39	-22.24	43.50	16.11	Vertical	QP
4	250.2340	38.86	21.05	-17.81	46.00	24.95	Vertical	QP
5	399.8380	39.18	25.20	-13.98	46.00	20.80	Vertical	QP
6	608.0416	35.18	25.16	-10.02	46.00	20.84	Vertical	QP

Transmitter Emission above 1GHz

Worse case mode:		GFSK (1-DH5)	Test channel:		Lowest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	3228.1728	44.10	41.21	-2.89	74.00	32.79	Horizontal
2	4804.000	44.94	45.55	0.61	74.00	28.45	Horizontal
3	7206.000	40.15	46.34	6.19	74.00	27.66	Horizontal
4	8381.5632	41.88	49.89	8.01	74.00	24.11	Horizontal
5	9608.000	40.68	49.34	8.66	74.00	24.66	Horizontal
6	12010.000	35.73	46.89	11.16	74.00	27.11	Horizontal
1	3187.2187	48.84	46.02	-2.82	74.00	27.98	Vertical
2	4804.000	41.52	42.13	0.61	74.00	31.87	Vertical
3	7206.000	38.53	44.72	6.19	74.00	29.28	Vertical
4	8376.6877	41.78	49.73	7.95	74.00	24.27	Vertical
5	9608.000	39.86	48.52	8.66	74.00	25.48	Vertical
6	12010.000	35.24	46.40	11.16	74.00	27.60	Vertical

Worse case mode:		GFSK (1-DH5)	Test channel:		Middle	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	4882.000	43.81	44.88	1.07	74.00	29.12	Horizontal
2	7323.000	38.38	44.81	6.43	74.00	29.19	Horizontal
3	8809.6310	40.52	48.63	8.11	74.00	25.37	Horizontal
4	9764.000	38.87	47.69	8.82	74.00	26.31	Horizontal
5	11174.2424	37.57	49.50	11.93	74.00	24.50	Horizontal
6	12205.000	35.45	46.86	11.41	74.00	27.14	Horizontal
1	3198.9199	45.89	43.16	-2.73	74.00	30.84	Vertical
2	4882.000	43.97	45.05	1.08	74.00	28.95	Vertical
3	7323.000	37.20	43.63	6.43	74.00	30.37	Vertical
4	9764.000	39.50	48.32	8.82	74.00	25.68	Vertical
5	10271.3021	40.55	50.22	9.67	74.00	23.78	Vertical
6	12205.000	34.49	45.90	11.41	74.00	28.10	Vertical

Worse case mode:		GFSK (1-DH5)	Test channel:		Highest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	3714.7465	41.25	39.35	-1.90	74.00	34.65	Horizontal
2	4960.000	41.86	42.99	1.13	74.00	31.01	Horizontal
3	7440.000	37.64	44.31	6.67	74.00	29.69	Horizontal
4	8408.8659	40.78	49.00	8.22	74.00	25.00	Horizontal
5	9920.000	37.13	46.14	9.01	74.00	27.86	Horizontal
6	12400.000	36.25	47.65	11.40	74.00	26.35	Horizontal
1	3192.0942	46.43	43.65	-2.78	74.00	30.35	Vertical
2	4960.000	46.34	47.47	1.13	74.00	26.53	Vertical
3	7440.000	37.90	44.57	6.67	74.00	29.43	Vertical
4	8497.5998	40.81	49.05	8.24	74.00	24.95	Vertical
5	9920.000	38.33	47.34	9.01	74.00	26.66	Vertical
6	12400.000	35.52	46.92	11.40	74.00	27.08	Vertical

Worse case mode:		$\pi/4$ DQPSK (2-DH5)	Test channel:		Lowest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	3912.6913	43.94	42.71	-1.23	74.00	31.29	Horizontal
2	4804.000	41.00	41.61	0.61	74.00	32.39	Horizontal
3	7206.000	40.43	46.62	6.19	74.00	27.38	Horizontal
4	7894.0144	42.58	50.19	7.61	74.00	23.81	Horizontal
5	9608.000	39.52	48.18	8.66	74.00	25.82	Horizontal
6	12010.000	35.79	46.95	11.16	74.00	27.05	Horizontal
1	3198.9199	48.80	46.07	-2.73	74.00	27.93	Vertical
2	4804.000	39.56	40.17	0.61	74.00	33.83	Vertical
3	7206.000	39.96	46.15	6.19	74.00	27.85	Vertical
4	8407.8908	42.39	50.61	8.22	74.00	23.39	Vertical
5	9608.000	38.90	47.56	8.66	74.00	26.44	Vertical
6	12010.000	36.16	47.32	11.16	74.00	26.68	Vertical

Worse case mode:		$\pi/4$ DQPSK (2-DH5)	Test channel:		Middle	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	3396.8647	44.47	41.82	-2.65	74.00	32.18	Horizontal
2	4882.000	41.76	42.84	1.08	74.00	31.16	Horizontal
3	7323.000	36.95	43.38	6.43	74.00	30.62	Horizontal
4	9764.000	37.53	46.35	8.82	74.00	27.65	Horizontal
5	11095.2595	38.11	49.93	11.82	74.00	24.07	Horizontal
6	12205.000	34.88	46.29	11.41	74.00	27.71	Horizontal
1	3184.2934	42.36	39.52	-2.84	74.00	34.48	Vertical
2	4882.000	38.97	40.05	1.08	74.00	33.95	Vertical
3	7323.000	35.62	42.05	6.43	74.00	31.95	Vertical
4	9764.000	36.94	45.76	8.82	74.00	28.24	Vertical
5	11218.1218	38.04	49.91	11.87	74.00	24.09	Vertical
6	12205.000	35.35	46.76	11.41	74.00	27.24	Vertical

Worse case mode:		$\pi/4$ DQPSK (2-DH5)	Test channel:		Highest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	4960.000	38.05	39.19	1.14	74.00	34.81	Horizontal
2	7440.000	35.26	41.93	6.67	74.00	32.07	Horizontal
3	8398.1398	39.39	47.60	8.21	74.00	26.40	Horizontal
4	9920.000	35.40	44.41	9.01	74.00	29.59	Horizontal
5	11165.4665	38.91	50.84	11.93	74.00	23.16	Horizontal
6	12400.000	36.11	47.51	11.40	74.00	26.49	Horizontal
1	3188.1938	41.48	38.67	-2.81	74.00	35.33	Vertical
2	4960.000	40.68	41.81	1.13	74.00	32.19	Vertical
3	7440.000	34.50	41.17	6.67	74.00	32.83	Vertical
4	9920.000	36.28	45.29	9.01	74.00	28.71	Vertical
5	11288.3288	38.08	50.24	12.16	74.00	23.76	Vertical
6	12400.000	35.24	46.64	11.40	74.00	27.36	Vertical

Worse case mode:		8DPSK (3-DH5)	Test channel:		Lowest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	4804.000	38.90	39.51	0.61	74.00	34.49	Horizontal
2	6498.6499	38.46	42.86	4.40	74.00	31.14	Horizontal
3	7206.000	36.20	42.39	6.19	74.00	31.61	Horizontal
4	9608.000	36.38	45.04	8.66	74.00	28.96	Horizontal
5	11313.681	37.77	49.99	12.22	74.00	24.01	Horizontal
6	12010.000	34.46	45.62	11.16	74.00	28.38	Horizontal
1	3185.2685	42.19	39.36	-2.83	74.00	34.64	Vertical
2	4804.000	35.56	36.17	0.61	74.00	37.83	Vertical
3	7206.000	35.15	41.34	6.19	74.00	32.66	Vertical
4	9608.000	35.92	44.58	8.66	74.00	29.42	Vertical
5	11303.930	37.77	50.03	12.26	74.00	23.97	Vertical
6	12010.000	34.61	45.77	11.16	74.00	28.23	Vertical

Worse case mode:		8DPSK (3-DH5)	Test channel:		Middle	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	4882.000	38.80	39.87	1.07	74.00	34.13	Horizontal
2	7323.000	34.78	41.21	6.43	74.00	32.79	Horizontal
3	8268.4518	38.37	46.06	7.69	74.00	27.94	Horizontal
4	9764.000	36.31	45.13	8.82	74.00	28.87	Horizontal
5	11171.3171	38.50	50.43	11.93	74.00	23.57	Horizontal
6	12205.000	34.64	46.05	11.41	74.00	27.95	Horizontal
1	3195.9946	42.93	40.18	-2.75	74.00	33.82	Vertical
2	4882.000	39.28	40.36	1.08	74.00	33.64	Vertical
3	7323.000	35.83	42.26	6.43	74.00	31.74	Vertical
4	9764.000	38.06	46.88	8.82	74.00	27.12	Vertical
5	11151.8152	38.39	50.32	11.93	74.00	23.68	Vertical
6	12205.000	35.27	46.68	11.41	74.00	27.32	Vertical

Worse case mode:		8DPSK (3-DH5)	Test channel:		Highest	Remark: Peak	
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Polarity
1	3192.0942	41.76	38.98	-2.78	74.00	35.02	Horizontal
2	4960.000	38.32	39.45	1.13	74.00	34.55	Horizontal
3	7440.000	35.13	41.80	6.67	74.00	32.20	Horizontal
4	9920.000	35.37	44.38	9.01	74.00	29.62	Horizontal
5	11157.6658	38.76	50.69	11.93	74.00	23.31	Horizontal
6	12400.000	36.19	47.59	11.40	74.00	26.41	Horizontal
1	3184.2934	43.66	40.82	-2.84	74.00	33.18	Vertical
2	4960.000	40.57	41.70	1.13	74.00	32.30	Vertical
3	7440.000	35.19	41.86	6.67	74.00	32.14	Vertical
4	9920.000	35.37	44.38	9.01	74.00	29.62	Vertical
5	11299.0549	38.34	50.61	12.27	74.00	23.39	Vertical
6	12400.000	36.75	48.15	11.40	74.00	25.85	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor


4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: UN1880



Radiated spurious emission Test Setup-1(9K-30M)

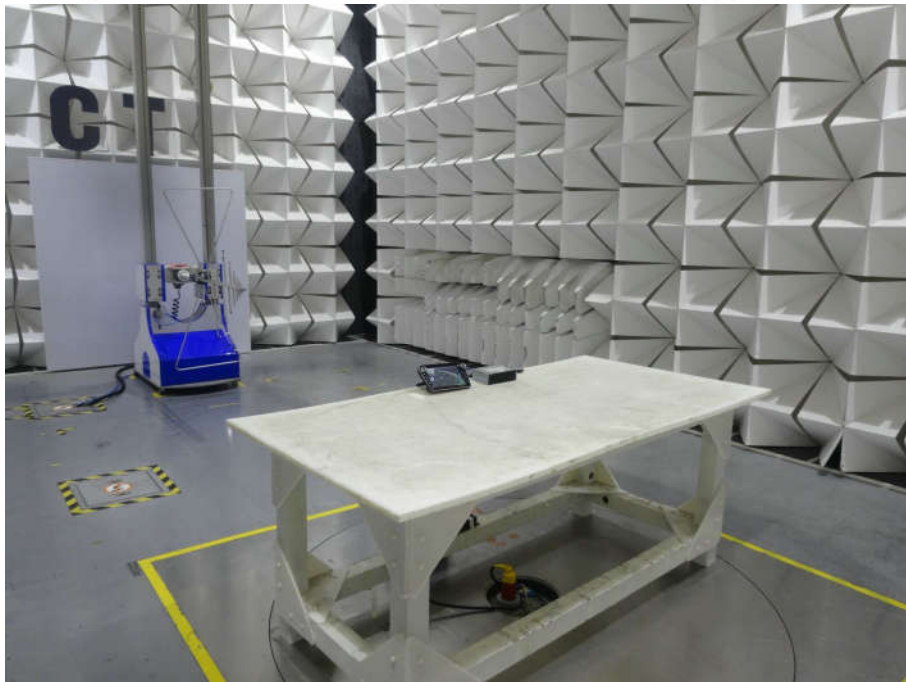

Radiated spurious emission Test Setup-2(30-1G)



Radiated spurious emission Test Setup-3(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32K00161901 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.