



# FCC RADIO TEST REPORT

**FCC ID** : XHG-RG1000  
**Equipment** : Mobile Hotspot  
**Model Name** : RG1000  
**Applicant** : Franklin Technology Inc.  
906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu,  
Seoul, South Korea, 08502  
**Manufacturer** : Franklin Technology Inc.  
906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu,  
Seoul, South Korea, 08502  
**Standard** : FCC 47 CFR Part 2, and 30

The product was received on May 07, 2021 and testing was started from Jul. 10, 2021 and completed on Aug. 17, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration .....	8
2.4 Measurement Results Explanation Example .....	9
2.5 Far Field Condition for Frequency above 18GHz.....	10
2.6 Frequency List of Low/Middle/High Channels.....	10
<b>3 Radiated Test Items .....</b>	<b>11</b>
3.1 Measuring Instruments.....	11
3.2 Test Setup .....	11
3.3 Test Result of Radiated Test.....	14
3.4 EIRP Measurement .....	15
3.5 Occupied Bandwidth .....	16
3.6 Radiated Spurious Emission Measurement.....	17
3.7 Frequency Stability Measurement.....	18
<b>4 List of Measuring Equipment.....</b>	<b>19</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>21</b>
<b>Appendix A. Test Results of Conducted and Radiated Test</b>	
<b>Appendix B. R&amp;S Mixer and Horn Antenna Calibration Reports</b>	
<b>Appendix C. Designation Number and Maximum Assessed Frequency in MHz</b>	
<b>Appendix D Test Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.4	§2.1046 §30.202	EIRP Measurement	+43dBm	Pass	-
3.5	§2.1049	Occupied Bandwidth	Not Applicable	Reporting only	-
3.6	§2.1053 §30.203	Radiated Spurious Emission	-5dBm/MHz -13dBm/MHz	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Within the band	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Avis Chuang**

**Report Producer: Dara Chiu**



# 1 General Description

## 1.1 Feature of Equipment Under Test

WCDMA/LTE/5G NR, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, and Wi-Fi 5GHz 802.11n/ac/ax

Product Feature & Specification	
Antenna Type	WWAN <Main>: PIFA Antenna <Aux.>: PIFA Antenna WLAN: <Chain 0>: PIFA Antenna <Chain 1>: PIFA Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory			
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site Information	Site No.	Engineer	Temperature	Humidity
	03CH18-HY	Eric Cheng	22~26°C	43~61%
	03CH19-HY	Eric Cheng	20~25°C	42~59%

Note 1: FCC Designation No.: TW3786

Note 2: The highest accredited frequency is 280GHz and the ISO 17025 accreditation letter can be found on TAF (Taiwan Accreditation Foundation) Website ([Website link](#)).



## **1.4 Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the dual beam rated maximum EIRP is higher than single beam.

The NR radio operation is controlled via software tool QRCT FTM mode (Factory mode).

The EUT is forced to operate continuously (100% duty cycle) with maximum output power during the test.


### 2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

Test Items	Band	Bandwidth (MHz)		Modulation				RB #			Test Channel		
		50	100	BPSK	QPSK	16QAM	64QAM	1	Inner Full	Outer Full	L	M	H
EIRP	n260 n261	v	v	v	v	v	v	v	v	v	v	v	v
99% Occupied Bandwidth	n260 n261	v	v	v	v	v	v	-	-	v	v	v	v
Out of Band Emission	n260 n261	v	v	v	v	v	v	v	-	v	v	-	v
Spurious Emission	n260 n261	v	v	v	v	-	-	v	-	-	v	v	v
Frequency Stability	n260 n261	CW tone									-	v	-
Remark	1. The mark "v " means that this configuration is chosen for testing. 2. The device is investigated from 9kHz to 200GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 3. Both modulation type DFT-s OFDM and CP-OFDM are evaluated and reported. 4. All the radiated test cases were performed with built-in battery. 5. The out of band emission were measured radiated EIRP. The TRP method is applied when EIRP exceeds limit.												

Note: EUT antenna gain information is not listed because all the measured results are radiated EIRP or TRP.

## 2.2 Connection Diagram of Test System

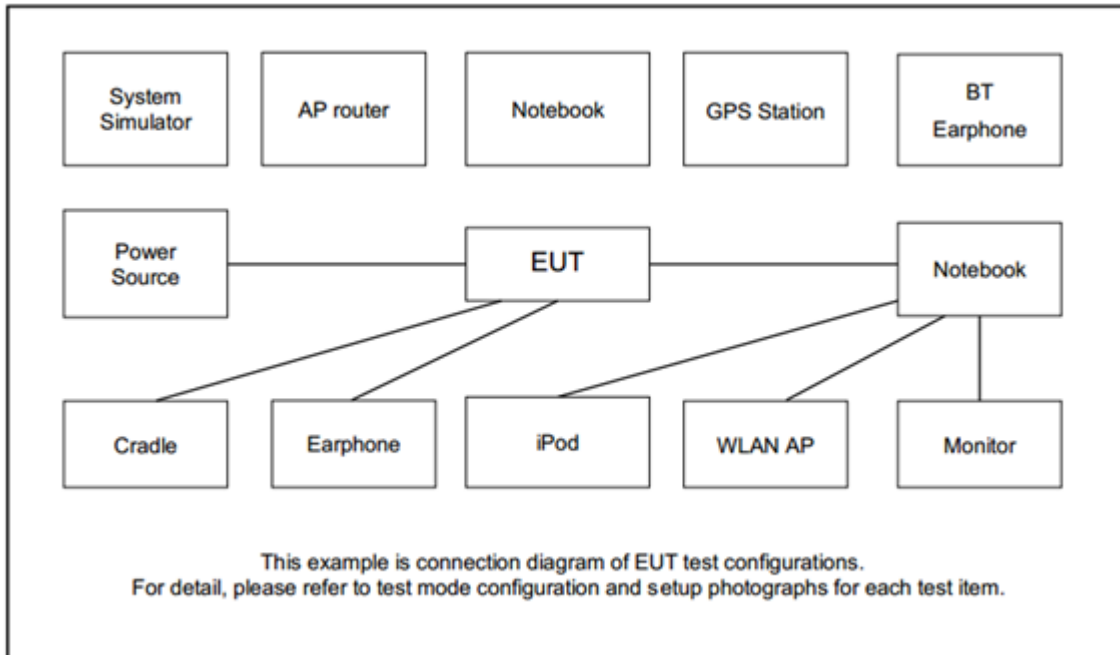

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

**Remark:** Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.





## 2.4 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8.$$

- where D is the measurement distance (in the far field region) in m.
- $E(\text{dBuV/m}) = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 42.3 + 3.0 + 107 + 20\log(1) - 104.8 \\ &= 47.5 \text{ (dB)} \end{aligned}$$



### 2.5 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)	Distance Factor $20\log(D)$ (dB)
BBHA 9170	18	60	0.0167	0.43	1	0.00
	40	60	0.0075	0.96		
QWH-UPRR00	40	48	0.0075	0.61	1	0.00
	60	48	0.0050	0.92		
QWH-EPRR00	60	31	0.0050	0.38	1	0.00
	90	31	0.0033	0.58		
QWH-FPRR00	90	21	0.0033	0.26	1	0.00
	140	21	0.0021	0.41		
QWH-GPRR00	140	15	0.0021	0.21	0.5	-6.02
	220	15	0.0014	0.33		

### 2.6 Frequency List of Low/Middle/High Channels

NR Band n260 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	37025	38500	39975
100	Frequency	37050	38500	39950

NR Band n261 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	27525	27925	28325
100	Frequency	27550	27925	28300


### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


For radiated emissions from 9kHz to 30MHz

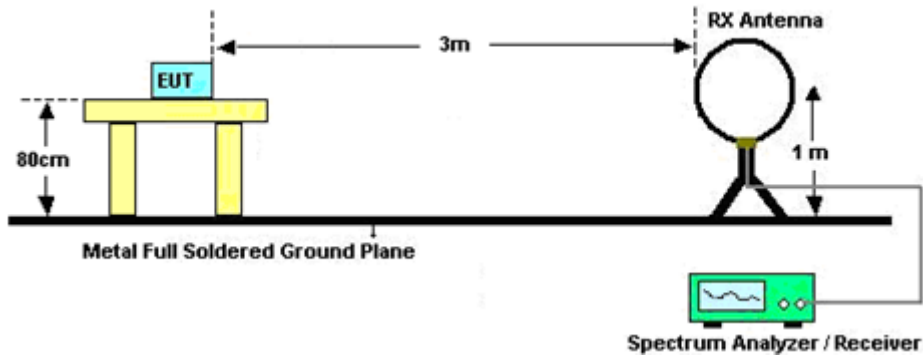


For radiated emissions from 30MHz to 1GHz

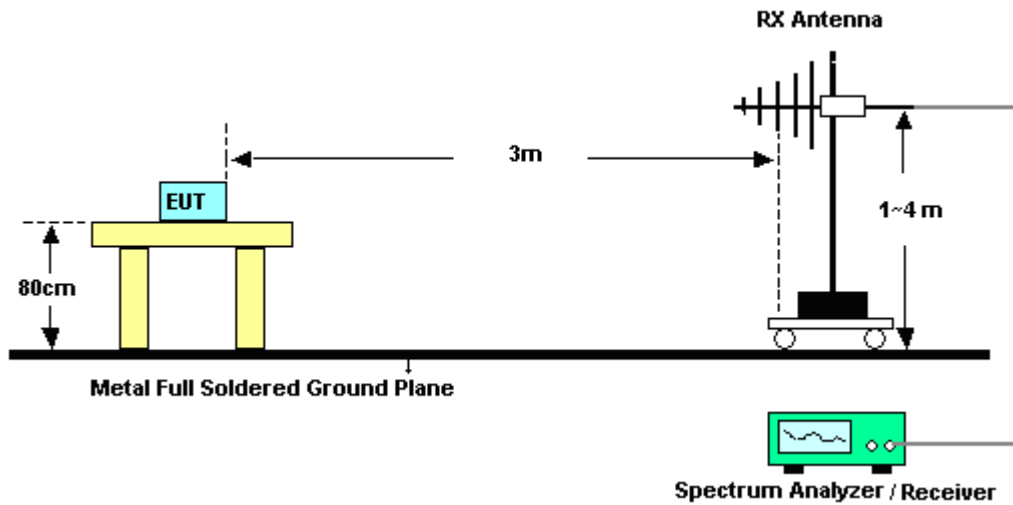


For radiated emissions 1GHz to 18GHz

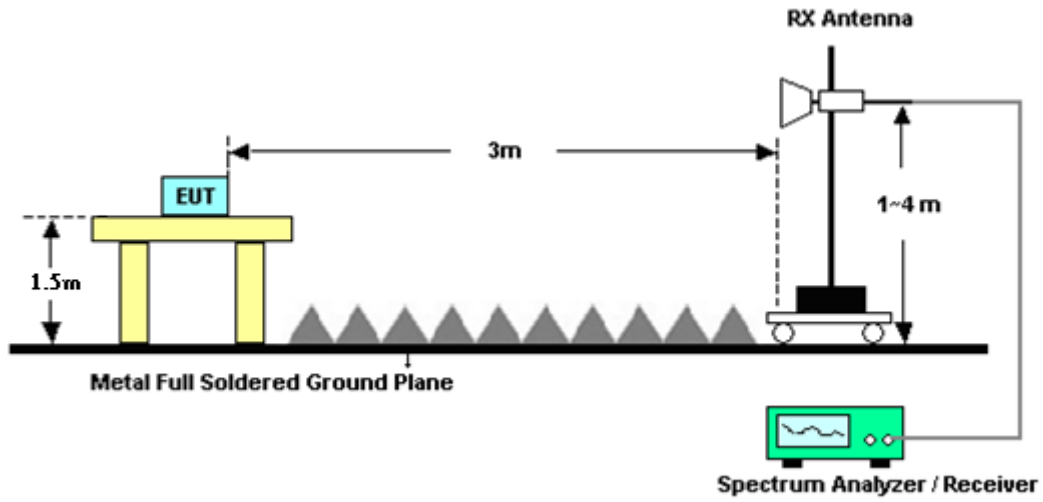


For radiated emissions above 18GHz up to 40GHz

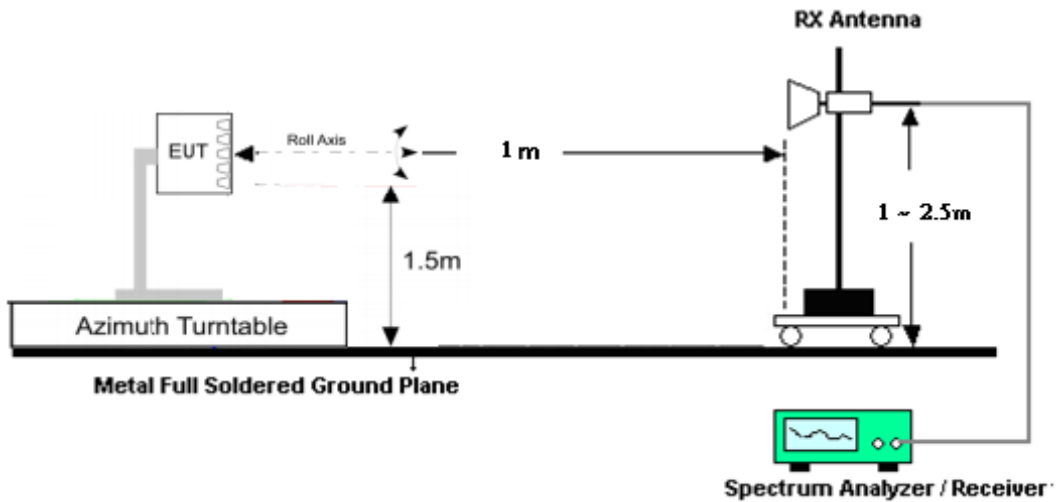


For radiated emissions above 40GHz up to 140GHz

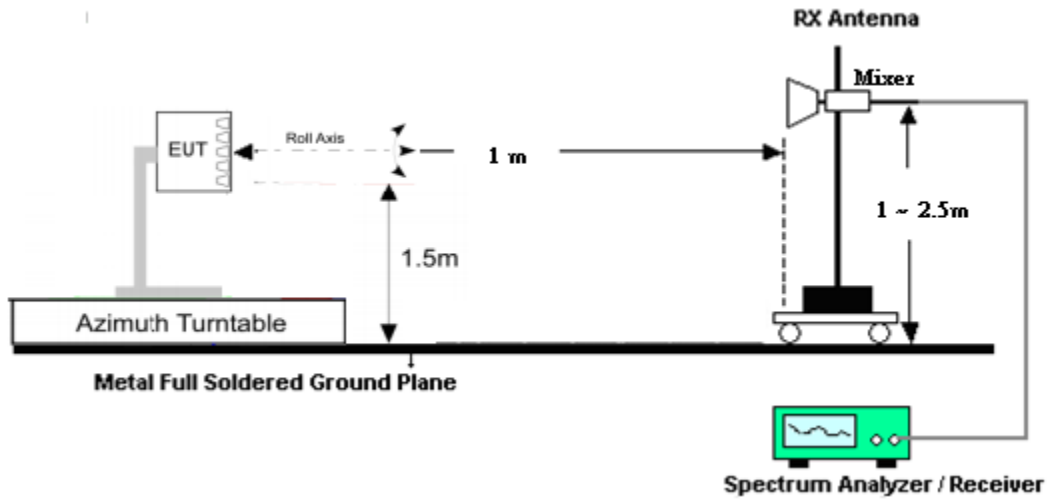

For radiated emissions above 140GHz up to 200GHz

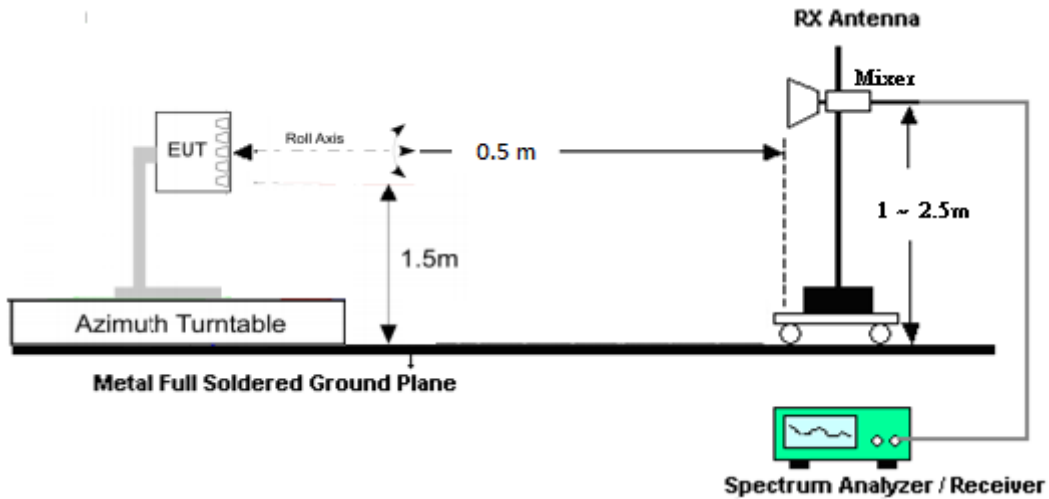

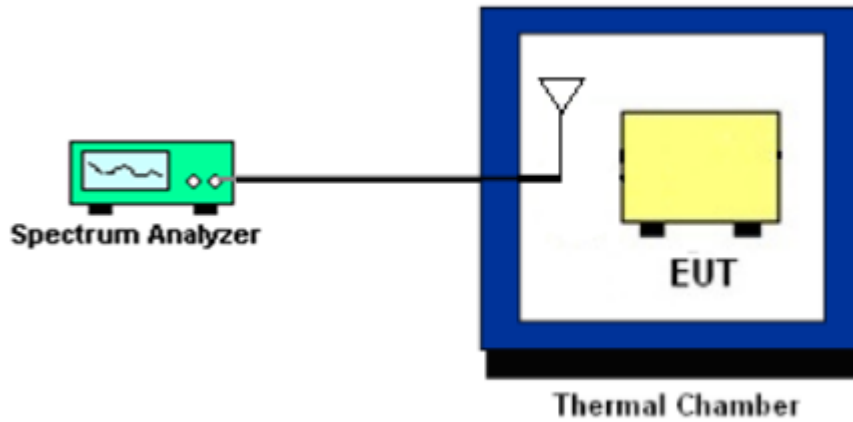**Frequency stability Setup****3.3 Test Result of Radiated Test**

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v03r01, and the result came out very similar.



## 3.4 EIRP Measurement

### 3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

### 3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points  $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



## **3.5 Occupied Bandwidth**

### **3.5.1 Description of Occupied Bandwidth Measurement**

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

### **3.5.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.





### 3.6 Radiated Spurious Emission Measurement

#### 3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

#### 3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS, Trace mode = trace average, sweep time = auto couple
6. Set sweep points  $\geq 2 \times \text{Span/RBW}$ , sweep count 100 and wait until the trace to be stabilized.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. For measurement frequency from 30MHz to 18GHz,  
An antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
9. For measurement frequency above 18GHz, the test result is calculated according to ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4  
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.  
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of  
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
10. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.
11. The TRP method refers to the clause 4.4.2.2 of FCC KDB 842590 D01 v01r02.  
If EIRP measurement results exceed the emission limit, then TRP measurement will be used as an alternative method. Test results of TRP measurement are marked as "TRP Measurement".



## 3.7 Frequency Stability Measurement

### 3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	COM-POWER	PAM-103	18020199	1MHz-1000MHz	Jan. 04, 2021	Aug. 17, 2021	Jan. 03, 2022	Radiation (03CH19-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	55608 & 09	30MHz~1GHz	Oct. 22, 2020	Aug. 17, 2021	Oct. 21, 2021	Radiation (03CH19-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Nov. 03, 2020	Aug. 17, 2021	Nov. 02, 2021	Radiation (03CH19-HY)
Amplifier	EMCI	EMC118A45SE	980791	1GHz-18GHz	Nov. 16, 2020	Aug. 17, 2021	Nov. 15, 2021	Radiation (03CH19-HY)
EMI Test Receiver	Keysight	N9038A	MY59053012	N/A	Nov. 18, 2020	Aug. 17, 2021	Nov. 17, 2021	Radiation (03CH19-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 17, 2021	N/A	Radiation (03CH19-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 17, 2021	N/A	Radiation (03CH19-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Aug. 17, 2021	N/A	Radiation (03CH19-HY)
Software	Audix	E3 6.2009-8-24	RK-002155	N/A	Jun .20,2021	Aug. 17, 2021	N/A	Radiation (03CH19-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519226/2,804014/2,804026 /2	30MHz~40GHz	Jan. 20, 2021	Aug. 17, 2021	Jan. 19, 2022	Radiation (03CH19-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz~40GHz	Dec. 11, 2020	Jul. 10, 2021 ~ Aug. 13, 2021	Dec. 10, 2021	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101010	10Hz~44GHz	Nov. 25, 2020	Jul. 10, 2021 ~ Aug. 13, 2021	Nov. 24, 2021	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	9kHz~40GHz	Dec. 22, 2020	Jul. 10, 2021 ~ Aug. 13, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
Turn Table	EMEC	N/A	N/A	Phi/Theta 0~360 Degree	N/A	Jul. 10, 2021 ~ Aug. 13, 2021	N/A	Radiation (03CH18-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table	N/A	Jul. 10, 2021 ~ Aug. 13, 2021	N/A	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	103738	9kHz to 30GHz	May 19, 2021	Aug. 15, 2021	May 18, 2022	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	9kHz~40GHz	Dec. 22, 2020	Aug. 15, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801589/2	9kHz~40GHz	Dec. 22, 2020	Aug. 15, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	RPG FS-Z60	101033	40GHz to 60GHz	Mar. 17, 2020	Aug. 15, 2021	Mar. 16, 2023	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	FSZ-90	101867	60GHz to 90GHz	Jan. 10, 2019	Aug. 15, 2021	Jan. 09, 2022	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	RPG FS-Z140	101128	90GHz to 140GHz	Oct. 26, 2020	Aug. 15, 2021	Oct. 25, 2023	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	RPG FS-Z220	101014	140GHz to 220GHz	Aug. 27, 2018	Aug. 15, 2021	Aug. 26, 2021	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-UPRR00	923600007	40-60 GHz	Aug. 17, 2018	Aug. 15, 2021	Note 3	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-EPRR00	784600034	60-90 GHz	Aug. 17, 2018	Aug. 15, 2021	Note 3	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-FPRR00	923800009	90-140 GHz	Aug. 17, 2018	Aug. 15, 2021	Note 3	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-GPRR00	923900001	140-220 GHz	Aug. 17, 2018	Aug. 15, 2021	Note 3	Radiation (03CH18-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz~40GHz	Dec. 11, 2020	Aug. 16 , 2021	Dec. 10, 2021	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101010	10Hz~44GHz	Nov. 25, 2020	Aug. 16 , 2021	Nov. 24, 2021	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	9kHz~40GHz	Dec. 22, 2020	Aug. 16 , 2021	Dec. 21, 2021	Radiation (03CH18-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 10, 2020	Aug. 16 , 2021	Nov. 09, 2021	Radiation (03CH18-HY)

**Note 1:** (\*) Equipment manufacturer's Calibration Certificate.

**Note 2:** The Standard Gain Horn Antennas are calibrated by the ISO 17025 accredited test lab MWM Lab (<http://en.mwmlab.com/about>), a sub unit of Belarussian State University of Informatics and Radio electronics which is accredited by the Belarusian State Centre for Accreditation (BSCA). BSCA is the National accreditation body of the Republic of Belarus and an associated member of the International Laboratory Accreditation Cooperation (ILAC).

**Note 3:** The standard gain horn's critical dimensions is verified on an annual basis within the equipment specification according to KDB 842590 D01 v01r02 clause 2)a)2)iii).



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.31
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.62
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.62
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.92
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.78
-------------------------------------------------------------------------	------



### Appendix A. Test Results of Conducted and Radiated Test

#### EIRP Power(Average power)

##### Module 0 (ANT L)

NR Band n260 Module 0_AG0 (Beam ID:39 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	19.03	18.91
	50	DFT-S	QPSK	19.14	18.97
	50	DFT-S	16QAM	18.43	18.35
	50	DFT-S	64QAM	16.27	16.16
	50	CP	QPSK	17.21	16.97
	100	DFT-S	BPSK	18.77	18.86
	100	DFT-S	QPSK	18.59	19.17
	100	DFT-S	16QAM	17.95	18.41
	100	DFT-S	64QAM	15.55	16.16
	100	CP	QPSK	16.91	16.91

NR Band n260 Module 0_AG0 (Beam ID:39 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	18.38	18.34
	50	DFT-S	QPSK	18.34	19.28
	50	DFT-S	16QAM	18.87	18.8
	50	DFT-S	64QAM	17,43	17.87
	50	CP	QPSK	18.17	18.55
	100	DFT-S	BPSK	18.67	18.57
	100	DFT-S	QPSK	18.6	19.67
	100	DFT-S	16QAM	18.75	18.96
	100	DFT-S	64QAM	18.25	18.05
	100	CP	QPSK	19.02	18.74



NR Band n260 Module 0_AG0 (Beam ID:39 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	18.39	18.59
	50	DFT-S	QPSK	18.71	18.7
	50	DFT-S	16QAM	16.53	16.93
	50	DFT-S	64QAM	14.91	14.98
	50	CP	QPSK	15.82	15.7
	100	DFT-S	BPSK	18.64	18.56
	100	DFT-S	QPSK	18.73	18.56
	100	DFT-S	16QAM	16.58	16.86
	100	DFT-S	64QAM	15.02	14.95
	100	CP	QPSK	15.85	15.68



NR Band n260 Module 0_AG1 (Beam ID:155 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	18.92	18.68
	50	DFT-S	QPSK	19.42	19.05
	50	DFT-S	16QAM	18.81	18.7
	50	DFT-S	64QAM	18.1	18.09
	50	CP	QPSK	19.31	19.02
	100	DFT-S	BPSK	18.99	18.94
	100	DFT-S	QPSK	19.59	19.42
	100	DFT-S	16QAM	18.74	18.89
	100	DFT-S	64QAM	17.27	17.43
100	CP	QPSK	18.49	18.38	

NR Band n260 Module 0_AG1 (Beam ID:155 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	18.8	18.39
	50	DFT-S	QPSK	18.87	18.57
	50	DFT-S	16QAM	18.64	18.46
	50	DFT-S	64QAM	16.26	16.55
	50	CP	QPSK	17.17	17.55
	100	DFT-S	BPSK	18.94	18.83
	100	DFT-S	QPSK	18.88	19.04
	100	DFT-S	16QAM	19.44	19.36
	100	DFT-S	64QAM	17.33	17.34
100	CP	QPSK	18.11	18.06	





NR Band n260 Module 0_AG1 (Beam ID:155 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.02	18.5
	50	DFT-S	QPSK	17.61	18.95
	50	DFT-S	16QAM	16.13	17.88
	50	DFT-S	64QAM	14.45	16.06
	50	CP	QPSK	15.84	16.33
	100	DFT-S	BPSK	18.94	18.92
	100	DFT-S	QPSK	19.14	18.91
	100	DFT-S	16QAM	16.78	17.12
	100	DFT-S	64QAM	15.2	15.22
	100	CP	QPSK	16.12	15.99




NR Band n260 Module 0_AG0+1 (Beam ID:27+155 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.51	22.28
	50	DFT-S	QPSK	22.51	22.17
	50	DFT-S	16QAM	20.37	20.54
	50	DFT-S	64QAM	18.58	18.41
	50	CP	QPSK	17.51	17.31
	100	DFT-S	BPSK	22.54	22.99
	100	DFT-S	QPSK	22.26	22.85
	100	DFT-S	16QAM	22.34	21.66
	100	DFT-S	64QAM	19.6	19.42
100	CP	QPSK	17.41	17.34	

NR Band n260 Module 0_AG0+1 (Beam ID:27+155 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.21	22.11
	50	DFT-S	QPSK	22.21	22.44
	50	DFT-S	16QAM	20.37	20.51
	50	DFT-S	64QAM	18.37	18.66
	50	CP	QPSK	17.98	17.7
	100	DFT-S	BPSK	22.2	22.45
	100	DFT-S	QPSK	22.19	22.33
	100	DFT-S	16QAM	20.2	20.45
	100	DFT-S	64QAM	18.4	18.79
100	CP	QPSK	18.06	17.97	



NR Band n260 Module 0_AG0+1 (Beam ID:27+155 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.66	22.82
	50	DFT-S	QPSK	22.29	22.8
	50	DFT-S	16QAM	21.23	21.6
	50	DFT-S	64QAM	19.05	19.28
	50	CP	QPSK	17.69	17.96
	100	DFT-S	BPSK	22.01	22.49
	100	DFT-S	QPSK	22.18	22.49
	100	DFT-S	16QAM	21.84	21.39
	100	DFT-S	64QAM	18.95	19.21
	100	CP	QPSK	17.41	17.73

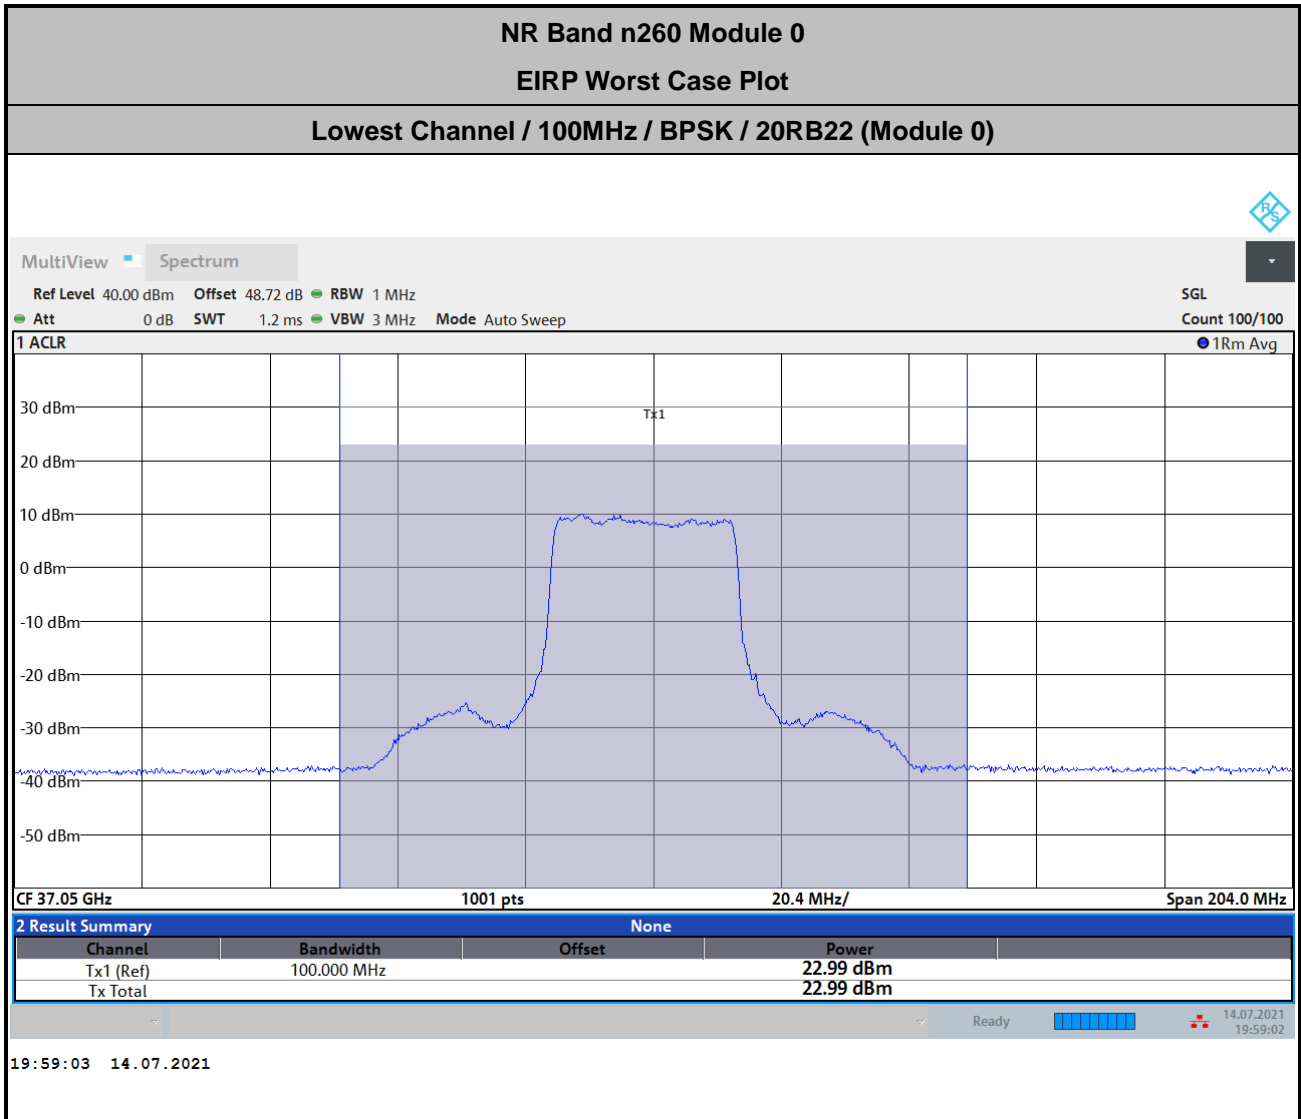

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log (D) – 104.8  
 = 43.8 + 2.72 + 107 + 20log(1) – 104.8 = 48.72 (dB)



Module 1 (ANT R)

NR Band n260 Module 1_AG0 (Beam ID:35 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	19.5	17.74
	50	DFT-S	QPSK	18.55	18.99
	50	DFT-S	16QAM	18.82	18.92
	50	DFT-S	64QAM	18.11	17.73
	50	CP	QPSK	18.84	19.1
	100	DFT-S	BPSK	18.77	18.83
	100	DFT-S	QPSK	18.66	18.68
	100	DFT-S	16QAM	18.82	18.86
	100	DFT-S	64QAM	16.47	16.48
	100	CP	QPSK	17.32	17.92

NR Band n260 Module 1_AG0 (Beam ID:35 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	18.6	18.72
	50	DFT-S	QPSK	18.67	18.96
	50	DFT-S	16QAM	17.77	18.03
	50	DFT-S	64QAM	15.8	16.08
	50	CP	QPSK	16.7	16.66
	100	DFT-S	BPSK	19.2	19.16
	100	DFT-S	QPSK	19.21	19.06
	100	DFT-S	16QAM	17.45	17.28
	100	DFT-S	64QAM	15.57	15.46
	100	CP	QPSK	16.24	16.22



NR Band n260 Module 1_AG0 (Beam ID:35 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	18.24	18.56
	50	DFT-S	QPSK	17.78	18.64
	50	DFT-S	16QAM	16.46	16.6
	50	DFT-S	64QAM	13.07	14.1
	50	CP	QPSK	15.39	15.28
	100	DFT-S	BPSK	19.06	19.09
	100	DFT-S	QPSK	19.42	19.08
	100	DFT-S	16QAM	17.33	17.7
	100	DFT-S	64QAM	14.75	15.4
	100	CP	QPSK	16.29	16.05



NR Band n260 Module 1_AG1 (Beam ID:150 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.1	19.12
	50	DFT-S	QPSK	19.44	19.17
	50	DFT-S	16QAM	18.03	18.17
	50	DFT-S	64QAM	15.23	15.58
	50	CP	QPSK	16.64	16.87
	100	DFT-S	BPSK	18.78	19.01
	100	DFT-S	QPSK	18.92	18.89
	100	DFT-S	16QAM	16.77	17.29
	100	DFT-S	64QAM	14.2	15.05
100	CP	QPSK	15.62	15.6	

NR Band n260 Module 1_AG1 (Beam ID:150 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.42	19.05
	50	DFT-S	QPSK	19.81	19.07
	50	DFT-S	16QAM	16.87	17.27
	50	DFT-S	64QAM	15.42	15.07
	50	CP	QPSK	15.63	15.95
	100	DFT-S	BPSK	19.3	18.84
	100	DFT-S	QPSK	19.54	18.95
	100	DFT-S	16QAM	16.74	16.8
	100	DFT-S	64QAM	15.46	16.76
100	CP	QPSK	15.56	15.94	



NR Band n260 Module 1_AG1 (Beam ID:150 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.04	19.1
	50	DFT-S	QPSK	18.88	19.08
	50	DFT-S	16QAM	17.21	16.86
	50	DFT-S	64QAM	14.17	14.75
	50	CP	QPSK	15.79	15.7
	100	DFT-S	BPSK	19.35	18.87
	100	DFT-S	QPSK	19.05	18.87
	100	DFT-S	16QAM	17.47	17.24
	100	DFT-S	64QAM	14.89	15.25
	100	CP	QPSK	16.25	16.15






NR Band n260 Module 1_AG0+1 (Beam ID:25+153 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.45	22.37
	50	DFT-S	QPSK	22.39	22.33
	50	DFT-S	16QAM	20.11	20.23
	50	DFT-S	64QAM	17.33	17.85
	50	CP	QPSK	16.18	16.2
	100	DFT-S	BPSK	22.29	22.24
	100	DFT-S	QPSK	21.96	22.18
	100	DFT-S	16QAM	20.85	19.87
	100	DFT-S	64QAM	17.55	17.77
100	CP	QPSK	16.17	16.09	

NR Band n260 Module 1_AG0+1 (Beam ID:25+153 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.03	22.27
	50	DFT-S	QPSK	21.46	22.14
	50	DFT-S	16QAM	20.46	20.01
	50	DFT-S	64QAM	18.33	18.01
	50	CP	QPSK	17.84	17.4
	100	DFT-S	BPSK	22.48	22.31
	100	DFT-S	QPSK	22.35	22.37
	100	DFT-S	16QAM	22.24	21.66
	100	DFT-S	64QAM	19.76	19.78
100	CP	QPSK	17.52	17.35	



NR Band n260 Module 1_AG0+1 (Beam ID:25+153 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	22.01	22.49
	50	DFT-S	QPSK	22.13	22.46
	50	DFT-S	16QAM	20.26	20.58
	50	DFT-S	64QAM	17.1	18.07
	50	CP	QPSK	18.03	17.8
	100	DFT-S	BPSK	22.27	22.3
	100	DFT-S	QPSK	21.86	22.19
	100	DFT-S	16QAM	19.72	20.1
	100	DFT-S	64QAM	16.92	17.99
	100	CP	QPSK	18.93	18.55

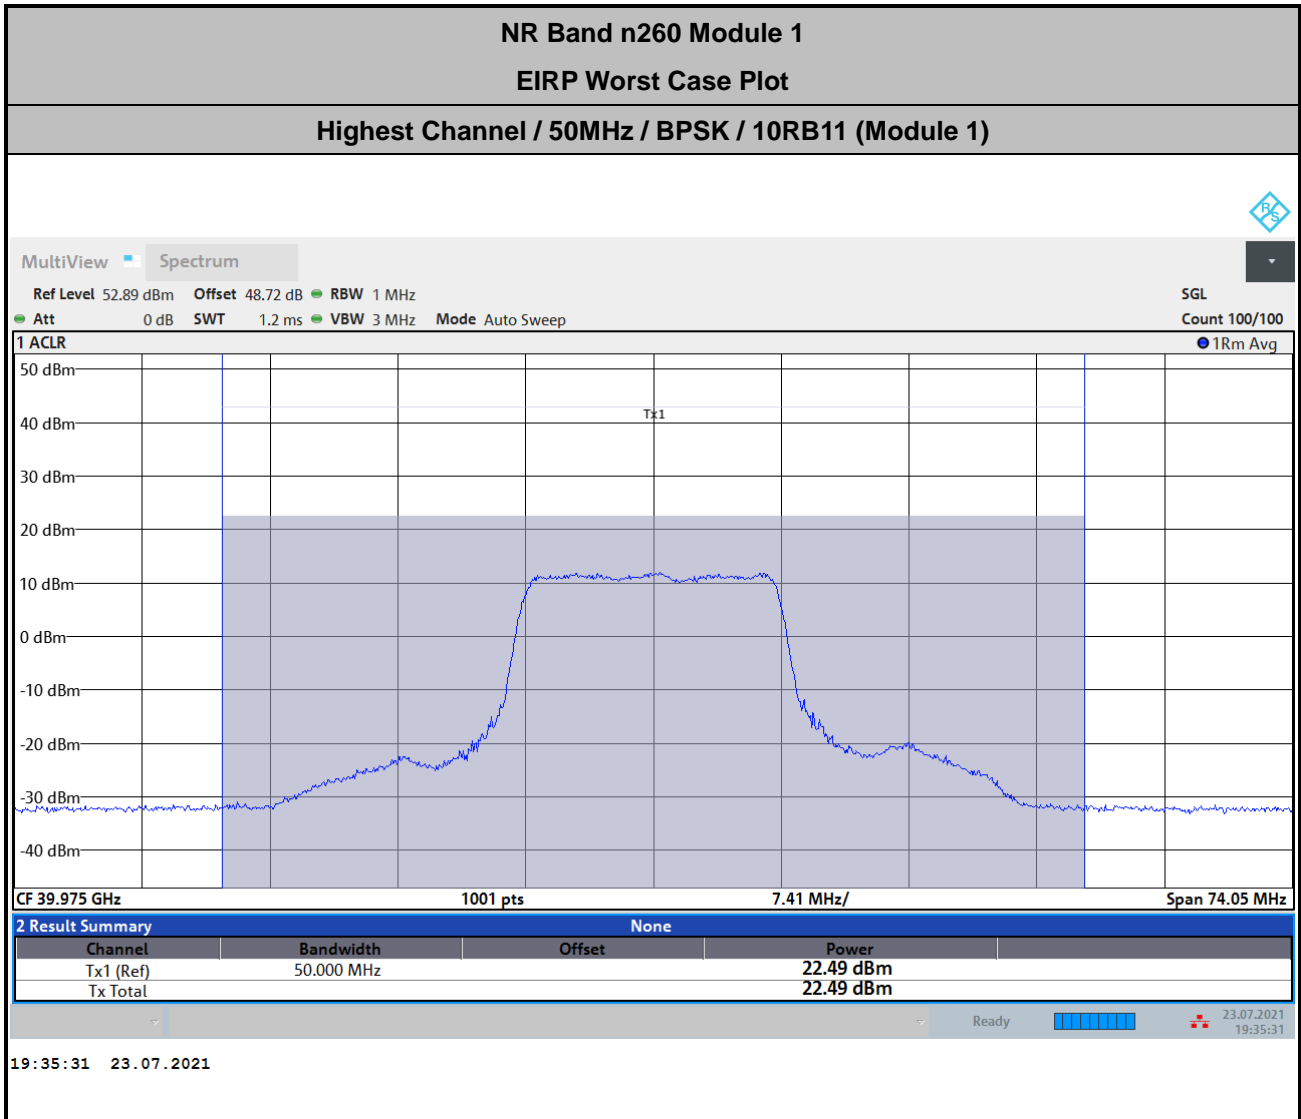

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log (D) – 104.8  
 = 43.8 + 2.72 + 107 + 20log(1) – 104.8 = 48.72 (dB)



Module 0 (ANT L)

NR Band n261 Module 0_AG0 (Beam ID:28 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	17.48	17.71
	50	DFT-S	QPSK	17.33	17.56
	50	DFT-S	16QAM	16.84	16.99
	50	DFT-S	64QAM	14.7	15
	50	CP	QPSK	15.72	15.87
	100	DFT-S	BPSK	17.56	17.21
	100	DFT-S	QPSK	17.25	17.24
	100	DFT-S	16QAM	17.37	17.17
	100	DFT-S	64QAM	15.29	15.24
	100	CP	QPSK	16.38	15.98

NR Band n261 Module 0_AG0 (Beam ID:28 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	17.36	17.07
	50	DFT-S	QPSK	17.2	17.16
	50	DFT-S	16QAM	17.37	17.67
	50	DFT-S	64QAM	16.16	16.15
	50	CP	QPSK	17.12	16.82
	100	DFT-S	BPSK	17.15	16.95
	100	DFT-S	QPSK	17.05	16.98
	100	DFT-S	16QAM	17.21	17.53
	100	DFT-S	64QAM	15.56	15.5
	100	CP	QPSK	16.5	16.3



NR Band n261 Module 0_AG0 (Beam ID:28 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.16	17.03
	50	DFT-S	QPSK	17.31	17.27
	50	DFT-S	16QAM	17.52	17.11
	50	DFT-S	64QAM	15.02	15.09
	50	CP	QPSK	16.08	15.64
	100	DFT-S	BPSK	17.45	16.87
	100	DFT-S	QPSK	17.42	16.93
	100	DFT-S	16QAM	17.02	16.15
	100	DFT-S	64QAM	14.74	14.3
	100	CP	QPSK	15.45	15



NR Band n261 Module 0_AG1 (Beam ID:158 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.4	17.17
	50	DFT-S	QPSK	17.38	17.18
	50	DFT-S	16QAM	17.85	17.63
	50	DFT-S	64QAM	16.09	16.09
	50	CP	QPSK	17.32	16.91
	100	DFT-S	BPSK	17.38	17.34
	100	DFT-S	QPSK	17.47	17.34
	100	DFT-S	16QAM	17.89	17.75
	100	DFT-S	64QAM	15.99	15.9
100	CP	QPSK	17.06	16.64	

NR Band n261 Module 0_AG1 (Beam ID:158 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.09	16.87
	50	DFT-S	QPSK	17.07	17.28
	50	DFT-S	16QAM	17.18	17.07
	50	DFT-S	64QAM	14.58	15.09
	50	CP	QPSK	15.25	15.53
	100	DFT-S	BPSK	17.63	16.95
	100	DFT-S	QPSK	17.43	17.22
	100	DFT-S	16QAM	17.77	16.58
	100	DFT-S	64QAM	15.8	14.82
100	CP	QPSK	15.41	15.08	



NR Band n261 Module 0_AG1 (Beam ID:158 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.23	17.35
	50	DFT-S	QPSK	17.44	17.36
	50	DFT-S	16QAM	17.44	17.3
	50	DFT-S	64QAM	17.79	17.41
	50	CP	QPSK	17.19	17.72
	100	DFT-S	BPSK	17.56	17.68
	100	DFT-S	QPSK	17.89	17.54
	100	DFT-S	16QAM	18	17.6
	100	DFT-S	64QAM	17.9	17.57
	100	CP	QPSK	17.64	17.51




NR Band n261 Module 0_AG0+1 (Beam ID:31+159 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.42	19.42
	50	DFT-S	QPSK	19.68	19.59
	50	DFT-S	16QAM	19.15	19.55
	50	DFT-S	64QAM	17.35	18.34
	50	CP	QPSK	16.39	17.05
	100	DFT-S	BPSK	19.99	19.57
	100	DFT-S	QPSK	19.94	19.44
	100	DFT-S	16QAM	19.53	19.67
	100	DFT-S	64QAM	17.94	18.43
100	CP	QPSK	16.61	16.65	

NR Band n261 Module 0_AG0+1 (Beam ID:31+159 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.99	19.57
	50	DFT-S	QPSK	19.94	19.44
	50	DFT-S	16QAM	19.53	19.67
	50	DFT-S	64QAM	17.94	18.43
	50	CP	QPSK	16.61	16.65
	100	DFT-S	BPSK	19.32	19.31
	100	DFT-S	QPSK	19.2	19.33
	100	DFT-S	16QAM	19.51	19.4
	100	DFT-S	64QAM	17.27	17.52
100	CP	QPSK	18.57	18.44	





NR Band n261 Module 0_AG0+1 (Beam ID:31+159 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.02	19.5
	50	DFT-S	QPSK	19.42	19.45
	50	DFT-S	16QAM	19.21	19.49
	50	DFT-S	64QAM	19.1	19.48
	50	CP	QPSK	14.32	14.33
	100	DFT-S	BPSK	19.24	19.43
	100	DFT-S	QPSK	19.5	19.35
	100	DFT-S	16QAM	19.26	19.3
	100	DFT-S	64QAM	20.25	19.56
	100	CP	QPSK	14.19	14.3

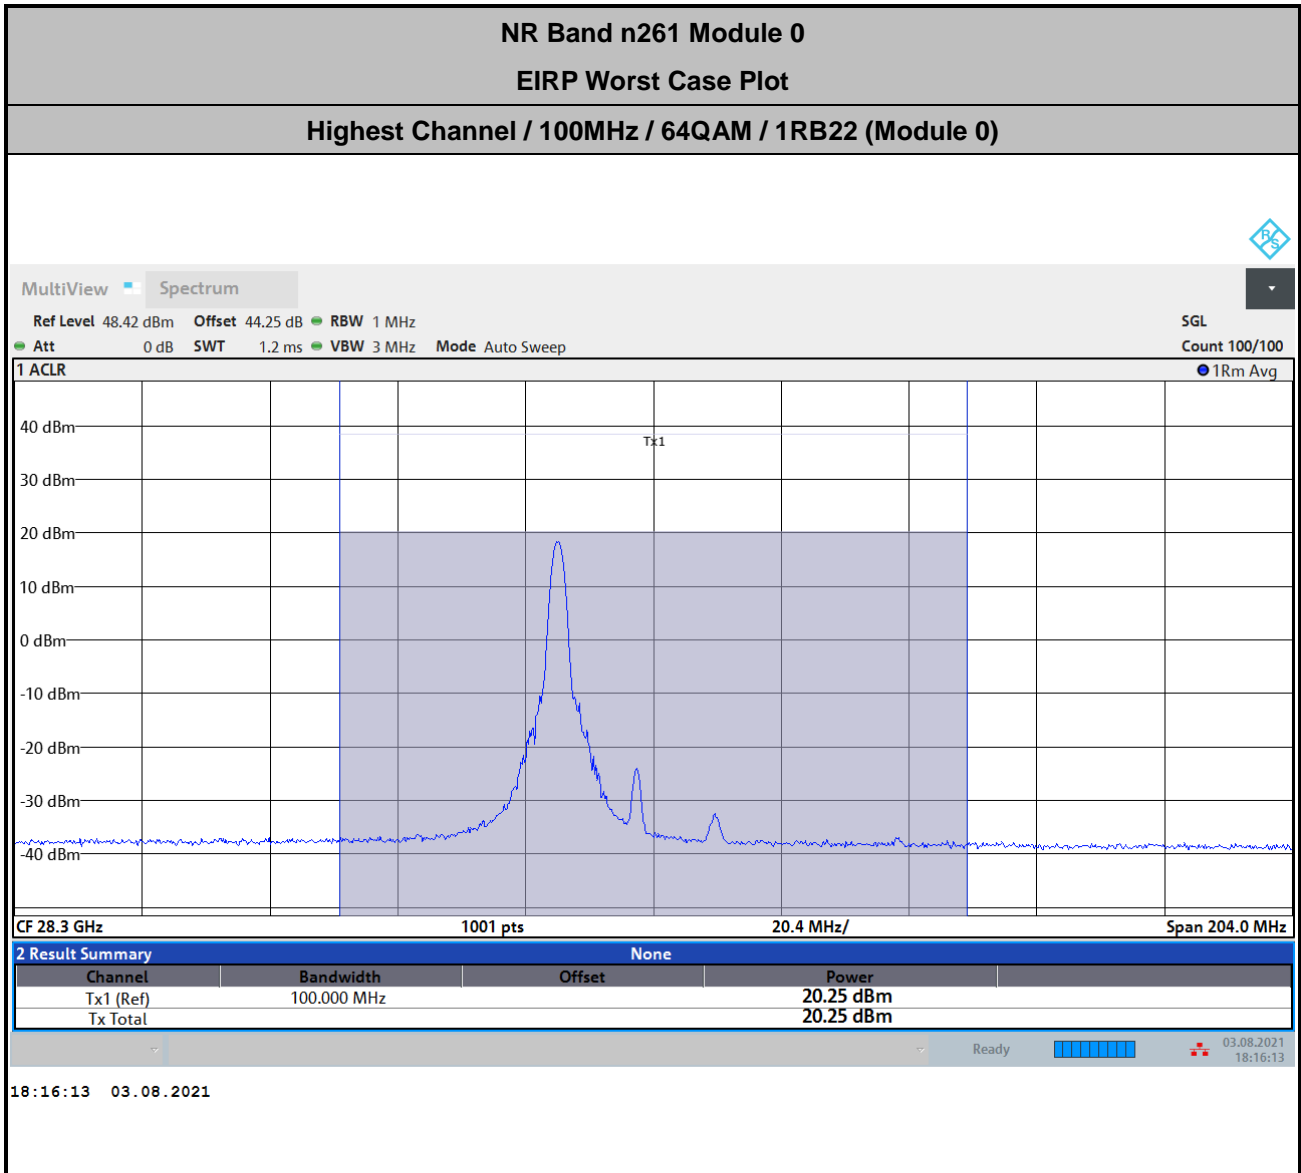

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.4 + 2.65 + 107 + 20log(1) – 104.8 = 44.25 (dB)



Module 1 (ANT R)

NR Band n261 Module 1_AG0 (Beam ID:32 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	17.45	17.71
	50	DFT-S	QPSK	17.14	17.46
	50	DFT-S	16QAM	17.3	17.53
	50	DFT-S	64QAM	17.1	17.59
	50	CP	QPSK	17	17.36
	100	DFT-S	BPSK	17.54	17.23
	100	DFT-S	QPSK	17.61	17.22
	100	DFT-S	16QAM	18.09	17.59
	100	DFT-S	64QAM	18.28	17.79
	100	CP	QPSK	17.82	17.35

NR Band n261 Module 1_AG0 (Beam ID:32 )					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	17.04	16.96
	50	DFT-S	QPSK	17.07	17.06
	50	DFT-S	16QAM	17.63	17.31
	50	DFT-S	64QAM	17.67	17.54
	50	CP	QPSK	17.31	17.1
	100	DFT-S	BPSK	17.26	17.21
	100	DFT-S	QPSK	17.02	17.17
	100	DFT-S	16QAM	17.63	17.52
	100	DFT-S	64QAM	17.71	17.7
	100	CP	QPSK	17.44	17.35



NR Band n261 Module 1_AG0 (Beam ID:32 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.22	16.8
	50	DFT-S	QPSK	17.07	16.97
	50	DFT-S	16QAM	17.48	17.27
	50	DFT-S	64QAM	17.38	17.43
	50	CP	QPSK	17	16.99
	100	DFT-S	BPSK	17.58	17.03
	100	DFT-S	QPSK	17.62	16.82
	100	DFT-S	16QAM	18.18	17.38
	100	DFT-S	64QAM	16.84	16.63
	100	CP	QPSK	17.75	17.21



NR Band n261 Module 1_AG1 (Beam ID:162 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.27	17.01
	50	DFT-S	QPSK	17.19	17.02
	50	DFT-S	16QAM	16.72	16.81
	50	DFT-S	64QAM	14.81	15.07
	50	CP	QPSK	16.9	16.51
	100	DFT-S	BPSK	16.11	16.93
	100	DFT-S	QPSK	16.41	17.02
	100	DFT-S	16QAM	16.11	16.38
	100	DFT-S	64QAM	13.4	14.15
100	CP	QPSK	15.19	15.25	

NR Band n261 Module 1_AG1 (Beam ID:162 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.65	17.23
	50	DFT-S	QPSK	17.55	17.2
	50	DFT-S	16QAM	15.65	15.64
	50	DFT-S	64QAM	13.72	13.6
	50	CP	QPSK	14.84	14.36
	100	DFT-S	BPSK	16.79	17.04
	100	DFT-S	QPSK	16.44	17.07
	100	DFT-S	16QAM	17.04	17.11
	100	DFT-S	64QAM	15.14	15.4
100	CP	QPSK	16.3	16.77	



NR Band n261 Module 1_AG1 (Beam ID:162 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	17.69	17.36
	50	DFT-S	QPSK	17	17.49
	50	DFT-S	16QAM	18.4	17.19
	50	DFT-S	64QAM	16.8	16.33
	50	CP	QPSK	16.71	17.39
	100	DFT-S	BPSK	16.9	17.05
	100	DFT-S	QPSK	16.59	17.06
	100	DFT-S	16QAM	16.74	16.92
	100	DFT-S	64QAM	14.64	14.94
	100	CP	QPSK	15.96	16.06




NR Band n261 Module 1_AG0+1 (Beam ID:26+154 )					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.59	19.47
	50	DFT-S	QPSK	19.62	19.34
	50	DFT-S	16QAM	19.23	19.47
	50	DFT-S	64QAM	17.55	17.77
	50	CP	QPSK	14.7	14.33
	100	DFT-S	BPSK	19.42	19.43
	100	DFT-S	QPSK	19.2	19.3
	100	DFT-S	16QAM	18.72	18.43
	100	DFT-S	64QAM	16.75	16.72
100	CP	QPSK	14.65	14.71	

NR Band n261 Module 1_AG0+1 (Beam ID:26+154 )					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.13	19.18
	50	DFT-S	QPSK	19.55	19.12
	50	DFT-S	16QAM	19.07	18.92
	50	DFT-S	64QAM	16.82	17.08
	50	CP	QPSK	14.95	14.36
	100	DFT-S	BPSK	18.81	18.76
	100	DFT-S	QPSK	18.81	18.8
	100	DFT-S	16QAM	18.58	18.75
	100	DFT-S	64QAM	16.61	16.71
100	CP	QPSK	14.25	14.08	



NR Band n261 Module 1_AG0+1 (Beam ID:26+154 )					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	BPSK	19.36	18.88
	50	DFT-S	QPSK	19.15	18.85
	50	DFT-S	16QAM	17.77	17.36
	50	DFT-S	64QAM	15.64	15.27
	50	CP	QPSK	15.42	15.1
	100	DFT-S	BPSK	19.17	19.1
	100	DFT-S	QPSK	19.28	19.27
	100	DFT-S	16QAM	17.45	17.64
	100	DFT-S	64QAM	15.52	15.51
	100	CP	QPSK	15.26	15.29



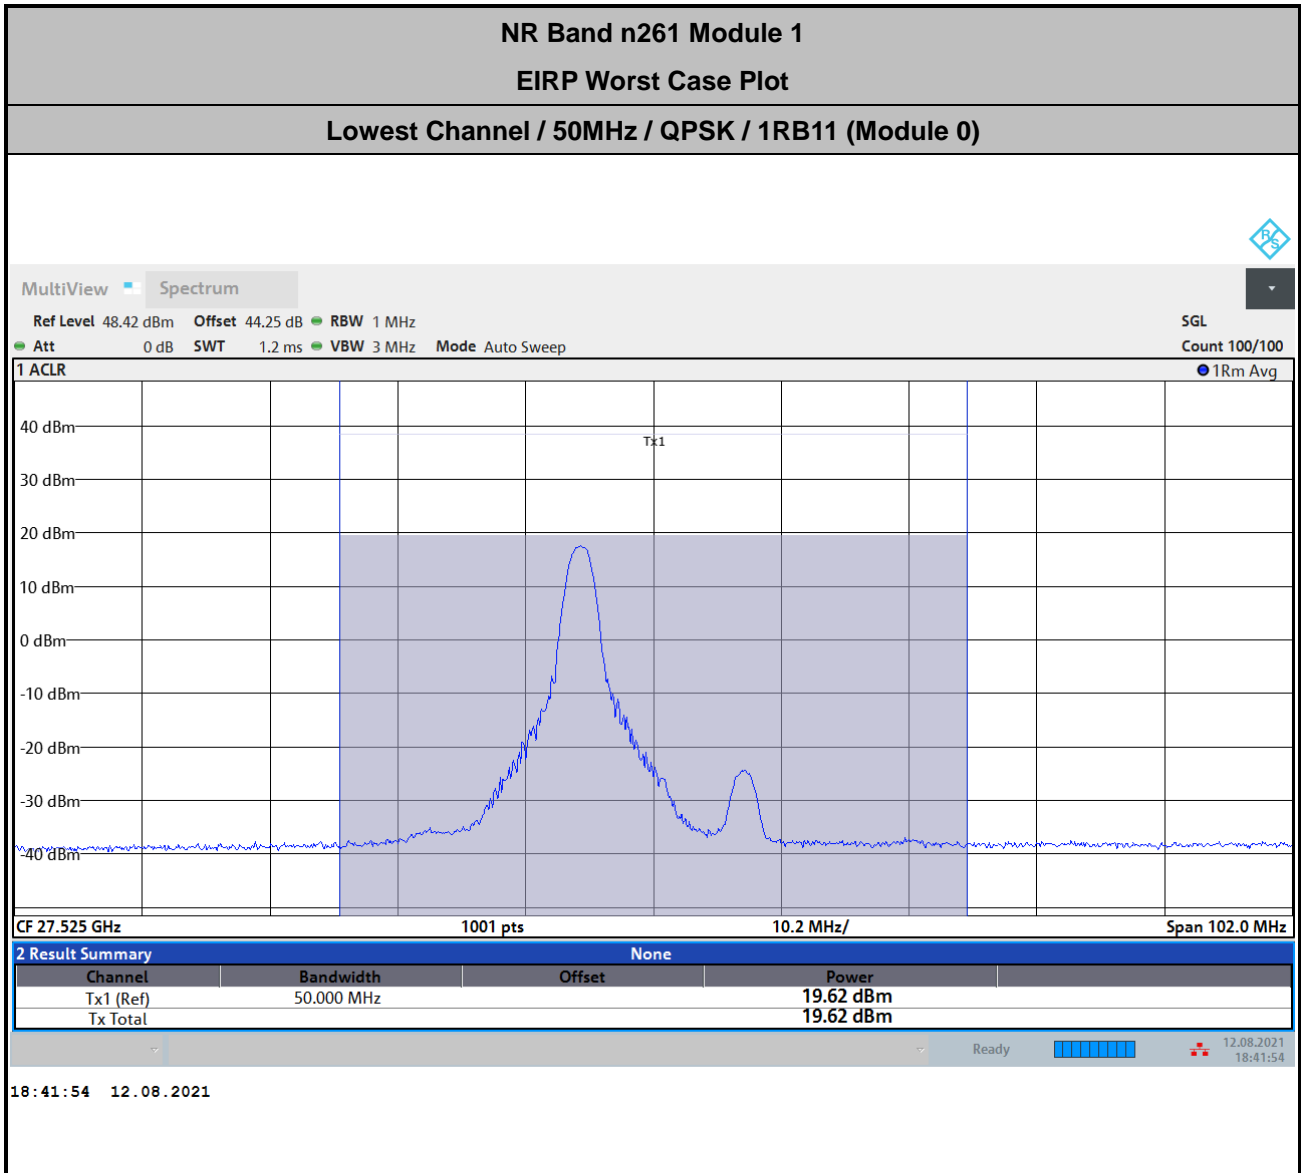

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.4 + 2.65 + 107 + 20log(1) – 104.8 = 44.25 (dB)



# NR Band n260 Module 0 Beam AG0

## Occupied Bandwidth

Mode	DFT-s-OFDM Module 0 NR Band n260 : 99%OBW(MHz)							
	50MHz				100MHz			
Mod.	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Lowest CH	45.43	45.33	45.42	45.47	90.78	91.25	91.13	91.69
Middle CH	45.36	45.28	45.21	45.35	90.37	90.32	90.33	90.48
Highest CH	45.19	45.23	45.15	45.62	92.03	92.01	90.38	90.71


Mode	CP-OFDM Module 0 NR Band n260 : 99%OBW(MHz)					
	50MHz			100MHz		
Mod.	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Lowest CH	45.27	45.42	45.47	94.04	94.62	92.92
Middle CH	45.20	45.13	45.29	92.89	93.16	93.55
Highest CH	45.25	45.32	45.35	93.08	93.10	93.06




DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / BPSK

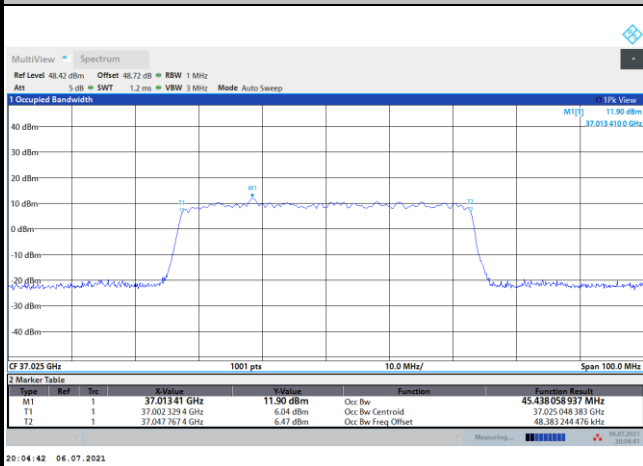


Lowest Channel / 50MHz / QPSK

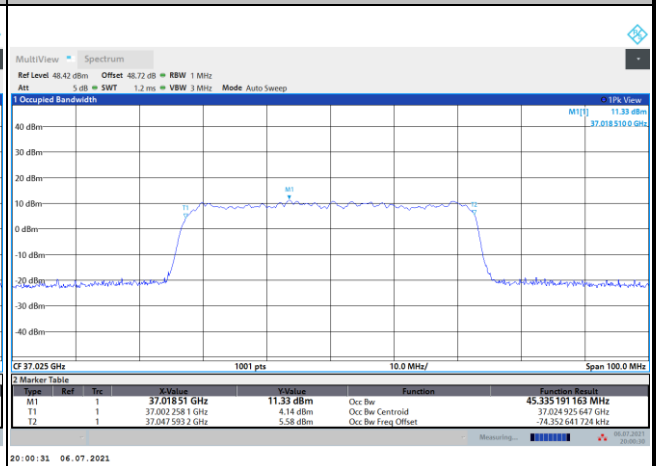


Middle Channel / 50MHz / BPSK

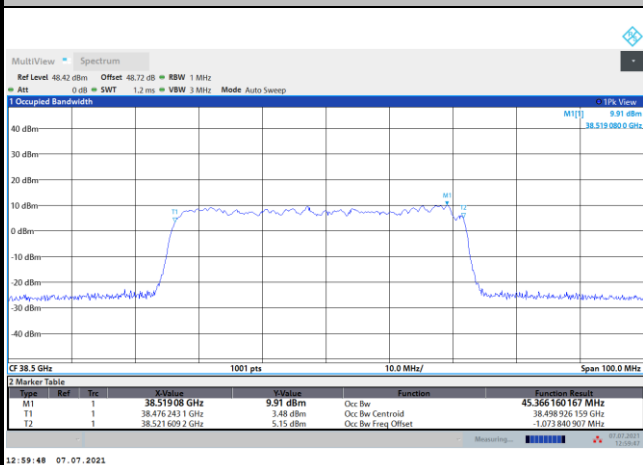


Middle Channel / 50MHz / QPSK

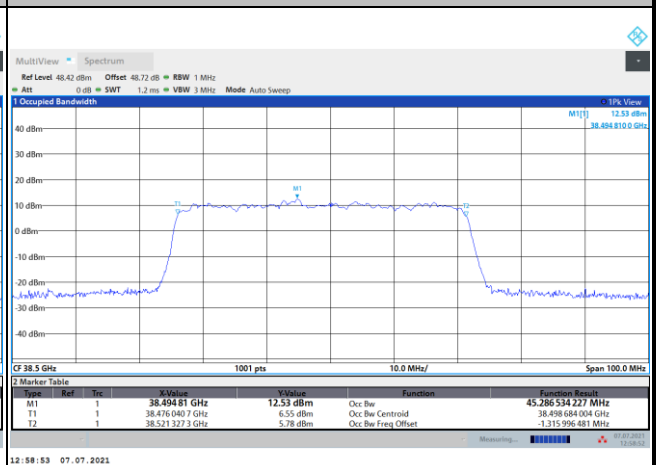

Highest Channel / 50MHz / BPSK

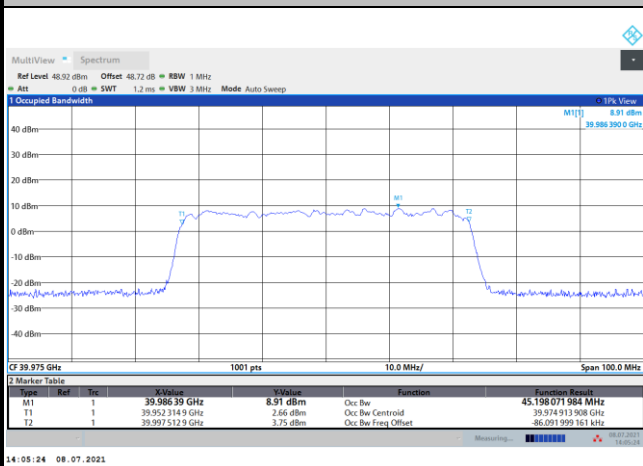

Highest Channel / 50MHz / QPSK

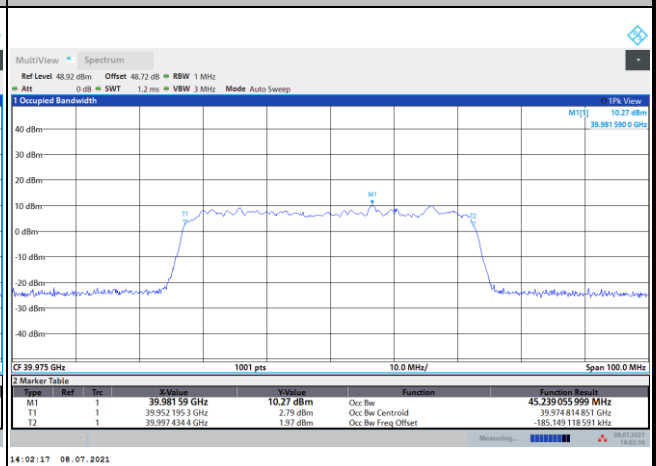





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / 16QAM

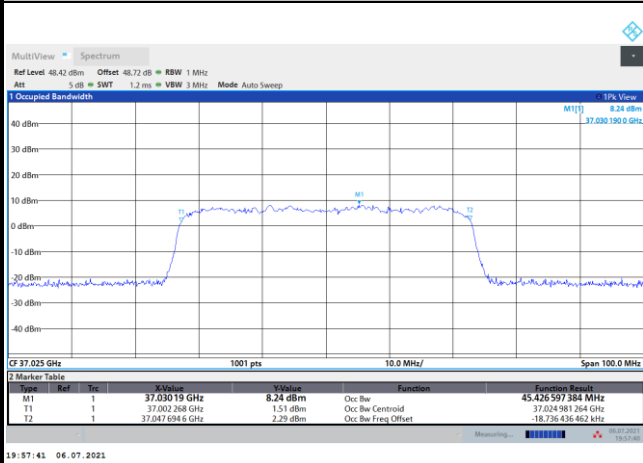


Lowest Channel / 50MHz / 64QAM

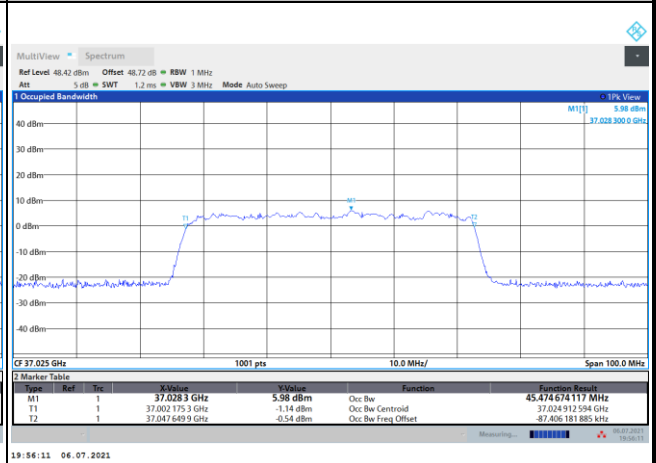


Middle Channel / 50MHz / 16QAM

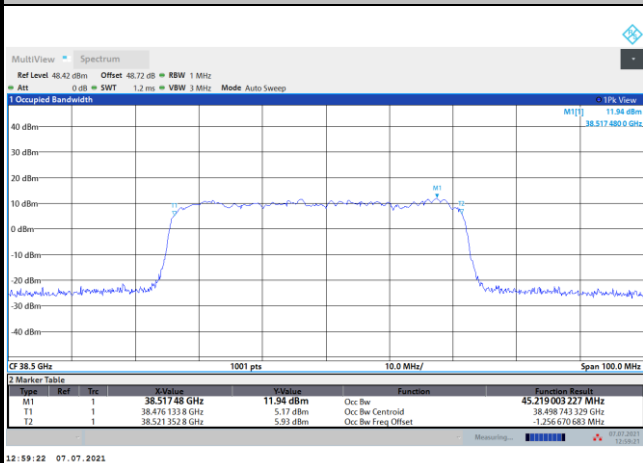


Middle Channel / 50MHz / 64QAM

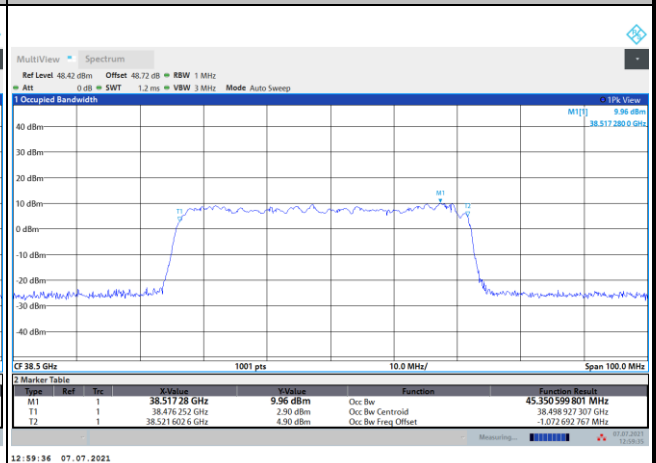

Highest Channel / 50MHz / 16QAM

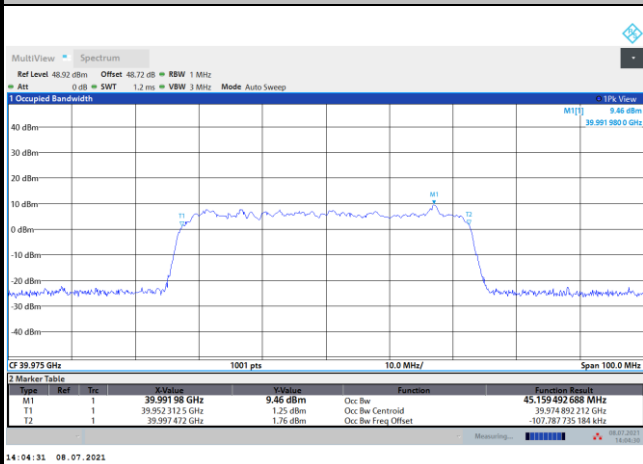

Highest Channel / 50MHz / 64QAM

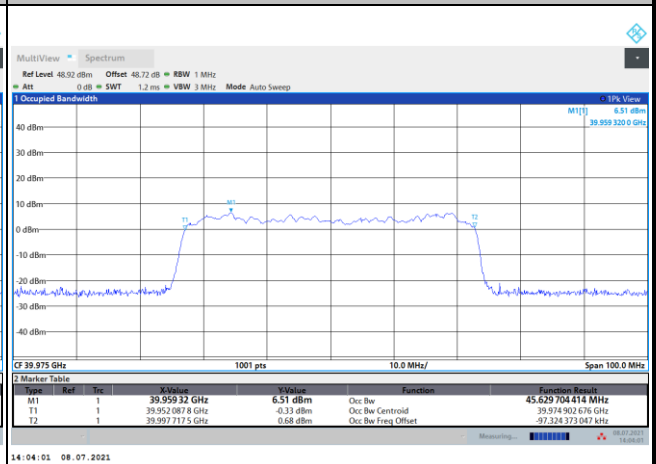





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / BPSK

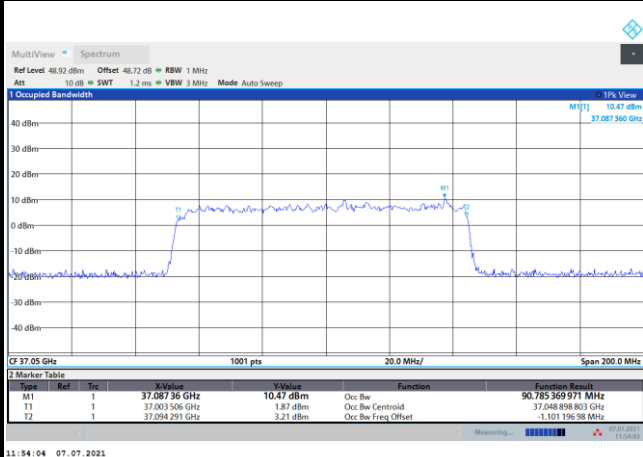


Lowest Channel / 100MHz / QPSK

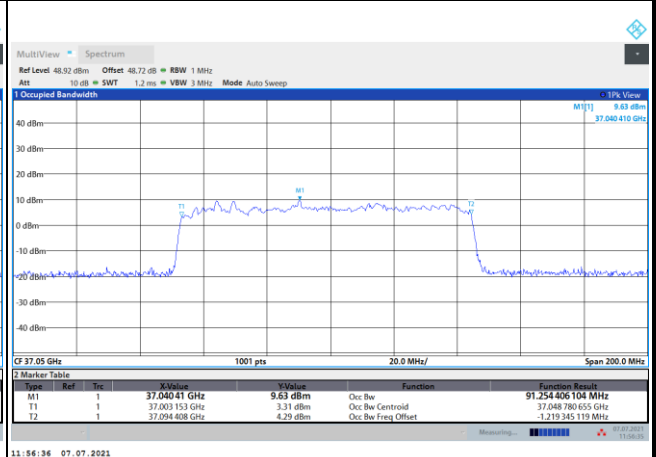


Middle Channel / 100MHz / BPSK

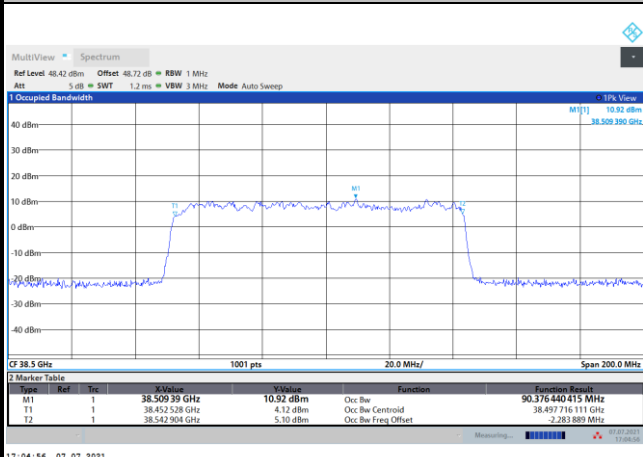


Middle Channel / 100MHz / QPSK

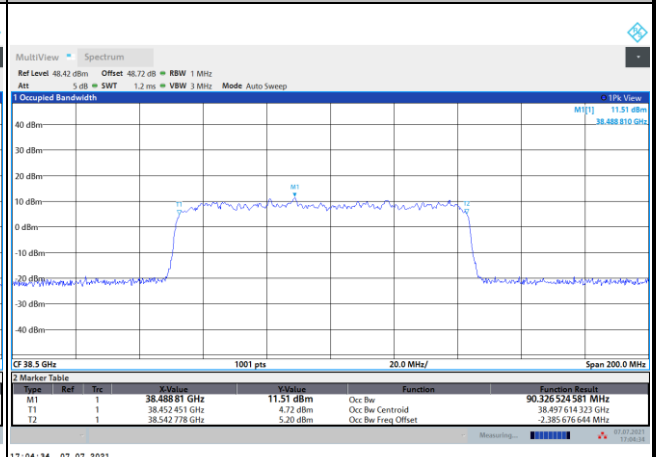

Highest Channel / 100MHz / BPSK

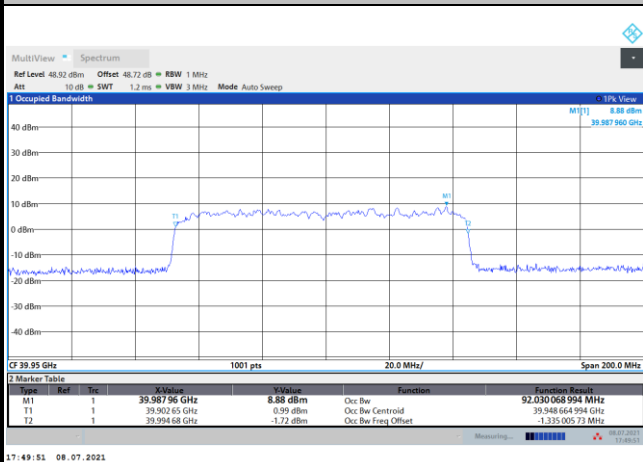

Highest Channel / 100MHz / QPSK

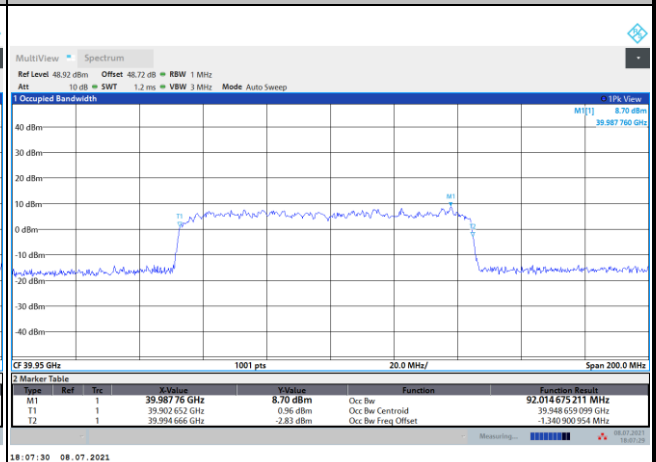





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

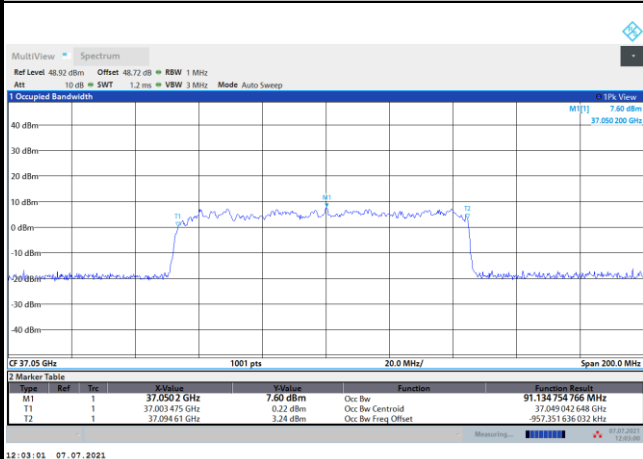


Lowest Channel / 100MHz / 64QAM

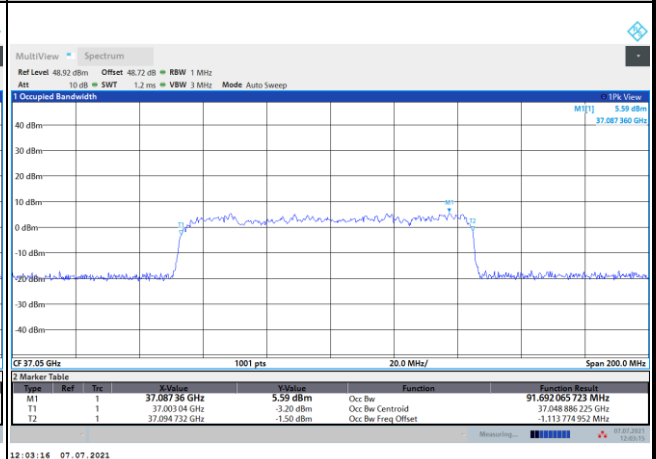


Middle Channel / 100MHz / 16QAM

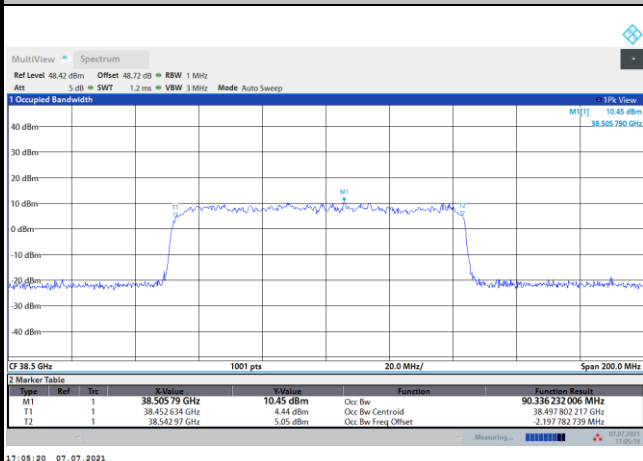


Middle Channel / 100MHz / 64QAM

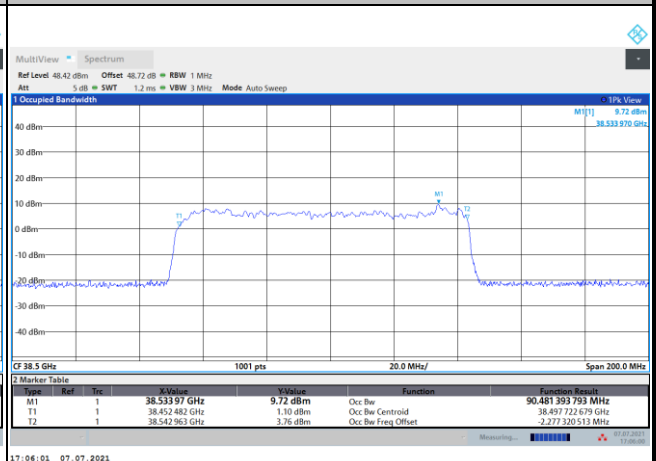

Highest Channel / 100MHz / 16QAM

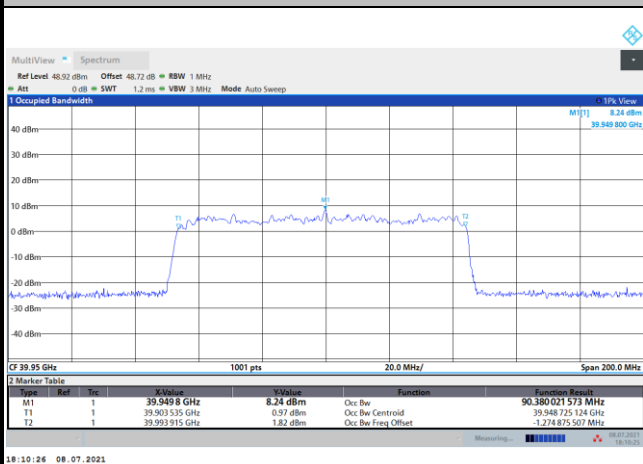

Highest Channel / 100MHz / 64QAM

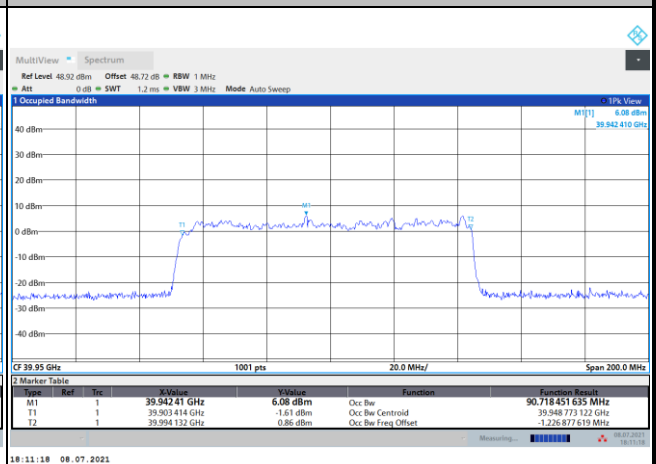





CP-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / QPSK

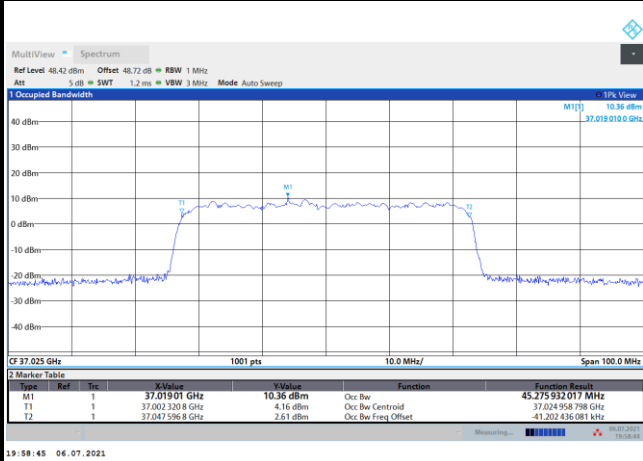


Lowest Channel / 50MHz / 16QAM

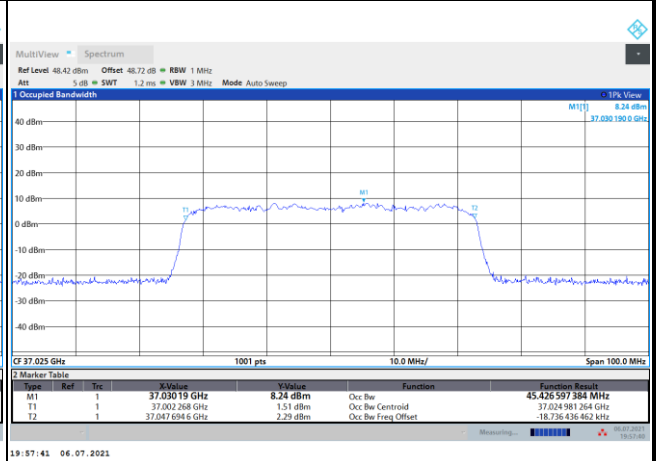


Middle Channel / 50MHz / QPSK

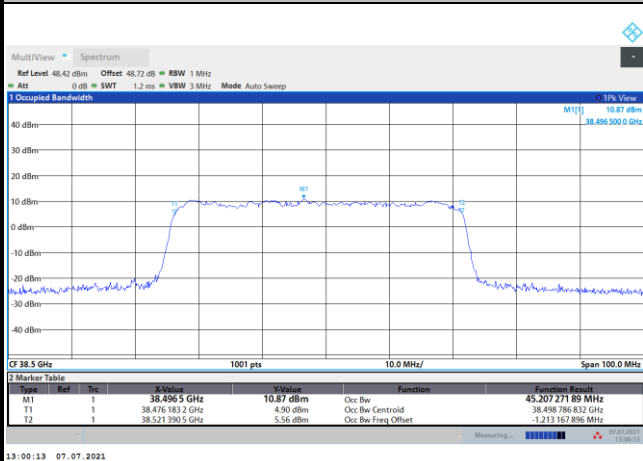


Middle Channel / 50MHz / 16QAM

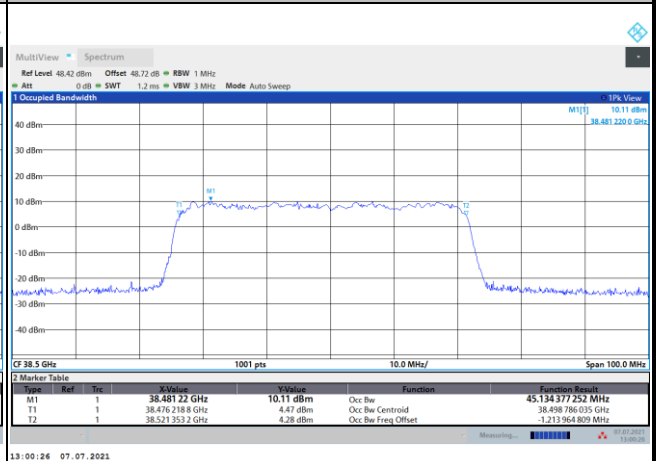

Highest Channel / 50MHz / QPSK

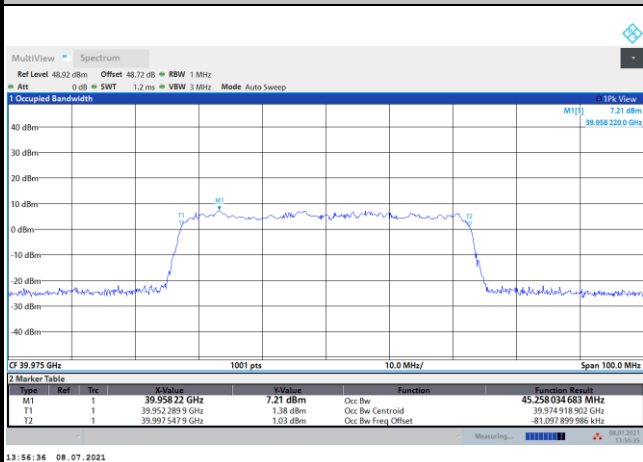

Highest Channel / 50MHz / 16QAM

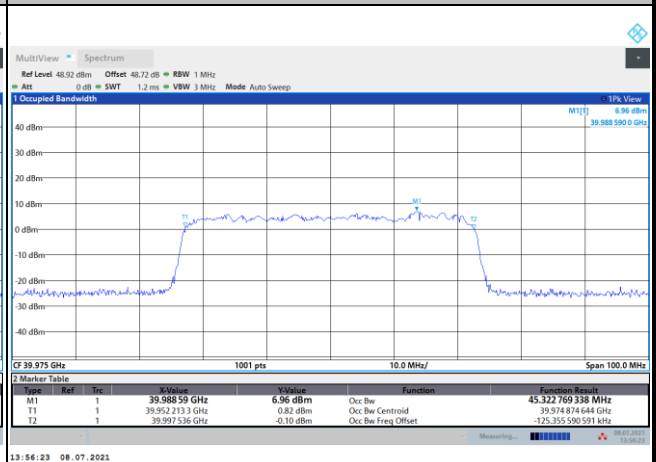





CP-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / 64QAM

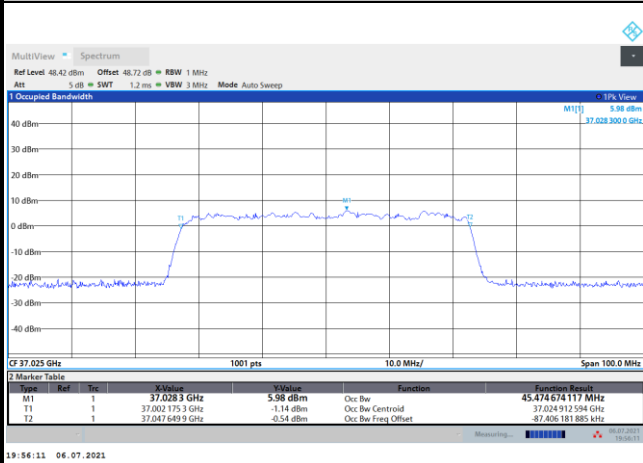


Lowest Channel / 100MHz / QPSK

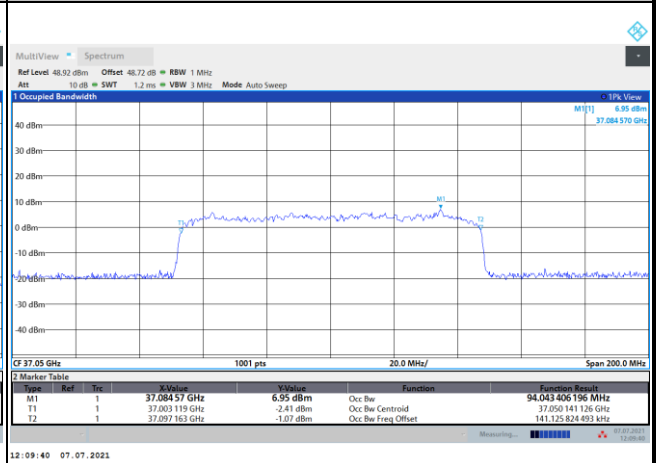


Middle Channel / 50MHz / 64QAM

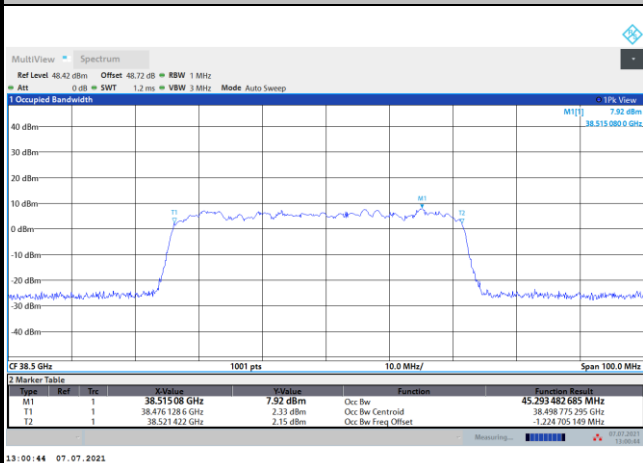


Middle Channel / 100MHz / QPSK

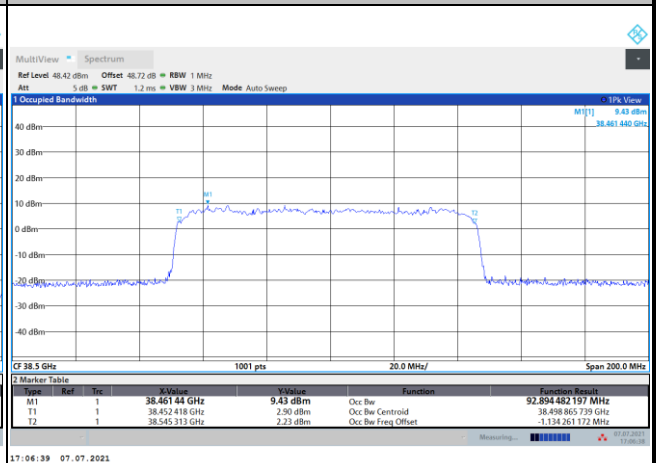

Highest Channel / 50MHz / 64QAM

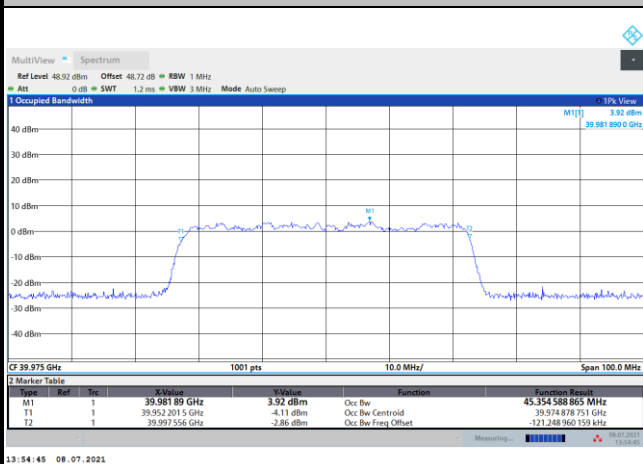

Highest Channel / 100MHz / QPSK

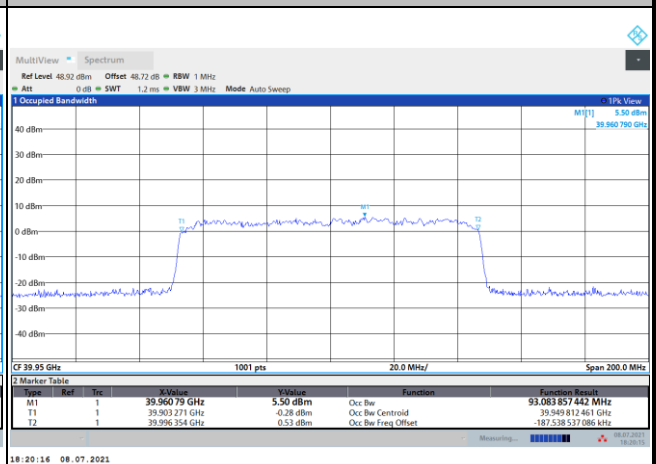







CP-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

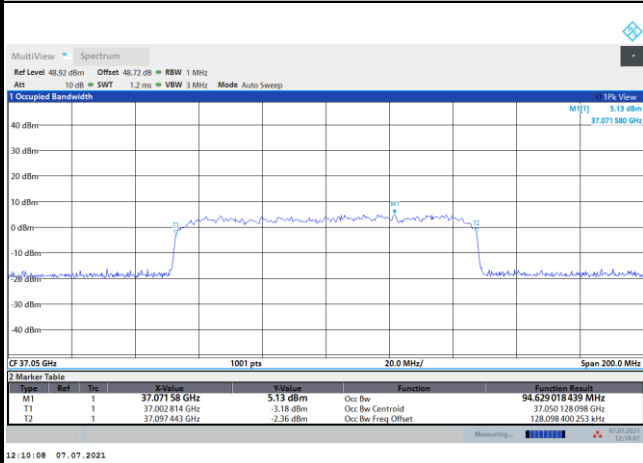


Lowest Channel / 100MHz / 64QAM

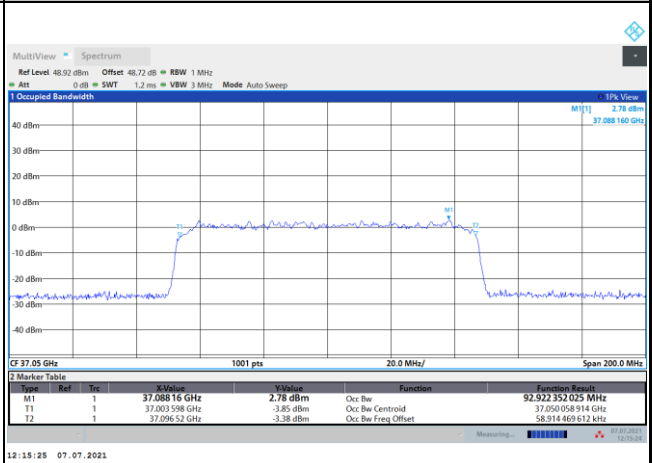


Middle Channel / 100MHz / 16QAM

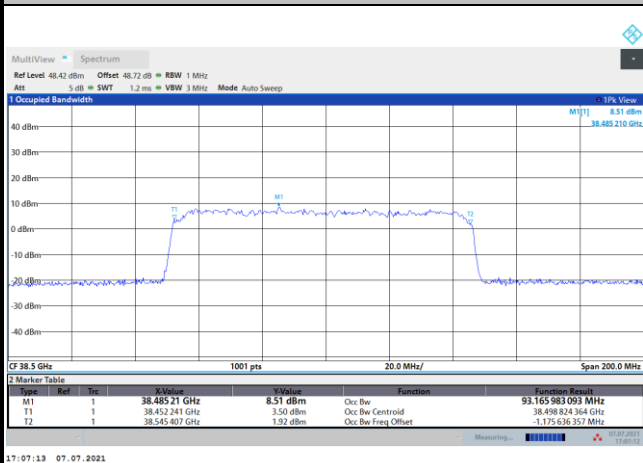


Middle Channel / 100MHz / 64QAM

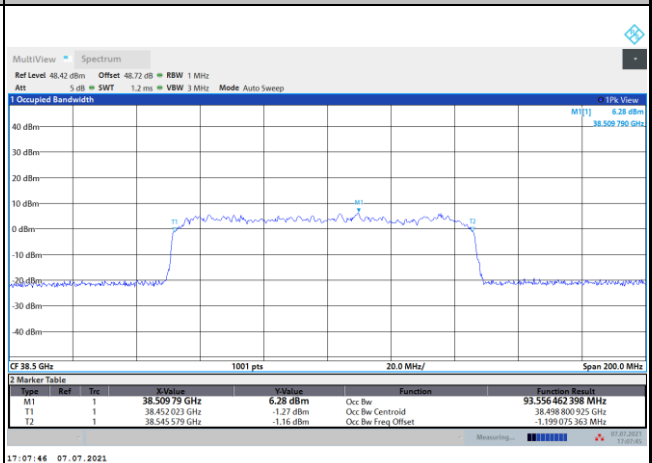

Highest Channel / 100MHz / 16QAM

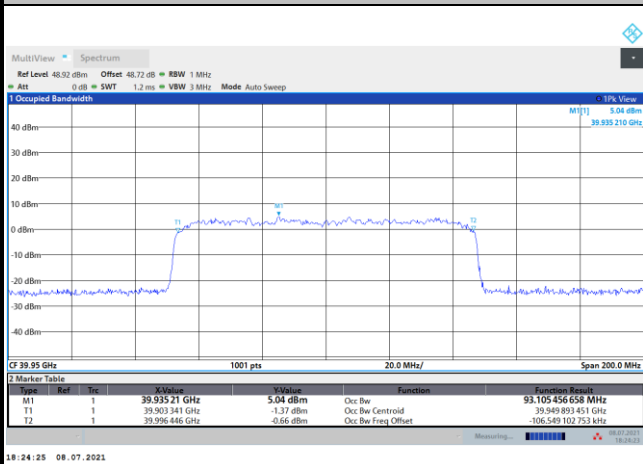

Highest Channel / 100MHz / 64QAM

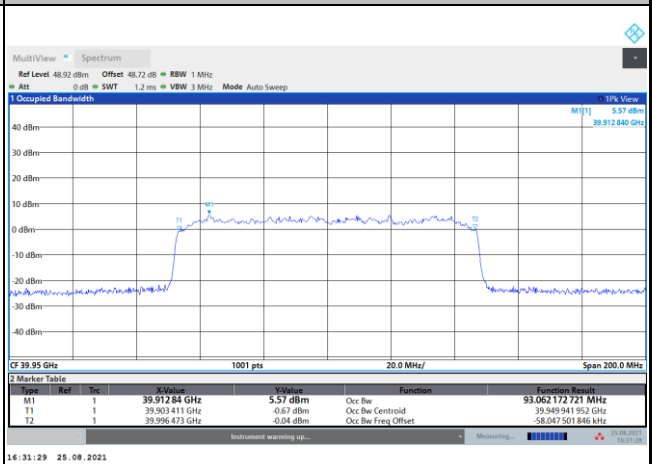



**Radiated Out of Band Emissions**

Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB							
BW			50MHz				100MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤-5	-20.58	-20.09	-22.23	-23.37	-22.88	-22.12	-24.87	-25.83
	>10%OB	≤-13	-34.44	-34.21	-34.70	-34.71	-34.60	-34.47	-34.65	-34.53
HighCH	0~10%OB	≤-5	-22.55	-21.39	-24.84	-24.98	-23.61	-24.71	-24.24	-26.42
	>10%OB	≤-13	-31.85	-32.04	-32.44	-32.42	-32.48	-32.58	-32.33	-32.53
Result			Compliance							

Mode			CP-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB					
BW			50MHz			100MHz		
Limit (dBm)			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤-5	-23.38	-23.56	-26.26	-23.97	-26.20	-26.66
	>10%OB	≤-13	-34.59	-34.51	-34.72	-34.68	-34.70	-34.66
High CH	0~10%OB	≤-5	-23.86	-23.99	-27.82	-24.66	-26.03	-27.04
	>10%OB	≤-13	-32.30	-31.75	-32.40	-32.40	-32.51	-32.46
Result			Compliance					

Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) Full RB							
BW			50MHz				100MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤-5	-30.64	-30.04	-31.57	-33.49	-32.44	-32.26	-33.85	-34.67
	>10%OB	≤-13	-34.14	-32.53	-34.10	-34.72	-34.63	-34.17	-34.42	-34.83
HighCH	0~10%OB	≤-5	-30.98	-30.67	-31.52	-32.39	-32.51	-32.39	-32.86	-32.99
	>10%OB	≤-13	-32.30	-31.81	-32.33	-32.49	-32.11	-32.18	-32.37	-32.40
Result			Compliance							

Mode			CP-OFDM Module 0 NR Band n260 : BE (dBm) Full RB					
BW			50MHz			100MHz		
Limit (dBm)			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤-5	-31.61	-32.34	-33.45	-33.88	-34.76	-34.87
	>10%OB	≤-13	-33.06	-34.41	-34.74	-34.70	-34.63	-34.73
High CH	0~10%OB	≤-5	-31.89	-32.13	-32.81	-32.50	-32.85	-32.69
	>10%OB	≤-13	-32.35	-32.39	-32.54	-32.04	-32.19	-32.49
Result			Compliance					





DFT-s-OFDM Module 0

NR Band n260 / 50MHz / BPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

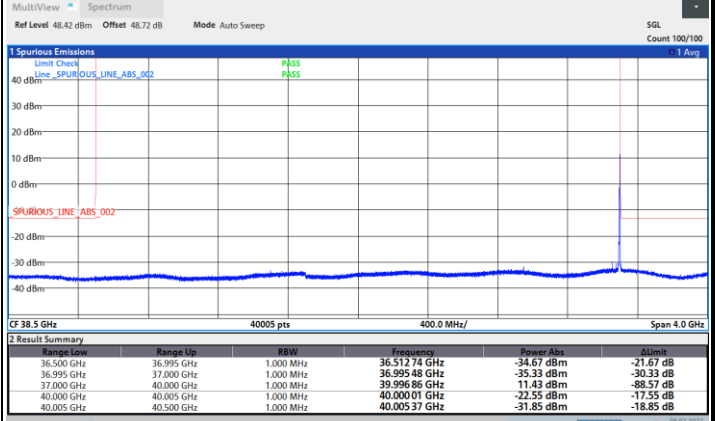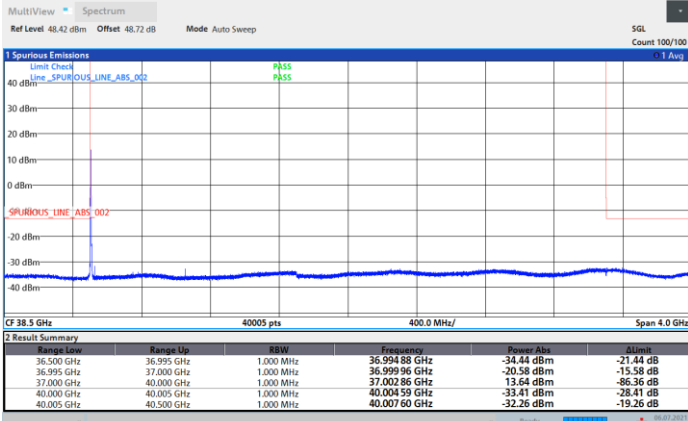

NR Band n260 / 50MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

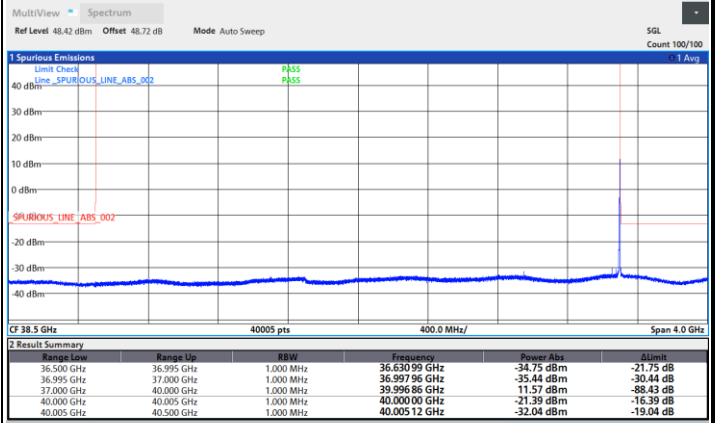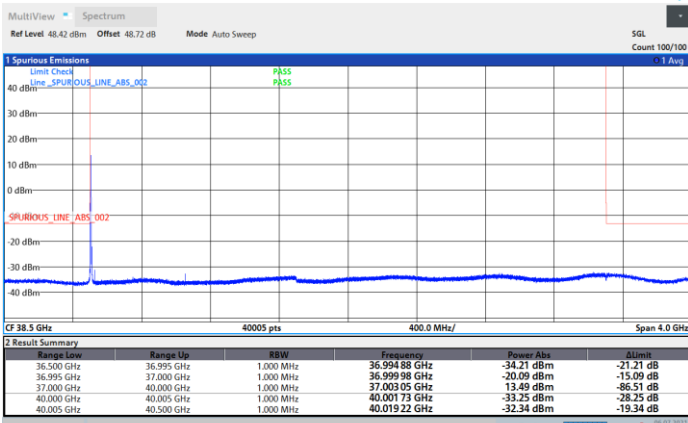





DFT-s-OFDM Module 0

NR Band n260 / 50MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

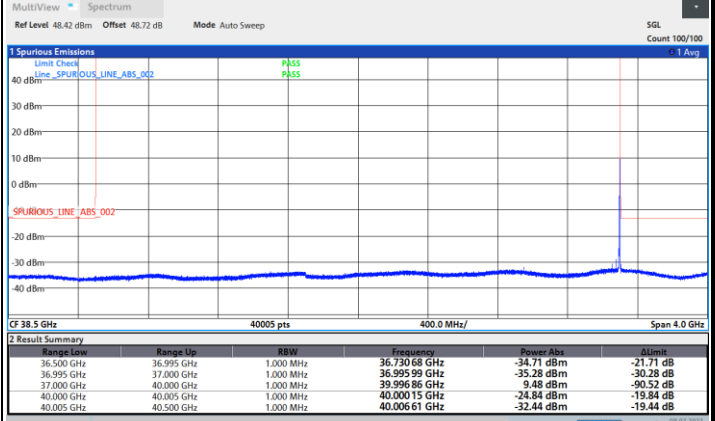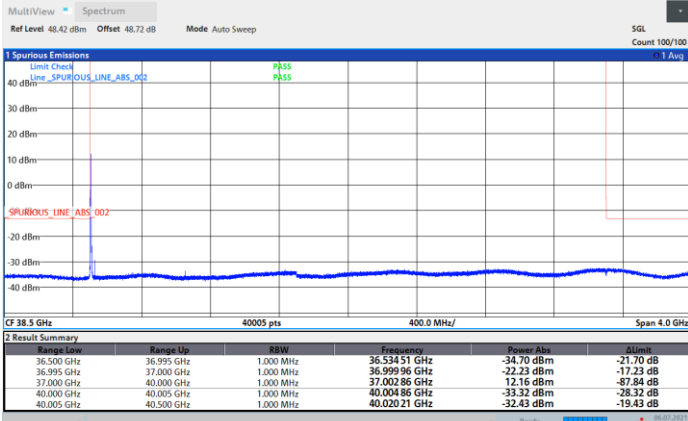

NR Band n260 / 50MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

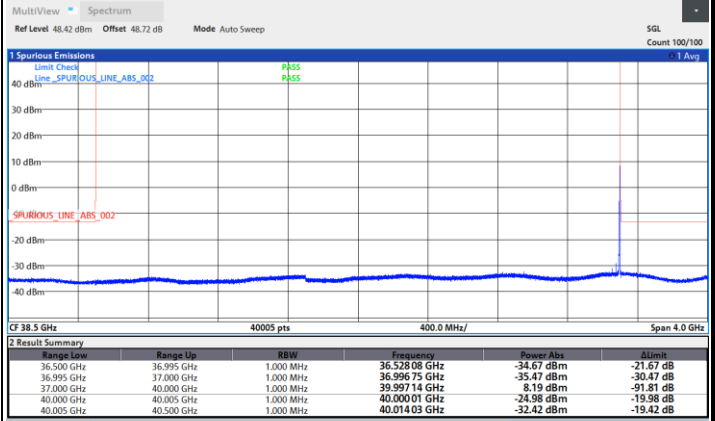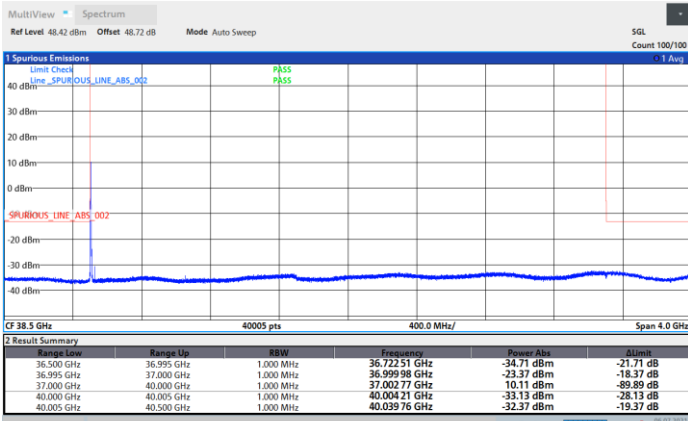





DFT-s-OFDM Module 0

NR Band n260 / 100MHz / BPSK

Lowest Band Edge / 1 RB

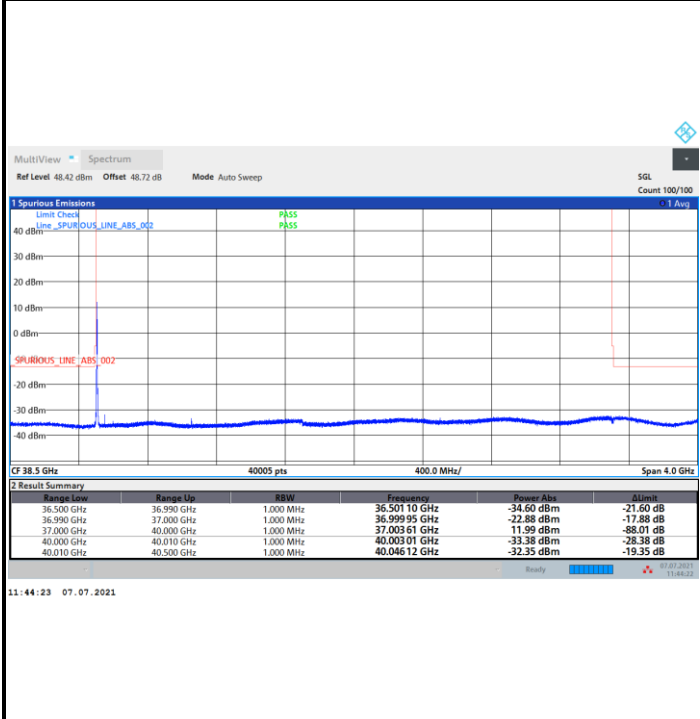


Highest Band Edge / 1 RB

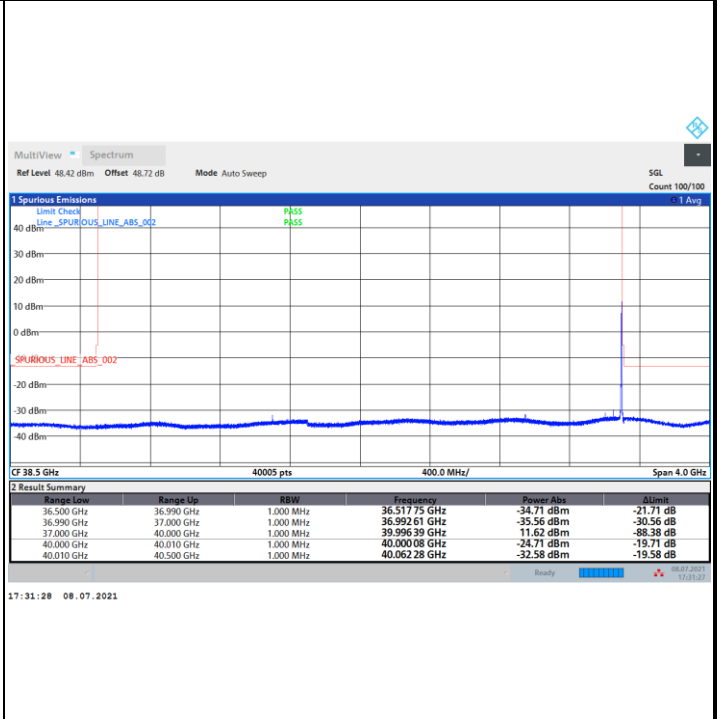


NR Band n260 / 100MHz / QPSK

Lowest Band Edge / 1 RB

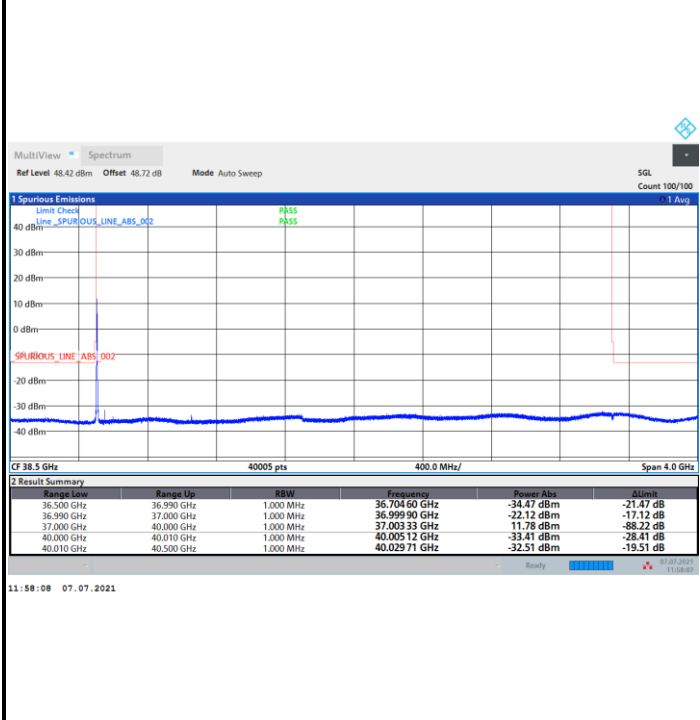

Highest Band Edge / 1 RB

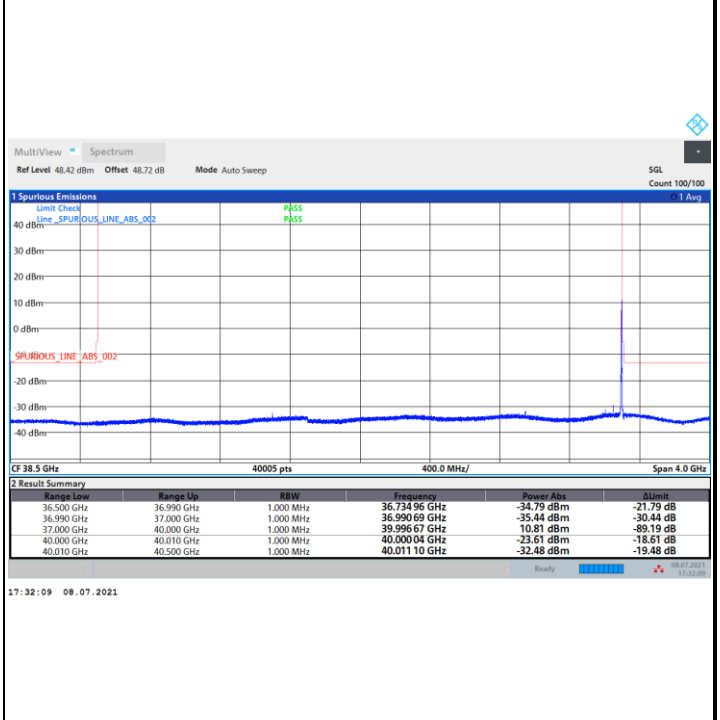





DFT-s-OFDM Module 0

NR Band n260 / 100MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

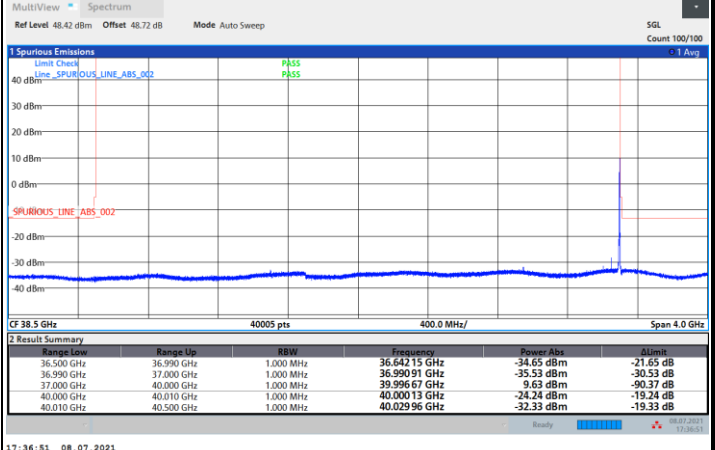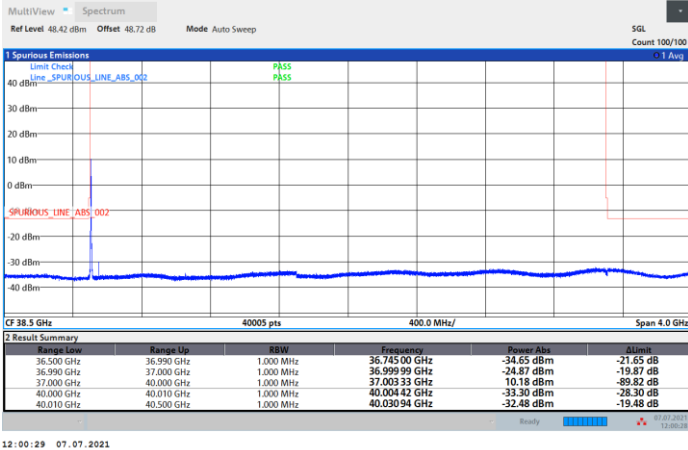

NR Band n260 / 100MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

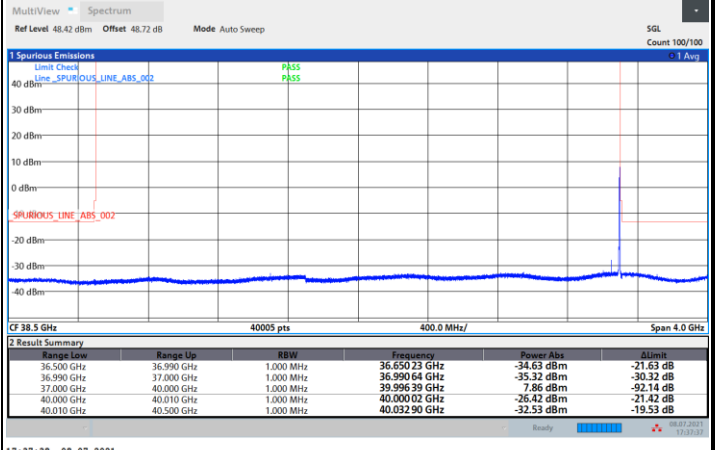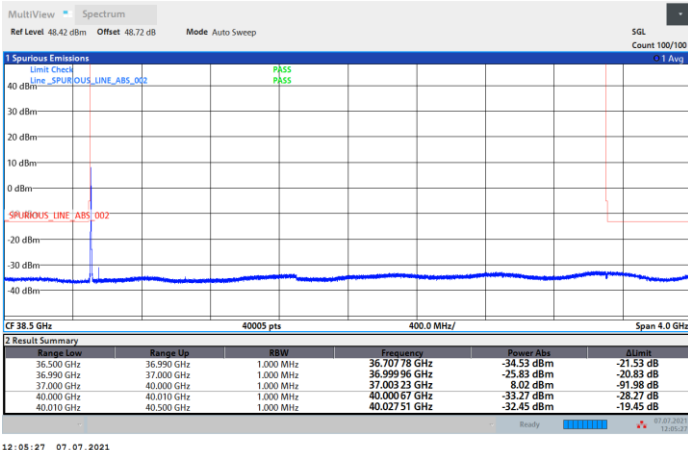





CP-OFDM Module 0

NR Band n260 / 50MHz / QPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

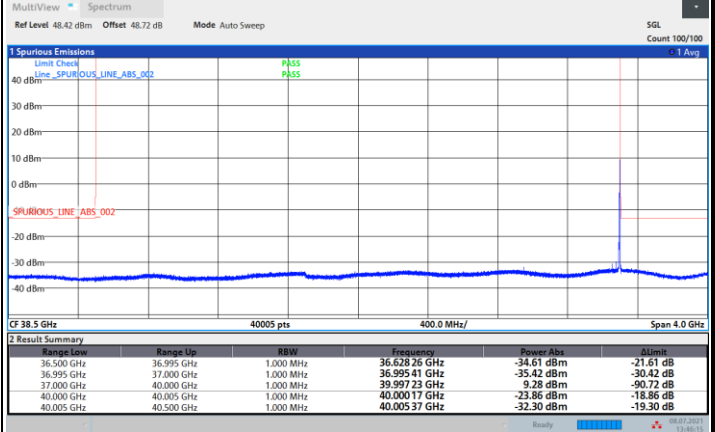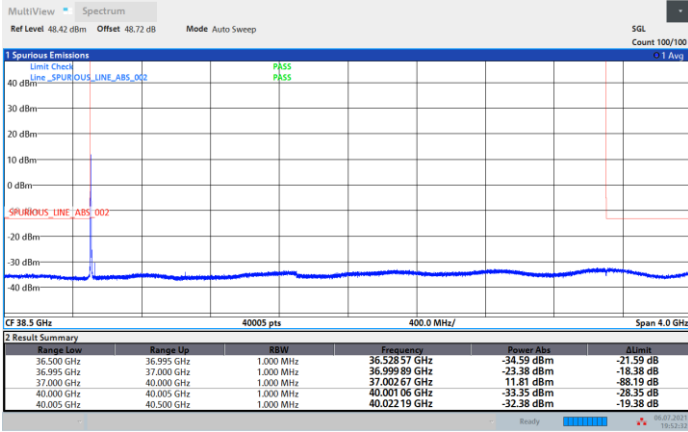

NR Band n260 / 50MHz / 16QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

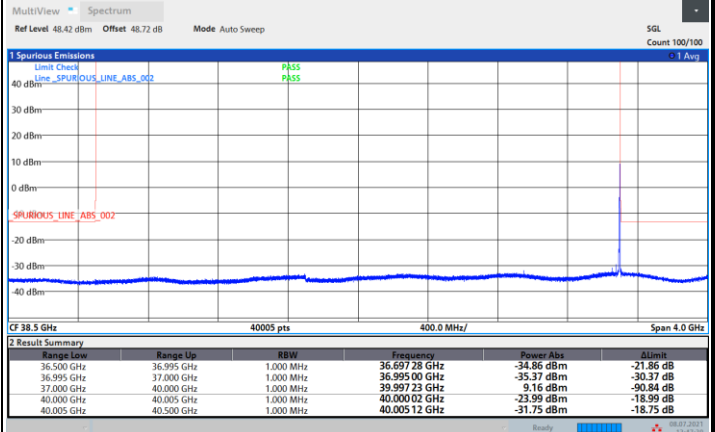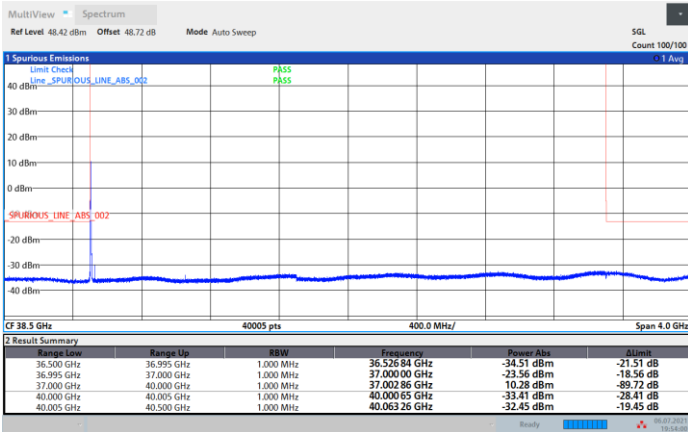





CP-OFDM Module 0

NR Band n260 / 50MHz / 64QAM

Lowest Band Edge / 1 RB

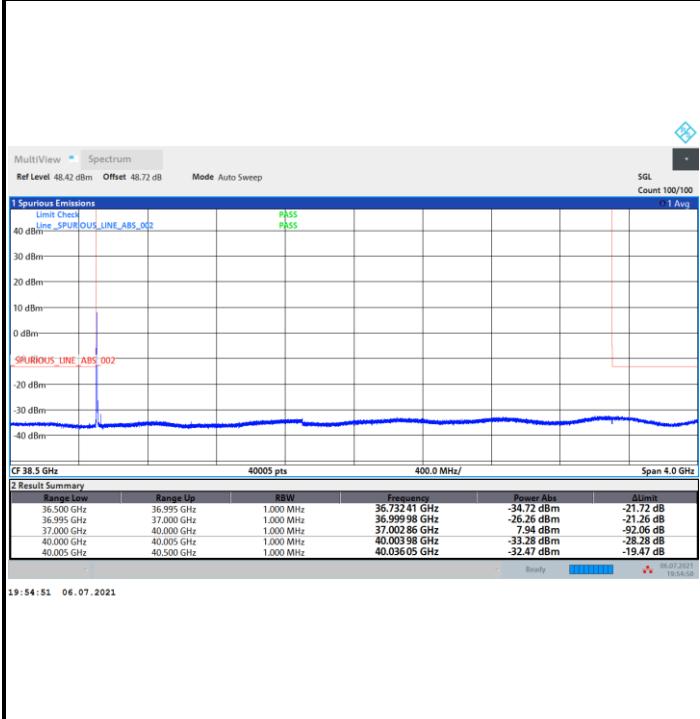

Highest Band Edge / 1 RB

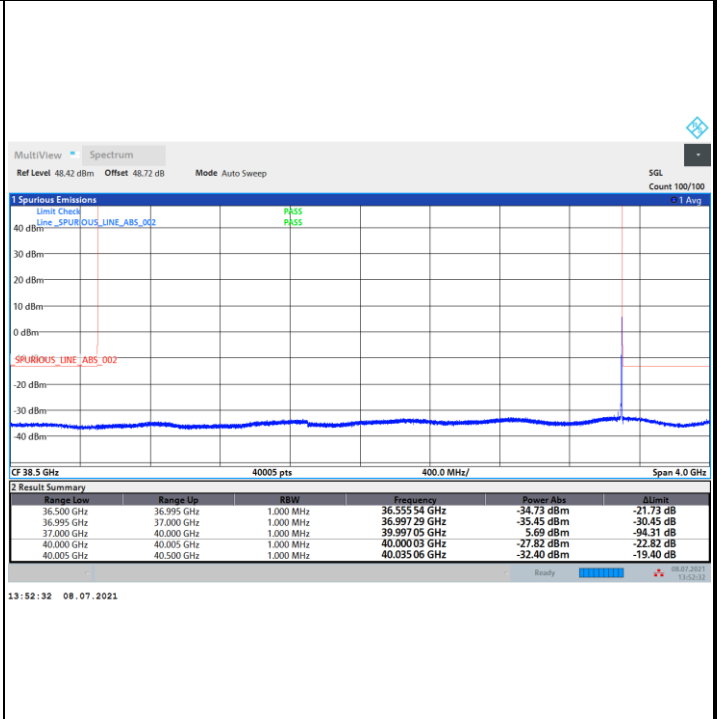


NR Band n260 / 100MHz / QPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

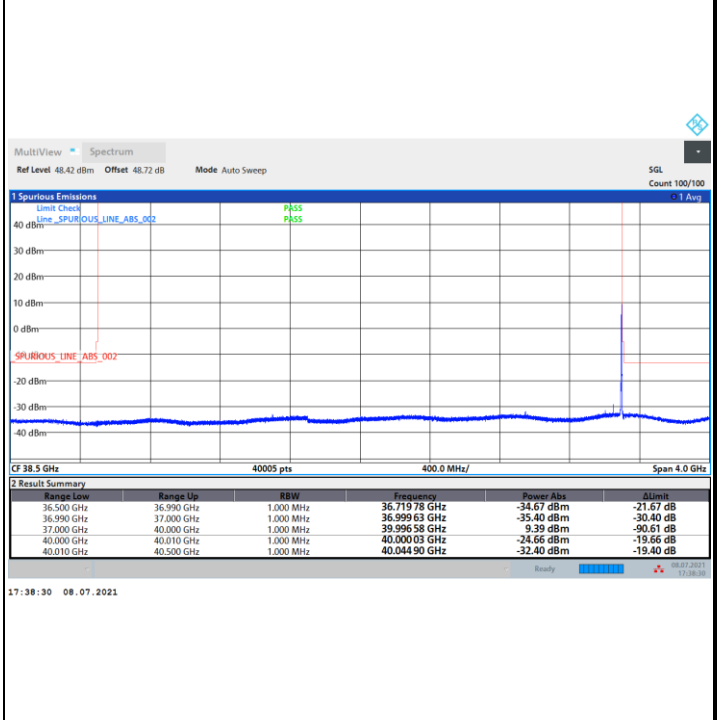







CP-OFDM Module 0

NR Band n260 / 100MHz / 16QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

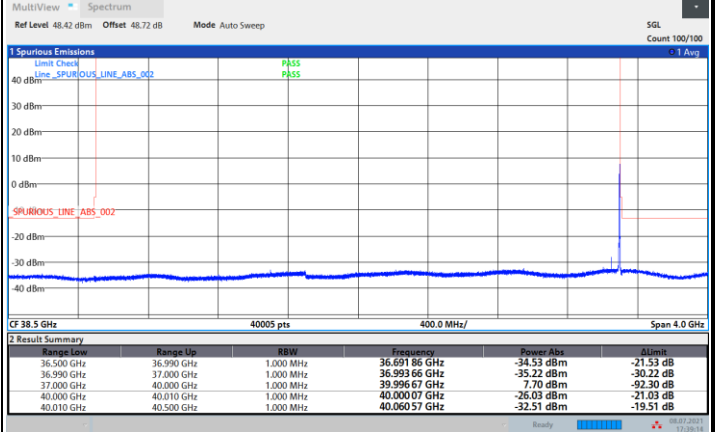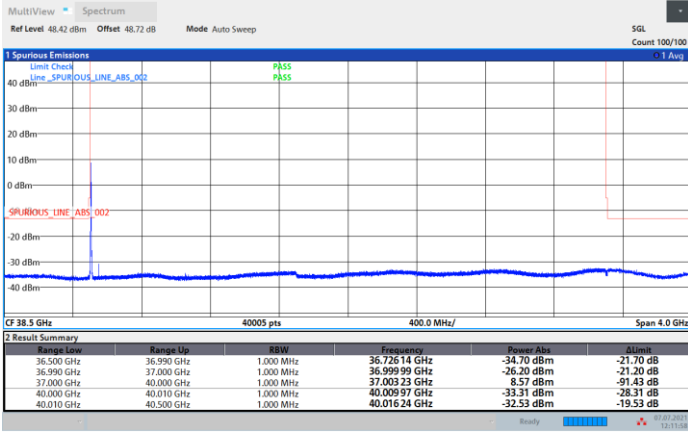

NR Band n260 / 100MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

