



PCTEST
 7185 Oakland Mills Road, Columbia, MD 21046 USA
 Tel. 410.290.6652 / Fax 410.290.6654
 http://www.pctest.com

TEST REPORT CBSD-SAS Interoperability

Applicant Name:
 Netcomm Wireless Limited
 18-20 Orion Road
 Lane Cove NSW 2066,
 Sydney Australia


Date of Testing:
 4/23/2020 – 5/8/2020
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M2003310053-04.XIA

FCC ID:	XIA-CFW2132
APPLICANT:	NETCOMM WIRELESS LIMITED

Application Type: Certification
Model: CFW-2132
EUT Type: Outdoor LTE Router
Frequency Range: 3550 – 3700 MHz
FCC Classification: Citizens Band Category A and B Devices (CBD)
FCC Rule Part(s): Part 96
Test Procedure(s): KDB 940660 D01 v02, KDB 940660 D02 v01, WINNF-TS-0122-V1.0.0, CBRSA-TS-9001 V.1.0.0, [WINNF-19-IN-00033] CBRS CPE-CBSD as UUT Test Guidelines Version V1.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President







FCC ID: XIA-CFW2132	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 1 of 59

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Modifications.....	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS	6
5.0	EVALUATION PROCEDURE	7
6.0	TEST Summary.....	8
6.1	Summary	8
7.0	CONCLUSION	10
APPENDIX A – TEST RESULT AND DATA		
A1	[WINNF.FT.C.REG.1] MULTI-STEP REGISTRATION.....	11
A3	[WINNF.FT.C.REG.5] SINGLE-STEP REGISTRATION FOR CBSD WITH CPI SIGNED DATA	13
A4	[WINNF.FT.C.REG.8] MISSING REQUIRED PARAMETERS (RESPONSECODE 102)	15
A5	[WINNF.FT.C.REG.10] PENDING REGISTRATION (RESPONSECODE 200)	16
A6	[WINNF.FT.C.REG.12] INVALID PARAMETER (RESPONSECODE 103).....	17
A7	[WINNF.FT.C.REG.14] BLACKLISTED CBSD (RESPONSECODE 101).....	18
A8	[WINNF.FT.C.REG.16] UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE 100).....	19
A9	[WINNF.FT.C.REG.18] GROUP ERROR (RESPONSECODE 201)	20
A10	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE)	21
A11	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT).....	22
A12	[WINNF.FT.C.HBT.1] HEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE).....	23
A13	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DEREGISTER).....	25
A14	[WINNF.FT.C.HBT.4] HEARTBEAT RESPONSECODE=500 (TERMINATED_GRANT)	27
A15	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE	29
A16	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE	31
A17	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM)	33
A18	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT)	35
A19	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT).....	37
A20	[WINNF.FT.C.RLQ.1] SUCCESSFUL RELINQUISHMENT	39
A21	[WINNF.FT.C.DRG.1] SUCCESSFUL DEREGISTRATION.....	41
A22	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS.....	43
A23	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE	45
A24	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE	47
A25	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA.....	49
A26	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED	51
A27	[WINNF.PT.C.HBT] UUT RF TRANSMIT POWER MEASUREMENT	53
APPENDIX B – CPE-CBSD INITIAL SAS COMMUNICATIONS duty cycle (x OF y)		57
APPENDIX C – TEST LOGS.....		59

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 2 of 59	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 3 of 59

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Netcomm Wireless Limited Residential Gateway **FCC ID: XIA-CFW2132**. The test data contained in this report pertains only to CBSD-SAS interoperability. The EUT is not a Domain Proxy.

EUT Serial Number(s): 354237109900308
EUT Hardware Version: 1.0
EUT Software Version: 1.1.29.5
EUT SAS Client Version: 0.01

2.2 Device Capabilities

This device contains the following capabilities:

LTE Band 48

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	<input checked="" type="checkbox"/>
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	<input type="checkbox"/>
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	<input checked="" type="checkbox"/>
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	<input type="checkbox"/>
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	<input type="checkbox"/>
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	<input type="checkbox"/>



Table 2-1. Conditional Features

2.3 Test Configuration

Test configuration is setup per [WINNF-19-IN-00033] CBRS CPE-CBSD as UUT Test Guidelines Version V1.0. The EUT was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The BTS-CBSD used is the Ruckus Q710 (FCC ID: S9GQ910US00). The latest version of the SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used for BTS-CBSD and CPE-CBSD. The SAS Test Harnesses are synchronized to UTC time.

2.4 Modifications

No modifications were made to EUT during testing.



FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 4 of 59

3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	5/20/2020	US46470561
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/6/2019	Annual	6/6/2020	161662
-	LTX1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTX1
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A
Tripplenet	Isolator 144	RF Isolation Test Chamber	N/A	N/A	N/A	N/A
Seekonk	NC-100	Torque Wrench	5/10/2018	2 year	5/10/2020	N/A

Table 3-1 Annual Test Equipment Calibration Schedule

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 5 of 59

4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: XIA-CFW2132	 <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	 NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 6 of 59

5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v01 and WINNF-TS-0122-V1.0.0 was used in the measurement of the EUT.

Deviation from measurement procedure.....None

FCC ID: XIA-CFW2132	 <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	 NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 7 of 59	

6.0 TEST SUMMARY

6.1 Summary

Company Name: Netcomm Wireless Limited
 FCC ID: XIA-CFW2132

Table 6-1. Summary of Test Results

FCC Part Section(s)	KDB940660 D01 Section 3.3 a	Test Case Description	WinnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.C.REG.1 WINNF.FT.C.REG.5 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2 WINNF.FT.C.HBT.11	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.C.REG.1 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.C.HBT.1	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	Pass
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT	Pass
96.39(b)(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.4 WINNF.FT.C.HBT.5 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10 WINNF.FT.C.RLQ.1 WINNF.FT.C.DRG.1	Pass





FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 8 of 59

Table 6-2. Summary of Test Results (continued)

96.39 (c)	9	Confirm that the device sends measurements data in response to the command from the SAS.	N/A	Pass
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter (± 50 m) within the required time frame.	N/A	N/A
96.39 (c)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	N/A	Pass
96E	12	When CBSDs communicate through a management system, confirm compliance with all requirements	N/A	Pass
96.39	13	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass

Notes:

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- During testing, the antenna RF output port was monitored during testing.
- Spectrum analyzer plots show that the device is transmitting on a channel used by or indicated by the BTS-CBSD after receiving an authorization signal from the BS-CBSD.
- Please see Appendices for test data.

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 9 of 59

7.0 CONCLUSION



The data collected relate only to the item(s) tested and show that the Netcomm Wireless Limited Residential Gateway **FCC ID: XIA-CFW2132** has been tested to show compliance with Part 96 and KDB 940660.

FCC ID: XIA-CFW2132	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	 NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 10 of 59


APPENDIX A – TEST RESULT AND DATA

A1 [WINNF.FT.C.REG.1] Multi-Step registration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:	--	--
2	<ul style="list-style-type: none"> • The required userId, fcId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response as follows: <ul style="list-style-type: none"> - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 11 of 59

Test Plots:

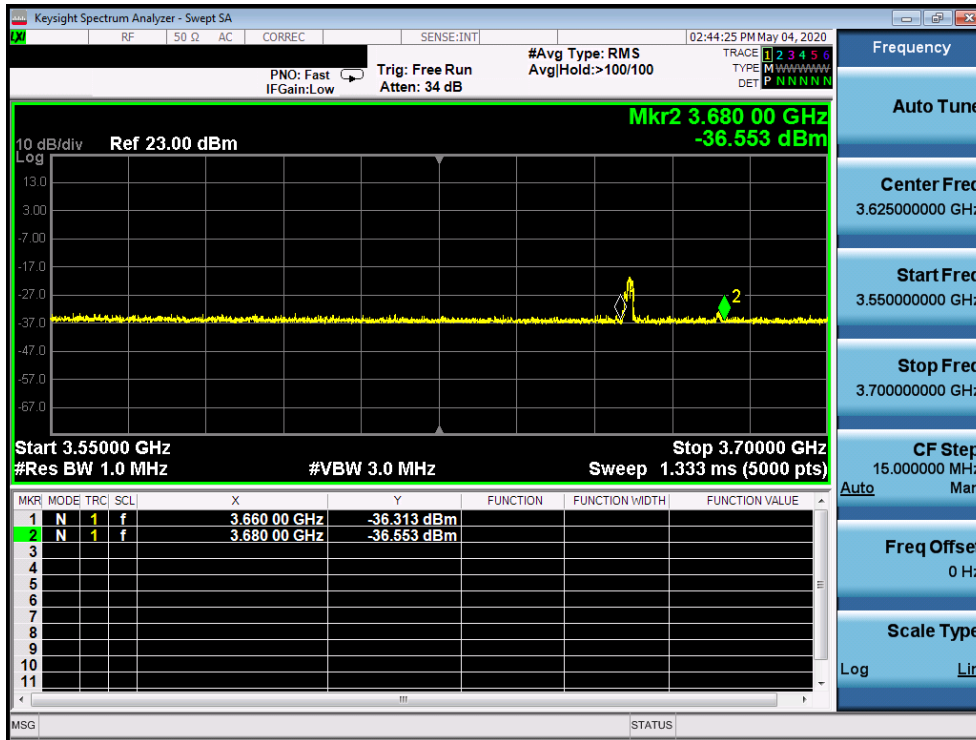



Plot 1. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.1)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 12 of 59

A3 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state • All of the required and REG-Conditional parameters shall be configured and CPI signature provided 	--	--
2	CBSD sends Registration request to the SAS Test Harness: <ul style="list-style-type: none"> • The required userId, fcclId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response as follows: <ul style="list-style-type: none"> - cbsdId = C - measReportConfig shall not be included - responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 13 of 59

Test Plots:

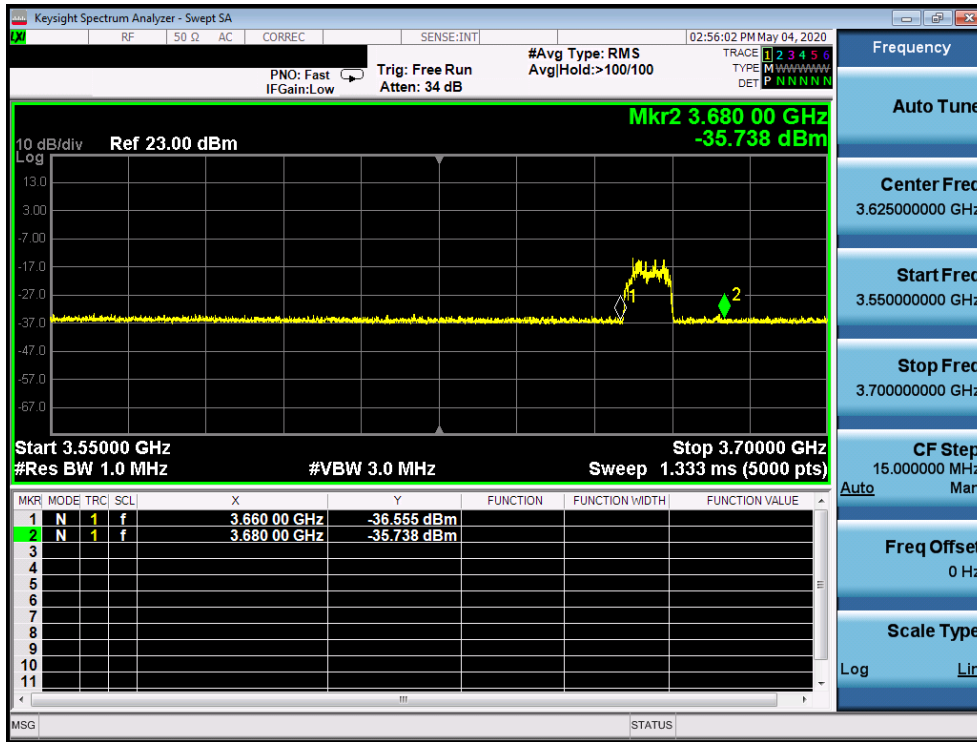


Plot 2. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.5)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 14 of 59

A4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

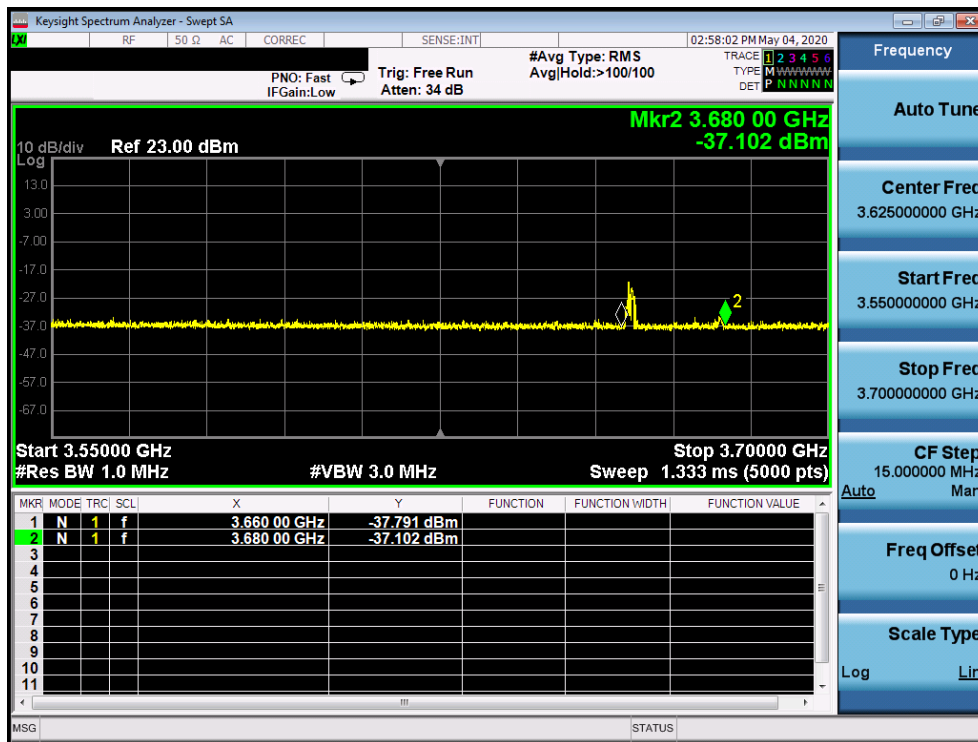


Plot 3. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.8)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 15 of 59

A5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

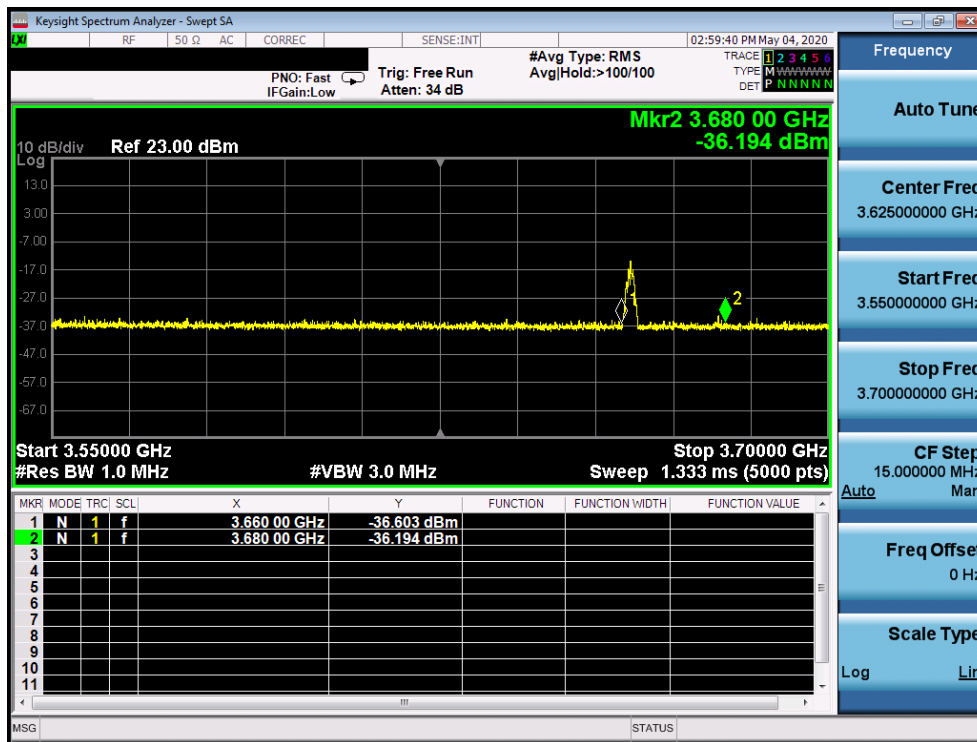


Plot 4. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.10)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 16 of 59

A6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

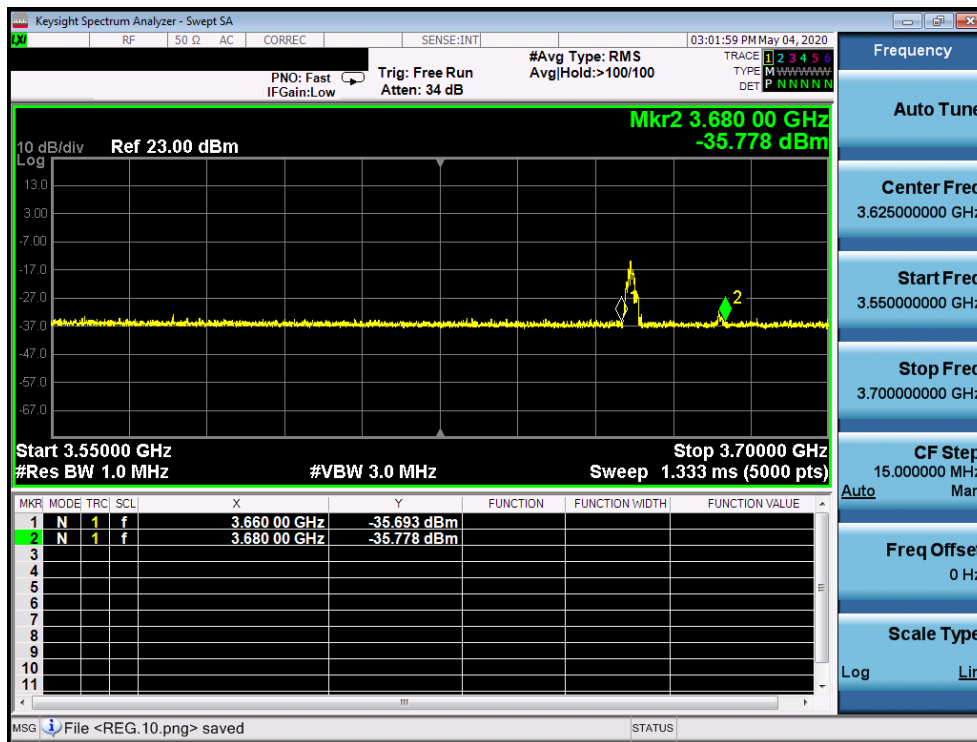


Plot 5. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.12)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 17 of 59

A7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

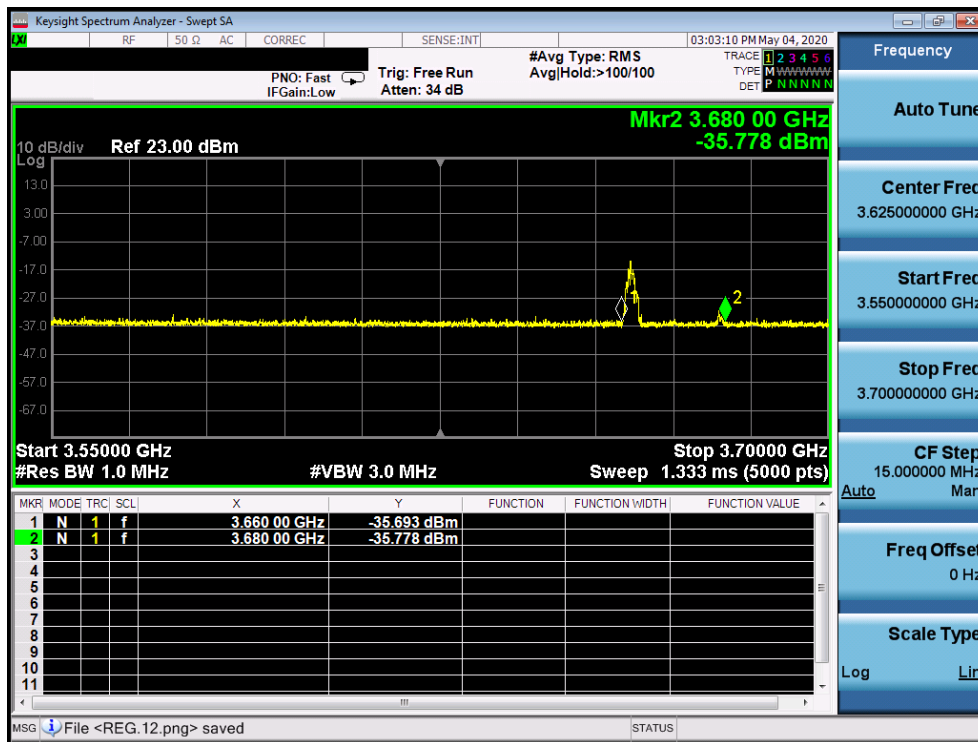


Plot 6. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.14)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 18 of 59

A8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

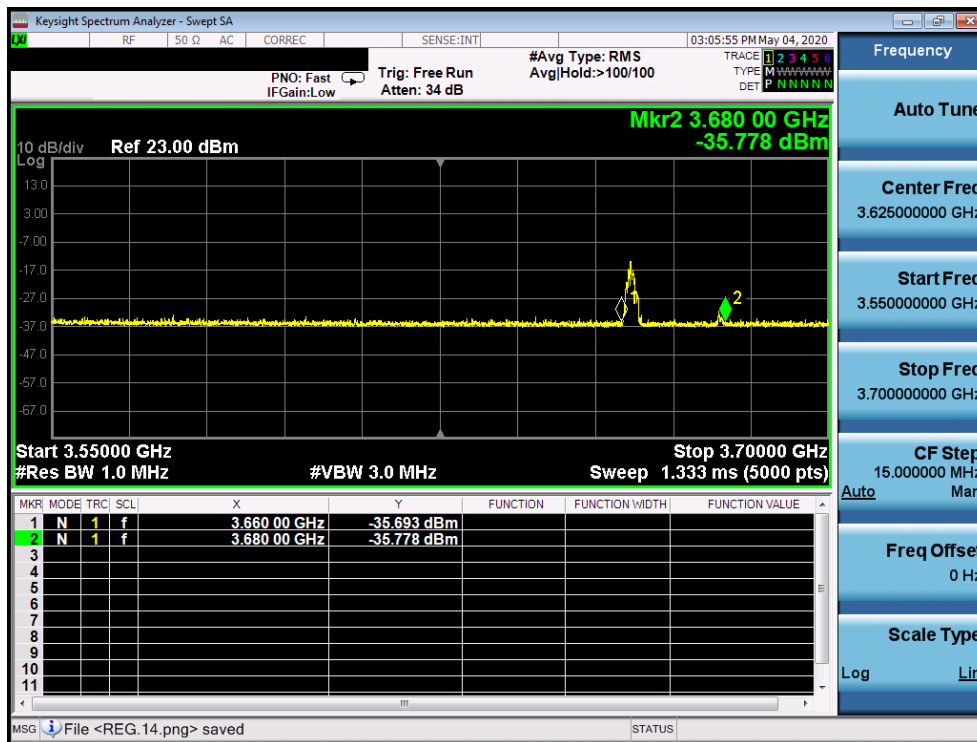


Plot 7. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.16)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 19 of 59

A9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include cbsdId - responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

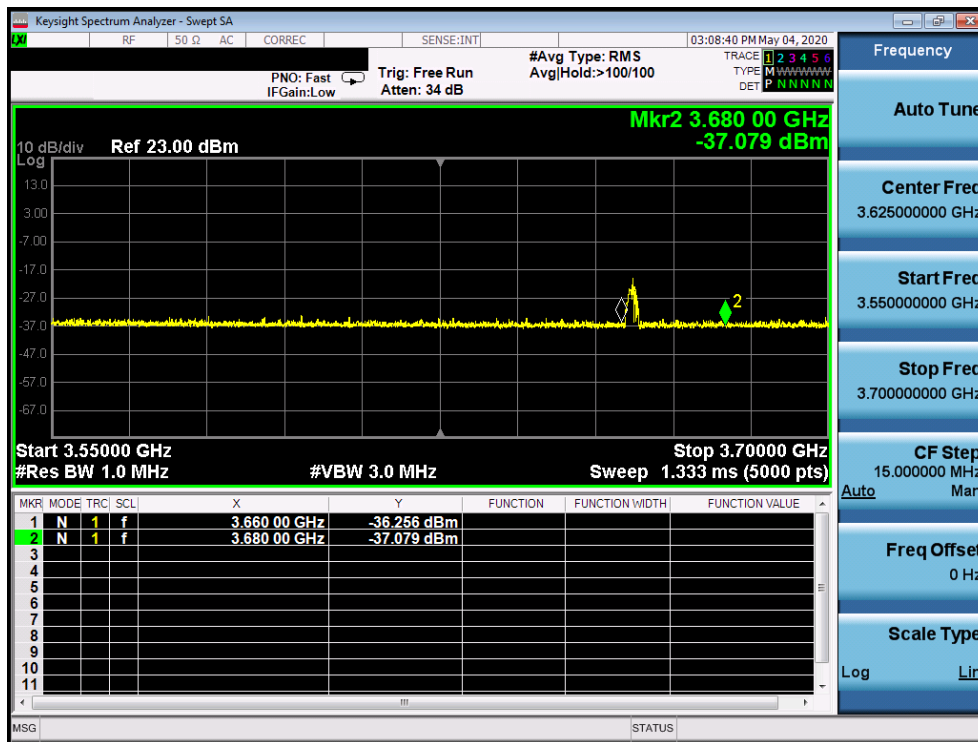


Plot 8. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.REG.18)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 20 of 59

A10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

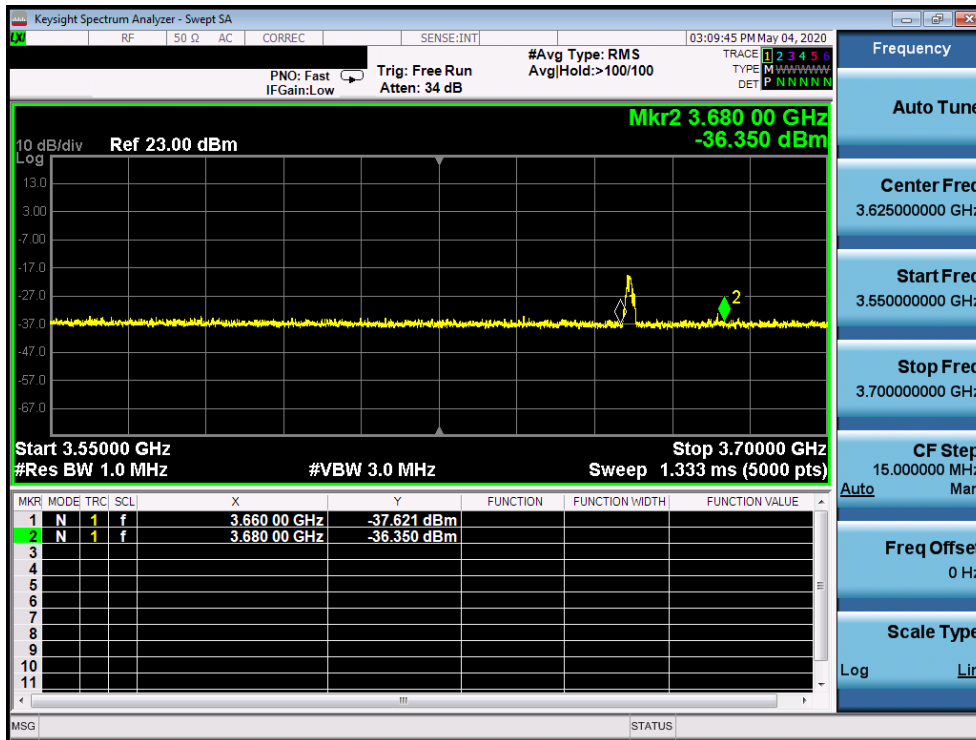


Plot 9. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.GRA.1)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 21 of 59

A11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

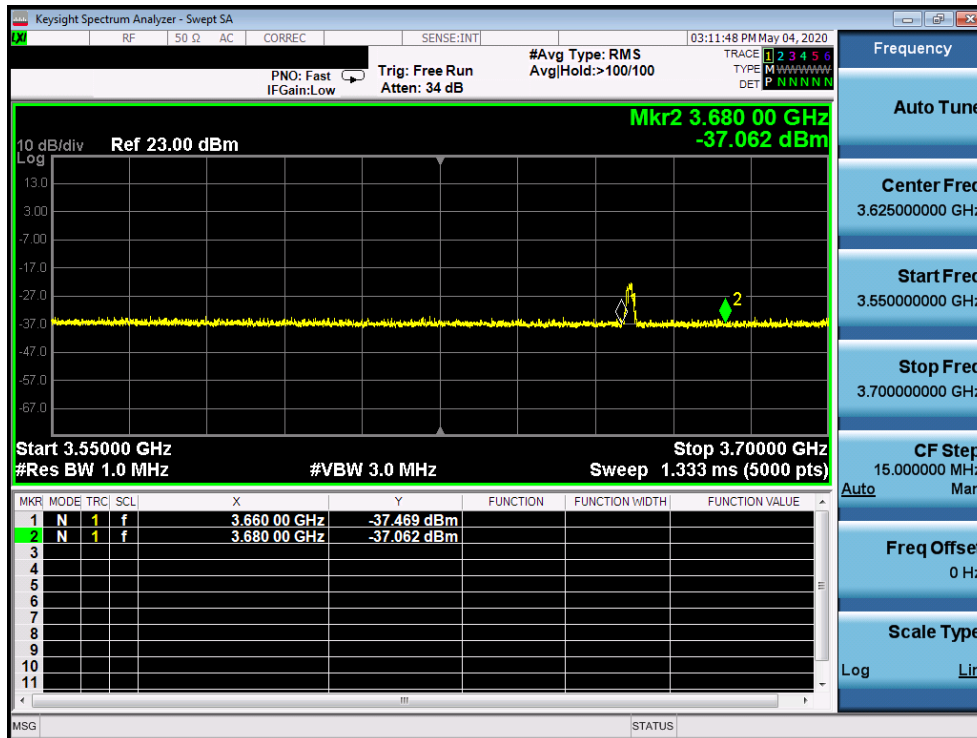



Plot 10. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD(WINNF.FT.C.GRA.2)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 22 of 59


A12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness, with cbsdId = C 	--	--
2	UUT sends a message: <ul style="list-style-type: none"> • If message is type Spectrum Inquiry Request, go to step 3, or • If message is type Grant Request, go to step 5 	--	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none"> • cbsdId = C • List of frequencyRange objects sent by UUT are within the CBRS frequency range 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • availableChannel is an array of availableChannel objects • responseCode = 0 	--	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none"> • cbsdId = C • maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 • operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G = a valid grant ID • grantExpireTime = UTC time greater than duration of the test • responseCode = 0 	--	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 	--	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters:	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 23 of 59

	<ul style="list-style-type: none"> • cbsId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 		
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify:</p> <ul style="list-style-type: none"> • UUT does not transmit at any time prior to completion of the first heartbeat response • UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

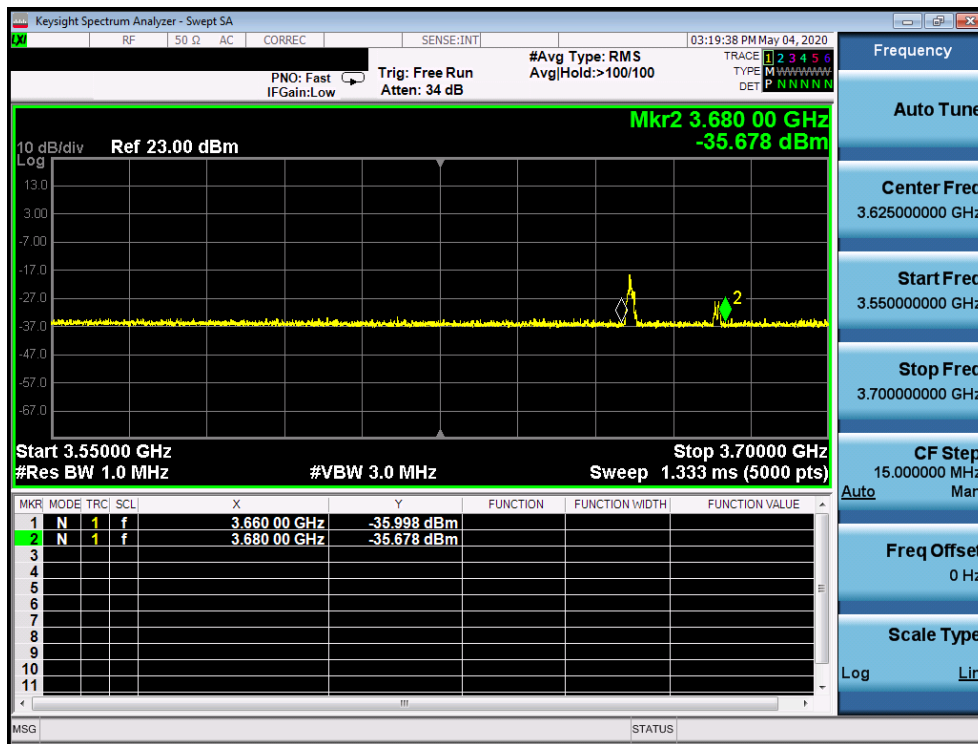



Plot 11. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.1)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 24 of 59

A13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 105 (DEREGISTER) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 25 of 59

Test Plots:

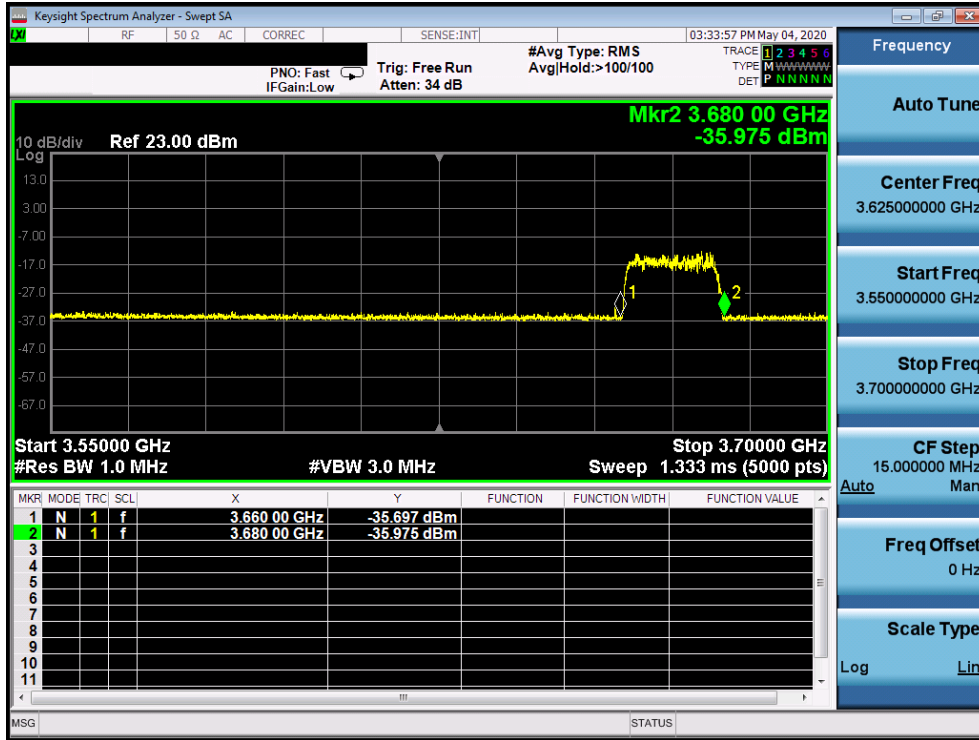



Plot 12. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.3)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 26 of 59

A14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 500 (TERMINATED_GRANT) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 27 of 59

Test Plots:

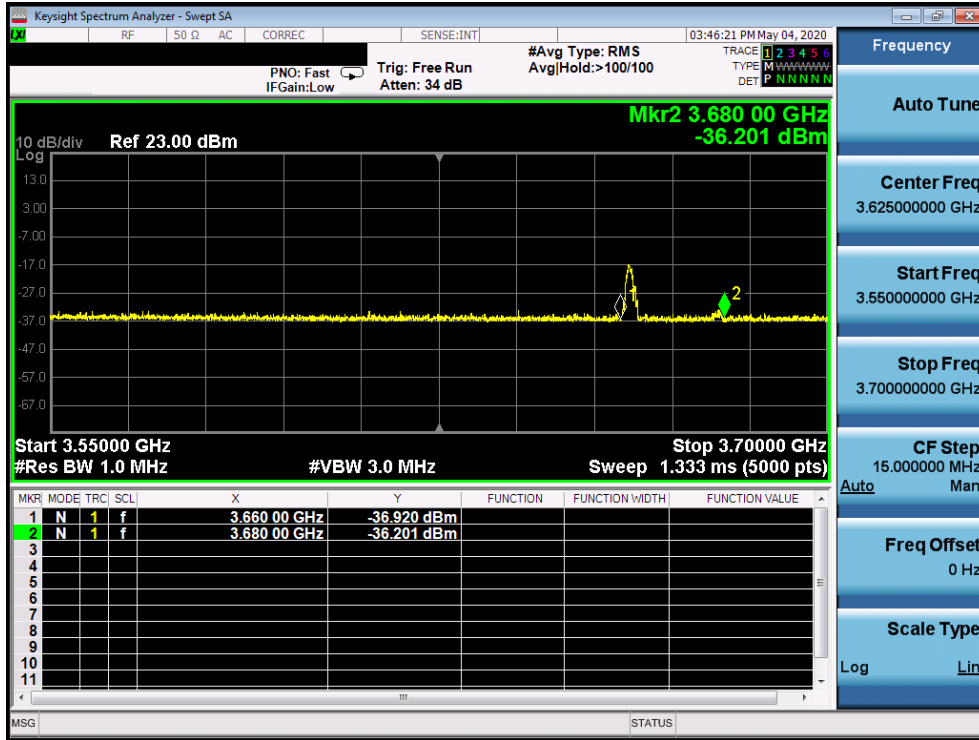



Plot 13. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.4)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 28 of 59	

A15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT does not transmit at any time 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 29 of 59

Test Plots:

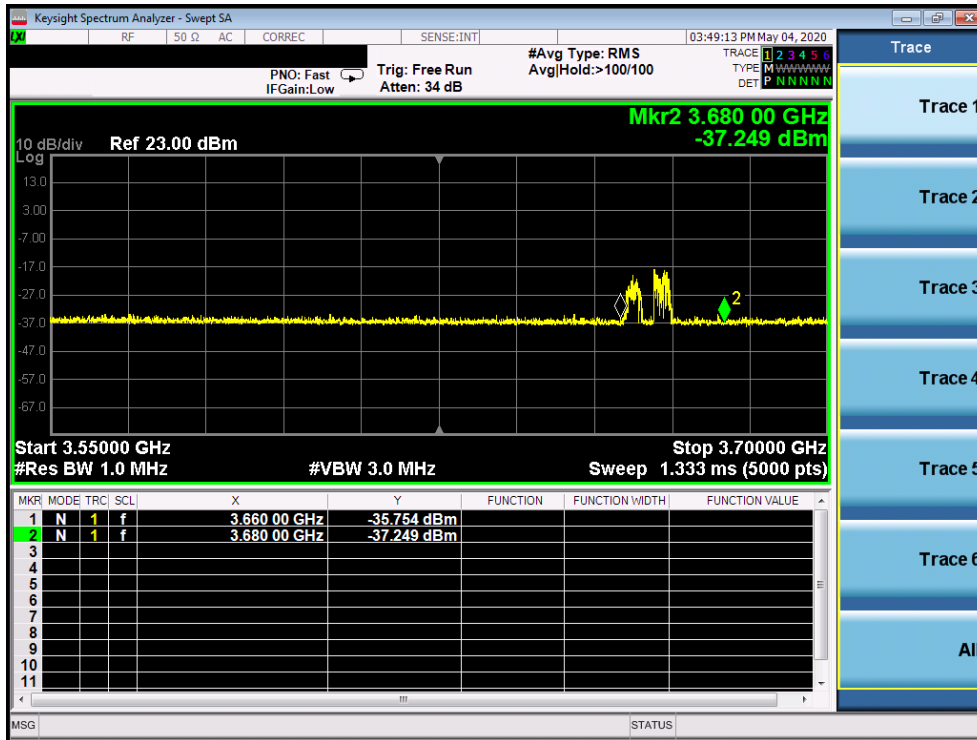



Plot 14. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.5)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 30 of 59

A16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 31 of 59

Test Plots:

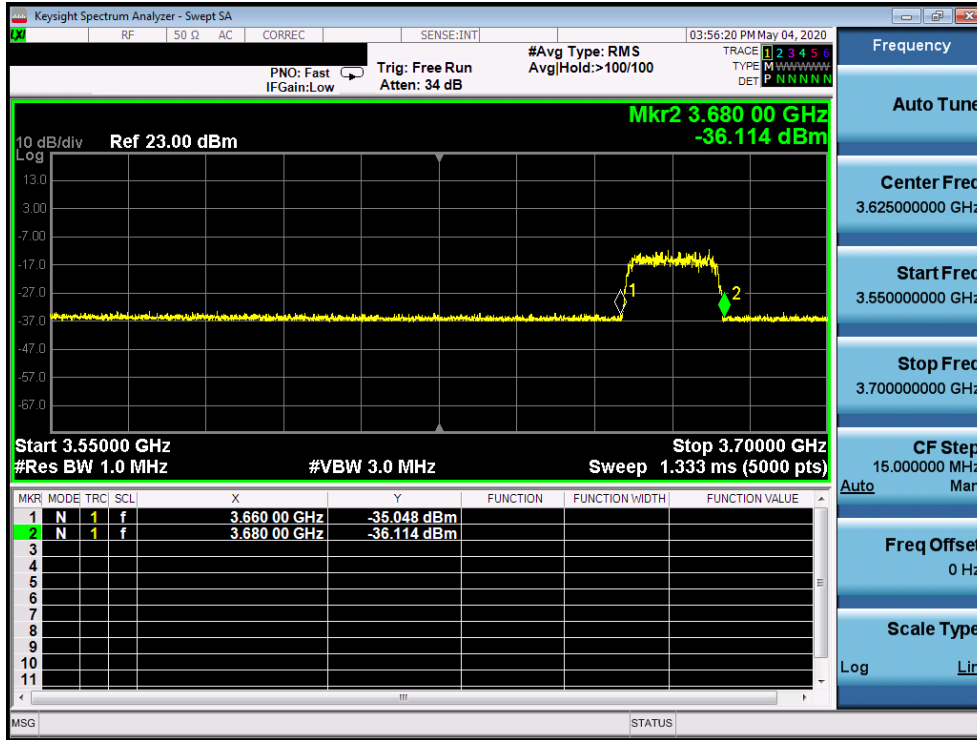


Plot 15. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.6)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 32 of 59

A17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 502 (UNSYNC_OP_PARAM) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: <ul style="list-style-type: none"> • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> o cbsdId = C o grantId = G Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T+60) seconds of completion of step 3. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 33 of 59	

Test Plots:

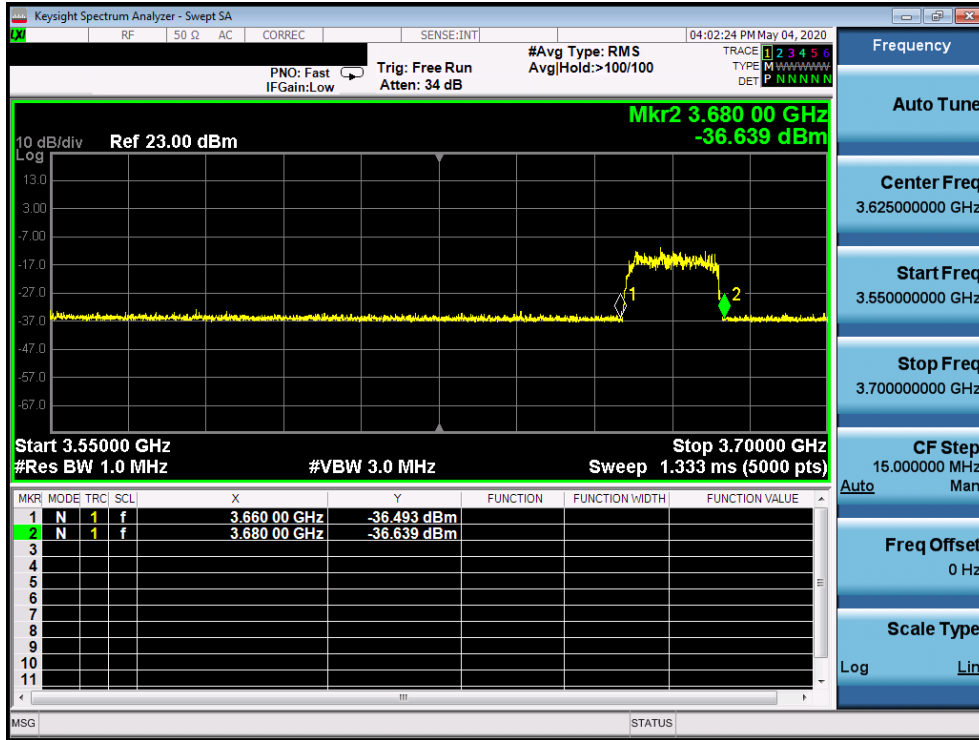

Plot 16. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.7)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 34 of 59

A18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: <ul style="list-style-type: none"> • At any time during the test, UUT shall not transmit on RF interface 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 35 of 59

Test Plots:

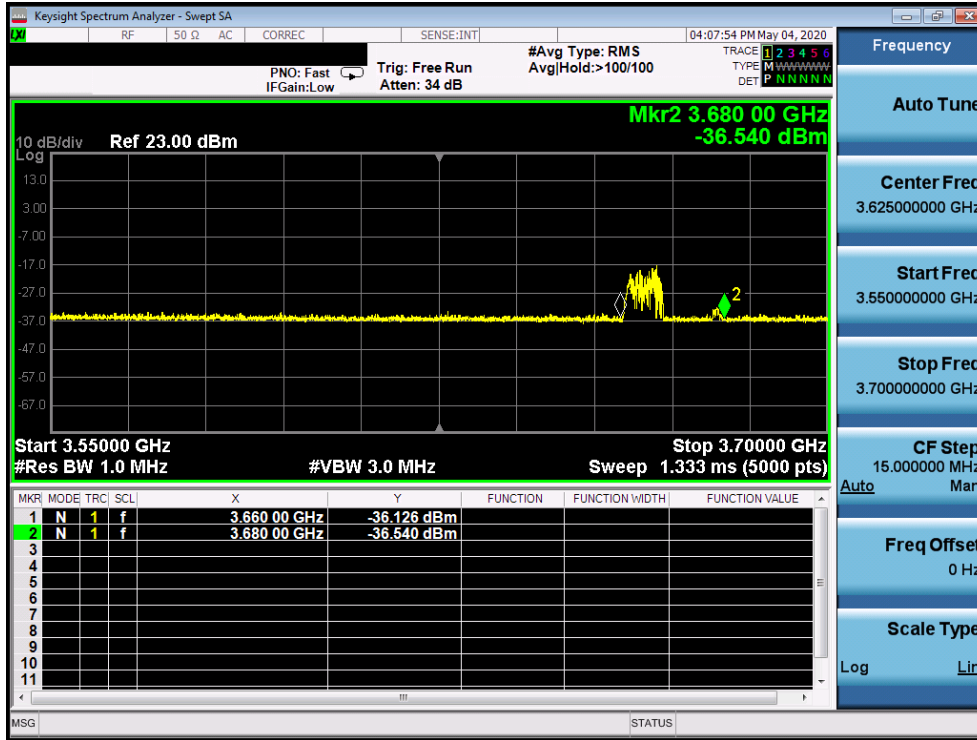



Plot 17. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.9)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 36 of 59

A19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 37 of 59

Test Plots:

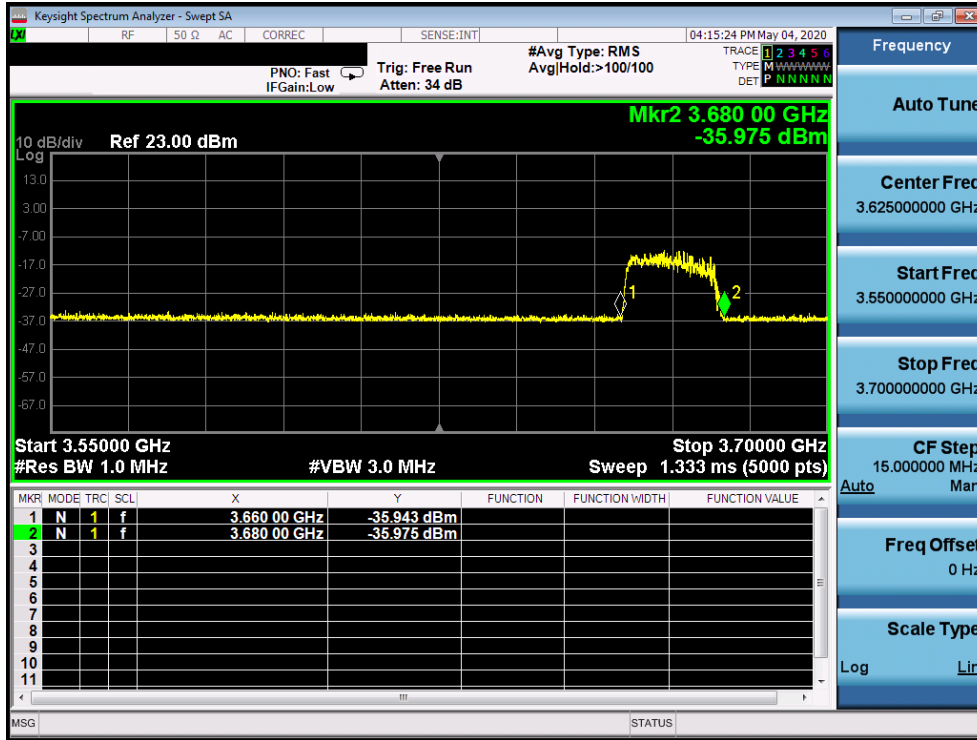



Plot 18. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.10)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 38 of 59

A20 [WINNF.FT.C.RLQ.1] Successful Relinquishment

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> • cbsdId = C • grantId = G 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: <ul style="list-style-type: none"> • cbsdId = C • grantId = G • responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 39 of 59

Test Plots:

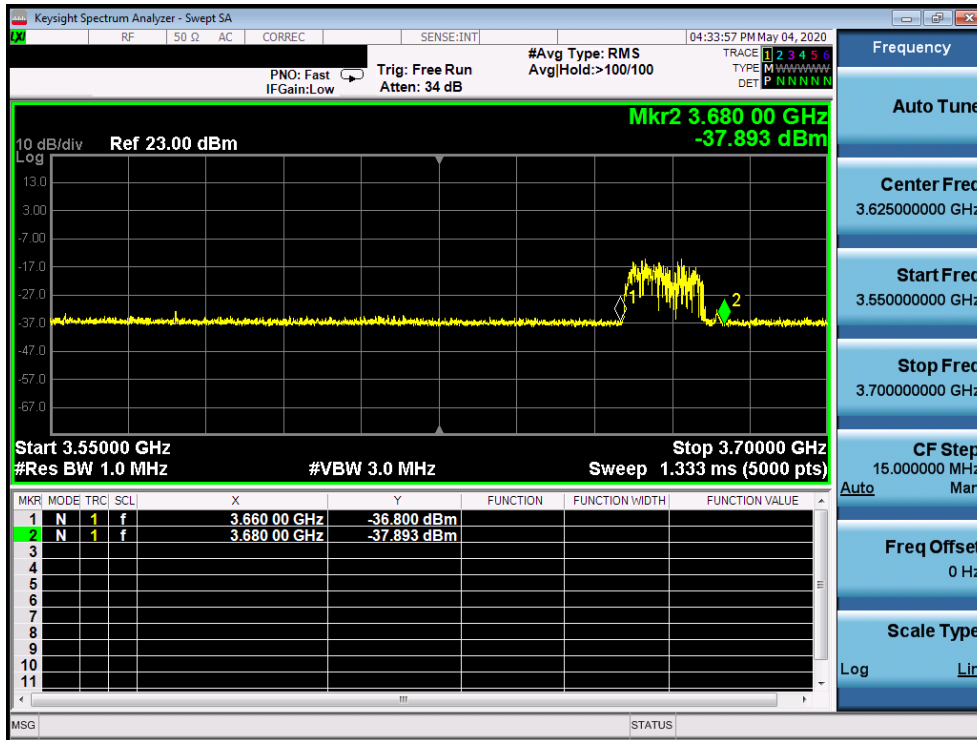



Plot 19. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.RLQ.1)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 40 of 59

A21 [WINNF.FT.C.DRG.1] Successful Deregistration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	UUT sends Deregistration Request to SAS Test Harness with cbsdId = C.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: <ul style="list-style-type: none"> • cbsdId = C • responseCode = 0 	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 41 of 59

Test Plots:

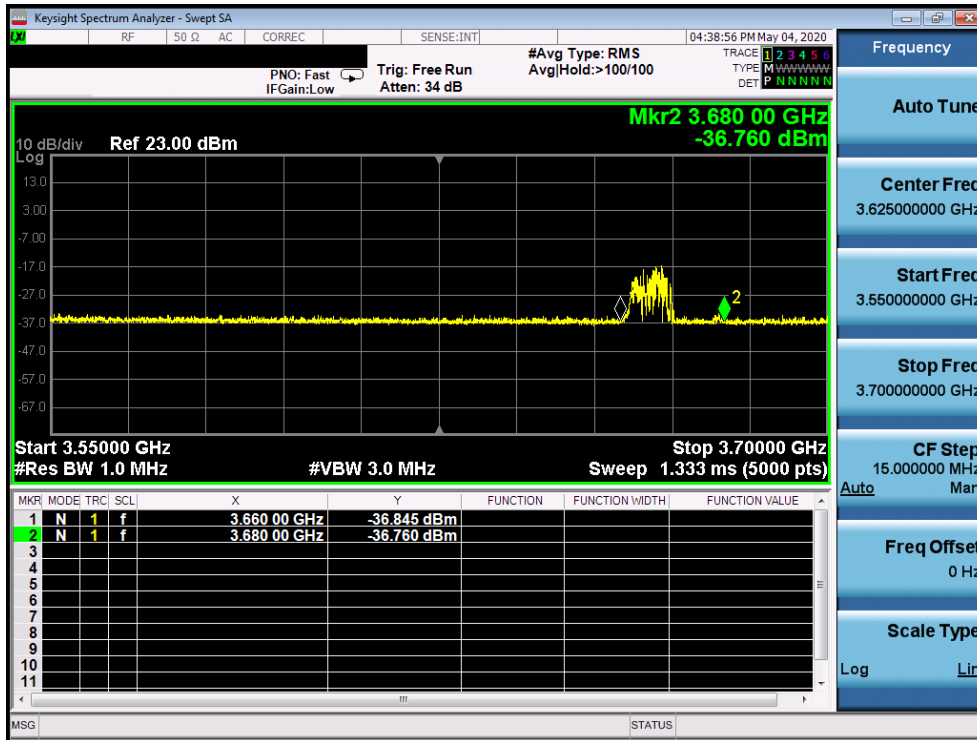



Plot 20. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.DRG.1)


FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 42 of 59

A22 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness


	Test Execution Steps	PASS	FAIL
1	<ul style="list-style-type: none"> • UUT shall start CBSD-SAS communication with the security procedure • The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. • Configure the SAS Test Harness to accept the security procedure and establish the connection 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> • Make sure that Mutual authentication happens between UUT and the SAS Test Harness. • Make sure that UUT uses TLS v1.2 • Make sure that cipher suites from one of the following is selected, • TLS_RSA_WITH_AES_128_GCM_SHA256 • TLS_RSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> • UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 43 of 59

Test Plots:

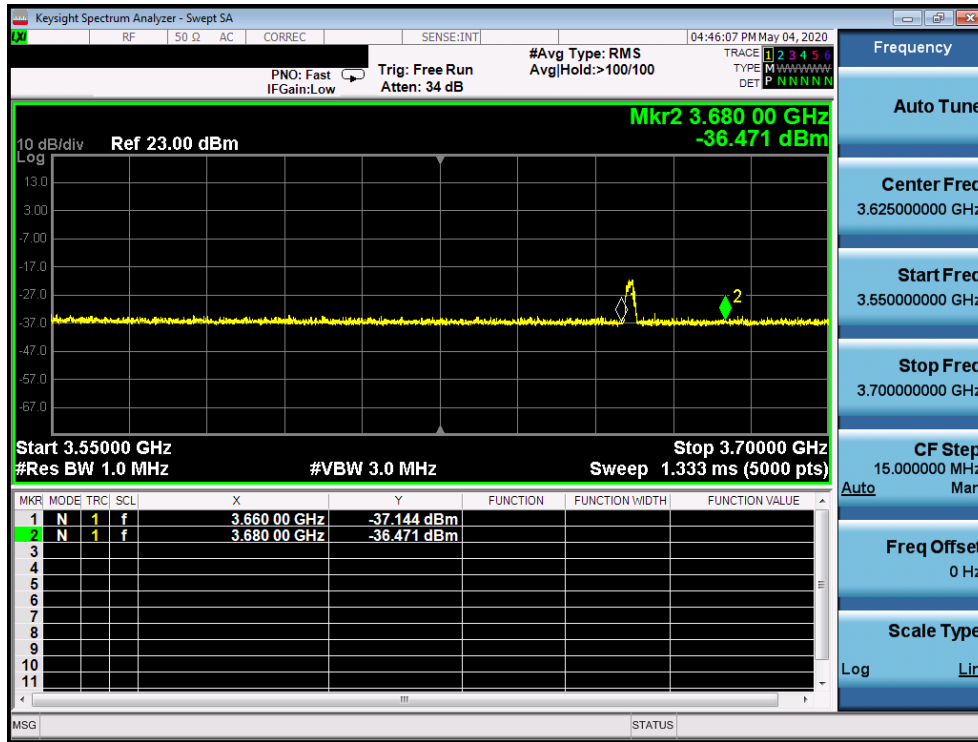

Plot 21. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.1)

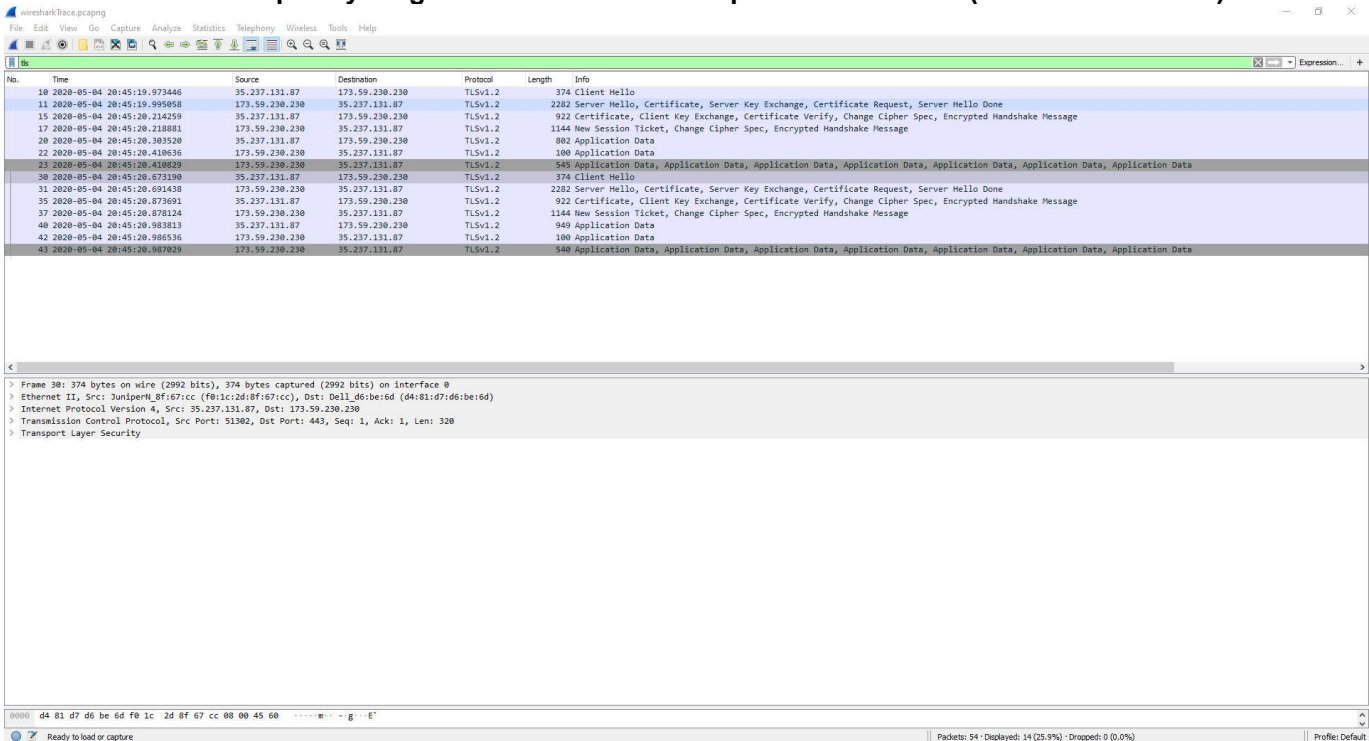


Plot 22. WireShark Screenshot (WINNF.FT.C.SCS.1)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 44 of 59

A23 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate


	Test Execution Steps	PASS	FAIL
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedure 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> Make sure that UUT uses TLS v1.2 for security establishment. Make sure UUT selects the correct cipher suite. UUT shall use CRL or OCSP to verify the validity of the server certificate. Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

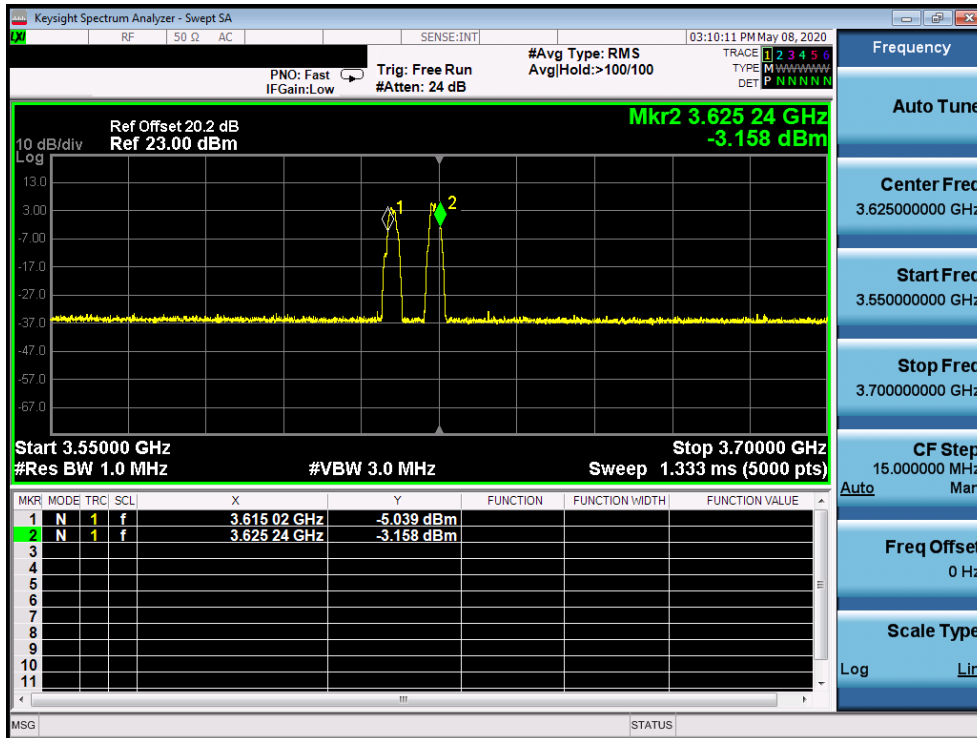

Plot 23. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.2)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 45 of 59

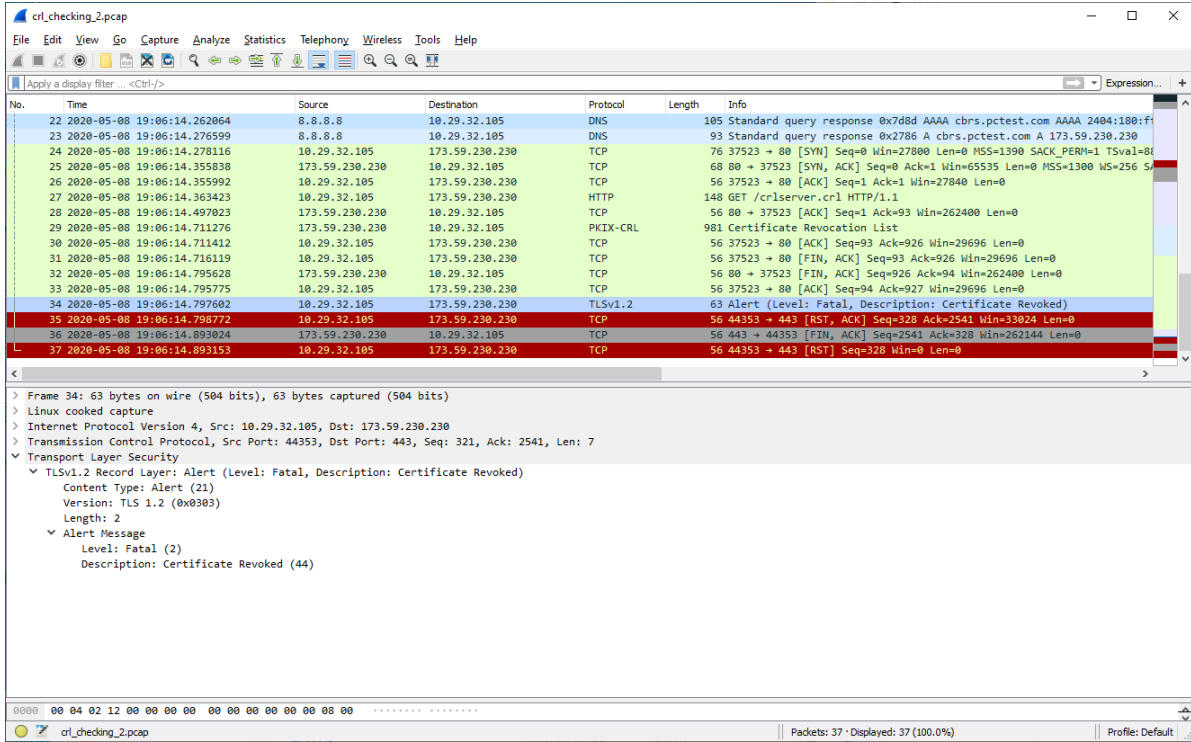


Plot 24. Wireshark Screenshot 1 (WINNF.FT.C.SCS.2)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 46 of 59

A24 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> • Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

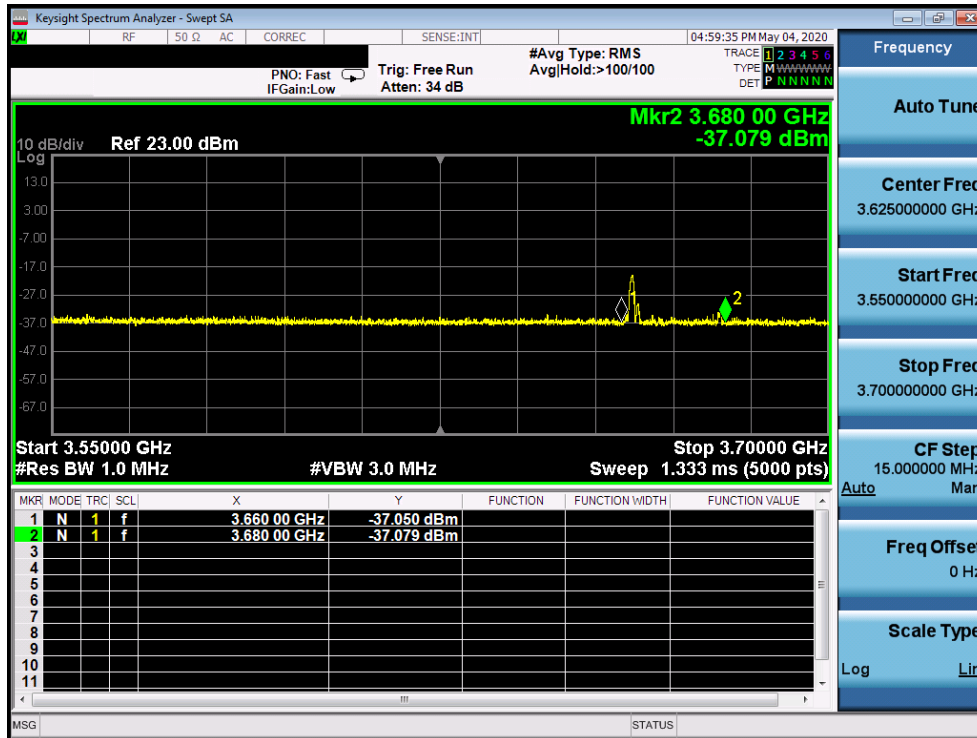

Plot 25. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.3)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 47 of 59

The screenshot shows a Wireshark capture of a TLS session. Packet 37 is a fatal alert because the server's certificate has expired. The details pane for packet 37 shows:

- Source Port: 51303
- Destination Port: 443
- Stream Index: 3
- TCP Segment Len: 7
- Sequence number: 321 (relative sequence number)
- Next sequence number: 328 (relative sequence number)
- Acknowledgment number: 2388 (relative ack number)
- Header Length: 20 bytes (5)
- Flags: 0x018 (PSH, ACK)
- Reserved: Not set
- Nonce: Not set
- Congestion Window Reduced (CWR): Not set
- ECN-Echo: Not set
- Urgent: Not set
- Acknowledgment: Set


Plot 26. WireShark Screenshot (WINNF.FT.C.SCS.3)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 48 of 59	

A25 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

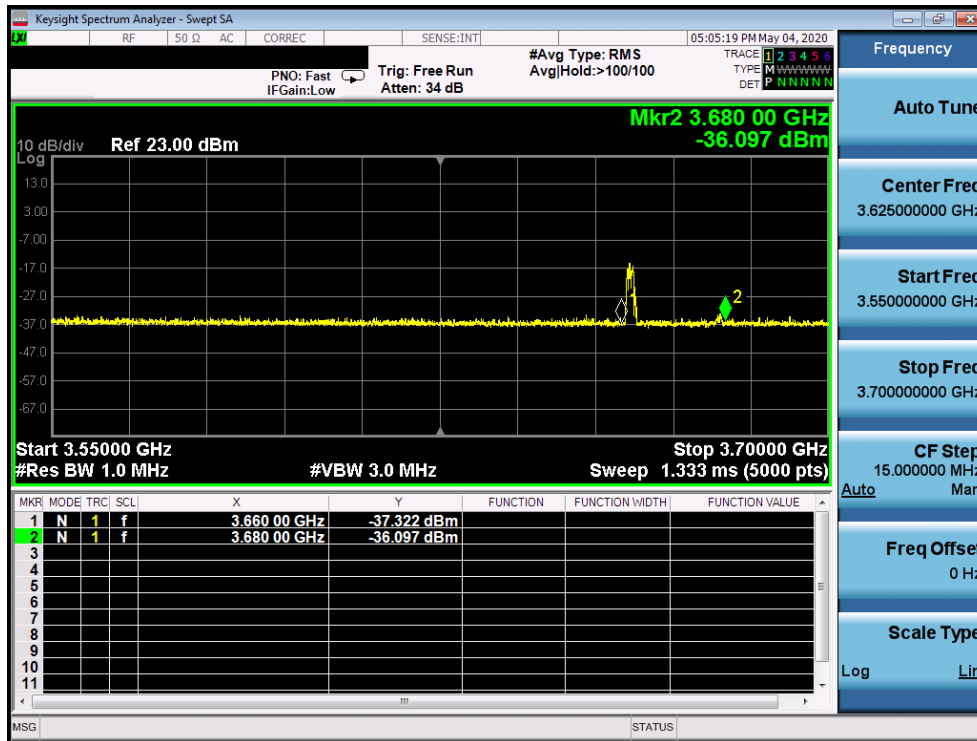

Plot 27. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.4)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 49 of 59

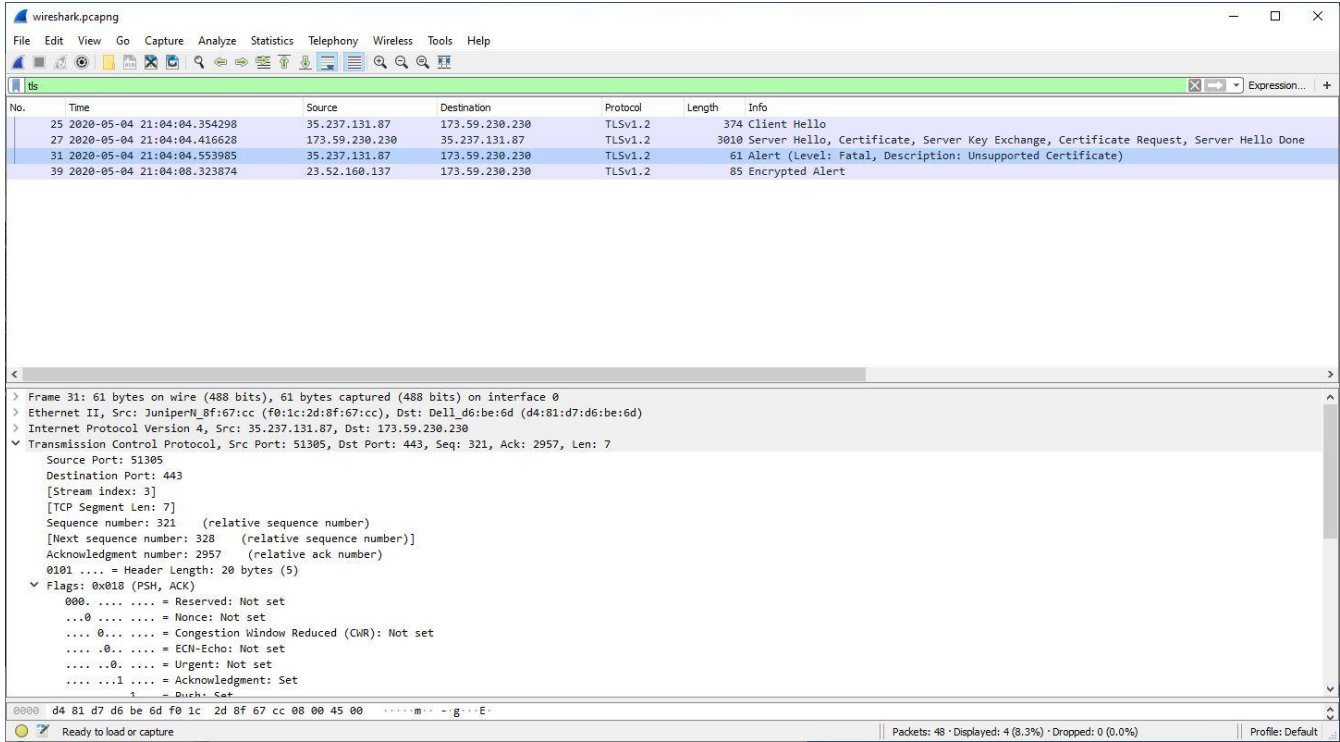


Plot 28. WireShark Screenshot (WINNF.FT.C.SCS.4)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router	Page 50 of 59	

A26 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

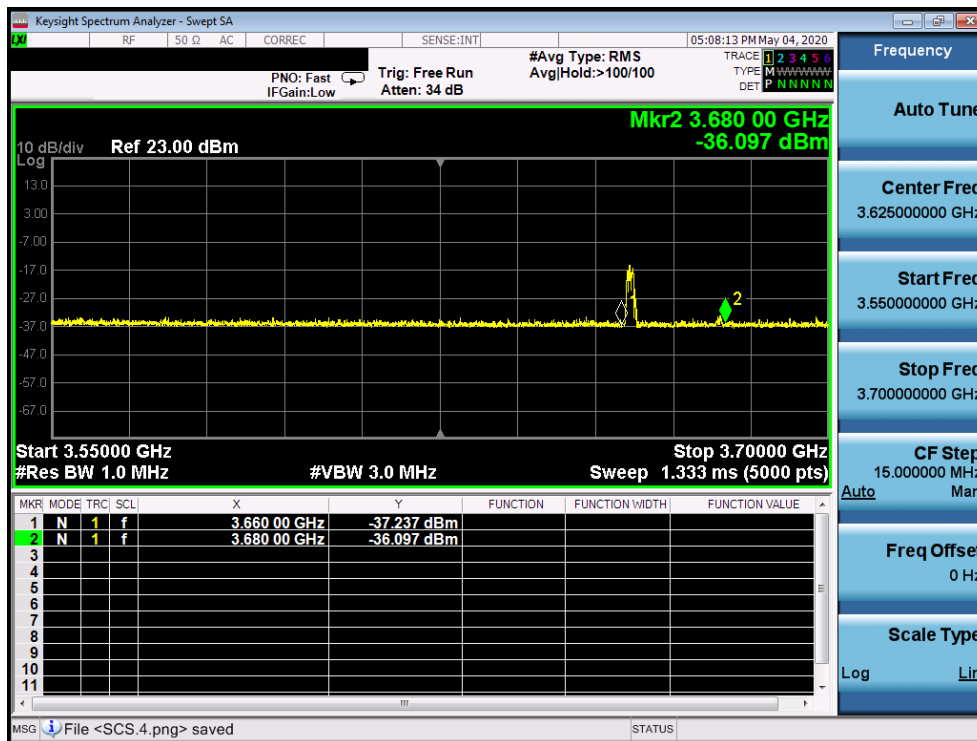

Plot 29. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.5)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 51 of 59

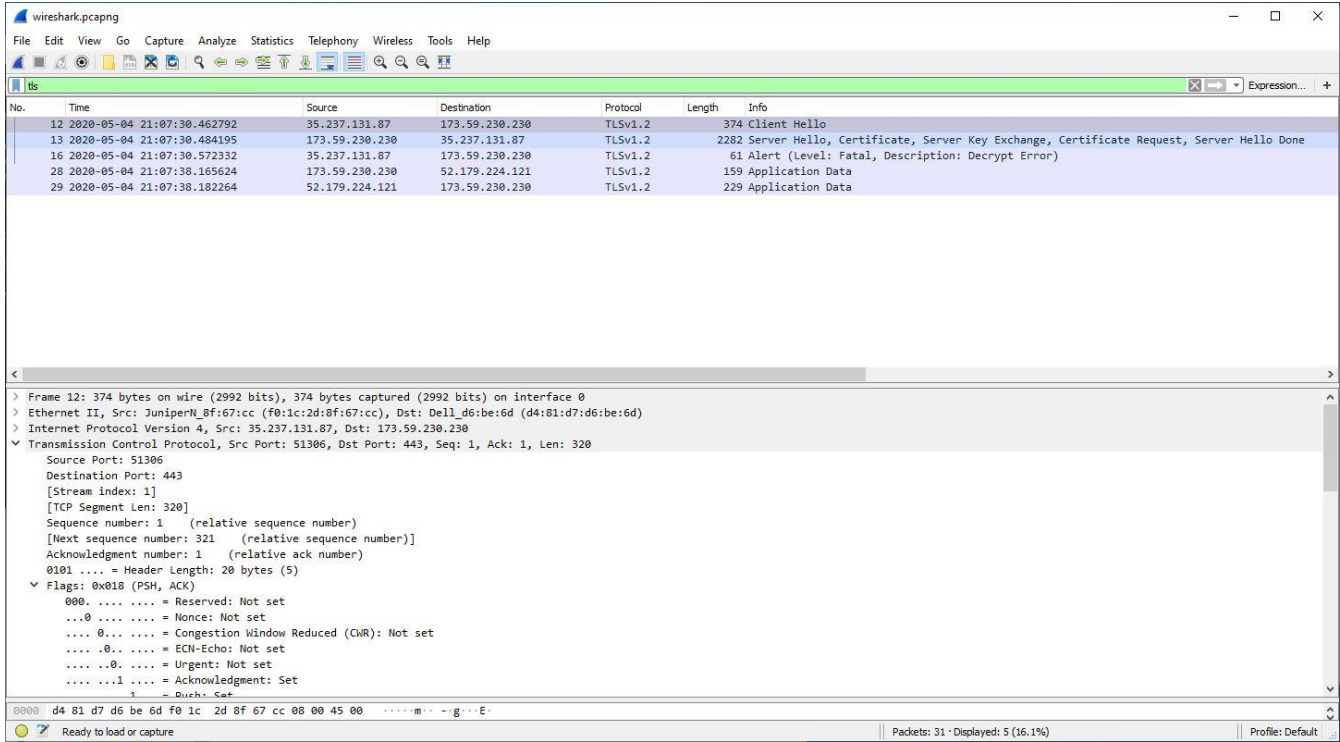

No.	Time	Source	Destination	Protocol	Length	Info
12	2020-05-04 21:07:30.462792	35.237.131.87	173.59.230.230	TLSv1.2	374	Client Hello
13	2020-05-04 21:07:30.484195	173.59.230.230	35.237.131.87	TLSv1.2	2282	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
16	2020-05-04 21:07:30.572332	35.237.131.87	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Decrypt Error)
28	2020-05-04 21:07:38.165624	173.59.230.230	52.179.224.121	TLSv1.2	159	Application Data
29	2020-05-04 21:07:38.182264	52.179.224.121	173.59.230.230	TLSv1.2	229	Application Data

> Frame 12: 374 bytes on wire (2992 bits), 374 bytes captured (2992 bits) on interface 0
 > Ethernet II, Src: JuniperM_8f:67:cc (f0:1c:2d:8f:67:cc), Dst: Dell_d6:be:6d (d4:81:d7:d6:be:6d)
 > Internet Protocol Version 4, Src: 35.237.131.87, Dst: 173.59.230.230
 > Transmission Control Protocol, Src Port: 51306, Dst Port: 443, Seq: 1, Ack: 1, Len: 320
 Source Port: 51306
 Destination Port: 443
 [Stream index: 1]
 [TCP Segment Len: 320]
 Sequence number: 1 (relative sequence number)
 [Next sequence number: 321 (relative sequence number)]
 Acknowledgment number: 1 (relative ack number)
 0101 = Header Length: 20 bytes (5)
 Flags: 0x018 (PSH, ACK)
 000. = Reserved: Not set
 ...0. = Nonce: Not set
 0... = Congestion Window Reduced (CWR): Not set
 0... = ECN-Echo: Not set
 0... = Urgent: Not set
 1... = Acknowledgment: Set

0000 d4 81 d7 d6 be 6d f0 1c 2d 8f 67 cc 08 00 45 00m...-g...E-



Ready to load or capture | Packets: 31 - Displayed: 5 (16.1%) | Profile: Default

Plot 30. WireShark Screenshot (WINNF.FT.C.SCS.5)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 52 of 59

A27 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSID ID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> • UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> o cbsdId = C o grantId = G • SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> o cbsdId = C o grantId = G o transmitExpireTime = current UTC time + 200 seconds o responseCode = 0 	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 53 of 59



RF Power Measurements:

Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 31dBm/MHz to 14dBm/MHz for 20MHz Bandwidth. The maxEIRP is the sum of Conducted PSD and Ant Gain.


Using a CMW500, the UUT was configured to transmit at maximum power from the main antenna. The EIRP was calculated by summing the conducted power level and antenna gain.

Freq [MHz]	SAS Granted maxEIRP [dBm/MHz]	Conducted PSD [dBm/MHz]	Ant Gain [dBi]	maxEIRP [dBm/MHz]	Margin [dB]
3625	31	11.23	17.5	28.7	-2.27
3625	21	1.93	17.5	19.4	-1.57
3625	14	-5.29	17.5	12.2	-1.79


Table A-1 RF Output Power Measurements (WINNF.PT.C.HBT)

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 54 of 59

Test Plots:

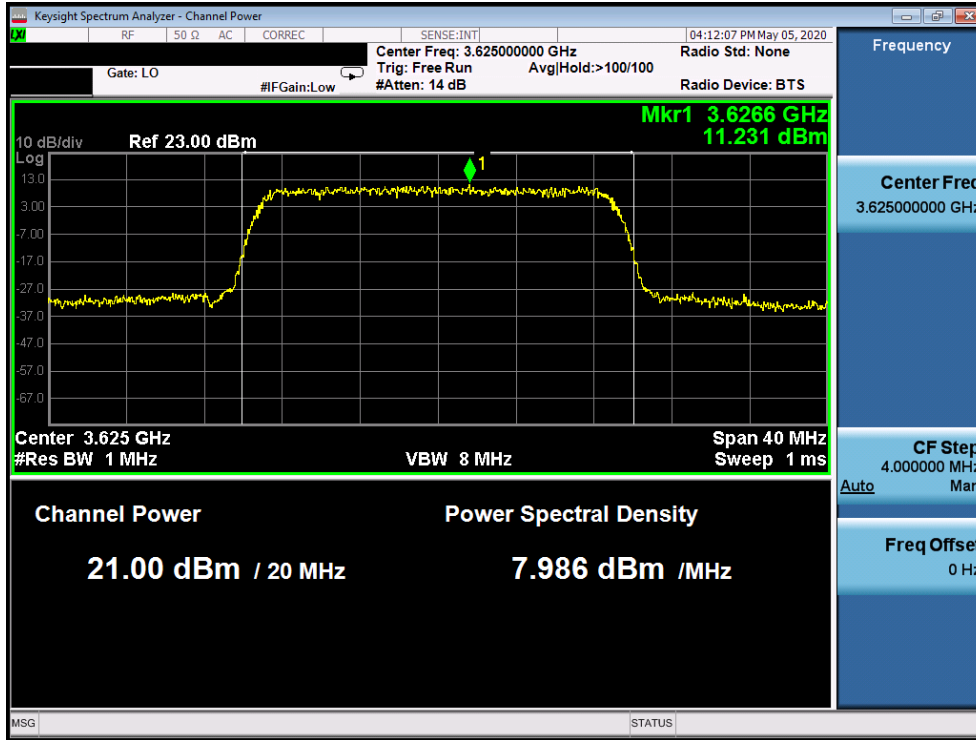


Plot 31. Conducted PSD, Mid-Channel SAS Granted maxEIRP 31

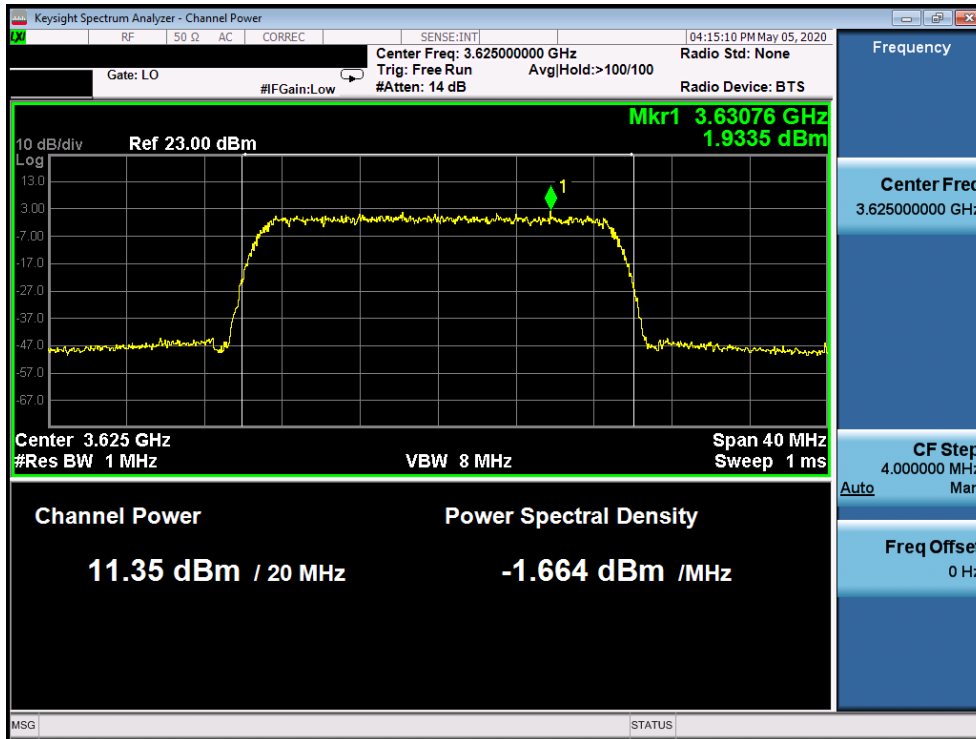

Plot 32. Conducted PSD, Mid-Channel SAS Granted maxEIRP 21

FCC ID: XIA-CFW2132	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 55 of 59

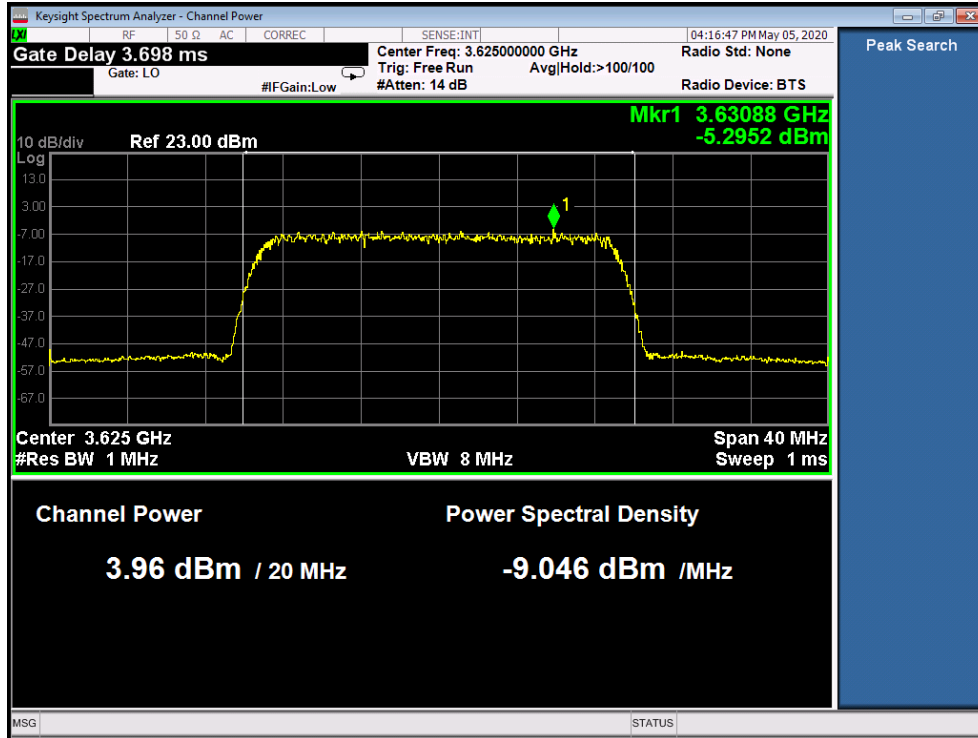

Plot 33. Conducted PSD, Mid-Channel SAS Granted maxEIRP 14


FCC ID: XIA-CFW2132	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 56 of 59

APPENDIX B – CPE-CBSD INITIAL SAS COMMUNICATIONS DUTY CYCLE (X OF Y)

Testing is performed per [WINNF-19-IN-00033] CBRS CPE-CBSD as UUT Test Guidelines Version V1.0. Using spectrum analyzer, time domain sweeps were performed at each time duration: 10s, 300s, and 3600s.


Time allowed per KDB	Aggregate amount of time > 23dBm
1s of 10s period	0.002s
10s of 300s period	0.030s
20s of 3600s period	0.003s

Table B-1 Duty Cycle (X of Y) Measurements

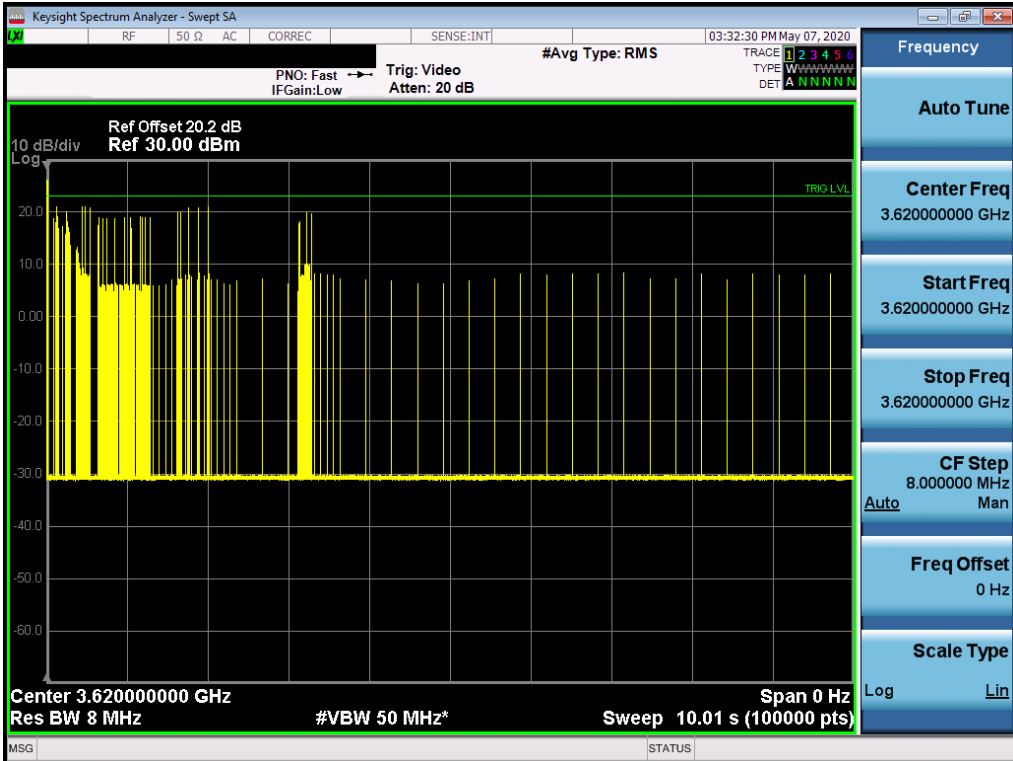


Plot 34. 10s Time Domain Sweep

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 57 of 59

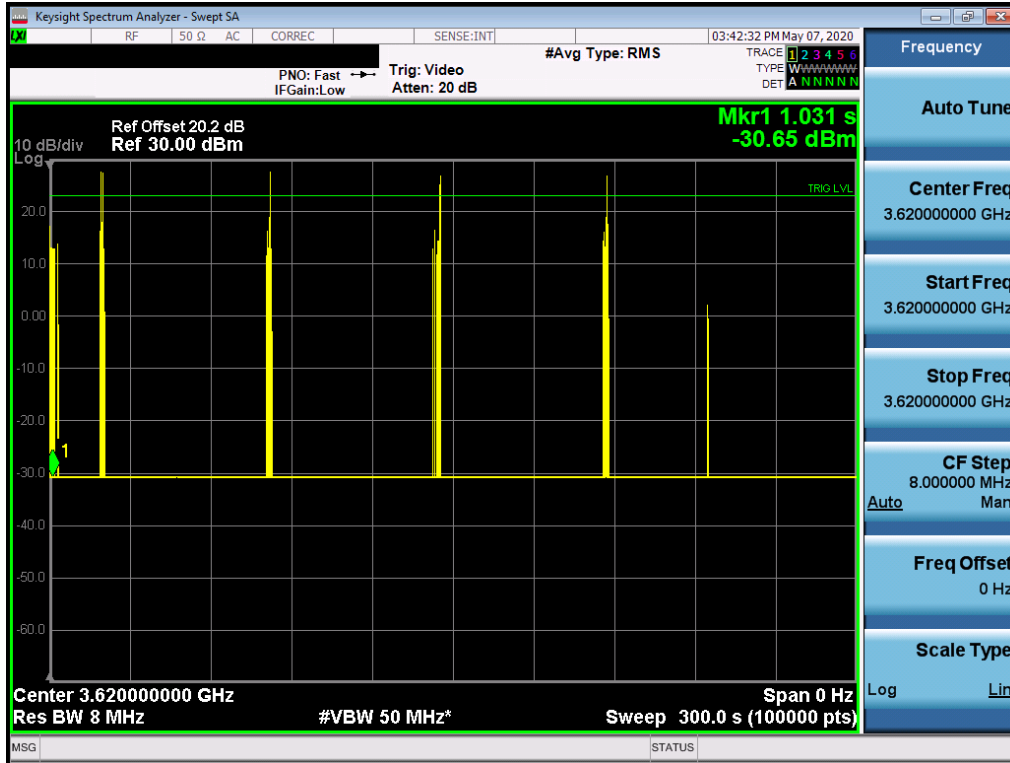

Plot 35. 300s Time Domain Sweep

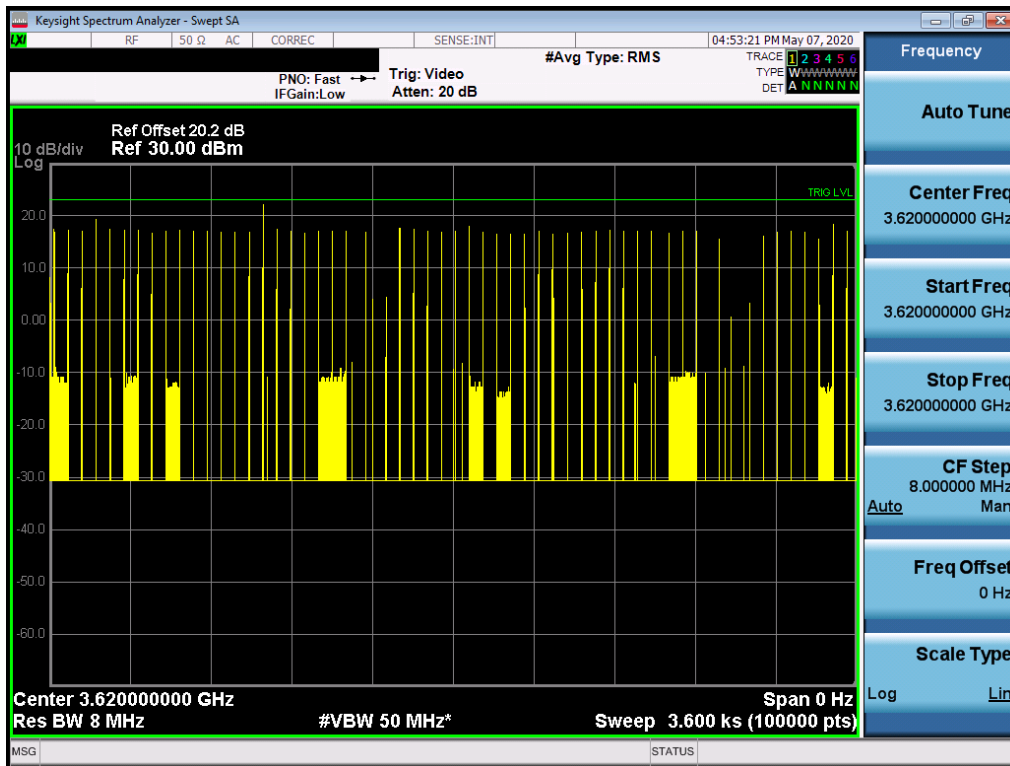





























Plot 36. 3600s Time Domain Sweep

FCC ID: XIA-CFW2132	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	NetComm	Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 58 of 59

APPENDIX C – TEST LOGS

Logs are available upon request

 winnf.ft.c.drg.1_2020-05-04T20.35.3 8Z.log Text Document	 winnf.ft.c.gra.1_2020-05-04T19.07.5 0Z.log Text Document	 winnf.ft.c.gra.2_2020-05-04T19.10.1 9Z.log Text Document
 winnf.ft.c.hbt.1_2020-05-04T19.13.0 6Z.log Text Document	 winnf.ft.c.hbt.3_2020-05-04T19.33.0 2Z.log Text Document	 winnf.ft.c.hbt.4_2020-05-04T19.39.2 0Z.log Text Document
 winnf.ft.c.hbt.5_2020-05-04T19.46.1 4Z.log Text Document	 winnf.ft.c.hbt.6_2020-05-04T19.50.5 5Z.log Text Document	 winnf.ft.c.hbt.7_2020-05-04T19.57.3 4Z.log Text Document
 winnf.ft.c.hbt.9_2020-05-04T20.03.2 9Z.log Text Document	 winnf.ft.c.hbt.10_2020-05-04T20.08. 4Z.log Text Document	 winnf.ft.c.hbt.11_2020-05-04T20.17. 3Z.log Text Document
 winnf.ft.c.reg.1_2020-05-04T18.42.2 9Z.log Text Document	 winnf.ft.c.reg.5_2020-05-04T18.54.4 9Z.log Text Document	 winnf.ft.c.reg.8_2020-05-04T18.56.3 9Z.log Text Document
 winnf.ft.c.reg.10_2020-05-04T18.58. 2Z.log Text Document	 winnf.ft.c.reg.12_2020-05-04T19.00. 5Z.log Text Document	 winnf.ft.c.reg.14_2020-05-04T19.02. 2Z.log Text Document
 winnf.ft.c.reg.16_2020-05-04T19.04. 3Z.log Text Document	 winnf.ft.c.reg.18_2020-05-04T19.06. 2Z.log Text Document	 winnf.ft.c.rfq.1_2020-05-04T20.31.51 Z.log Text Document
 winnf.ft.c.reg.1_2020-05-04T20.44.3 1Z.log Text Document	 winnf.ft.c.reg.1_2020-05-08T18.58.0 9Z.log Text Document	 winnf.ft.c.reg.1_2020-05-04T20.57.3 1Z.log Text Document
 winnf.ft.c.reg.1_2020-05-04T21.03.4 4Z.log Text Document	 winnf.ft.c.reg.1_2020-05-04T21.07.2 3Z.log Text Document	

FCC ID: XIA-CFW2132		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310053-04.XIA	Test Dates: 4/23/2020 – 5/8/2020	EUT Type: Outdoor LTE Router		Page 59 of 59