

| | |
|-----------------------------|----------------|
| Report Reference ID: | REP006261TRFWL |
|-----------------------------|----------------|

| | |
|----------------------------|--|
| Test specification: | <p>Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter B – Common carrier services Part 27 – Miscellaneous wireless communications services</p> |
|----------------------------|--|

| | |
|-------------------|--|
| Applicant: | TEKO Telecom Srl. Via Meucci, 24/a 40024 – Castel S. Pietro Terme (BO) – Italy |
| Apparatus: | Next Generation Very Very High Power Remote Unit 3700-3980MHz |
| Model: | RD35TWW2AT |
| FCC ID: | XM2-RD35TW2 |

| | |
|----------------------------|--|
| Testing laboratory: | <p>Nemko Italy Spa Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221</p> |
|----------------------------|--|



| | Name and title | Date |
|---------------------|---|------------|
| Tested by: |  <hr/> P. Barbieri, Wireless/EMC Specialist | 2022-11-25 |
| Reviewed by: |  <hr/> D. Guarnone, Wireless/EMC Specialist | 2022-11-25 |

Table of contents

| | |
|---|------------|
| Section 1: Report summary | 3 |
| 1.1 Test specification | 3 |
| 1.2 Statement of compliance | 3 |
| 1.3 Exclusions | 3 |
| 1.4 Registration number | 3 |
| 1.5 Test report revision history | 3 |
| 1.6 Limits of responsibility | 3 |
| Section 2: Summary of test results | 4 |
| 2.1 FCC Part 27, test results | 4 |
| Section 3: Equipment under test (EUT) and application details | 5 |
| 3.1 Applicant details | 5 |
| 3.2 Modular equipment | 5 |
| 3.3 Product details | 5 |
| 3.4 Application purpose | 5 |
| 3.5 Composite/related equipment | 6 |
| 3.6 Sample information | 6 |
| 3.7 EUT technical specifications | 6 |
| 3.8 Accessories and support equipment | 7 |
| The following information identifies accessories used to exercise the EUT during testing: | 7 |
| 3.9 Operation of the EUT during testing | 8 |
| 3.10 EUT setup diagram | 8 |
| Section 4: Engineering considerations | 9 |
| 4.1 Modifications incorporated in the EUT | 9 |
| 4.2 Deviations from laboratory tests procedures | 9 |
| 4.3 Technical judgment | 9 |
| Section 5: Test conditions | 10 |
| 5.1 Deviations from laboratory tests procedures | 10 |
| 5.2 Test conditions, power source and ambient temperatures | 10 |
| 5.3 Measurement uncertainty | 10 |
| 5.4 Test equipment | 12 |
| Appendix A: Test results | 13 |
| Clause 935210 D05v01r04 (3.2) AGC threshold | 13 |
| Clause 935210 D05v01r04 (3.3) Out of band rejection | 18 |
| Clause 27.53(l)(1) Occupied bandwidth | 20 |
| Clause 27.50(j) Peak output power at RF antenna connector | 29 |
| Clause 27.53(l) Spurious emissions at RF antenna connector | 40 |
| Clause 27.53(l) Radiated Spurious emissions | 84 |
| Clause 27.54 Frequency stability | 104 |
| Appendix B: Block diagrams of test set-ups | 111 |
| Appendix C: EUT Photos | 112 |

Section 1: Report summary

1.1 Test specification

| | |
|-----------------------|---|
| Specifications | Part 27 – Miscellaneous wireless communications services |
|-----------------------|---|

1.2 Statement of compliance

| | |
|-------------------|--|
| Compliance | <p>In the configuration tested the EUT was found compliant Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p> <p>Test method: ANSI C63.26-2015, 662911 D01 Multiple Transmitter Output v02r01, 662911 D02 MIMO with Cross-Polarized Antennas v01, 935210 D05 Measurements guidance for industrial and non-consumer signal booster, repeater and amplifier devices v01r04</p> |
|-------------------|--|

1.3 Exclusions

| | |
|-------------------|------|
| Exclusions | None |
|-------------------|------|

1.4 Registration number

| | |
|------------------------|--------|
| FCC site number | 682159 |
|------------------------|--------|

1.5 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRFWL | Original report issued |

1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Section 2: Summary of test results

2.1 FCC Part 27, test results

| Part | Methods | Test description | Verdict |
|--------------|-----------------------------|--|---------|
| | § 935210 D05v01r04 (3.2) | AGC threshold | Pass |
| | § 935210 D05v01r04 (3.3) | Out of band rejection | Pass |
| §27.53(l)(1) | § 935210 D05v01r04 (3.4) | Occupied bandwidth | Pass |
| §27.50(j) | § 935210 D05v01r04 (3.5) | Peak output power at RF antenna connector | Pass |
| §27.53(l) | § 935210 D05v01r04 (3.6) | Spurious emissions at RF antenna connector | Pass |
| §27.53(l) | § 935210 D05v01r04 (3.8) | Radiated spurious emissions | Pass |
| §27.54 | § 935210 D05v01r04 (3.7) | Frequency stability | Pass |

Notes:

Section 3: Equipment under test (EUT) and application details

3.1 Applicant details

| | | |
|---|------------------------------------|------------------------|
| Applicant complete business name | Name: | Teko Telecom Srl |
| | Federal Registration Number (FRN): | 0018963462 |
| | Grantee code | XM2 |
| Mailing address | Address: | Via Meucci, 24/a |
| | City: | Castel S. Pietro Terme |
| | Province/State: | Bologna |
| | Post code: | 40024 |
| | Country: | Italy |

3.2 Modular equipment

| | |
|---|--|
| a) Single modular approval | Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> |
| b) Limited single modular approval | Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> |

3.3 Product details

| | | |
|---|--------------------|------------|
| FCC ID | Grantee code: | XM2 |
| | Product code: | -RD35TW2 |
| Equipment class | B2I | |
| Description of product as it is marketed | Booster | |
| | Model name/number: | RD35TWW2AT |
| | Serial number: | 1038378001 |

3.4 Application purpose

| | |
|----------------------------|--|
| Type of application | <input checked="" type="checkbox"/> Original certification <input type="checkbox"/> Change in identification of presently authorized equipment Original FCC ID: _____ Grant date: _____ <input type="checkbox"/> Class II permissive change or modification of presently authorized equipment |
|----------------------------|--|

Section 3: Equipment under test

3.5 Composite/related equipment

| | |
|-------------------------------|--|
| a) Composite equipment | The EUT is a composite device subject to an additional equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> |
| b) Related equipment | The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> |
| c) Related FCC ID | If either of the above is "yes": <input type="checkbox"/> has been granted under the FCC ID(s) listed below: <input type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statuses under the FCC ID(s) listed below: i FCC ID: ii FCC ID: |

3.6 Sample information

| | |
|--------------------------------|------------|
| Receipt date: | 2022/11/11 |
| Nemko sample ID number: | 4478350001 |

3.7 EUT technical specifications

| | |
|-----------------------------|--|
| Operating band: | Down Link – Up Link: 3700–3980 MHz |
| Operating frequency: | Wideband |
| Modulation type: | TDD 5G NR (QAM and QPSK) |
| Occupied bandwidth: | 5G NR: 10 MHz to 100 MHz |
| Channel spacing: | standard |
| Emission designator: | 5G NR: D7W |
| RF Output | Down Link: - max composite output power based on one carrier per path: 46dBm (40,00W) - MIMO max composite output power based on one carrier per path: 49dBm (80,00W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction) |
| Gain | Down Link: 48dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction) |
| Antenna type: | External Antenna is not provided, equipment that has an external 50 Ω RF connector |
| Power source: | 100-240 Vac |

Section 3: Equipment under test

3.8 Accessories and support equipment
 The following information identifies accessories used to exercise the EUT during testing:

| | |
|------------------------|---|
| Item # 1 | |
| Type of equipment: | Next Generation OTRX |
| Brand name: | Teko Telecom srl |
| Model name or number: | ED35TD |
| Serial number: | ----- |
| Nemko sample number: | ----- |
| Connection port: | DL/UL RF connector (to connect to the base station) SFP/Optical port (to connect to remote unit) |
| Cable length and type: | ----- |
| Item # 2 | |
| Type of equipment: | |
| Brand name: | |
| Model name or number: | |
| Serial number: | |
| Nemko sample number: | |
| Connection port: | |
| Cable length and type: | |
| Item # 3 | |
| Type of equipment: | |
| Brand name: | |
| Model name or number: | |
| Serial number: | |
| Nemko sample number: | |
| Connection port: | |
| Cable length and type: | |
| Item # 4 | |
| Type of equipment: | |
| Brand name: | |
| Model name or number: | |
| Serial number: | |
| Nemko sample number: | |
| Connection port: | |
| Cable length and type: | |

Section 3: Equipment under test

3.9 Operation of the EUT during testing

| | |
|-----------------|--|
| Details: | In down-link direction, normal working at max gain with max RF power output. |
|-----------------|--|

3.10 EUT setup diagram

In this system, Next Generation Remote Unit is the EUT. Next Generation OTRX includes only management of optical conversion (to convert RF signal in optical signal in down-link direction and vice versa optical signal in RF signal in up-link direction). As described in “Operational description”, OTRX is connected directly to base station, so the system doesn’t use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of the OTRX.

Test setup for output power, occupied bandwidth, spurious emissions:



Procedure
 Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.

Section 4: Engineering considerations

4.1 Modifications incorporated in the EUT

| | |
|----------------------|---|
| Modifications | Modifications performed to the EUT during this assessment None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> , performed by Client <input type="checkbox"/> or Nemko <input type="checkbox"/> Details: |
|----------------------|---|

4.2 Deviations from laboratory tests procedures

| | |
|-------------------|---|
| Deviations | Deviations from laboratory test procedures None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> - details are listed below: |
|-------------------|---|

4.3 Technical judgment

| | |
|-----------------|------|
| Judgment | None |
|-----------------|------|

Section 5: Test conditions

5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

5.2 Test conditions, power source and ambient temperatures

| | |
|---|---|
| Normal temperature, humidity and air pressure test conditions | Temperature: 18–33 °C Relative humidity: 25–75 % Air pressure: 86–106 kPa When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated. |
| Power supply range: | The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed. |

5.3 Measurement uncertainty

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko’s measurement uncertainties are reported:

Section 5: Test conditions, continued

| EUT | Type | Test | Range | Measurement Uncertainty | Notes | |
|----------------------------|--------------------------------------|---|------------------------------|-------------------------|--------|-----|
| Transmitter | Conducted | Frequency error | 0.001 MHz ÷ 40 GHz | 0.08 ppm | (1) | |
| | | Carrier power RF Output Power | 0.009 MHz ÷ 30 MHz | 1.1 dB | (1) | |
| | | | 30 MHz ÷ 18 GHz | 1.5 dB | (1) | |
| | | | 18 MHz ÷ 40 GHz | 3.0 dB | (1) | |
| | | | 40 MHz ÷ 140 GHz | 5.0 dB | (1) | |
| | | Adjacent channel power | 1 MHz ÷ 18 GHz | 1.4 dB | (1) | |
| | | Conducted spurious emissions | 0.009 MHz ÷ 18 GHz | 3.0 dB | (1) | |
| | | | 18 GHz ÷ 40 GHz | 4.2 dB | (1) | |
| | | | 40 GHz ÷ 220 GHz | 6.0 dB | (1) | |
| | | Intermodulation attenuation | 1 MHz ÷ 18 GHz | 2.2 dB | (1) | |
| | | Attack time – frequency behaviour | 1 MHz ÷ 18 GHz | 2.0 ms | (1) | |
| | | Attack time – power behaviour | 1 MHz ÷ 18 GHz | 2.5 ms | (1) | |
| | | Release time – frequency behaviour | 1 MHz ÷ 18 GHz | 2.0 ms | (1) | |
| | | Release time – power behaviour | 1 MHz ÷ 18 GHz | 2.5 ms | (1) | |
| | | Transient behaviour of the transmitter– Transient frequency behaviour | 1 MHz ÷ 18 GHz | 0.2 kHz | (1) | |
| | | Transient behaviour of the transmitter – Power level slope | 1 MHz ÷ 18 GHz | 9% | (1) | |
| | | Frequency deviation - Maximum permissible frequency deviation | 0.001 MHz ÷ 18 GHz | 1.3% | (1) | |
| | | Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz | 0.001 MHz ÷ 18 GHz | 0.5 dB | (1) | |
| | Dwell time | - | 3% | (1) | | |
| | Hopping Frequency Separation | 0.01 MHz ÷ 18 GHz | 1% | (1) | | |
| Occupied Channel Bandwidth | 0.01 MHz ÷ 18 GHz | 2% | (1) | | | |
| Modulation Bandwidth | 0.01 MHz ÷ 18 GHz | 2% | (1) | | | |
| Radiated | Radiated spurious emissions | 0.009 MHz ÷ 26.5 GHz | 6.0 dB | (1) | | |
| | | 26.5 GHz ÷ 66 GHz | 8.0 dB | (1) | | |
| | | 66 GHz ÷ 220 GHz | 10 dB | (1) | | |
| | Effective radiated power transmitter | 10 kHz ÷ 26.5 GHz | 6.0 dB | (1) | | |
| | | 26.5 GHz ÷ 66 GHz | 8.0 dB | (1) | | |
| | | 66 GHz ÷ 220 GHz | 10 dB | (1) | | |
| Receiver | Radiated | Radiated spurious emissions | 0.009 MHz ÷ 26.5 GHz | 6.0 dB | (1) | |
| | | | 26.5 GHz ÷ 66 GHz | 8.0 dB | (1) | |
| | | | 66 GHz ÷ 220 GHz | 10 dB | (1) | |
| | Conducted | Sensitivity measurement | 1 MHz ÷ 18 GHz | 6.0 dB | (1) | |
| | | | Conducted spurious emissions | 0.009 MHz ÷ 18 GHz | 3.0 dB | (1) |
| | | | | 18 GHz ÷ 40 GHz | 4.2 dB | (1) |
| 40 GHz ÷ 220 GHz | 6.0 dB | (1) | | | | |

NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k = 2, which for a normal distribution corresponds to a coverage probability of approximately 95 %

Section 5: Test conditions, continued

5.4 Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------------|-----------------|---------------------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Vector Signal Generator | Keysight | N5182B MXG | MY61252595 | 2024-11 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |
| Spectrum Analyzer | Keysight | N9041B UXA | US57220208 | 2023-05 |
| Combiner | Miczen | MZP200506GA (0.5-6 GHz) | 210314001 | COU |
| Climatic Chambre | Angelantoni | ACS-Hygros 600 | 7237 | 2023-11 |
| Antenna Trilog 25MHz - 8GHz | Schwarzbeck | VULB9162 | 9162-025 | 2024-07 |
| Antenna 1-18 GHz | Schwarzbeck | STLP 9148 | STPL 9148-123 | 2024-06 |
| Double Ridge Horn Antenna | RFSpin | DRH40 | 061106A40 | 2023-04 |
| Broadband Amplifier | Schwarzbeck | BBV9718C | 00121 | 2023-03 |
| Broadband Bench Top Amplifier | Sage | STB-1834034030-KFKF-L1 | 18490-01 | 2023-05 |
| EMI Receiver | Rohde & Schwarz | ESW44 | 101620 | 2023-08 |
| Spectrum analyzer | R&S | FSW43 | 101767 | 2023-01 |
| Controller | Maturo | FCU3.0 | 10041 | NCR |
| Tilt antenna mast | Maturo | TAM4.0-E | 10042 | NCR |
| Turntable | Maturo | TT4.0-5T | 2.527 | NCR |
| Semi-anechoic chamber | Nemko | 10m semi-anechoic chamber | 530 | NCR |
| Shielded room | Siemens | 10m control room | 1947 | NCR |

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Appendix A: Test results

Clause 935210 D05v01r04 (3.2) AGC threshold

Measure of EUT AGC Threshold

Test date: 2022-11-11 to 2022-11-25

Test results: Pass

Special notes

–


Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------|--------------|------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |


Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Test data


RF PORT 1

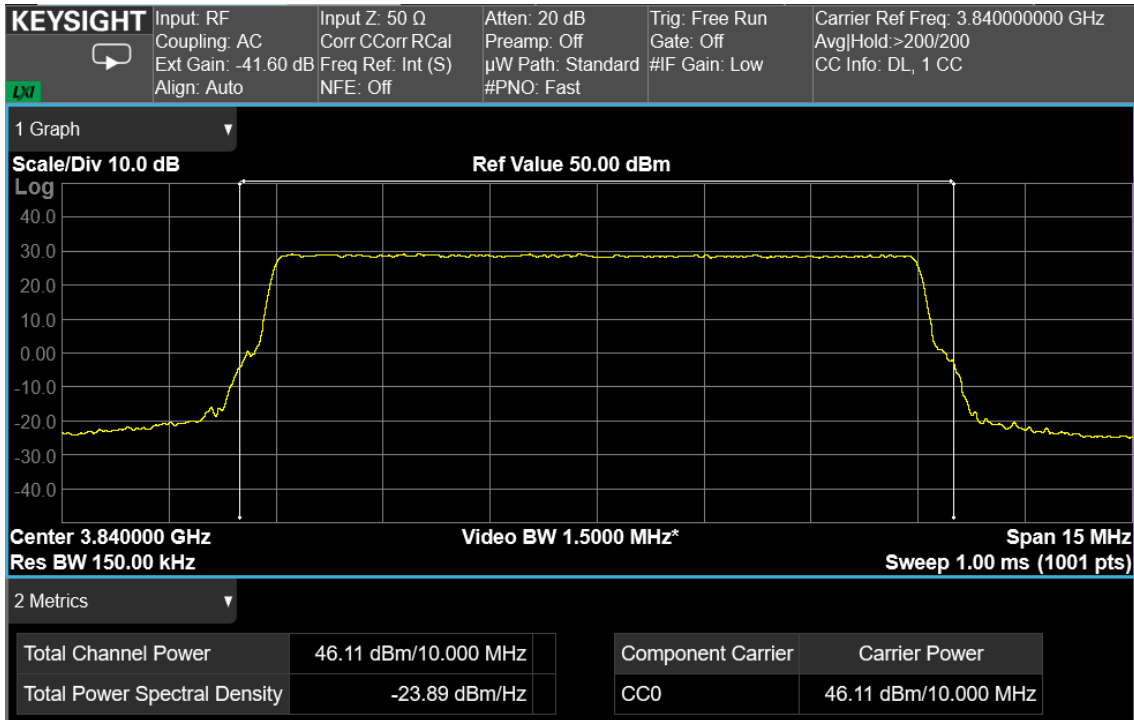


10 MHz signal, middle channel, nominal input signal

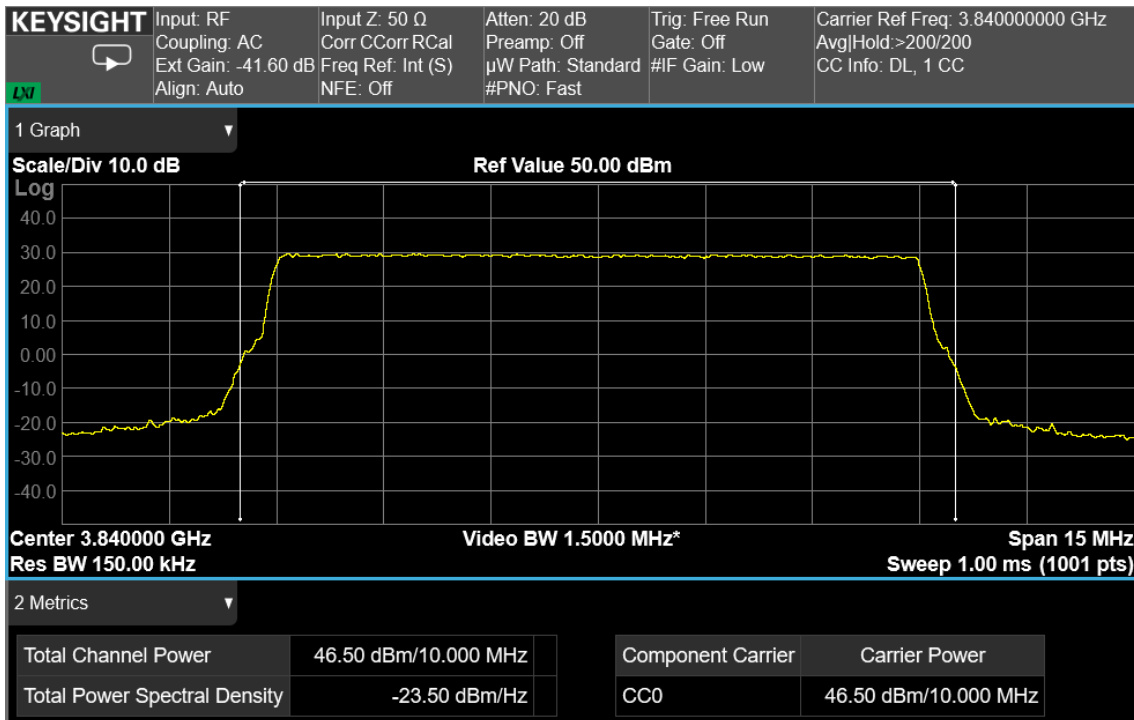

10 MHz signal, middle channel, nominal input signal +1 dB

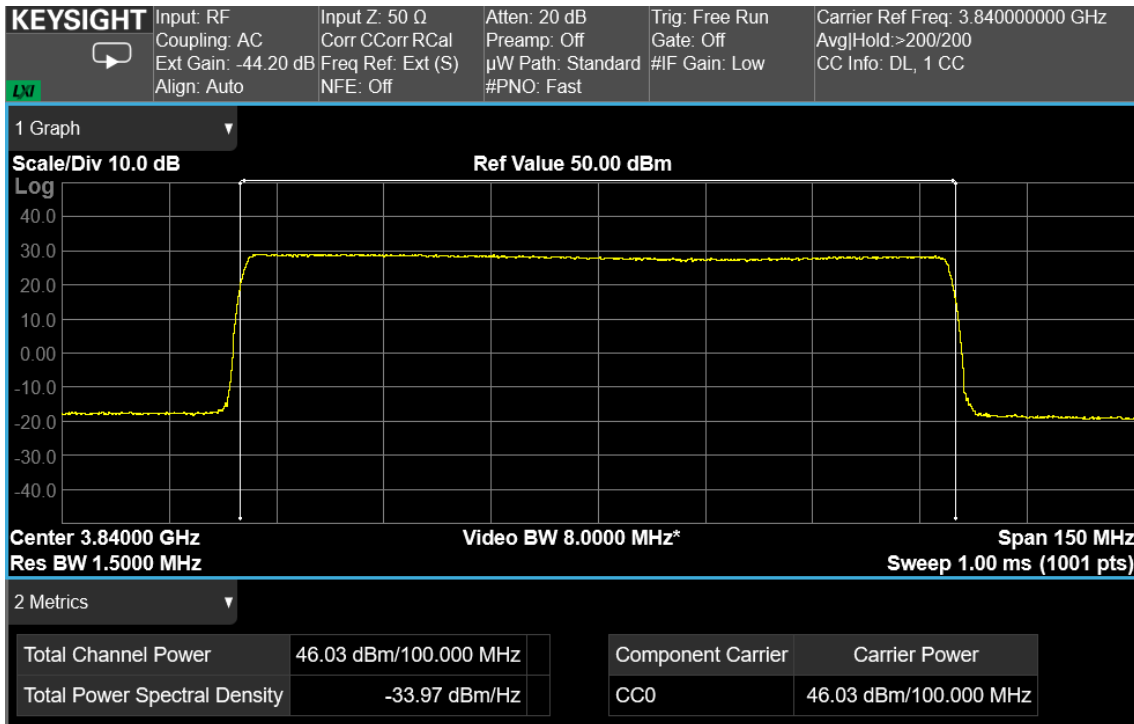


100 MHz signal, middle channel, nominal input signal

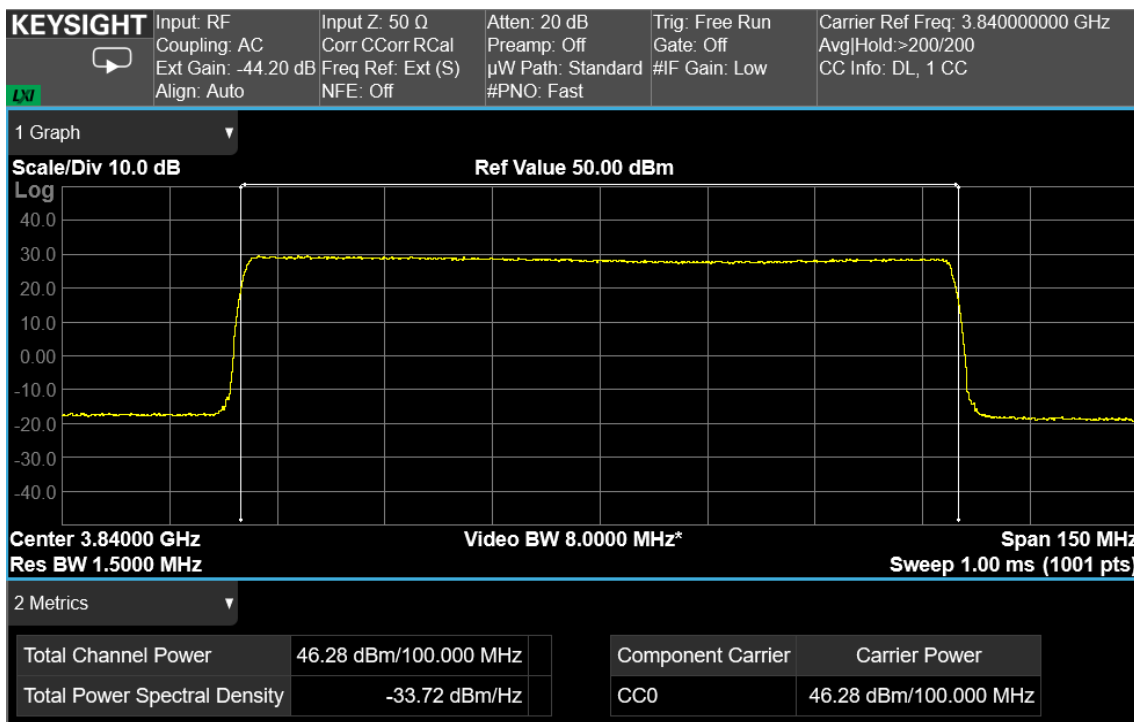


100 MHz signal, middle channel, nominal input signal +1 dB


RF PORT 2

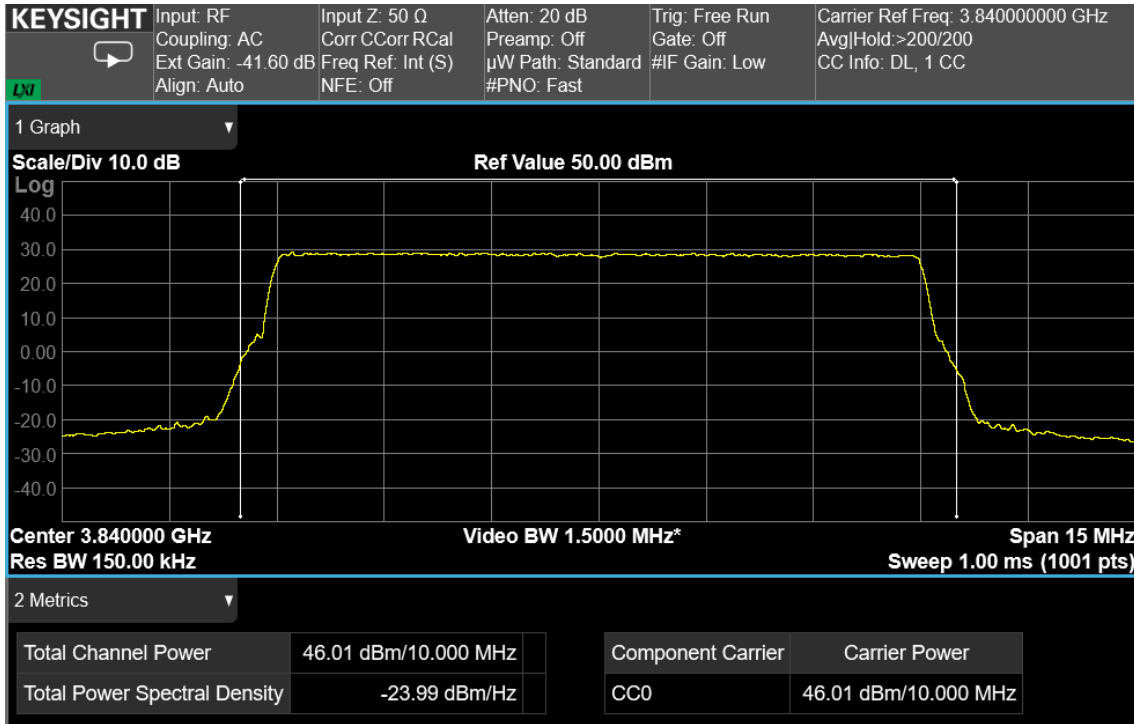


10 MHz signal, middle channel, nominal input signal

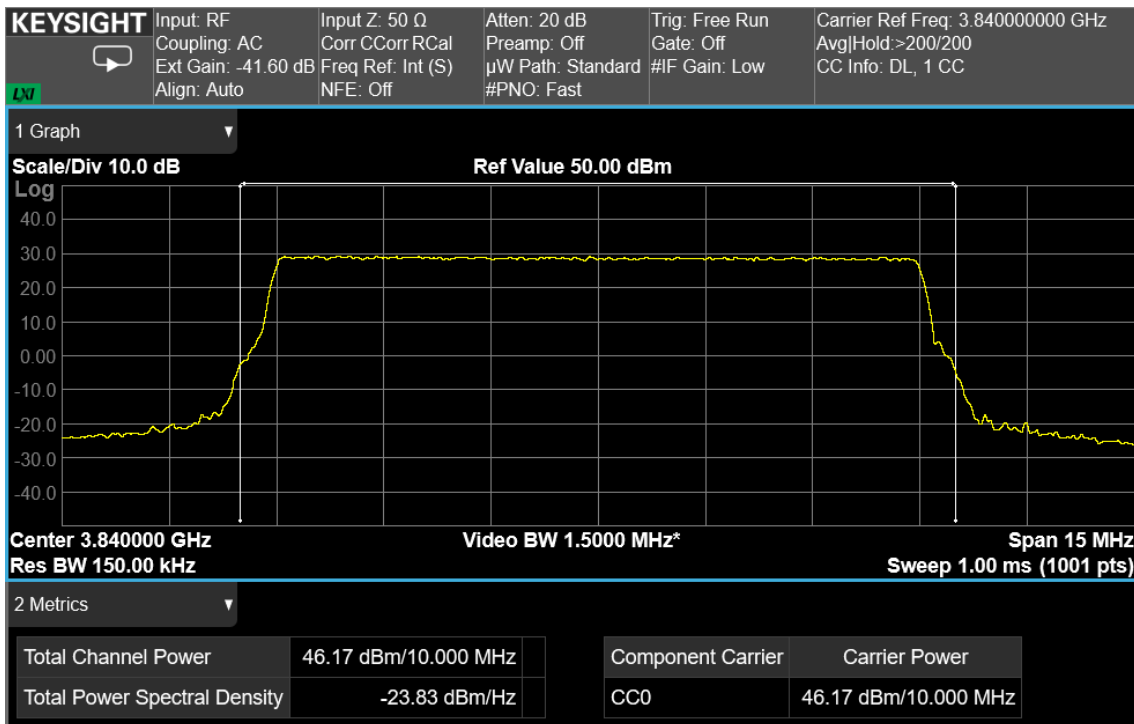

10 MHz signal, middle channel, nominal input signal +1 dB

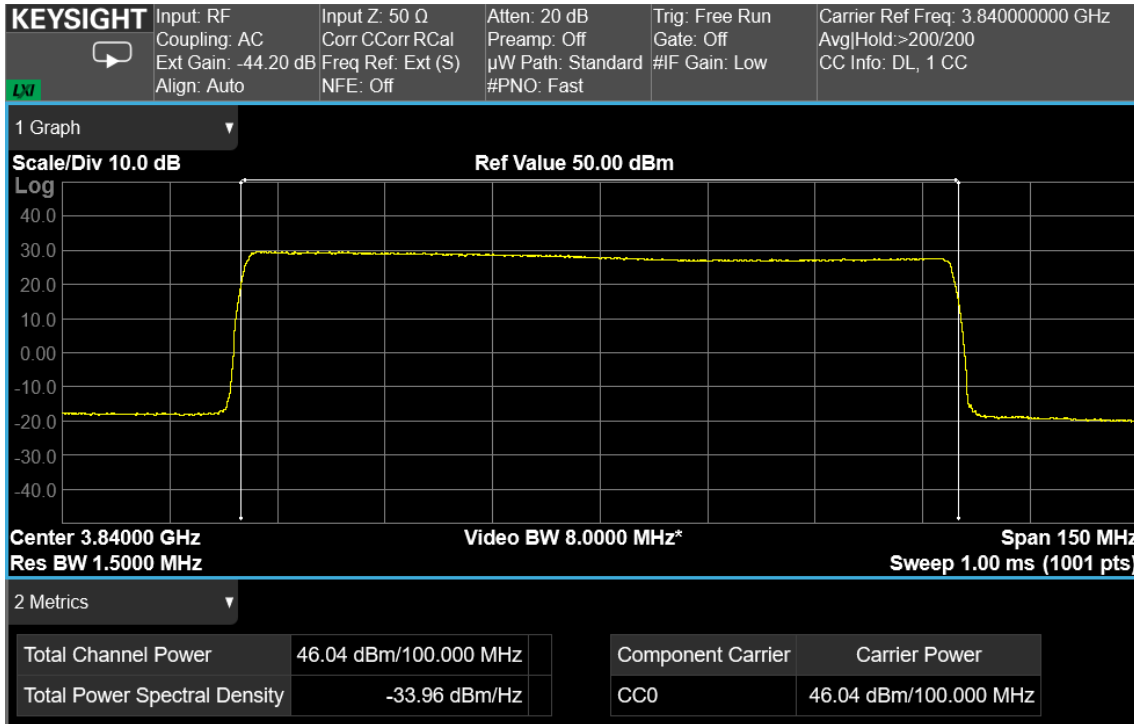

100 MHz signal, middle channel, nominal input signal

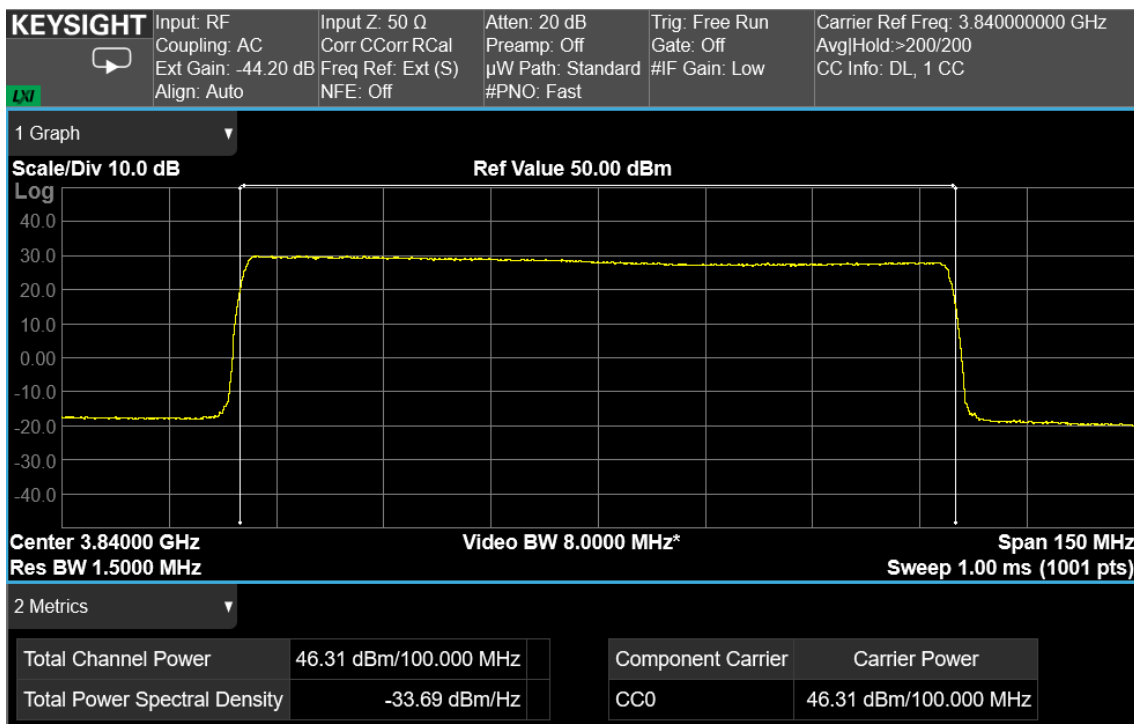

100 MHz signal, middle channel, nominal input signal +1 dB

Clause 935210 D05v01r04 (3.3) Out of band rejection

Out of Band Rejection – Test for rejection of out of band signals.

Test date: 2022-11-11 to 2022-11-25

Test results: Pass

Special notes

–


Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------|--------------|------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |


Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Test data

RF PORT 1

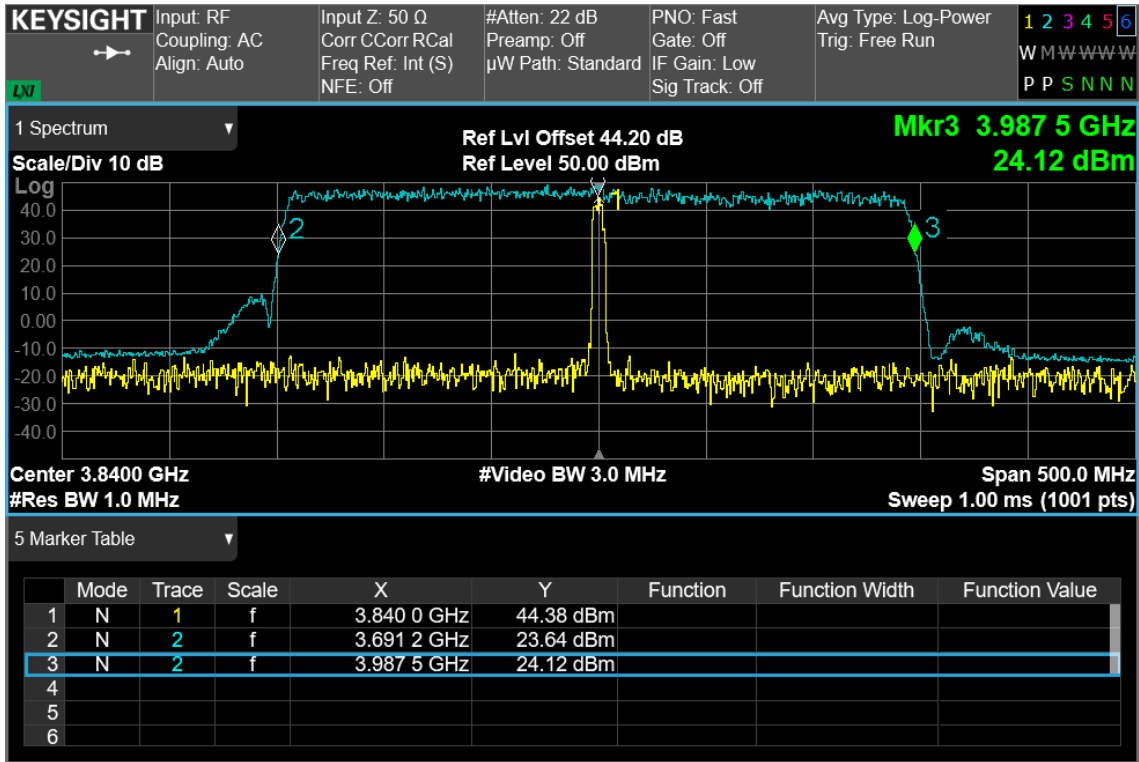

RF PORT 2

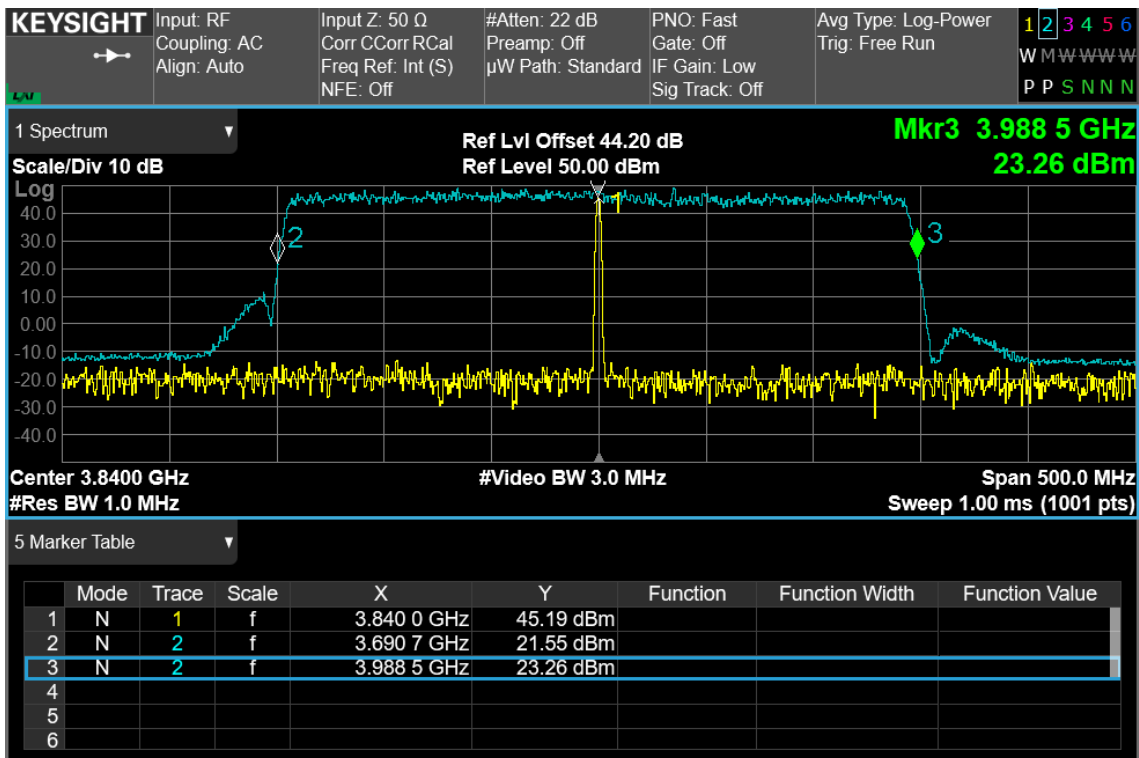

Clause 27.53(I)(1) Occupied bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 2022-11-11 to 2022-11-25

Test results: Pass

Special notes

-


Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------|--------------|------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |


Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Test data


RF PORT 1

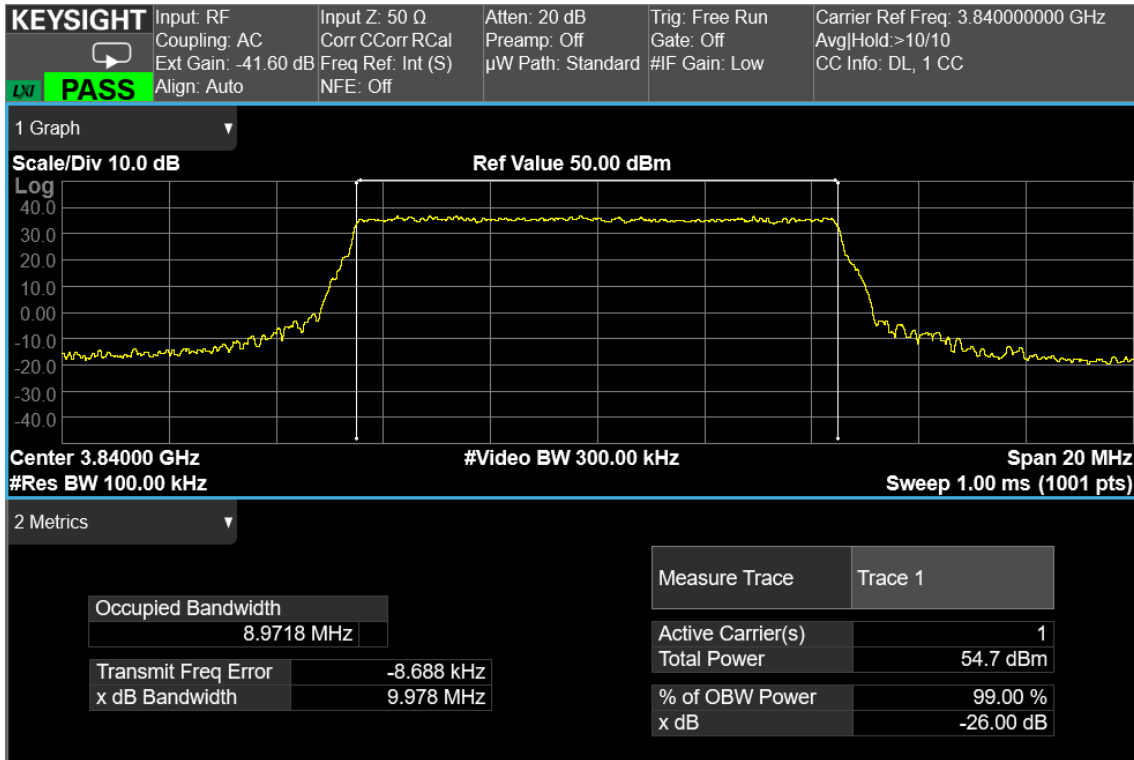


10 MHz signal, middle channel, nominal input signal - Output

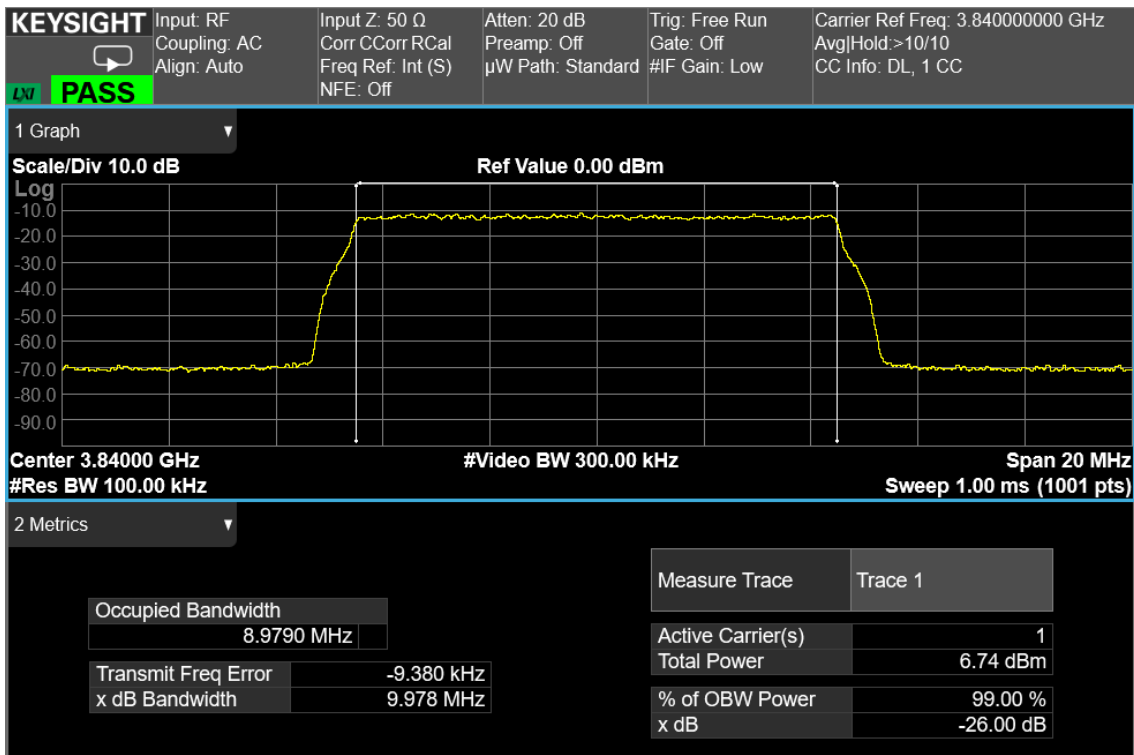


10 MHz signal, middle channel, nominal input signal - Input

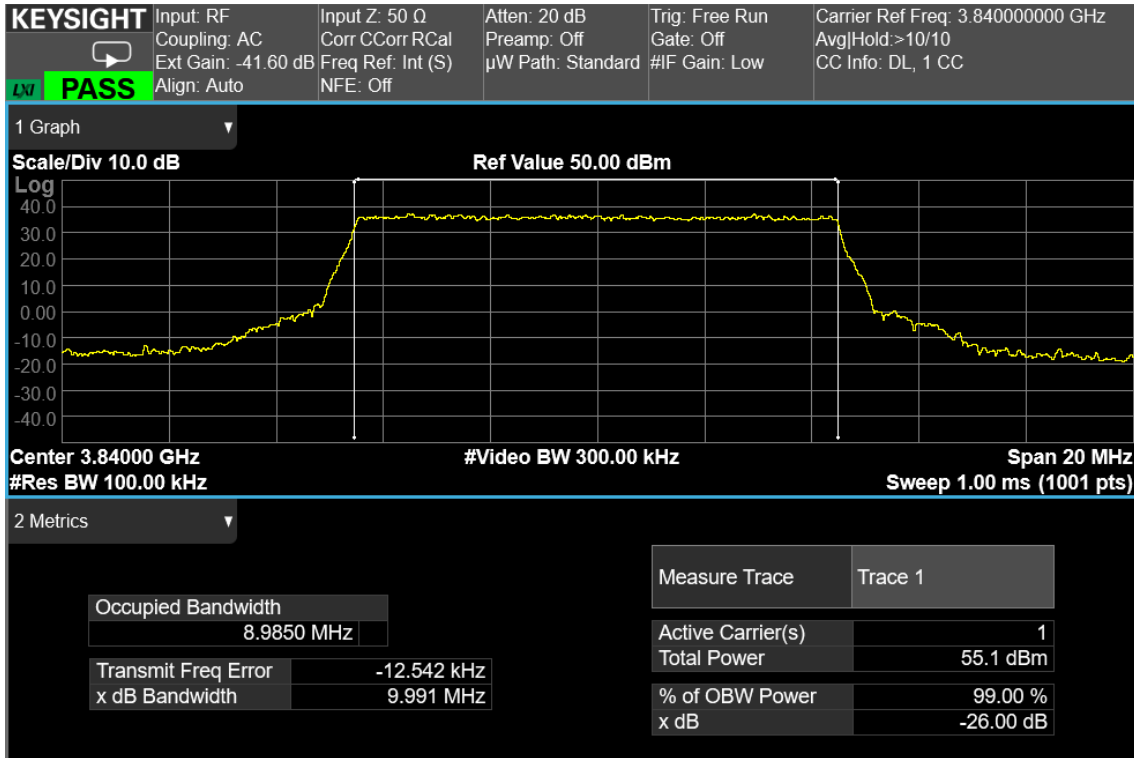


10 MHz signal, middle channel, nominal input signal + 3dB - Output

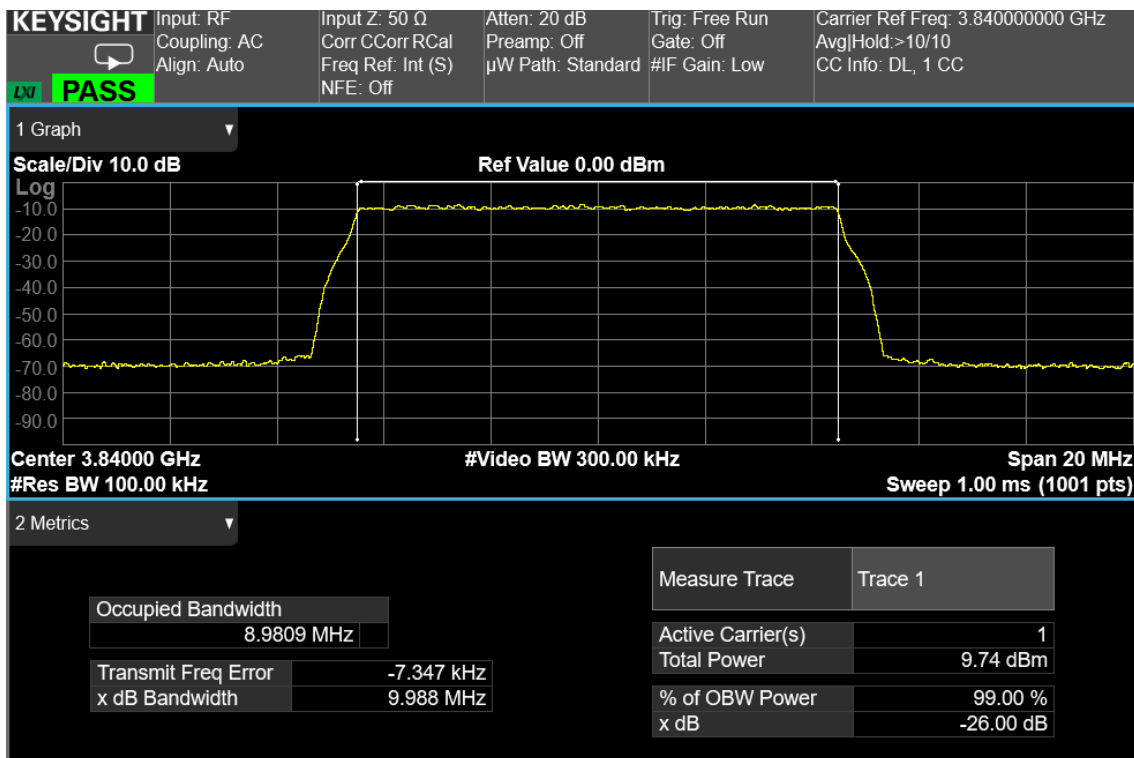


10 MHz signal, middle channel, nominal input signal + 3dB - Input

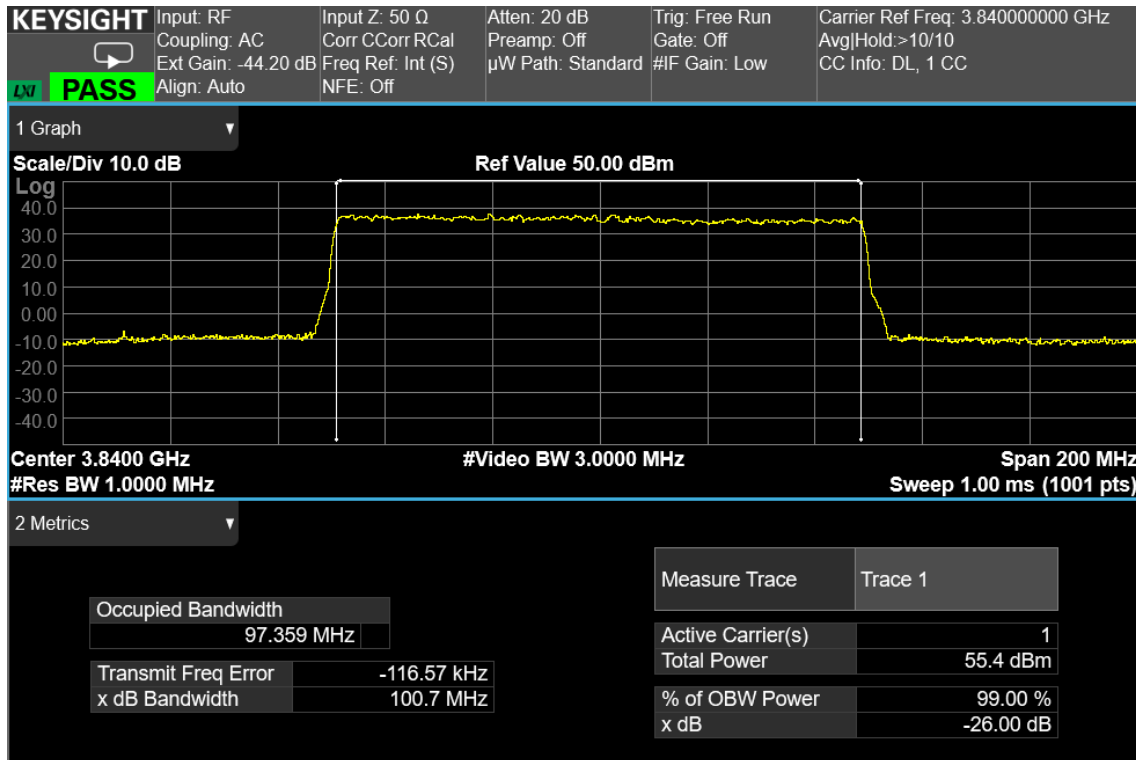


100 MHz signal, middle channel, nominal input signal - Output

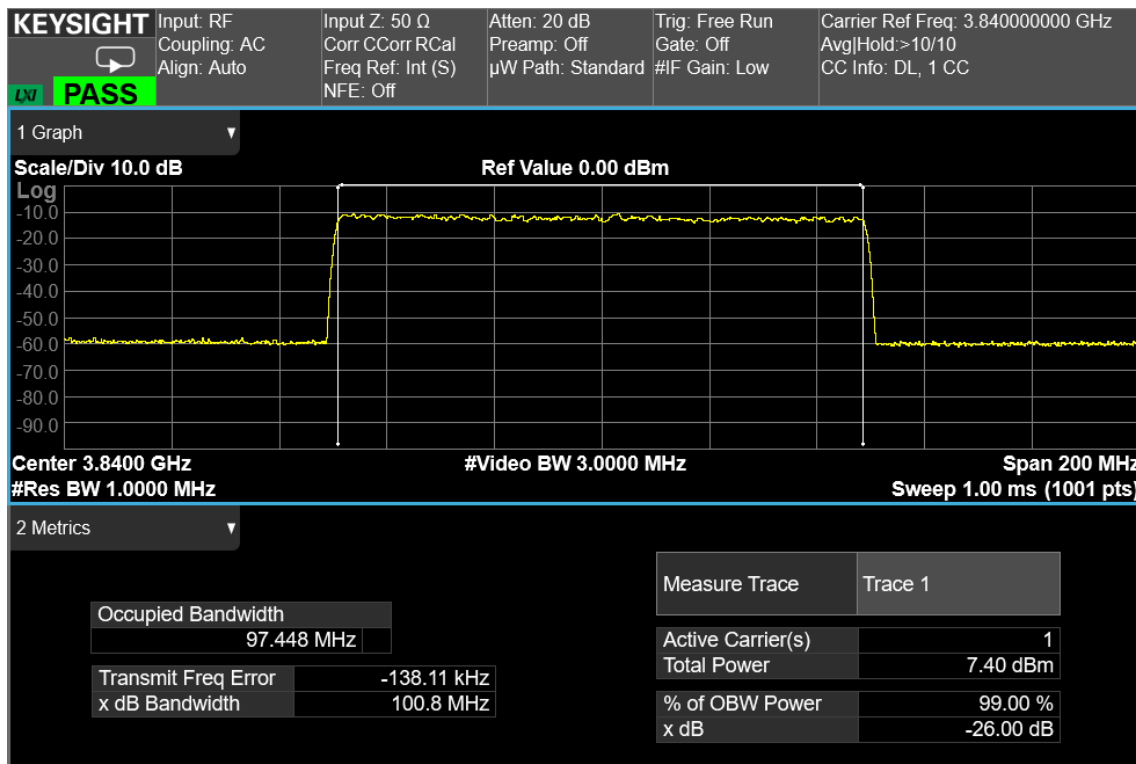

100 MHz signal, middle channel, nominal input signal - Input

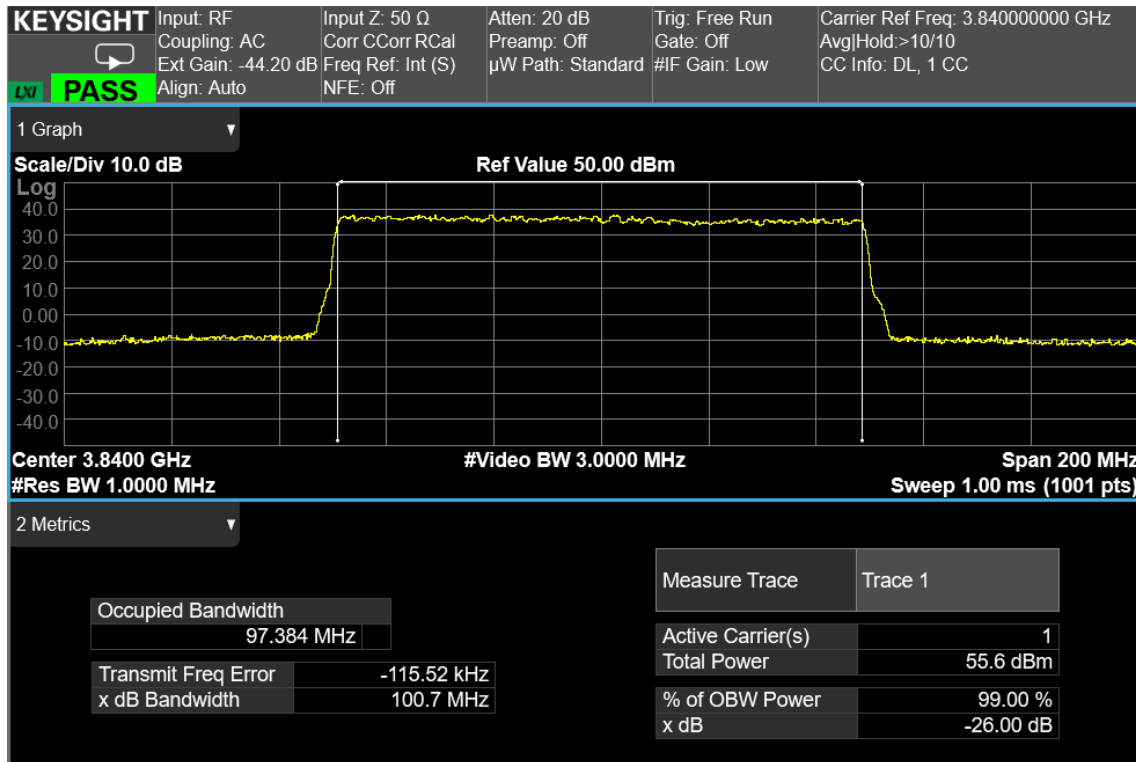


100 MHz signal, middle channel, nominal input signal + 3dB - Output

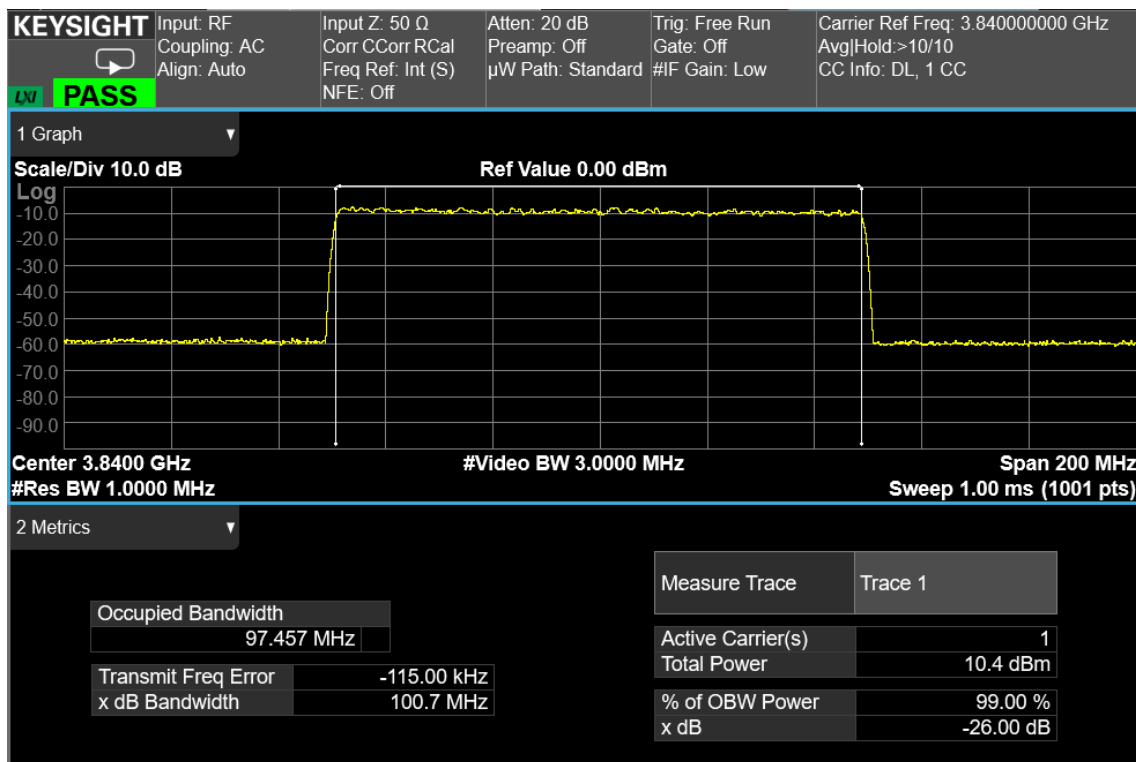


100 MHz signal, middle channel, nominal input signal + 3dB - Input


RF PORT 2

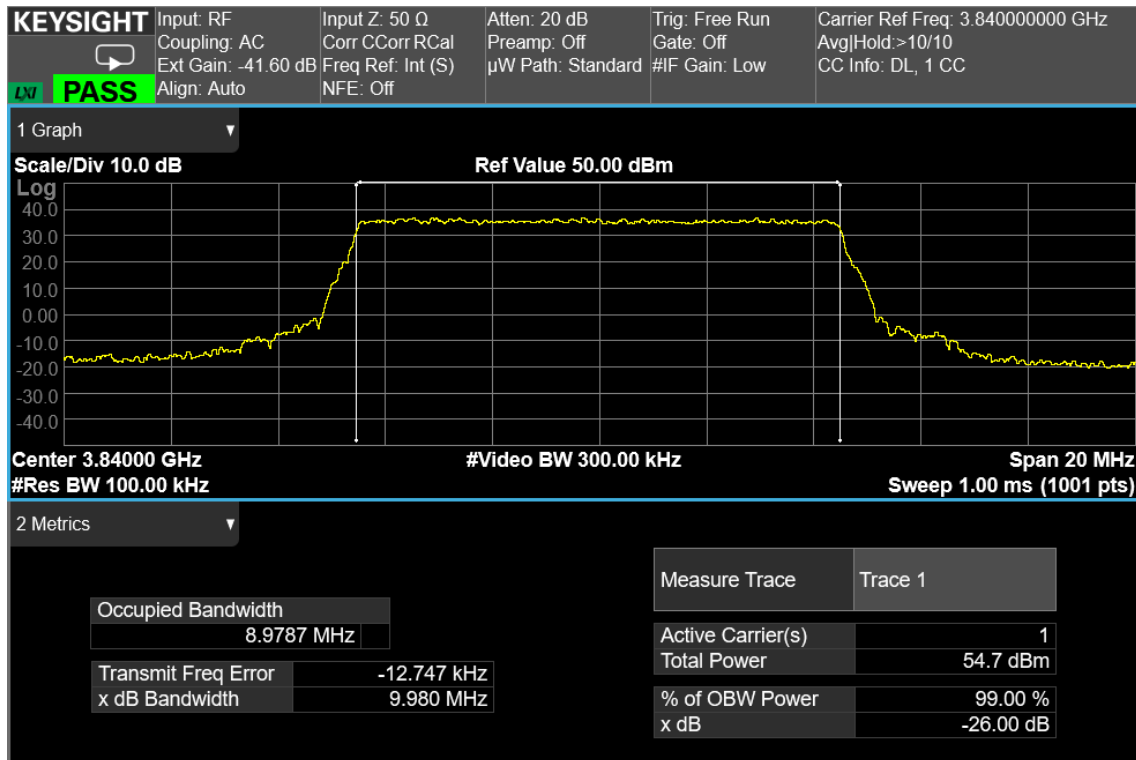


10 MHz signal, middle channel, nominal input signal - Output

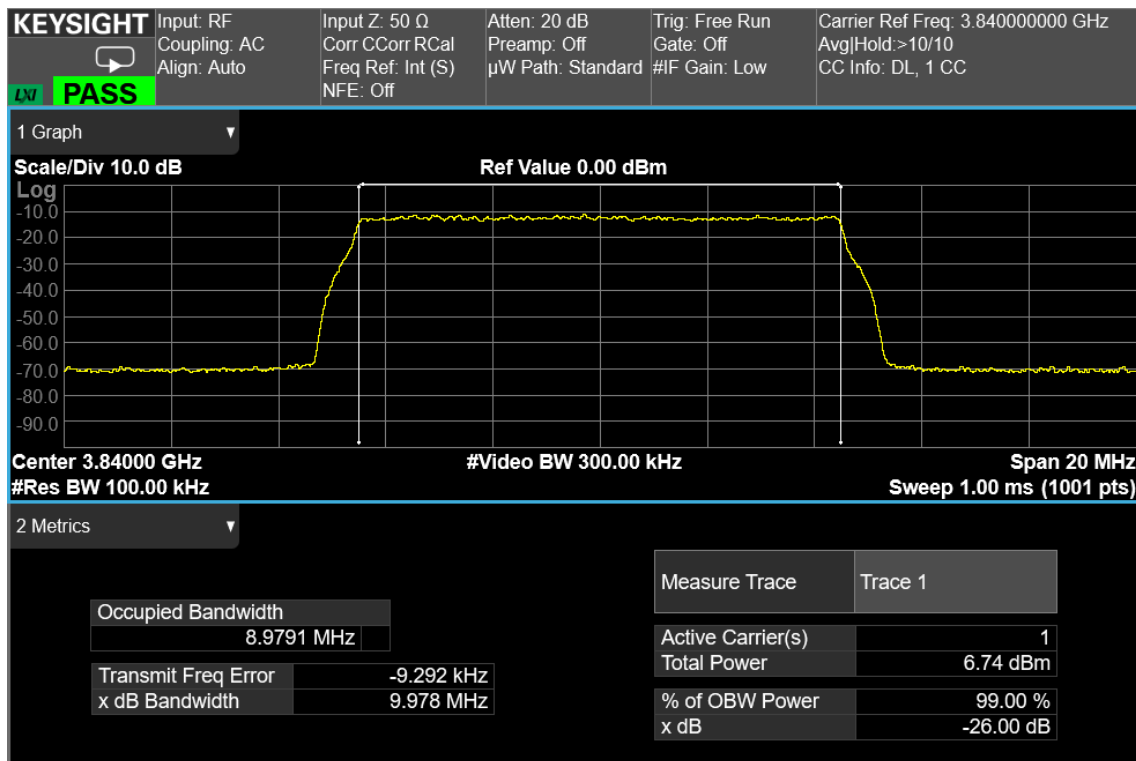


10 MHz signal, middle channel, nominal input signal – Input

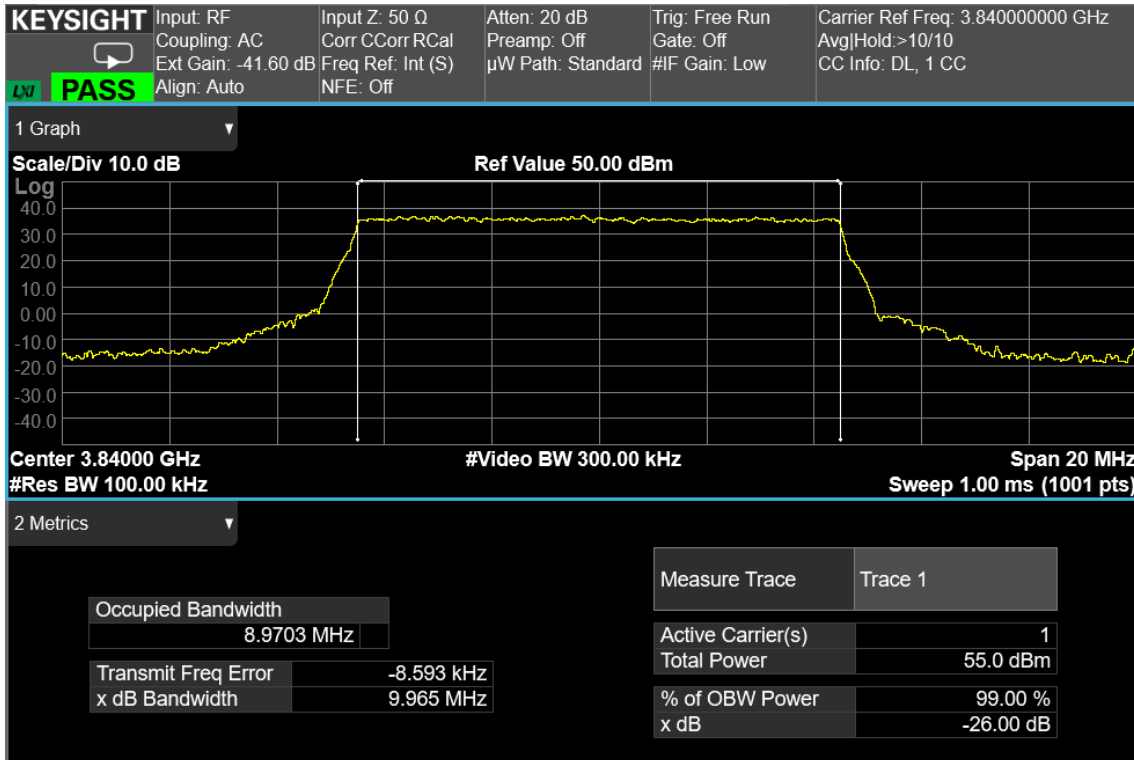


10 MHz signal, middle channel, nominal input signal + 3dB - Output

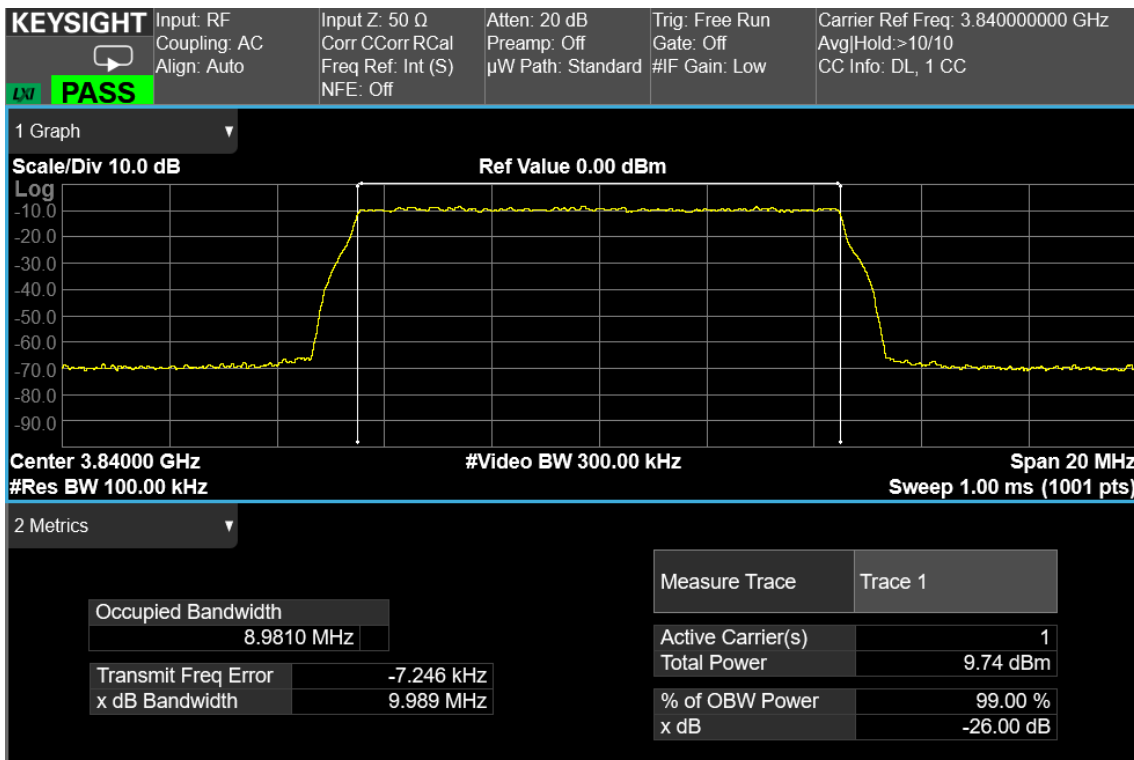


10 MHz signal, middle channel, nominal input signal + 3dB - Input

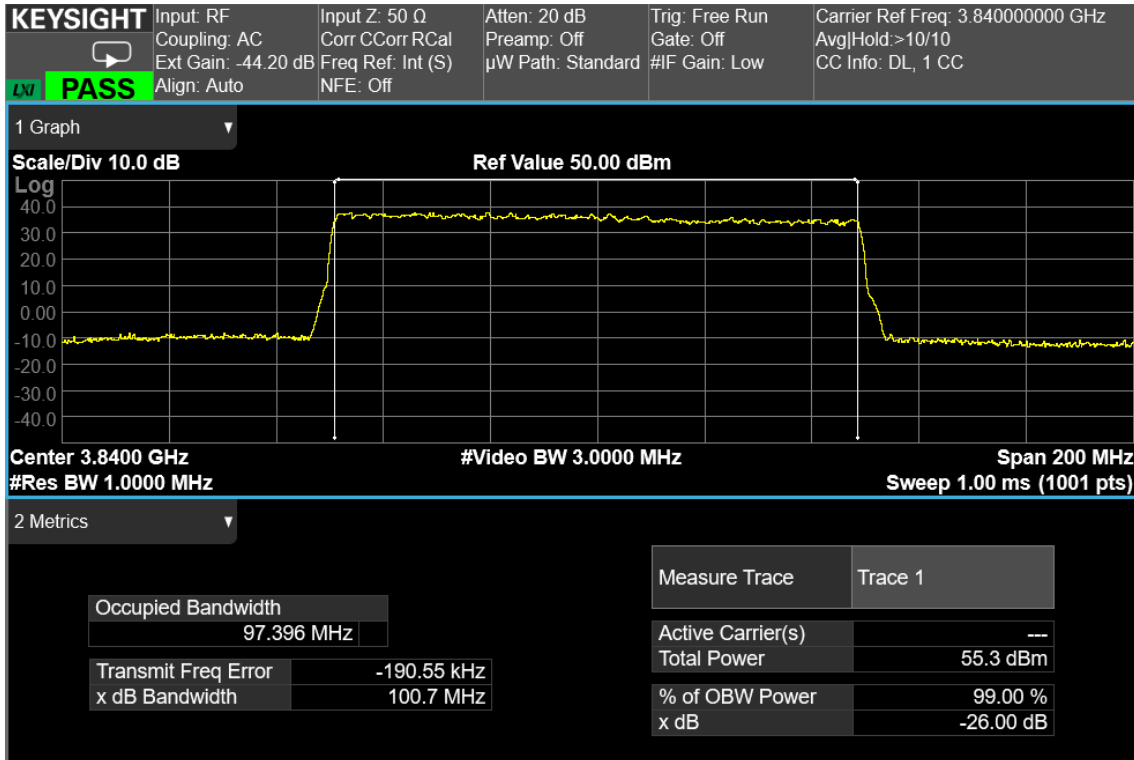


100 MHz signal, middle channel, nominal input signal - Output

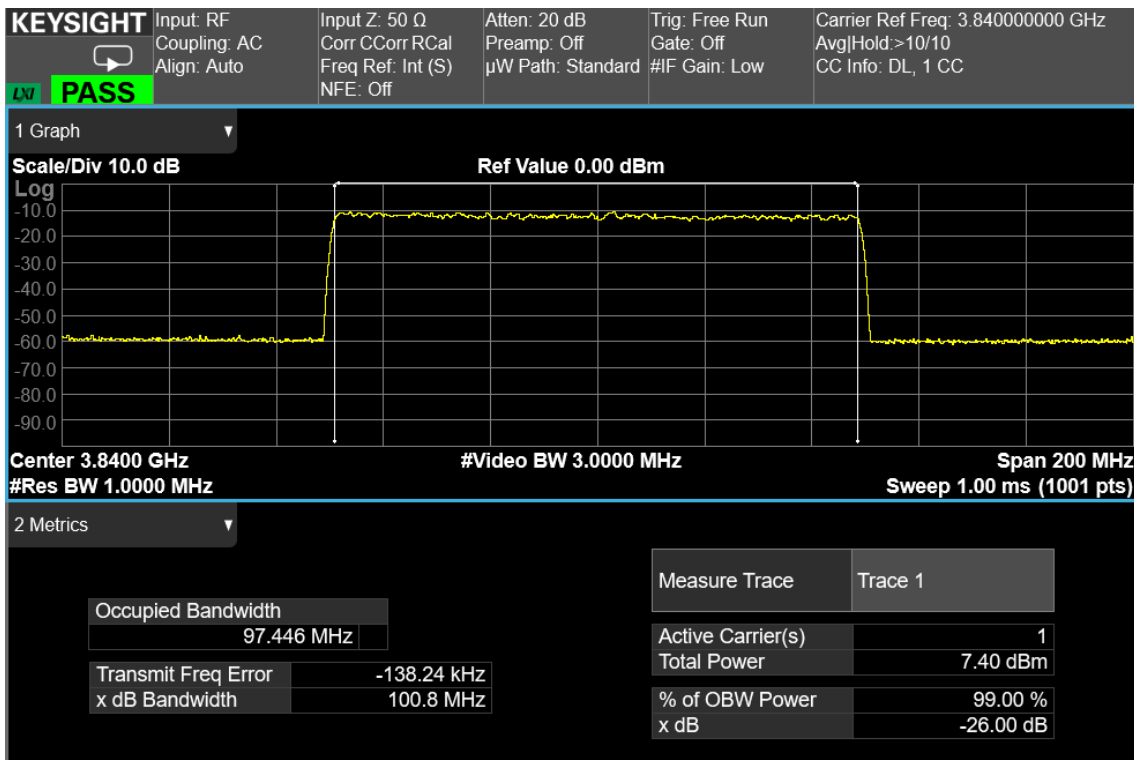

100 MHz signal, middle channel, nominal input signal - Input

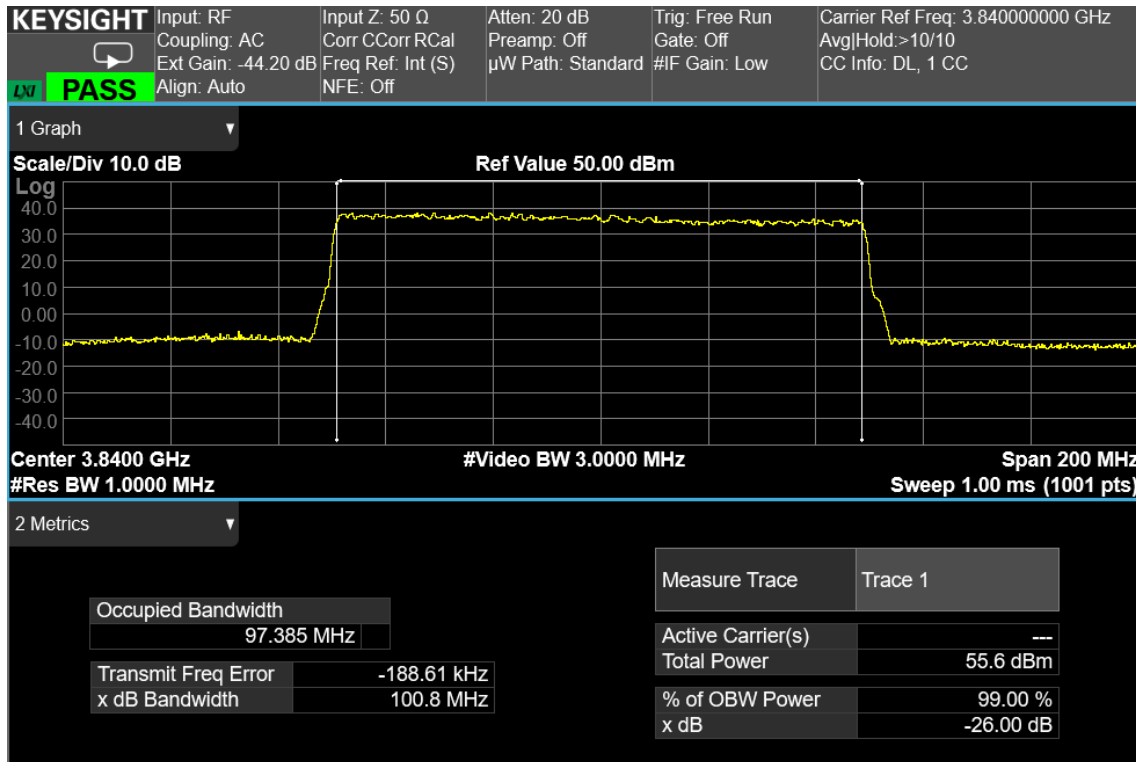

100 MHz signal, middle channel, nominal input signal + 3dB - Output

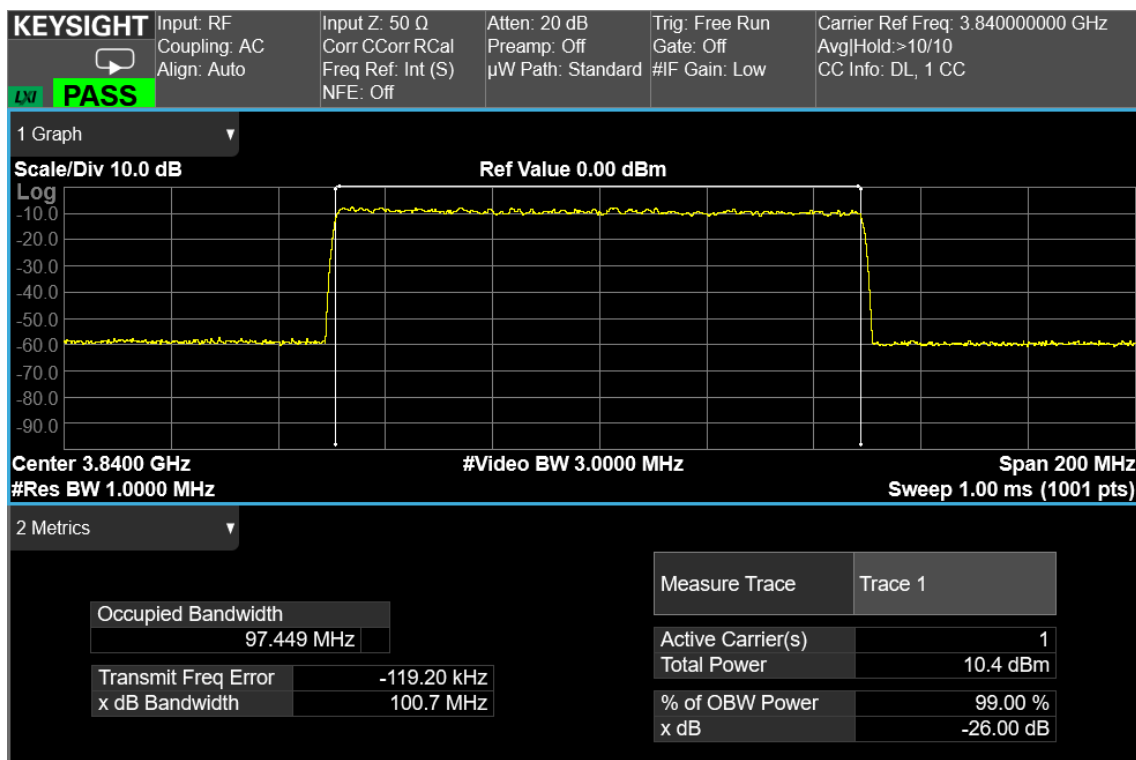

100 MHz signal, middle channel, nominal input signal + 3dB - Input

Clause 27.50(j) Peak output power at RF antenna connector

§ 27.50(j) The following power requirements apply to stations transmitting in the 3700-3980MHz band:

- (1) The power of each fixed or base station transmitting in the 3700-3980 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to an equivalent isotropically radiated power (EIRP) of 3280 Watts/MHz. This limit applies to the aggregate power of all antenna elements in any given sector of a base station.
- (2) The power of each fixed or base station transmitting in the 3700-3980 MHz band and situated in any geographic location other than that described in paragraph (j)(1) of this section is limited to an EIRP of 1640 Watts/MHz. This limit applies to the aggregate power of all antenna elements in any given sector of a base station.
- (4) Equipment employed must be authorized in accordance with the provisions of §27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (j)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
- (5) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, and any other relevant factors, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Test date: 2022-11-11 to 2022-11-25

Test results: Pass

Special notes

-

Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------|--------------|------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Test data

RF PORT 1



AWGN signal, nominal input signal

| Test data | | | | | | |
|-----------|----------------|-----------------|-----------------------|-----------------------------|-------------------------|----------|
| Direction | Modulation | Frequency (MHz) | RF output Power (dBm) | RF output channel Power (W) | RF output Power (W/MHz) | PAR (dB) |
| Down-link | 5G NR, 10 MHz | 3840.0 | 46.1 | 40.7 | 4.1 | 8.50 |
| Down-link | 5G NR, 100 MHz | 3840.0 | 46.0 | 40.0 | 0.4 | 8.61 |



AWGN signal, nominal input signal + 3dB

| Test data | | | | | | |
|-----------|----------------|-----------------|-----------------------|-----------------------------|-------------------------|----------|
| Direction | Modulation | Frequency (MHz) | RF output Power (dBm) | RF output channel Power (W) | RF output Power (W/MHz) | PAR (dB) |
| Down-link | 5G NR, 10 MHz | 3840.0 | 46.5 | 44.7 | 4.5 | 8.16 |
| Down-link | 5G NR, 100 MHz | 3840.0 | 46.2 | 41.7 | 0.4 | 8.27 |



Note: PAR measure is performed by the “CCDF” function installed on Spectrum analyzer that provides average power (the same measured with “Channel power” function), peak power and PAR.

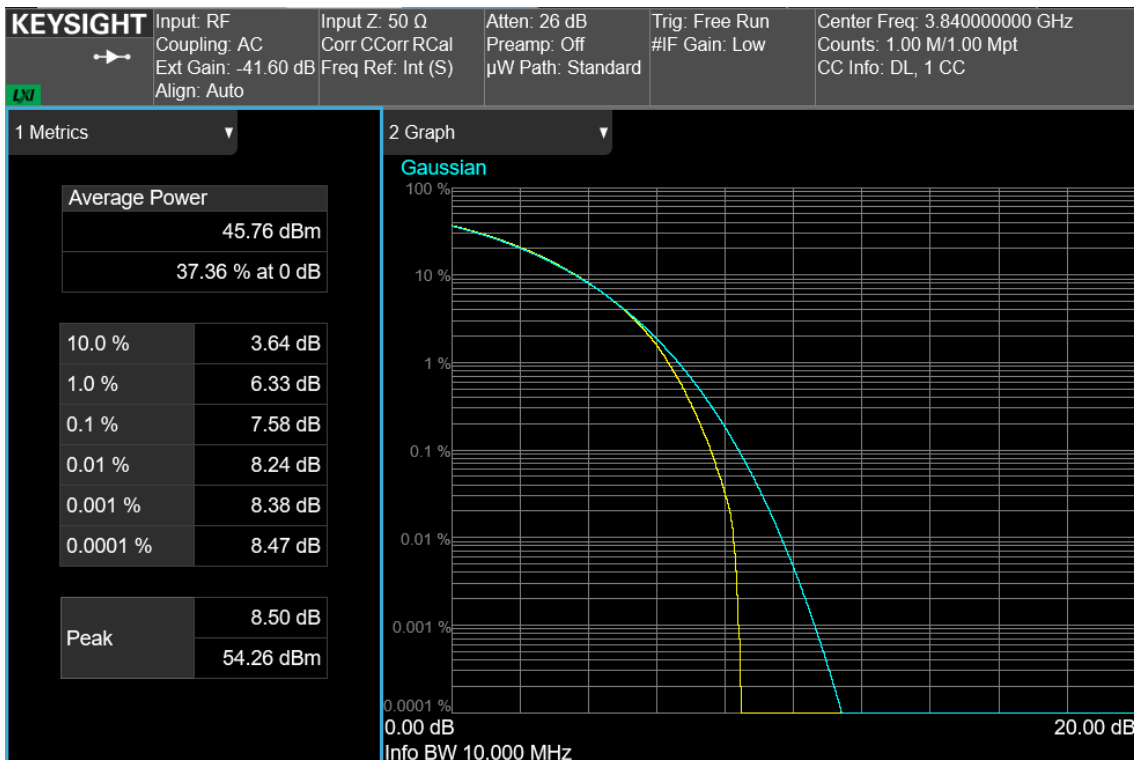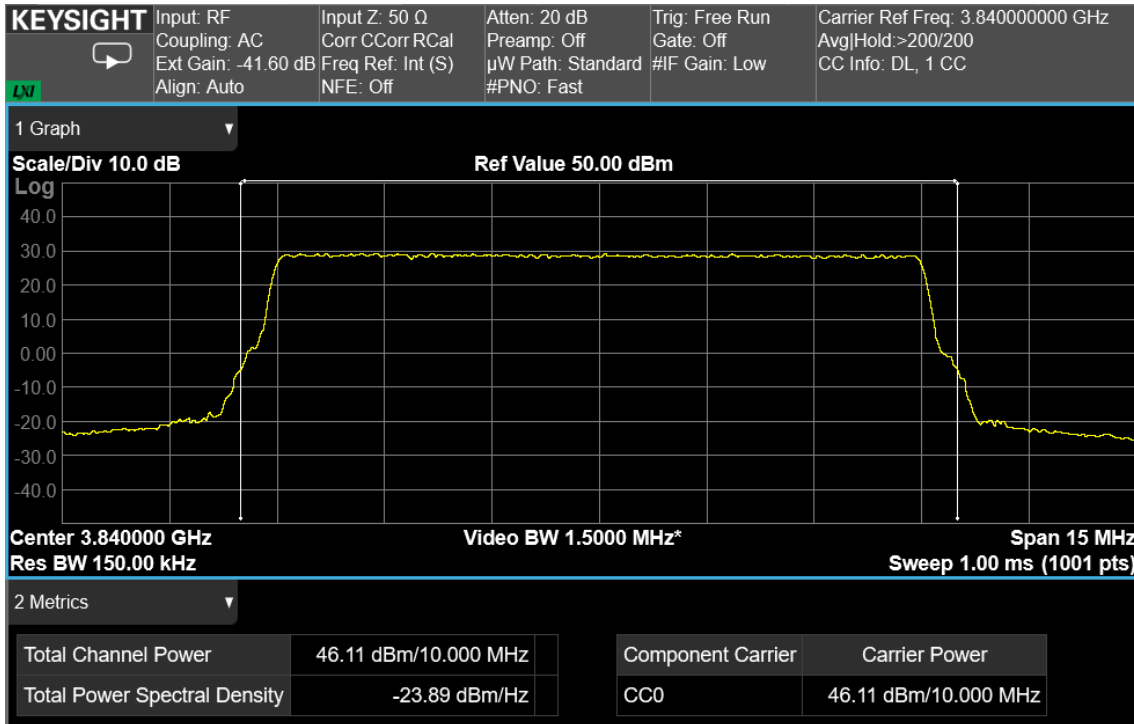



10 MHz signal, middle channel, nominal input signal

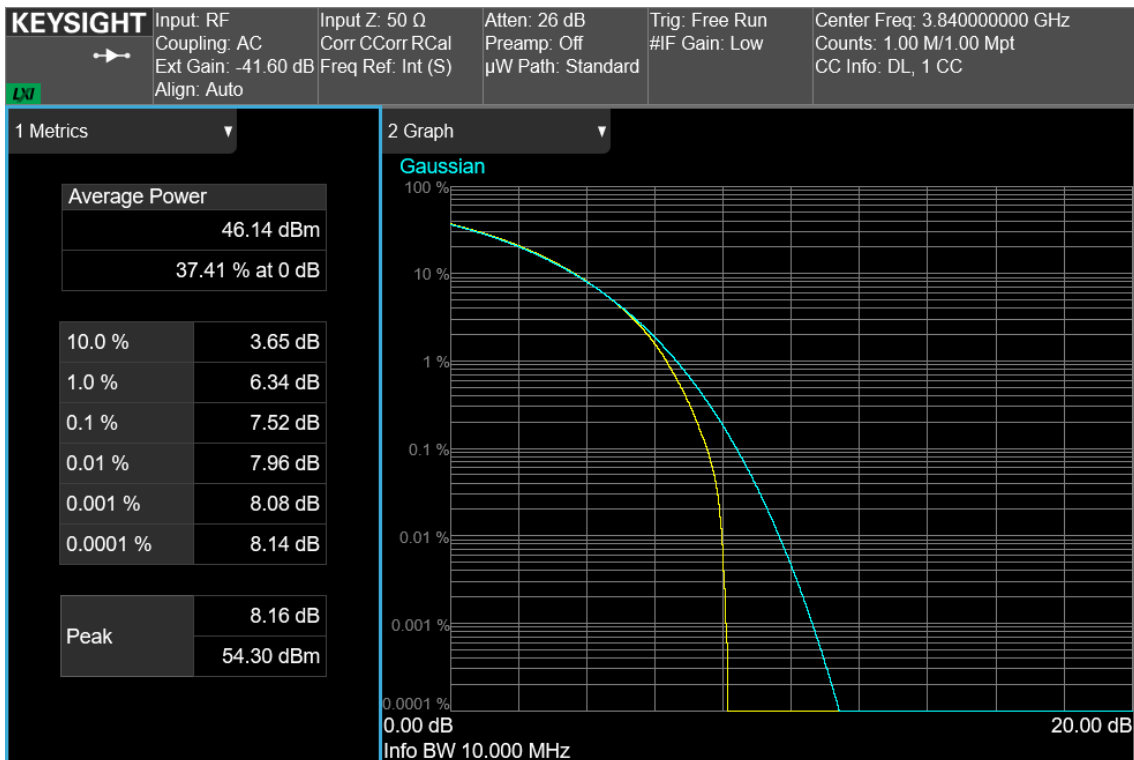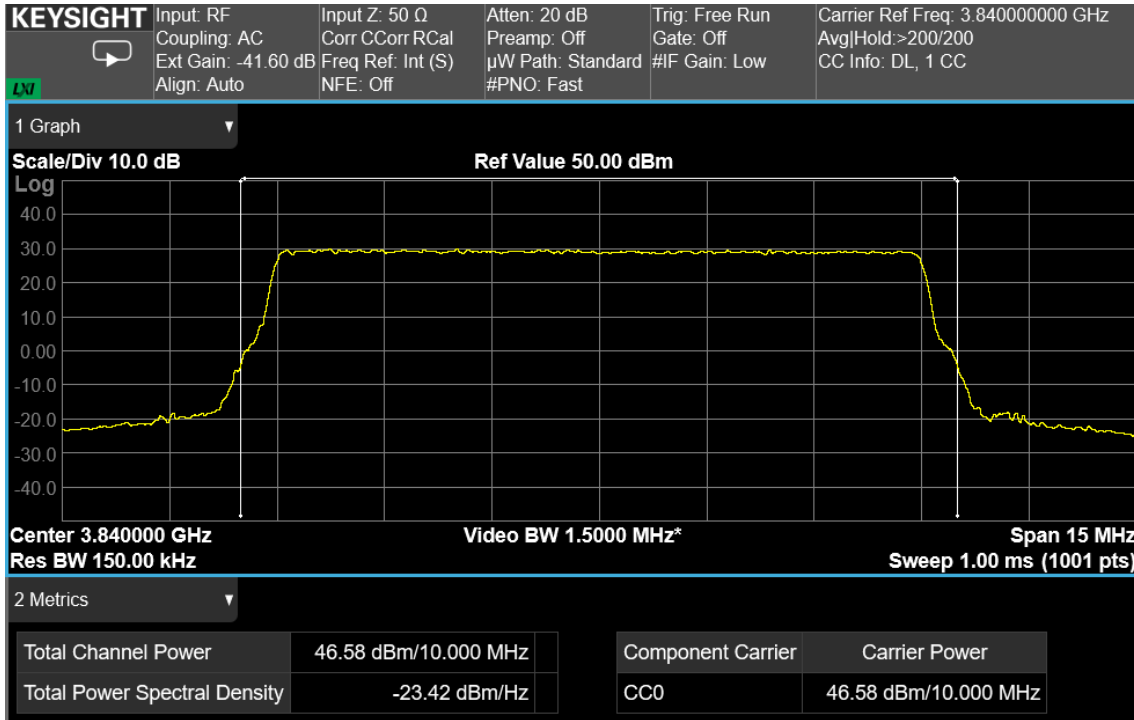

10 MHz signal, middle channel, nominal input signal + 3dB

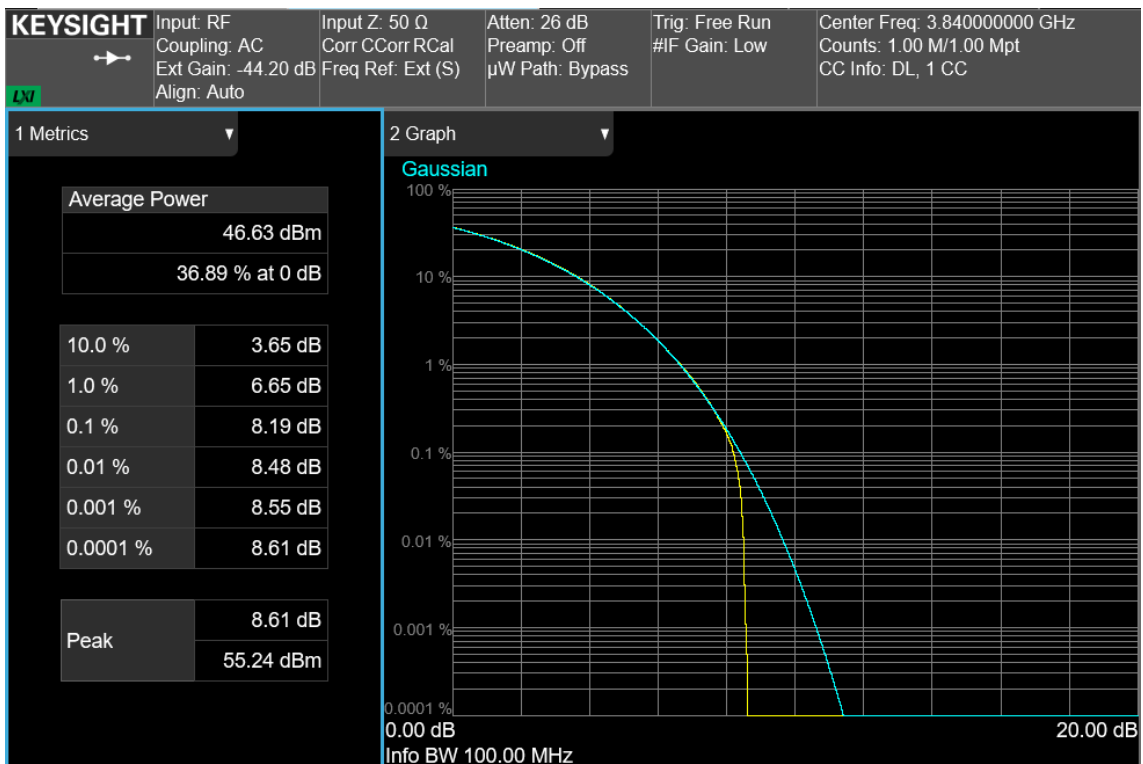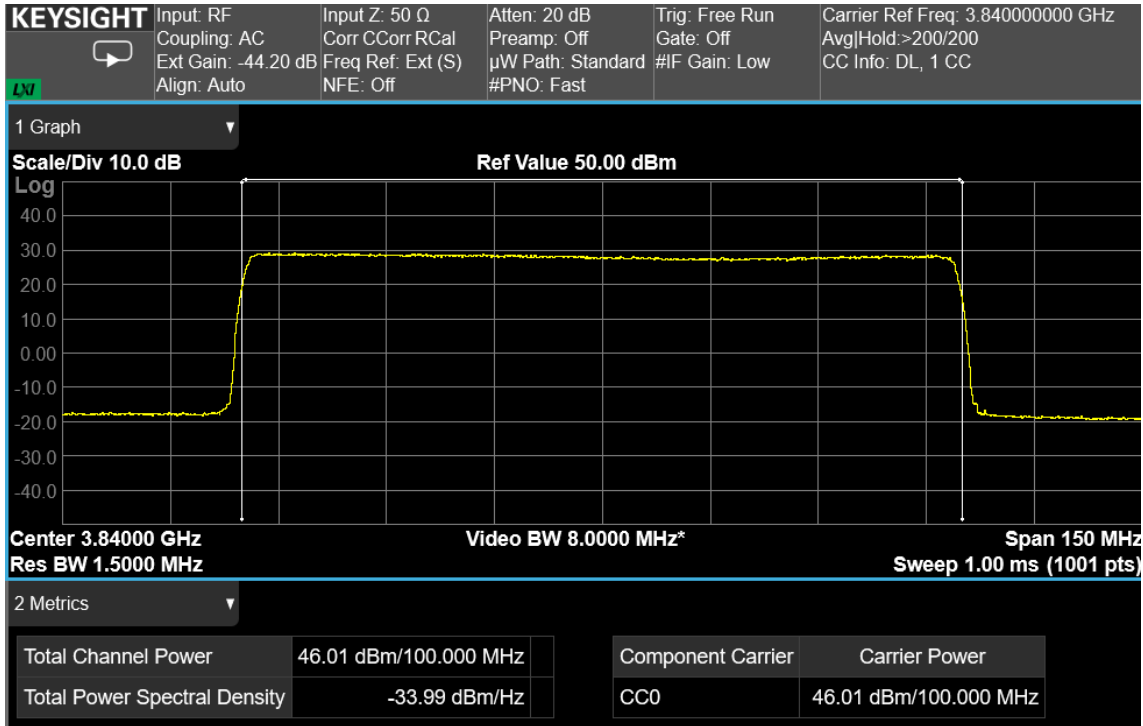

100 MHz signal, middle channel, nominal input signal

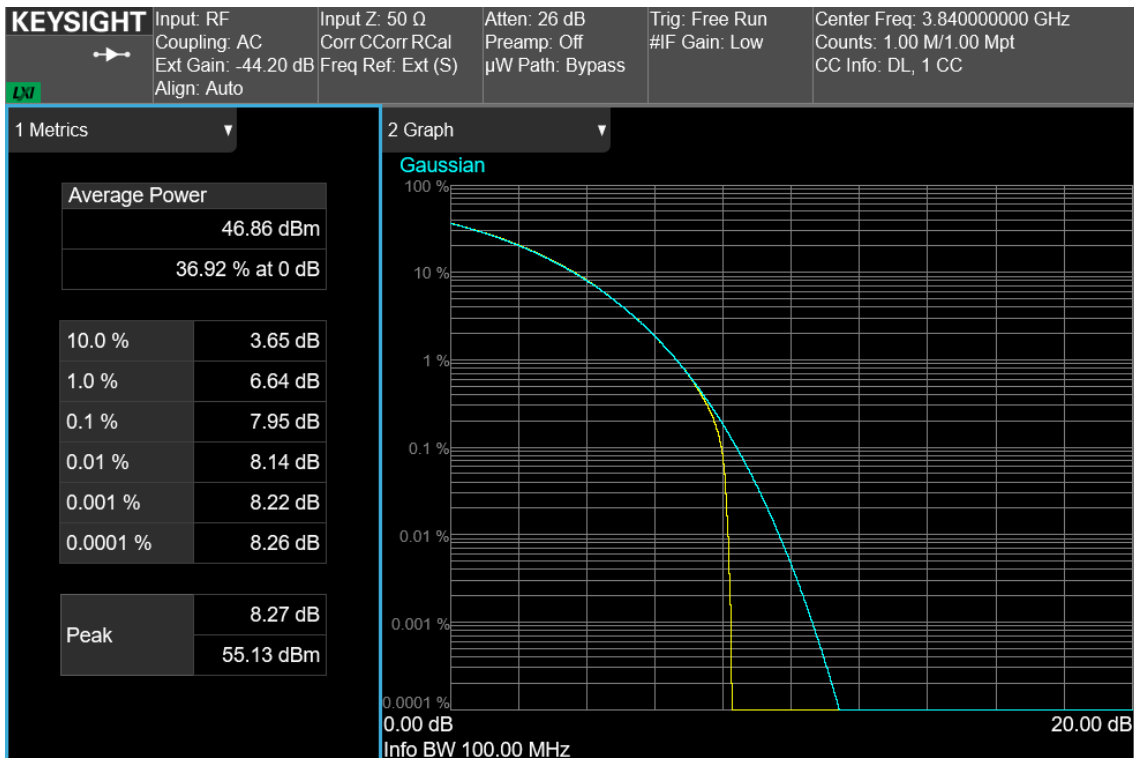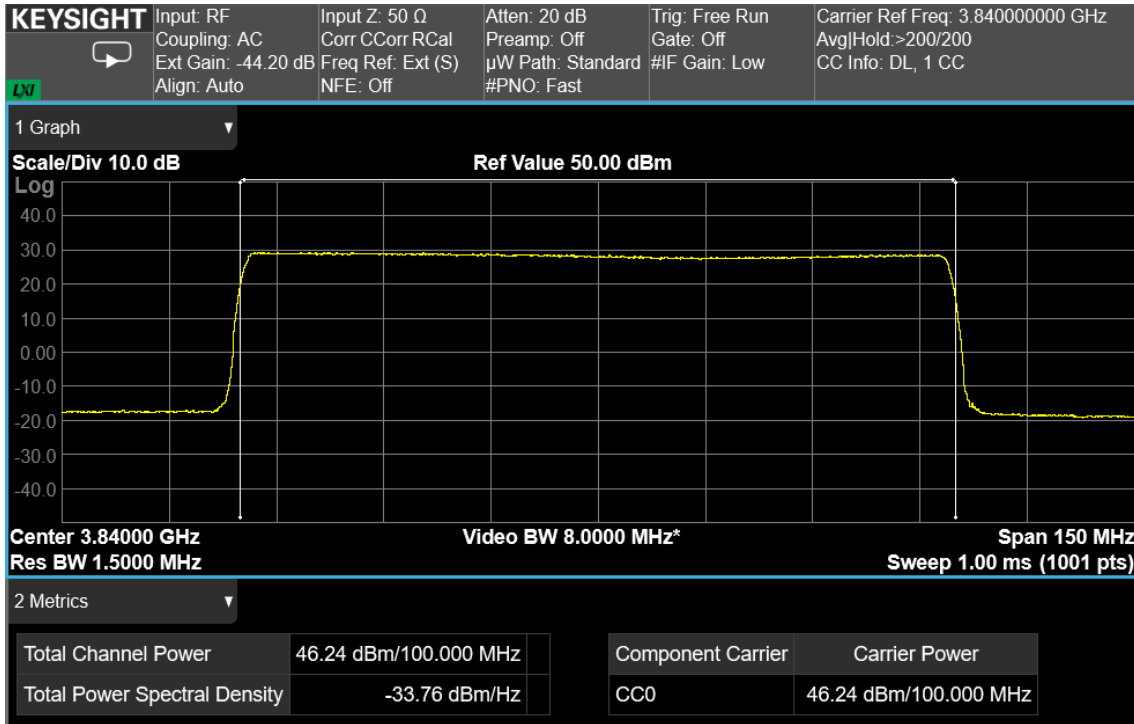

100 MHz signal, middle channel, nominal input signal + 3dB

RF PORT 2



AWGN signal, nominal input signal

| Test data | | | | | | |
|-----------|----------------|-----------------|-----------------------|-----------------------------|-------------------------|----------|
| Direction | Modulation | Frequency (MHz) | RF output Power (dBm) | RF output channel Power (W) | RF output Power (W/MHz) | PAR (dB) |
| Down-link | 5G NR, 10 MHz | 3840.0 | 46.0 | 40.0 | 4.0 | 8.62 |
| Down-link | 5G NR, 100 MHz | 3840.0 | 46.0 | 40.0 | 0.4 | 8.74 |



AWGN signal, nominal input signal + 3dB

| Test data | | | | | | |
|-----------|----------------|-----------------|-----------------------|-----------------------------|-------------------------|----------|
| Direction | Modulation | Frequency (MHz) | RF output Power (dBm) | RF output channel Power (W) | RF output Power (W/MHz) | PAR (dB) |
| Down-link | 5G NR, 10 MHz | 3840.0 | 46.2 | 41.7 | 4.2 | 8.19 |
| Down-link | 5G NR, 100 MHz | 3840.0 | 46.3 | 42.7 | 0.4 | 8.35 |



Note: PAR measure is performed by the “CCDF” function installed on Spectrum analyzer that provides average power (the same measured with “Channel power” function), peak power and PAR.

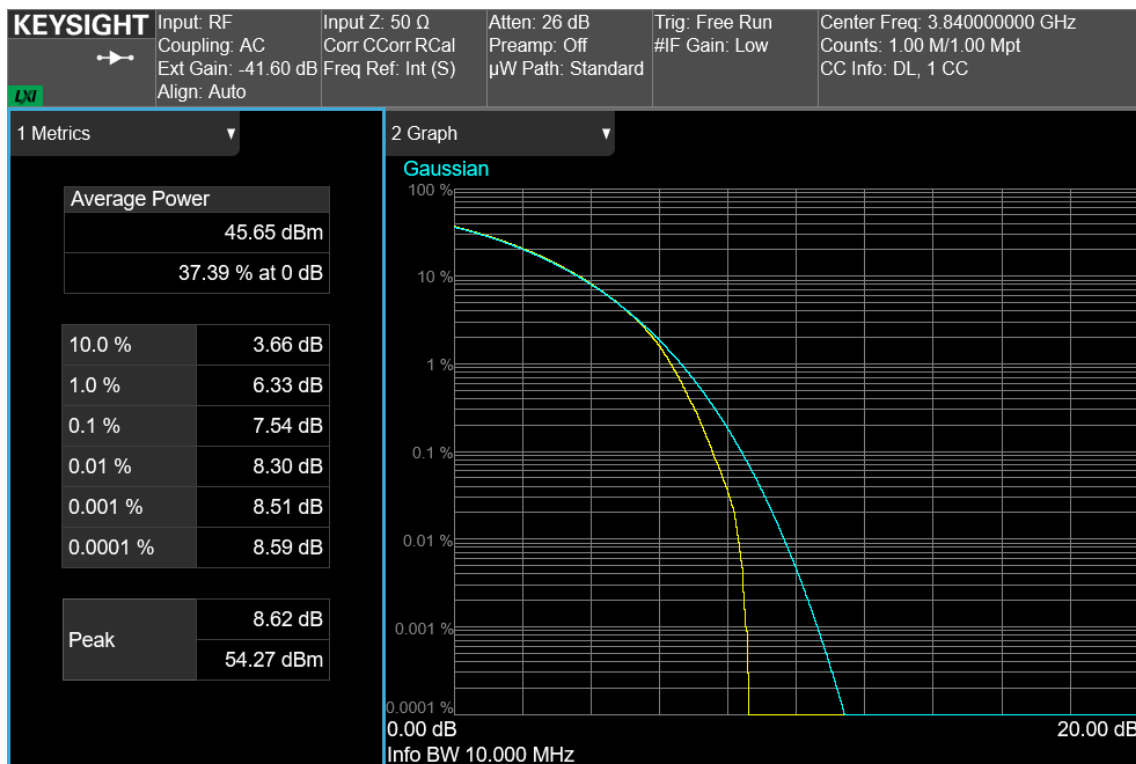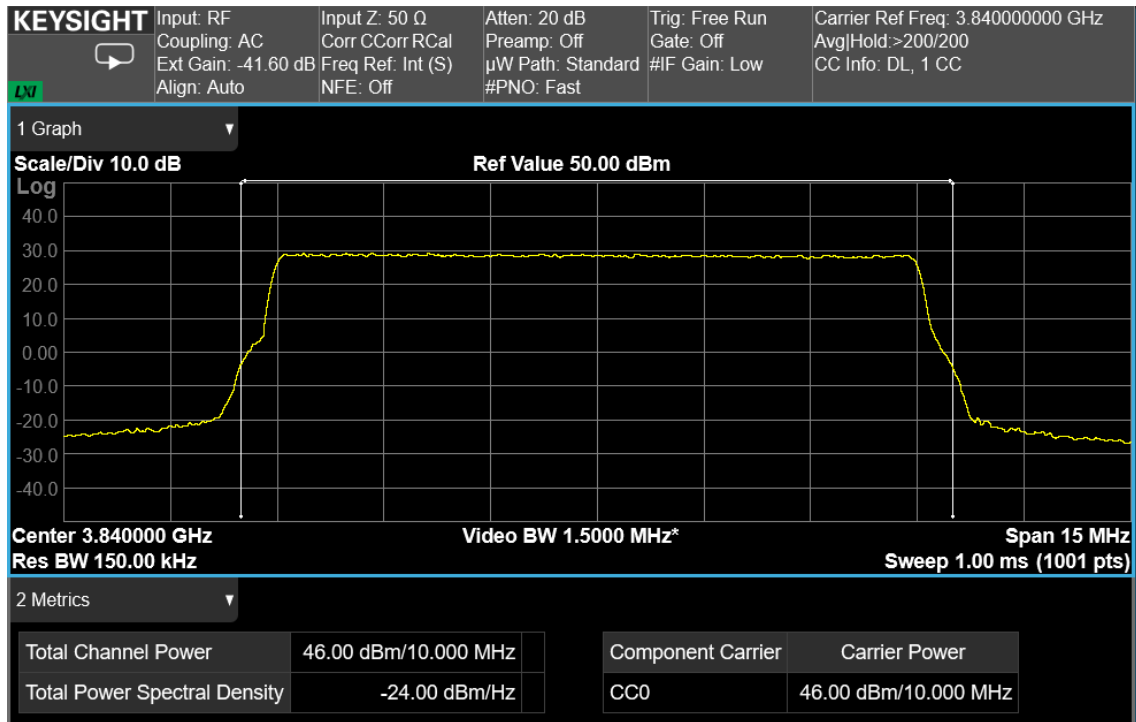



10 MHz signal, middle channel, nominal input signal

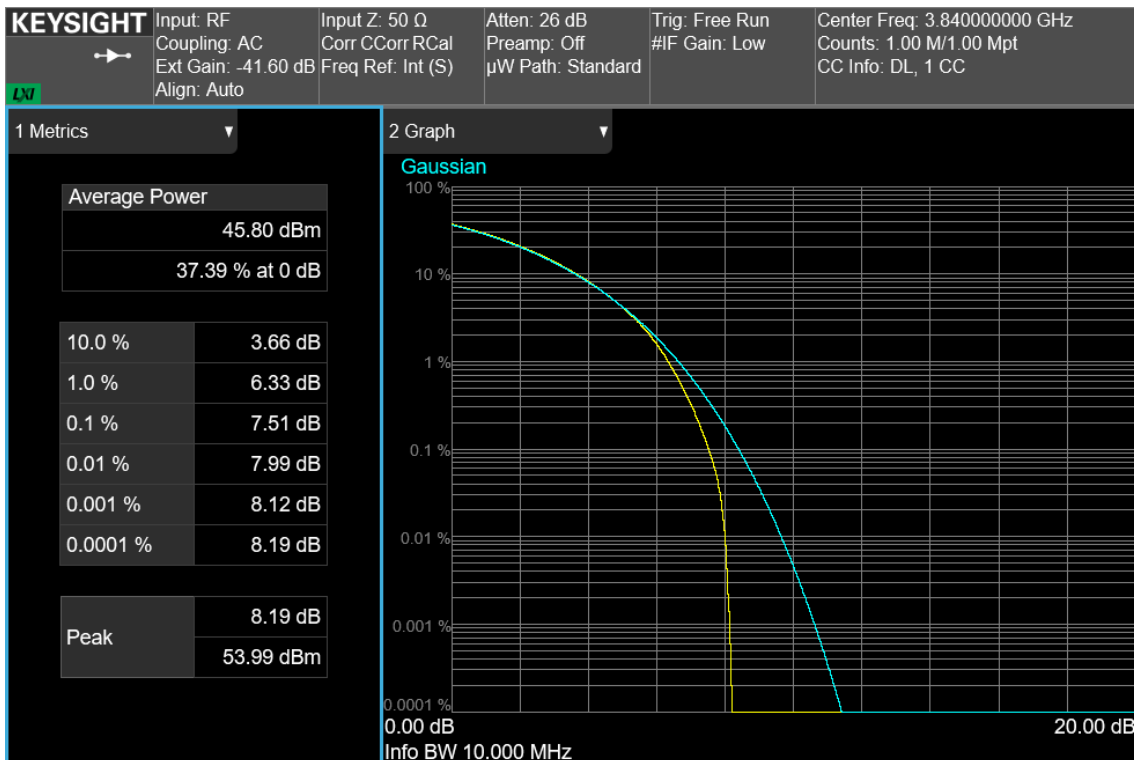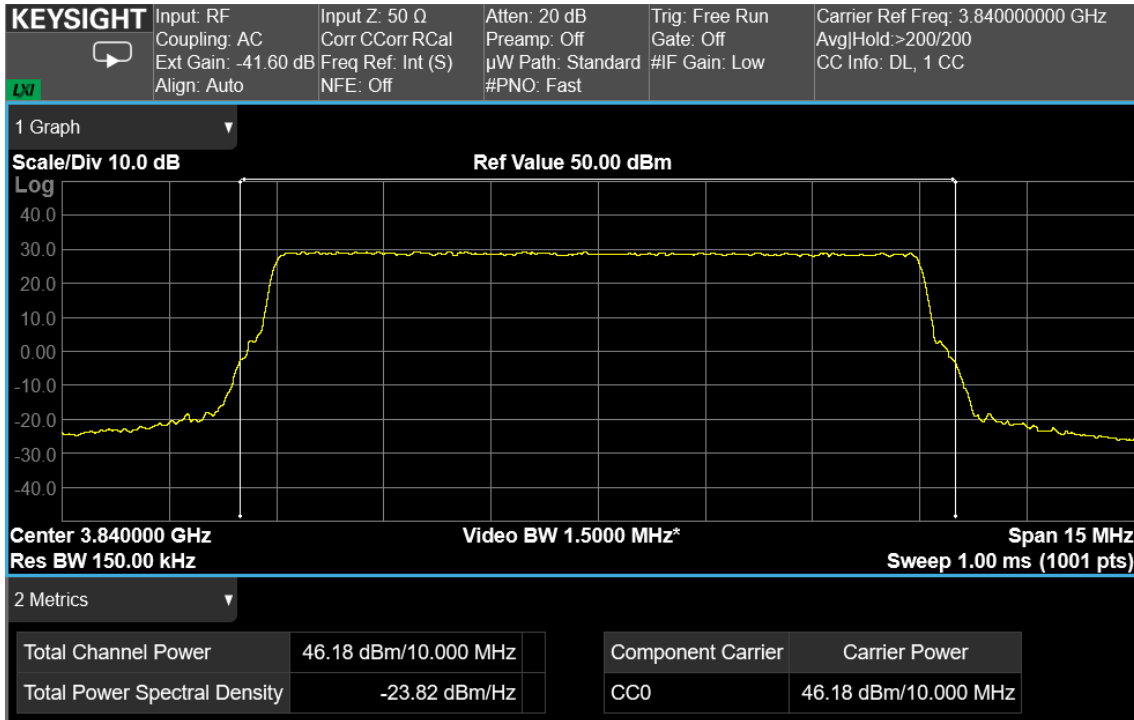

10 MHz signal, middle channel, nominal input signal + 3dB

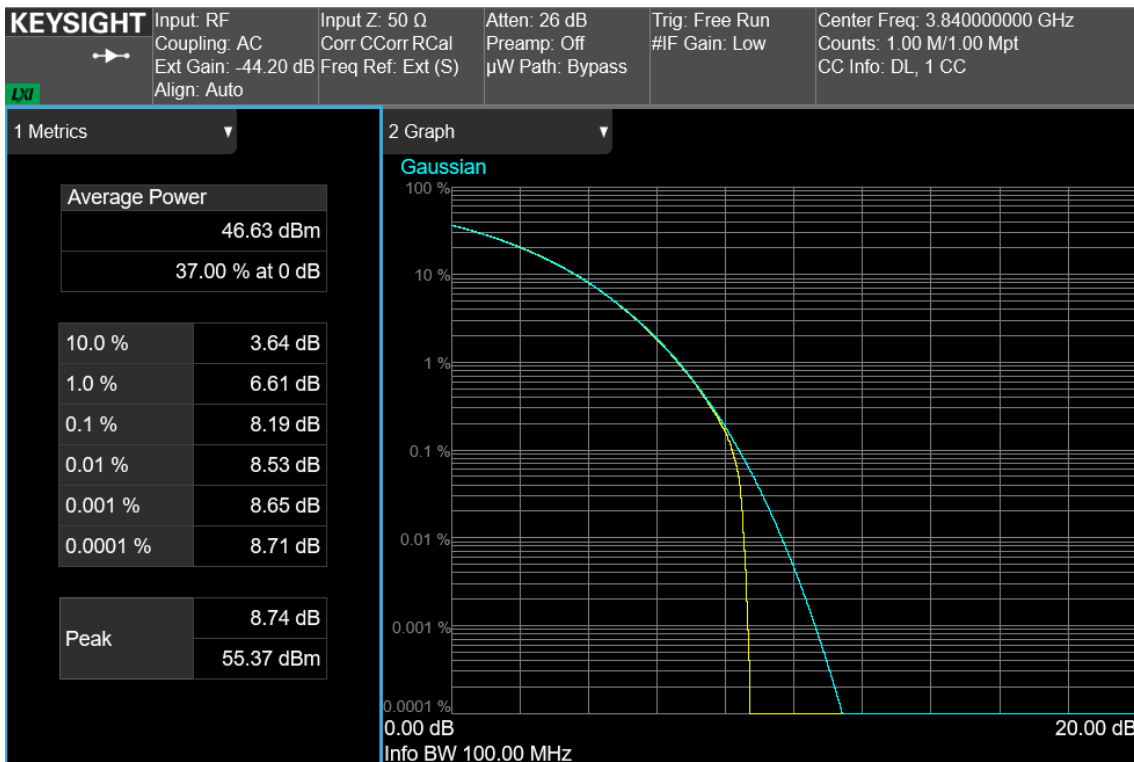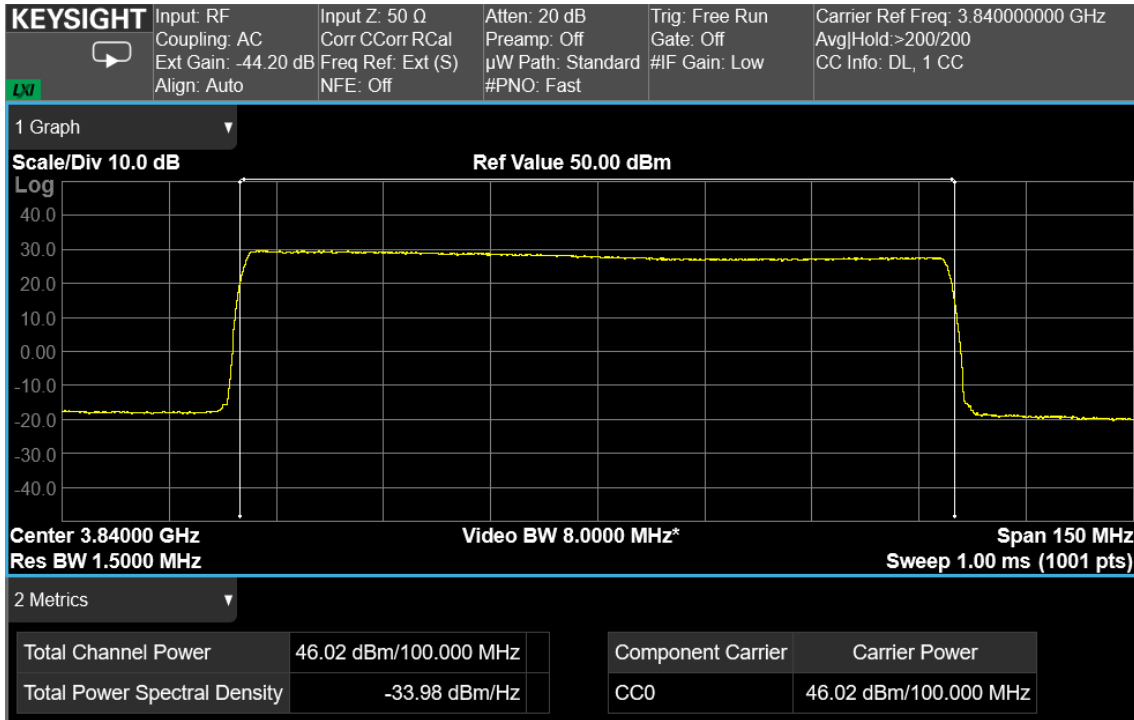

100 MHz signal, middle channel, nominal input signal

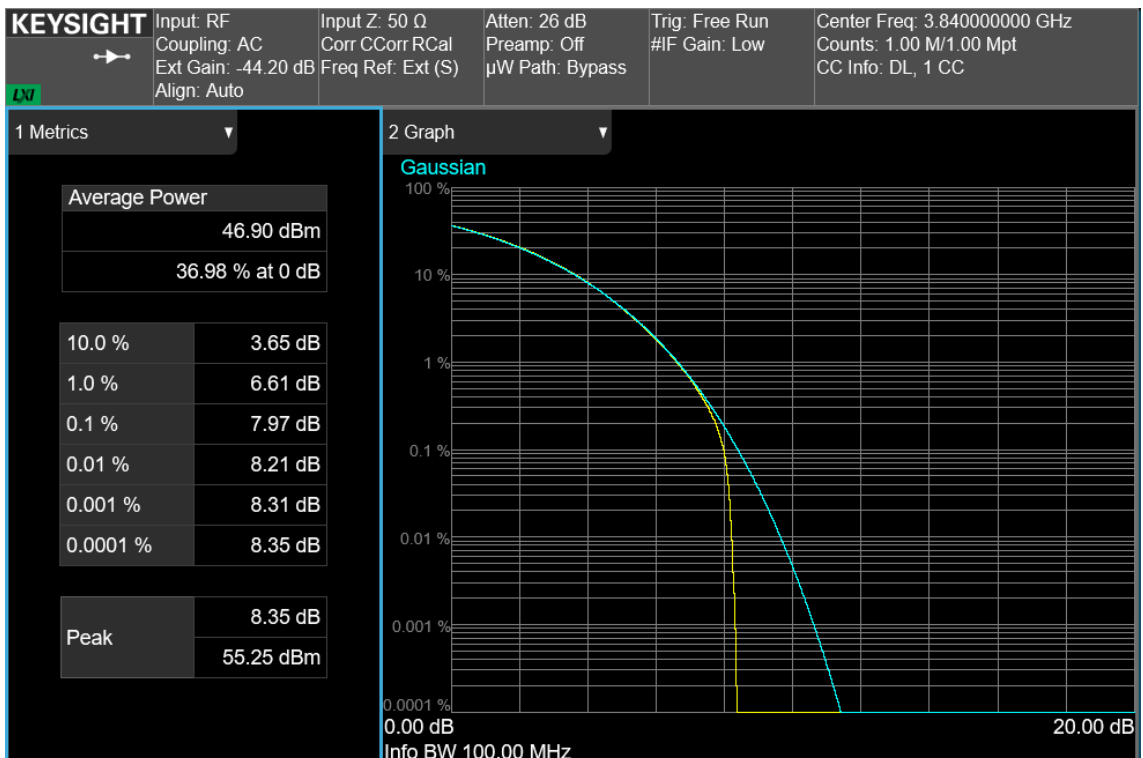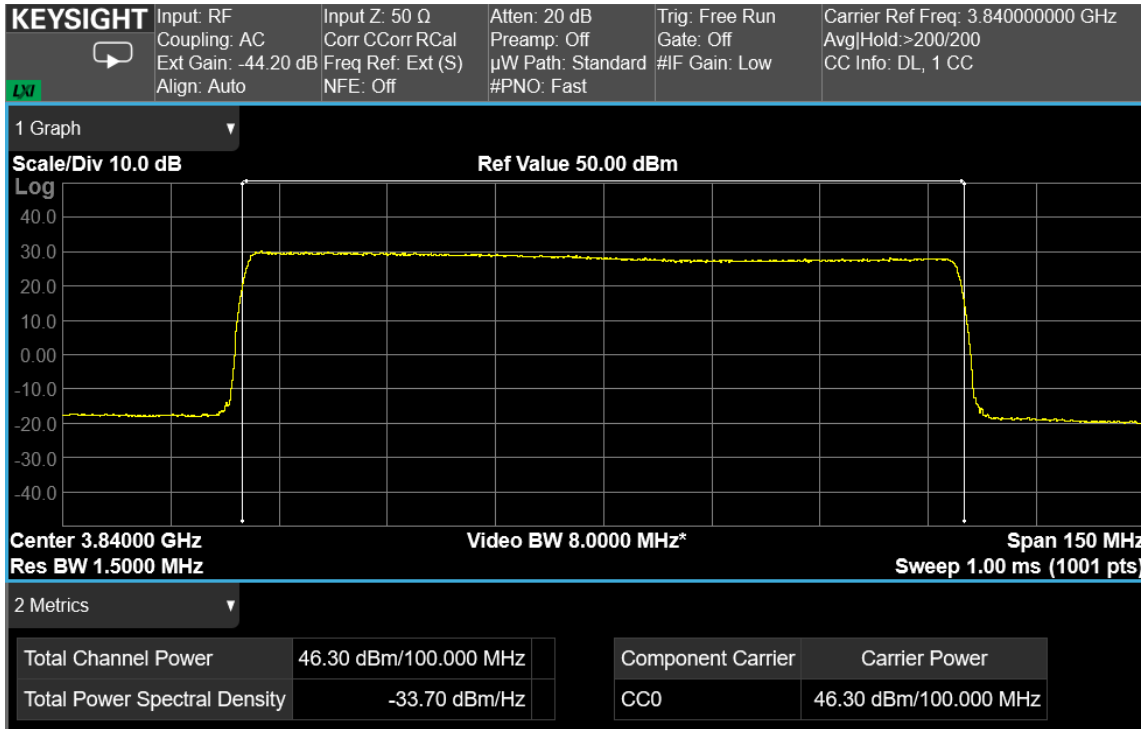

100 MHz signal, middle channel, nominal input signal + 3dB

Clause 27.53(l) Spurious emissions at RF antenna connector

(l) 3.7 GHz Service. The following emission limits apply to stations transmitting in the 3700-3980 MHz band:

(1) For base station operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(1) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 2022-11-11 to 2022-11-25

Test results: Pass

Special notes

-

Test equipment

| Equipment | Manufacturer | Model No. | Asset/Serial No. | Next cal. |
|-------------------------|--------------|-------------------------|------------------|-----------|
| Vector Signal Generator | Keysight | N5182B MXG | MY59100262 | 2025-07 |
| Vector Signal Generator | Keysight | N5182B MXG | MY61252595 | 2024-11 |
| Spectrum Analyzer | Keysight | N9030B PXA | MY61330632 | 2023-04 |
| Spectrum Analyzer | Keysight | N9041B UXA | US57220208 | 2023-05 |
| Combiner | Miczen | MZP200506GA (0.5-6 GHz) | 210314001 | COU |

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

| Test data | | | |
|---|-------------------------|-------------|-------------|
| See Plots below | | | |
| Spurious emissions measurement results: | | | |
| Frequency (MHz) | Spurious emission (dBm) | Limit (dBm) | Margin (dB) |
| Low channel | | | |
| Bottom channel | Negligible | -16 | |
| | | | |
| Mid channel | | | |
| Middle channel | Negligible | -16 | |
| | | | |
| High channel | | | |
| Last channel | Negligible | -16 | |
| | | | |


MIMO consideration

The EUT has two MIMO RF Port, so it's possible manage two MIMO RF paths. If EUT is used in MIMO configuration according to KDB 662911-D01 v02r01 and 662911-D02 v01 with signals completely uncorrelated, the maximum emission is calculated as follows:


- MIMO Maximum Emission = Emission at each path + 10log(Nant) dB = Emission at each path + 10log(2) = Emission at each path + 3dB
- Spurious emission are negligible.

Test data, continued: spurious emissions at antenna terminal


RF PORT 1

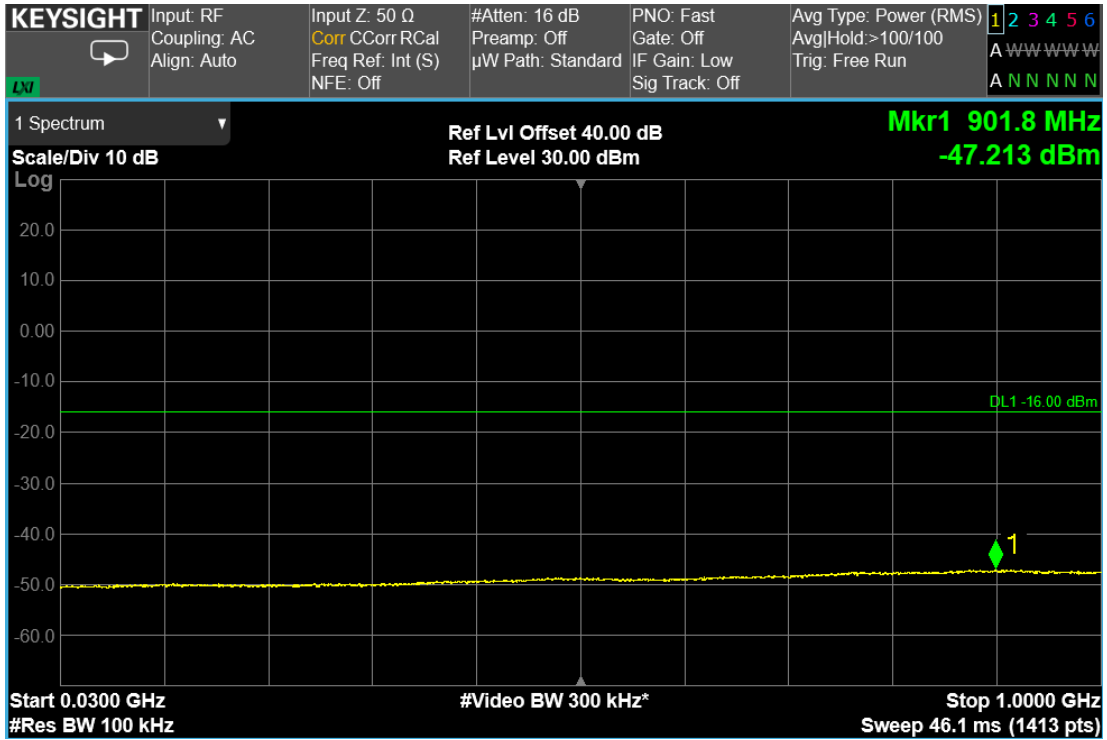


10 MHz signal, bottom channel, 30MHz – 1GHz

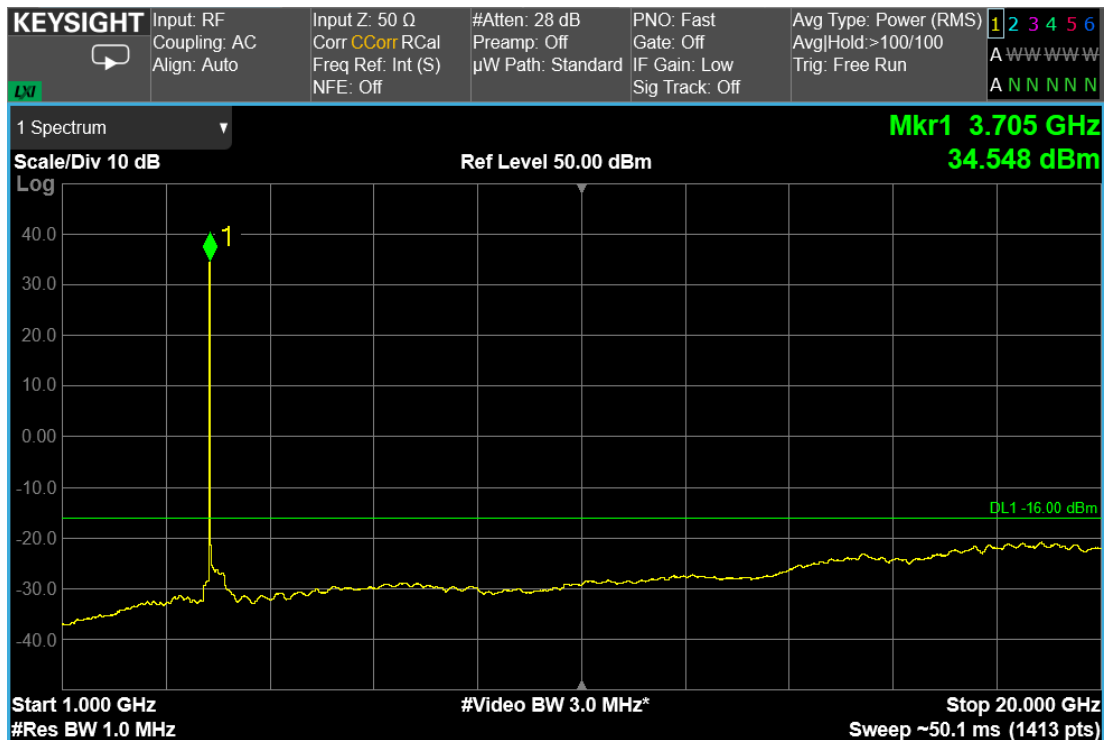


10 MHz signal, bottom channel, 1GHz – 20GHz

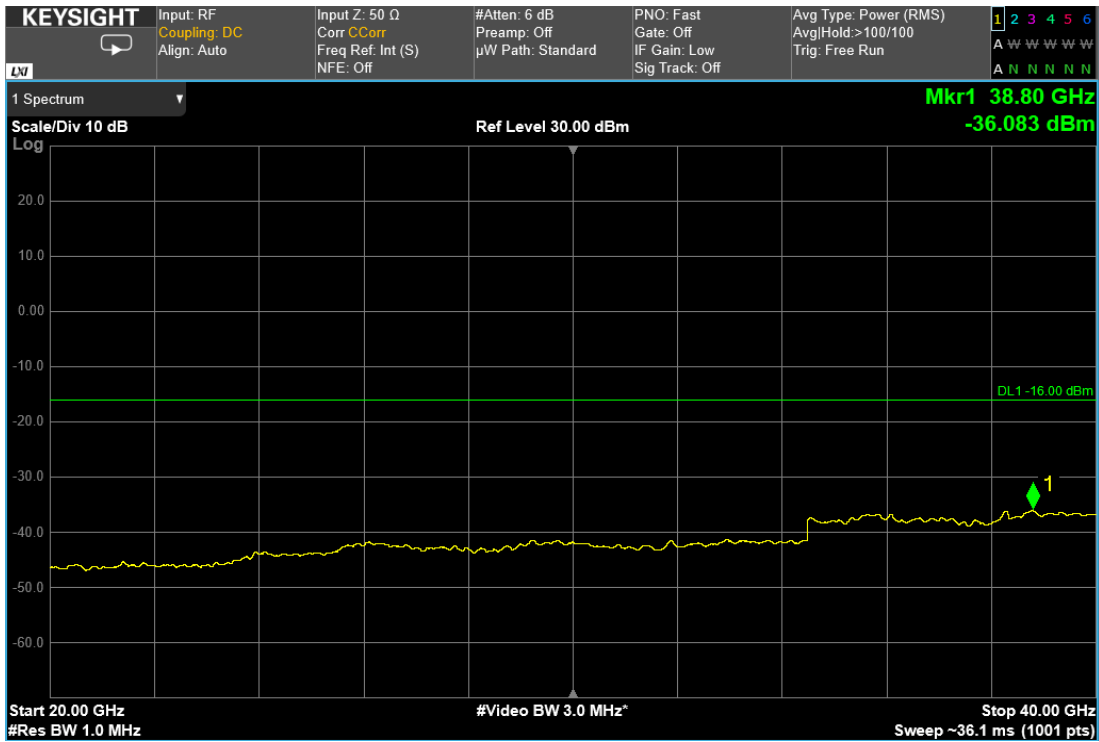


10 MHz signal, bottom channel, 20GHz – 40GHz

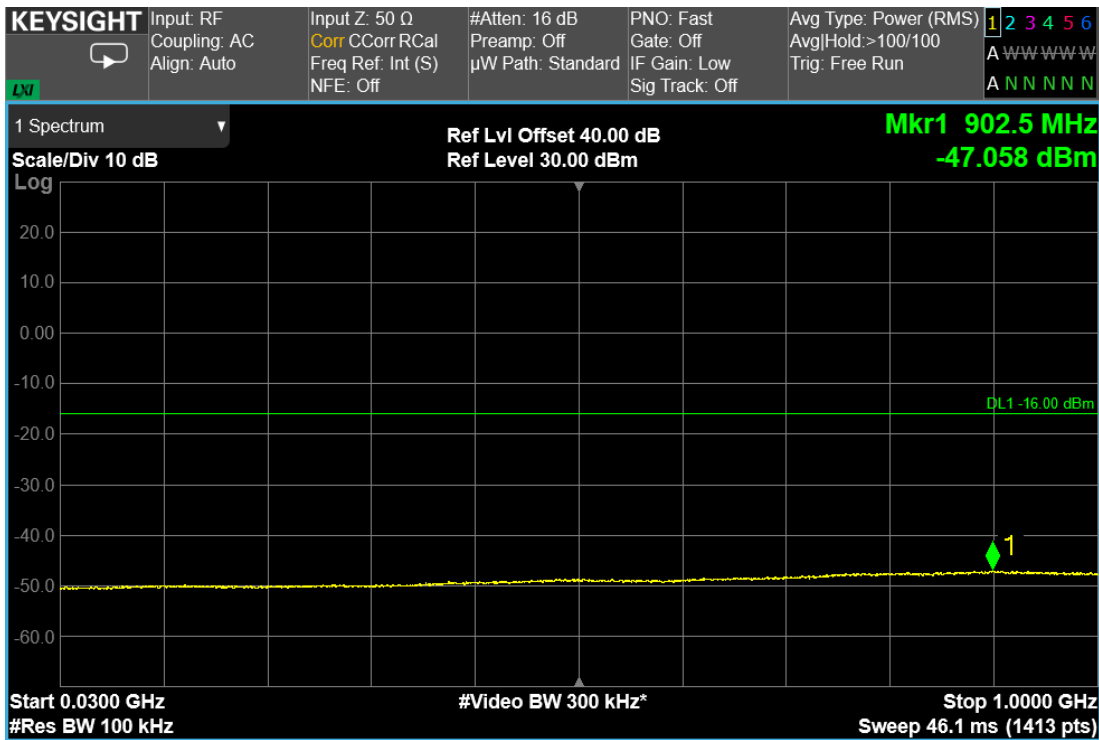


10 MHz signal, middle channel, 30Mhz – 1GHz

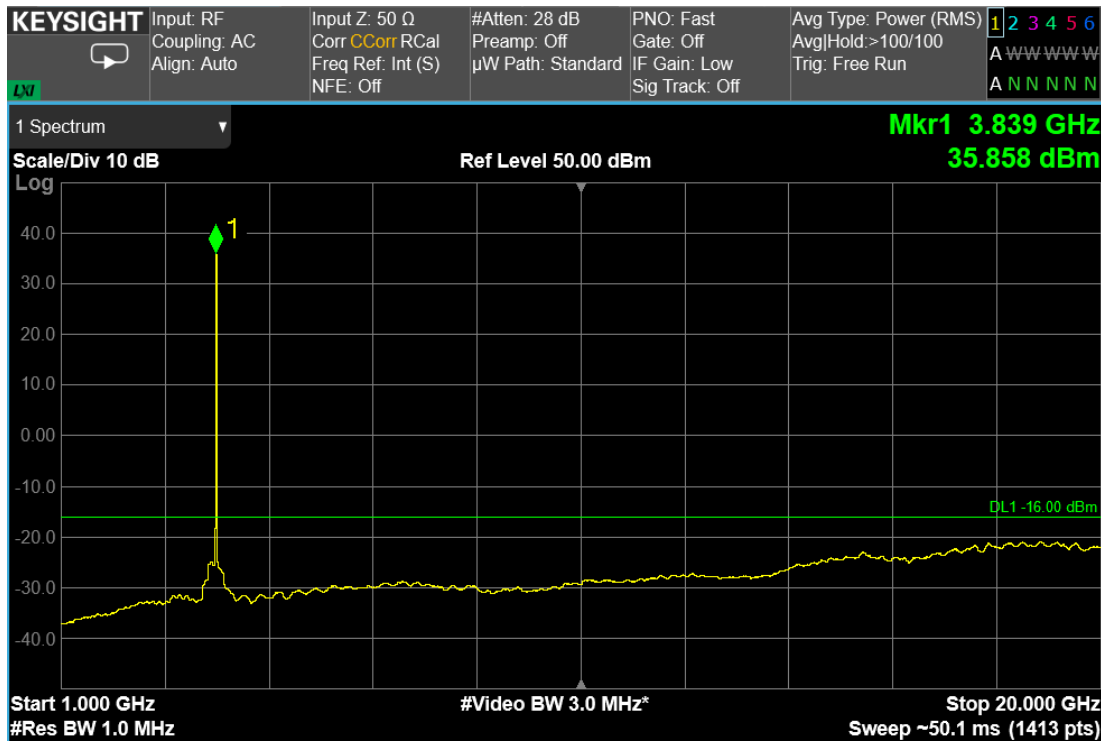


10 MHz signal, middle channel, 1GHz – 20GHz

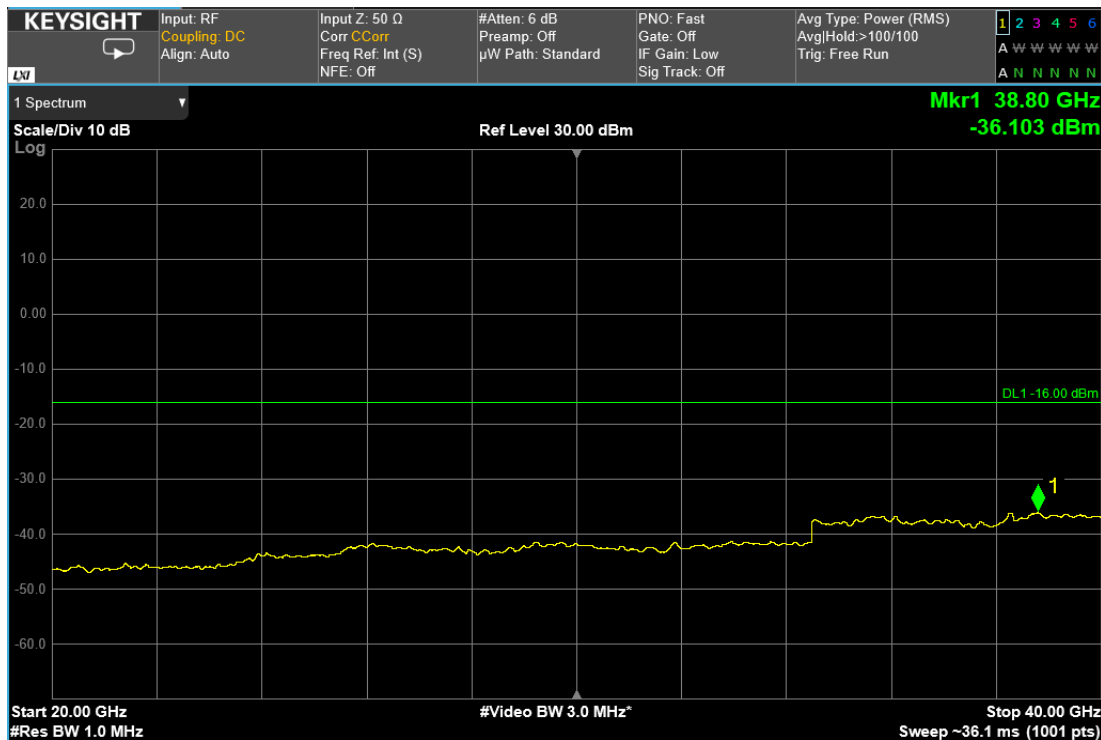


10 MHz signal, middle channel, 20GHz – 40GHz

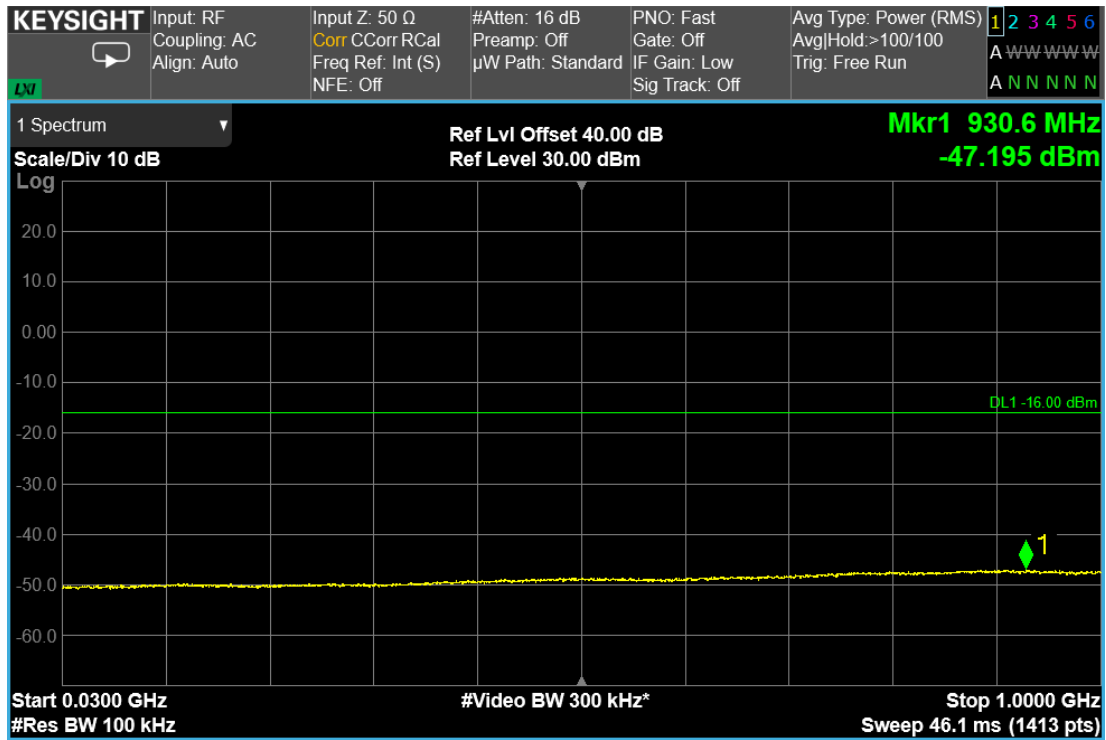


10 MHz signal, top channel, 30MHz – 1GHz

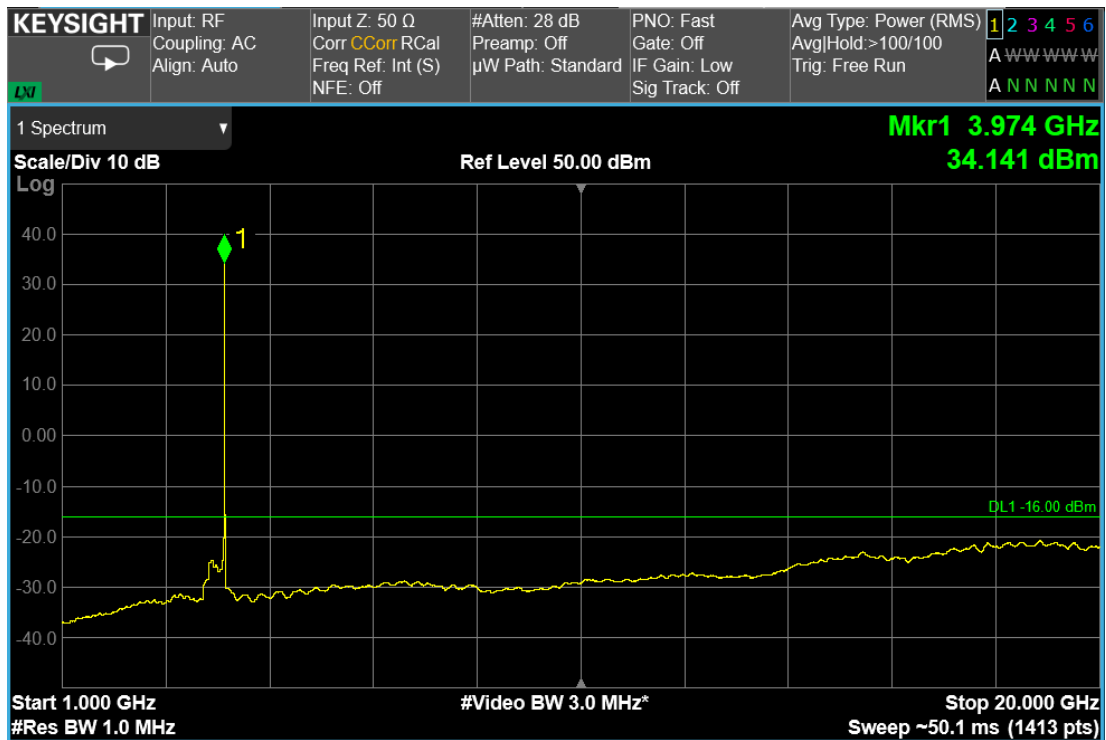


10 MHz signal, top channel, 1GHz – 20GHz

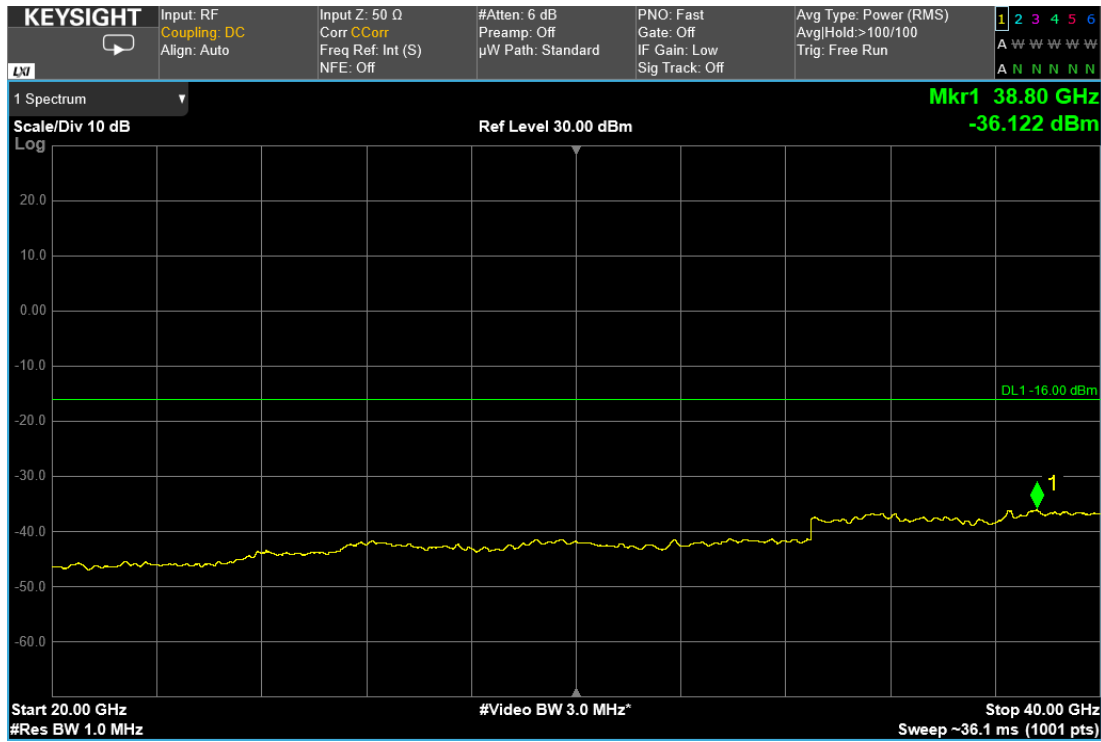


10 MHz signal, top channel, 20GHz – 40GHz

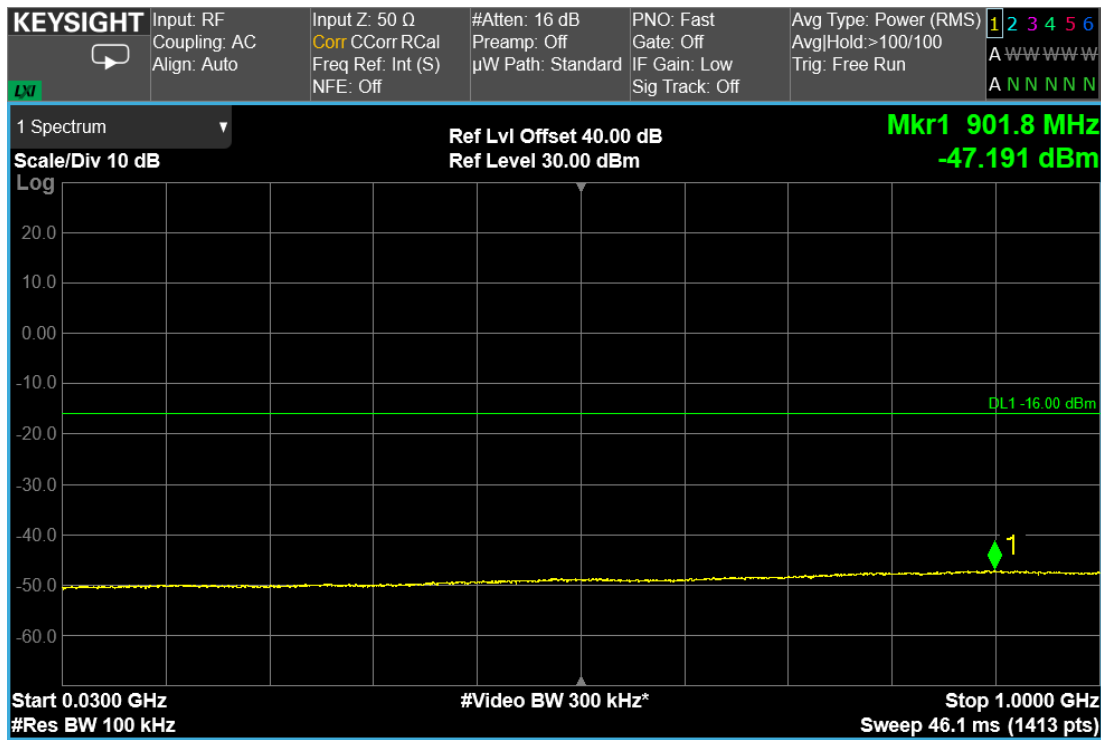


100 MHz signal, bottom channel, 30Mhz – 1GHz

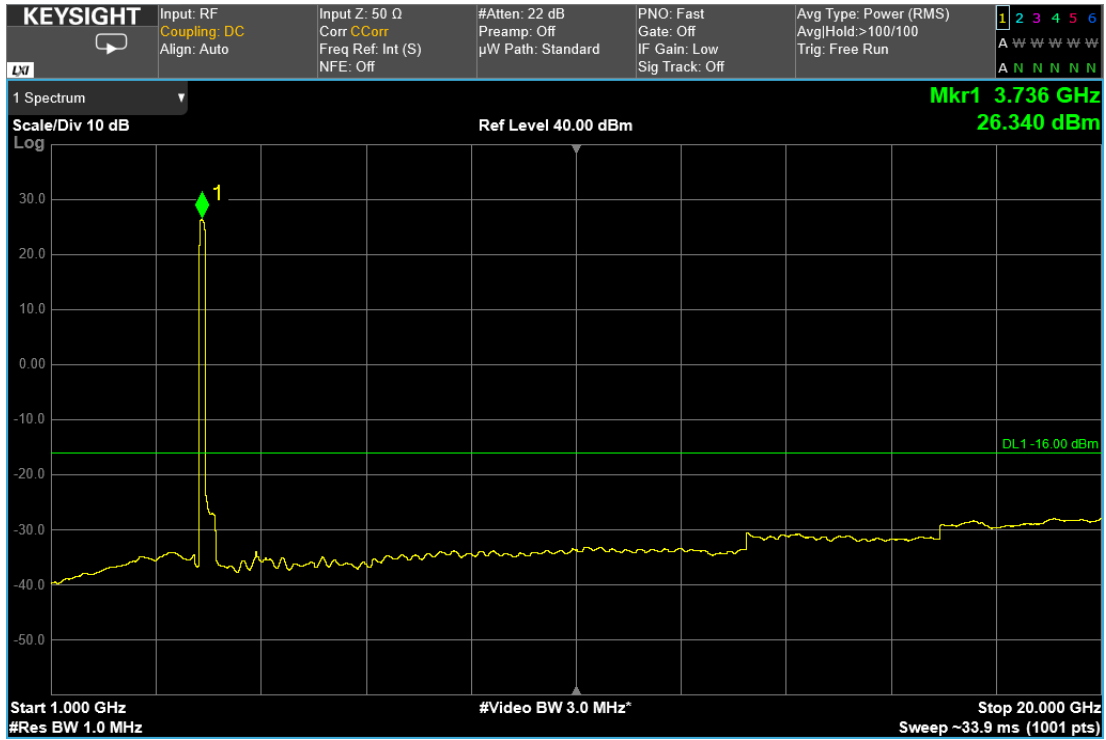


100 MHz signal, bottom channel, 1GHz – 20GHz

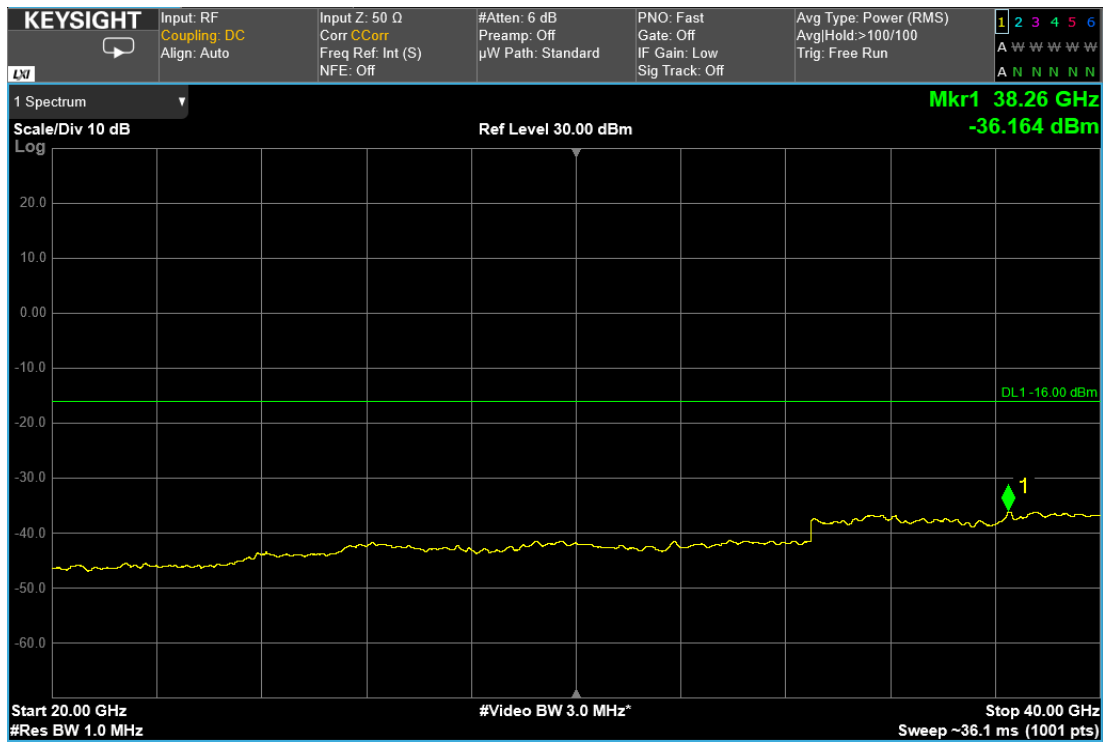


100 MHz signal, bottom channel, 20GHz – 40GHz

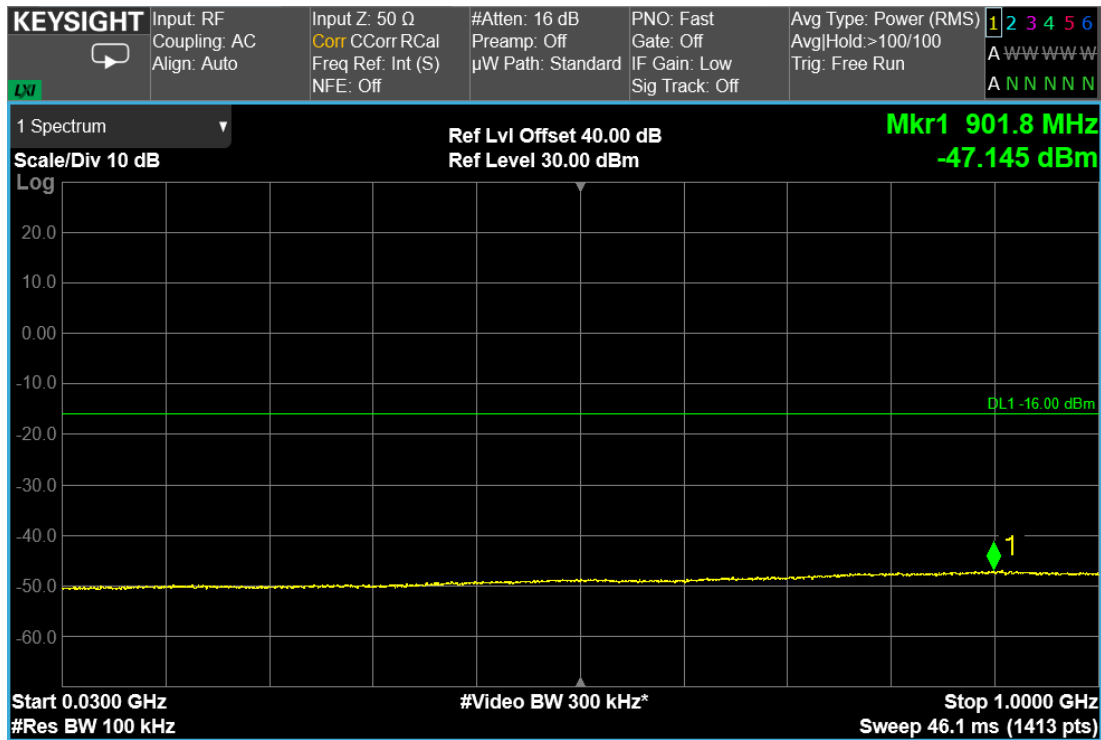


100 MHz signal, middle channel, 30MHz – 1GHz

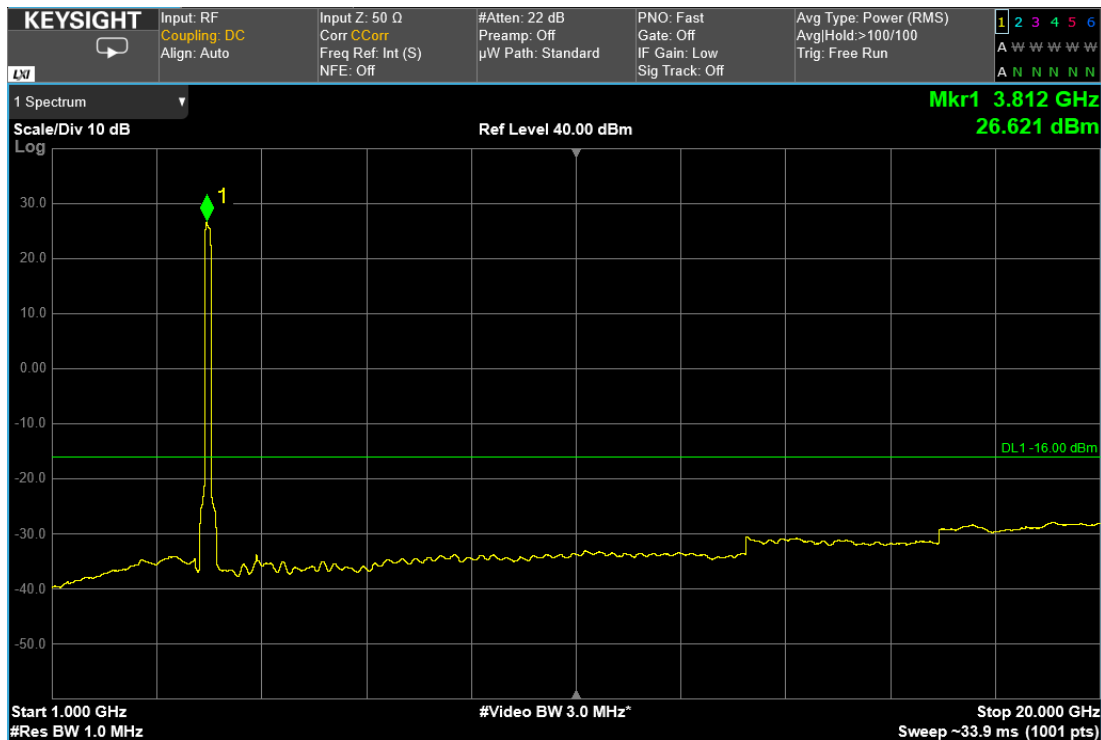


100 MHz signal, middle channel, 1GHz – 20GHz

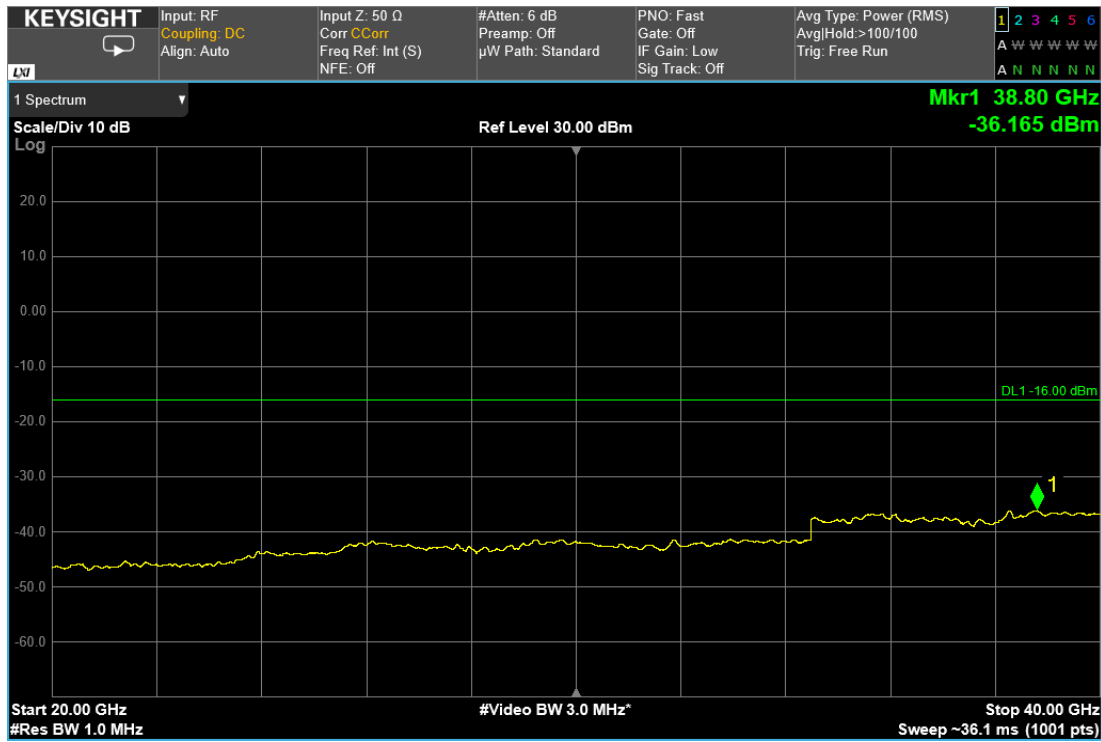


100 MHz signal, middle channel, 20GHz – 40GHz

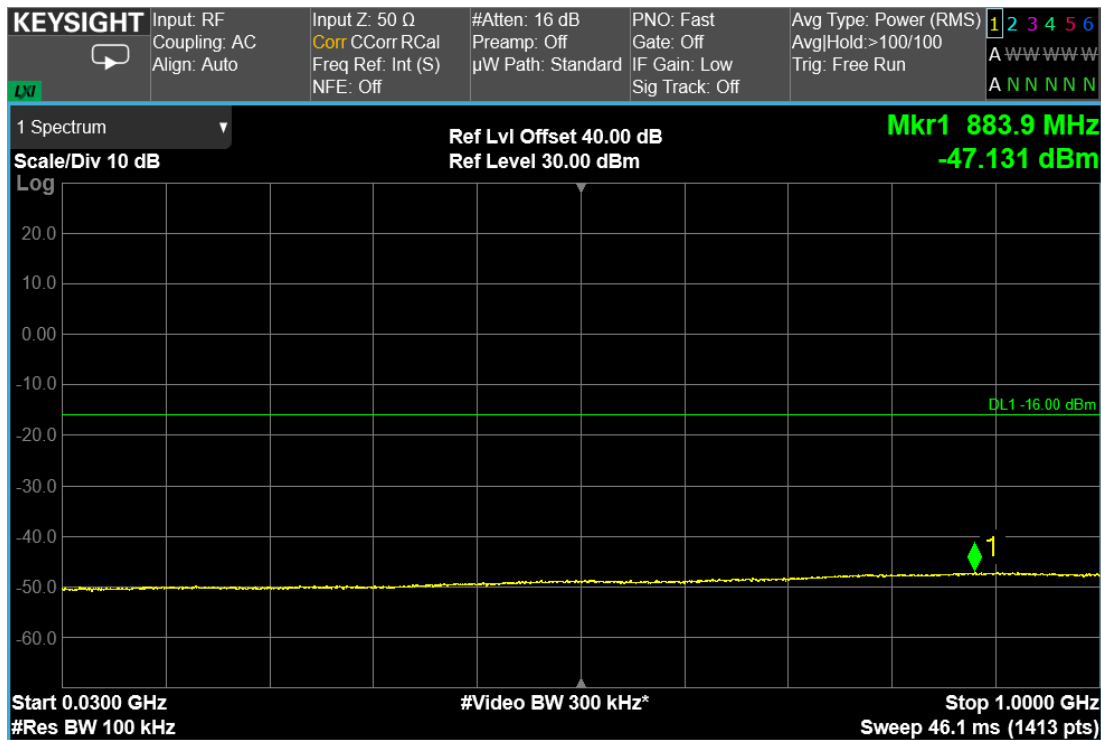

100 MHz signal, top channel, 30Mhz – 1GHz

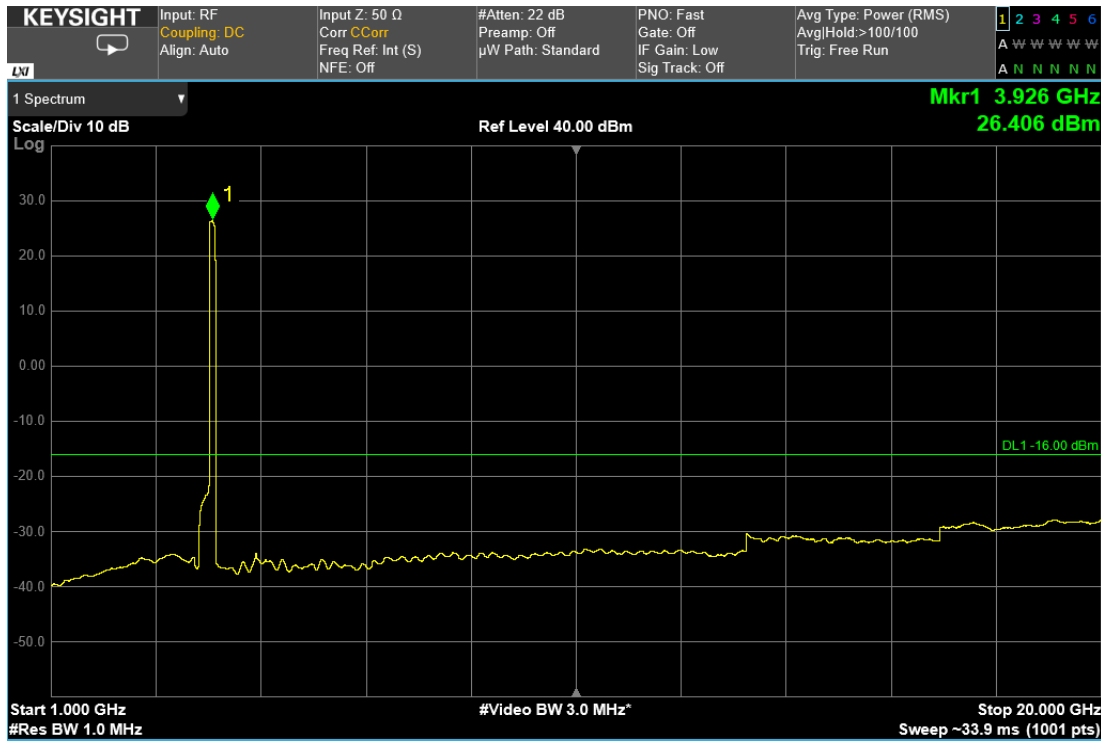


100 MHz signal, top channel, 1GHz – 20GHz

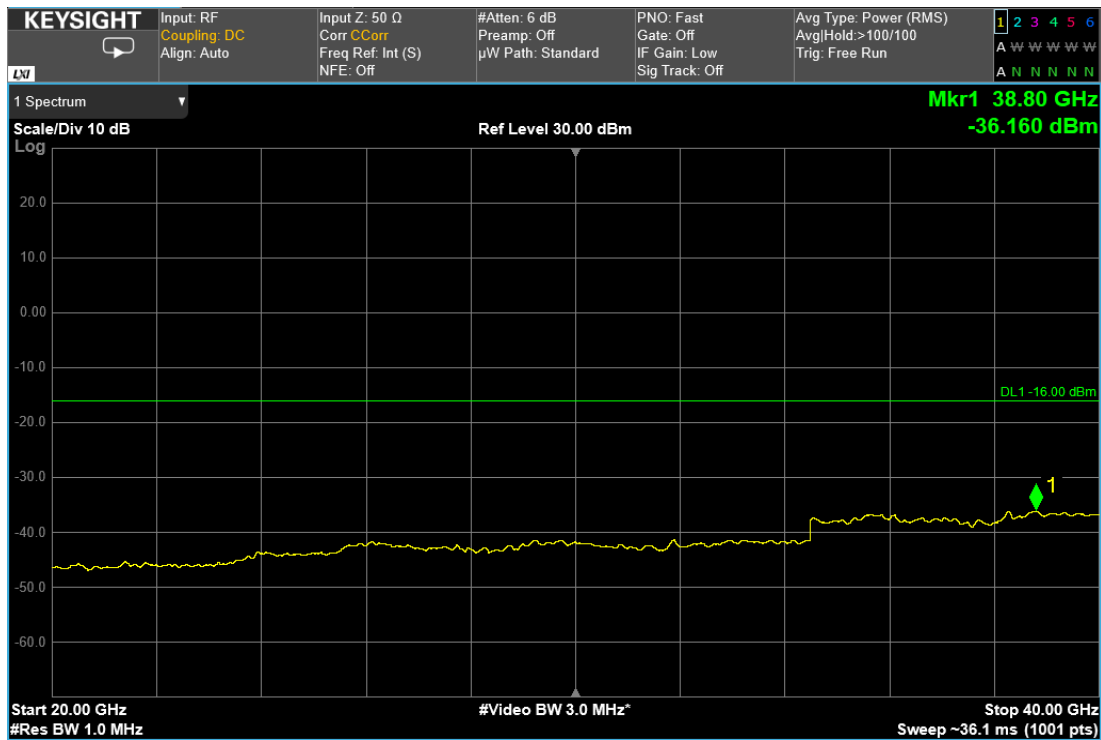


100 MHz signal, top channel, 20GHz – 40GHz


RF PORT 2

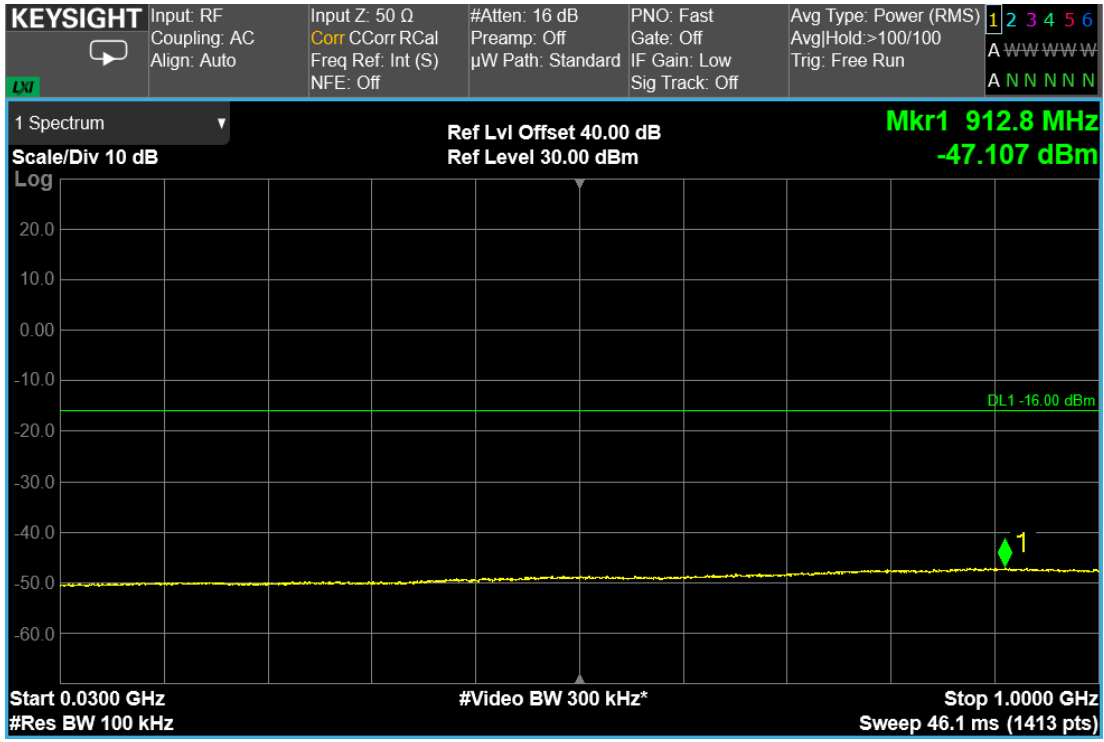


10 MHz signal, bottom channel, 30MHz – 1GHz

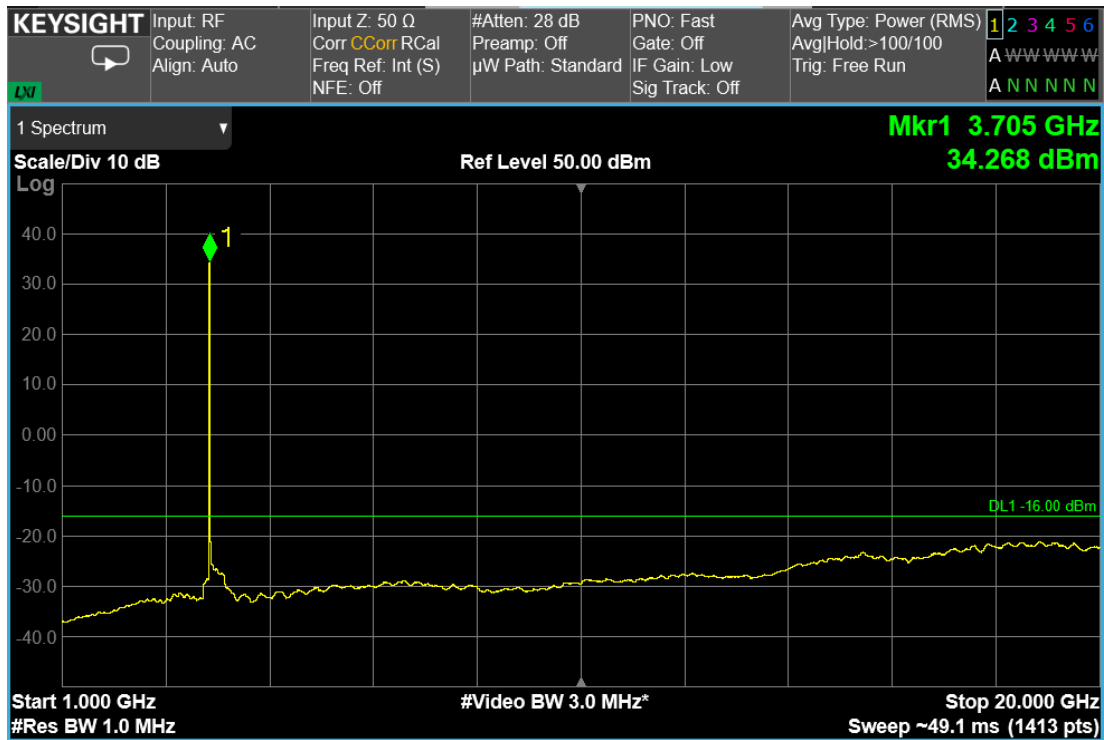


10 MHz signal, bottom channel, 1GHz – 20GHz

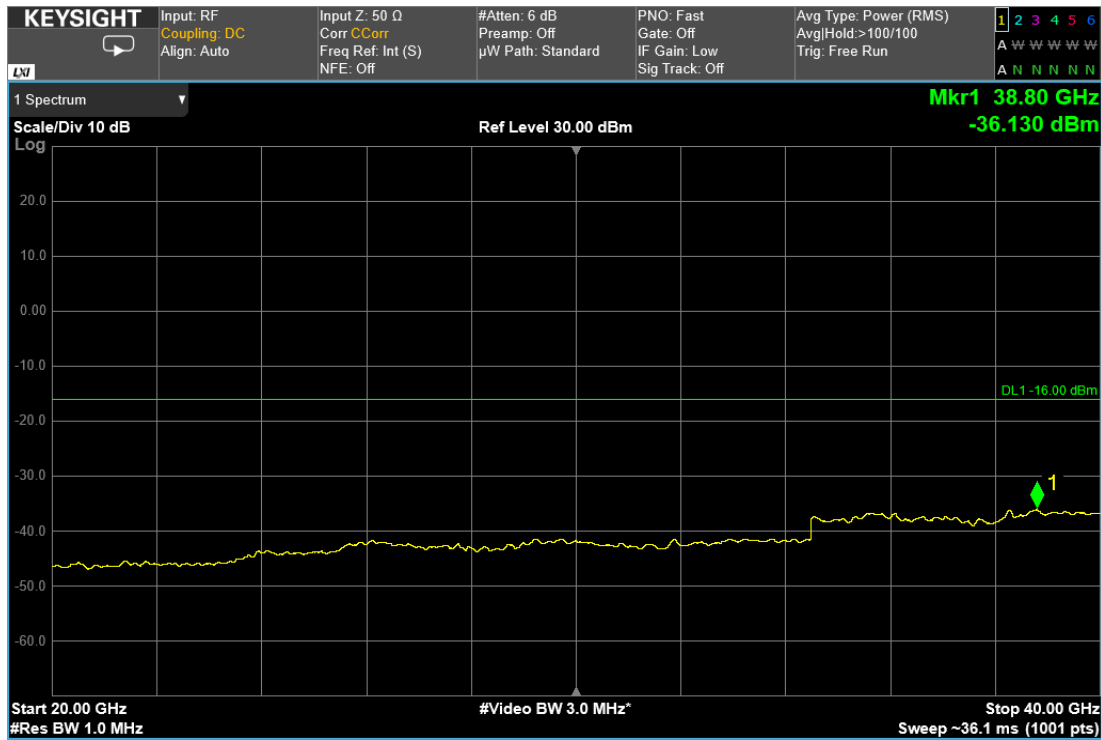


10 MHz signal, bottom channel, 20GHz – 40GHz

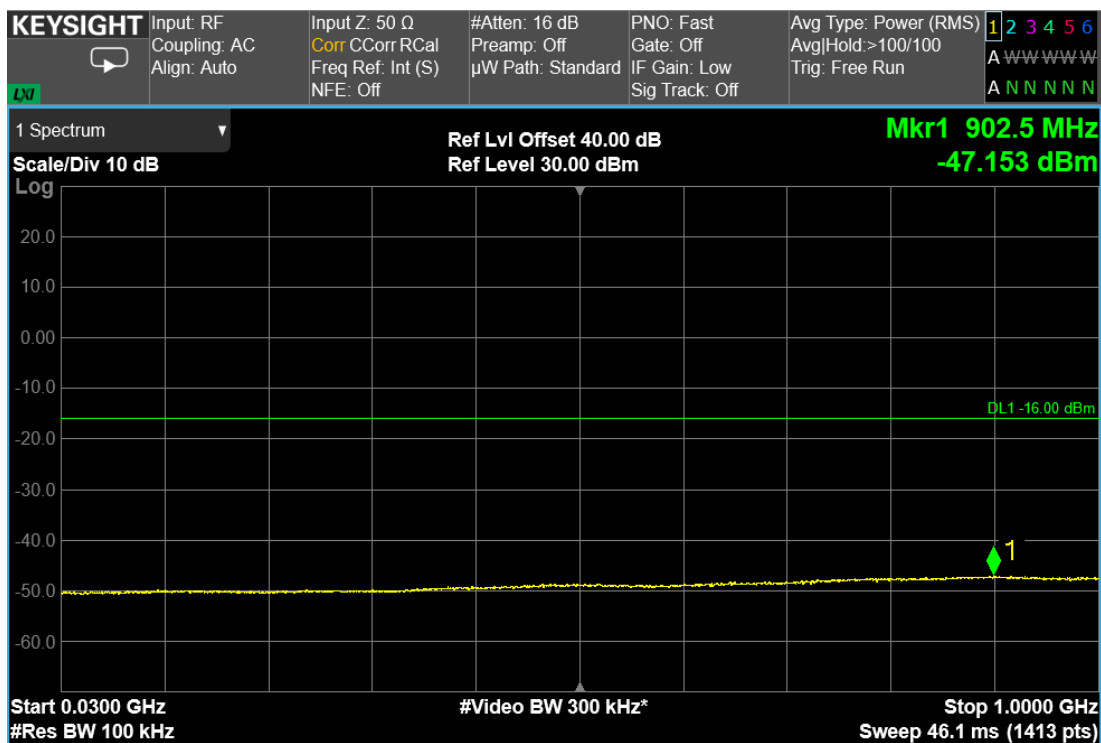



10 MHz signal, middle channel, 30Mhz – 1GHz

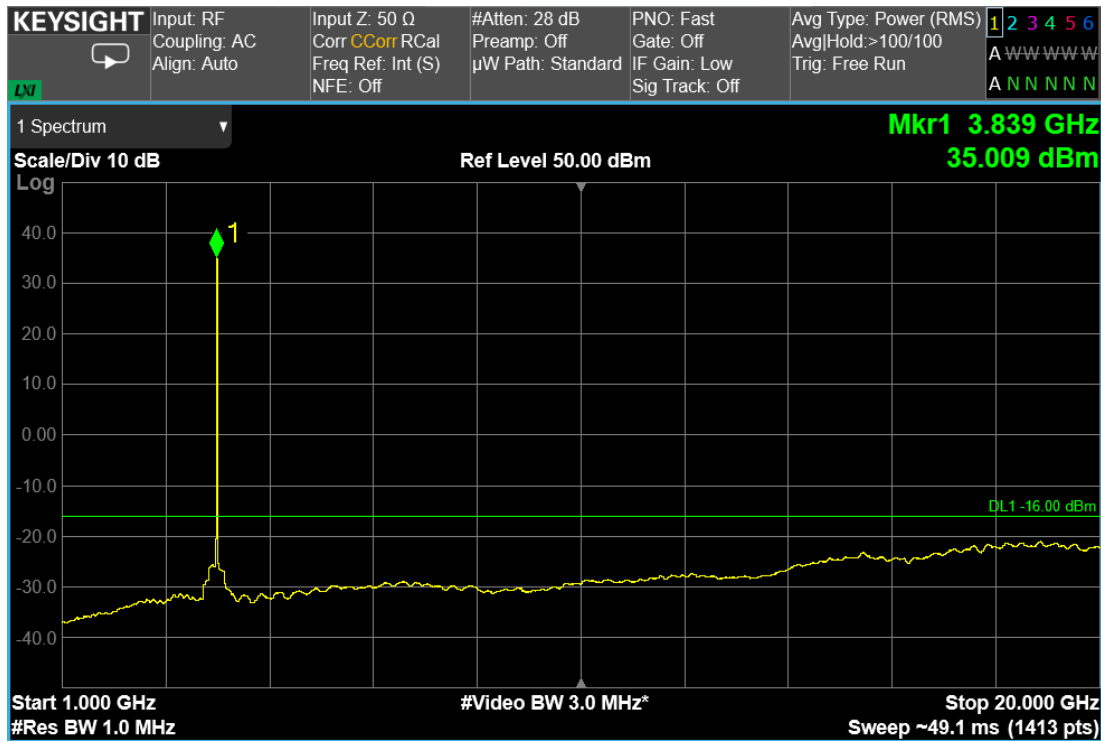


10 MHz signal, middle channel, 1GHz – 20GHz

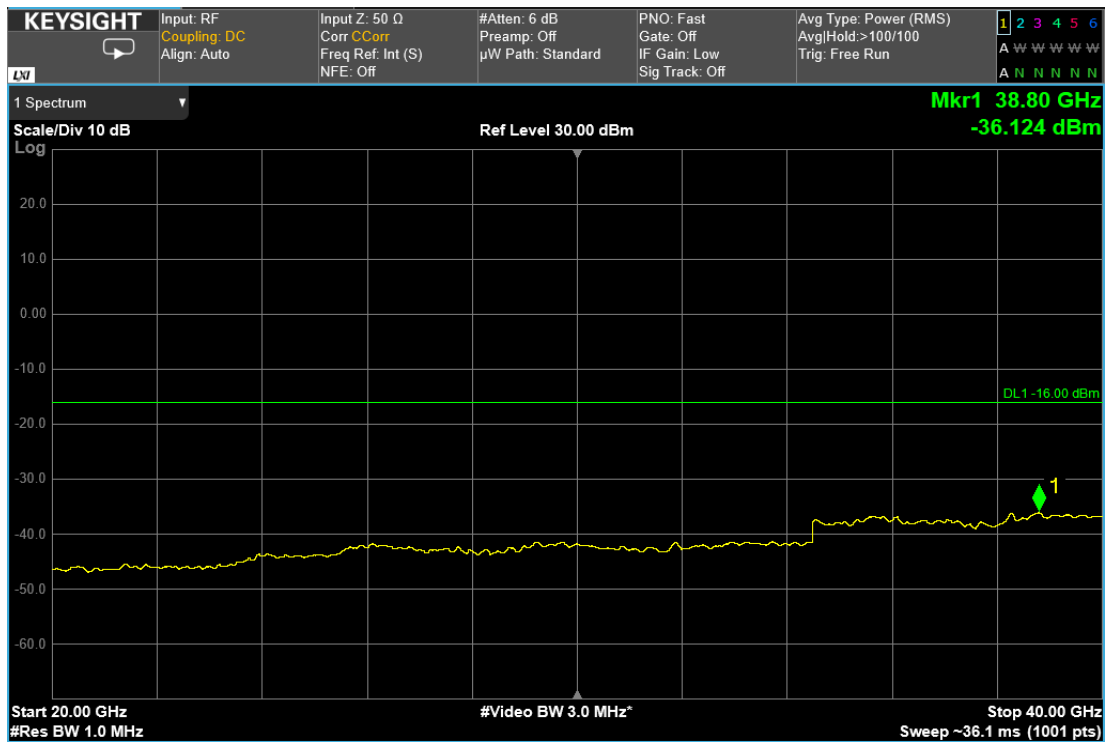


10 MHz signal, middle channel, 20GHz – 40GHz

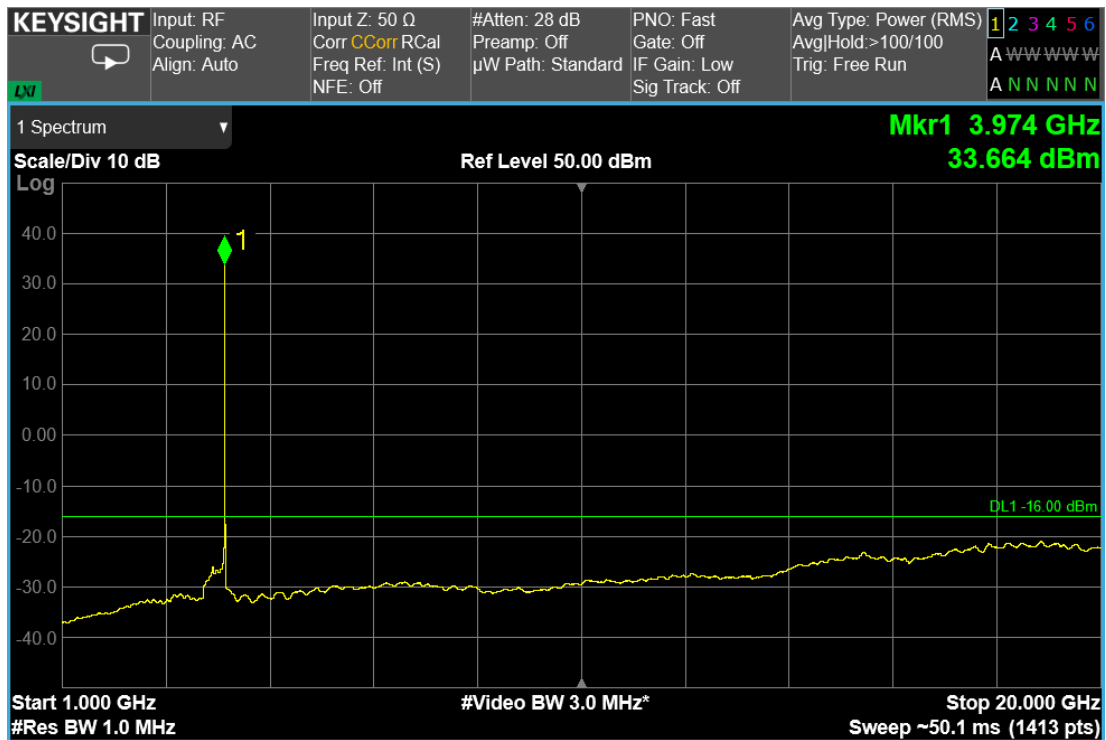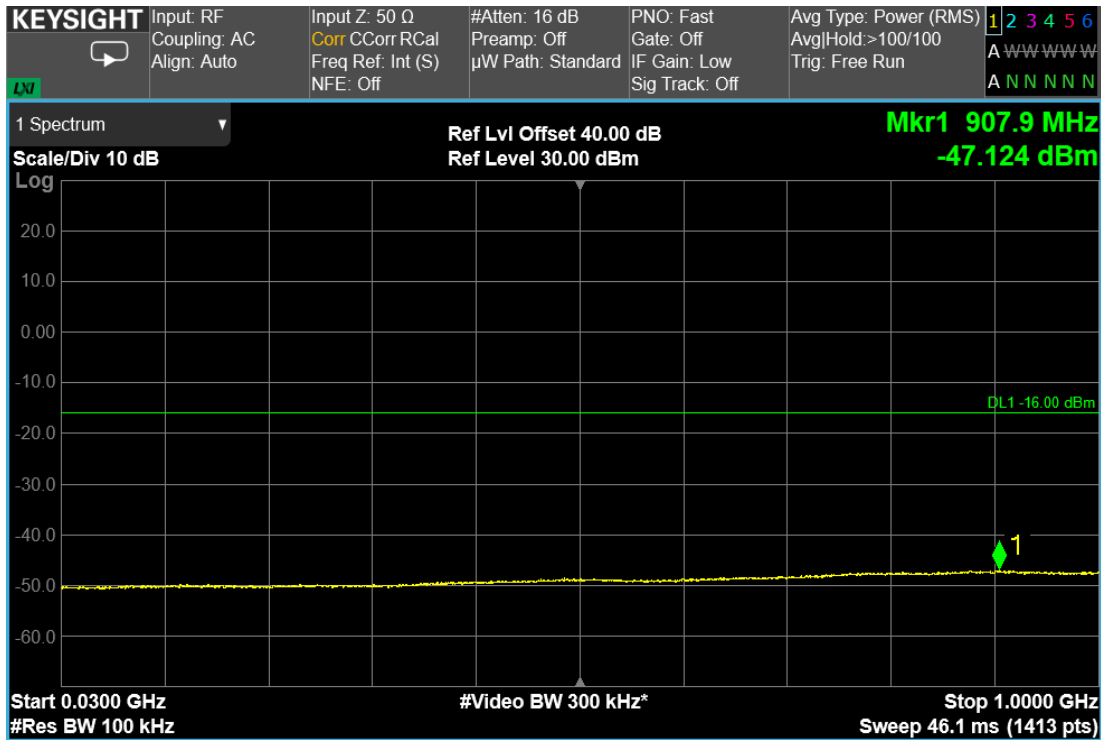


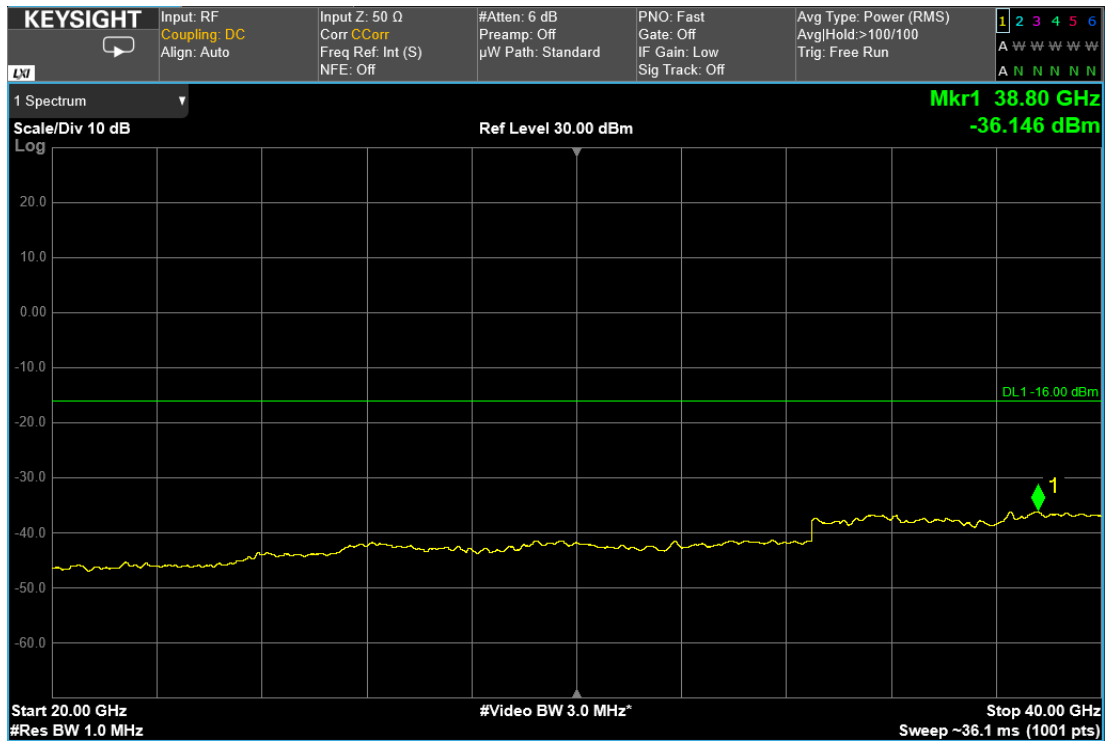


10 MHz signal, top channel, 20GHz – 40GHz

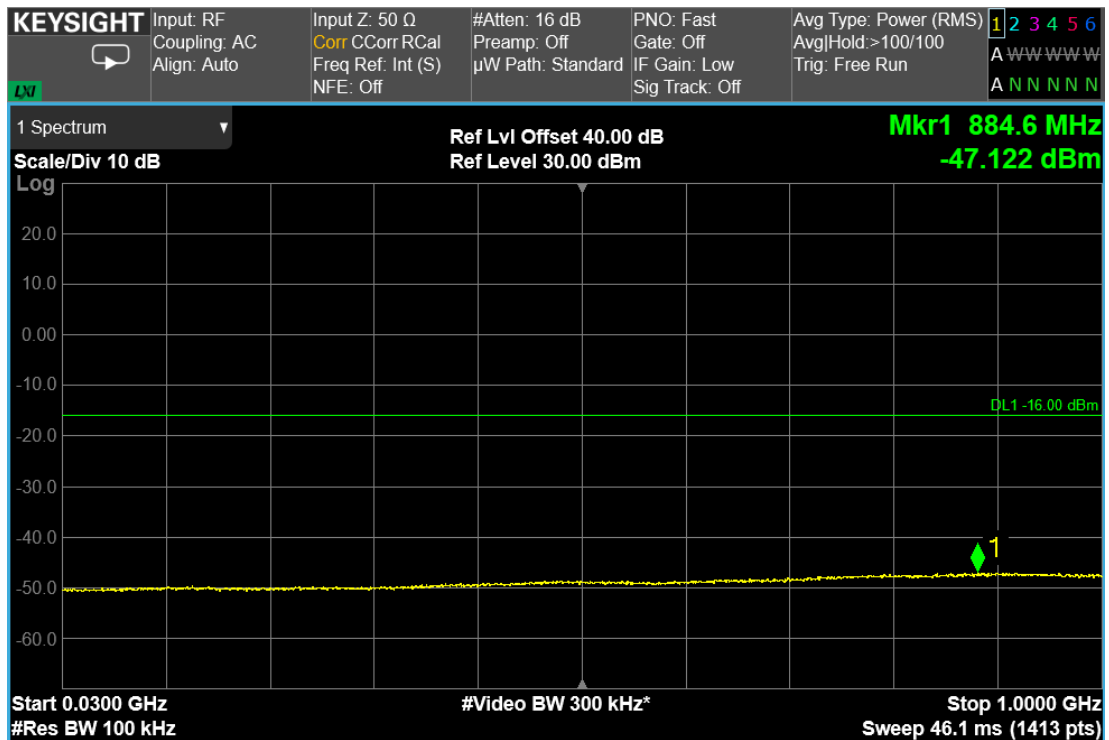


100 MHz signal, bottom channel, 30Mhz – 1GHz

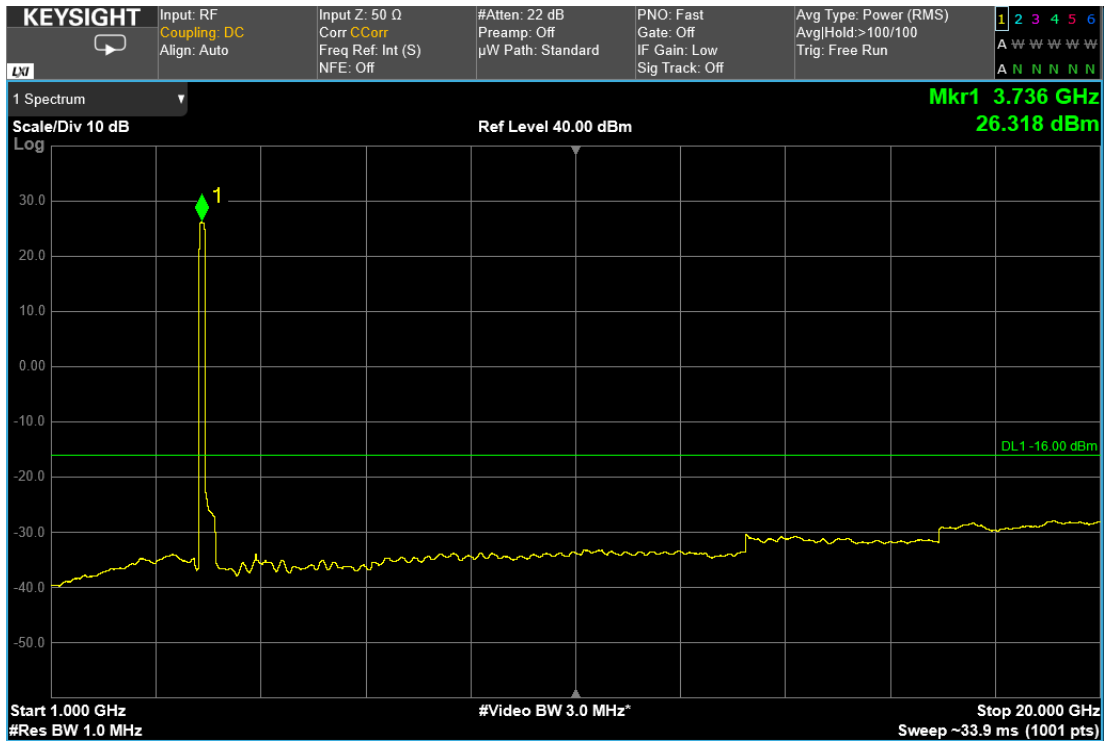


100 MHz signal, bottom channel, 1GHz – 20GHz

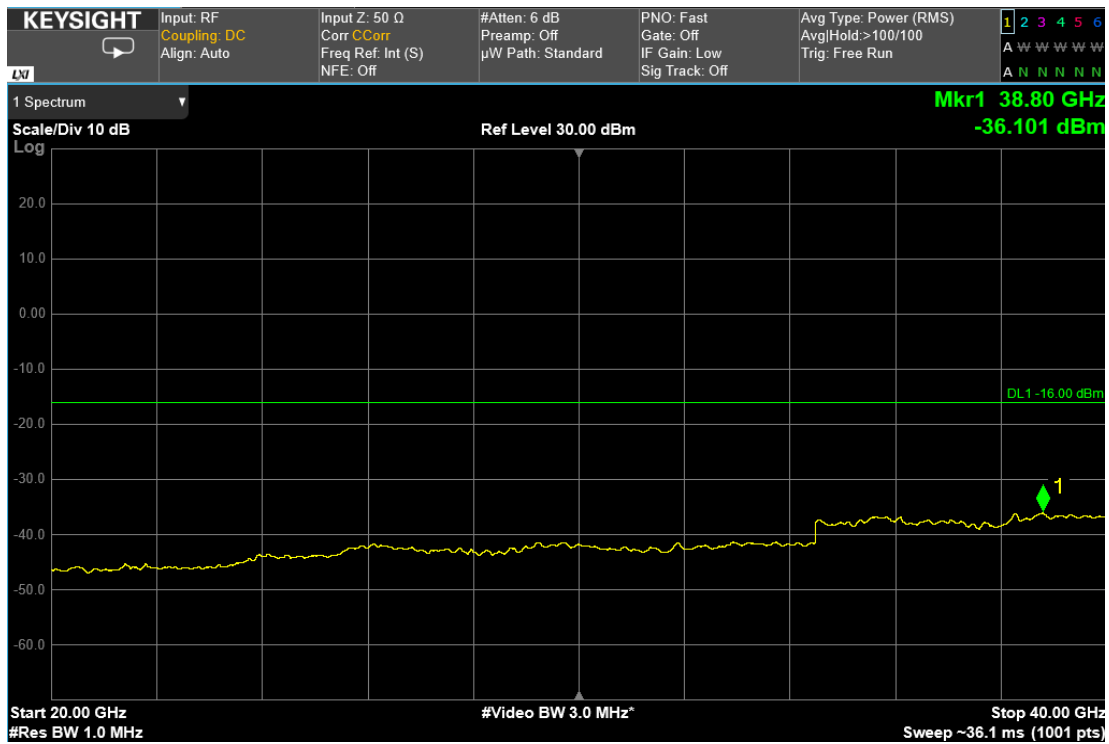


100 MHz signal, bottom channel, 20GHz – 40GHz

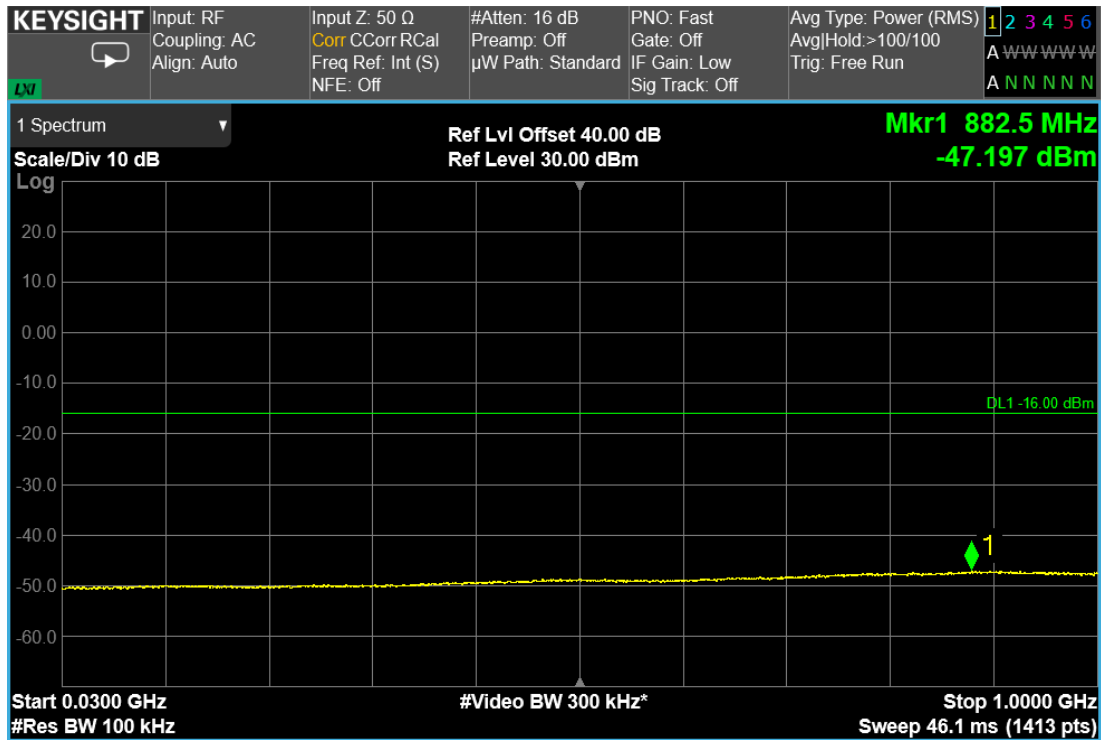


100 MHz signal, middle channel, 30MHz – 1GHz

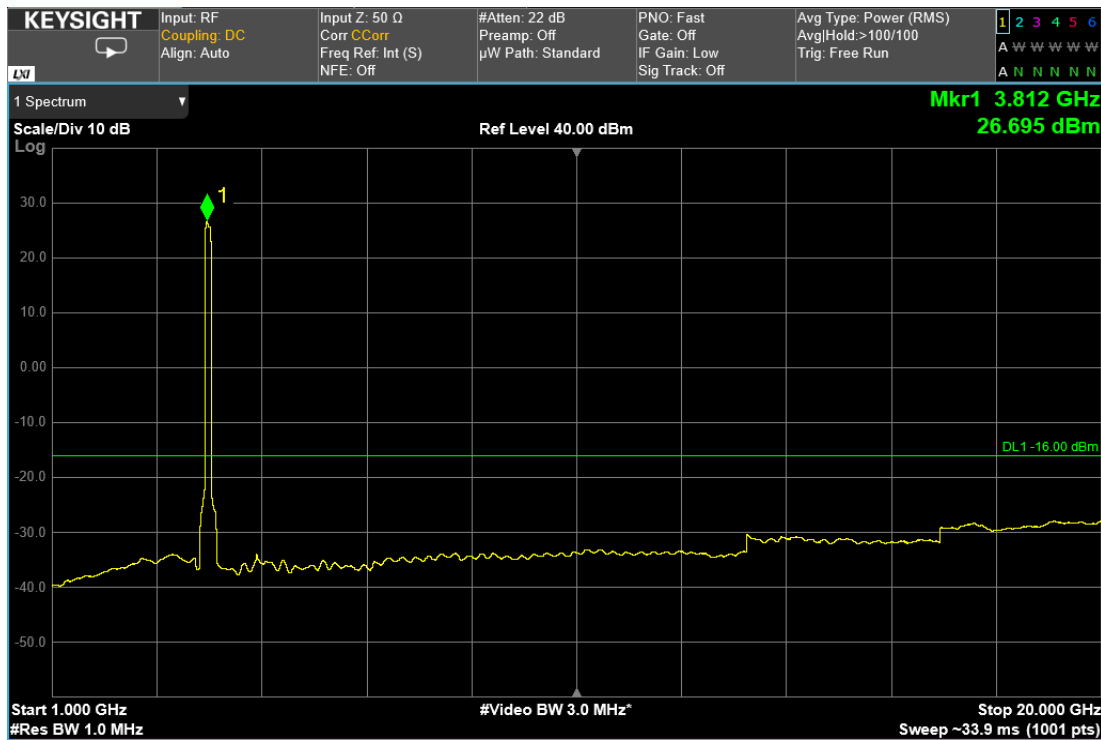


100 MHz signal, middle channel, 1GHz – 20GHz

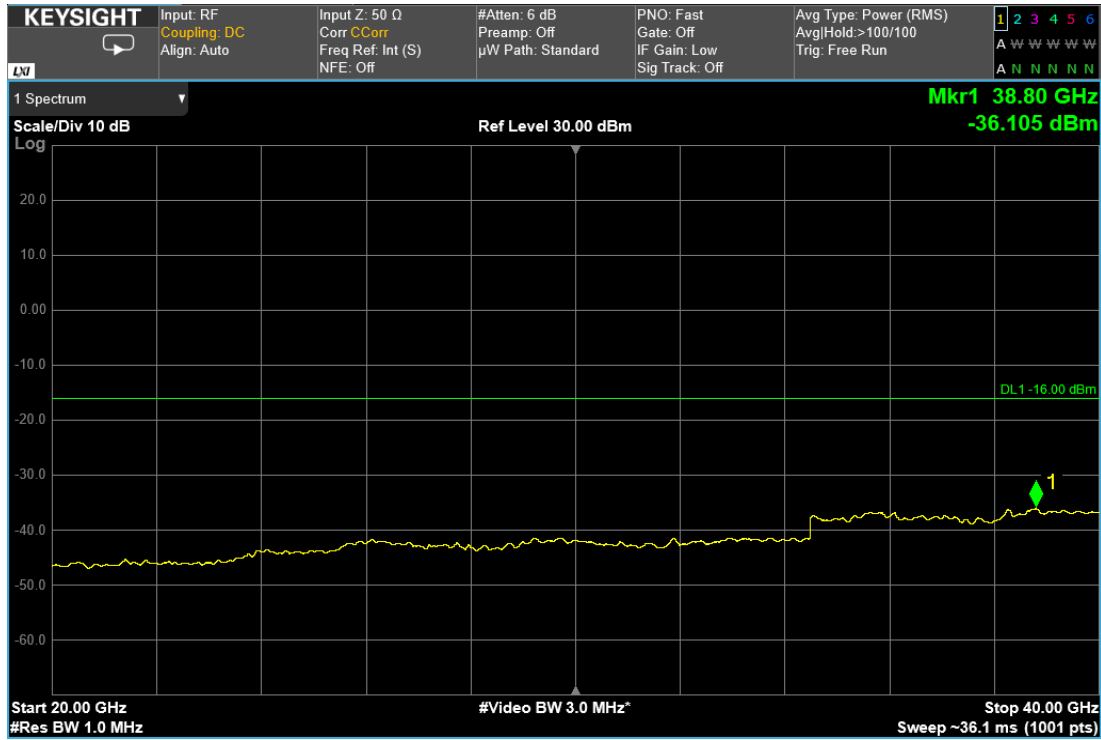


100 MHz signal, middle channel, 20GHz – 40GHz

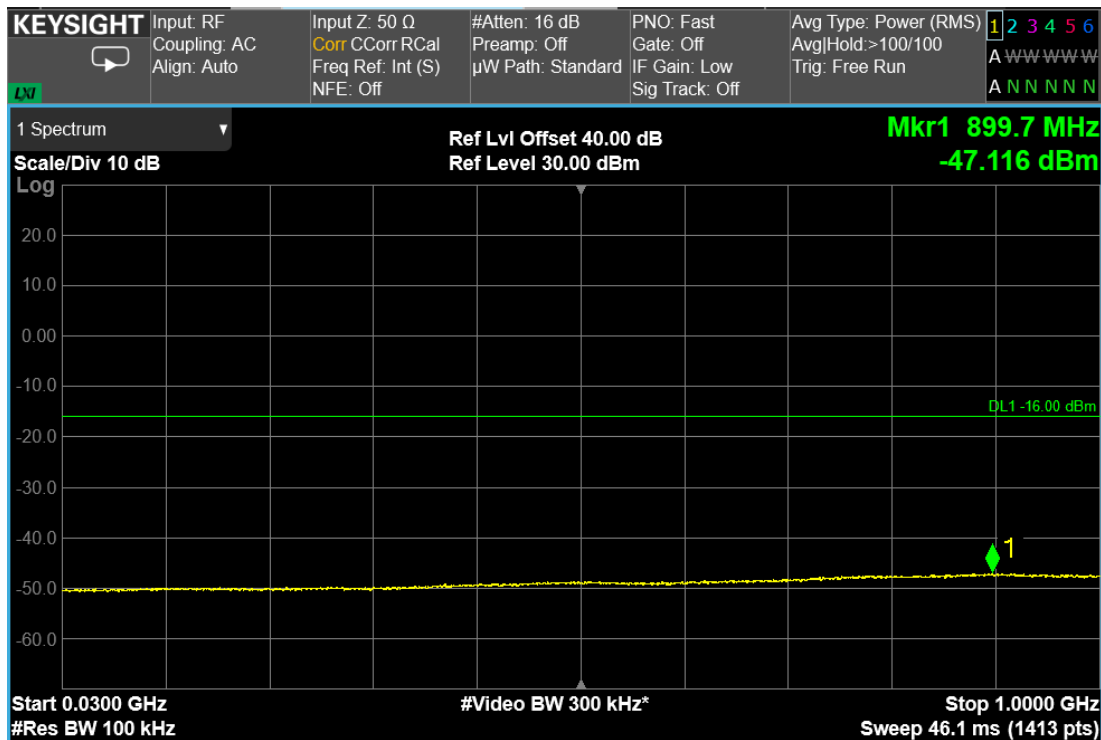

100 MHz signal, top channel, 30Mhz – 1GHz

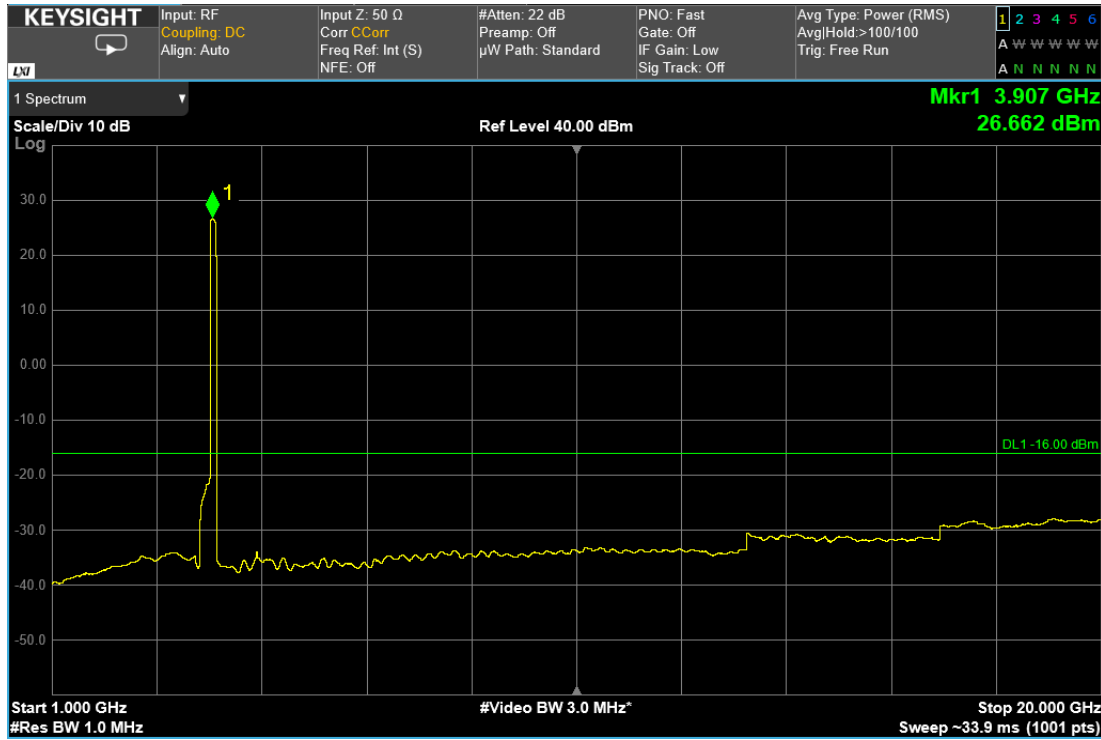



100 MHz signal, top channel, 1GHz – 20GHz

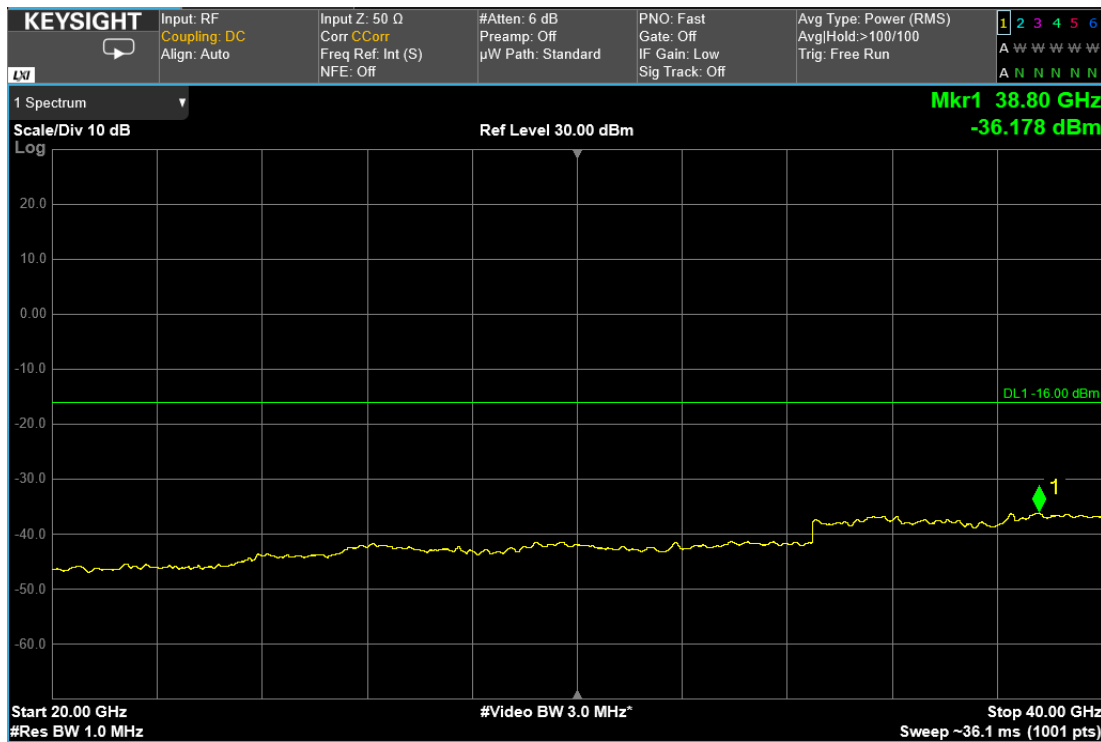



100 MHz signal, top channel, 20GHz – 40GHz

Test data, continued: band edges Inter modulation



RF PORT 1

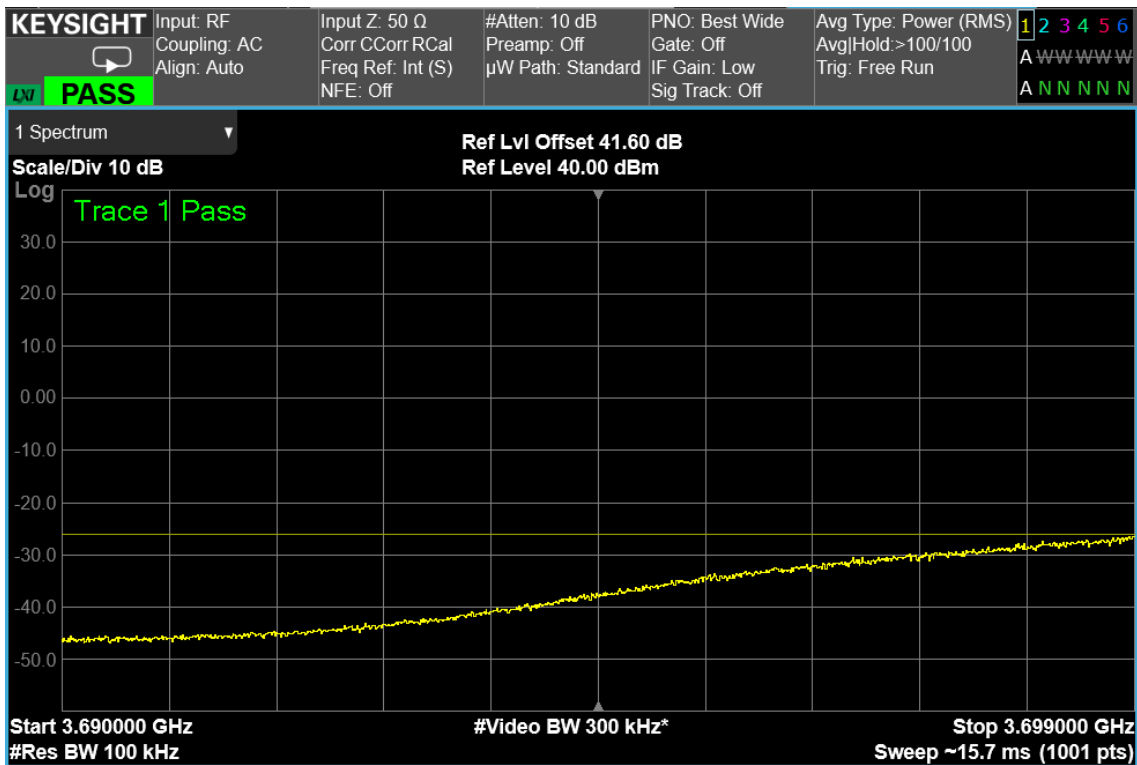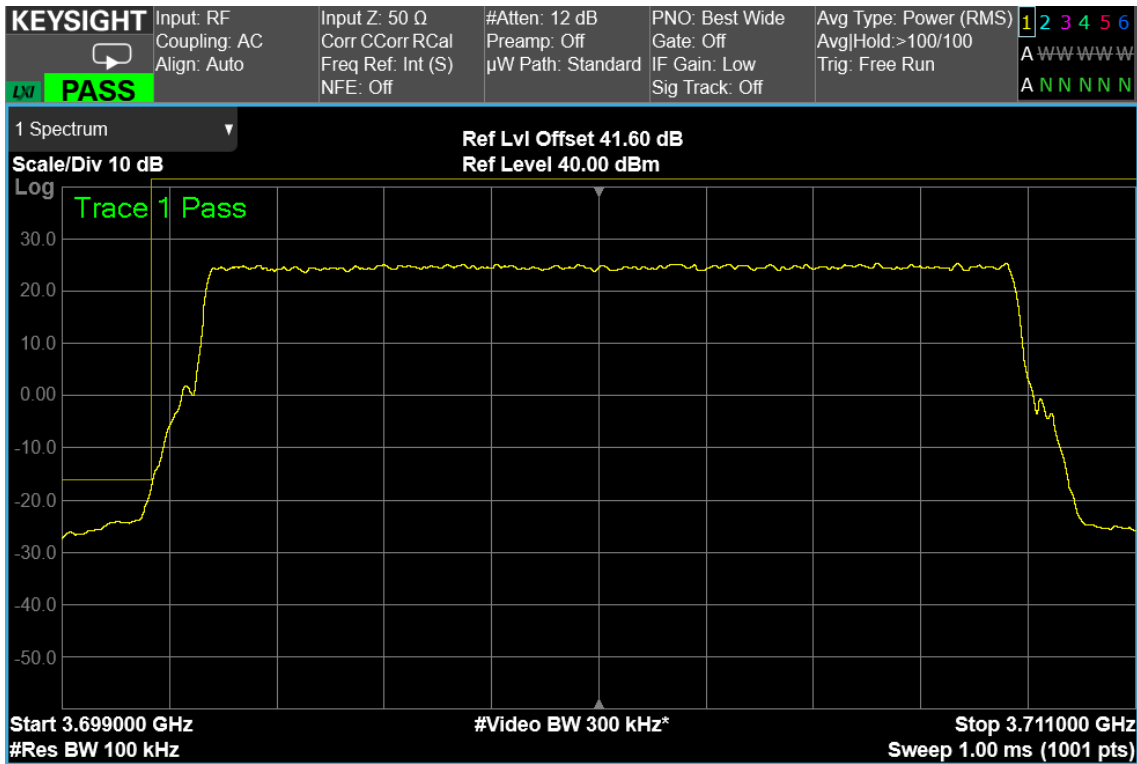



10 MHz signal, Low Band Edge, 1 carrier, nominal input signal

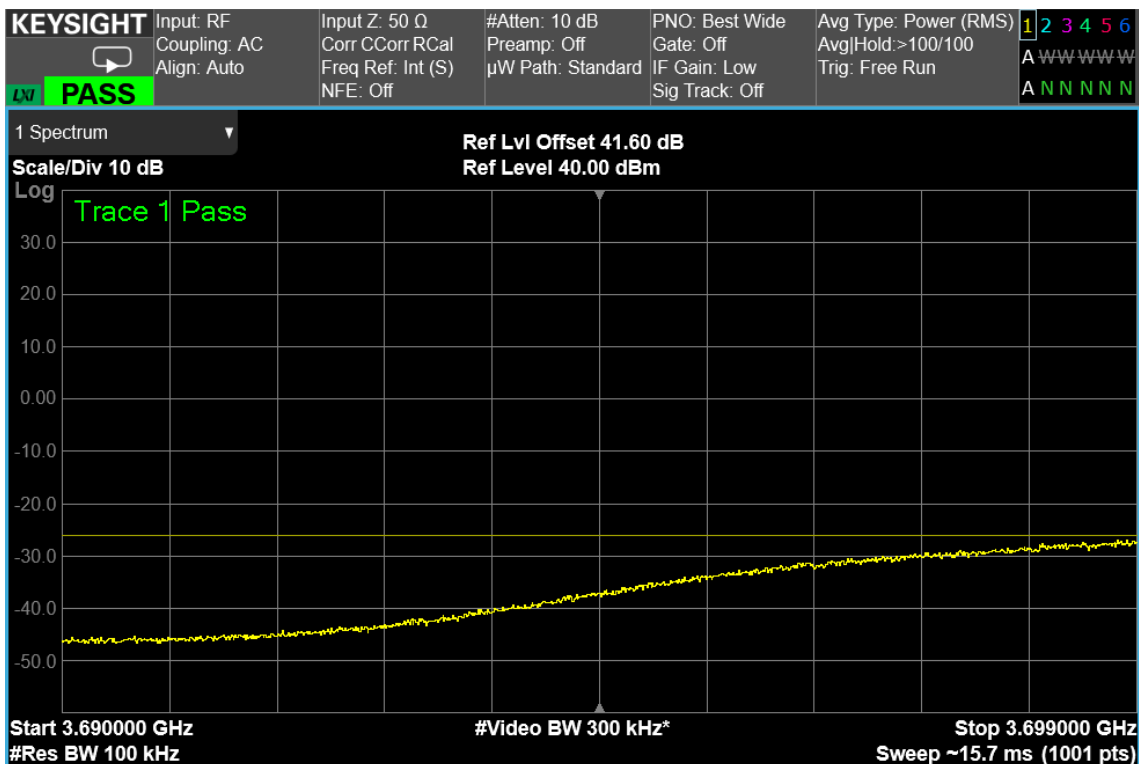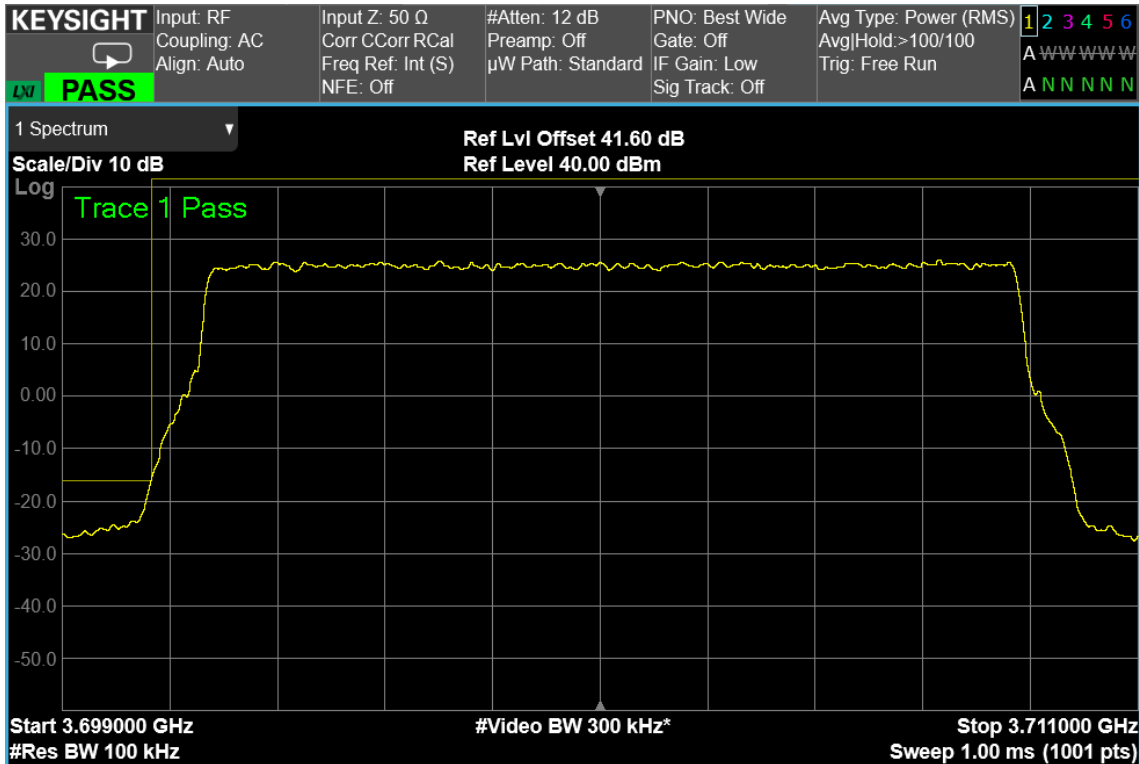



10 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB

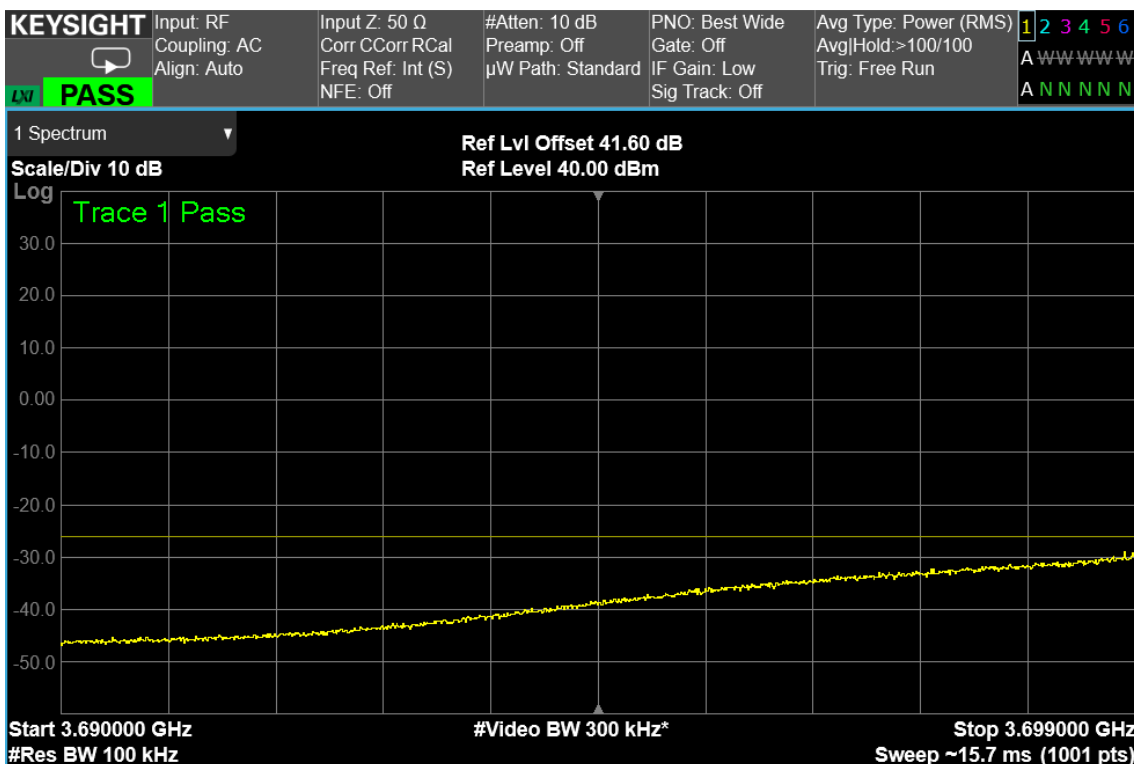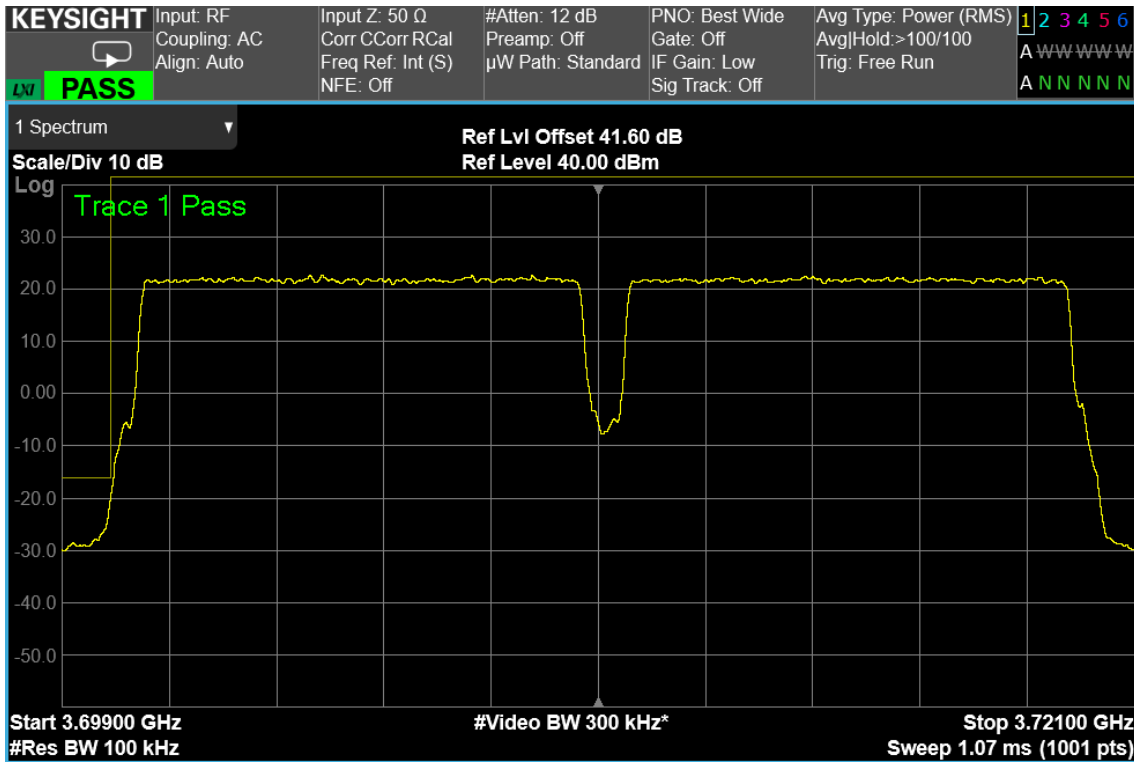



10 MHz signal, Low Band Edge, 2 carrier, nominal input signal

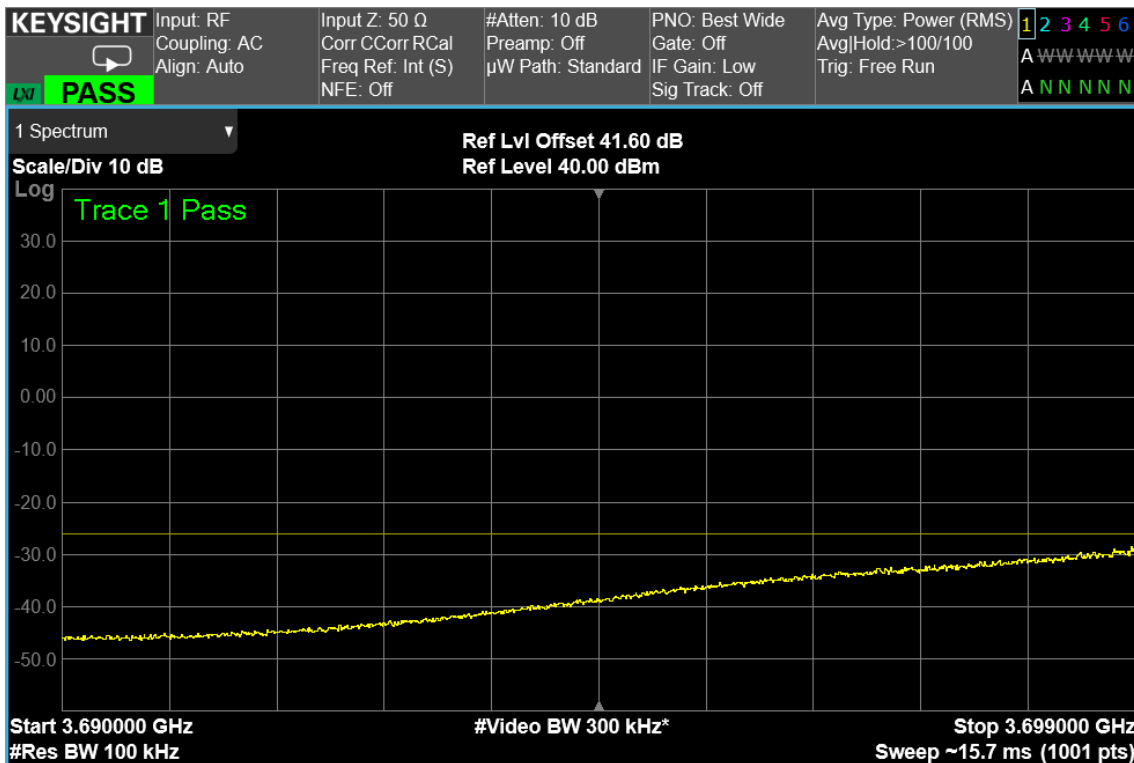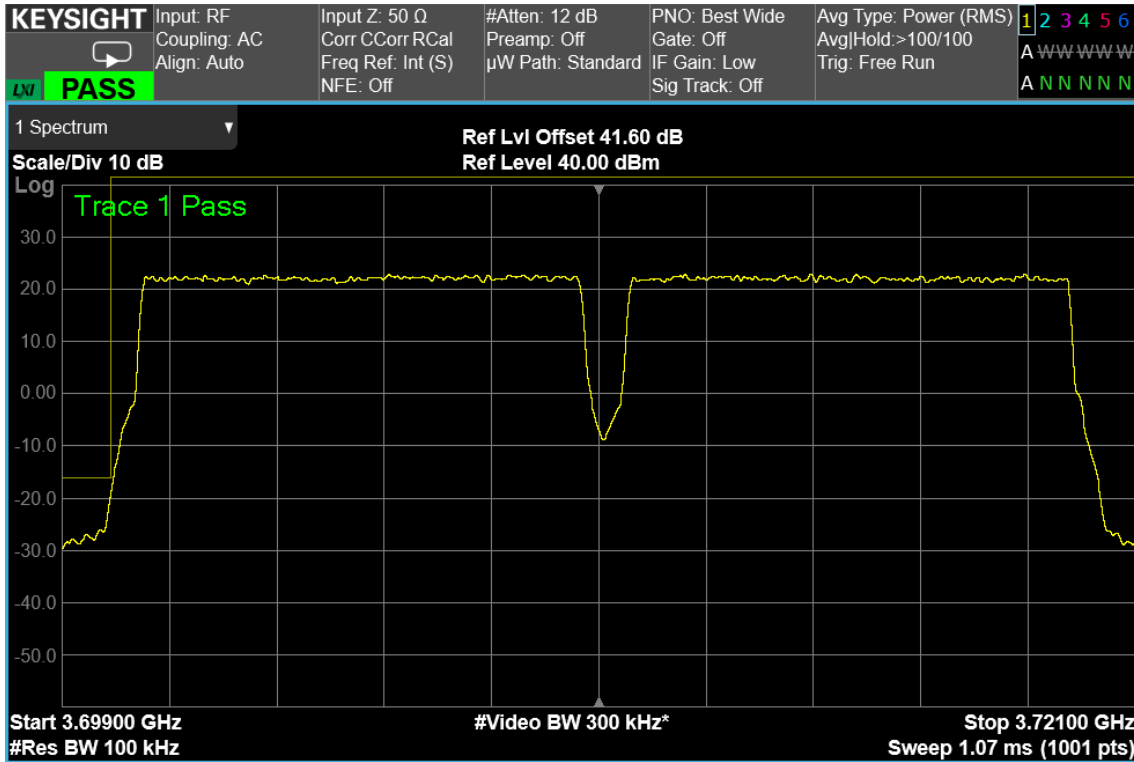



10 MHz signal, Low Band Edge, 2 carrier, nominal input signal + 3dB

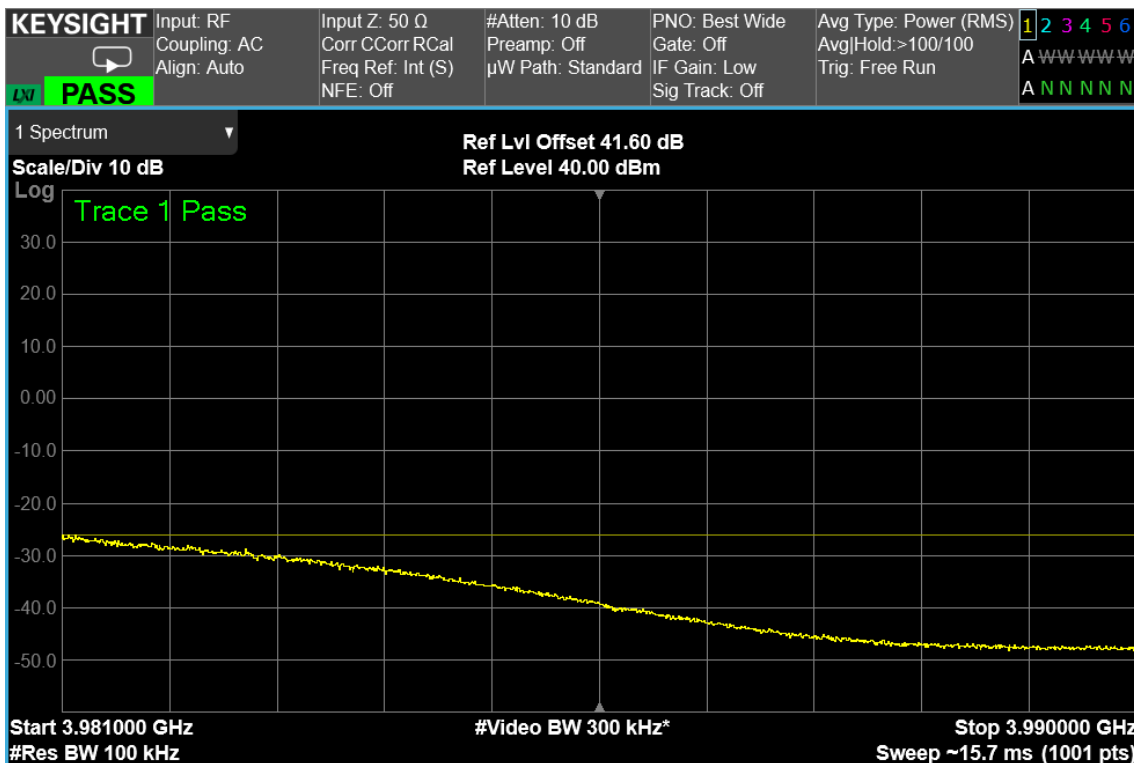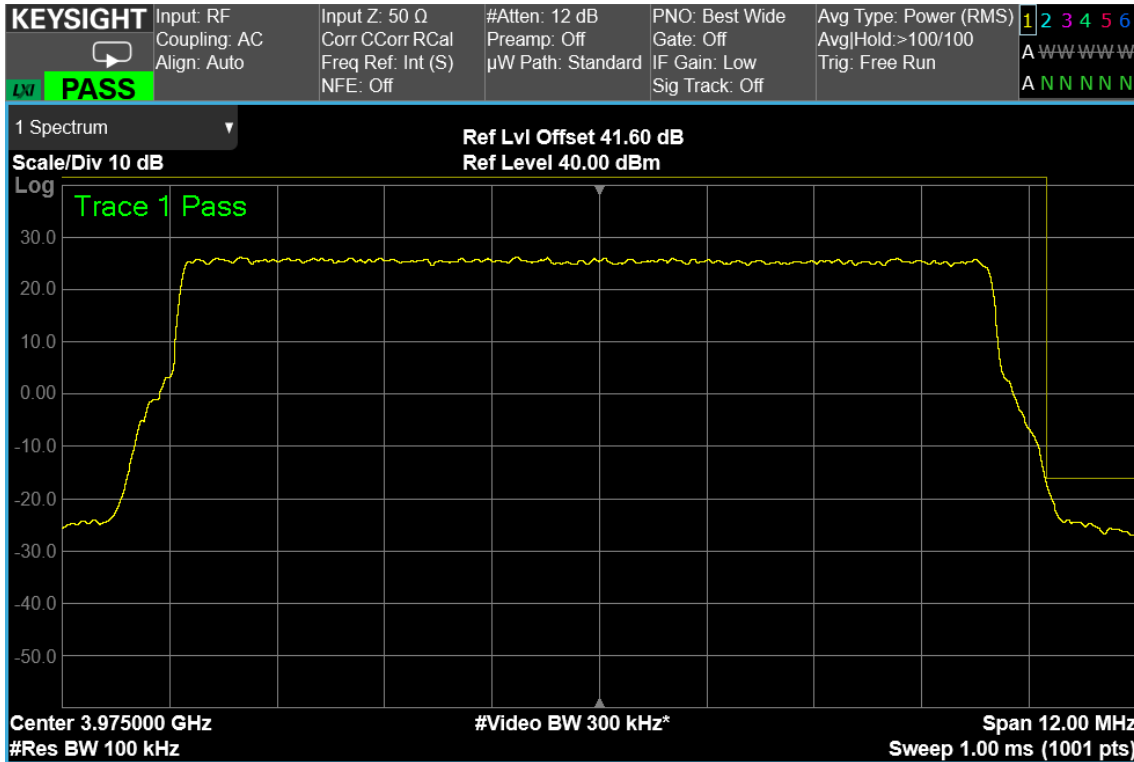



10 MHz signal, High Band Edge, 1 carrier, nominal input signal

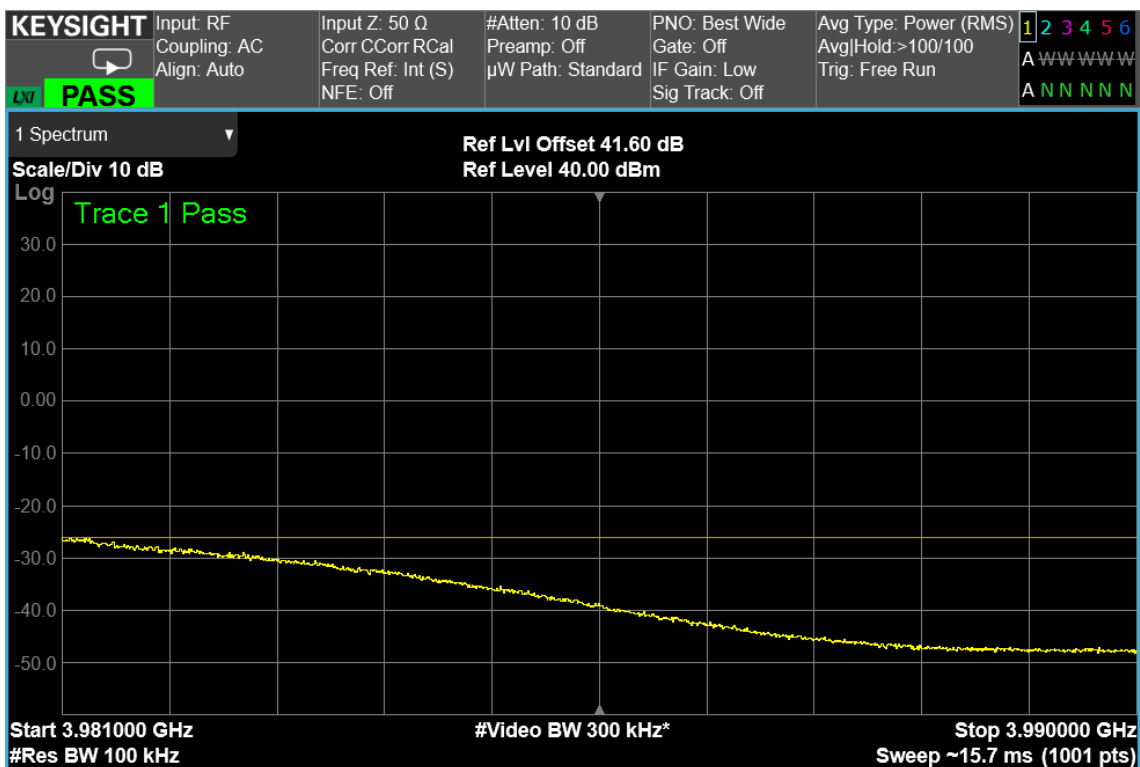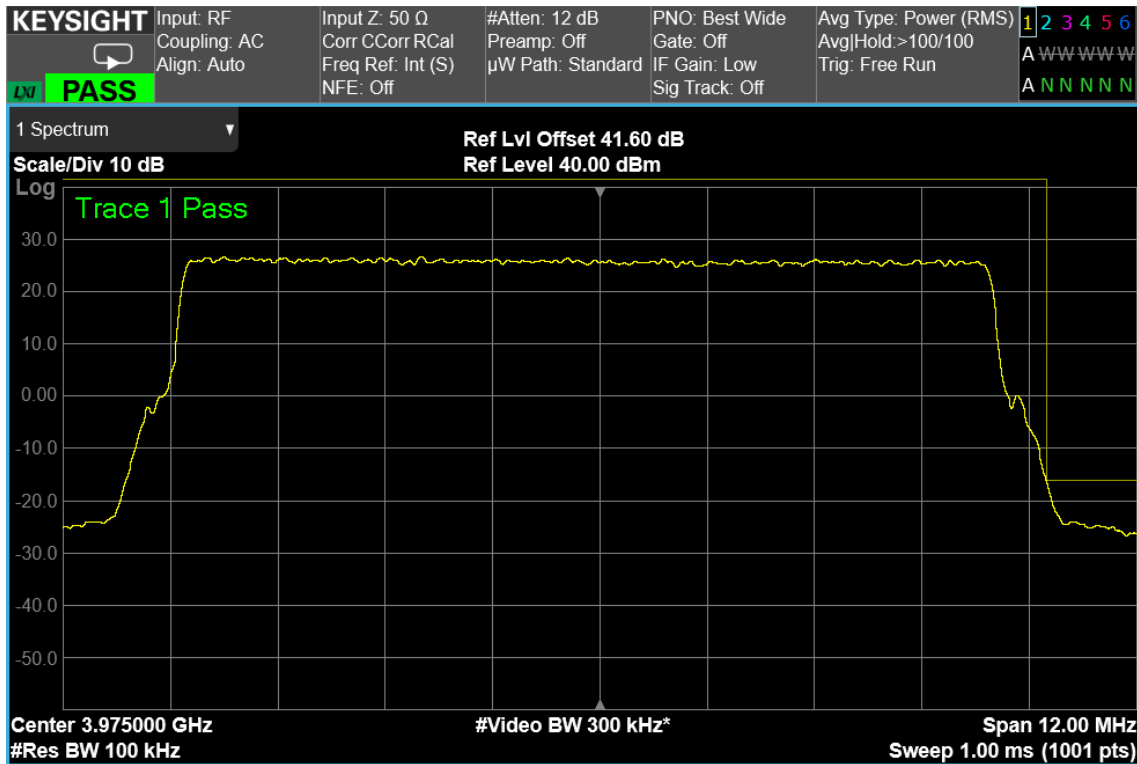


10 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB

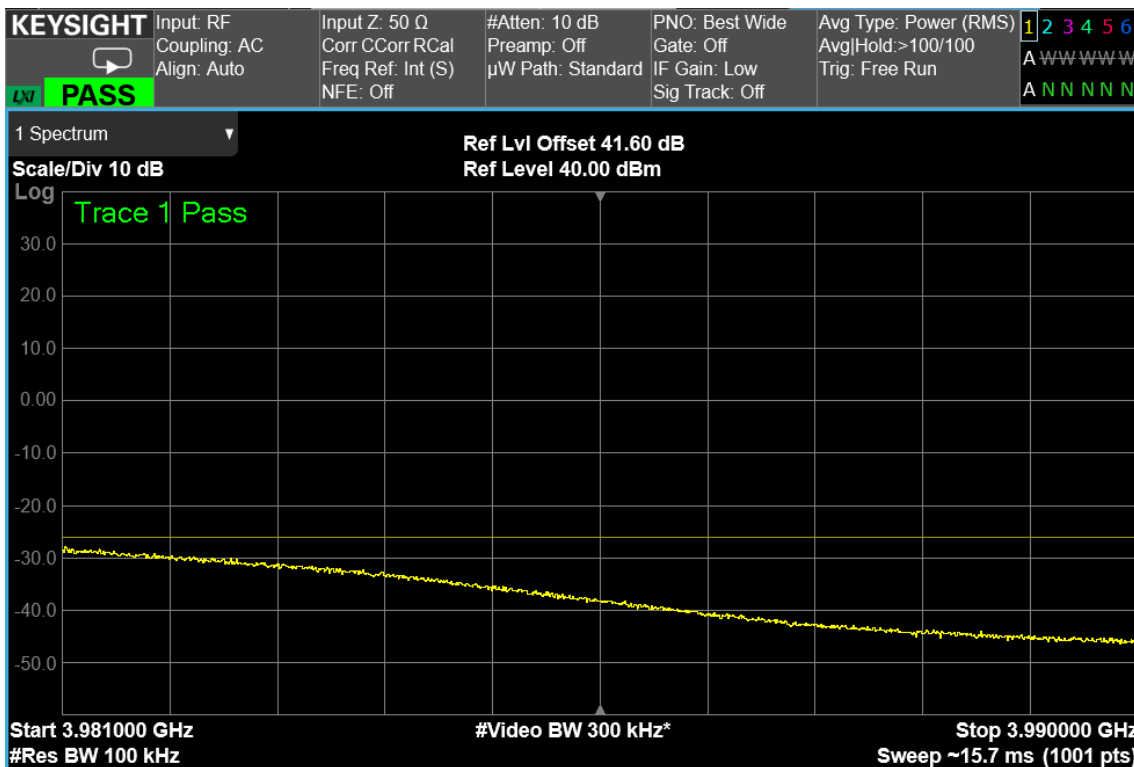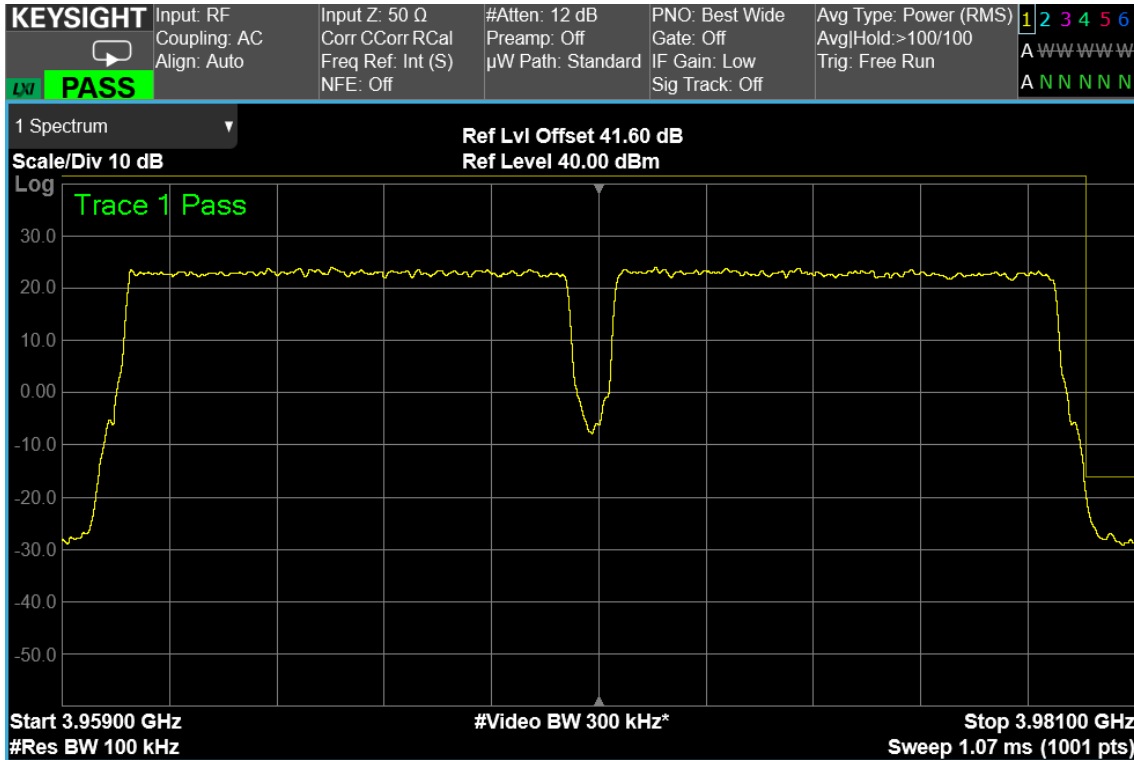


10 MHz signal, High Band Edge, 2 carrier, nominal input signal

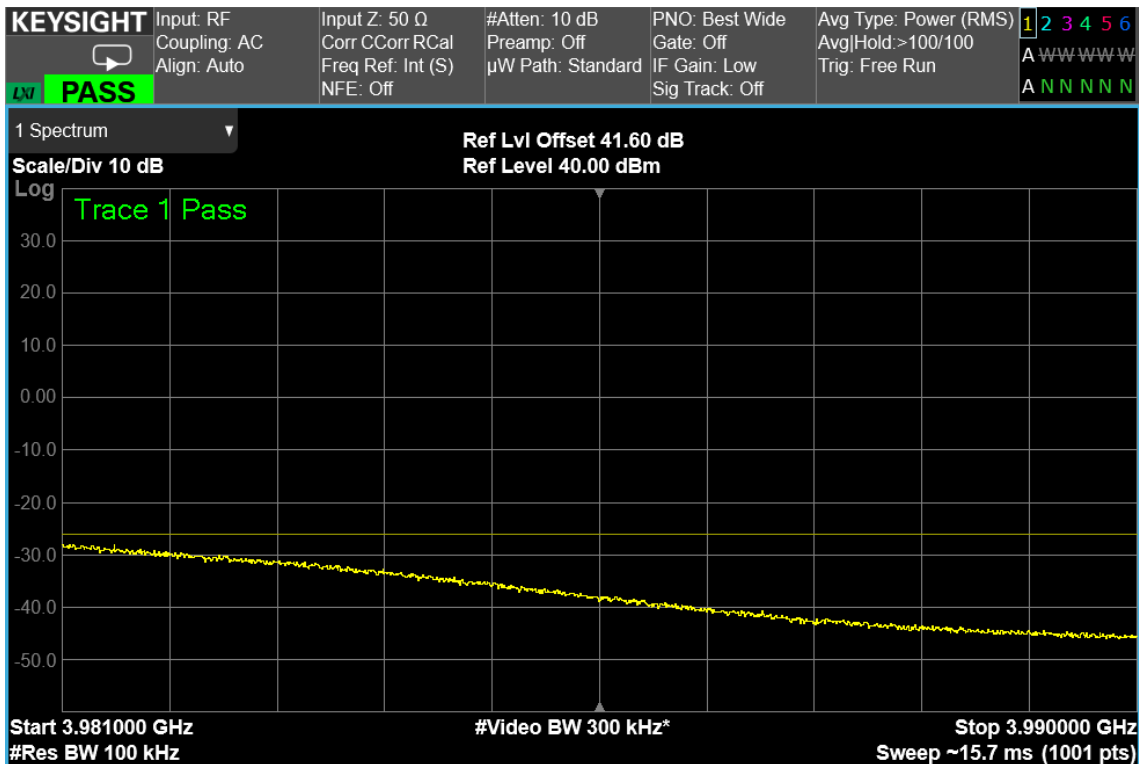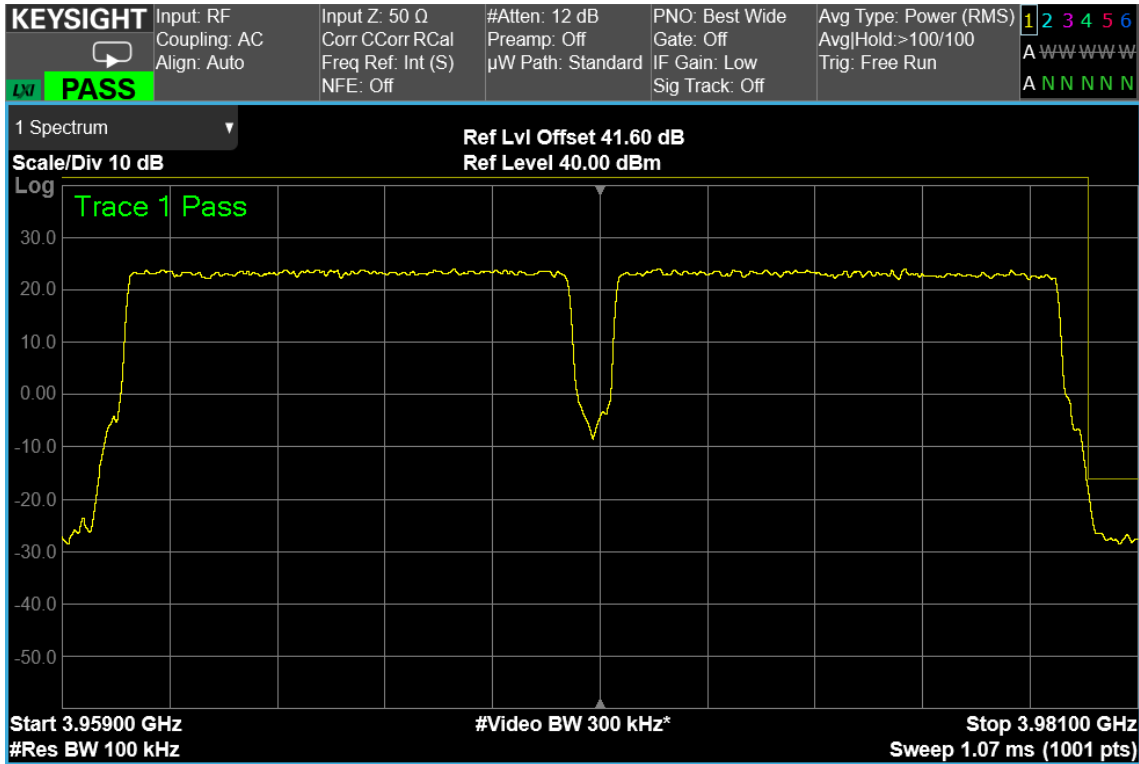


10 MHz signal, High Band Edge, 2 carrier, nominal input signal + 3dB

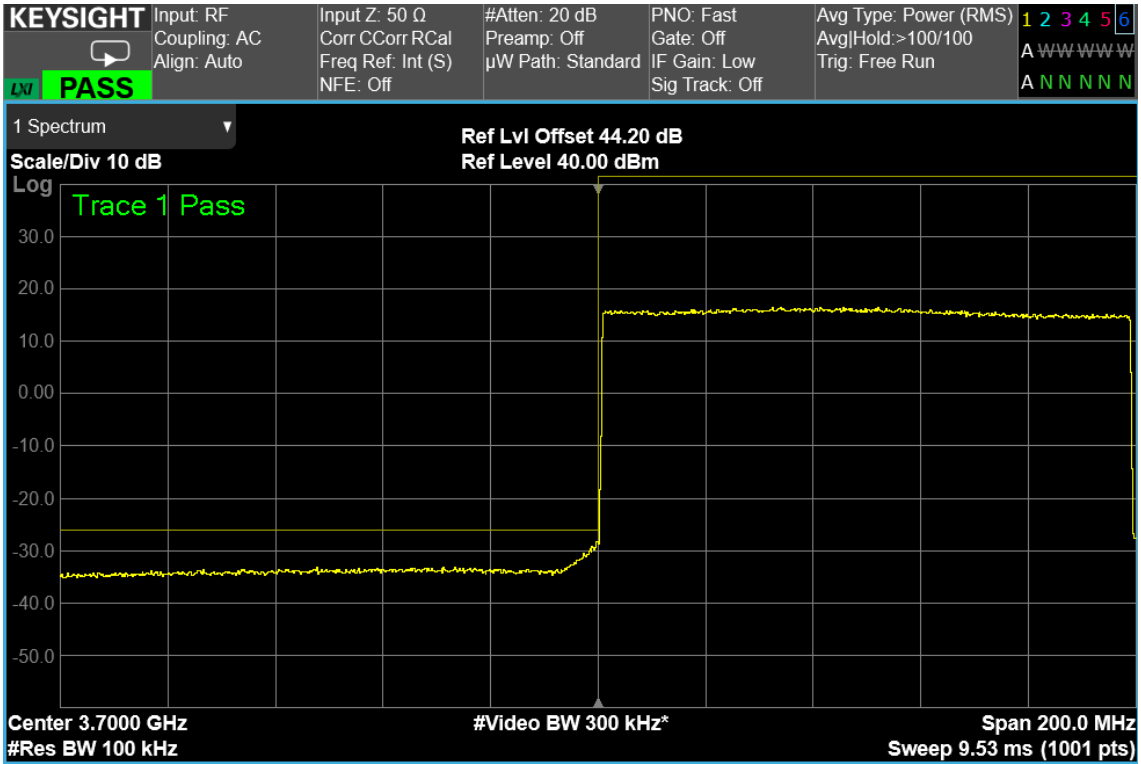


100 MHz signal, Low Band Edge, 1 carrier, nominal input signal

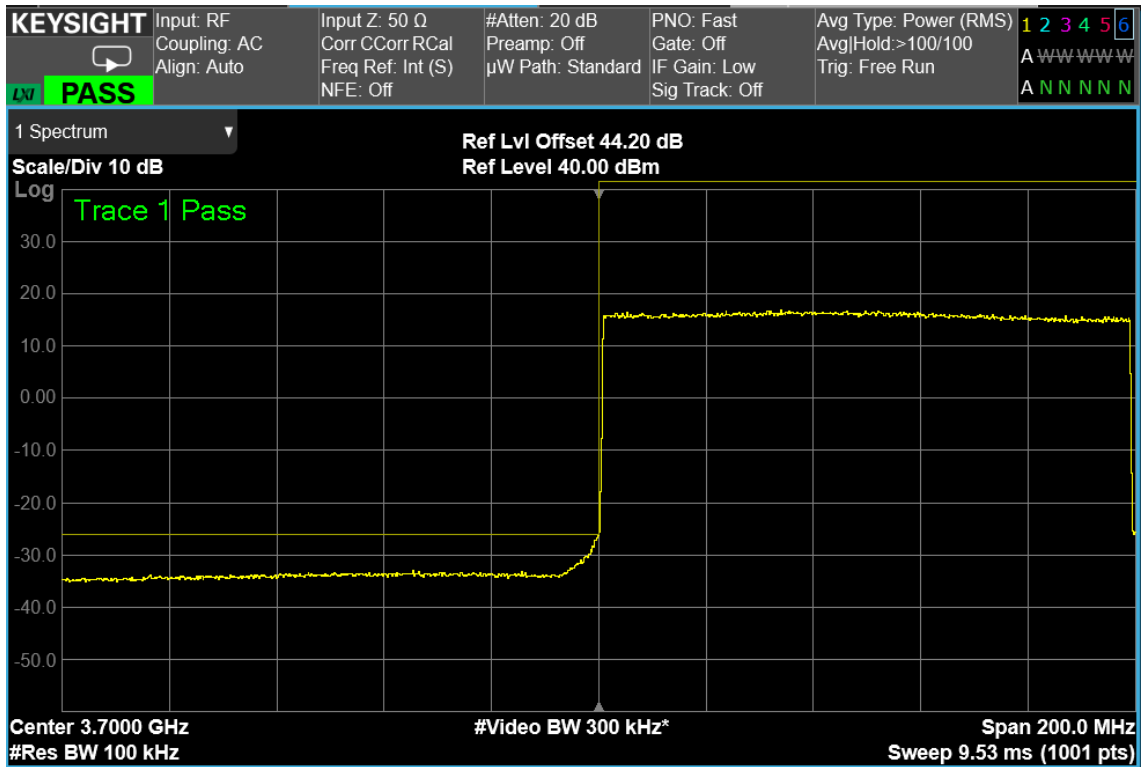


100 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB

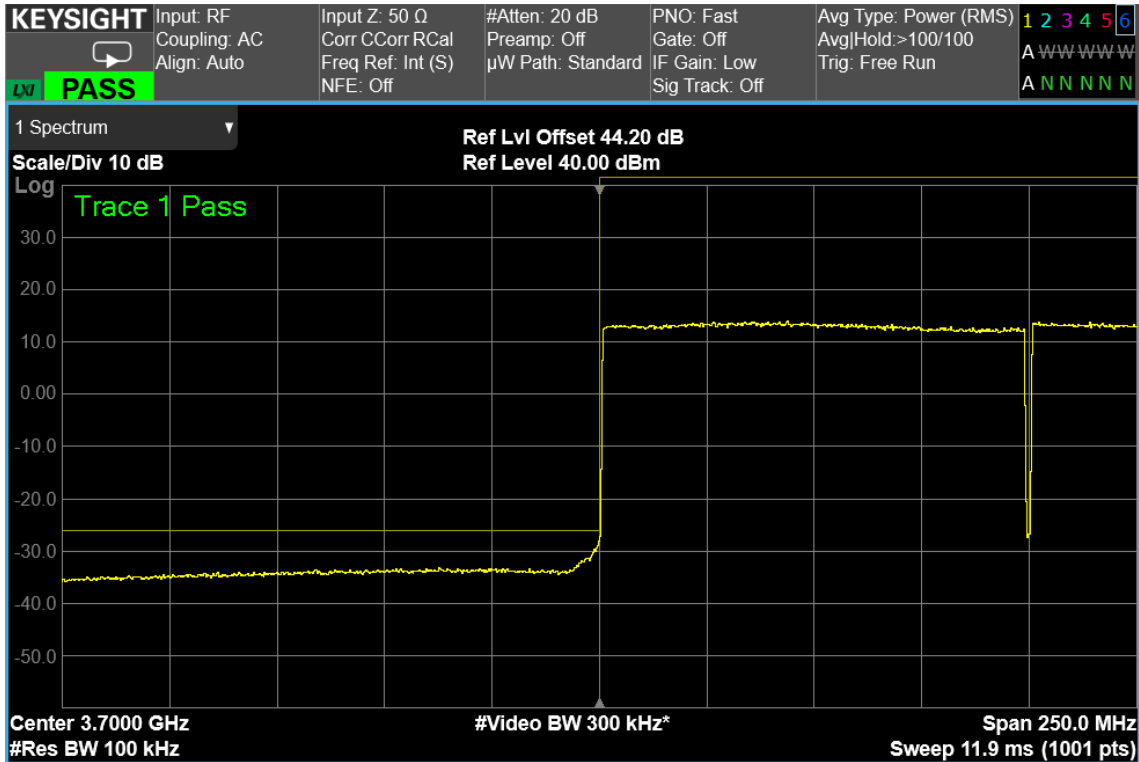


100 MHz signal, Low Band Edge, 2 carrier, nominal input signal

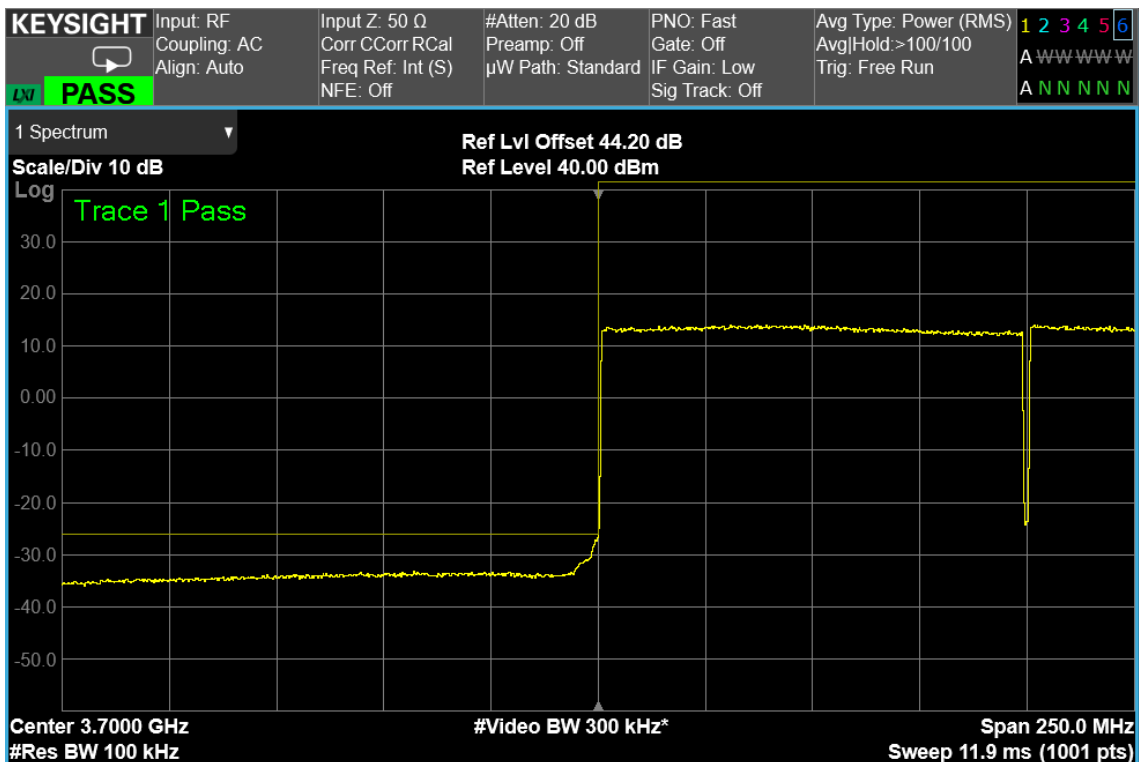


100 MHz signal, Low Band Edge, 2 carrier, nominal input signal + 3dB

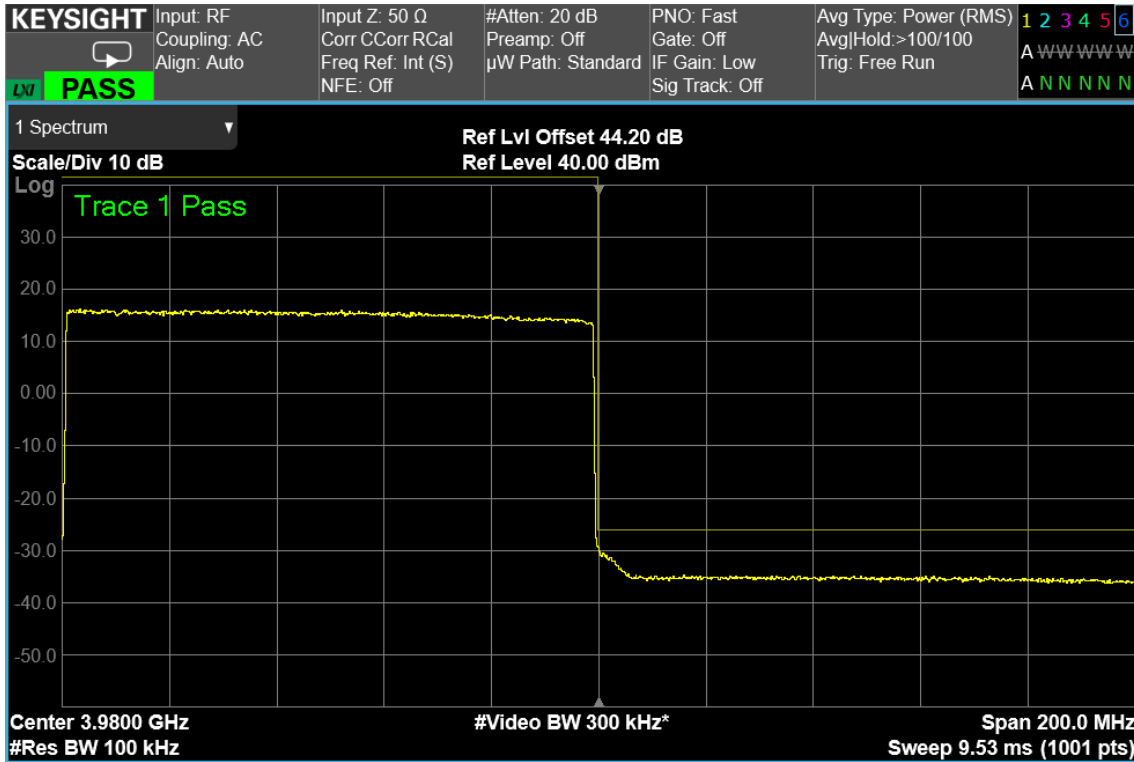


100 MHz signal, High Band Edge, 1 carrier, nominal input signal

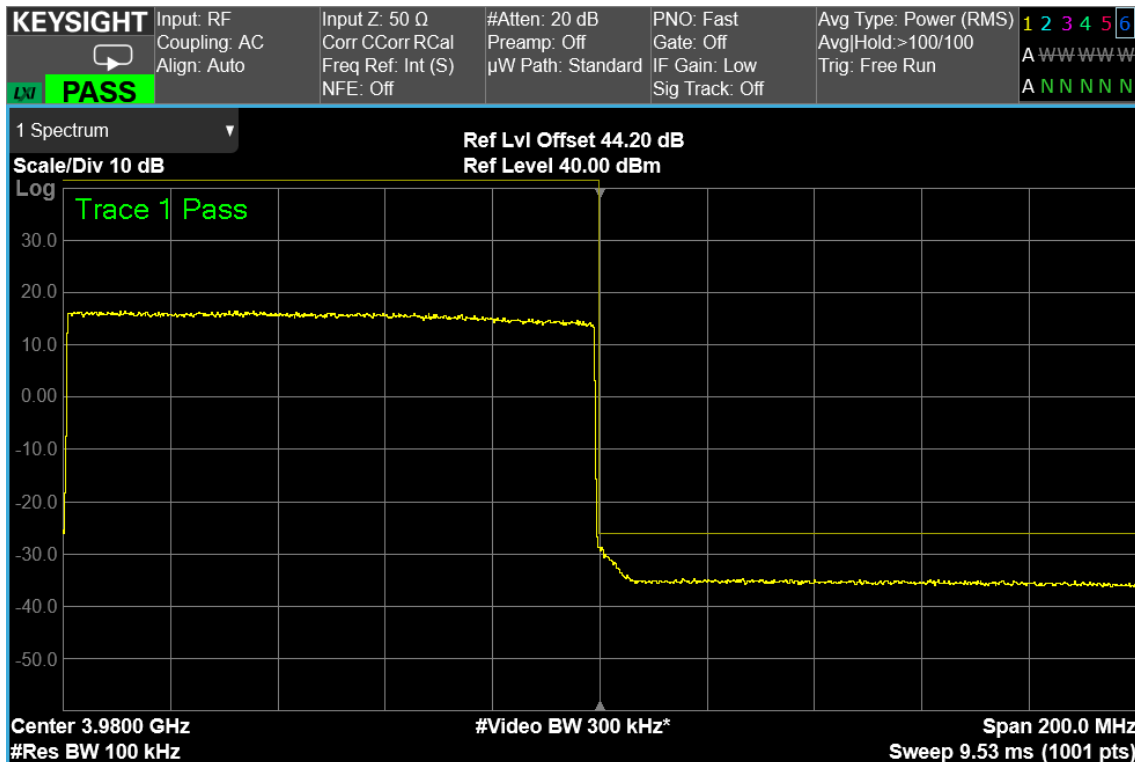

100 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB

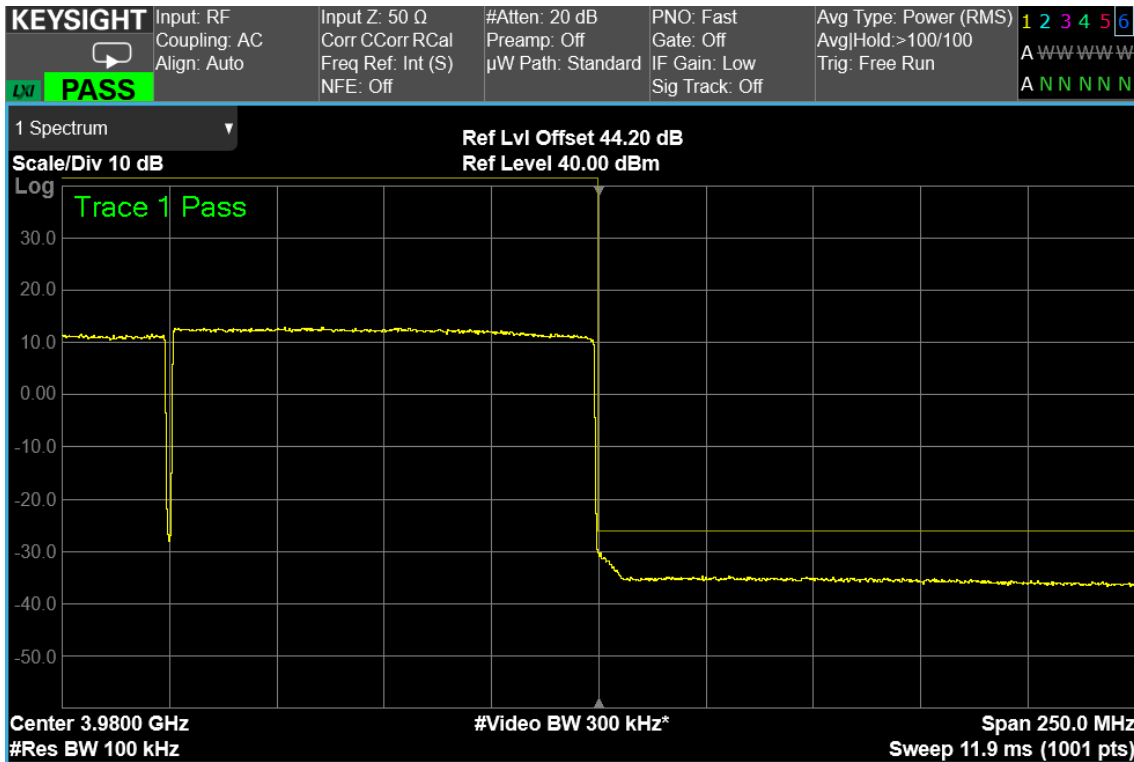


100 MHz signal, High Band Edge, 2 carrier, nominal input signal


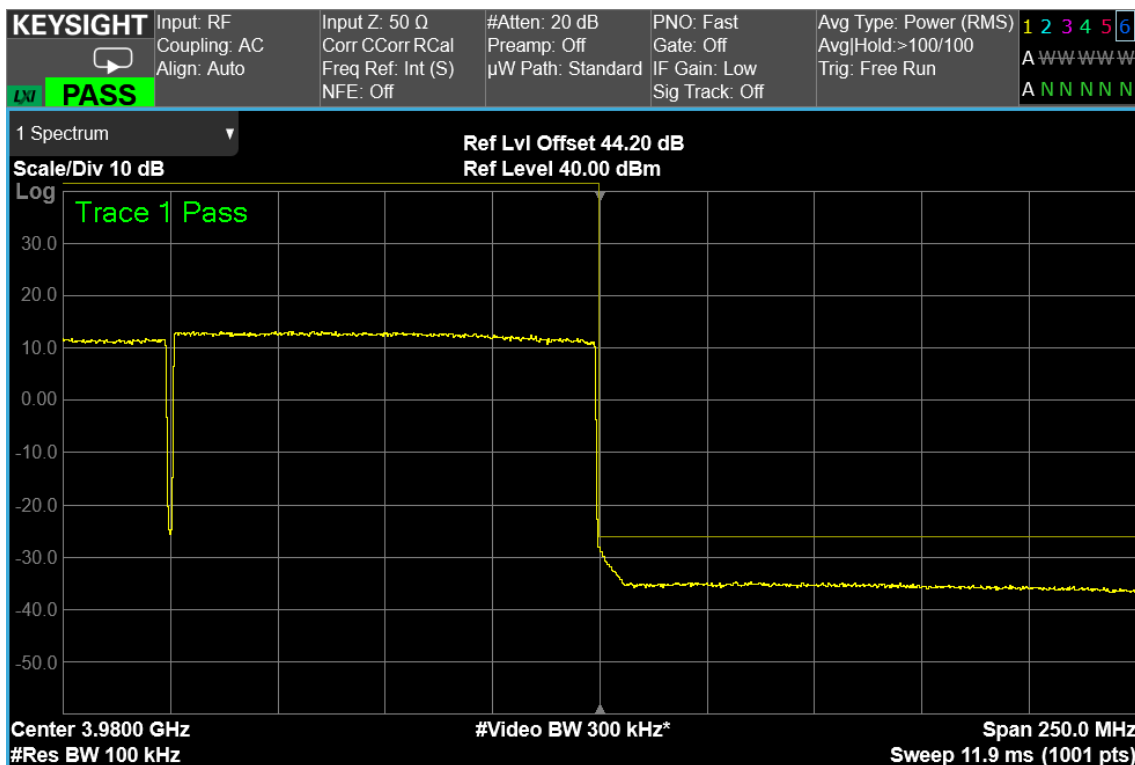


100 MHz signal, High Band Edge, 2 carrier, nominal input signal + 3dB



RF PORT 2

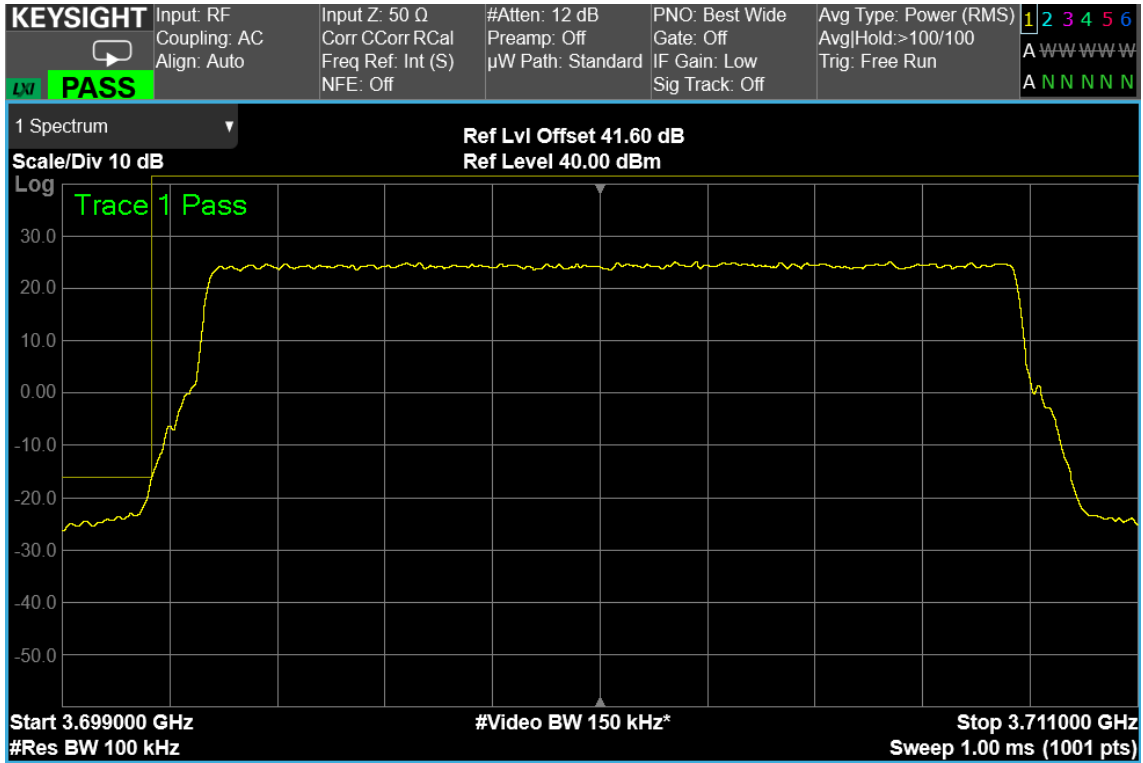



10 MHz signal, Low Band Edge, 1 carrier, nominal input signal

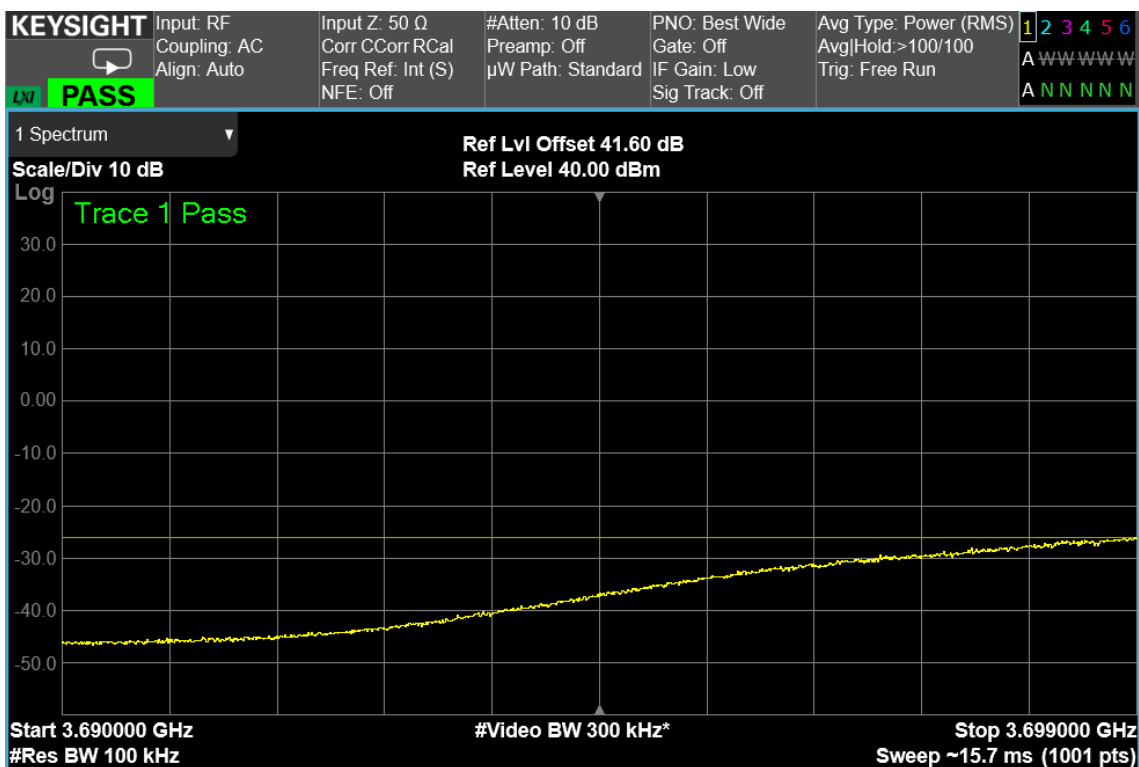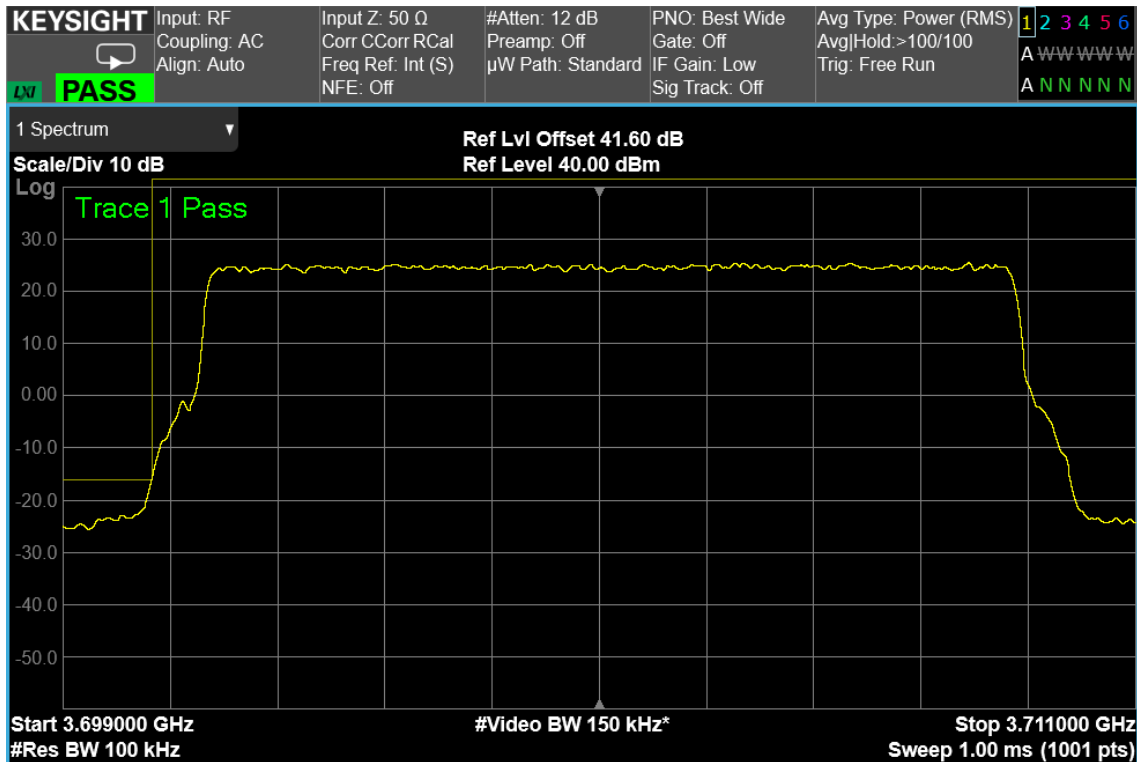



10 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB

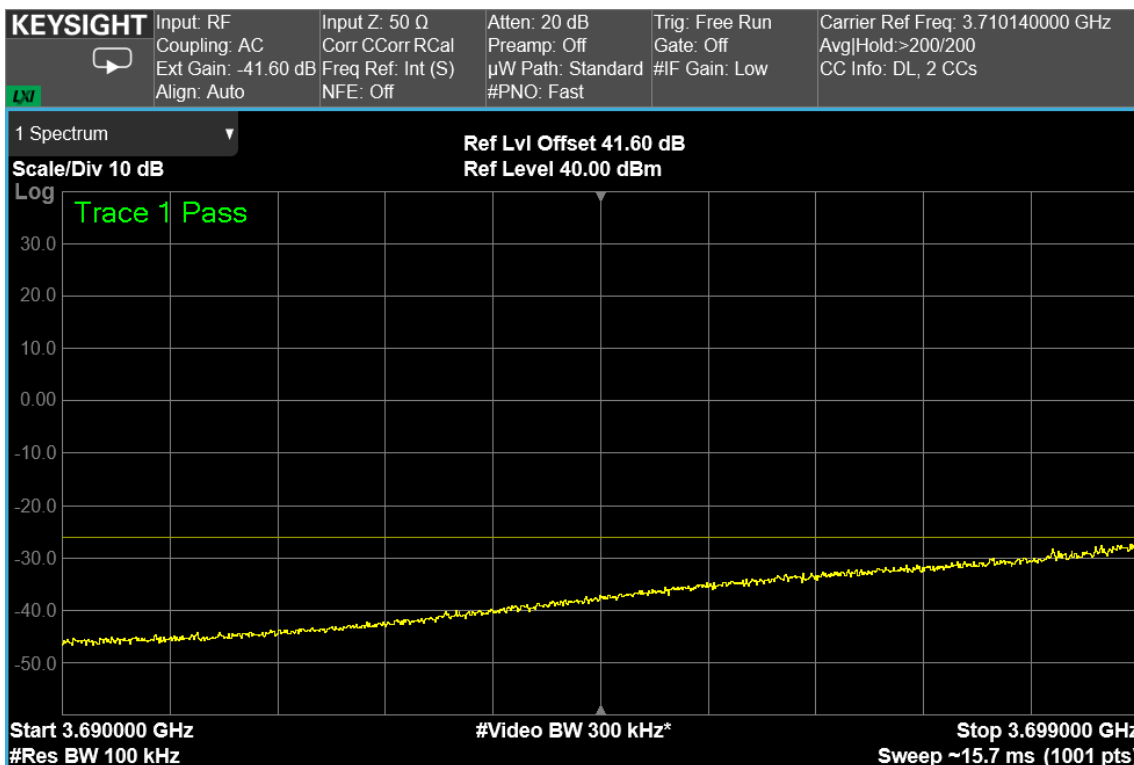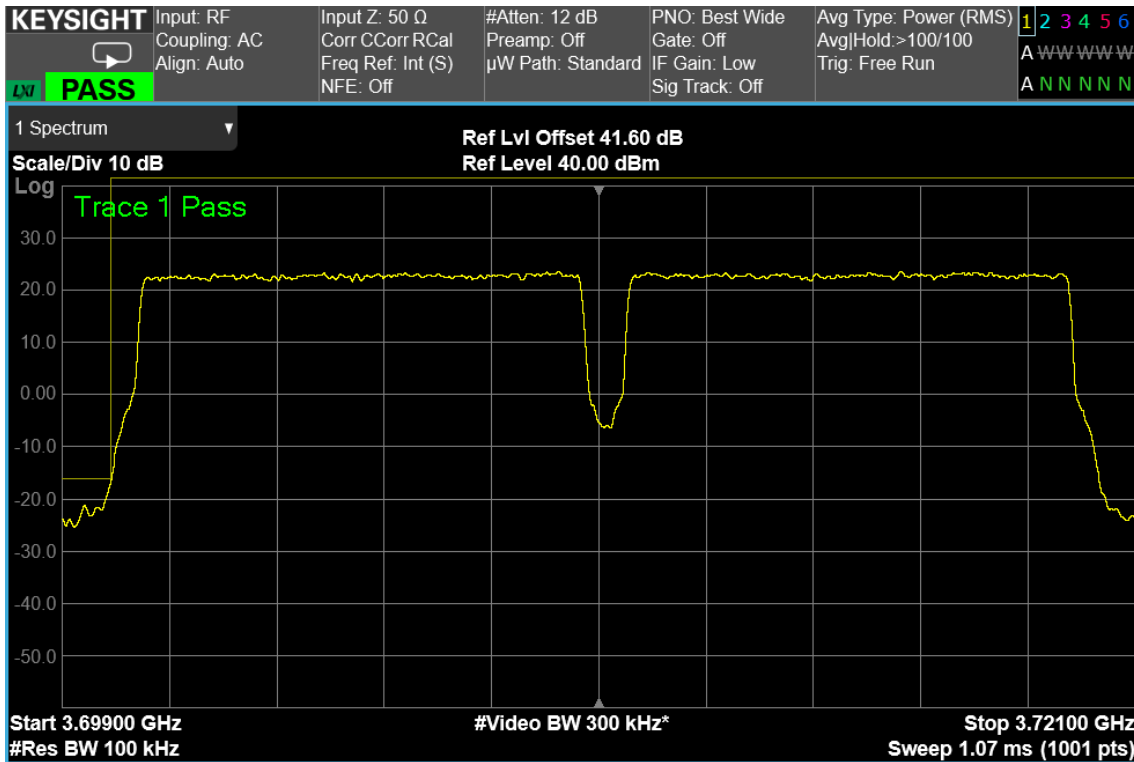



10 MHz signal, Low Band Edge, 2 carrier, nominal input signal

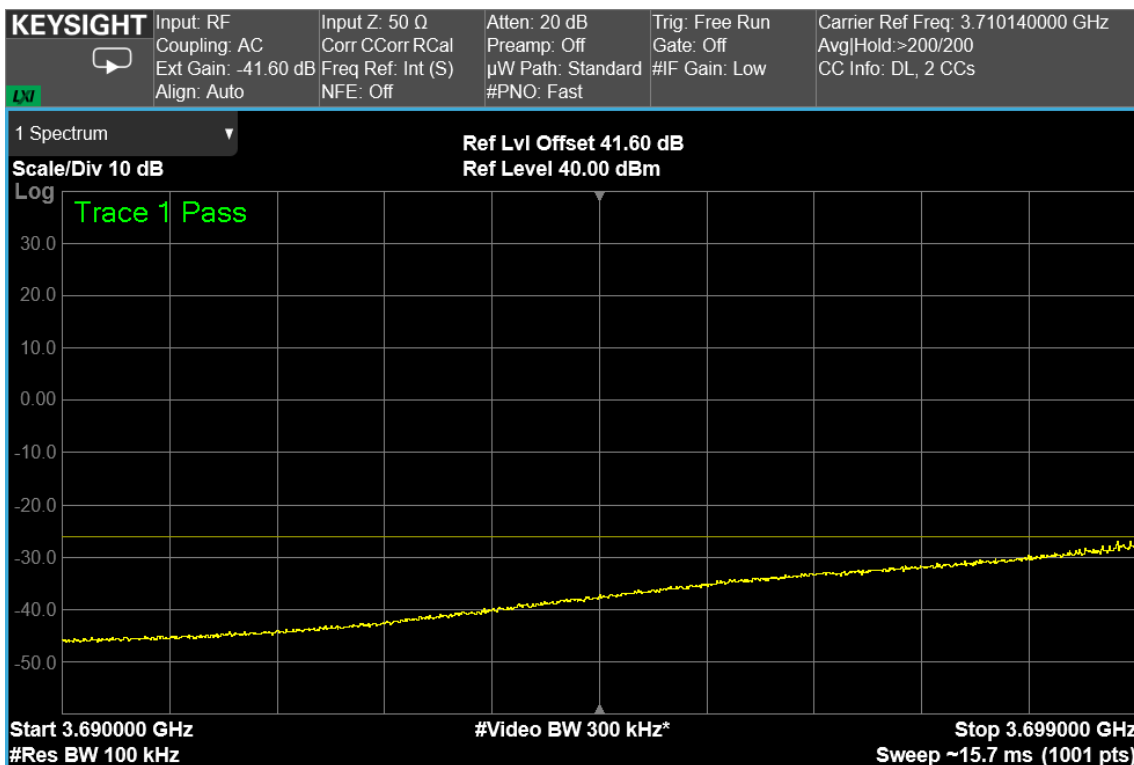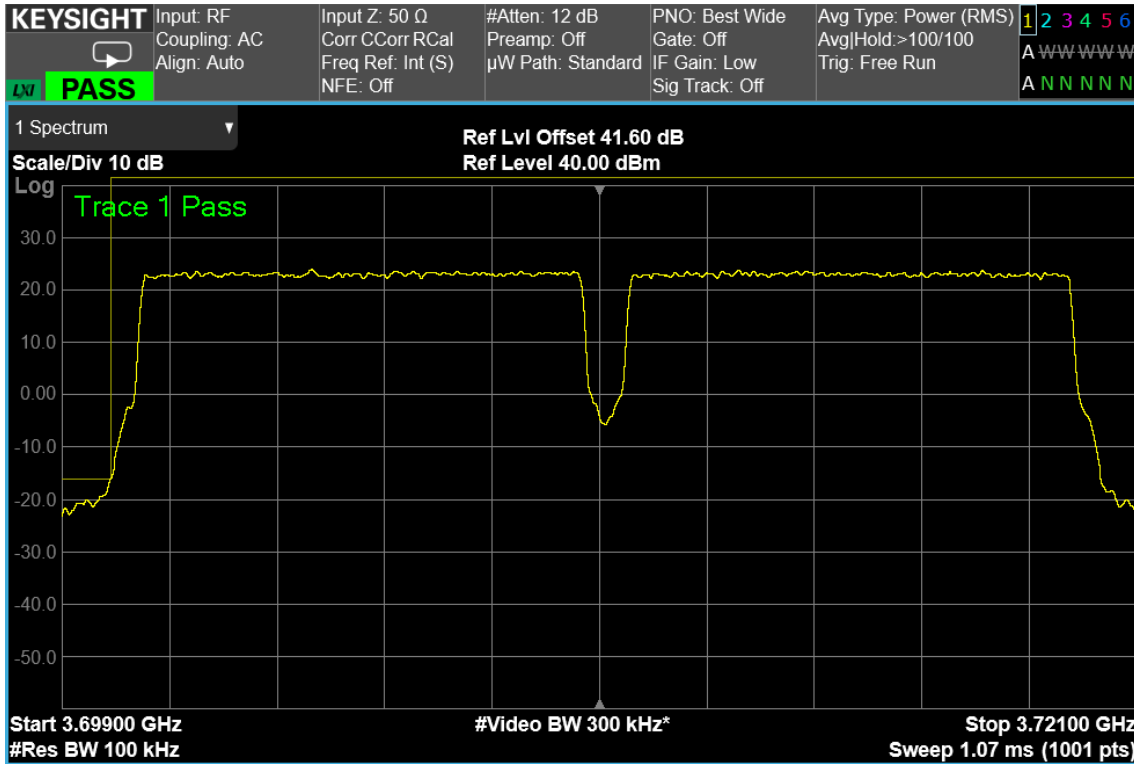



10 MHz signal, Low Band Edge, 2 carrier, nominal input signal + 3dB

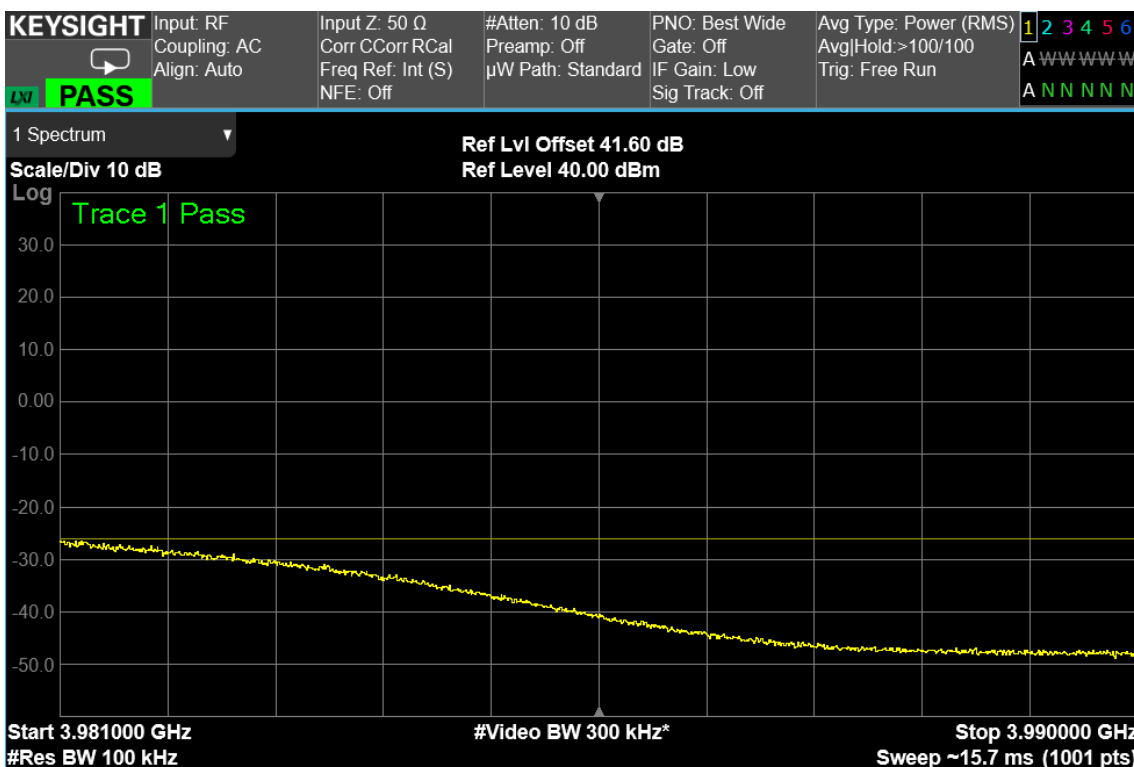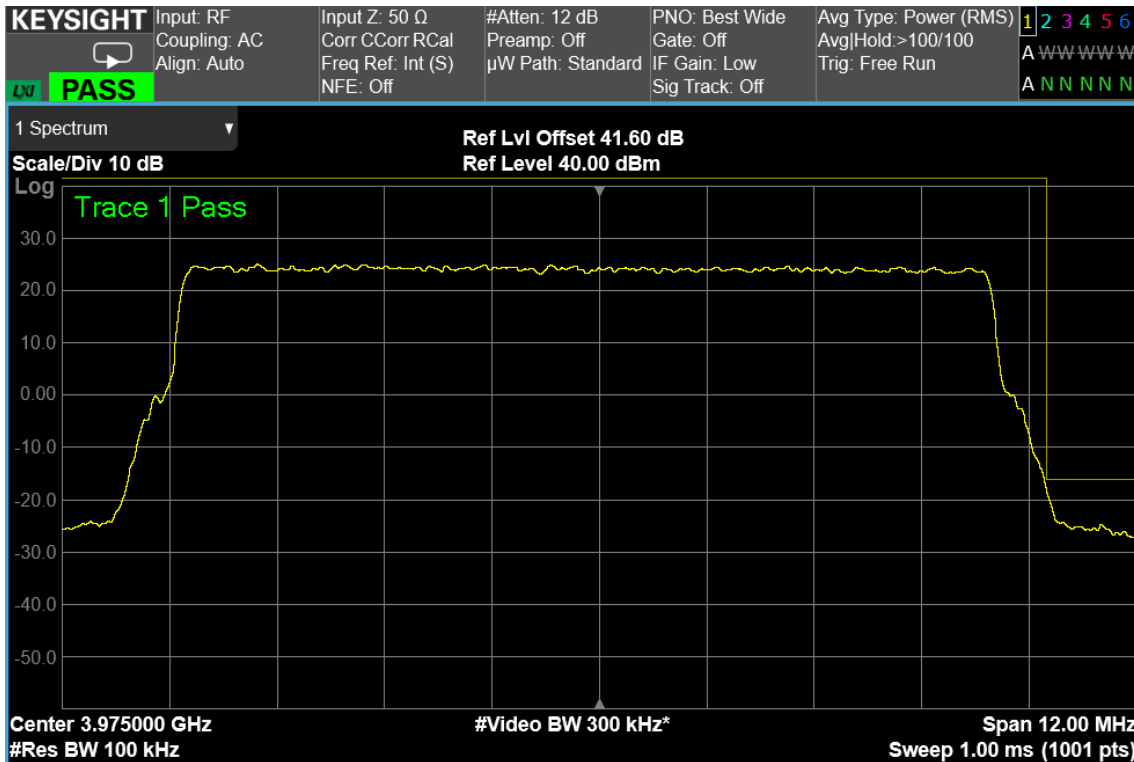



10 MHz signal, High Band Edge, 1 carrier, nominal input signal

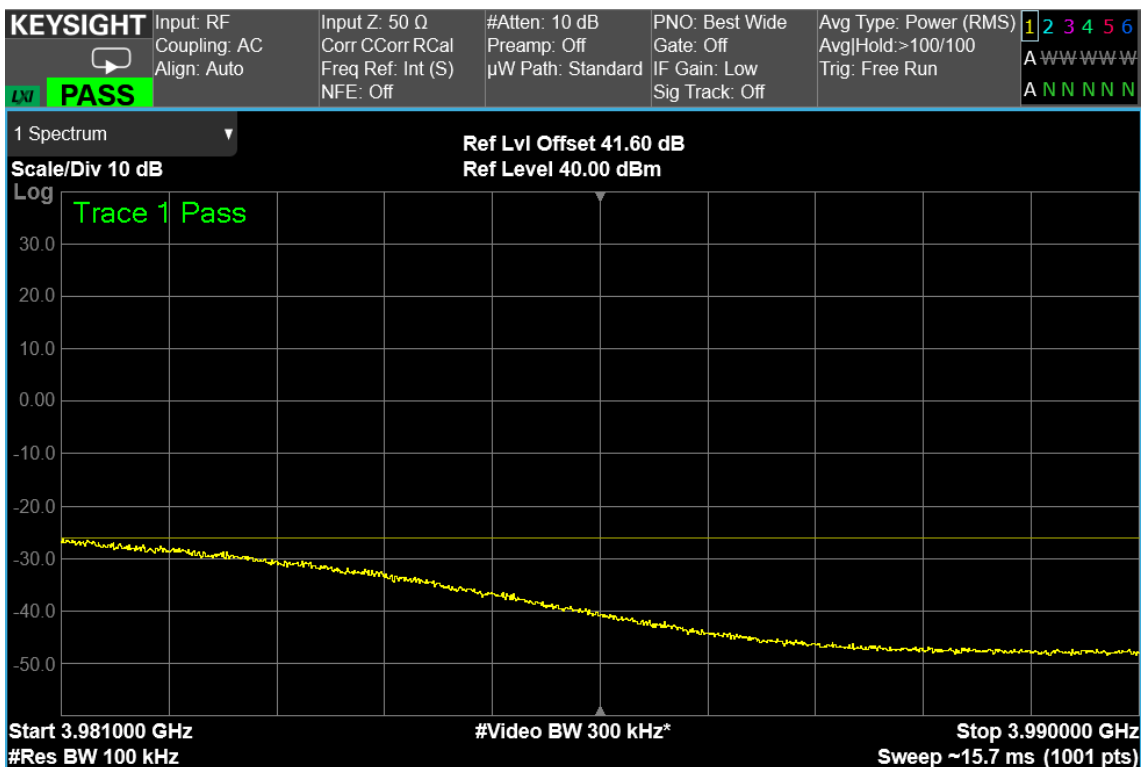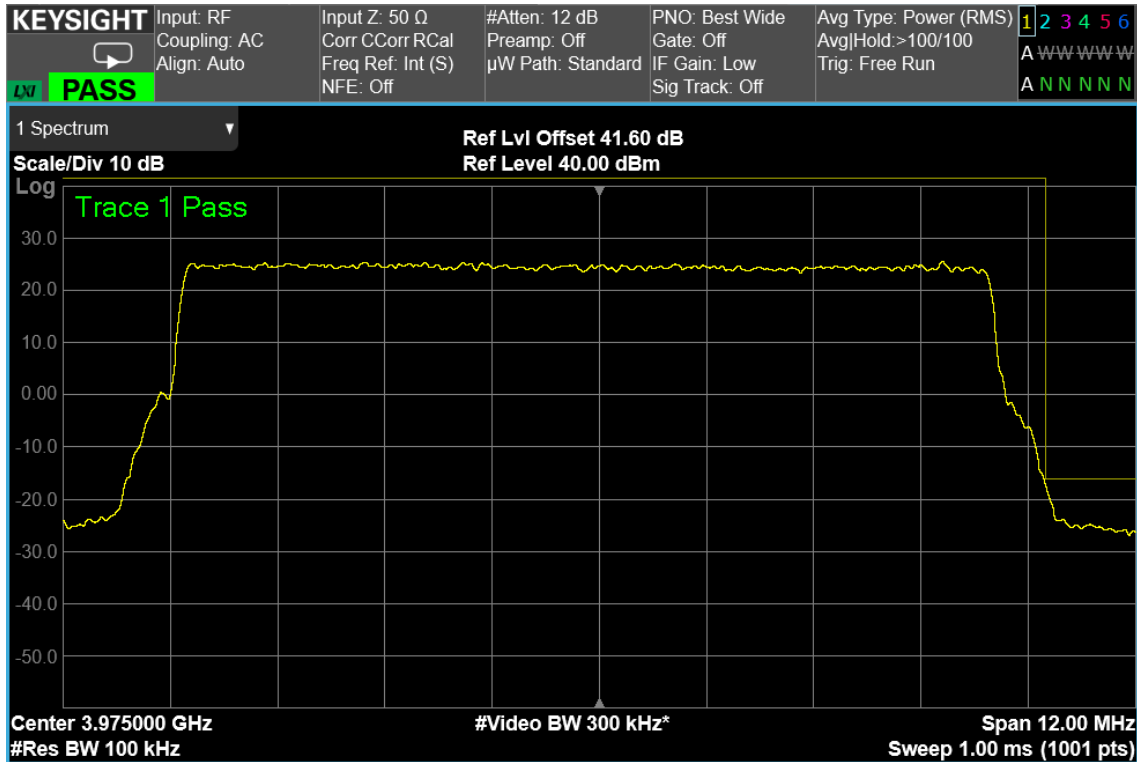


10 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB

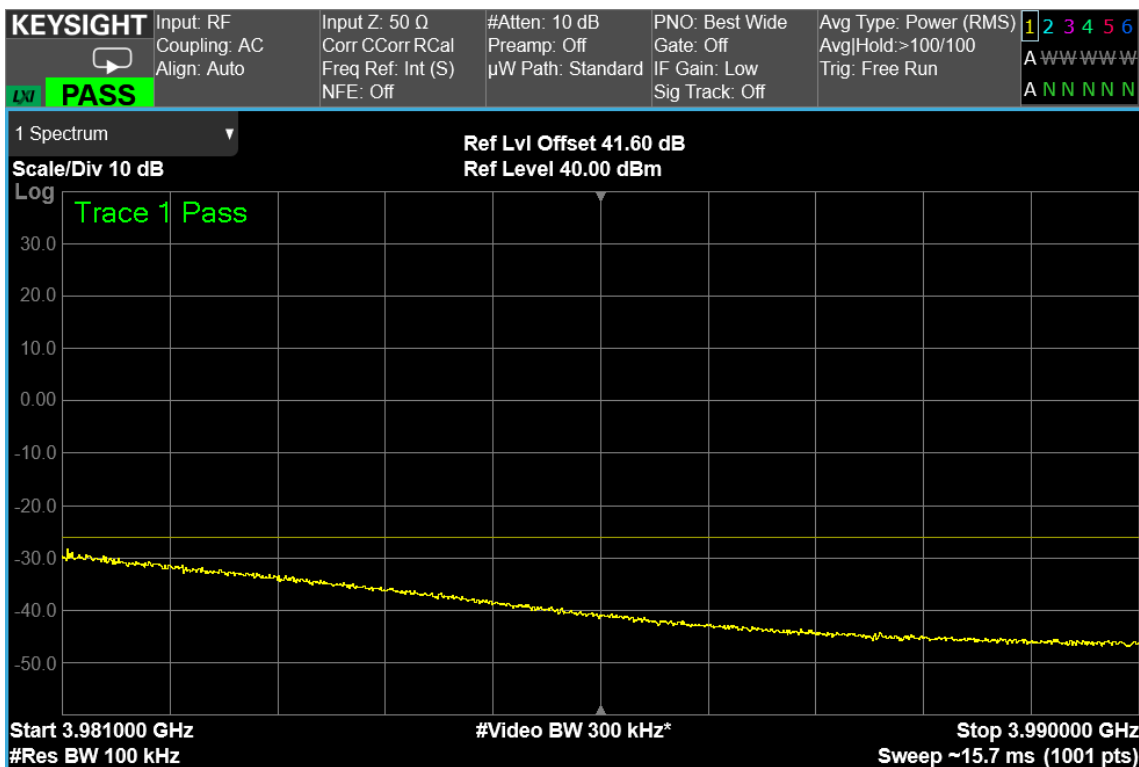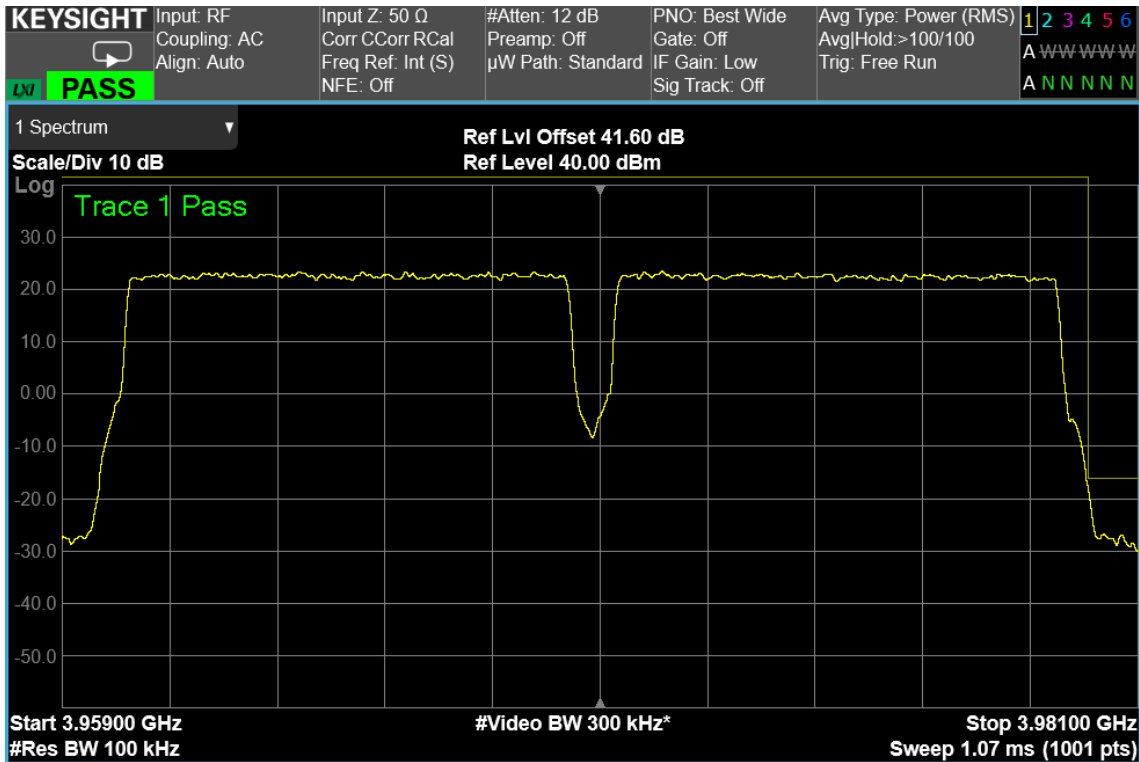


10 MHz signal, High Band Edge, 2 carrier, nominal input signal

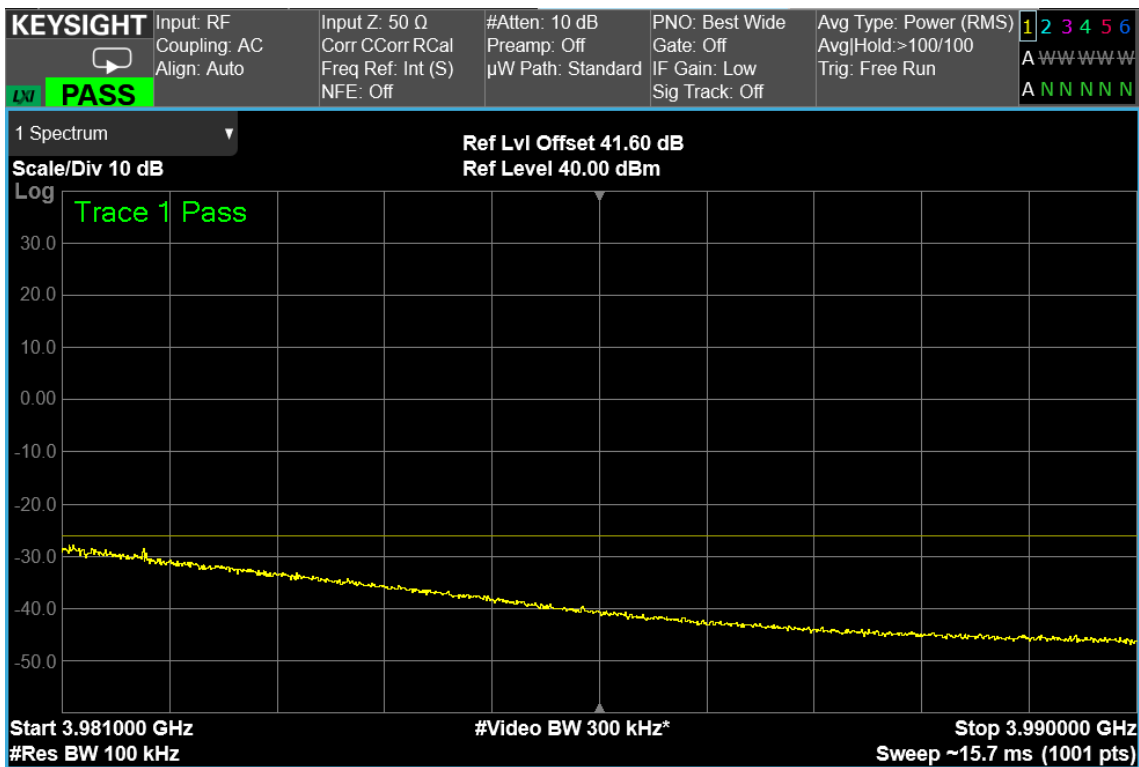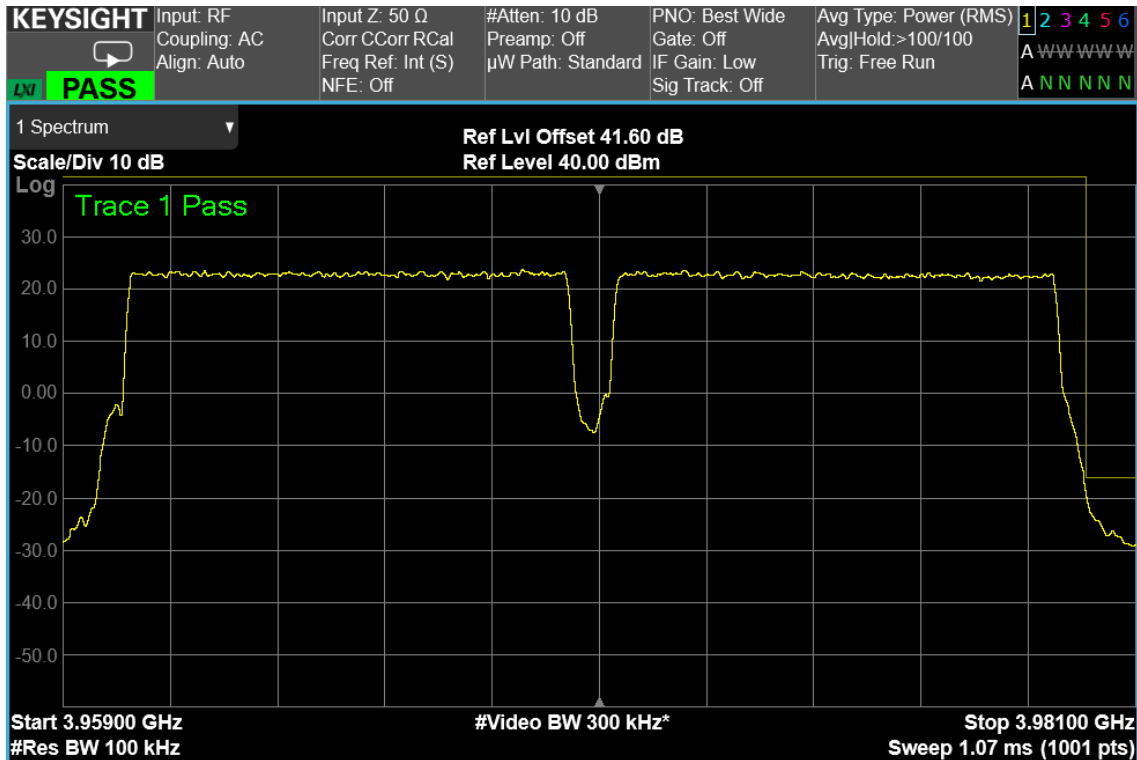


10 MHz signal, High Band Edge, 2 carrier, nominal input signal + 3dB

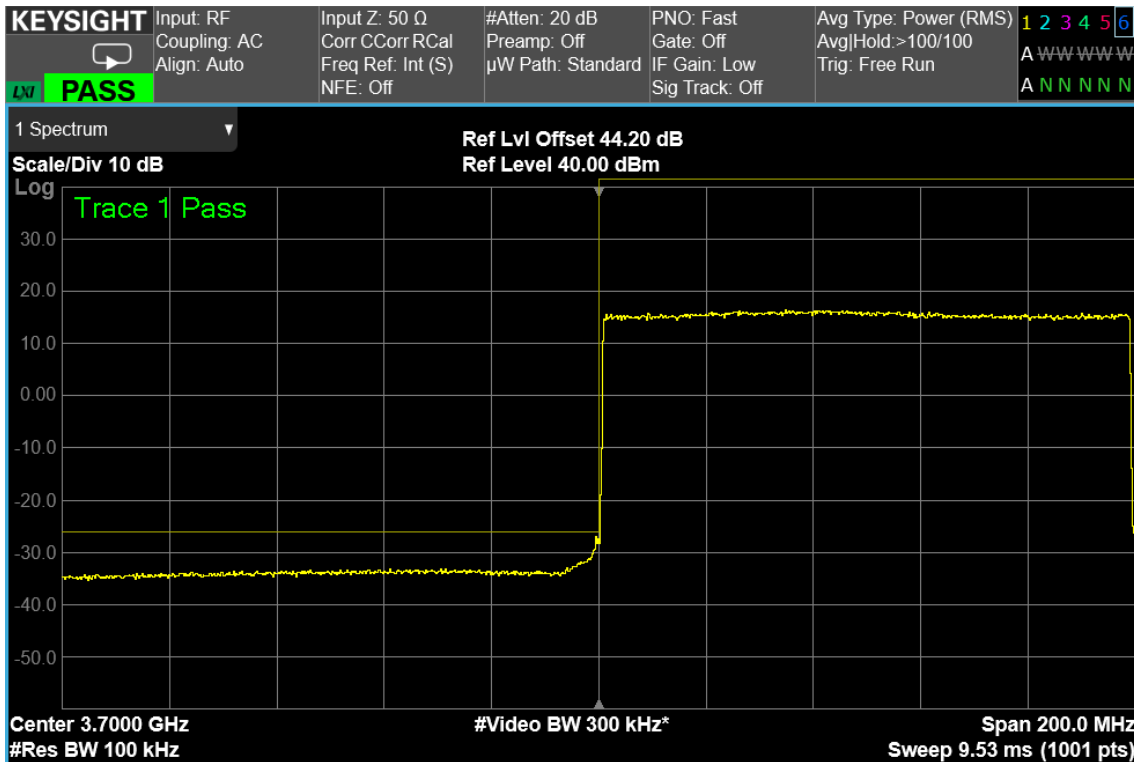


100 MHz signal, Low Band Edge, 1 carrier, nominal input signal

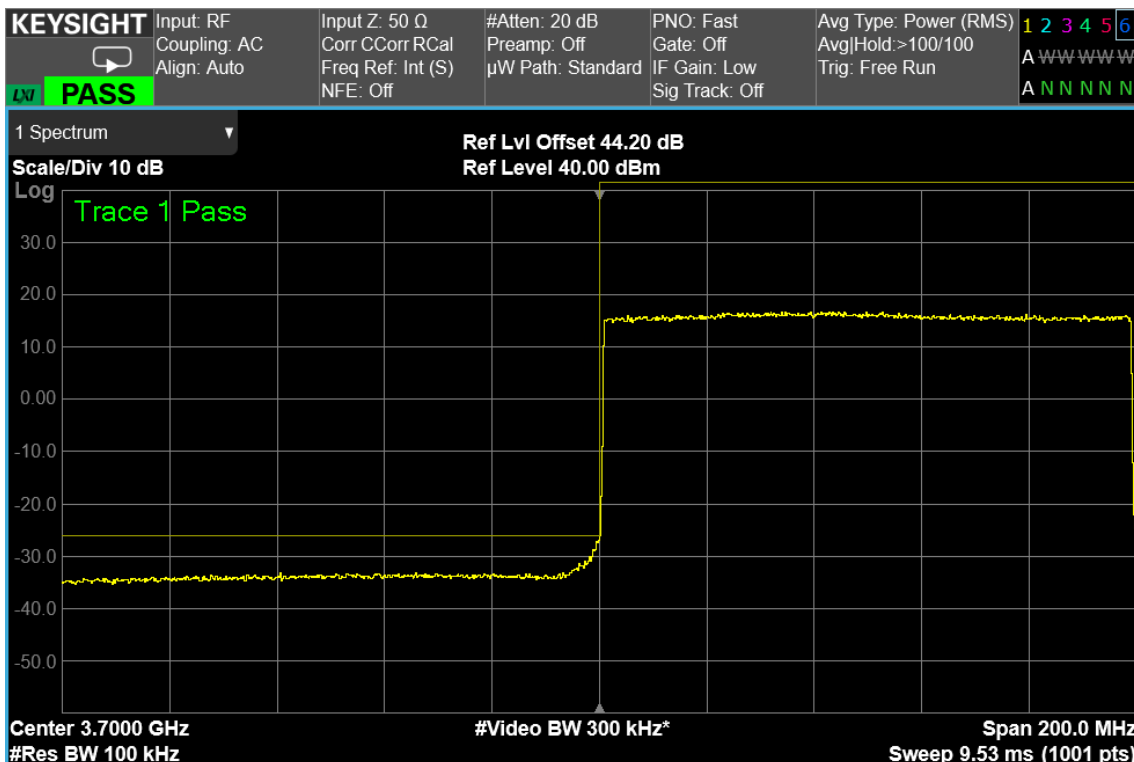


100 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB

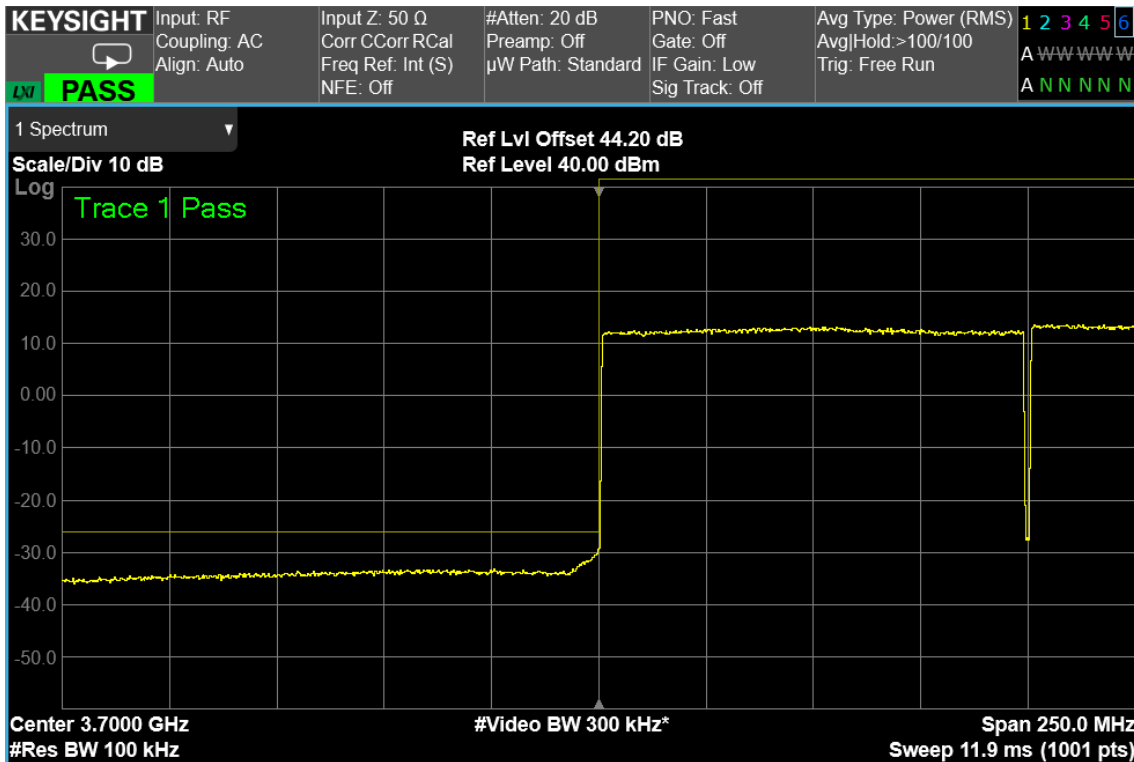


100 MHz signal, Low Band Edge, 2 carrier, nominal input signal

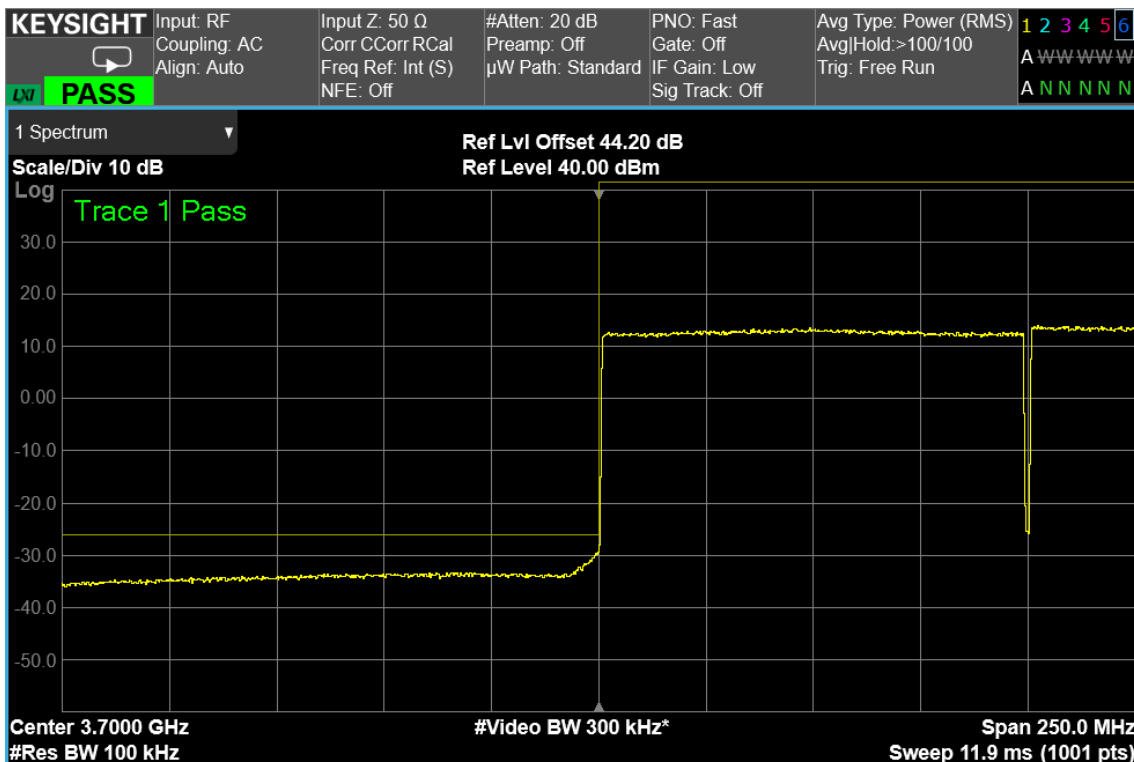

100 MHz signal, Low Band Edge, 2 carrier, nominal input signal + 3dB

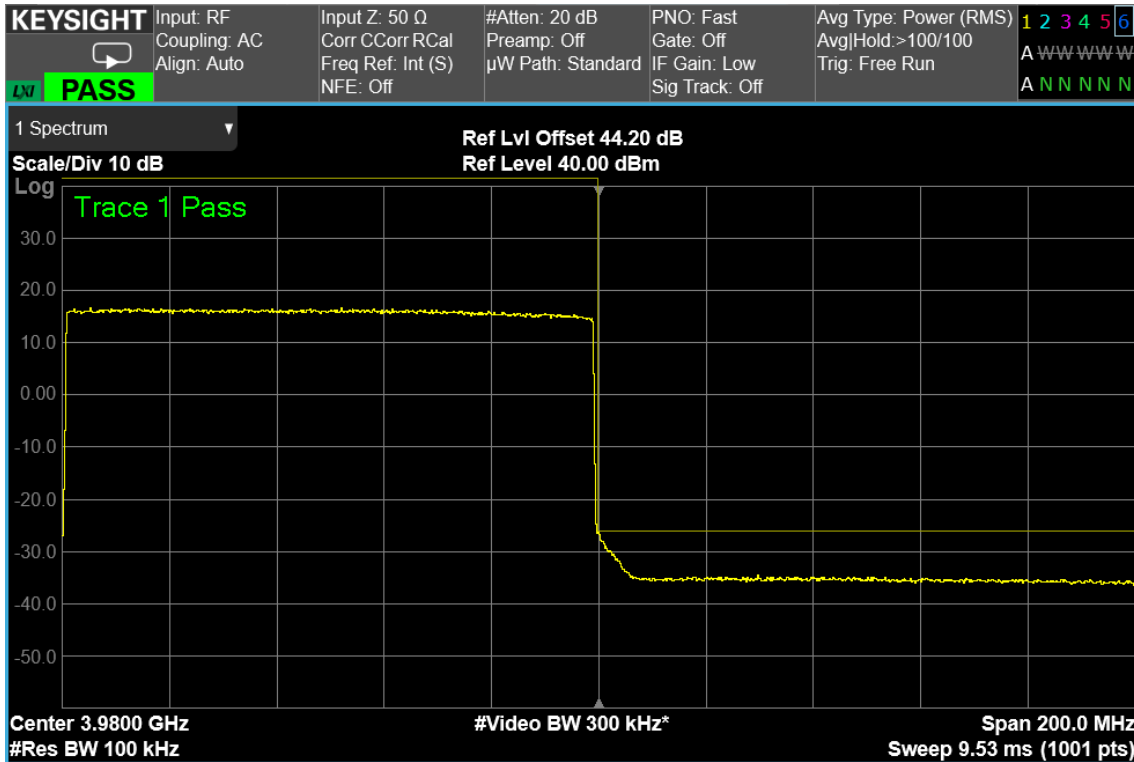

100 MHz signal, High Band Edge, 1 carrier, nominal input signal

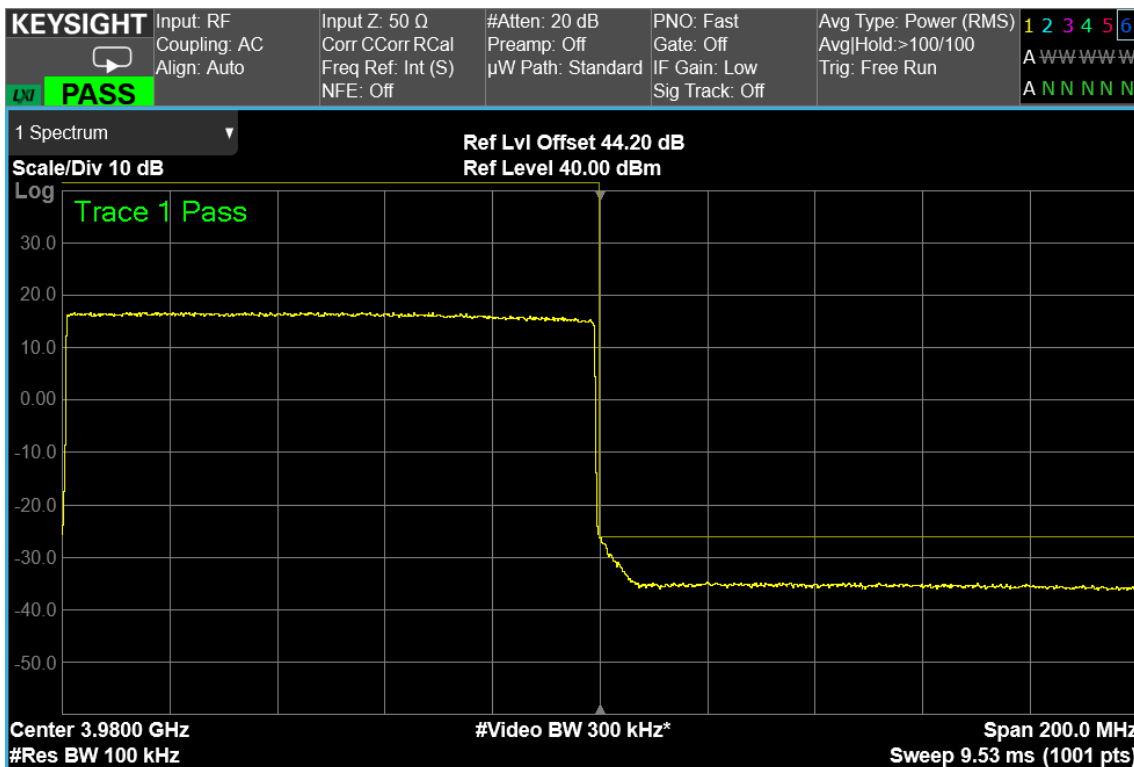

100 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB