



REPORT No.: SZ24010201E01

# TEST REPORT

**APPLICANT** : MiMOMax Wireless Limited  
**PRODUCT NAME** : 900MHz TornadoXR Transceiver  
**MODEL NAME** : MWL-TORNADOX-\*G\*A/B/C  
**BRAND NAME** : Ubiik Mimomax  
**FCC ID** : XMK-MMXTRNXB007  
**STANDARD(S)** : 47 CFR Part 15 Subpart A and B  
**RECEIPT DATE** : 2024-02-01  
**TEST DATE** : 2024-02-02 to 2024-02-28  
**ISSUE DATE** : 2024-03-08



Edited by:

*Chen Bilian*

Chen Bilian(Rapporteur)

Approved by:

*Xiao Xiong*

Xiao Xiong( Supervisor )

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555      Fax: 86-755-36698525  
Http://www.morlab.cn      E-mail: service@morlab.cn





## DIRECTORY

<b>1. Technical Information.....</b>	<b>3</b>
<b>1.1. Applicant and Manufacturer Information .....</b>	<b>3</b>
<b>1.2. Equipment Under Test (EUT) Description .....</b>	<b>3</b>
<b>2. Test Results .....</b>	<b>4</b>
<b>2.1. Applied Reference Documents .....</b>	<b>4</b>
<b>2.2. EUT Setup and Operating Conditions .....</b>	<b>5</b>
<b>3. 47 CFR Part 15B Requirements .....</b>	<b>6</b>
<b>3.1. Conducted Emission.....</b>	<b>6</b>
<b>3.2. Radiated Emission .....</b>	<b>10</b>
<b>3.3. Antenna Terminal Disturbance .....</b>	<b>20</b>
<b>Annex A Test Uncertainty .....</b>	<b>33</b>
<b>Annex B Testing Laboratory Information .....</b>	<b>34</b>

### Change History

Version	Date	Reason for change
1.0	2024-03-08	First edition



REPORT No.: SZ24010201E01

## 1. Technical Information

**Note:** Provide by applicant

### 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	MiMOMax Wireless Limited
<b>Applicant Address:</b>	540 Wairakei Road, Christchurch 8053, New Zealand
<b>Manufacturer:</b>	MiMOMax Wireless Limited
<b>Manufacturer Address:</b>	540 Wairakei Road, Christchurch 8053, New Zealand

### 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	900MHz TornadoXR Transceiver
<b>EUT No.:</b>	1#
<b>Hardware Version:</b>	P001
<b>Software Version:</b>	TRN_04.08.04
<b>Frequency Range:</b>	901 MHz ~ 902 MHz, 930 MHz ~ 931 MHz, 940 MHz ~ 941 MHz
<b>Operating Voltage:</b>	10.5 VDC to 60 VDC

**Note:**

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart A and B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are listed as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.101	Equipment authorization requirement	Receiver contained within a FCC Part 24 transceiver that has been certified. The receiver has therefore been verified.			No deviation
2	15.103	Exempted devices	Device is not exempt as it is a receiver that contains a digital device			No deviation
3	15.107	Conducted Emission	2024.02.05	Wang Deyong	PASS	No deviation
4	15.109	Radiated Emissions	2024.02.02	Zhang Bangyi	PASS	No deviation
5	15.111	Antenna Terminal Disturbance	2024.02.28	Wang Deyong	PASS	No deviation

**Note 1:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 2:** TORNADOX TRANSCEIVER complies with FCC Part 15 Subparts A and B as a Class B Unintentional Radiator. Tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2.2. EUT Setup and Operating Conditions

<b>Test Item</b>	
<b>Conducted Emission</b>	
<b>Mode 1</b>	<b>EUT + 24VDC Source + RJ45 + PC + PC Adapter + 901.5 MHz Idle + Ping Network</b>
Mode 2	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 930.5 MHz Idle + Ping Network
Mode 3	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 940.5 MHz Idle + Ping Network
<b>Radiated Emission</b>	
<b>Mode 1</b>	<b>EUT + 24VDC Source + RJ45 + PC + PC Adapter + 901.5 MHz Idle + Ping Network</b>
Mode 2	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 930.5 MHz Idle + Ping Network
Mode 3	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 940.5 MHz Idle + Ping Network
<b>Antenna Terminal Disturbance</b>	
Mode 1	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 901.5 MHz Idle + Ping Network
Mode 2	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 930.5 MHz Idle + Ping Network
Mode 3	EUT + 24VDC Source + RJ45 + PC + PC Adapter + 940.5 MHz Idle + Ping Network
<b>Remark:</b>	
The above test mode in boldface (Mode 1) was the worst case of conducted emission test, only the test data of these modes were reported. The above test mode in boldface (Mode 1) was the worst case of radiated emission test, only the test data of these modes were reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

## 3. 47 CFR Part 15B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

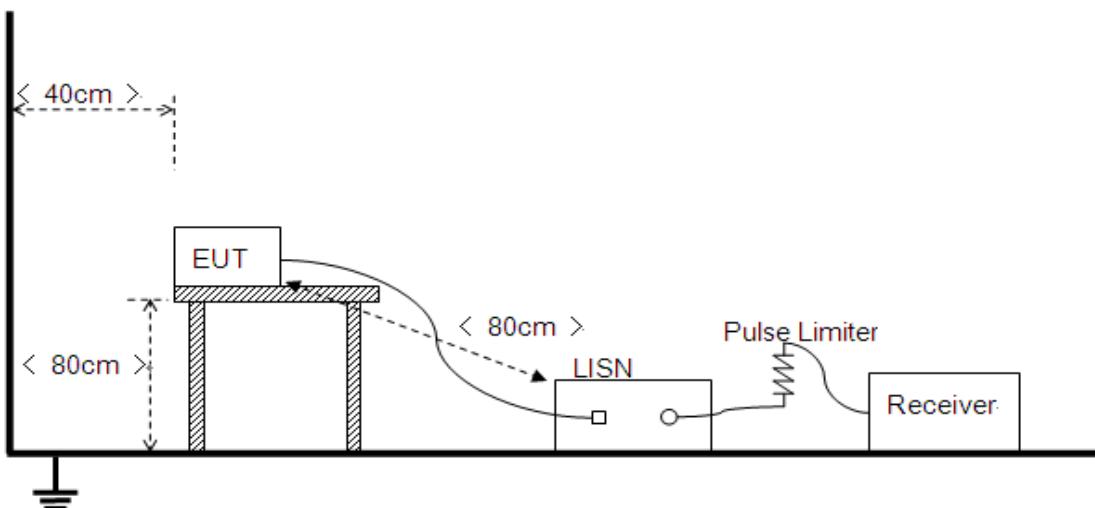



The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### 3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R [\text{dB}\mu\text{V}] + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}} [\text{dB}]$$


$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage Division Factor of LISN

$L_{\text{Cable loss}}$ : Correction Factor Contains Pulse Limiter and Cable


During the test, the total correction Factor  $L_{\text{Cable loss}}$  and  $A_{\text{Factor}}$  were built in test software.

## A. Test Plot and Suspicious Points:

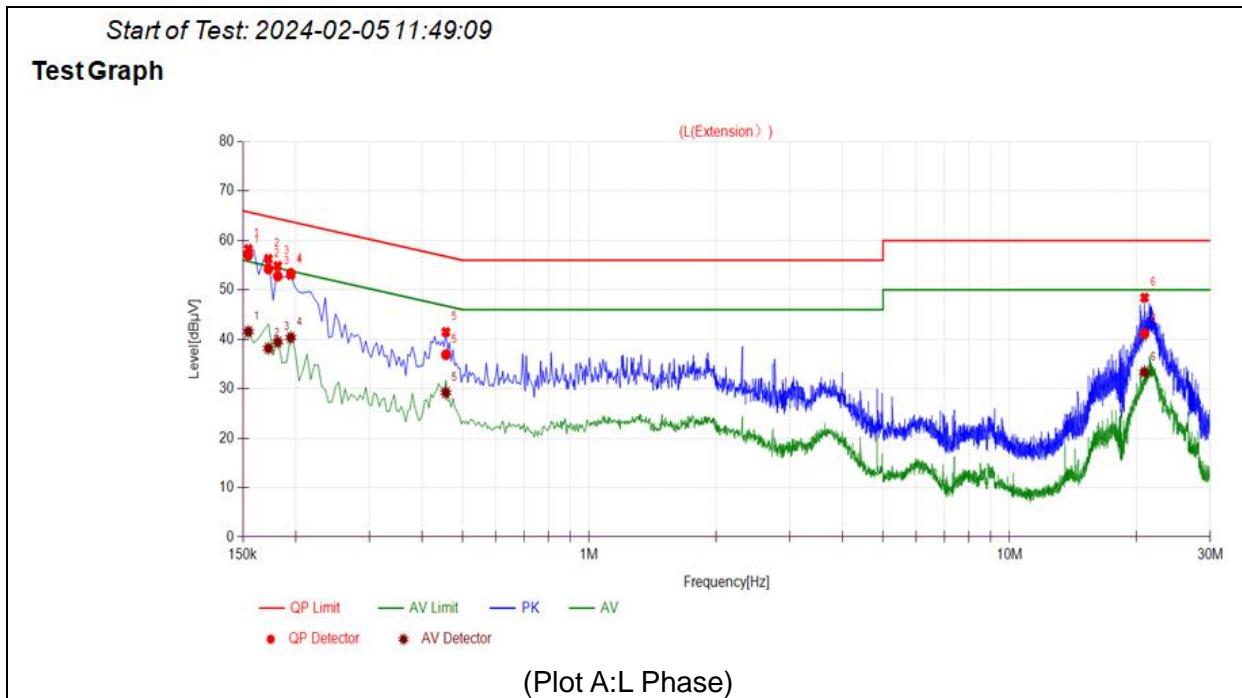

No.	Fre. (MHz)	Emission Level (dB $\mu$ V)		Limit (dB $\mu$ V)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1545	57.01	41.58	65.76	55.76	Line	PASS
2	0.1725	54.24	38.18	64.84	54.84		PASS
3	0.1815	52.79	39.48	64.42	54.42		PASS
4	0.1950	53.35	40.37	63.82	53.82		PASS
5	0.4560	36.89	29.21	56.77	46.77		PASS
6	20.9409	41.11	33.36	60.00	50.00		PASS

Start of Test: 2024-02-05 11:53:11

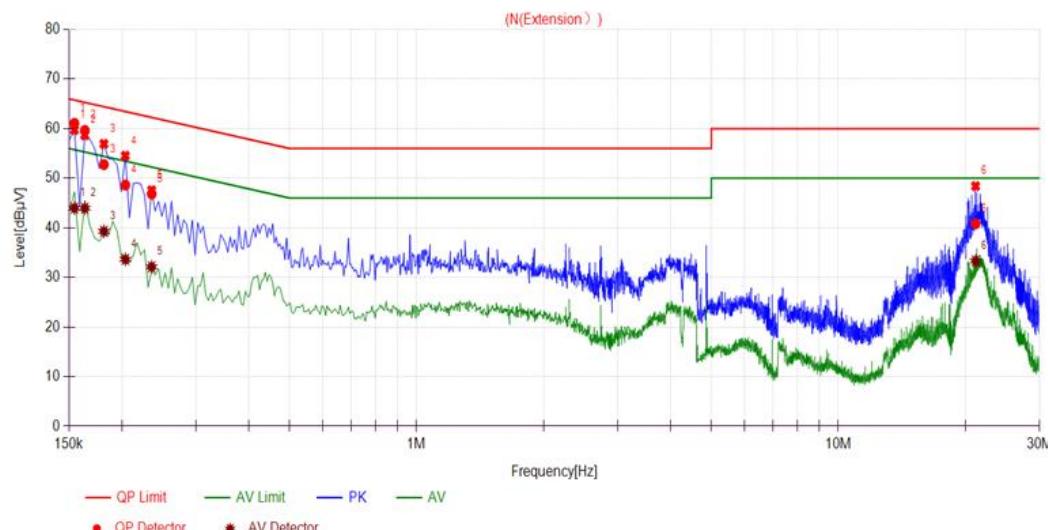**TestGraph**

No.	Fre. (MHz)	Emission Level (dB $\mu$ V)		Limit (dB $\mu$ V)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1545	61.07	43.97	65.75	55.75	Neutral	PASS
2	0.1635	59.65	43.96	65.28	55.28		PASS
3	0.1815	52.76	39.29	64.42	54.42		PASS
4	0.2040	48.62	33.64	63.45	53.45		PASS
5	0.2355	46.83	32.12	62.25	52.25		PASS
6	21.1581	40.82	33.33	60.00	50.00		PASS



## 3.2. Radiated Emission

### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Distance	
	( $\mu$ V/m)	(dB $\mu$ V/m)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

For CB receivers, the field strength of radiated emissions within the frequency range of 25-30 MHz shall not exceed 40 microvolts/meter at a distance of 3 meters.

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu$ V/m is calculated by 20log Emission Level( $\mu$ V/m).




### 3.2.2. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


<b>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</b>	<b>Upper frequency of measurement range (MHz)</b>
Below 1.705 .....	30.
1.705 – 108 .....	1000.
108 – 500 .....	2000.
500 – 1000 .....	5000.
Above 1000 .....	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

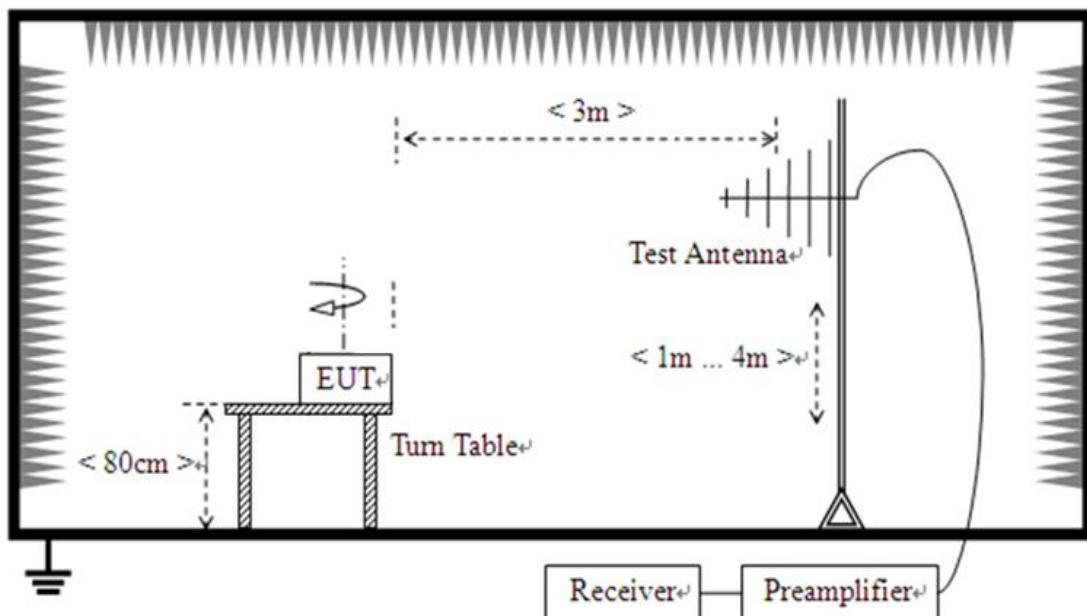

- 2) For radiated emissions above 1GHz

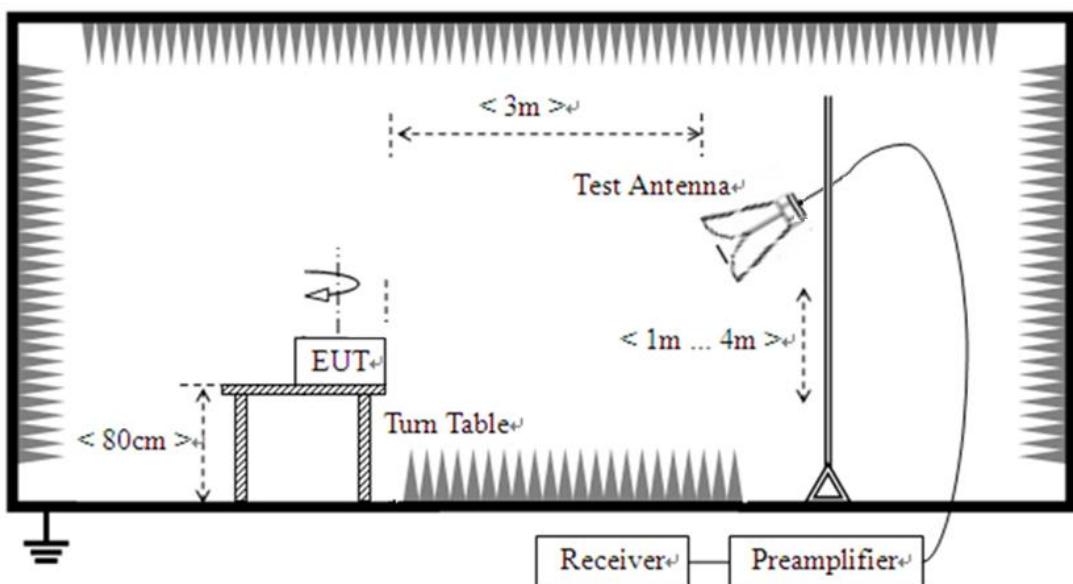



REPORT No.: SZ24010201E01

The test is performed in a 3m Semi-Anechoic Chamber, the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz)are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.



### 3.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which are attenuated more than 20 dB below the permissible value need not be reported.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R [\text{dB}\mu\text{V}] + A_T [\text{dB}] + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna


$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain


$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

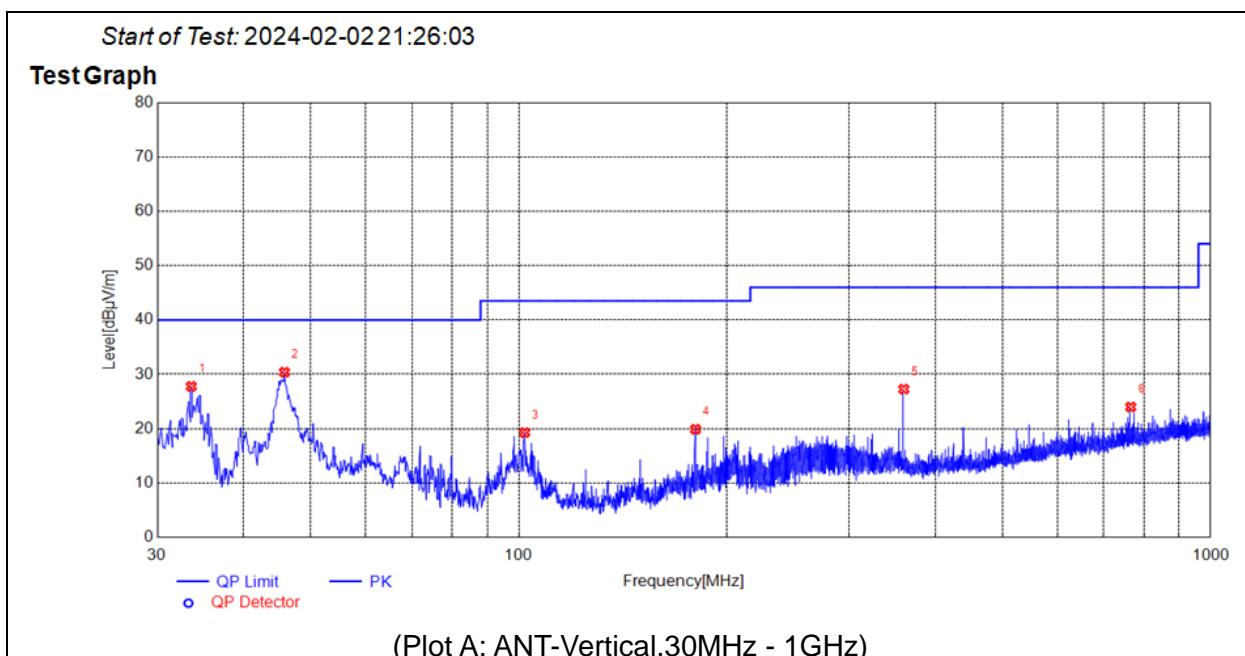


No.	Fre. MHz	Pk dB $\mu$ V/m	QP dB $\mu$ V/m	AV dB $\mu$ V/m	Limit-PK dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	Limit-AV dB $\mu$ V/m	ANT	Verdict
1	33.5894	27.77	N.A.	N.A.	N.A.	40.00	N.A.	V	PASS
2	45.8126	30.38	N.A.	N.A.	N.A.	40.00	N.A.	V	PASS
3	101.8842	19.28	N.A.	N.A.	N.A.	43.50	N.A.	V	PASS
4	179.9770	19.89	N.A.	N.A.	N.A.	43.50	N.A.	V	PASS
5	360.0270	27.27	N.A.	N.A.	N.A.	46.00	N.A.	V	PASS
6	766.3036	23.98	N.A.	N.A.	N.A.	46.00	N.A.	V	PASS

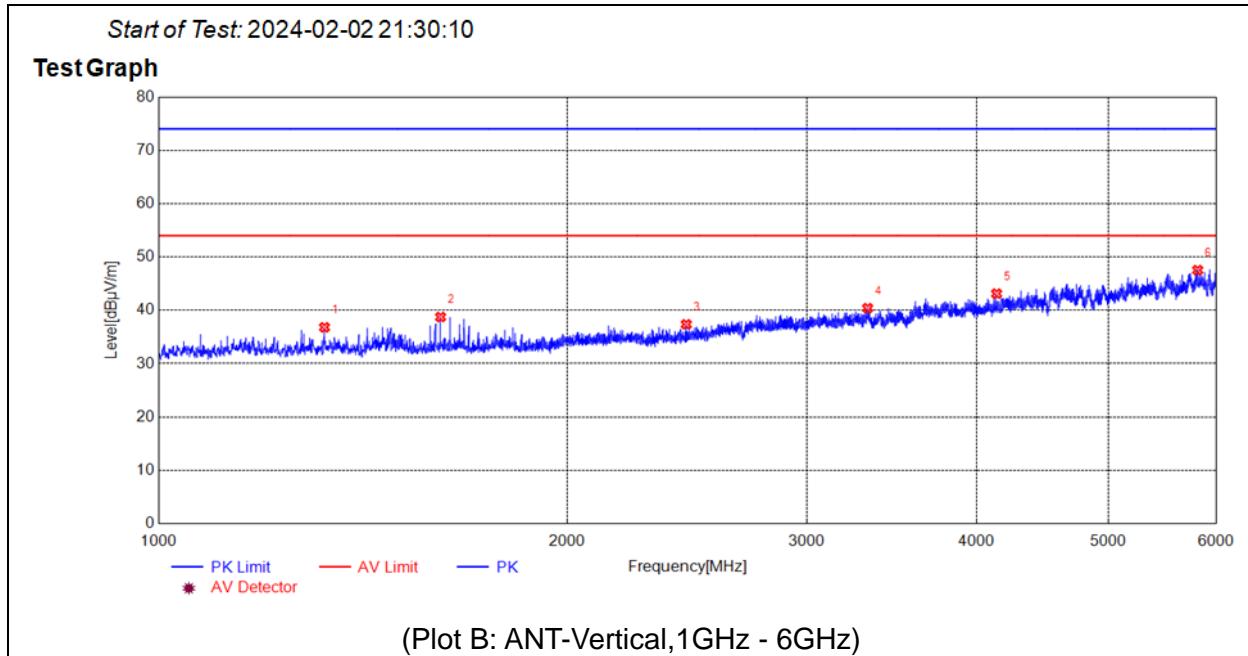

No.	Fre. MHz	Pk dB $\mu$ V/m	QP dB $\mu$ V/m	AV dB $\mu$ V/m	Limit-PK dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	Limit-AV dB $\mu$ V/m	ANT	Verdict
1	1325.0000	36.81	N.A.	N.A.	74.00	N.A.	54.00	V	PASS
2	1613.0000	38.75	N.A.	N.A.	74.00	N.A.	54.00	V	PASS
3	2446.0000	37.37	N.A.	N.A.	74.00	N.A.	54.00	V	PASS
4	3326.0000	40.40	N.A.	N.A.	74.00	N.A.	54.00	V	PASS
5	4138.5000	43.13	N.A.	N.A.	74.00	N.A.	54.00	V	PASS
6	5818.0000	47.54	N.A.	N.A.	74.00	N.A.	54.00	V	PASS

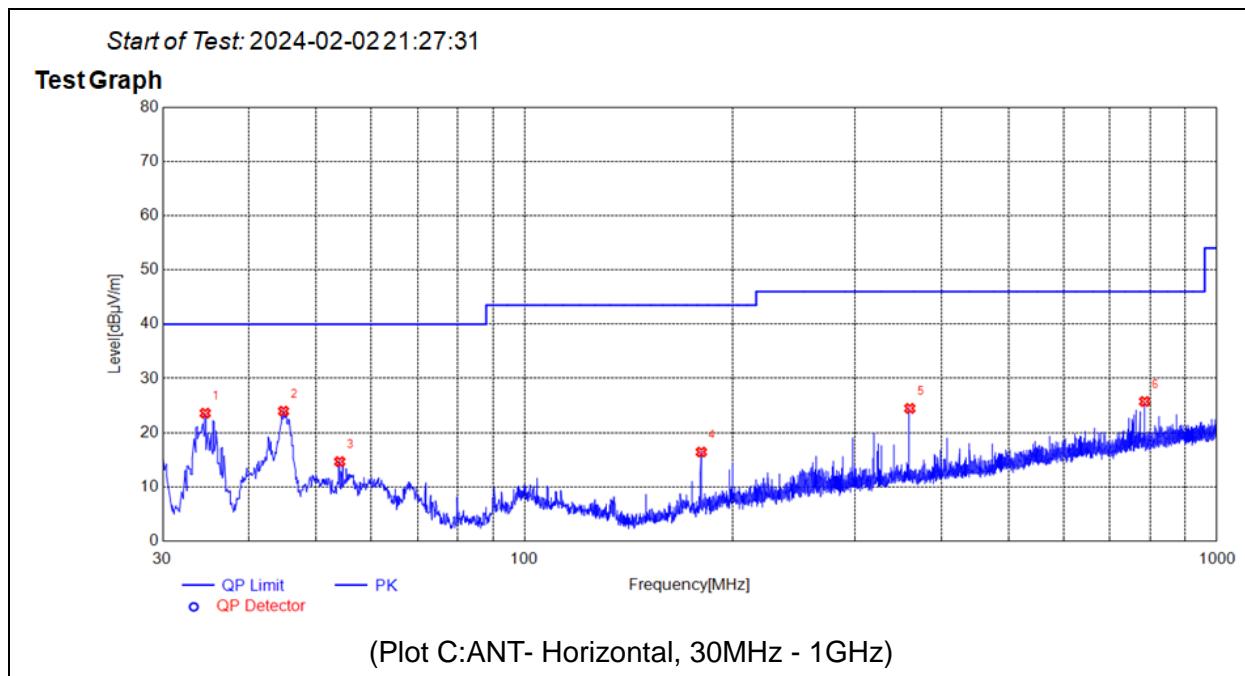

No.	Fre. MHz	Pk dB $\mu$ V/m	QP dB $\mu$ V/m	AV dB $\mu$ V/m	Limit-PK dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	Limit-AV dB $\mu$ V/m	ANT	Verdict
1	34.5595	23.59	N.A.	N.A.	N.A.	40.00	N.A.	H	PASS
2	44.8425	23.96	N.A.	N.A.	N.A.	40.00	N.A.	H	PASS
3	54.0584	14.66	N.A.	N.A.	N.A.	40.00	N.A.	H	PASS
4	179.9770	16.43	N.A.	N.A.	N.A.	43.50	N.A.	H	PASS
5	360.0270	24.47	N.A.	N.A.	N.A.	46.00	N.A.	H	PASS
6	786.1906	25.74	N.A.	N.A.	N.A.	46.00	N.A.	H	PASS

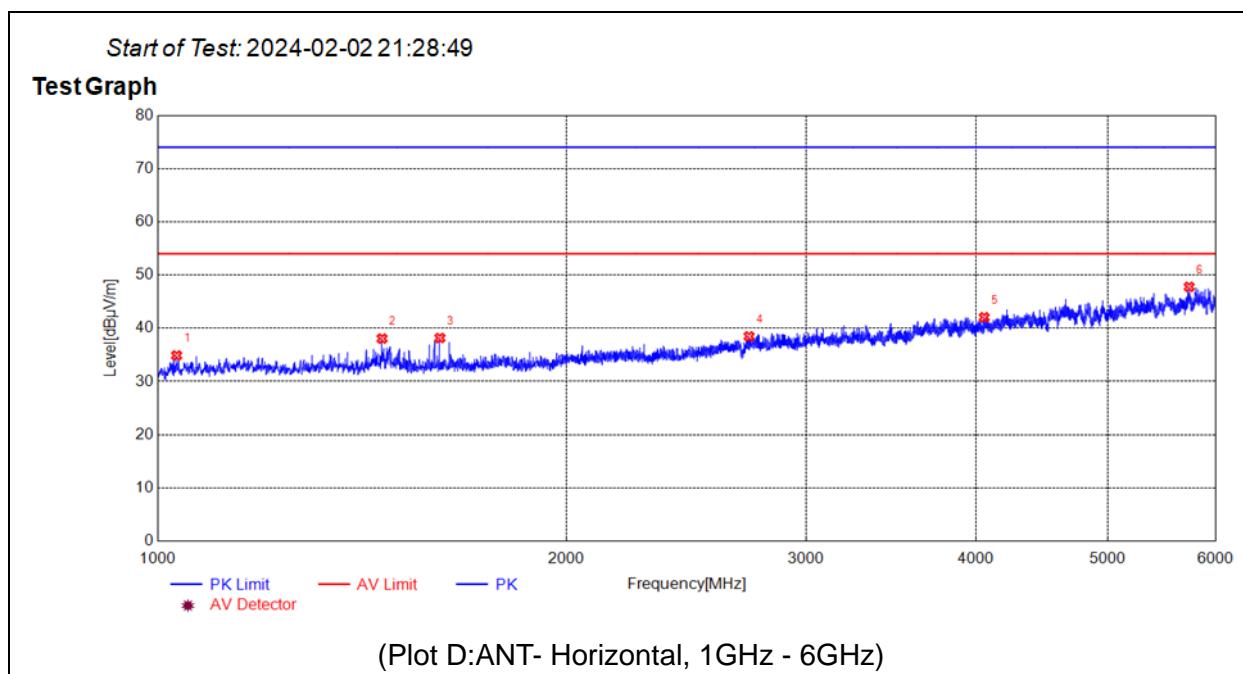

No.	Fre. MHz	Pk dB $\mu$ V/m	QP dB $\mu$ V/m	AV dB $\mu$ V/m	Limit-PK dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	Limit-AV dB $\mu$ V/m	ANT	Verdict
1	1033.0000	34.89	N.A.	N.A.	74.00	N.A.	54.00	H	PASS
2	1463.0000	38.06	N.A.	N.A.	74.00	N.A.	54.00	H	PASS
3	1613.5000	38.17	N.A.	N.A.	74.00	N.A.	54.00	H	PASS
4	2724.0000	38.47	N.A.	N.A.	74.00	N.A.	54.00	H	PASS
5	4057.0000	42.05	N.A.	N.A.	74.00	N.A.	54.00	H	PASS
6	5741.0000	47.78	N.A.	N.A.	74.00	N.A.	54.00	H	PASS



REPORT No.: SZ24010201E01

## The test result for CB receiver RSE (25-30MHz) .

Test mode	Fre. MHz	QP dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	ANT	Verdict
Mode 1	25.51	23.47	32.04	V	PASS
	25.46	22.78			PASS
	26.65	21.96			PASS
	27.55	20.78			PASS
	28.63	22.49			PASS
	29.88	24.85			PASS
	25.25	23.66	32.04	H	PASS
	26.67	21.88			PASS
	26.98	25.74			PASS
	27.47	24.63			PASS
	28.59	23.85			PASS
	29.56	20.77			PASS



## 3.3. Antenna Terminal Disturbance

### 3.3.1. Requirement

In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts(-57dBm).

Measurements were attempted over the range of 30 MHz– 5 GHz

### 3.3.2. Test Result

**Note:**  $P_{\text{Final value}}(\text{dBm}) = P_{\text{Reading value}}(\text{dBm}) + \text{Factor(dB)}$  ,  
 Factor = Cable loss(dB)

H port, Operate at 901.5MHz, 30MHz -1000MHz

Fre. MHz	$P_{\text{Reading value}}$ dBm	Factor dB	$P_{\text{Final value}}$ dBm	Limit dBm	Verdict
199.75	-71.959	0.18	-71.779	-57	PASS
385.99	-80.382	0.37	-80.012	-57	PASS
463.59	-80.232	0.45	-79.782	-57	PASS
645.95	-78.707	0.63	-78.077	-57	PASS
687.66	-77.6	0.67	-76.930	-57	PASS
958.29	-80.138	0.94	-79.198	-57	PASS


Attach spectrum pictures of  $P_{\text{Reading value}}$  for this test here:



### H port, Operate at 901.5MHz, 1GHz -5GHz

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.124	-68.718	1.01	-67.708	-57	PASS
1.912	-67.830	1.8	-66.03	-57	PASS
2.244	-67.225	2.11	-65.115	-57	PASS
3.372	-67.769	3.21	-64.559	-57	PASS
4.044	-67.285	3.89	-63.395	-57	PASS
4.888	-68.635	4.73	-63.905	-57	PASS

Attach spectrum pictures of P<sub>Reading value</sub> for this test here:

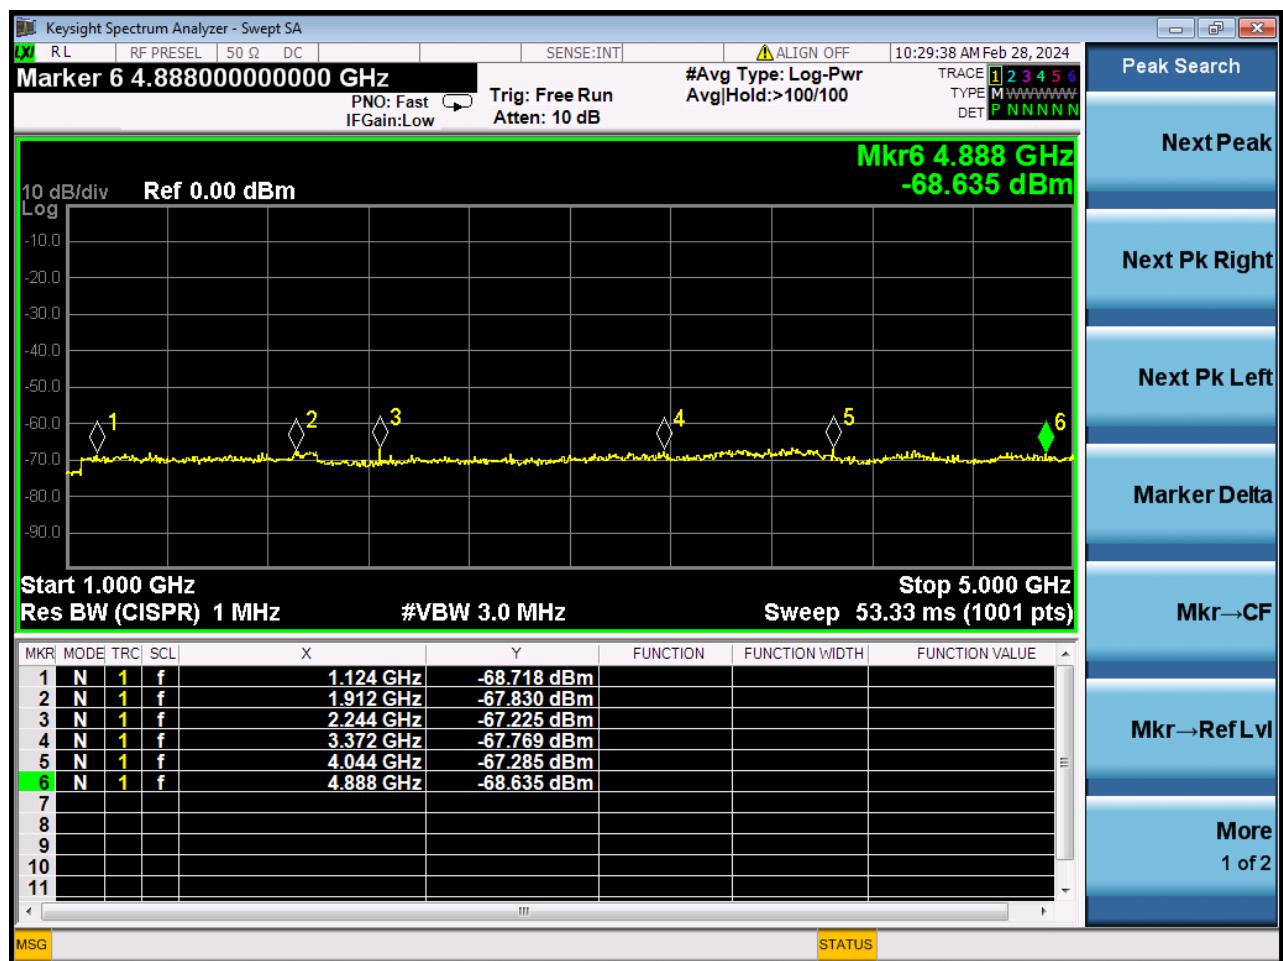




REPORT No.: SZ24010201E01

## V port, Operate at 901.5MHz, 30MHz -1000MHz

Fre. MHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
66.86	-78.856	0.05	-78.806	-57	PASS
199.78	-73.044	0.18	-72.864	-57	PASS
497.54	-79.915	0.48	-79.435	-57	PASS
548.95	-80.377	0.53	-79.847	-57	PASS
777.87	-78.974	0.76	-78.214	-57	PASS
967.77	-80.141	0.95	-79.191	-57	PASS

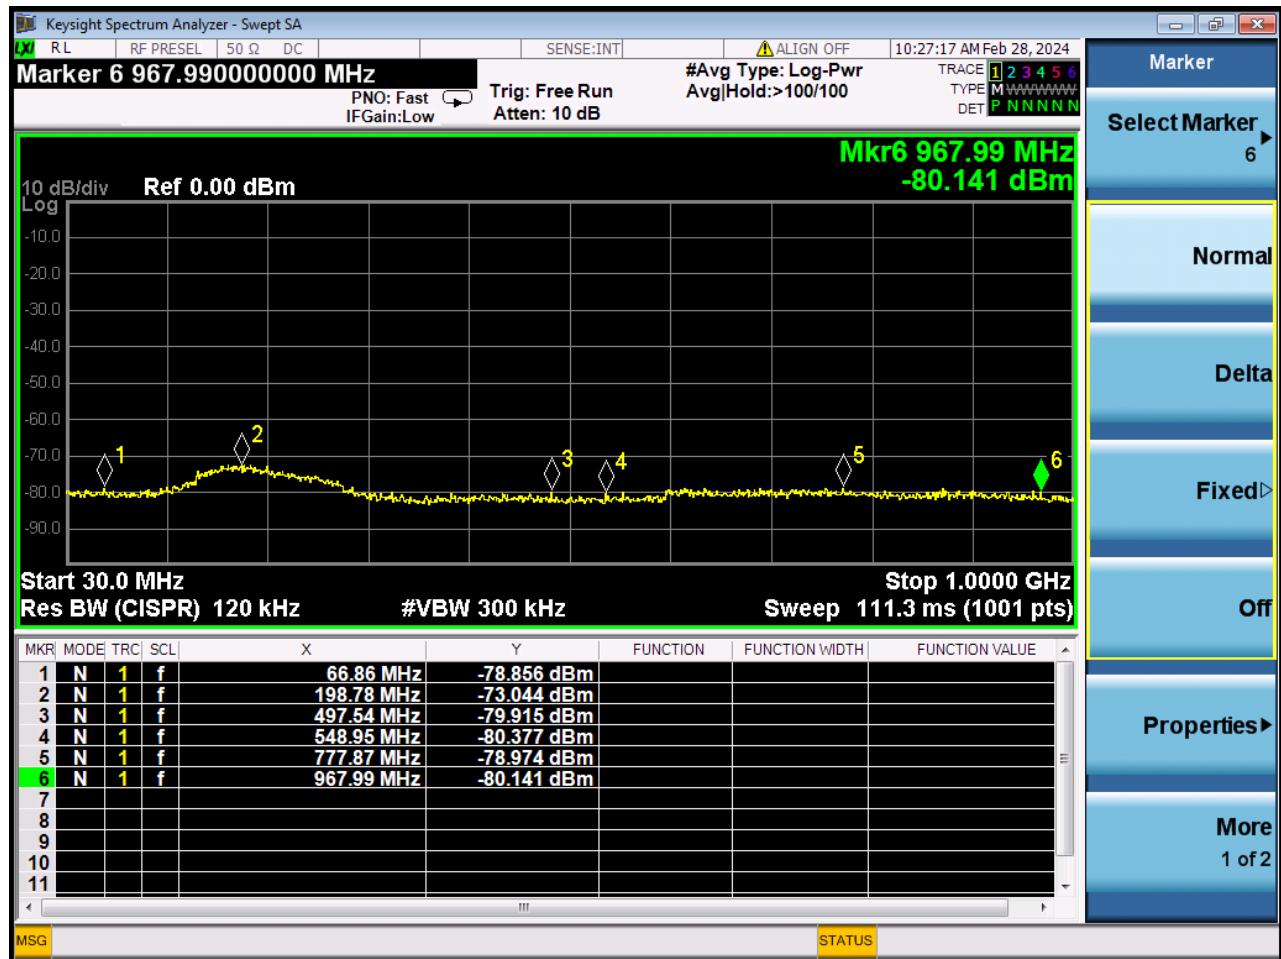
Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:



REPORT No.: SZ24010201E01

## V port, Operate at 901.5MHz, 1GHz -5GHz

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.216	-72.025	1.11	-70.915	-57	PASS
1.996	-68.241	1.83	-66.411	-57	PASS
3.176	-68.316	3.05	-65.266	-57	PASS
3.888	-67.16	3.72	-63.44	-57	PASS
4.404	-68.048	4.32	-63.728	-57	PASS
4.86	-68.52	4.75	-63.77	-57	PASS

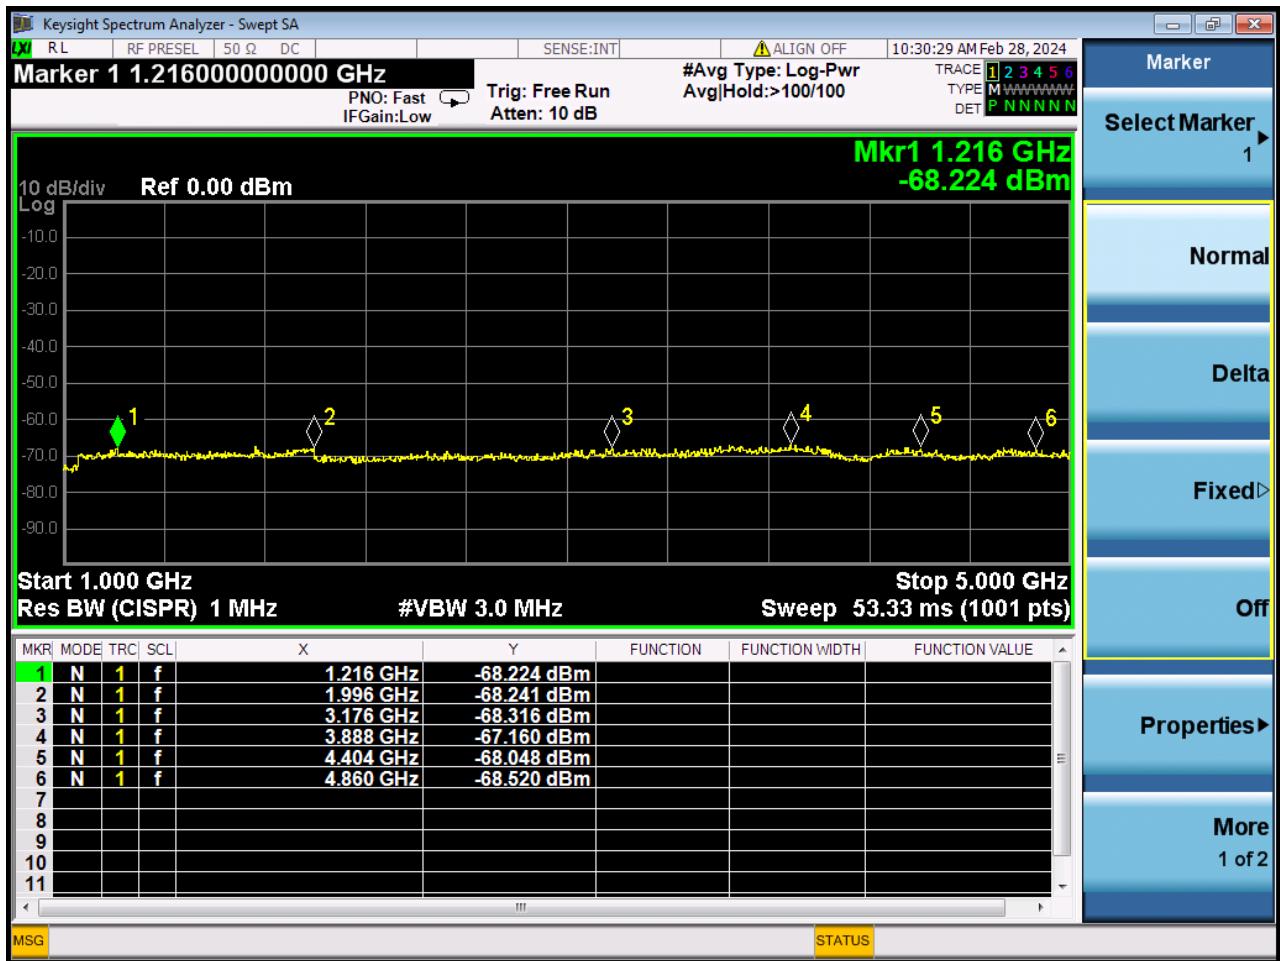
Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:



REPORT No.: SZ24010201E01

**H port, Operate at 930.5MHz, 30MHz -1000MHz**

Fre. MHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
76.56	-79.737	0.06	-79.677	-57	PASS
215.27	-73.284	0.19	-73.094	-57	PASS
394.72	-80.319	0.29	-80.029	-57	PASS
577.08	-79.993	0.48	-79.513	-57	PASS
737.13	-78.576	0.62	-77.956	-57	PASS
861.29	-79.039	0.74	-78.299	-57	PASS

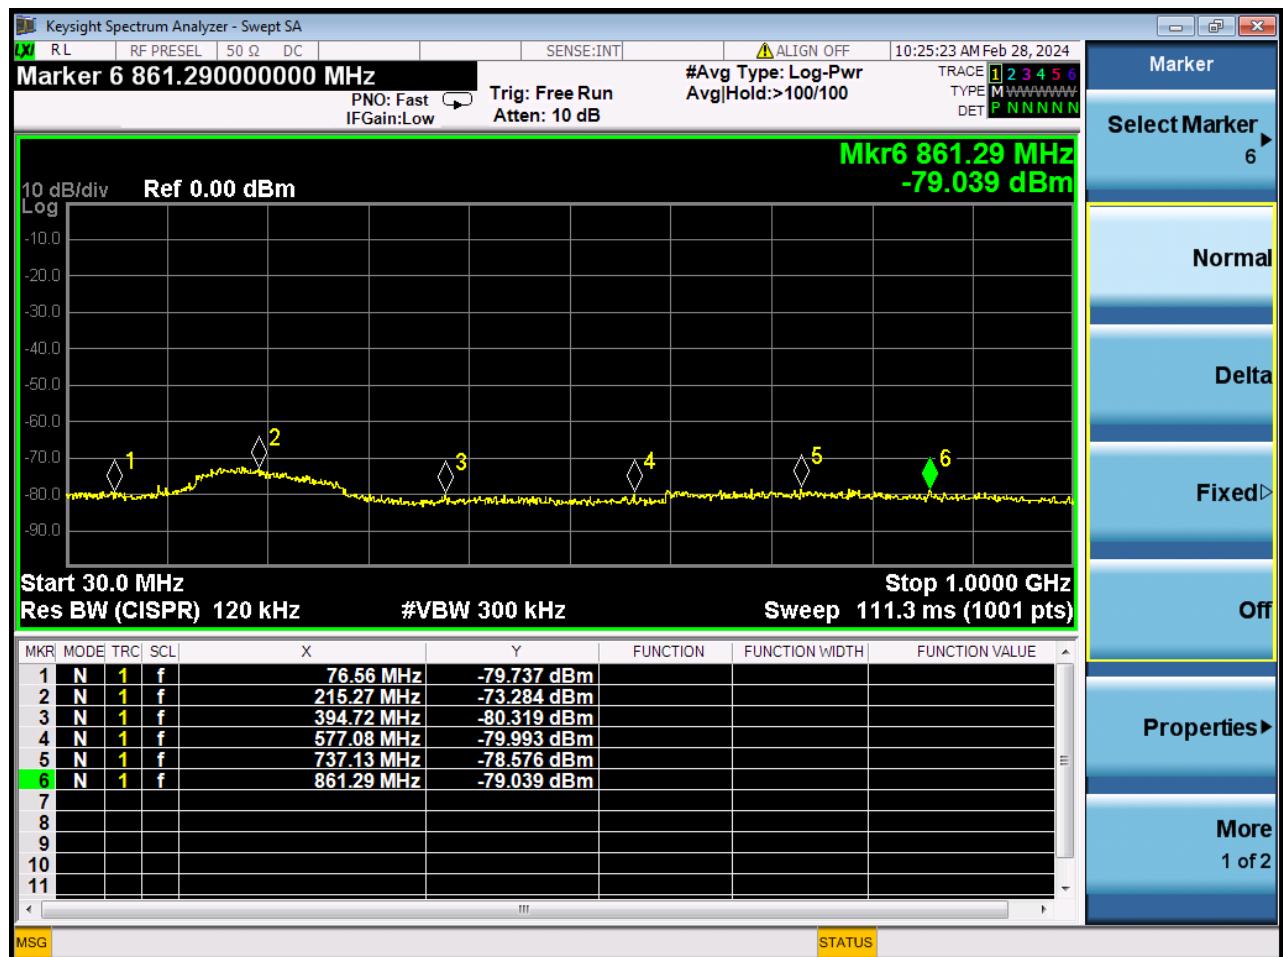
Attach spectrum pictures of P<sub>Reading value</sub> for this test here:



REPORT No.: SZ24010201E01

**H port, Operate at 930.5MHz, 1GHz -5GHz**

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.196	-68.273	1.03	-67.243	-57	PASS
1.336	-68.449	1.12	-67.329	-57	PASS
2.504	-69.185	2.42	-66.765	-57	PASS
3.672	-67.05	3.53	-63.52	-57	PASS
4.412	-67.054	4.32	-62.734	-57	PASS
4.912	-68.3	4.81	-63.49	-57	PASS

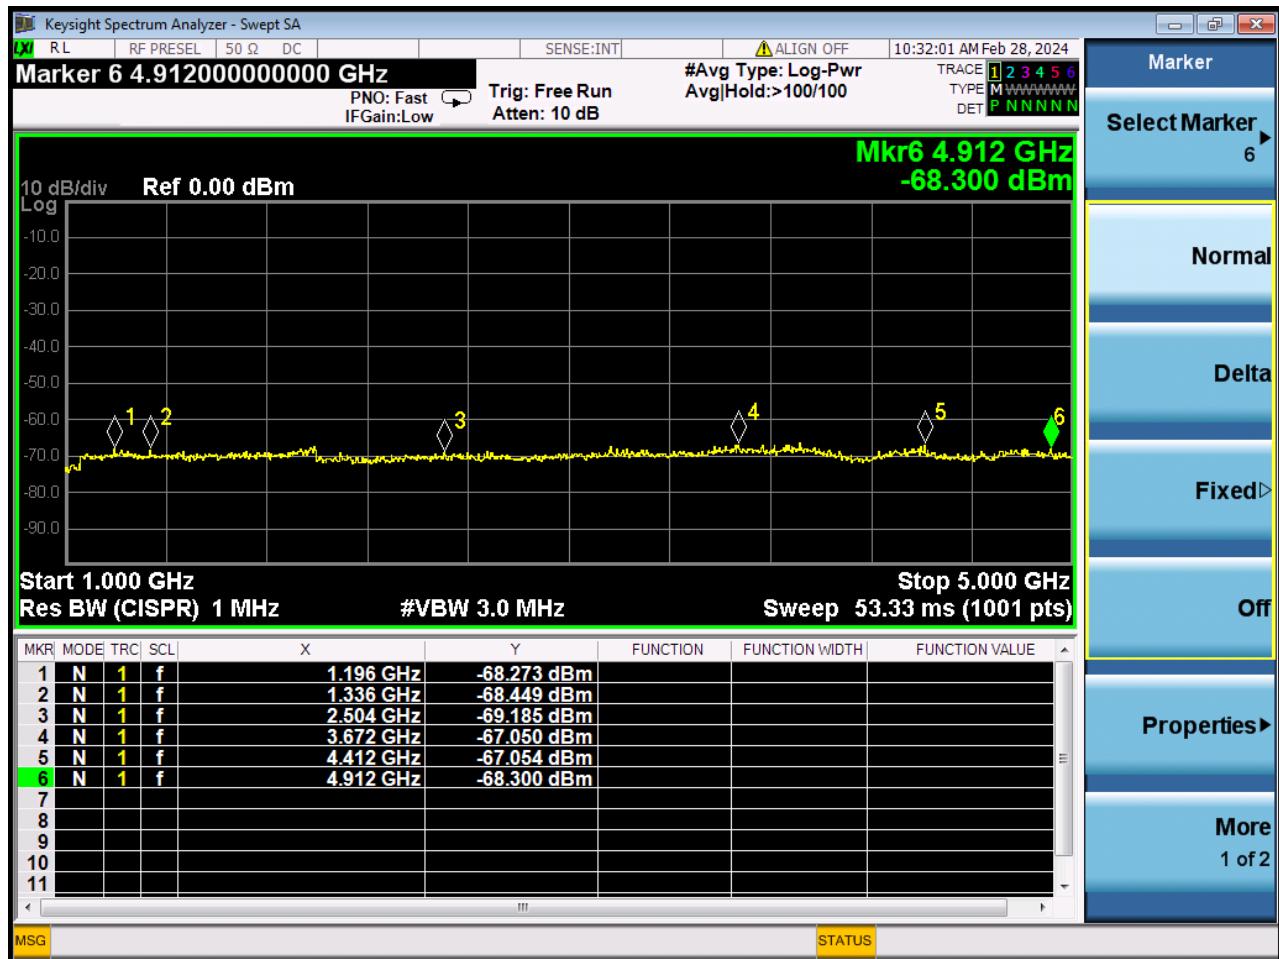Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:

**V port, Operate at 930.5MHz, 30MHz -1000MHz**

<b>Fre. MHz</b>	<b>P<sub>Reading value</sub> dBm</b>	<b>Factor dB</b>	<b>P<sub>Final value</sub> dBm</b>	<b>Limit dBm</b>	<b>Verdict</b>
49.4	-79.06	0.03	-79.03	-57	PASS
171.62	-72.422	0.16	-81.976	-57	PASS
460.68	-80.279	0.45	-79.829	-57	PASS
586.78	-79.779	0.57	-79.209	-57	PASS
780.78	-79.225	0.69	-78.535	-57	PASS
915.61	-80.222	0.82	-79.402	-57	PASS


Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:




REPORT No.: SZ24010201E01

**V port, Operate at 930.5MHz, 1GHz -5GHz**

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.308	-66.263	1.21	-65.053	-57	PASS
1.96	-68.643	1.8	-66.843	-57	PASS
3.036	-68.793	2.91	-65.883	-57	PASS
3.868	-66.577	3.75	-62.827	-57	PASS
4.312	-67.853	4.21	-63.643	-57	PASS
4.944	-68.354	4.81	-63.544	-57	PASS

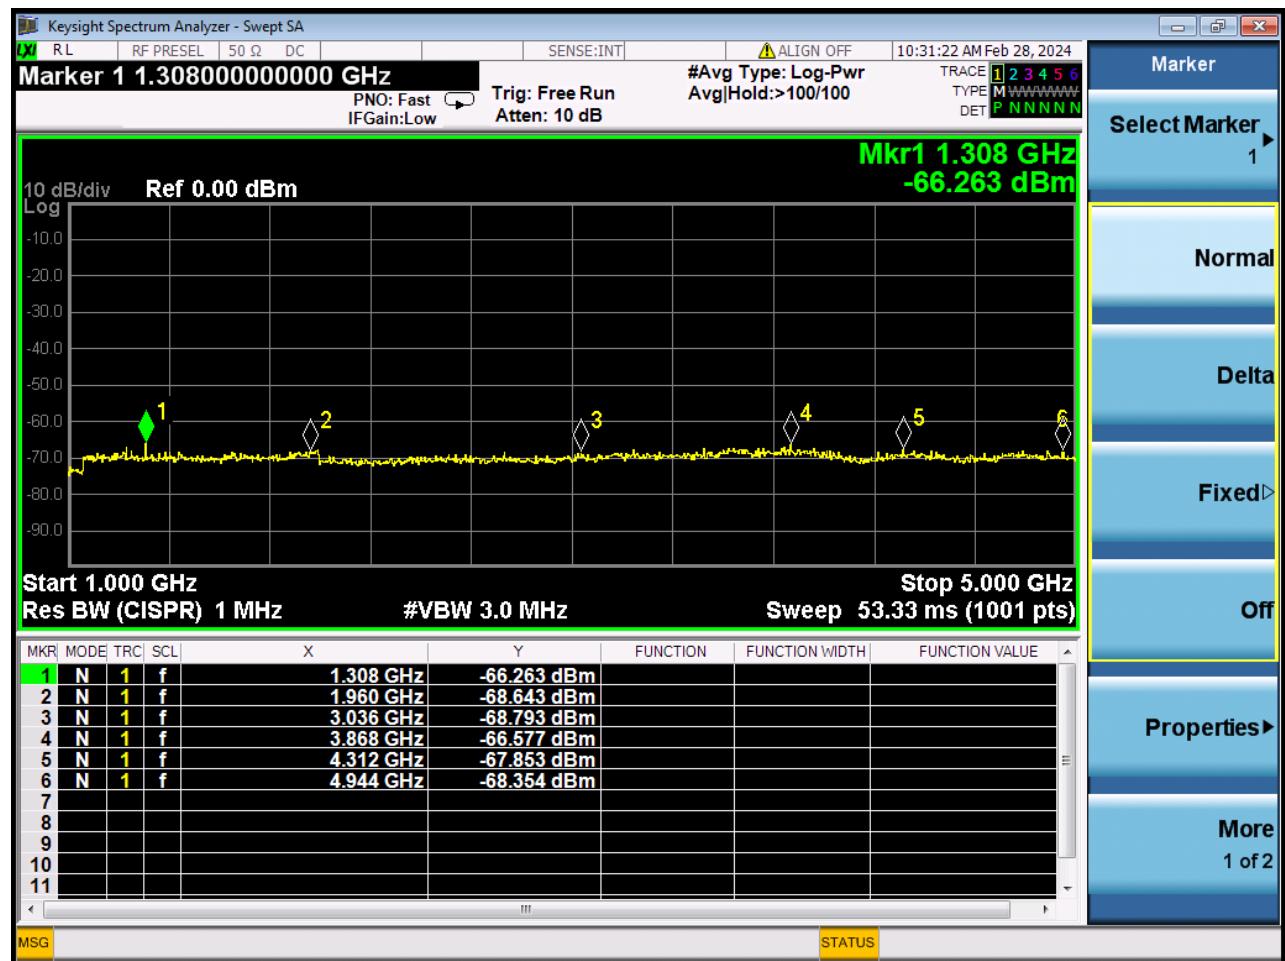Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:

**H port, Operate at 940.5MHz, 30MHz -1000MHz**


Fre. MHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
96.93	-80.5	0.08	-80.42	-57	PASS
191.99	-71.59	0.11	-71.48	-57	PASS
354.95	-80.993	0.34	-80.653	-57	PASS
557.68	-80.657	0.45	-80.207	-57	PASS
787.57	-78.387	0.67	-77.717	-57	PASS
988.36	-79.999	0.89	-79.109	-57	PASS

Attach spectrum pictures of P<sub>Reading value</sub> for this test here:



**H port, Operate at 940.5MHz, 1GHz -5GHz**

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.52	-68.895	1.4	-67.495	-57	PASS
2.34	-68.905	2.21	-66.695	-57	PASS
2.952	-68.727	2.81	-65.917	-57	PASS
3.812	-67.611	3.73	-63.881	-57	PASS
4.288	-67.956	4.12	-63.836	-57	PASS
4.732	-67.613	4.63	-62.983	-57	PASS

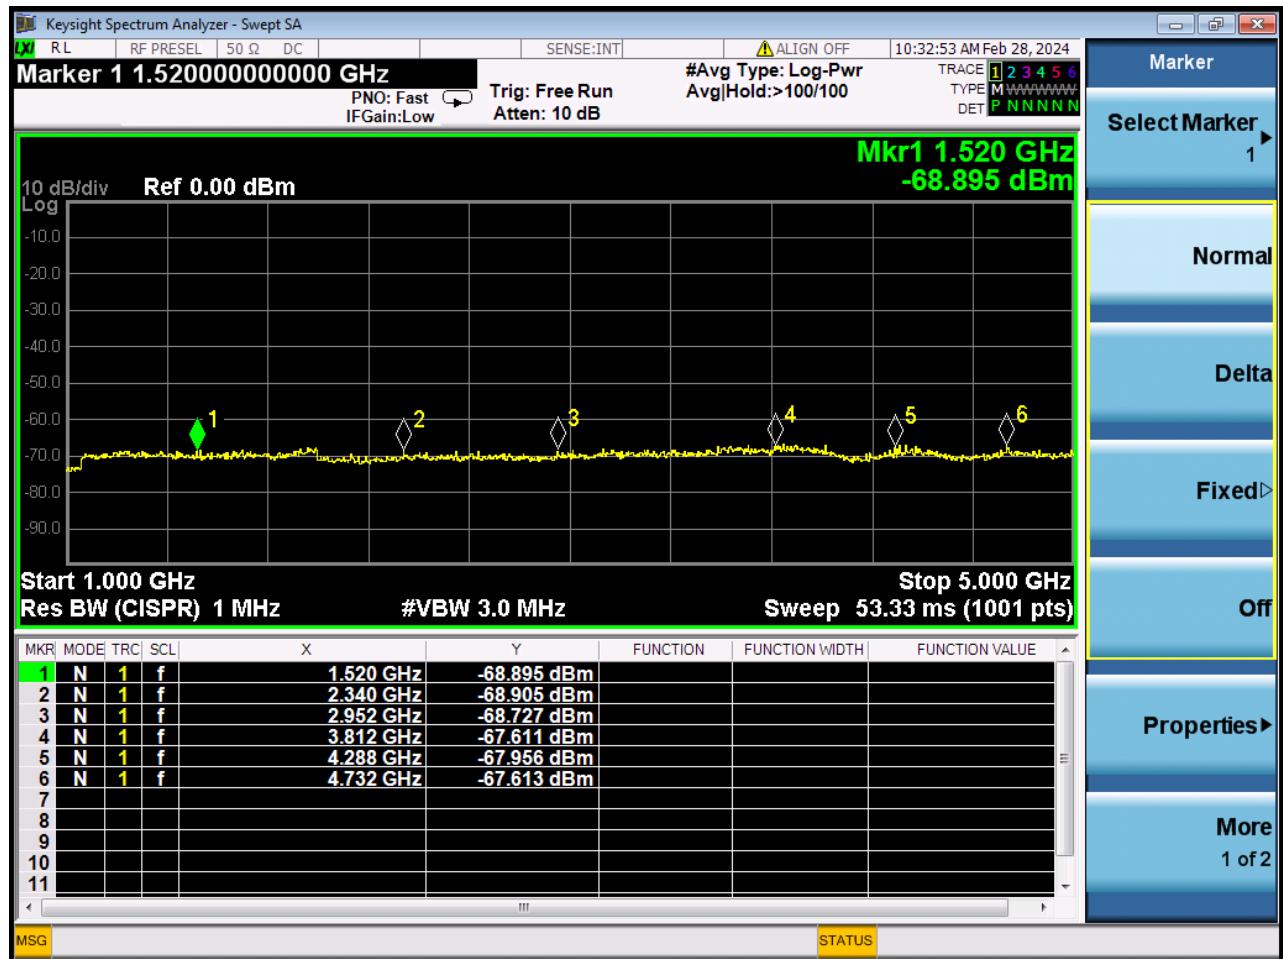
 Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:




REPORT No.: SZ24010201E01

**V port, Operate at 940.5MHz, 30MHz -1000MHz**

Fre. MHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
72.68	-78.798	0.06	-78.738	-57	PASS
189.08	-72.665	0.17	-81.976	-57	PASS
337.49	-79.628	0.23	-79.398	-57	PASS
538.28	-80.324	0.42	-79.904	-57	PASS
752.65	-79.995	0.65	-79.345	-57	PASS
970.9	-80.46	0.83	-79.63	-57	PASS

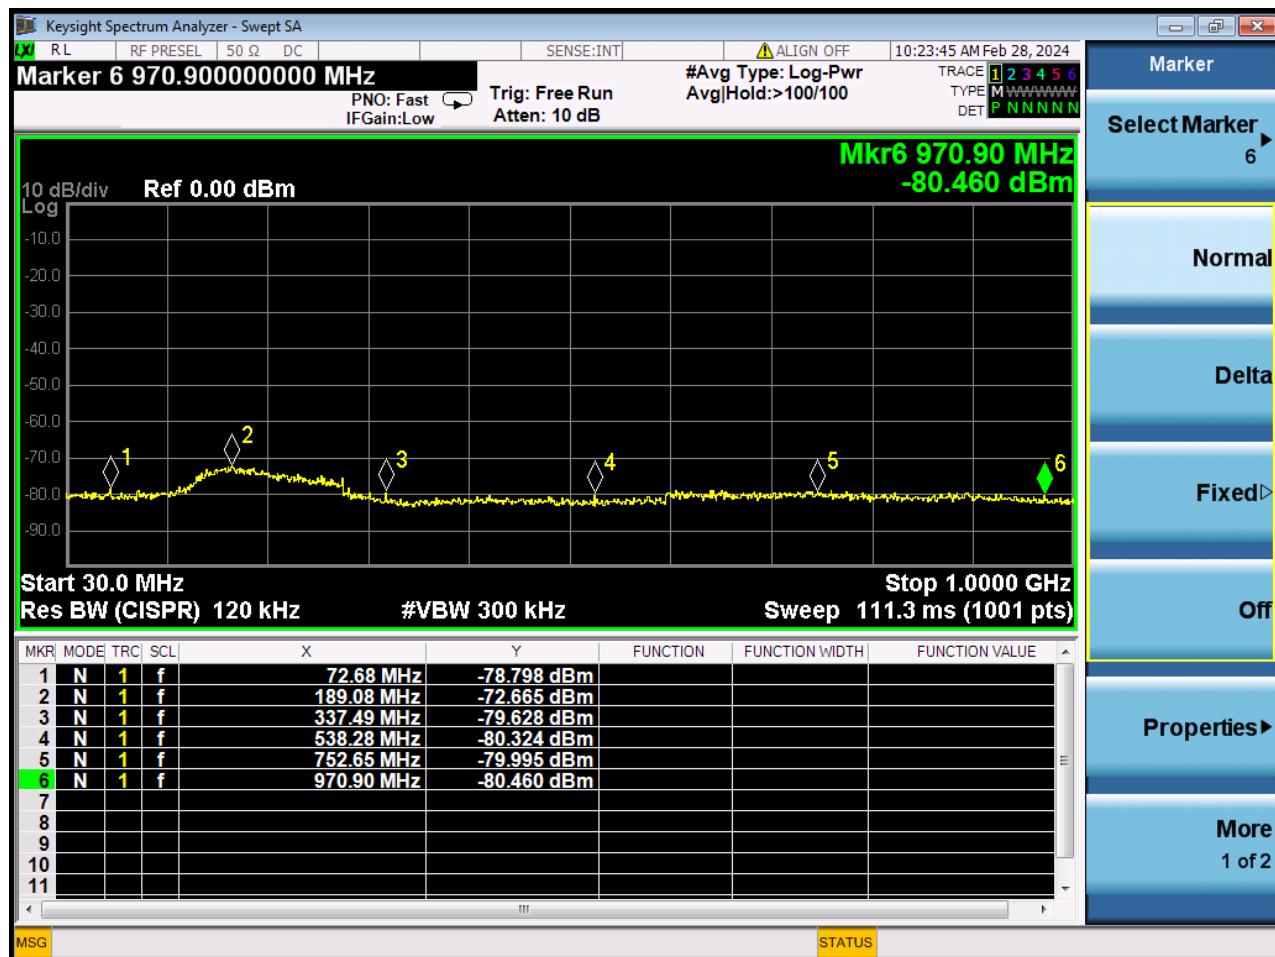
Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:



REPORT No.: SZ24010201E01

## V port, Operate at 940.5MHz, 1GHz -5GHz

Fre. GHz	P <sub>Reading value</sub> dBm	Factor dB	P <sub>Final value</sub> dBm	Limit dBm	Verdict
1.244	-68.498	1.12	-67.378	-57	PASS
1.976	-68.172	1.83	-66.342	-57	PASS
2.668	-69.282	2.56	-66.722	-57	PASS
3.604	-67.153	3.54	-63.613	-57	PASS
4.368	-68.077	4.21	-63.867	-57	PASS
4.828	-68.407	4.73	-63.677	-57	PASS

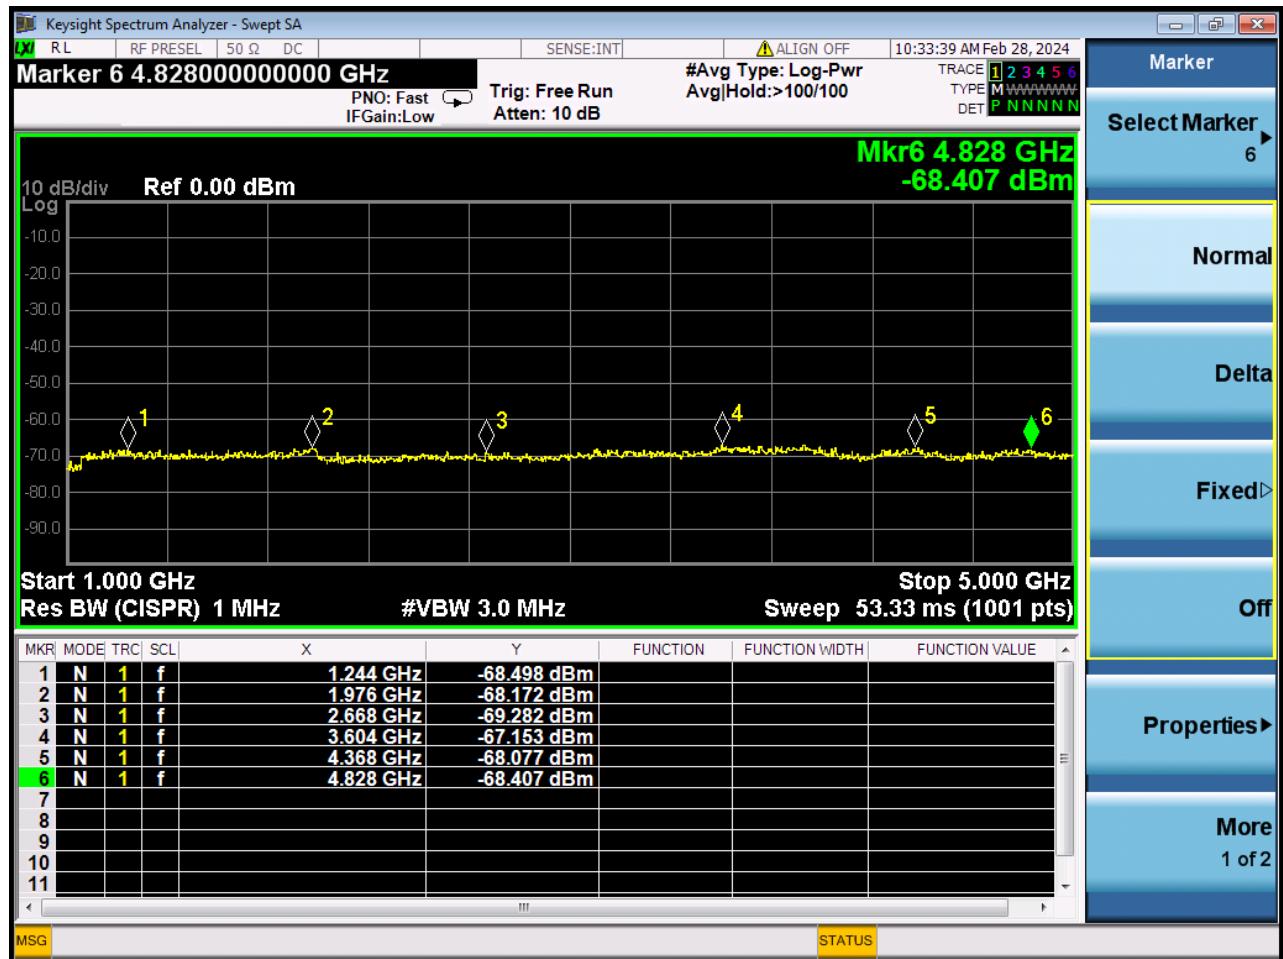Attach spectrum pictures of P<sub>Readingvalue</sub> for this test here:



REPORT No.: SZ24010201E01

## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±3.3dB
	150kHz-30MHz	±2.8dB

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.04dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



REPORT No.: SZ24010201E01

## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

### 4. Test Software Utilized

Model	Version Number	Producer
TS+ -[JS32-RE]	Version 2.5.0.6	Tonscend
TS+ -[JS32-CE]	Version 2.5.0.0	Tonscend



REPORT No.: SZ24010201E01

## 5. Test Equipments Utilized

Description	Model	Serial No.	Manufacturer	Cal. Date	Due. Date
Bi-Log Antenna	VULB 9163	9163-274	SCHWARZBECK	2023/6/27	2024/6/26
Bi-Log Antenna	VULB 9163	9163-519	SCHWARZBECK	2023/7/1	2024/6/30
Horn Antenna	BBHA 9120D	9120D-963	SCHWARZBECK	2023/6/27	2024/6/26
Horn Antenna	BBHA 9120D	01774	SCHWARZBECK	2023/7/1	2024/6/30
Receiver	N9038A	MY541300 16	Agilent	2023/6/21	2024/6/20
Receiver	N9038A	MY564000 93	KEYSIGHT	2024/1/25	2025/1/24
6db Attenuator	BW-N6W5+	E191001	Mini-circuits	2023/9/19	2024/9/18
Preamplifier	S020180L3203	61171/611 72	LUCIX CORP.	2023/6/27	2024/6/26
Preamplifier	S10M100L3802	46732	LUCIX CORP.	2023/6/27	2024/6/26
RF Coaxial Cable	PE330	MRE001	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE002	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE003	Pasternack	N/A	N/A
RF Coaxial Cable	QA360-40-KK- 0.5	22290045	Qualwave	N/A	N/A
RF Coaxial Cable	QA360-40-KKF -2	22290046	Qualwave	N/A	N/A
RF Coaxial Cable	QA500-18-NN- 5	22120181	Qualwave	N/A	N/A
RF Coaxial Cable	BNC	MRE04	Qualwave	N/A	N/A
Receiver	ESPI	101052	R&S	2023/6/21	2024/6/20
LISN	NSLK 8127	8127449	Schwarzbeck	2024/2/2	2025/2/1
10dB Pulse Limiter	VTSD 9561-F	VTSD 9561 F-B #206	SCHWARZBECK	2023/6/27	2024/6/26
System Simulator	CMW500	152038	R&S	2023/9/19	2024/9/18

## 6. Ancillary Equipment Utilized

Description	Manufacturer	Model	Serial No.
DC source	LINI-T	N/A	C2040182272



REPORT No.: SZ24010201E01

PC	APPLE	A1370	N/A
PC Adapter	APPLE	A1374	N/A
RJ45 Cable	N/A	N/A	N/A

———— END OF REPORT ————