



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd.

FCC ID XMR201707BG96

Product LTE Cat M1 & Cat NB1 & EGPRS Module

Brand Quectel

Model BG96, BG96 MINIPCIE

Marketing Quectel BG96, Quectel BG96 MINIPCIE

Report No. R1811A0536-R2

Issue Date February 26, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 24E (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	10
5.1. RF Power Output	10
5.2. Effective Isotropic Radiated Power	14
5.3. Occupied Bandwidth	19
5.4. Band Edge Compliance.....	27
5.5. Peak-to-Average Power Ratio (PAPR).....	45
5.6. Frequency Stability.....	47
5.7. Spurious Emissions at Antenna Terminals.....	54
5.8. Radiates Spurious Emission	75
6. Main Test Instruments	83
ANNEX A: EUT Appearance and Test Setup	84
A.1 EUT Appearance	84
A.2 Test Setup	86
ANNEX B: Product Change Description	87

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	24.232(c)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 /24.238(a)	PASS
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 24.235	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
8	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: June 24 ,2017~July 3 ,2017 and December 20, 2018 ~ February 13, 2019			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

BG96, BG96 MINIPCIE (Report No: R1811A0536-R2) is a variant model of BG96 (Report No: RXA1706-0199RF02R1). Test items tested see the table below. The detailed product change description please refers to the ANNEX B.

Band	Original (RXA1706-0199RF02R1)	Variant (R1811A0536-R2)
GSM1900	Pass	Refer to the Original
LTE Band 2	Pass	Pass
LTE Band 25	NA	Pass

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China

General information

EUT Description			
Model	BG96, BG96 MINIPCIE		
IMEI	866425038291656		
Hardware Version	R1.2		
Software Version	BG96MAR04A01M1G		
Power Supply	External power supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	4 dBi		
Test Mode(s)	GSM1900; LTE Band 2; LTE Band 25		
Test Modulation	(GSM)GMSK,8PSK; (LTE)QPSK,16QAM		
LTE Category	M1		
Maximum E.I.R.P	GSM 1900:	32.43 dBm	
	LTE Band 2:	29.66 dBm	
	LTE Band 25:	22.61 dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM1900	1850 ~ 1910	1930 ~ 1990
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 25	1850 ~ 1915	1930 ~ 1995
Note: The information of the EUT is declared by the manufacturer.			

The series model number is: BG96 MINIPCIE. The difference of these models are have different marketing requirement.

Accessory equipment	
Evaluation Board	RF Cable
RS232-to-USB Cable	Antenna: Dipole Antenna
Headset	USB Cable



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2018)

FCC CFR 47 Part 24E (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM /LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	GSM 1900
RF power output	GPRS EGPRS
Effective Isotropic Radiated power	GPRS(1Tx slot) EGPRS(1Tx slot)
Occupied Bandwidth	GPRS(1Tx slot) EGPRS(1Tx slot)
Band Edge Compliance	GPRS(1Tx slot) EGPRS(1Tx slot)
Peak-to-Average Power Ratio	GPRS(1Tx slot) EGPRS(1Tx slot)
Frequency Stability	GPRS(1Tx slot) EGPRS(1Tx slot)
Spurious Emissions at Antenna Terminals	GPRS(1Tx slot)
Radiates Spurious Emission	GPRS(1Tx slot)



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2/25

Test items	Mode	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 25	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Effective Isotropic Radiated power	LTE 2	0	0	0	0	0	0	0	0	-	-	0	0	0	0
	LTE 25	0	0	0	0	0	0	0	0	-	-	0	0	0	0
Occupied Bandwidth	LTE 2	0	0	0	0	0	0	0	0	-	-	0	-	0	-
	LTE 25	0	0	0	0	0	0	0	0	-	-	0	-	0	-
Band Edge Compliance	LTE 2	0	0	0	0	0	0	0	0	0	-	0	0	-	0
	LTE 25	0	0	0	0	0	0	0	0	0	-	0	0	-	0
Peak-to-Average Power Ratio	LTE 2	0	0	0	0	0	0	0	0	-	-	0	-	0	-
	LTE 25	0	0	0	0	0	0	0	0	-	-	0	-	0	-
Frequency Stability	LTE 2	0	0	0	0	0	0	0	0	-	-	0	-	0	-
	LTE 25	0	0	0	0	0	0	0	0	-	-	0	-	0	-
Conducted Spurious Emissions	LTE 2	0	0	0	0	0	0	0	-	0	-	-	0	0	0
	LTE 25	0	0	0	0	0	0	0	-	0	-	-	0	0	0
Radiates Spurious Emission	LTE 2	-	-	-	-	-	0	0	-	0	-	-	0	0	0
	LTE 25	-	-	-	-	-	0	0	-	0	-	-	0	0	0
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5. Test Case Results

5.1.RF Power Output

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup



The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

GSM 1900		Conducted Power(dBm)		
		Channel 512	Channel 661	Channel 810
		1850.2(MHz)	1880(MHz)	1909.8(MHz)
GPRS (GMSK)	1TXslot	29.76	29.66	29.46
	2TXslots	29.65	29.57	29.38
	3TXslots	29.51	29.45	29.27
	4TXslots	29.42	29.32	29.16
EGPRS (8PSK)	1TXslot	26.06	25.88	25.84
	2TXslots	25.89	25.81	25.68
	3TXslots	25.78	25.64	25.49
	4TXslots	25.57	25.45	25.38

Mode	Bandwidth	Channel/ Frequency(MHz)	RB# RBstart	Index	Conducted Power (dBm)	
					QPSK	16QAM
Band2	1.4MHz	18607/1850.7	1#0	0	23.25	23.80
			6#0	0	23.42	23.52
		18900/1880	1#0	0	23.37	23.83
			6#0	0	23.55	23.72
		19193/1909.3	1#5	0	23.73	23.84
			6#0	0	23.70	23.74
	3MHz	18615/1851.5	1#0	0	23.84	23.83
			6#0	0	23.74	23.55
		18900/1880	1#0	0	23.41	23.85
			6#0	0	23.59	23.76
		19185/1908.5	1#5	1	23.76	23.87
			6#0	1	23.73	23.77
	5MHz	18625/1852.5	1#0	0	23.24	23.80
			6#0	0	23.43	23.53
		18900/1880	1#0	0	23.39	23.81
			6#0	0	23.58	23.72
		19175/1907.5	1#5	3	23.72	23.84
			6#0	3	23.71	23.72
	10MHz	18650/1855	1#0	0	23.26	23.82
			4#0	0	23.51	23.56
		18900/1880	1#0	0	23.40	23.84
			4#0	0	23.60	23.77
		19150/1905	1#5	7	23.75	23.86
			4#2	7	23.75	23.76
15MHz	18675/1857.5	1#0	0	23.25	23.77	
		6#0	0	23.49	23.53	



		18900/1880	1#0	0	23.36	23.82
			6#0	0	23.56	23.72
		19125/1902.5	1#5	11	23.73	23.84
			6#0	11	23.70	23.72
	20MHz	18700/1860	1#0	0	23.22	23.75
			6#0	0	23.46	23.51
		18900/1880	1#0	0	23.32	23.78
			6#0	0	23.51	23.68
		19100/1900	1#5	15	23.70	23.79
			6#0	15	23.66	23.69



Mode	Bandwidth	Channel/ Frequency(MHz)	RB# RBstart	Index	Conducted Power (dBm)	
					QPSK	16QAM
Band 25	1.4MHz	26047/1850.7	1#0	0	23.41	24.08
			6#0	0	23.53	23.64
		26365/1882.5	1#0	0	24.10	23.94
			6#0	0	23.53	23.56
		26683/1914.3	1#5	0	23.50	23.98
			6#0	0	23.62	23.66
	3MHz	26055/1851.5	1#0	0	23.32	23.88
			6#0	0	23.63	23.56
		26365/1882.5	1#0	0	23.79	23.02
			6#0	0	23.63	24.00
		26675/1913.5	1#5	1	24.02	23.20
			6#0	1	23.70	24.12
	5MHz	26065/1852.5	1#0	0	23.77	23.25
			6#0	0	23.66	24.17
		26365/1882.5	1#0	0	23.69	23.55
			6#0	0	23.60	24.24
		26665/1912.5	1#5	0	23.70	24.52
			6#0	3	23.76	23.86
	10MHz	26090/1855	1#0	0	23.79	23.38
			4#0	0	24.00	24.37
		26365/1882.5	1#0	0	23.50	24.41
			4#0	0	23.66	23.47
		26640/1910	1#5	4	23.65	24.53
			4#2	7	23.85	23.55
	15MHz	26115/1857.5	1#0	0	23.85	23.42
			6#0	0	23.72	24.09
		26365/1882.5	1#0	0	23.56	24.41
			6#0	0	23.68	23.90
		26615/1907.5	1#5	8	23.62	24.50
			6#0	11	23.81	23.80
	20MHz	26140/1860	1#0	0	23.81	23.41
			6#0	0	23.81	24.24
26365/1882.5		1#0	0	23.58	24.42	
		6#0	0	23.78	23.74	
26590/1905		1#5	12	23.99	23.63	
		6#0	15	23.84	24.28	

5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

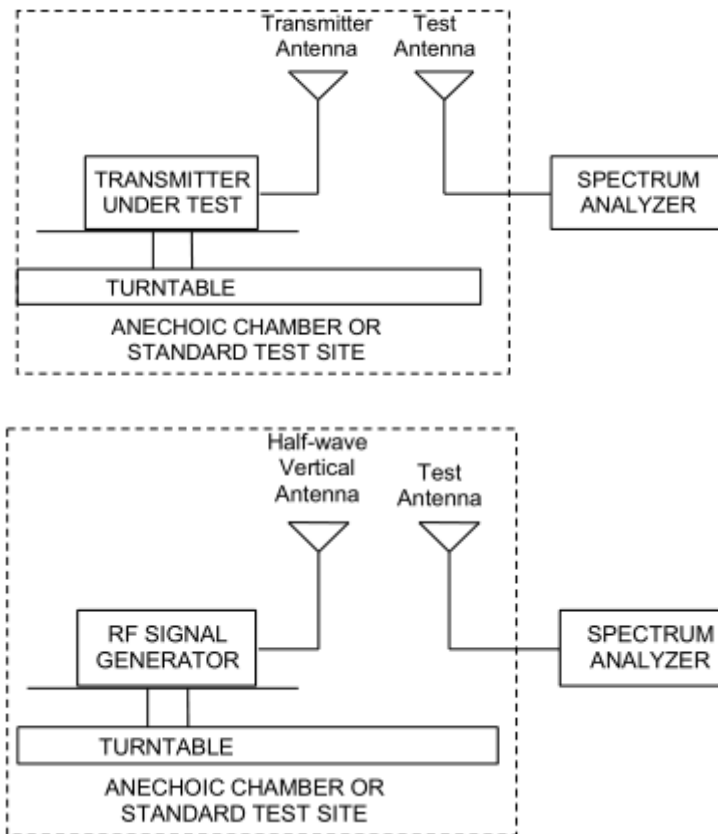

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2\text{ W}$ (33 dBm)
-------	----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Polarization	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Conclusion
GPRS 1900	H	1850.2	31.88	33	Pass
	H	1880	31.82	33	Pass
	H	1909.8	32.43	33	Pass
EGPRS 1900	H	1850.2	28.06	33	Pass
	H	1880	27.88	33	Pass
	H	1909.8	27.84	33	Pass

LTE Band 2							
Bandwidth	Channel/ Frequency (MHz)	Polarization	RB	Index	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	18607/1850.7	Horizontal	1#0	0	28.96	33	Pass
	18900/1880	Horizontal	1#2	0	29.66	33	Pass
	19193/1909.3	Horizontal	1#5	0	29.38	33	Pass
3 MHz (QPSK)	18615/1851.5	Horizontal	1#0	0	29.27	33	Pass
	18900/1880	Horizontal	1#5	0	29.54	33	Pass
	19185/1908.5	Horizontal	1#5	1	29.45	33	Pass
5 MHz (QPSK)	18625/1852.5	Horizontal	1#0	0	28.76	33	Pass
	18900/1880	Horizontal	1#5	1	28.96	33	Pass
	19175/1907.5	Horizontal	1#5	3	29.00	33	Pass
10 MHz (QPSK)	18650/1855	Horizontal	4#0	0	27.74	33	Pass
	18900/1880	Horizontal	4#2	3	28.31	33	Pass
	19150/1905	Horizontal	4#2	7	28.25	33	Pass
15 MHz (QPSK)	18675/1857.5	Horizontal	1#0	0	27.23	33	Pass
	18900/1880	Horizontal	1#5	5	27.53	33	Pass
	19125/1902.5	Horizontal	1#5	11	27.53	33	Pass
20 MHz (QPSK)	18700/1860	Horizontal	6#0	0	26.34	33	Pass
	18900/1880	Horizontal	6#0	7	26.74	33	Pass
	19100/1900	Horizontal	6#0	15	26.67	33	Pass
1.4 MHz (16QAM)	18607/1850.7	Horizontal	1#0	0	28.65	33	Pass
	18900/1880	Horizontal	1#2	0	29.30	33	Pass
	19193/1909.3	Horizontal	1#5	0	29.05	33	Pass
3 MHz (16QAM)	18615/1851.5	Horizontal	1#0	0	29.00	33	Pass
	18900/1880	Horizontal	1#5	0	29.22	33	Pass
	19185/1908.5	Horizontal	1#5	1	29.15	33	Pass
5 MHz	18625/1852.5	Horizontal	1#0	0	28.42	33	Pass



(16QAM)	18900/1880	Horizontal	1#5	1	28.66	33	Pass
	19175/1907.5	Horizontal	1#5	3	28.69	33	Pass
10 MHz (16QAM)	18650/1855	Horizontal	4#0	0	27.42	33	Pass
	18900/1880	Horizontal	4#2	3	28.01	33	Pass
	19150/1905	Horizontal	4#2	7	27.95	33	Pass
15 MHz (16QAM)	18675/1857.5	Horizontal	1#0	0	26.92	33	Pass
	18900/1880	Horizontal	1#5	5	27.22	33	Pass
	19125/1902.5	Horizontal	1#5	11	27.22	33	Pass
20 MHz (16QAM)	18700/1860	Horizontal	6#0	0	26.04	33	Pass
	18900/1880	Horizontal	6#0	7	26.41	33	Pass
	19100/1900	Horizontal	6#0	15	26.35	33	Pass

LTE Band 25								
bandwidth	Channel	Frequency (MHz)	Polarization	RB	Index	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1850.7	Horizontal	1#0	0	22.16	33	Pass
	Mid	1882.5	Horizontal	1#2	0	22.06	33	Pass
	High	1914.3	Horizontal	1#5	0	21.27	33	Pass
3 MHz (QPSK)	Low	1851.5	Horizontal	1#0	0	22.23	33	Pass
	Mid	1882.5	Horizontal	1#5	0	22.12	33	Pass
	High	1913.5	Horizontal	1#5	1	21.68	33	Pass
5 MHz (QPSK)	Low	1852.5	Horizontal	1#0	0	22.37	33	Pass
	Mid	1882.5	Horizontal	1#5	1	22.24	33	Pass
	High	1912.5	Horizontal	1#5	3	21.37	33	Pass
10 MHz (QPSK)	Low	1855	Horizontal	4#0	0	22.49	33	Pass
	Mid	1882.5	Horizontal	4#2	3	21.89	33	Pass
	High	1910	Horizontal	4#2	7	21.45	33	Pass
15 MHz (QPSK)	Low	1857.5	Horizontal	1#0	0	22.59	33	Pass
	Mid	1882.5	Horizontal	1#5	5	22.03	33	Pass
	High	1907.5	Horizontal	1#5	11	21.47	33	Pass
20 MHz (QPSK)	Low	1860	Horizontal	6#0	0	22.61	33	Pass
	Mid	1882.5	Horizontal	6#0	7	22.29	33	Pass
	High	1905	Horizontal	6#0	15	21.11	33	Pass
1.4 MHz (16QAM)	Low	1850.7	Horizontal	1#0	0	21.67	33	Pass
	Mid	1882.5	Horizontal	1#2	0	21.59	33	Pass
	High	1914.3	Horizontal	1#5	0	20.83	33	Pass
3 MHz (16QAM)	Low	1851.5	Horizontal	1#0	0	21.76	33	Pass
	Mid	1882.5	Horizontal	1#5	0	21.68	33	Pass
	High	1913.5	Horizontal	1#5	1	21.09	33	Pass
5 MHz	Low	1852.5	Horizontal	1#0	0	21.77	33	Pass



LTE Band 25								
bandwidth	Channel	Frequency (MHz)	Polarization	RB	Index	EIRP (dBm)	Limit (dBm)	Conclusion
(16QAM)	Mid	1882.5	Horizontal	1#5	1	21.69	33	Pass
	High	1912.5	Horizontal	1#5	3	20.81	33	Pass
10 MHz (16QAM)	Low	1855	Horizontal	4#0	0	22.01	33	Pass
	Mid	1882.5	Horizontal	4#2	3	21.39	33	Pass
	High	1910	Horizontal	4#2	7	20.97	33	Pass
15 MHz (16QAM)	Low	1857.5	Horizontal	1#0	0	21.93	33	Pass
	Mid	1882.5	Horizontal	1#5	5	21.51	33	Pass
	High	1907.5	Horizontal	1#5	11	21.04	33	Pass
20 MHz (16QAM)	Low	1860	Horizontal	6#0	0	22.14	33	Pass
	Mid	1882.5	Horizontal	6#0	7	21.67	33	Pass
	High	1905	Horizontal	6#0	15	20.51	33	Pass

5.3.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

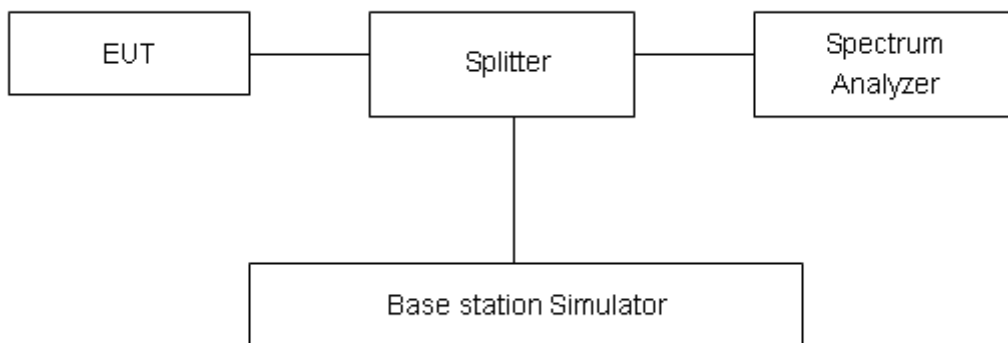

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result






Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GPRS 1900 (GMSK)	512	1850.2	0.24637	0.3169
	661	1880.0	0.24585	0.3154
	810	1909.8	0.24375	0.3155
EGPRS 1900 (8-PSK)	512	1850.2	0.24164	0.3155
	661	1880.0	0.2447	0.3111
	810	1909.8	0.24768	0.3121







Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
Band2	1.4MHz	QPSK	18900/1880	6#0	0	1.1111	1.341
		16QAM	18900/1880	6#0	0	0.94755	1.300
	3MHz	QPSK	18900/1880	6#0	0	1.1621	1.896
		16QAM	18900/1880	6#0	0	0.98549	1.307
	5MHz	QPSK	18900/1880	6#0	0	1.1669	2.051
		16QAM	18900/1880	6#0	0	1.0119	1.558
	10MHz	QPSK	18900/1880	6#0	0	1.1876	1.955
		16QAM	18900/1880	6#0	0	1.1939	1.823
	15MHz	QPSK	18900/1880	6#0	0	1.2171	2.062
		16QAM	18900/1880	6#0	0	1.8960	1.865
	20MHz	QPSK	18900/1880	6#0	0	1.2544	2.005
		16QAM	18900/1880	6#0	0	1.1472	1.957







Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
LTE Band 25	1.4MHz	QPSK	26365/1882.5	6#0	0	1.1084	1.378
		16QAM	26365/1882.5	6#0	0	0.9513	1.369
	3MHz	QPSK	26365/1882.5	6#0	0	1.1634	1.780
		16QAM	26365/1882.5	6#0	0	0.9924	1.425
	5MHz	QPSK	26365/1882.5	6#0	0	1.1385	1.736
		16QAM	26365/1882.5	6#0	0	0.9751	1.369
	10MHz	QPSK	26365/1882.5	6#0	0	1.1808	1.813
		16QAM	26365/1882.5	6#0	0	1.0452	1.634
	15MHz	QPSK	26365/1882.5	6#0	0	1.1986	1.917
		16QAM	26365/1882.5	6#0	0	1.0619	1.717














	20MHz	QPSK	26365/1882.5	6#0	0	1.2081	1.824
		16QAM	26365/1882.5	6#0	0	1.1054	1.889

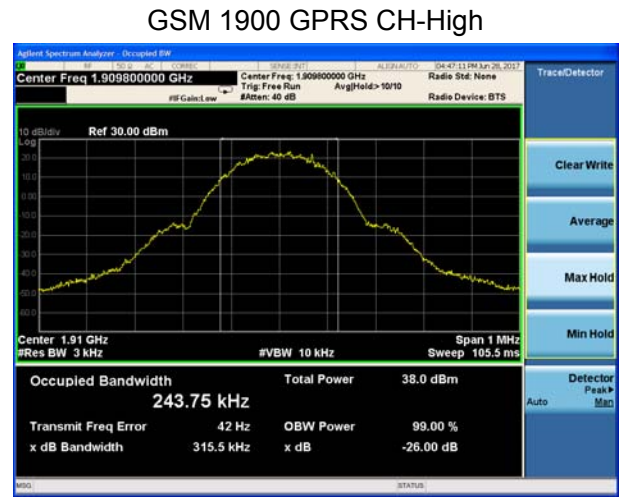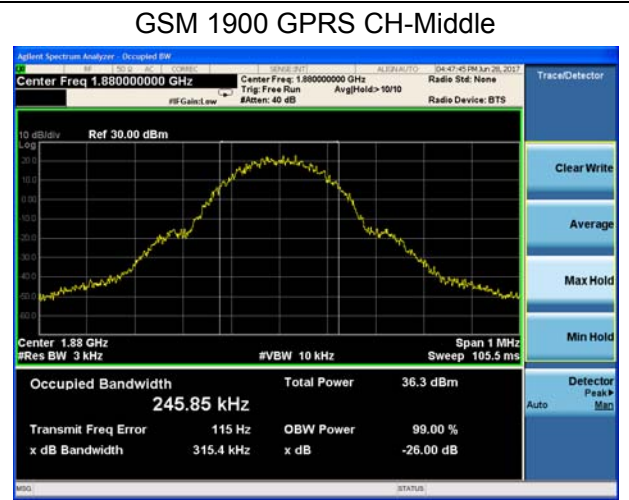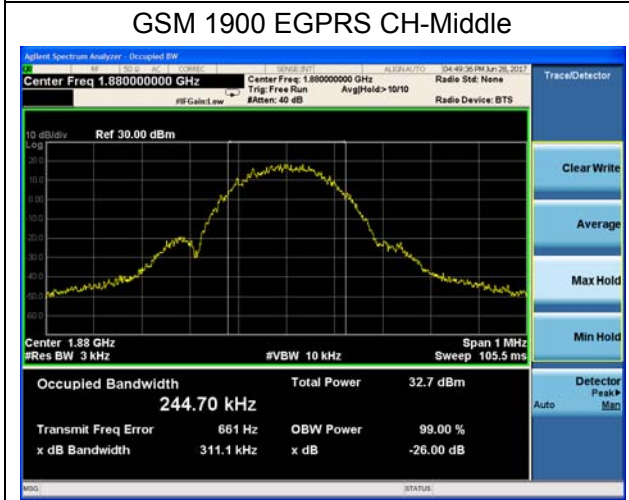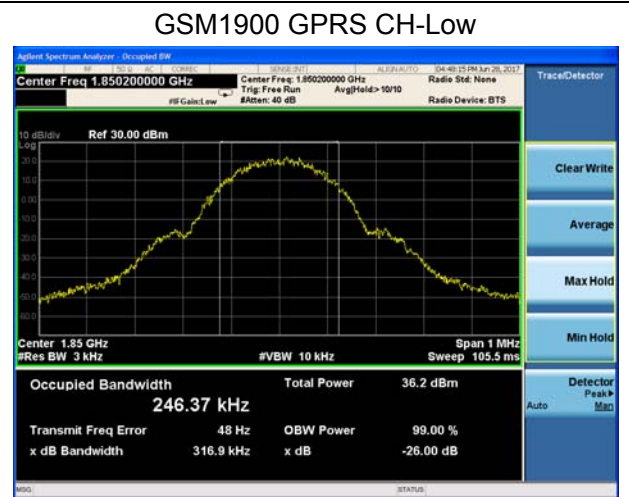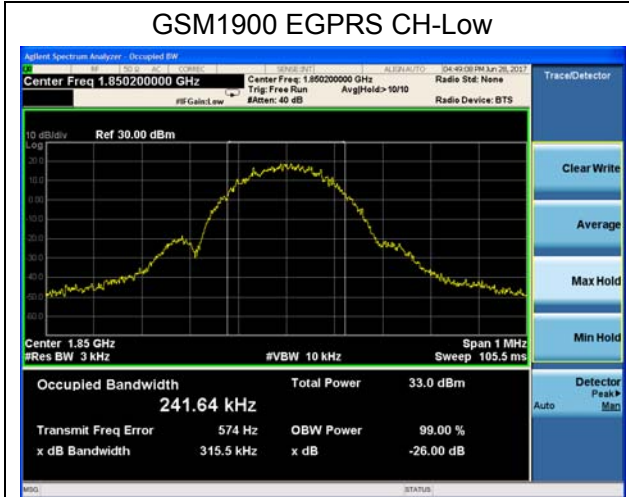

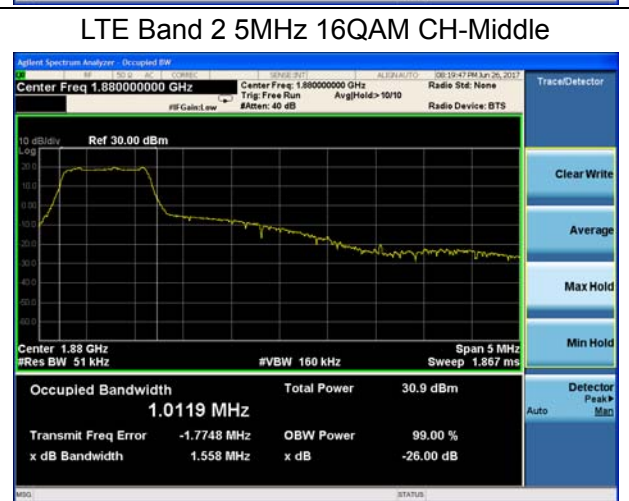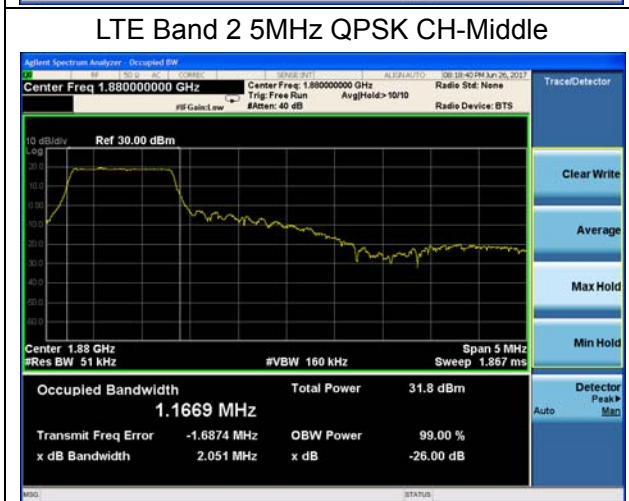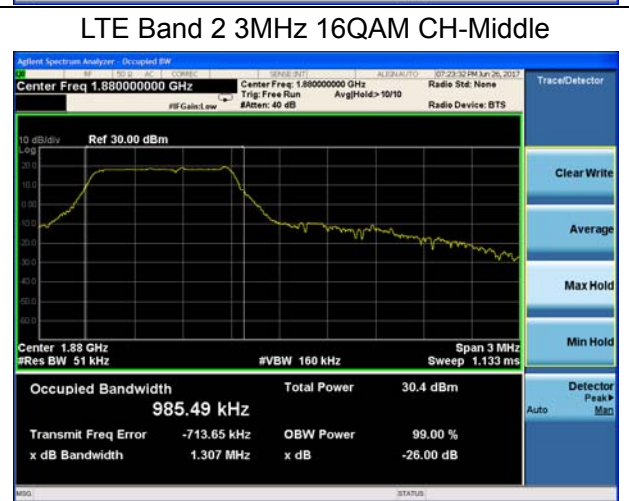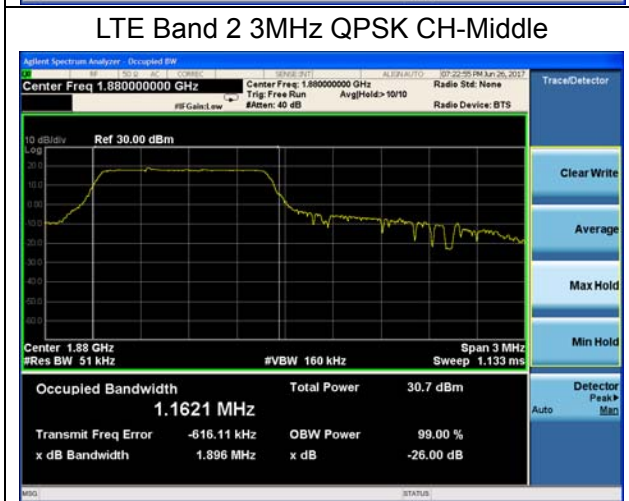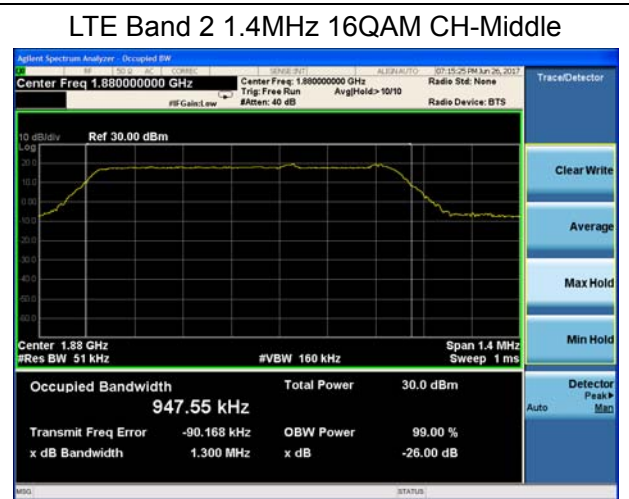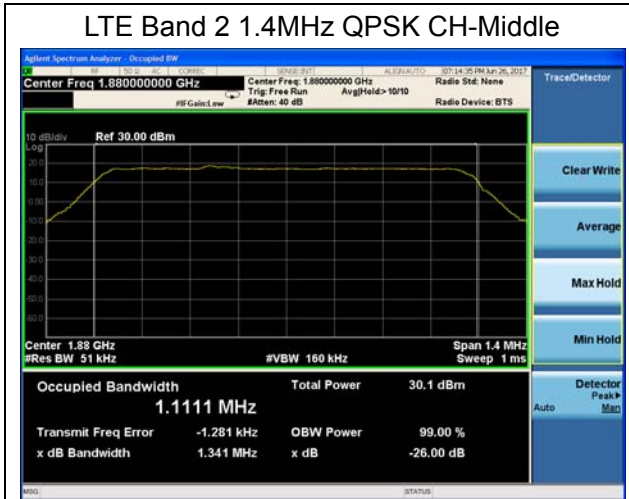

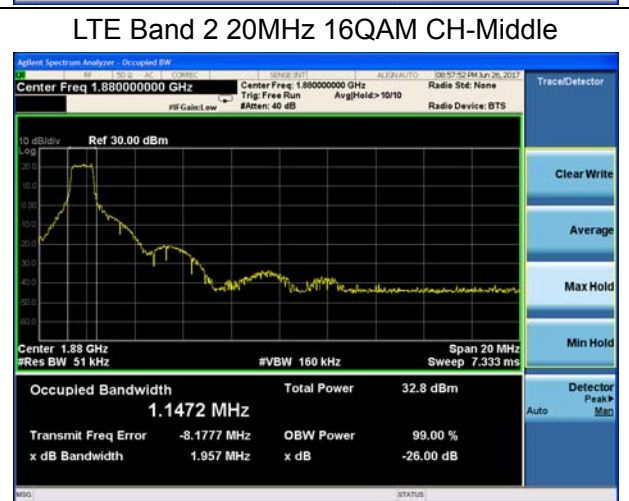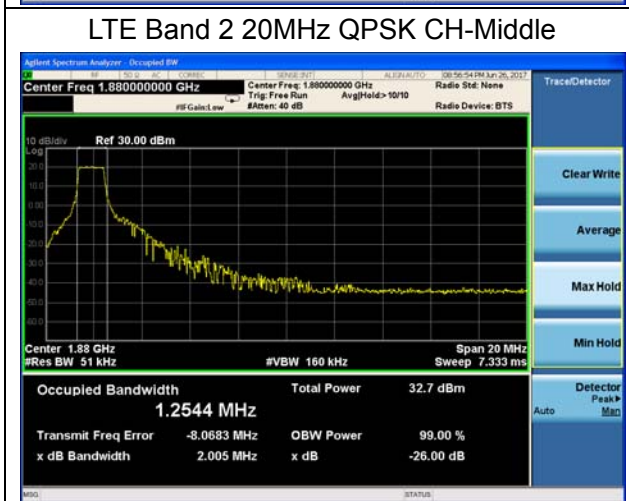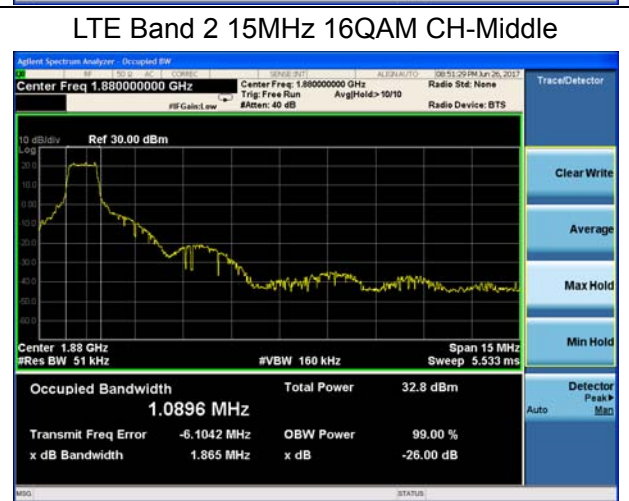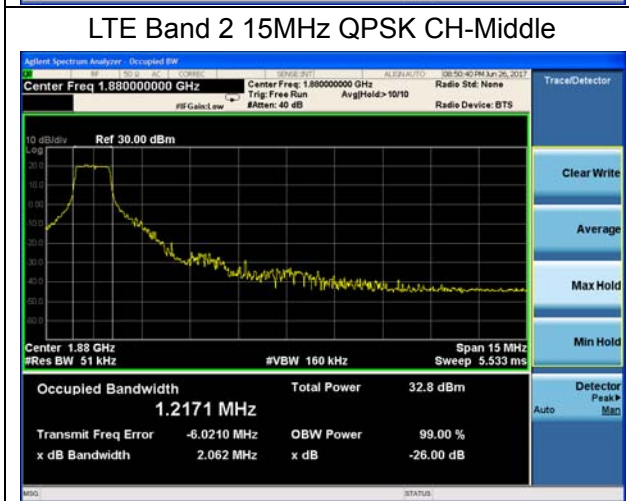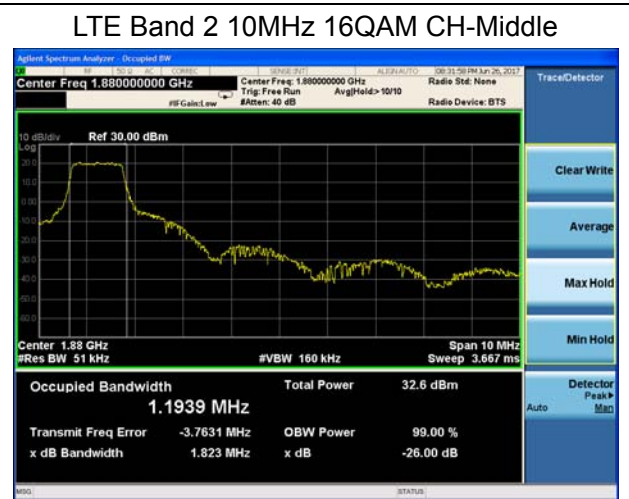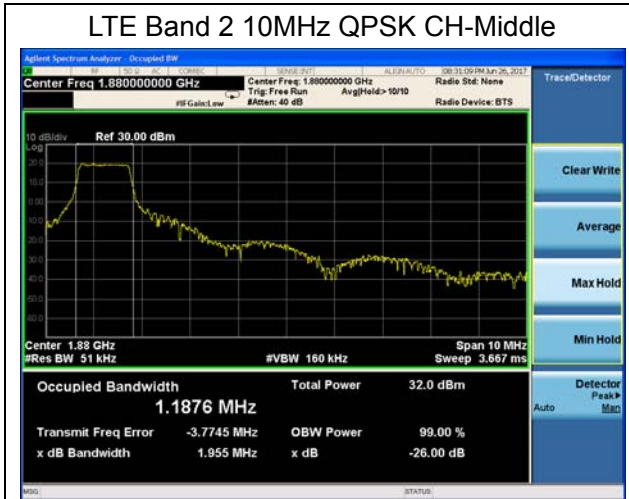

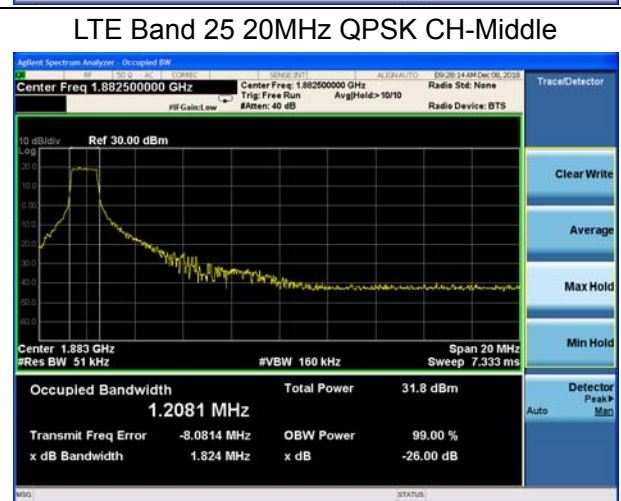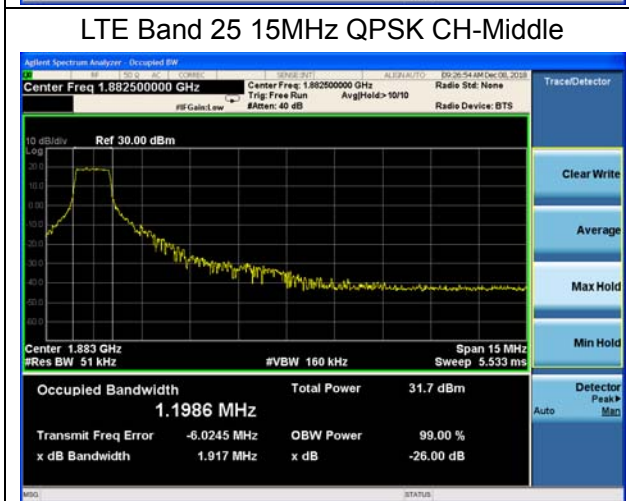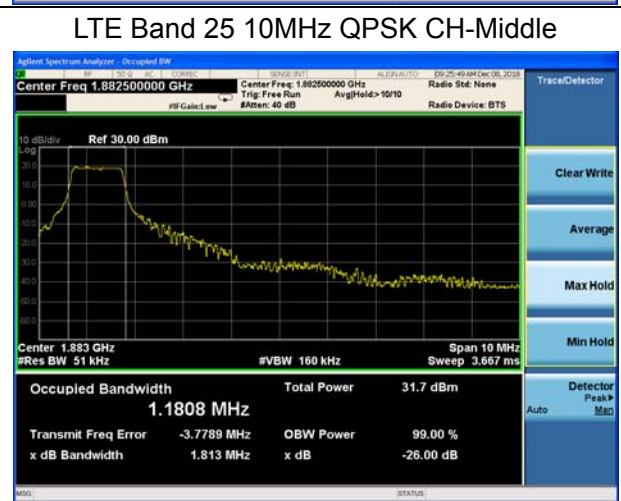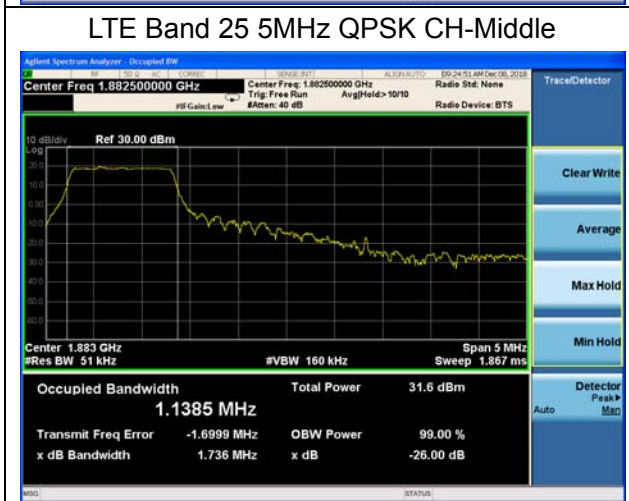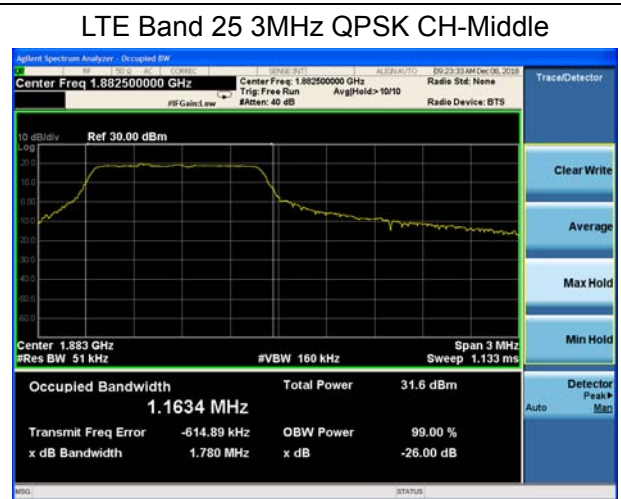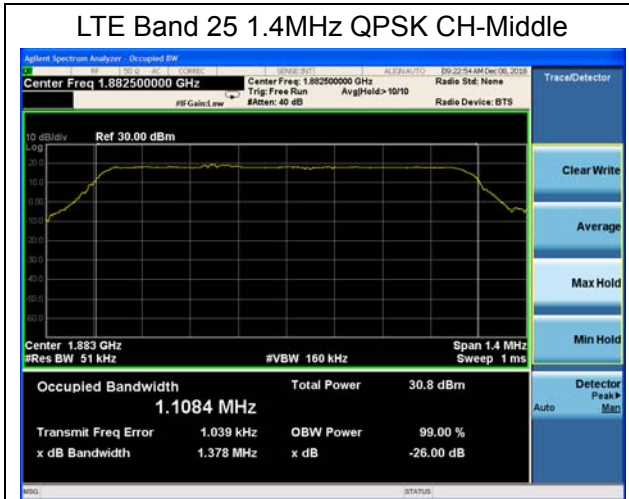

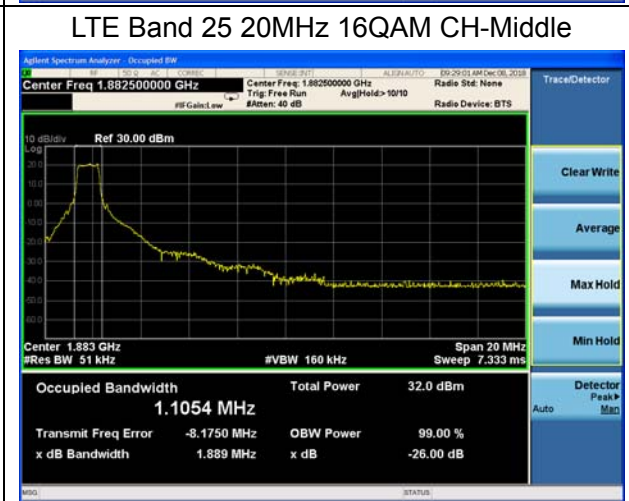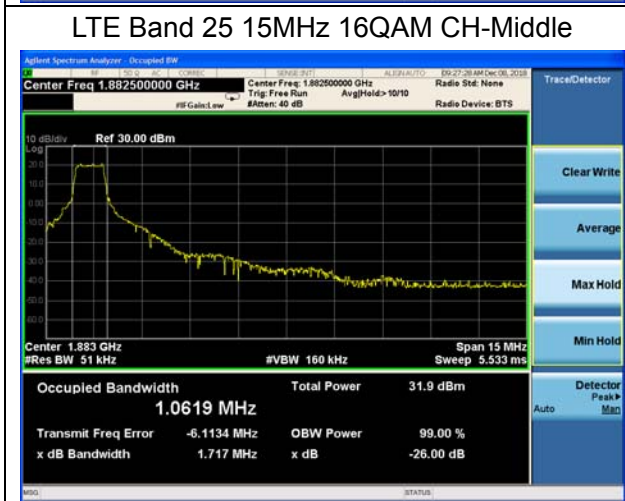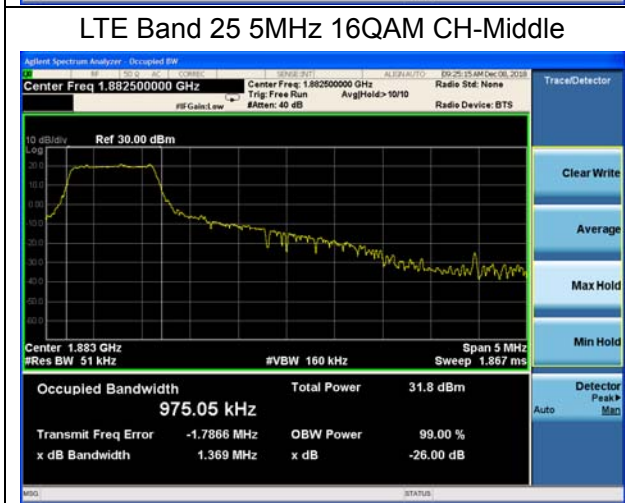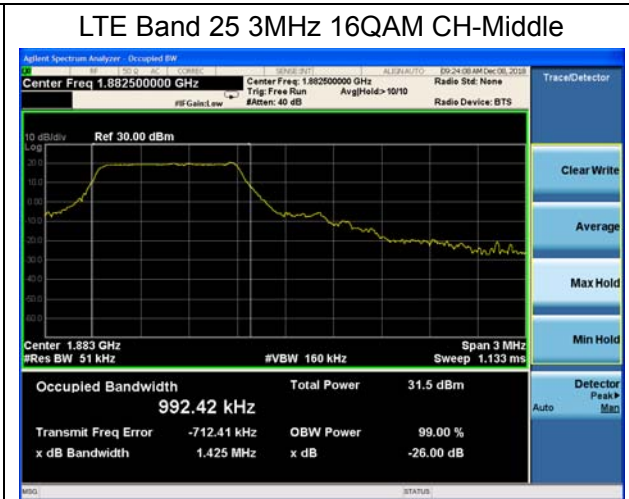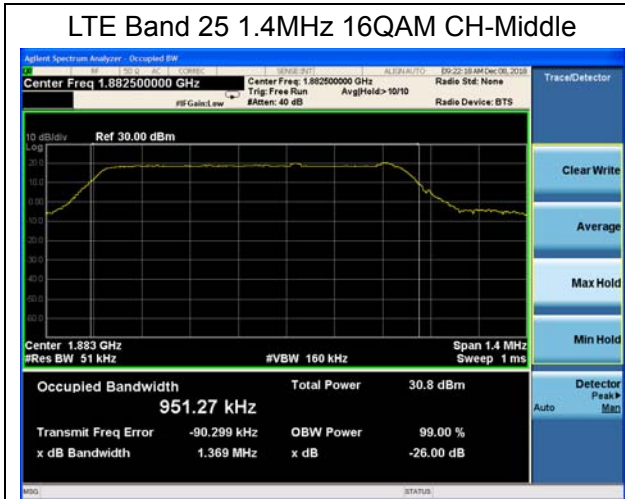

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25 Spectrum analyzer plots are included on the following pages.

Test Setup

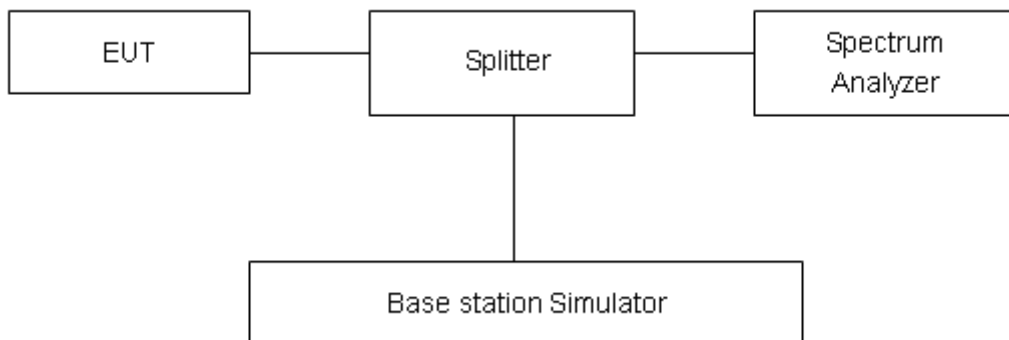

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM1900 GPRS CH-Low



GSM 1900 GPRS CH-High



GSM1900 EGPRS CH-Low



GSM 1900 EGPRS CH-High



LTE Band 2 1.4MHz QPSK 1RB CH-Low




LTE Band 2 1.4MHz QPSK 1RB CH-High






LTE Band 2 1.4MHz QPSK 100%RB CH-Low

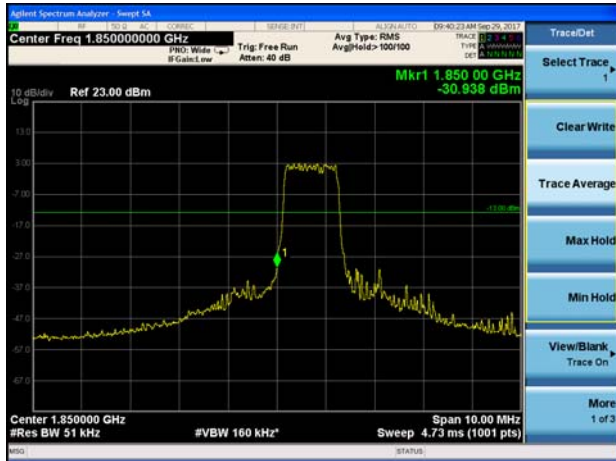

LTE Band 2 1.4MHz QPSK 100%RB CH-High




LTE Band 2 3MHz QPSK 1RB CH-Low

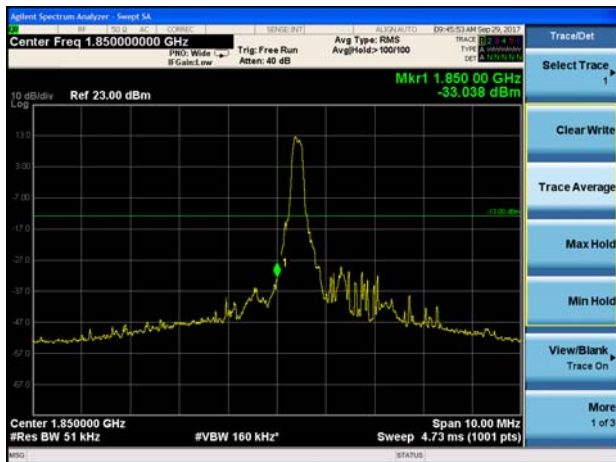

LTE Band 2 3MHz QPSK 1RB CH-High



LTE Band 2 3MHz QPSK 100%RB CH-Low

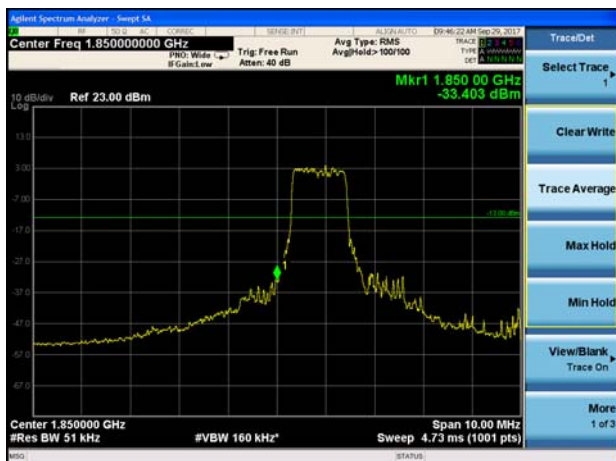


LTE Band 2 3MHz QPSK 100%RB CH-High





LTE Band 2 5MHz QPSK 1RB CH-Low

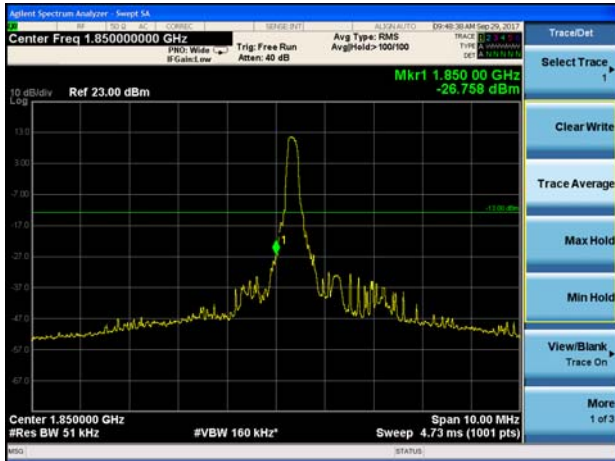


LTE Band 2 5MHz QPSK 1RB CH-High




LTE Band 2 5MHz QPSK 100%RB CH-Low




LTE Band 2 5MHz QPSK 100%RB CH-High

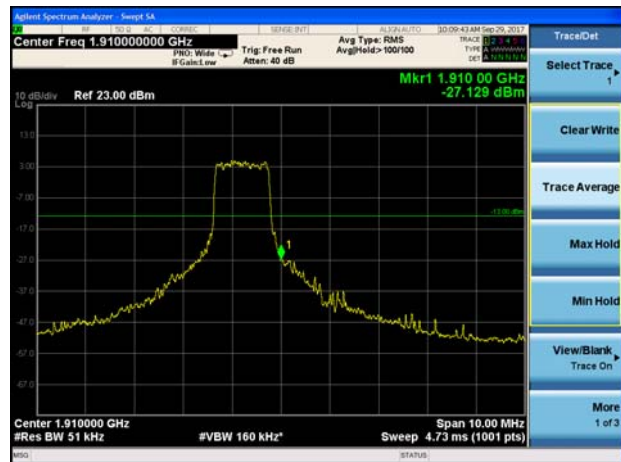

LTE Band 2 10MHz QPSK 1RB CH-Low

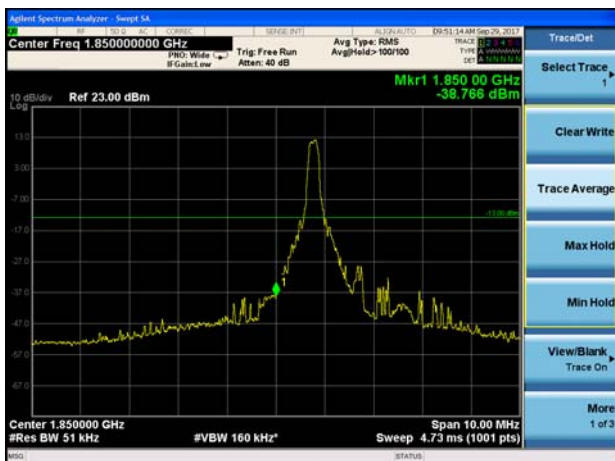


LTE Band 2 10MHz QPSK 1RB CH-High

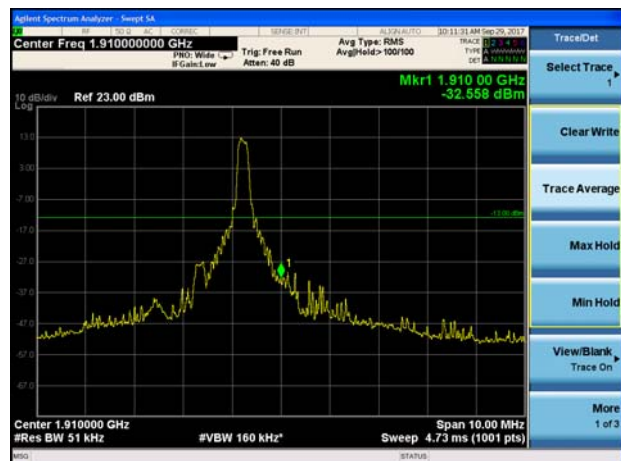





LTE Band 2 10MHz QPSK 100%RB CH-Low

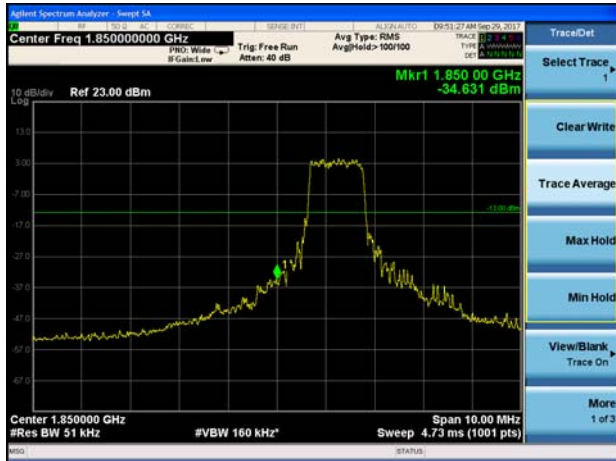


LTE Band 2 10MHz QPSK 100%RB CH-High

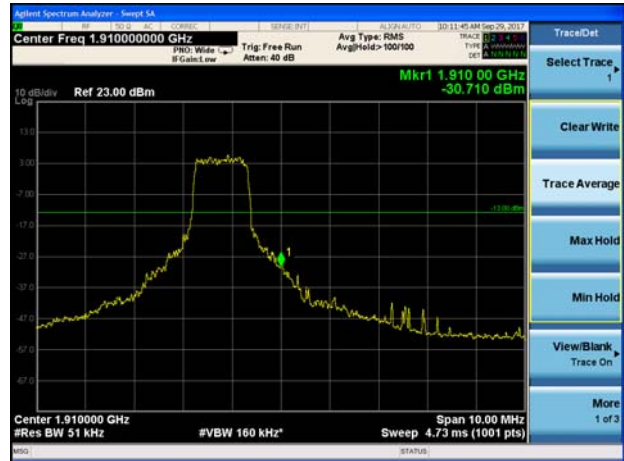


LTE Band 2 15MHz QPSK 1RB CH-Low

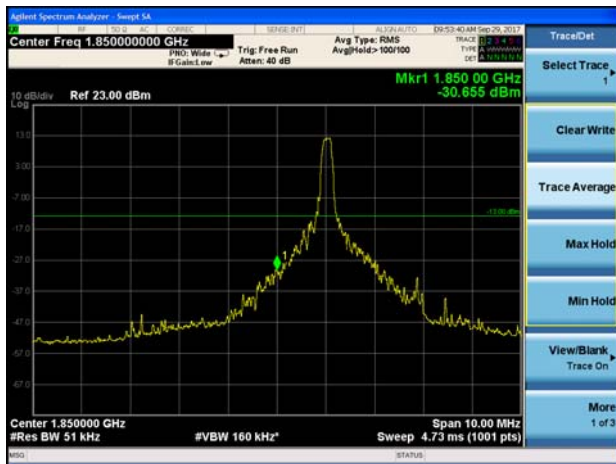

LTE Band 2 15MHz QPSK 1RB CH-High

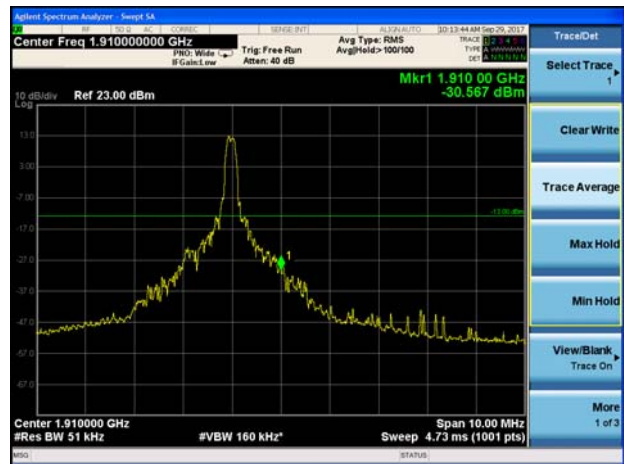

LTE Band 2 15MHz QPSK 100%RB CH-Low

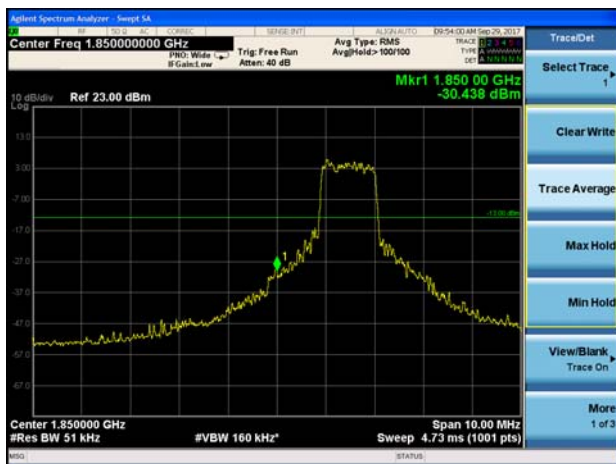


LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low



LTE Band 2 20MHz QPSK 1RB CH-High

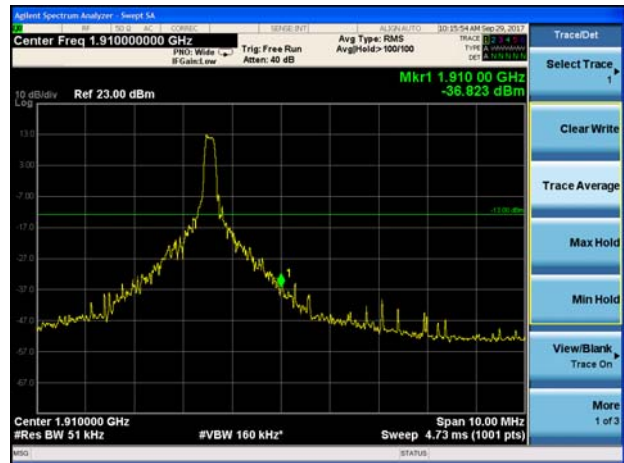


LTE Band 2 20MHz QPSK 100%RB CH-Low



LTE Band 2 20MHz QPSK 100%RB CH-High




LTE Band 2 1.4MHz 16QAM 1RB CH-Low

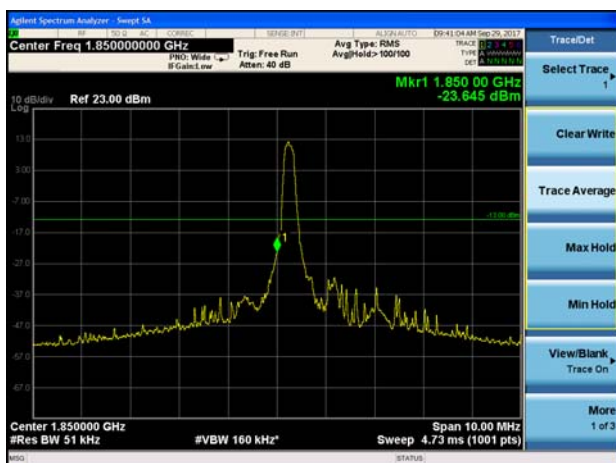

LTE Band 2 1.4MHz 16QAM 1RB CH-High



LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

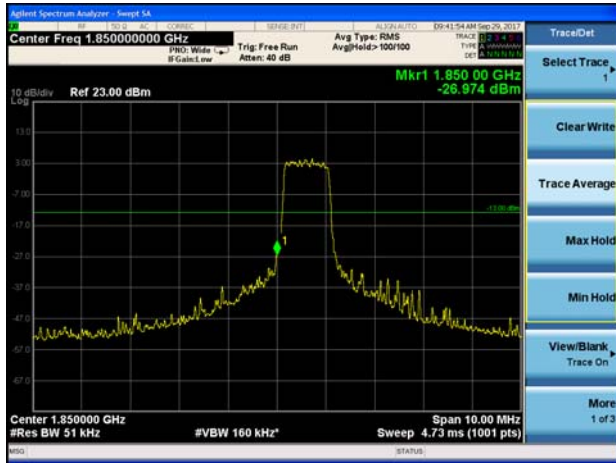

LTE Band 2 1.4MHz 16QAM 100%RB CH-High




LTE Band 2 3MHz 16QAM 1RB CH-Low




LTE Band 2 3MHz 16QAM 1RB CH-High




LTE Band 2 3MHz 16QAM 100%RB CH-Low

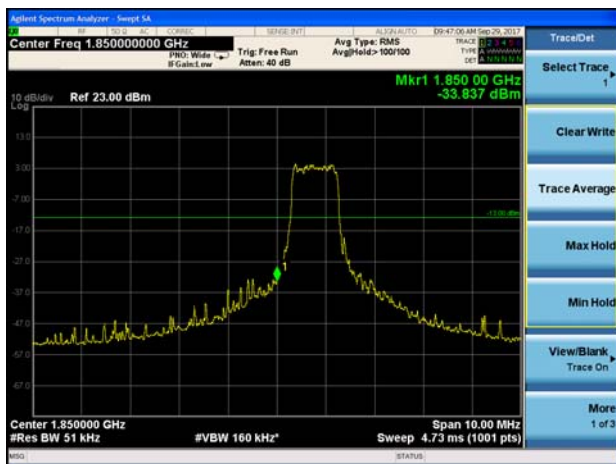


LTE Band 2 3MHz 16QAM 100%RB CH-High

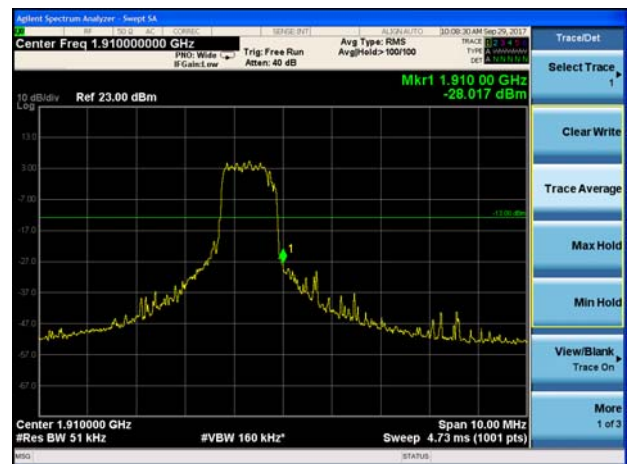


LTE Band 2 5MHz 16QAM 1RB CH-Low

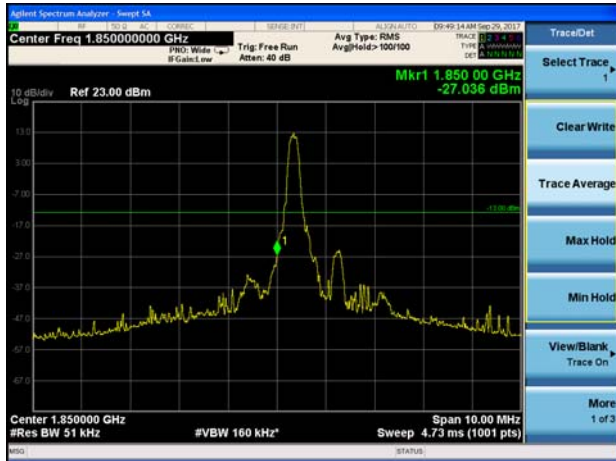

LTE Band 2 5MHz 16QAM 1RB CH-High

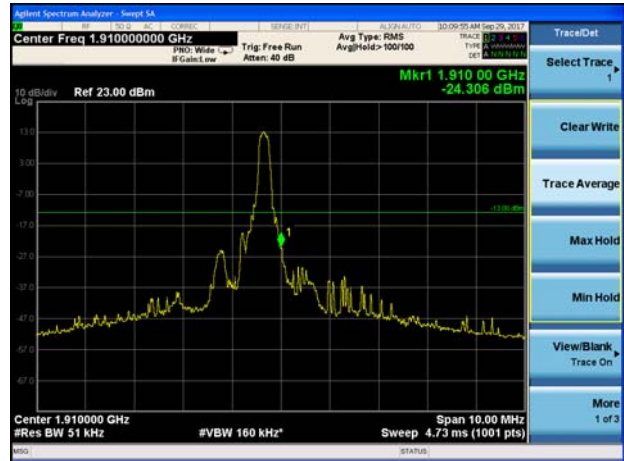

LTE Band 2 5MHz 16QAM 100%RB CH-Low

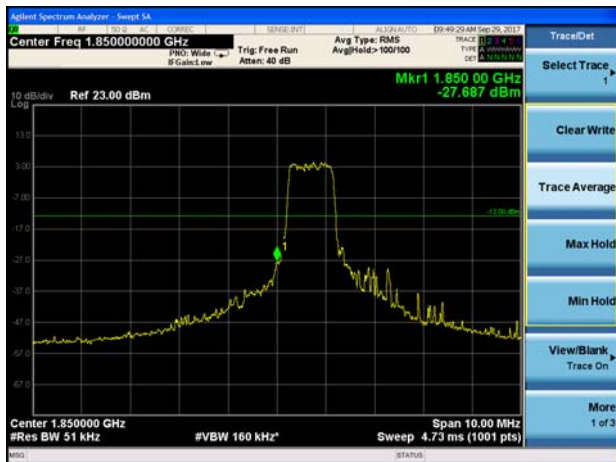


LTE Band 2 5MHz 16QAM 100%RB CH-High



LTE Band 2 10MHz 16QAM 1RB CH-Low




LTE Band 2 10MHz 16QAM 1RB CH-High

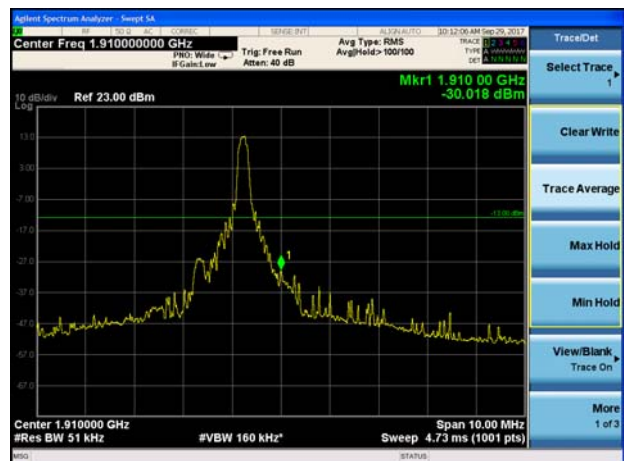




LTE Band 2 10MHz 16QAM 100%RB CH-Low

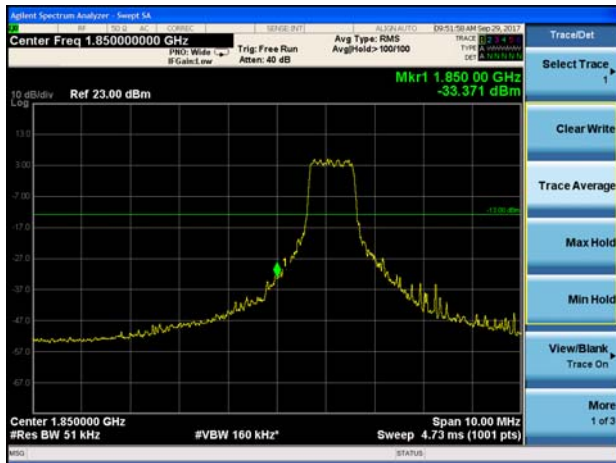


LTE Band 2 10MHz 16QAM 100%RB CH-High




LTE Band 2 15MHz 16QAM 1RB CH-Low

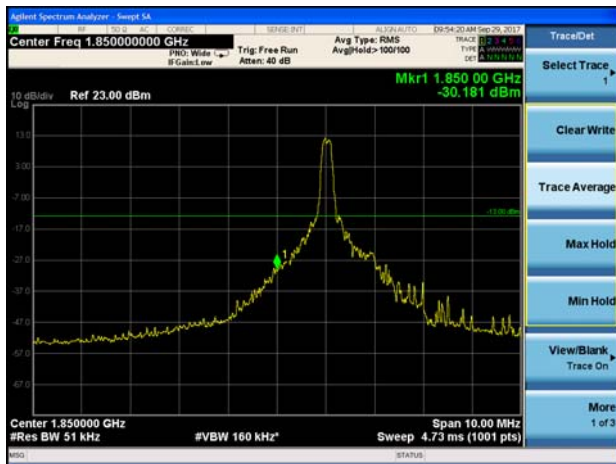


LTE Band 2 15MHz 16QAM 1RB CH-High

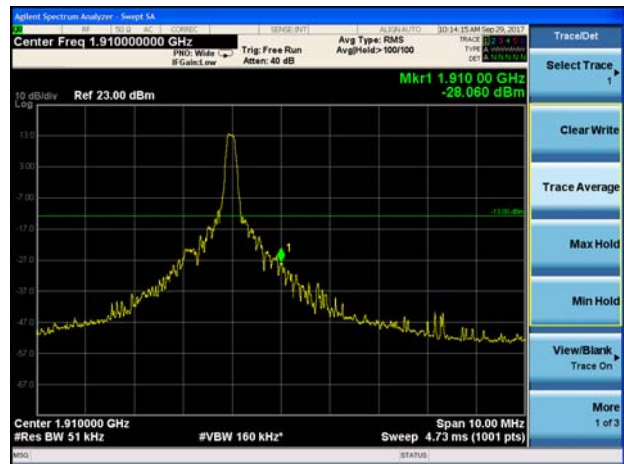

LTE Band 2 15MHz 16QAM 100%RB CH-Low

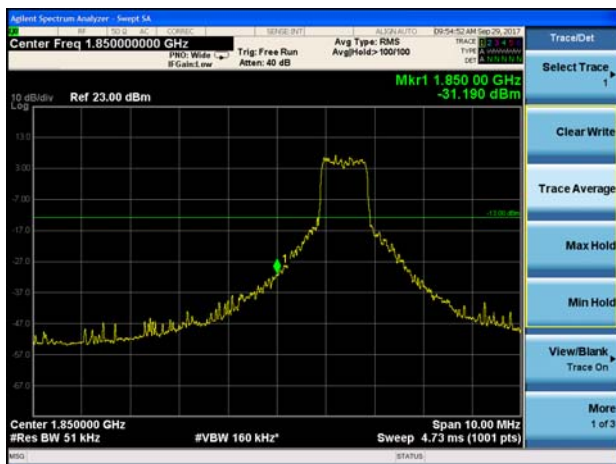


LTE Band 2 15MHz 16QAM 100%RB CH-High

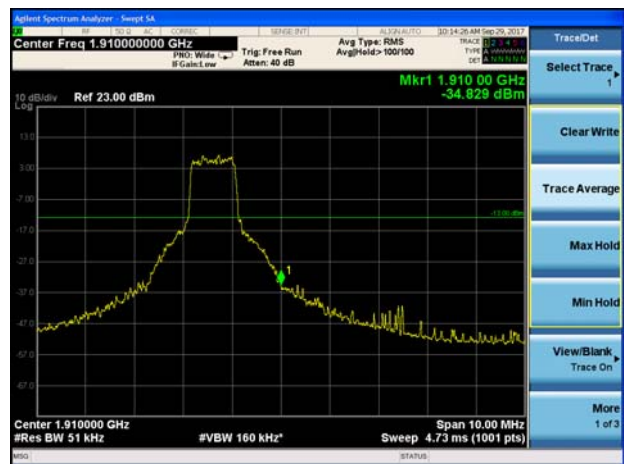




LTE Band 2 20MHz 16QAM 1RB CH-Low

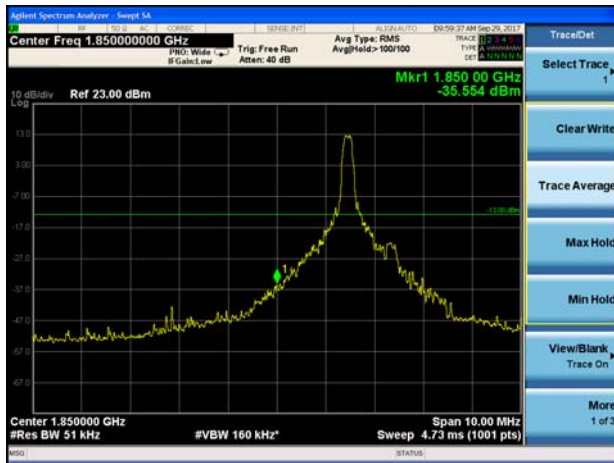


LTE Band 2 20MHz 16QAM 1RB CH-High

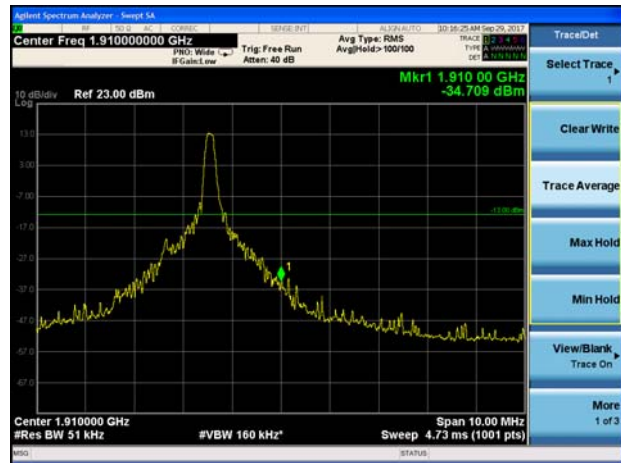


LTE Band 2 20MHz 16QAM 100%RB CH-Low



LTE Band 2 20MHz 16QAM 100%RB CH-High

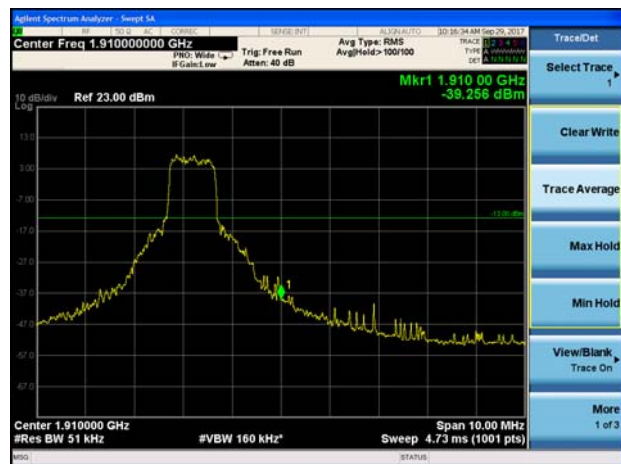

LTE Band 25 1.4MHz QPSK 1RB CH-Low

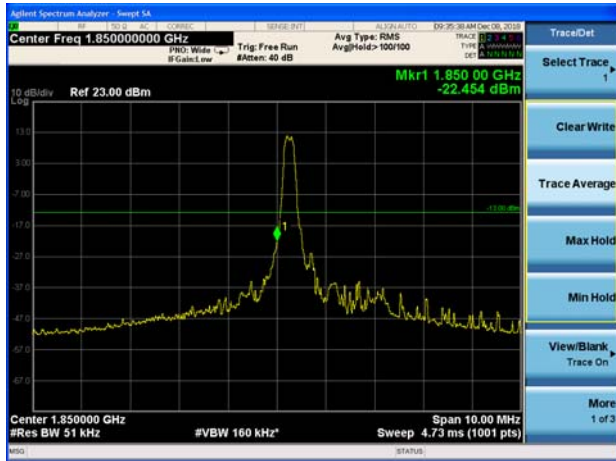

LTE Band 25 1.4MHz QPSK 1RB CH-High



LTE Band 25 1.4MHz QPSK 100%RB CH-Low




LTE Band 25 1.4MHz QPSK 100%RB CH-High



LTE Band 25 3MHz QPSK 1RB CH-Low




LTE Band 25 3MHz QPSK 1RB CH-High

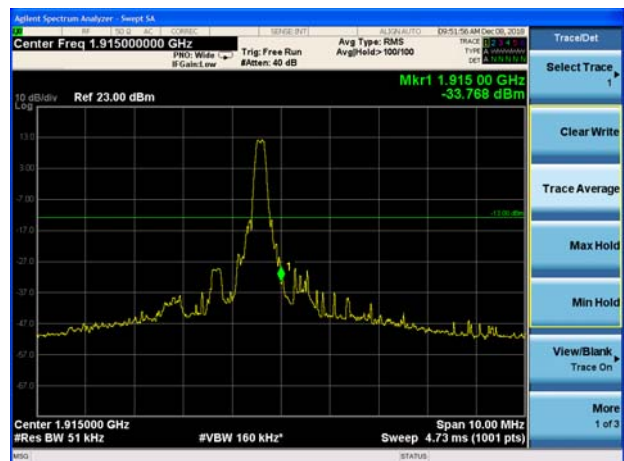



LTE Band 25 3MHz QPSK 100%RB CH-Low

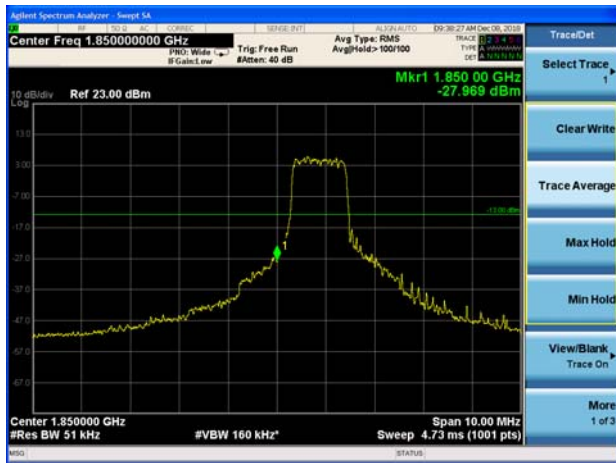

LTE Band 25 3MHz QPSK 100%RB CH-High



LTE Band 25 5MHz QPSK 1RB CH-Low




LTE Band 25 5MHz QPSK 1RB CH-High



LTE Band 25 5MHz QPSK 100%RB CH-Low




LTE Band 25 5MHz QPSK 100%RB CH-High

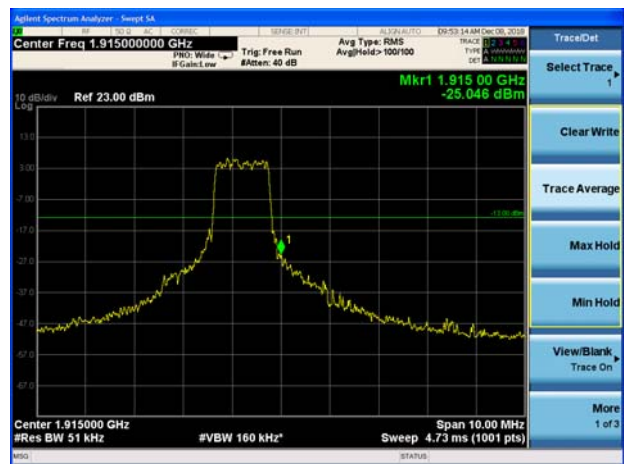





LTE Band 25 10MHz QPSK 1RB CH-Low

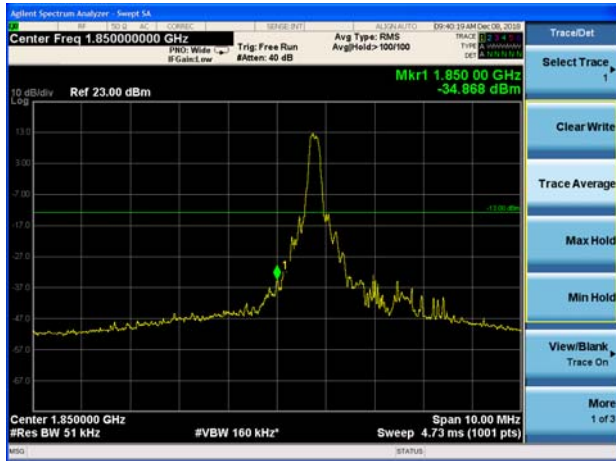

LTE Band 25 10MHz QPSK 1RB CH-High

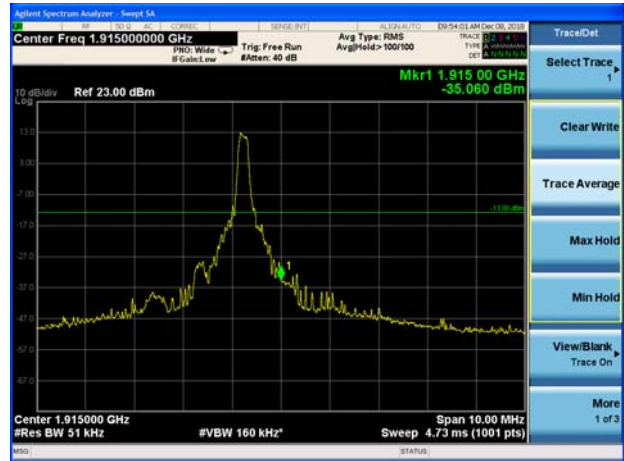


LTE Band 25 10MHz QPSK 100%RB CH-Low

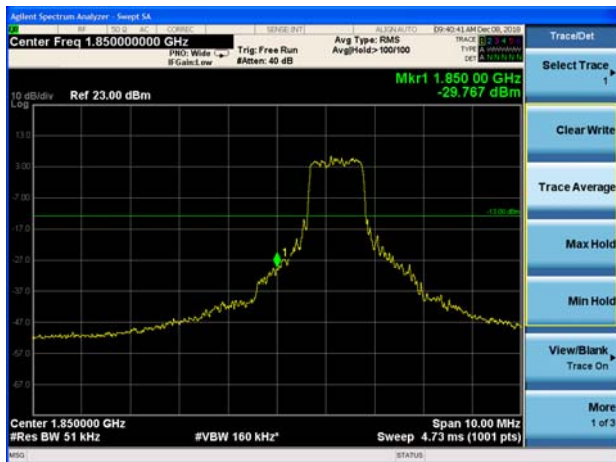


LTE Band 25 10MHz QPSK 100%RB CH-High



LTE Band 25 15MHz QPSK 1RB CH-Low

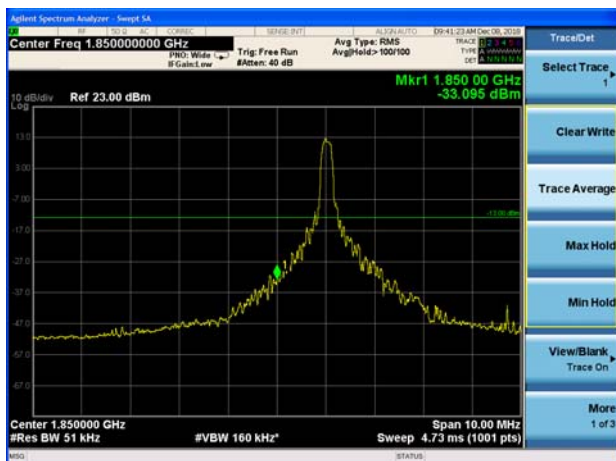

LTE Band 25 15MHz QPSK 1RB CH-High

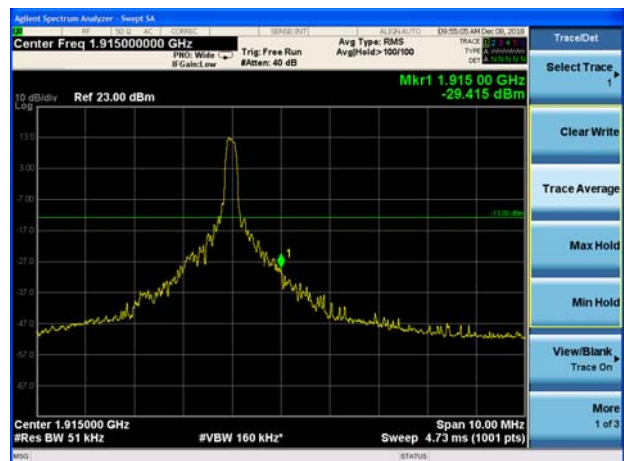


LTE Band 25 15MHz QPSK 100%RB CH-Low




LTE Band 25 15MHz QPSK 100%RB CH-High



LTE Band 25 20MHz QPSK 1RB CH-Low

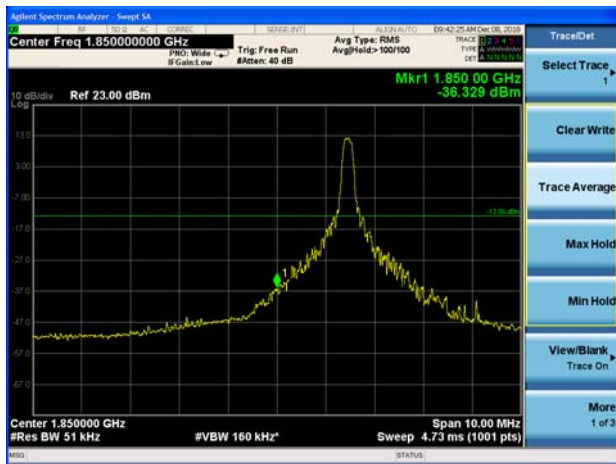

LTE Band 25 20MHz QPSK 1RB CH-High

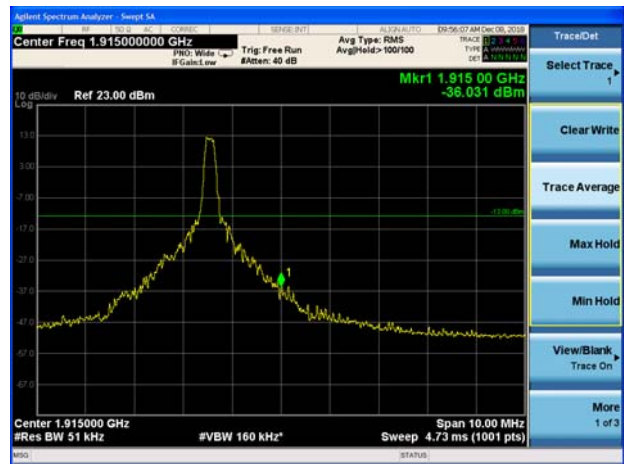

LTE Band 25 20MHz QPSK 100%RB CH-Low



LTE Band 25 20MHz QPSK 100%RB CH-High





LTE Band 25 1.4MHz 16QAM 1RB CH-Low




LTE Band 25 1.4MHz 16QAM 1RB CH-High



LTE Band 25 1.4MHz 16QAM 100%RB CH-Low



LTE Band 25 1.4MHz 16QAM 100%RB CH-High

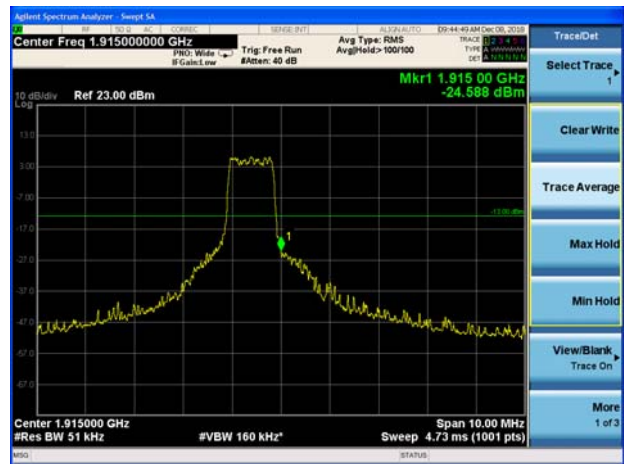

LTE Band 25 3MHz 16QAM 1RB CH-Low



LTE Band 25 3MHz 16QAM 1RB CH-High






LTE Band 25 3MHz 16QAM 100%RB CH-Low



LTE Band 25 3MHz 16QAM 100%RB CH-High

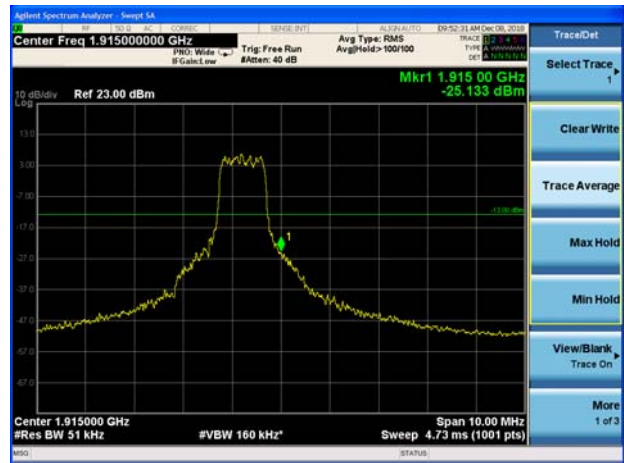

LTE Band 25 5MHz 16QAM 1RB CH-Low




LTE Band 25 5MHz 16QAM 1RB CH-High




LTE Band 25 5MHz 16QAM 100%RB CH-Low



LTE Band 25 5MHz 16QAM 100%RB CH-High

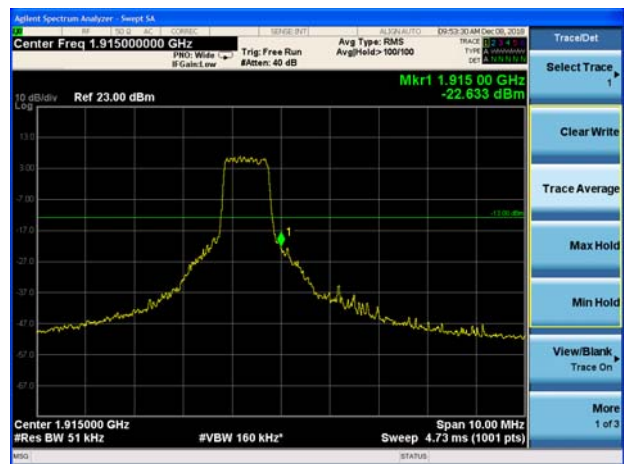


LTE Band 25 10MHz 16QAM 1RB CH-Low

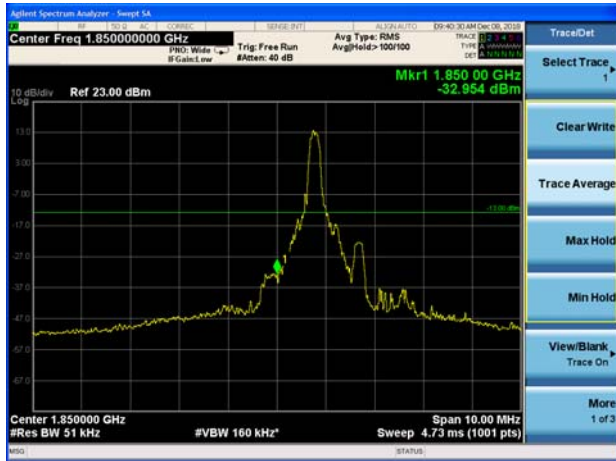

LTE Band 25 10MHz 16QAM 1RB CH-High




LTE Band 25 10MHz 16QAM 100%RB CH-Low

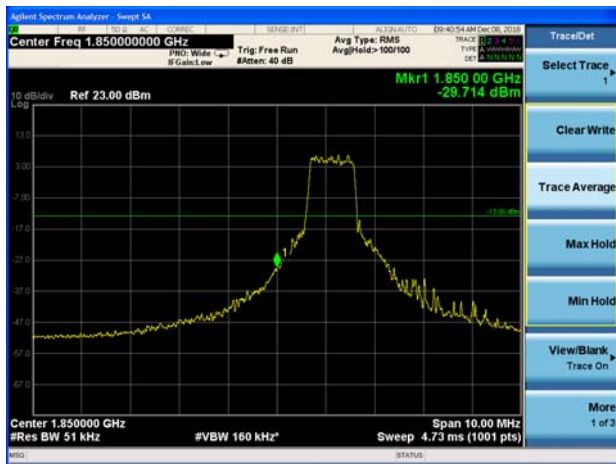


LTE Band 25 10MHz 16QAM 100%RB CH-High



LTE Band 25 15MHz 16QAM 1RB CH-Low

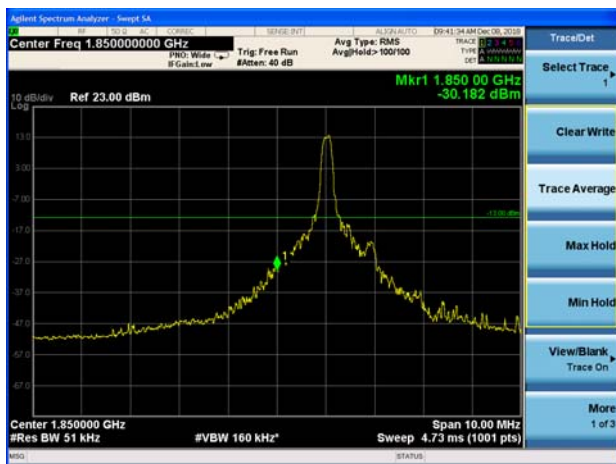

LTE Band 25 15MHz 16QAM 1RB CH-High

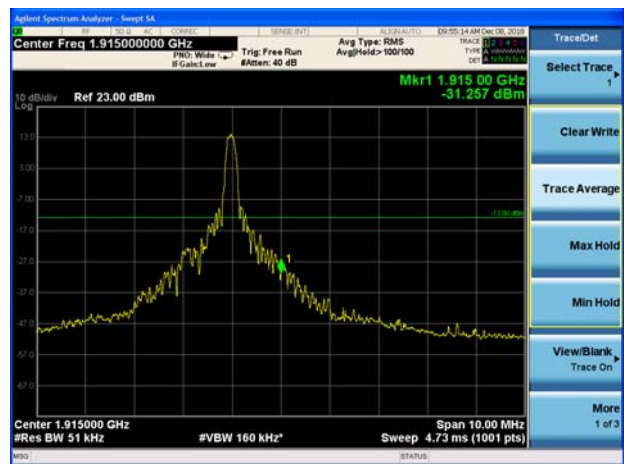





LTE Band 25 15MHz 16QAM 100%RB CH-Low




LTE Band 25 15MHz 16QAM 100%RB CH-High

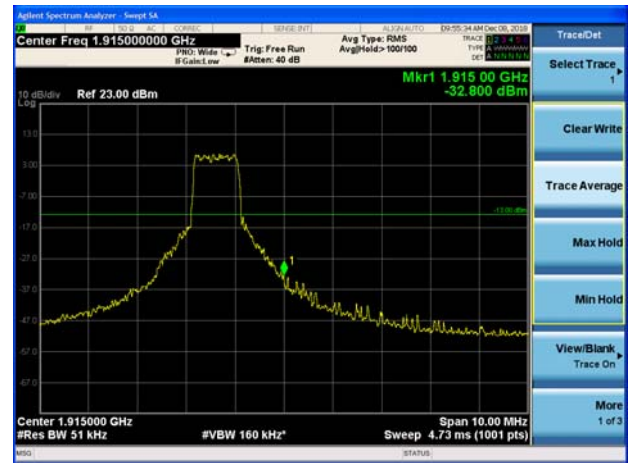


LTE Band 25 20MHz 16QAM 1RB CH-Low

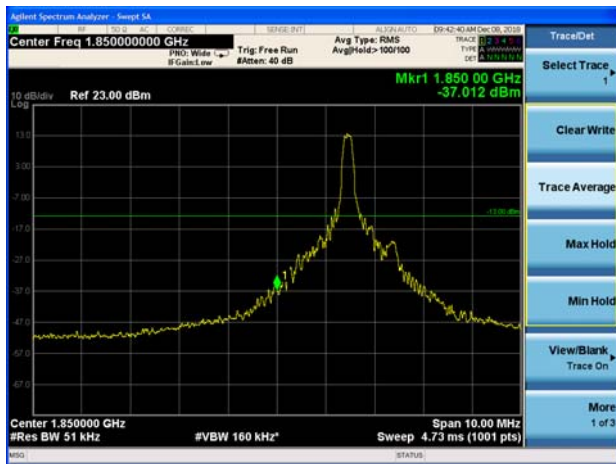


LTE Band 25 20MHz 16QAM 1RB CH-High

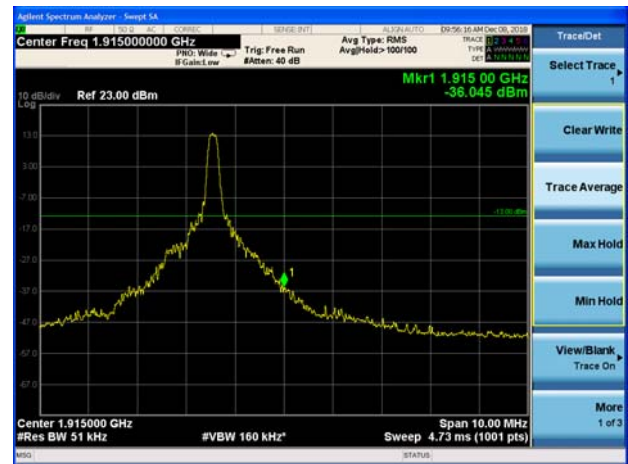

LTE Band 25 20MHz 16QAM 100%RB CH-Low

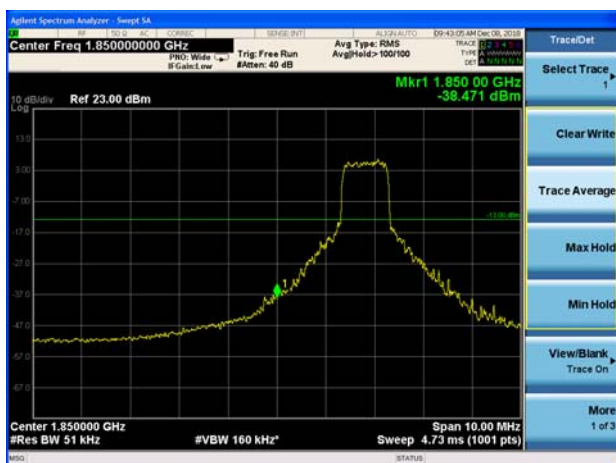

LTE Band 25 20MHz 16QAM 100%RB CH-High

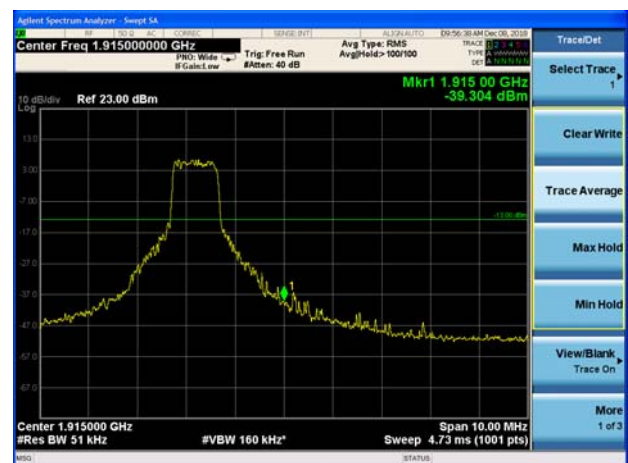

5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

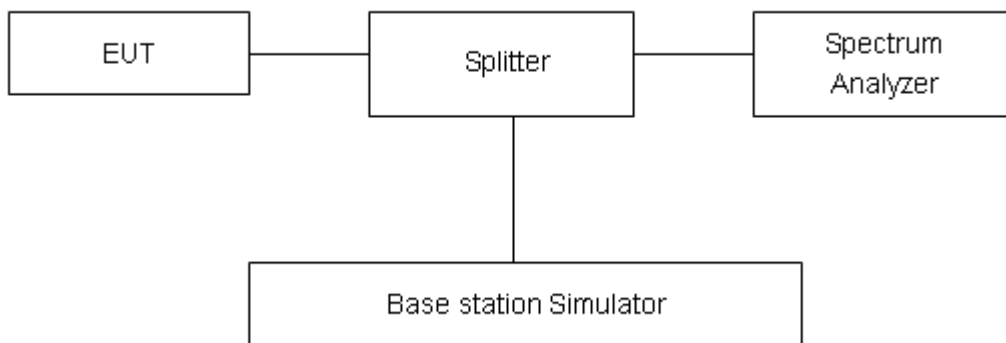

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GPRS 1900 (GMSK)	512	1850.2	30.38	29.42	0.96	≤13	PASS
	661	1880	30.34	29.32	1.02	≤13	PASS
	810	1909.8	30.21	29.16	1.05	≤13	PASS
EGPRS 1900 (8-PSK)	512	1850.2	26.46	25.57	0.89	≤13	PASS
	661	1880	26.36	25.45	0.91	≤13	PASS
	810	1909.8	26.23	25.38	0.85	≤13	PASS

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)		
				Peak(dBm)	Avg(dBm)	PAPR(dB)
Band2	1.4MHz	QPSK	18900/1880	33.29	23.55	9.74
		16QAM	18900/1880	34.38	23.72	10.66
	3MHz	QPSK	18900/1880	33.32	23.59	9.73
		16QAM	18900/1880	34.41	23.76	10.65
	5MHz	QPSK	18900/1880	32.76	23.58	9.18
		16QAM	18900/1880	33.88	23.72	10.16
	10MHz	QPSK	18900/1880	32.72	23.60	9.12
		16QAM	18900/1880	33.69	23.77	9.92
	15MHz	QPSK	18900/1880	31.57	23.56	8.01
		16QAM	18900/1880	32.69	23.72	8.97
	20MHz	QPSK	18900/1880	32.45	23.51	8.94
		16QAM	18900/1880	32.98	23.68	9.30

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)		
				Peak(dBm)	Avg(dBm)	PAPR(dB)
LTE Band 25	1.4MHz	QPSK	26365/1882.5	26.72	18.35	8.37
		16QAM	26365/1882.5	27.37	18.11	9.26
	3MHz	QPSK	26365/1882.5	26.74	18.05	8.69
		16QAM	26365/1882.5	27.32	18.46	8.86
	5MHz	QPSK	26365/1882.5	26.80	19.35	7.45
		16QAM	26365/1882.5	27.45	19.60	7.85
	10MHz	QPSK	26365/1882.5	26.75	18.00	8.75
		16QAM	26365/1882.5	27.47	18.86	8.61
	15MHz	QPSK	26365/1882.5	26.75	19.01	7.74
		16QAM	26365/1882.5	27.46	18.44	9.02
	20MHz	QPSK	26365/1882.5	26.72	17.51	9.21
		16QAM	26365/1882.5	27.03	17.96	9.07

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

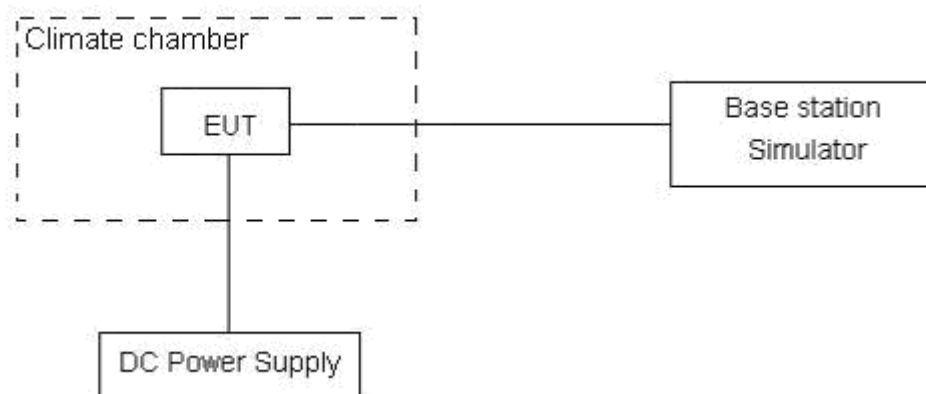

**Limits**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.



Test Result

Mode	Test status	Test Results (ppm)	
		GPRS(GMSK)	EGPRS(8PSK)
GSM 1900 Middle Channel	-40°C/Normal Voltage	0.0139	0.0135
	-30°C/Normal Voltage	0.0144	0.0070
	-20°C/Normal Voltage	0.0140	0.0129
	-10°C/Normal Voltage	0.0155	0.0123
	0°C/Normal Voltage	0.0170	0.0131
	10°C/Normal Voltage	0.0170	0.0120
	20°C/Normal Voltage	0.0185	0.0150
	30°C/Normal Voltage	0.0121	0.0119
	40°C/Normal Voltage	0.0162	0.0122
	50°C/Normal Voltage	0.0161	0.0140
	60°C/Normal Voltage	0.0146	0.0117
	70°C/Normal Voltage	0.0157	0.0124
	80°C/Normal Voltage	0.0145	0.0193
	85°C/Normal Voltage	0.0172	0.0118
	20°C/Min Voltage	0.0172	0.0125
	20°C/Max Voltage	0.0137	0.0116

Bandwidth	Test status	LTE Band 2 Middle Channel Test Results (ppm)	
		QPSK	16QAM
1.4MHz	-40°C/Normal Voltage	-0.00399	0.00378
	-30°C/Normal Voltage	-0.00274	0.00394
	-20°C/Normal Voltage	-0.00106	0.00364
	-10°C/Normal Voltage	-0.00433	0.00427
	0°C/Normal Voltage	-0.00320	0.00394
	10°C/Normal Voltage	-0.00021	0.00416
	20°C/Normal Voltage	-0.00184	0.00584
	30°C/Normal Voltage	-0.00221	0.00381
	40°C/Normal Voltage	-0.00271	0.00513
	50°C/Normal Voltage	-0.00241	0.00366
	60°C/Normal Voltage	-0.00366	0.00311
	70°C/Normal Voltage	-0.00218	0.00375
	80°C/Normal Voltage	-0.00166	0.00308
	85°C/Normal Voltage	-0.00124	0.00506
	20°C/Min Voltage	0.00060	0.00382
	20°C/Max Voltage	-0.00176	0.00370



3MHz	-40°C/Normal Voltage	-0.00113	0.00396
	-30°C/Normal Voltage	-0.00001	0.00337
	-20°C/Normal Voltage	-0.00161	0.00466
	-10°C/Normal Voltage	-0.00031	0.00533
	0°C/Normal Voltage	-0.00230	0.00514
	10°C/Normal Voltage	-0.00171	0.00461
	20°C/Normal Voltage	-0.00326	0.00501
	30°C/Normal Voltage	-0.00006	0.00295
	40°C/Normal Voltage	-0.00078	0.00408
	50°C/Normal Voltage	-0.00315	0.00440
	60°C/Normal Voltage	-0.00209	0.00459
	70°C/Normal Voltage	-0.00199	0.00624
	80°C/Normal Voltage	-0.00406	0.00580
	85°C/Normal Voltage	-0.00166	0.00471
	20°C/Min Voltage	-0.00202	0.00473
	20°C/Max Voltage	-0.00419	0.00486
5MHz	-40°C/Normal Voltage	-0.00069	-0.00293
	-30°C/Normal Voltage	-0.00293	-0.00303
	-20°C/Normal Voltage	-0.00041	0.00184
	-10°C/Normal Voltage	-0.00124	-0.00352
	0°C/Normal Voltage	-0.00276	-0.00260
	10°C/Normal Voltage	-0.00248	-0.00299
	20°C/Normal Voltage	-0.00054	-0.00269
	30°C/Normal Voltage	-0.00129	-0.00273
	40°C/Normal Voltage	-0.00036	-0.00256
	50°C/Normal Voltage	-0.00165	-0.00065
	60°C/Normal Voltage	-0.00072	-0.00313
	70°C/Normal Voltage	-0.00131	-0.00252
	80°C/Normal Voltage	-0.00295	-0.00371
	85°C/Normal Voltage	-0.00143	-0.00437
	20°C/Min Voltage	-0.00004	-0.00224
	20°C/Max Voltage	-0.00091	-0.00373
10MHz	-40°C/Normal Voltage	-0.00283	-0.00578
	-30°C/Normal Voltage	-0.00379	-0.00323
	-20°C/Normal Voltage	-0.00508	-0.00273
	-10°C/Normal Voltage	-0.00077	-0.00219
	0°C/Normal Voltage	-0.00171	-0.00193
	10°C/Normal Voltage	-0.00043	-0.00306
	20°C/Normal Voltage	-0.00134	-0.00188
	30°C/Normal Voltage	-0.00288	-0.00006